

System Check_H2450

DUT: Dipole 2450 MHz; Type:D2450V2; SN:927

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2450\text{ MHz}$; $\sigma = 1.78\text{ S/m}$; $\epsilon_r = 40.085$; $\rho = 1000\text{ kg/m}^3$

Ambient Temperature : $22.2\text{ }^\circ\text{C}$; Liquid Temperature : $22.0\text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(8.06, 8.06, 8.06); Calibrated: 2023/5/17;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2023/4/25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (41x51x1): Interpolated grid: $dx=2.000\text{ mm}$, $dy=2.000\text{ mm}$

Maximum value of SAR (interpolated) = 25.4 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{ mm}$, $dy=5\text{ mm}$, $dz=5\text{ mm}$

Reference Value = 114.7 V/m ; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 30.4 W/kg

SAR(1 g) = 13.10 W/kg ; SAR(10 g) = 6.11 W/kg

Maximum value of SAR (measured) = 23.0 W/kg

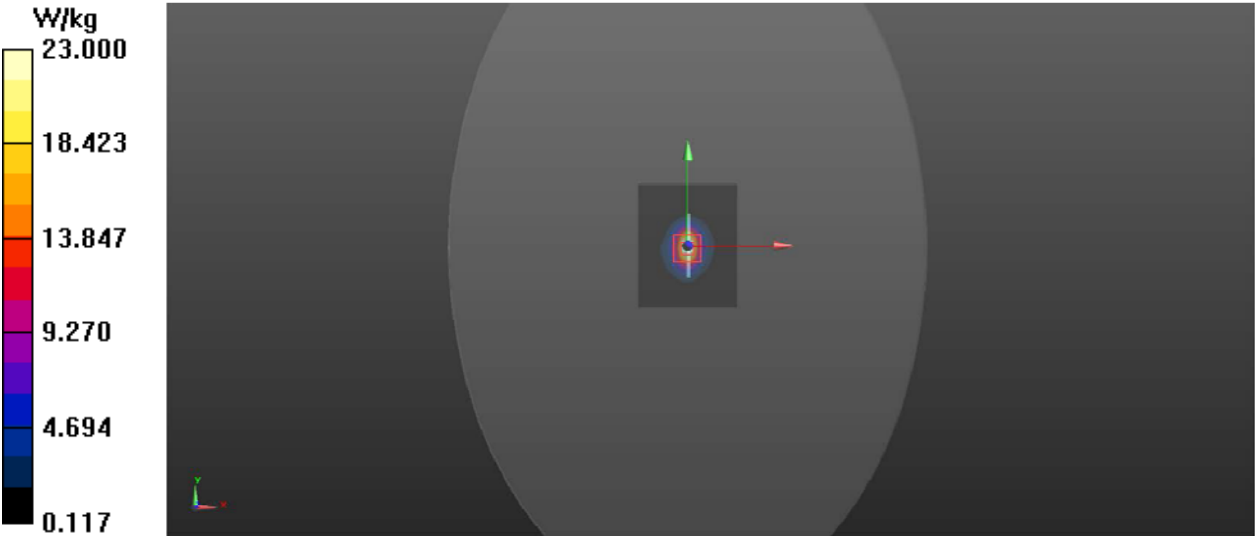

System Check_H5250


DUT: Dipole 5GHzV2;Type:D5GHzV2; SN:1169

Communication System: CW; Frequency: 5250 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: f = 5250 MHz; $\sigma = 4.739 \text{ S/m}$; $\epsilon_r = 36.85$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : 22.5 °C; Liquid Temperature : 22.3 °C

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(5.85, 5.85, 5.85); Calibrated: 2023/5/17;
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1418; Calibrated: 2023/4/25
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=100mW/Area Scan (7x9x1): Interpolated grid: dx=10.00 mm, dy=10.00 mm
Maximum value of SAR (interpolated) = 22.2 W/kg

Pin=100mW/Zoom Scan (8x8x13)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 57.229 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 37.6 W/kg
SAR(1 g) =7.66 W/kg; SAR(10 g) = 2.12 W/kg
Maximum value of SAR (measured) = 23.4 W/kg

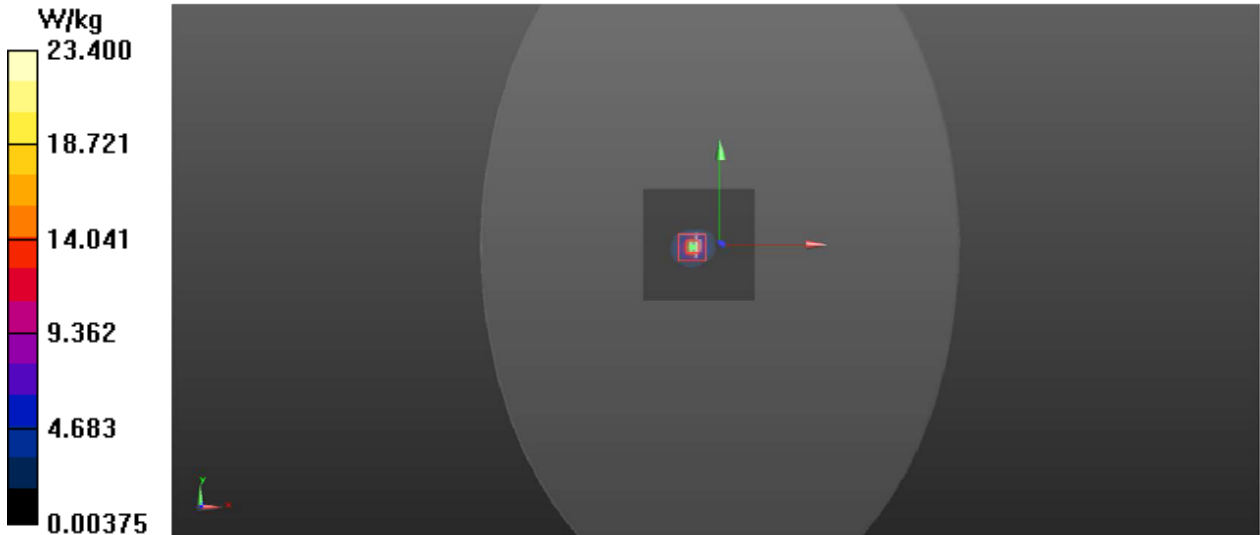

System Check_H5600


DUT: Dipole 5GHzV2;Type:D5GHzV2; SN:1169

Communication System: CW; Frequency: 5600 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: $f = 5600\text{ MHz}$; $\sigma = 5.180\text{ S/m}$; $\epsilon_r = 36.085$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $21.5\text{ }^\circ\text{C}$; Liquid Temperature : $21.4\text{ }^\circ\text{C}$

DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(5.17, 5.17, 5.17); Calibrated: 2023/5/17;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2023/4/25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=100mW/Area Scan (7x9x1): Interpolated grid: $dx=10.00\text{ mm}$, $dy=10.00\text{ mm}$
Maximum value of SAR (interpolated) = 22.7 W/kg

Pin=100mW/Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4\text{ mm}$, $dy=4\text{ mm}$, $dz=2\text{ mm}$
Reference Value = 59.652 V/m ; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 39.2 W/kg
SAR(1 g) = 7.88 W/kg ; SAR(10 g) = 2.23 W/kg
Maximum value of SAR (measured) = 24.0 W/kg

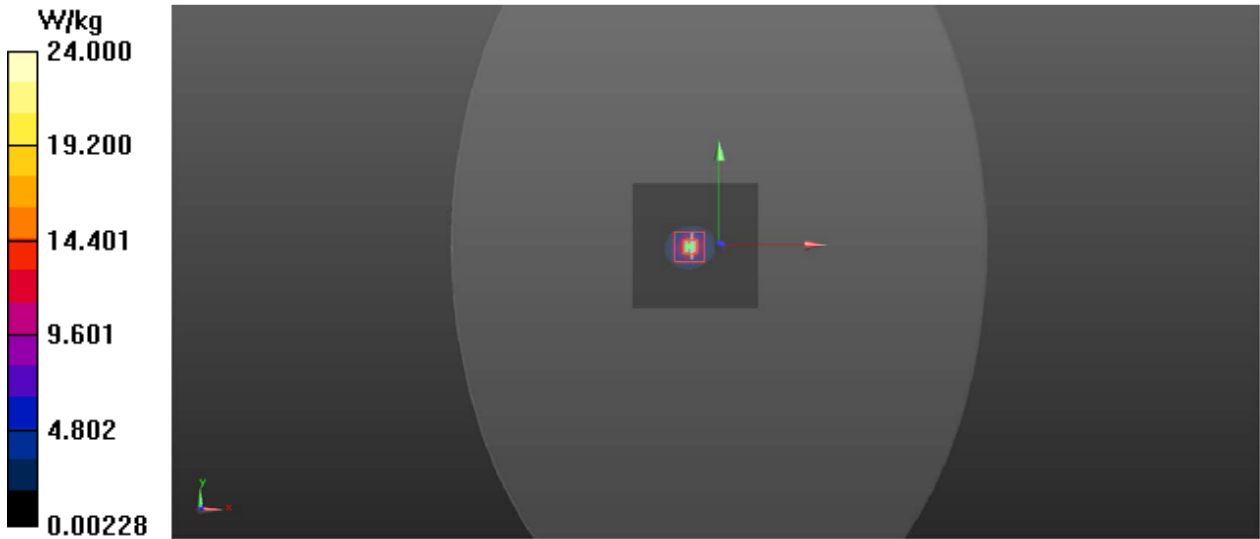

System Check_H5750

DUT: Dipole 5GHzV2;Type:D5GHzV2; SN:1169

Communication System: CW; Frequency: 5750 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: $f = 5750 \text{ MHz}$; $\sigma = 5.428 \text{ S/m}$; $\epsilon_r = 35.640$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(5.2, 5.2, 5.2); Calibrated: 2023/5/17;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2023/4/25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=100mW/Area Scan (7x9x1): Interpolated grid: $dx=10.00 \text{ mm}$, $dy=10.00 \text{ mm}$
Maximum value of SAR (interpolated) = 20.6 W/kg

Pin=100mW/Zoom Scan (8x8x13)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 50.784 V/m ; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 35.0 W/kg
SAR(1 g) = 7.51 W/kg ; SAR(10 g) = 2.10 W/kg
Maximum value of SAR (measured) = 21.5 W/kg

