



This test report cancels and replaces RR-EVE-22P171-4A Ed.0
Test report issued under the responsibility of:
EMITECH MONTPELLIER laboratory
MRA US-EU Designation Number: FR0006
Canadian CAB Identifier: FR0003

RADIO TEST REPORT

FCC 47 CFR Part 15.247
RSS-247 Issue 2 : February 2017
(Patial tests)

Company : **EDGE TECHNOLOGIES SAS**
Address..... : 735 RUE DU LIEUTENANT PARAYRE
13290 - AIX EN PROVENCE
FRANCE

Test item description : **Autonomous connected industrial temperature sensor**
Trade Mark : EDGE TECHNOLOGIES
Manufacturer..... : EDGE TECHNOLOGIES SAS
Model/Type reference..... : (SENSA915A / SENSAIO) inside HMN: SENSA.TEMP
FCC ID..... : 2A2T5-SENSA915A
IC : 29177-SENSA915A
Ratings..... : 2.4 V_{DC} to 3.7 V_{DC}

Testing Laboratory : **EMITECH MONTPELLIER laboratory**
Address..... : 145 rue de Massacan
34740 VENDARGUES
FRANCE

Report Reference No. : **RR-EVE-22P171-4A**
Test procedure : FCC IC Verification
Diffusion..... : Mr LEVEQUE
Applicant's name : EDGE TECHNOLOGIES SAS
Date of issue..... : June 2, 2023
Total number of pages..... : 23
Revision : 1
Compiled by..... : Morgan PATEY
Approved by (+ signature) : Olivier HEYER (Laboratory Manager)



*Duplication of this test report is only permitted for an integral photographic facsimile. It includes the number of pages referenced here above.
This document is the result of testing a specimen or a sample of the product submitted. It does not imply an assessment of the conformity of
the whole manufactured products of the tested sample.*

REPORT INDEX:

1. GENERAL INFORMATIONS	3
2. REFERENCE DOCUMENT(S)	4
3. EQUIPMENT TECHNICAL DESCRIPTION	5
3.1. TEST CONDITIONS	5
3.2. EUT MARKING PLATE	5
3.3. EUT GENERAL VIEW	5
3.4. EUT MECHANICAL AND ELECTRICAL DESIGN	6
3.5. EUT INPUT/OUTPUT PORTS	6
3.6. EUT RADIO SPECIFICATIONS	7
4. RESULT SUMMARY	8
5. MEASUREMENT UNCERTAINTY	9
6. RF EXPOSURE	9
7. TEST CONDITIONS AND RESULTS	10
7.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES >30MHz	10
7.2. EQUIVALENT ISOTROPIC RADIATED POWER	18

REVISION HISTORY:

Revision	Date	Modified pages	Modifications
0	November 21, 2022	/	Creation
1	June 2, 2023	1, 5, 6, 9	Informations about EST (ID for FCC and IC, Model, type etc...) and RF exposure completed

1. GENERAL INFORMATION

This document submits the results of Radio tests performed on the equipment **Autonomous connected industrial temperature sensor SENSEA.TEMP** (denominated hereafter E.U.T.: equipment under test) according to document(s) listed in §2 of this test report.

TESTING PROCEDURE AND TESTING LOCATION:					
Testing Location : EMITECH MONTPELLIER laboratory Address. : 145 rue de Massacan 34740 VENDARGUES FRANCE Test procedure. : FCC IC Verification Tested by : Morgan PATEY Test supervisor : None Date of receipt of test item : N/A Date (s) of performance of tests : November 04 th of 2022					
APPLICANT'S GENERAL INFORMATION:					
Company name : EDGE TECHNOLOGIES SAS Company address. : 735 RUE DU LIEUTENANT PARAYRE 13290 - AIX EN PROVENCE FRANCE Person(s) present during the tests. : Mr LEVEQUE Responsible. : Mr LEVEQUE					
GENERAL REMARKS:					
The information in <i>italics</i> is declared by the manufacturer and is under his responsibility The test results presented in this report relate only to the object tested. The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report. "(see Enclosure #)" refers to additional information appended to the report. "(see appended table)" refers to a table appended to the report. Throughout this report the decimal separator is point.					
POSSIBLE TEST CASE VERDICTS:					
Test case does not apply to the test object.: N/A Test case not performed..... : N/P Test object does meet the requirement..... : P (Pass) Test object does not meet the requirement. F (Fail) :					
DEFINITIONS AND ABBREVIATIONS:					
E.U.T.	Equipment Under Test	AE	Ancillary Equipment	Pk	Peak detector
RBW	Resolution BandWidth	VBW	Video BandWidth	QP	Quasi-peak detector
OATS	Open Area Test Site	FAR	Full Anechoic Room	Av	Average detector
VP	Vertical Polarization	HP	Horizontal Polarization	RMS	Root Mean Square
RF	Radio Frequency	N.T.R	Nothing To Report	N/C	Not Communicated

2. REFERENCE DOCUMENT(S)

NORMATIVE REFERENCES:

The following referenced documents are necessary for the application of the present test report.

FCC 47 CFR PART 15 : April 2022

Code of federal regulations. Title 47- Telecommunication Chapter 1- Federal Communication Commission. Part 15- Radio frequency devices Subpart B- Unintentional Radiators. Limits and methods of measurement of radio disturbance. Characteristic of information technology equipment.

FCC part 15.247

Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850MHz. (frequency hopping and digitally modulated)

RSS-247 Issue 2 : February 2017

Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

RSS-Gen Issue 5 April : 2018 / AMD 1 : 2019 / AMD 2 : 2021

General Requirements for Compliance of Radio Apparatus

ANSI C 63.10: 2013

American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

KDB 447498 D01

General RF Exposure Guidance V06

Although the product standard uses obsolete technical standards, the latest versions of standards achievable by the laboratory will be used for testing.

INFORMATIVE REFERENCES:

The following referenced documents are not necessary for the application of the present test report but they assist the user with regard to a particular subject area.

3. EQUIPMENT TECHNICAL DESCRIPTION

3.1. Test Conditions

Test item description. :	Autonomous connected industrial temperature sensor
Model/Type reference..... :	(SENSA915A / SENSAIO) inside HMN: SENSA.TEMP
Trade Mark. :	EDGE TECHNOLOGIES
Serial number (S/N)..... :	Not communicated
Part number (P/N). :	N/A
Software version..... :	N/A
Firmware version. :	1.1.4
Type of sample. :	Pre-serial
Function(s)..... :	SensaIO is a range of autonomous connected industrial sensors. It is an assembly of two parts : a cartridge common to all sensors where BLE and LoRaWan communication are implemented, and a process connection which is dedicated to physical phenomenon sensing (temperature, pressure, vibration, acoustic, ...)
Manufacturer name. :	EDGE TECHNOLOGIES SAS
Address. :	735 RUE DU LIEUTENANT PARAYRE 13290 - AIX EN PROVENCE FRANCE
General product information:	
N/A	

3.2. EUT Marking plate

EUT did not have its marking plate during tests..

3.3. EUT General view




3.4. EUT Mechanical and Electrical Design

Power supply. : $3V_{DC}$
Power supply range..... : $2.4V_{DC}$ to $3.2V_{DC}$
Power type..... : *Battery powered*
Power (W)..... : 0.375
Nominal current (A). : 0.125
Dimensions (L x W x H) (m). : 0.45×0.06 (diameter)
Weight (kg). : 1
Temperature range ($^{\circ}C$). : -40 to $+85$
Ground bounding strap..... : *No*

Comments:

N/A

3.5. EUT Input/Output ports

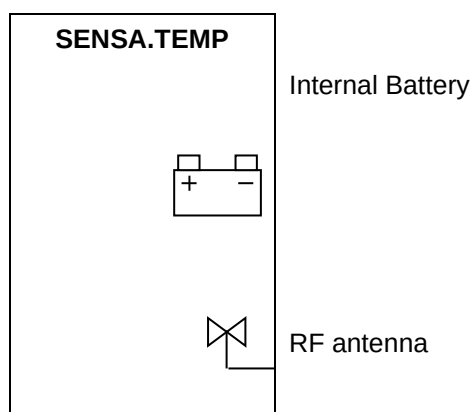

PORT	NAME	TYPE	LENGTH	CABLE TYPE	COMMENTS
0	Main frame	N/E	N/A	Metallic	N/A
1	Internal Battery	DC	N/A	N/A	$3V_{DC}$
2	RF antenna	RF	N/A	N/A	902MHz to 928MHz

AC/DC : AC/DC Converter port AC : Alternative current port DC : Discontinuous current port
I/O : Input or Output port TP : Telecommunication port RF : Radio frequency port
N/E : Non Electrical port

3.6. EUT Radio Specifications

a) GENERAL INFORMATIONS	
According to manufacturer's declarations :	
EUT type.....	Transceiver
Technology	BLE
Environmental profile.....	Data transmissions
Temperature range	-40°C to +85°C
Antenna type	Integrated
Antenna Gain.....	-5 dBi
Comments:	
b) TRANSMITTER PARAMETERS (Tx)	
Frequency bands.....	2400 MHz to 2483.5 MHz
RF Power.....	2.5 mW
Number of channels / Separation	40 / 2MHz
Modulation type	GFSK
Duty cycle	2.5 %
Tested frequency	2402 MHz : Low channel (ch.37)
	2426 MHz: Mid channel (ch.38)
	2480 MHz: High channel (ch.39)
c) RECEIVER PARAMETERS (Rx)	
Frequency bands.....	2400 MHz to 2483.5 MHz
Bandwidth	Not communicated

4. RESULT SUMMARY

TEST DESIGNATION	SEVERITY	VERDICT	BASIC STANDARDS / COMMENTS
Transmitter radiated spurious emissions at frequencies >30MHz - Radiated measurement / BLE / 30 MHz to 1 GHz - Radiated measurement / Temperature sensor / BLE / Low channel / 1 GHz to 18 GHz - Radiated measurement / Temperature sensor / BLE / Mid channel / 1 GHz to 18 GHz - Radiated measurement / Temperature sensor / BLE / High channel / 1 GHz to 18 GHz	15.209 15.209 15.209 15.209	PASS PASS PASS PASS	FCC Part 15.209 RSS-Gen FCC Part 15.247 RSS-247
Equivalent isotropic radiated power - EIRP / BLE / Low channel - EIRP / BLE / Mid channel - EIRP / BLE / High channel	1W (30dBm) 1W (30dBm) 1W (30dBm)	PASS PASS PASS	

Sample subject to the test complies for tests done with the requirements of the reference document(s) listed in §2 of this test report and, where applicable, with deviation(s) specified in this document.

To declare, or not, the compliance with the specifications, it was not explicitly taken into account of uncertainty associated with the results.

5. MEASUREMENT UNCERTAINTY

PARAMETER	MAXIMAL EMITECH UNCERTAINTY	MINIMAL STANDARD UNCERTAINTY
Radio frequency	$\pm 1 \times 10^{-7}$	$\pm 1 \times 10^{-7}$
Radiated emission (ERP / EIRP)		
$f \leq 62.5$ MHz	± 5.7 dB	± 6 dB
62.5 MHz - 1 GHz	± 5.8 dB	± 6 dB
1 GHz - 18 GHz	± 5.6 dB	± 6 dB
18 GHz – 40 GHz	± 5.6 dB	± 6 dB
Radiated emission (electric field for FCC standard)		
9kHz – 30MHz	± 2.7 dB	/
30MHz – 1GHz	± 5.0 dB	/
1GHz – 18GHz	± 5.3 dB	/
18GHz – 40GHz	± 6.1 dB	/
40GHz – 140GHz	± 5.7 dB	/

For the calculation of expanded uncertainty, the confidence interval is 95 % (k=2).

6. RF EXPOSURE

Maximum EIRP = -12.4 dBm (0.05 mW) at 2426 MHz (see §7.2 of this document)

In accordance with KDB 447498 D01 General RF Exposure Guidance v06 and OET Bulletin 65:

$$\text{PSD} = \text{EIRP} / (4 \cdot \pi \cdot R^2) = 0.05 / (4 \cdot \pi \cdot (20 \text{ cm})^2) = 0.0001 \text{ mW/cm}^2$$

Limit= 1 mW/cm²

In accordance with RSS-102, Issue 5, Section 2.5.1., as EIRP is lower than 4.25 mW at 2426 MHz, SAR exemption for ISED can be considered for a distance ≤ 5 cm.

7. TEST CONDITIONS AND RESULTS

7.1. Transmitter radiated spurious emissions at frequencies >30MHz

Reference standard:	FCC Part 15.209 RSS-Gen
Test method:	ANSI C63.10: 2013
General test setup: The EUT is set on an insulating support at 80cm above the ground reference plane (150cm for $f > 1\text{GHz}$). Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 3-meter. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (quasi-peak or average) were then performed in a semi-anechoic chamber or Open Area Test Site that complies to CISPR 16. The EUT was rotated 360° about its azimuth and adjusting the receive antenna height from 1 to 4 m. All frequencies were investigated, where applicable. For portable equipments a research of maximum level is done on the 3 axes. Only the highest levels are recorded.	


TESTED CONFIGURATION	PARAMETER	SEVERITY	RESULT TAB.	VERDICT
Radiated measurement / BLE / 30 MHz to 1 GHz	30MHz-1GHz	15.209	EMI4526	PASS
Radiated measurement / Temperature sensor / BLE / Low channel / 1 GHz to 18 GHz	1GHz-18GHz	15.209	EMI4532	PASS
Radiated measurement / Temperature sensor / BLE / Mid channel / 1 GHz to 18 GHz	1GHz-18GHz	15.209	EMI4553	PASS
Radiated measurement / Temperature sensor / BLE / High channel / 1 GHz to 18 GHz	1GHz-18GHz	15.209	EMI4554	PASS

LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	See Graph(s)
Relative Humidity	20 to 75 %	See Graph(s)
Atmospheric pressure	N/A	See Graph(s)
Test method deviation: N/A		
Supplementary information: N/A		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Antenna	ETS lindgren	3142E	14523	27/01/2022	27/03/2025
Antenna	AARONIA	Powerlog 70180	15306	24/07/2019	24/03/2023
Cable	Techniwave	N-1.5m	18341	25/01/2022	25/03/2024
Cable	Techniwave	N-1.5m	18342	25/01/2022	25/03/2024
Cable	/	N-1m	3622	10/11/2021	10/01/2024
Cable	SUCOFLEX	N-6,5m	14380	23/08/2021	23/10/2023
Cable	Techniwave	N-8m	18349	25/01/2022	25/03/2024
Cable	MegaPhase	TM18-N1N1-118	12842	02/12/2020	02/02/2023
Filter	Micro-Tronics	HPM 11630	4392	23/11/2021	23/01/2025
Filter	Micro-Tronics	HPM 15162	10273	26/11/2021	26/01/2025
Filter	Micro-Tronics	HPM18865	12843	24/08/2021	24/10/2024
Filter	Wainwright Instruments	WRCGV 2402/2480- 2380/2500- 40/10EE-200W	9771	15/03/2022	15/05/2025
Preamplifier	IMPULSE	CA118-546ACN	9169	26/04/2022	26/06/2023
Receiver	Rohde & Schwarz	ESW26	17791	23/04/2021	23/06/2023
Receiver	Rohde & Schwarz	FSW43	14830	10/08/2022	10/10/2024
Shielded enclosure	COMTEST	FAR-3m	18014	17/08/2021	17/10/2024
Shielded enclosure	COMTEST	SAC 3m	14494	02/10/2019	02/12/2022
Software	Nexio	BAT EMC	0000		
Thermohygrometer	Testo	608-H2	12269	07/06/2022	07/08/2024
Thermohygrometer	Bioblock Scientific	Météostar	0963	07/06/2021	07/08/2023

BAT-EMC software version: V3.18.0.26

Blank cells = Permanent validity

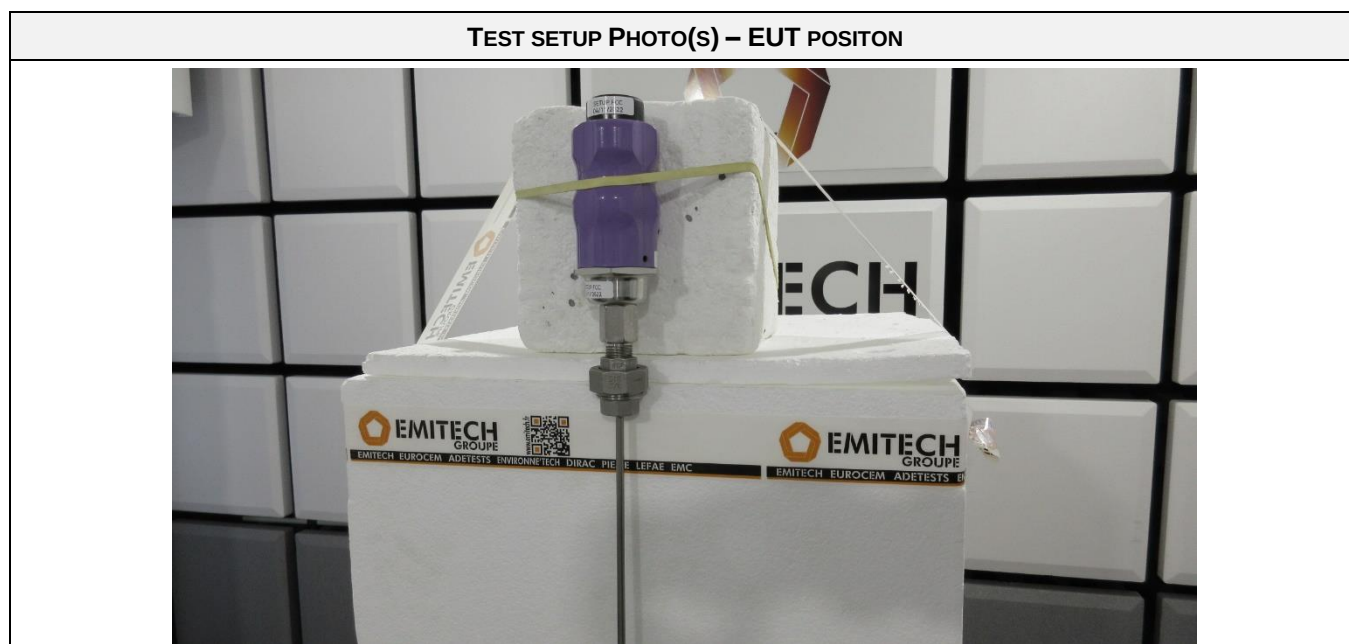

TEST SETUP PHOTO(S) - RADIATED MEASUREMENT / 30 MHz TO 1 GHz



TEST SETUP PHOTO(S) - RADIATED MEASUREMENT / 1 GHz TO 18 GHz





TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES >30MHz – TABULATED RESULTS					
RADIATED MEASUREMENT / BLE / 30 MHz TO 1 GHz					EMI4526
FREQUENCY (MHz)	POLARIZATION	PEAK LEVEL (dBμV/m)	AVERAGE / QPEAK LEVEL (dBμV/m)	AVERAGE / QPEAK LIMIT (dBμV/m)	MARGING (dB)
N/A	N/A	N/A	N/A	N/A	N/A
Supplementary information: No spurious emissions were detected.					


TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES >30MHz – TABULATED RESULTS					
RADIATED MEASUREMENT / TEMPERATURE SENSOR / BLE / LOW CHANNEL / 1 GHz TO 18 GHz					EMI4532
FREQUENCY (MHz)	POLARIZATION	PEAK LEVEL (dBμV/m)	AVERAGE LEVEL (dBμV/m)	AVERAGE LIMIT (dBμV/m)	MARGING
N/A	N/A	N/A	N/A	N/A	N/A
Supplementary information: No spurious emissions were detected.					


TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES >30MHz – TABULATED RESULTS					
RADIATED MEASUREMENT / TEMPERATURE SENSOR / BLE / MID CHANNEL / 1 GHz TO 18 GHz					EMI4553
FREQUENCY (MHz)	POLARIZATION	PEAK LEVEL (dBμV/m)	AVERAGE LEVEL (dBμV/m)	AVERAGE LIMIT (dBμV/m)	MARGING
N/A	N/A	N/A	N/A	N/A	N/A
Supplementary information: No spurious emissions were detected.					

TRANSMITTER RADIATED SPURIOUS EMISSIONS AT FREQUENCIES >30MHz – TABULATED RESULTS					
RADIATED MEASUREMENT / TEMPERATURE SENSOR / BLE / HIGH CHANNEL / 1 GHz TO 18 GHz					EMI4554
FREQUENCY (MHz)	POLARIZATION	PEAK LEVEL (dBμV/m)	AVERAGE LEVEL (dBμV/m)	AVERAGE LIMIT (dBμV/m)	MARGING
N/A	N/A	N/A	N/A	N/A	N/A
Supplementary information: No spurious emissions were detected.					

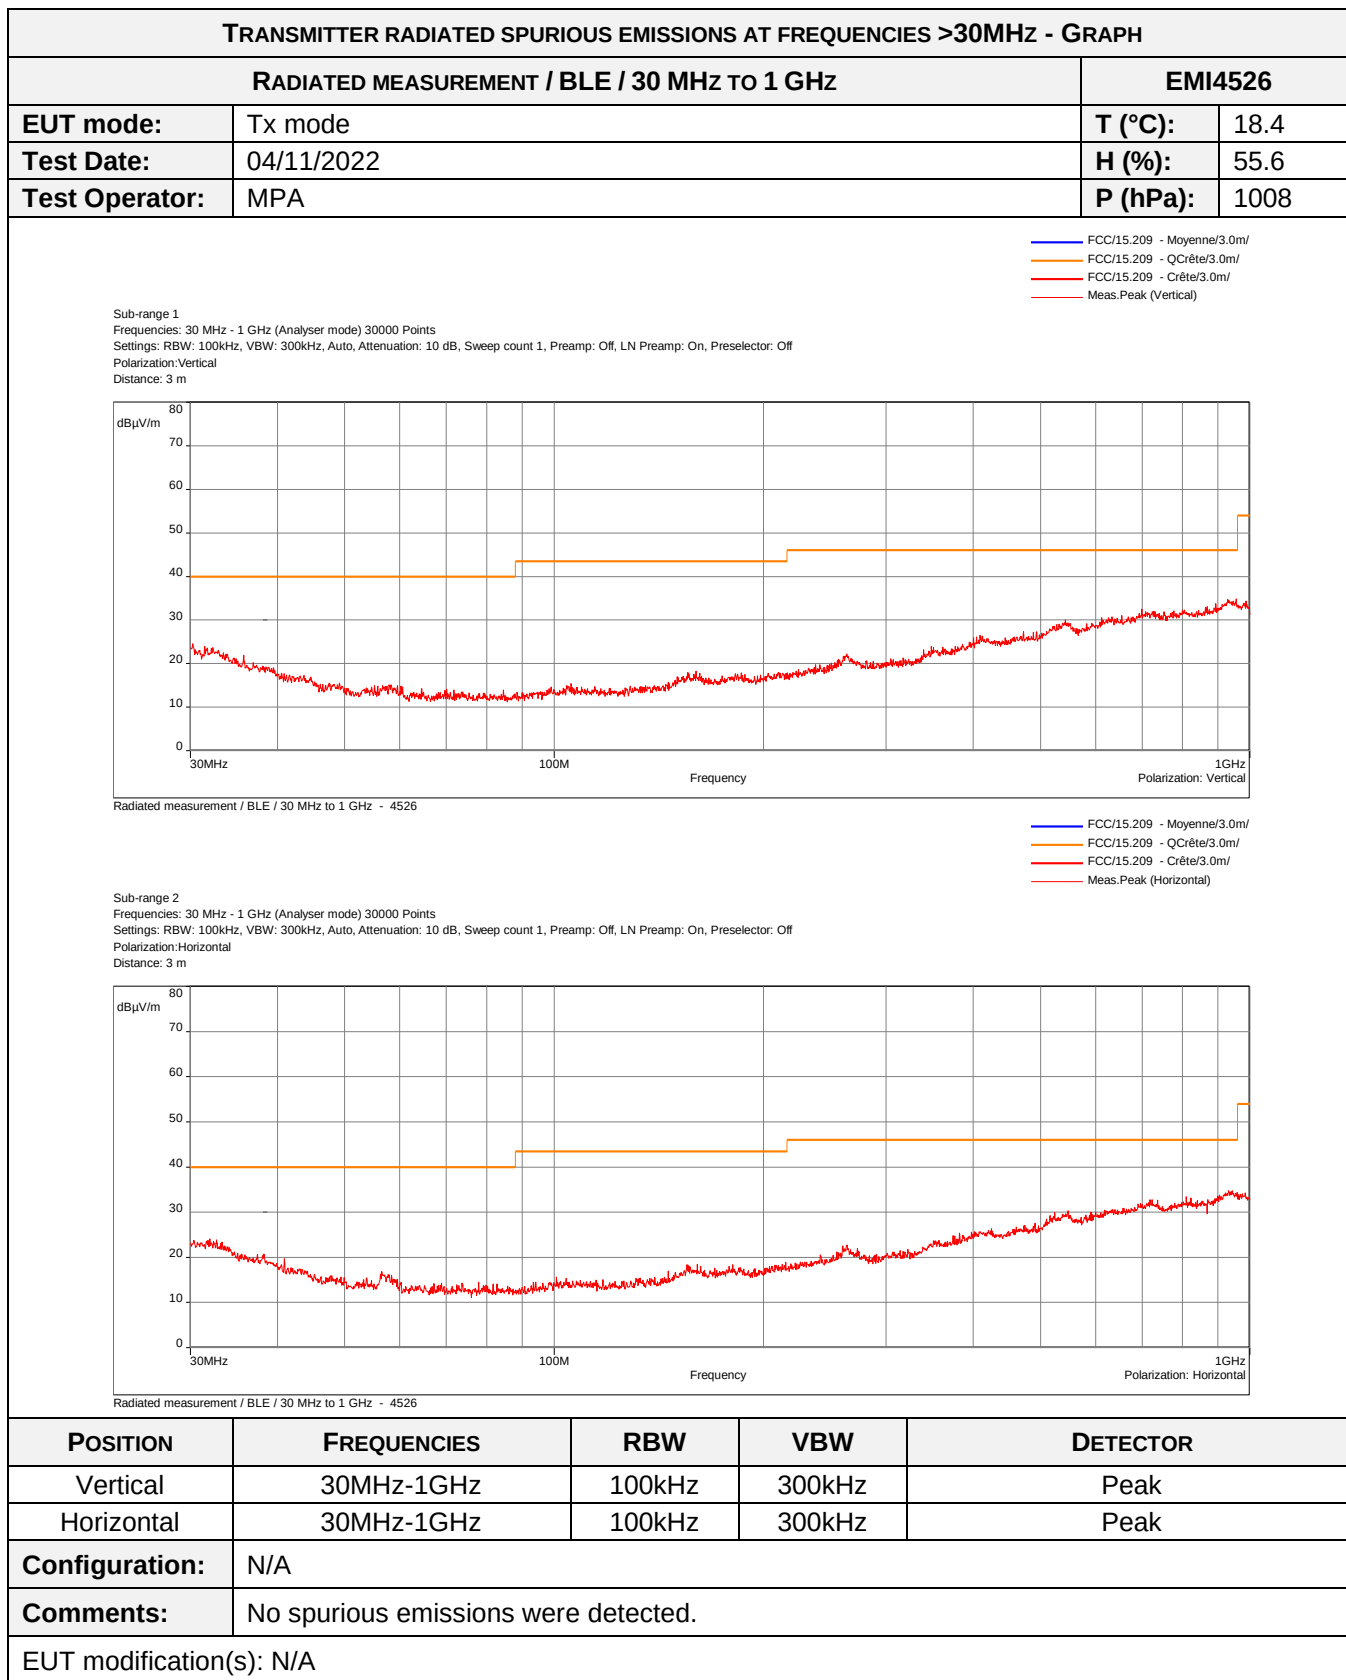

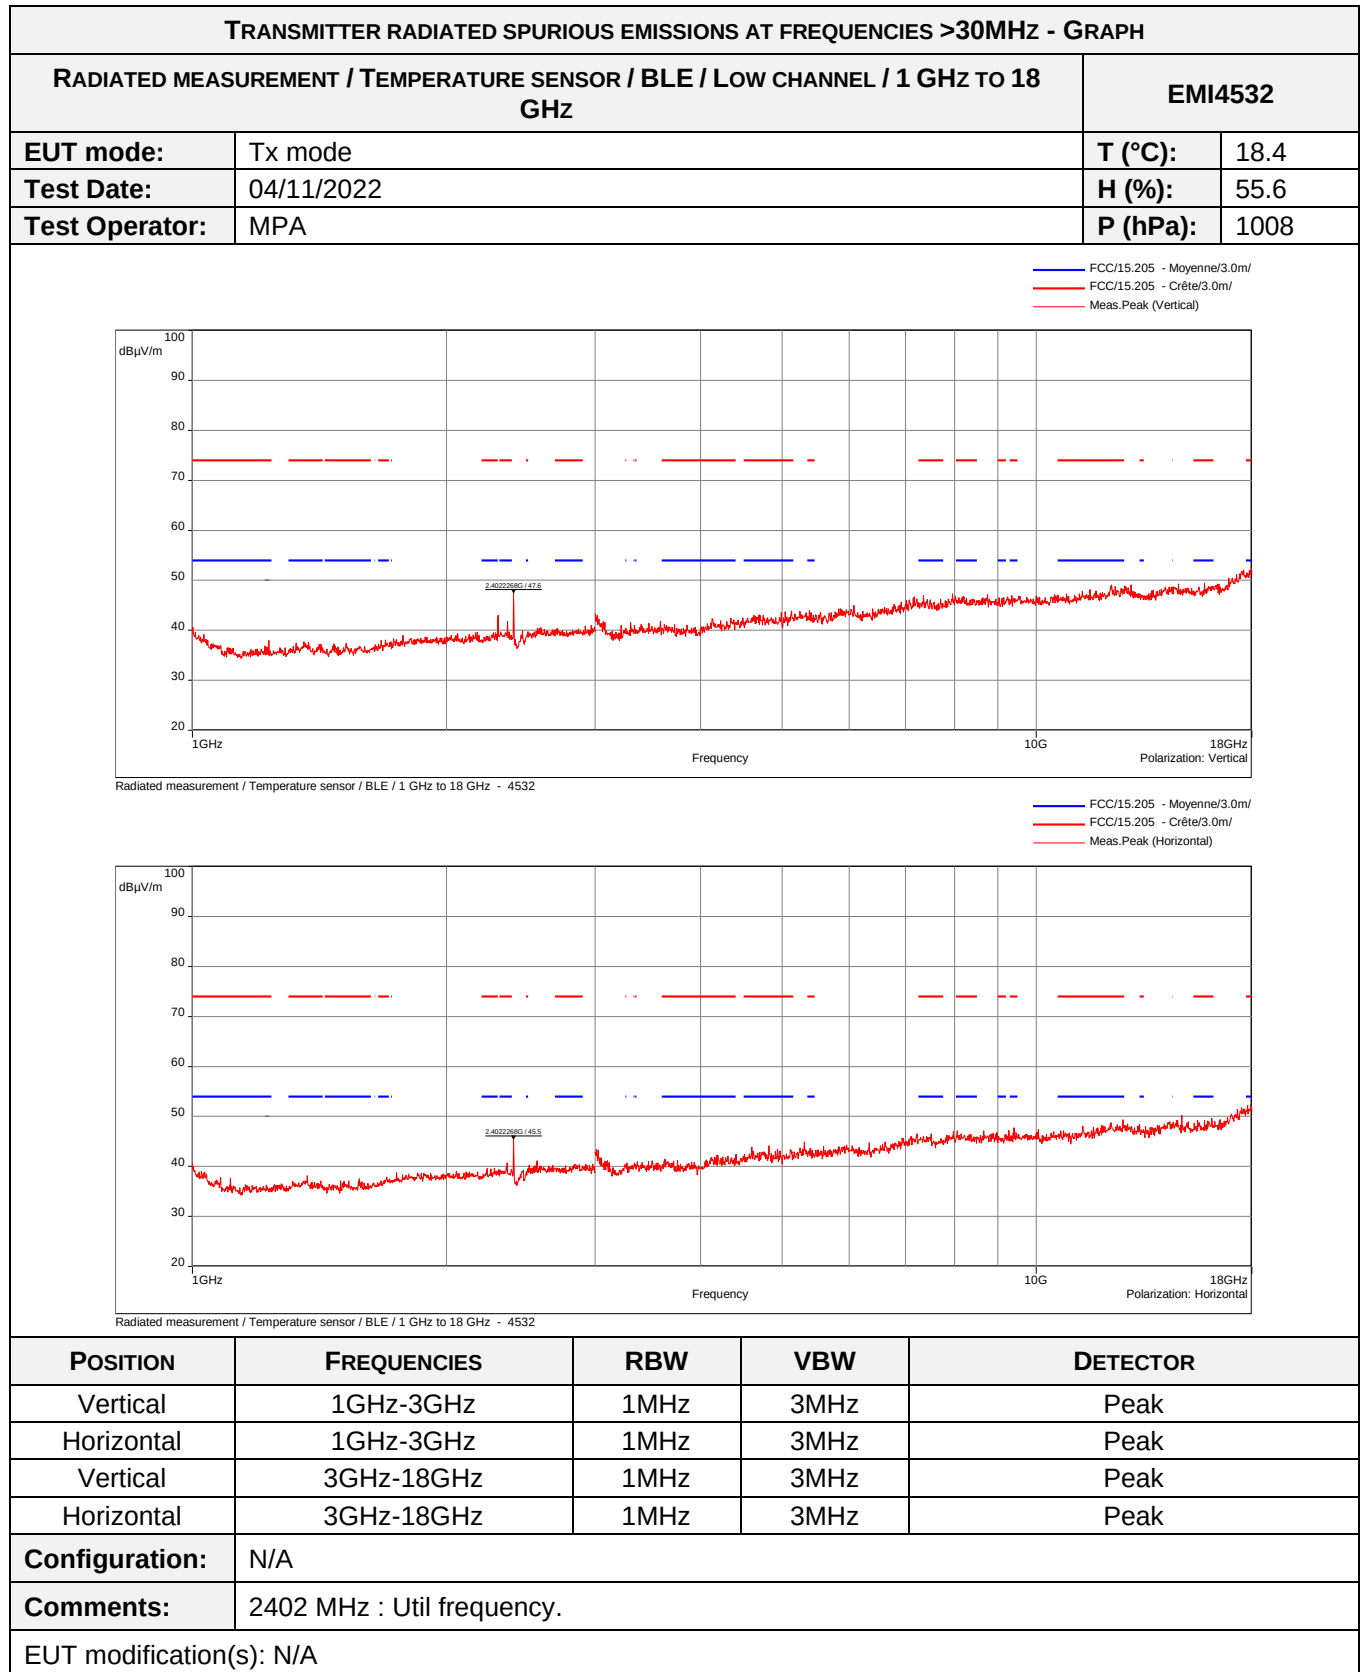

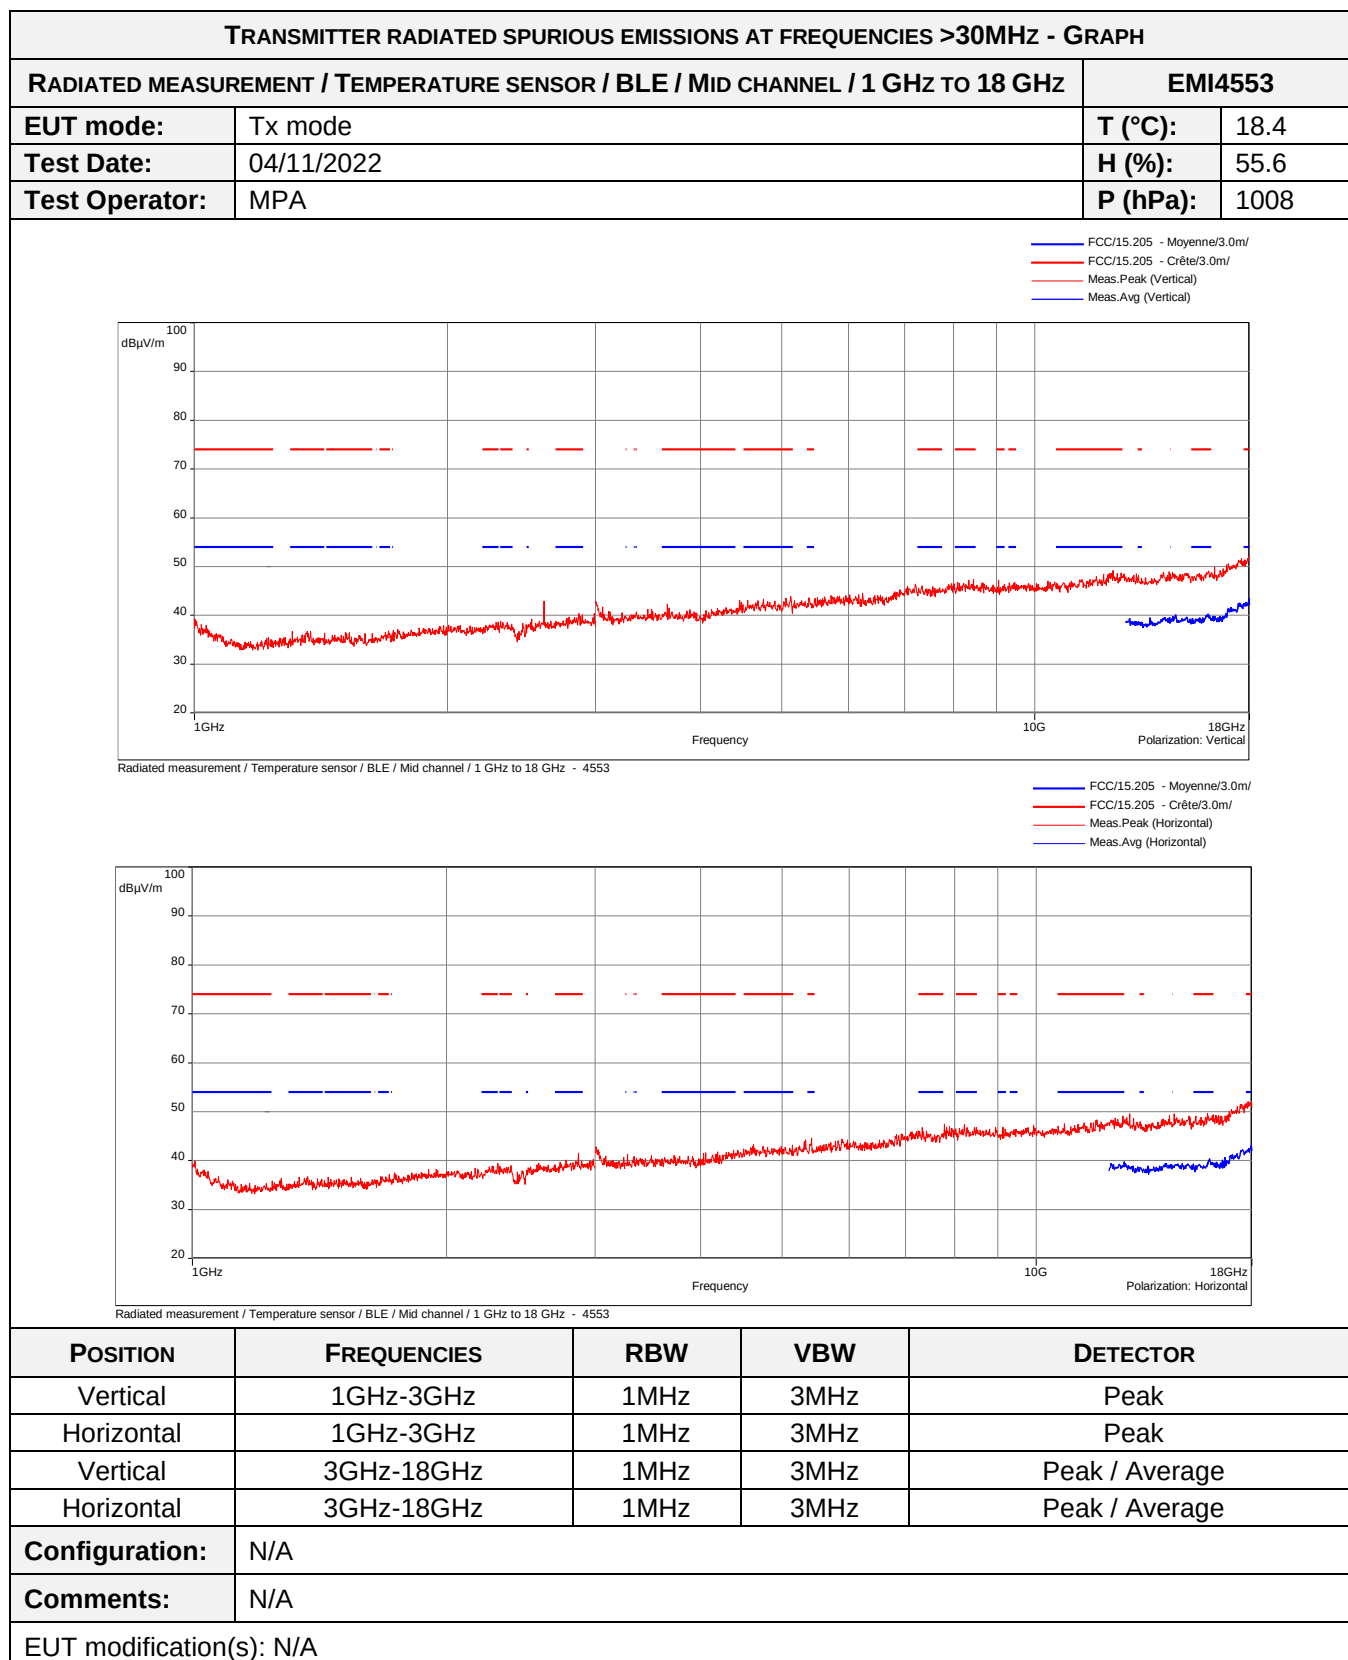

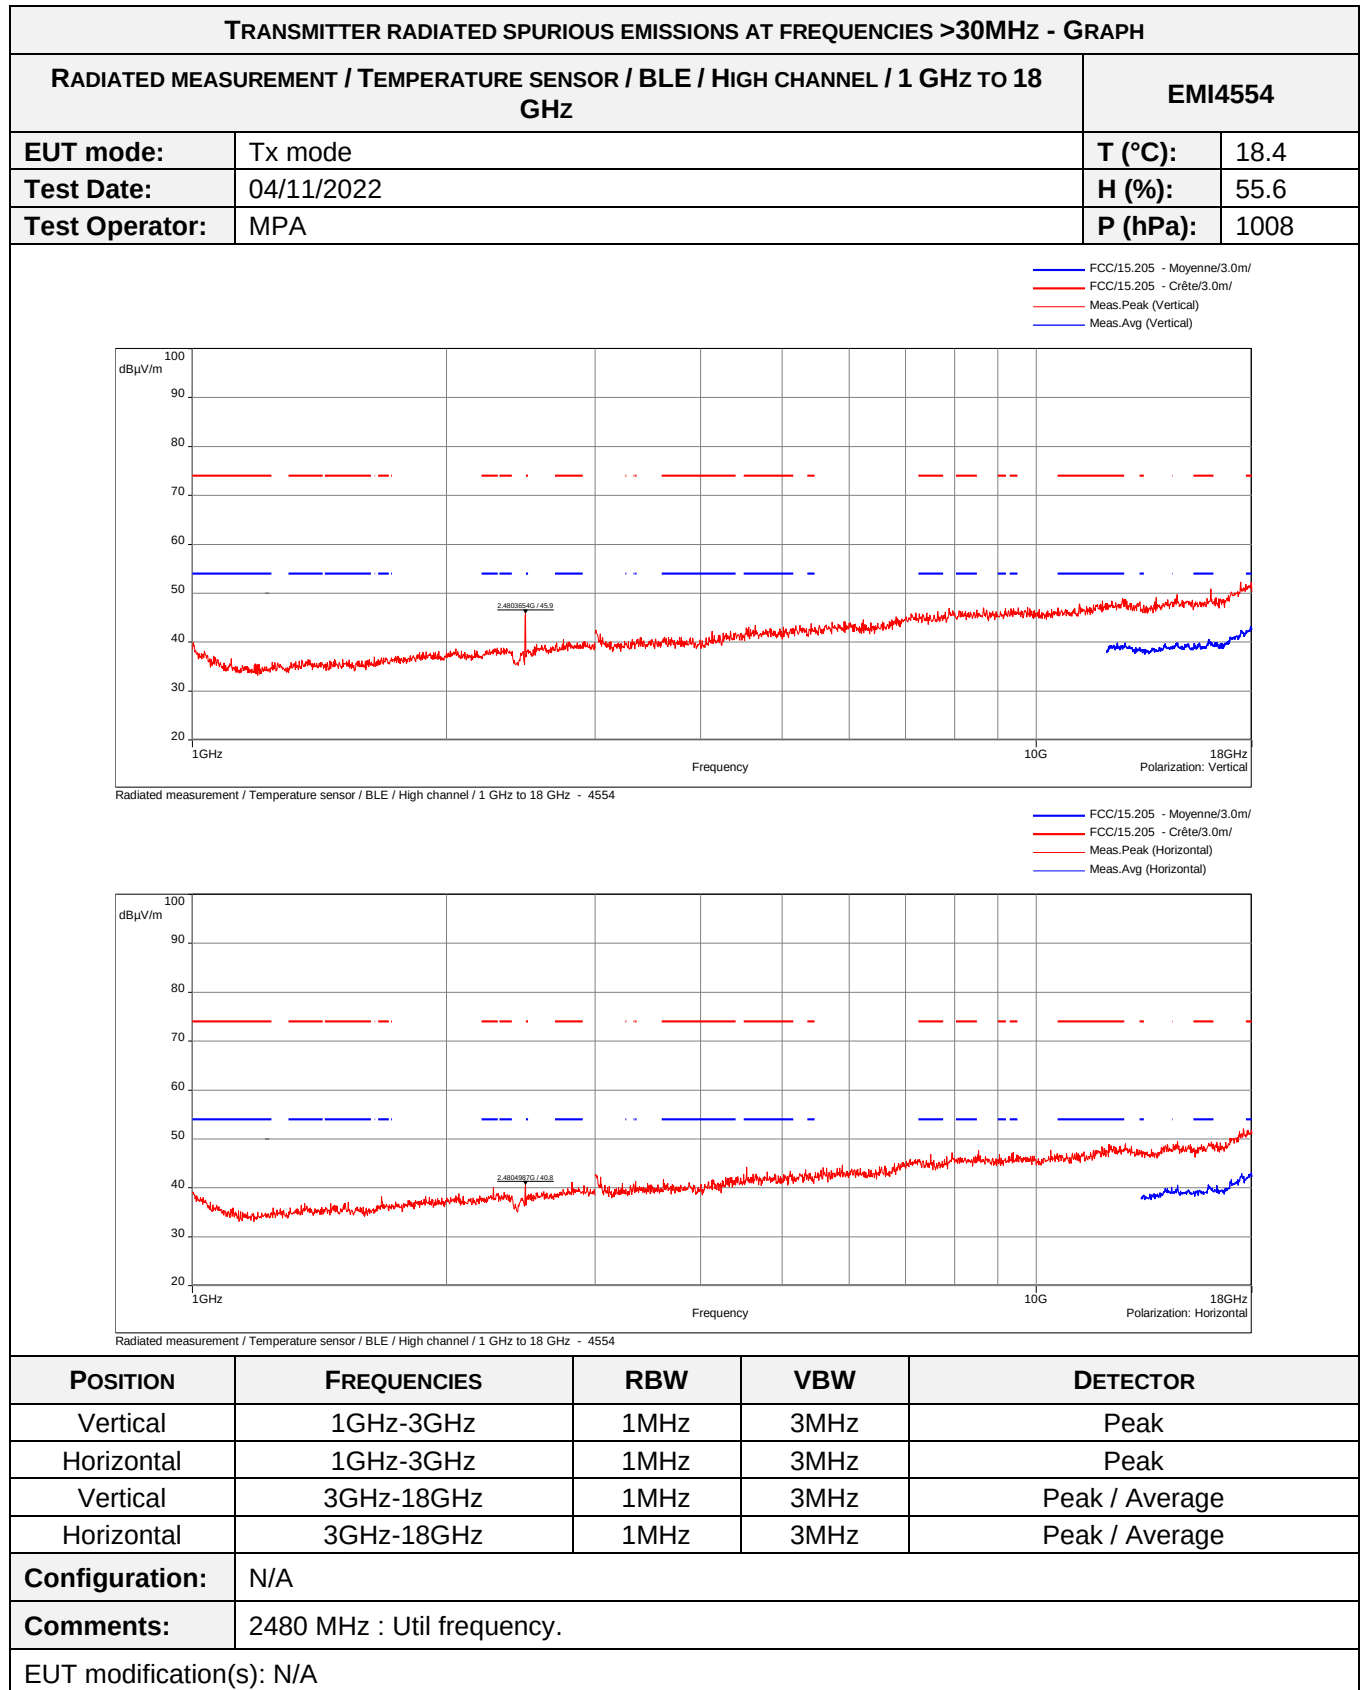

7.2. Equivalent isotropic radiated power

Reference standard:	FCC Part 15.247 RSS-247
Test method:	ANSI C63.10: 2013
Test description: b) (2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section. Only the highest levels are recorded.	

TESTED CONFIGURATION	RESULTS	SEVERITY	RESULT TAB.	VERDICT
EIRP / BLE / Low channel	-12.1 dBm	1W (30dBm)	EMI4402	PASS
EIRP / BLE / Mid channel	-12.9 dBm	1W (30dBm)	EMI4403	PASS
EIRP / BLE / High channel	-14.0 dBm	1W (30dBm)	EMI4404	PASS


LABORATORY PARAMETERS:	REQUIRED PRIOR TO THE TEST	DURING THE TEST
Ambient Temperature	15 to 35 °C	21 °C
Relative Humidity	20 to 75 %	37.9 %
Atmospheric pressure	N/A	1008 hPa
Test method deviation: N/A		
Supplementary information: Measurements are done in radiated. Only highest level are recorded.		

TEST EQUIPMENT USED					
CATEGORY	BRAND	TYPE	IDENTIFIER	CAL. DATE	CAL. DUE
Antenna	ETS lindgren	3143B	17930	12/08/2021	12/10/2024
Antenna	AARONIA	Powerlog 70180	15306	24/07/2019	24/03/2023
Attenuator	EMITECH	SUB.V4-H	18112	05/01/2022	05/03/2023
Attenuator	EMITECH	SUB.V4-V	18111	05/01/2022	05/03/2023
Cable	Techniwave	N-1.5m	18341	25/01/2022	25/03/2024
Cable	Techniwave	N-1.5m	18342	25/01/2022	25/03/2024
Cable	/	N-1m	3622	10/11/2021	10/01/2024
Cable	Techniwave	N-3.5m	18353	25/01/2022	25/03/2024
Cable	Techniwave	N-4m	18355	25/01/2022	25/03/2024
Preamplifier	IMPULSE	CA118-546ACN	9169	26/04/2022	26/06/2023
Receiver	Rohde & Schwarz	FSW43	14830	10/08/2022	10/10/2024
Shielded enclosure	COMTEST	FAR-3m	18014	17/08/2021	17/10/2024
Software	Nexio	BAT EMC	0000		
Thermohygrometer	Testo	608-H2	12269	07/06/2022	07/08/2024
Thermohygrometer	Bioblock Scientific	Météostar	0963	07/06/2021	07/08/2023

BAT-EMC software version: V3.18.0.26

Blank cells = Permanent validity

TEST SETUP PHOTO(s) – EUT POSITON

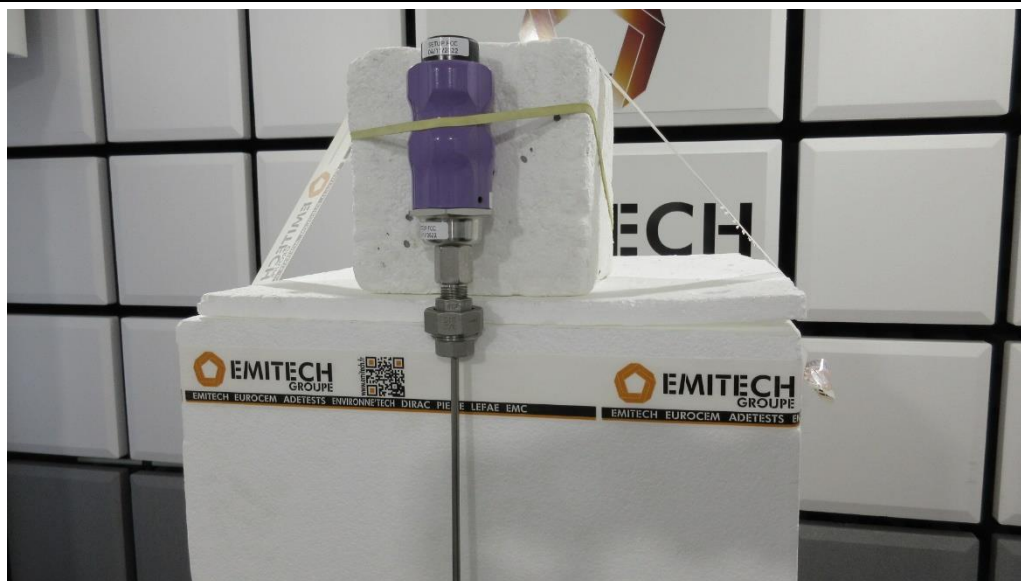


TEST SETUP PHOTO(s) – EIRP





EQUIVALENT ISOTROPIC RADIATED POWER - TABULATED RESULTS				
EIRP / BLE / LOW CHANNEL				EMI4402
FREQUENCY (MHz)	POLARIZATION	LEVEL (dBm)	LIMIT (dBm)	MARGIN (dB)
2402	Vertical	-13.9	30.00	-43.9
2402	Horizontal	-15.3	30.00	-45.3

EQUIVALENT ISOTROPIC RADIATED POWER - TABULATED RESULTS				
EIRP / BLE / MID CHANNEL				EMI4403
FREQUENCY (MHz)	POLARIZATION	LEVEL (dBm)	LIMIT (dBm)	MARGIN (dB)
2426	Vertical	-12.4	30.00	-42.4
2426	Horizontal	-13.2	30.00	-43.2

EQUIVALENT ISOTROPIC RADIATED POWER - TABULATED RESULTS				
EIRP / BLE / HIGH CHANNEL				EMI4404
FREQUENCY (MHz)	POLARIZATION	LEVEL (dBm)	LIMIT (dBm)	MARGIN (dB)
2480	Vertical	-13.2	30.00	-43.2
2480	Horizontal	-14.2	30.00	-44.2

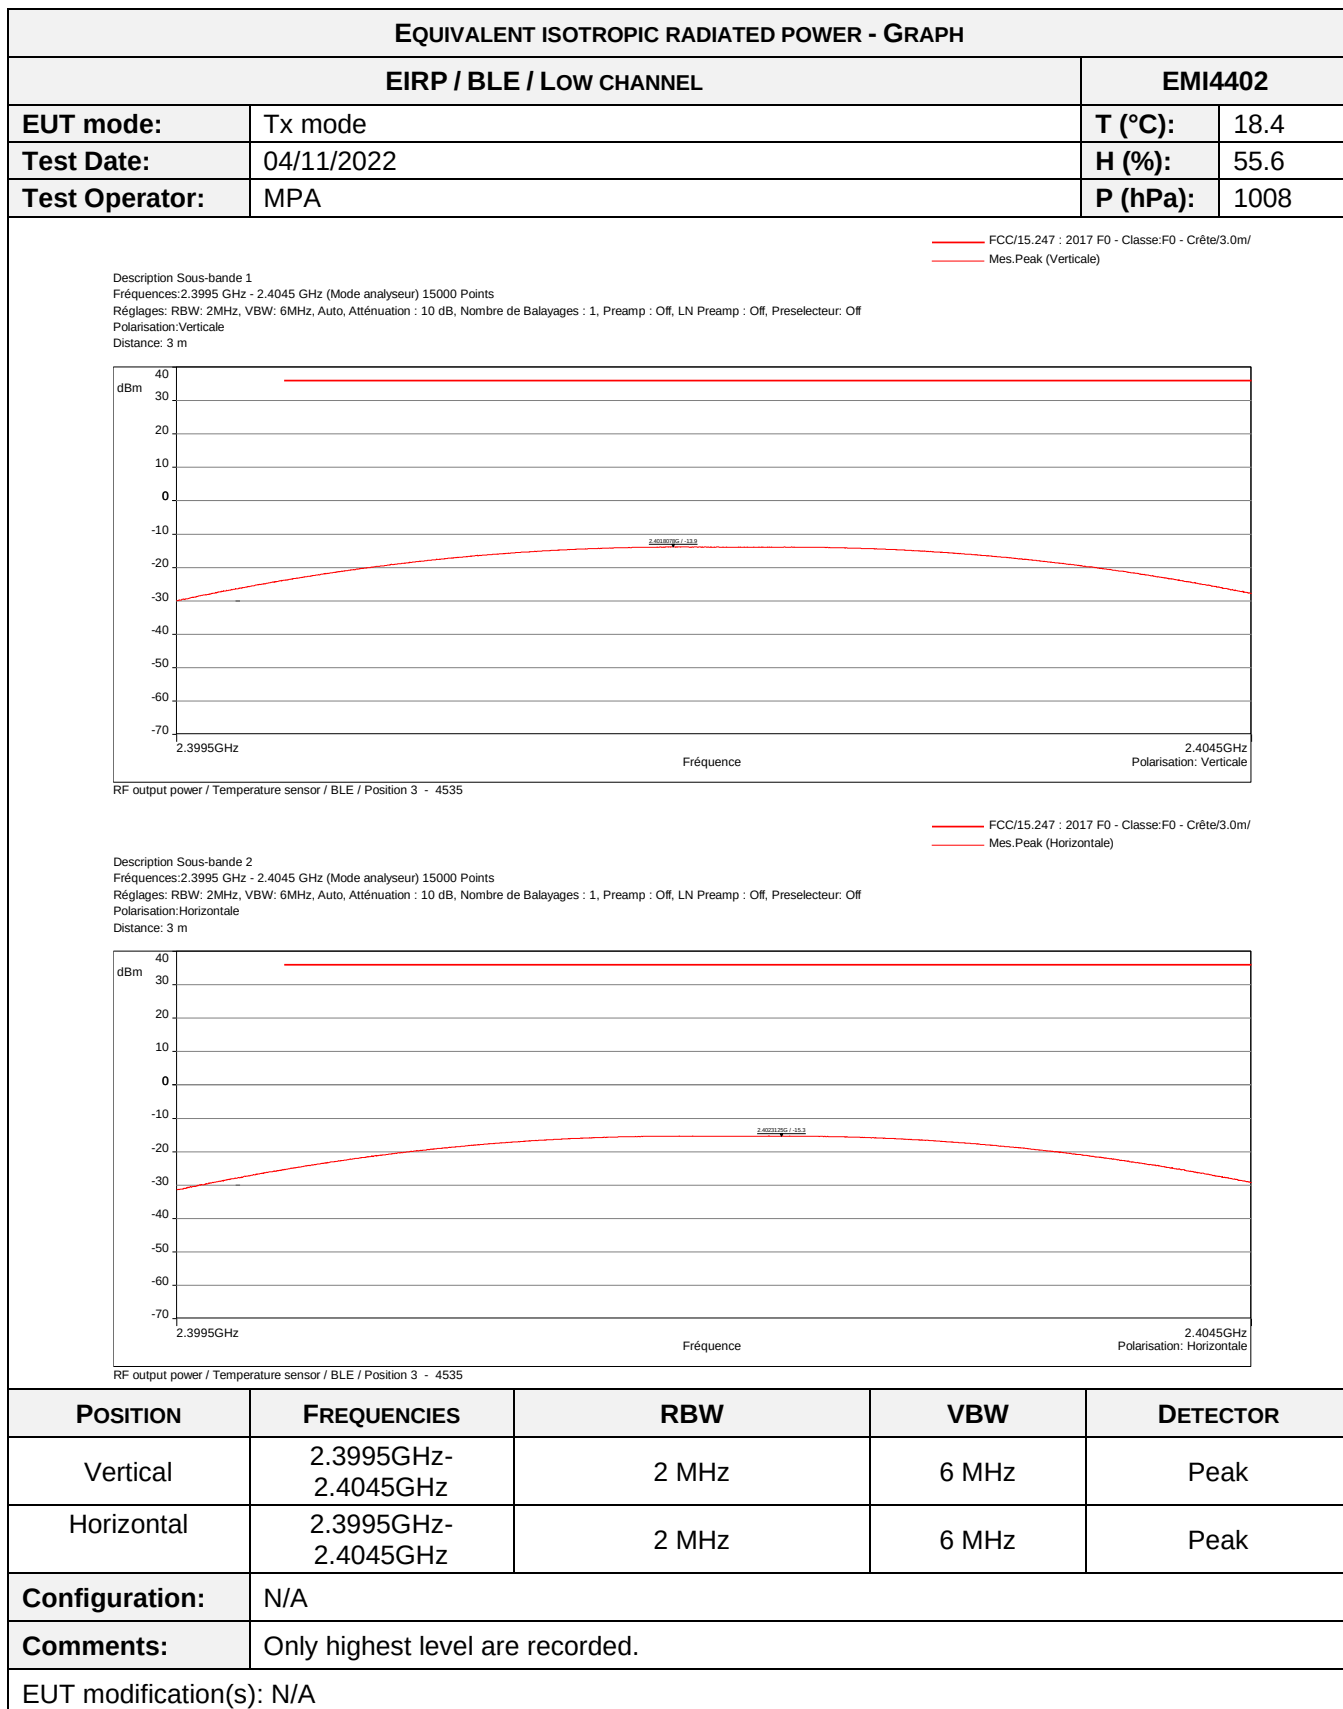

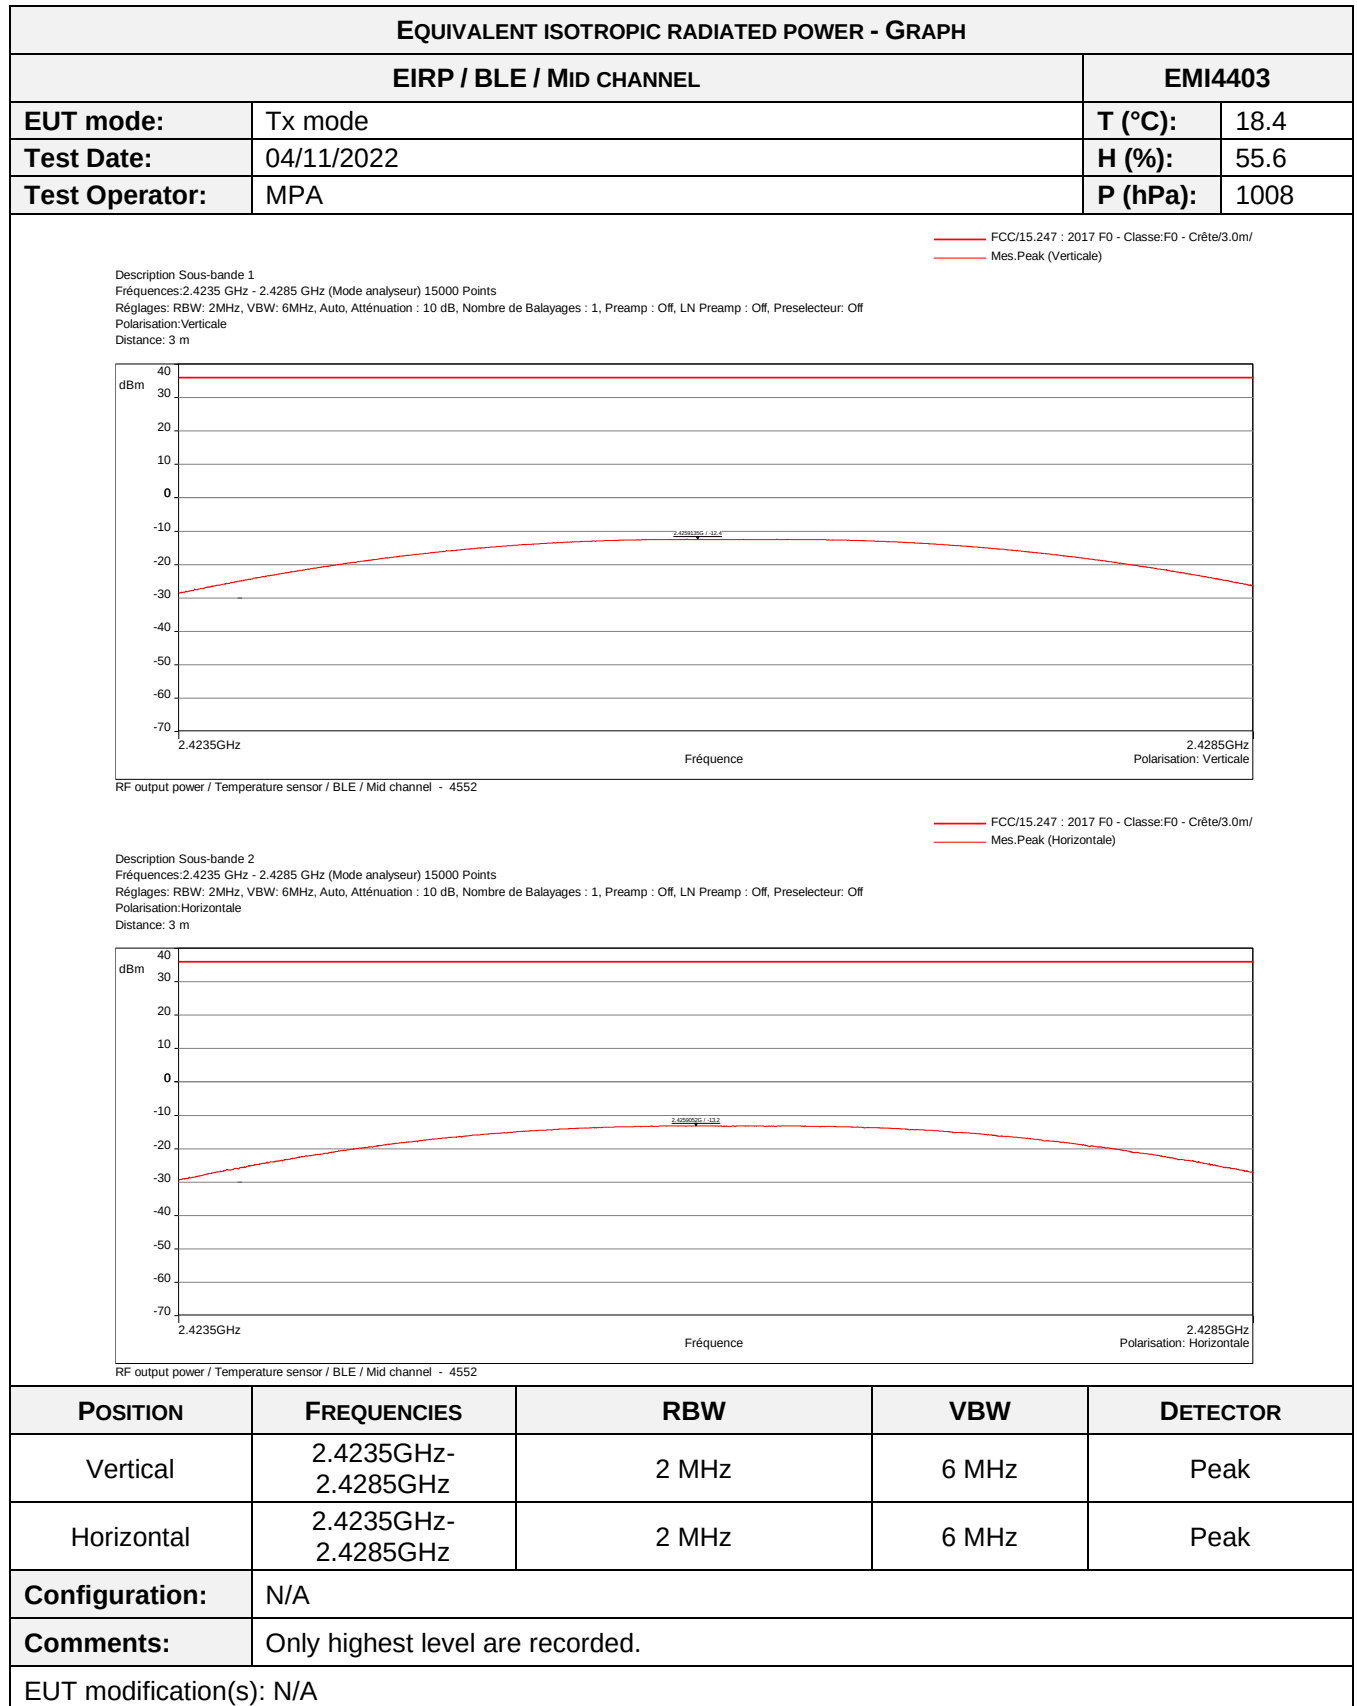

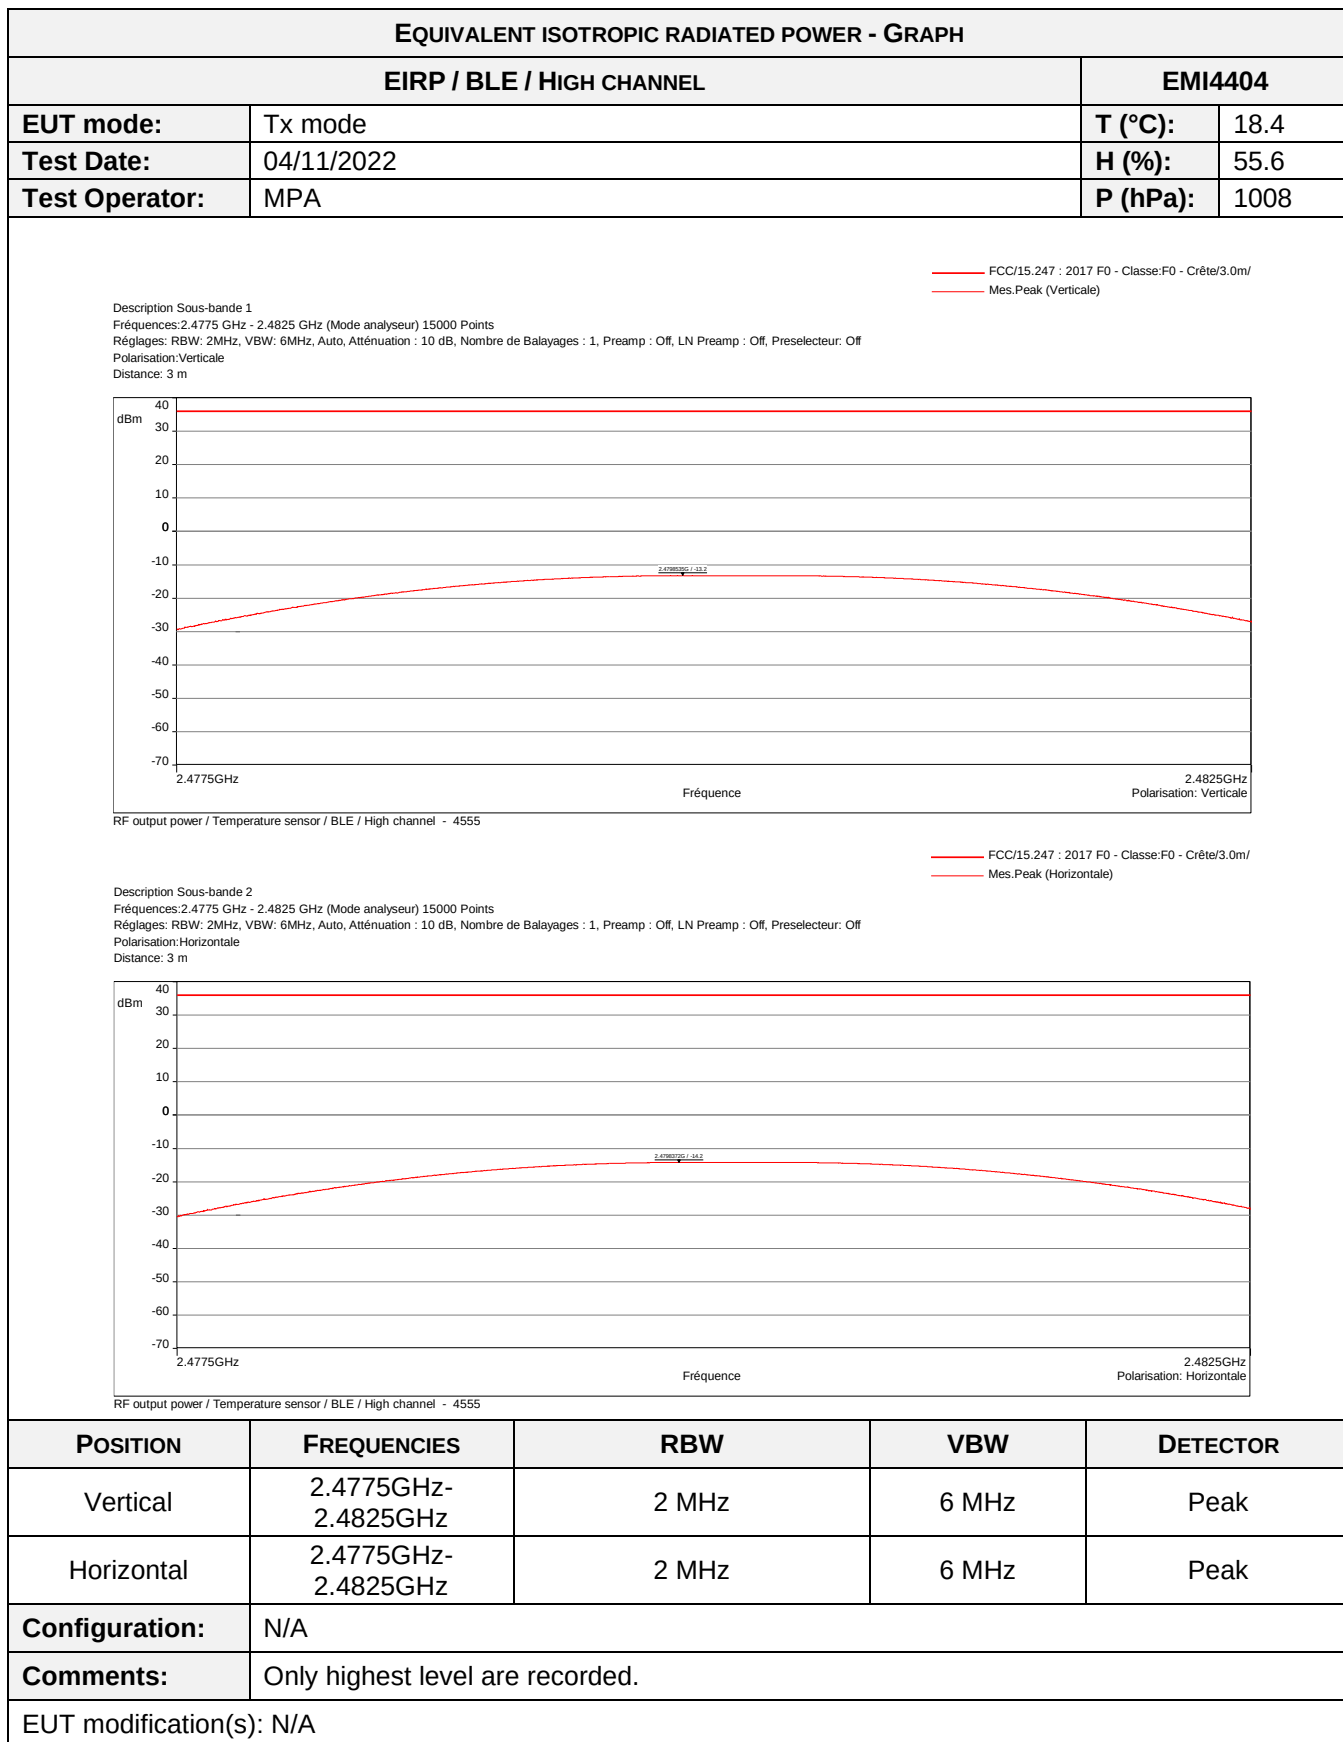

End of test report