

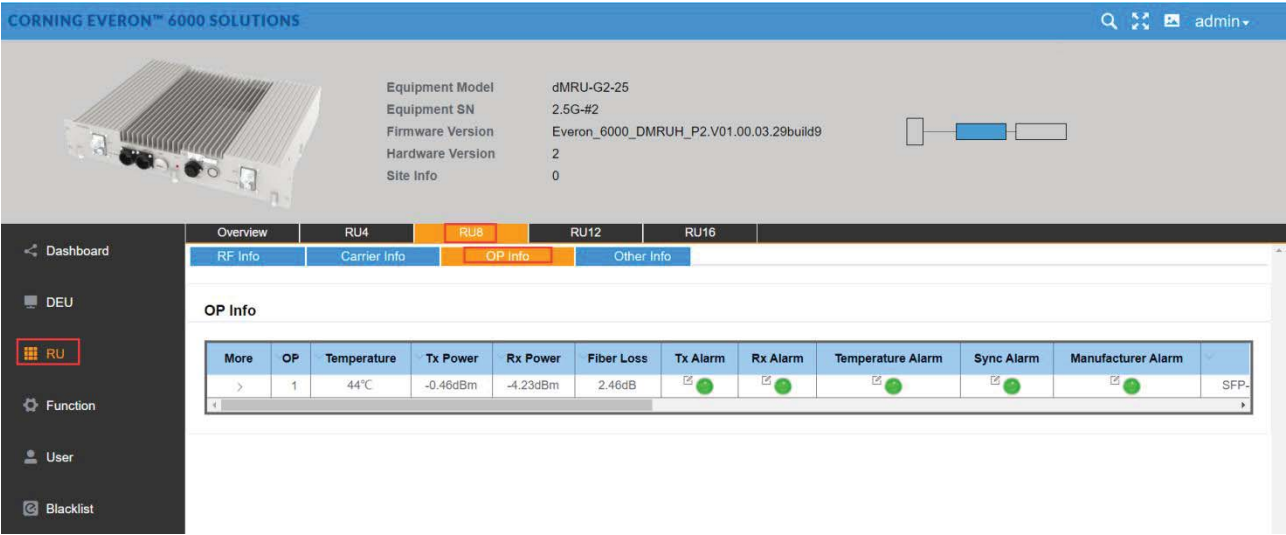


Figure 162. RU→OP Info

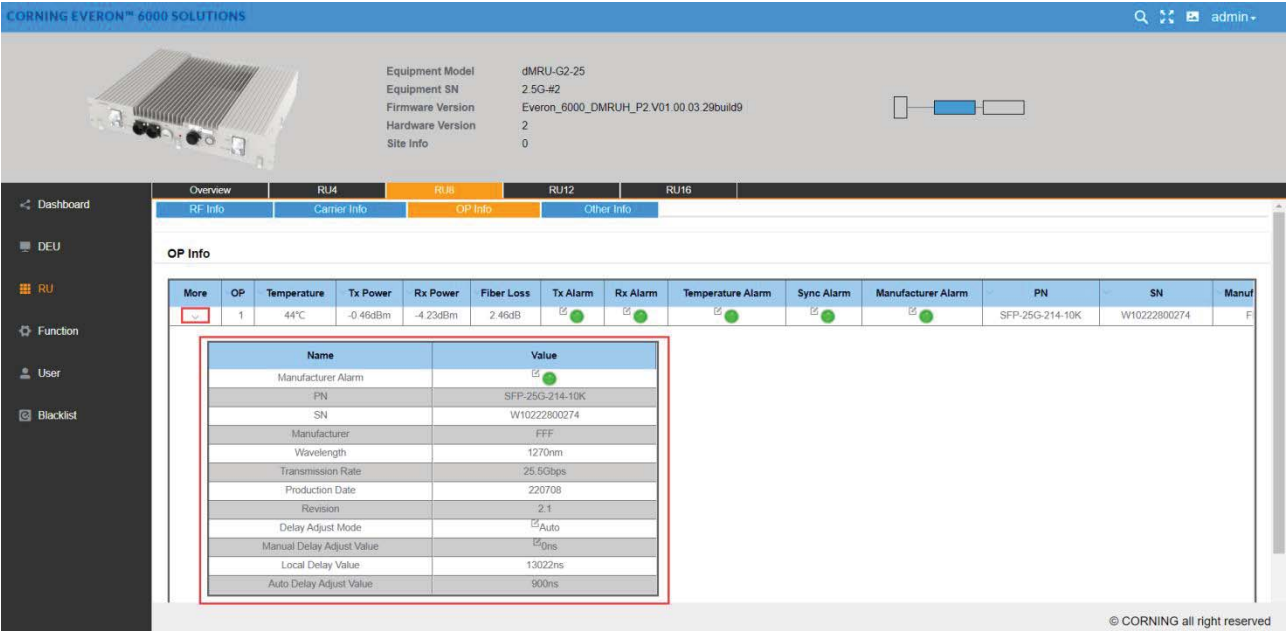


Figure 163. RU→OP Info→More

5.4.2.4 Other Info

CORNING EVERON™ 6000 SOLUTIONS

Equipment Model: dMRU-G2-25
Equipment SN: 2.5G-#2
Firmware Version: Everon_6000_DMRUH_P2.V01.00.03.29build9
Hardware Version: 2
Site Info: 0

Other Info

Name	Value
Fan Switch	OFF
Fan Alarm 1	ON
Fan Alarm 2	ON
Fan Alarm 3	ON
DL VSWR THR	2.0

Figure 164. RU→Other info

5.5 DLRU Config

5.5.1 RU -> Overview & Alarm

Click RU to enter the Overview interface and view the current status of RU alarms (e.g., Link Alarm).

CORNING EVERON™ 6000 SOLUTIONS

DEU ID: 21
RU Number: 2

Overview

More	RU ID	Equipment Alarm	Equipment Model	Equipment SN	Firmware Version	Site Info	Temperature	Power Saving	Link Alarm	Digital HW Alarm
>	1	ON	dLRU-G2-17192325	0	Everon_6000_DLRUM_P2.V02.00.02.12build9	0	54°C	OFF	ON	ON
>	19	ON	dLRU-G2-678	0721170103	Everon_6000_DLRUM_P2.V02.00.02.10build9	0	41°C	OFF	ON	ON

Figure 165. RU→Overview

Each alarm is defined as follows:

- Link Alarm
- Digital HW ALM
- Temperature Alarm
- Low Transmission Alarm
- Overflow Alarm
- DC Voltage Lower Alarm
- Over Power Consumption Alarm
- Firmware Mismatch Alarm

Drag the scroll bar to view more information (e.g., Temperature) as shown in the figure below.

CORNING EVERON™ 6000 SOLUTIONS

DEU ID 21
RU Number 2

Dashboard | Overview | RU1 | RU19

More RU ID Equipment Alarm Equipment Model Equipment SN Firmware Version Site Info Temperature Power Saving Link Alarm Digital HW Alarm

Name	Value
Digital HW Alarm	ON
Temperature Alarm	ON
Low Transmission Alarm	ON
Overflow Alarm	ON
Firmware Mismatch Alarm	ON

19 dLRU-G2-678 0721170103 Everon_6000_DLRUM_P2.V02.00.02.12build9 41°C OFF ON ON

Figure 166. RU → Overview → More

5.5.2 RU Parameter config

5.5.2.1 RF info

CORNING EVERON™ 6000 SOLUTIONS

Equipment Model dLRU-G2-17192325
Equipment SN 0
Firmware Version Everon_6000_DLRUM_P2.V02.00.02.12build9
Hardware Version 4
Site Info 0

Overview | RU1 | RU19

RF Info | Carrier Info | OP Info

RF Info

CH	Band	RF Switch	Rating Power	DL Pwr_out	UL Pwr_in	DL ATT	UL ATT	Work Mode	AGC Value	Service Off Alarm	MIMO
1	1900B	ON	20dBm	<-8.0dBm	-81.9dBm	0dB	0dB	N/A	0dB	ON	MIMO1
2	1900B	ON	20dBm	<-8.0dBm	-81.6dBm	0dB	0dB	N/A	0dB	ON	MIMO2
3	EAWS-A	ON	20dBm	15.7dBm	-87.3dBm	0dB	0dB	N/A	0dB	ON	MIMO1
4	EAWS-A	ON	20dBm	15.2dBm	-87.7dBm	0dB	0dB	N/A	0dB	ON	MIMO2
5	WCS	ON	20dBm	<-8.0dBm	-93.0dBm	0dB	0dB	N/A	0dB	ON	MIMO1
6	WCS	ON	20dBm	<-8.0dBm	-92.7dBm	0dB	0dB	N/A	0dB	ON	MIMO2
7	2500T	ON	20dBm	<-8.0dBm	-82.0dBm	0dB	0dB	Normal	0dB	ON	MIMO1
8	2500T	ON	20dBm	<-8.0dBm	-81.9dBm	0dB	0dB	Normal	0dB	ON	MIMO2

Figure 167. RF Info

Click RU → RU1 to read various RF information of RU, as shown in the figure below:

SN	Parameter	Range	Recommend value
1	RF Switch	ON/OFF	ON
2	DL ATT	(0~20)	10
3	UL ATT	(0~20)	10
4	Work Mode	Normal DL force uplink UL force uplink	Normal
5	Service off alarm	Disable Enable	Enable
6	MIMO	MIMO 1 MIMO 2	

Figure 167.RF info

5.5.2.2 Carrier info

Equipment Model: dLRU-G2-17192325
Equipment SN: 0
Firmware Version: Everon_6000_DLRUM_P2.V02.00.02.12build9
Hardware Version: 4
Site Info: 0


NO.	UL Center Freq.	DL Center Freq.	BW	MIMO	UL Carrier Pwr	DL Carrier Pwr	Technology
1	1707.5MHz/133097	2125MHz/150	20MHz	MIMO1	-69.0dBFS	-65.9dBFS	4G
2	1707.5MHz/133097	2125MHz/150	20MHz	MIMO2	-69.0dBFS	-65.9dBFS	4G
3	1760MHz/19700	2177.5MHz/66211	5MHz	MIMO1	-72.0dBFS	-65.9dBFS	4G
4	1760MHz/19700	2177.5MHz/66211	5MHz	MIMO2	-72.0dBFS	-65.9dBFS	4G
5	1875MHz/18850	1967.5MHz/975	10MHz	MIMO1	-72.0dBFS	-65.9dBFS	4G
6	1875MHz/18850	1967.5MHz/975	10MHz	MIMO2	-72.0dBFS	-65.9dBFS	4G
7	1907.5MHz/19175	2000MHz/68386	15MHz	MIMO1	-69.0dBFS	-65.9dBFS	4G
8	1907.5MHz/19175	2000MHz/68386	15MHz	MIMO2	-72.0dBFS	-65.9dBFS	4G
9	2640MHz/528000	2640MHz/528000	80MHz	MIMO1	-61.2dBFS	-65.9dBFS	5G
10	2640MHz/528000	2640MHz/528000	80MHz	MIMO2	-60.8dBFS	-65.9dBFS	5G
15	1742.5MHz/19525	2160MHz/500	20MHz	MIMO1	-69.0dBFS	-19.6dBFS	4G
16	1742.5MHz/19525	2160MHz/500	20MHz	MIMO2	-69.0dBFS	-19.7dBFS	4G

Figure 168.RU →RU 4→Carrier Info

5.5.2.3 OP info

The OP Info list box displays the current optical port connection status and information reading volume of the device, as shown in the figure below.

CORNING EVERON™ 6000 SOLUTIONS admin




Equipment Model: dLRU-G2-17192325

Equipment SN: 0

Firmware Version: Everon_6000_DLRUM_P2.V02.00.02.12build9

Hardware Version: 4

Site Info: 0



Dashboard

DEU

RU

Function

User

Blacklist

Overview
RU1
RU19


RF Info
Carrier Info
OP Info

OP Info

More	OP	Temperature	Tx Power	Rx Power	Fiber Loss	Tx Alarm	Rx Alarm	Temperature Alarm	Sync Alarm	Manufacturer Alarm	PN
>	1	64°C	-2.22dBm	-4.4dBm	1.9dB						FTLX2072D333
>	2	64°C	-1.66dBm	-2.39dBm	0.23dB						FTLX2072D333
>	3	N/A	N/A	N/A	N/A						N/A

Figure 169. RU → RU 1 → OP Info

CORNING EVERON™ 6000 SOLUTIONS admin




Equipment Model: dLRU-G2-17192325

Equipment SN: 0

Firmware Version: Everon_6000_DLRUM_P2.V02.00.02.12build9

Hardware Version: 4

Site Info: 0



Dashboard

DEU

RU

Function

User

Blacklist

Overview
RU1
RU19

RF Info
Carrier Info
OP Info

OP Info

More	OP	Temperature	Tx Power	Rx Power	Fiber Loss	Tx Alarm	Rx Alarm	Temperature Alarm	Sync Alarm	Manufacturer Alarm	PN	SN	Manufa
More	1	64°C	-2.22dBm	-4.4dBm	1.9dB						FTLX2072D333	U638CZD	FINISAR

Name	Value
SN	U638CZD
Manufacturer	FINISAR CORP
Wavelength	1331nm
Transmission Rate	10.3Gbps
Production Date	210723
Revision	A
Delay Adjust Mode	Auto
Manual Delay Adjust Value	0ms
Local Delay Value	2422ms
Auto Delay Adjust Value	0ms

Figure 170. RU → RU 1 → OP Info → More

5.6 Downlink/Uplink Config

5.6.1 Downlink Output Power Config (Power Sharing Process)

Step 1. Set Carrier Info in Chapter 5.3.1.3, including the operator info, carrier info. The DL ATT can be set to default value in power sharing config.

The screenshot displays the 'Power Sharing' configuration page in the CORNING EVERON™ 6000 SOLUTIONS web interface. The page features a sidebar with navigation options: Dashboard, DEU (highlighted), RU, Function, User, and Blacklist. The main content area has tabs for Alarm Info, OP Info, Carrier Info, and Power Sharing (selected). The Power Sharing tab shows a 'Calculate & Set DL ATT' button and a 'Power Sharing Lock' toggle. Below these are three tables for configuring power sharing for different bands (EAWA-A, EAWA-A, 1900B) and MIMO channels (MIMO1, MIMO2). Each table has columns for Band, Operator, Number of Carrier, Assign Percent, and Assign Type.

Band	Operator	Number of Carrier	Assign Percent	Assign Type
EAWA-A	ATT	2	10 %	Density
EAWA-A	ATT	2	10 %	Density
1900B	ATT	2	10 %	Density

Figure 154. Power sharing

Step 2. Set the power sharing parameters in chapter 5.3.1.4

- Assign each operator's power share (percentage).
- Select the carrier's power assignment mode for each operator (Density /Even).
Density mode: power assignment based on carrier bandwidth.
Even mode: power assignment based on the carrier number.
- Config MIMO 1 and MIMO 2 channel.
- Select the calculate button to active the value, then the DL ATT value in Step 1 will be automatically calculated.
- Select the 'Power Share Lock' button to lock the ATT config.
- The system will automatically emit the output target power based on power sharing configuration if the DCU input power is within the operation range.

Step 3. Set RIU ATT to meet DCU input power range according to chapter 5.1.2

- Set RIU high gain mode (ON/OFF) and DL ATT to suitable value to meet DCU input operation range.

High Gain Mode	DL ATT	Total Gain
ON (Gain = -7dB)	0~25	-7~-32dB
OFF (Gain = -30dB)	0~25	-30~-55dB

- The DCU input power target is -7dBm, and the RIU suggested input power range is 10~37dBm, so that please config RIU high gain mode and DL ATT according to the input power.

RIU Input Power(dBm)	High Gain Mode (ON/OFF)	DL ATT (0~25)	Total Gain(dB)	Target Output Power
10~25	ON (Gain = -7dB)	Gain=-10~-25	-17~-32	-7dBm
25~37	OFF (Gain = -30dB)	Gain=-2~-14	-32~-44	-7dBm

In this case, please config the DCU to the following config. The detailed config is listed in chapter 5.2.2

High Gain mode = OFF

DCU DL ATT changes from 20dB to 0dB after antenna connection.

5.6.2 Uplink Gain Config

The Total Uplink Gain = -2dB - RIU UL ATT - DCU UL ATT - RU UL ATT

Step 1. Config the RIU UL ATT according to chapter 5.1.2

Step 2. Config the DCU UL ATT according to chapter 5.2.2.2


Step 3. Config the RU UL ATT according to chapter 5.4.2.2

The range of each ATT is listed as below.


SN	ATT Range(dB)	Default Value(dB)	Config Description
1	0~25	20	chapter 2.1.2
2	0~20	20	chapter 2.2.2.2
3	0~20	10	chapter 2.4.2.2

5.7 Case

2T01 2x2 MIMO Case

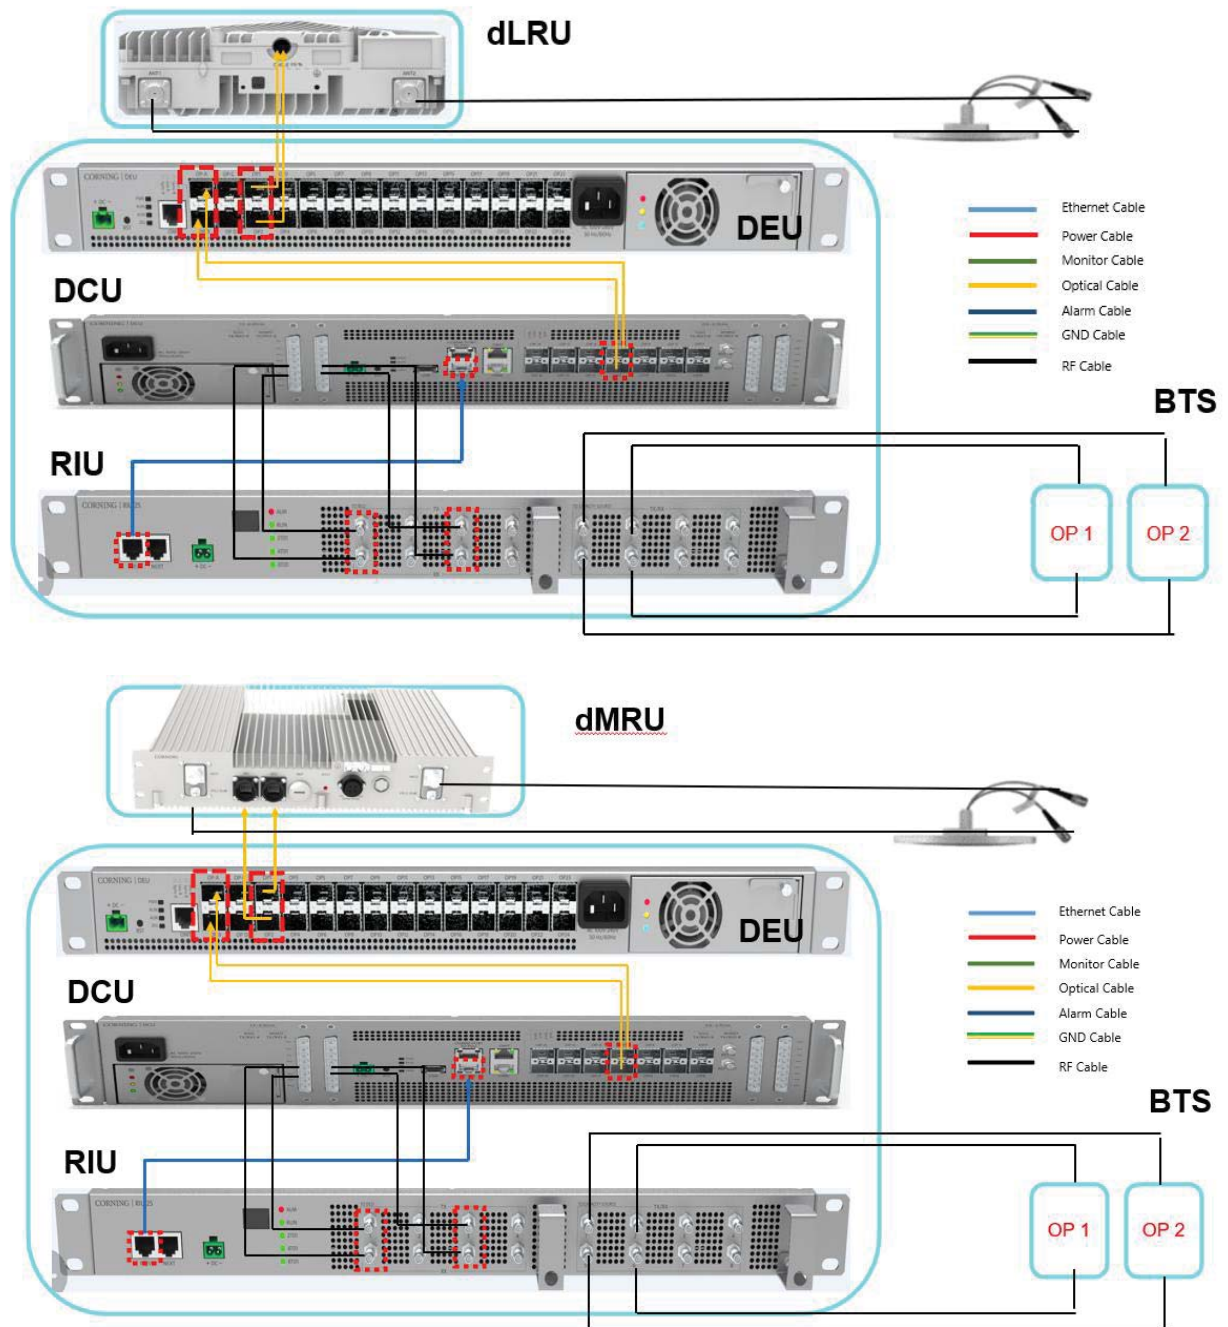

4TO1 2x2 MIMO Case

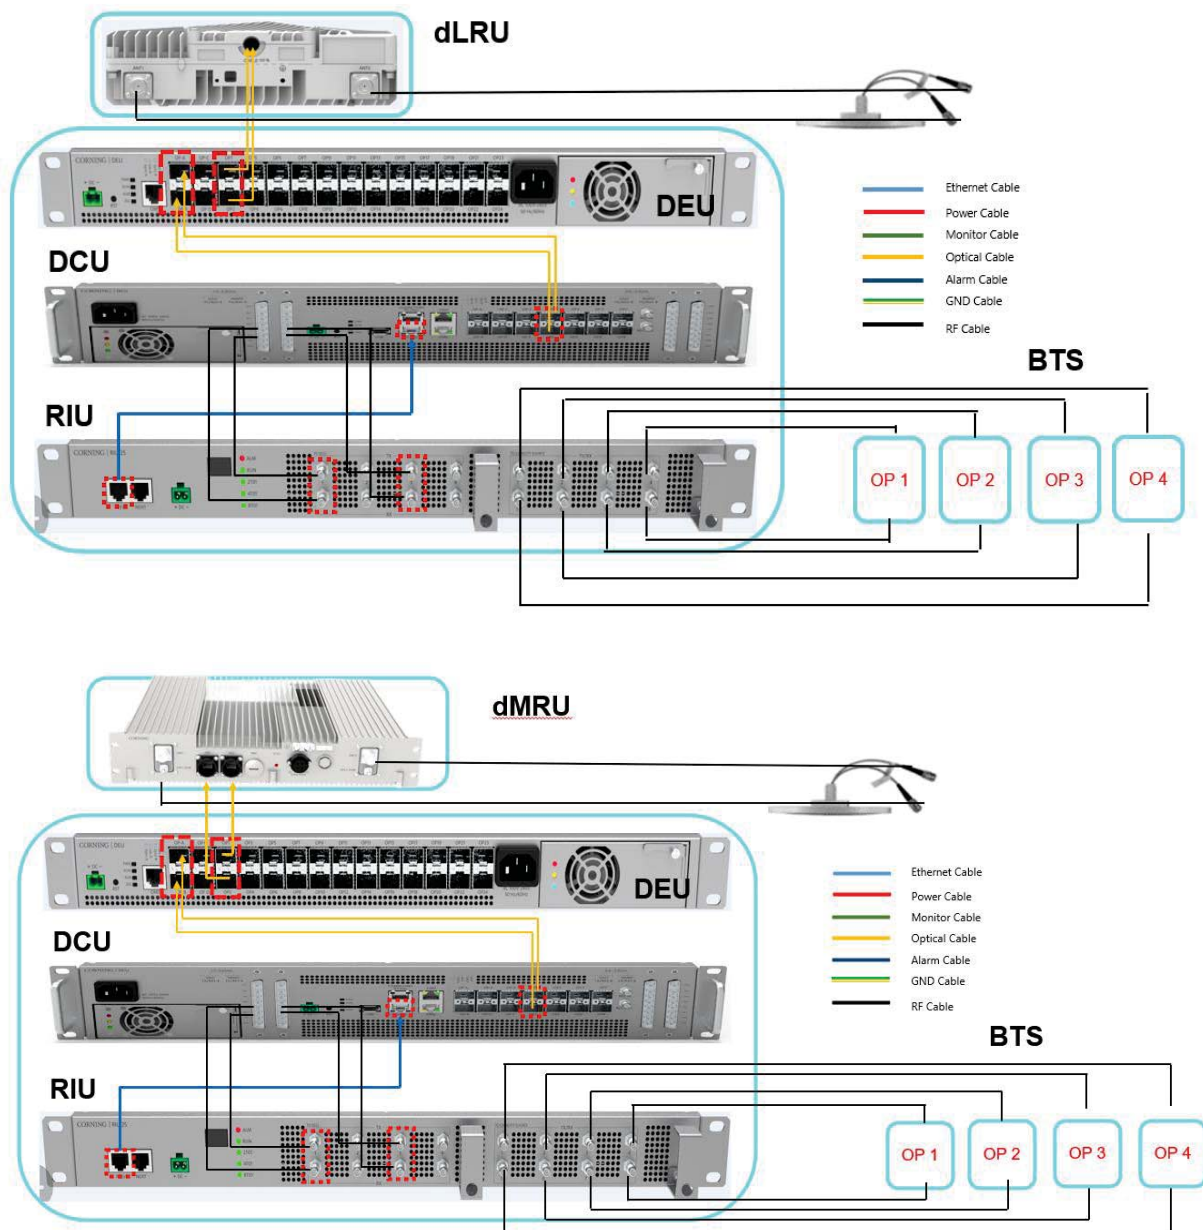

Refer to the table below for Everon™ 6000 Parameters.



Everon™ 6000
Parameters_Build

Release Version

SN	Unit	Version
1	System version	Everon_6000_SYSTEM_P2.V01.04.01.68build9
2	RIU	Everon_6000_RIU_P2.V01.00.00.10build9
3	RIU-FDD	Everon_6000_RIU_P2.V02.00.00.04build9
4	DEU-25G	Everon_6000_DEU_P2.V01.00.03.63build9
5	DEU-10G	Everon_6000_DEU_P2.V02.00.02.15build9
6	DCU	Everon_6000_DCU_P2.V01.00.03.54build9
7	DLRU-3.5	Everon_6000_DLRUH_P2.V01.00.04.55build9
8	DLRU-M	Everon_6000_DLRUM_P2.V02.00.02.12build9
9	DLRU-L	Everon_6000_DLRUL_P2.V02.00.02.10build9
10	DMRU-3.5	Everon_6000_DMRUH_P2.V01.00.03.29build9
11	DMRU-FDD	Everon_6000_DMRUF_P2.V02.00.00.16build9

6. APPENDIX: LED Functionality and Color Definition

Optical LED definition

		Green	Amber
		(SYNC)	(LOS)
SFP Plug out	SFP Plug out	OFF	OFF
Optic Link Fail	1. Optic cable disconnected	OFF	ON
	2. SFP fail	OFF	ON
	2.1 SFP fault	OFF	ON
	2.2 SFP warning	OFF	ON
	2.3 SFP alarm	OFF	ON
	3. CPRI link down	OFF	ON
Optic Link OK	1. Optic cable connected	ON	ON
	2. SFP OK	ON	ON
	3. CPRI link down	ON	ON
CPRI Link OK	1. Optic cable connected	ON	OFF
	2. SFP OK	ON	OFF
	3. CPRI link up	ON	OFF

ALM/RUN/Power LED definition

LED	Description	Color
ALM	1. Alarm	Red
	2. Device detect (Identify and is controlled from DCU)	Red Flash (1Hz, 10s)
	3. No alarm	OFF
RUN	1. The system is up and running	Green Flash(1Hz)
	2. Software or hardware failure	OFF
Power	1. Power on	Green
	2. Power off	OFF

The Corning logo consists of a solid blue square. Inside the square, the word "CORNING" is written in a white, serif, all-caps font, centered horizontally and vertically.

CORNING

Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC 28216 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

Corning Optical Communications reserves the right to improve, enhance, and modify the features and specifications of Corning Optical Communications products without prior notification. A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2023 Corning Optical Communications. All rights reserved. LAN-3091-AEN / January 2023