

# **DRAGON™ M SERIES**

QUICK REFERENCE



# DATALOGIC

DATALOGIC S.p.A.  
Via Candini 2  
40012 - Lippo di Calderara di Reno  
Bologna - Italy

DRAGON™ M Series

Ed.: 11/2005

## ALL RIGHTS RESERVED

Datalogic reserves the right to make modifications and improvements without prior notification.

Datalogic shall not be liable for technical or editorial errors or omissions contained herein, nor for incidental or consequential damages resulting from the use of this material.

Product names mentioned herein are for identification purposes only and may be trademarks and or registered trademarks of their respective companies.

© Datalogic S.p.A. 2001-2005

Preliminary

## CONTENTS

---

|                                         |    |
|-----------------------------------------|----|
| Updates and Language Availability ..... | iv |
| Using DRAGON™ M.....                    | 1  |
| Charging the Batteries .....            | 4  |
| DRAGON™ M Configuration .....           | 5  |
| Radio Timeout.....                      | 10 |
| DRAGON™ M Default Configuration .....   | 11 |
| Technical Features.....                 | 12 |
| Warranty.....                           | 13 |
| Services And Support .....              | 13 |
| Compliance .....                        | 14 |
| Reading Diagrams .....                  | 15 |
| Numeric Table.....                      | 16 |

## **UPDATES AND LANGUAGE AVAILABILITY**

---

### **UK/US**

The latest drivers and documentation updates for this product are available on Internet.

Log on to : [www.datalogic.com](http://www.datalogic.com)

### **I**

Su Internet sono disponibili le versioni aggiornate di driver e documentazione di questo prodotto. Questo manuale è disponibile anche nella versione italiana.

Collegarsi a : [www.datalogic.com](http://www.datalogic.com)

### **F**

Les versions mises à jour de drivers et documentation de ce produit sont disponibles sur Internet. Ce manuel est aussi disponible en version française.

Cliquez sur : [www.datalogic.com](http://www.datalogic.com)

### **D**

Im Internet finden Sie die aktuellsten Versionen der Treiber und Dokumentation von diesem Produkt. Die deutschsprachige Version dieses Handbuchs ist auch verfügbar.

Adresse : [www.datalogic.com](http://www.datalogic.com)

### **E**

En Internet están disponibles las versiones actualizadas de los drivers y documentación de este producto. También está disponible la versión en español de este manual.

Dirección Internet : [www.datalogic.com](http://www.datalogic.com)



## USING DRAGON™ M

The DRAGON™ M series laser gun can be used with either an OM-DRAGON™ cradle or STARGATE™ radio base station to build a Cordless Reading System for the collection, decoding and transmission of barcoded data.


DRAGON™ M laser guns automatically scan barcodes **at a distance**. Simply aim and pull the trigger.

### SCAN LINE POSITION

Code scanning is performed along the scan line emitted from the reading window. This line must cross the entire code.



### AIMING SYSTEM

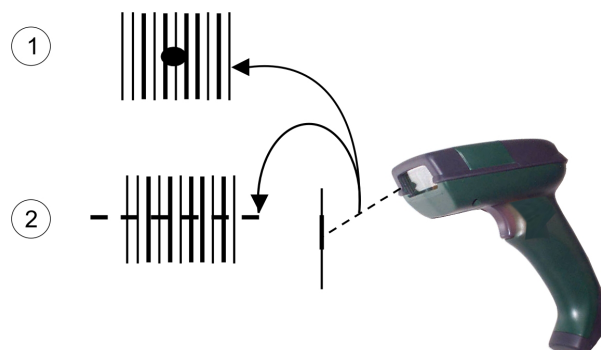

DRAGON™ M provides a programmable aiming system. If enabled, the scan line emitted from the reading window is preceded by a red spot which must illuminate the code center to get the best reading performance (see figure above, ①). Once the defined timeout is reached, the red spot disappears and is followed by the scan line to start the code scanning.



After Dragon™ M Setup, read one of the following codes to set desired aiming system timeout.

◆ aiming system disabled



300 ms



500 ms



1 sec



## READING ANGLE

Successful scanning is obtained by tilting the reader with respect to the barcode to avoid direct reflections that impair the reading performance, see the figure below.



OK



Not Advised



## SETUP

### **DRAGON™ M/OM-DRAGON™ Stand Alone Configuration**

1. Connect an OM-DRAGON™ cradle to the Host. For installation and connection information see the OM-DRAGON™ Quick Reference Manual.
2. Charge the DRAGON™ M battery using an OM-DRAGON™ or the C-DRAGON™ charger as described in this Quick Reference manual. A full charge takes 2 hours with NiMh battery models.
3. Configure the laser gun as described in this Quick Reference - **DRAGON™ M/OM-DRAGON™ Stand Alone Setup.**
4. Configure the OM-DRAGON™ cradle. See OM-DRAGON™ Configuration in the OM-DRAGON™ Quick Reference.

or

### **DRAGON™ M/STAR-System™ Configuration**

1. Charge the DRAGON™ M battery using an OM-DRAGON™ or the C-DRAGON™ charger as described in this Quick Reference manual. A full charge takes 2 hours with NiMh battery models.
2. Configure the laser gun as described in this Quick Reference - **DRAGON™ M/STAR-System™ Setup.**




## CHARGING THE BATTERIES

Once the OM-DRAGON™ is powered, you can charge the laser gun's batteries: Place the DRAGON™ M into the OM-DRAGON™ cradle. The red LED on the cradle goes on.


The battery is completely charged when the green LED on the cradle goes on.

After many recharging cycles NiMh and NiCd batteries may tend to lose their operating autonomy. This condition can be overcome by inserting the DRAGON™ M into the OM-DRAGON™ / C-DRAGON™ charger and pressing the "battery reconditioning" button (see below).

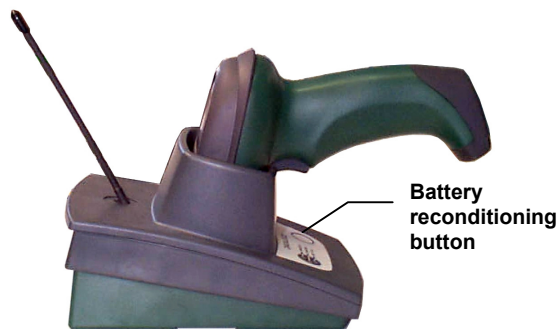

When the above procedure is no longer effective, the batteries must be changed. To change the batteries of your laser gun, unscrew the battery cover screw, replace the old batteries with new ones, then screw the battery cover back into place. (See the following figures).

Battery cover screw



NiMh, NiCd or Alkaline



**CAUTION**

*Dispose of used batteries as required by the relevant laws in force.*



## DRAGON™ M CONFIGURATION

### DRAGON™ M/OM-DRAGON™ STAND ALONE SETUP

When the OM-Dragon™ cradle is connected and powered, configure the Dragon™ M by reading the following codes in the given sequence and follow the instructions.

**Note:** for the numeric code selection of steps 3, 4, and 5 use the table at the end of this Quick Reference.

1. 

Restore Dragon™ M Default  

  
2. 

Enter Configuration  

  
3. 

Set Date  
  
+  
six digits for Day, Month and Year (DDMMYY).
  
4. 

Set Time  
  
+  
four digits for Hours and Minutes (HHMM).
  
5. 

Set Radio Address  
  
+  
four digits for the Dragon™ M Address  
(from 0000 to 1999).

**All readers used in the same area must have different addresses.**



## Exit and Save Configuration

6.



7. Read the **Bind** code to pair the Dragon™ M to the OM-Dragon™ cradle.

The reader is dedicated to the cradle. Any previously **bound** reader will be excluded.


*To connect several readers to the same cradle see the following section "Using Multiple Readers with Same Cradle".*

Bind



The green LED on the Dragon™ M will blink: the reader is ready to be inserted into the cradle.

8. Firmly insert the reader into the cradle within 10 seconds, a beep will be emitted, signaling that the OM-Dragon™ cradle has been paired to the Dragon™ M, and the green LED on the reader will go off.

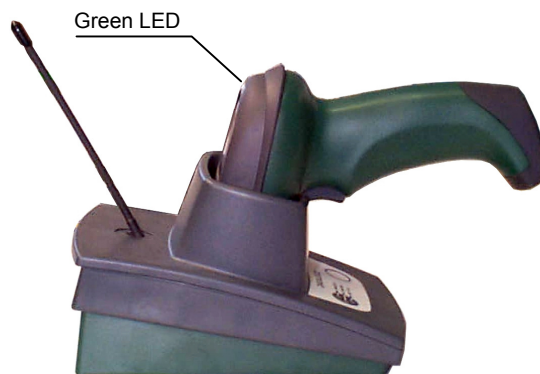

**YOUR READER IS NOW CONFIGURED TO READ BARCODES USING THE DEFAULT VALUES.**

9. Configure the OM-Dragon™ cradle, refer to the "OM-Dragon™ Quick Reference".



## USING MULTIPLE READERS WITH SAME CRADLE

If you want to use several readers associated with the same cradle, you must first **Bind** the cradle with one of the readers (see previously described configuration procedure).

Successive readers can be associated with the same cradle by following the configuration procedure substituting the **Bind** command with **Join**.

7.

Join



The green LED on the Dragon™ M will blink: the reader is ready to be inserted into the cradle. **Complete step 8.**

END of procedure.



CAUTION

*If the cradle is not **Bound** to a reader, its address assumes a random value which can cause conflicts and malfunctions to other cradles within its range.*

## DRAGON™ M/STAR-MODEM™ STAND ALONE SETUP

To configure a Dragon™ M reader to communicate with STAR-Modem™ in Stand Alone Mode, follow the "Dragon™ M/OM-Dragon™ Stand Alone Setup" procedure substituting steps 6 and 7 with those below:

6.

STAR-Modem™ Address



Read the code above and the four-digit address of the STAR-Modem™.

Exit and Save Configuration

7.



END of procedure.

**YOUR READER IS NOW READY TO READ BARCODES.**



## DRAGON™ M/STAR-SYSTEM™ SETUP

The following procedure allows configuring a Dragon™ M reader to communicate with various STAR-System™ devices such as STARGATE™ RF base stations:

1. Restore Dragon™ M Default  

2. Enter Configuration  

3. Set Date  
  
+  
six digits for Day, Month and Year (DDMMYY).
4. Set Time  
  
+  
four digits for Hours and Minutes (HHMM).
5. Set the connection according to the length of the codes to be read:  
Code Length  $\leq 240$  Characters  
  
Code Length  $> 240$  Characters  
(not for systems with OM-Dragon™ as Master)  




6. Set Radio Address
- 
- +
- four digits from the Numeric Table for the Dragon™ M Address  
(from 0000 to 1999).
- All readers used in the same area must have different addresses.**

7. Set First STAR-System™ Address
- 
- +
- four digits from the Numeric Table in the range 0000 to 1999

8. Set Last STAR-System™ Address
- 
- +
- four digits from the Numeric Table in the range 0000 to 1999



**NOTE**

*Whenever the system is composed of a single base station, the first and last base station addresses (steps 7 and 8) must have the same value.*

9. Exit and Save Configuration
- 

**END of procedure.**

**YOUR READER IS NOW READY TO READ BARCODES.**



## RADIO TIMEOUT

After a code has been read and transmitted, the radio remains active for the amount of time set by the Radio Timeout parameter. This is particularly useful when the Host is expected to send a reply message to the gun. This parameter depends heavily on the application and is therefore provided here for system optimization according to your application.

The default value for this parameter is 008 (about 1/2 sec.). This is a reasonable value for most applications, but it could need to be changed according to the following considerations:

- If your application does not require the host to send messages to the gun(s), (which is true for all Wedge applications), the best setting for the radio timeout is the minimum value 001 which is about 1/16 of a second. This allows maximum battery autonomy.
- When your application requires bi-directional communications, the radio timeout must be set according to the number of guns and the amount of traffic so that no host messages are lost.

**NOTE**

*Setting the radio timeout to 000 causes the radio to always be ON. If you do this, the gun will accept messages from the host at any time, but the batteries will discharge quickly.*

To change the default parameter, follow the instructions below:

**Note:** for the numeric code selection use the table at the end of this Quick Reference.

1.

Enter Configuration



2.

Radio Timeout



+

3 digits in the range 000-255:

000 = disables Radio Timeout (always on)

001 to 255 = timeout from .063 to 16 seconds.

3.

Exit and Save Configuration





## DRAGON™ M DEFAULT CONFIGURATION

### DATA FORMAT

code identifier disabled, field adjustment disabled, code length not transmitted, character replacement disabled, time stamping disabled, time stamping delimiter disabled

### READING PARAMETERS

hardware trigger, trigger active level, no trigger timeout, one read per cycle, safety time 0.5 sec, beeper intensity high, tone 2, aiming spot = disabled

### DISPLAY/KEYPAD PARAMETERS

Font size = small, display timeout = 8 sec., backlight = off, display mode = local echo, keypad enabled, KeyID characters: left = '<', center = '=', right = '>'

### DECODING PARAMETERS

ink spread enabled, overflow control enabled, interdigit control enabled, decoding safety = one read, Puzzle Solver™ disabled

### CODE SELECTION

#### enabled codes

- EAN 8/EAN 13 / UPC A/UPC E without ADD ON  
check digit transmitted, no conversions
- Interleaved 2/5  
check digit control and transmission, variable length code; 4-99 characters
- Standard Code 39  
no check digit control, variable length code; 1-99 characters
- Code 128  
variable length code; 1-99 characters

#### disabled codes

*EAN 128, ISBT128, Code 93, Codabar, pharmaceutical codes, RSS codes, MSI, Plessey, Telepen, Delta IBM, Code 11, Code 16K, Code 49*

### ADVANCED FORMATTING PARAMETERS

concatenation disabled, no advanced formats defined

### RADIO PARAMETERS

radio protocol timeout = 2 seconds, power-off timeout = 4 hours, transmission mode = one-way, beeper control for radio response = normal, single store disabled, batch mode disabled



## TECHNICAL FEATURES

| Electrical Features                                |                                                           |                  |
|----------------------------------------------------|-----------------------------------------------------------|------------------|
| Battery Type                                       | 2 AA NiMh* batteries                                      |                  |
| Time of recharge NiMh                              | 2 hours                                                   |                  |
| Operating autonomy<br>(typ. continuous reading)    | 60,000 reads - NiMh                                       |                  |
| Display<br>(Only available with some models)       | LCD 4 lines x 16 chars<br>Programmable font and backlight |                  |
| Indicators                                         | Laser On / battery low LED (red)<br>Programmable Beeper   |                  |
| Laser Features                                     | Standard                                                  | LR               |
| Power (typical) in mW                              | 0.9 mW                                                    | 1.4 mW           |
| Light Source                                       | VLD in the range between 630~680 nm                       |                  |
| Scan rate                                          | 35 ± 5 scans/sec                                          |                  |
| Typical reading field width                        | see reading diagram                                       |                  |
| Max. resolution                                    | 0.12 mm, 5 mils                                           | 0.25 mm, 10 mils |
| PCS minimum<br>(Datalogic Test Chart)              | 15%                                                       | 40%              |
| Scan angle                                         | 42°                                                       | 23°              |
| Laser Safety Class                                 | 2 (EN 60825-1 / CDRH)                                     |                  |
| Radio Features                                     | European Models                                           | USA Models       |
| Working frequency                                  | 433.92 MHz                                                | 910 MHz          |
| Bit rate                                           | 19200 baud                                                | 36800 baud       |
| Range (in open air)                                | 50 m.                                                     | 30 m.            |
| System Configuration                               | OM-DRAGON™                                                | STARGATE™        |
| Max. number of devices<br>per base station         | 32                                                        | 255              |
| Max. number of devices<br>in the same reading area | 2000                                                      |                  |
| Environmental Features                             |                                                           |                  |
| Working Temperature                                | -10 to + 40 °C / +14 to +104 °F                           |                  |
| Storage Temperature                                | -20 to + 50 °C / -4 to +140 °F                            |                  |
| Humidity                                           | 90% non condensing                                        |                  |
| Drop resistance (on concrete)<br>with display      | 1.5 m                                                     |                  |
| without display                                    | 1.8 m                                                     |                  |
| Protection                                         | sealed against rain and dust                              |                  |
| Mechanical Features                                |                                                           |                  |
| Weight (with batteries)                            | about 340 g.                                              |                  |
| Dimensions                                         | 203 x 117 x 69 mm                                         |                  |
| Material                                           | ABS and Polycarbonate molded with rubber                  |                  |

\* It is possible to employ also NiCd or non-chargeable Alkaline AA batteries.



## WARRANTY

---

Datalogic warrants this product against defects in workmanship and materials, for a period of 24 months from the date of shipment, provided that the product is operated under normal and proper conditions.

Datalogic has the faculty to repair or replace the product, these provisions do not prolong the original warranty term. The warranty does not apply to any product that has been subject to misuse, accidental damage, unauthorized repair or tampering.

## SERVICES AND SUPPORT

---

Datalogic provides several services as well as technical support through its website. Log on to **www.datalogic.com** and click on the links indicated for further information including:

- **PRODUCTS**  
 Search through the links to arrive at your product page where you can download specific **Manuals** and **Software & Utilities** including:
  - **DL Sm@rtSet™** a Windows-based utility program which allows device configuration using a PC. It provides RS232 interface configuration as well as configuration barcode printing.
- **SERVICES & SUPPORT**
  - **Datalogic Services** - Warranty Extensions and Maintenance Agreements
  - **Authorised Repair Centres**
- **CONTACT US**  
 E-mail form and listing of Datalogic Subsidiaries



## COMPLIANCE

---

**This device must be opened by qualified personnel only.**

**The batteries must be removed before opening the device.**

### FCC COMPLIANCE

Modifications or changes to this equipment without the expressed written approval of Datalogic could void the authority to use the equipment.

This device complies with PART 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference which may cause undesired operation.

This device contains FCC ID OMJ0015.

### RADIO COMPLIANCE

Contact the competent authority responsible for the management of radio frequency devices of your country to verify the eventual necessity of a user license.

Refer to the web site <http://europa.eu.int/comm/enterprise/rte/spectr.htm> for further information.





### WEEE COMPLIANCE





## READING DIAGRAMS

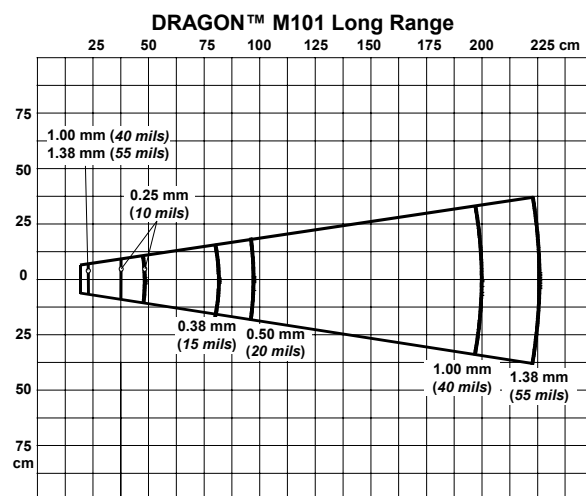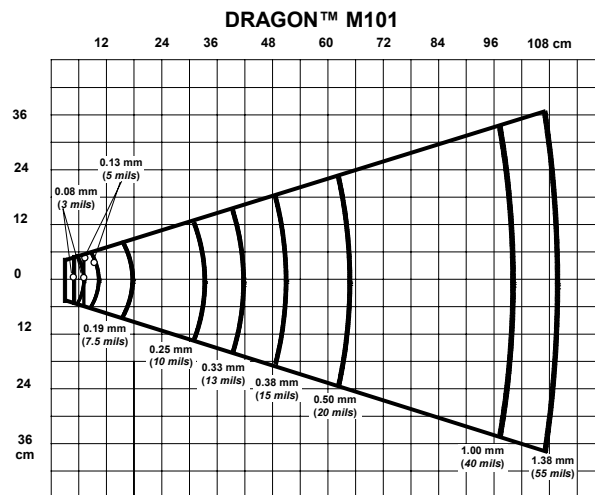



## NUMERIC TABLE

---



0



1



2



3



4



5



6



7



8



9

DATALOGIC S.p.A.,  
Via Candini, 2  
40012 - Lippo di Calderara  
Bologna - Italy



dichiara che  
declares that the  
déclare que le  
bescheinigt, daß das Gerät  
declare que el

Dragon M101 433 MHz, Cordless Bar Code Reader  
Dragon M101/D 433 MHz, Cordless Bar Code Reader  
Dragon M101/D LR 433 MHz, Cordless Bar Code Reader

e tutti i suoi modelli  
and all its models  
et tous ses modèles  
und seine modelle  
y todos sus modelos


sono conformi alla Direttiva del Consiglio Europeo sottoelencata:  
are in conformity with the requirements of the European Council Directive listed below:  
sont conformes aux spécifications de la Directive de l'Union Européenne ci-dessous:  
der nachstehenden angeführten Direktive des Europäischen Rats entsprechen:  
cumple con los requisitos de la Directiva del Consejo Europeo, según la lista siguiente:

**1999/5/EEC R&TTE**

Questa dichiarazione è basata sulla conformità dei prodotti alle norme seguenti:  
This declaration is based upon compliance of the products to the following standards:  
Cette déclaration repose sur la conformité des produits aux normes suivantes:  
Diese Erklärung basiert darauf, daß das Produkt den folgenden Normen entspricht:  
Esta declaración se basa en el cumplimiento de los productos con las siguientes normas:

- ETSI EN 301 489-3 v.1.4.1, AUGUST 2002:** ELECTROMAGNETIC COMPATIBILITY AND RADIO SPECTRUM MATTERS (ERM); ELECTROMAGNETIC COMPATIBILITY (EMC) STANDARD FOR RADIO EQUIPMENT AND SERVICES; PART 3: SPECIFIC CONDITIONS FOR SHORT-RANGE DEVICES (SRD) OPERATING ON FREQUENCIES BETWEEN 9 KHz AND 40 GHz
- ETSI EN 300 220 v.1.1.1, SEPTEMBER 2004:** ELECTROMAGNETIC COMPATIBILITY AND RADIO SPECTRUM MATTERS (ERM); SHORT RANGE DEVICES (SRD); RADIO EQUIPMENT TO BE USED IN THE 25 MHz TO 1000 MHz FREQUENCY RANGE WITH POWER LEVELS RANGING UP TO 500 MW; PART 3: HARMONIZED EN COVERING ESSENTIAL REQUIREMENTS UNDER ARTICLE 3.2 OF THE R&TTE DIRECTIVE
- EN 60950-1, December 2001:** INFORMATION TECHNOLOGY EQUIPMENT – SAFETY – PART 1: GENERAL REQUIREMENTS

Lippo di Calderara, September 8th, 2005

  
Ruggero Cacioppo  
Quality Assurance Laboratory Manager