



Data Package 2
CDMA IS-95A Modulated Test Data

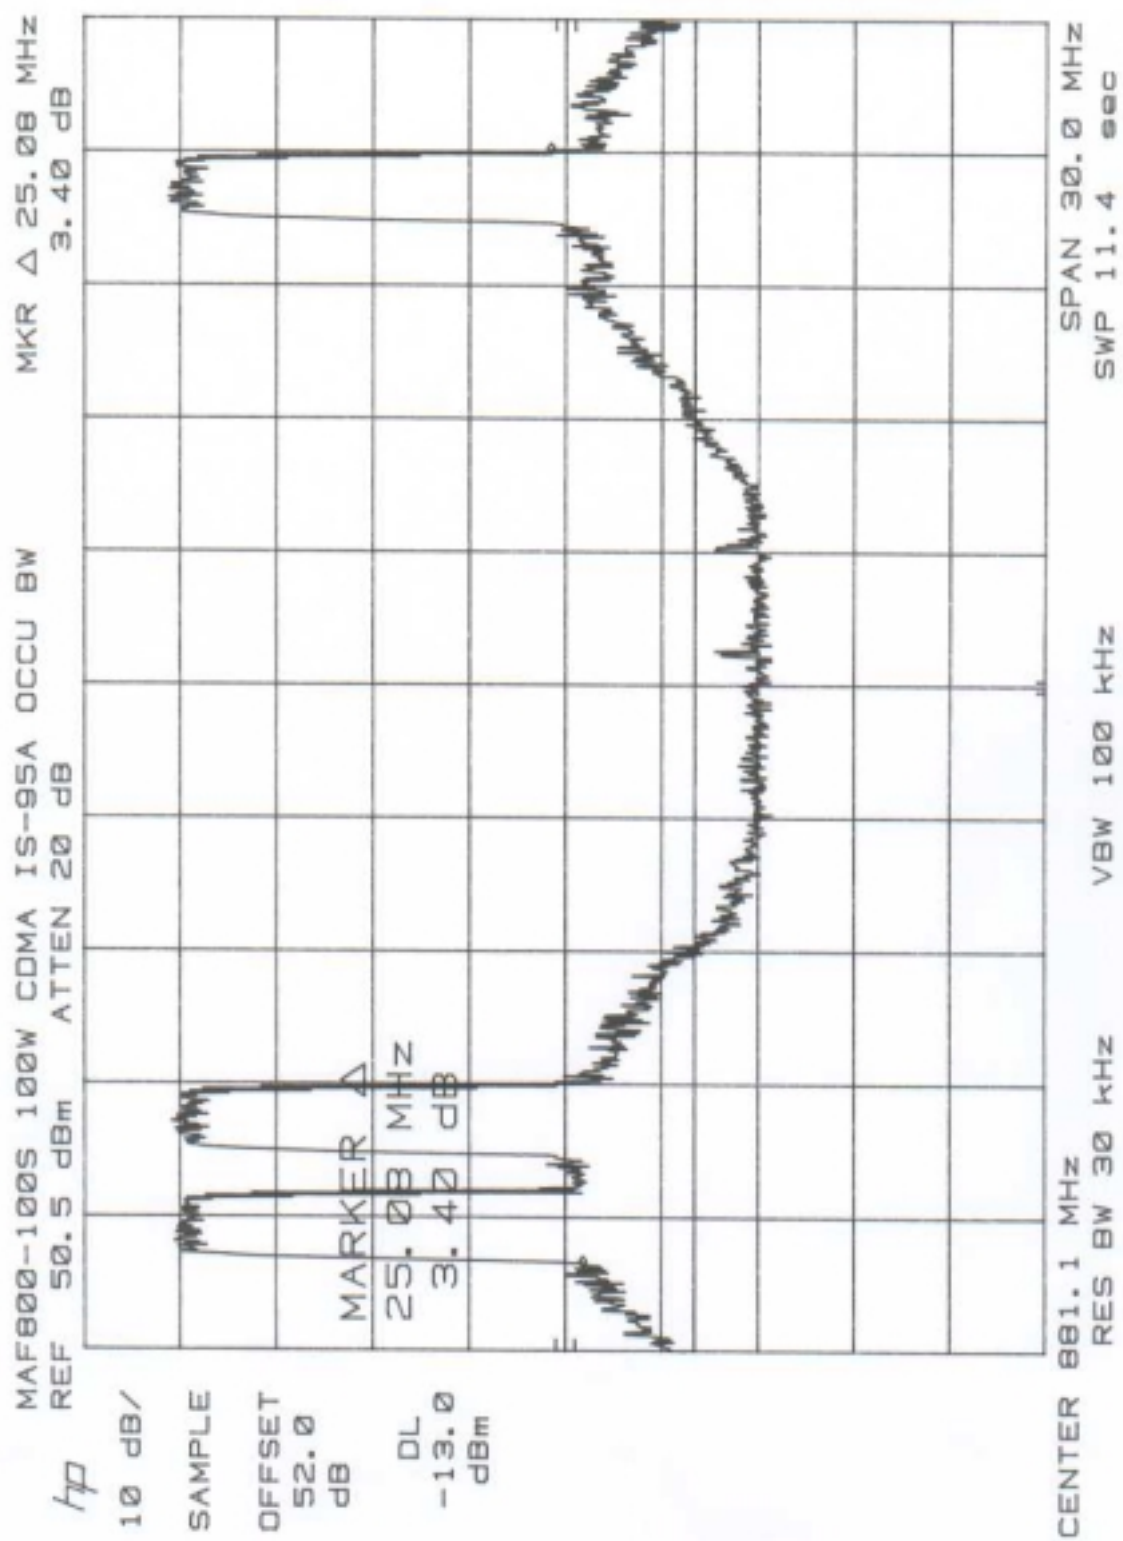

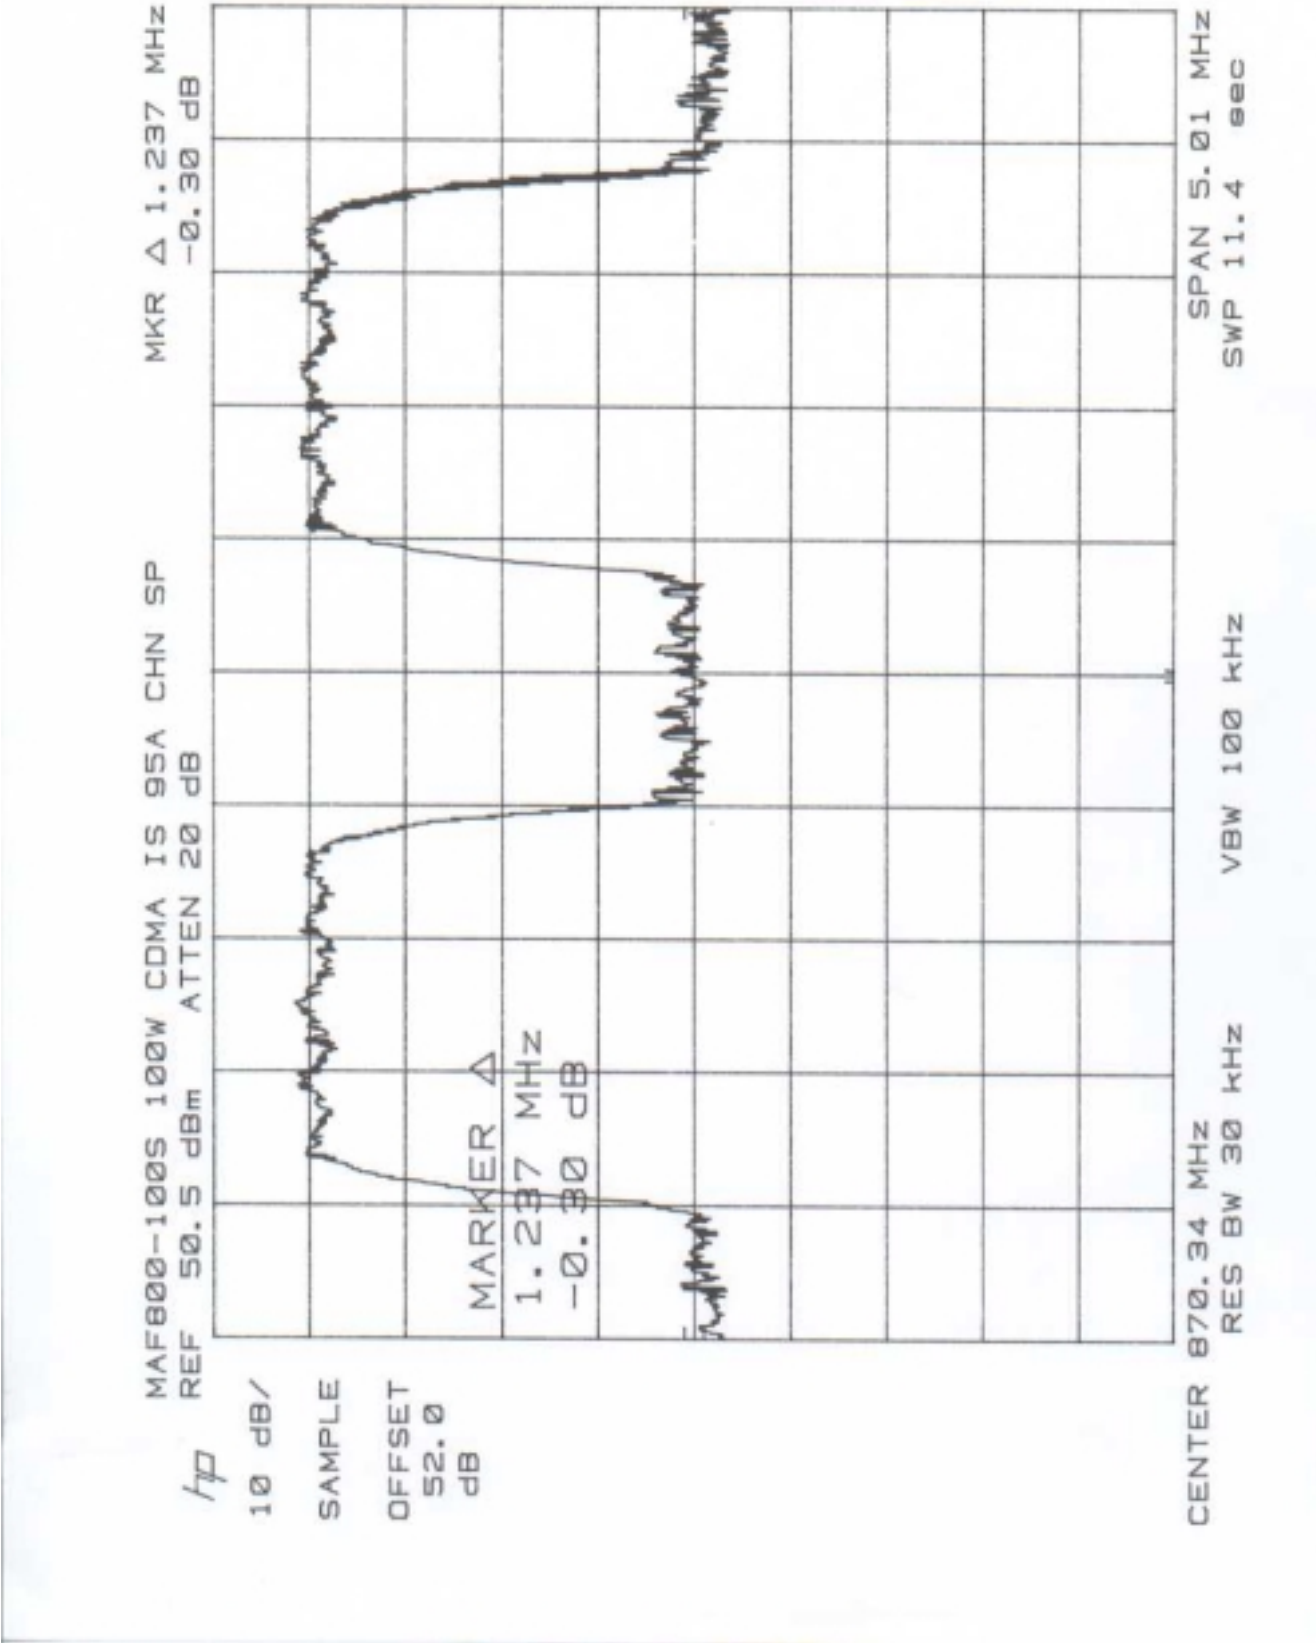

MAF800-100S 100W CDMA IS 95A COND. SPUR.

REF 50.5 dBm ATTEN 20 dB

10 dB/

SAMPLE

OFFSET


52.0

dB

DL

-13.0

dBm

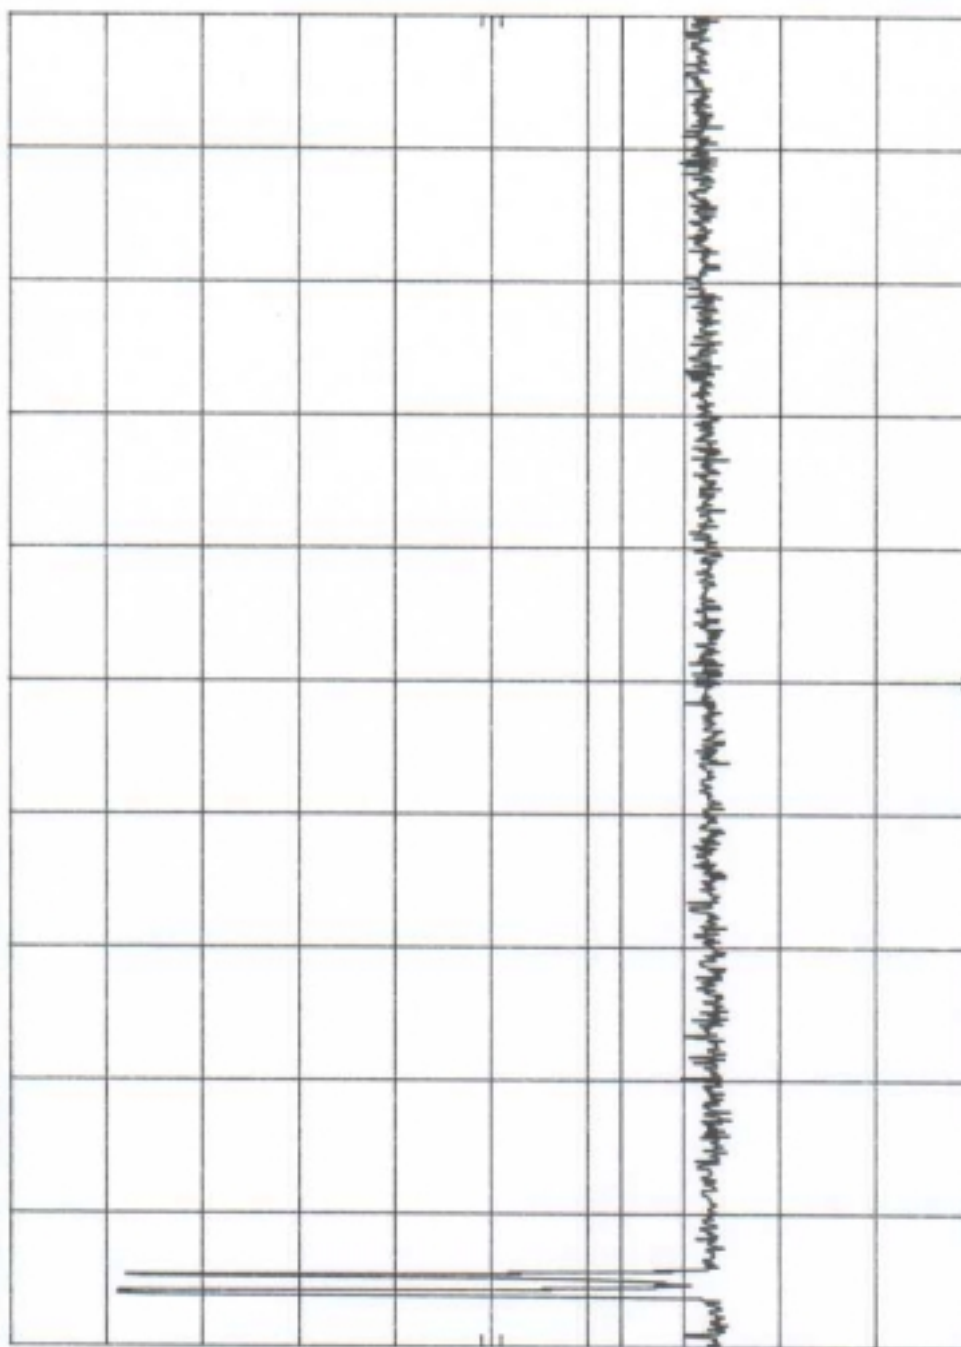

START 800 MHz

RES BW 30 kHz

VBW 100 kHz

STOP 2.50 GHz

SWP 5.10 sec

MAF800--100S 100W COMA IS 95A COND. SPUR.

HP REF 50.5 dBm ATTN 20 dB

10 dB/


SAMPLE

OFFSET

52.0
dB

DL

-13.0
dBm

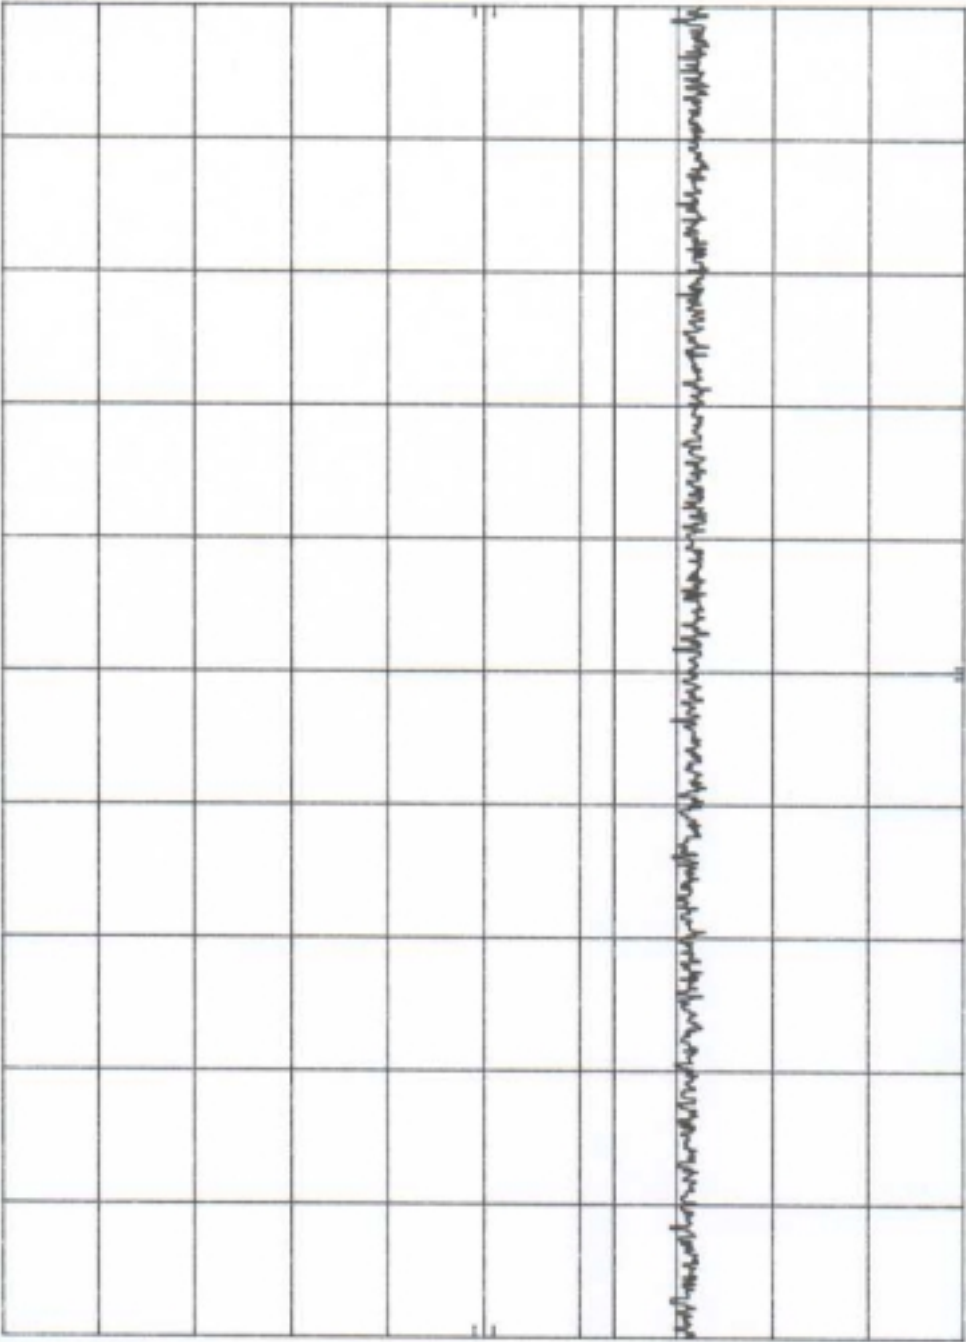

START 2.50 GHz RES BW 30 kHz VBW 100 kHz STOP 5.00 GHz SWP 9.90 sec

MAF800-100S 100W COMA IS 95A COND. SPUR.

HP REF 50.5 dBm ATTN 20 dB

10 dB/


SAMPLE

OFFSET

52.0
dB

DL

-13.0
dBm

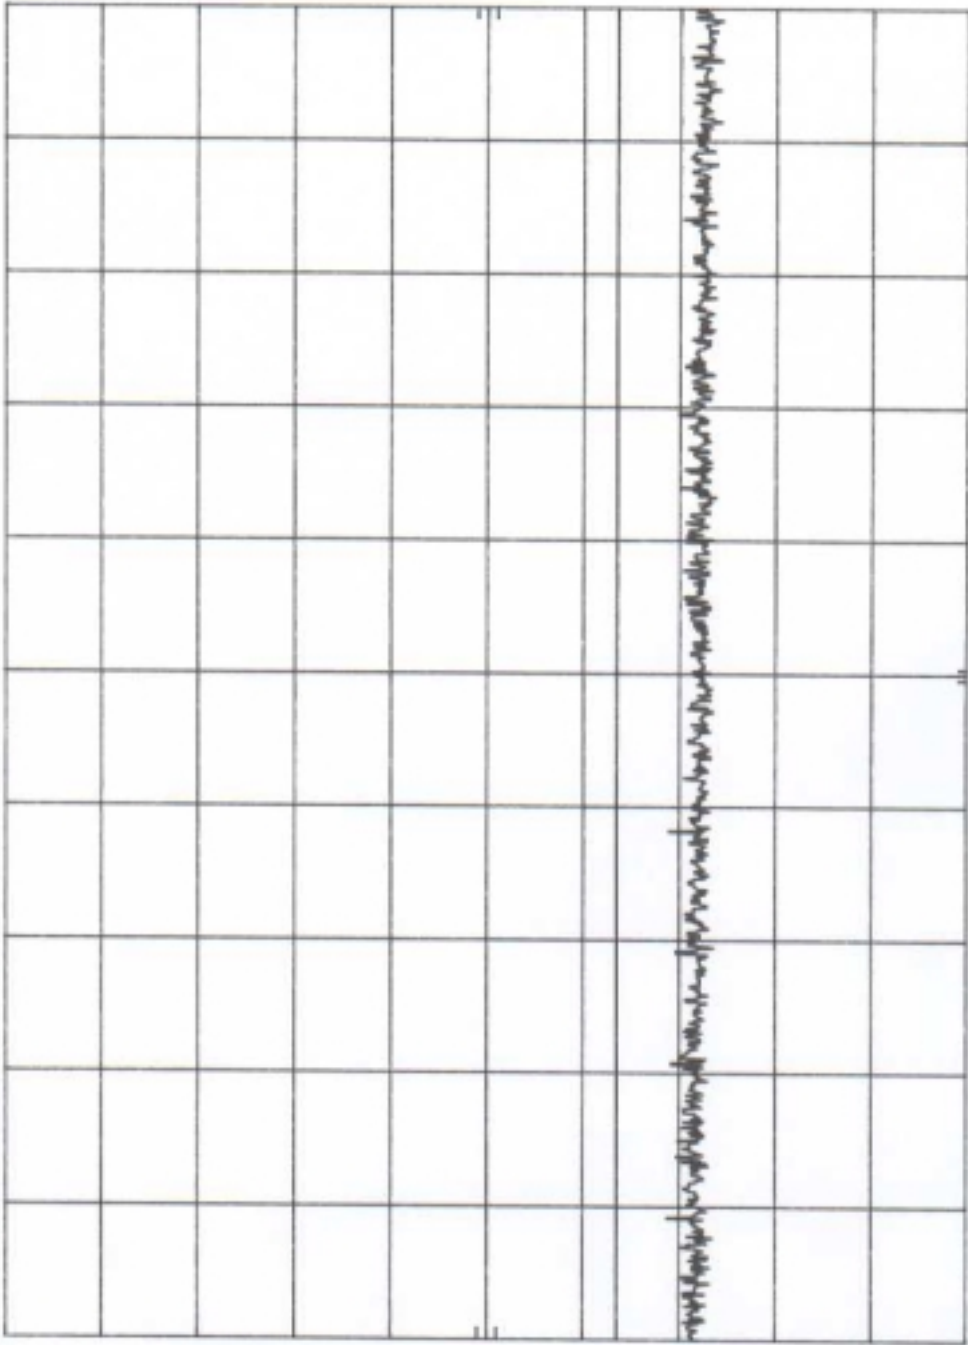

START 2.00 GHz

RES BW 30 kHz

VBW 100 kHz

STOP 5.80 GHz

SWP 11.4 sec

MAF800-100S 100W CDMA IS 95A COND. SPUR.

REF 50.5 dBm ATTEN 10 dB

HP

10 dB/

SAMPLE

OFFSET

52.0
dB

DL

-13.0
dBm




START 5.80 GHz

RES BW 30 kHz

VBW 100 kHz

STOP 10.00 GHz

SWP 12.6 sec

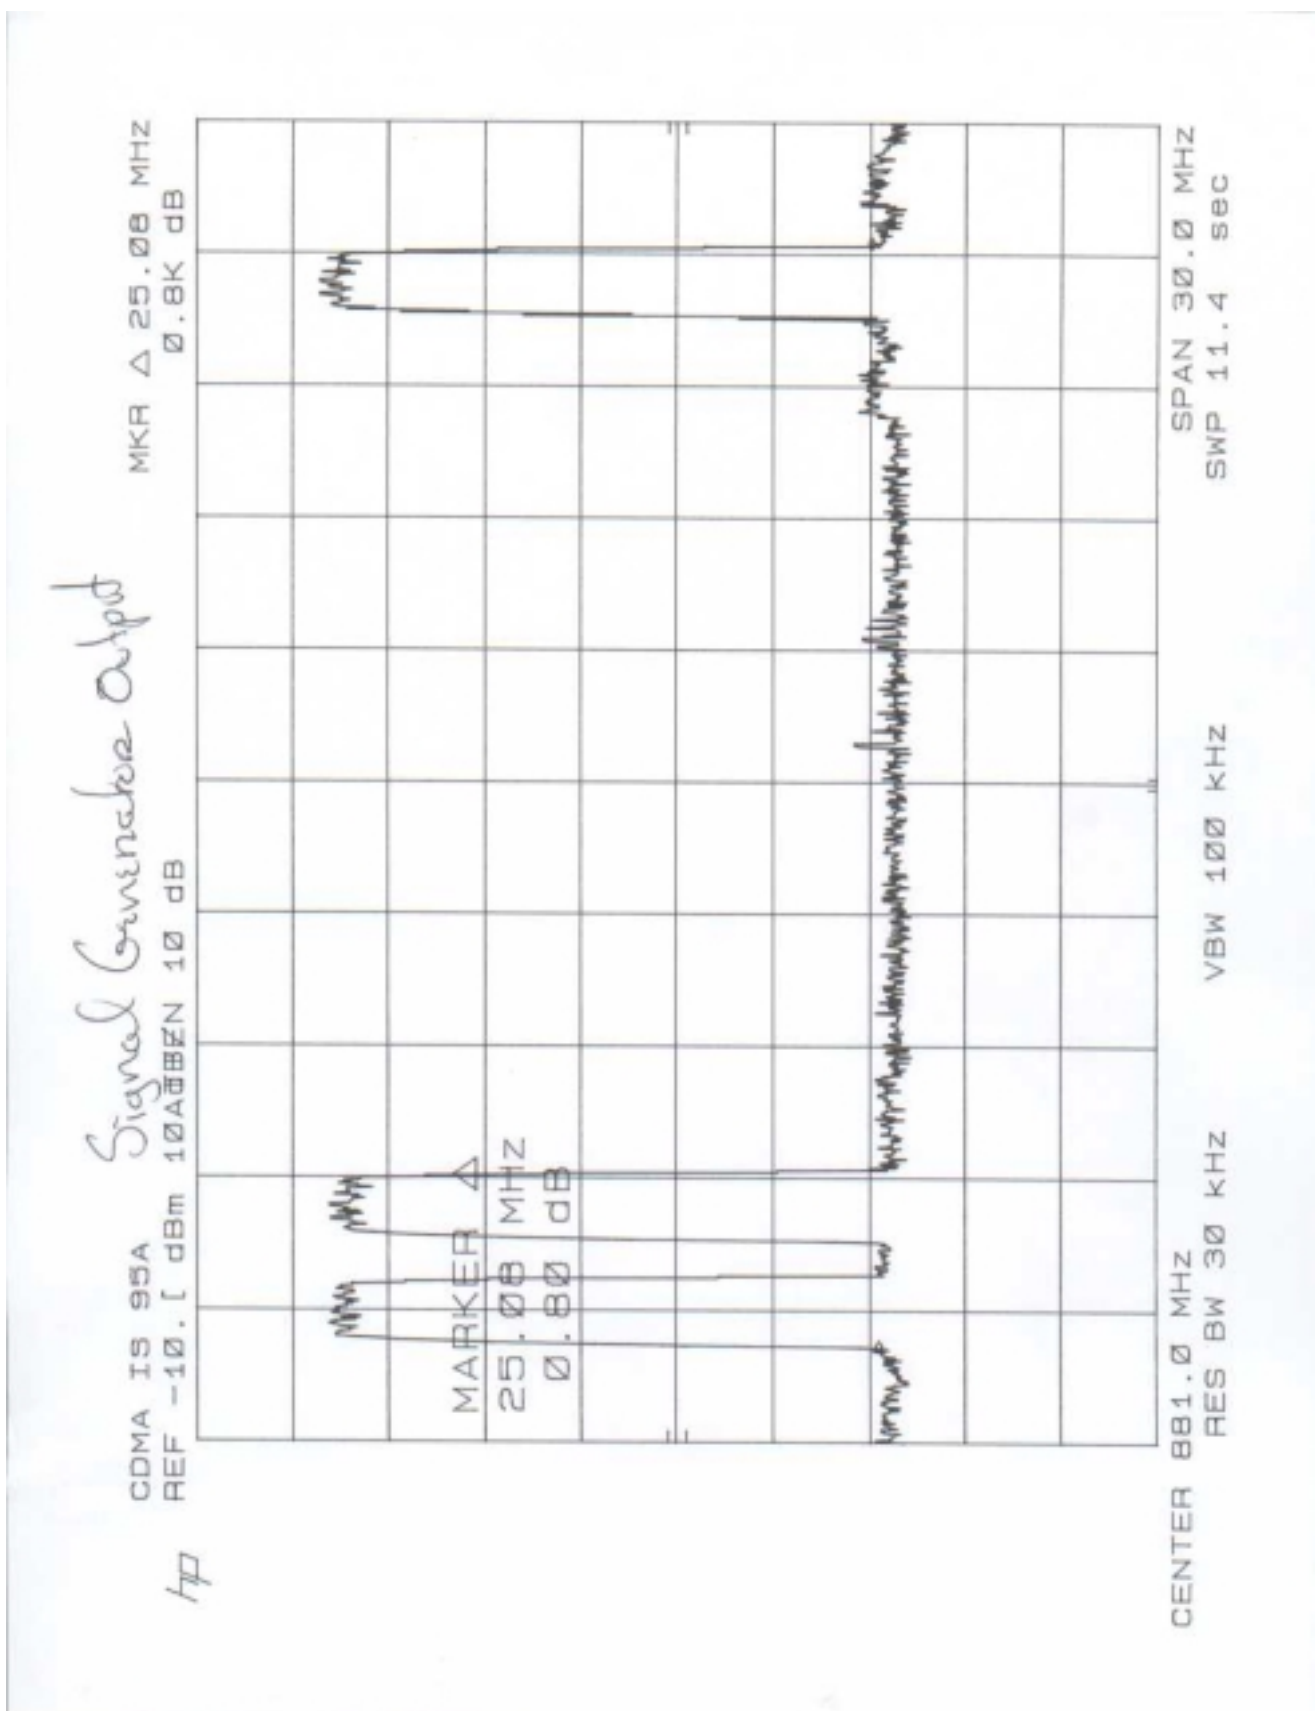

EMI Datasheet (ITE Devices)

DNB

5969 Robinson Avenue
Riverside, CA 92503
(909) 637-2630
FAX (909) 637-2704

EMI Datasheet (ITE Devices)

Specification
FCC Class A

DNB Job Number: 28116

Customer: Paradigm Wireless Systems, Inc.

Model Number: MAF800-100S

Description: Multi Carrier Power Amplifier

Date: April 9, 2002

Serial Number: N/A

EUT performed within the requirements of the applicable Standard(s)

[X] YES [] NO Signed Mike Quan

Bcn

Log

Def

Type

Notes

= A.H. Systems SAS-200/540 Biconical Antenna S/N 138 (30-200 Mhz)

= EMCO 3146 Log-Periodic Antenna S/N 1284 (200-1000 Mhz)

= Distance Correction Factor = 20*LOG₁₀(Test Distance/Specification Distance)

= Type of reading PK = Peak reading QP = Quasi-peak reading

= Readings taken with a res bandwidth of 10KHz do to nearby ambient signal

Cbl

Amp

Pl

Hgt

Tbl

= Cable Loss

= Pre-amplifier Gain

= Antenna polarity V = Vertical H = Horizontal

= Antenna height in meters XXX = 1.00 to 4.00 meters

= Table Position in degrees XXX = 000 to 360 degrees

NOTES:

Freq	Meter	Bcn	Log	Cbl	Amp	Def	Corr	Lim dB	Delta	Corr uV	Lim uV	Delta	Typ	Tbl	Pl	Hgt
30.025	27.3	11.9	0.0	.7	-24.1	0	15.8	39.1	-23.3	6	90	-84	PK	175	H	1.20
30.267	25.0	11.9	0.0	.7	-24.1	0	13.5	39.1	-25.6	5	90	-85	PK	145	H	1.01
58.179	29.2	11.9	0.0	1.0	-24.0	0	18.1	39.1	-21	8	90	-82	PK	64	H	1.01
58.270	42.7	11.9	0.0	1.0	-24.0	0	31.6	39.1	-7.5	38	90	-52	PK	145	H	1.01
66.061	30.4	10.2	0.0	1.1	-24.1	0	17.6	39.1	-21.5	8	90	-82	PK	252	H	1.01
66.396	39.6	10.1	0.0	1.1	-24.1	0	26.7	39.1	-12.4	22	90	-68	PK	84	H	1.01
108.739	29.0	13.7	0.0	1.4	-24.0	0	20.1	43.5	-23.4	10	150	-140	PK	23	H	1.01
109.676	43.7	13.8	0.0	1.4	-24.0	0	34.9	43.5	-8.6	56	150	-94	PK	301	H	1.01
225.902	29.1	0.0	14.3	2.0	-24.0	0	21.4	46.4	-25.0	12	210	-198	PK	99	H	1.01
260.044	28.4	0.0	14.3	2.2	-24.2	0	20.7	46.4	-25.7	11	210	-199	PK	112	H	1.39
262.089	31.6	0.0	14.4	2.2	-24.2	0	24	46.4	-22.4	16	210	-194	PK	249	H	2.61
268.094	32.0	0.0	14.9	2.2	-24.2	0	24.9	46.4	-21.5	18	210	-192	PK	257	H	2.61
274.068	29.6	0.0	15.3	2.3	-24.2	0	23	46.4	-23.4	14	210	-196	PK	241	H	2.62

EMI Datasheet (ITE Devices)

DNB Job Number:	28116	Date:	April 9, 2002	Specification 90 FCC Class A
Customer:	Paradigm Wireless Systems, Inc.			
Model Number:	MAF800-100S	Serial Number:	N/A	
Description:	Multi Carrier Power Amplifier			

[illegible]


		5969 Robinson Avenue Riverside, CA 92503 (909) 637-2630 FAX (909) 637-2704		Radiated Spurious Data Date: 13 April 2002 Specification FCC Part: 90			
		DNB Job Number:	28116			Date:	13 April 2002
		Customer:	Paradigm Wireless Systems			Serial Number:	N/A
		Model Number:	MAF800-100S				
Description:		Multi Carrier Power Amplifier					

Transmitter Number	Fundamental Frequency in MHz	Rated Output Power in Watts	Channel Spacing in kHz	Modulation
1 - Band 1	881	100	25	"Worst Case"

Harm	Freq in Mhz	Dipole	H Gain	Horz Mtr	Power	Corr'd	Vert Mtr	Power	Corr'd	Antenna
Fund	881	3.30	-	-25.7	-21.4	-21.4	-28.8	-24.5	-24.5	Log
2	1.762	-	7.83	-56.5	-39.7	-47.53	-55.9	-39.1	-46.93	Horn
3	2.645	-	8.70	-47.5	-35.1	-43.8	-48.6	-36.2	-44.9	Horn
4	3.524	-	8.98	-57.1	-41.7	-50.68	-64.5	-49.1	-58.08	Horn
5	4.405	-	9.63	-68.6	-51.2	-60.83	-68.3	-50.9	-60.53	Horn
6	5.286	-	10.29	-69.1	-49.9	-60.19	-69.0	-49.8	-60.09	Horn
7	6.167	-	10.45	-63.7	-43.5	-53.95	-64.5	-44.3	-54.75	Horn
8	7.048	-	10.21	-64.1	-40.7	-50.91	-64.5	-43.5	-53.71	Horn
9	7.929	-	10.29	-64.3	-42.3	-52.59	-64.0	-42.0	-52.29	Horn
10	8.810	-	11.20	-64.8	-43.6	-54.8	-64.6	-43.4	-54.6	Horn

		5969 Robinson Avenue Riverside, CA 92503 (909) 637-2630 FAX (909) 637-2704	
Radiated Spurious Data			
DNB Job Number:	28116	Date:	13 April 2002
Customer:	Paradigm Wireless Systems		
Model Number:	MAF800-100S	Serial Number:	N/A
Description:	Multi Carrier Power Amplifier		
		Specification 88 FCC Parts: 90	

Freq	881	1.762	2.645	3.524	4.405	5.286	6.167	7.048	7.929	8.810
Horz Corr'd	-21.4	-47.53	-43.8	-50.68	-60.83	-60.19	-53.95	-50.91	-52.59	-54.8
Vert Corr'd	-24.5	-46.93	-44.9	-58.08	-60.53	-60.09	-54.75	-53.71	-52.29	-54.6
12.5 kHz Limit	-20.0	-20.0	-20.0	-20.0	-20.0	-20.0	-20.0	-20.0	-20.0	-20.0
25 kHz Limit	-13.0	-13.0	-13.0	-13.0	-13.0	-13.0	-13.0	-13.0	-13.0	-13.0

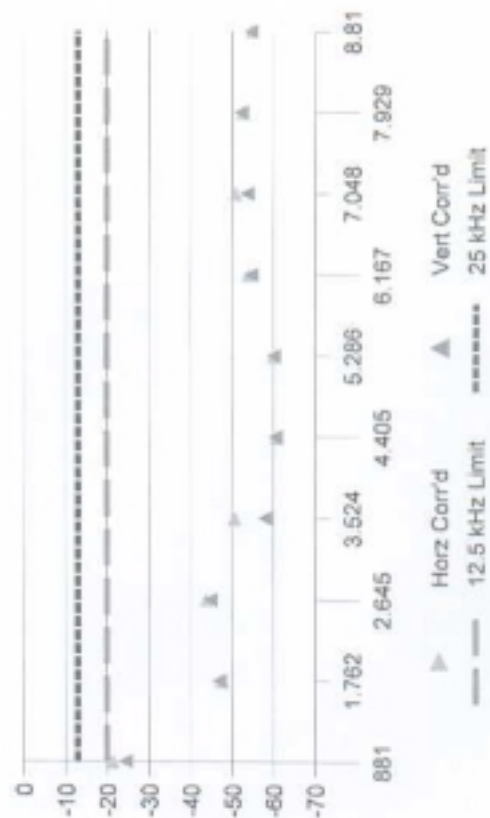

		5969 Robinson Avenue Riverside, CA 92503 (909) 637-2630 FAX (909) 637-2704	
FCC Datasheet			
DNB Job Number:	28116	Date:	13 April 2002
Customer:	Paradigm Wireless Systems		Ⓢ FCC Parts: 90 Ⓢ FCC Parts: 90
Model Number:	MAF800-100S		
Description:	Multi Carrier Power Amplifier		

Key to Abbreviations:

H Gain = Horizontal Gain of Horn antenna - This is subtracted from the reading to determine reference to reference antenna substitution.

Horz = Indicates that the receive antenna is in a horizontal position

Horz Mtr / Vert Mtr = Is the received meter reading from the EUT in either the Horz or Vert antenna polarities

Power = The matching power required to be driven into the transmit antenna during substitution measurements

Corr'd = The corrected meter reading taking into account the gain of the Horn antenna, no correction used for dipole to dipole substitutions.

Dipole = Is the element length in inches at the given frequency.

Antenna = The type of antenna used for a given frequency.