




Wireless Monitor User manual

Receiver:

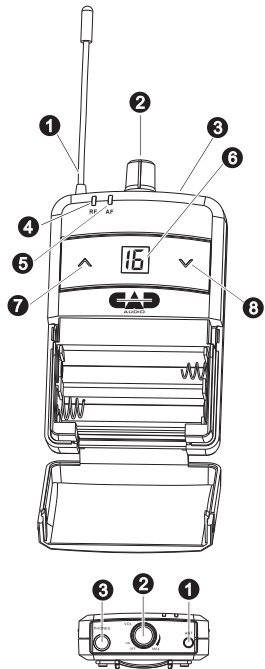


Function:

- ① Antenna
- ② The output audio level control knob and power switch
Turning to the left rotation output level will reduce,
to the right will increase
- ③ Earphone output socket
- ④ RF signal indicating light
Receive radio signal will light.
- ⑤ Stereo signal indicating light
Receive the stereo signal will light.
- ⑥ LCD display screen:
Display all current used channel
(The light will blink when it is low)
- ⑦ Channel adjusting upward button
- ⑧ Channel adjusting down button


Specifications:

Frequency range: 470-489MHz
Adjustable channel: 16
Switching bandwidth: 24MHz
Modulation: FM
Stereo channel separation: >42dB
Sensitivity: <90dBm/30dB SNR
Phantom rejections: >50dBc
Peak deviation: ± 40 KHz
Peak deviation: 40~16000KHz
Signal-to-noise ratio: >86 dB(A)
THD: <1%
Dynamic range: >80dB
Earphone socket: 3.5mm
Audio output level: 100mW max
Power supply: 2x1.5V(AA)
Operating time: >8H
Dimensions: 95x64x23mm
Weight: 95g



Worn of badypack receiver:

First clamp the belt on the receiver ①, can also be through the receiver with guitar ②, As the diagram shows on the left. To achieve the best result, please put down the receiver, until the belt tightly connect the base of receiver holder ①.



Changing the batteries:

2 alkaline batteries are expected to use about 8 hours.

Working Range: 50M in good position (Actual range depends on RF signals absorption, reflection, and interference.)

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.