

FCC Part 15.225

TEST REPORT

For

LT Security Inc

17333 Freedom Way, City of Industry, CA 91748 United States

FCC ID: 2A2TG-LXKCI202USB

Report Type:
Original Report

Product Type:
Enrollment Reader

Report Producer : Coco Lin

Report Number : RXZ250320070RF01

Report Date : 2025-04-15

Reviewed By: Andy Shih *Andy Shih*

Prepared By: Bay Area Compliance Laboratories Corp.

(New Taipei Laboratory)

70, Lane 169, Sec. 2, Datong Road, Xizhi Dist.,

New Taipei City 221, Taiwan, R.O.C.

Tel: +886 (2) 2647 6898

Fax: +886 (2) 2647 6895

www.bacl.com.tw

Revision History

Revision	No.	Report Number	Issue Date	Description	Author/ Revised by
0.0	RXZ250320070	RXZ250320070RF01	2025-04-15	Original Report	Coco Lin

TABLE OF CONTENTS

1	General Information.....	4
1.1	Product Description for Equipment under Test (EUT)	4
1.2	Objective	5
1.3	Test Methodology.....	5
1.4	Statement	5
1.5	Measurement Uncertainty	6
1.6	Environmental Conditions.....	6
1.7	Test Facility.....	6
2	System Test Configuration.....	7
2.1	Description of Test Configuration.....	7
2.2	Equipment Modifications	7
2.3	EUT Exercise Software	7
2.4	Support Equipment List and Details.....	7
2.5	External Cable List and Details.....	7
2.6	Test Mode.....	7
2.7	Block Diagram of Test Setup	8
3	Summary of Test Results	9
4	Test Equipment List and Details	10
5	FCC §15.203 – Antenna Requirements.....	11
5.1	Applicable Standard	11
5.2	Antenna Information	11
6	FCC §15.207(a) – AC Line Conducted Emissions	12
6.1	Applicable Standard	12
6.2	EUT Setup	12
6.3	EMI Test Receiver Setup	13
6.4	Test Procedure.....	13
6.5	Factor & Over Limit.....	13
6.6	Test Results	14
7	FCC §15.205, §15.209 , §15.225 - Radiated Emissions	15
7.1	Applicable Standard	15
7.2	EUT Setup	16
7.3	EMI Test Receiver & Spectrum Analyzer Setup.....	16
7.4	Test Procedure.....	16
7.5	Corrected Factor & Margin Calculation.....	17
7.6	Test Results	17
8	FCC §15.225(e) - Frequency Stability	20
8.1	Applicable Standard	20
8.2	Test Procedure.....	20
8.3	Test Results	21
9	FCC §15.215(c) – 20 dB Bandwidth Testing	22
9.1	Applicable Standard	22
9.2	Test Procedure.....	22
9.3	Test Results	23

1 General Information

1.1 Product Description for Equipment under Test (EUT)

Applicant	LT Security Inc
	17333 Freedom Way, City of Industry, CA 91748 United States
Brand(Trade) Name	N/A
Product (Equipment)	Enrollment Reader
Main Model Name	LXKCI202-USB
Series Model Name	N/A
Frequency Range	13.56 MHz
E-field Strength	78.51 dBuV/m@3m
Modulation Technique	ASK
Power Operation	5Vdc
Received Date	2025/01/24

*All measurement and test data in this report was gathered from production sample serial number:

RXZ250320070-1 (Assigned by BACL, New Taipei Laboratory).

1.2 Objective

This report is prepared on behalf of *LT Security Inc* in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commission's rules

The objective is to determine the compliance of the EUT with FCC rules, section 15.203, 15.205, 15.207, 15.209, 15.215 and 15.225.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.4 Statement

Decision Rule: No, (The test results do not include MU judgment)

It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (New Taipei Laboratory).

Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

The determination of the test results does not require consideration of the uncertainty of the measurement, unless the assessment is required by customer agreement, regulation or standard document specification.

Bay Area Compliance Laboratories Corp. (New Taipei Laboratory) is not responsible for the authenticity of the information provided by the applicant that affects the test results.

1.5 Measurement Uncertainty

Parameter		Uncertainty
AC Mains		+/- 3.02 dB
Frequency stability		+/- 0.00 ppm
Occupied Bandwidth		+/- 0.09 %
Unwanted Emissions, conducted		+/- 1.09 dB
Emissions, radiated	9 kHz~30 MHz	+/- 3.20 dB
	30 MHz~1 GHz	+/- 3.30 dB
Temperature		+/- 0.76 °C
Humidity		+/- 0.41 %

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

1.6 Environmental Conditions

Test Site	Test Date	Temperature (°C)	Relative Humidity (%)	Test Engineer
AC Line Conducted Emissions	2025/4/15	20.2	54	Jing
Radiation Spurious Emissions	2025/3/20	18.4	52	Nick
Frequency Stability	2025/3/24	23.9	52	Sean
Emission Bandwidth	2025/3/24	23.9	52	Sean

1.7 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (New Taipei Laboratory) to collect test data is located on

☒ 70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 221, Taiwan, R.O.C.

Bay Area Compliance Laboratories Corp. (New Taipei Laboratory) is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3732) and the FCC designation No.TW3732 under the Mutual Recognition Agreement (MRA) in FCC Test.

2 System Test Configuration

2.1 Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

2.2 Equipment Modifications

No modification was made to the EUT.

2.3 EUT Exercise Software

The test software was used “EleLockManageTool v1.0.0.1”

2.4 Support Equipment List and Details

Description	Manufacturer	Model Number
NB	DELL	E6410
Adapter	DELL	DA90PM111
DC Power Supply	KIKUSUI	PMC35-2

2.5 External Cable List and Details

Description	Manufacturer	Model Number
USB Cable	Fuyunda technolog	USB2.0 A to A cable


2.6 Test Mode

Full System (Model : LXXCI202-USB) for all test item.


2.7 Block Diagram of Test Setup

See test photographs attached in setup photos for the actual connections between EUT and support equipment.


Radiation:

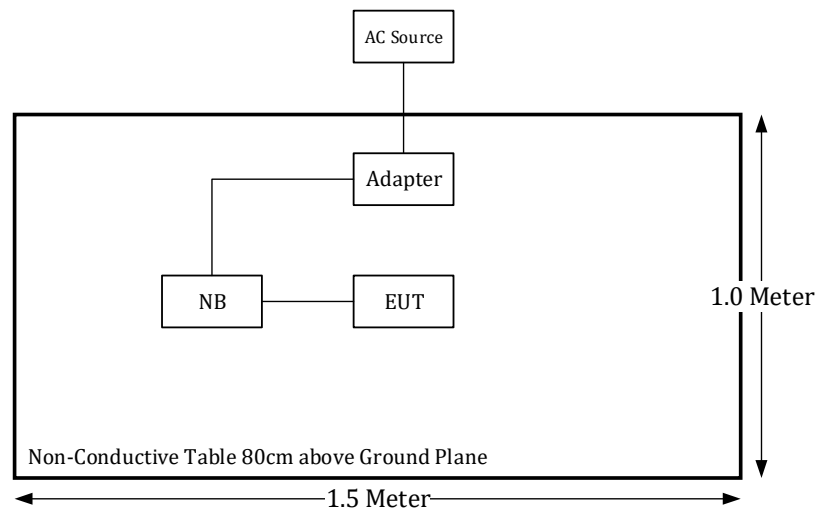

Conduction:

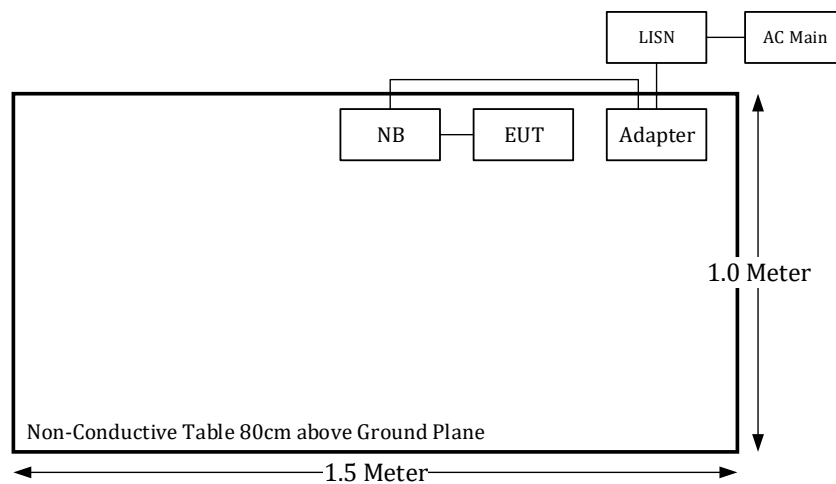

Conducted:

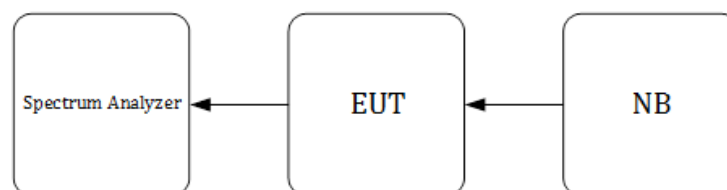

3 Summary of Test Results

Rules	Description of Test	Results
FCC §15.203	Antenna Requirement	Compliance
FCC §15.207(a)	AC Line Conducted Emissions	Compliance
FCC §15.205, §15.209, §15.225	Radiated Emissions	Compliance
FCC §15.225(e)	Frequency Stability	Compliance
FCC §15.215 (c)	20 dB Emission Bandwidth	Compliance

4 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conduction Room (CON-A)					
LISN	Rohde & Schwarz	ENV216	101612	2025/2/17	2026/2/17
EMI Test Receiver	Rohde & Schwarz	ESW	100947	2024/5/24	2025/5/24
RF Cable	EMEC	EM-CB5D	1	2024/6/5	2025/6/5
Software	AUDIX	E3	V9.150826k	N.C.R	N.C.R
Radiation 3M Room (966-A)					
Active Loop Antenna	ETS-Lindgren	6502	35796	2024/3/27	2025/3/27
Bilog Antenna with 6 dB Attenuator	SUNOL SCIENCES & MINI-CIRCUITS	JB6/UNAT-6+	A050115/1554 2_01	2025/1/16	2026/1/16
Preamplifier	Sonoma	310N	130602	2024/6/18	2025/6/18
EMI Test Receiver	Rohde & Schwarz(R&S)	ESR3	102099	2024/6/24	2025/6/24
Microflex Cable	UTIFLEX	UFB197C-1-2362-70U-70U	225757-001	2024/12/20	2025/12/20
Coaxial Cable	UTIFLEX	UFB311A-Q-1440-300300	220490-006	2024/12/20	2025/12/20
Coaxial Cable	COMMATE	PEWC	8Dr	2024/12/20	2025/12/20
Cable	EMC	EMC105-SM-SM-10000	201003	2024/12/20	2025/12/20
Coaxial Cable	JUNFLON	J12J102248-00-B-5	AUG-07-15-044	2024/12/20	2025/12/20
Software	AUDIX	E3	18621a	N.C.R	N.C.R
Conducted Room					
Temperature and Humidity Chamber	BACL	BTH-150-40	30028	2025/1/13	2026/1/13
Spectrum Analyzer	Rohde & Schwarz(R&S)	FSV40	101204	2024/5/30	2025/5/30
Cable	UTIFLEX	UFA210A	9435	2024/10/1	2025/10/1

***Statement of Traceability:** BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to the SI System of Units via the R.O.C. Center for Measurement Standards of the Electronics Testing Center, Taiwan (ETC) or to another internationally recognized National Metrology Institute (NMI), and were compliant with the current Taiwan Accreditation Foundation (TAF) requirements.

5 FCC §15.203 – Antenna Requirements

5.1 Applicable Standard

According to § 15.203,

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level.

However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested. For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

5.2 Antenna Information

Manufacturer	Type	Antenna Gain	Input impedance
LT Security Inc	PCB Antenna	0 dBi	50Ω

Antenna was permanently attached to the unit.

Result: Compliance.

6 FCC §15.207(a) – AC Line Conducted Emissions

6.1 Applicable Standard


According to FCC §15.207 for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency.

6.2 EUT Setup

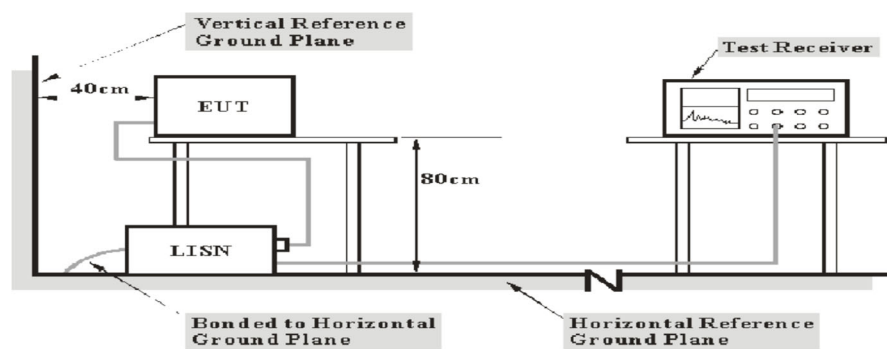

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

6.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150kHz to 30MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations

Frequency Range	RBW	VBW
150kHz – 30MHz	9kHz	30kHz

6.4 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

6.5 Factor & Over Limit

The factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “Over Limit” column of the following data tables indicates the degree of compliance with the applicable limit line. For example, an over limit of -7 dB means the emission is 7 dB below the limit line. The equation for Over Limit calculation is as follows:

$$\text{Over Limit} = \text{Result} - \text{Limit Line}$$

6.6 Test Results


Test Mode: Transmitting

Main: AC120V, 60Hz

Line

Description: RBW:9kHz/VBW:30kHz

2025-04-15 17:35:25

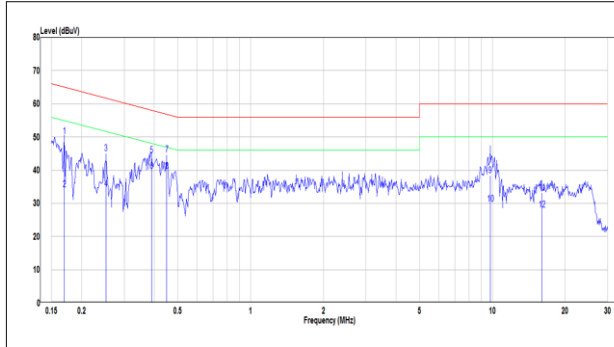


No.	Frequency	Reading	Correct Factor	Result	Limit	Over limit	Remark	Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.169	40.05	10.10	50.15	64.99	-14.84	QP	Line
2	0.169	24.18	10.10	34.28	54.99	-20.71	Average	Line
3	0.252	34.78	10.25	45.03	61.69	-16.65	QP	Line
4	0.252	24.19	10.25	34.44	51.69	-17.24	Average	Line
5	0.389	34.21	10.35	44.56	58.08	-13.52	QP	Line
6	0.389	29.37	10.35	39.72	48.08	-8.36	Average	Line
7	0.449	34.25	10.39	44.64	56.89	-12.25	QP	Line
8	0.449	29.23	10.51	39.74	46.89	-7.15	Average	Line
9	9.809	27.83	10.63	38.46	60.00	-21.54	QP	Line
10	9.809	19.15	10.63	29.78	50.00	-20.22	Average	Line
11	16.055	22.44	10.76	33.20	60.00	-26.80	QP	Line
12	16.055	17.24	10.76	28.00	50.00	-22.00	Average	Line

Neutral

Description: RBW:9kHz/VBW:30kHz

2025-04-15 17:38:11

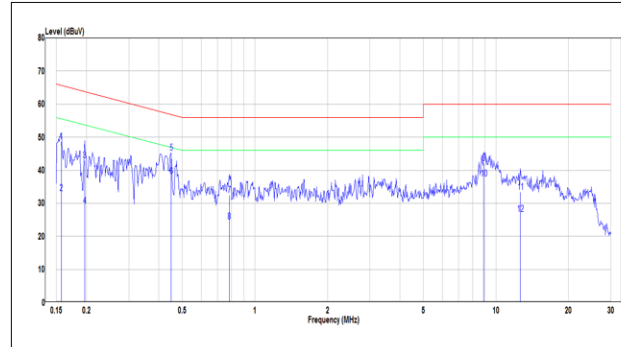

No.	Frequency	Reading	Correct Factor	Result	Limit	Over limit	Remark	Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.157	38.65	10.01	48.66	65.60	-16.94	QP	Neutral
2	0.157	23.02	10.01	33.03	55.60	-22.57	Average	Neutral
3	0.197	32.73	10.17	42.90	63.76	-20.86	QP	Neutral
4	0.197	19.08	10.17	29.25	53.76	-24.51	Average	Neutral
5	0.449	34.92	10.34	45.26	56.89	-11.63	QP	Neutral
6	0.449	27.77	10.34	38.11	46.89	-8.78	Average	Neutral
7	0.783	22.04	10.43	32.47	56.00	-23.53	QP	Neutral
8	0.783	13.99	10.43	24.42	46.00	-21.58	Average	Neutral
9	8.916	31.69	10.59	42.28	60.00	-17.72	QP	Neutral
10	8.916	26.88	10.59	37.47	50.00	-12.53	Average	Neutral
11	12.649	22.75	10.66	33.41	60.00	-26.59	QP	Neutral
12	12.649	16.08	10.66	26.74	50.00	-23.26	Average	Neutral

Note:

Result = Reading + Factor

Over Limit = Result - Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

7 FCC §15.205, §15.209 , §15.225 - Radiated Emissions

7.1 Applicable Standard

According to FCC §15.225(a)

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

As per FCC §15.209(a) : Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3


** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

According to ANSI C63.10-2013, section 5.3.3


Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field, and the emissions to be measured can be detected by the measurement equipment (see 4.3.4). Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. Measurements from 18 GHz to 40 GHz are typically made at distances significantly less than 3 m from the EUT. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade of distance (inverse of linear distance for field-strength measurements or inverse of linear distance-squared for power-density measurements).

7.2 EUT Setup

9kHz-30MHz:

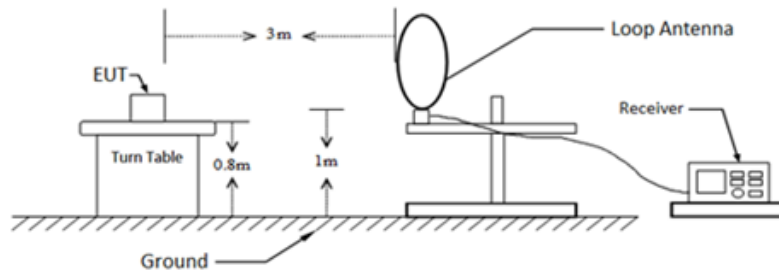

30MHz-1GHz:

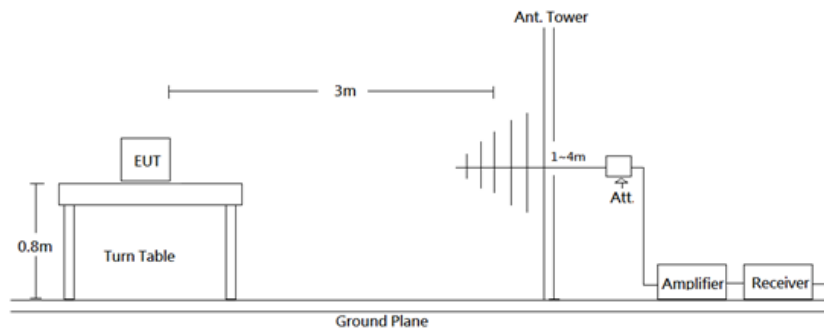

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013.

7.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 1 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	VBW	Measurement method
9 kHz - 150 kHz	300 Hz	1 kHz	QP/AV
150 kHz - 30 MHz	10 kHz	30 kHz	QP/AV
30-1000 MHz	120 kHz	300 kHz	QP

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform QP/Average measurement.

7.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in Quasi-peak and average detector mode from 9 kHz to 30 MHz, Quasi-peak detector mode from 30 MHz to 1 GHz.

7.5 Corrected Factor & Margin Calculation

The Correct Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Correct Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Result} - \text{Limit}$$


7.6 Test Results

Test Mode: Transmitting


(Pre-scan with three orthogonal axis, and worse case as Z axis.)

9kHz-30MHz:

(Pre-scan using three directional polarities, worst case as parallel.)

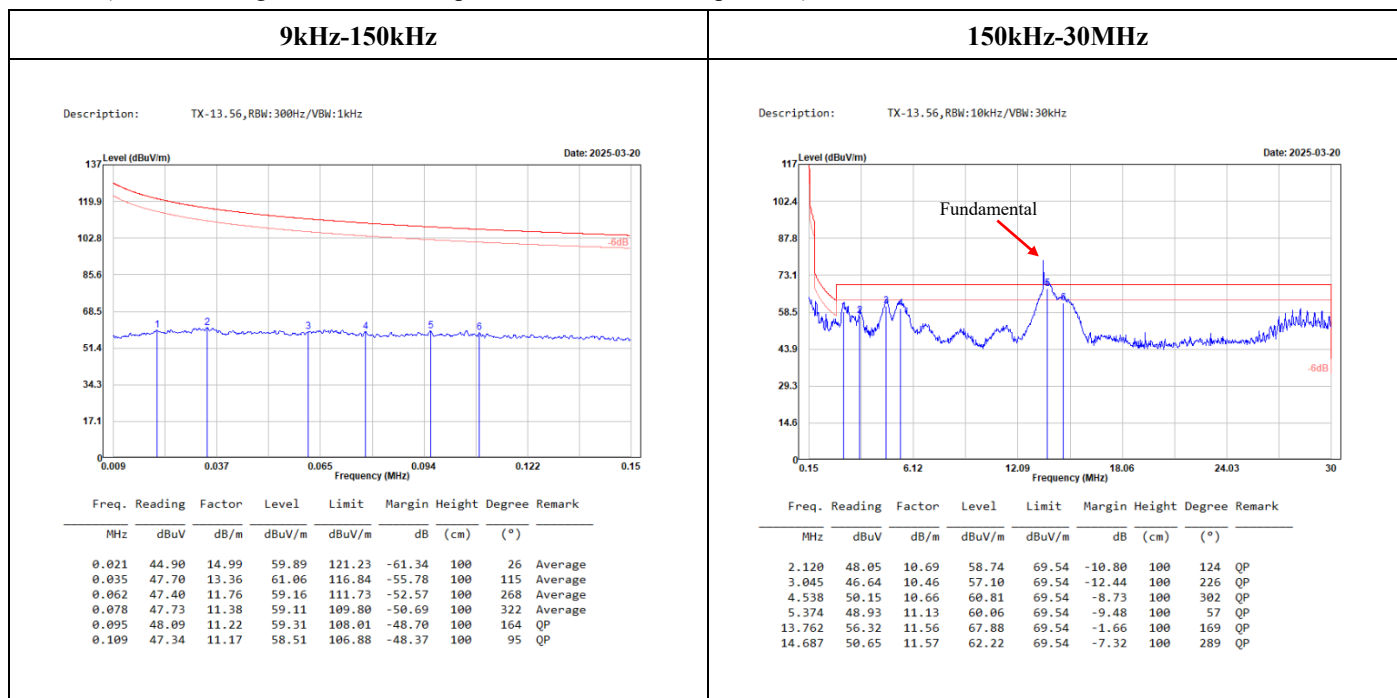

30MHz-1GHz:

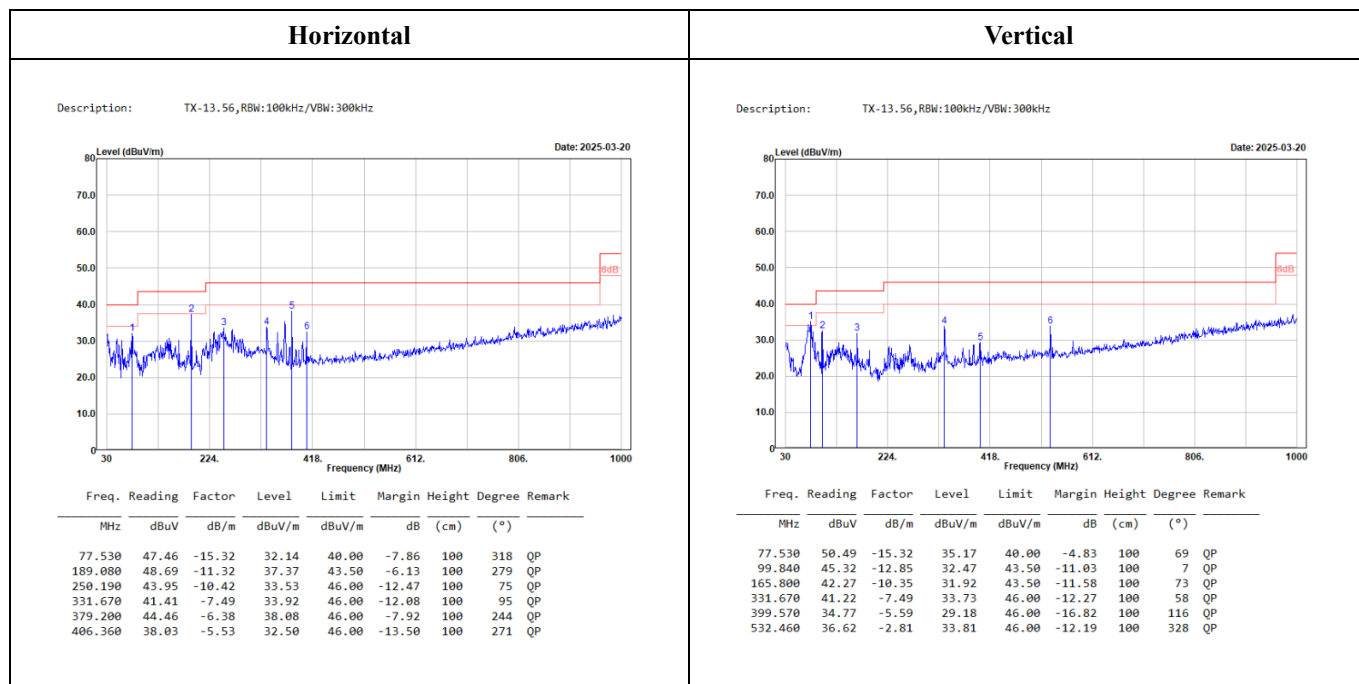


Level = Reading + Factor.

Margin = Level - Limit.

Factor = Antenna Factor + Cable Loss - Amplifier Gain.

Fundamental:

(Pre-scan using three directional polarities, parallel, perpendicular, and ground-parallel, worst case as parallel.)

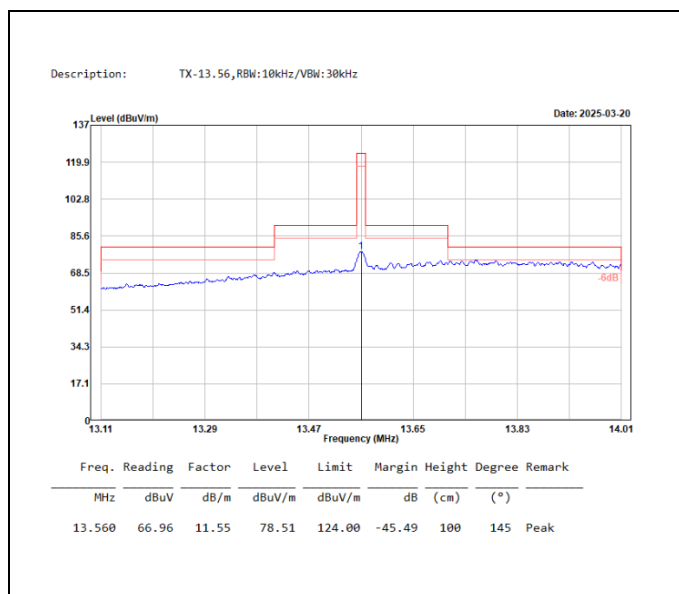

Level = Reading + Factor.

Margin = Level - Limit.

Factor = Antenna Factor + Cable Loss - Amplifier Gain.

8 FCC §15.225(e) - Frequency Stability

8.1 Applicable Standard

According to FCC §15.225(e)

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery

8.2 Test Procedure


According to ANSI C63.10-2013 Section 6.8

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power.

The EUT was placed inside the temperature chamber.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Spectrum Analyzer.

Frequency Stability vs. Voltage: An external variable DC power supply Source. The voltage was set to the end point of the battery. The output frequency was recorded for each voltage.

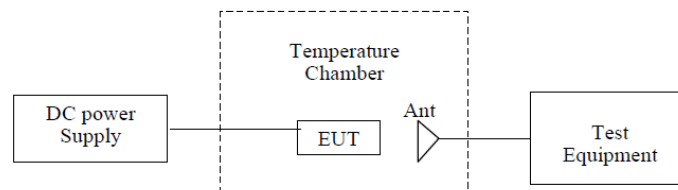

8.3 Test Results

Test Mode: Transmitting

Temperature (°C)	Voltage (Vdc)	Measured Frequency (MHz)	Frequency Error (%)	Limit (%)	Result
-20	5	13.56027	0.00197	±0.01	Pass
-10	5	13.56027	0.00197	±0.01	Pass
0	5	13.56027	0.00197	±0.01	Pass
10	5	13.56025	0.00181	±0.01	Pass
20	5	13.56026	0.00192	±0.01	Pass
30	5	13.56025	0.00181	±0.01	Pass
40	5	13.56026	0.00192	±0.01	Pass
50	5	13.56026	0.00192	±0.01	Pass
20	4.25	13.56026	0.00192	±0.01	Pass
	5.7	13.56027	0.00197	±0.01	Pass

9 FCC §15.215(c) – 20 dB Bandwidth Testing

9.1 Applicable Standard

According to FCC §15.225(c)

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. In the case of intentional radiators operating under the provisions of subpart E, the emission bandwidth may span across multiple contiguous frequency bands identified in that subpart. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

9.2 Test Procedure

According to ANSI C63.10-2013 Section 6.9.2


20dB bandwidth test:

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

9.3 Test Results

Frequency (MHz)	20 dB Emission Bandwidth (kHz)
13.56	1.53

20 dB Emission Bandwidth

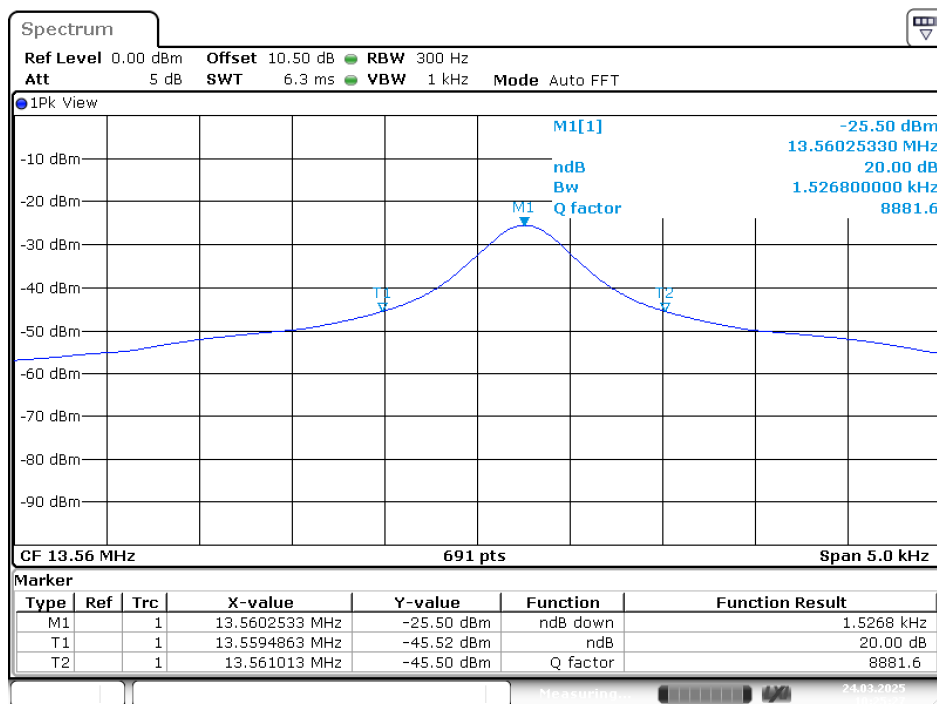

Date: 24.MAR.2025 10:25:28

***** END OF REPORT *****