

TEST REPORT

Report No.: BCTC2606414210E

Applicant: AplusX Inc.

Product Name: Pulsar Pro series Susanto-X 2.0 Wireless gaming mouse

Test Model: PRSSSTX221

Tested Date: 2026-06-23 to 2026-07-01

Issued Date: 2026-07-02

Shenzhen BCTC Technology Co., Ltd.



FCC ID: 2A2TU-PRSSSTX221

Product Name: Pulsar Pro series Susanto-X 2.0 Wireless gaming mouse

Trademark: Pulsar Gaming Gears

Model/Type Ref.: PRSSSTX221
PRSSSTX231, PRSSSTX222, PRSSSTX232, PRSSSTX223, PRSSSTX233,
PRSSSTX224, PRSSSTX234, PRSSSTX225, PRSSSTX235, PRSSSTX226,
PRSSSTX236, PRSSSTX227, PRSSSTX237, PRSSSTX228, PRSSSTX238,
PRSSSTX229, PRSSSTX239, PRSSSTX2211, PRSSSTX2311, PRSSSTX2212,
PRSSSTX2312, PRSSSTX2213, PRSSSTX2313, PRSSSTX2214,
PRSSSTX2314, PRSSSTX2215, PRSSSTX2315, PRSSSTX2216,
PRSSSTX2316, PRSSSTX2217, PRSSSTX2317, PRSSSTX2218,
PRSSSTX2318, PRSSSTX2219, PRSSSTX2319, PRSSSTX2220,
PRSSSTX2320

Prepared For: AplusX Inc.

Address: A-614, 58-1 Giheung-Ro, Giheung-Gu, Yongin-Si, Gyeonggi-Do, South Korea

Manufacturer: AplusX Inc.

Address: A-614, 58-1 Giheung-Ro, Giheung-Gu, Yongin-Si, Gyeonggi-Do, South Korea

Prepared By: Shenzhen BCTC Technology Co., Ltd.

Address: Room 101M, Unit 1, Building1, Pengyuan, No.18, Lilang Road, Shanglilang,
Nanwan Subdistrict, Longgang District, Shenzhen, Guangdong, China.

Sample Received Date: 2026-06-23

Sample tested Date: 2026-06-23 to 2026-07-01


Report No.: BCTC2606414210E

Test Standards: FCC Part15.247
ANSI C63.10-2020

Test Results: PASS

Remark: This is SRD 2.4GHz radio test report.

Prepared by :



Louis Zeng /Editor

Reviewer by :



Mike Zheng / Supervisor

Approved by:




Sewen Guo/Manager

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Technology Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table of Content


Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information And Test Setup	8
4.1 Product Information	8
4.2 Test Setup Configuration	9
4.3 Support Equipment	9
4.4 Channel List	10
4.5 Test Mode	10
4.6 Table Of Parameters Of Text Software Setting	10
5. Test Facility And Test Instrument Used	11
5.1 Test Facility	11
5.2 Test Instrument Used	11
6. Conducted Emissions	14
6.1 Block Diagram Of Test Setup	14
6.2 Limit	14
6.3 Test procedure	14
6.4 EUT Operating Conditions	14
6.5 Test Result	15
7. Radiated Emissions	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	18
7.3 Test procedure	19
7.4 EUT operating Conditions	20
7.5 Test Result	21
8. Radiated Band Emission Measurement and Restricted Bands Of Operation	25
8.1 Block Diagram Of Test Setup	25
8.2 Limit	25
8.3 Test Procedure	26
8.4 EUT Operating Conditions	26
8.5 Test Result	27
9. Power Spectral Density Test	28
9.1 Block Diagram Of Test Setup	28
9.2 Limit	28
9.3 Test procedure	28
9.4 EUT Operating Conditions	28
9.5 Test Result	29
10. Bandwidth Test	32
10.1 Block Diagram Of Test Setup	32
10.2 Limit	32
10.3 Test procedure	32
10.4 EUT operating Conditions	32
10.5 Test Result	33
11. Peak Output Power Test	36
11.1 Block Diagram Of Test Setup	36

11.2	Limit	36
11.3	Test Procedure	36
11.4	EUT Operating Conditions	36
11.5	Test Result.....	36
12.	100 kHz Bandwidth Of Frequency Band Edge	37
12.1	Block Diagram Of Test Setup.....	37
12.2	Limit	37
12.3	Test procedure	37
12.4	EUT operating Conditions	37
12.5	Test Result.....	37
13.	Antenna Requirement	43
13.1	Limit	43
13.2	Test Result.....	43
14.	EUT Test Setup Photographs.....	43

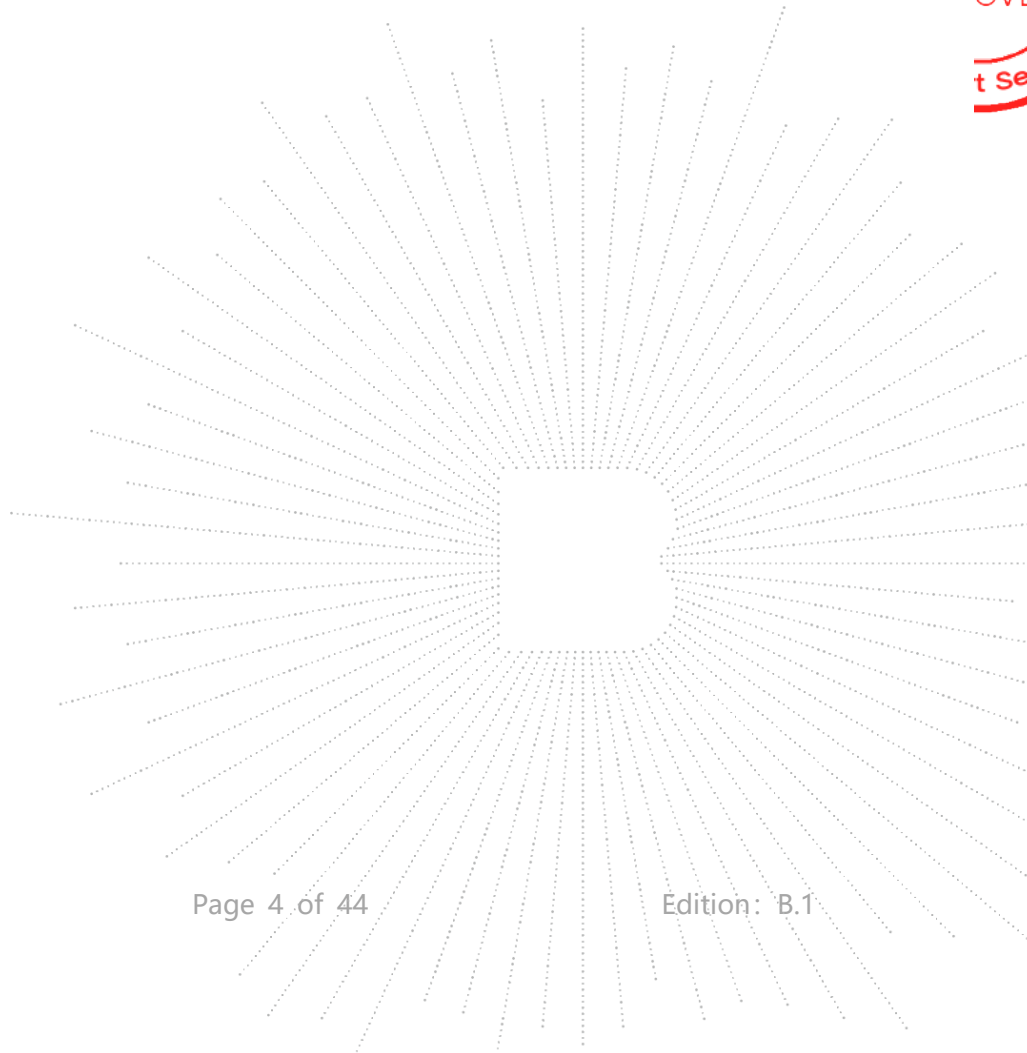

1. Version

Report No.	Issue Date	Description	Approved
BCTC2606414210E	2026-07-02	Original	Valid

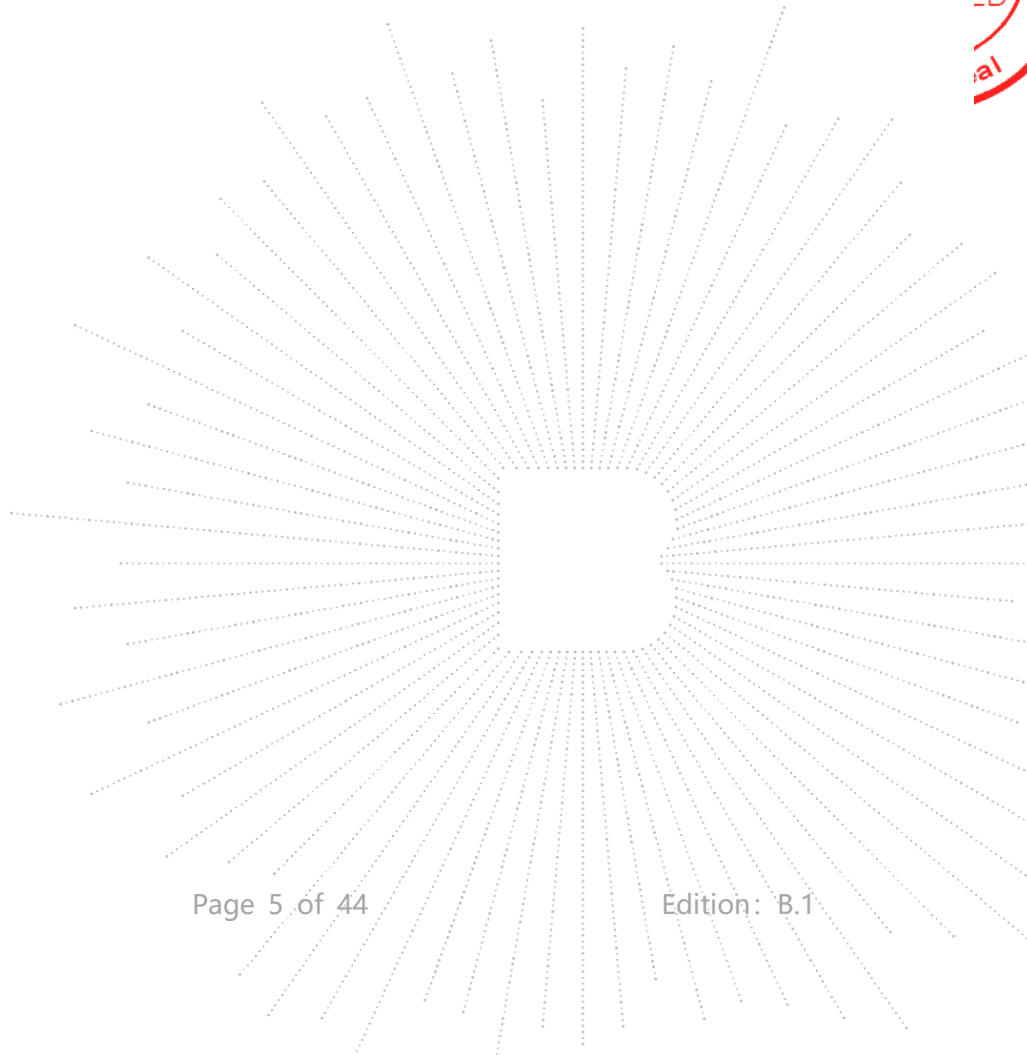

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	Conducted Emission	15.207	PASS*
2	6dB Bandwidth	15.247 (a)(2)	PASS*
3	Peak Output Power	15.247 (b)	PASS*
4	Radiated Spurious Emission	15.247 (d), 15.205	PASS*
5	Power Spectral Density	15.247 (e)	PASS*
6	Restricted Band of Operation	15.205	PASS*
7	Band Edge (Out of Band Emissions)	15.247(d)	PASS*
8	Antenna Requirement	15.203	PASS

NOTE1: N/A (Not Applicable)

NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.

Note 3: "*" indicates that the test results are determined base on CFR 47 FCC Part 15 Subpart C (clause 15.247). And the test results are took into account measurement uncertainty(see section 3 for measurement uncertainty information)

BCTC CO., LTD

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2:2011/AMD2:2018. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9kHz-30MHz)	U=3.7dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=5.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=5.0dB
5	Conducted Emission(150kHz-30MHz)	U=3.0dB
6	Power Spectral Density	U=3.46dB
7	Peak Power	U=0.31dB
8	Occupied Bandwidth/Frequency Range	U=3.46%
9	Conducted output power uncertainty	U=0.55dB
10	Frequency Error	U= 53.50 Hz
11	Frequency Drift	U=0.64 KHz
12	Temperature	U= 0.59 °C
13	Humidity	U= 5.3 %

4. Product Information And Test Setup

4.1 Product Information


Model/Type reference:	PRSSSTX221 PRSSSTX231, PRSSSTX222, PRSSSTX232, PRSSSTX223, PRSSSTX233, PRSSSTX224, PRSSSTX234, PRSSSTX225, PRSSSTX235, PRSSSTX226, PRSSSTX236, PRSSSTX227, PRSSSTX237, PRSSSTX228, PRSSSTX238, PRSSSTX229, PRSSSTX239, PRSSSTX2211, PRSSSTX2311, PRSSSTX2212, PRSSSTX2312, PRSSSTX2213, PRSSSTX2313, PRSSSTX2214, PRSSSTX2314, PRSSSTX2215, PRSSSTX2315, PRSSSTX2216, PRSSSTX2316, PRSSSTX2217, PRSSSTX2317, PRSSSTX2218, PRSSSTX2318, PRSSSTX2219, PRSSSTX2319, PRSSSTX2220, PRSSSTX2320
Model differences:	All the model are the same circuit and RF module, except model names, color and size, the test model is PRSSSTX221.
Hardware Version:	V02
Software Version:	0506
Operation Frequency:	2403-2480MHz
Type of Modulation:	GFSK
Number Of Channel:	16channel
Antenna installation:	PCB antenna
Antenna Gain:	2.08 dBi Remark: ☒ The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. Antenna gain information is provided by the client and the laboratory is not responsible for its authenticity ☐ The antenna gain of the product is provided by the customer, and the test data is affected by the customer information. Antenna gain information is provided by the client and the laboratory is not responsible for its authenticity
Ratings:	DC 3.7V from battery, DC 5V from USB
Battery:	DC 3.7V 300mAh

	Model
Large size (L:124.17mm, W:65.11mm, H:40.21mm)	PRSSSTX221, PRSSSTX231, PRSSSTX232, PRSSSTX233, PRSSSTX234, PRSSSTX235, PRSSSTX236, PRSSSTX237, PRSSSTX238, PRSSSTX239, PRSSSTX2311, PRSSSTX2312, PRSSSTX2313, PRSSSTX2314, PRSSSTX2315, PRSSSTX2316, PRSSSTX2317, PRSSSTX2318, PRSSSTX2319, PRSSSTX2320
Small size (L:118.71mm, W:62.03mm, H:38.57mm)	PRSSSTX222, PRSSSTX223, PRSSSTX224, PRSSSTX225, PRSSSTX226, PRSSSTX227, PRSSSTX228, PRSSSTX229, PRSSSTX2211, PRSSSTX2212, PRSSSTX2213, PRSSSTX2214, PRSSSTX2215, PRSSSTX2216, PRSSSTX2217, PRSSSTX2218, PRSSSTX2219, PRSSSTX2220

4.2 Test Setup Configuration

See test photographs attached in eut test setup photographs for the actual connections between product and support equipment.

Conducted Emission:



Radiated Spurious Emission:



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	Adapter	UGREEN	CD122	---	---

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1M	DC cable unshielded

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Channel List			
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
1	2403	2	2424
3	2442	4	2444
5	2446	6	2450
7	2452	8	2458
9	2462	10	2464
11	2466	12	2468
13	2470	14	2472
15	2474	16	2480

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description	Modulation Type
Mode 1	CH01	GFSK
Mode 2	CH03	
Mode 3	CH16	
Mode 4	Link mode (Radiated emission)	
Mode 5	Charging (Conducted emissions)	

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The product supplies power to the battery and is tested at full charge

4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

RF Function	Mode Or Modulation type	Power Class	Software For Testing
SRD-2.4GHz	GFSK	DEF	/

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Technology Co., Ltd.

Address: Room 101M, Unit 1, Building1, Pengyuan, No.18, Lilang Road, Shanglilang, Nanwan Subdistrict, Longgang District, Shenzhen, Guangdong, China.

The site and apparatus are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-1:2019 other equivalent standards.

FCC Test Firm Registration Number: 754702

ANAB certificate registration number is: CN3479

5.2 Test Instrument Used

Conducted emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESCI	101421	2025.08.30	2026.08.29
AMN	SCHWHRZBECK	NSLK8128	05152	2026.01.22	2027.01.21
AMN	SCHWHRZBECK	NSLK8127	8127739	2025.09.16	2026.09.15
Pulse Limiter	SCHWHRZBECK	VTSD 9561-F-N	00547	2025.08.30	2026.08.29
Temperature & Humidity	Wetest	HTC-1	/	2025.09.01	2026.08.31
Software	EZ-EMC	Ver.EMC-CON 3A1	/	/	/

Radiated disturbance 1#					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Shielded room	CRT	9*6*6	/	2023.08.02	2026.08.01
Broadband antenna	Schwarzbeck	VULB9160	3369	2026.05.16	2027.05.15
Receiver	R&S	ESPI	101396	2025.08.30	2026.08.29
Preamplifier	Schwarzbeck	BBV9744	00342	2025.08.30	2026.08.29
Loop Antenna	Schwarzbeck	FMZB1519B	00014	2026.01.05	2027.01.04
RF cable 5# (9kHz-6GHz)	Yunyi	3M	/	2025.08.30	2026.08.29
RF cable 8# (9kHz-1GHz)	Yunyi	7M	/	2025.10.28	2026.10.27
Temperature & Humidity	Wettest	HTC-1	/	2025.09.01	2026.08.31
Software	EZ-EMC	Ver.FA-03A2	/	/	/


Radiated disturbance 2#					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Shielded room	ChengYu	9*6*6	/	2023.09.25	2026.09.24
Loop Antenna	Schwarzbeck	FMZB1519B	00014	2026.01.05	2027.01.04
Broadband antenna	SCHWHRZBECK	VULB9168	01620	2025.08.29	2026.08.28
Horn antenna(1 GHz -18GHz)	SCHWARZBECK	BBHA 9120 D	2792	2025.08.29	2026.08.28
Horn antenna (18 GHz -40GHz)	SCHWARZBECK	BBHA9170	00822	2025.12.29	2026.12.28
Receiver	R&S	ESR	1316	2025.08.30	2026.08.29
Spectrum Analyzer	R&S	FSV40	101328	2026.01.22	2027.01.21
Amplifier	SCHWHRZBECK	BBV9744	568	2025.08.30	2026.08.29
Amplifier	EMC INSTRUMENTS CORPORATION	EMC0518A45SEE	EMT-SZ2 233	2025.08.30	2026.08.29
Amplifier (18GHz-40GHz)	MITEQ	TTA1840-35-HG	2034381	2026.05.09	2027.05.08
RF cable 3# (9kHz-6GHz)	Yunyi	10M	/	2025.08.30	2026.08.29
RF cable 9# (9kHz-1GHz)	Yunyi	2M	/	2025.10.28	2026.10.27

RF cable 5# (1GHz-18GHz)	SKET	9M	18038626	2025.08.30	2026.08.29
RF cable 6# (1GHz-18GHz)	SKET	5M	#10	2025.09.05	2026.09.04
RF cable 10# (18GHz-40GHz)	/	2M	2M	2026.05.09	2027.05.08
RF cable 11# (18GHz-40GHz)	/	2.5M	2.5M	2026.05.09	2027.05.08
Temperature & Humidity	Wetest	HTC-1	/	2025.09.05	2026.09.04
Software	EZ-EMC	Ver.FA-03A2	/	/	/

RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Spectrum Analyzer	Keysight	N9020A	MY51287403	2025.08.30	2026.08.29
Signal Generator	Keysight	N5182A	MY50144088	2025.08.30	2026.08.29
Power Sensor	Keysight	U2001	MY51250006	2025.10.28	2026.10.27
Temperature & Humidity	Wetest	HTC-1	/	2025.09.01	2026.08.31
Communication test set	R&S	CMW500	157483	2025.08.30	2026.08.29
Radio frequency control box	MWRFTest	MW100-RFCB	\	\	\
Software	MWRFTest	MTS 8310	V 3.0.0.0	\	\
D.C. Power Supply	Elektro-Automatik GmbH & Co.KG	D-41747 Viersen	6230316	2025.09.30	2026.08.29
Temperature and humidity test chamber	Auchno	OJN-9606-408 L	19120183	2025.07.09	2026.07.08

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

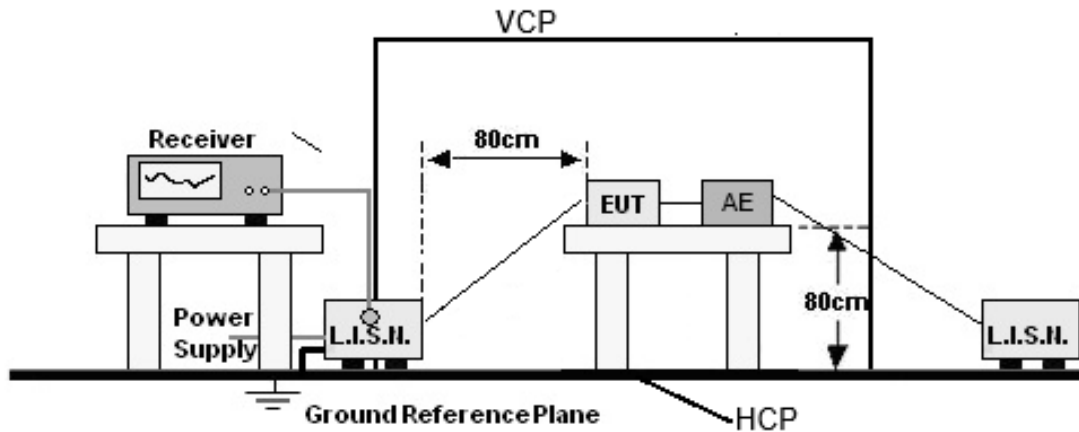

6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

- *Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N.).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

Temperature:	26.2 °C	Relative Humidity:	58 %
Pressure:	101KPa	Phase :	L
Test Mode:	Mode 5	Test Voltage :	AC 120V/60Hz

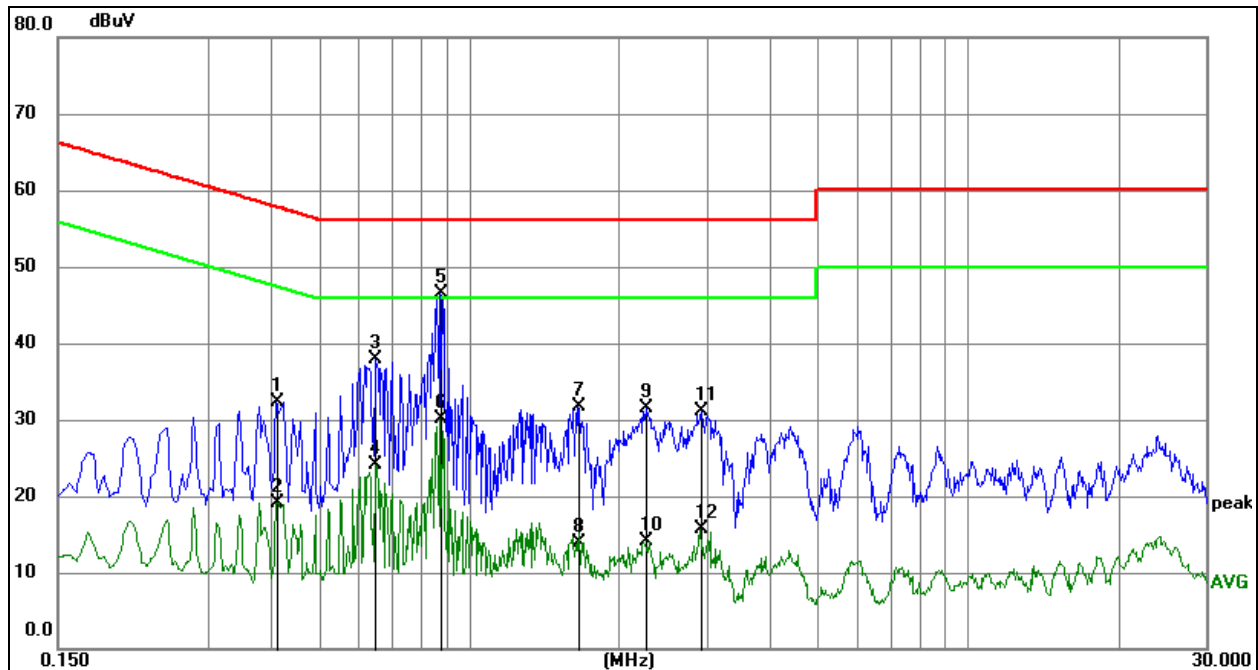


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = LISN factor + Cable Loss+ Limiter (10dB).
3. Margin = (Reading+ Factor)–Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.4110	21.75	10.52	32.27	57.63	-25.36	QP	P
2	0.4110	8.65	10.52	19.17	47.63	-28.46	AVG	P
3	0.6495	27.35	10.53	37.88	56.00	-18.12	QP	P
4	0.6495	13.57	10.53	24.10	46.00	-21.90	AVG	P
5 *	0.8790	36.00	10.54	46.54	56.00	-9.46	QP	P
6	0.8790	19.49	10.54	30.03	46.00	-15.97	AVG	P
7	1.6575	21.06	10.55	31.61	56.00	-24.39	QP	P
8	1.6575	3.28	10.55	13.83	46.00	-32.17	AVG	P
9	2.2695	20.86	10.55	31.41	56.00	-24.59	QP	P
10	2.2695	3.59	10.55	14.14	46.00	-31.86	AVG	P
11	2.9265	20.51	10.55	31.06	56.00	-24.94	QP	P
12	2.9265	5.07	10.55	15.62	46.00	-30.38	AVG	P

* Indicates the worst data.

Temperature:	26.2 °C	Relative Humidity:	58 %
Pressure:	101KPa	Phase :	N
Test Mode:	Mode 5	Test Voltage :	AC 120V/60Hz

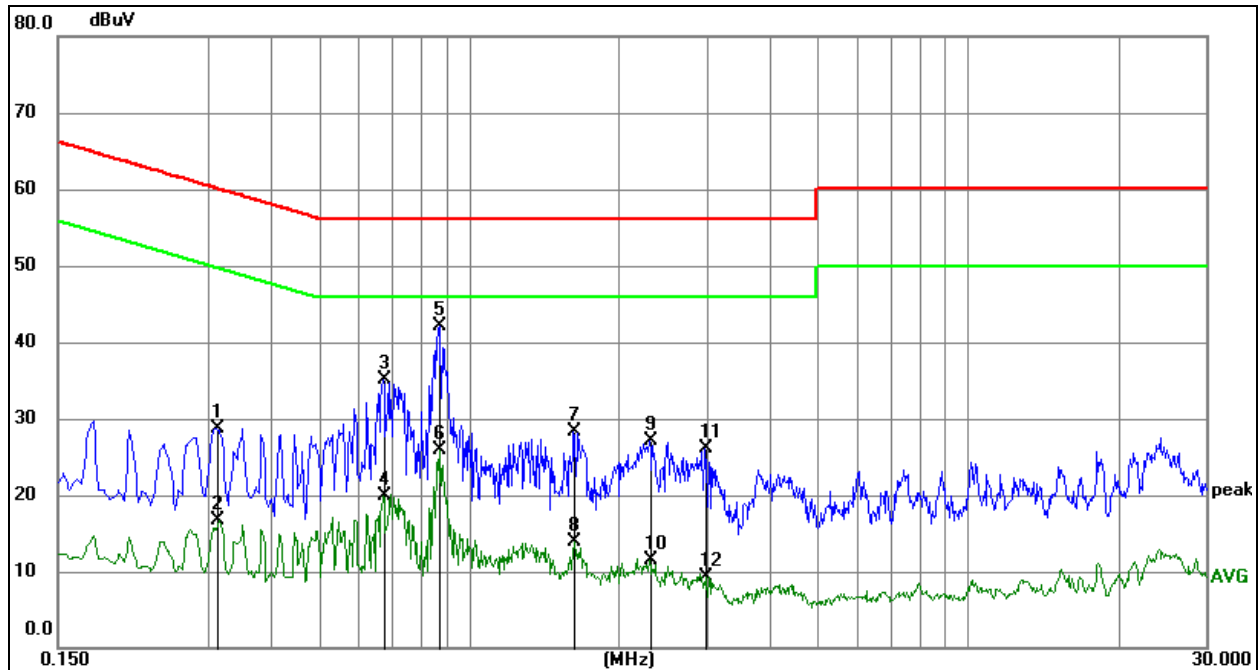

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = LISN factor + Cable Loss+ Limiter (10dB).
3. Margin = (Reading+ Factor)-Limit


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.3120	18.21	10.51	28.72	59.92	-31.20	QP	P
2	0.3120	6.17	10.51	16.68	49.92	-33.24	AVG	P
3	0.6720	24.58	10.53	35.11	56.00	-20.89	QP	P
4	0.6720	9.42	10.53	19.95	46.00	-26.05	AVG	P
5 *	0.8745	31.59	10.54	42.13	56.00	-13.87	QP	P
6	0.8745	15.41	10.54	25.95	46.00	-20.05	AVG	P
7	1.6260	17.78	10.55	28.33	56.00	-27.67	QP	P
8	1.6260	3.29	10.55	13.84	46.00	-32.16	AVG	P
9	2.3010	16.47	10.55	27.02	56.00	-28.98	QP	P
10	2.3010	0.88	10.55	11.43	46.00	-34.57	AVG	P
11	2.9715	15.64	10.55	26.19	56.00	-29.81	QP	P
12	2.9715	-1.28	10.55	9.27	46.00	-36.73	AVG	P

* Indicates the worst data.


7. Radiated Emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

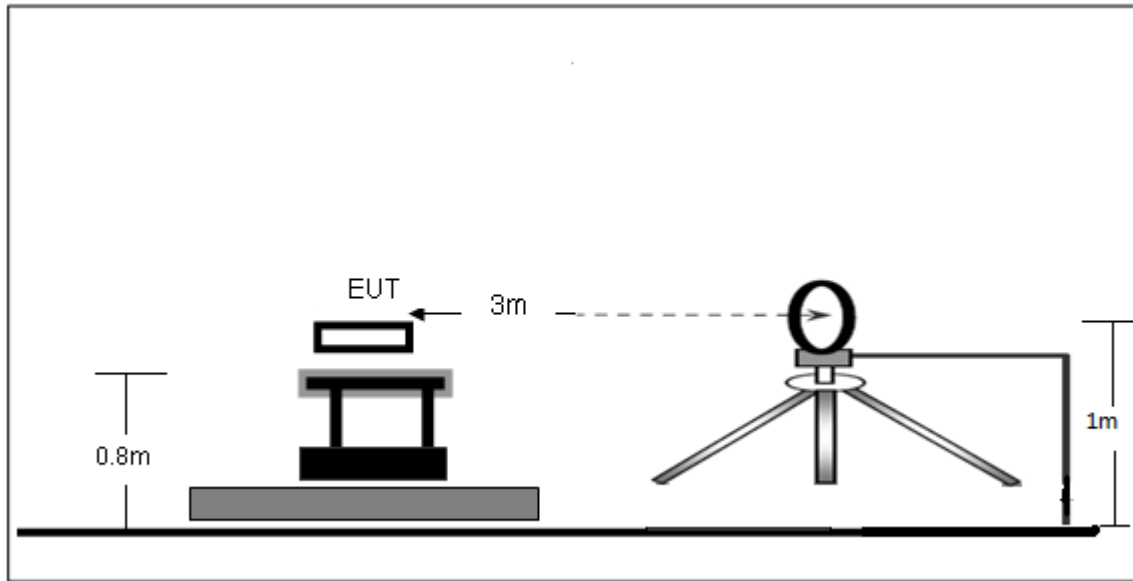

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

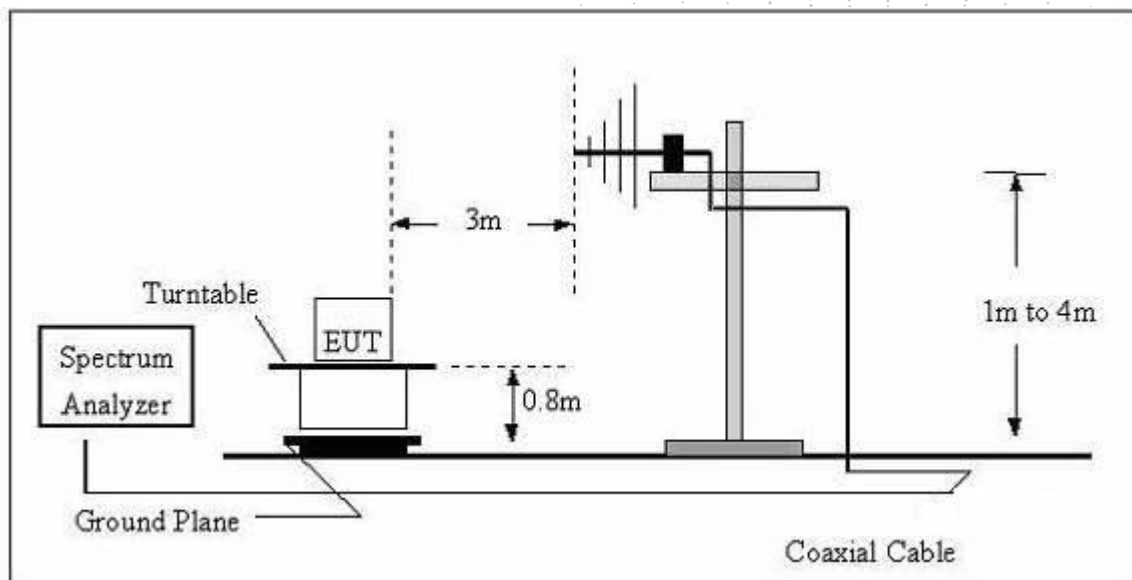

(C) Radiated Emission Test-Up Frequency Above 1GHz

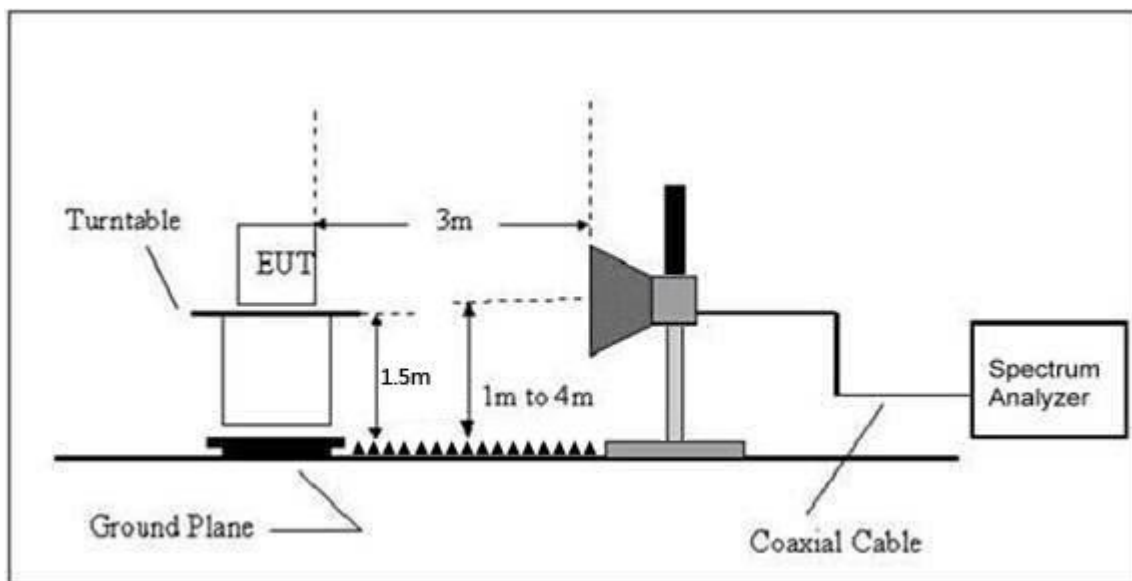

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency	Field Strength	Distance	Field Strength Limit at 3m Distance	
(MHz)	uV/m	(m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	$10000 * 2400/F(kHz)$	$20\log(2400/F(kHz)) + 80$
0.490 ~ 1.705	24000/F(kHz)	30	$100 * 24000/F(kHz)$	$20\log(24000/F(kHz)) + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log(30) + 40$
30 ~ 88	100	3	100	$20\log(100)$
88 ~ 216	150	3	150	$20\log(150)$
216 ~ 960	200	3	200	$20\log(200)$
Above 960	500	3	500	$20\log(500)$

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Frequency Range Of Radiated Measurement

(a) For an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

(1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.

(3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.

(4) If the intentional radiator operates at or above 95 GHz: To the third harmonic of the highest fundamental frequency or to 750 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.

(5) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a) (1) through (4) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.

7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not

have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middlest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



7.5 Test Result

Below 30MHz

Temperature:	23.1 °C	Relative Humidity:	55 %
Pressure:	101KPa	Test Voltage :	DC 3.7V
Test Mode:	Mode 4		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})(\text{dB})$;

Limit line = specific limits(dBuv) + distance extrapolation factor.

C T
3C
PR
por

Temperature:	23.1 °C	Relative Humidity:	55 %
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 4	Test Voltage :	DC 3.7V



Remark:


Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Margin = (Reading + Factor) – Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	66.2662	30.67	-12.97	17.70	40.00	-22.30	QP	100	360	P
2	96.7749	30.51	-15.17	15.34	43.50	-28.16	QP	100	360	P
3	160.3456	29.04	-10.43	18.61	43.50	-24.89	QP	100	360	P
4	245.9509	39.82	-11.53	28.29	46.00	-17.71	QP	100	360	P
5	316.5890	46.04	-9.55	36.49	46.00	-9.51	QP	100	360	P
6 *	729.3583	38.81	-0.08	38.73	46.00	-7.27	QP	100	360	P

* Indicates the worst data.

Temperature:	23.1 °C	Relative Humidity:	55 %
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 4	Test Voltage :	DC 3.7V

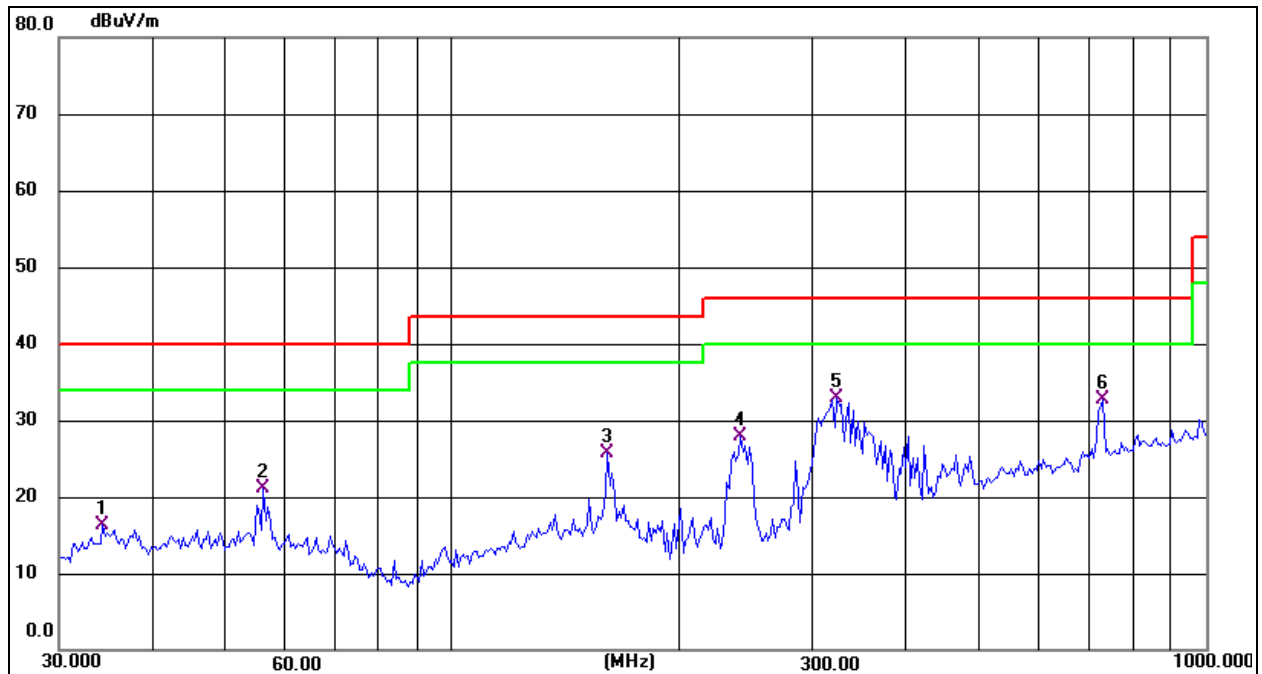

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Margin = (Reading + Factor) – Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	34.2760	28.62	-12.26	16.36	40.00	-23.64	QP	100	1	P
2	56.0007	32.66	-11.52	21.14	40.00	-18.86	QP	100	1	P
3	160.3456	36.06	-10.43	25.63	43.50	-17.87	QP	100	1	P
4	240.8304	39.64	-11.74	27.90	46.00	-18.10	QP	100	1	P
5 *	323.3204	42.22	-9.34	32.88	46.00	-13.12	QP	100	1	P
6	729.3583	32.79	-0.08	32.71	46.00	-13.29	QP	100	1	P

* Indicates the worst data.

Between 1GHz – 25GHz

GFSK							
Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel							
V	4806.00	68.12	-9.61	58.51	74.00	-15.49	PK
V	4806.00	58.06	-9.61	48.45	54.00	-5.55	AV
V	7209.00	59.95	-4.13	55.82	74.00	-18.18	PK
V	7209.00	49.34	-4.13	45.21	54.00	-8.79	AV
H	4806.00	63.30	-9.61	53.69	74.00	-20.31	PK
H	4806.00	54.26	-9.61	44.65	54.00	-9.35	AV
H	7209.00	57.63	-4.13	53.50	74.00	-20.50	PK
H	7209.00	49.40	-4.13	45.27	54.00	-8.73	AV
Middle channel							
V	4884.00	66.07	-8.84	57.23	74.00	-16.77	PK
V	4884.00	57.97	-8.84	49.13	54.00	-4.87	AV
V	7326.00	55.29	-3.41	51.88	74.00	-22.12	PK
V	7326.00	46.26	-3.41	42.85	54.00	-11.15	AV
H	4884.00	63.23	-8.84	54.39	74.00	-19.61	PK
H	4884.00	53.90	-8.84	45.06	54.00	-8.94	AV
H	7326.00	53.38	-3.41	49.97	74.00	-24.03	PK
H	7326.00	44.76	-3.41	41.35	54.00	-12.65	AV
High channel							
V	4960.00	68.68	-8.65	60.03	74.00	-13.97	PK
V	4960.00	59.48	-8.65	50.83	54.00	-3.17	AV
V	7440.00	61.86	-3.4	58.46	74.00	-15.54	PK
V	7440.00	52.50	-3.4	49.10	54.00	-4.90	AV
H	4960.00	67.22	-8.65	58.57	74.00	-15.43	PK
H	4960.00	58.10	-8.65	49.45	54.00	-4.55	AV
H	7440.00	60.03	-3.4	56.63	74.00	-17.37	PK
H	7440.00	52.42	-3.4	49.02	54.00	-4.98	AV


Remark:

1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over = Emission Level - Limit
2. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

8. Radiated Band Emission Measurement and Restricted Bands Of Operation

8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz

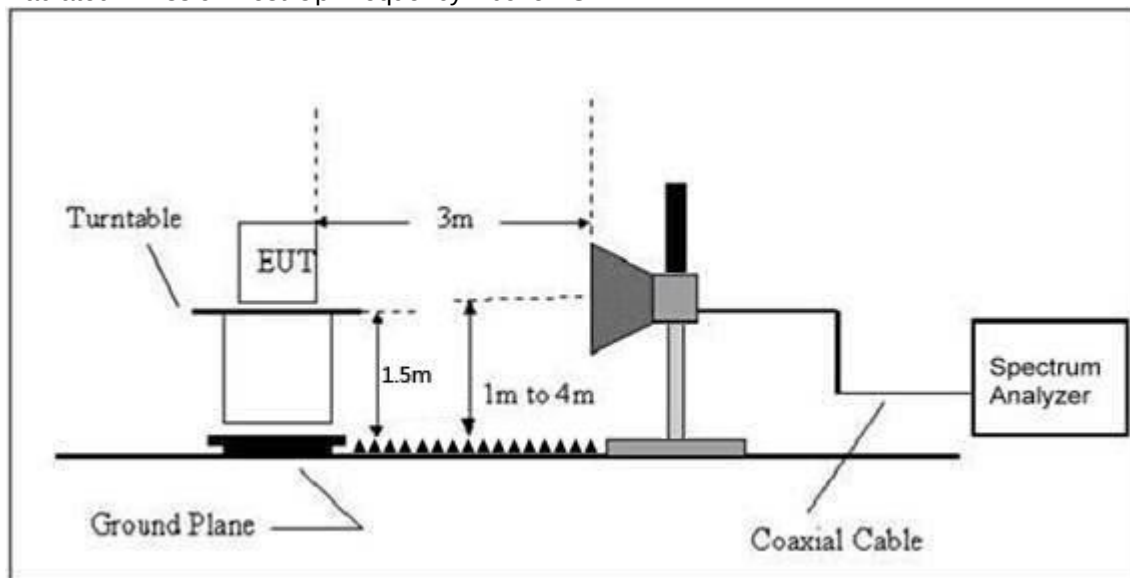

8.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

(1)The limit for radiated test was performed according to FCC PART 15C.

(2)The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

8.3 Test Procedure

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Above 1GHz test procedure as below:

a.The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the middle channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

8.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

8.5 Test Result

GFSK	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)		Result	
					PK	PK	AV		
	Low Channel 2403MHz								
	H	2390	62.29	-17.27	45.02	74.00	54.00	PASS	
	H	2400	65.57	-17.23	48.34	74.00	54.00	PASS	
	V	2390	62.74	-17.27	45.47	74.00	54.00	PASS	
	V	2400	65.54	-17.23	48.31	74.00	54.00	PASS	
	High Channel 2480MHz								
	H	2483.5	65.11	-16.91	48.20	74.00	54.00	PASS	
	H	2500	33.28	16.71	49.99	74.00	54.00	PASS	
V	2483.5	66.43	-16.91	49.52	74.00	54.00	PASS		
V	2500	32.74	16.71	49.45	74.00	54.00	PASS		

Remark:

1. Emission Level = Meter Reading + Factor,

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Over= Emission Level - Limit

2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB

4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

9. Power Spectral Density Test

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

Limits Of Radiated Emission Measurement (Above 1000MHz)

9.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

9.4 EUT Operating Conditions


The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.


Note: Power Spectral Density(dBm)=Reading+Cable Loss

9.5 Test Result


Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	DC 3.7V

Frequency	Power Spectral Density(dBm/3kHz)	Limit (dBm/3kHz)	Result
2403 MHz	-17.57	8	PASS
2442 MHz	-17.01	8	PASS
2480 MHz	-16.58	8	PASS

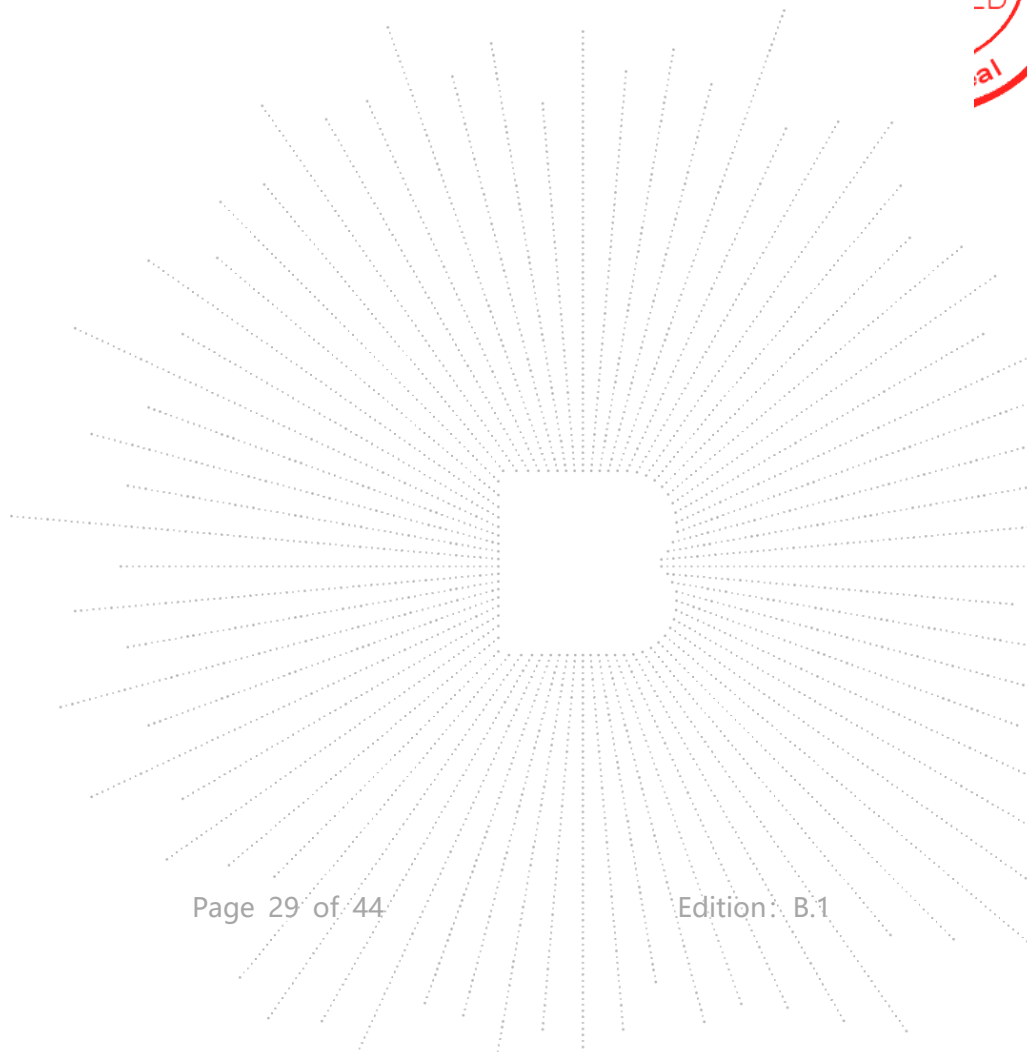

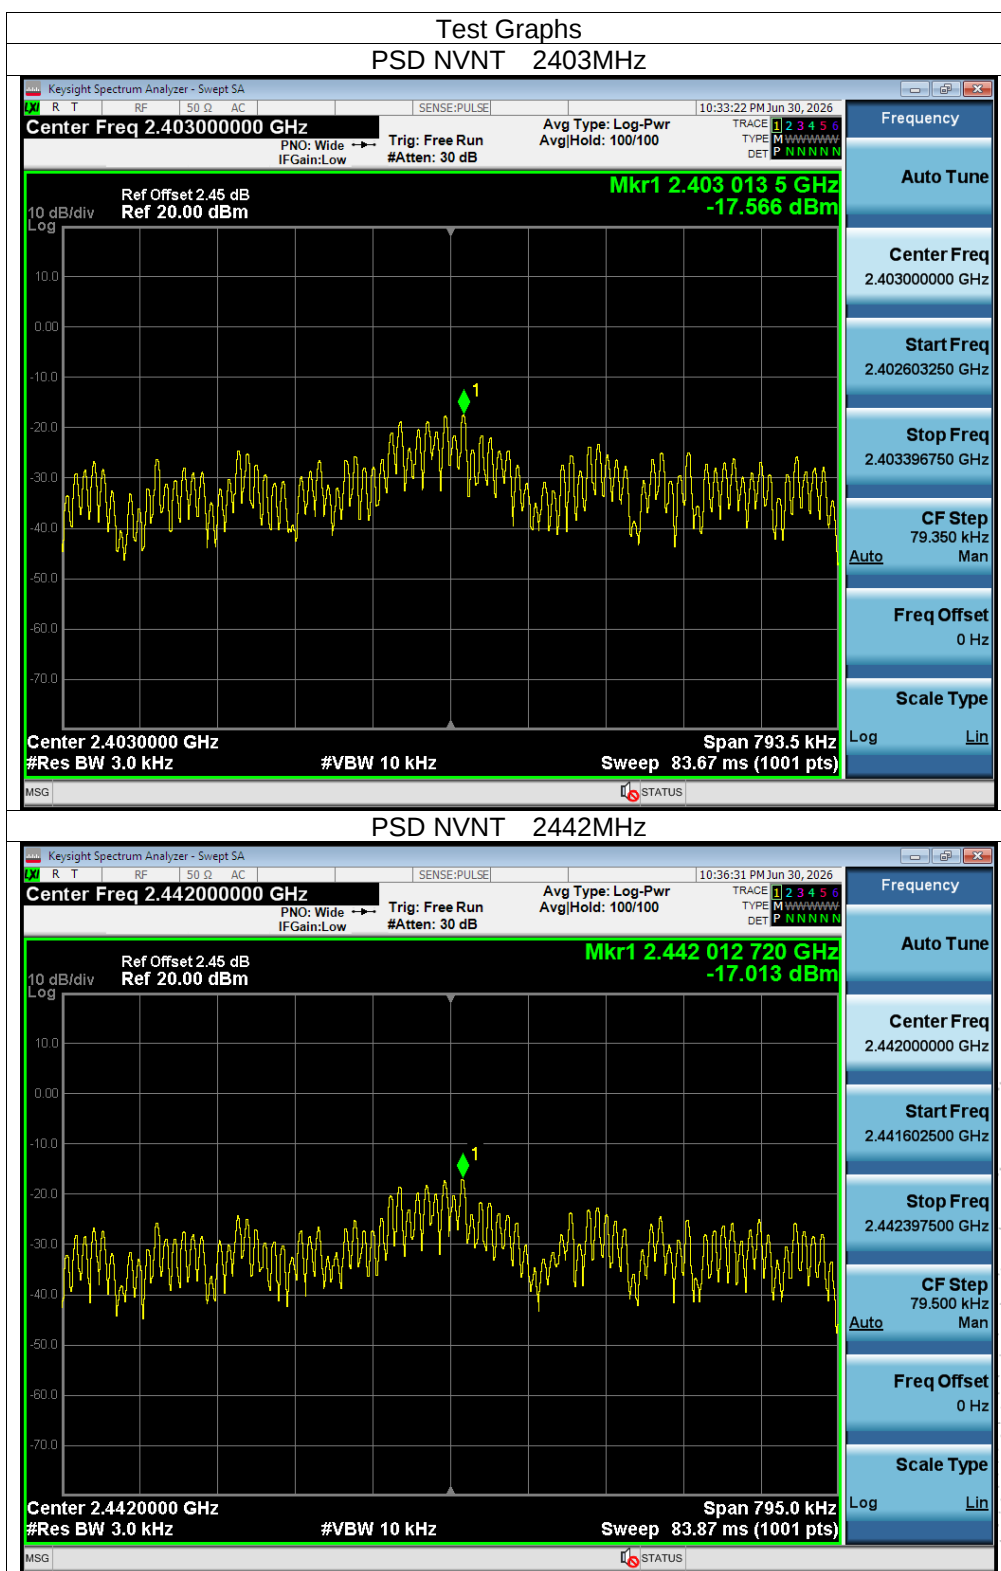

KJ CO., LTD

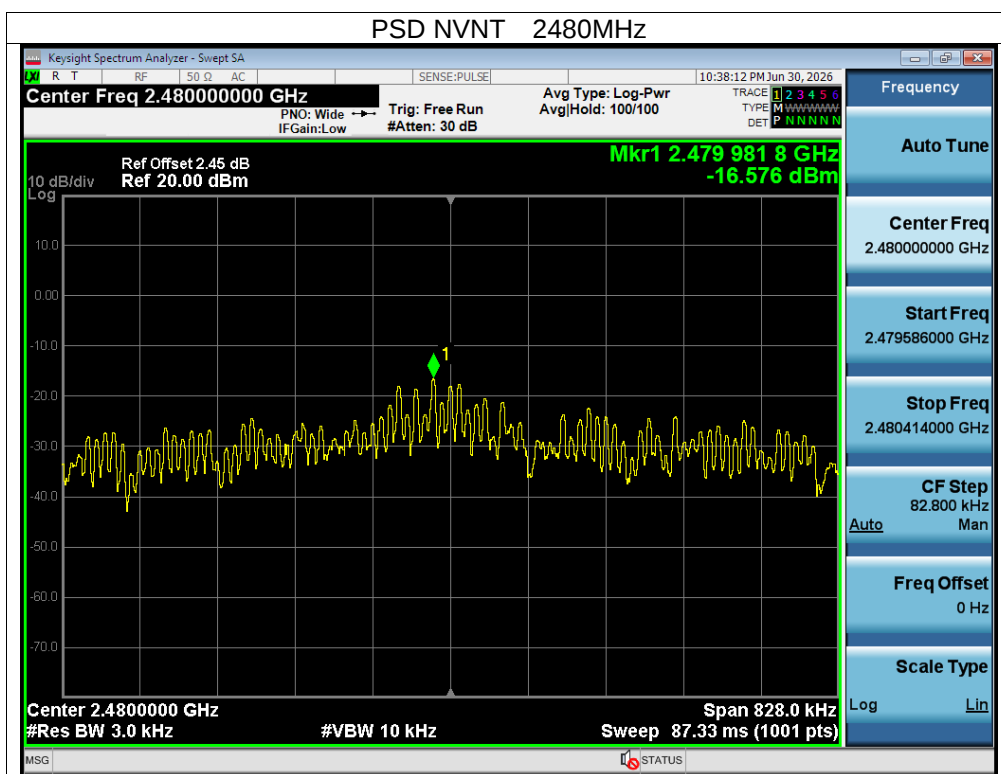

10. Bandwidth Test

10.1 Block Diagram Of Test Setup



10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (-6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 EUT operating Conditions


The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.


Note: Power Spectral Density(dBm)=Reading+Cable Loss



10.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	DC 3.7V

Frequency (MHz)	-6dB bandwidth (MHz)	Limit (MHz)	Result
2403 MHz	0.529	0.5	Pass
2442 MHz	0.53	0.5	Pass
2480 MHz	0.552	0.5	Pass

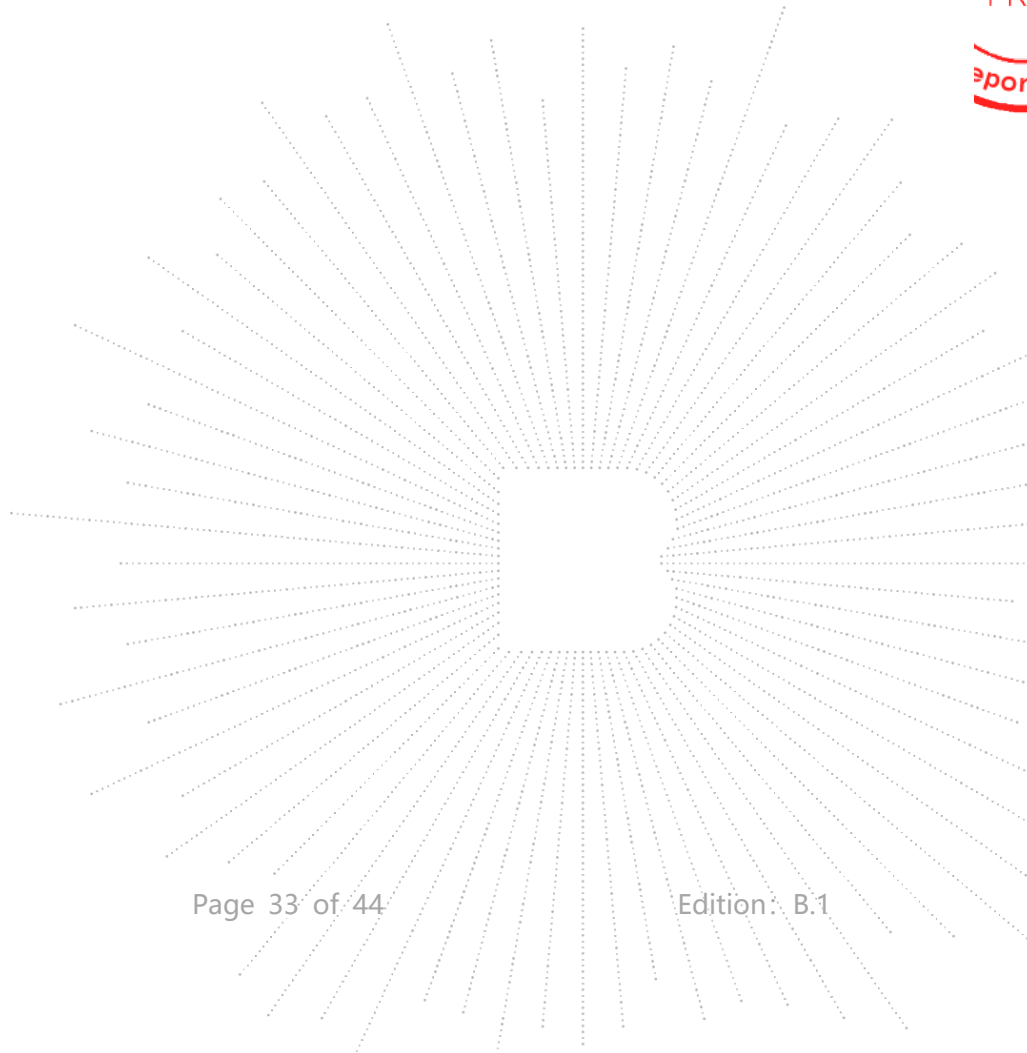

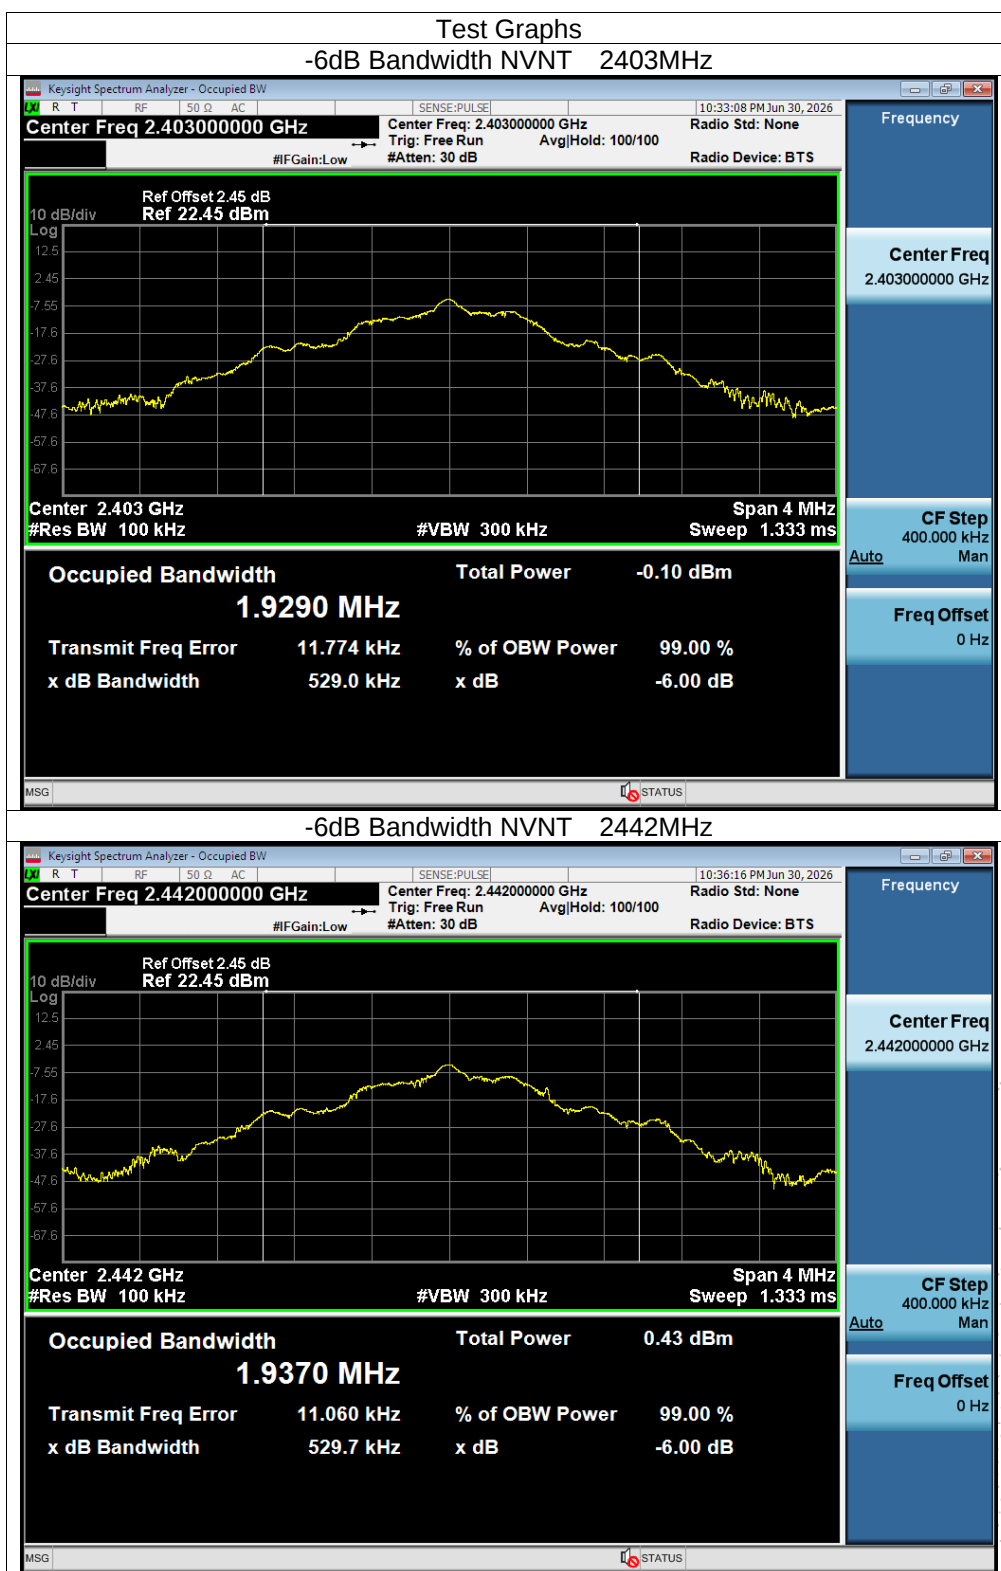

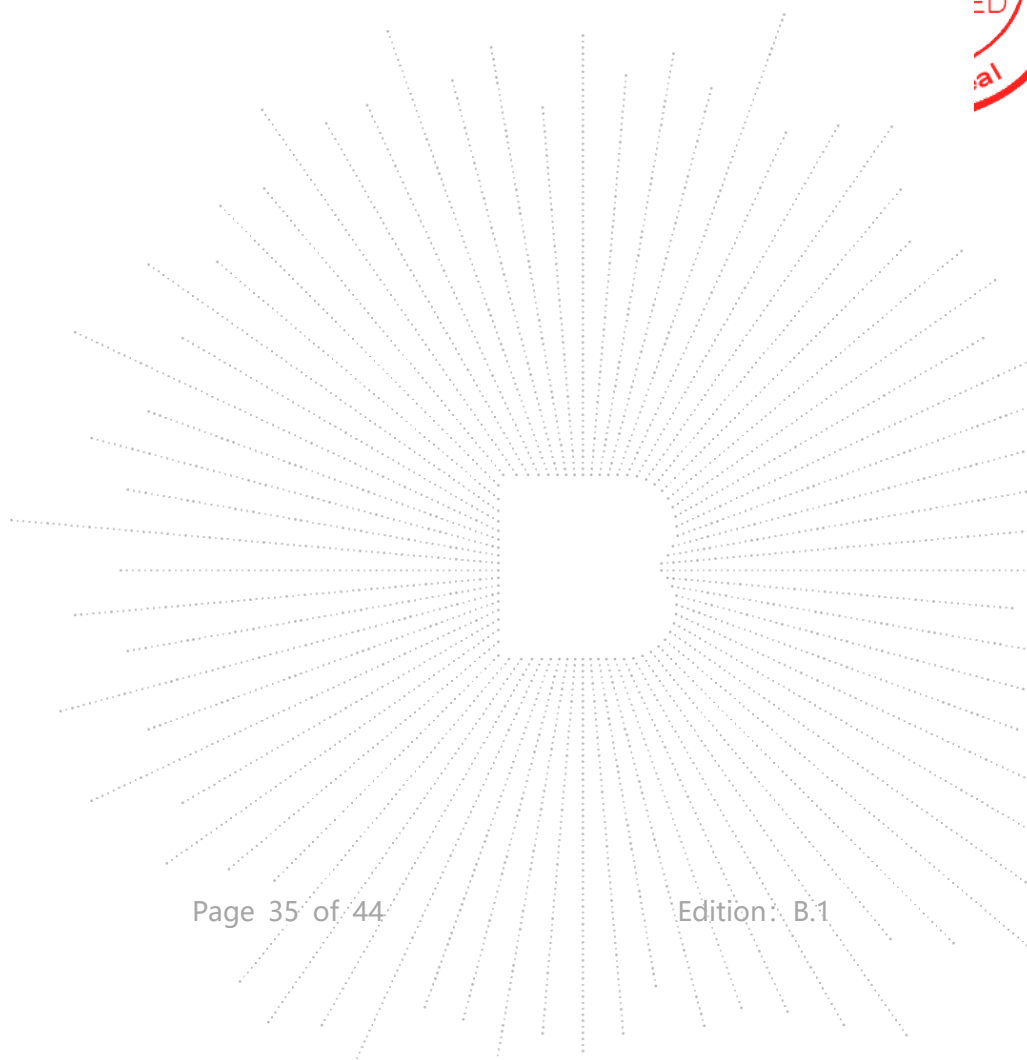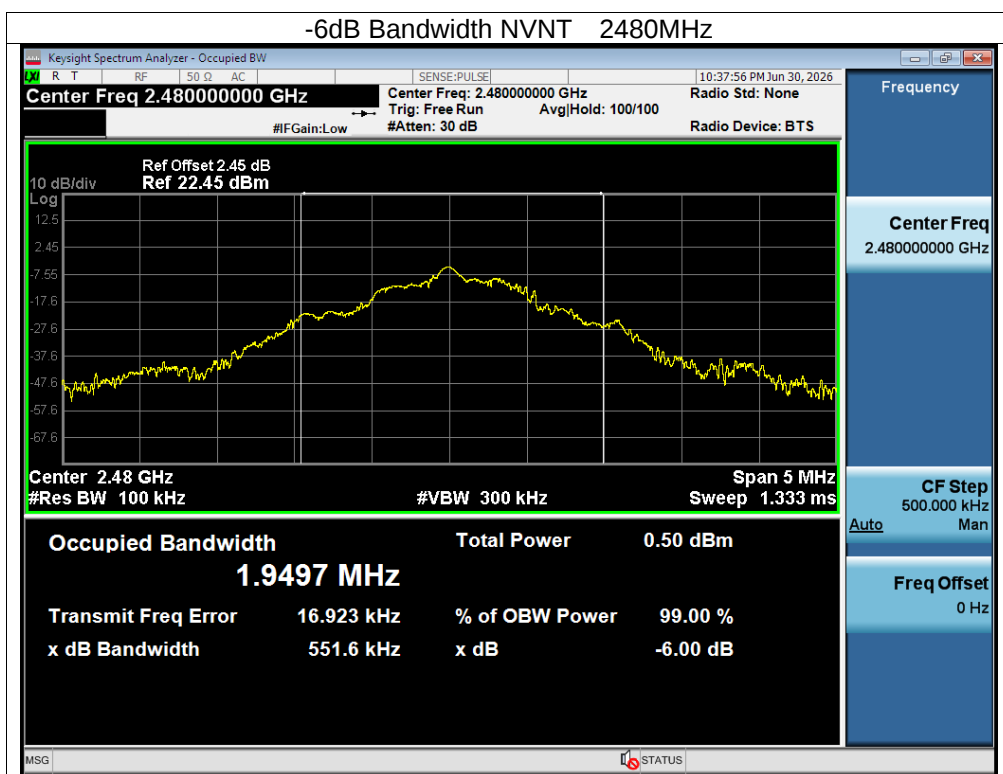

11. Peak Output Power Test

11.1 Block Diagram Of Test Setup



11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

11.3 Test Procedure

- a. The EUT was directly connected to the Power meter

11.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss


11.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	DC 3.7V

GFSK	Frequency(MHz)	Maximum Conducted Output Power(PK) (dBm)	Conducted Output Power Limit(dBm)
	2403	-4.71	30
	2442	-4.2	30
	2480	-4.26	30

12. 100 kHz Bandwidth Of Frequency Band Edge

12.1 Block Diagram Of Test Setup

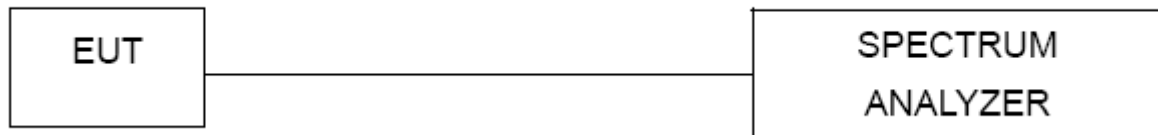

12.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

12.3 Test procedure

Using the following spectrum analyzer setting:


- Set the RBW = 100KHz.
- Set the VBW = 300KHz.
- Sweep time = auto couple.
- Detector function = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.



12.4 EUT operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

12.5 Test Result

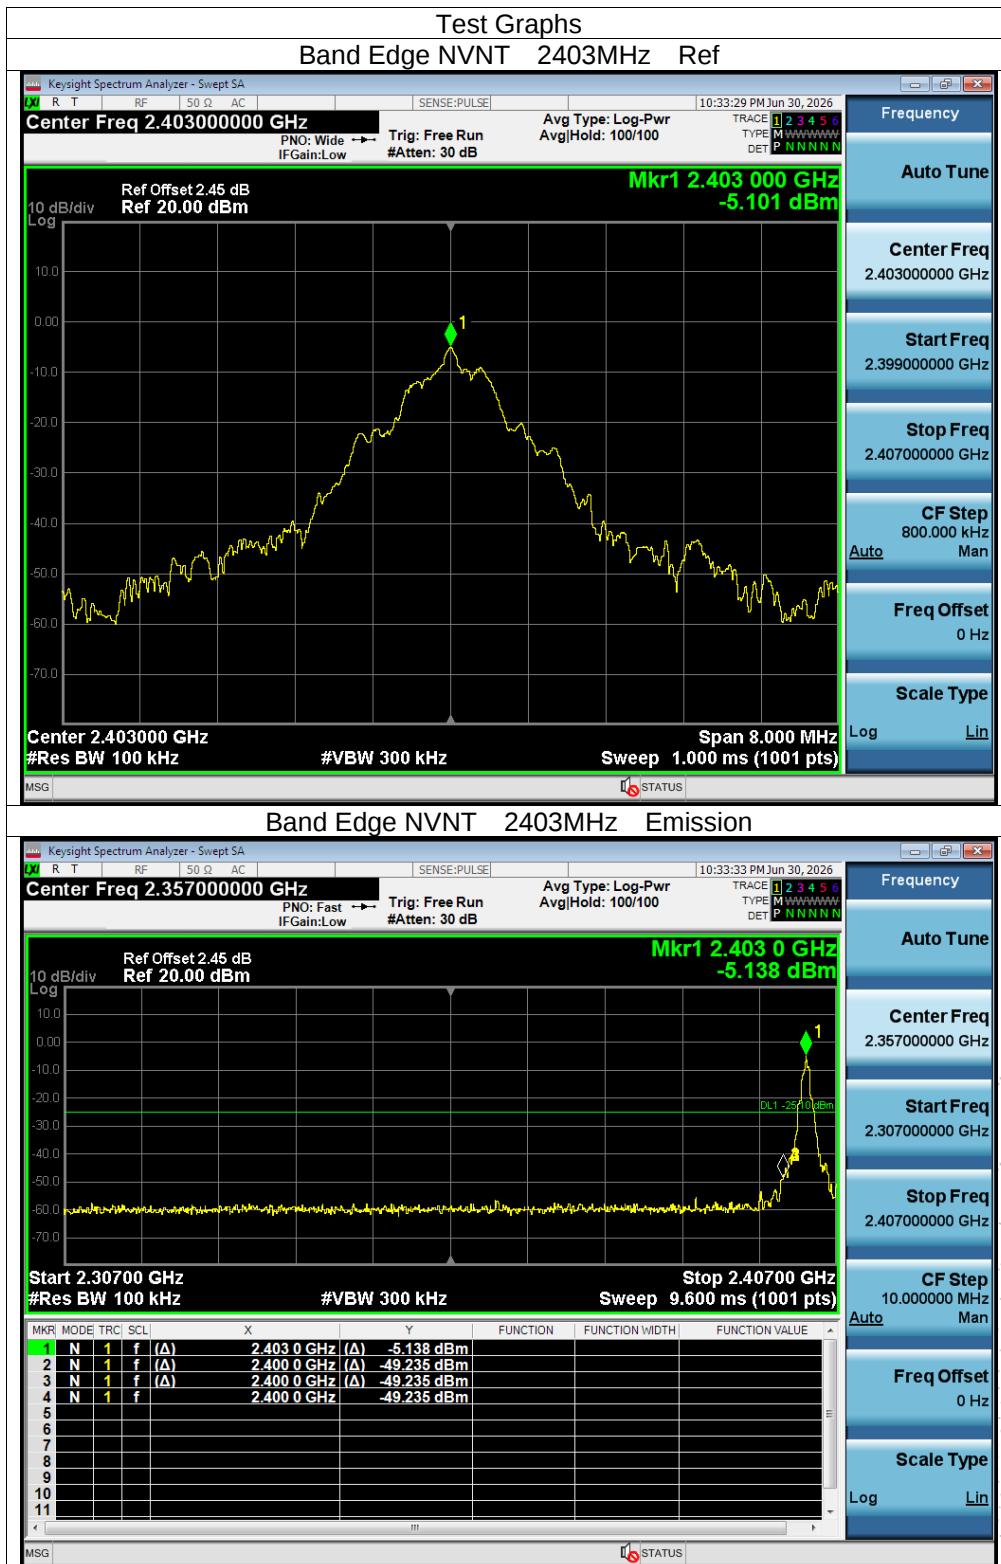


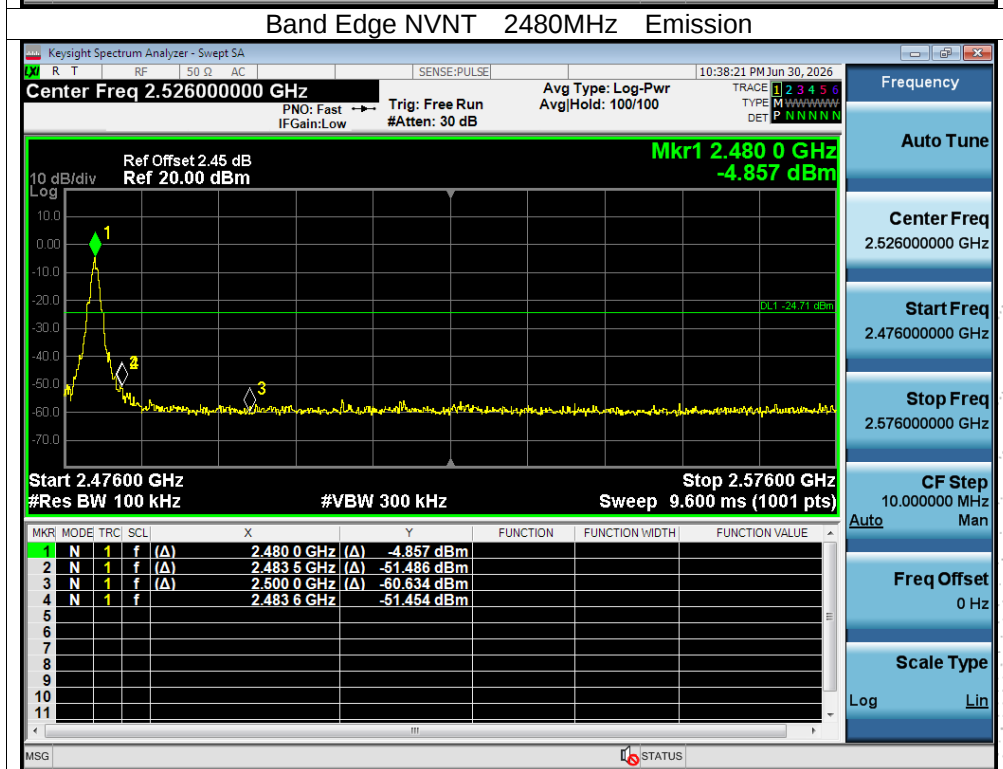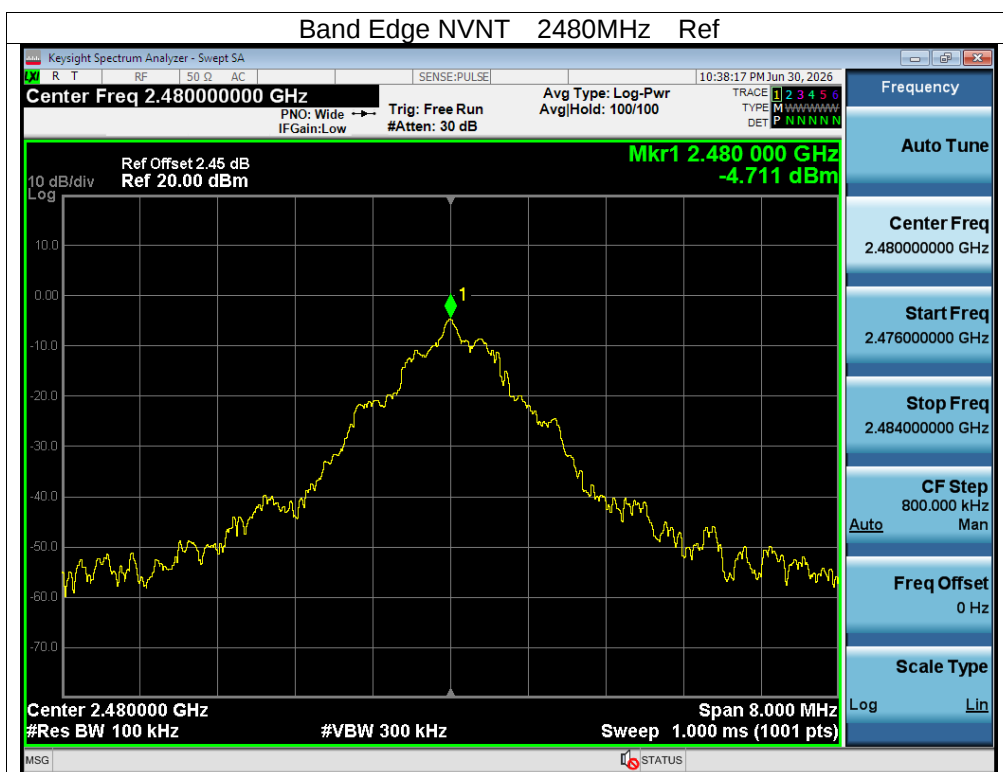




Conducted

Emission

Measurement

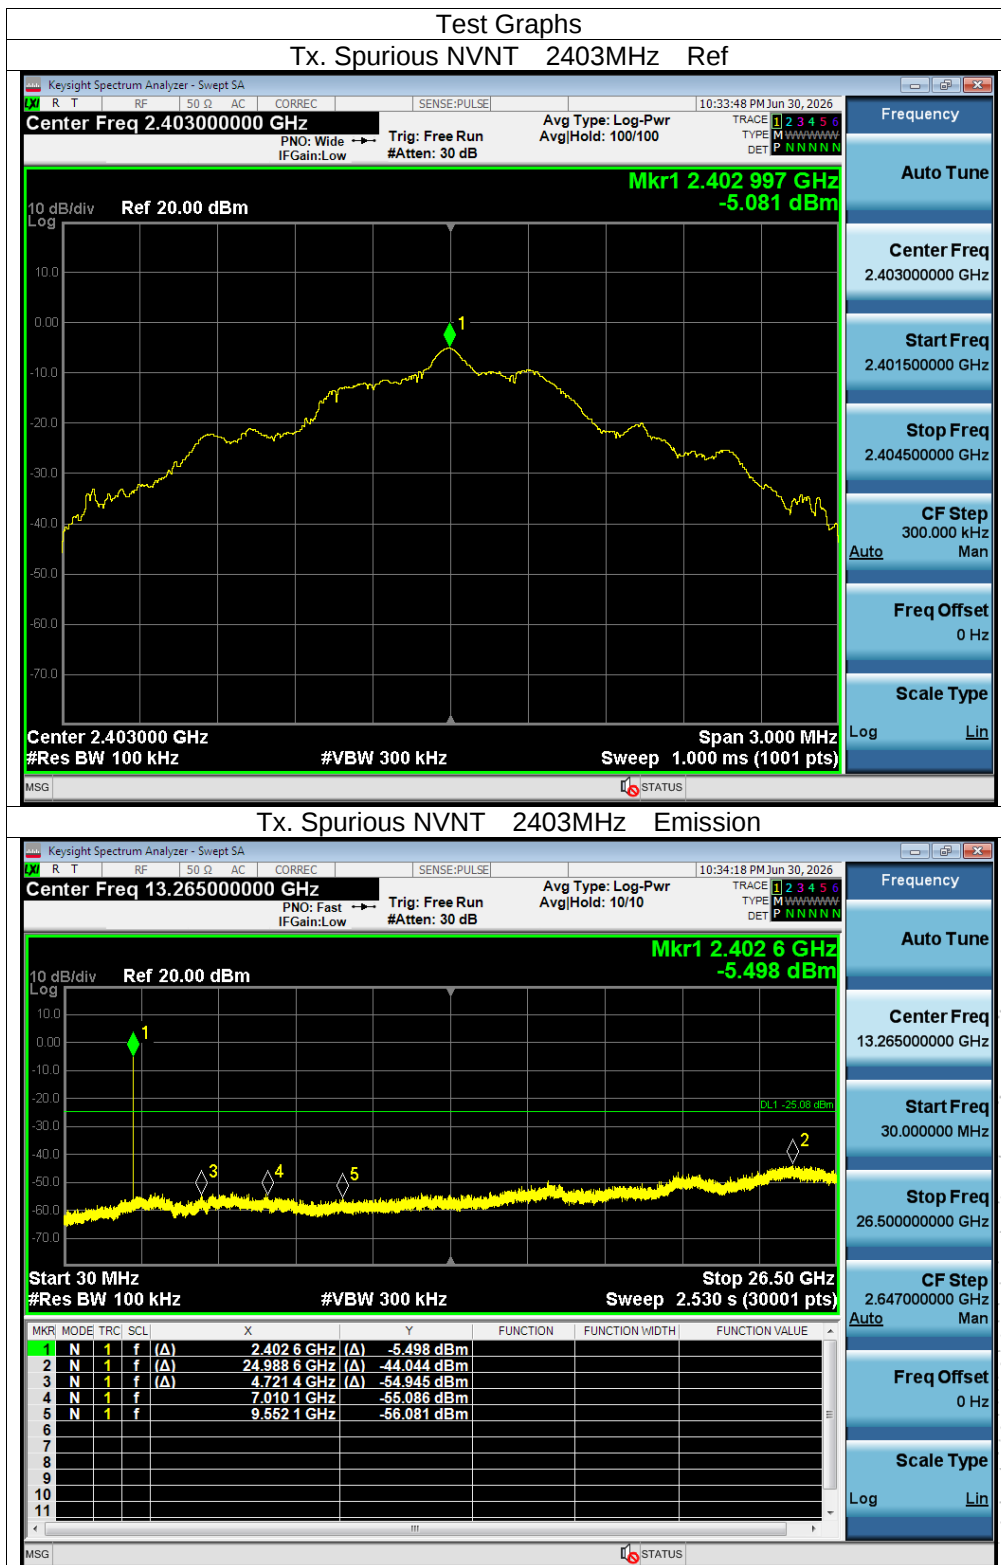

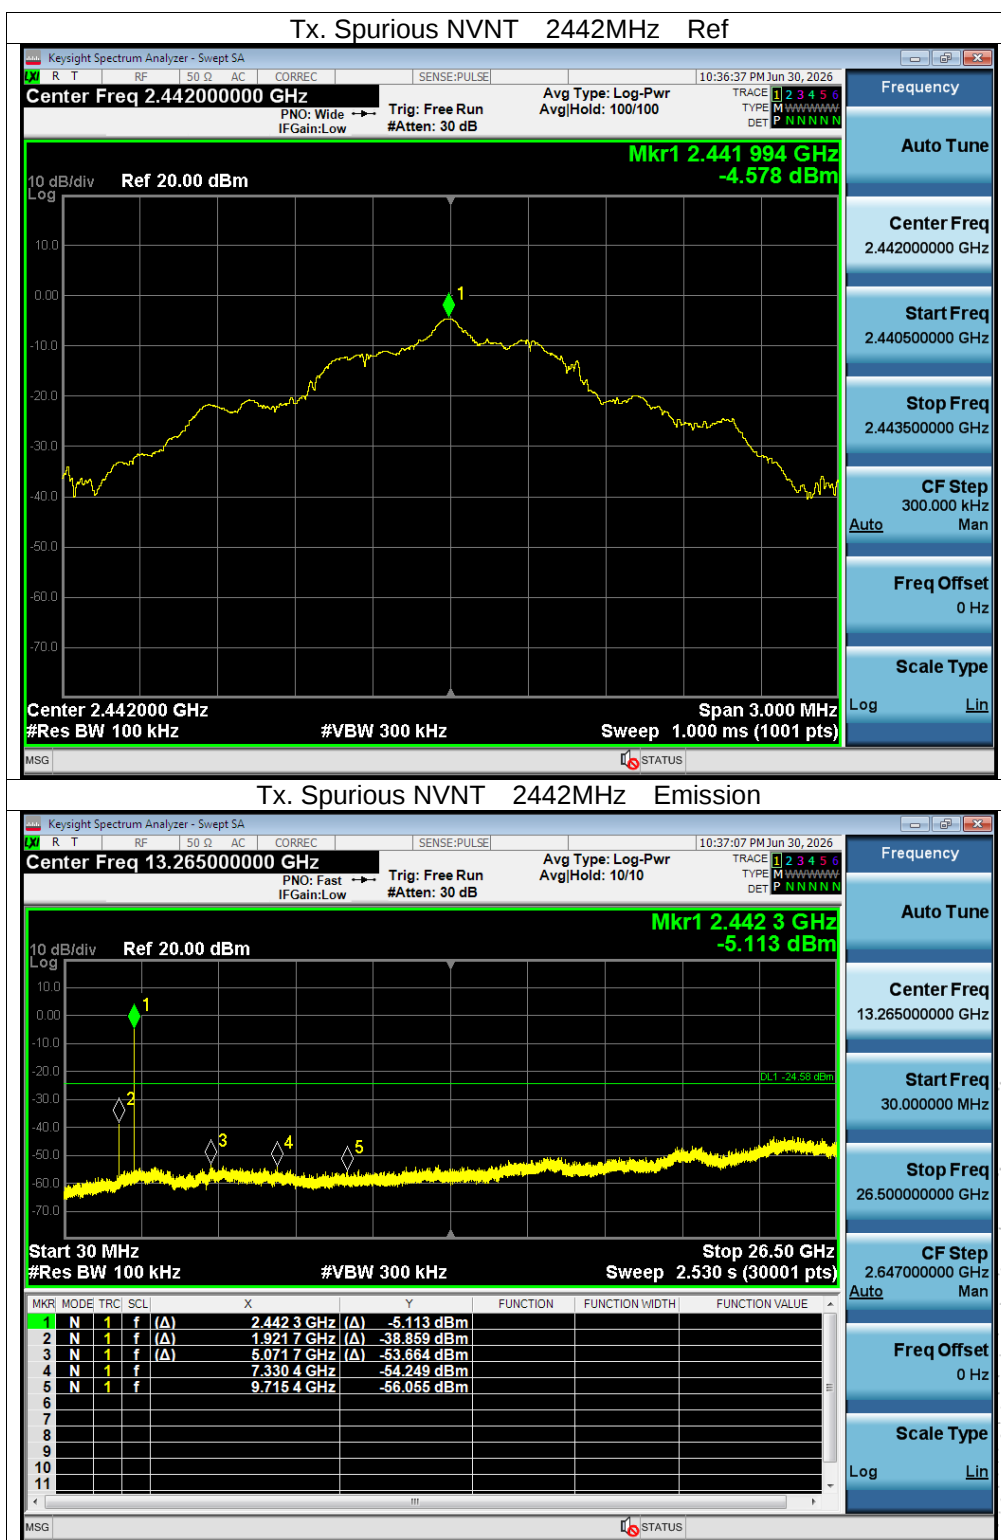

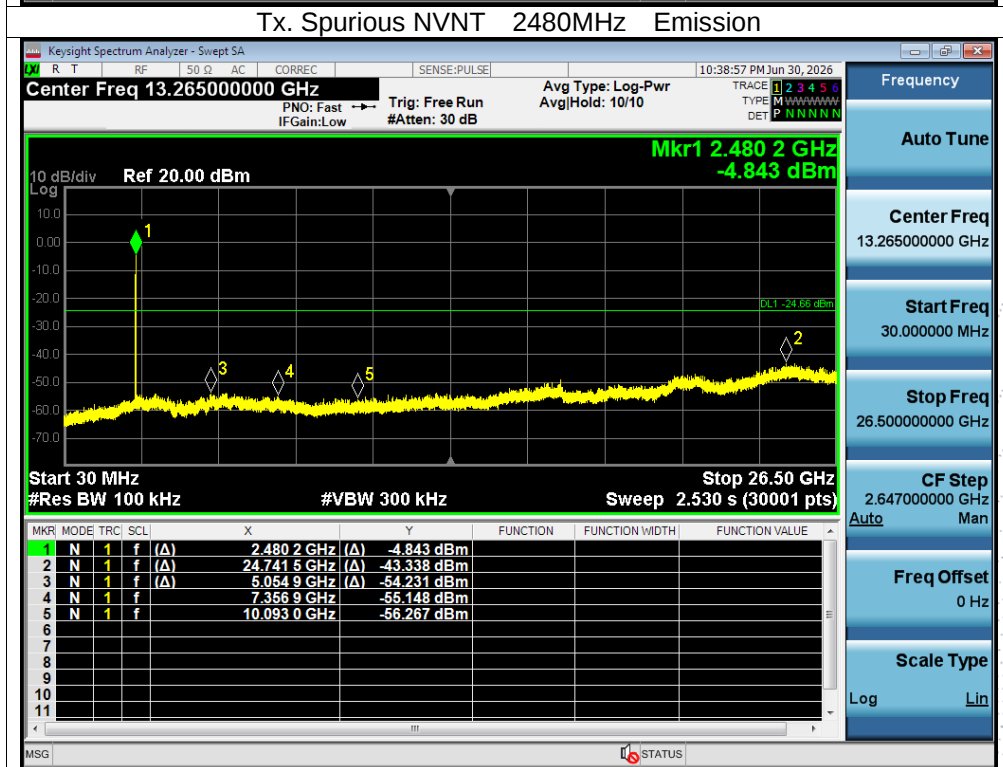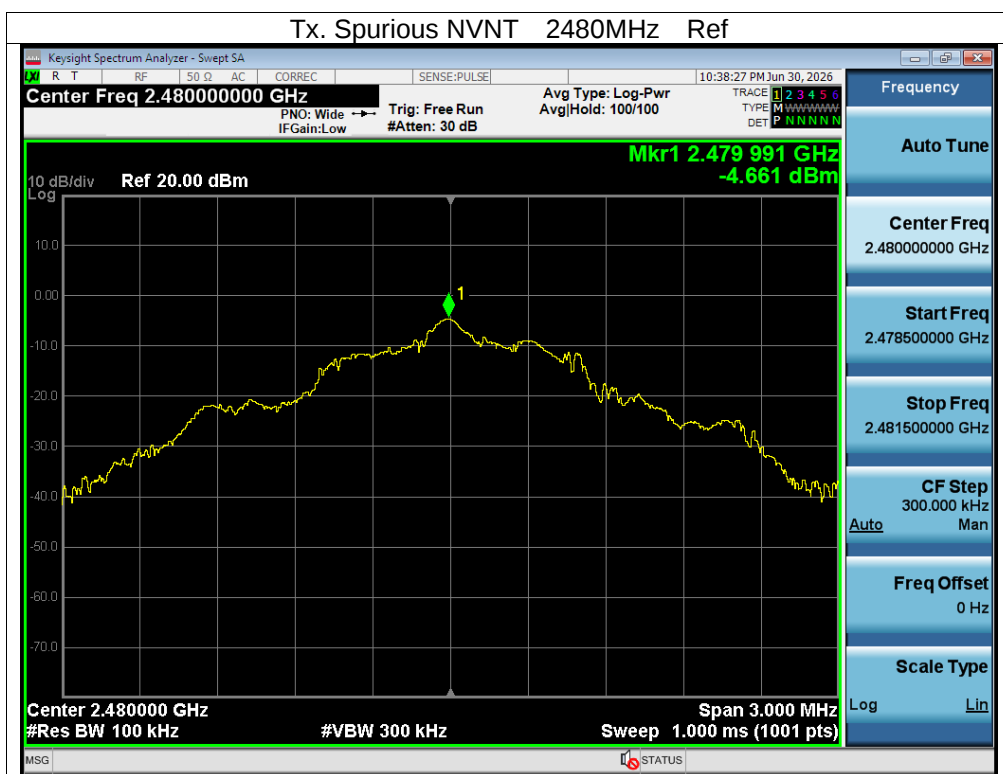

13. Antenna Requirement

13.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

13.2 Test Result

The EUT antenna is PCB antenna, fulfill the requirement of this section.

14. EUT Test Setup Photographs

Please refer to separated files for Test Setup Photographs of the EUT.

STATEMENT

1. The equipment lists are traceable to the International System of Units (SI)
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC 17025:2017.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

Room 101M, Unit 1, Building1, Pengyuan, No.18, Lilang Road, Shanglilang, Nanwan Subdistrict, Longgang District, Shenzhen, Guangdong, China

TEL:400-788-9558

P.C.: 518116

FAX:0755-33229357

Website: <http://www.chnbctc.com>

Consultation E-mail: bctc@bctc-lab.com.cn

Complaint/Advice E-mail: advice@bctc-lab.com.cn

***** END *****