

GE

Lighting

A SAVANT COMPANY

Process

BLACK

GRAPHICS APPROVAL

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

SKU LISTING INFO:

REVISION (DATE) PA:

BAR CODE SPEC:

INSERT (IF SHARED):

ANSI SAFETY NUMBER:

PRINT METHOD:

GE DIE:

PK (VERSION):

EVENT: Walmart Reset Oct 2026_Shoplight

v4 (05-27-26) IS

☐ 100% No BWR

☒ 80% No BWR

☐ N/A

None

☐ N/A

ANSI: A-1033750

☐ Offset/Litho

☐ Flexo (direct)

DL-91089-0

PK-00115993-1

☐ Proof Reading ~ Spelling

☐ Website

☐ Proof against TDS request

☐ Graphics Printability

PC93132752 ING

THIS ART IS SUPPLIED AT 100% SCALE
DO NOT RESIZE, RESHAPE OR ALTER

FRONT

BACK



CYNC Direct Connect Smart Shop Light Installation Guide



Getting Started

- Determine location, complete installation and power on the Shop Light
- Add the Shop Light to the Cync App, powered by Savant or Google Home voice assistant smart home app
- Set up your Amazon Alexa or Google Home voice assistant (optional)

For set up help, call 1-844-302-2943 or visit cyncsupport.gelighting.com

GET IT ON Google Play

Download on the App Store

Let's Do It

INCLUDED

-
-
-
-
-
-
-
-
-

YOU'LL NEED

-
-
-
-

ALTERNATIVE MOUNTING OPTION

Use toggle bolts (not included) to replace drywall anchors, hanging hooks and screws if desired.

Specifications

Model	Input Voltage (Vac, Hz)	Current (mA)	Wattage (W)
Direct Connect 46" Shop Light	120/60	750	85



Before you begin: Read these instructions completely and carefully. Before installing, ensure all parts are present. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

PREPARE ELECTRICAL WIRING

ELECTRICAL REQUIREMENTS
The LED fixture must be supplied with 120V AC 60Hz power.
GROUNDING INSTRUCTIONS
The grounding and bonding of the overall system shall be done in accordance with National Electric Code (NEC) and local codes.

WARNING

- Risk of shock.
 - House electric current can cause painful shock or serious injury unless handled properly.
 - Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.
 - The luminaire is non-dimmable.
 - The luminaire is for residential use only.
 - Suitable for damp location.
 - Linkable up to 4 units.
- All electrical connections must be in accordance with local National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the service of a qualified electrician. This fixture is intended to be only installed directly beneath a ceiling-mounted receptacle. Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instruction.
- Note:** This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference; (2) this device must accept any interference received, including interference that may cause undesired operation.
- Risk of Damage:** Must use UL approved conduit fittings for all enclosure box connections to prevent wire cuts by sharp edges and excessive strain on wiring.

PRE-INSTALLATION

Before beginning assembly, installation and operation of the product, make sure all parts are present. Compare parts with package contents list and hardware contents. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service. Check your installation location to make sure there is a receptacle on the ceiling. If not, consult a qualified electrician to install a correct branch circuit receptacle. **Remove protective film on the plastic lens before installation.**

INSTALLATION

Warning: Before wiring the fixture to the house power supply, ensure the electricity is TURNED OFF at the main circuit breaker or fuse box. **DO NOT ATTEMPT TO INSTALL FIXTURE WITH THE POWER ON.** All wiring connections must be made with the POWER OFF to avoid personal injury and/or damage to the fixture. Verify power is OFF at the junction box using AC voltage tester before installation. If using ladder for installation, ensure ladder base is secure and stable before attempting light fixture installation.

Caution: Do not install on radiant-heat ceilings. Do not use hooks to engage electric cord. Hooks are to engage the chain only and not the electric cord.


SURFACE MOUNT INSTALLATION EYEHOLE BRACKET

- Mark two points on the desired mounting location with 46.5 inches / 118.3cm distance between them.
- Hard Wood Installation**
Locate the two marked positions. If necessary, pre-drill a small pilot hole using a 1/8-inch / 3mm drill bit. Tighten 2 screws.
- Drywall Installation**
Locate the two marked positions. Drill a 1/4-inch / 6mm hole and insert a drywall anchor. Insert the mounting screw and tighten, leaving approximately 1/8 inch of space between the ceiling and the screw head.
- Insert the eyehole bracket onto the screw with the bent edges facing downward.
- Hold the Shop Light up to the screws and slide the eyehole bracket into the fixture's end cap opening.
- Repeat on other side of the fixture.
- Plug the power cord into the outlet.

SUSPENDED INSTALLATION CHAIN & HOOK


- Mark two points on the desired mounting location with 43.7 inches / 111cm distance between them.
- Hard Wood Installation**
Locate the two marks. Pre-drill a small pilot hole using 1/8-inch / 3mm bit if necessary. Insert the hanging hook and screw until the bottom of the eye hole is flush with the ceiling.
- Drywall Installation**
Locate the two marks. Drill a 1/4-inch / 6mm hole and insert drywall anchor. Insert the hanging hook into the drywall anchor and screw until the bottom of the eye hole is flush with the ceiling.
- Use the cable tie to attach the power cord to the hanging chain.
- Plug the power cord into the outlet.
- Attach the chain to the V-hook by inserting the end of the hook through the opening in the bottom chain link. Insert both ends of the V-hook into the keyholes on top of the Shop Light, then hang the fixture from the ceiling.
- Repeat on other side of the fixture.
- Plug the power cord into the outlet.

FINISH OPTIONS

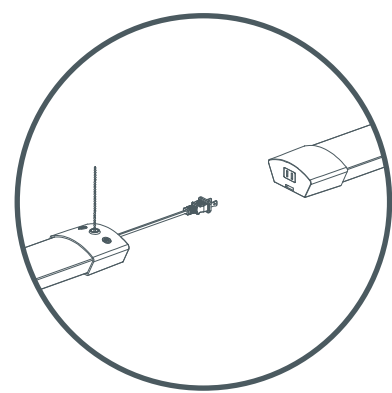

LINKING

Link Multiple Shop Lights
Connect the connect the power cord into the other fixture's receptacle. Connect up to 4 Smart Shop Lighting to a single power outlet.

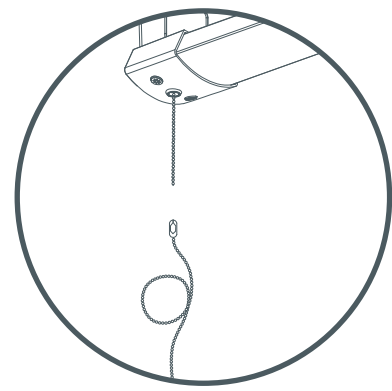

EXTENDING PULL CHAIN
Extend ON/OFF Pull Chain
Connect the extension chain to the end of the pull chain.

TOUCH CONTROLS

- Quick Touch**
Quick brightness level adjustment: 4000 / 7000 / 10,000 lumens
- Long Press**
Fine-tuned brightness adjustment. Press and hold to increase brightness in 10% increments up to full brightness. Continuing to press and hold at 100% brightness resets brightness level to 10%.
- Quick Touch**
Cycles through colors: 3000K / 4000K / 5000K / 2000K / Red / Orange / Yellow / Pink / Green / Blue / Teal / Purple
- Long Press**
Press and hold for 10 seconds to factory reset the Shop Light.

ENABLE SMART CONTROL

	Set up with Cync	Set up with Matter
Set schedules & control away from home	☒	☒
Connect to Amazon Alexa & Google Assistant	☒	☒
Connect to Apple Home & Samsung SmartThings	☐	☒
Basic color control	☒	☒
Millions of colors and tunable white	☒	☐
Personalized app experience	☒	☐

Get Started With Cync

Plug in and power on your Direct Connect Smart Shop Light.

Scan QR code to download the Cync App and complete set up.



Get Started With Matter

Plug in and power on your Direct Connect Smart Shop Light. If your preferred smart home app says "New light bulb found," you're all set!

If not, open your app of choice: Google Home, Samsung SmartThings, Amazon Alexa, or Apple Home and scan Matter QR code or enter 11-digit code on the device sticker to complete set up.

You may set up your device through Cync or Matter, but not both. To switch after setting up, you will need to reset the device and set up again.

NOTE: You may see a "set up using Matter" notification on your phone. To set up in the Cync App, powered by Savant, dismiss the notification.

FCC Compliance Statement:
Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.
Increase the separation between the equipment and receiver.
Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
Consult the dealer or an experienced radio/TV technician for help.

The device must not be co-located or operating in conjunction with any other antenna or transmitter. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC RF Radiation Exposure Statement:
To maintain compliance with the FCC's RF exposure guidelines, place the product at least 20cm from nearby persons.

ISED Statement:
This device complies with RSS247 of Innovation, Science and Economic Development (ISED) Canada. Cet appareil se conforme à RSS247 de l'Innovation, Sciences et Développement économique (ISDE) Canada.

This device complies with ISED license-exempt RSS standard(s). Operation is subject to the following two conditions:
(1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Appareils radio exempts de licence. Son fonctionnement est sujet aux deux conditions suivantes: (1) le dispositif ne doit pas produire de brouillage préjudiciable, et (2) ce dispositif doit accepter tout brouillage reçu, y compris un brouillage susceptible de provoquer un fonctionnement indésirable.

This equipment complies with ISED RSS-102 radiation exposure limits set forth for an uncontrolled environment. This transmitter must be installed to provide a separation distance of at least 20cm from all persons and must not be collocated or operating in conjunction with any other antenna or transmitter.

Cet équipement est conforme aux limites d'exposition aux rayonnements ISDE RSS-102 définies pour un environnement non contrôlé. Cet émetteur doit être installé pour fournir une distance de séparation d'au moins 20 cm de toutes les personnes et ne doit pas être co-localisé ou fonctionner en conjonction avec une autre antenne ou émetteur.

PK-00115993-1

420 mm

420 mm

297 mm

297 mm

©2026 Savant Technologies, LLC. GE is a trademark of General Electric Company. Used under trademark license. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Google and other related marks and logos are trademarks or Google, LLC.