

TEST REPORT

Applicant: ShenZhen FLYSKY Technology Co., Ltd.

Address of Applicant: 16F, Huafeng Building, No. 6006 Shennan Road, Futian District, Shenzhen, Guangdong, China

Manufacturer: ShenZhen FLYSKY Technology Co., Ltd.

Address of Manufacturer: 16F, Huafeng Building, No. 6006 Shennan Road, Futian District, Shenzhen, Guangdong, China

Factory: Dongguan Flysky RC Model technology Co.,Ltd

Address of Factory: West building 3, Huangjinyuan Ind Park, Qiaoli North Gate, Changping Town, Dongguan ,China

Equipment Under Test (EUT)

Product Name: CAN RECEIVER

Model No.: FS-CAN01

Trade Mark: FLYSKY

FCC ID: 2A2UNCAN0100

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: February 06, 2026

Date of Test: February 06, 2026-April 10, 2026

Date of report issued: April 15, 2026

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:




Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	April 15, 2026	Original

Tested By:



Date:

April 15, 2026

Test Engineer

Prepared By:




Date:

April 15, 2026

Project Engineer

Check By:



Date:

April 15, 2026

Reviewer

3 Contents

Page

1	COVER PAGE.....	1
2	VERSION	2
3	CONTENTS	3
4	TEST SUMMARY	4
4.1	MEASUREMENT UNCERTAINTY	4
5	GENERAL INFORMATION	5
5.1	GENERAL DESCRIPTION OF EUT	5
5.2	TEST MODE	7
5.3	TEST FACILITY	7
5.4	TEST LOCATION	7
5.5	DESCRIPTION OF SUPPORT UNITS	7
5.6	DEVIATION FROM STANDARDS	7
5.7	ABNORMALITIES FROM STANDARD CONDITIONS	7
5.8	ADDITIONAL INSTRUCTIONS	7
6	TEST INSTRUMENTS LIST	8
7	TEST RESULTS AND MEASUREMENT DATA	10
7.1	ANTENNA REQUIREMENT	10
7.2	CONDUCTED EMISSIONS	11
7.3	CONDUCTED PEAK OUTPUT POWER	14
7.4	20dB EMISSION BANDWIDTH	15
7.5	CARRIER FREQUENCIES SEPARATION	16
7.6	HOPPING CHANNEL NUMBER	17
7.7	DWELL TIME	18
7.8	SPURIOUS EMISSION IN NON-RESTRICTED & RESTRICTED BANDS	19
7.8.1	Conducted Emission Method	19
7.8.2	Radiated Emission Method	20
8	TEST SETUP PHOTO	54
9	EUT CONSTRUCTIONAL DETAILS	54

4 Test Summary

Test Item	Section	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)(iii)	Pass
Dwell Time	15.247 (a)(1)(iii)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2020
3. N/A: Not applicable.

4.1 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	RF conducted power	$\pm 0.75\text{dB}$
5	RF power density	$\pm 3\text{dB}$
6	Conducted Spurious emissions	$\pm 2.58\text{dB}$
7	AC Power Line Conducted Emission	$\pm 3.44\text{dB}$ (0.15MHz ~ 30MHz)
8	Radiated Spurious emission test	$\pm 3.1\text{dB}$ (9kHz-30MHz)
		$\pm 3.8039\text{dB}$ (30MHz-200MHz)
		$\pm 3.9679\text{dB}$ (200MHz-1GHz)
		$\pm 4.29\text{dB}$ (1GHz-18GHz)
		$\pm 3.30\text{dB}$ (18GHz-40GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
10	Humidity test	$\pm 3\%$
11	Time	$\pm 3\%$

5 General Information

5.1 General Description of EUT

Product Name:	CAN RECEIVER
Model No.:	FS-CAN01
Serial No.:	N/A
Test sample(s) ID:	GTS2026020132-1
Sample(s) Status	Engineer sample
Operation Frequency:	2406MHz~2472MHz
Channel numbers:	133
Modulation method:	FHSS
Modulation technology:	GFSK
Antenna Type:	ANT 1: Integral antenna ANT 2: Integral antenna
Antenna gain:	ANT 1: 0.75dBi(declare by applicant) ANT 2: 0.75dBi(declare by applicant)
Power supply:	DC 4.5~12V

Disclaimer statement:

1. Antenna gain information provided by the customer, and the laboratory is not responsible for its authenticity.
2. The information in this section is provided by the applicant or manufacturer, GTS is not liable to the accuracy, suitability, reliability or/and integrity of the information.
3. The system works in the frequency range of 2406MHz to 2472MHz. This band has been divided to 133 independent channels. Each radio system uses 16 different channels; the minimum channel separation is ≥ 4 MHz. By using various switch-on times, hopping scheme and channel frequencies, the system can guarantee a jamming free radio transmission. Pre-testing all radio systems, this radio system recorded in the report is the worst mode. The channel list is below.

The test frequencies are below:

Channel	Frequency
The lowest channel	2406MHz
The middle channel	2440MHz
The Highest channel	2472MHz

Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2406	36	2423.5	71	2441	106	2458.5
2	2406.5	37	2424	72	2441.5	107	2459
3	2407	38	2424.5	73	2442	108	2459.5
4	2407.5	39	2425	74	2442.5	109	2460
5	2408	40	2425.5	75	2443	110	2460.5
6	2408.5	41	2426	76	2443.5	111	2461
7	2409	42	2426.5	77	2444	112	2461.5
8	2409.5	43	2427	78	2444.5	113	2462
9	2410	44	2427.5	79	2445	114	2462.5
10	2410.5	45	2428	80	2445.5	115	2463
11	2411	46	2428.5	81	2446	116	2463.5
12	2411.5	47	2429	82	2446.5	117	2464
13	2412	48	2429.5	83	2447	118	2464.5
14	2412.5	49	2430	84	2447.5	119	2465
15	2413	50	2430.5	85	2448	120	2465.5
16	2413.5	51	2431	86	2448.5	121	2466
17	2414	52	2431.5	87	2449	122	2466.5
18	2414.5	53	2432	88	2449.5	123	2467
19	2415	54	2432.5	89	2450	124	2467.5
20	2415.5	55	2433	90	2450.5	125	2468
21	2416	56	2433.5	91	2451	126	2468.5
22	2416.5	57	2434	92	2451.5	127	2469
23	2417	58	2434.5	93	2452	128	2469.5
24	2417.5	59	2435	94	2452.5	129	2470
25	2418	60	2435.5	95	2453	130	2470.5
26	2418.5	61	2436	96	2453.5	131	2471
27	2419	62	2436.5	97	2454	132	2471.5
28	2419.5	63	2437	98	2454.5	133	2472
29	2420	64	2437.5	99	2455		
30	2420.5	65	2438	100	2455.5		
31	2421	66	2438.5	101	2456		
32	2421.5	67	2439	102	2456.5		
33	2422	68	2439.5	103	2457		
34	2422.5	69	2440	104	2457.5		
35	2423	70	2440.5	105	2458		

5.2 Test mode

Transmitting mode	Keep the EUT in transmitting mode.
-------------------	------------------------------------

5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations: ● FCC—Registration No.: 381383 Designation Number: CN5029 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. ● ISED—Registration No.: 9079A CAB identifier: CN0091 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of ISED for radio equipment testing. ● NVLAP (LAB CODE:600179-0) Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

5.4 Test Location

All other tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

5.5 Description of Support Units

Manufacturer	Description	Model	Serial Number
ShenZhen FLYSKY Technology Co.,Ltd	Remote control	ST16	N/A
GW	DC POWER SUPPLY	GPR-6030D	EF924756

5.6 Deviation from Standards

None.

5.7 Abnormalities from Standard Conditions

None.

5.8 Additional Instructions

Software (Used for test) from client
Built-in by manufacturer, power set default.

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Apr. 11, 2025	Apr. 10, 2026
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Apr. 12, 2025	Apr. 11, 2026
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	Apr. 12, 2025	Apr. 11, 2026
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	Apr. 11, 2025	Apr. 10, 2026
6	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	Jul. 11, 2025	Jul 10, 2026
7	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov.22, 2025	Nov.21, 2026
8	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	Apr. 11, 2025	Apr. 10, 2026
9	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	Apr. 11, 2025	Apr. 10, 2026
10	Horn Antenna (18GH-40GHz)	Schwarzbeck	BBHA 9170	GTS691	Apr. 11, 2025	Apr. 10, 2026
11	FSV-Signal Analyzer (10Hz-40GHz)	Keysight	FSV-40-N	GTS666	Mar. 10, 2026	Mar. 09, 2027
12	Amplifier	/	LNA-1000-30S	GTS650	Apr. 11, 2025	Apr. 10, 2026
13	CDNE M2+M3-16A	HCT	30MHz-300MHz	GTS692	Nov. 24, 2025	Nov. 23, 2026
14	Wideband Amplifier	/	WDA-01004000-15P35	GTS602	Apr. 11, 2025	Apr. 10, 2026
15	Thermo meter	JINCHUANG	GSP-8A	GTS643	Apr. 15, 2025	Apr. 14, 2026
16	RE cable 1	GTS	N/A	GTS675	Jul. 11, 2025	Jul. 10, 2026
17	RE cable 2	GTS	N/A	GTS676	Jul. 11, 2025	Jul. 10, 2026
18	RE cable 3	GTS	N/A	GTS677	Jul. 11, 2025	Jul. 10, 2026
19	RE cable 4	GTS	N/A	GTS678	Jul. 11, 2025	Jul. 10, 2026
20	RE cable 5	GTS	N/A	GTS679	Jul. 11, 2025	Jul. 10, 2026
21	RE cable 6	GTS	N/A	GTS680	Jul. 11, 2025	Jul. 10, 2026
22	RE cable 7	GTS	N/A	GTS681	Jul. 11, 2025	Jul. 10, 2026
23	RE cable 8	GTS	N/A	GTS682	Jul. 11, 2025	Jul. 10, 2026
24	EMI Test Software	AUDIX	E3-6.100614a	GTS725	N/A	N/A

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	Jul. 12, 2022	Jul. 11, 2027
2	EMI Test Receiver	R&S	ESCI 7	GTS552	Apr. 12, 2025	Apr. 11, 2026
3	LISN	ROHDE & SCHWARZ	ENV216	GTS226	Apr. 11, 2025	Apr. 10, 2026
4	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
5	Thermo meter	JINCHUANG	GSP-8A	GTS642	Apr. 15, 2025	Apr. 14, 2026
6	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	Apr. 12, 2025	Apr. 11, 2026
7	ISN	SCHWARZBECK	NTFM 8158	GTS565	Apr. 11, 2025	Apr. 10, 2026
8	High voltage probe	SCHWARZBECK	TK9420	GTS537	Apr. 11, 2025	Apr. 10, 2026
9	Antenna end assembly	Weinschel	1870A	GTS560	Apr. 11, 2025	Apr. 10, 2026
10	EMI Test Software	AUDIX	E3-6.100622	GTS726	N/A	N/A

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Wireless Connectivity Test Set	Anritsu	MT8862A	SN6272327180	2025-08-26	2026-08-25
2	Bluetooth Test Set	Anritsu	MT8852B	SN6262097212	2025-08-26	2026-08-25
3	EXA Signal Analyzer	Keysight	N9010B	MY60241168	2025-08-26	2026-08-25
4	Vector Signal Generator	Keysight	N5182B	MY61250192	2025-04-17	2026-4-16
5	Analog Signal Generator	Keysight	N5171B	MY61252573	2025-08-26	2026-08-25
6	RF Control Unit and Power Test Unit	Tonscend	JS0806-2	SN21F8060437	2025-04-17	2026-4-16
7	Power Control Unit	Tonscend	JS0806-4ADC	SN21C8060386	N/A	N/A
8	Wideband Radio Communication Tester	R&S	CWM500	GTS569	2025-08-26	2026-08-25
9	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	Apr. 11, 2025	Apr. 10, 2026
10	Thermo meter	JINCHUANG	GSP-8A	GTS641	Apr. 15, 2025	Apr. 14, 2026
11	Test Software	Tonscend	JS1120-3 V3.5.39	N/A	N/A	N/A

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	KUMAO	SF132	GTS647	Jul. 16, 2025	Jul. 15, 2026

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
15.247(c) (1)(i) requirement:	(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.
EUT Antenna:	The antenna is integral antenna, reference to the appendix II for details.


7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2020					
Test Frequency Range:	150KHz to 30MHz					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
	5-30		60		50	
* Decreases with the logarithm of the frequency.						
Test setup:	Reference Plane Test table/Insulation plane <i>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</i>					
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Measurement data:

Pre-scan all test modes, found worst case at 2472MHz, and so only show the test result of it.


Line:

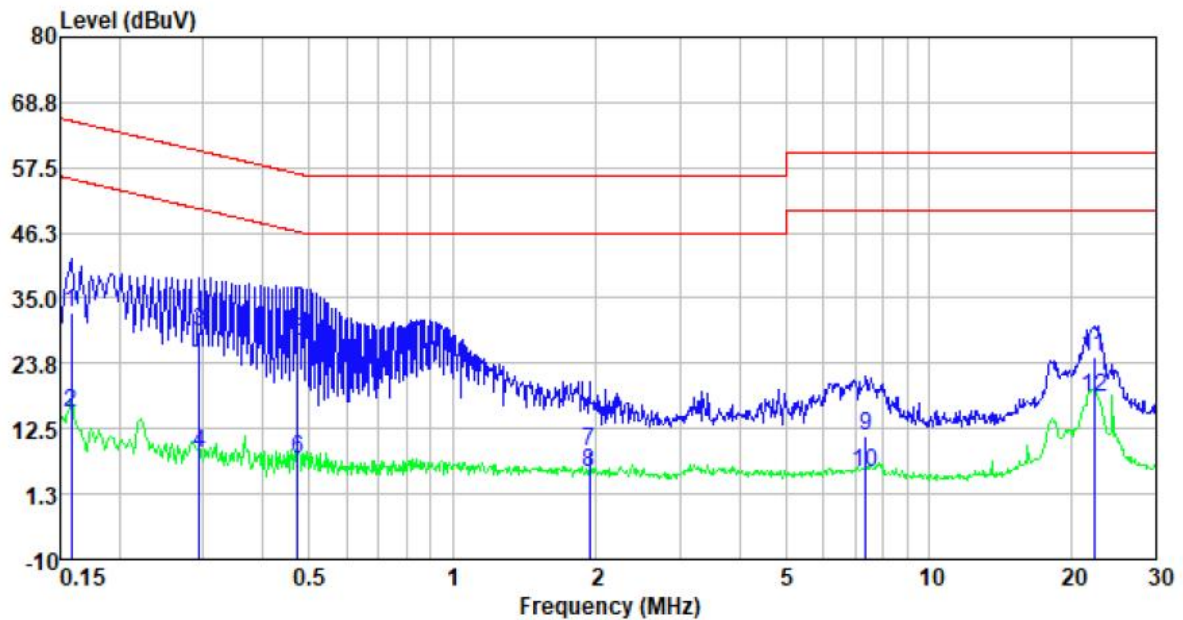

Freq	Reading level	Correct Factor	Final level	Limit level	Over limit	Remark
MHz	dBuV	dB	dBuV	level	dBuV	
0.16	12.80	19.60	32.40	65.56	-33.16	QP
0.16	-4.20	19.60	15.40	55.56	-40.16	Average
0.29	9.56	19.60	29.16	60.41	-31.25	QP
0.29	-11.28	19.60	8.32	50.41	-42.09	Average
0.47	8.08	19.60	27.68	56.45	-28.77	QP
0.47	-12.45	19.60	7.15	46.45	-39.30	Average
1.94	-10.93	19.66	8.73	56.00	-47.27	QP
1.94	-14.80	19.66	4.86	46.00	-41.14	Average
7.37	-8.52	19.72	11.20	60.00	-48.80	QP
7.37	-14.71	19.72	5.01	50.00	-44.99	Average
22.18	4.90	20.01	24.91	60.00	-35.09	QP
22.18	-2.06	20.01	17.95	50.00	-32.05	Average

Note: Correct Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
 Final level (dBuV) = Reading level (dBuV) + Correct Factor (dB)

Neutral:

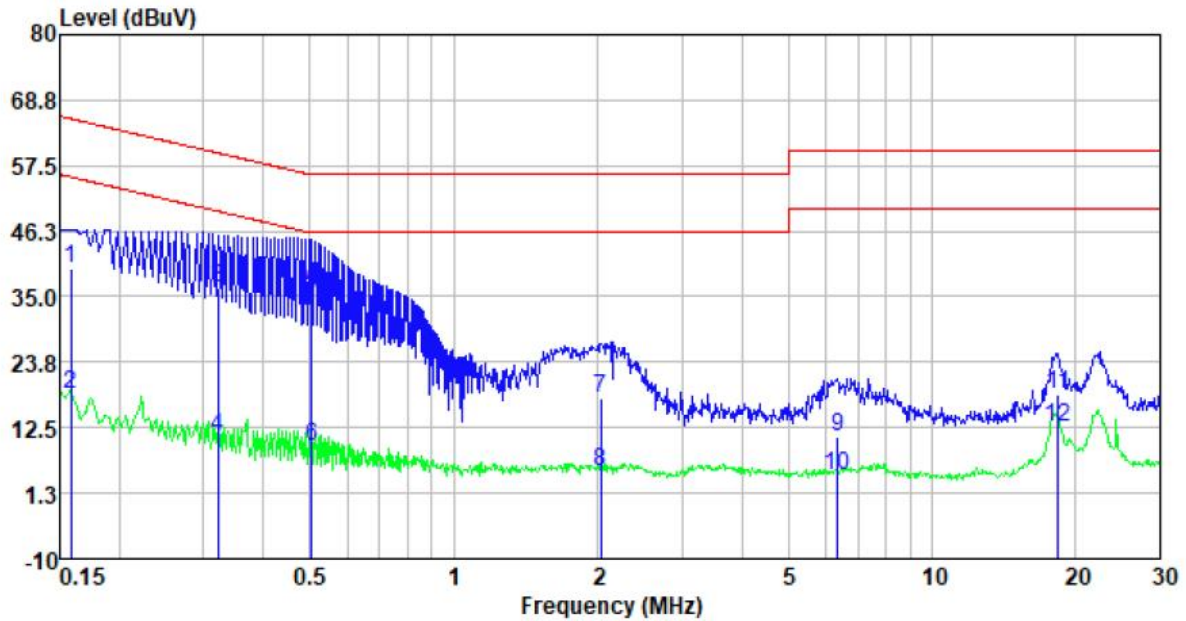


Freq	Reading level	Correct Factor	Final level	Limit level	Over limit	Remark
MHz	dBuV	dB	dBuV	level	dBuV	
0.16	20.30	19.60	39.90	65.56	-25.66	QP
0.16	-1.36	19.60	18.24	55.56	-37.32	Average
0.32	17.00	19.60	36.60	59.66	-23.06	QP
0.32	-8.75	19.60	10.85	49.66	-38.81	Average
0.50	16.04	19.60	35.64	56.00	-20.36	QP
0.50	-10.19	19.60	9.41	46.00	-36.59	Average
2.03	-2.26	19.66	17.40	56.00	-38.60	QP
2.03	-14.57	19.66	5.09	46.00	-40.91	Average
6.35	-8.91	19.70	10.79	60.00	-49.21	QP
6.35	-15.29	19.70	4.41	50.00	-45.59	Average
18.33	-1.64	19.89	18.25	60.00	-41.75	QP
18.33	-7.15	19.89	12.74	50.00	-37.26	Average

Note: Correct Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
 Final level (dBuV) = Reading level (dBuV) + Correct Factor (dB)

Notes:


1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.

7.3 Conducted Peak Output Power

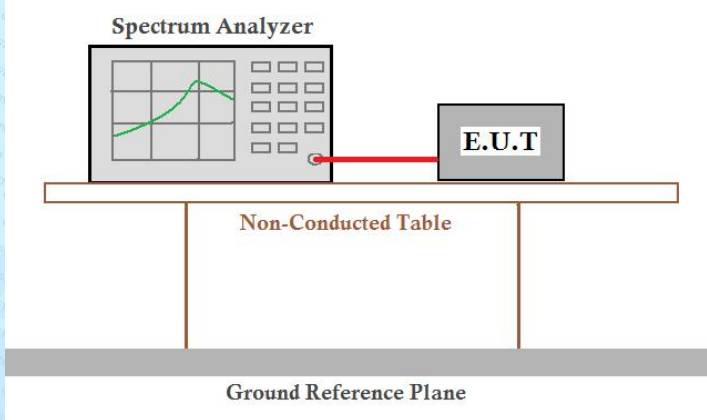Test Requirement:	FCC Part15 C Section 15.247(a)(1)
Test Method:	ANSI C63.10:2020
Limit:	20.97dBm
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. The setup is on a Non-Conducted Table, which is placed on a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data: The detailed test data see Appendix for 2.4G.

7.4 20dB Emission Bandwidth

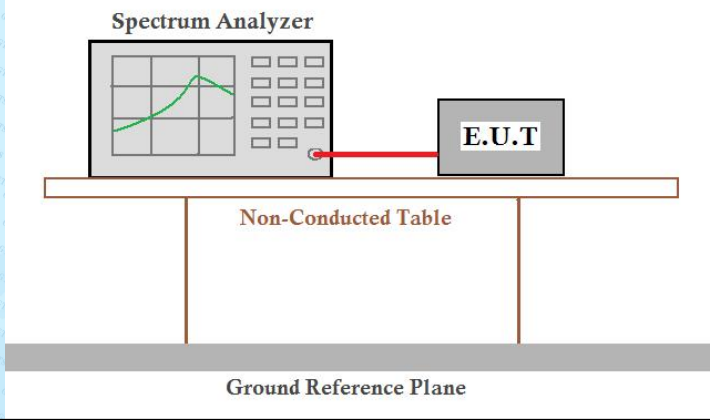Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2020
Limit:	N/A
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a grid and a green curve, is connected to an E.U.T. (Equipment Under Test) box by a red cable. Both the Spectrum Analyzer and the E.U.T. are positioned on a 'Non-Conducted Table'. This table is supported by a 'Ground Reference Plane' at the base of the setup.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data: The detailed test data see Appendix for 2.4G.

7.5 Carrier Frequencies Separation

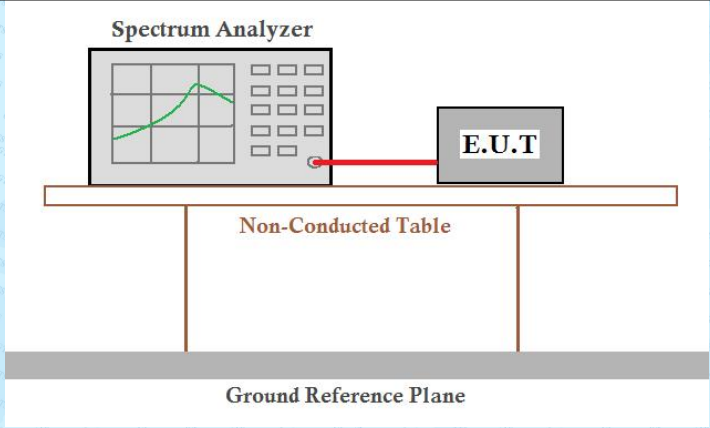Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2020
Receiver setup:	RBW=150KHz, VBW=470KHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data: The detailed test data see Appendix for 2.4G.

7.6 Hopping Channel Number

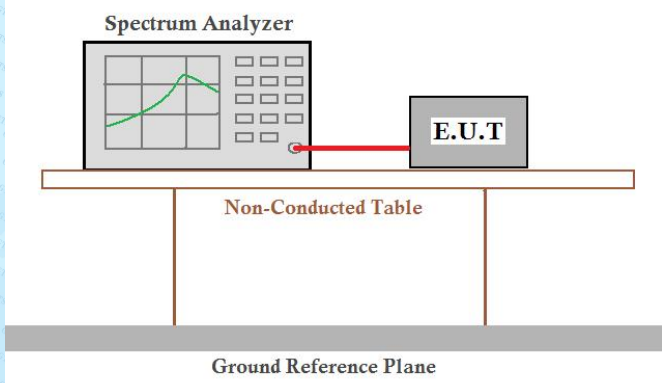Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2020
Receiver setup:	RBW=100KHz, VBW=300KHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for 2.4G.


7.7 Dwell Time

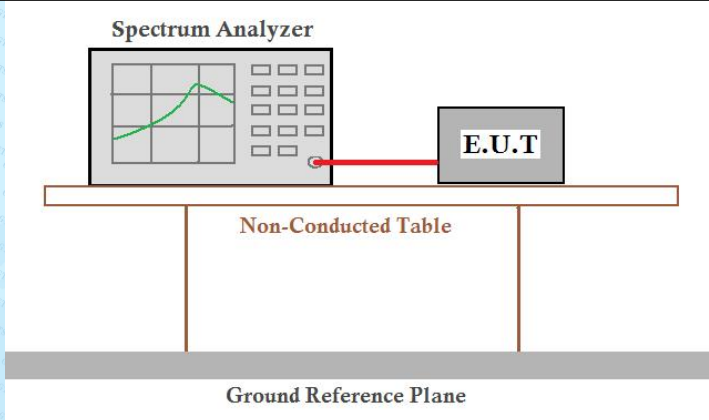Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2020
Receiver setup:	RBW=470KHz, VBW=470KHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. The Spectrum Analyzer is placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for 2.4G.



7.8 Spurious Emission in Non-restricted & restricted Bands


7.8.1 Conducted Emission Method

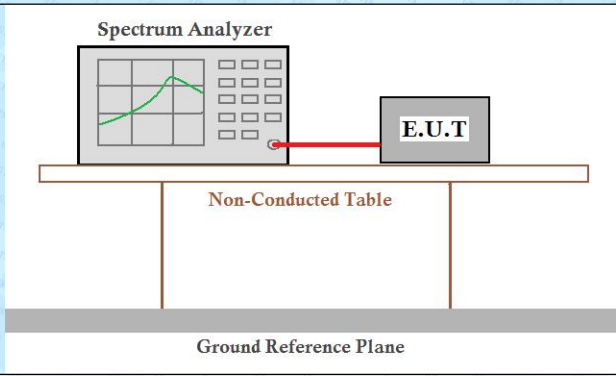Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2020
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for 2.4G.

7.8.2 Radiated Emission Method

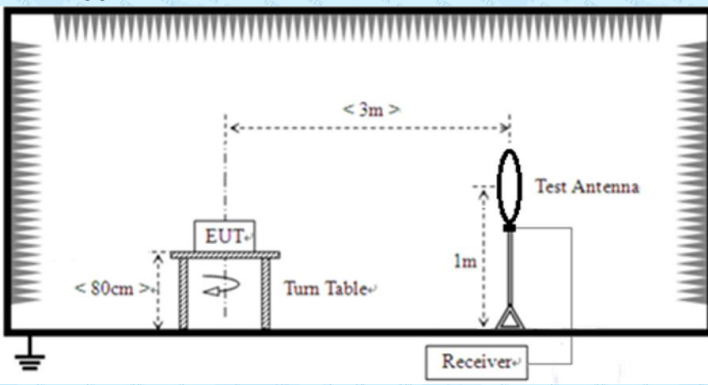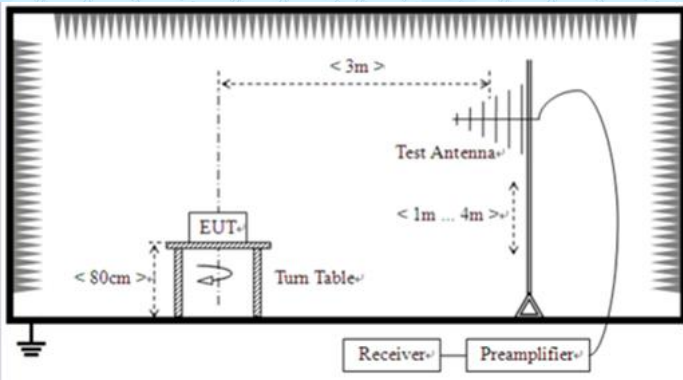Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2020				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Note: For Duty cycle ≥ 98%, average detector set as above For Duty cycle < 98%, average detector set as below: VBW ≥ 1 / T					
Limit: (Spurious Emissions)	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	30m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
5000		Peak			
Test setup:	Below 30MHz				
					
	Below 1GHz				
					
	Above 1GHz				

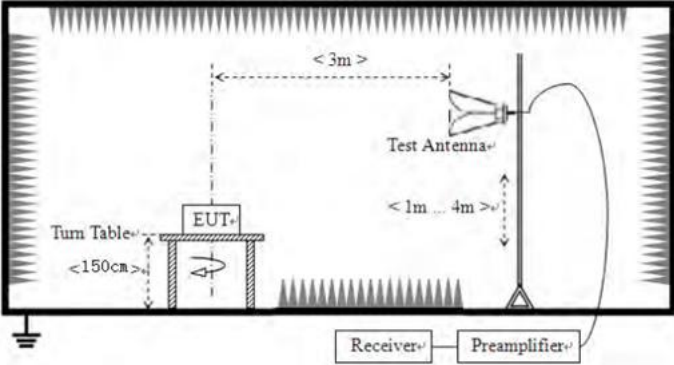						
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8 meters for below 1GHz and 1.5meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Test Instruments:	Refer to section 5.8 for details					
Test mode:	Refer to section 5.2 for details					
Temp. / Hum.	Temp.:	25 °C	Humid.:	52%	Press.:	1 012mbar
Test results:	Pass					

Remark:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Measurement data:


■ **Below 30MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

30MHz ~ 1GHz

ANT 1

Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

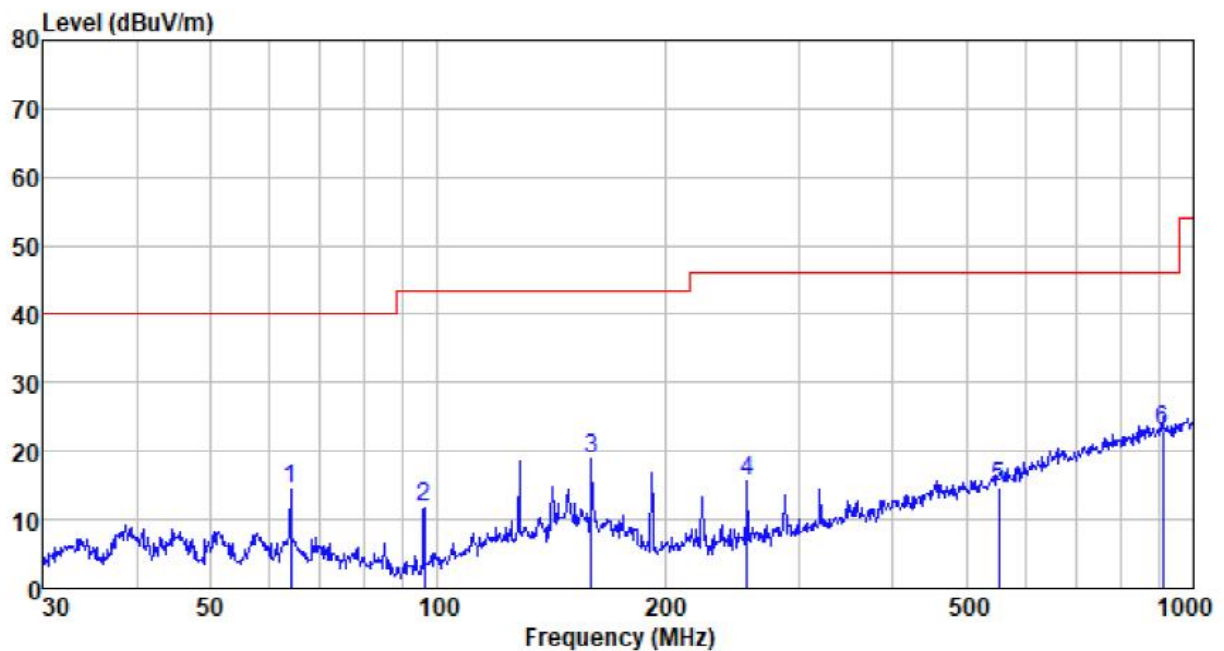


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
63.983	34.71	11.50	1.67	33.54	14.34	40.00	-25.66	QP
96.099	34.66	9.01	1.86	33.59	11.94	43.50	-31.56	QP
159.784	35.43	14.42	2.52	33.46	18.91	43.50	-24.59	QP
256.521	35.11	10.66	3.26	33.28	15.75	46.00	-30.25	QP
552.883	24.86	17.86	4.86	32.75	14.83	46.00	-31.17	QP
909.667	25.07	23.29	6.26	31.57	23.05	46.00	-22.95	QP

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

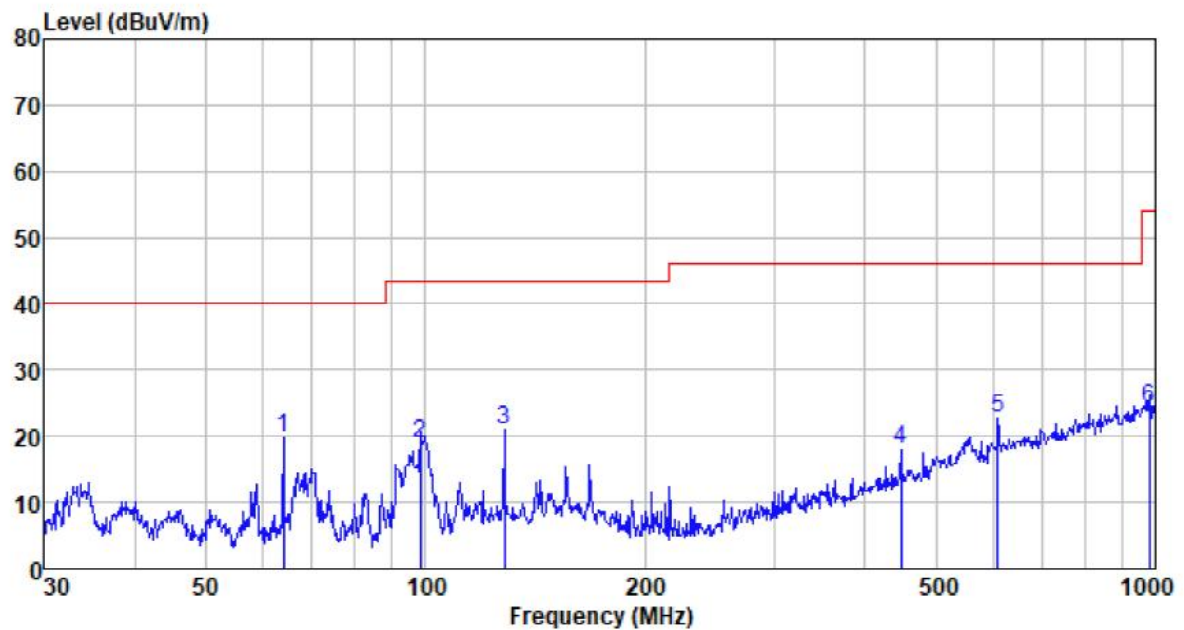


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
63.983	40.09	11.50	1.67	33.54	19.72	40.00	-20.28	QP
98.487	41.13	9.35	1.92	33.60	18.80	43.50	-24.70	QP
128.113	39.27	13.01	2.26	33.53	21.01	43.50	-22.49	QP
447.982	30.65	15.96	4.36	32.96	18.01	46.00	-27.99	QP
607.787	31.21	19.16	5.12	32.61	22.88	46.00	-23.12	QP
979.180	24.86	23.88	6.59	31.20	24.13	54.00	-29.87	QP

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Middle	Polarization:	Horizontal
---------------	--------	---------------	------------

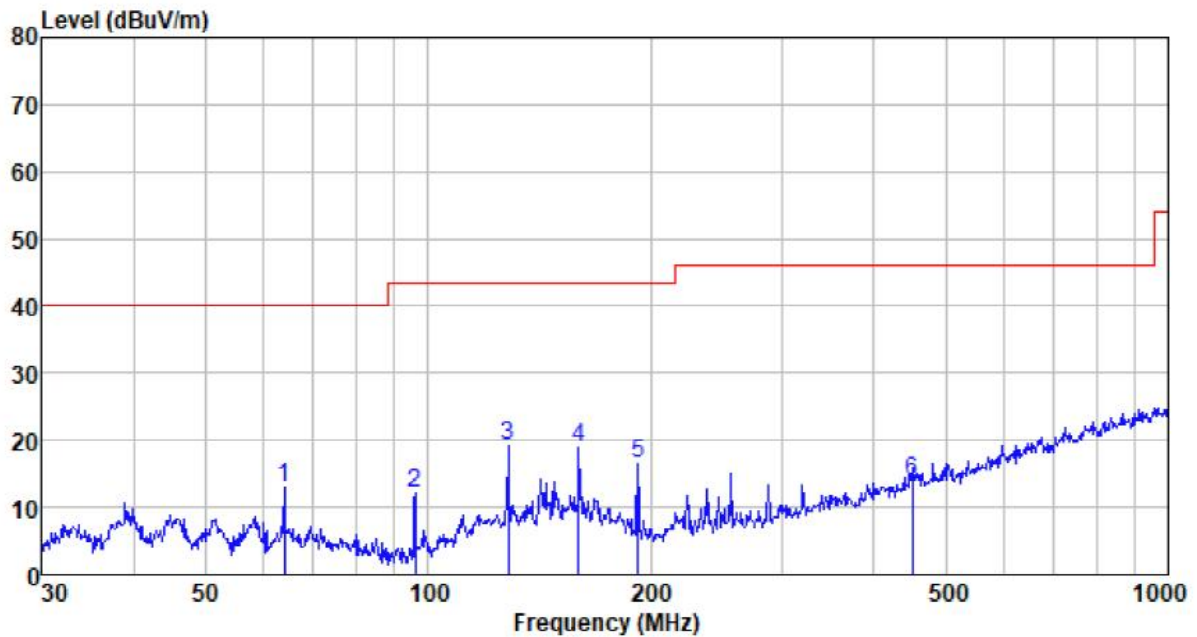


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
63.983	33.46	11.50	1.67	33.54	13.09	40.00	-26.91	QP
96.099	34.91	9.01	1.86	33.59	12.19	43.50	-31.31	QP
128.113	37.57	13.01	2.26	33.53	19.31	43.50	-24.19	QP
159.784	35.48	14.42	2.52	33.46	18.96	43.50	-24.54	QP
191.745	36.65	10.60	2.74	33.41	16.58	43.50	-26.92	QP
451.135	26.49	16.02	4.38	32.96	13.93	46.00	-32.07	QP

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Middle	Polarization:	Vertical
---------------	--------	---------------	----------

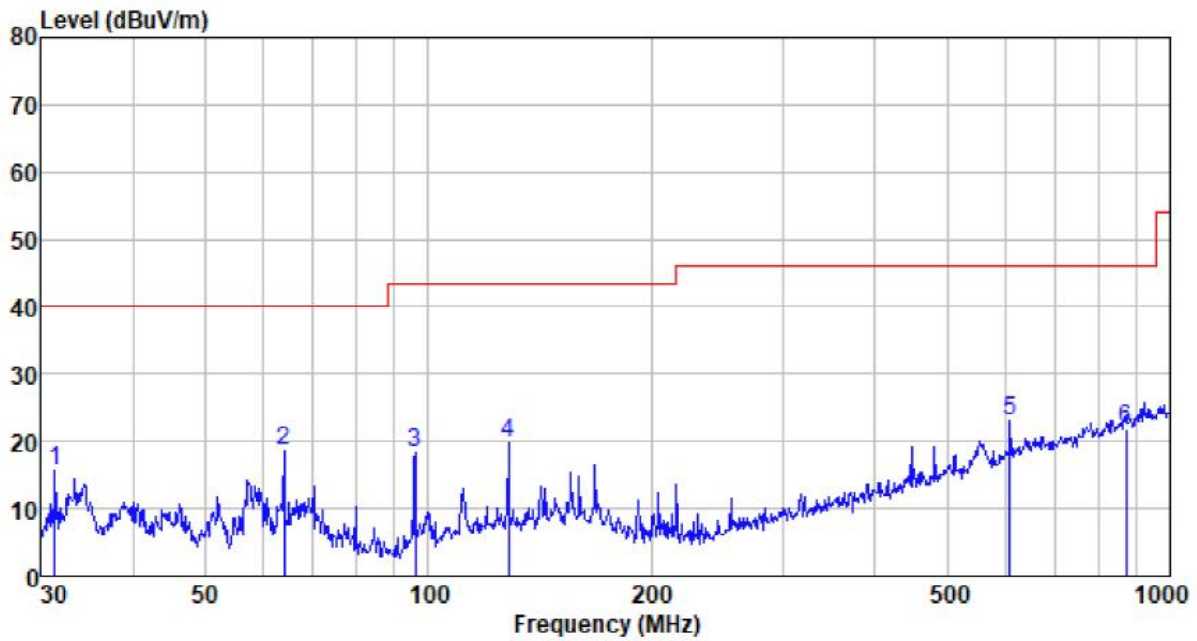


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
31.399	35.53	12.50	1.23	33.59	15.67	40.00	-24.33	QP
63.983	39.04	11.50	1.67	33.54	18.67	40.00	-21.33	QP
96.099	41.11	9.01	1.86	33.59	18.39	43.50	-25.11	QP
128.113	38.12	13.01	2.26	33.53	19.86	43.50	-23.64	QP
607.787	31.35	19.16	5.12	32.61	23.02	46.00	-22.98	QP
872.183	24.60	22.86	6.18	31.77	21.87	46.00	-24.13	QP

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

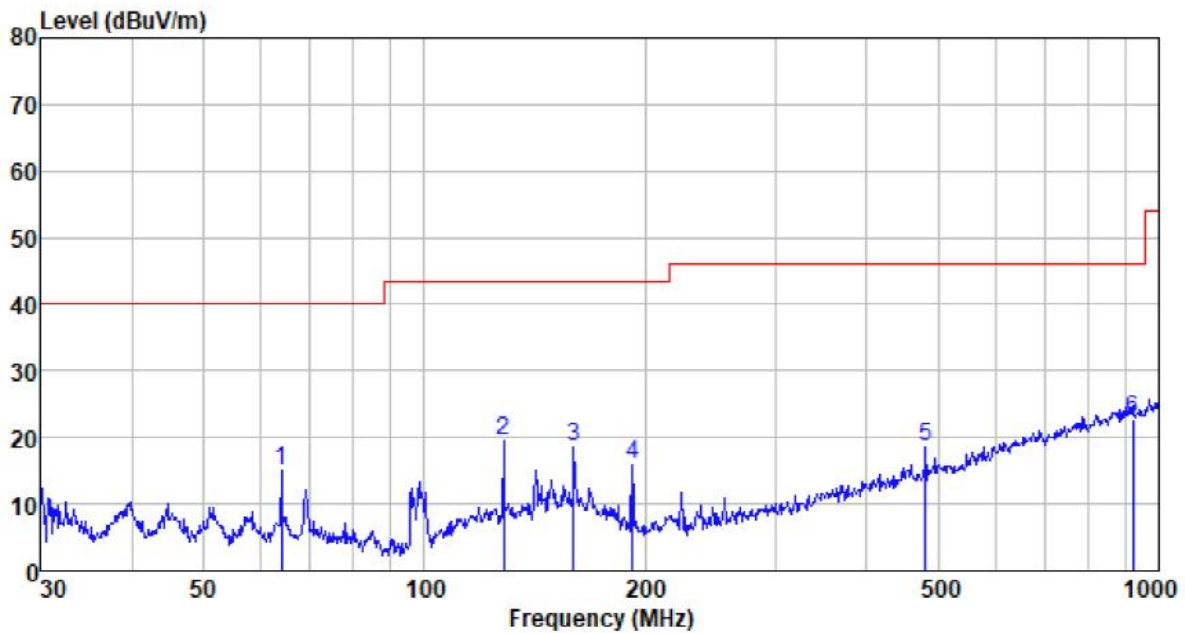


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
63.983	35.30	11.50	1.67	33.54	14.93	40.00	-25.07	QP
128.113	37.86	13.01	2.26	33.53	19.60	43.50	-23.90	QP
159.784	35.14	14.42	2.52	33.46	18.62	43.50	-24.88	QP
191.745	35.90	10.60	2.74	33.41	15.83	43.50	-27.67	QP
480.528	30.57	16.50	4.50	32.92	18.65	46.00	-27.35	QP
922.516	24.58	23.35	6.32	31.50	22.75	46.00	-23.25	QP

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

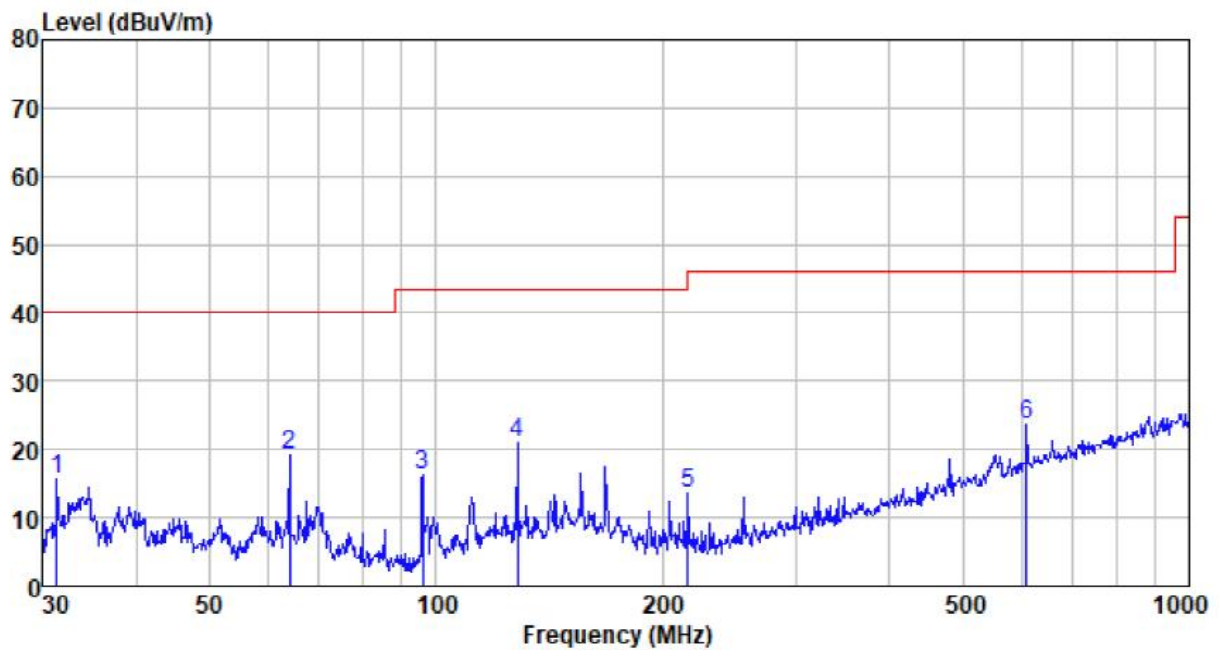


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
31.399	35.49	12.50	1.23	33.59	15.63	40.00	-24.37	QP
63.983	39.66	11.50	1.67	33.54	19.29	40.00	-20.71	QP
96.099	38.93	9.01	1.86	33.59	16.21	43.50	-27.29	QP
128.113	39.13	13.01	2.26	33.53	20.87	43.50	-22.63	QP
216.024	34.02	9.86	2.93	33.36	13.45	46.00	-32.55	QP
607.787	32.06	19.16	5.12	32.61	23.73	46.00	-22.27	QP

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

ANT 2

Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

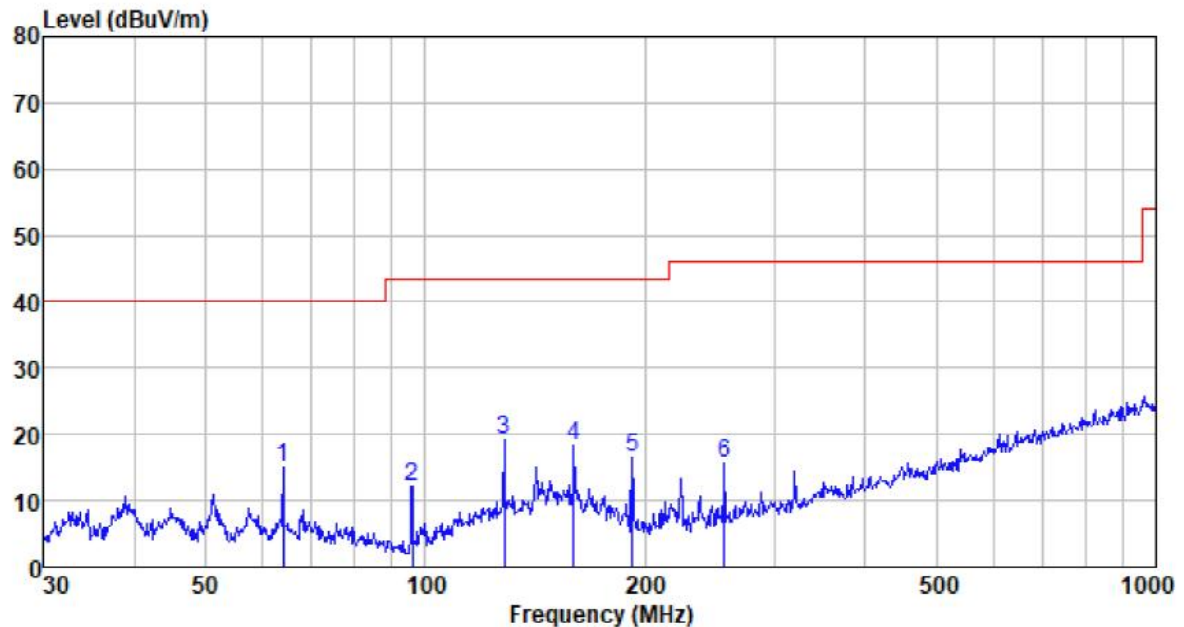


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
63.983	35.30	11.50	1.67	33.54	14.93	40.00	-25.07	QP
96.099	34.86	9.01	1.86	33.59	12.14	43.50	-31.36	QP
128.113	37.34	13.01	2.26	33.53	19.08	43.50	-24.42	QP
159.784	34.96	14.42	2.52	33.46	18.44	43.50	-25.06	QP
191.745	36.46	10.60	2.74	33.41	16.39	43.50	-27.11	QP
256.521	34.96	10.66	3.26	33.28	15.60	46.00	-30.40	QP

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

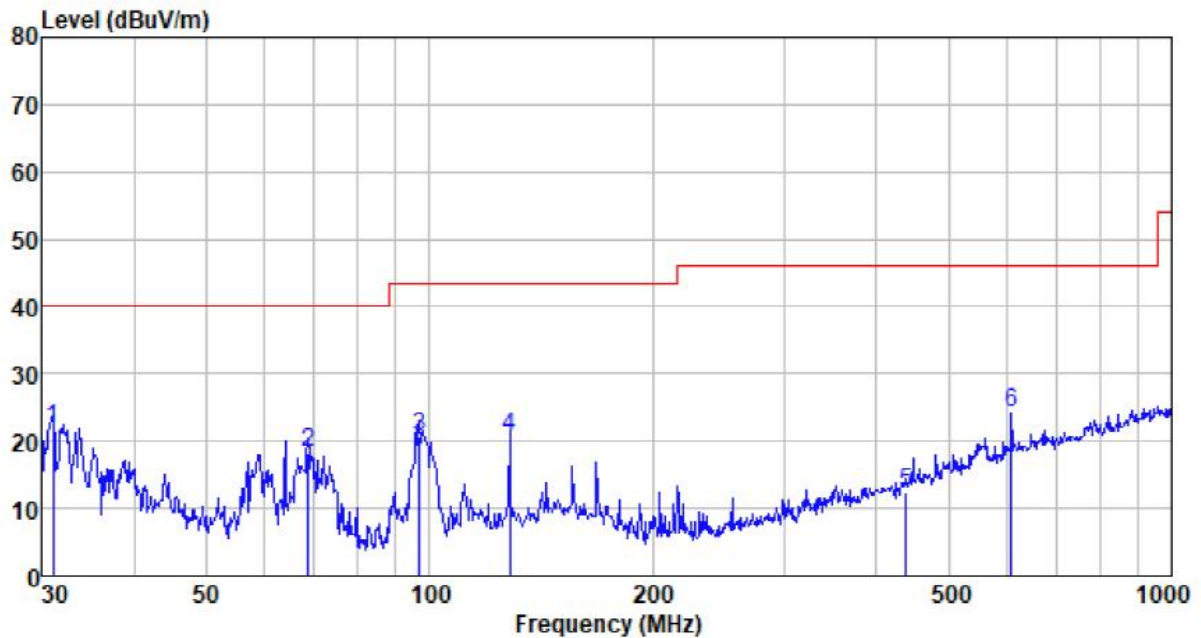


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
31.071	41.75	12.50	1.23	33.59	21.89	40.00	-18.11	QP
68.631	38.98	11.04	1.72	33.55	18.19	40.00	-21.81	QP
96.775	43.22	9.08	1.88	33.60	20.58	43.50	-22.92	QP
128.113	38.85	13.01	2.26	33.53	20.59	43.50	-22.91	QP
438.655	25.43	15.67	4.32	32.98	12.44	46.00	-33.56	QP
607.787	32.47	19.16	5.12	32.61	24.14	46.00	-21.86	QP

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Middle	Polarization:	Horizontal
---------------	--------	---------------	------------

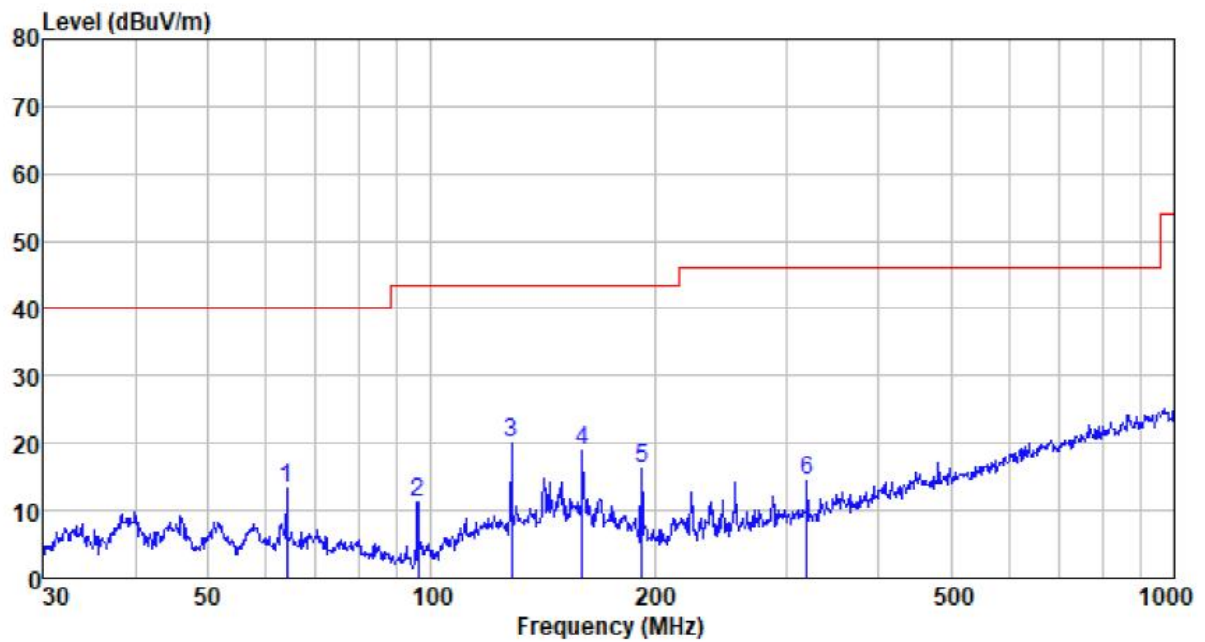


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
63.983	33.67	11.50	1.67	33.54	13.30	40.00	-26.70	QP
96.099	34.06	9.01	1.86	33.59	11.34	43.50	-32.16	QP
128.113	38.43	13.01	2.26	33.53	20.17	43.50	-23.33	QP
159.784	35.29	14.42	2.52	33.46	18.77	43.50	-24.73	QP
191.745	36.44	10.60	2.74	33.41	16.37	43.50	-27.13	QP
319.937	31.24	12.80	3.68	33.16	14.56	46.00	-31.44	QP

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Middle	Polarization:	Vertical
---------------	--------	---------------	----------

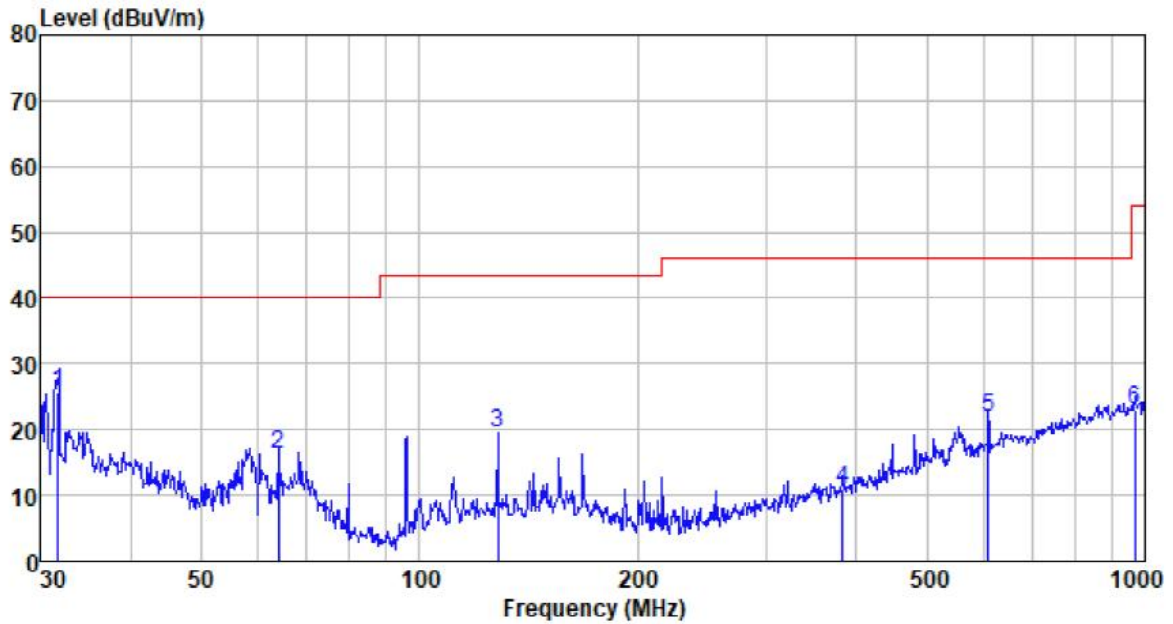


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
31.731	45.53	12.50	1.23	33.59	25.67	40.00	-14.33	QP
63.983	36.69	11.50	1.67	33.54	16.32	40.00	-23.68	QP
128.113	37.74	13.01	2.26	33.53	19.48	43.50	-24.02	QP
382.588	25.77	14.30	4.05	33.06	11.06	46.00	-34.94	QP
607.787	30.24	19.16	5.12	32.61	21.91	46.00	-24.09	QP
968.934	23.95	23.76	6.55	31.26	23.00	54.00	-31.00	QP

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

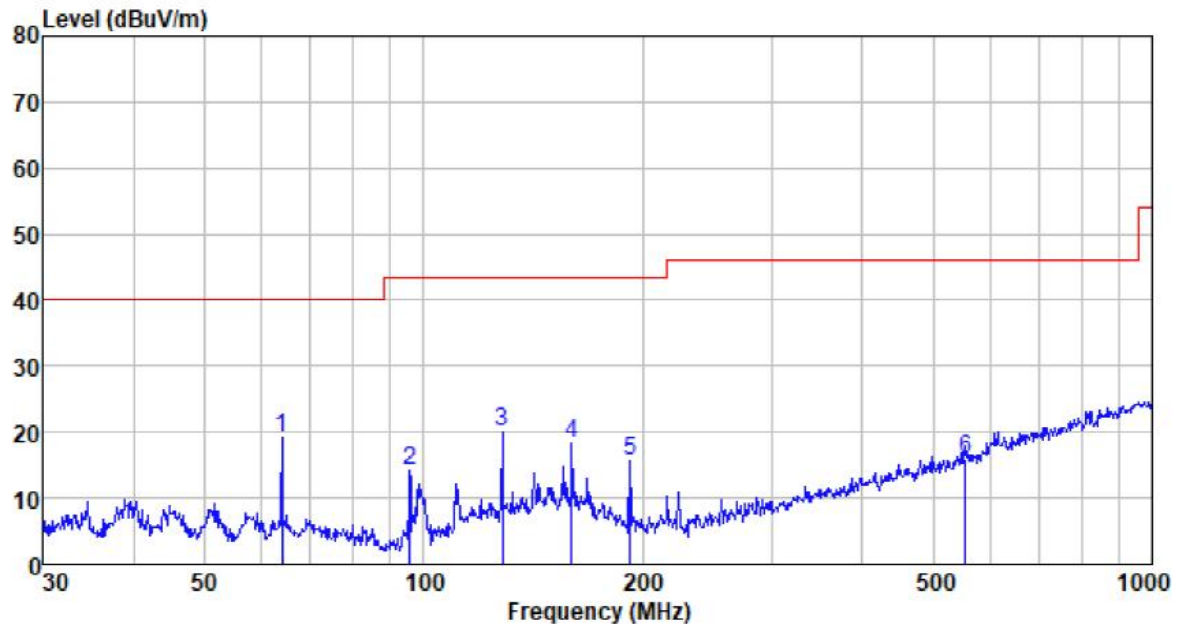


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
63.983	39.44	11.50	1.67	33.54	19.07	40.00	-20.93	QP
95.762	36.95	9.00	1.85	33.59	14.21	43.50	-29.29	QP
128.113	38.27	13.01	2.26	33.53	20.01	43.50	-23.49	QP
159.784	34.94	14.42	2.52	33.46	18.42	43.50	-25.08	QP
191.745	35.71	10.60	2.74	33.41	15.64	43.50	-27.86	QP
554.825	25.90	17.90	4.87	32.75	15.92	46.00	-30.08	QP

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

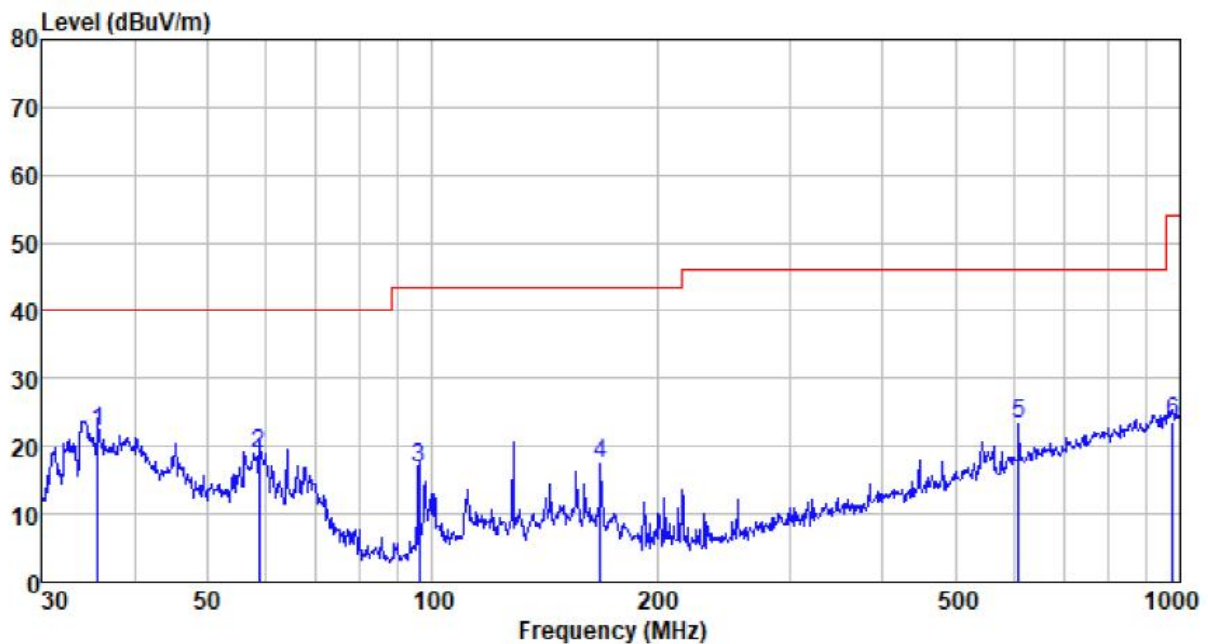


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
35.749	41.15	13.35	1.26	33.57	22.19	40.00	-17.81	QP
58.613	38.58	12.18	1.60	33.52	18.84	40.00	-21.16	QP
96.099	39.55	9.01	1.86	33.59	16.83	43.50	-26.67	QP
167.824	34.43	13.72	2.58	33.45	17.28	43.50	-26.22	QP
607.787	31.72	19.16	5.12	32.61	23.39	46.00	-22.61	QP
975.753	24.32	23.82	6.58	31.22	23.50	54.00	-30.50	QP

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

- Above 1GHz
 - Unwanted Emissions in Non-restricted Frequency Bands
- ANT 1

Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

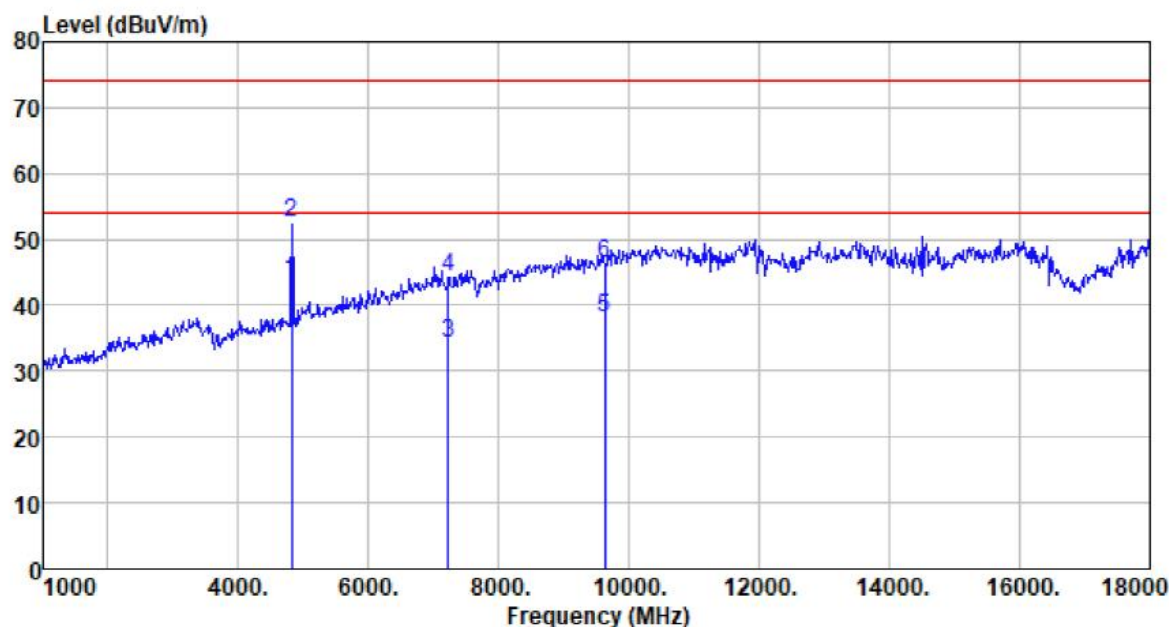


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4812.000	43.74	32.27	5.57	38.01	43.57	54.00	-10.43	Average
4812.000	52.77	32.27	5.57	38.01	52.60	74.00	-21.40	Peak
7224.000	28.63	36.45	7.18	37.98	34.28	54.00	-19.72	Average
7224.000	38.49	36.45	7.18	37.98	44.14	74.00	-29.86	Peak
9632.000	30.10	38.20	9.08	39.19	38.19	54.00	-15.81	Average
9632.000	38.25	38.20	9.08	39.19	46.34	74.00	-27.66	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

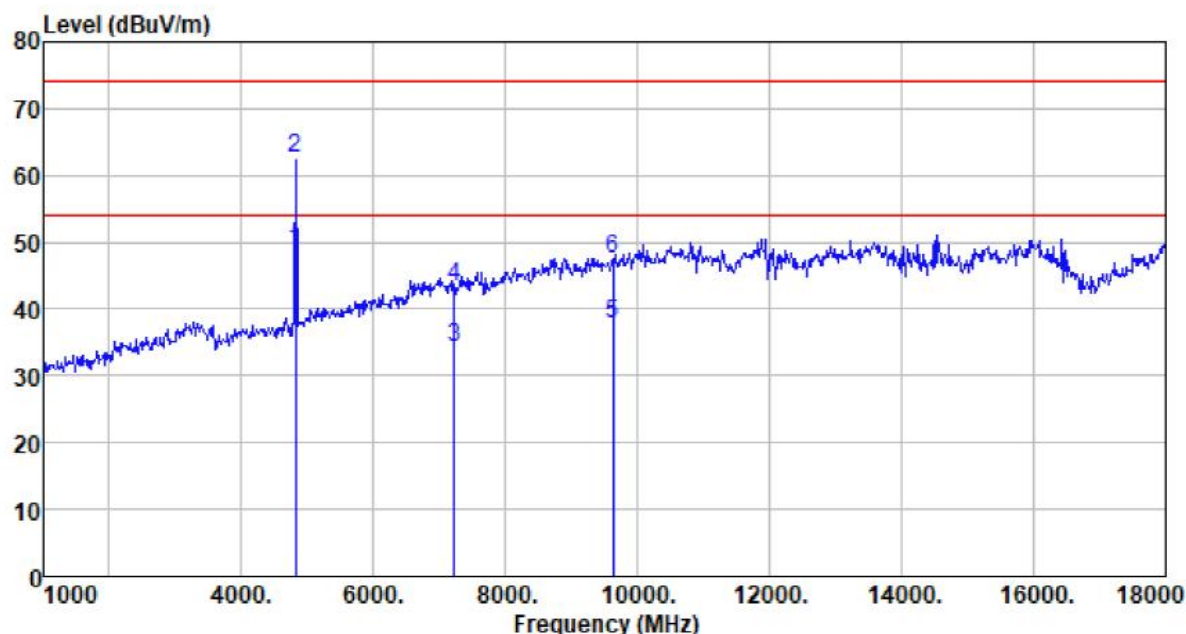


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4812.000	48.76	32.27	5.57	38.01	48.59	54.00	-5.41	Average
4812.000	62.71	32.27	5.57	38.01	62.54	74.00	-11.46	Peak
7224.000	28.72	36.45	7.18	37.98	34.37	54.00	-19.63	Average
7224.000	37.86	36.45	7.18	37.98	43.51	74.00	-30.49	Peak
9632.000	29.67	38.20	9.08	39.19	37.76	54.00	-16.24	Average
9632.000	39.45	38.20	9.08	39.19	47.54	74.00	-26.46	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Middle	Polarization:	Horizontal
---------------	--------	---------------	------------

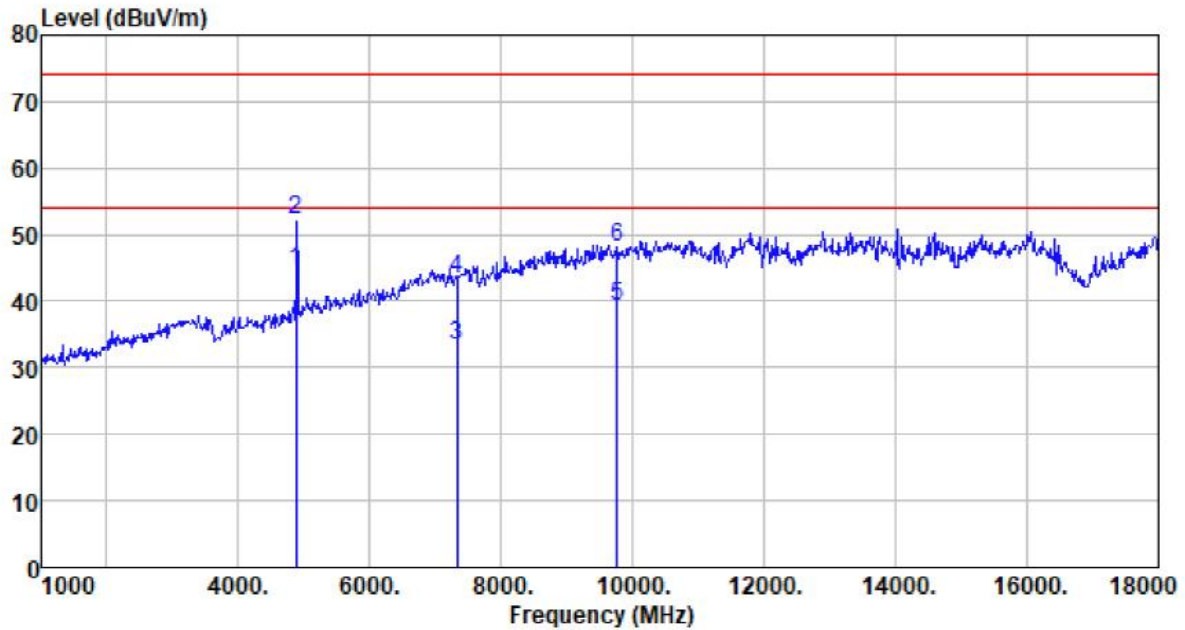


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	44.21	32.56	5.66	37.97	44.46	54.00	-9.54	Average
4880.000	52.11	32.56	5.66	37.97	52.36	74.00	-21.64	Peak
7320.000	27.40	36.64	7.26	38.06	33.24	54.00	-20.76	Average
7320.000	37.52	36.64	7.26	38.06	43.36	74.00	-30.64	Peak
9760.000	30.94	38.30	9.17	39.23	39.18	54.00	-14.82	Average
9760.000	39.82	38.30	9.17	39.23	48.06	74.00	-25.94	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Middle	Polarization:	Vertical
---------------	--------	---------------	----------

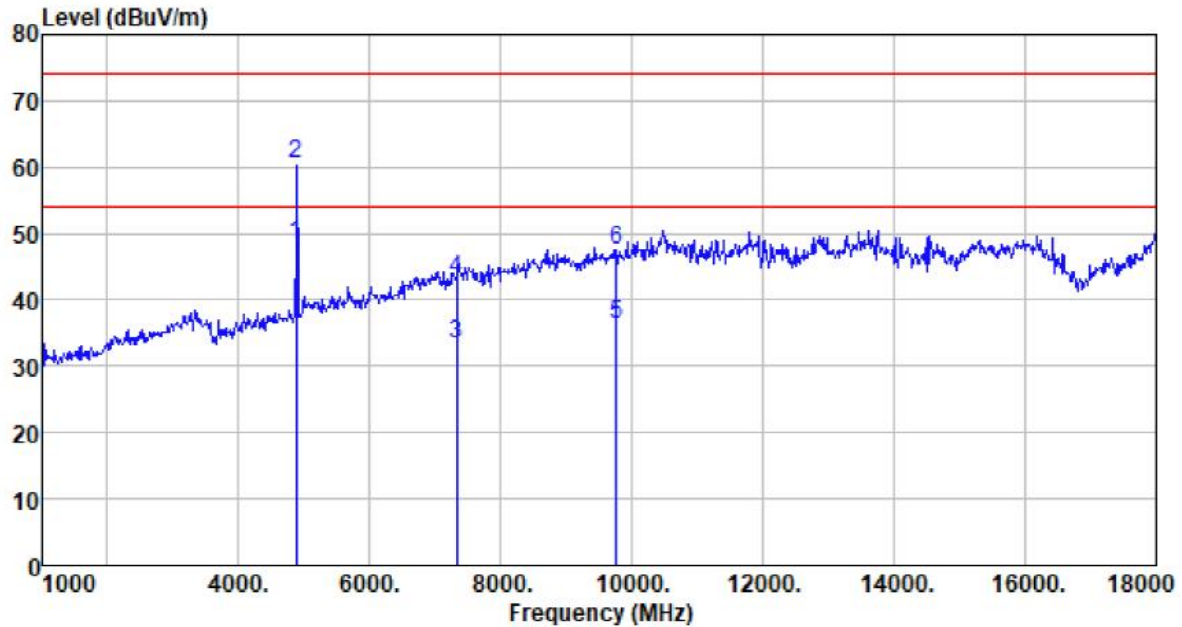


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	48.20	32.56	5.66	37.97	48.45	54.00	-5.55	Average
4880.000	60.32	32.56	5.66	37.97	60.57	74.00	-13.43	Peak
7320.000	27.43	36.64	7.26	38.06	33.27	54.00	-20.73	Average
7320.000	37.40	36.64	7.26	38.06	43.24	74.00	-30.76	Peak
9760.000	28.11	38.30	9.17	39.23	36.35	54.00	-17.65	Average
9760.000	39.24	38.30	9.17	39.23	47.48	74.00	-26.52	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

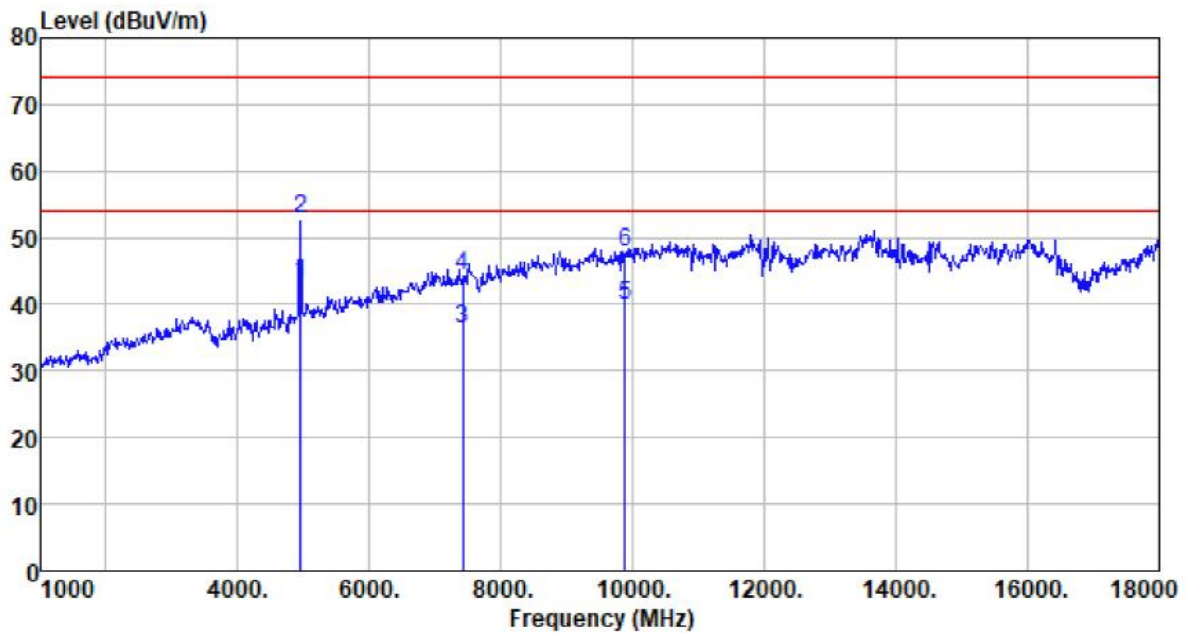


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4944.000	42.69	32.69	5.75	37.93	43.20	54.00	-10.80	Average
4944.000	52.46	32.69	5.75	37.93	52.97	74.00	-21.03	Peak
7416.000	30.35	36.63	7.33	38.13	36.18	54.00	-17.82	Average
7416.000	38.42	36.63	7.33	38.13	44.25	74.00	-29.75	Peak
9888.000	31.49	38.40	9.23	39.27	39.85	54.00	-14.15	Average
9888.000	39.32	38.40	9.23	39.27	47.68	74.00	-26.32	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

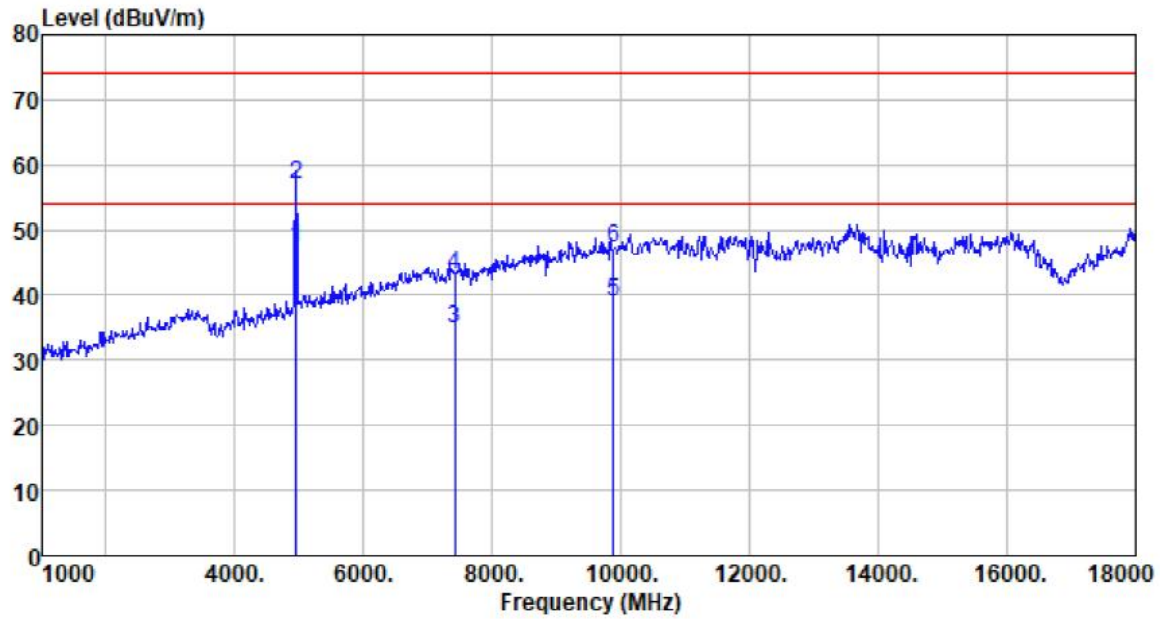


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4944.000	46.73	32.69	5.75	37.93	47.24	54.00	-6.76	Average
4944.000	56.60	32.69	5.75	37.93	57.11	74.00	-16.89	Peak
7416.000	29.12	36.63	7.33	38.13	34.95	54.00	-19.05	Average
7416.000	37.26	36.63	7.33	38.13	43.09	74.00	-30.91	Peak
9888.000	30.62	38.40	9.23	39.27	38.98	54.00	-15.02	Average
9888.000	38.74	38.40	9.23	39.27	47.10	74.00	-26.90	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

ANT 2

Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

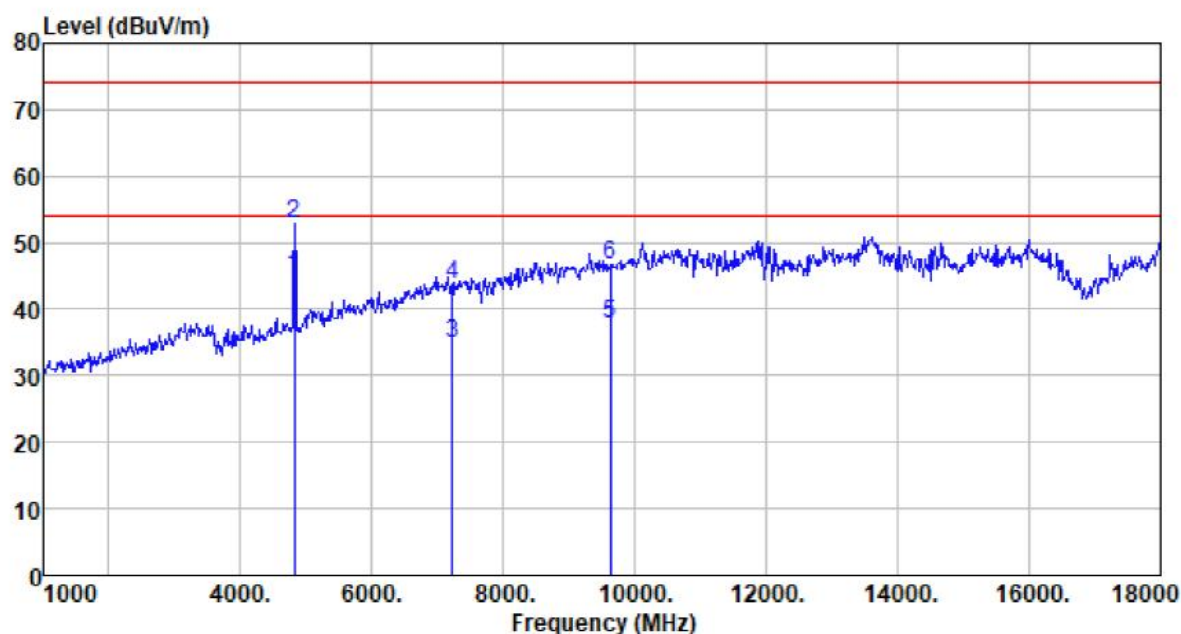


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4812.000	45.15	32.27	5.57	38.01	44.98	54.00	-9.02	Average
4812.000	53.00	32.27	5.57	38.01	52.83	74.00	-21.17	Peak
7224.000	29.22	36.45	7.18	37.98	34.87	54.00	-19.13	Average
7224.000	38.11	36.45	7.18	37.98	43.76	74.00	-30.24	Peak
9632.000	29.81	38.20	9.08	39.19	37.90	54.00	-16.10	Average
9632.000	38.65	38.20	9.08	39.19	46.74	74.00	-27.26	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

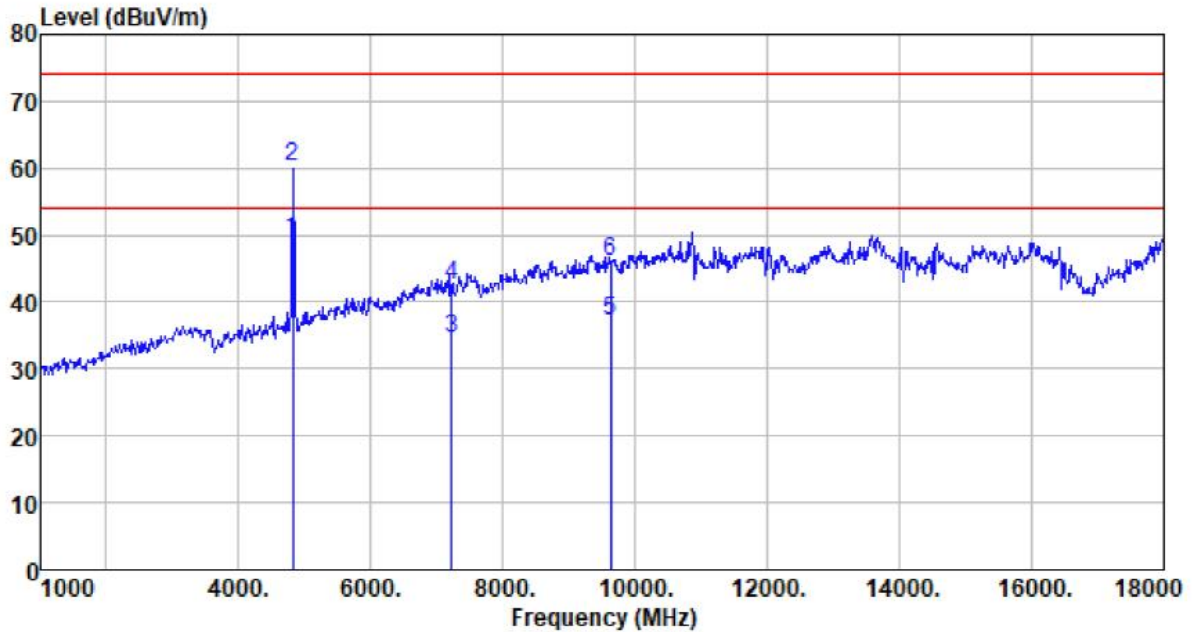


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4812.000	49.49	32.27	5.57	38.01	49.32	54.00	-4.68	Average
4812.000	60.33	32.27	5.57	38.01	60.16	74.00	-13.84	Peak
7224.000	28.85	36.45	7.18	37.98	34.50	54.00	-19.50	Average
7224.000	36.90	36.45	7.18	37.98	42.55	74.00	-31.45	Peak
9632.000	29.17	38.20	9.08	39.19	37.26	54.00	-16.74	Average
9632.000	38.09	38.20	9.08	39.19	46.18	74.00	-27.82	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Middle	Polarization:	Horizontal
---------------	--------	---------------	------------

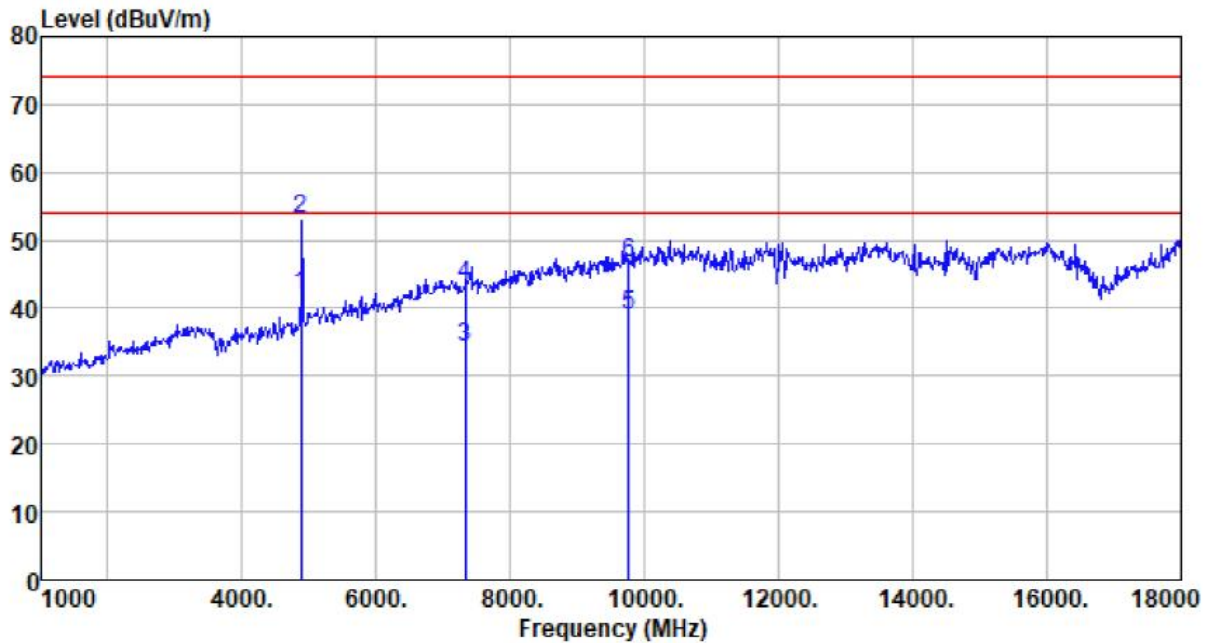


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	41.65	32.56	5.66	37.97	41.90	54.00	-12.10	Average
4880.000	52.79	32.56	5.66	37.97	53.04	74.00	-20.96	Peak
7320.000	28.43	36.64	7.26	38.06	34.27	54.00	-19.73	Average
7320.000	37.54	36.64	7.26	38.06	43.38	74.00	-30.62	Peak
9760.000	30.68	38.30	9.17	39.23	38.92	54.00	-15.08	Average
9760.000	38.54	38.30	9.17	39.23	46.78	74.00	-27.22	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Middle	Polarization:	Vertical
---------------	--------	---------------	----------

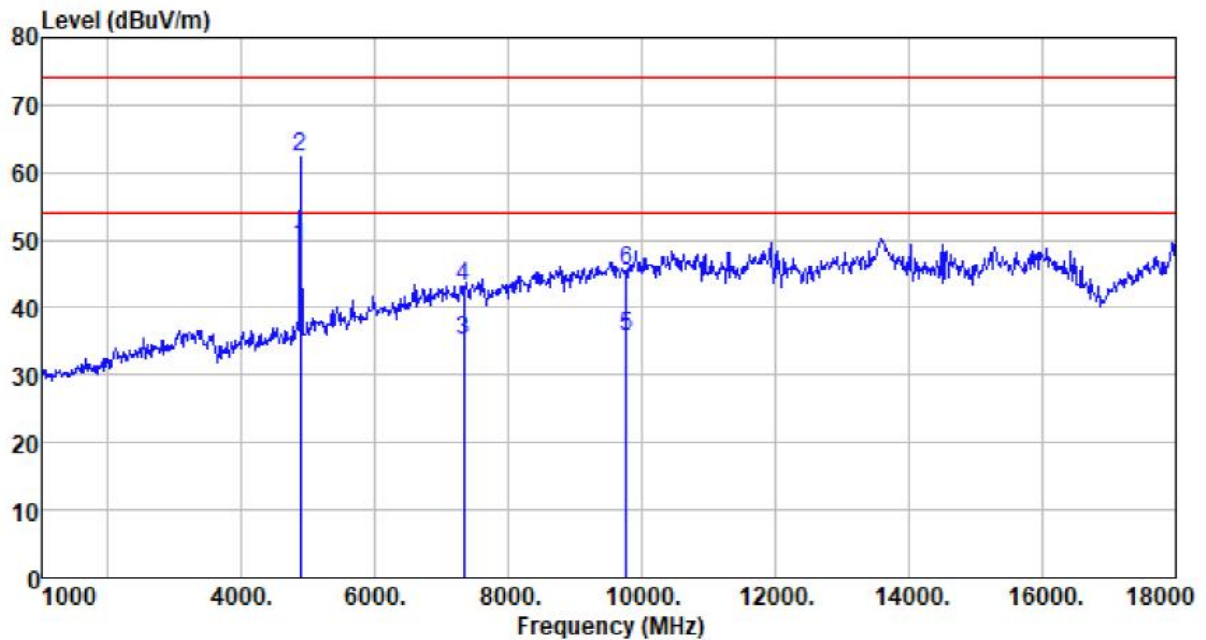


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	48.76	32.56	5.66	37.97	49.01	54.00	-4.99	Average
4880.000	61.95	32.56	5.66	37.97	62.20	74.00	-11.80	Peak
7320.000	29.32	36.64	7.26	38.06	35.16	54.00	-18.84	Average
7320.000	37.27	36.64	7.26	38.06	43.11	74.00	-30.89	Peak
9760.000	27.39	38.30	9.17	39.23	35.63	54.00	-18.37	Average
9760.000	37.21	38.30	9.17	39.23	45.45	74.00	-28.55	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

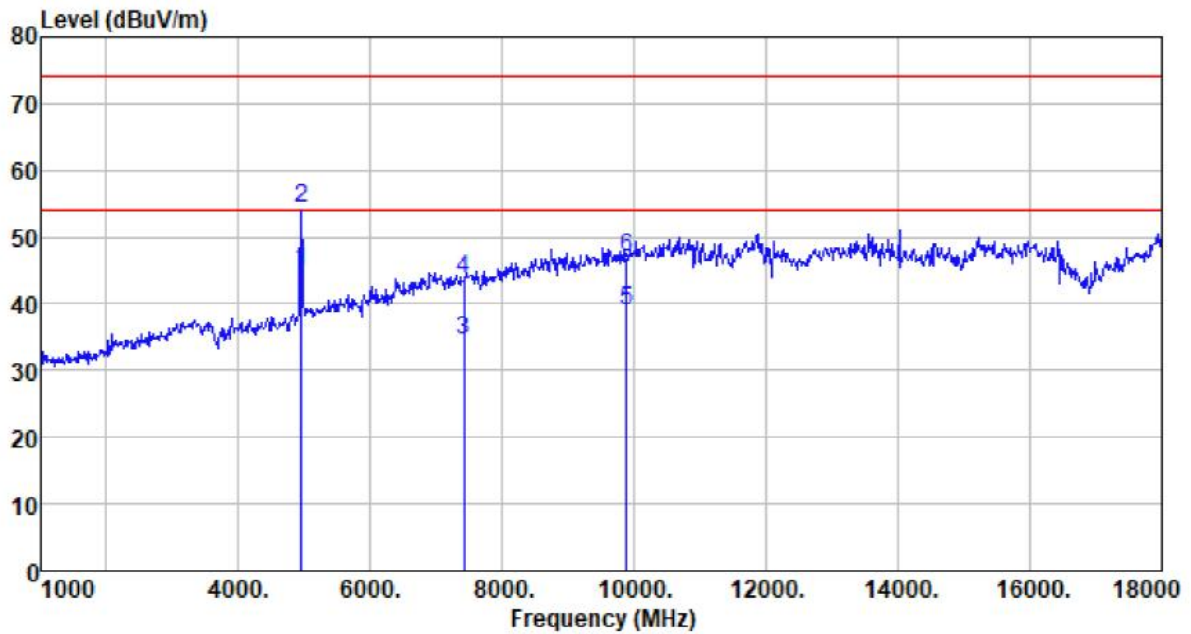


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4944.000	44.43	32.69	5.75	37.93	44.94	54.00	-9.06	Average
4944.000	53.69	32.69	5.75	37.93	54.20	74.00	-19.80	Peak
7416.000	28.73	36.63	7.33	38.13	34.56	54.00	-19.44	Average
7416.000	37.89	36.63	7.33	38.13	43.72	74.00	-30.28	Peak
9888.000	30.51	38.40	9.23	39.27	38.87	54.00	-15.13	Average
9888.000	38.64	38.40	9.23	39.27	47.00	74.00	-27.00	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

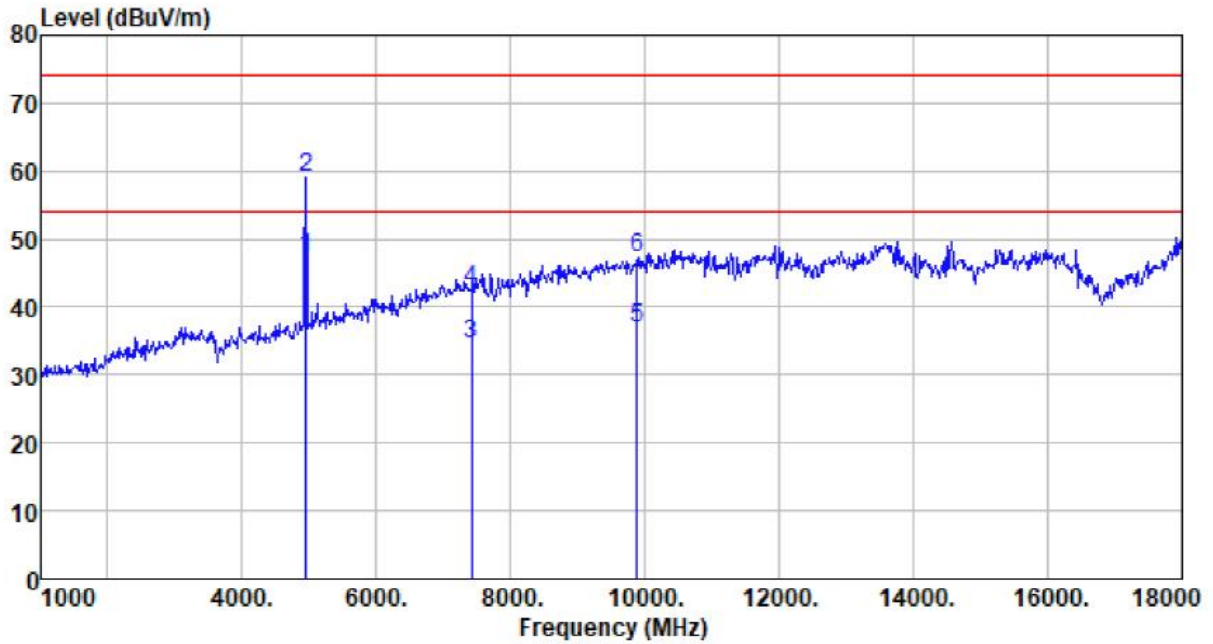

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4944.000	46.72	32.69	5.75	37.93	47.23	54.00	-6.77	Average
4944.000	58.65	32.69	5.75	37.93	59.16	74.00	-14.84	Peak
7416.000	28.78	36.63	7.33	38.13	34.61	54.00	-19.39	Average
7416.000	36.80	36.63	7.33	38.13	42.63	74.00	-31.37	Peak
9888.000	28.63	38.40	9.23	39.27	36.99	54.00	-17.01	Average
9888.000	38.73	38.40	9.23	39.27	47.09	74.00	-26.91	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)


Remark:

1. The emission levels of other frequencies are very lower than the limit and not show in test report.
2. For above 18GHz, no emission found.

■ Unwanted Emissions in Restricted Frequency Bands

ANT 1

Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

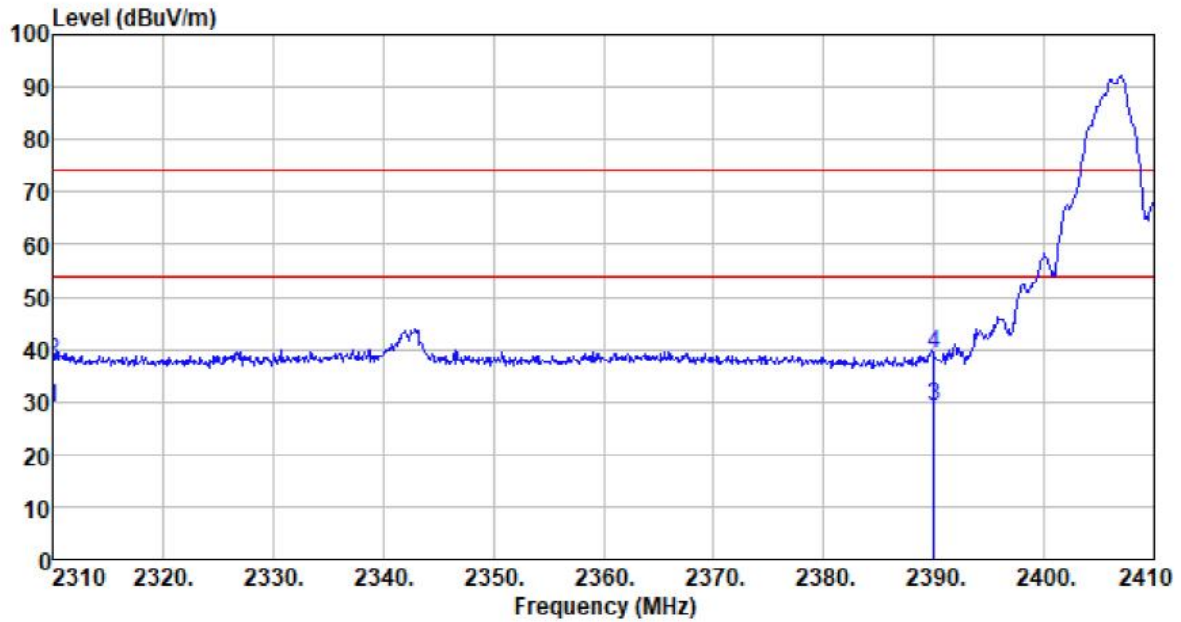


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	36.74	26.66	4.09	38.86	28.63	54.00	-25.37	Average
2310.000	45.90	26.66	4.09	38.86	37.79	74.00	-36.21	Peak
2390.000	37.16	26.62	4.11	38.88	29.01	54.00	-24.99	Average
2390.000	47.13	26.62	4.11	38.88	38.98	74.00	-35.02	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

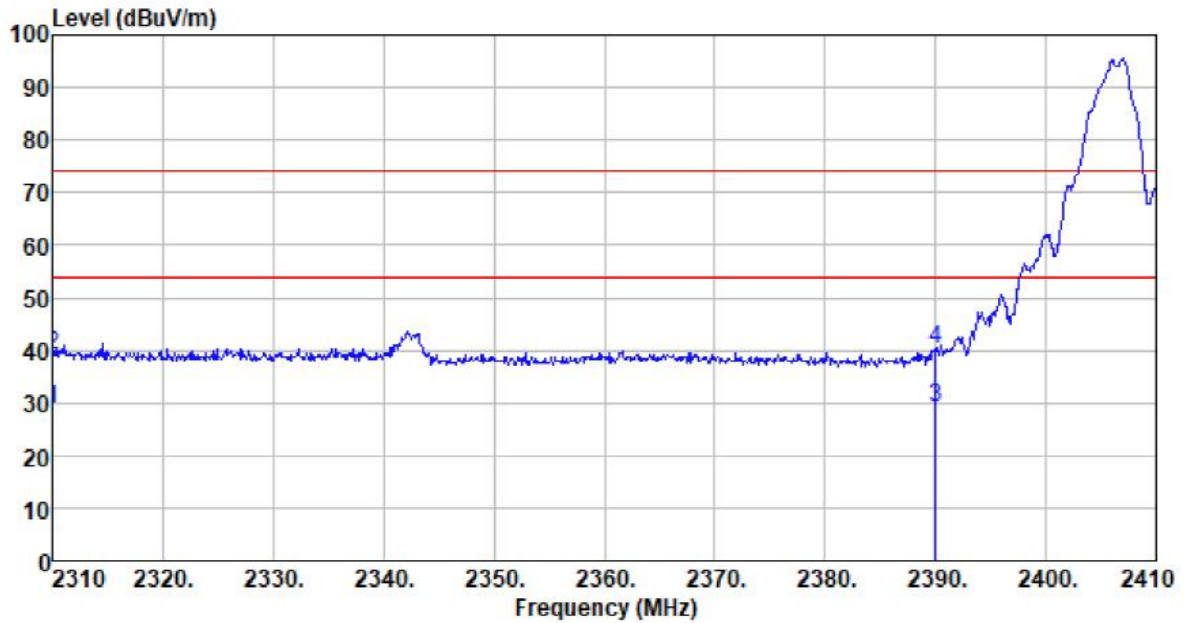


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	35.62	28.05	4.09	38.86	28.90	54.00	-25.10	Average
2310.000	45.75	28.05	4.09	38.86	39.03	74.00	-34.97	Peak
2390.000	36.91	27.03	4.11	38.88	29.17	54.00	-24.83	Average
2390.000	47.90	27.03	4.11	38.88	40.16	74.00	-33.84	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

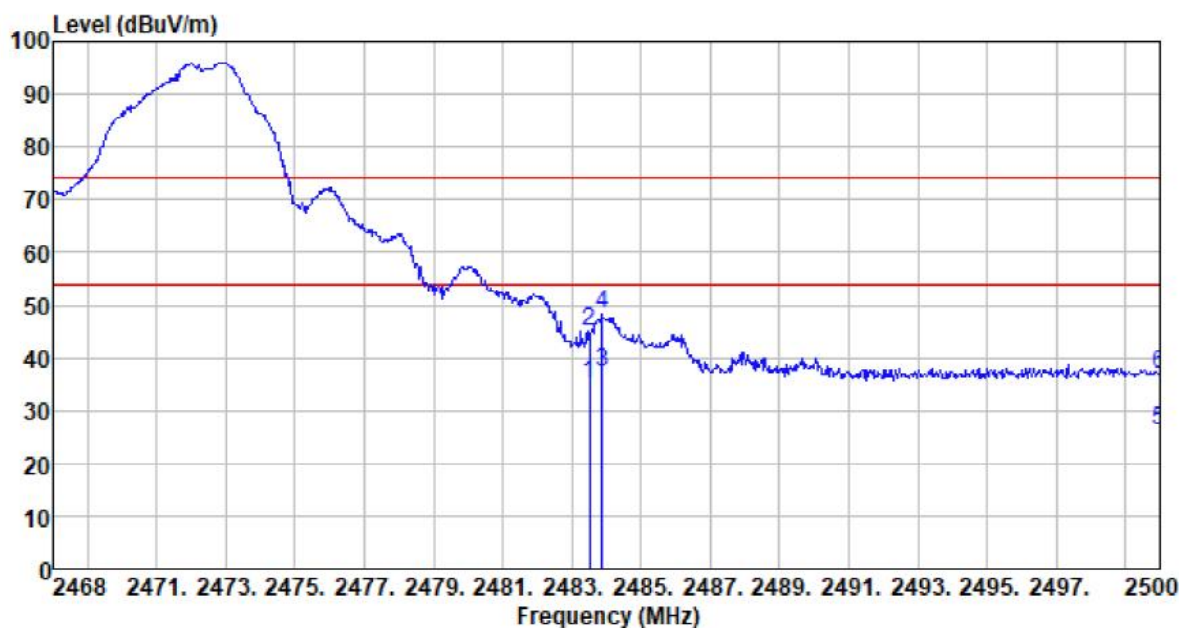

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2483.500	43.12	26.78	4.13	38.90	35.13	54.00	-18.87	Average
2483.500	53.09	26.78	4.13	38.90	45.10	74.00	-28.90	Peak
2483.872	45.29	26.78	4.13	38.90	37.30	54.00	-16.70	Average
2483.872	56.26	26.78	4.13	38.90	48.27	74.00	-25.73	Peak
2500.000	34.37	26.48	4.14	38.90	26.09	54.00	-27.91	Average
2500.000	45.16	26.48	4.14	38.90	36.88	74.00	-37.12	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------




Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2483.500	44.65	28.22	4.13	38.90	38.10	54.00	-15.90	Average
2483.500	53.72	28.22	4.13	38.90	47.17	74.00	-26.83	Peak
2483.904	47.83	28.23	4.13	38.90	41.29	54.00	-12.71	Average
2483.904	57.72	28.23	4.13	38.90	51.18	74.00	-22.82	Peak
2500.000	34.63	28.63	4.14	38.90	28.50	54.00	-25.50	Average
2500.000	45.89	28.63	4.14	38.90	39.76	74.00	-34.24	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

ANT 2

Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

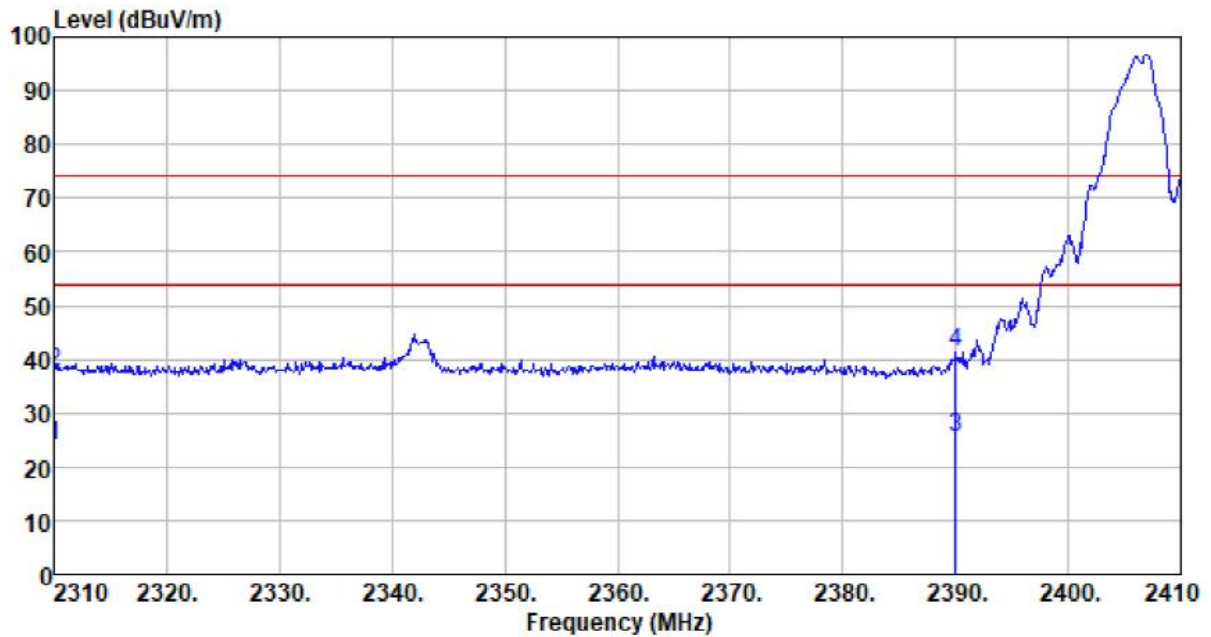


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	31.94	26.66	4.09	38.86	23.83	54.00	-30.17	Average
2310.000	45.91	26.66	4.09	38.86	37.80	74.00	-36.20	Peak
2390.000	33.54	26.62	4.11	38.88	25.39	54.00	-28.61	Average
2390.000	49.62	26.62	4.11	38.88	41.47	74.00	-32.53	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

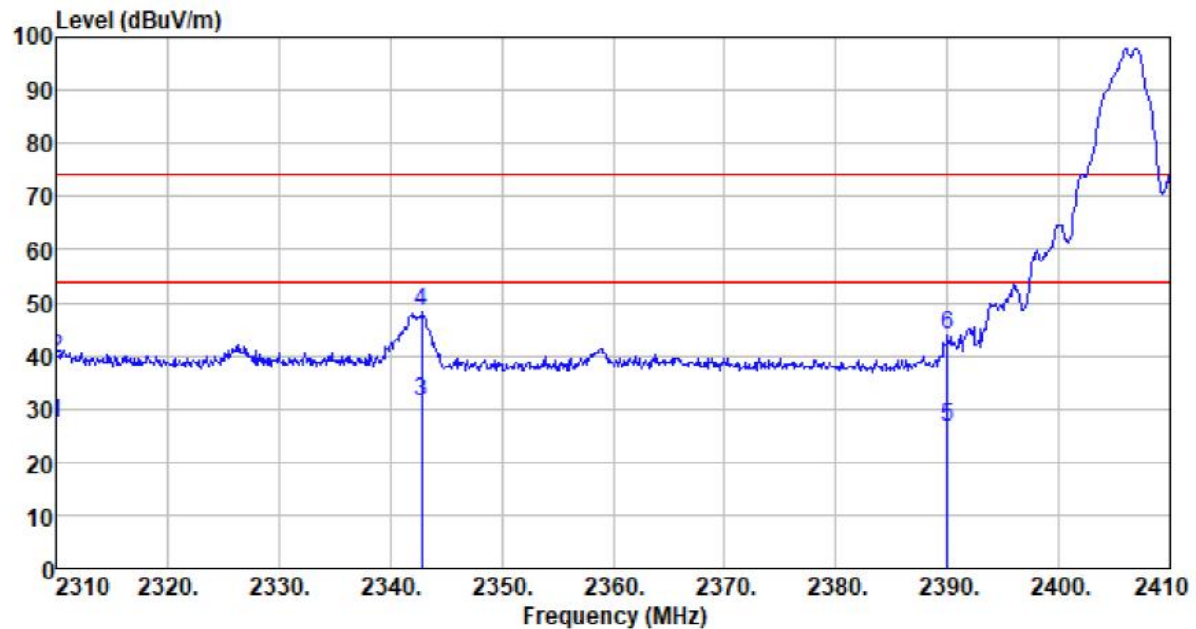


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	34.14	28.05	4.09	38.86	27.42	54.00	-26.58	Average
2310.000	46.02	28.05	4.09	38.86	39.30	74.00	-34.70	Peak
2342.800	38.67	27.52	4.10	38.87	31.42	54.00	-22.58	Average
2342.800	55.44	27.52	4.10	38.87	48.19	74.00	-25.81	Peak
2390.000	34.42	27.03	4.11	38.88	26.68	54.00	-27.32	Average
2390.000	51.53	27.03	4.11	38.88	43.79	74.00	-30.21	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

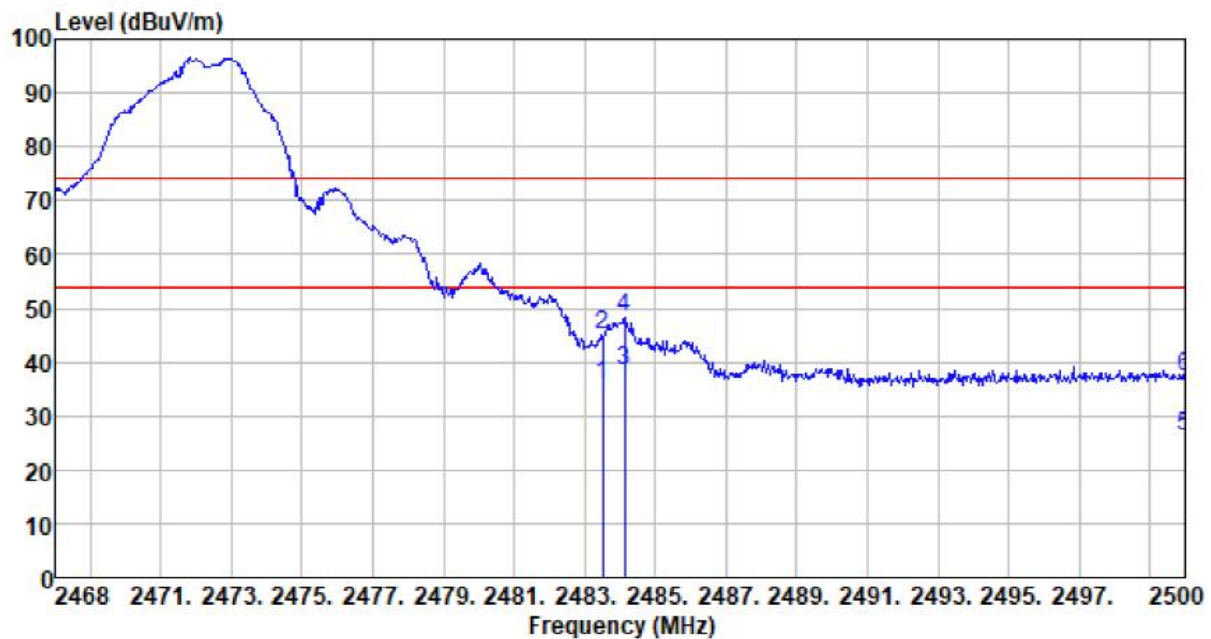

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2483.500	43.83	26.78	4.13	38.90	35.84	54.00	-18.16	Average
2483.500	52.96	26.78	4.13	38.90	44.97	74.00	-29.03	Peak
2484.128	46.48	26.77	4.13	38.90	38.48	54.00	-15.52	Average
2484.128	56.33	26.77	4.13	38.90	48.33	74.00	-25.67	Peak
2500.000	34.45	26.48	4.14	38.90	26.17	54.00	-27.83	Average
2500.000	45.54	26.48	4.14	38.90	37.26	74.00	-36.74	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------



Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2483.500	42.13	28.22	4.13	38.90	35.58	54.00	-18.42	Average
2483.500	53.10	28.22	4.13	38.90	46.55	74.00	-27.45	Peak
2483.936	46.06	28.23	4.13	38.90	39.52	54.00	-14.48	Average
2483.936	56.16	28.23	4.13	38.90	49.62	74.00	-24.38	Peak
2500.000	35.48	28.63	4.14	38.90	29.35	54.00	-24.65	Average
2500.000	45.28	28.63	4.14	38.90	39.15	74.00	-34.85	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Remarks:

1. The emission levels of other frequencies are very lower than the limit and not show in test report.

8 Test Setup Photo

Reference to the appendix I for details.

9 EUT Construcational Details

Reference to the appendix II for details.

---End---