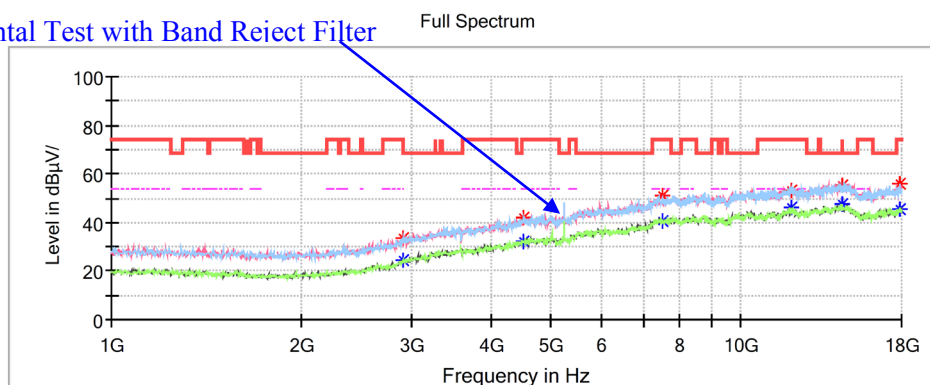


High Channel: 5240MHz**Common Information**

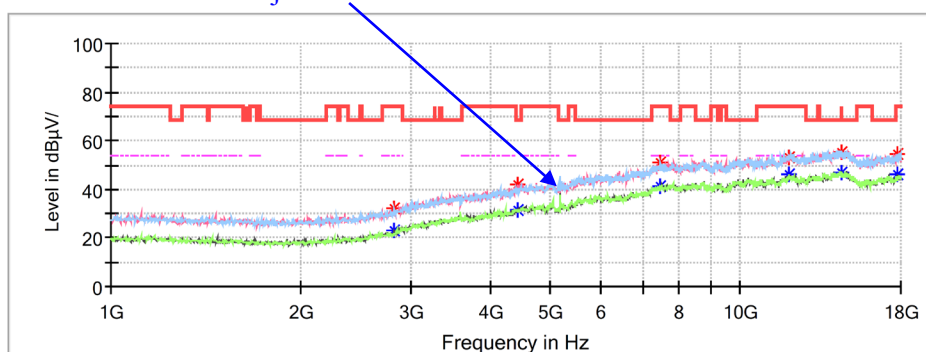
Project No.: RKSA260107001
EUT Model: K1133
Test Mode: Transmitting in 802.11a mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.3℃
Humidity: 52%
Atmospheric Pressure: 102.6kPa
Test Engineer: Destine Hu
Test Date: 2026/1/13

Fundamental Test with Band Reiect Filter**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2897.200000	---	24.71	54.00	29.29	H	-8.4
2897.200000	33.41	---	74.00	40.59	H	-8.4
4508.800000	42.26	---	74.00	31.74	V	-4.2
4508.800000	---	32.29	54.00	21.71	V	-4.2
7524.600000	51.08	---	74.00	22.92	V	3.0
7524.600000	---	40.48	54.00	13.52	V	3.0
11995.600000	---	46.44	54.00	7.56	V	9.1
11995.600000	52.89	---	74.00	21.11	H	9.1
14484.400000	55.00	---	74.00	19.00	H	11.9
14484.400000	---	47.21	54.00	6.79	H	11.9
17853.800000	---	45.11	54.00	8.89	V	11.4
17853.800000	56.00	---	74.00	18.00	H	11.4

802.11ac20 Mode:**Low Channel: 5180MHz****Common Information**

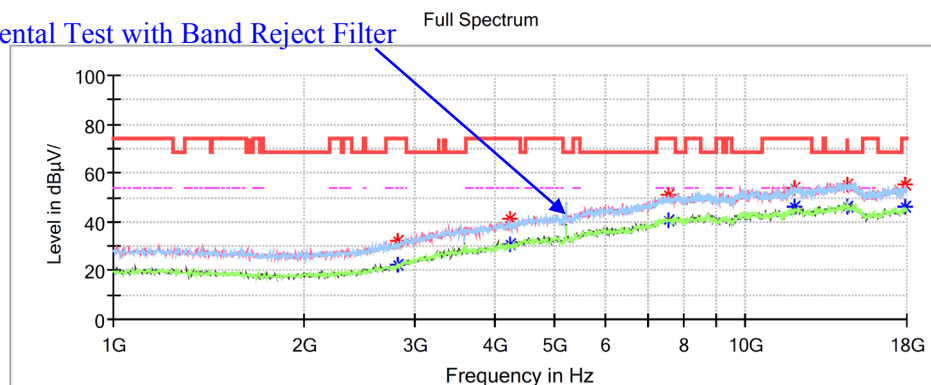
Project No.: RKSA260107001
 EUT Model: K1133
 Test Mode: Transmitting in 802.11ac20 mode Low Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 20.3℃
 Humidity: 52%
 Atmospheric Pressure: 102.6kPa
 Test Engineer: Destine Hu
 Test Date: 2026/1/13

Fundamental Test with Band Reject Filter Full Spectrum**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2825.800000	---	23.04	54.00	30.96	V	-8.6
2825.800000	31.94	---	74.00	42.06	H	-8.6
4423.800000	---	31.81	---	---	H	-4.3
4423.800000	41.83	---	68.20	26.37	V	-4.3
7480.400000	51.11	---	74.00	22.89	H	2.9
7480.400000	---	41.26	54.00	12.74	H	2.9
11968.400000	---	45.87	54.00	8.13	H	9.0
11968.400000	53.24	---	74.00	20.76	H	9.0
14481.000000	---	46.71	54.00	7.29	V	11.9
14481.000000	55.02	---	74.00	18.98	V	11.9
17802.800000	54.24	---	74.00	19.76	V	11.2
17802.800000	---	45.82	54.00	8.18	V	11.2

Middle Channel: 5200MHz**Common Information**

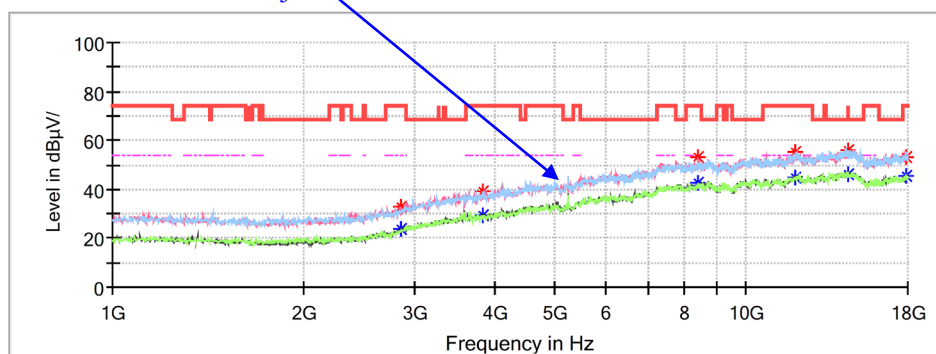
Project No.: RKSA260107001
EUT Model: K1133
Test Mode: Transmitting in 802.11ac20 mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.3°C
Humidity: 52%
Atmospheric Pressure: 102.6kPa
Test Engineer: Destine Hu
Test Date: 2026/1/13

Fundamental Test with Band Reject Filter**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2815.600000	---	22.28	54.00	31.72	V	-8.6
2815.600000	32.24	---	74.00	41.76	H	-8.6
4233.400000	41.33	---	74.00	32.67	V	-4.6
4233.400000	---	30.55	54.00	23.45	H	-4.6
7551.800000	---	40.48	54.00	13.52	H	3.0
7551.800000	51.03	---	74.00	22.97	H	3.0
11931.000000	53.84	---	74.00	20.16	H	8.9
11931.000000	---	46.38	54.00	7.62	V	8.9
14484.400000	---	46.40	54.00	7.60	H	11.9
14484.400000	55.42	---	74.00	18.58	V	11.9
17874.200000	---	46.01	54.00	7.99	V	11.4
17874.200000	54.97	---	74.00	19.03	V	11.4

High Channel: 5240MHz**Common Information**

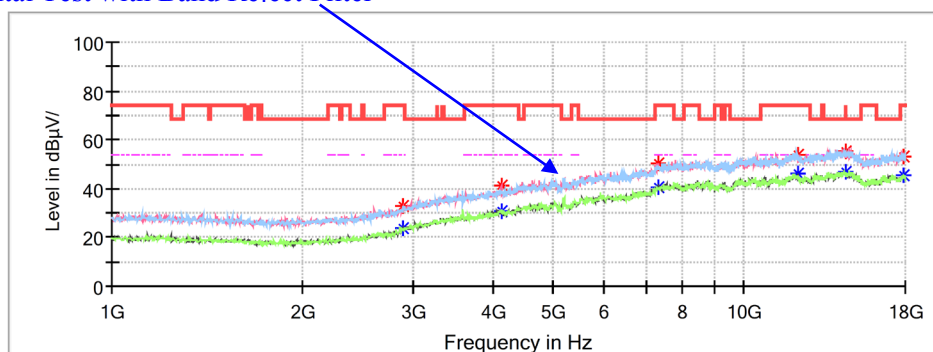
Project No.: RKSA260107001
EUT Model: K1133
Test Mode: Transmitting in 802.11ac20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.3°C
Humidity: 52%
Atmospheric Pressure: 102.6kPa
Test Engineer: Destine Hu
Test Date: 2026/1/13

Fundamental Test with Band Reject Filter Full Spectrum**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2849.600000	---	23.78	54.00	30.22	V	-8.5
2849.600000	32.63	---	74.00	41.37	V	-8.5
3835.600000	39.49	---	74.00	34.51	H	-5.4
3835.600000	---	29.51	54.00	24.49	V	-5.4
8384.800000	---	42.36	54.00	11.64	V	4.4
8384.800000	53.27	---	74.00	20.73	V	4.4
11961.600000	---	44.84	54.00	9.16	H	9.0
11961.600000	55.22	---	74.00	18.78	V	9.0
14477.600000	---	46.20	54.00	7.80	H	11.9
14477.600000	56.19	---	74.00	17.81	H	11.9
17864.000000	53.13	---	74.00	20.87	V	11.4
17864.000000	---	45.72	54.00	8.28	V	11.4

802.11ac40 Mode:**Low Channel: 5190MHz****Common Information**

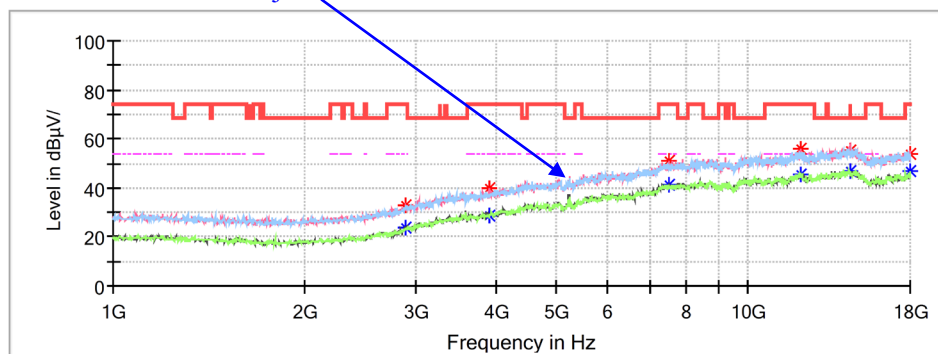
Project No.: RKSA260107001
EUT Model: K1133
Test Mode: Transmitting in 802.11ac40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.3℃
Humidity: 52%
Atmospheric Pressure: 102.6kPa
Test Engineer: Destine Hu
Test Date: 2026/1/13

Fundamental Test with Band Reiect Filter Full Spectrum**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2890.400000	---	23.74	54.00	30.26	H	-8.4
2890.400000	33.10	---	74.00	40.90	H	-8.4
4128.000000	---	30.71	54.00	23.29	V	-4.8
4128.000000	41.02	---	74.00	32.98	V	-4.8
7324.000000	---	40.47	54.00	13.53	H	2.5
7324.000000	50.15	---	74.00	23.85	V	2.5
12152.000000	54.06	---	74.00	19.94	H	9.0
12152.000000	---	46.47	54.00	7.53	V	9.0
14484.400000	55.28	---	74.00	18.72	H	11.9
14484.400000	---	46.79	54.00	7.21	H	11.9
17932.000000	53.03	---	74.00	20.97	V	11.6
17932.000000	---	45.65	54.00	8.35	H	11.6

High Channel: 5230MHz**Common Information**

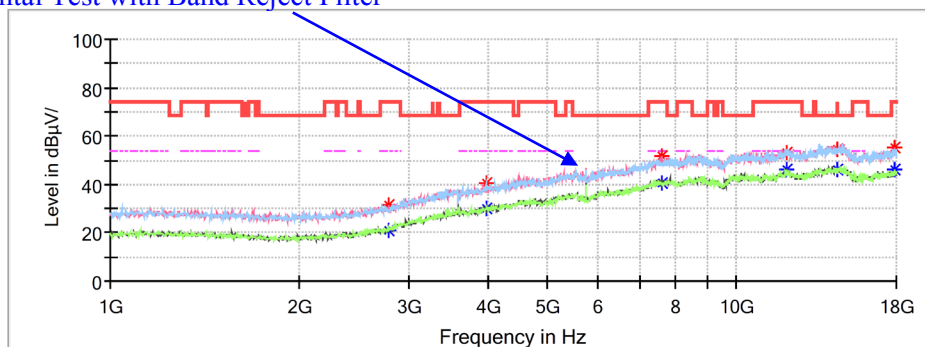
Project No.: RKSA260107001
 EUT Model: K1133
 Test Mode: Transmitting in 802.11ac40 mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 20.3°C
 Humidity: 52%
 Atmospheric Pressure: 102.6kPa
 Test Engineer: Destine Hu
 Test Date: 2026/1/13

Fundamental Test with Band Reject Filter Full Spectrum**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2883.600000	---	23.79	54.00	30.21	V	-8.4
2883.600000	33.01	---	74.00	40.99	H	-8.4
3903.600000	---	28.64	54.00	25.36	V	-5.2
3903.600000	39.63	---	74.00	34.37	V	-5.2
7521.200000	---	41.41	54.00	12.59	V	3.0
7521.200000	50.72	---	74.00	23.28	V	3.0
12084.000000	---	45.42	54.00	8.58	V	9.0
12084.000000	55.68	---	74.00	18.32	V	9.0
14481.000000	---	46.75	54.00	7.25	H	11.9
14481.000000	55.33	---	74.00	18.67	H	11.9
17969.400000	53.90	---	74.00	20.10	H	11.7
17969.400000	---	47.01	54.00	6.99	H	11.7

1GHz-18GHz(5725-5850MHz Band):**802.11a Mode:****Low Channel: 5745MHz****Common Information**

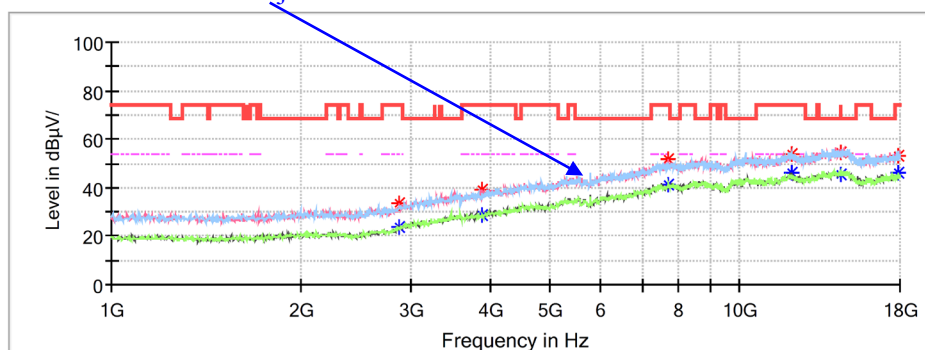
Project No.:	RKSA260107001
EUT Model:	K1133
Test Mode:	Transmitting in 802.11a mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	20.3℃
Humidity:	52%
Atmospheric Pressure:	102.6kPa
Test Engineer:	Destine Hu
Test Date:	2026/1/13

Fundamental Test with Band Reject Filter Full Spectrum**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2781.600000	---	21.26	54.00	32.74	V	-8.7
2781.600000	31.56	---	74.00	42.44	V	-8.7
3978.400000	40.55	---	74.00	33.45	H	-5.0
3978.400000	---	29.85	54.00	24.15	H	-5.0
7599.400000	51.76	---	74.00	22.24	V	3.0
7599.400000	---	40.69	54.00	13.31	V	3.0
11992.200000	53.39	---	74.00	20.61	H	9.1
11992.200000	---	45.91	54.00	8.09	V	9.1
14477.600000	---	46.13	54.00	7.87	V	11.9
14477.600000	54.75	---	74.00	19.25	V	11.9
17911.600000	---	46.16	54.00	7.84	H	11.5
17911.600000	55.27	---	74.00	18.73	V	11.5

Middle Channel: 5785MHz**Common Information**

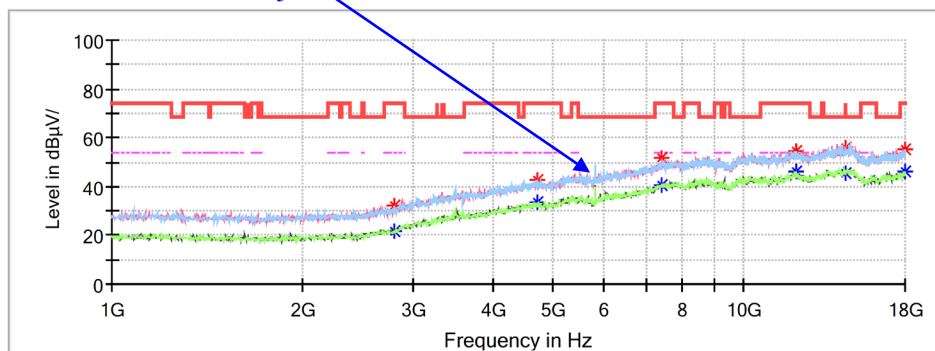
Project No.: RKSA260107001
EUT Model: K1133
Test Mode: Transmitting in 802.11a mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.3℃
Humidity: 52%
Atmospheric Pressure: 102.6kPa
Test Engineer: Destine Hu
Test Date: 2026/1/13

Fundamental Test with Band Reject Filter Full Spectrum**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2873.400000	33.22	---	74.00	40.78	V	-8.4
2873.400000	---	23.90	54.00	30.10	V	-8.4
3879.800000	39.03	---	74.00	34.97	V	-5.3
3879.800000	---	28.34	54.00	25.66	H	-5.3
7708.200000	51.44	---	74.00	22.56	V	3.1
7708.200000	---	40.96	54.00	13.04	H	3.1
12087.400000	---	46.22	54.00	7.78	V	9.0
12087.400000	53.94	---	74.00	20.06	H	9.0
14484.400000	---	45.59	54.00	8.41	V	11.9
14484.400000	54.49	---	74.00	19.51	V	11.9
17898.000000	---	46.36	54.00	7.64	H	11.5
17898.000000	53.24	---	74.00	20.76	V	11.5

High Channel: 5825MHz**Common Information**

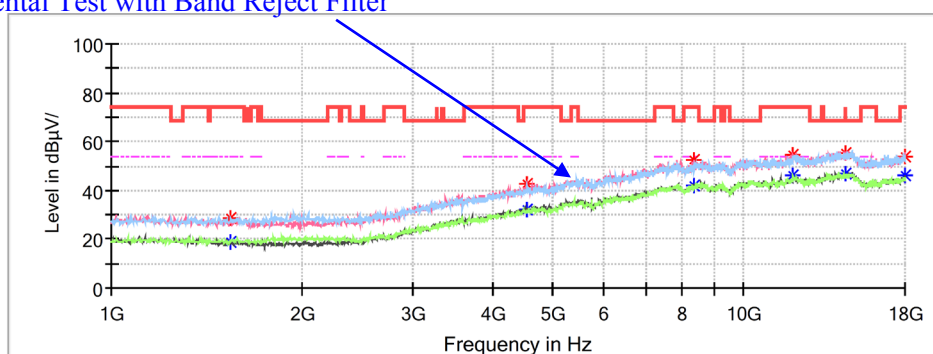
Project No.: RKSA260107001
EUT Model: K1133
Test Mode: Transmitting in 802.11a mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.3℃
Humidity: 52%
Atmospheric Pressure: 102.6kPa
Test Engineer: Destine Hu
Test Date: 2026/1/13

Fundamental Test with Band Reject Filter Full Spectrum**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2795.200000	---	21.75	54.00	32.25	V	-8.7
2795.200000	32.45	---	74.00	41.55	H	-8.7
4712.800000	42.63	---	74.00	31.37	H	-3.6
4712.800000	---	33.30	54.00	20.70	H	-3.6
7405.600000	51.56	---	74.00	22.44	V	2.7
7405.600000	---	40.53	54.00	13.47	V	2.7
12087.400000	---	46.29	54.00	7.71	H	9.0
12087.400000	54.26	---	74.00	19.74	H	9.0
14470.800000	---	45.43	54.00	8.57	V	11.9
14470.800000	56.00	---	74.00	18.00	H	11.9
17959.200000	54.91	---	74.00	19.09	H	11.7
17959.200000	---	45.99	54.00	8.01	H	11.7

802.11ac20 Mode:**Low Channel: 5745MHz****Common Information**

Project No.: RKSA260107001
EUT Model: K1133
Test Mode: Transmitting in 802.11ac20 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.3℃
Humidity: 52%
Atmospheric Pressure: 102.6kPa
Test Engineer: Destine Hu
Test Date: 2026/1/13

Fundamental Test with Band Reject Filter Full Spectrum**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1547.400000	---	19.11	54.00	34.89	H	-13.1
1547.400000	28.70	---	74.00	45.30	H	-13.1
4529.200000	42.37	---	74.00	31.63	V	-4.1
4529.200000	---	32.08	54.00	21.92	V	-4.1
8320.200000	52.66	---	74.00	21.34	V	4.2
8320.200000	---	42.13	54.00	11.87	V	4.2
11988.800000	---	45.86	54.00	8.14	H	9.0
11988.800000	54.30	---	74.00	19.70	V	9.0
14481.000000	---	46.78	54.00	7.22	H	11.9
14481.000000	55.40	---	74.00	18.60	V	11.9
17976.200000	53.91	---	74.00	20.09	V	11.7
17976.200000	---	45.95	54.00	8.05	V	11.7