



ExtremeWireless™ AP4020X Installation Guide

Setup, Maintenance, and Best Practices

9038978-00 Rev AA
March 2025



Copyright © 2025 Extreme Networks, Inc. All rights reserved.

Legal Notice

Extreme Networks, Inc. reserves the right to make changes in specifications and other information contained in this document and its website without prior notice. The reader should in all cases consult representatives of Extreme Networks to determine whether any such changes have been made.

The hardware, firmware, software or any specifications described or referred to in this document are subject to change without notice.

Trademarks

Extreme Networks® and the Extreme Networks logo are trademarks or registered trademarks of Extreme Networks, Inc. in the United States and/or other countries.

All other names (including any product names) mentioned in this document are the property of their respective owners and may be trademarks or registered trademarks of their respective companies/owners.

For additional information on Extreme Networks trademarks, see: <https://www.extremenetworks.com/about-extreme-networks/company/legal/trademarks>

Open Source Declarations

Some software files have been licensed under certain open source or third-party licenses.

End-user license agreements and open source declarations can be found at: <https://www.extremenetworks.com/support/policies/open-source-declaration/>


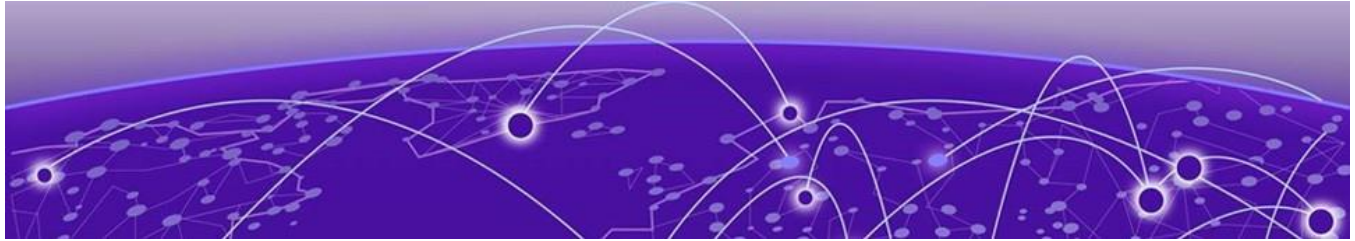


Table of Contents


Abstract.....	v
Preface.....	6
Text Conventions.....	6
Documentation and Training.....	7
Open Source Declarations.....	8
Training.....	8
Help and Support.....	8
Subscribe to Product Announcements.....	9
Send Feedback.....	9
Overview.....	10
Purchase Information.....	11
Technical Specifications.....	11
Environmental Specifications.....	11
Physical Specifications.....	11
Antenna Specifications.....	11
Radiation Patterns.....	12
Ports, Connectors, and Hardware Features.....	22
Hardware Ports - Front.....	22
Hardware Ports - Rear.....	22
LED Descriptions.....	23
Radios.....	24
Power Profile.....	25
Power Options.....	26
Enclosure.....	26
Security.....	26
Accessories.....	26
Mounting Accessories.....	26
Power Accessories.....	27
Other Accessories.....	27
MAC Address.....	28
Micro USB Console.....	28
Cleaning Guidelines.....	29
Installation.....	30
Installation Workflow.....	30
Pre-Installation Tasks.....	32
Site Survey.....	32
Other.....	32
Box Contents.....	33
Position the Access Point before Installation.....	33
Install the Access Point on a Wall or a Flat Ceiling.....	34

Install the Access Point to a Wall with AH-ACC-BKT-AX-WL.	35
Install the Access Point on a Standard Flat Ceiling Rail with Sculpted Ceiling Tiles.....	35
Install the Access Point on a Silhouette Ceiling.	37
Install the Access Point to a 9/16-inch T-bar Ceiling.	39
Install the Access Point on a 15/16-inch T-bar.	41
Install the Access Point on a Junction Box.....	43
Install the Access Point on a Beam.....	45
Connect a Power Supply.	47
Nonstandard Ceiling or Wall.	49
Lock Your Access Point.	53
Onboard the Access Point with the ExtremeCloud IQ Mobile Onboarding App.....	54
Regulatory and Compliance.....	55
Country of Manufacture.	55
China.....	55
Philippines.	56
Taiwan.	56
Professional Installation Instruction.....	56
Installation personnel.	56
Installation location.	56
External antenna.	56
Installation procedure.....	56
Instructions d'installation professionnelle.....	56
Safety Guidelines.....	57
CE Marking and European Area (EEA).....	57
FCC Notice (Part 15 - Class B).	57
FCC Radiation Exposure Statement.....	58
Industry Canada Notice.	59
Brazil Agência Nacional De Telecomunicações (Anatel) Statement.	60
Israel Regulatory Statement.	61
Mexico Compliance Statement.	61
Thailand Regulatory Statement.	61
Japan (VCCI) - Voluntary Control Council for Interference Class A ITE.	61
Taiwan Regulatory Statement.	62
United Kingdom (UK) and European Union (EU) Radiation Warning Statement.	62
Extreme Networks EU Importer Address.	62
Extreme Networks UK Address.	63
Supplement to Product Instructions.....	63
European Waste Electrical and Electronic Equipment (WEEE) Notice.....	63
Declaration of Conformity in Languages of the European Community.	64
Index.....	66

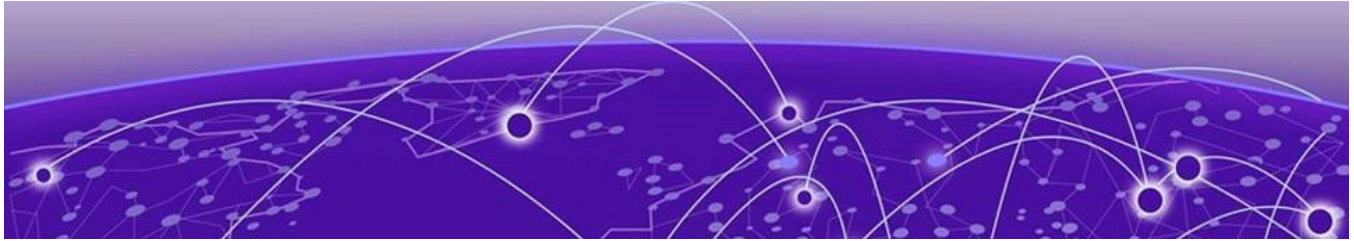

Abstract

The AP4020X Installation Guide by Extreme Networks, Inc., released in March 2025 introduces the ExtremeWireless™ AP4020X, a Wi-Fi 7 (802.11be) universal indoor access point with a quad-radio design. This access point features three 2x2:2 radios for the 6 GHz, 5 GHz, and 2.4 GHz bands, a dedicated sensor, and dual IoT radios. It can operate in two modes: Mode 1 with 2.4 GHz, 5 GHz, and 6 GHz data radios and a sensor, and Mode 2 with 2.4 GHz, dual 5 GHz, and a sensor. The AP4020X is designed for flexible mounting options, including ceilings, walls, beams, and junction boxes. The guide also covers setup, maintenance, and best practices for installation.

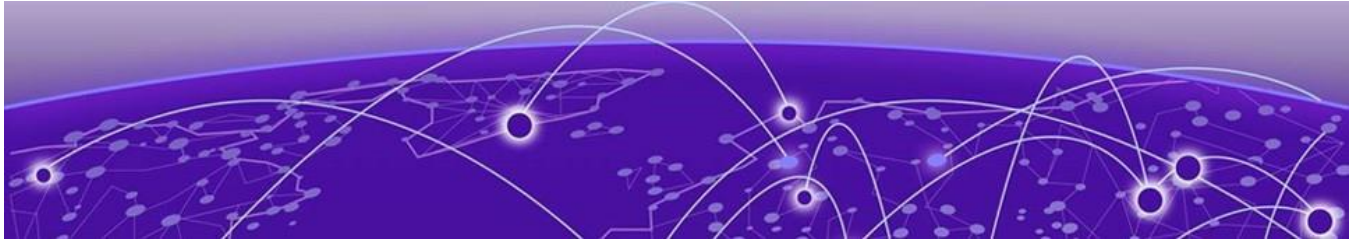

Preface

Read the following topics to learn about:

- The meanings of text formats used in this document.
- Where you can find additional information and help.
- How to reach us with questions and comments.

Text Conventions

Unless otherwise noted, information in this document applies to all supported environments for the products in question. Exceptions, like command keywords associated with a specific software version, are identified in the text.

When a feature, function, or operation pertains to a specific hardware product, the product name is used. When features, functions, and operations are the same across an entire product family, such as Extreme Networks switches or SLX routers, the product is referred to as *the switch* or *the router*.

Table 1: Notes and warnings

Icon	Notice type	Alerts you to...
	Tip	Helpful tips and notices for using the product
	Note	Useful information or instructions
	Important	Important features or instructions
	Caution	Risk of personal injury, system damage, or loss of data
	Warning	Risk of severe personal injury

Table 2: Text

Convention	Description
screen displays	This typeface indicates command syntax, or represents information as it is displayed on the screen.
The words <i>enter</i> and <i>type</i>	When you see the word <i>enter</i> in this guide, you must type something, and then press the Return or Enter key. Do not press the Return or Enter key when an instruction simply says <i>type</i> .
Key names	Key names are written in boldface, for example Ctrl or Esc . If you must press two or more keys simultaneously, the key names are linked with a plus sign (+). Example: Press Ctrl+Alt+Del
<i>Words in italicized type</i>	Italics emphasize a point or denote new terms at the place where they are defined in the text. Italics are also used when referring to publication titles.
NEW!	New information. In a PDF, this is searchable text.

Table 3: Command syntax

Convention	Description
bold text	Bold text indicates command names, keywords, and command options.
<i>italic text</i>	Italic text indicates variable content.
[]	Syntax components displayed within square brackets are optional. Default responses to system prompts are enclosed in square brackets.
{ x y z }	A choice of required parameters is enclosed in curly brackets separated by vertical bars. You must select one of the options.
x y	A vertical bar separates mutually exclusive elements.
< >	Nonprinting characters, such as passwords, are enclosed in angle brackets.
...	Repeat the previous element, for example, <i>member[member...]</i> .
\	In command examples, the backslash indicates a "soft" line break. When a backslash separates two lines of a command input, enter the entire command at the prompt without the backslash.

Documentation and Training

Find Extreme Networks product information at the following locations:

[Current Product Documentation](#)

[Release Notes](#)

[Hardware and Software Compatibility](#) for Extreme Networks products

[Extreme Optics Compatibility](#)

[Other Resources](#) such as articles, white papers, and case studies

Open Source Declarations

Some software files have been licensed under certain open source licenses. Information is available on the [Open Source Declaration](#) page.

Training

Extreme Networks offers product training courses, both online and in person, as well as specialized certifications. For details, visit the [Extreme Networks Training](#) page.

Help and Support

If you require assistance, contact Extreme Networks using one of the following methods:

[Extreme Portal](#)

Search the GTAC (Global Technical Assistance Center) knowledge base; manage support cases and service contracts; download software; and obtain product licensing, training, and certifications.

[The Hub](#)

A forum for Extreme Networks customers to connect with one another, answer questions, and share ideas and feedback. This community is monitored by Extreme Networks employees, but is not intended to replace specific guidance from GTAC.

[Call GTAC](#)

For immediate support: (800) 998 2408 (toll-free in U.S. and Canada) or 1 (408) 579 2800. For the support phone number in your country, visit www.extremenetworks.com/support/contact.

Before contacting Extreme Networks for technical support, have the following information ready:

- Your Extreme Networks service contract number, or serial numbers for all involved Extreme Networks products
- A description of the failure
- A description of any actions already taken to resolve the problem
- A description of your network environment (such as layout, cable type, other relevant environmental information)
- Network load at the time of trouble (if known)
- The device history (for example, if you have returned the device before, or if this is a recurring problem)
- Any related RMA (Return Material Authorization) numbers

Subscribe to Product Announcements

You can subscribe to email notifications for product and software release announcements, Field Notices, and Vulnerability Notices.

1. Go to [The Hub](#).
2. In the list of categories, expand the **Product Announcements** list.
3. Select a product for which you would like to receive notifications.
4. Select **Subscribe**.
5. To select additional products, return to the **Product Announcements** list and repeat steps 3 and 4.

You can modify your product selections or unsubscribe at any time.


Send Feedback

The User Enablement team at Extreme Networks has made every effort to ensure that this document is accurate, complete, and easy to use. We strive to improve our documentation to help you in your work, so we want to hear from you. We welcome all feedback, but we especially want to know about:

- Content errors, or confusing or conflicting information.
- Improvements that would help you find relevant information.
- Broken links or usability issues.


To send feedback, email us at <https://www.extremenetworks.com/documentation-feedback/>.

Provide as much detail as possible including the publication title, topic heading, and page number (if applicable), along with your comments and suggestions for improvement.

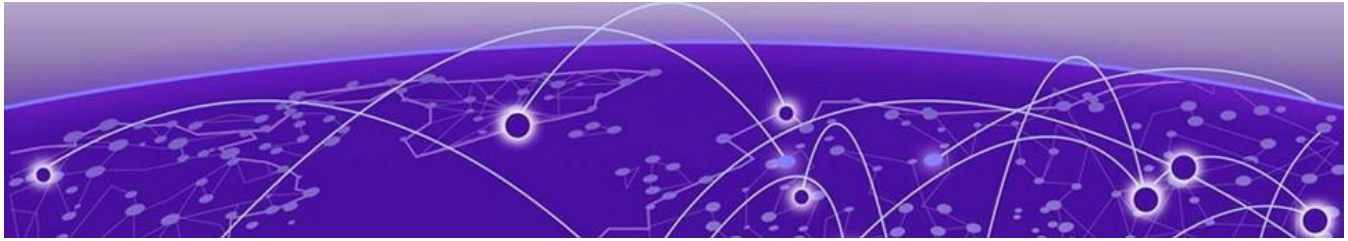

Overview

[Purchase Information](#) on page 11
[Technical Specifications](#) on page 11
[Ports, Connectors, and Hardware Features](#) on page 22
[LED Descriptions](#) on page 23
[Radios](#) on page 24
[Power Profile](#) on page 25
[Power Options](#) on page 26
[Enclosure](#) on page 26
[Security](#) on page 26
[Accessories](#) on page 26
[MAC Address](#) on page 28
[Micro USB Console](#) on page 28
[Cleaning Guidelines](#) on page 29

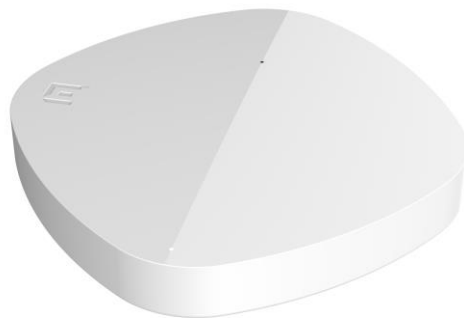

The AP4020X is an ExtremeCloud IQ managed, Wi-Fi 7 (802.11be) universal *indoor* access point (AP). It has a quad-radio design with three 2x2:2 radios for use across the 6 GHz, 5 GHz, and 2.4 GHz bands. It also features a dedicated sensor and dual IoT radios.

You can operate the AP in one of two modes:

- Mode 1: 2.4 GHz /5 GHz/6 GHz data radios and sensor
- Mode 2: 2.4 GHz, and dual 5 GHz, and sensor

It can be mounted to a ceiling, wall, beam or junction box. The AP4020X ships with the AH-ACC-BKT-AX-TB mounting bracket for use on flat t-bar ceiling grids and flat surfaces.

Purchase Information

Use the information below when you order your AP. The AP4020X is sold with the AH-ACC-BKT-AX-TB mounting bracket.

Table 4: Access point part number

Part number	Description
AP4020X -WW	Indoor Quad Radio Wi-Fi 7 (2x2:2): 2.4GHz, 5GHz, 6GHz and dedicated sensor, Multi-Rate Port, internal antennas. T-Bar, Incl Mt (AH-ACC-BKT-AX-TB). Domain: World SKU
AP4020X -WW-TAA	Indoor Quad Radio Wi-Fi 7 (2x2:2): 2.4GHz, 5GHz, 6GHz and dedicated sensor, Multi-Rate Port, internal antennas. T-Bar, Incl Mt (AH-ACC-BKT-AX-TB). Domain: World SKU TAA Compliant
AP4020X -EG	Indoor Quad Radio Wi-Fi 7 (2x2:2): 2.4GHz, 5GHz, 6GHz and dedicated sensor, Multi-Rate Port, internal antennas. T-Bar, Incl Mt (AH-ACC-BKT-AX-TB). Domain: Egypt

Technical Specifications

The AP4020X supports both 802.3at PoE and 802.3bt PoE.

For more information about the technical specifications, see the AP4020X Data Sheets [found here](#).

Environmental Specifications

The following list shows the environmental operating conditions for the AP4020X:

- Operating: 0°C to 50°C (32°F to 122°F)
- Storage: 0°C to 70°C (32°F to 158°F)
- Humidity: 0% to 95% (non-condensing)

Physical Specifications

The AP4020X has the following dimensions and weight:

- Dimensions: 240.3 mm x 240.3 mm x 37 mm (9.46 in. x 9.46 in. x 1.48 in.)
- Weight: 1.3 kg (2.9 lbs)

Antenna Specifications

The AP4020X has the following internal antennas:

- Two (2) dual band 2.4 GHz and 5 GHz
- Two (2) single band 5 GHz

- Two (2) single band 6 GHz
- One (1) 2 GHz/5 GHz/6 GHz sensor
- Three (3) IoT sensors

Antenna Specifications

The following list shows the Gain and Beam for the AP4020X internal antenna. Use this information when you plan your installation.

- Omni: 4dBi on 2.4GHz; 6dBi on 5GHz and 6GHz.
- Coverage: Symmetrical coverage
- **60 degree Sector: 8dBi on 6GHz**

Radiation Patterns

Antenna radiation patterns are an important tool when you install your access point. Use this information to optimize your coverage, to reduce interference from other devices, and to ensure you comply with government regulations.

2.4 GHz Radiation Patterns

The following diagrams illustrate the radiation patterns for the AP4020X 2GHz internal antenna.

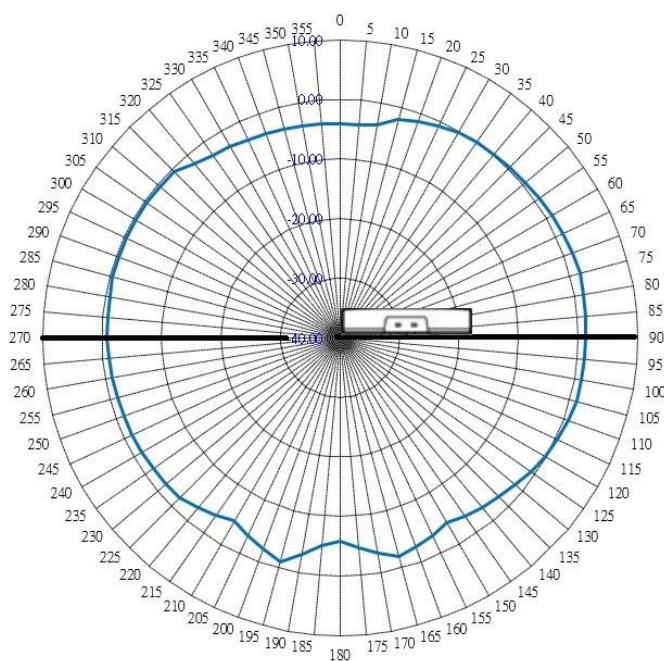


Figure 1: AP4020X 2GHz Vertical Radiation Pattern

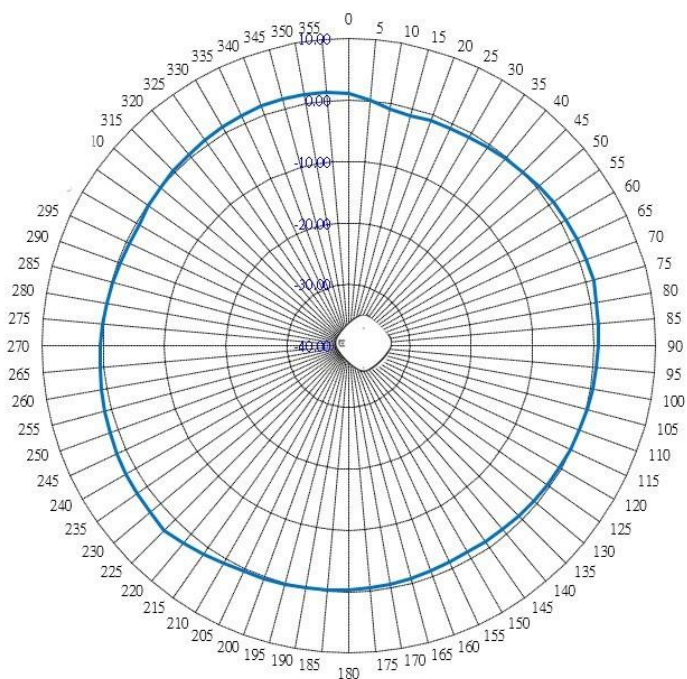


Figure 2: AP4020X 2GHz Horizontal Radiation Pattern

5 GHz Radiation Patterns

The following diagrams illustrate the radiation patterns for the AP4020X 5 GHz internal antenna.

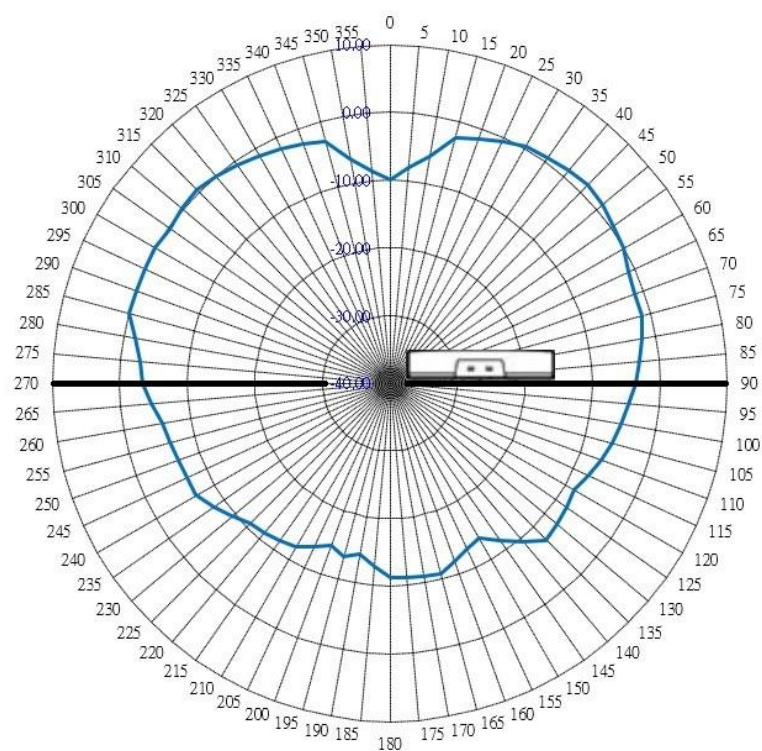


Figure 3: AP4020X 5 GHz Low Vertical Radiation Pattern

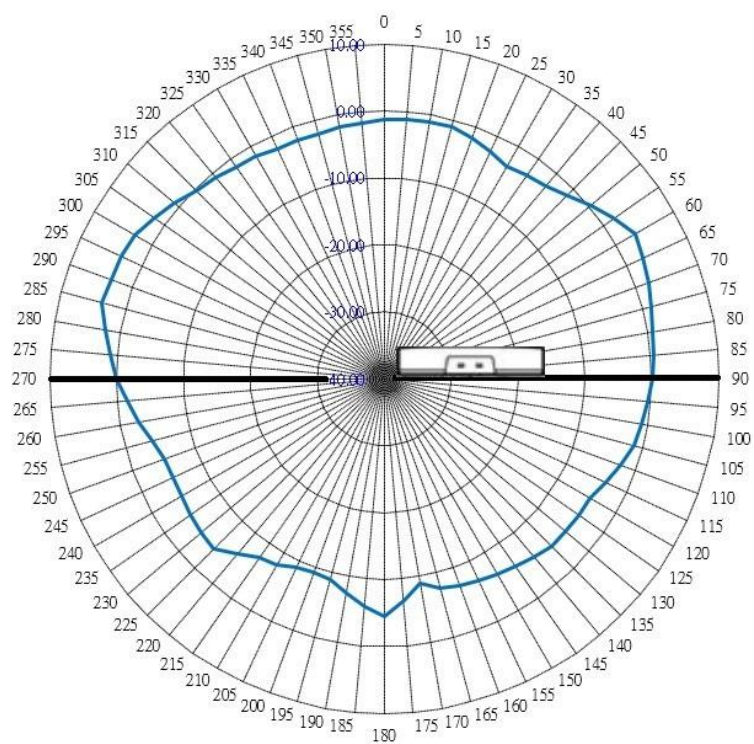


Figure 4: AP4020X 5 GHz Vertical Radiation Pattern

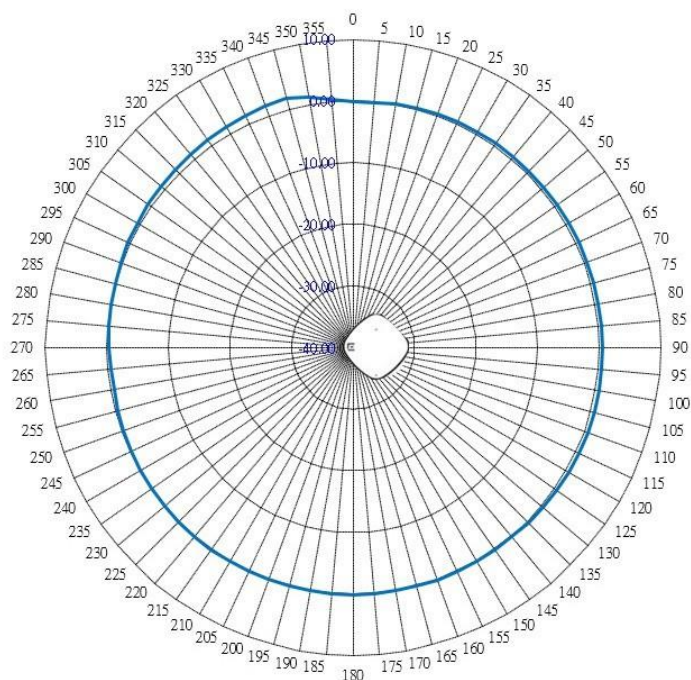


Figure 5: AP4020X 5 GHz Low Horizontal Radiation Pattern

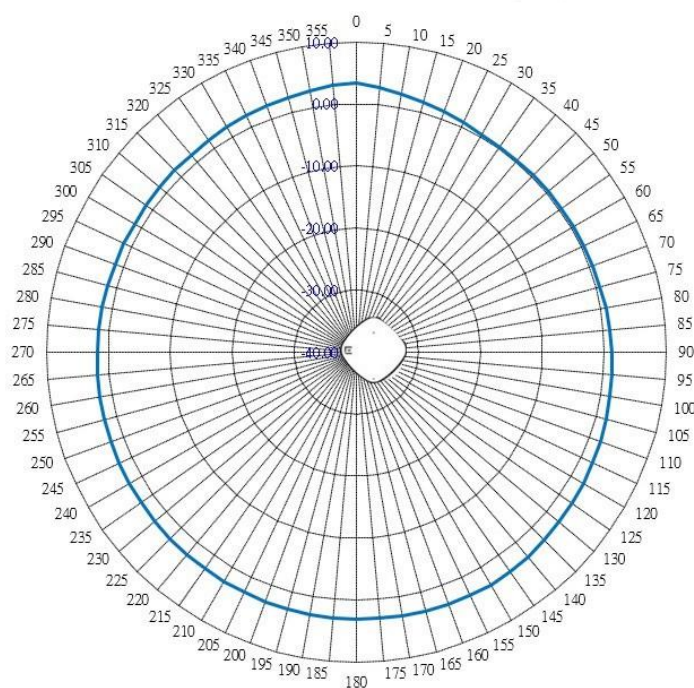


Figure 6: AP4020X 5 GHz Horizontal Radiation Pattern

6 GHz Radiation Patterns

The following diagrams illustrate the radiation patterns for the AP4020X 6 GHz internal antenna.

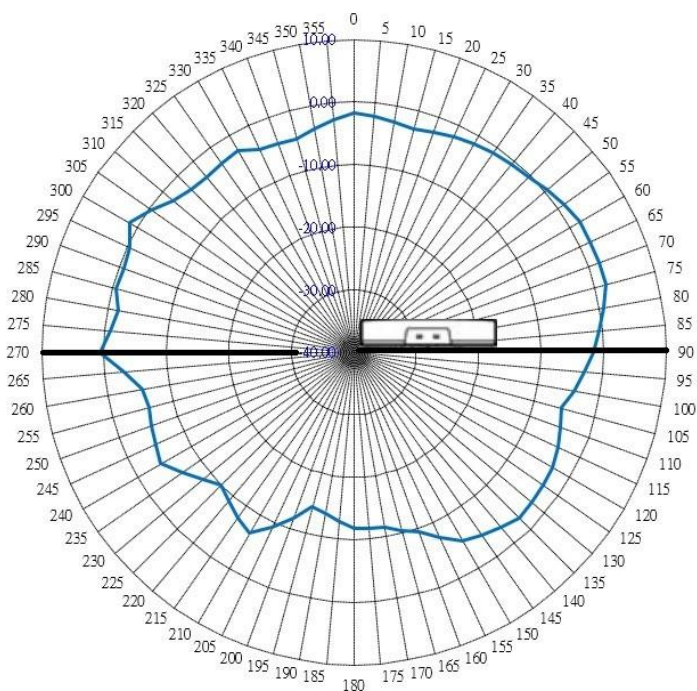


Figure 7: AP4020X 6 GHz Vertical Radiation Pattern

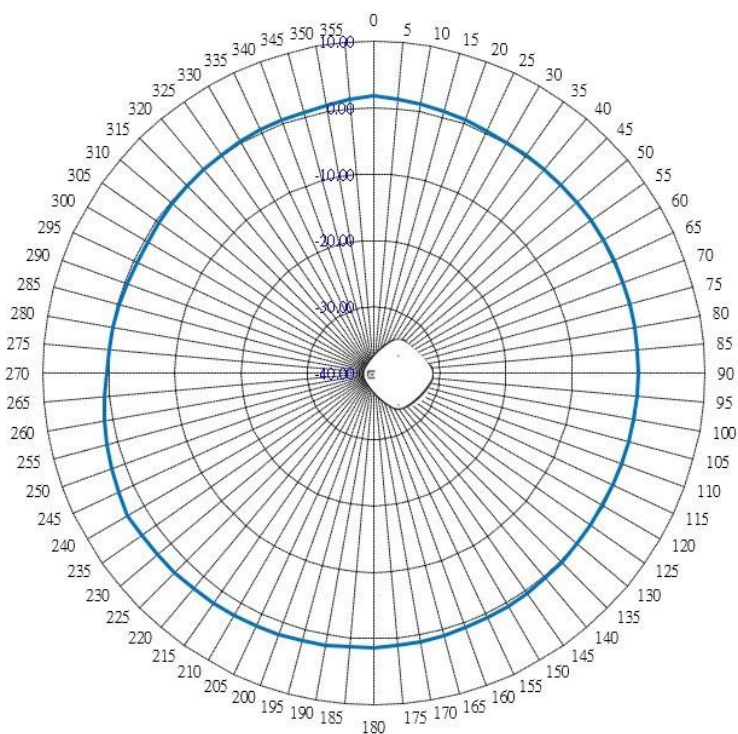


Figure 8: AP4020X 6 GHz Horizontal Radiation Pattern

BLE Radio 1 Radiation Patterns

The following diagrams illustrate the radiation patterns for the AP4020X BLE radio 1.

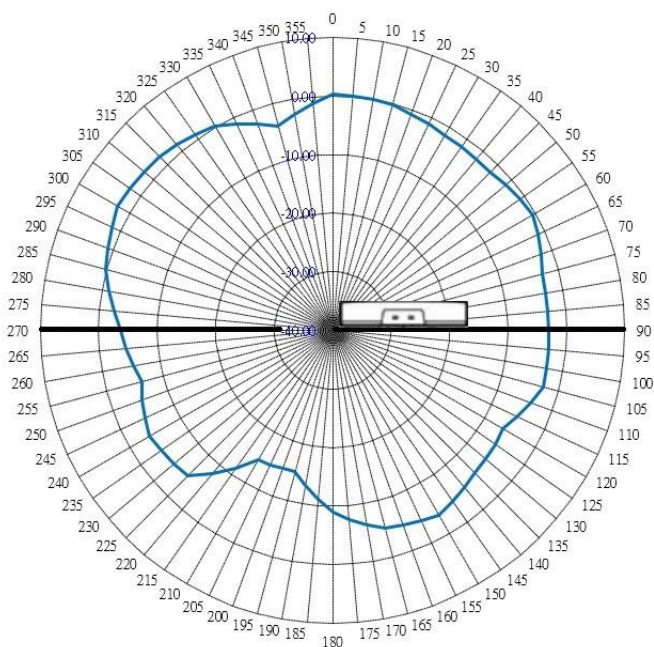


Figure 9: AP4020X BLE Radio 1 Vertical Radiation Pattern

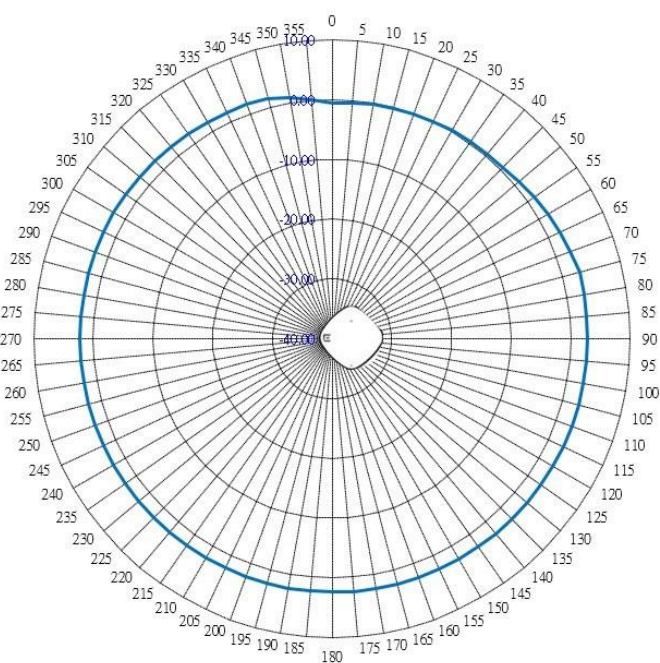


Figure 10: AP4020X BLE Radio 1 Horizontal Radiation Pattern

BLE Radio 2 Radiation Patterns

The following diagrams illustrate the radiation patterns for the AP4020X BLE radio 1.

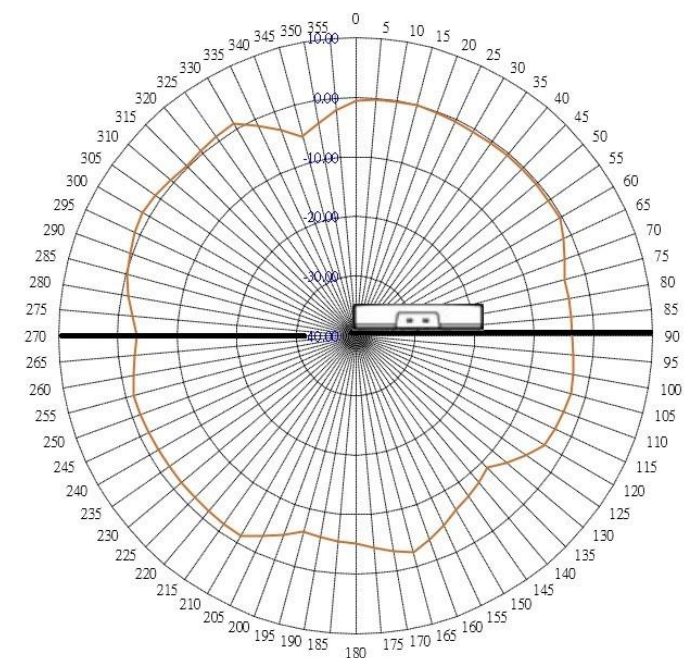


Figure 11: AP4020X BLE Radio 2 Vertical Radiation Pattern

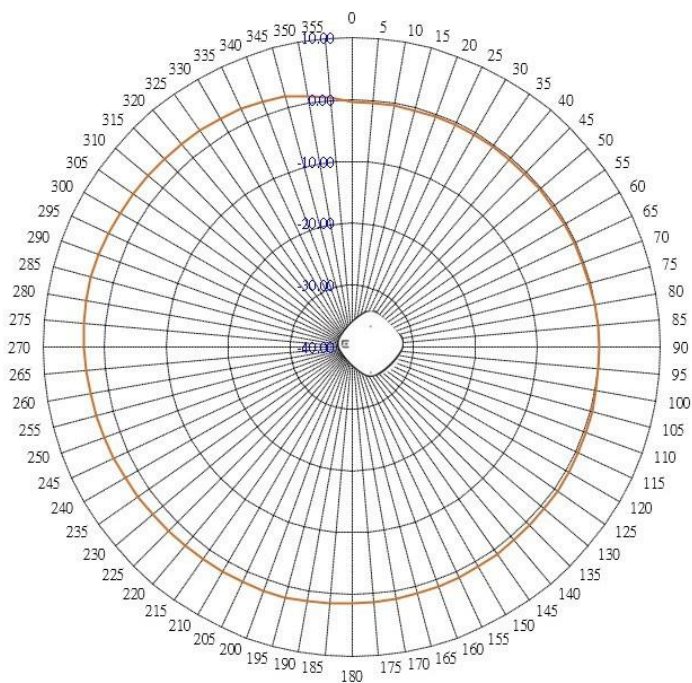


Figure 12: AP4020X BLE Radio 2 Horizontal Radiation Pattern

Sensor Radiation Patterns

The following diagrams illustrate the radiation patterns for the AP4020X sensor.

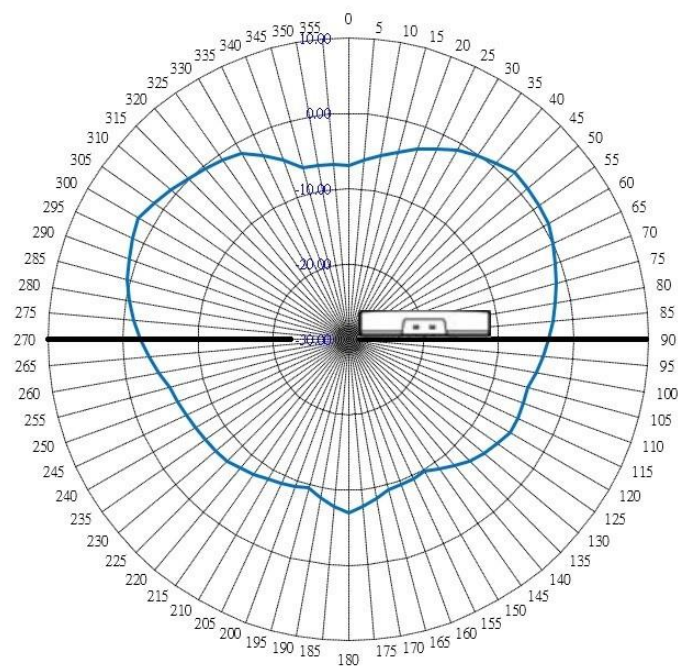


Figure 13: AP4020X 2GHz Sensor Vertical Radiation Pattern

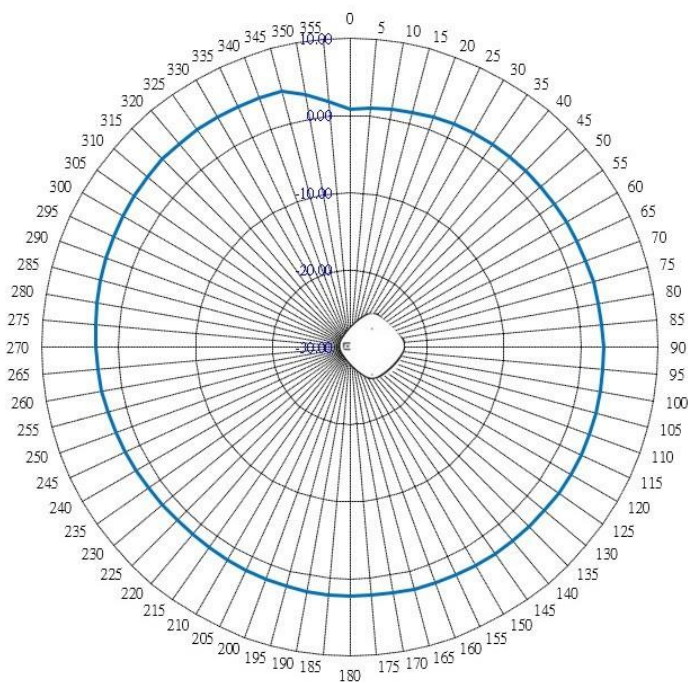


Figure 14: AP4020X 2GHz Sensor Horizontal Radiation Pattern

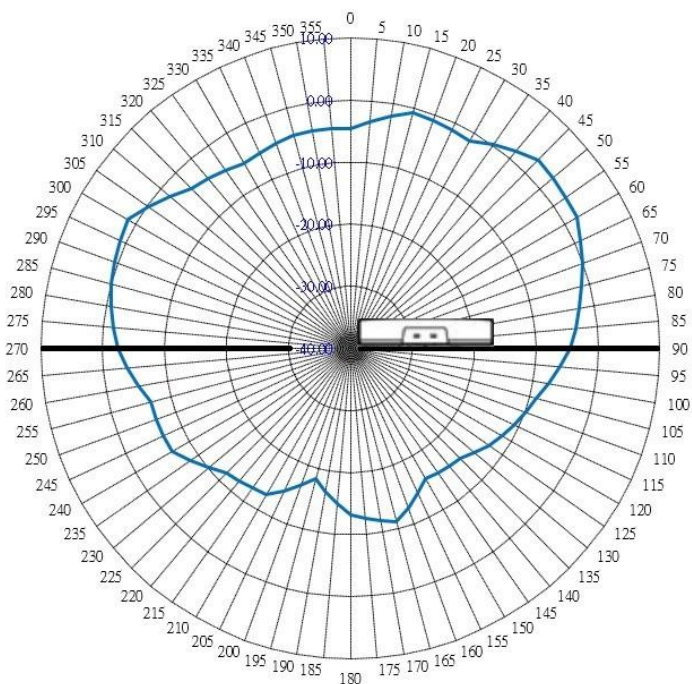


Figure 15: AP4020X 5GHz Sensor Vertical Radiation Pattern

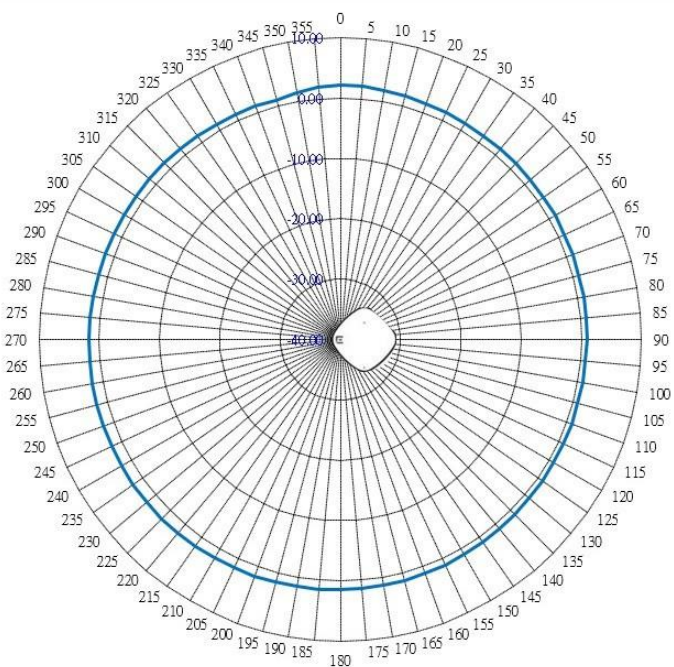


Figure 16: AP4020X 5GHz Sensor Horizontal Radiation Pattern

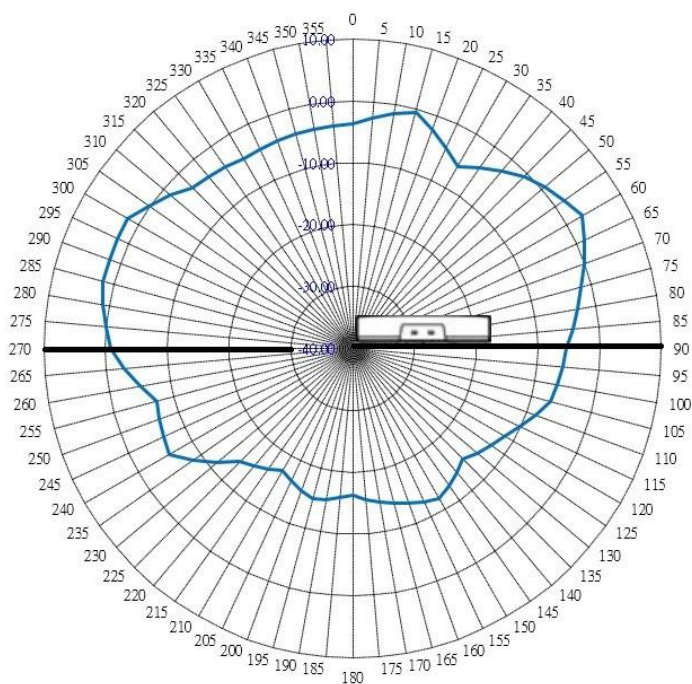


Figure 17: AP4020X 6 GHz Sensor Vertical Radiation Pattern

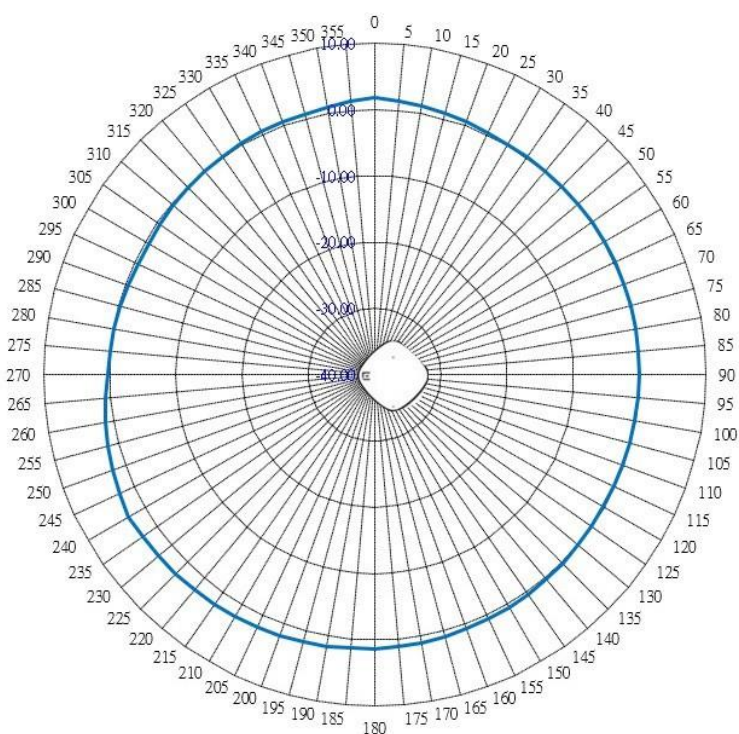


Figure 18: AP4020X 6 GHz Sensor Horizontal Radiation Pattern

Ports, Connectors, and Hardware Features

The AP4020X has the following ports, connectors, and hardware features:

- One console port.
- One 12-volt DC connector.
- One Kensington security slot.
- USB 2.0: Type A, 5V/500mA with PoE 802.3at.
- Two Ethernet ports with RJ45 connectors:
 - Eth0: 100/1000/2500/5000Mbps autosensing link speed Ethernet port, PoE PD.
 - Eth1: 100/1000/2500Mbps autosensing link speed Ethernet port, PoE PD.
 - 802.3az Energy-Efficient Ethernet (EEE).
 - USB 2.0: Type A, 5V/500mA with PoE 802.3at.

Hardware Ports - Front

The following table and graphic show the available ports on the front of the AP.

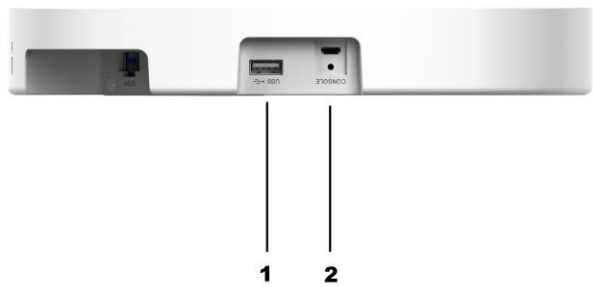


Figure 19: Front Ports and Connectors

Table 5: AP4020X Front Ports and Connections

Item	Port	Description
1	2.0 USB type A	Used with a thumb drive or other external device.
2	Console port	Micro USB console port for a serial connection between your management system and the access point. Use the port when you troubleshoot the AP. Tip: The best practice is to use the Extreme Networks micro USB cable (ACC-WIFI-MICRO-USB). When you connect to the device, the management station must have a VT100 emulation program, such as the terminal emulator TeraTerm Pro or Hilgraeve HyperTerminal. Set your baud rate to 115200. Note: The console port can only be used with the Extreme Networks console cable. You will damage the AP if you use another cable.

Hardware Ports - Rear

The following table and graphic show the available ports on the rear of the AP.

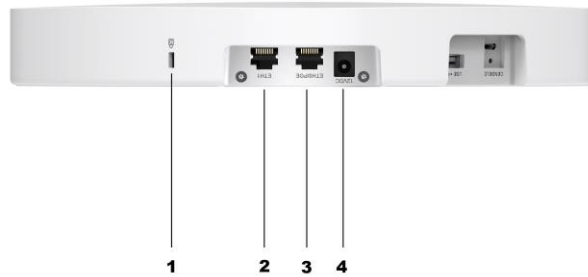


Figure 20: Rear Ports and Connectors

Table 6: AP4020X Rear Ports and Connections

Item	Description	Use
1	Kensington security slot	A security feature that prevents someone from removing the AP. This is an optional task
2	ETH1 port	Ethernet port.
3	ETH0/PoE port	Ethernet port.
4	12VDC	12-volts of direct current.

LED Descriptions

The LED status light shows the AP's operating status. A solid white means that the AP is working normally. A solid or blinking amber indicates an issue.

The following table shows the LED states based on your firmware platform.

Table 7: ExtremeCloud IQ LED Activity

Status	Activity
Dark	Power is off.
Solid white	The device power is on and the AP is ready to use. The device has successfully established a Control And Provisioning of Wireless Access Points (CAPWAP) connection to ExtremeCloud IQ and is operating normally.
Slow-blinking white	The device has a CAPWAP connection to ExtremeCloud IQ, but is operating on 802.3at power instead of 802.3bt power.
Solid amber	The power is on and the AP is in boot up mode, or is running without a CAPWAP connection.

Table 7: ExtremeCloud IQ LED Activity (continued)

Status	Activity
Slow-blinking amber	The device has no CAPWAP connection to ExtremeCloud IQ, and is operating on 802.3at power instead of 802.3bt power.
Fast-blinking amber	The IQ Engine firmware is updating.

Table 8: ExtremeCloud IQ Controller LED Activity

Status	Activity
Dark	Power is off or the AP is taken over by the controller. Configuration pushes down to AP from controller to turn off the LED.
Solid white	The AP is starting up or is already taken over by the controller.
Slow-blinking white	The AP is being taken over by the controller or has failed to be taken over by the controller.
Flashing fading white	Configuration pushes down to AP from controller helping the user locate the AP by sight.
Solid amber	A firmware upgrade is occurring.
Fast-blinking amber	The AP is acquiring the DHCP IP.

Radios

The AP4020X has a quad-radio design with three 2x2:2 radios (6 GHz, 5 GHz, and 2.4 GHz bands), a dedicated sensor and dual IoT radios.

Operational Modes:

- Mode 1: 2.4 GHz / 5 GHz/6 GHz data radios and sensor
- Mode 2: 2.4 GHz, and dual 5 GHz, and sensor

Max Users:

- SSID per Radio/Total: 16/48
- Users per Radio/total: 512/1536

Power Profile

The following tables show the AP4020X power profiles for the radio modes. Use this information to plan for power consumption as you deploy your APs.

Table 9: AP4020X 802.3at Power Droffilg - Power Status Normal

	Radio 1	Radio 2	Radio 3	1x1 Sensor	Ethernet Port	USB (2.5)	USB (5.0)
Radio Mode 1	(2.4G) 17dBm, 2x2	(5G) 18dBm, 2x2	(6G) 18dBm, 2x2	Yes	Yes	Yes	No
Radio Mode 2	(2.4G) 17dBm, 2x2	(5GH) 16dBm, 2x2	(5GL) 16dBm, 2x2	Yes	Yes	Yes	No

Table 10: AP4020X 802.3at Power Droffilg - Power Status High

	Radio 1	Radio 2	Radio 3	1x1 Sensor	Ethernet Port	USB (2.5)	USB (5.0)
Radio Mode 1	(2.4G) 17dBm, 2x2	(5G) 18dBm, 2x2	(6G) 18dBm, 2x2	Yes	Yes	Yes	Yes
Radio Mode 2	(2.4G) 17dBm, 2x2	(5GH) 16dBm, 2x2	(5GL) 16dBm, 2x2	Yes	Yes	Yes	Yes

Table 11: AP4020X 802.3af Power Droffilg - Power Status Low

	Radio 1	Radio 2	Radio 3	1x1 Sensor	Ethernet Port	USB (2.5)	USB (5.0)
Radio Mode 1	(2.4G) 17dBm, 2x2	No	No	Yes	Yes	No	No
Radio Mode 2	(2.4G) 17dBm, 2x2	No	No	Yes	Yes	No	No

Table 12: AP4020X Available Radio Modes

	Radio 1	Radio 2	Radio 3	Scan Radio
Radio Mode 1	2.4GHz - Full	5GHz - Full	6GHz - Full	1X1 Sensor
Radio Mode 2	2.4GHz - Full	5GHz - Full	5GHz - Full	1X1 Sensor

Power Options

The AP4020X supports the following power options:

- Power Draw: 802.3at PoE - Typical 21W with USB 2.5W; Max: 25.5W 2.5W USB
- Power Draw: 802.3bt - Max: 28W with 5W USB
- 12V DC/3A. DC power has priority when both DC and PoE power sources are available
- PoE Failover

Enclosure

The AP4020X has a plastic top with an aluminum bottom. For cleaning guidelines, see [Cleaning Guidelines](#).

Security

The AP4020X supports Wi-Fi Alliance WPA3 security certifications. Use Extreme Fabric Attach for provisioning and deployment to a Fabric Connect-enabled switch.

The access point also supports the following security features:

- A L2-L7 DPI firewall
- Tri-frequency security
- Private Pre-Shared Key (PPSK) for Cloud deployment
- Location analytics sensor

Accessories

The AP4020X comes with the AH-ACC-BKT-AX-TB mounting bracket that can be used to mount the access point on flat t-bar ceiling grids and flat surfaces, such as Prelude ceilings (15/16 in. ceiling grid), Suprafine ceilings (flat bottomed 9/16 in. ceiling grid), and walls. The ceiling tile sides must be flat.

Mounting Accessories

The following table lists the supported mounting accessories. For more information, see the [Wi-Fi6 11ax Accessories Installation Guide](#).

Table 13: Supported Mounting Accessories

Item	Description
AH-ACC-BKT-AX-TB	Mounting bracket that can be used to mount the access point on flat surfaces such as Prelude ceilings (15/16 in. ceiling grid), Suprafine ceilings (flat bottomed 9/16 in. ceiling grid), and walls. Note: AH-ACC-BKT-AX-TB is included with the access point.
AH-ACC-BKT-AX-IL	Mounting bracket for Interlude ceilings (9/16 in. wide T-bar with center protrusion).

Table 13: Supported Mounting Accessories (continued)

Item	Description
AH-ACC-BKT-AX-SL	Mounting bracket for Silhouette ceilings (ceiling grid with 1/8 in. or 1/4 in. bottom opening).
AH-ACC-BKT-AX-WL	Mounting bracket for direct-to-wall installations when a 1.25 in. of space is desired between the wall and the access point.
ACC-BKT-TB-NF	Mounting bracket for 15/16 in. wide T-bars with sculpted ceiling tiles.
AH-ACC-BKT-916-KIT	Mounting bracket for 9/16 in. wide T-bars with sculpted ceiling tiles.
ACC-BKT-AX-BEAM	Mounting bracket for beam mounting.
ACC-BKT-AX-JB	Mounting bracket for junction box or wall mounting.
ACC-BKT-AX-WNGADAPT	Adapter bracket for Cloud AP to WiNG Mounting Plate (37201). Ships in a pack of 10.

Power Accessories

You can power the access point through the ETH0 RJ45 Ethernet port. But if you need to power the AP with an external power supply, you can purchase a 12V DC power supply.

For more information, see the [Wi-Fi6 11ax Accessories Installation Guide](#).

Table 14: Power Accessories

Part number	Description
37219	PWR 12V DC, 3A, 2.5mm x 5.5mm connector

Other Accessories

The following table shows the additional accessories available for your access point.

For more information, see the [Wi-Fi6 11ax Accessories Installation Guide](#).

Table 15: Other Supported Accessories

Part number	Description
ACC-WIFI-MICRO-USB	Extreme Networks micro USB cable. Note: When you connect to the device using the micro USB Console port, the management station from which you connect to the device must have a VT100 emulation program, such as TeraTerm Pro (a free terminal emulator) or Hilgraeve HyperTerminal. Set your baud rate to 115200.

MAC Address

The media access control address (MAC address) is located on the bottom of the access point. You can record the address for your company's records by scanning the code.



Figure 21: MAC Address Location

Micro USB Console

Use the console port to make a serial connection between your management system and the access point. You can order a micro USB console adapter for your access point using the part number ACC-WIFI-MICRO-USB.



Note

When you connect to the Micro USB console port, the management station from which you connect to the device must have a VT100 emulation program, such as TeraTerm Pro (a free terminal emulator) or Hilgraeve HyperTerminal (provided with Windows operating systems from XP forward).

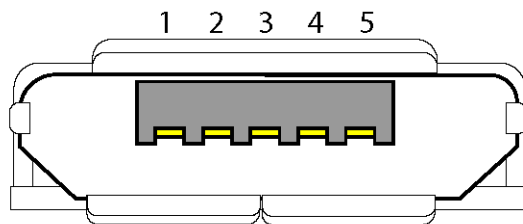


Figure 22: Micro-B model Console Port Pin Information

Table 16: Micro-B USB Pin Information

Pin number	Pin name and description
1	NC
2	RxD (input to access point)
3	TxD (output to terminal)
4	Signal (GND)
5	Signal (GND)

Cleaning Guidelines

You can clean your AP with the following solutions:


- Hydrogen peroxide (a 3% solution)
- Chlorine bleach
- Sodium hypochlorite (a 0.05% solution)
- Ethyl alcohol (a 75% solution)
- Isopropyl alcohol (a 75% solution)
- White vinegar
- Sporidical (peracetic acid; a 0.5% solution)
- Water
- Baking soda (a 3:1 solution)
- Non-abrasive soap



Note

Do not wash or immerse the AP in a liquid as you will damage the device and void the warranty. Instead, wipe the plastic housing - also called the radome - with a damp cloth avoiding the ports and connectors.

Do not power wash the AP.

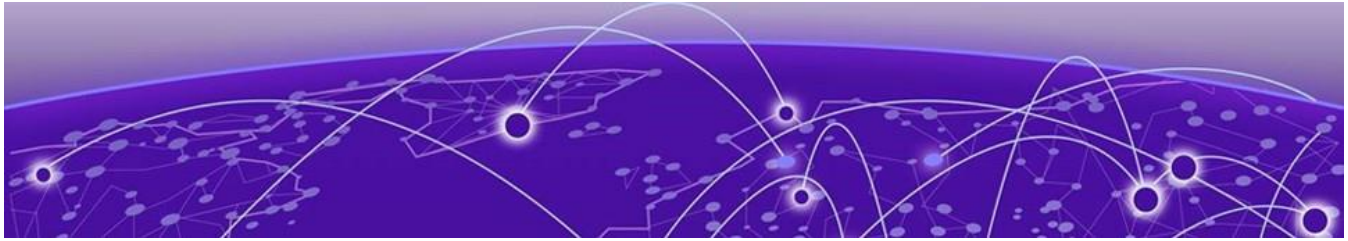

Installation

[Installation Workflow](#) on page 30
[Pre-Installation Tasks](#) on page 32
[Box Contents](#) on page 33
[Position the Access Point before Installation](#) on page 33
[Install the Access Point on a Wall or a Flat Ceiling](#) on page 34
[Install the Access Point to a Wall with AH-ACC-BKT-AX-WL](#) on page 35
[Install the Access Point on a Standard Flat Ceiling Rail with Sculpted Ceiling Tiles](#) on page 35
[Install the Access Point on a Silhouette Ceiling](#) on page 37
[Install the Access Point to a 9/16-inch T-bar Ceiling](#) on page 39
[Install the Access Point on a 15/16-inch T-bar](#) on page 41
[Install the Access Point on a Junction Box](#) on page 43
[Install the Access Point on a Beam](#) on page 45
[Connect a Power Supply](#) on page 47
[Nonstandard Ceiling or Wall](#) on page 49
[Lock Your Access Point](#) on page 53
[Onboard the Access Point with the ExtremeCloud IQ Mobile Onboarding App](#) on page 54

The AP4020X is an indoor access point that can be installed on a ceiling rail, on non-standard ceilings, and on a wall. For more information about selecting the right access point bracket and accessory for your installation needs, see the *Extreme Networks 11.ax Access Points Accessories Guide*.

Installation Workflow

Access points are automatically added to your network when the DHCP and DNS prerequisites have been met. But you can save time and configure the AP before you

install it with the pre-provision mode. You can revert the AP to production mode when you are ready for deployment.



Note

Confirm that Domain Name System (DNS), Network Time Protocol (NTP), and the firewall ports are configured and available before deployment. Create a firewall rule to allow outbound traffic from Extreme Networks devices. For more information about firewalls, see [Firewall Configuration Guides](#).

You should configure the DHCP options on your DHCP server to assign an allowed NTP server to Extreme Networks devices. Both DNS and NTP are critical for country and region detection and certificate validation. For more information about DNS and NTP, see *ExtremeCloud IQ Controller Deployment Guide* for Cloud deployment and *Extreme Campus Controller Deployment Guide* for Campus or on-premises deployment.

For more information on deployment, see the Knowledge Base article [How to deploy a new Access Point or replace a faulty Access Point to your ExtremeCloud IQ Controller](#). AP deployment is also documented in [ExtremeCloud IQ Controller documentation](#) and the [IQ Engine documentation](#).

Use the information in the following table to help you install your access point.

Table 17: Installation Work flow

Steps	Action	Purpose
1	Verify the box contents .	Confirm that your AP and accessories arrived complete and undamaged.
2	Install the access point to one of the following: • Wall or flat ceiling • Wall with AH-ACC-BKT-AX-WL Bracket • Standard ceiling • Nonstandard Ceiling or Wall • Wall with AH-ACC-BKT-AX-WL • Silhouette ceiling • Interlude ceiling • 15/16-inch T-bar • Junction Box • Beam	Install the AP on a ceiling or wall, and connect the network cable. If you use Power over Ethernet (PoE), then the AP powers up. The AP begins a discovery process to determine its own IP address and the IP address of the controller. When the discovery process is successful, the AP registers with the controller. For more information, see the following articles: • Access points failing the Wireless Controller discovery process • How to Onboard, Switch, and Troubleshoot the Universal AP modes between IQE (ExtremeCloud IQ Engine) and WiNG modes?
3	(Optional) Connect to a power supply .	Connect to an external 12-volt DC power supply if you are not using Power over Ethernet (PoE). Note: Your Extreme AP must be grounded so it can be used safely. Consider this requirement when you plan your deployment.
4	(Optional) Lock the access point .	Secure the AP and prevent someone from removing it.

Table 17: Installation Work flow (continued)

Steps	Action	Purpose
5	(Optional) Onboard the AP with the ExtremeCloud IQ Mobile Onboarding application.	Scan the QR code or bar code on the back of the device and begin the onboarding process.
6	Confirm that the LED is white.	A white LED indicates that your AP has powered up and registered with the Cloud. An amber light indicates a technical issue that requires a resolution. See the Led Descriptions section in the "Overview" chapter for an explanation of the LED states.

Pre-Installation Tasks

Extreme Networks Access Points have been designed for quick and easy deployment. But you can make the process even easier with a little preparation.

Site Survey

Before you install your AP, do a site survey and coverage map so you have identified and addressed any potential issues.

Ask yourself the following questions:

- What is the WLAN's purpose?
- What applications will be used over the WLAN?
- Who will use the WLAN?
- What devices will be connecting to the WLAN?
- Are there any mounting or aesthetic restrictions?

Consider the following items as you plan your deployment:

- Capacity and coverage requirements.
- Existing issues such as RF interference and dead zones
- Existing networks or devices that can interfere with your network. There could be interference from floors above and below, or from outside sources such as nearby office buildings.
- Antenna radiation patterns. Consider the patterns as you decide where to place your APs, their orientation, and their configuration.

For more information on site surveys, see the Knowledge Base article [What is Wireless Site Survey and why is it important?](#)

Other

Perform the following tasks:

- If you plan to use Power over Ethernet (PoE) then confirm that it meets the AP's requirements. See [Power Profile](#).
- Document the switch and ports used by the AP with LLDP protocol.

- Confirm cables meet or exceed the required specifications.
- Check that the AP power ups correctly.

Box Contents

Your Extreme access point ships with everything that you need for a basic installation. All optional brackets and accessories are sold separately.

Confirm that you have received the following items before you install your device.

Table 18: Hardware

Quantity	Item
1	Extreme AP4020X access point
1	Regulatory document for your access point
1	AH-ACC-BKT-AX-TB mounting bracket
2	Phillips pan head wood screws
2	Phillips head plastic screw-in anchors

Position the Access Point before Installation

About This Task

Use the red dot on the back of the access point and the bracket to help you with installation.

Procedure

Line up the red dot on the access point and the bracket for ease of installation.

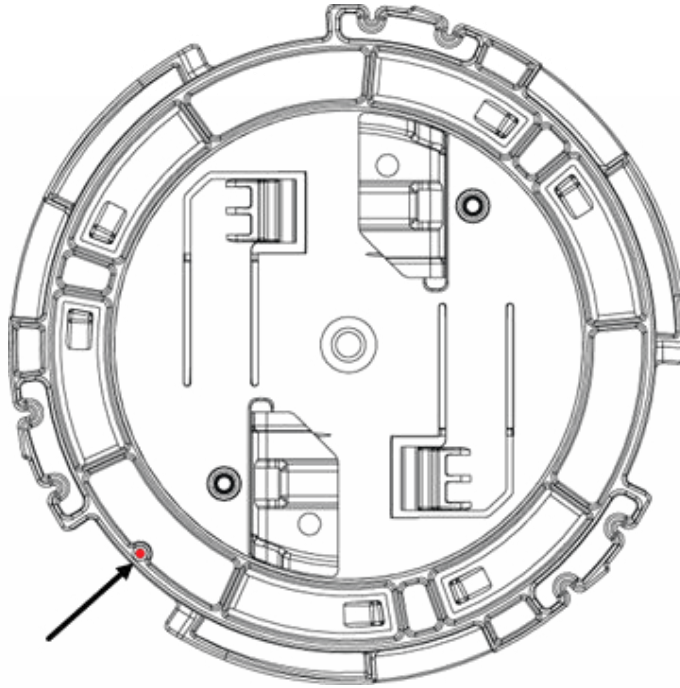


Figure 23: AH-ACC-BKT-AX-TB bracket red dot

Install the Access Point on a Wall or a Flat Ceiling

Before You Begin

Confirm that you have the following items:

- The access point
- One (1) AH-ACC-BKT-AX-TB mounting bracket. The bracket is used for flat surface wall or solid ceiling installation.
- Two (2) M3.5 pan head wood screws and two screw-in anchors.

About This Task

Follow these steps when you install the access point on a wall or solid ceiling.

Procedure

1. Mark and drill two mounting holes.
Use the AH-ACC-BKT-AX-TB mounting bracket as a template.
2. Attach the bracket to the wall.
Use the two M3.5 pan head screws. Use push-in anchors or screw-in anchors for drywall or plastic board installations.
3. Attach the access point to the bracket.
Align the red dots on the bracket and the access point base.
4. Press and rotate the AP one-sixth turn clockwise.
The AP clicks into place on the bracket.

5. Attach the network cable and power-up the AP.

If you use Power over Ethernet (PoE) then attach the network cable to the ETH0 port. If you use Power Sourcing Equipment (PSE), then connect the power supply and attach the network cable to the ETH0 port.

Install the Access Point to a Wall with AH-ACC-BKT-AX-WL

Before You Begin

You need the following items:

- AP4020X
- One (1) AH-ACC-BKT-ASM wall accessory, purchased separately.
- Four (4) shoulder M5 bolts.
- Four (4) M5 mount screws and screw-in anchors, provided by the installer.

About This Task

Use the AH-ACC-BKT-AX-WL bracket when you need a 1.25 inch space between the wall and the access point. If you want less space, use the AH-ACC-BKT-AX-TB that comes with the AP.

Procedure

1. Using the -WL bracket as a template, mark and drill mounting holes on the wall.
2. Bring the LAN cable from the wall through the bracket hole.

Align the cable before attaching the bracket to the wall.



Note

A standard Ethernet cable can be used if you do not mind the cable being visible. To hide the Ethernet cable, a flat cable and a cable cap are required.

3. Attach the wall bracket to the wall using three M3.5 screws and three screw-in anchors.
4. Align the access point red dot against the three red dots on the -WL bracket.
5. Press and rotate the access point clockwise about one-sixth turn until it locks into place on the bracket.
6. Attach the network cable.

Install the Access Point on a Standard Flat Ceiling Rail with Sculpted Ceiling Tiles

Before You Begin

The following hardware is required for a standard ceiling rail installation:

- An access point
- One AH-ACC-BKT-AX-TB mounting bracket for prelude T-bar ceiling installation, that is shipped with the access point

About This Task

The access points ship with a mounting bracket for standard 15/16" (24mm) wide t-bars or 9/16" (14mm) wide t-bar rails. For non-standard ceiling rail installations, see [Non-Standard Ceiling Grid or Wall Installation](#).

Procedure

1. Remove the ceiling tiles.
2. Align the bracket on the ceiling rail in such a way that the bracket metal hinges are almost parallel to the sides of the ceiling rail.
3. Rotate the accessory clockwise until the metal hinges hook over the edge of the rail and the white tabs click in place.



Note
There are two white tabs on the back of the bracket that holds on to the ceiling rail. Use your finger to push and unhook one side of the white tab if you want to remove the bracket from the ceiling rail.

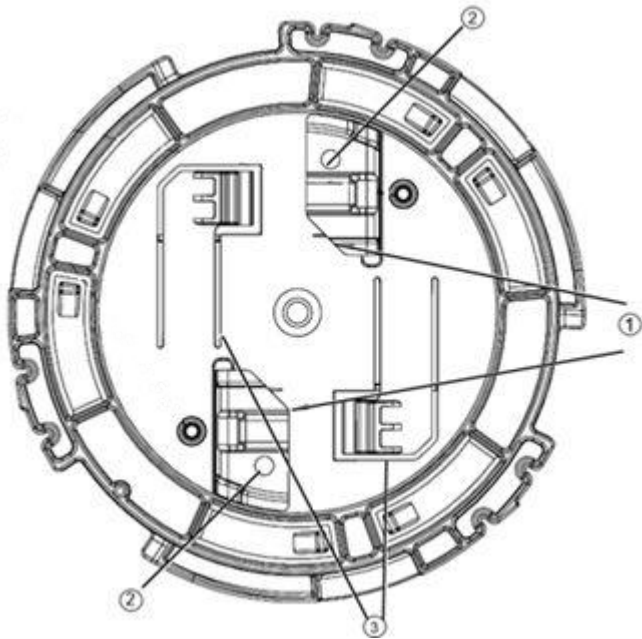


Figure 24: AH-ACC-BKT-AX-TB bracket

Table 19: AH-ACC-BKT-AX-TB bracket parts description

Callout	Description
1	Metal hinges on the AH-ACC-BKT-AX-TB bracket
2	Mounting holes for wall mounting
3	White tab on the AH-ACC-BKT-AX-TB bracket

4. Attach the LAN cable Ethernet plug to the appropriate AP Ethernet receptacle.

5. Align the red dot on the back of the access point against the bracket red dot.

**Note**

The bracket has a circular tip that fits into the circular depression on the back of the access point.

6. Press and rotate the access point 1/8th turn clockwise until it clicks into place on the bracket.

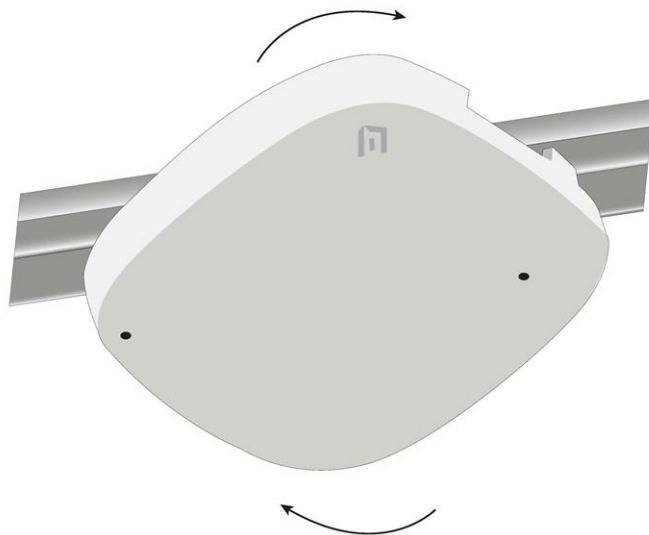


Figure 25: Access point ceiling install

7. Attach the Cat6 RJ45 cable to the ETH0 or ETH1 port.
8. Replace the ceiling tiles.

Install the Access Point on a Silhouette Ceiling

Before You Begin

You need the following items:

- One access point
- One AH-ACC-BKT-AX-SL bracket

About This Task

You can mount the access point to a ceiling grid with 1/8 in. or 1/4 in. bottom opening.

Silhouette is an Armstrong Ceiling Solutions name.

Procedure

1. Remove the ceiling tiles.
2. Place the bracket on the ceiling rail in such a way that the accessory metal hinges are almost perpendicular to the sides of the ceiling rail with the ceiling rail over the center hole.

- 3. Lightly push onto to the ceiling rail and rotate the accessory clockwise until the hinges hook over the edge of the rail and the white tabs click in place.



Note
There are two white tabs in the back of the bracket that holds on to the ceiling rail. Use your finger to pull and unhook one side of the white tab if you want to remove the accessory from the ceiling rail.
Gently rotate the bracket counterclockwise and if there is resistance, the other white tab in the back of the accessory must also be released.

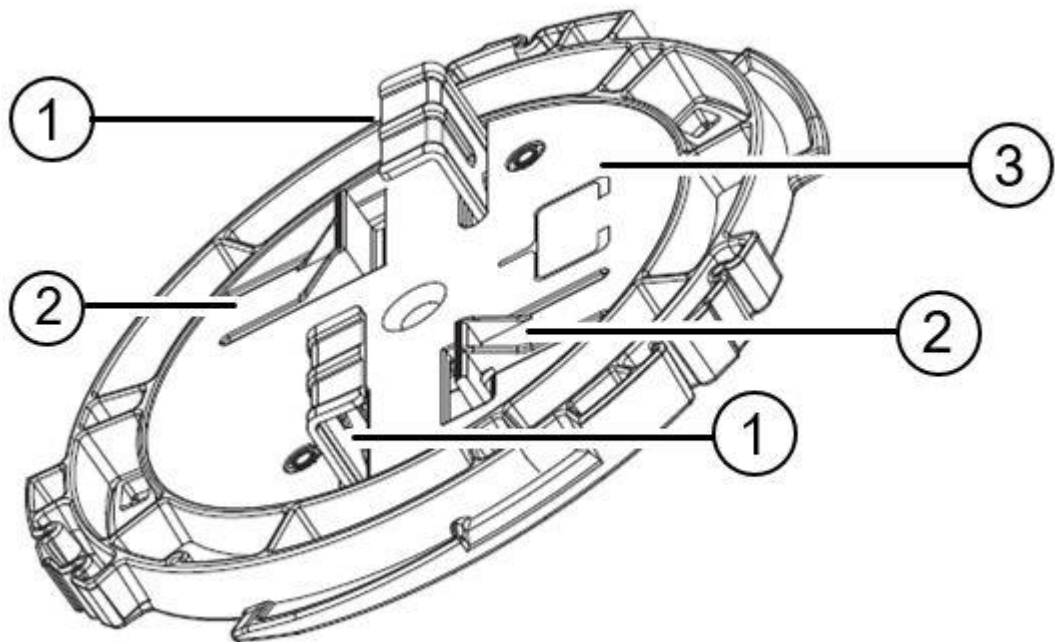


Figure 26: AH-ACC-BKT-AX-SL Accessory Bracket

Call out	Description
1	Metal hinges on the AH-ACC-BKT-AX-SL bracket.
2	White tabs on the AH-ACC-BKT-AX-SL bracket.
3	Drawing of 1/8 in. or 1/4 in. ceiling grid, for your reference.

- 4. Align the red dot on the back of the access point against the accessory bracket red dot.



Note
The accessory has a circular tip that fits into the circular depression on the back of the access point.

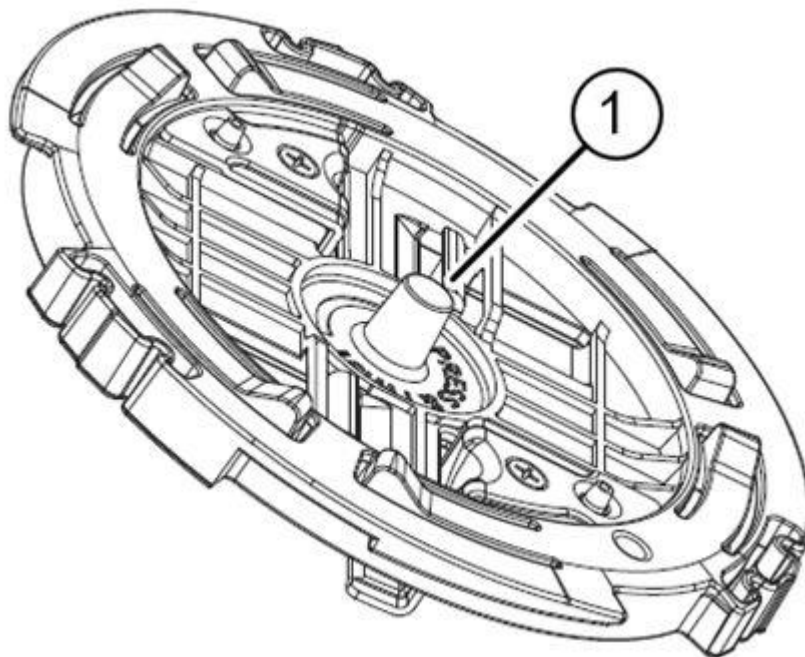


Figure 27: AH-ACC-BKT-AX-SL Accessory Bracket Circular Tip

Call out	Description
1	AH-ACC-BKT-AX-SL bracket circular tip

5. Press and rotate the access point clockwise until it locks into place on the accessory.
6. Connect the network cable.
7. Remove the ceiling tiles.

Install the Access Point to a 9/16-inch T-bar Ceiling

Before You Begin

You need the following items:

- One AP4020X access point
- One AH-ACC-BKT-AX-TB accessory bracket if the t-bar bottom is flat
- One AH-ACC-BKT-AX-IL accessory bracket if there is a protrusion in the center of the t-bar bottom

About This Task

You can mount the access point to a ceiling that has a 9/16 in. wide T-bar.

Procedure

1. Remove the ceiling tiles.
2. Place the bracket on the ceiling rail in such a way that the accessory center is over the protrusion and the metal hinges are between perpendicular and about one-eighth of a turn from the sides of the ceiling rail.

3. Push up gently and rotate the bracket clockwise until the hinges hook over the edge of the rail and the white tabs click in place.



Note

There are two white tabs in the back of the accessory bracket that holds on to the ceiling rail in place. Use your finger to pull and unhook one side of the white tab if you want to remove the accessory from the ceiling rail.

Gently rotate the bracket counterclockwise and if there is resistance, the other white tab in the back of the accessory must also be released.

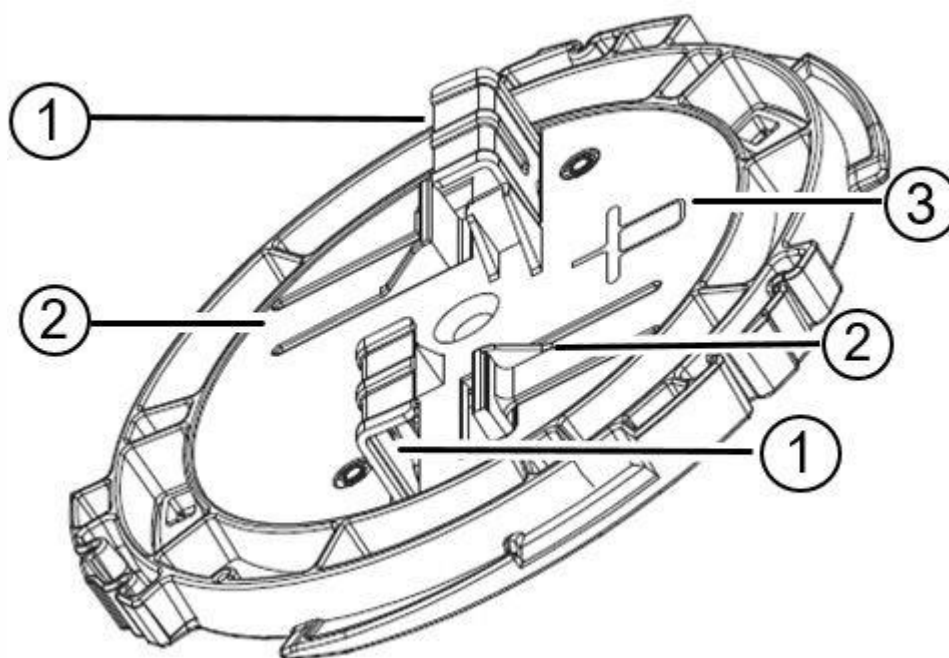


Figure 28: AH-ACC-BKT-AX-IL accessory bracket

Call out	Description
1	Metal hinges on the AH-ACC-BKT-AX-IL bracket.
2	White tabs on the AH-ACC-BKT-AX-IL bracket.
3	Drawing of 9/16 in. ceiling grid, for your reference.

4. Align the red dot on the back of the access point against the accessory red dot.



Note

The bracket has a circular tip that fits into the circular depression on the back of the access point.

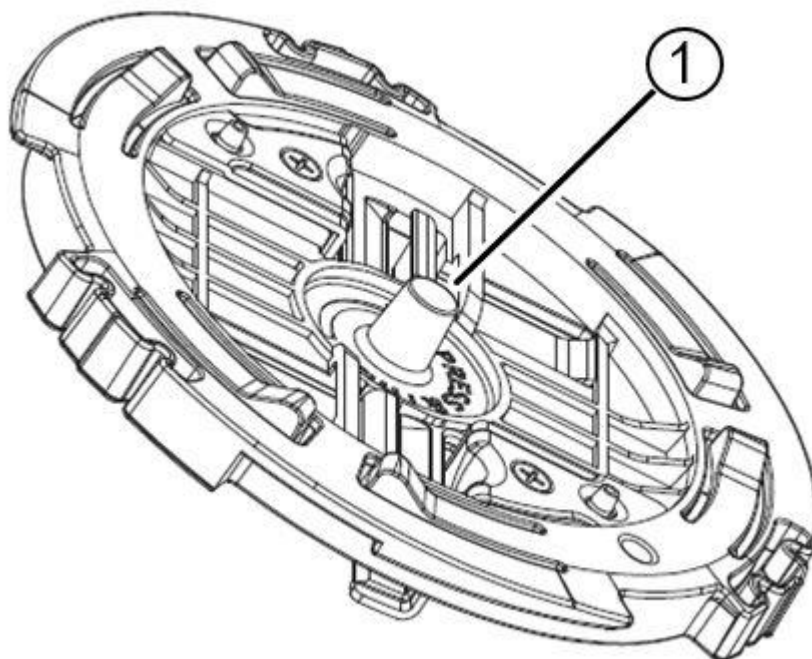


Figure 29: AH-ACC-BKT-AX-IL accessory bracket circular tip

Call out	Description
1	AH-ACC-BKT-AX-IL bracket circular tip

5. Press and rotate the access point clockwise about one-sixth of a turn until it locks into place on the accessory bracket.
6. Connect the network cable.
7. Place the cable cover over the Ethernet cable.
8. Replace the ceiling tiles.

Install the Access Point on a 15/16-inch T-bar

Before You Begin

Obtain the following items:

- One access point
- One ACC-BKT-TB-NF adapter
- One AH-ACC-BKT-AX-TB accessory

About This Task

Use the ACC-BKT-TB-NF bracket when you install the AP on a suspended ceiling with 15/16-inch grid system.

Procedure

1. Remove the ceiling tiles.

2. Using the adapter guide on the top half of the ACC-BKT-TB-NF adapter, align and attach the -NF on to the ceiling rail.
3. Slide the other part of the -NF adapter onto the half attached to the ceiling rail.
4. Attach the AH-ACC-BKT-AX-TB accessory onto the -NF adapter.
 - a. Center the -TB accessory on the attached -NF parts.
 - b. Push up and rotate the -TB accessory clockwise until the metal hinges hook over the bottom halves of the -NF adapter ends and the plastic tabs on the -TB accessory click into place.

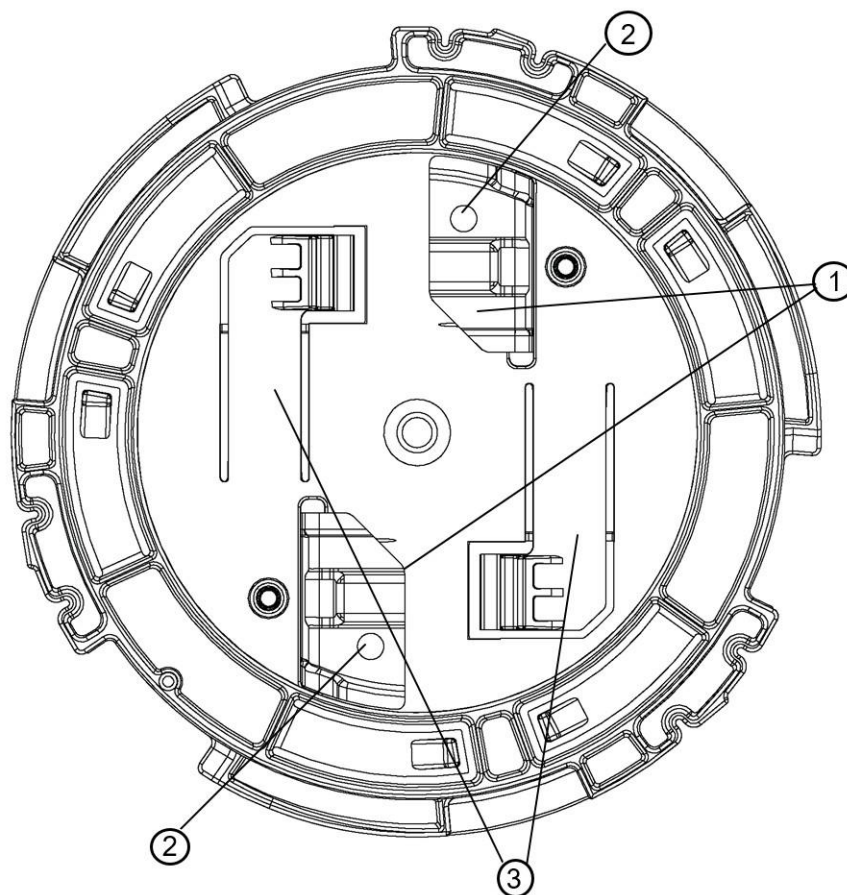


Figure 30: AH-ACC-BKT-AX-TB Accessory Bracket

Callout	Description
2	Mounting holes for wall mounting
3	White plastic tab on the AH-ACC-BKT-AX-TB bracket

5. Align the red dot on the back of the access point against the -TB bracket red dot.



Note

The bracket has a circular tip that fits into the circular depression on the back of the access point.

6. Press and rotate the access point one-eighth of a turn clockwise until it clicks into place on the accessory.
7. Connect the network cable.
8. Replace the ceiling tiles.

Install the Access Point on a Junction Box

Before You Begin

The following hardware is required to install an indoor access point on a junction box (box):

- An indoor access point
- ACC-BKT-AX-JB accessory

About This Task

Install the access point to a junction box if you want to power the AP using an electrical connection.

The ACC-BKT-AX-JB accessory bracket is used when you need to install the access point on an indoor junction box. The ACC-BKT-AX-JB access has two parts:

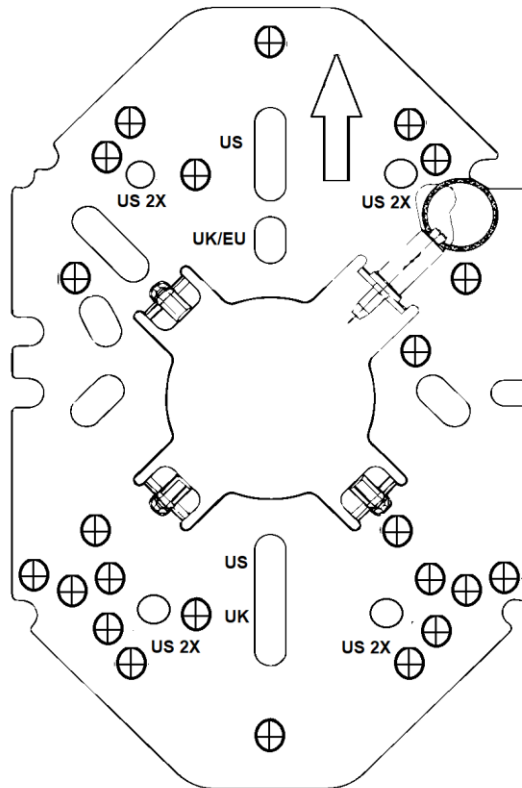


Figure 31: ACC-BKT-AX-JB Accessory Bracket Metal Part

Procedure

1. Remove the screws holding the junction box cover plate.
2. Remove the LAN cable from the cover plate.
3. Bring the LAN cable through the center hole of the metal bracket part.
The LAN wire must be in-between the metal part and the plastic part during installation.
4. Place the ACC-BKT-AX-JB accessory metal part, with the bracket holes against the cover plate of the box.
5. Using the screws removed from the cover plate, find the bracket holes that align with the junction box screw holes.



Important

The text for the holes must be normally readable.

6. Using the cover plate screws, attach the metal bracket part to the junction box.
7. Place the plastic part on the metal part, rotate it 1/4th to 1/3rd turn clockwise until you hear it click in place as the lock is set.



Important

When installed correctly on a wall, the side arrows on the plastic part must be pointing up.



Note

There is a metal pull ring in the metal part that is used to unlock and remove the plastic part.

To unlock the plastic part, pull out the pin's ring and turn the plastic part 1/3rd turn counter-clockwise and lift it apart.

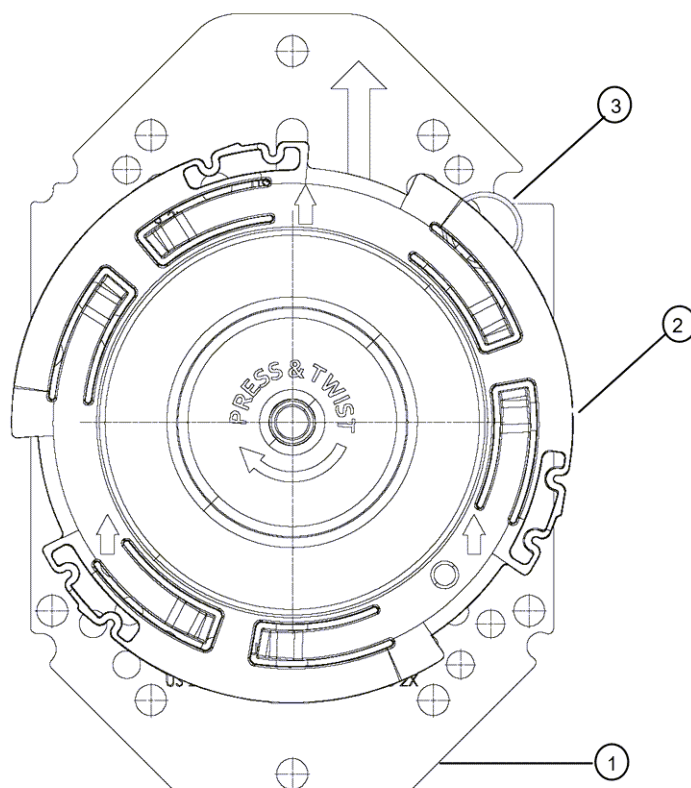


Figure 32: Junction Box Accessory Bracket Assembly

Callout	Description
1	Sheet-metal junction box hole metal part
2	Plastic twist plate part
3	Pull ring with 10 mm diameter ring for unlocking the plastic part

8. Align the red dot on the back of the access point against the red dot on the plastic part.
9. Push the access point onto the plastic part and turn it clockwise until you hear it lock in place.
10. Insert the RJ45 cable connector to the Ethernet connector on the access point.

Install the Access Point on a Beam

Before You Begin

The following hardware is required to install the access point on a beam:

- An indoor model access point
- ACC-BKT-AX-BEAM accessory

Find a location that supports the following requirements:

- The beam must be able to support the access point in all environmental conditions.
- The beam must be flat.
- Beam attachment area is at least 0.5 in. (12.7mm) wide and as long as the access point's largest dimension.
- Beam mounting surface is at least 0.040 in. (1.0 mm) thick, but less than 0.650 in. (16.5mm) thick.

About This Task

If you are installing the access point in a warehouse or other industrial environments, then you might have to install the AP on a beam instead of a ceiling.

Procedure

1. Align the red dot on the access point with the red dot on the accessory bracket.
2. Insert the plastic part posts into the access point back recess.
3. Push the access point onto the plastic part, and rotate the access point about one-sixth turn clockwise to make it lock in place.



Note

If you can turn or twist the access point, it was not locked in place properly. Remove the access point and attach it again until it locks in place.

4. Plug the RJ45 connector plug into ETH or ETH0, RJ45 connector receptacle on the access point.

If desired, flat Ethernet cables and caps may be used with all indoor access points.

- 5. Open the top screw as necessary and place the beam clip onto a beam.



Note
You must hold the access point when attaching the beam clip.

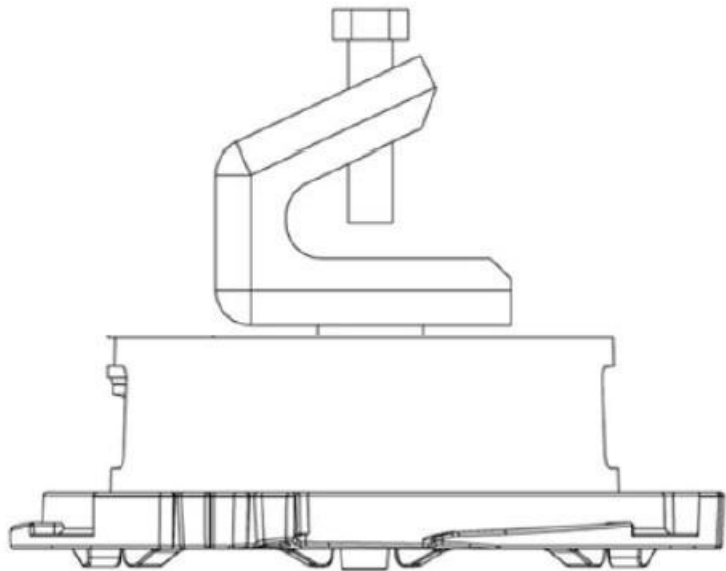


Figure 33: ACC-BKT-AX-BEAM Accessory Bracket

- 6. Tighten the beam clip top screw to a torque of 50 in-lbs.

Connect a Power Supply

Before You Begin

Obtain a Powertron 12V DC power supply. The power supply is ordered separately. See the table below.



Caution
Only use Extreme approved power supplies for your access point. Unapproved third-party components can damage your AP.

Table 20: Power Accessory

Part number	Description
37219	PWR 12VDC, 3A, 2.5 mm X 5.5 mm connector

About This Task

You can power the AP through the ETH0 RJ45 Ethernet port. But if you prefer an external power supply, then you can use the 12V DC power supply. See the [Power Profile](#) for power consumption specifications.

Figure 34: AP4020X 12V Port



Table 21: AP4020X 12V Port

Item	Description	Use
1	12V DC	12-volts of direct current.

Procedure



Plug the power supply into the 12-volt power connector.



Results




The LED on the top of the AP lights up. It should be white. If the LED is amber, then your AP has a technical issue.



Nonstandard Ceiling or Wall


The access point can be installed on a nonstandard ceiling grid using the following accessories:

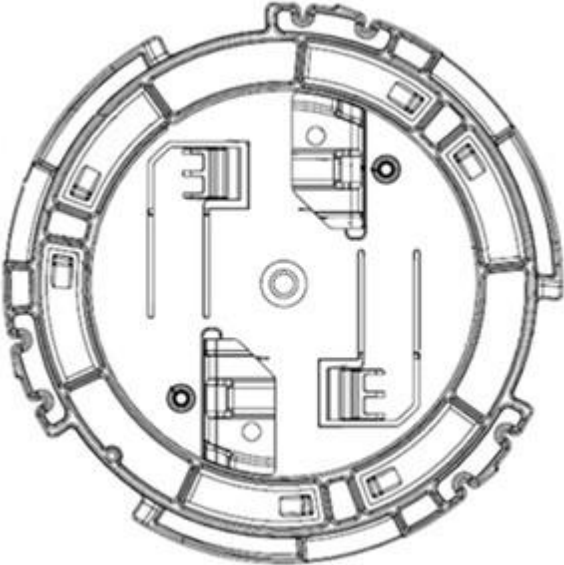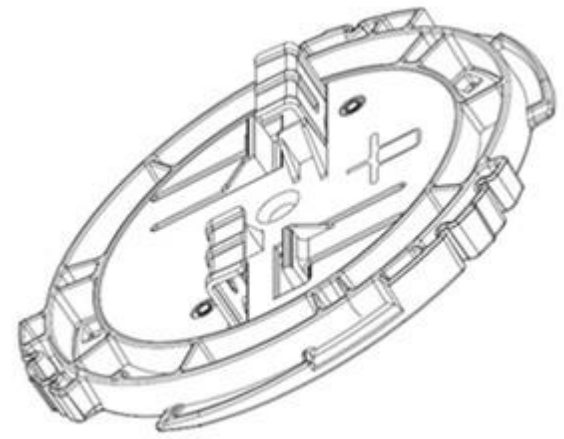Order part number	Description
AH-ACC-BKT-AX-TB Note: Only this bracket is included with the access point	Mounting bracket for 15/16 in. ceiling grid 
AH-ACC-BKT-AX-IL	Mounting bracket for 9/16 in. wide T-bar with protrusion, 9/16 in. ceilings, and walls 

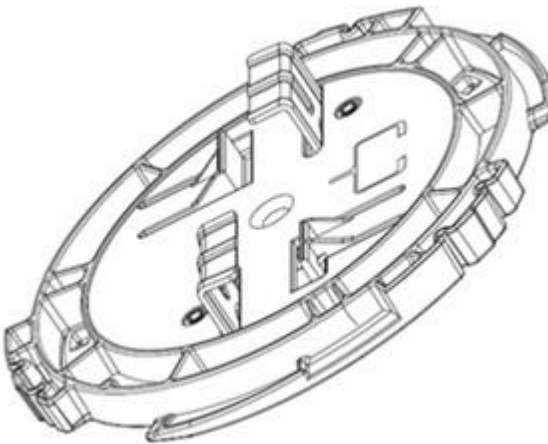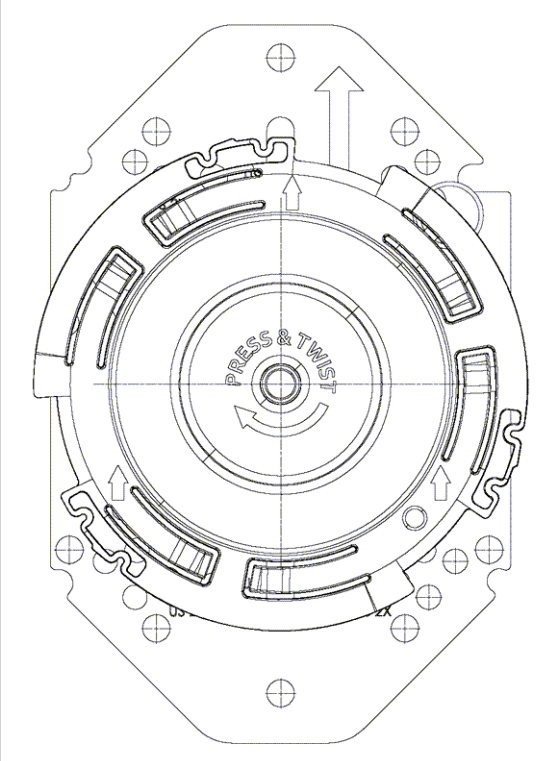Order part number	Description
AH-ACC-BKT-AX-SL	Mounting bracket for 1/8 in. and 1/4 in. ceiling grids with a bottom opening 
ACC-BKT-AX-JB	Junction box or wall mounting for indoor access points 

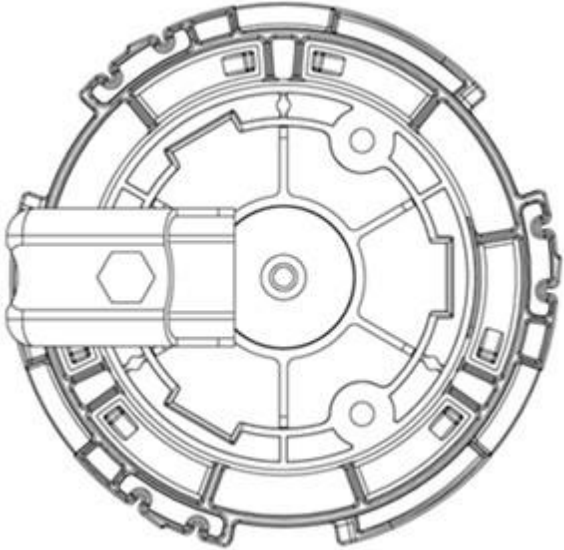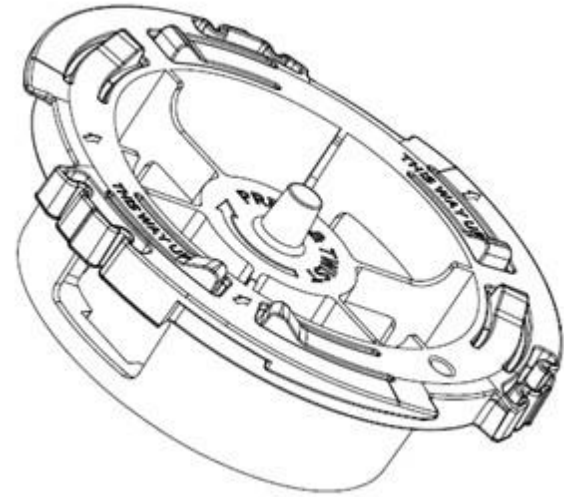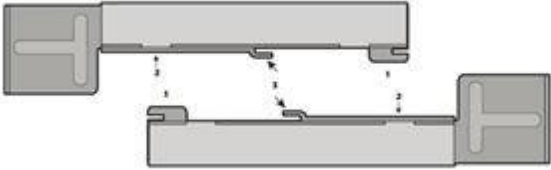Order part number	Description
ACC-BKT-AX-BEAM	Beam mounting for indoor access points 
AH-ACC-BKT-AX-WL	Mounting bracket for direct-to-wall installations 
AH-ACC-BKT-916-KIT	9/16 in. ceiling mount brackets for non-flat and protruded ceiling tiles. Use with AH-ACC-BKT-AX-TB 

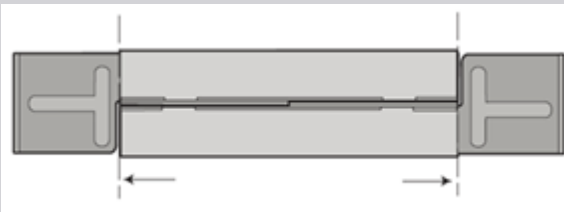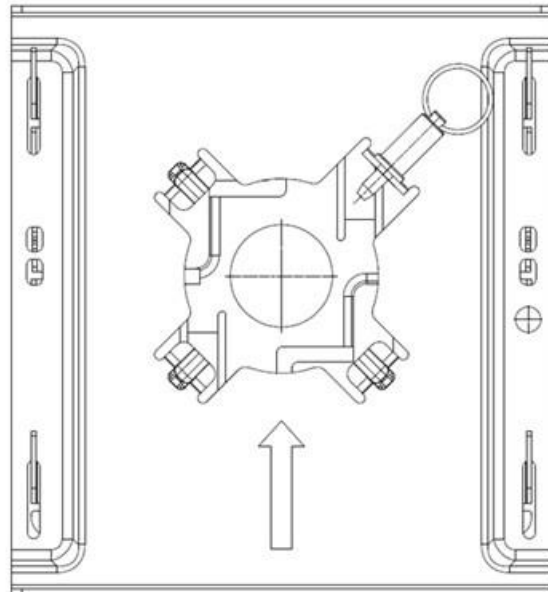Order part number	Description
ACC-BKT-TB-NF	Adapter bracket for use with AH-ACC-BKT-TB with 15/16 in. wide T-bars on non-flat or protruded ceiling tiles  A side-view technical drawing of a rectangular adapter bracket. It features a central horizontal slot and two T-shaped protrusions on the left and right ends. Arrows at the bottom indicate the direction of assembly or adjustment.
ACC-BKT-AX-WNGADAPT	Adapter bracket for use with cloud access point that has an existing WiNG mounting plate (#37201)  A top-down technical drawing of a square adapter bracket. It has a central circular hole with a crosshair. Four mounting points with screws are located around the perimeter. A large upward-pointing arrow is centered below the bracket. The bracket is shown within a rectangular frame representing a ceiling tile.

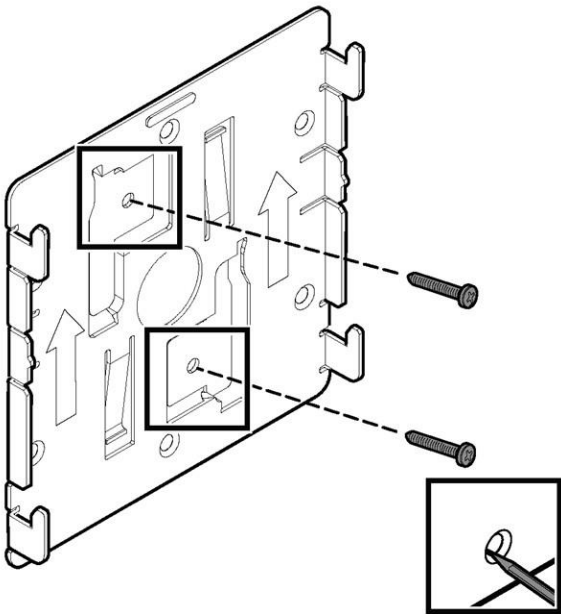Order part number	Description
	 Figure 36: WiNG metal bracket (#37201)

**Important**

The default bracket for wall installation is the ACC-BKT-AX-JB bracket.

**Note**

Order the -JB bracket for new wall installations. The AH-ACC-BKT-AX-WL bracket is for users who already have the -WL brackets.

Lock Your Access Point

Before You Begin

You will need a Kensington security lock.

About This Task

Secure the access point from damage or theft.

Procedure

1. Securely attach the free end of the Kensington lock cable near the AP.
2. Insert the rectangular lock end into the Kensington security slot on the AP.
3. Lock the Kensington lock.

Onboard the Access Point with the ExtremeCloud IQ Mobile Onboarding App

Before You Begin

You can download the ExtremeCloud IQ Mobile Onboarding application to your mobile device from the [Google application store](#) or from the [Apple application store](#). For more information, see [APs Onboarding - An Effortless Onboarding Experience](#).


You require administrator login privileges. Contact your network administrator if you need login credentials.

About This Task

You can use the ExtremeCloud IQ Mobile Onboarding application to quickly onboard, monitor and troubleshoot access points.

Procedure

1. Open the ExtremeCloud IQ Mobile Onboarding application.
2. Enter your login information.
3. Tap **Add a Device**.
4. Scan the QR code or bar code on the back of the AP with your mobile device camera.
5. Verify the AP model and serial number
6. Select the location.
7. Choose any configured network policies for the AP.

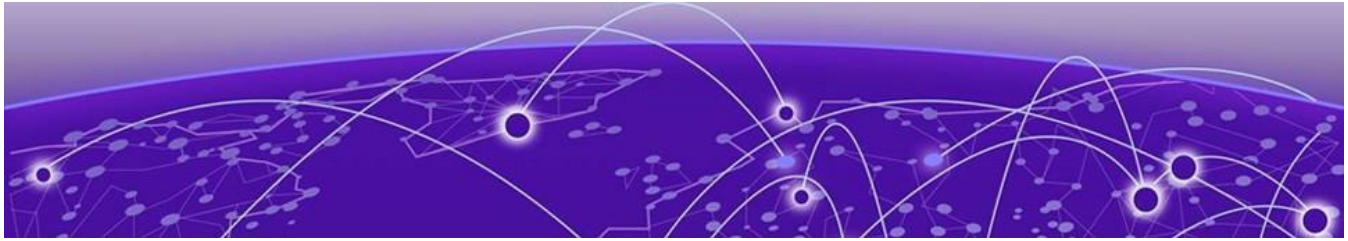

Regulatory and Compliance

[Country of Manufacture](#) on page 55
[Professional Installation Instruction](#) on page 56
[Safety Guidelines](#) on page 57
[CE Marking and European Area \(EEA\)](#) on page 57
[FCC Notice \(Part 15 - Class B\)](#) on page 57
[FCC Radiation Exposure Statement](#) on page 58
[Industry Canada Notice](#) on page 59
[Brazil Agência Nacional De Telecomunicações \(Anatel\) Statement](#) on page 60
[Israel Regulatory Statement](#) on page 61
[Mexico Compliance Statement](#) on page 61
[Thailand Regulatory Statement](#) on page 61
[Japan \(VCCI\) - Voluntary Control Council for Interference Class A ITE](#) on page 61
[Taiwan Regulatory Statement](#) on page 62
[United Kingdom \(UK\) and European Union \(EU\) Radiation Warning Statement](#) on page 62
[Extreme Networks EU Importer Address](#) on page 62
[Extreme Networks UK Address](#) on page 63
[Supplement to Product Instructions](#) on page 63
[European Waste Electrical and Electronic Equipment \(WEEE\) Notice](#) on page 63
[Declaration of Conformity in Languages of the European Community](#) on page 64

The following sections outline the regulatory and compliance information for the AP4020X.

Country of Manufacture

China

Manufacturer: Sercomm Corporation

Address: No.8, Tangzhuang Road, Suzhou Industrial Park, Jiangsu, China

Philippines

Manufacturer: Sercomm Philippines, Inc.

Address: Lot 4, Innovation Drive, CIP 1, Canlubang, 4027, City of Calamba Laguna, Philippines

Taiwan

Manufacturer: Sercomm Chunan

Address: No.81, YuYi Road, Chu-Nan Miao-Li 350, Taiwan

Professional Installation Instruction

Installation personnel

This product is designed for specific application and needs to be installed by a qualified personnel who has RF and related rule knowledge. The general user shall not attempt to install or change the setting.

Installation location

The product shall be installed at a location where the radiating antenna can be kept 62 cm(FCC)/30 cm(ISED) from nearby person in normal operation condition to meet regulatory RF exposure requirement.

External antenna

Use only the antennas which have been approved by the applicant. The non-approved antenna(s) may produce unwanted spurious or excessive RF transmitting power which may lead to the violation of FCC/IC limit and is prohibited.

Installation procedure

Refer to the installation instructions for details.



Warning

Select the installation position and make sure that the final output power does not exceed the limit set force in relevant rules. The violation of the rule could lead to serious federal penalty.

Instructions d'installation professionnelle

Installation

Ce produit est destine a un usage specifique et doit etre installe par un personnel qualifie maitrisant les radiofrequences et les regles s'y rapportant. L'installation et les reglages ne doivent pas etre modifies par l'utilisateur final.

Emplacement d'installation

En usage normal, afin de respecter les exigences réglementaires concernant l'exposition aux radiofréquences, ce produit doit être installé de façon à respecter une distance de 62 cm(FCC)/30 cm(ISED) entre l'antenne émettrice et les personnes.

Antenn externe

Utiliser uniquement les antennes approuvées par le fabricant. L'utilisation d'autres antennes peut conduire à un niveau de rayonnement essentiel ou non essentiel dépassant les niveaux limites définis par FCC/IC, ce qui est interdit.

Procédure d'installation

Consulter le manuel d'utilisation.



Warning

Avertissement: Choisir avec soin la position d'installation et s'assurer que la puissance de sortie ne dépasse pas les limites en vigueur. La violation de cette règle peut conduire à de sérieuses pénalités fédérales.

Safety Guidelines

The following safety guidelines are intended to protect your personal safety and prevent damage to the equipment.



Important

Only qualified personnel must perform installation procedures. Within the context of the safety notes in this documentation, qualified persons are defined as persons who are authorized to commission grounding, label devices, systems, and circuits in accordance with established safety practices and standards. A qualified person understands the requirements and risks involved with installing outdoor electrical equipment in accordance with national codes.

CE Marking and European Area (EEA)



Warning

This is a class B product. In a domestic environment, this product may cause radio interference in which case the user may be required to take adequate measures.

FCC Notice (Part 15 - Class B)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, it may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from the one the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This device meets all the other requirements specified in Part 15E, Section 15.407 of the FCC Rules

For 5925-7125 MHz transmitter operation in Low Power Indoor mode:

1. FCC regulations restrict the operation of this device to indoor use only.
2. The operation of this device is prohibited on oil platforms, cars, trains, boats, and aircraft, except that operation of this device is permitted in large aircraft while flying above 10,000 feet in the 5.925-6.425 GHz band.
3. Operation of transmitters in the 5.925-7.125 GHz band is prohibited for control of or communications with unmanned aircraft systems.

For 5925-6425 MHz and 6525-6875 MHz transmitter operation in Standard power access point mode:

1. The operation of this device is prohibited on oil platforms, cars, trains, boats, and aircraft.
2. Operation of transmitters in the 5.925-7.125 GHz band is prohibited for control of or communications with unmanned aircraft systems.

FCC Radiation Exposure Statement

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

This device meets all the other requirements specified in Part15C, Section 247 and Part 15E, Section 15.407 of the FCC Rules.



Warning

FCC Radiation Exposure Statement: This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This device has been tested and meets applicable limits for Radio Frequency (RF) exposure.

This device was tested with a separation distance of 62 cm. Always keep the device away from your body to ensure exposure levels remain at or below the tested levels.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Industry Canada Notice



Warning

The device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems.



Warning

les dispositifs fonctionnant dans la bande 5150-5250 MHz sont réservés uniquement pour une utilisation É l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux.

This device complies with ISED's licence-exempt RSSs. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

L'appareil ne doit pas produire de brouillage;

L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 30cm between the radiator & your body.

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 30cm de distance entre la source de rayonnement et votre corps

Indoor AP(6ID)

Operation shall be limited to indoor use only.

Le fonctionnement doit être limitée à une utilisation à l'intérieur seulement.

Standard AP(6SD)

- The antenna height shall be determined by the installer or operator of the standard-power access point or fixed client device, or by automatic means. This information shall be stored internally in the device. Provision of accurate device information is mandatory.

La hauteur de l'antenne doit être déterminée par l'installateur ou l'opérateur du point d'accès de puissance normale ou du dispositif client fixe, ou par des dispositifs automatiques. Cette information doit être enregistrée dans le dispositif. La fourniture d'information précise sur le dispositif est obligatoire.

- Information for antenna type(s), antenna models(s), and worst-case tilt angle(s) necessary to remain compliant with the e.i.r.p. elevation mask requirement set forth in section 4.5.4 (c) shall be clearly indicated.

Le ou les types d'antennes, le ou les modèles d'antennes et le ou les pires angles d'inclinaison nécessaires pour rester conforme à l'exigence de la section 4.5.4 c. s'appliquant au masque de p.i.r.e. doivent être clairement indiqués.

Le fonctionnement doit être limitée à une utilisation à l'intérieur seulement.

- Devices shall not be used for control of or communications with unmanned aircraft systems.
- Devices shall not be used on oil platforms.
- Devices shall not be used on aircraft, except for the low-power indoor access points, indoor subordinate devices, low-power client devices, and very low-power devices operating in the 5925-6425 MHz band, that may be used on large aircraft as defined in the Canadian Aviation Regulations, while flying above 3,048 metres (10,000 feet).
- Devices shall not be used on automobiles.
- Devices shall not be used on trains.
- Devices shall not be used on maritime vessels
- Les dispositifs ne doivent pas être utilisés pour commander des systèmes d'aéronef sans pilote ni pour communiquer avec de tels systèmes.
- Les dispositifs ne doivent pas être utilisés sur les plateformes de forage pétrolier.
- Les dispositifs ne doivent pas être utilisés dans les aéronefs, à l'exception des points d'accès intérieurs de faible puissance, des dispositifs subordonnés intérieurs, des dispositifs clients de faible puissance et des dispositifs de très faible puissance fonctionnant dans la bande de 5 925 à 6 425 MHz, qui peuvent être utilisés dans les gros aéronefs tel qu'il est défini dans le Règlement de l'aviation canadien, et ce, lorsqu'ils volent à une altitude supérieure à 3 048 mètres (10 000 pieds).
- Les dispositifs ne doivent pas être utilisés dans les automobiles.
- Les dispositifs ne doivent pas être utilisés dans les trains.
- Les dispositifs ne doivent pas être utilisés sur les navires maritimes.

Brazil Agência Nacional De Telecomunicações (Anatel) Statement

1. Este produto está homologado pela ANATEL, de acordo com os procedimentos regulamentados pela Resolução nº. 242/2000 e atende aos requisitos técnicos aplicados.

Este equipamento não tem direito à proteção contra interferência prejudicial e não pode causar interferência em sistemas devidamente autorizados. Para maiores informações, consulte o site da ANATEL – www.anatel.gov.br

2. O uso deste equipamento é restrito a ambientes fechados e proibido em plataformas petrolíferas, carros, trens, embarcações e no interior de aeronaves abaixo de 3.048 m (10.000 pés).

Israel Regulatory Statement

מספר אישור התאמה מטעם משרד התקשורת: 51-95969

חל איסור לבצע פעולות במכשיר שיש בהן כדי לשנות את תכונותיו האלחוטיות של המכשיר, ובכלל זה שינויי תוכנה, החלפת אנטנה מקורית או הוספת אפשרות לחיבור לאנטנה חיצונית, בלא קבלת אישור משרד התקשורת, בשל החשש להפרעות אלחוטיות.

חל איסור על הפעלת המכשיר מחוץ למבנה, בשל חשש להפרעות אלחוטיות.

Mexico Compliance Statement

Details about compliance conditions for device use in Mexico.

La operación de este equipo está sujeta a las siguientes dos condiciones

1. es posible que este equipo o dispositivo no cause interferencia perjudicial y
2. este equipo o dispositivo debe aceptar cualquier interferencia, incluyendo la que pueda causar su operación no deseada.

The operation of this equipment is subject to the following two conditions:

1. it is possible that this equipment or device does not cause disruptive interference and
2. this equipment or device must accept any interference, including interference that may cause undesired operation.

Thailand Regulatory Statement

เครื่องโทรคมนาคมและอุปกรณ์นี้ มีความสอดคล้องตามข้อกำหนดของ กทช.

Japan (VCCI) - Voluntary Control Council for Interference Class A ITE

This is a class A product based on the standard of the Voluntary Control Council for Interference by Information Technology Equipment (VCCI). If this equipment is used in a domestic environment, radio disturbance may arise. When such trouble occurs, the user may be required to take corrective actions.

この装置は、情報処理装置等電波障害自主規制協議会（VCCI）の基準に基づくクラスA情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。

Taiwan Regulatory Statement

取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前述合法通信，指依電信管理法規定作業之無線電通信。低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

應避免影響附近雷達系統之操作。

本器材須經專業工程人員安裝及設定，始得設置使用，且不得直接販售給一般消費者

United Kingdom (UK) and European Union (EU) Radiation Warning Statement

The device is restricted to indoor use only when operating in the 5150 to 5350 MHz frequency range.

The device is restricted to indoor use only when operating in the 5945 to 6425MHz frequency range.



Warning

EU/UK 20 cm radiation distance. This equipment complies with EU/UK radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 cm between the radiator and your body.

	AT	BE	BG	HR	CY	CZ	DK
	EE	FI	FR	DE	EL	HU	IE
	IT	LV	LT	LU	MT	NL	PL
	PT	RO	SK	SI	ES	SE	UK (NI)

AP4020X EU	AP4020X UK
2412-2472MHz: <20 dBm	2412-2472MHz: <20 dBm
2402-2480MHz (BT): <10 dBm	2402-2480MHz (BT): <10 dBm
5180-5240MHz: <23 dBm	5180-5240MHz: <23 dBm
5260-5320MHz: <23 dBm	5260-5320MHz: <23 dBm
5500-5700MHz: <30 dBm	5500-5700MHz: <30 dBm
5745-5825MHz: < 13.98 dBm	5745-5825MHz: <20 dBm
5955-6415MHz: <23 dBm	5925-6425MHz: < 24 dBm

Extreme Networks EU Importer Address

Extreme Networks, Ireland Ops Ltd.

Rineanna House Shannon Industrial Estate

Shannon, V14CA36 Ireland

Extreme Networks UK Address

Extreme Networks, UK Ltd.

250 Longwater Avenue Green Park

1st Floor

Reading, UK

Supplement to Product Instructions

單元 Unit	限用物質及其化學符號 Restricted substances and its chemical symbols					
	鉛Lead (Pb)	汞Mercury (Hg)	鎘Cadmium (Cd)	六價鉻 Hexavalent chromium (Cr ⁺⁶)	多溴聯苯 Polybrominated biphenyls (PBB)	多溴二苯醚 Polybrominated diphenyl ethers (PBDE)
金屬零件 (Metal Parts)	○	○	○	○	○	○
電路模組 (Circuit Modules)	—	○	○	○	○	○
電纜及電纜組件 (Cables & Cable Assemblies)	○	○	○	○	○	○
塑料和聚合物零件 (Plastic and Polymeric parts)	○	○	○	○	○	○
備考1. “超出0.1 wt %”及“超出0.01 wt %”係指限用物質之百分比含量超出百分比含量基準值。 Note 1: “Exceeding 0.1 wt %” and “exceeding 0.01 wt %” indicate that the percentage content of the restricted substance exceeds the reference percentage value of presence condition. 備考2. “○”係指該項限用物質之百分比含量未超出百分比含量基準值。 Note 2: “○” indicates that the percentage content of the restricted substance does not exceed the percentage of reference value of presence. 備考3. “—”係指該項限用物質為排除項目。 Note 3: The “—” indicates that the restricted substance corresponds to the exemption.						

European Waste Electrical and Electronic Equipment (WEEE) Notice



In accordance with Directive 2012/19/EU of the European Parliament on waste electrical and electronic equipment (WEEE):

1. The symbol above indicates that separate collection of electrical and electronic equipment is required.
2. When this product has reached the end of its serviceable life, it cannot be disposed of as unsorted municipal waste. It must be collected and treated separately.


3. It has been determined by the European Parliament that there are potential negative effects on the environment and human health as a result of the presence of hazardous substances in electrical and electronic equipment.
4. It is the user's responsibility to utilize the available collection system to ensure WEEE is properly treated.

For information about the available collection system, please contact Extreme Environmental Compliance at Green@extremenetworks.com.

Declaration of Conformity in Languages of the European Community

English	Hereby, Extreme Networks declares that the radio equipment type (AP4020X/ AP4020XWW) is in compliance with Directive 2014/53/EU. For full text of the EU Declaration of Conformity, contact Extreme Regulatory Compliance at compliancerequest@extremenetworks.com
Finnish	Valmistaja Extreme Networks vakuuttaa täten että Radio LAN device (AP4020X/AP4020XWW) tyyppinen laite on direktiivin 2014/53/EU oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen. EU-vaatimustenmukaisuusvaatimuksen täydellisestä tekstistä ota yhteyttä äärimmäisiin säädösten noudattamiseen osoitteessa compliancerequest@extremenetworks.com
Dutch	Hierbij verklaart Extreme Networks dat het toestel Radio LAN device (AP4020X/AP4020XWW) in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 2014/53/EU. Neem voor de volledige tekst van de EU-conformiteitsverklaring u contact opnemen met extreme regelgeving op compliancerequest@extremenetworks.com
French	Par la présente Extreme Networks déclare que l'appareil Radio LAN device (AP4020X/AP4020XWW) est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 2014/53/EU. Pour obtenir le texte intégral du processus de Déclaration de la conformité de l'UE, veuillez contacter la conformité réglementaire extrême à l'adresse suivante: compliancerequest@extremenetworks.com
Swedish	Härmed intygar Extreme Networks att radioutrustningstypen (AP4020X/ AP4020XWW) överensstämmer med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 2014/53/ EU. För fullständig text av EU-försäkran om överensstämmelse, kontakta Extreme regelförfarande på compliancerequest@extremenetworks.com
Danish	Undertegnede Extreme Networks erklærer herved, at følgende udstyr Radio LAN device (AP4020X/AP4020XWW) overholder de væsentlige krav og øvrige relevante krav i direktiv 2014/53/EU. For den fulde ordlyd af EU-overensstemmelseserklæringen bedes du kontakte Extreme Regulatory Compliance på compliancerequest@extremenetworks.com
German	Hiermit erklärt Extreme Networks die Übereinstimmung des "WLAN Wireless Controller bzw. Access Points" (AP4020X/AP4020XWW) mit den grundlegenden Anforderungen und den anderen relevanten Festlegungen der Richtlinie 2014/53/EU. Für den vollständigen Wortlaut der EU-Konformitätserklärung wenden Sie sich bitte an extreme Regulatory Compliance unter compliancerequest@extremenetworks.com

Greek	ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ Extreme Networks ΔΗΛΩΝΕΙ ΟΤΙ Radio LAN device (AP4020X/AP4020XWW) ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 2014/53/EU. Για το πλήρες κείμενο της δήλωσης συμμόρφωσης ΕΕ, παρακαλούμε επικοινωνήστε με την ακραία κανονιστική συμμόρφωση στο compliancerequest@extremenetworks.com
Icelandic	Extreme Networks lýsir her með yfir að thessi bunadur, Radio LAN device (AP4020X/AP4020XWW), uppfyllir allar grunnkröfur, sem gerðar eru í R&TTE tilskipun ESB nr 2014/53/EU. Fyrir fullan texta í ESB yfirlýsingu um samræmi, vinsamlegast hafðu samband við Extreme Reglufylgni á compliancerequest@extremenetworks.com
Italian	Con la presente Extreme Networks dichiara che questo Radio LAN device (AP4020X/AP4020XWW) è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 2014/53/EU. Per il testo integrale della Dichiarazione di conformità dell'UE, contattare Extreme Regulatory Compliance presso compliancerequest@extremenetworks.com
Spanish	Por medio de la presente Extreme Networks declara que el Radio LAN device (AP4020X/AP4020XWW) cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 2014/53/EU. Para obtener el texto completo de la Declaración de conformidad de la UE, póngase en contacto con Extreme Regulatory Compliance en compliancerequest@extremenetworks.com
Portuguese	Extreme Networks declara que este Radio LAN device (AP4020X/AP4020XWW) está conforme com os requisitos essenciais e outras disposições da Directiva 2014/53/EU. Para o texto integral da declaração de conformidade da UE, contacte a conformidade regulamentar extrema em compliancerequest@extremenetworks.com
Malti	Hawnhekk, Extreme Networks, jiddikjara li dan Radio LAN device (AP4020X/AP4020XWW) jikkonforma mal-htigijiet essenzjali u ma provvedimenti oħrajn rilevanti li hemm fid-Direttiva 2014/53/EU. Għat-test shiħ tad-dikjarazzjoni ta ' konformit� tal-UE, jekk jogħġbok ikkuntattja lill-konformit� regolatorja compliancerequest@extremenetworks.com

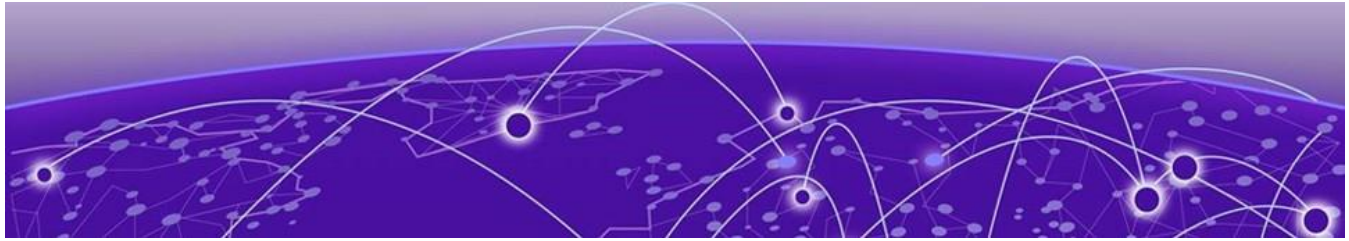

Index

A

- access point overview 10
- announcements 8, 9
- AP4020X access point overview 10
- AP4020X antenna specifications 11, 12
- AP4020X radiation patterns 12, 13, 15–18

B

- box contents
 - AP4020X access point 33
 - Quick Reference Guide 33

C

- console port information 28
- conventions
 - notice icons 6
 - text 6

D

- documentation
 - feedback 9
 - location 7, 8

E

- EU importer address 62

F

- feedback 9

I

- installation process
 - beam installation 45
 - box contents 30
 - how-to-install the access point 30
 - power connection 47
 - pre-installation tasks 32
 - purchase order information 30
 - safety guidelines 30
 - secure the access point 53
 - T-bar 15/16-inch ceiling installation 41
 - wall installation with AH-ACC-BKT-AX-WL 35
 - work flow 30

M

- MAC address location 28
- Media Access Control address (MAC address) 28
- Mexico compliance statement 61
- Micro USB Console Port 28

N

- notices 6

P

- part number 11
- power profile
 - 802.3af 25
 - 802.3at 25
- product announcements 8, 9
- Purchase Information 11

R

- Regulatory and Compliance
 - brazil statement 60
 - fcc notice 57
 - industry Canada notice 59
 - radiation exposure statement 58
 - UK and EU radiation warning 62

S

- safety guidelines 57
- support, see technical support
- supported accessories 26, 27

T

- technical specifications
 - access point features 11
 - enclosure 26
 - environmental specifications 11
 - physical specifications 11
 - ports and connectors 22
 - power options 26
 - radios 24
 - security 26
- technical support
 - contacting 8, 9

U

UK address 63

W

warnings 6