

FCC PART 15.407



TEST REPORT

For

Shanghai Xiangcheng Communication Technology Co.,Ltd

6th Floor, Building 10, No.3000 Longdong Avenue, Pudong New District, Shanghai, China

FCC ID: 2A2UU-K1141

Report Type: Original Report	Product Name: A8 Smart Payment Terminal, A8K Smart Payment Terminal
Report Number:	<u>RKSA251230001-00E</u>
Report Date:	<u>2026-03-30</u>
Reviewed By:	<u>Bard Liu</u> 
Approved By:	<u>Kyle Xu</u> 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu Province, China Tel: +86-512-86175000 Fax: +86-512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Kunshan). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S. Government.

TABLE OF CONTENTS

REPORT REVISION HISTORY.....	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	6
TEST METHODOLOGY	6
MEASUREMENT UNCERTAINTY	7
TEST FACILITY	7
SYSTEM TEST CONFIGURATION.....	8
DESCRIPTION OF TEST CONFIGURATION	8
EUT EXERCISE SOFTWARE	10
EQUIPMENT MODIFICATIONS	16
SUPPORT EQUIPMENT LIST AND DETAILS	16
EXTERNAL I/O CABLE.....	16
BLOCK DIAGRAM OF TEST SETUP	16
SUMMARY OF TEST RESULTS.....	18
TEST EQUIPMENT LIST	19
FCC §1.1307(b) & §2.1093 - RF EXPOSURE.....	21
APPLICABLE STANDARD	21
FCC §15.203 – ANTENNA REQUIREMENT.....	22
APPLICABLE STANDARD	22
ANTENNA CONNECTOR CONSTRUCTION	22
FCC §15.407 (b) (9) §15.207 (a) – AC POWER LINE CONDUCTED EMISSIONS.....	23
APPLICABLE STANDARD	23
TEST SYSTEM SETUP.....	23
EMI TEST RECEIVER SETUP.....	23
TEST PROCEDURE	24
TEST RESULTS SUMMARY	24
§15.205 & §15.209 & §15.407(B) – UNDESIRABLE EMISSION & RESTRICTED BANDS	25
APPLICABLE STANDARD	25
TEST SYSTEM SETUP.....	25
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	28
TEST PROCEDURE	28
FCC §15.407(a) & §15.407(e)–EMISSION BANDWIDTH	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
FCC §15.407(a) – CONDUCTED TRANSMITTER OUTPUT POWER.....	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
FCC §15.407(a) - POWER SPECTRAL DENSITY	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
APPENDIX - TEST DATA.....	32
CONDUCTED EMISSIONS	32
TRANSMITTER UNWANTED EMISSIONS & RESTRICTED FREQUENCY BANDS.....	41
EMISSION BANDWIDTH.....	166

CONDUCTED TRANSMITTER OUTPUT POWER	185
POWER SPECTRAL DENSITY	187
EUT PHOTOGRAPHS	197
TEST SETUP PHOTOGRAPHS	198

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	RKSA251230001-00E	R1V1	2026-03-30	Initial Release

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	Shanghai Xiangcheng Communication Technology Co.,Ltd				
Tested Model:	K1141				
Product Name:	A8 Smart Payment Terminal, A8K Smart Payment Terminal				
Power Supply:	DC 5V from adapter or DC 7.2V from battery				
Operating Frequency:	B1: 5150-5250 MHz, B2: 5250-5350 MHz, B3: 5470-5725 MHz, B4: 5725-5850 MHz				
Maximum Output Power:	Mode:	5G Wi-Fi Band 1:	Band 2:	Band 3:	Band 4:
	802.11a:	14.33 dBm	13.42 dBm	12.72 dBm	12.85 dBm
	802.11n20:	14.24 dBm	13.73 dBm	10.73 dBm	14.09 dBm
	802.11n40:	12.63 dBm	10.45 dBm	9.81 dBm	12.38 dBm
Channel Number:	B1:6; B2: 6; B3: 18; B4: 7				
Channel Separation	802.11a/n20: 20 MHz; 802.11n40: 40 MHz				
Modulation Type:	OFDM				
Antenna Type:	FPC antenna				
★Maximum Antenna Gain:	Configuration 1 & 2 Band 1: 4.06 dBi; Band 2: 3.89dBi; Band 3: 3.94 dBi; Band 4: 2.66 dBi; Configuration 3& 4 Band 1: 1.60 dBi; Band 2: 1.99 dBi; Band 3: 1.56 dBi; Band 4: 1.75 dBi;				
Sample/EUT Status	Good condition				

Adapter Information:

Model: PS10UA050K2000UU

Input: 100-240V, 50/60Hz, 0.35A Max.

Output: 5.0V, 2.0A, 10.0W

Note:

1. The maximum antenna gain was declared by the manufacturer.

2. The difference between A8 Smart Payment Terminal, A8K Smart Payment Terminal as below:

Differentiation description				
Product Name	A8 Smart Payment Terminal		A8K Smart Payment Terminal	
Configuration	1	2	3	4
Configuration name	A8 Dual	A8	A8K Dual	A8K
Secondary screen	YES	NO	YES	NO
Battery	3250mAh	F50188PA(2500mAh) C0256AC5(2500mAh)	3250mAh	F50188PA(2500mAh) C0256AC5(2500mAh)
Single and dual-frequency GPS	Dual-band GNSS	Single-frequency GNSS	Dual-band GNSS	Single-frequency GNSS
Small card configuration	1*Micro SIM+1*Esim*1*Mini SAM	2*Micro SIM+1*Mini SAM	1*Micro SIM+1*Esim*1*Mini SAM	2*Micro SIM+1*Mini SAM
Magnetic head	YES	NO	YES	NO
Main button/Full screen	Full screen	Full screen	Main button	Main button
Diversity antenna	NO	YES	NO	YES
G-Sensor	YES	NO	YES	NO
MIC	Dual MIC	NO	Single MIC	NO
Motor	NO	NO	YES	NO
Main antenna model (size/mm)	SY-P1018-MAIN-V0.4 (8.69*57.26)	SY-P1018-MAIN-V0.4 (8.69*57.26)	DZZ-P1916-MAIN-V04 (49.73*31.93mm)	DZZ-P1916-MAIN-V04 (49.73*31.93mm)
Three-in- one antenna model (size/mm)	SY-P1018-3/1-V0.2 (23.24*32.27)	SY-P1018-3/1-V0.2 FPC(23.24*32.27)	DZZ-P1916-GWB-V03 (32.80*25.16mm)	DZZ-P1916-GWB-V03 (32.80*25.16mm)
Diversity antenna model (size/mm)	NA	SY-P1018-DIV-V0.1 (40.17*41.77)	NA	DZZ-P1916-DIV-V03 (44.83*39.25mm)

All measurement and test data in this report was gathered from production samples serial number:

RKSA251230001-1 (Configuration 1), RKSA251230001-2 (Configuration 2),

RKSA251230001-3 (Configuration 3), RKSA251230001-4 (Configuration 4).

Based on above differences, we chose Configuration 1 for full test, Configuration 2 and Configuration 4 for "CONDUCTED EMISSIONS" "SPURIOUS EMISSIONS (below 1GHz)", Configuration 3 for "CONDUCTED EMISSIONS" "SPURIOUS EMISSIONS (below 1 GHz & above 1 GHz)" (Assigned by the BACL (Kunshan).

The EUT was received on 2025-12-30.)

Objective

This type approval report is prepared for *Shanghai Xiangcheng Communication Technology Co.,Ltd* in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions' rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	9 kHz~150 kHz	3.8dB
	150 kHz~30 MHz	3.4dB
	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu Province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) is accredited in accordance with ISO/IEC 17025:2017 by NVLAP (Lab code: 600338-0), and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No.: CN5055.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

For **5150~5250 MHz** band, test channel list is as below,

802.11a/n20 mode Channel 36, 40, 48 were tested.

802.11n40 mode Channel 38, 46 were tested.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240

For **5250~5350 MHz** band, test channel list is as below,

802.11a/n20 mode Channel 52, 60, 64 were tested.

802.11n40 mode Channel 54, 62 were tested.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300
54	5270	62	5310
56	5280	64	5320

For **5470~5725 MHz** band, test channel list is as below,

802.11a/n20 mode Channel 100, 116, 140, Cross channel 144 were tested.

802.11n40 mode Channel 102, 110, 134, Cross channel 142 were tested.

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	118	5590	136	5680
102	5510	120	5600	140	5700
104	5520	124	5620	142	5710
108	5540	126	5630	144	5720
110	5550	128	5640	/	/
112	5560	132	5660	/	/
116	5580	134	5670	/	/

For **5725~5850 MHz** band,

802.11a/n20 mode Channel 149, 157, 165 were tested.

802.11n40 mode Channel 151, 159 were tested.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	159	5795
151	5755	161	5805
153	5765	165	5825
157	5785	/	/

EUT Exercise Software

Engineering Mode

The worst case was performed under:

U-NII	Mode	Data rate	★Power Level		
			Low Channel	Middle Channel	High Channel
5150~5250MHz	802.11a	6Mbps	16	16	16
	802.11n20	MCS0	16.5	16.5	16.5
	802.11n40	MCS0	15	/	15

U-NII	Mode	Data rate	★Power Level		
			Low Channel	Middle Channel	High Channel
5250~5350MHz	802.11a	6Mbps	16	16	16
	802.11n20	MCS0	16.5	16.5	16.5
	802.11n40	MCS0	13.5	/	13.5

U-NII	Mode	Data rate	★Power Level			
			Low Channel	Middle Channel	High Channel	Cross Channel
5470~5725MHz	802.11a	6Mbps	15.5	15.5	15.5	15.5
	802.11n20	MCS0	14	14	14	14
	802.11n40	MCS0	13	13	13	13

U-NII	Mode	Data rate	★Power Level		
			Low Channel	Middle Channel	High Channel
5725~5850MHz	802.11a	6Mbps	16	16	16
	802.11n20	MCS0	17.5	17.5	17.5
	802.11n40	MCS0	16	16	16

Note: The power level was declared by the applicant.


Duty Cycle:

Environmental Conditions & Test Information

Test Date:	2026-01-19 to 2026-01-26
Temperature:	21.3-22.7°C
Relative Humidity:	51-53 %
ATM Pressure:	101.4-102.1 kPa
Test Engineer:	Neil Zhou


5150MHz-5250MHz Band:

802.11a mode

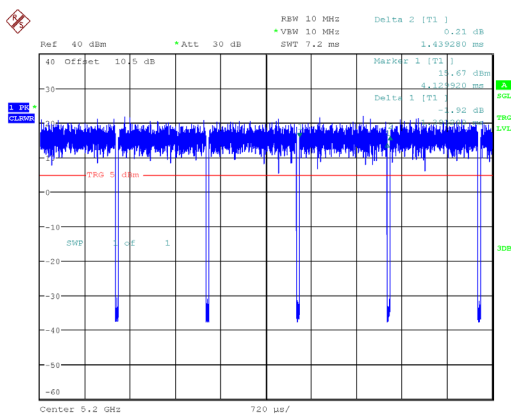


ProjectNo.:RKSA251230001 Tester:Neil Zhou
Date: 19.JAN.2026 09:56:31

802.11n20 mode

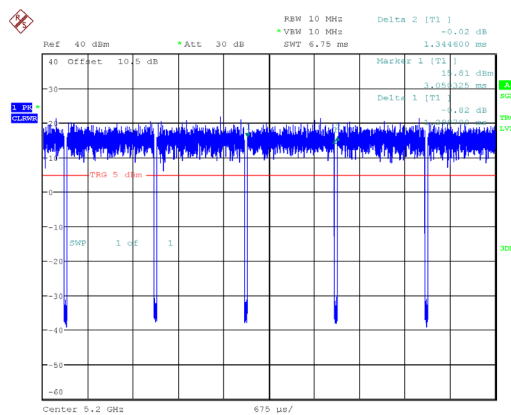


ProjectNo.:RKSA251230001 Tester:Neil Zhou
Date: 19.JAN.2026 10:03:50

802.11n40 mode

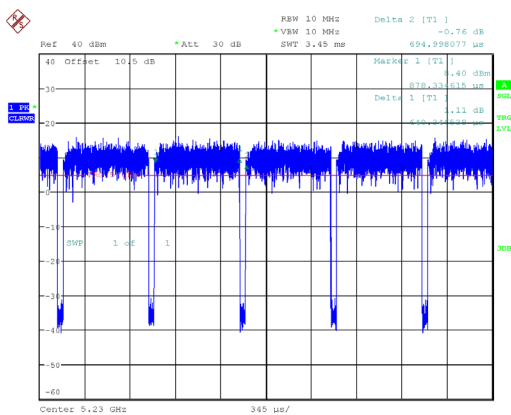


ProjectNo.:RKSA251230001 Tester:Neil Zhou
Date: 19.JAN.2026 10:14:24

5250MHz-5350MHz Band:
802.11a mode

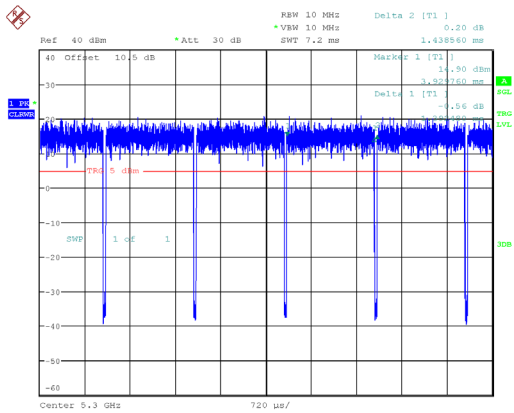


ProjectNo.:RKSA251230001 Tester:Neil Zhou
Date: 19.JAN.2026 10:20:26

802.11n20 mode

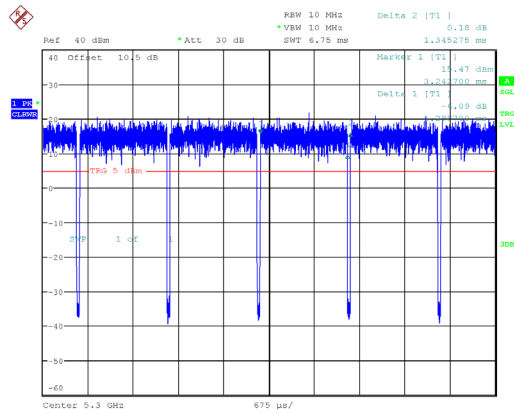


ProjectNo.:RKSA251230001 Tester:Neil Zhou
Date: 19.JAN.2026 10:28:50

802.11n40 mode

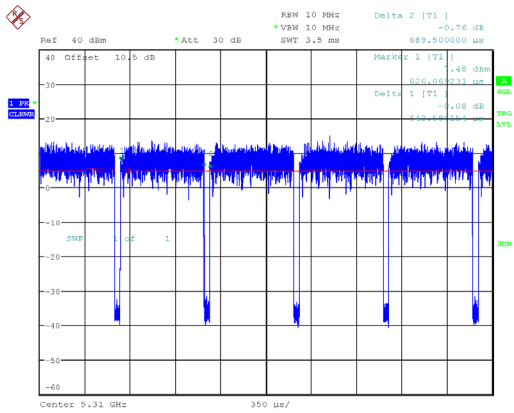


ProjectNo.:RKSA251230001 Tester:Neil Zhou
Date: 19.JAN.2026 10:43:36

5470MHz-5725MHz Band:
802.11a mode

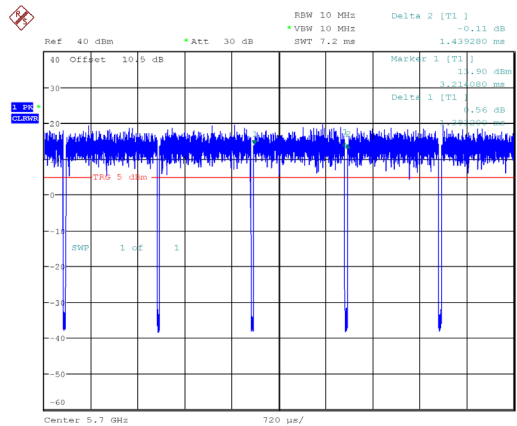


ProjectNo.:RKSA251230001 Tester:Neil Zhou
Date: 26.JAN.2026 14:35:57

802.11n20 mode

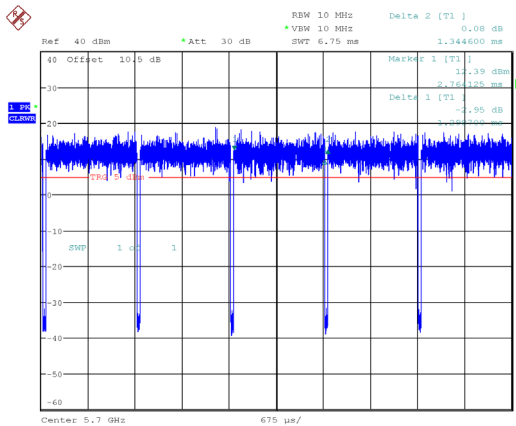

ProjectNo.:RKSA251230001 Tester:Neil Zhou
Date: 26.JAN.2026 14:54:35

802.11n40 mode

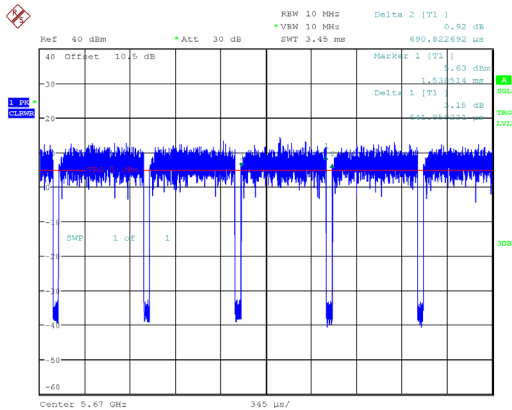

ProjectNo.:RKSA251230001 Tester:Neil Zhou
Date: 26.JAN.2026 15:19:24

802.11a mode



ProjectNo.:RKSA251230001 Tester:Neil Zhou
Date: 19.JAN.2026 10:58:54

ProjectNo.:RKSA251230001 Tester:Neil Zhou
Date: 19.JAN.2026 11:08:09

Page 14 of 199

5150MHz-5250MHz:

Mode	Test Frequency (MHz)	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)
802.11a	5200	1.393	1.439	96.80	0.14
802.11n20	5200	1.299	1.345	96.58	0.15
802.11n40	5230	0.640	0.695	92.09	0.36

5250MHz-5350MHz:

Mode	Test Frequency (MHz)	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)
802.11a	5300	1.392	1.439	96.73	0.14
802.11n20	5300	1.299	1.345	96.58	0.15
802.11n40	5310	0.644	0.690	93.33	0.30

5470MHz-5725MHz:

Mode	Test Frequency (MHz)	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)
802.11a	5700	1.393	1.439	96.80	0.14
802.11n20	5700	1.299	1.345	96.58	0.15
802.11n40	5670	0.642	0.691	92.91	0.32

5725MHz-5850MHz:

Mode	Test Frequency (MHz)	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)
802.11a	5785	1.378	1.440	95.69	0.19
802.11n20	5785	1.299	1.345	96.58	0.15
802.11n40	5795	0.640	0.692	92.49	0.34

Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	Power strip	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To Port
Power Cable	1.0	AC Source	Power strip
USB Cable	1.0	Adapter	EUT

Block Diagram of Test Setup


For Conducted Emissions:

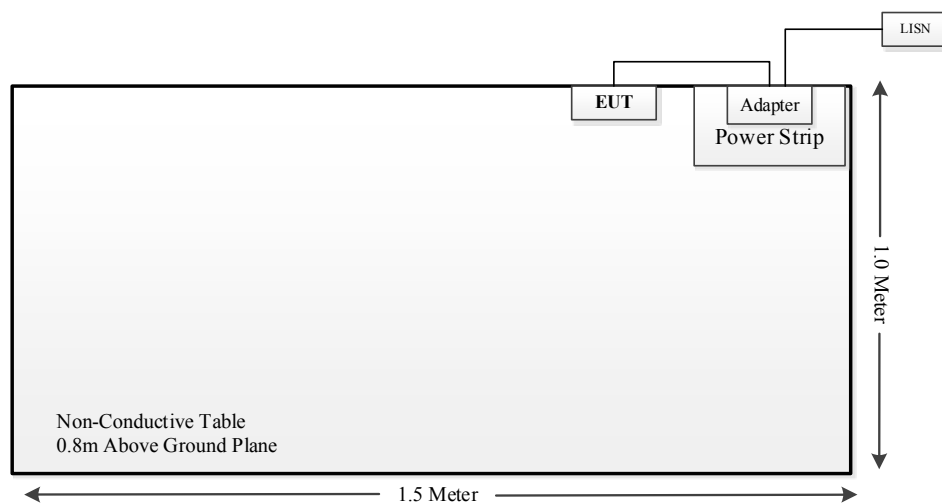

For Radiated Emissions (Below 1GHz):

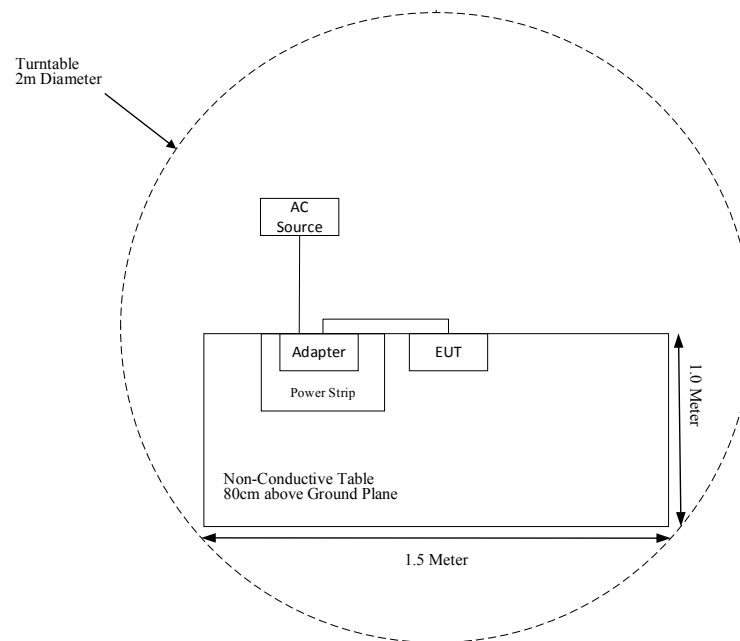

For Radiated Emissions (Above 1 GHz):

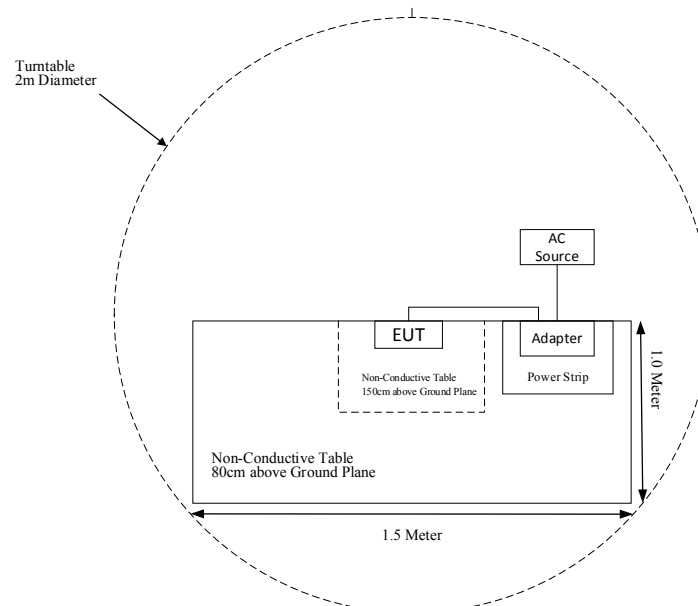

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207 & §15.407(b) (9)	AC Power Line Conducted Emissions	Compliant
§ 15.205 & §15.209 & §15.407(b)	Undesirable Emission & Restricted Bands	Compliant
§§15.407(a) & §15.407(e)	Emission Bandwidth	Compliant
§15.407(a)	Conducted Transmitter Output Power	Compliant
§15.407(a)	Power Spectral Density	Compliant
§1.1307(b)(1)& §2.1093	RF EXPOSURE	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber #1)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2025-04-09	2026-04-08
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2024-11-08	2027-11-07
Narda	6dB Attenuator	773-6	10690812-2-1	2024-11-08	2027-11-07
BACL	Active Loop Antenna	1313-1A	4041511	2024-11-22	2027-11-21
Sonoma Instrument	Pre-amplifier	310N	171205	2025-04-09	2026-04-08
Rohde & Schwarz	Auto Test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-9	009	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-10	010	2025-04-09	2026-04-08
Radiated Emission Test (Chamber #2)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207/040	2025-04-09	2026-04-08
EMCO	Horn Antenna	3115	9207-3900	2024-11-03	2027-11-02
ETS-LINDGREN	Horn Antenna	3116	2516	2024-12-12	2027-12-11
A.H.Systems, inc	Amplifier	PAM-0118P	512	2025-04-09	2026-04-08
SELECTOR	Amplifier	EM18G40G	060726	2025-04-09	2026-04-08
MICRO-TRONICS	Band Reject Filter	BRM50716	G059	2025-04-08	2026-04-07
Narda	Attenuator	10dB	010	2025-04-08	2026-04-07
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-11	011	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-12	012	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-13	013	2025-04-09	2026-04-08
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSU26	200103	2025-04-09	2026-04-08
Narda	Attenuator	10dB	010	2025-04-08	2026-04-07
Anritsu	Power Sensor	MA24418A	12621	2025-04-09	2026-04-08
XHFDZ	RG316 Coaxial Cable	SMA-316	XHF-1175	Each time	N/A

Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	101746	2025-09-01	2026-08-31
Rohde & Schwarz	LISN	ENV216	101115	2025-04-08	2026-04-07
Audix	Test Software	e3	V9	N/A	N/A
Rohde & Schwarz	Pulse limiter	ESH3-Z2	100552	2025-04-08	2026-04-07
MICRO-COAX	Coaxial Cable	Cable-15	015	2025-04-08	2026-04-07

Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE

Applicable Standard

FCC§1.1307, §2.1093.

Measurement Result

Result: Please refer to the SAR report: RKSA251230001-20B.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407, if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

Antenna permanently attached to the unit. fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	Frequency Range	Max. Antenna Gain	Input impedance
FPC (Configuration 1 & 2)	5150~5250 MHz	4.06 dBi	50Ω
	5250~5350 MHz	3.89 dBi	50Ω
	5470~5725 MHz	3.94 dBi	50Ω
	5725~5850 MHz	2.66 dBi	50Ω
FPC (Configuration 3 & 4)	5150~5250 MHz	1.60 dBi	50Ω
	5250~5350 MHz	1.99 dBi;	50Ω
	5470~5725 MHz	1.56 dBi	50Ω
	5725~5850 MHz	1.75 dBi	50Ω


Result: Compliant.

FCC §15.407 (b) (9) §15.207 (a) – AC POWER LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a), §15.407(b) (9)

Test System Setup

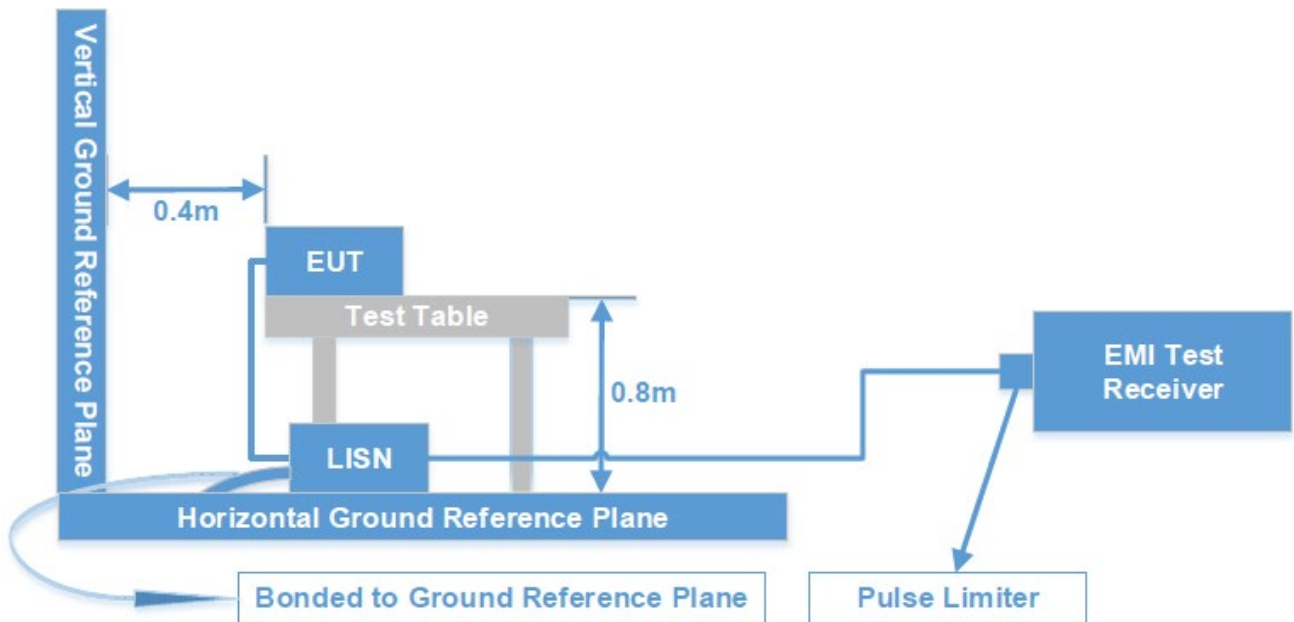

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW
150 kHz - 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the EUT or adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

If the maximum peak value of the emissions is below the average limit, the QP value and average value measurement will not need to be performed and only record the maximum peak measured value to meet the requirements.

Level & Over Limit Calculation

The Level is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation from the Meter Reading. The basic equation is as follows:

$$\begin{aligned}\text{Factor (dB)} &= \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)} \\ \text{Level (dB}\mu\text{V)} &= \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)}\end{aligned}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Level (dB}\mu\text{V)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data: See Appendix

§15.205 & §15.209 & §15.407(B) – UNDESIRABLE EMISSION & RESTRICTED BANDS

Applicable Standard

FCC §15.407 (b); §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:


(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000MHz shall be performed using a minimum resolution bandwidth of 1MHz.


According to 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP [dBm] + 95.2$, for $d = 3$ meters.

Test System Setup


9kHz-30 MHz:

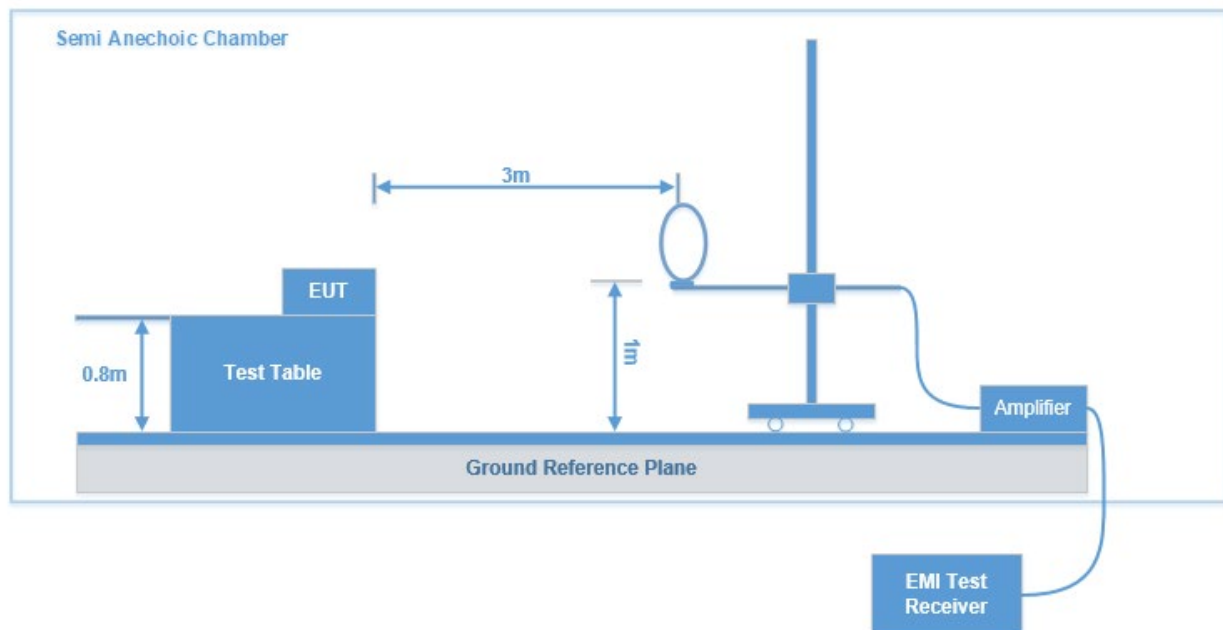


30MHz-1GHz:

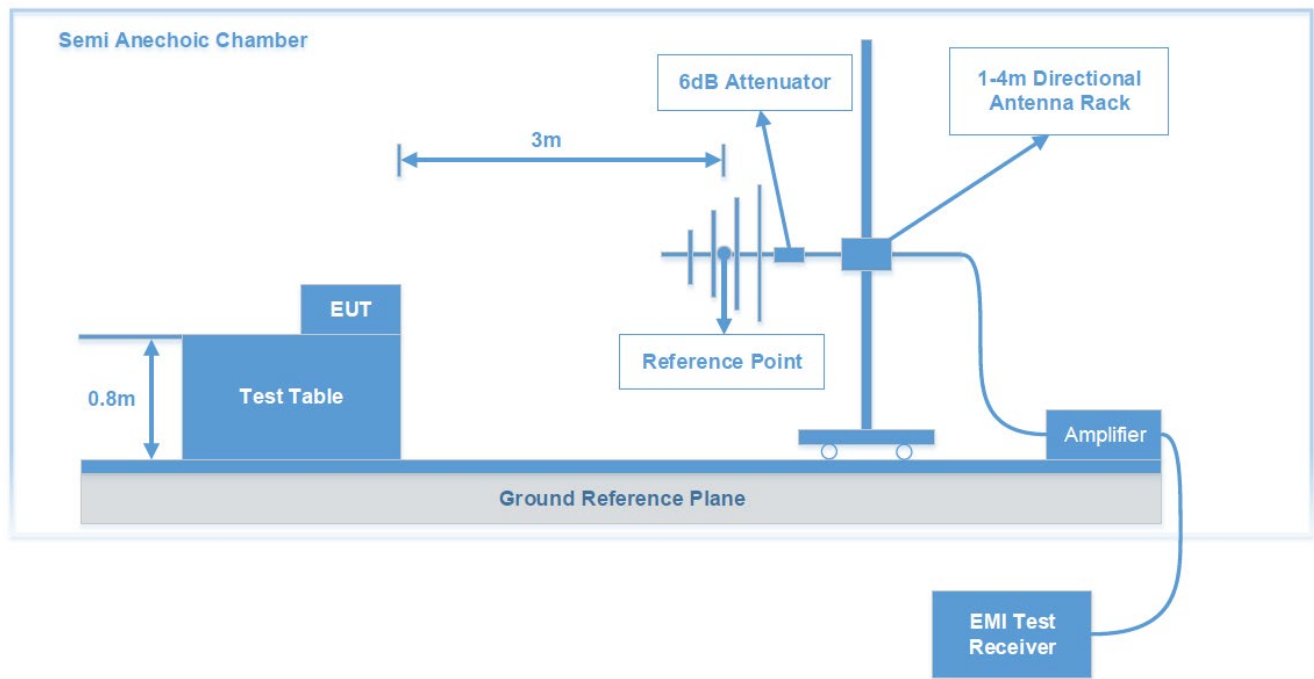

1 GHz-18GHz:

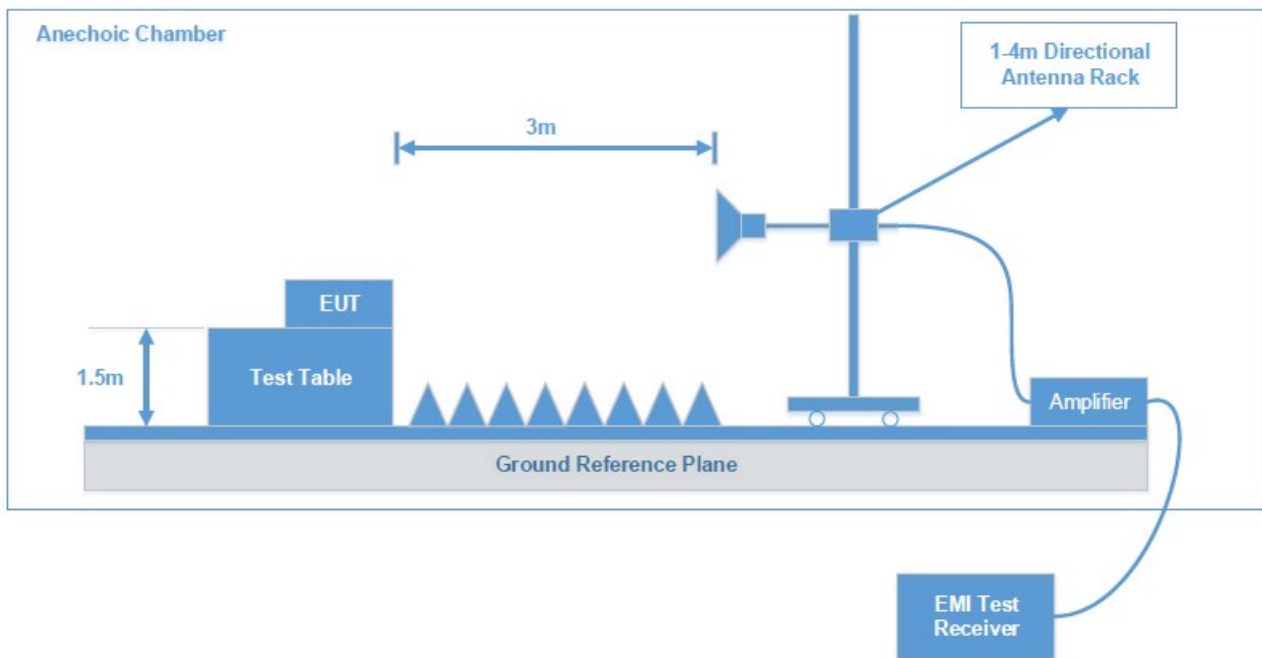

18-40GHz:

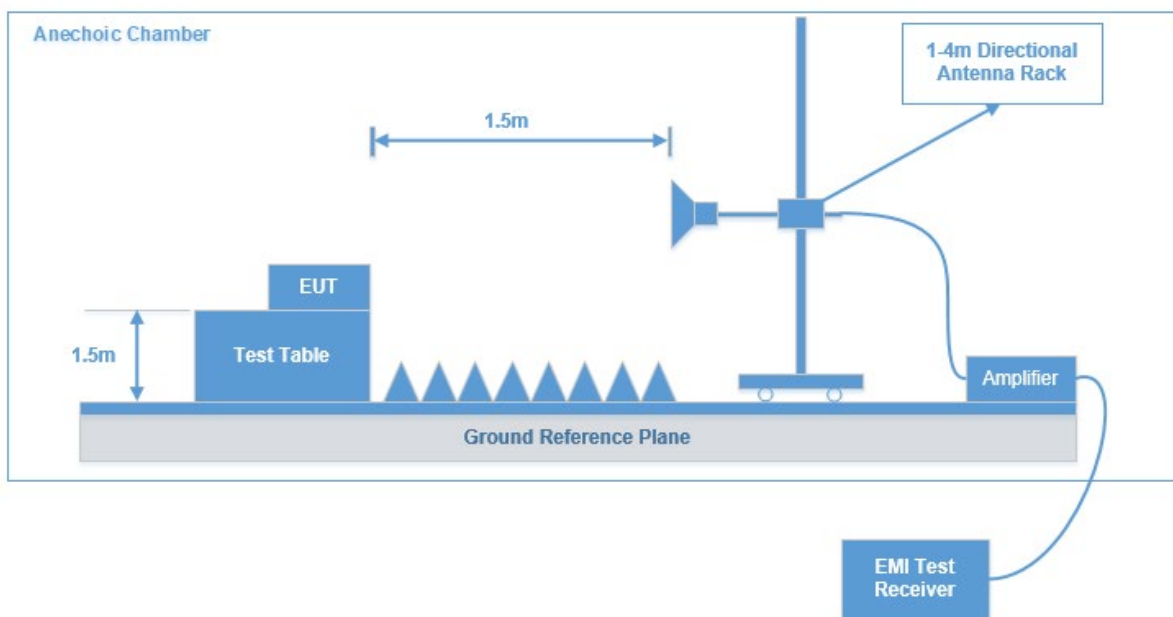

The radiated emission tests were performed in the 3 meters test site for below 18GHz and 1.5m for 18-40 GHz, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209 and FCC 15.407 limits. According to ANSI C63.10 - 2020,9.2.1: For field strength measurements made at other than the distance specified by the limit, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of

$$E_{SpecLimit} = E_{Meas} + 20 \log \left(\frac{D_{Meas}}{D_{SpecLimit}} \right)$$

distance)

Where

- $E_{SpecLimit}$ is the field strength of the emission at the distance specified by the limit, in dBuV/m
- E_{Meas} is the field strength of the emission at the measurement distance, in dBuV/m
- D_{Meas} is the measurement distance, in m
- $D_{SpecLimit}$ is the distance specified by the limit, in m

So the extrapolation factor of 1m is $20 \cdot \log(1.5/3) = -6.0$ dB, for 18 - 40GHz range, the limit of 1.5m distance was added by 6.0dB from limit of 3m to compared with the result measurement at 1.5m distance.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	VBW	IF B/W	Measurement	Detector
9 kHz - 150 kHz	200 Hz	1 kHz	200 Hz	Peak/QP/Average	Peak/QP/Average
150 kHz - 30 MHz	9 kHz	30 kHz	9 kHz	Peak/QP/Average	Peak/QP/Average
30 MHz - 1000 MHz	100 kHz	300 kHz	/	Peak	Peak
	/	/	120 kHz	QP	QP
Above 1GHz	1MHz	3 MHz	/	Peak	Peak
	1MHz	3 MHz	/	Average	Average

For 9 kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

Test Procedure

During the radiated emission test, the adapter was connected to AC floor outlet. Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

If the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is at least 6 dB below the QP emission limit, there's no need to record the measured QP level of the emissions in the report.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V/m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Corrected factor (dB/m)}$$

$$\text{Corrected factor (dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V/m)}$$

Note: The QuasiPeak (dB μ V/m), MaxPeak (dB μ V/m), Average (dB μ V/m) which shown in the data table are all Corrected Amplitude.

Test Data: See Appendix

FCC §15.407(a) & §15.407(e)–EMISSION BANDWIDTH

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure


1. Emission Bandwidth (EBW)

- Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max-hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Note: Offset (10.5dB) = Attenuator (10dB) + Cable Loss (0.5dB)

Test Data: See Appendix

FCC §15.407(a) – CONDUCTED TRANSMITTER OUTPUT POWER

Applicable Standard


For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Note: Offset (10.5dB) = Attenuator(10dB) + Cable loss(0.5dB)

Test Data: See Appendix

FCC §15.407(a) - POWER SPECTRAL DENSITY

Applicable Standard

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.


Test Procedure

The measurements are base on C63.10:2020

Duty cycle $\geq 98\%$,Method SA-1 should be applied.

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$,Method SA-2 should be applied.

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$,Method SA-3 should be applied.



Note: Offset (10.5dB) = Attenuator (10dB) + Cable Loss (0.5dB)

Test Data: See Appendix

APPENDIX - TEST DATA


CONDUCTED EMISSIONS

Environmental Conditions & Test Information

Test Date:	2026-02-03
Temperature:	15.9 °C
Relative Humidity:	35 %
ATM Pressure:	103.5 kPa
Test Result:	Pass
Test Engineer:	Jack He

EUT operation mode: Transmitting in 802.11a mode 5180MHz (maximum output power)

Configuration 1
AC 120V/60 Hz, Line

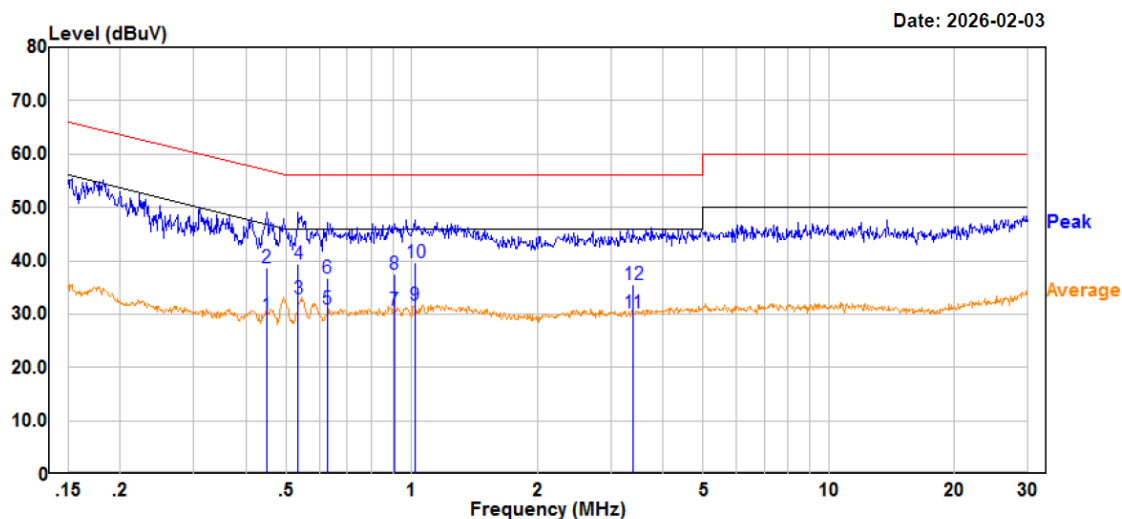


Trace: 1

Site : CE
Condition : limit\FCC PART 15.207\FCC 15.207 QP.csv Line
: DET:Peak
Project No. : RKSA251230001
Model : K1141
Phase : L
Voltage : 120V/60Hz
Mode : 5G WIFI
Test Equipment : ENV216,ESR3
Receiver Setting : RBW: 9 kHz, Sweep Time: Auto
Temperature : 15.9°C
Humidity : 35%
Atmospheric pressure: 103.5kPa
Test Engineer : Jack He
Check by : Bard Liu

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.449	9.50	20.28	29.78	46.89	-17.11	Average
2	0.449	18.50	20.28	38.78	56.89	-18.11	QP
3	0.535	12.60	20.19	32.79	46.00	-13.21	Average
4	0.535	19.20	20.19	39.39	56.00	-16.61	QP
5	0.627	10.60	20.23	30.83	46.00	-15.17	Average
6	0.627	16.40	20.23	36.63	56.00	-19.37	QP
7	0.907	10.60	20.19	30.79	46.00	-15.21	Average
8	0.907	17.30	20.19	37.49	56.00	-18.51	QP
9	1.017	11.60	20.17	31.77	46.00	-14.23	Average
10	1.017	19.40	20.17	39.57	56.00	-16.43	QP
11	3.381	10.10	20.22	30.32	46.00	-15.68	Average
12	3.381	15.20	20.22	35.42	56.00	-20.58	QP

AC 120V/60 Hz, Neutral

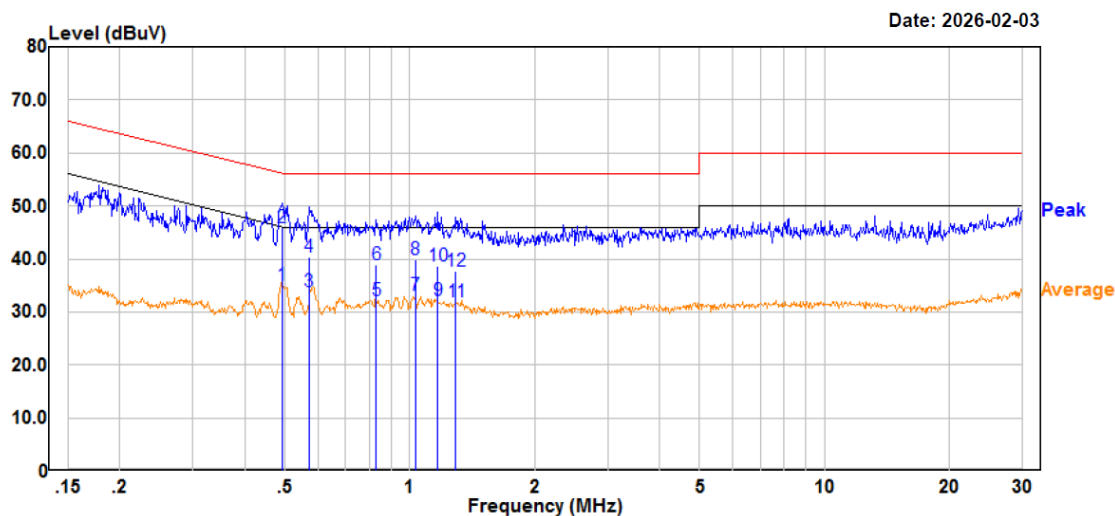


Trace: 1

Site : CE
 Condition : limit\FCC PART 15.207\FCC 15.207 QP.csv Neutral
 : DET:Peak
 Project No. : RKSA251230001
 Model : K1141
 Phase : N
 Voltage : 120V/60Hz
 Mode : 5G WIFI
 Test Equipment : ENV216,ESR3
 Receiver Setting : RBW: 9 kHz, Sweep Time: Auto
 Temperature : 15.9°C
 Humidity : 35%
 Atmospheric pressure: 103.5kPa
 Test Engineer : Jack He
 Check by : Bard Liu

	Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB	dBuV	dBuV	dB
1	0.491	14.90	20.22	35.12	46.15	-11.03 Average
2	0.491	25.60	20.22	45.82	56.15	-10.33 QP
3	0.570	13.60	20.22	33.82	46.00	-12.18 Average
4	0.570	20.10	20.22	40.32	56.00	-15.68 QP
5	0.829	11.90	20.21	32.11	46.00	-13.89 Average
6	0.829	18.70	20.21	38.91	56.00	-17.09 QP
7	1.032	13.00	20.18	33.18	46.00	-12.82 Average
8	1.032	19.70	20.18	39.88	56.00	-16.12 QP
9	1.169	11.91	20.19	32.10	46.00	-13.90 Average
10	1.169	18.61	20.19	38.80	56.00	-17.20 QP
11	1.292	11.60	20.21	31.81	46.00	-14.19 Average
12	1.292	17.60	20.21	37.81	56.00	-18.19 QP

Configuration 2
AC 120V/60 Hz, Line

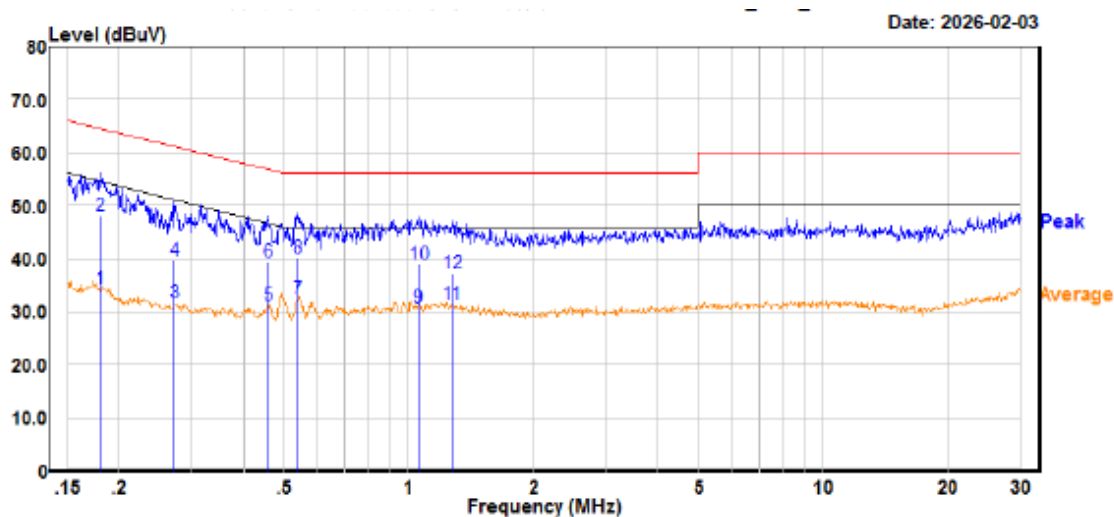


Trace: 1

Site : CE
 Condition : limit\FCC PART 15.207\FCC 15.207 QP.csv Line
 : DET:Peak
 Project No. : RKSA251230001
 Model : K1141
 Phase : L
 Voltage : 120V/60Hz
 Mode : 5G WIFI
 Test Equipment : ENV216,ESR3
 Receiver Setting : RBW: 9 kHz, Sweep Time: Auto
 Temperature : 15.9°C
 Humidity : 35%
 Atmospheric pressure: 103.5kPa
 Test Engineer : Jack He
 Check by : Bard Liu

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.179	13.80	20.45	34.25	54.51	-20.26	Average
2	0.179	27.60	20.45	48.05	64.51	-16.46	QP
3	0.271	11.20	20.39	31.59	51.07	-19.48	Average
4	0.271	19.30	20.39	39.69	61.07	-21.38	QP
5	0.456	10.90	20.27	31.17	46.77	-15.60	Average
6	0.456	19.20	20.27	39.47	56.77	-17.30	QP
7	0.537	12.10	20.19	32.29	46.00	-13.71	Average
8	0.537	20.00	20.19	40.19	56.00	-15.81	QP
9	1.053	10.51	20.17	30.68	46.00	-15.32	Average
10	1.053	18.71	20.17	38.88	56.00	-17.12	QP
11	1.266	11.20	20.21	31.41	46.00	-14.59	Average
12	1.266	17.10	20.21	37.31	56.00	-18.69	QP

AC 120V/60 Hz, Neutral

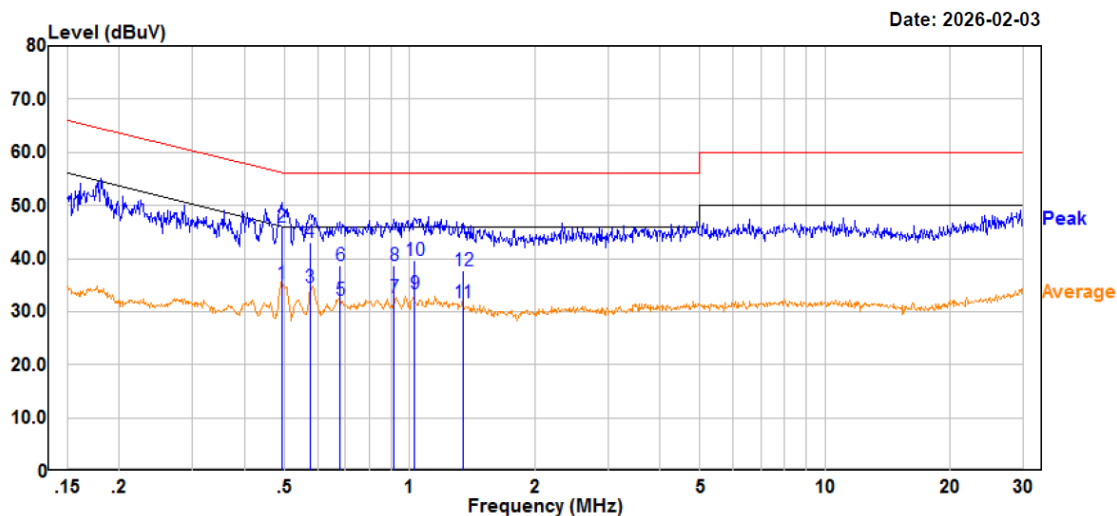


Trace: 1

Site : CE
 Condition : limit\FCC PART 15.207\FCC 15.207 QP.csv Neutral
 : DET:Peak
 Project No. : RKSA251230001
 Model : K1141
 Phase : N
 Voltage : 120V/60Hz
 Mode : 5G WIFI
 Test Equipment : ENV216,ESR3
 Receiver Setting : RBW: 9 kHz, Sweep Time: Auto
 Temperature : 15.9°C
 Humidity : 35%
 Atmospheric pressure: 103.5kPa
 Test Engineer : Jack He
 Check by : Bard Liu

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.491	15.00	20.22	35.22	46.15	-10.93	Average
2	0.491	25.60	20.22	45.82	56.15	-10.33	QP
3	0.576	14.30	20.22	34.52	46.00	-11.48	Average
4	0.576	22.80	20.22	43.02	56.00	-12.98	QP
5	0.679	12.00	20.24	32.24	46.00	-13.76	Average
6	0.679	18.40	20.24	38.64	56.00	-17.36	QP
7	0.916	12.50	20.19	32.69	46.00	-13.31	Average
8	0.916	18.50	20.19	38.69	56.00	-17.31	QP
9	1.027	13.10	20.18	33.28	46.00	-12.72	Average
10	1.027	19.40	20.18	39.58	56.00	-16.42	QP
11	1.344	11.50	20.22	31.72	46.00	-14.28	Average
12	1.344	17.60	20.22	37.82	56.00	-18.18	QP

Configuration 3

AC 120V/60 Hz, Line

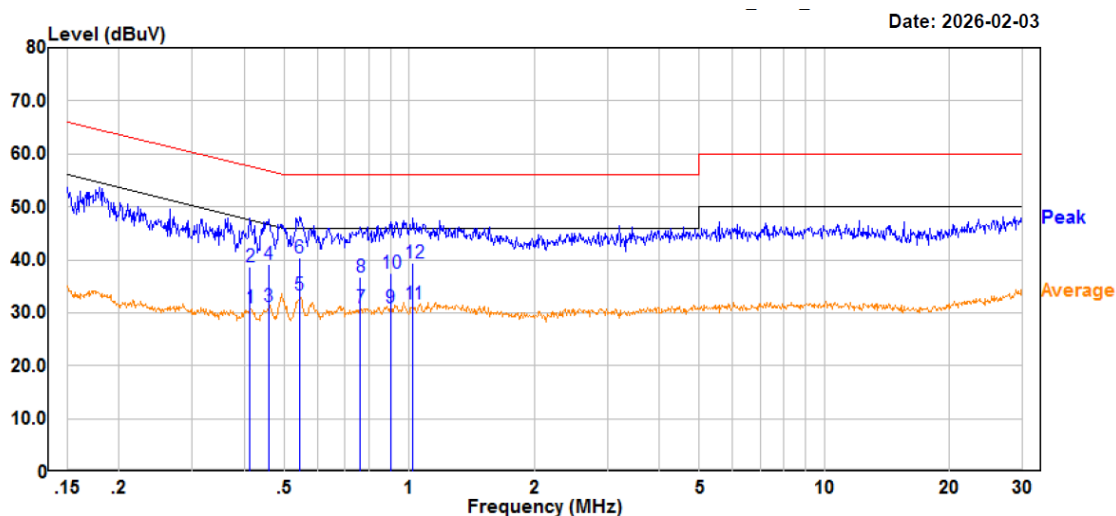


Trace: 1

Site : CE
 Condition : limit\FCC PART 15.207\FCC 15.207 QP.csv Line
 : DET:Peak
 Project No. : RKSA251230001
 Model : K1141
 Phase : L
 Voltage : 120V/60Hz
 Mode : 5G WIFI
 Test Equipment : ENV216,ESR3
 Receiver Setting : RBW: 9 kHz, Sweep Time: Auto
 Temperature : 15.9°C
 Humidity : 35%
 Atmospheric pressure: 103.5kPa
 Test Engineer : Jack He
 Check by : Bard Liu

	Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB	dBuV	dBuV	dB
1	0.413	10.71	20.29	31.00	47.60	-16.60 Average
2	0.413	18.31	20.29	38.60	57.60	-19.00 QP
3	0.458	11.00	20.27	31.27	46.73	-15.46 Average
4	0.458	19.00	20.27	39.27	56.73	-17.46 QP
5	0.543	13.20	20.19	33.39	46.00	-12.61 Average
6	0.543	20.10	20.19	40.29	56.00	-15.71 QP
7	0.762	10.70	20.24	30.94	46.00	-15.06 Average
8	0.762	16.60	20.24	36.84	56.00	-19.16 QP
9	0.902	10.80	20.20	31.00	46.00	-15.00 Average
10	0.902	17.20	20.20	37.40	56.00	-18.60 QP
11	1.022	11.60	20.17	31.77	46.00	-14.23 Average
12	1.022	19.20	20.17	39.37	56.00	-16.63 QP

AC 120V/60 Hz, Neutral

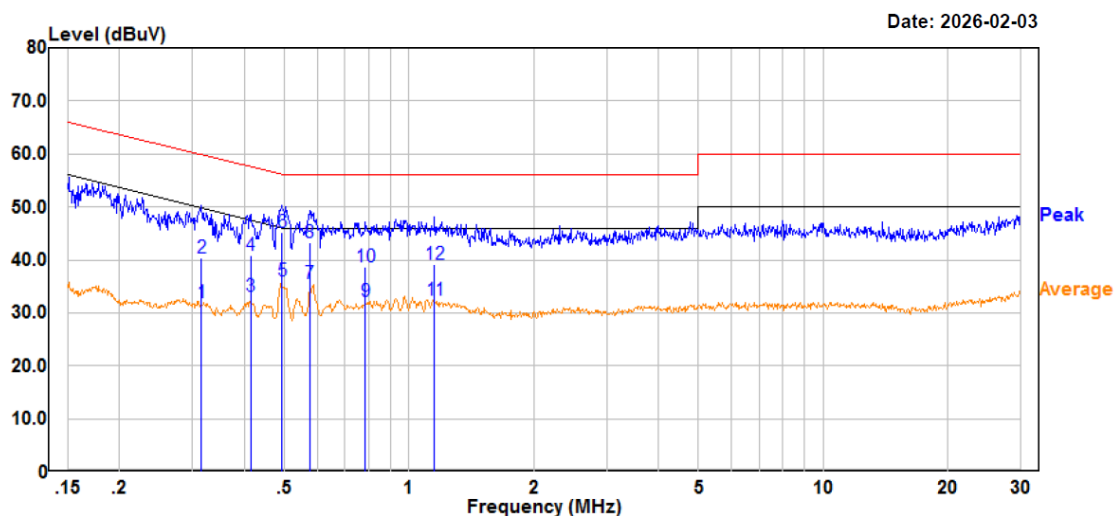


Trace: 1

Site : CE
 Condition : limit\FCC PART 15.207\FCC 15.207 QP.csv Neutral
 : DET:Peak
 Project No. : RKSA251230001
 Model : K1141
 Phase : N
 Voltage : 120V/60Hz
 Mode : 5G WIFI
 Test Equipment : ENV216,ESR3
 Receiver Setting : RBW: 9 kHz, Sweep Time: Auto
 Temperature : 15.9℃
 Humidity : 35%
 Atmospheric pressure: 103.5kPa
 Test Engineer : Jack He
 Check by : Bard Liu

		Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.315	11.60	20.36	31.96	49.83	-17.87	Average
2	0.315	20.10	20.36	40.46	59.83	-19.37	QP
3	0.415	12.70	20.31	33.01	47.55	-14.54	Average
4	0.415	20.60	20.31	40.91	57.55	-16.64	QP
5	0.494	15.80	20.21	36.01	46.11	-10.10	Average
6	0.494	25.10	20.21	45.31	56.11	-10.80	QP
7	0.576	15.40	20.22	35.62	46.00	-10.38	Average
8	0.576	23.00	20.22	43.22	56.00	-12.78	QP
9	0.785	11.90	20.22	32.12	46.00	-13.88	Average
10	0.785	18.40	20.22	38.62	56.00	-17.38	QP
11	1.152	12.31	20.19	32.50	46.00	-13.50	Average
12	1.152	18.91	20.19	39.10	56.00	-16.90	QP

Configuration 4

AC 120V/60 Hz, Line

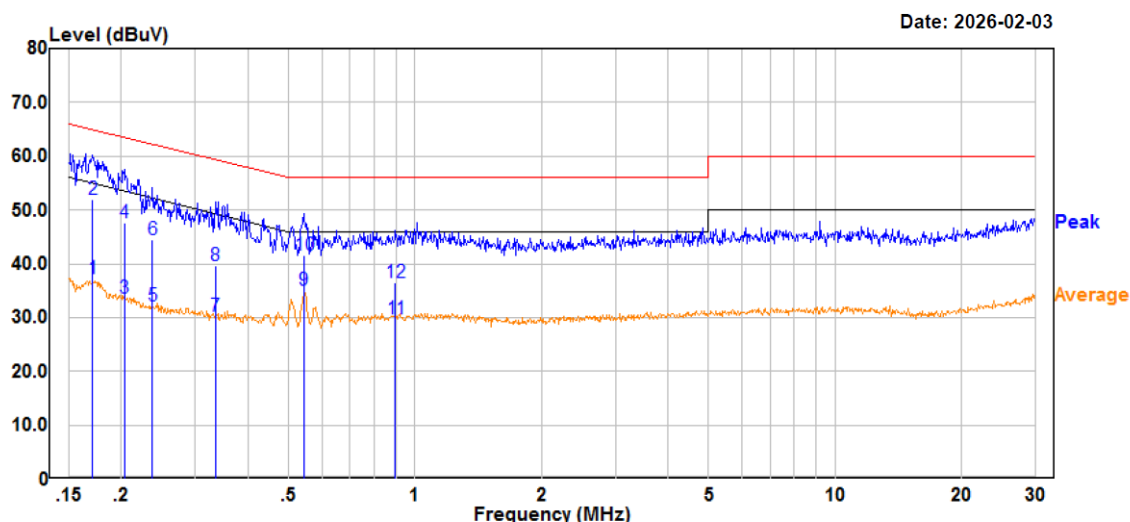


Trace: 1

Site : CE
 Condition : limit\FCC PART 15.207\FCC 15.207 QP.csv Line
 : DET:Peak
 Project No. : RKSA251230001
 Model : K1141
 Phase : L
 Voltage : 120V/60Hz
 Mode : 5G WIFI
 Test Equipment : ENV216,ESR3
 Receiver Setting : RBW: 9 kHz, Sweep Time: Auto
 Temperature : 15.9°C
 Humidity : 35%
 Atmospheric pressure: 103.5kPa
 Test Engineer : Jack He
 Check by : Bard Liu

	Read Freq	Level dBuV	Factor dB	Level dBuV	Limit Line dBuV	Over Limit dB	Remark
	MHz						
1	0.171	16.90	20.44	37.34	54.92	-17.58	Average
2	0.171	31.50	20.44	51.94	64.92	-12.98	QP
3	0.203	13.19	20.48	33.67	53.47	-19.80	Average
4	0.203	27.19	20.48	47.67	63.47	-15.80	QP
5	0.237	11.80	20.43	32.23	52.19	-19.96	Average
6	0.237	24.10	20.43	44.53	62.19	-17.66	QP
7	0.335	9.90	20.35	30.25	49.33	-19.08	Average
8	0.335	19.30	20.35	39.65	59.33	-19.68	QP
9	0.543	14.90	20.19	35.09	46.00	-10.91	Average
10	0.543	21.50	20.19	41.69	56.00	-14.31	QP
11	0.898	9.60	20.20	29.80	46.00	-16.20	Average
12	0.898	16.40	20.20	36.60	56.00	-19.40	QP

AC 120V/60 Hz, Neutral

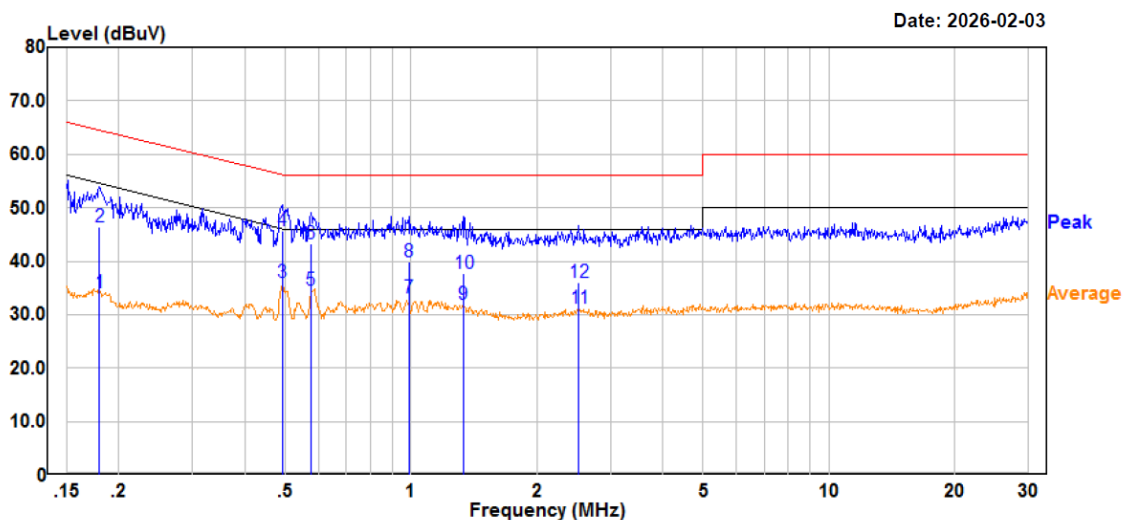

Site : CE
Condition : limit\FCC PART 15.207\FCC 15.207 QP.csv Neutral
Project No. : RKSA251230001
Model : K1141
Phase : N
Voltage : 120V/60Hz
Mode : 5G WIFI
Test Equipment : ENV216,ESR3
Receiver Setting : RBW: 9 kHz, Sweep Time: Auto
Temperature : 15.9°C
Humidity : 35%
Atmospheric pressure: 103.5kPa
Test Engineer : Jack He
Check by : Bard Liu

	Read		Limit	Over	
Freq	Level	Factor	Level	Line	Limit Remark
MHz	dBuV	dB	dBuV	dBuV	dB
1	0.179	13.61	20.41	34.02	54.51 -20.49 Average
2	0.179	26.01	20.41	46.42	64.51 -18.09 QP
3	0.491	15.80	20.22	36.02	46.15 -10.13 Average
4	0.491	25.40	20.22	45.62	56.15 -10.53 QP
5	0.576	14.30	20.22	34.52	46.00 -11.48 Average
6	0.576	23.00	20.22	43.22	56.00 -12.78 QP
7	0.987	12.90	20.18	33.08	46.00 -12.92 Average
8	0.987	19.60	20.18	39.78	56.00 -16.22 QP
9	1.331	11.59	20.22	31.81	46.00 -14.19 Average
10	1.331	17.59	20.22	37.81	56.00 -18.19 QP
11	2.519	11.00	20.26	31.26	46.00 -14.74 Average
12	2.519	15.80	20.26	36.06	56.00 -19.94 QP

TRANSMITTER UNWANTED EMISSIONS & RESTRICTED FREQUENCY BANDS**Environmental Conditions & Test Information**


Test Item:	SPURIOUS EMISSIONS			
	9kHz – 30MHz	30MHz - 1GHz	1 GHz - 18 GHz	18 GHz - 40 GHz
Test Date:	2026-01-14	206-01-13	2026-01-13 to 2026-01-24	2026-02-07
Temperature:	20.7 °C	15.6°C	16.2-16.3 °C	19.6 °C
Relative Humidity:	46 %	43 %	41-42 %	50 %
ATM Pressure:	102.2 kPa	102.3 kPa	102.3-103.3 kPa	102.7 kPa
Test Result:	Pass	Pass	Pass	Pass
Test Engineer:	Scarf Yang	Scarf Yang	Destine Hu	Hugh Wu

After pre-scan in the X, Y and Z axes of orientation, the worst case at Y axis is below:


Configuration 1

**9 kHz-30 MHz: Transmitting in 802.11a mode 5180MHz (maximum output power)
Parallel(worst case)**

9kHz-150kHz

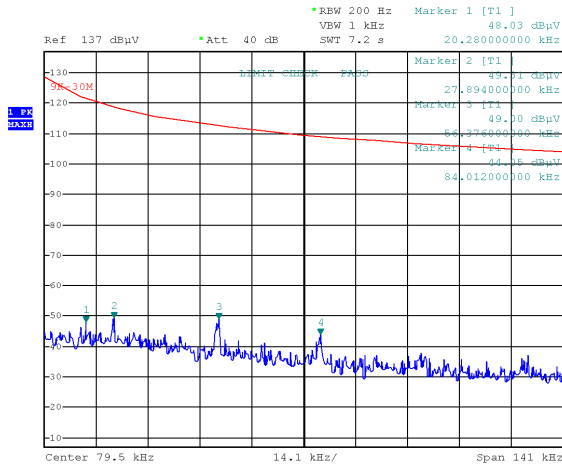

150kHz-30MHz

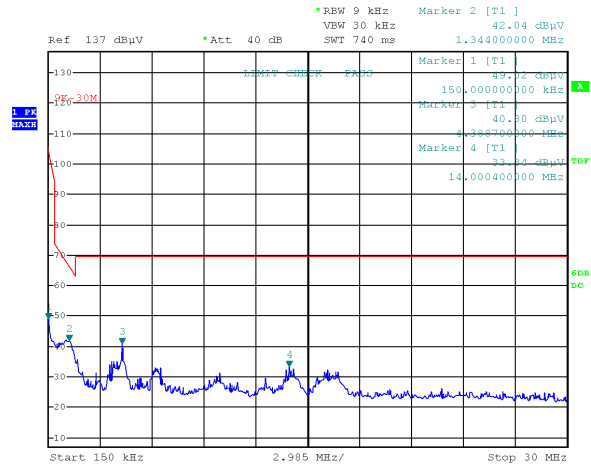

Project No.RKSA251230001
Date: 14.JAN.2026 13:46:29

Tester:Scarf Yang

Project No.RKSA251230001
Date: 14.JAN.2026 18:09:56

Tester:Scarf Yang

9kHz-150kHz


Frequency (MHz)	Corrected Amplitude (dBμV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m) @3m	Margin (dB)
0.020280	48.03	PK	-0.56	121.46	73.43
0.027894	49.31	PK	-0.60	118.69	69.38
0.056376	49.00	PK	-4.55	112.58	63.58
0.084012	44.05	PK	-7.69	109.12	65.07

150kHz-30MHz

Frequency (MHz)	Corrected Amplitude (dBμV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m) @3m	Margin (dB)
0.150000	49.02	PK	-11.34	104.08	55.06
1.344000	42.04	PK	-28.75	65.04	23.00
4.388700	40.80	PK	-31.97	69.54	28.74
14.000400	33.34	PK	-33.11	69.54	36.20

30MHz-1GHz: Transmitting in 802.11a mode 5180MHz (maximum output power)**Common Information**


Project No: RKSA251230001
EUT Model: K1141
Test Mode: 5G WIFI
Standard: FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.407
Test Equipment: ESCI, JB3, 310N
Receiver Setting: RBW: 100 kHz, VBW: 300 kHz, Sweep Time: Auto
Temperature: 15.6°C
Humidity: 43%
Barometric Pressure: 102.3kPa
Test Engineer: Scarf Yang
Check Engineer: Hardy Huang
Test Date: 2026/1/13

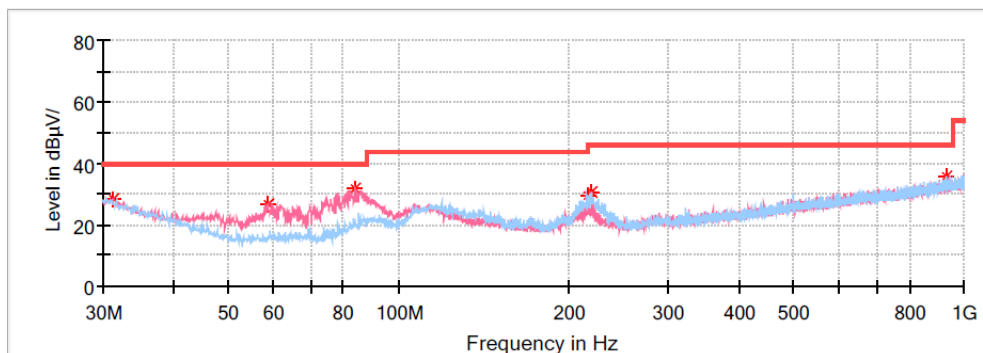**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
31.212500	28.59	40.00	11.41	V	-5.5
58.615000	26.73	40.00	13.27	V	-17.1
84.077500	31.50	40.00	8.50	V	-17.0
216.240000	29.31	46.00	16.69	H	-13.2
219.998750	30.69	46.00	15.31	H	-13.5
931.130000	35.94	46.00	10.06	H	1.5

1GHz-18GHz (5150-5250MHz Band):**802.11a Mode:****Low Channel: 5180MHz****Common Information**


Project No.: RKSA251230001
 EUT Model: K1141
 Test Mode: 5G WIFI 802.11a mode Low Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 16.3℃
 Humidity: 42%
 Atmospheric Pressure: 102.3kPa
 Test Engineer: Destine Hu
 Test Date: 2026/1/13

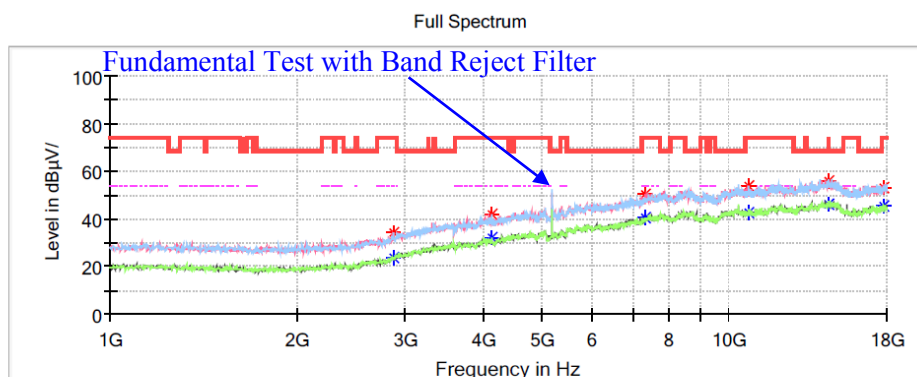**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2866.600000	---	23.79	54.00	30.21	V	-8.4
2866.600000	34.15	---	74.00	39.85	V	-8.4
4141.600000	---	32.31	54.00	21.69	H	-4.8
4141.600000	41.73	---	74.00	32.27	H	-4.8
7337.600000	---	40.49	54.00	13.51	H	2.5
7337.600000	50.35	---	74.00	23.65	H	2.5
10761.400000	53.66	---	74.00	20.34	H	6.7
10761.400000	---	42.56	54.00	11.44	H	6.7
14491.200000	---	46.14	54.00	7.86	V	12.0
14491.200000	55.97	---	74.00	18.03	V	12.0
17806.200000	---	45.58	54.00	8.42	V	11.2
17806.200000	52.91	---	74.00	21.09	V	11.2

Middle Channel: 5200MHz**Common Information**


Project No.: RKSA251230001
 EUT Model: K1141
 Test Mode: 5G WIFI 802.11a mode Middle Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 16.3℃
 Humidity: 42%
 Atmospheric Pressure: 102.3kPa
 Test Engineer: Destine Hu
 Test Date: 2026/1/13

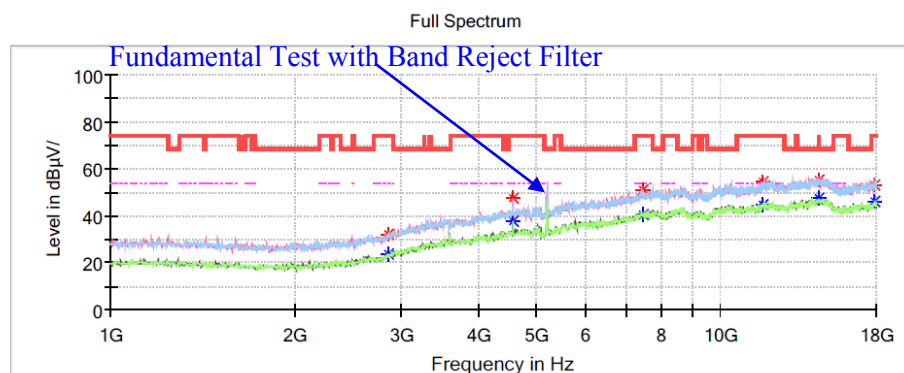**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2846.200000	---	23.60	54.00	30.40	V	-8.5
2846.200000	32.00	---	74.00	42.00	V	-8.5
4576.800000	47.23	---	74.00	26.77	H	-4.0
4576.800000	---	37.76	54.00	16.24	H	-4.0
7446.400000	51.00	---	74.00	23.00	H	2.8
7446.400000	---	40.82	54.00	13.18	H	2.8
11754.200000	---	44.60	54.00	9.40	H	8.6
11754.200000	54.76	---	74.00	19.24	H	8.6
14477.600000	---	47.69	54.00	6.31	V	11.9
14477.600000	55.24	---	74.00	18.76	V	11.9
17850.400000	---	46.27	54.00	7.73	V	11.4
17850.400000	52.81	---	74.00	21.19	V	11.4

High Channel: 5240MHz**Common Information**


Project No.: RKSA251230001
 EUT Model: K1141
 Test Mode: 5G WIFI 802.11a mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 16.3℃
 Humidity: 42%
 Atmospheric Pressure: 102.3kPa
 Test Engineer: Destine Hu
 Test Date: 2026/1/13

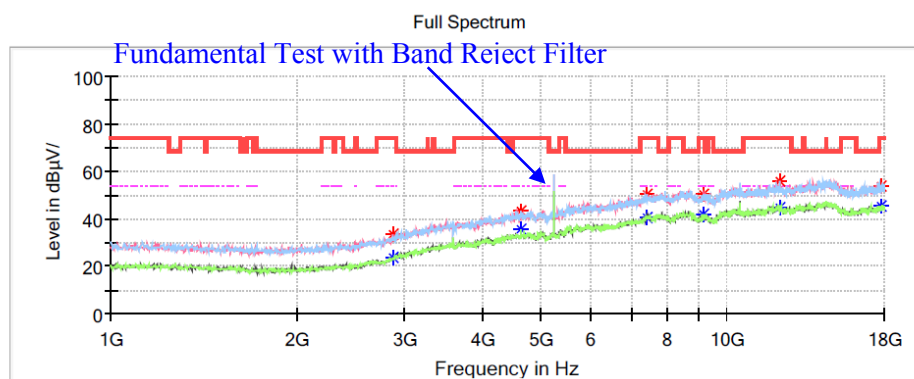**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2873.400000	33.59	---	74.00	40.41	V	-8.4
2873.400000	---	23.48	54.00	30.52	V	-8.4
4634.600000	---	35.73	54.00	18.27	H	-3.9
4634.600000	43.67	---	74.00	30.33	H	-3.9
7412.400000	50.44	---	74.00	23.56	V	2.7
7412.400000	---	40.86	54.00	13.14	V	2.7
9132.800000	---	42.12	54.00	11.88	H	4.7
9132.800000	50.66	---	74.00	23.34	H	4.7
12162.200000	---	44.73	54.00	9.27	H	9.0
12162.200000	55.70	---	74.00	18.30	H	9.0
17809.600000	---	45.74	54.00	8.26	V	11.3
17809.600000	53.64	---	74.00	20.36	V	11.3

802.11n20 Mode:**Low Channel: 5180MHz****Common Information**


Project No.: RKSA251230001
EUT Model: K1141
Test Mode: 5G WIFI 802.11n20 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 16.3℃
Humidity: 42%
Atmospheric Pressure: 102.3kPa
Test Engineer: Destine Hu
Test Date: 2026/1/13

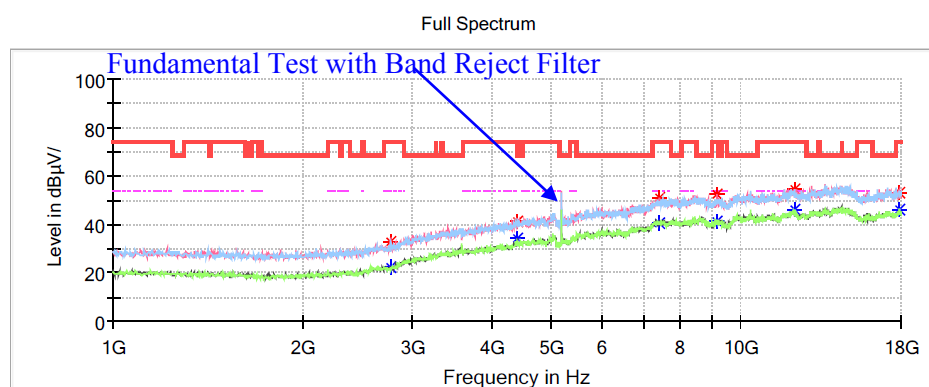**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2771.400000	---	22.18	54.00	31.82	H	-8.7
2771.400000	32.92	---	74.00	41.08	H	-8.7
4396.600000	41.21	---	74.00	32.79	V	-4.4
4396.600000	---	34.29	54.00	19.71	V	-4.4
7405.600000	---	40.32	54.00	13.68	V	2.7
7405.600000	50.85	---	74.00	23.15	V	2.7
9166.800000	---	40.96	54.00	13.04	V	4.7
9166.800000	52.46	---	74.00	21.54	V	4.7
12158.800000	54.39	---	74.00	19.61	H	9.0
12158.800000	---	45.95	54.00	8.05	H	9.0
17915.000000	53.18	---	74.00	20.82	H	11.5
17915.000000	---	46.05	54.00	7.95	H	11.5

Middle Channel: 5200MHz**Common Information**

Project No.: RKSA251230001
 EUT Model: K1141
 Test Mode: 5G WIFI 802.11n20 mode Middle Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 16.3℃
 Humidity: 42%
 Atmospheric Pressure: 102.3kPa
 Test Engineer: Destine Hu
 Test Date: 2026/1/13

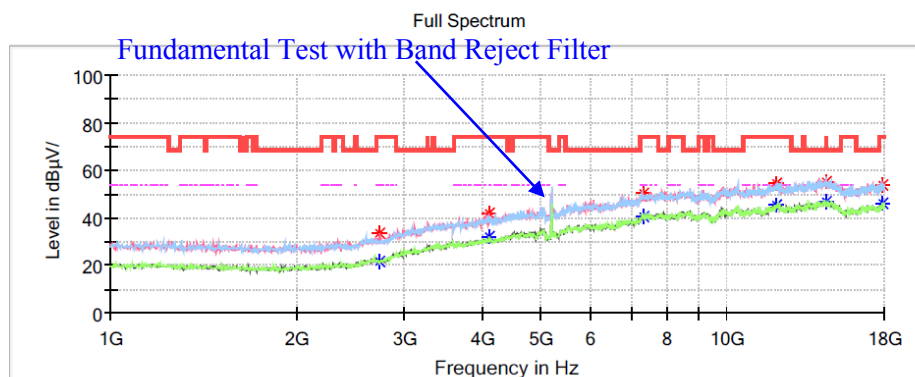
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2737.400000	---	21.58	54.00	32.42	V	-8.8
2737.400000	33.27	---	74.00	40.73	V	-8.8
4111.000000	---	32.24	54.00	21.76	V	-4.8
4111.000000	41.72	---	74.00	32.28	V	-4.8
7310.400000	---	40.70	54.00	13.30	V	2.4
7310.400000	50.38	---	74.00	23.62	V	2.4
12043.200000	---	45.26	54.00	8.74	H	9.0
12043.200000	54.70	---	74.00	19.30	H	9.0
14481.000000	55.52	---	74.00	18.48	H	11.9
14481.000000	---	47.04	54.00	6.96	H	11.9
17918.400000	53.54	---	74.00	20.46	H	11.5
17918.400000	---	46.04	54.00	7.96	H	11.5

High Channel: 5240MHz**Common Information**

Project No.: RKSA251230001
EUT Model: K1141
Test Mode: 5G WIFI 802.11n20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 16.3℃
Humidity: 42%
Atmospheric Pressure: 102.3kPa
Test Engineer: Destine Hu
Test Date: 2026/1/13

Full Spectrum

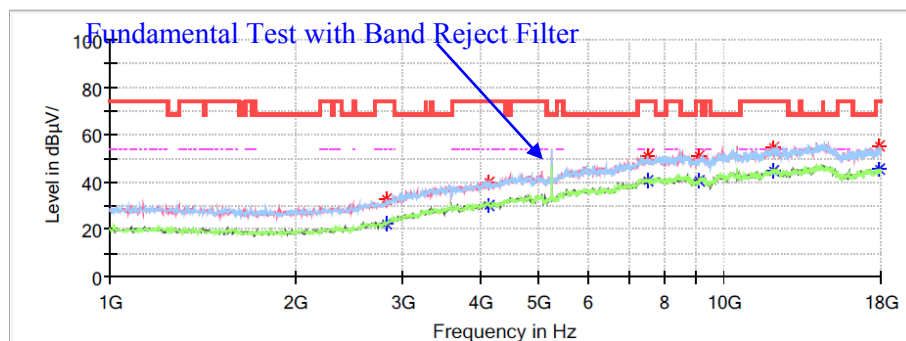
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2812.200000	---	22.56	54.00	31.44	H	-8.6
2812.200000	32.58	---	74.00	41.42	H	-8.6
4134.800000	---	30.27	54.00	23.73	V	-4.8
4134.800000	40.06	---	74.00	33.94	V	-4.8
7517.800000	50.78	---	74.00	23.22	H	3.0
7517.800000	---	40.77	54.00	13.23	H	3.0
9098.800000	---	40.47	54.00	13.53	V	4.7
9098.800000	51.25	---	74.00	22.75	V	4.7
12060.200000	54.73	---	74.00	19.27	H	9.0
12060.200000	---	45.03	54.00	8.97	H	9.0
17881.000000	55.52	---	74.00	18.48	H	11.4
17881.000000	---	45.70	54.00	8.30	H	11.4

802.11n40 Mode:**Channel: 5190MHz****Common Information**

Project No.: RKSA251230001
EUT Model: K1141
Test Mode: 5G WIFI 802.11n40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 16.3°C
Humidity: 42%
Atmospheric Pressure: 102.3kPa
Test Engineer: Destine Hu
Test Date: 2026/1/13

Full Spectrum

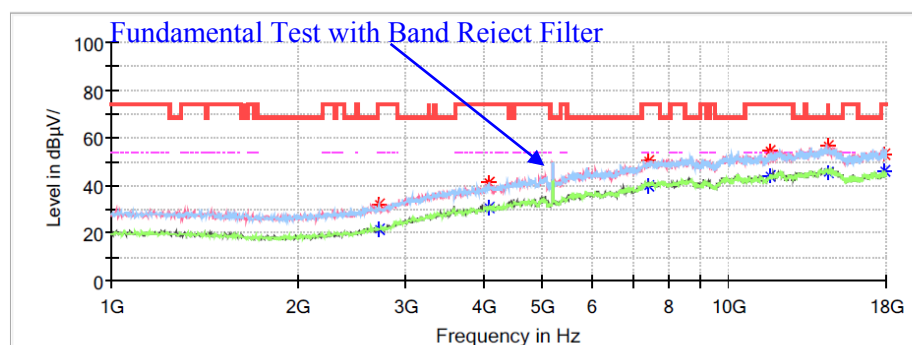
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
2706.800000	---	21.33	54.00	32.67	H	-8.9
2706.800000	32.06	---	74.00	41.94	H	-8.9
4083.800000	41.09	---	74.00	32.91	H	-4.8
4083.800000	---	30.96	54.00	23.04	H	-4.8
7415.800000	---	40.18	54.00	13.82	V	2.7
7415.800000	50.17	---	74.00	23.83	V	2.7
11635.200000	54.40	---	74.00	19.60	V	8.4
11635.200000	---	44.27	54.00	9.73	V	8.4
14481.000000	56.80	---	74.00	17.20	H	11.9
14481.000000	---	45.79	54.00	8.21	H	11.9
17925.200000	---	46.27	54.00	7.73	H	11.6
17925.200000	52.97	---	74.00	21.03	H	11.6

Channel: 5230MHz**Common Information**

Project No.: RKSA251230001
 EUT Model: K1141
 Test Mode: 5G WIFI 802.11n40 mode High Channel
 Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 16.3°C
 Humidity: 42%
 Atmospheric Pressure: 102.3kPa
 Test Engineer: Destine Hu
 Test Date: 2026/1/13


Full Spectrum

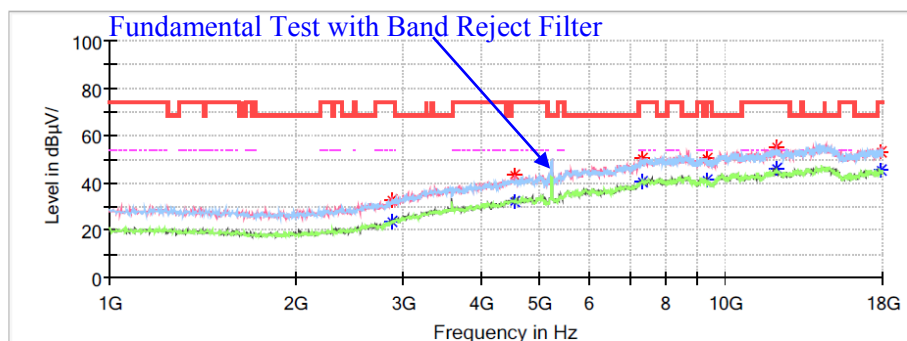**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2876.800000	---	23.49	54.00	30.51	H	-8.4
2876.800000	33.01	---	74.00	40.99	H	-8.4
4553.000000	43.15	---	74.00	30.85	H	-4.1
4553.000000	---	32.26	54.00	21.74	H	-4.1
7313.800000	---	40.75	54.00	13.25	V	2.4
7313.800000	50.43	---	74.00	23.57	V	2.4
9306.200000	---	41.26	54.00	12.74	H	4.7
9306.200000	50.49	---	74.00	23.51	H	4.7
12067.000000	55.06	---	74.00	18.94	V	9.0
12067.000000	---	45.93	54.00	8.07	V	9.0
17935.400000	---	45.79	54.00	8.21	V	11.6
17935.400000	53.15	---	74.00	20.85	V	11.6

1GHz-18GHz(5250-5350MHz Band):**802.11a Mode:****Low Channel: 5260MHz****Common Information**


Project No.:	RKSA251230001
EUT Model:	K1141
Test Mode:	5G WIFI 802.11a mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	16.3℃
Humidity:	42%
Atmospheric Pressure:	102.3kPa
Test Engineer:	Destine Hu
Test Date:	2026/1/13

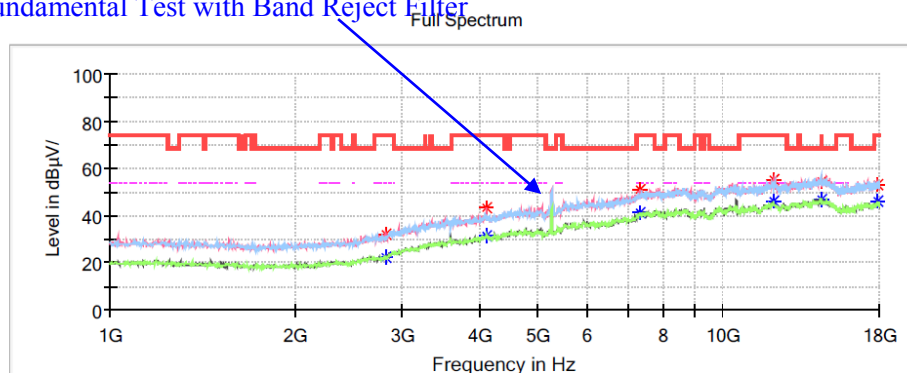Fundamental Test with Band Reject Filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2808.800000	32.39	---	74.00	41.61	V	-8.6
2808.800000	---	22.56	54.00	31.44	V	-8.6
4117.800000	43.08	---	74.00	30.92	V	-4.8
4117.800000	---	31.48	54.00	22.52	V	-4.8
7313.800000	---	41.51	54.00	12.49	V	2.4
7313.800000	50.70	---	74.00	23.30	V	2.4
12084.000000	55.58	---	74.00	18.42	H	9.0
12084.000000	---	46.07	54.00	7.93	H	9.0
14481.000000	---	46.79	54.00	7.21	V	11.9
14481.000000	54.70	---	74.00	19.30	V	11.9
17877.600000	---	46.26	54.00	7.74	H	11.4
17877.600000	53.12	---	74.00	20.88	H	11.4

Middle Channel: 5300MHz**Common Information**


Project No.: RKSA251230001
EUT Model: K1141
Test Mode: 5G WIFI 802.11a mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 16.3℃
Humidity: 42%
Atmospheric Pressure: 102.3kPa
Test Engineer: Destine Hu
Test Date: 2026/1/13

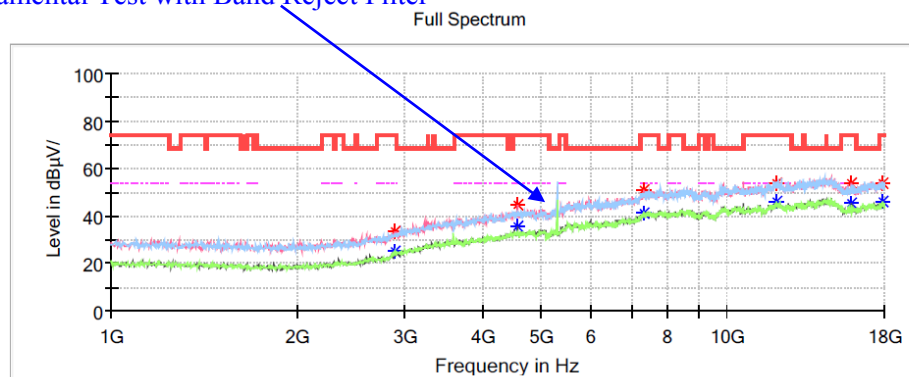Fundamental Test with Band Reject Filter**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2883.600000	---	25.36	54.00	28.64	V	-8.4
2883.600000	33.30	---	74.00	40.70	V	-8.4
4576.800000	---	35.92	54.00	18.08	V	-4.0
4576.800000	44.82	---	74.00	29.18	V	-4.0
7313.800000	51.10	---	74.00	22.90	H	2.4
7313.800000	---	41.22	54.00	12.78	H	2.4
12002.400000	---	45.86	54.00	8.14	H	9.1
12002.400000	54.18	---	74.00	19.82	H	9.1
15898.800000	53.85	---	74.00	20.15	V	8.8
15898.800000	---	45.59	54.00	8.41	V	8.8
17857.200000	---	46.19	54.00	7.81	V	11.4
17857.200000	53.51	---	74.00	20.49	V	11.4

High Channel: 5320MHz**Common Information**

Project No.: RKSA251230001
EUT Model: K1141
Test Mode: 5G WIFI 802.11a mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 16.3℃
Humidity: 42%
Atmospheric Pressure: 102.3kPa
Test Engineer: Destine Hu
Test Date: 2026/1/13

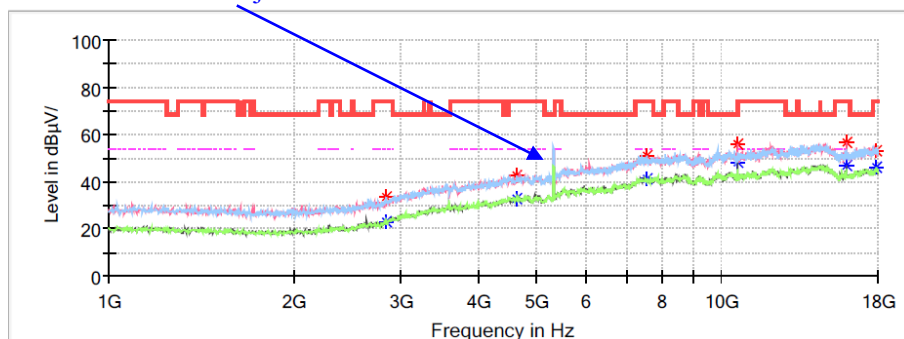
Fundamental Test with Band Reject Filter Full Spectrum**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2829.200000	---	22.76	54.00	31.24	H	-8.6
2829.200000	33.35	---	74.00	40.65	H	-8.6
4617.600000	---	33.21	54.00	20.79	H	-3.9
4617.600000	42.83	---	74.00	31.17	H	-3.9
7538.200000	---	40.97	54.00	13.03	H	3.0
7538.200000	51.16	---	74.00	22.84	H	3.0
10642.400000	55.67	---	74.00	18.33	V	6.7
10642.400000	---	48.20	54.00	5.80	V	6.7
15966.800000	56.59	---	74.00	17.41	V	8.8
15966.800000	---	47.08	54.00	6.92	V	8.8
17921.800000	52.95	---	74.00	21.05	V	11.6
17921.800000	---	46.12	54.00	7.88	V	11.6

802.11n20 Mode:**Low Channel: 5260MHz****Common Information**

Project No.:	RKSA251230001
EUT Model:	K1141
Test Mode:	5G WIFI 802.11n20 mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	16.3°C
Humidity:	42%
Atmospheric Pressure:	102.3kPa
Test Engineer:	Destine Hu
Test Date:	2026/1/13


Full Spectrum

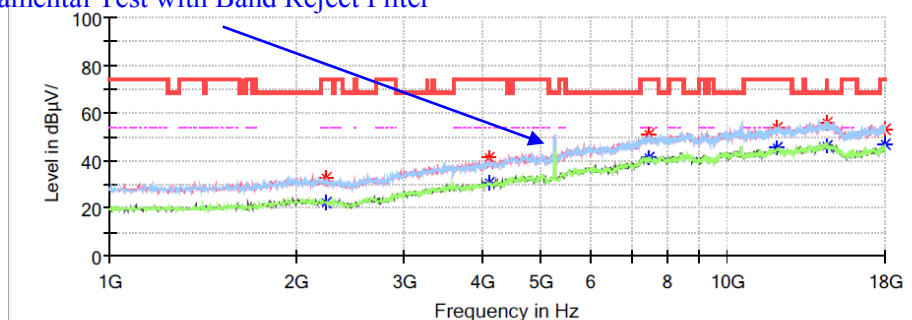Fundamental Test with Band Reject Filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2241.000000	---	22.70	54.00	31.30	V	-9.8
2241.000000	33.17	---	74.00	40.83	V	-9.8
4121.200000	---	30.99	54.00	23.01	V	-4.8
4121.200000	41.24	---	74.00	32.76	V	-4.8
7477.000000	---	41.06	54.00	12.94	H	2.9
7477.000000	50.87	---	74.00	23.13	H	2.9
12005.800000	---	45.66	54.00	8.34	V	9.1
12005.800000	54.15	---	74.00	19.85	V	9.1
14487.800000	---	45.91	54.00	8.09	V	11.9
14487.800000	56.15	---	74.00	17.85	V	11.9
17966.000000	53.03	---	74.00	20.97	H	11.7
17966.000000	---	46.57	54.00	7.43	H	11.7

Middle Channel: 5300MHz**Common Information**

Project No.: RKSA251230001
EUT Model: K1141
Test Mode: 5G WIFI 802.11n20 mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 16.3°C
Humidity: 42%
Atmospheric Pressure: 102.3kPa
Test Engineer: Destine Hu
Test Date: 2026/1/13

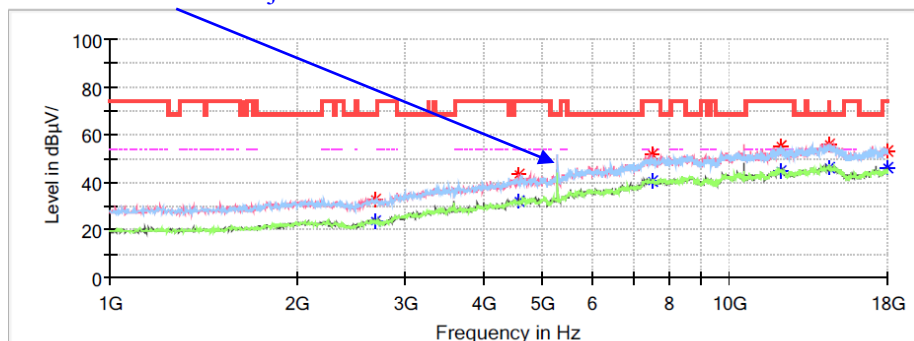Fundamental Test with Band Reject Filter Full Spectrum**Critical Freqs**


Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2672.800000	---	23.92	---	---	V	-9.0
2672.800000	32.92	---	68.20	35.28	V	-9.0
4580.200000	43.07	---	74.00	30.93	V	-4.0
4580.200000	---	32.51	54.00	21.49	V	-4.0
7494.000000	51.82	---	74.00	22.18	H	3.0
7494.000000	---	40.68	54.00	13.32	H	3.0
12077.200000	55.44	---	74.00	18.56	H	9.0
12077.200000	---	45.04	54.00	8.96	H	9.0
14494.600000	---	45.97	54.00	8.03	H	12.0
14494.600000	55.75	---	74.00	18.25	H	12.0
17969.400000	---	45.90	54.00	8.10	V	11.7
17969.400000	52.85	---	74.00	21.15	V	11.7

High Channel: 5320MHz**Common Information**

Project No.: RKSA251230001
 EUT Model: K1141
 Test Mode: 5G WIFI 802.11n20 mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 16.3°C
 Humidity: 42%
 Atmospheric Pressure: 102.3kPa
 Test Engineer: Destine Hu
 Test Date: 2026/1/13

Fundamental Test with Band Reject Filter


Full Spectrum

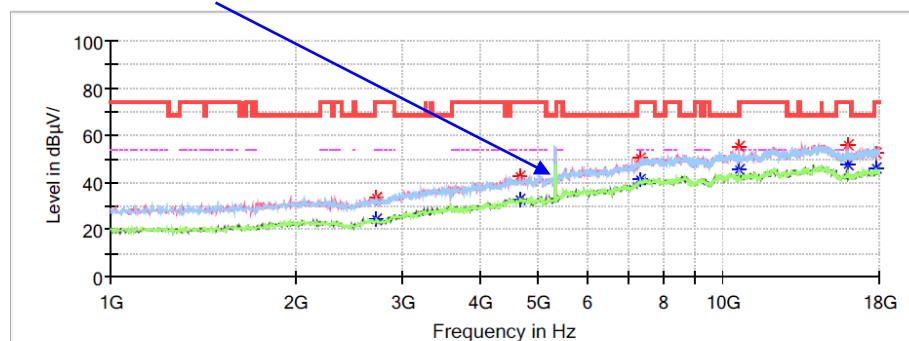**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2720.400000	---	24.38	54.00	29.62	H	-8.9
2720.400000	33.60	---	74.00	40.40	H	-8.9
4651.600000	---	32.74	54.00	21.26	H	-3.8
4651.600000	42.69	---	74.00	31.31	H	-3.8
7327.400000	---	41.37	54.00	12.63	H	2.5
7327.400000	50.35	---	74.00	23.65	H	2.5
10642.400000	---	45.63	54.00	8.37	V	6.7
10642.400000	54.98	---	74.00	19.02	V	6.7
15963.400000	---	47.78	54.00	6.22	V	8.8
15963.400000	55.61	---	74.00	18.39	V	8.8
17765.400000	52.51	---	74.00	21.49	V	11.1
17765.400000	---	46.37	54.00	7.63	V	11.1

802.11n40 Mode:**Low Channel: 5270MHz****Common Information**

Project No.: RKSA251230001
EUT Model: K1141
Test Mode: 5G WIFI 802.11n40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 16.3°C
Humidity: 42%
Atmospheric Pressure: 102.3kPa
Test Engineer: Destine Hu
Test Date: 2026/1/13

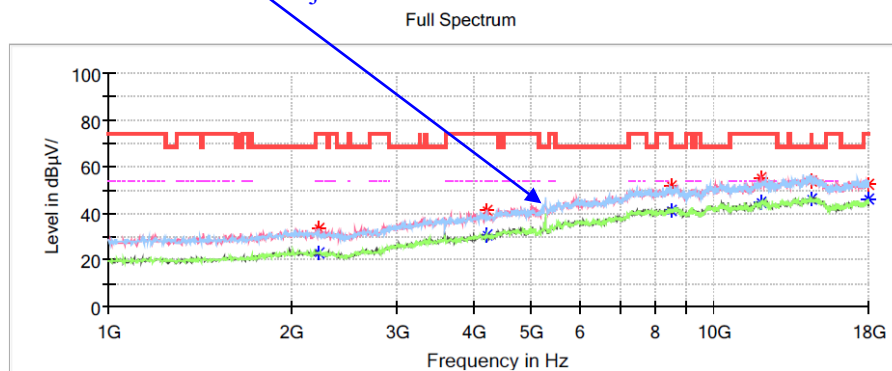Fundamental Test with Band Reject Filter**Critical_Freqs**


Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
2224.000000	---	23.11	54.00	30.89	H	-9.8
2224.000000	33.55	---	74.00	40.45	H	-9.8
4223.200000	---	30.64	54.00	23.36	H	-4.6
4223.200000	41.08	---	74.00	32.92	H	-4.6
8493.600000	---	41.37	54.00	12.63	H	4.7
8493.600000	51.87	---	74.00	22.13	H	4.7
11988.800000	---	44.90	54.00	9.10	V	9.0
11988.800000	55.43	---	74.00	18.57	V	9.0
14494.600000	54.19	---	74.00	19.81	V	12.0
14494.600000	---	46.20	54.00	7.80	V	12.0
17966.000000	52.44	---	74.00	21.56	H	11.7
17966.000000	---	46.01	54.00	7.99	H	11.7

High Channel: 5310MHz**Common Information**

Project No.: RKSA251230001
 EUT Model: K1141
 Test Mode: 5G WIFI 802.11n40 mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 16.3°C
 Humidity: 42%
 Atmospheric Pressure: 102.3kPa
 Test Engineer: Destine Hu
 Test Date: 2026/1/13

Fundamental Test with Band Reject Filter


Full Spectrum

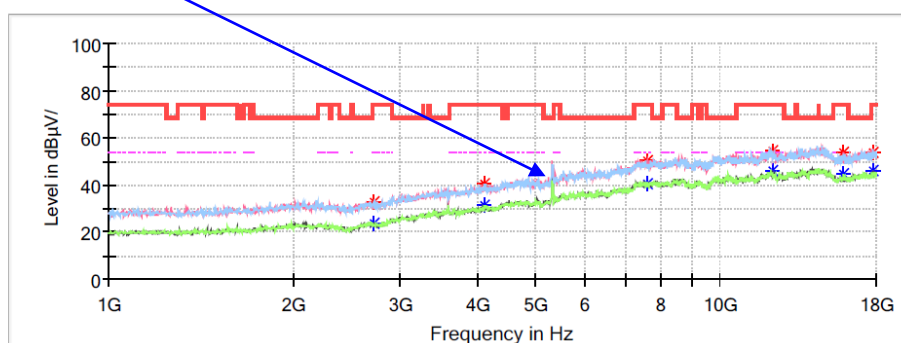**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2706.800000	32.70	---	74.00	41.30	H	-8.9
2706.800000	---	23.78	54.00	30.22	H	-8.9
4114.400000	40.34	---	74.00	33.66	H	-4.8
4114.400000	---	31.13	54.00	22.87	H	-4.8
7579.000000	50.52	---	74.00	23.48	V	3.0
7579.000000	---	40.75	54.00	13.25	V	3.0
12152.000000	---	45.91	54.00	8.09	H	9.0
12152.000000	54.70	---	74.00	19.30	H	9.0
15936.200000	---	44.96	54.00	9.04	V	8.8
15936.200000	53.65	---	74.00	20.35	V	8.8
17796.000000	---	46.17	54.00	7.83	V	11.2
17796.000000	53.67	---	74.00	20.33	V	11.2

1GHz-18GHz(5470-5725MHz Band):**802.11a Mode:****Low Channel: 5500MHz****Common Information**

Project No.:	RKSA251230001
EUT Model:	K1141
Test Mode:	5G WIFI 802.11a mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	16.2°C
Humidity:	41%
Atmospheric Pressure:	103.3kPa
Test Engineer:	Destine Hu
Test Date:	2026/1/24

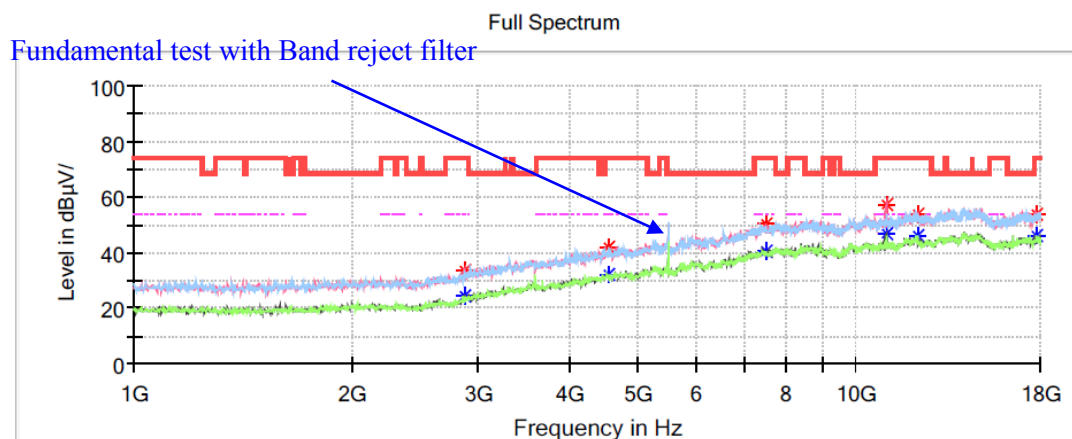**Critical_Freqs**


Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2863.200000	---	24.46	54.00	29.54	V	-8.5
2863.200000	33.40	---	74.00	40.60	V	-8.5
4532.600000	---	31.98	54.00	22.02	H	-4.1
4532.600000	41.77	---	74.00	32.23	H	-4.1
7494.000000	---	40.82	54.00	13.18	V	3.0
7494.000000	50.13	---	74.00	23.87	V	3.0
10996.000000	---	46.54	54.00	7.46	V	6.6
10996.000000	57.67	---	74.00	16.33	V	6.6
12165.600000	53.53	---	74.00	20.47	H	9.0
12165.600000	---	46.10	54.00	7.90	H	9.0
17796.000000	---	46.00	54.00	8.00	H	11.2
17796.000000	53.77	---	74.00	20.23	H	11.2

Middle Channel: 5580MHz**Common Information**

Project No.: RKSA251230001
 EUT Model: K1141
 Test Mode: 5G WIFI 802.11a mode Middle Channel
 Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 16.2°C
 Humidity: 41%
 Atmospheric Pressure: 103.3kPa
 Test Engineer: Destine Hu
 Test Date: 2026/1/24

Fundamental test with Band reject filter

Full Spectrum

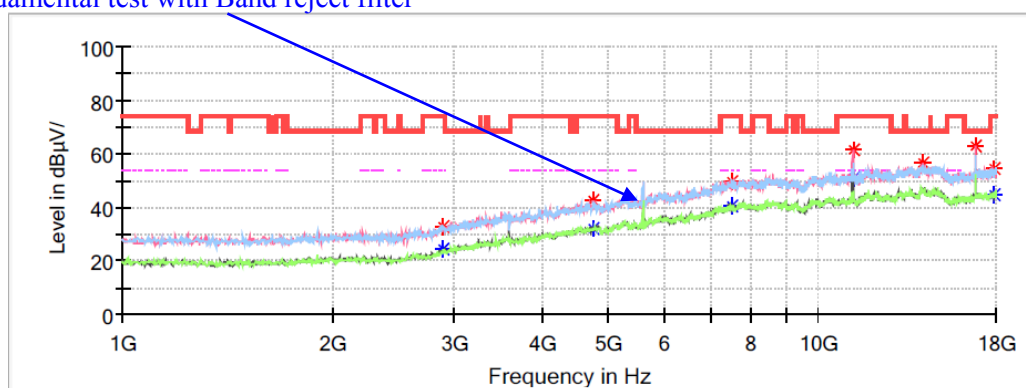**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2890.400000	---	24.13	54.00	29.87	H	-8.4
2890.400000	33.16	---	74.00	40.84	H	-8.4
4750.200000	---	32.32	54.00	21.68	H	-3.5
4750.200000	42.98	---	74.00	31.02	H	-3.5
7497.400000	---	40.58	54.00	13.42	H	3.0
7497.400000	49.92	---	74.00	24.08	H	3.0
11200.000000	---	50.74	54.00	3.26	V	7.2
11200.000000	61.31	---	74.00	12.69	V	7.2
14130.800000	56.51	---	68.20	11.69	V	11.3
16803.200000	62.86	---	68.20	5.34	V	10.2
17864.000000	54.80	---	74.00	19.20	V	11.4
17864.000000	---	44.53	54.00	9.47	V	11.4