

Product Description

Inside the transmitter, a voltage regulator, XC62FP-3.9 converts voltage of a 6V-battery into a regulated 3.9V voltage, which is the supply voltage for the whole circuit. When any one button connecting to microcontroller, PIC16C505-04 is pressed, a sequence of digital signal is sent to transmitter IC, HiMARK TX4930, in which the digital signal modulates onto a carrier frequency of 916.5MHz. The modulated frequency goes to a PCB-printed inverted-L antenna via a L-C lumped filter(L6, C28, C29, C30 and C31). The carrier frequency is from a VCO generated by multiplying a local oscillator at frequency 14.32MHz by 64.

HiMARK Technology, Inc. reserves the right to change the product described in this datasheet. All information contained in this datasheet is subject to change without prior notice. HiMARK Technology, Inc. assumes no responsibility for the use of any circuits shown in this datasheet.

Description

The TX4930 is a low-power 433/868/915 MHz FM/FSK transmitter IC suitable for use in the North American 915 MHz and European 433 and 868 MHz ISM bands. The TX4930 is intended as a phase-locked frequency source in local oscillator or transmitter applications.


Features

- ◆ Integrated VCO with multi-modulus $\div 64/65/128/129$ prescaler, phase/frequency detector, and reference oscillator forming complete phase-locked loop
- ◆ Transmitter enable pin for power saving
- ◆ 2.7V to 5V supply voltage
- ◆ On-chip varactor diode for narrowband modulation
- ◆ SSOP-16 package (0.64mm pitch)


Applications

- ◆ Wireless mouse
- ◆ Wireless amplifier/ speaker/ headphone/ microphone
- ◆ Wireless car alarm system

Block Diagram

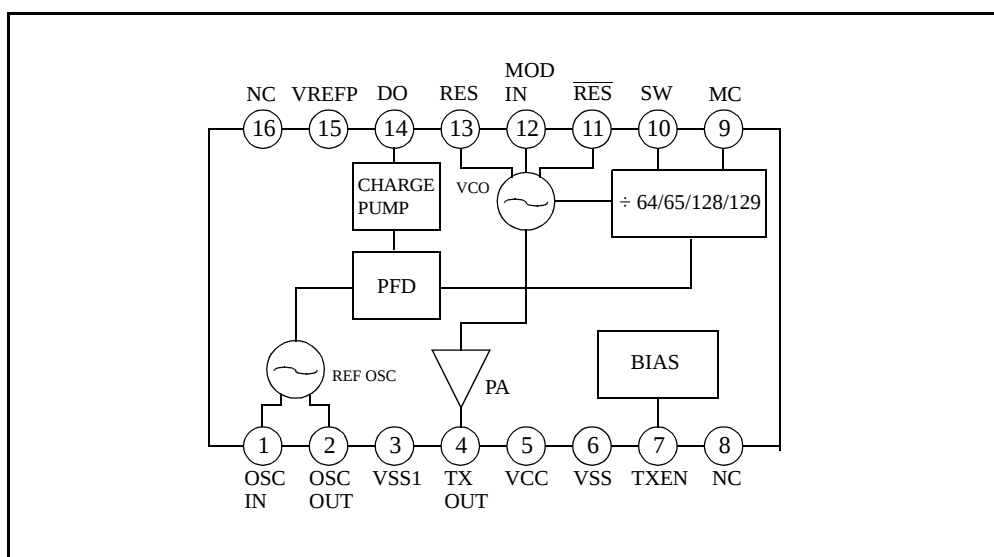

Package and Pin Assignment: SSOP-16

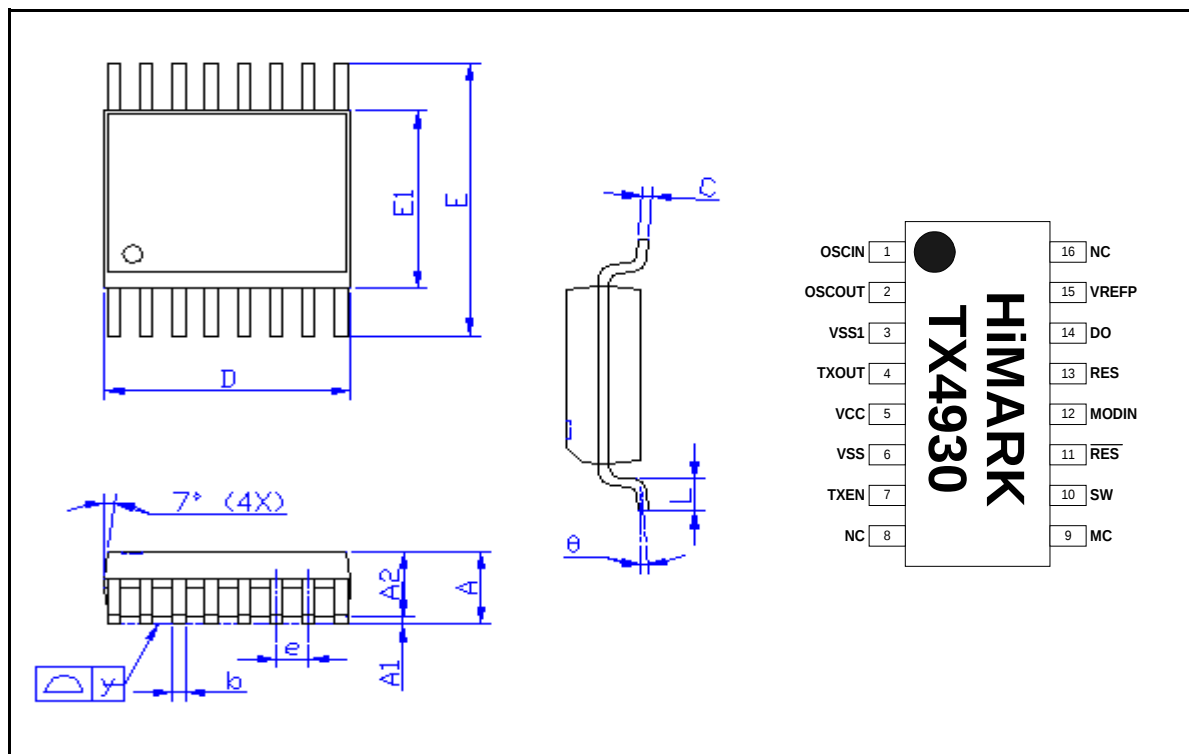

Symbols	Dimensions in mm			Dimensions in inch		
	min.	nom.	max.	min.	nom.	max.
A	1.35	1.60	1.75	0.053	0.064	0.069
A1	0.10	—	0.25	0.004	—	0.010
A2	—	1.45	—	—	0.057	—
b	0.20	0.25	0.30	0.008	0.010	0.012
C	0.19	—	0.25	0.007	—	0.010
D	4.80	—	5.00	0.189	—	0.197
E	5.80	—	6.20	0.228	—	0.244
E1	3.80	—	4.00	0.150	—	0.157
e	—	0.64	—	—	0.025	—
L	0.40	—	1.27	0.016	—	0.050
y	—	—	0.10	—	—	0.004
θ	0°	—	8°	0°	—	8°

Pin Descriptions

Number	Name	I/O	Description
1	OSCIN	I	Connected directly to the reference oscillator transistor base.
2	OSCOUT	O	Connected directly to the emitter of the reference oscillator transistor.
3	VSS1	GND	Ground for TXOUT.
4	TXOUT	O	Buffered output of the VCO.
5	VCC	POWER	DC power supply.
6	VSS	GND	Ground.
7	TXEN	I	Power-down control for all circuitry. When this pin is a logic "low", all circuits are turned off.
8	NC	NC	Not internally connected.
9	MC	I	Selects the prescaler modulus. A logic "high" selects 64 or 128 for the prescaler divisor. A logic "low" selects 65 or 129 for the divisor.
10	SW	I	Select the desired prescaler divisor. A logic "high" selects the 64/65 divisor. A logic "low" selects the 128/129 divisor.
11	$\overline{\text{RES}}$	I/O	Supply DC voltage to the VCO, as well as to tune the center frequency of the VCO.
12	MODIN	I	FM analog or digital modulation can be imparted to the VCO through this pin.
13	RES	I/O	See Pin 11.
14	DO	O	Output of the charge pump. An RC network from this pin to ground is used to establish the PLL bandwidth.
15	VREFP	O	Bias voltage reference pin for bypassing the prescaler and phase detector.
16	NC	NC	Not internally connected.

Absolute Maximum Ratings

$$V_{SS} = V_{SS1} = 0 \text{ V}$$

Parameter	Symbol	Rating	Unit
Supply Voltage	V_{CC}	2.2 to 6	V
Operating Temperature Range	T_{OPR}	−40 to 85	°C
Storage Temperature Range	T_{STG}	−40 to 150	°C
Soldering Temperature Range	T_{SLD}	255	°C
Soldering Time Range	t_{SLD}	10	s

Recommended Operating Conditions

$$V_{SS} = V_{SS1} = 0 \text{ V}$$

Parameter	Symbol	Value			Unit
		min.	typ.	max.	
Supply Voltage Range	V_{CC}	2.7	3.6	5.0	V
Operating Temperature	T_A	−10	25	60	°C


Electrical Characteristics

($V_{CC} = 2.7$ to $5V$, $V_{SS} = V_{SS1} = 0V$, TXEN = high, $T_A = -10$ to $60^\circ C$, $f_{RF} = 915MHz$ unless otherwise noted)

Parameter	Symbol	Condition	Value			Unit
			min.	typ.	max.	
VCC Supply Voltage	V_{CC}		2.2	3	5	V
Total Consumption Current	I_{CC}	$V_{CC} = 3.3V$		12.5	14	mA
Power-down I_{CC}					1	μA
Output Power	P_{out}	$V_{CC} = 3.3V$		-3		dBm
Phase Noise		Offset 10KHz, 5KHz loop BW		-80		dBc/Hz
Harmonics		with output matching		-27		dBm
Crystal Frequency Spurs		5KHz loop BW		-50		dBc
Charge Pump Current			-40		40	μA

Application Circuit (915 MHz)

(FM/FSK Transmitter)

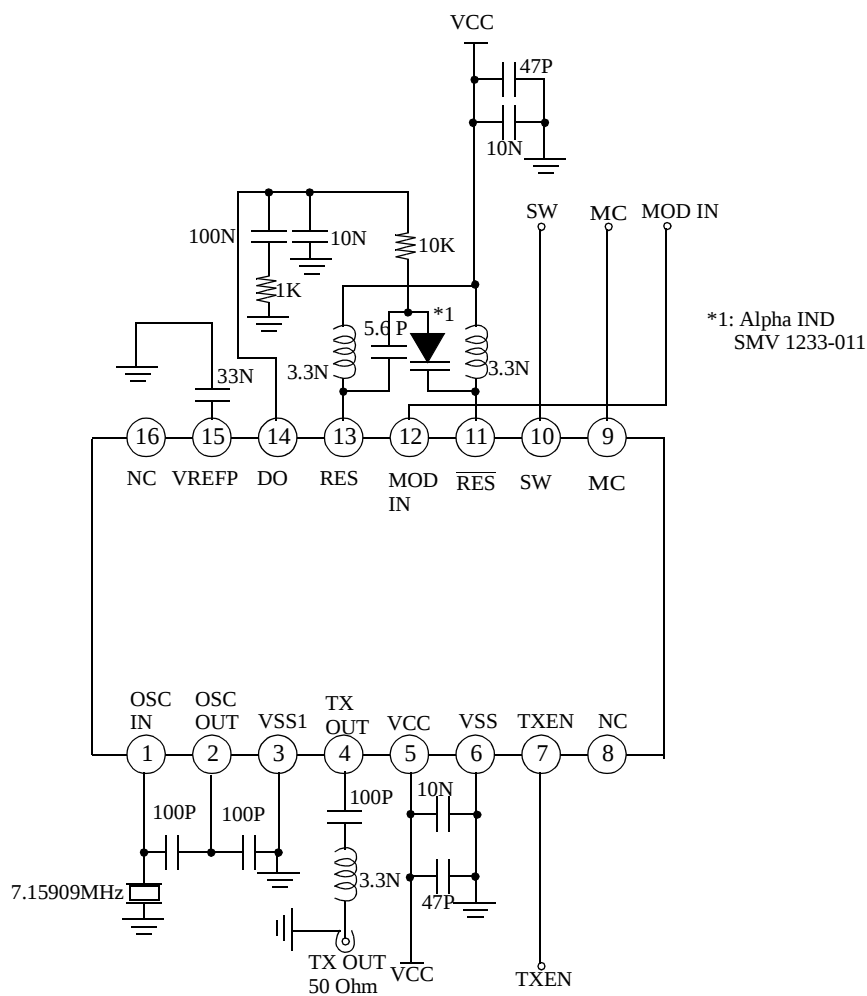

Application Circuit (915 MHz)

(Audio Transmitter)

