

PHILIPS

AI 拾音设备
VTR6710



User manual

使用手册

中文

欢迎

欢迎来到飞利浦世界！您能选择和购买飞利浦的产品，我们非常高兴。您可在我们的官方网站上获得飞利浦公司的全方位技术支持，如：使用手册、软件下载、保修信息等。

www.philips.com/support

产品特点

本产品是一款功能便捷的 AI 拾音设备。采用飞利浦音频处理技术，适用于节目访谈、采访拾音、视频教学等领域。产品特点如下：

- 高清音质
- 高清晰降噪 2.0
- 边充边用
- 对码连接锁定

安全信息

1. 为了避免短路，切勿将产品放置在触水受潮处。
2. 不要将产品放在加热设备附近。
3. 请注意，切勿挤压电缆，特别是插头处。

注意

- 特别声明：使用本产品前请仔细阅读本说明书，如因人为操作或不可抗力因素而导致数据丢失，损坏，本公司一概不予负责。特别提醒用户小心操作，注意将资料另外备份。
- 显示图像仅作参考。飞利浦保留更改颜色/外观/设计/参数/产品功能的权利，硬件、软件、APP 如有更新，恕不另行通知。

使用须知


- 第一次使用前建议先对机器充电 2 小时，充电仓只支持充电，不作连接电脑使用。

您的设备

设备包含



主机预览

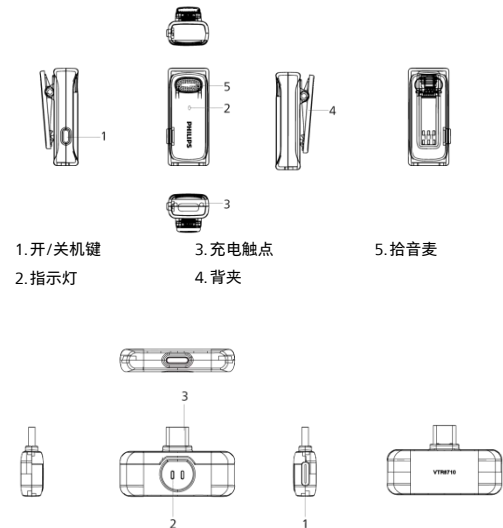

6. 充电·放电·低电·说明				
充电				
设备	功能	操作说明	指示灯	备注
发射器	充电盒充电	将发射器放入充电盒	充电· 红灯常亮 满电· 熄灭	支持宽压
	TYPE-C 充电	发射器接入 TYPE-C 充电		
接收器	转接对手机充电	接收器插入手机，接收器再接入 TYPE-C 充电	无特定义灯显	支持宽压 电流 5V/1A 支持边充边工作
充电盒	对充电盒充电	充电盒插入 TYPE-C 充电	充电· 数显个位数显亮 满电· 数显 100 常亮	
注： 以上充电电压默认 5V				
放电				
设备	功能	操作说明	指示灯	备注
充电盒	充电盒对发射器充电中	发射器入仓充电中	放电· 数显常亮	
	充电盒对发射器充满电	发射器入仓充电满电	停止放电· 数显熄灭	
注： 充电盒支持边充边放功能，显示为充电优先				
低电				
设备	功能	操作说明	指示灯	备注
发射器	发射器低电状态	开机低电或使用低电	低电· 红灯闪亮	3.4V 以下 低电模式， 3.2V 以下关机
充电盒	充电盒低电状态	充电盒对发射器充电	低电· 数显 05--00，闪	
注：指示灯优先级：充电 > 低电量 > 状态显示				

APP 操作指南

- 1、安卓/苹果手机均可扫描此二维码，安装下载 APP，安装过程中弹出的权限，请都点击“始终允许”项，否则不能使用，请知悉。



- 温馨提示：APP 应用会定期更新，恕不另行通知，说明书仅供参考，实际操作以最新 APP 为准。
- 2、安装下载成功后，打开 APP 输入机器的激活码捆绑使用。
 - 3、连接手机使用：按照说明书上设置说明部分的连接方式连接使用。
 - 4、APP 支持录音，实时翻译，回放等。

保修卡

此产品是一件设计精良的高品质数码产品，在正确使用及保养下应能正确地表现其优越性能。

自购买日期始，整机保修一年。关于主要部件保修期限，按照国家消费法规定执行。

中国区总经销（深圳市京华数码科技有限公司）将按下列保用条款持卡用户提供免费维修服务。

保用条例：

保用服务只限于一般正常使用下有效。一切人为损坏，例如接入不当电源，使用不当配件，不依说明书使用，因运输及其他意外而造成之损坏，非经本公司认可之维修和改装，用于商业及工业目的造成产品损坏，错误使用或疏忽而造成损坏，不适当之安装或因天灾造成损坏等，保用服务立刻失效。此保用服务并不包括附件，辅助装置，运输费。维修时请带上此卡及正本发票。

Model No: 型号: _____
Serial No: 机身编号: _____
Product Place: 产地: _____
Shop name and address: 购买商名称及地址: _____
Tel.No/Post Code: 电话/邮编: _____
Company Seal: 购买商品印章: _____
Tel.No/Post Code: 电话/邮编: _____
Date of Purchase: 购买日期: _____
Invoice No: 发票号: _____

产品服务热线：400 800 7890

注册您的产品，并获得支持尽在:

www.philips.com/voicetracer

EN

Welcome

Welcome to the world of Philips! We are Philips products. You can have access to full set of technical support on Philips official website, such as user manuals, software downloads, and warranty information, etc.
www.philips.com/support

Product Features

- This product is a Voice Recorder, easy to carry, with the following product features:
- Real-time transcription.
 - Real-time translation.
 - Transcription while recording.

Safety Information

- To avoid short circuits, do not place the product in areas exposed to water or moisture.
- Do not place the product near heating equipment.
- Please note that do not squeeze the cable, especially at the plug.

Attention

- Special Statement: Please read this manual carefully before using this product. The company shall not be liable for any data loss or damage caused by human operation or force majeure. Users are specially reminded to operate with caution and back up data separately.
- The displayed images are for reference only. Philips reserves the right to change the color/appearance/design/parameters/product functions. For any updates to hardware, software, or APP, no prior notice will be given.

Usage Notes


- It is recommended to charge the device with a compliant charger for about 2 hours before first use.

Your device


The device includes



Host Preview

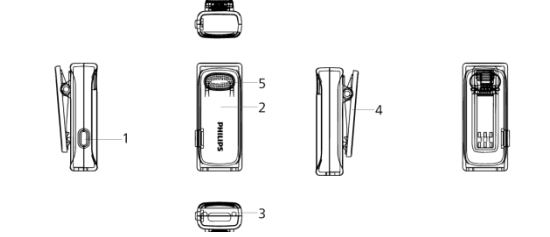

1. Power On/Off Button
2. Indicator Light
3. Charging Contacts
4. Back Clip
5. Microphone

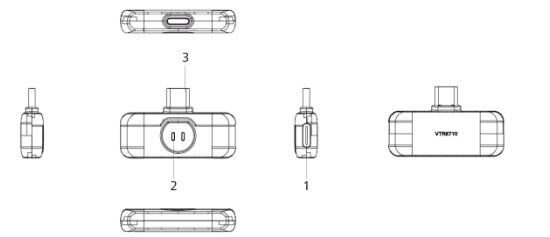

1. Type-C Charging Port
2. Indicator Light
3. Mobile Phone Interface

Usage Instructions

Interaction Definition: (Buttons, Indicator Lights)				
1.Power On/Off Instructions				
Device Status	Function	Operation Instructions	Indicator Light	
Power-Off State	Turn On the Device	User's Name: 用户姓名: _____ Address: 地址: _____ Tel.No: 电话: _____ Post Code: 邮编: _____ Company Seal: 购买商品印章: _____ Date of Purchase: 购买日期: _____	Transmitter: Manual: Press and hold the power button for 1.5 seconds to turn on, and it will automatically reconnect to the receiver. Automatic: Take the transmitter out of the charging case, and it will automatically turn on and	Transmitter: Connection Successful: Green light stays on Not Connected: Green light flashes slowly Receiver: Connection Successful: TX1 and TX2 green lights stay on Not Connected: TX1 green light flashes slowly, TX2 turns off

		reconnect. Receiver: Insert it into the mobile phone, and it will automatically reconnect to the transmitter.		
Power -on State	Turn Off the Device	Transmitter Manual: Press and hold for 1.5 seconds to turn off, or place it into the charging case. Automatic: Automatically turns off after 5 minutes of no connection. Receiver Unplug the device, indicator light turns off	Transmitter Charging State: Red light stays on Power-Off State: No (indicator light) Receiver	
Note: When the transmitter is being charged, it will automatically power off and enter the charging state. In the disconnected state, the transmitter cannot enable mute or switch sound effects.				
2. Reconnection Instructions				
Device Status	Function	Operating Instructions	Indicator Light	Remarks
Power - On State	Power - On Reconnection	Automatic Reconnection	Transmitter Connected: Green light stays on Not Connected: Green light flashes slowly	
Over - distance Reconnection	Reconnection After Disconnection Due to Over - distance	Automatic Reconnection	Receiver Connection Successful: TX1 and TX2 green lights stay on Not Connected: TX1 green light flashes slowly, TX2 turns off	

Note:
After the receiver connects to TX1, the corresponding TX1 indicator light will stay on green, and the TX2 indicator light will turn off (but remain in the background pending pairing); when TX2 is turned on, it can connect automatically and the TX2 indicator light will stay on green.

3.Transmitter Key Operation

Device Status	Function	Operating Instructions	Indicator Light	Remarks
Power Button	On/Off	Press and hold the button for 1.5 seconds	Connected: Green light stays on Not Connected: Green light flashes slowly	
Connection Status	Noise Reduction / Original Sound / Reverb / Mute	Single-press the transmitter button	Noise Reduction - Green light stays on Original Sound - Light turns off Reverb - Yellow light stays on Mute - Red light stays on	Cycle switching, default to Noise Reduction on startup In Reverb mode, 30% noise reduction effect is enabled
Connection	Pairing Lock	Triple-press the button	Locked - Red light flashes once	
Connection	Pairing Unlock	Triple-press the button or disconnect the connection	Unlocked - Red light flashes once	

Note:
The pairing lock function is used to prevent transmitters of the same product from connecting inadvertently when using the one-to-one mode (the receiver supports one-to-two mode). Operations take effect only after connection.
The TYPE-C port of the transmitter has a headphone monitoring function.
In Mute mode, the indicator light status of the transmitter and receiver is synchronized.
The pairing lock will be released and return to the default state immediately after the connection is disconnected.

Device Status	Function	Operating Instructions	Indicator Light	Remarks
Connection	Connection Successful	TX connects to RX	Connected: TX1/TX2 green lights stay on	
Connection	Not Connected	RX is powered on, TX is powered on or	Not Connected: TX1 green light flashes slowly / TX2 turns off	

		out of range		
Connection	Mute	TX switches to Mute mode	Mute: Corresponding TX1/TX2 red lights stay on	
Note: The receiver supports pass-through charging.				
5. Charging - Discharging - Low Power - Instructions				
Charging				
Device	Function	Operating Instructions	Indicator Light	Remarks
Transmitter	Charging Case Charging	Place the transmitter into the charging case	Charging - Red light stays on	
	Type-C Charging	Connect the transmitter to Type-C for charging	Fully Charged - Light turns off	Supports Wide Voltage Range
Receiver	Pass-through Charging for Mobile Phones	Operation Instruction: Connect the receiver to the mobile phone first, then connect the receiver to Type-C for charging	No specific light indication	Supports Wide Voltage Range Current: 5V/1A Supports Working While Charging
	Charge the Charging Case	Connect the charging case to Type-C for charging	Charging - Single-digit of the digital display lights up Fully Charged - Digital display shows 100 and stays on	
Note: The default charging voltage for the above is 5V.				
Discharging				
Device	Function	Operating Instructions	Indicator Light	Remarks
Charging Case	Charging Case is Discharging to Charge the Transmitter	Operation Instruction: The transmitter is charging in the case	Discharging - Digital display stays on	
	The charging case has fully charged the transmitter	The transmitter is fully charged in the case	Stop discharging - The digital display turns off	
Note: The charging case supports the pass-through charging function, with charging priority enabled.				
Low Power				
Device	Function	Operating Instructions	Indicator Light	Remarks
Transmitter	Transmitter Low Power State	Low power at startup or during use	Low Power - Red light flashes	Low power mode when below 3.4V, auto power off when below 3.2V
Charging Case	Charging Case Low Power State	The charging case charges the transmitter	Low Power - Digital display shows 05--00 and flashes	
Note: Indicator light priority: Charging > Low Power > Status Display				

APP Operation Guide

1.Both Android and iOS mobile phones can scan this QR code to download and install the APP. For all permission pop-ups during the installation process, please select "Always Allow". Otherwise, the APP cannot be used. Please be advised.



Friendly Reminder: The APP will be updated regularly without further notice. This manual is for reference only, and the actual operation shall be subject to the latest version of the APP.

2. After successful download and installation, open the APP and enter the device's activation code to bind for use.

3.Connection with mobile phone: Connect and use it according to the connection method in the Settings section of this manual.

4.The APP supports recording, real-time translation, playback, and other functions.。

Warranty Card

This product is made of high quality material and great care has been taken in its manufacture. It is designed to give good performance provided it is properly operated and maintained. The product is sold subject to the understanding that if any defect in manufacture or material shall appear within 12 months, the warranty period is subject to country Consumer Law, Jingwah Digital Service will arrange for such defect to be rectified without charge under the following warranty terms and conditions.

Warranty Terms and Conditions:

The defect is not due to use of the product for other than domestic purposes, or an incorrect voltage, or use of improper accessories, or contrary to operating instructions, or to accidental damage(whether in transit or otherwise), misuse, neglect or inexpert repair, or incorrect installation, or the product is excessively used for improper purposes other than daily consumption, or accessories belonging to the product, transportation.

Present this warranty card and sales invoice when demanding service from Philips authorized service centres.

User's Name: 用户姓名: _____
Address: 地址: _____
Tel.No: 电话: _____
Post Code: 邮编: _____
Company Seal: 购买商品印章: _____
Date of Purchase: 购买日期: _____
Model No: 型号: _____
Serial No: 机身编号: _____
Product Place: 产地: _____
Shop name and address: 购买商名称及地址: _____
Tel.No/Post Code: 电话/邮编: _____
Invoice No: 发票号: _____

Product Service Hotline:400 800 7890

Register your product and get support at:

www.philips.com/voicetracer

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

This device has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This device generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this device does cause harmful interference to radio or television reception, which can be determined by turning the device off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

--Reorient or relocate the receiving antenna.

--Increase the separation between the device and receiver.

--Connect the device into an outlet on a circuit different from that to which the receiver is connected.

--Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

© 2026 Speech Processing Solutions GmbH. All rights reserved.

This product has been manufactured by and is sold under the responsibility of Speech Processing Solutions GmbH, and Speech Processing Solutions GmbH is the warrantor in relation to this product.

Specifications are subject to change without notice. Philips and the Philips shield emblem are registered trademarks of Koninklijke Philips N.V. and are used under license.

Document version 1.0, 20/03/26

