



Report No.: KSCR240700144905

Page: 1 of 53

TEST REPORT

Application No.: KSCR2407001449AT
FCC ID: ROR2002
Applicant: Blinq Networks Inc.
Address of Applicant: 140 Renfrew Drive, Suite 200, Markham, L3R 6B3, Canada
Manufacturer: Blinq Networks Inc.
Address of Manufacturer: 140 Renfrew Drive, Suite 200, Markham, L3R 6B3, Canada
Factory: VVDN Technologies Private Limited
Address of Factory: Plot No: CP-07, Sector 8, IMT Manesar, Gurugram, Haryana
Equipment Under Test (EUT):
EUT Name: PCW-400i
Model No.: PCW-400i
Standard(s): CBRSA-TS-9001-V1.2.1
WINNF-TS-0122-V1.0.2
FCC 47 CFR Part 96
KDB 940660 D01 V03
Date of Receipt: 2024-07-31
Date of Test: 2025-01-20 to 2025-02-20
Date of Issue: 2025-02-21

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Compliance Certification Services (Kunshan) Inc.
程智电子科技（昆山）有限公司

No.10 Weiye Road, Development Zone, Kunshan, Jiangsu, China
中国·江苏省昆山开发区伟业路10号 215301

t (86-512)57355888
f (86-512)57370818

www.sgsgroup.com.cn
sgs.china@sgs.com

Member of the SGS Group (SGS SA)



Revision Record			
Version	Description	Date	Remark
00	Original	2025-02-21	/

Authorized for issue by:				
Tested By				
		Eric Liu /Project Engineer		
Approved By				
		Terry Hou /Reviewer		



2 Test Summary

Item	Standard	Test Case ID	Result
Domain Proxy Multi-Step registration	WINNF-TS-0122-V1.0.2	WINNF.FT.D.REG.2	Pass
Domain Proxy Single-Step registration for CBSD with CPI signed data	WINNF-TS-0122-V1.0.2	WINNF.FT.D.REG.6	Pass
Domain Proxy Missing Required parameters (responseCode 102)	WINNF-TS-0122-V1.0.2	WINNF.FT.D.REG.9	Pass
Domain Proxy Pending registration (responseCode 200)	WINNF-TS-0122-V1.0.2	WINNF.FT.D.REG.11	Pass
Domain Proxy Invalid parameters (responseCode 103)	WINNF-TS-0122-V1.0.2	WINNF.FT.D.REG.13	Pass
Domain Proxy Blacklisted CBSD (responseCode 101)	WINNF-TS-0122-V1.0.2	WINNF.FT.D.REG.15	Pass
Domain Proxy Unsupported SAS protocol version responseCode 100)	WINNF-TS-0122-V1.0.2	WINNF.FT.D.REG.17	Pass
Domain Proxy Group Error (responseCode 201)	WINNF-TS-0122-V1.0.2	WINNF.FT.D.REG.19	Pass
Unsuccessful Grant responseCode=400 (INTERFERENCE)	WINNF-TS-0122-V1.0.2	WINNF.FT.C.GRA.1	Pass
Unsuccessful Grant responseCode=401 (GRANT_CONFLICT)	WINNF-TS-0122-V1.0.2	WINNF.FT.C.GRA.2	Pass
Domain Proxy Heartbeat Success Case (first Heartbeat Response)	WINNF-TS-0122-V1.0.2	WINNF.FT.D.HBT.2	Pass
Heartbeat responseCode=105 (DEREGISTER)	WINNF-TS-0122-V1.0.2	WINNF.FT.C.HBT.3	Pass
Heartbeat responseCode=501 (SUSPENDED_GRANT) in First Heartbeat Response	WINNF-TS-0122-V1.0.2	WINNF.FT.C.HBT.5	Pass
Heartbeat responseCode=501 (SUSPENDED_GRANT) in Subsequent Heartbeat Response	WINNF-TS-0122-V1.0.2	WINNF.FT.C.HBT.6	Pass
Heartbeat responseCode=502 (UNSYNC_OP_PARAM)	WINNF-TS-0122-V1.0.2	WINNF.FT.C.HBT.7	Pass
Domain Proxy Heartbeat responseCode=500 (TERMINATED_GRANT)	WINNF-TS-0122-V1.0.2	WINNF.FT.D.HBT.8	Pass
Heartbeat Response Absent (First Heartbeat)	WINNF-TS-0122-V1.0.2	WINNF.FT.C.HBT.9	Pass
Heartbeat Response Absent (Subsequent Heartbeat)	WINNF-TS-0122-V1.0.2	WINNF.FT.C.HBT.10	Pass
Successful Grant Renewal in Heartbeat Test Case	WINNF-TS-0122-V1.0.2	WINNF.FT.C.HBT.11	Pass
Domain Proxy Registration Response contains measReportConfig	WINNF-TS-0122-V1.0.2	WINNF.FT.D.MES.2	Pass



Item	Standard	Test Case ID	Result
Grant Response contains measReportConfig	WINNF-TS-0122-V1.0.2	WINNF.FT.C.MES.3	Pass
Domain Proxy Heartbeat Response contains measReportConfig	WINNF-TS-0122-V1.0.2	WINNF.FT.D.MES.5	Pass
Domain Proxy Successful Relinquishment	WINNF-TS-0122-V1.0.2	WINNF.FT.D.RLQ.2	Pass
Domain Proxy Unsuccessful Relinquishment, responseCode=102	WINNF-TS-0122-V1.0.2	WINNF.FT.D.RLQ.4	Pass
Domain Proxy Unsuccessful Relinquishment, responseCode=103	WINNF-TS-0122-V1.0.2	WINNF.FT.D.RLQ.6	Pass
Domain Proxy Successful Deregistration	WINNF-TS-0122-V1.0.2	WINNF.FT.D.DRG.2	Pass
Domain Proxy Deregistration responseCode=102	WINNF-TS-0122-V1.0.2	WINNF.FT.D.DRG.4	Pass
Deregistration responseCode=103	WINNF-TS-0122-V1.0.2	WINNF.FT.C.DRG.5	Pass
Successful TLS connection between UUT and SAS Test Harness	WINNF-TS-0122-V1.0.2	WINNF.FT.C.SCS.1	Pass
TLS failure due to revoked certificate	WINNF-TS-0122-V1.0.2	WINNF.FT.C.SCS.2	Pass
TLS failure due to expired server certificate	WINNF-TS-0122-V1.0.2	WINNF.FT.C.SCS.3	Pass
TLS failure when SAS Test Harness certificate is issue by unknown CA	WINNF-TS-0122-V1.0.2	WINNF.FT.C.SCS.4	Pass
TLS failure when certificate at the SAS Test Harness is corrupted	WINNF-TS-0122-V1.0.2	WINNF.FT.C.SCS.5	Pass
UUT RF Transmit Power Measurement	WINNF-TS-0122-V1.0.2	WINNF.PT.C.HBT.1	Pass
SAS Version: 1.0.0.3			

The UUT is a CBSD with Domain Proxy. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

CBRSA-TS-9001-V1.0.0

CBRS Alliance Certification Test Plan

WINNF-TS-0122-V1.0.2

Test and Certification for Citizens Broadband Radio Service (CBRS); Conformance and Performance Test Technical Specification; CBSD/DP as Unit Under Test (UUT)

KDB 940660 D01 Part 96 CBRS Eqpt v03



3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents.....	5
4 General Information.....	6
4.1 Details of E.U.T.	6
4.2 Description of CBSD/DP Support Features.....	7
4.3 Summary of Test Results	8
4.4 Measurement Uncertainty	8
4.5 Description of Support Units.....	9
4.6 Test Location	9
4.7 Test Facility	9
5 Equipment List	10
6 Test Method and Environment.....	11
6.1 CBSD/DP Conformance and Performance	11
6.2 CBSD Test Procedure	11
6.3 Test Environment	12
6.4 Test Setup	12
7 Test Data	13
7.1 CBSD Registration Process	13
7.2 CBSD Spectrum Grant Process	18
7.3 CBSD HeartBeat Process	19
7.4 CBSD Measurement Report.....	31
7.5 CBSD Relinquishment Process.....	36
7.6 CBSD Deregistration Process	39
7.7 CBSD Security Validation.....	42
7.8 CBSD RF Power Measurement.....	45
8 Test Data Log	48
8.1 WINNF.FT.C.SCS.1	48
8.2 WINNF.FT.C.SCS.2	49
8.3 WINNF.FT.C.SCS.3	50
8.4 WINNF.FT.C.SCS.4	51
8.5 WINNF.FT.C.SCS.5	52
9 Test Setup Photo.....	53
10 EUT Constructional Details (EUT Photos).....	53



Report No.: KSCR240700144904

Page: 6 of 53

4 General Information

4.1 Details of E.U.T.

Power supply:	44-57V DC By POE
Test Voltage:	120V, 60Hz
Serial Number of Tested EUT:	CBSD-1
CBSD Class:	Category A CBSD
Transmitter Frequency Band:	5GNR N48, N77, N78
Transmitter Frequency Range:	3550~3700MHz
Hardware Version:	V1.0.0
Software Version:	V1.0.0
Antenna Gain:	7.0dBi (Provided by manufacturer)



4.2 Description of CBSD/DP Support Features

Condition	Feature Description	Supported
C1	Mandatory for UUT which supports multi-step registration message.	Y
C2	Mandatory for UUT which supports single-step registration with no CPI-signed data in the registration message. By definition, this is a subset of Category A devices which determine all registration information, including location, without CPI intervention.	N
C3	Mandatory for UUT which supports single-step registration containing CPI-signed data in the registration message.	Y
C4	Mandatory for UUT which supports RECEIVED_POWER_WITHOUT_GRANT measurement report type.	Y
C5	Mandatory for UUT which supports RECEIVED_POWER_WITH_GRANT measurement report type.	N
C6	Mandatory for UUT which supports parameter change being made at the UUT and prior to sending a deregistration.	Y

Y: Supported

N: Not supported



4.3 Summary of Test Results

WINNF-TS-0122			
Classes	Test Case Items	Pass Items	Pass Rate (%)
FT (CBSD, DP/CBSD)	33	33	100
PT (CBSD, DP/CBSD)	1	1	100
Total	34	34	100

Note:

1. Functional Test (FT): Test to validate the conformance of the Protocols and functionalities implemented in the CBSD/DP UUT to the requirements developed by WinnForum and supporting FCC/DoD requirements.
2. Field/Performance Test (PT): Test to check the capability of the CBSD/DP UUT to support various traffic models and actual operations in the field.

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	RF conducted power	$\pm 0.75\text{dB}$
3	Temperature test	$\pm 1^{\circ}\text{C}$
4	Humidity test	$\pm 3\%$
5	Supply voltages	$\pm 1.5\%$
6	Time	$\pm 3\%$



4.5 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
NUC	Simply NUC	CBM1r8RB	770000T2
CPE	/	JT8900D N78	GX6000FEB2E4
Router	TP-Link	TL-SG108S-M2	22452H2000477
POE	PROCET	PT-PSE106GBR-10	PT2409211224

4.6 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

- 1.SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
- 2.SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

• **FCC**

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory. Designation Number: CN1172.

• **ISED**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 2324E

• **VCCI**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.



Report No.: KSCR240700144904

Page: 10 of 53

5 Equipment List

Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
Laptop	Lenovo	Y510P	HFL000026	N/A	N/A
Spectrum Analyzer	KEYSIGHT	N9020A	KUS2001M00 1-2	08/01/2024	07/31/2025
Shield Room	YanChuang	N/A	KS301115-2	N/A	N/A
Coaxial Cable	Thermax	N/A	13	2024/09/15	2025/09/14
Attenuator	Mini-Circuits	NAT-6-2W	15542-1	N.C.R.	N.C.R.
Humidity / Temperature Indicator	Renke	RS-WS- N01-6J	1032844	2024/03/19	2025/03/18



6 Test Method and Environment

6.1 CBSD/DP Conformance and Performance

Test Requirement:	CBRS CBSD Test Specification WINNF-TS-0122-V1.0.2
Test Method:	CBRS CBSD Test Specification WINNF-TS-0122-V1.0.2 WINNF-IN-0156_WinnForum_SAS_Test_Harness_CBSD_UUT_Tutorial_ v1_0_0_1

6.2 CBSD Test Procedure


- a. Connect the UUT to SAS Test Harness system and RF Test instruments via the DP interface and RF components. The highest level is set to test configuration.
- b. UUT shall be UTC time synchronized
- c. The frequency band is granted and set as UUT supported Modulation and Channels, transmitted power of the UUT according to it granted parameters from the SAS Test Harness.
- d. Each test case results were recorded and validated by SAS Test Harness system and RF instruments test cases was recorded test results from SAS Test Harness system.

6.3 Test Environment

Test Harness Version:	V1.0.0.3
Operating System:	Microsoft Windows 10
TLS Version:	1.2
Python Version:	2.7.13
Environmental Conditions:	25deg. C, 65%RH
Input Power:	120Vac, 60Hz

6.4 Test Setup

- 1) DP is deployed on the network management, and the registration of DP to SAS is to register with SAS according to the granularity of CBSD ID;
- 2) The DP and the network element communicate messages according to the cell granularity, and each CBSDID corresponds to a cell of an RRU which belongs to a base station.

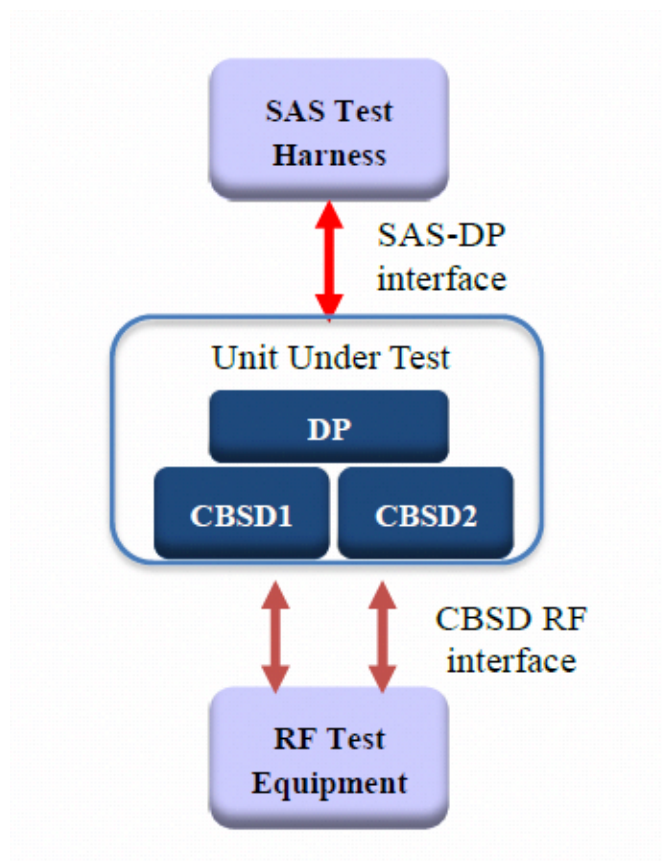

DP/CBSD as UUT, BTS-CBSD communication with Domain Proxy

7 Test Data

7.1 CBSD Registration Process

7.1.1 WINNF.FT.D.REG.2

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness ● UUT is in the Unregistered state	--	--
2	DP with two CBSD sends correct Registration request information, as specified in [n.5], in the form of one 2-element Array or as individual messages to the SAS Test Harness: ● The required userId, fcId and cbsdSerialNumber registration parameters shall be sent for each CBSD and conform to proper format and acceptable ranges. ● Any REG-conditional or optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges. Note: It is outside the scope of this document to test the Registration information that is supplied via another means.	■ Pass	□ Fail
3	● SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or individual messages as follows: - cbsdId = Ci - measReportConfig shall not be included - responseCode = 0 for each CBSD	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: ● UUT shall not transmit RF	■ Pass	□ Fail

**7.1.2 WINNF.FT.D.REG.6**

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness ● UUT is in the Unregistered state ● All of the required and REG-Conditional parameters shall be configured and CPI signature provided	--	--
2	The DP with two CBSDs sends Registration requests in the form of one 2-element Array or as individual messages to the SAS Test Harness: ● The required userId, fcId and cbsdSerialNumber and REG-Conditional cbsdCategory, airInterface, measCapability and cpiSignatureData registration parameters shall be sent from the CBSD and conform to proper format and acceptable ranges. ● Any optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges.	■ Pass	□ Fail
3	● SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or individual messages as follows: - cbsdId = Ci - measReportConfig for each CBSD shall not be included - responseCode = 0 for each CBSD	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: ● UUT shall not transmit RF	■ Pass	□ Fail

7.1.3 WINNF.FT.D.REG.9

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness ● UUT is in the Unregistered state	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: - SAS response does not include a cbsdId. - responseCode = 102 for CBSD1 and CBSD2	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: ● UUT shall not transmit RF	☒ Pass	☐ Fail

7.1.4 WINNF.FT.D.REG.11

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness ● UUT is in the Unregistered state	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: - SAS response does not include a cbsdId. - responseCode = 200 for CBSD1 and CBSD2	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: ● UUT shall not transmit RF	☒ Pass	☐ Fail



7.1.5 WINNF.FT.D.REG.13

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness ● UUT is in the Unregistered state	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: - SAS response does not include a cbsdId. - responseCode = 0 for CBSD1 - responseCode = 103 for CBSD2	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: ● UUT shall not transmit RF	☒ Pass	☐ Fail

7.1.6 WINNF.FT.D.REG.15

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness ● UUT is in the Unregistered state	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: - SAS response does not include a cbsdId. - responseCode = 0 for CBSD1 - responseCode = 101 for CBSD2	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: ● UUT shall not transmit RF	☒ Pass	☐ Fail



7.1.7 WINNF.FT.D.REG.17

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness ● UUT is in the Unregistered state	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: - SAS response does not include a cbsdId. - responseCode = 100 for CBSD1 and CBSD2	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: ● UUT shall not transmit RF	☒ Pass	☐ Fail

7.1.8 WINNF.FT.D.REG.19

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness ● UUT is in the Unregistered state	--	--
2	The DP with two CBSDs sends a Registration request in the form of one 2-element Array or as individual messages to SAS Test Harness.	--	--
3	SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or as individual messages as follows: - SAS response does not include a cbsdId. - responseCode = 0 for CBSD1 - responseCode = 201 for CBSD2	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: ● UUT shall not transmit RF	☒ Pass	☐ Fail



7.2 CBSD Spectrum Grant Process

7.2.1 WINNF.FT.C.GRA.1

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● UUT has registered successfully with SAS Test Harness, with cbsdId = C	--	--
2	UUT sends valid Grant Request.	--	--
3	SAS Test Harness sends a Grant Response message, including - cbsdId=C - responseCode = 400	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: ● UUT shall not transmit RF	☒ Pass	☐ Fail

7.2.2 WINNF.FT.C.GRA.2


#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● UUT has registered successfully with SAS Test Harness, with cbsdId = C	--	--
2	UUT sends valid Grant Request.	--	--
3	SAS Test Harness sends a Grant Response message, including - cbsdId=C - responseCode = 400	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: ● UUT shall not transmit RF	☒ Pass	☐ Fail

7.3 CBSD HeartBeat Process

7.3.1 WINNF.FT.D.HBT.2

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: DP has two CBSD registered successfully with SAS Test Harness, with cbsdId = Ci, i={1,2}	--	--
2	DP sends a message: - If message is type Spectrum Inquiry Request, go to step 3, or - If message is type Grant Request, go to step 5	--	--
3	DP sends a Spectrum Inquiry Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Spectrum Inquiry Request message is formatted correctly for each CBSD, including for CBSDi, i={1,2}: - cbsdId = Ci - List of frequencyRange objects sent by DP are within the CBRS frequency range	■ Pass	□ Fail
4	If a separate Spectrum Inquiry Request message was sent for each CBSD, the SAS Test Harness shall respond to each Spectrum Inquiry Request message with a separate Spectrum Inquiry Response message. If a single Spectrum Inquiry Request message was sent containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Spectrum Inquiry Response message containing a 2-object array. Verify parameters for each CBSD within the Spectrum Inquiry Response message are as follows, for CBSDi, i={1,2}: - cbsdId = Ci - availableChannel is an array of availableChannel objects - responseCode = 0	--	--
5	DP sends a Grant Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Grant Request message is formatted correctly for each CBSD, including for CBSDi, i={1,2}: - cbsdId = C - maxEIRP is at or below the limit appropriate for CBSD category as defined by Part 96 - operationFrequencyRange, Fi, sent by UUT is a valid range within the CBRS band	■ Pass	□ Fail
6	If a separate Grant Request message was sent for each CBSD, the SAS Test Harness shall respond to each Grant Request message with a separate Grant Response message. If a single Grant Request message was sent containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Grant Response message containing a 2-object array. Verify parameters for each CBSD within the Grant Response message are as follows, for CBSDi, i={1,2}: - cbsdId = Ci - grantId = Gi = a valid grant ID - grantExpireTime = UTC time greater than duration of the test	--	--

	● responseCode = 0		
7	Ensure DP sends first Heartbeat Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Heartbeat Request message is formatted correctly for each CBSD, including, for CBSDi i={1,2}: ● cbsdId = Ci, i={1,2} ● grantId = Gi, i={1,2} ● operationState = "GRANTED"	☒ Pass	☐ Fail
8	If a separate Heartbeat Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Heartbeat Request message with a separate Heartbeat Response message. If a single Heartbeat Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Heartbeat Response message containing a 2-object array. Verify parameters for each CBSD within the Heartbeat Response message are as follows, for CBSDi: ● cbsdId = Ci ● grantId = Gi ● transmitExpireTime = current UTC time + 200 seconds ● responseCode = 0	--	--
9	For further Heartbeat Request messages sent from DP after completion of step 8, validate message is sent within latest specified heartbeatInterval for CBSDi: ● cbsdId = Ci ● grantId = Gi ● operationState = "AUTHORIZED" and SAS Test Harness responds with a Heartbeat Response message including the following parameters, for CBSDi ● cbsdId = Ci ● grantId = Gi ● transmitExpireTime = current UTC time + 200 seconds ● responseCode = 0	☒ Pass	☐ Fail
10	Monitor the RF output of the UUT from start of test until UUT transmission commences. Monitor the RF output of the UUT from start of test until RF transmission commences. Verify: ● UUT does not transmit at any time prior to completion of the first heartbeat response ● UUT transmits after step 8 is complete, and its transmission is limited to within the bandwidth range Fi.	☒ Pass	☐ Fail

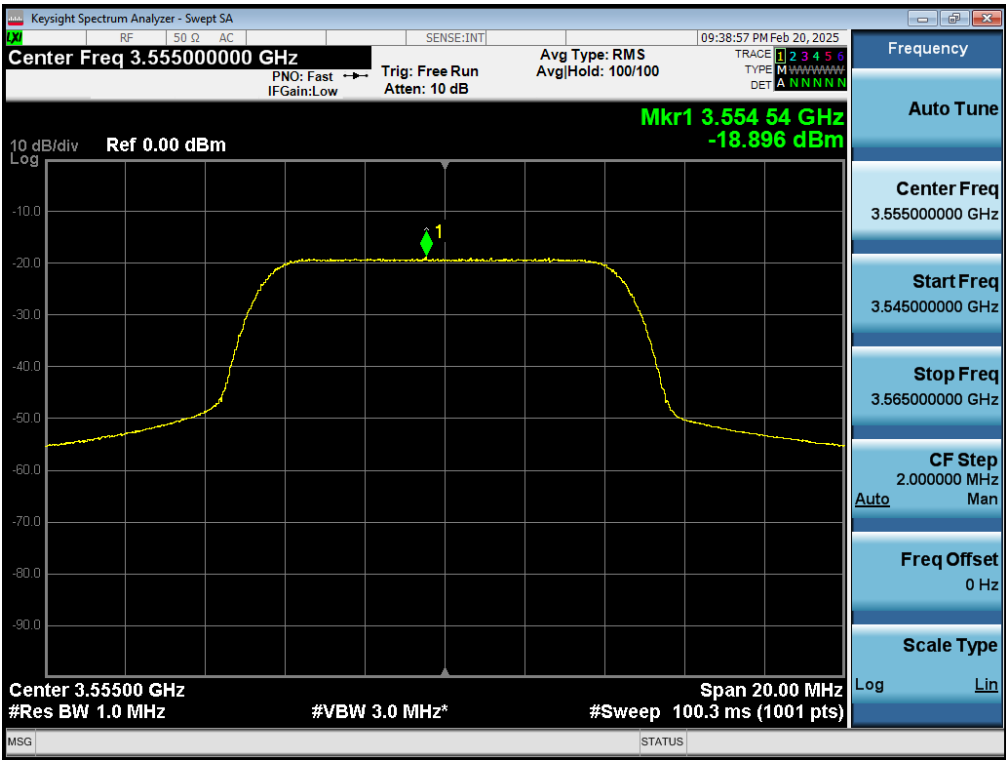

7.3.2 WINNF.FT.C.HBT.3

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● UUT has registered successfully with SAS Test Harness ● UUT has a valid single grant as follows: ○ valid cbsdId = C ○ valid grantId = G ○ grant is for frequency range F, power P ○ grantExpireTime = UTC time greater than duration of the test ● UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: ● cbsdId = C ● grantId = G ● operationState = "AUTHORIZED"	☒ Pass	☐ Fail
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: ● cbsdId = C ● grantId = G ● transmitExpireTime = T = Current UTC time ● responseCode = 105 (DEREGISTER)	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the RF output of the UUT. Verify: ● UUT shall stop transmission within (T + 60 seconds) of completion of step 3	☒ Pass	☐ Fail

7.3.3 WINNF.FT.C.HBT.5

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● UUT has registered successfully with SAS Test Harness ● UUT has a valid single grant as follows: ○ valid cbsdId = C ○ valid grantId = G ○ grant is for frequency range F, power P ○ grantExpireTime = UTC time greater than duration of the test ● UUT is in GRANTED, but not AUTHORIZED state (i.e. has not performed its first Heartbeat Request)	--	--
2	UUT sends a Heartbeat Request message. Verify Heartbeat Request message is formatted correctly, including: ● cbsdId = C ● grantId = G ● operationState = "GRANTED"	■ Pass	□ Fail
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: ● cbsdId = C ● grantId = G ● transmitExpireTime = T = current UTC time ● responseCode = 501 (SUSPENDED_GRANT)	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the SAS-CBSD interface. Verify either A OR B occurs: A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters: ● cbsdId = C ● grantId = G ● operationState = "GRANTED" B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters: ● cbsdId = C ● grantId = G Monitor the RF output of the UUT. Verify: ● UUT does not transmit at any time	■ Pass	□ Fail

7.3.4 WINNF.FT.C.HBT.6

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● UUT has registered successfully with SAS Test Harness ● UUT has a valid single grant as follows: ○ valid cbsdId = C ○ valid grantId = G ○ grant is for frequency range F, power P ○ grantExpireTime = UTC time greater than duration of the test ● UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including: ● cbsdId = C ● grantId = G ● operationState = "AUTHORIZED"	■ Pass	□ Fail
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: ● cbsdId = C ● grantId = G ● transmitExpireTime = T = current UTC time ● responseCode = 501 (SUSPENDED_GRANT)	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the SAS-CBSD interface. Verify either A OR B occurs: A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters: ● cbsdId = C ● grantId = G ● operationState = "GRANTED" B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters: ● cbsdId = C ● grantId = G Monitor the RF output of the UUT. Verify: ● UUT shall stop transmission within (T+60) seconds of completion of step 3	■ Pass	□ Fail

7.3.5 WINNF.FT.C.HBT.7

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● UUT has registered successfully with SAS Test Harness ● UUT has a valid single grant as follows: ○ valid cbsdId = C ○ valid grantId = G ○ grant is for frequency range F, power P ○ grantExpireTime = UTC time greater than duration of the test ● UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including: ● cbsdId = C ● grantId = G ● operationState = "AUTHORIZED"	■ Pass	□ Fail
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: ● cbsdId = C ● grantId = G ● transmitExpireTime = T = current UTC time ● responseCode = 502 (UNSYNC_OP_PARAM)	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the SAS-CBSD interface. Verify: ● UUT sends a Grant Relinquishment Request message. Verify message is correctly formatted with parameters: ○ cbsdId = C ○ grantId = G Monitor the RF output of the UUT. Verify: ● UUT shall stop transmission within (T+60) seconds of completion of step 3	■ Pass	□ Fail

7.3.6 WINNF.FT.D.HBT.8

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● DP has two CBSD registered successfully with SAS Test Harness ● Each CBSD {1,2} has a valid single grant as follows ○ valid cbsdId = Ci, i={1,2} ○ valid grantId = Gi, i={1,2} ○ grant is for frequency range Fi, power Pi ○ grantExpireTime = UTC time greater than duration of the test ● Both CBSD are in AUTHORIZED state and transmitting within their granted bandwidth on RF interface	--	--
2	DP sends a Heartbeat Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of size 2. Verify Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly for each CBSD, including, for CBSDi i={1,2}: ● cbsdId = Ci, i = {1,2} ● grantId = Gi, i = {1,2} ● operationState = "AUTHORIZED"	■ Pass	□ Fail
3	If separate Heartbeat Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Heartbeat Request message with a separate Heartbeat Response message. If a single Heartbeat Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Heartbeat Response message containing a 2-object array. Parameters for each CBSD within the Heartbeat Response message should be as follows, for CBSDi: ● cbsdId = Ci ● grantId = Gi ● For CBSD1: ○ transmitExpireTime = current UTC time + 200 seconds ○ responseCode = 0 ● For CBSD2: ○ transmitExpireTime = T = current UTC time ○ responseCode = 500 (TERMINATED_GRANT)	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT. If CBSD sends further Heartbeat Request messages for CBSD1, SAS Test Harness shall respond with a Heartbeat Response message with parameters: ● cbsdId = C1 ● grantId = G1 ● transmitExpireTime = current UTC time + 200 seconds ● responseCode = 0 ● Heartbeat Request message is within heartbeatInterval of previous Heartbeat Request message	--	--



Report No.: KSCR240700144904

Page: 27 of 53

5	Monitor the RF output of CBSD2. Verify: ● CBSD2 shall stop transmission within bandwidth F2 within (T + 60 seconds) of completion of step 3	☒ Pass	☐ Fail
---	---	---	----------------------------------

**7.3.7 WINNF.FT.C.HBT.9**

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● UUT has registered successfully with SAS Test Harness ● UUT has a valid single grant as follows: ○ valid cbsdId = C ○ valid grantId = G ○ grant is for frequency range F, power P ○ grantExpireTime = UTC time greater than duration of the test ● UUT is in GRANTED, but not AUTHORIZED state(i.e. has not performed its first Heartbeat Request)	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including: ● cbsdId = C ● grantId = G ● operationState = "GRANTED"	☒ Pass	☐ Fail
3	After completion of step 2, SAS Test Harness does not respond to any further ● messages from UUT to simulate loss of network connection	--	--
4	Monitor the RF output of the UUT from start of test to 60 seconds after step 3. Verify: ● At any time during the test, UUT shall not transmit on RF interface	☒ Pass	☐ Fail

7.3.8 WINNF.FT.C.HBT.10

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● UUT has registered successfully with SAS Test Harness ● UUT has a valid single grant as follows: ○ valid cbsdId = C ○ valid grantId = G ○ grant is for frequency range F, power P ○ grantExpireTime = UTC time greater than duration of the test ● UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--	--
2	UUT sends a Heartbeat Request message. Verify Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including: ● cbsdId = C ● grantId = G ● operationState = "AUTHORIZED"	☒ Pass	☐ Fail
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: ● cbsdId = C ● grantId = G ● transmitExpireTime = T = current UTC time + 200 seconds ● responseCode = 0	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the RF output of the UUT. Verify: ● UUT shall stop all transmission on RF interface within (transmitExpireTime + 60 seconds), using the transmitExpireTime sent in Step 3.	☒ Pass	☐ Fail

7.3.9 WINNF.FT.C.HBT.11

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● UUT has registered successfully with SAS Test Harness ● UUT has a valid single grant as follows: ○ valid cbsdId = C ○ valid grantId = G ○ grant is for frequency range F, power P ● UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface. ● Grant has the following parameters at the start of the test: ○ grantExpireTime = UTC time equal to time at start of test + 300 seconds = Tgrant_expire ○ transmitExpireTime = UTC time equal to time at start of test + 200 seconds ○ heartbeatInterval = 60 seconds	--	--
2	UUT sends a Heartbeat Request message. If Heartbeat Request message contains grantRenew = TRUE, go to Step 6, else go to Step 3.	--	--
3	Verify Heartbeat Request message is sent within the latest specified heartbeatInterval, and is formatted correctly, including: ● cbsdId = C ● grantId = G ● operationState = "AUTHORIZED"	☒ Pass	☐ Fail
4	SAS Test Harness sends a Heartbeat Response message, with the following parameters: ● cbsdId = C ● grantId = G ● transmitExpireTime = current UTC + 200 seconds ● grantExpireTime = same as Step 1 ● responseCode = 0	--	--
5	Go to Step 2	--	--
6	Verify Heartbeat Request message is sent within the latest specified heartbeatInterval, and is formatted correctly, including: ● cbsdId = C ● grantId = G ● operationState = "AUTHORIZED" ● grantRenew = TRUE	☒ Pass	☐ Fail
7	SAS Test Harness sends a Heartbeat Response message, with the following parameters: ● cbsdId = C ● grantId = G ● grantExpireTime = UTC time set far in the future ● transmitExpireTime = current UTC time + 200 seconds ● responseCode = 0	--	--
8	Continue to respond to any subsequentHeartbeat Request from CBSD with Heartbeat Response with the following parameters: ● cbsdId = C ● grantId = G ● transmitExpireTime = same as Step 7 ● responseCode = 0	--	--
9	Monitor RF transmission of UUT from start of test until Tgrant_expire + 60 seconds and ensure UUT continues to transmit throughout the time period.	☒ Pass	☐ Fail

7.4 CBSD Measurement Report

7.4.1 WINNF.FT.D.MES.2

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: DP has successfully completed SAS Discovery and Authentication with SAS Test Harness	--	--
2	DP sends a Registration Request message for each of two CBSD. This may occur in a separate Request message per CBSD, or together in a single Request message with array of 2. Verify Registration Request message contains all required parameters properly formatted for CBSDi, i={1,2}, and specifically: - userId is present and correct - fcclid is present and correct - cbsdSerialNumber is present and correct - measCapability = "RECEIVED_POWER_WITHOUT_GRANT"	■ Pass	□ Fail
3	If a separate Registration Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Registration Request message with a separate Registration Response message. If a single Registration Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Registration Response message containing a 2-object array. Parameters for each CBSD within the Registration Response message should be as follows, for CBSDi: - cbsdId = Ci - measReportConfig= "RECEIVED_POWER_WITHOUT_GRANT" - responseCode = 0	--	--
4	UUT sends a message: - If message is type Spectrum Inquiry Request, go to step 5, or - If message is type Grant Request, go to step 7	■ Pass	□ Fail
5	UUT sends message type Spectrum Inquiry Request. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Spectrum Inquiry Request message contains all required parameters properly formatted for CBSDi, i= {1,2}, and specifically: - cbsdId = Ci - measReport is present, and is a properly formatted rcvdPowerMeasReport.	■ Pass	□ Fail
6	If a separate Spectrum Inquiry Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Spectrum Inquiry Request message with a separate Spectrum Inquiry Response message. If a single Spectrum Inquiry Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Spectrum Inquiry Response message containing a 2-object array. Parameters for each CBSD within the Spectrum Inquiry Response message should be as follows: - cbsdId = Ci - availableChannel is an array of availableChannel objects - responseCode = 0	--	--



Report No.: KSCR240700144904

Page: 32 of 53

7	UUT sends message type Grant Request message. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify the Grant Request message contains all required parameters properly formatted for CBSDi, i= {1,2}, and specifically: ● cbsdId = Ci ● measReport is present, and is a properly formatted rcvdPowerMeasReport.	☒ Pass	☐ Fail
---	--	---	--

7.4.2 WINNF.FT.C.MES.3

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: - UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness - UUT has successfully registered with SAS Test Harness, with cbsdId=C and measCapability = "RECEIVED_POWER_WITH_GRANT"	--	--
2	UUT sends a Grant Request message. Verify Grant Request message contains all required parameters properly formatted, and specifically: - cbsdId = C - operationParam is present and format is valid	Pass	Fail
3	SAS Test Harness sends a Grant Response message, with the following parameters: - cbsdId = C - grantId = G = valid grant ID - grantExpireTime = UTC time in the future - heartbeatInterval = 60 seconds - measReportConfig= "RECEIVED_POWER_WITH_GRANT" - operationParam is set to valid operating parameters - channelType = "GAA" - responseCode = 0	--	--
4	UUT sends a Heartbeat Request message. Verify message contains all required parameters properly formatted, and specifically: - cbsdId = C - grantId = G - operationState = "GRANTED"	Pass	Fail
5	If Heartbeat Request message (step 4) contains measReport object, then: - verify measReport is properly formatted as object rcvdPowerMeasReport - end test, with PASS result else, if Heartbeat Request message (step 4) does not contain measReport object, then: - If number of Heartbeat Requests sent by UUT after Step 3 is =5, then stop test with result of FAIL	Pass	Fail
6	SAS Test Harness sends a Heartbeat Response message, containing all required parameters properly formatted, and specifically: - cbsdId = C - grantId = G - transmitExpireTime = current UTC time + 200 seconds - responseCode = 0 Go to Step 4, above	--	--

7.4.3 WINNF.FT.D.MES.5

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: - DP has successfully completed SAS Discovery and Authentication with SAS Test Harness - DP has successfully registered 2 CBSD with SAS Test Harness, each with cbsdId=Ci, i={1,2} and measCapability = "RECEIVED_POWER_WITH_GRANT" - DP has received a valid grant with grantId = Gi, i={1,2} for each CBSD - Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of their grants. - Grants have heartbeatInterval =60 seconds	--	--
2	Verify DP sends a Heartbeat Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Heartbeat Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSDi: - cbsdId = Ci - grantId = Gi - operationState = "AUTHORIZED"	■ Pass	□ Fail
3	If a separate Heartbeat Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Heartbeat Request message with a separate Heartbeat Response message. If a single Heartbeat Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Heartbeat Response message containing a 2-object array. Parameters for each CBSD within the Heartbeat Response message containing all required parameters properly formatted, and specifically: - cbsdId = Ci - grantId = Gi - measReportConfig= "RECEIVED_POWER_WITH_GRANT" - responseCode = 0	--	--
4	Verify DP sends a Heartbeat Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Heartbeat Request message contains all required parameters properly formatted for each CBSD, and specifically, for CBSDi, i = {1,2}: - cbsdId = Ci - grantId = Gi - operationState = "AUTHORIZED" - Check whether measReport is present, and if present, ensure it is a properly formatted rcvdPowerMeasReport object, and record its reception for each CBSDi, i = {1,2}.	■ Pass	□ Fail
5	If Heartbeat Request message (step 4) contains measReport object, then: - Verify measReport is properly formatted as object rcvdPowerMeasReport - record which CBSD have successfully sent a measReport object If all CBSDi, i = {1,2} have successfully sent a measReport object, then	■ Pass	□ Fail



	● end test, with PASS result else, if the number of Heartbeat Requests sent per CBSD is 5 or more, then stop test with result of FAIL		
6	If a separate Heartbeat Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each Heartbeat Request message with a separate Heartbeat Response message. If a single Heartbeat Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Heartbeat Response message containing a 2-object array. Parameters for each CBSD within the Heartbeat Response message containing all required parameters properly formatted, and specifically: ● cbsdId = Ci ● grantId = Gi ● responseCode = 0 Go to Step 4, above.	--	--

7.5 CBSD Relinquishment Process

7.5.1 WINNF.FT.D.RLQ.2

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● DP has successfully completed SAS Discovery and Authentication with SAS Test Harness ● DP has successfully registered 2 CBSD with SAS Test Harness, each with cbsdId=Ci, i={1,2} ● DP has received a valid grant with grantId = Gi, i={1,2} for each CBSD ● Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of their grants. Invoke trigger to relinquish UUT Grant from the SAS Test Harness	--	--
2	Verify DP sends a Relinquishment Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Relinquishment Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSDi: ● cbsdId = Ci ● grantId = Gi	■ Pass	□ Fail
3	If a separate Relinquishment Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each request message with a separate response message. If a single Relinquishment Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Response message containing a 2-object array. Parameters for each CBSD within the Relinquishment Response shall be as follows: ● cbsdId = Ci ● grantId = Gi ● responseCode = 0	--	--
4	After completion of step 3, SAS Test Harness will not provide any additional positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: ● UUT shall stop RF transmission at any time between triggering the relinquishments and UUT sending the relinquishment requests for each CBSD.	■ Pass	□ Fail

7.5.2 WINNF.FT.D.RLQ.4

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● DP has successfully completed SAS Discovery and Authentication with SAS Test Harness ● DP has successfully registered 2 CBSD with SAS Test Harness, each with cbsdId=Ci, i={1,2} ● DP has received a valid grant with grantId = Gi, i={1,2} for each CBSD ● Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of their grants. Invoke trigger to relinquish UUT Grant from the SAS Test Harness	--	--
2	DP with two CBSDs sends Relinquishment Request with two objects to the SAS Test Harness. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify DP sends a Relinquishment Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Relinquishment Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSDi: ● cbsdId = Ci ● grantId = Gi	☒ Pass	☐ Fail
3	If a separate Relinquishment Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each request message with a separate response message. If a single Relinquishment Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Response message containing a 2-object array. Parameters for each CBSD within the Relinquishment Response shall be as follows: ● cbsdId = Ci ● grantId = Gi ● responseCode = Ri	--	--
4	After completion of step 3, SAS Test Harness will not provide any additional positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: A. UUT stopped RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request	☒ Pass	☐ Fail

7.5.3 WINNF.FT.D.RLQ.6

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● DP has successfully completed SAS Discovery and Authentication with SAS Test Harness ● DP has successfully registered 2 CBSD with SAS Test Harness, each with cbsdId=Ci, i={1,2} ● DP has received a valid grant with grantId = Gi, i={1,2} for each CBSD ● Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of their grants. Invoke trigger to relinquish UUT Grant from the SAS Test Harness	--	--
2	DP with two CBSDs sends Relinquishment Request with two objects to the SAS Test Harness. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify DP sends a Relinquishment Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Relinquishment Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSDi: ● cbsdId = Ci ● grantId = Gi	☒ Pass	☐ Fail
3	If a separate Relinquishment Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each request message with a separate response message. If a single Relinquishment Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Response message containing a 2-object array. Parameters for each CBSD within the Relinquishment Response shall be as follows: ● cbsdId = Ci ● grantId = Gi ● responseCode = 103	--	--
4	After completion of step 3, SAS Test Harness will not provide any additional positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: A. UUT stopped RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request	☒ Pass	☐ Fail

7.6 CBSD Deregistration Process

7.6.1 WINNF.FT.D.DRG.2

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● DP has successfully completed SAS Discovery and Authentication with SAS Test Harness ● DP has successfully registered 2 CBSD with SAS Test Harness, each with cbsdId=Ci, i={1,2} ● DP has received a valid grant with grantId = Gi, i={1,2} for each CBSD ● Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of their grants. Invoke trigger to relinquish UUT Grant from the SAS Test Harness	--	--
2	UUT may send a Relinquishment request and receives Relinquishment response with responseCode=0 for each CBSD	--	--
3	Verify DP sends a Deregistration Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Deregistration Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSDi: ● cbsdId = Ci	☒ Pass	☐ Fail
4	If a separate Deregistration Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each request message with a separate response message. If a single Deregistration Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Response message containing a 2-object array. Parameters for each CBSD within the Deregistration Response shall be as follows: ● No cbsdId in either response ● responseCode = Ri	--	--
5	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
6	Monitor the RF output of each UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify: ● UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs: A. UUT sending a Registration Request message, as this is not mandatory B. UUT sending a Deregistration Request message	☒ Pass	☐ Fail

7.6.2 WINNF.FT.D.DRG.4

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● Each UUT has successfully registered with SAS Test Harness ● Each UUT is in the authorized state ● DP has successfully completed SAS Discovery and Authentication with SAS Test Harness ● DP has successfully registered 2 CBSD with SAS Test Harness, each with cbsdId=Ci, i={1,2} ● DP has received a valid grant with grantId = Gi, i={1,2} for each CBSD ● Both CBSD are in Grant State AUTHORIZED and actively transmitting within the bounds of their grants. Invoke trigger to relinquish UUT Grant from the SAS Test Harness	--	--
2	UUT sends a Relinquishment request and receives Relinquishment response with responseCode=0	--	--
3	Verify DP sends a Deregistration Request message for each CBSD. This may occur in a separate message per CBSD, or together in a single message with array of 2. Verify Deregistration Request message contains all required parameters properly formatted for each CBSD, specifically, for CBSDi: ● cbsdId = Ci	■ Pass	□ Fail
4	If a separate Deregistration Request message was sent for each CBSD by the DP, the SAS Test Harness shall respond to each request message with a separate response message. If a single Deregistration Request message was sent by the DP containing a 2-object array (one per CBSD), the SAS Test Harness shall respond with a single Response message containing a 2-object array. Parameters for each CBSD within the Deregistration Response shall be as follows: ● cbsdId = Ci ● responseCode = 0	--	--
5	After completion of step 4, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
6	Monitor the RF output of each UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify: ● UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs: A. UUT sending a Registration Request message, as this is not mandatory B. UUT sending a Deregistration Request message	■ Pass	□ Fail

7.6.3 WINNF.FT.C.DRG.5

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: ● UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness ● UUT has successfully registered with SAS Test Harness, with cbsdId=C ● UUT has received a valid grant with grantId = G ● UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant. Invoke trigger to deregister UUT from the SAS Test Harness	--	--
2	UUT sends a Relinquishment request and receives Relinquishment response with responseCode=0	--	--
3	● UUT sends Deregistration Request to SAS Test Harness with cbsdId = C.	--	--
4	The SAS Test Harness sends the Deregistration Response Message to UUT with: ● cbsdId=C ● responseCode = 103	--	--
5	After completion of step 3, SAS Test Harness will not provide any additional positive response (responseCode=0) to further request messages from the UUT.	--	--
6	Monitor the RF output of the UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify: ● UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs: A. UUT sending a Registration Request message, as this is not mandatory B. UUT sending a Deregistration Request message	☒ Pass	☐ Fail

7.7 CBSD Security Validation

7.7.1 WINNF.FT.C.SCS.1

#	Test Execution Steps	Results	
1	- UUT shall start CBSD-SAS communication with the security procedure - The UUT shall establish a TLS handshake with the SAS Test Harness using configured certificate. - Configure the SAS Test Harness to accept the security procedure and establish the connection	☒ Pass	☐ Fail
2	- Make sure that Mutual authentication happens between UUT and the SAS Test Harness. - Make sure that UUT uses TLS v1.2 - Make sure that cipher suites from one of the following is selected, - TLS_RSA_WITH_AES_128_GCM_SHA256 - TLS_RSA_WITH_AES_256_GCM_SHA384 - TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256 - TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384 - TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256	☒ Pass	☐ Fail
3	A successful registration is accomplished using one of the test cases described in section 6.1.4.1, depending on CBSD capability. UUT sends a registration request to the SAS Test Harness and the SAS Test Harness sends a Registration Response with responseCode = 0 and cbsdId.	☒ Pass	☐ Fail
4	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: UUT shall not transmit RF	☒ Pass	☐ Fail

7.7.2 WINNF.FT.C.SCS.2

#	Test Execution Steps	Results	
1	UUT shall start CBSD-SAS communication with the security procedures	☒ Pass	☐ Fail
2	- Make sure that UUT uses TLS v1.2 for security establishment. - Make sure UUT selects the correct cipher suite. - UUT shall use CRL or OCSP to verify the validity of the server certificate. - Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.	☒ Pass	☐ Fail
3	UUT may retry for the security procedure which shall fail.	☒ Pass	☐ Fail
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: UUT shall not transmit RF	☒ Pass	☐ Fail

7.7.3 WINNF.FT.C.SCS.3

#	Test Execution Steps	Results	
1	UUT shall start CBSD-SAS communication with the security procedures	☒ Pass	☐ Fail
2	- Make sure that UUT uses TLS v1.2 for security establishment. - Make sure UUT selects the correct cipher suite. - UUT shall use CRL or OCSP to verify the validity of the server certificate. - Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.	☒ Pass	☐ Fail
3	UUT may retry for the security procedure which shall fail.	☒ Pass	☐ Fail
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: UUT shall not transmit RF	☒ Pass	☐ Fail

7.7.4 WINNF.FT.C.SCS.4

#	Test Execution Steps	Results	
1	UUT shall start CBSD-SAS communication with the security procedures	☒ Pass	☐ Fail
2	- Make sure that UUT uses TLS v1.2 for security establishment. - Make sure UUT selects the correct cipher suite. - UUT shall use CRL or OCSP to verify the validity of the server certificate - Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.	☒ Pass	☐ Fail
3	UUT may retry for the security procedure which shall fail.	☒ Pass	☐ Fail
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: UUT shall not transmit RF	☒ Pass	☐ Fail

**7.7.5 WINNF.FT.C.SCS.5**

#	Test Execution Steps	Results	
1	• UUT shall start CBSD-SAS communication with the security procedures	☒ Pass	☐ Fail
2	• Make sure that UUT uses TLS v1.2 for security establishment. • Make sure UUT selects the correct cipher suite. • UUT shall use CRL or OCSP to verify the validity of the server certificate • Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.	☒ Pass	☐ Fail
3	• UUT may retry for the security procedure which shall fail.	☒ Pass	☐ Fail
4	• SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒ Pass	☐ Fail



7.8 CBSD RF Power Measurement

7.8.1 WINNF.PT.C.HBT.1

#	Test Execution Steps	Results	
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness • UUT has registered with the SAS, with CBSD ID = C • UUT has a single valid grant G with parameters {lowFrequency = FL, highFrequency = FH, maxEirp = Pi}, with grant in AUTHORIZED state, and grantExpireTime set to a value far past the duration of this test case • Note: in order for the UUT to request a grant with the parameters {lowFrequency, highFrequency, maxEirp}, the SAS Test Harness may need to provide appropriate guidance in the availableChannel object of the spectrumInquiry response message, and the operationParam object of the grant response message. Alternately, the UUT vendor may provide the ability to set those parameters on the UUT so that the UUT will request a grant with those parameters	--	--
2	UUT and SAS Test Harness perform a series of Heartbeat Request/Response cycles, which continues until the other test steps are complete. Messaging for each cycle is as follows: • UUT sends Heartbeat Request, including: ○ cbsdId = C ○ grantId = G • SAS Test Harness responds with Heartbeat Response, including: ○ cbsdId = C ○ grantId = G ○ transmitExpireTime = current UTC time + 200 seconds • responseCode = 0	--	--
3	Tester performs power measurement on RF interface(s) of UUT, and verifies it complies with the maxEirp setting, Pi. The RF measurement method is out of scope of this document, but may include additional configuration of the UUT, as required, to fulfill the requirements of the power measurement method. • Note: it may be required for the vendor to provide a method or configuration to bring the UUT to a mode which is required by the measurement methodology. Any such mode is vendor-specific and depends upon UUT behavior and the measurement methodology.	☒ Pass	☐ Fail

RF measurement plot for Test Case:


- Tester performs power measurement on RF interface(s) of UUT, and verifies it complies with the maxEirp setting, Pi. The RF measurement method is out of scope of this document, but may include additional configuration of the UUT, as required, to fulfill the requirements of the power measurement method.

Frequency (MHz)	Channel Bandwidth (MHz)	Granted maxEIRP (dBm/MHz)	Conducted PSD (dBm/MHz)	MIMO Factor (dB)	Antenna Gain (dBi)	Cable Loss (dB)	maxEIRP (dBm/MHz)
3555	10	18	-18.896	6.02	7	22.8	16.924
3555	10	15	-22.365	6.02	7	22.8	13.455
3555	10	10	-26.709	6.02	7	22.8	9.111


Note:

MaxEIRP= Conducted PSD+ Antenna Gain+ Cable loss+MIMO Factor


Target Power: 18 dBm/MHz

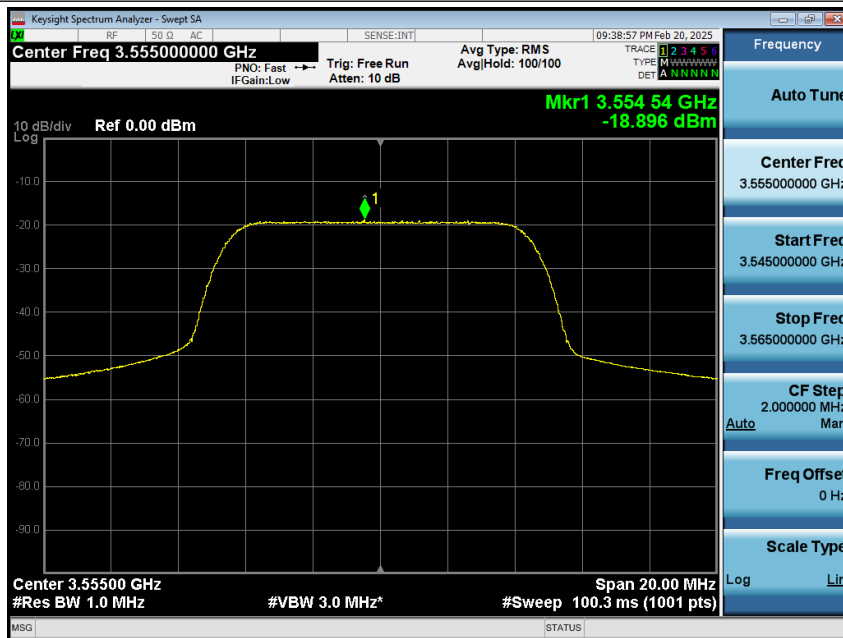

Target Power: 15 dBm/MHz

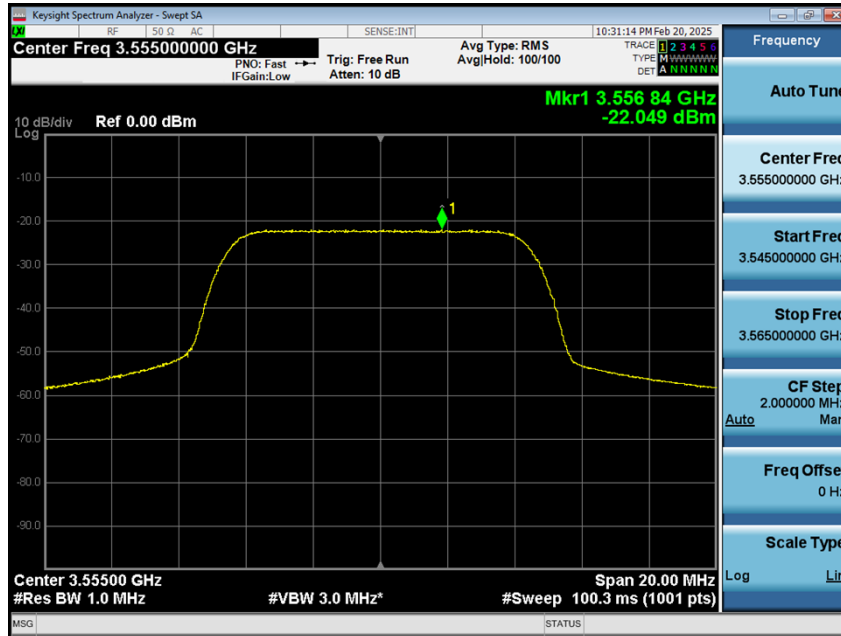

Target Power: 10 dBm/MHz

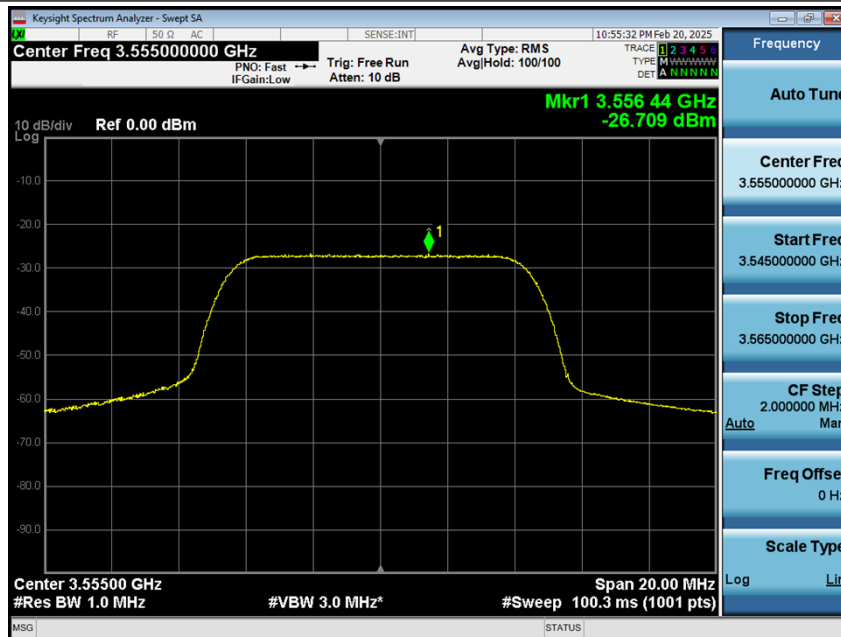

8 Test Data Log

Test data log refer to log files (Log files appendix) except for security test cases which shows below.

8.1 WINNF.FT.C.SCS.1

The image shows a Wireshark packet capture analysis of a TLSv1.2 Client Hello message. The packet list on the left shows the message at frame 14, 589 bytes on wire (4712 bits), 589 bytes captured (4712 bits). The packet details pane shows the message structure: TLSv1.2 Record Layer: Handshake Protocol: Client Hello. The packet bytes pane shows the raw data in hexadecimal and ASCII.

No.	Time	Source	Destination	Protocol	Length	Info
12	0.005335	10.120.8.10	10.120.8.205	TLSv1.2	589	Client Hello
14	0.005361	10.120.8.10	172.19.0.2	TLSv1.2	589	Client Hello
19	0.005568	172.19.0.2	10.120.8.10	TLSv1.2	3379	Server Hello, Certificate, Certificate Request, Server Hello Done
21	0.005602	10.120.8.205	10.120.8.10	TLSv1.2	3379	Server Hello, Certificate, Certificate Request, Server Hello Done
26	0.022170	10.120.8.10	10.120.8.205	TLSv1.2	3860	Certificate, Client Key Exchange, Certificate Verify, Change Cipher Spec, Encrypted Handshake Message
28	0.022222	10.120.8.10	172.19.0.2	TLSv1.2	3860	Certificate, Client Key Exchange, Certificate Verify, Change Cipher Spec, Encrypted Handshake Message
33	0.024808	172.19.0.2	10.120.8.10	TLSv1.2	123	Change Cipher Spec, Encrypted Handshake Message
35	0.024829	10.120.8.205	10.120.8.10	TLSv1.2	123	Change Cipher Spec, Encrypted Handshake Message
40	0.025571	10.120.8.10	10.120.8.205	TLSv1.2	611	Application Data
42	0.025589	10.120.8.10	172.19.0.2	TLSv1.2	611	Application Data
44	0.066184	172.19.0.2	10.120.8.10	TLSv1.2	118	Application Data
46	0.066232	10.120.8.205	10.120.8.10	TLSv1.2	118	Application Data
51	0.066604	172.19.0.2	10.120.8.10	TLSv1.2	551	Application Data, Application Data, Application Data, Application Data, Application Data, Application Data, Application Data, Application Data
53	0.066622	10.120.8.205	10.120.8.10	TLSv1.2	551	Application Data, Application Data, Application Data, Application Data, Application Data, Application Data, Application Data, Application Data


Frame 14: 589 bytes on wire (4712 bits), 589 bytes captured (4712 bits)

- Linux cooked capture v2
- Internet Protocol Version 4, Src: 10.120.8.10, Dst: 172.19.0.2
- Transmission Control Protocol, Src Port: 47004, Dst Port: 9990, Seq: 1, Ack: 1, Len: 517
- Transport Layer Security
 - TLSv1.2 Record Layer: Handshake Protocol: Client Hello
 - Content Type: Handshake (22)
 - Version: TLS 1.0 (0x0301)
 - Length: 512
 - Handshake Protocol: Client Hello
 - Handshake Type: Client Hello (1)
 - Length: 508
 - Version: TLS 1.2 (0x0303)
 - Random: 4eb418785b4622a9f382ac2f9a31bcfce41cd79b603e45bab0e009266becb11
 - Session ID Length: 32
 - Session ID: 52c1e1b174a1feb807b64901760809ced8ea1b41d74de5fead05eea24ad122
 - Cipher Suites Length: 10
 - Cipher Suites (9 suites)
 - Compression Methods Length: 1
 - Compression Methods (1 method)
 - Extensions Length: 417
 - Extension: ec_point_formats (len=4)
 - Extension: supported_groups (len=12)
 - Extension: next_protocol_negotiation (len=0)
 - Extension: application_layer_protocol_negotiation (len=11)

0070 be cb 11 20 52 cb 1e b1 a7 4a 1f eb 80 76
0080 17 60 80 9c 0e d8 ea 1b 41 d7 4d e5 fe ad
0090 a2 4a d1 22 00 12 13 02 13 03 13 01 c0 2c
00a0 c0 2f c0 2b 00 9c 00 ff 01 00 01 a1 00 0b
00b0 03 00 01 02 00 0a 00 0c 00 0a 00 1d 00 17
00c0 00 19 00 18 33 74 00 00 00 10 00 0b 00 09
00d0 74 74 70 2f 31 2e 31 00 16 00 00 00 17 00
00e0 31 00 00 00 04 00 30 00 2e 04 03 05 03 06
00f0 07 08 08 08 09 08 0a 08 0b 00 04 08 05 08
0100 01 05 01 06 01 03 03 02 03 03 01 02 01 03
0110 02 04 02 05 02 06 02 00 2b 00 05 04 03 04
0120 00 24 00 02 01 01 00 33 00 25 00 24 00 1d
0130 da 1c 3d 7e f0 7c 37 86 31 78 61 4c 42 74
0140 1f fa 42 e6 a5 a0 b1 7a 4b f5 fa 4f 41 a9
0150 00 15 00 f9 00 00 00 00 00 00 00 00 00 00
0160 00 00 00 00 00 00 00 00 00 00 00 00 00 00
0170 00 00 00 00 00 00 00 00 00 00 00 00 00 00
0180 00 00 00 00 00 00 00 00 00 00 00 00 00 00
0190 00 00 00 00 00 00 00 00 00 00 00 00 00 00
01a0 00 00 00 00 00 00 00 00 00 00 00 00 00 00
01b0 00 00 00 00 00 00 00 00 00 00 00 00 00 00
01c0 00 00 00 00 00 00 00 00 00 00 00 00 00 00
01d0 00 00 00 00 00 00 00 00 00 00 00 00 00 00
01e0 00 00 00 00 00 00 00 00 00 00 00 00 00 00
01f0 00 00 00 00 00 00 00 00 00 00 00 00 00 00
0200 00 00 00 00 00 00 00 00 00 00 00 00 00 00
0210 00 00 00 00 00 00 00 00 00 00 00 00 00 00



8.2 WINNF.FT.C.SCS.2

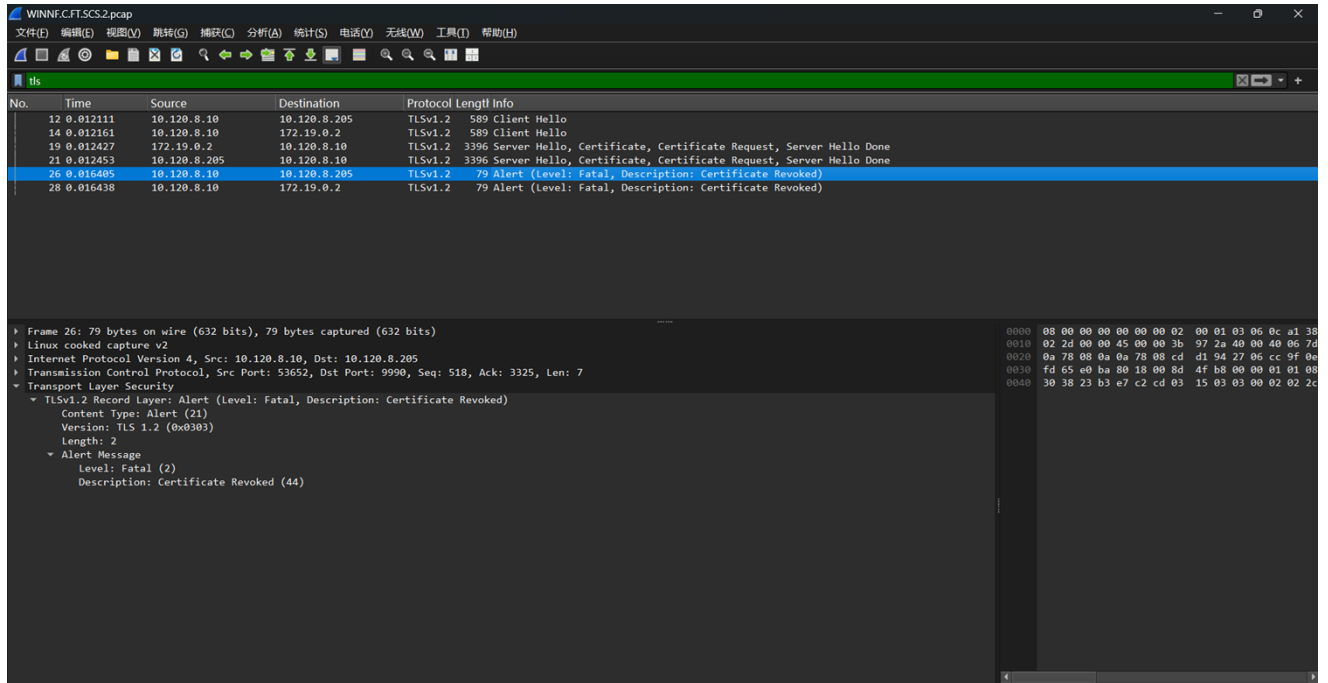



Report No.: KSCR240700144904

Page: 50 of 53

8.3 WINNF.FT.C.SCS.3

WINNF.CFT.SCS.3.pcap

文件(F) 编辑(E) 视图(V) 跳转(G) 捕获(C) 分析(A) 统计(S) 电话(T) 无线(W) 工具(I) 帮助(H)

tls

No.	Time	Source	Destination	Protocol	Length	Info
12	0.018541	10.120.8.10	10.120.8.205	TLSv1.2	589	Client Hello
14	0.018579	10.120.8.10	172.19.0.2	TLSv1.2	589	Client Hello
19	0.018854	172.19.0.2	10.120.8.10	TLSv1.2	3396	Server Hello, Certificate, Certificate Request, Server Hello Done
21	0.018903	10.120.8.205	10.120.8.10	TLSv1.2	3396	Server Hello, Certificate, Certificate Request, Server Hello Done
26	0.021846	10.120.8.10	10.120.8.205	TLSv1.2	79	Alert (Level: Fatal, Description: Certificate Expired)
28	0.021989	10.120.8.10	172.19.0.2	TLSv1.2	79	Alert (Level: Fatal, Description: Certificate Expired)

Frame 26: 79 bytes on wire (632 bits), 79 bytes captured (632 bits)

Linux cooked capture v2

Internet Protocol Version 4, Src: 10.120.8.10, Dst: 10.120.8.205

Transmission Control Protocol, Src Port: 34524, Dst Port: 9990, Seq: 518, Ack: 3325, Len: 7


Transport Layer Security

- TLSv1.2 Record Layer: Alert (Level: Fatal, Description: Certificate Expired)
 - Content Type: Alert (21)
 - Version: TLS 1.2 (0x0303)
 - Length: 2
 - Alert Message
 - Level: Fatal (2)
 - Description: Certificate Expired (45)

0000 08 00 00 00 00 00 02 00 01 03 06 0c a1 38
0010 02 2d 00 00 45 00 00 3b b4 9d 40 00 40 06 60
0020 0a 78 08 0a 0a 78 08 cd 86 dc 27 06 9b ff 8d
0030 c9 7d 9a ee 80 18 00 8d 80 69 00 00 01 01 08
0040 30 40 c5 ff e7 cb 6f 28 15 03 03 00 02 02 2d



8.4 WINNF.FT.C.SCS.4

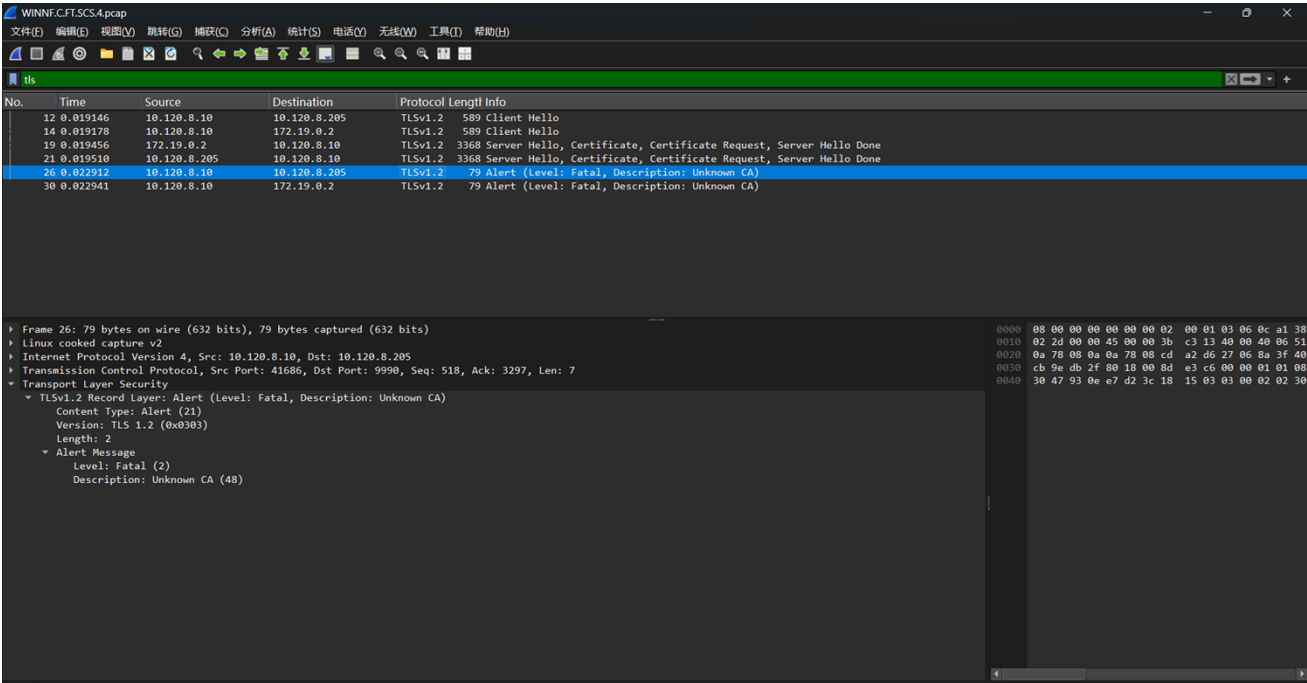



8.5 WINNF.FT.C.SCS.5

WINNF.FT.C.SCS.5.pcap

文件(F) 编辑(E) 视图(V) 跳转(G) 捕获(C) 分析(A) 统计(S) 电话(Q) 无线(W) 工具(T) 帮助(H)

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

347

348

349

350

351

352

353

354

355

356

357

358

359

360

361

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

382

383

384

385

386

387

388

389

390

391

392

393

394

395

396

397

398

399

400

401

402

403

404

405

406

407

408

409

410

411

412

413

414

415

416

417

418

419

420

421

422

423

424

425

426

427

428

429

430

431

432

433

434

435

436

437

438

439

440

441

442

443

444

445

446

447

448

449

450

451

452

453

454

455

456

457

458

459

460

461

462

463

464

465

466

467

468

469

470

471

472

473

474

475

476

477

478

479

480

481

482

483

484

485

486

487

488

489

490

491

492

493

494

495

496

497

498

499

500

501

502

503

504

505

506

507

508

509

510

511

512

513

514

515

516

517

518

519

520

521

522

523

524

525

526

527

528

529

530

531

532

533

534

535

536

537

538

539

540

541

542

543

544

545

546

547

548

549

550

551

552

553

554

555

556

557

558

559

560

561

562

563

564

565

566

567

568

569

570

571

572

573

574

575

576

577

578

579

580

581

582

583

584

585

586

587

588

589

590

591

592

593

594

595

596

597

598

599

600

601

602

603

604

605

606

607

608

609

610

611

612

613

614

615

616

617

618

619

620

621

622

623

624

625

626

627

628

629

630

631

632

633

634

635

636

637

638

639

640

641

642

643

644

645

646

647

648

649

650

651

652

653

654

655

656

657

658

659

660

661

662

663

664

665

666

667

668

669

670

671

672

673

674

675

676

677

678

679

680

681

682

683

684

685

686

687

688

689

690

691

692

693

694

695

696

697

698

699

700

701

702

703

704

705

706

707

708

709

710

711

712

713

714

715

716

717

718

719

720

721

722

723

724

725

726

727

728

729

730

731

732

733

734

735

736

737

738

739

740

741

742

743

744

745

746

747

748

749

750

751

752

753

754

755

756

757

758

759

760

761

762

763

764

765

766

767

768

769

770

771

772

773

774

775

776

777

778

779

780

781

782

783

784

785

786

787

788

789

790

791

792

793

794

795

796

797

798

799

800

801

802

803

804

805

806

807

808

809

810

811

812

813

814

815

816

817

818

819

820

821

822

823

824

825

826

827

828

829

830

831

832

833

834

835

836

837

838

839

840

841

842

843

844

845

846

847

848

849

850

851

852

853

854

855

856

857

858

859

860

861

862

863

864

865

866

867

868

869

870

871

872

873

874

875

876

877

878

879

880

881

882

883

884

885

886

887

888

889

890

891

892

893

894

895

896

897

898

899

900

901

902

903

904

905

906

907

908

909

910

911

912

913

914

915

916

917

918

919

920

921

922

923

924

925

926

927

928

929

930

931

932

933

934

935

936

937

938

939

940

941

942

943

944

945

946

947

948

949

950

951

952

953

954

955

956

957

958

959

960

961

962

963

964

965

966

967

968

969

970

971

972

973

974

975

976

977

978

979

980

981

982

983

984

985

986

987

988

989

990

991

992

993

994

995

996

997

998

999

1000

1001

1002

1003

1004

1005

1006

1007

1008

1009

1010

1011

1012

1013

1014

1015

1016

1017

1018

1019

1020

1021

1022

1023

1024

1025

1026

1027

1028

1029

1030

1031

1032

1033

1034

1035

1036

1037

1038

1039

1040

1041

1042

1043

1044

1045

1046

1047

1048

1049

1050

1051

1052

1053

1054

1055

1056

1057

1058

1059

1060

1061

1062

1063

1064

1065

1066

1067

1068

1069

1070

1071

1072

1073

1074

1075

1076

1077

1078

1079

1080

1081

1082

1083

1084

1085

1086

1087

1088

1089

1090

1091

1092

1093

1094

1095

1096

1097

1098

1099

1100

1101

1102

1103

1104

1105

1106

1107

1108

1109

1110

1111

1112

1113

1114

1115

1116

1117

1118

1119

1120

1121

1122

1123

1124

1125

1126

1127

1128

1129

1130

1131

1132

1133

1134

1135

1136

1137

1138

1139

1140

1141

1142

1143

1144

1145

1146

1147

1148

1149

1150

1151

1152

1153

1154

1155

1156

1157

1158

1159

1160

1161

1162

1163

1164

1165

1166

1167

1168

1169

1170

1171

1172

1173

1174

1175

1176

1177

1178

1179

1180

1181

1182

1183

1184

1185

1186

1187

1188

1189

1190

1191

1192

1193

1194

1195

1196

1197

1198

1199

1200

1201

1202

1203

1204

1205

1206

1207

1208

1209

1210

1211

1212

1213

1214

1215

1216

1217

1218

1219

1220

1221

1222

1223

1224

1225

1226

1227

1228

1229

1230

1231

1232

1233

1234

1235

1236

1237

1238

1239

1240

1241

1242

1243

1244

1245

1246

1247

1248

1249

1250

1251

1252

1253

1254

1255

1256

1257

1258

1259

1260

1261

1262

1263

1264

1265

1266

1267

1268

1269

1270

1271

1272

1273

1274

1275

1276

1277

1278

1279

1280

1281

1282

1283

1284

1285

1286

1287

1288

1289

1290

1291

1292

1293

1294

1295

1296

1297

1298

1299

1300

1301

1302

1303

1304

1305

1306

1307

1308

1309

1310

1311

1312

1313

1314

1315

1316

1317

1318

1319

1320

1321

1322

1323

1324

1325

1326

1327

1328

1329

1330

1331

1332

1333

1334

1335

1336

1337

1338

1339

1340

1341

1342

1343

1344

1345

1346

1347

1348

1349

1350

1351

1352

1353

1354

1355

1356

1357

1358

1359

1360

1361

1362

1363

1364

1365

1366

1367

1368

1369

1370

1371

1372

1373

1374

1375

1376

1377

1378

1379

1380

1381

1382

1383

1384

1385

1386

1387

1388

1389

1390

1391

1392

1393

1394

1395

1396

1397

1398

1399

1400

1401

1402

1403

1404

1405

1406

1407

1408

1409

1410

1411

1412

1413

1414

1415

1416

1417

1418

1419

1420

1421

1422

1423

1424

1425

1426

1427

1428

1429

1430

1431

1432

1433

1434

1435

1436

1437

1438

1439

1440

1441

1442

1443

1444

1445

1446

1447

1448

1449

1450

1451

1452

1453

1454

1455

1456

1457

1458

1459

1460

1461

1462

1463

1464

1465

1466

1467

1468

1469

1470

1471

1472

1473

1474

1475

1476

1477

1478

1479

14



Report No.: KSCR240700144904

Page: 53 of 53

9 Test Setup Photo

Refer to Appendix - Test Setup Photo for KSCR2407001449AT

10 EUT Constructional Details (EUT Photos)

Refer to Appendix - Photographs of EUT Constructional Details for KSCR2407001449AT