

Meas1.Head Left Cheek WLAN 2.4G Ch11

Date: 2026/8/13

Communication System Band: WLAN 2.4GHz; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.747$ S/m; $\epsilon_r = 40.34$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature:22.8°C Liquid Temperature:21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(7.07, 7.02, 7.22); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch11/Area Scan (81x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.430 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.45 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.553 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.126 W/kg

Smallest distance from peaks to all points 3 dB below = 10.5 mm

Ratio of SAR at M2 to SAR at M1 = 46.5%

Maximum value of SAR (measured) = 0.438 W/kg

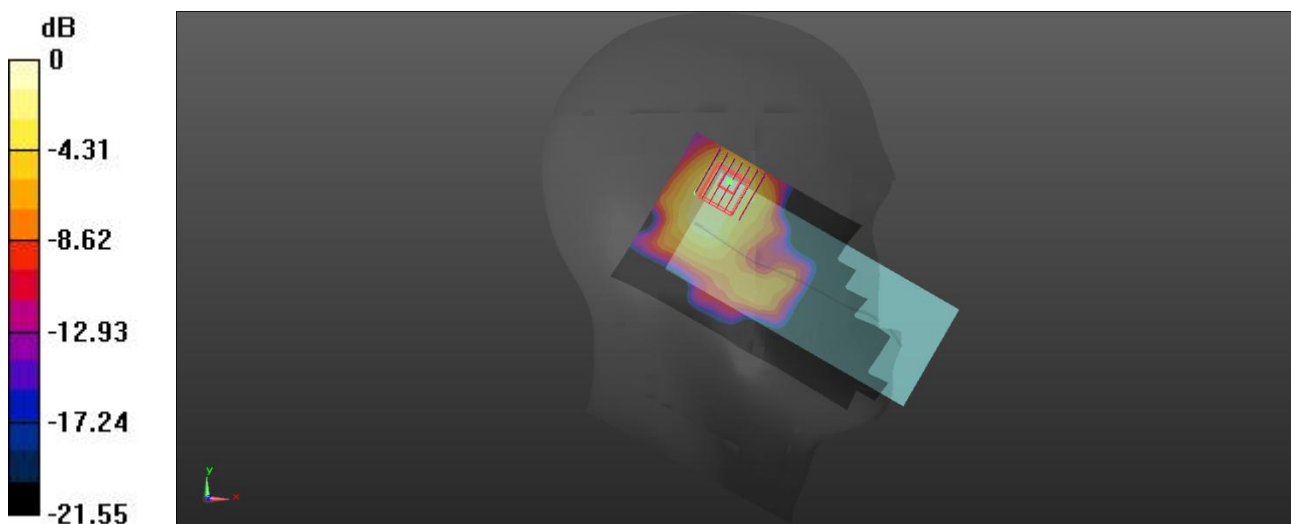

0 dB = 0.438 W/kg

Meas2.Body-worn& Hotspot Back Side 10mm WLAN 2.4G Ch11

Date: 2026/8/13

Communication System Band: WLAN 2.4GHz; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.747$ S/m; $\epsilon_r = 40.34$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.8°C Liquid Temperature:21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(7.07, 7.02, 7.22); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch11/Area Scan (81x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.165 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.152 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.189 W/kg

SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.062 W/kg

Smallest distance from peaks to all points 3 dB below = 15 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 0.162 W/kg

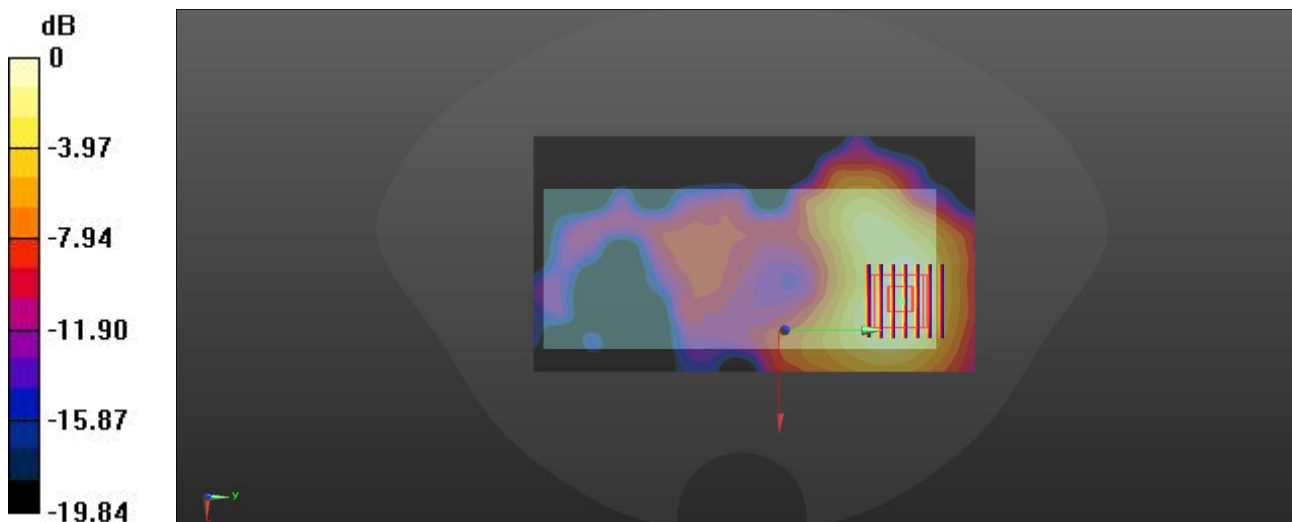

0 dB = 0.162 W/kg

Meas3.Head Left Cheek WALN 5.2G Ch44

Date: 2026/8/14

Communication System Band: Band 1; Frequency: 5220 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5220$ MHz; $\sigma = 4.742$ S/m; $\epsilon_r = 36.113$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(5.54, 5.49, 5.65); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch44/Area Scan (101x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.08 W/kg

Ch44/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.127 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 55.1%

Maximum value of SAR (measured) = 0.987 W/kg

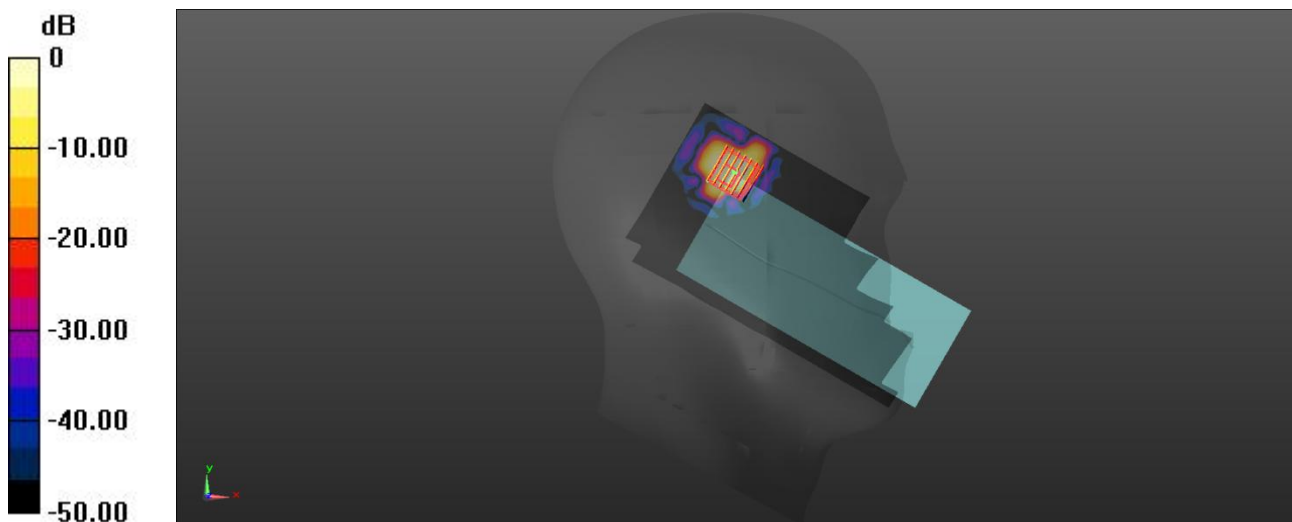

0 dB = 0.987 W/kg

Meas4.Body-worn& Hotspot Right Side 10mm WLAN 5.2G Ch44

Date: 2026/8/14

Communication System Band: Band 1; Frequency: 5220 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5220$ MHz; $\sigma = 4.742$ S/m; $\epsilon_r = 36.113$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3°C Liquid Temperature:21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(5.54, 5.49, 5.65); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch44/Area Scan (71x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.915 W/kg

Ch44/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.385 W/kg; SAR(10 g) = 0.143 W/kg

Smallest distance from peaks to all points 3 dB below = 10.5 mm

Ratio of SAR at M2 to SAR at M1 = 54.9%

Maximum value of SAR (measured) = 0.833 W/kg

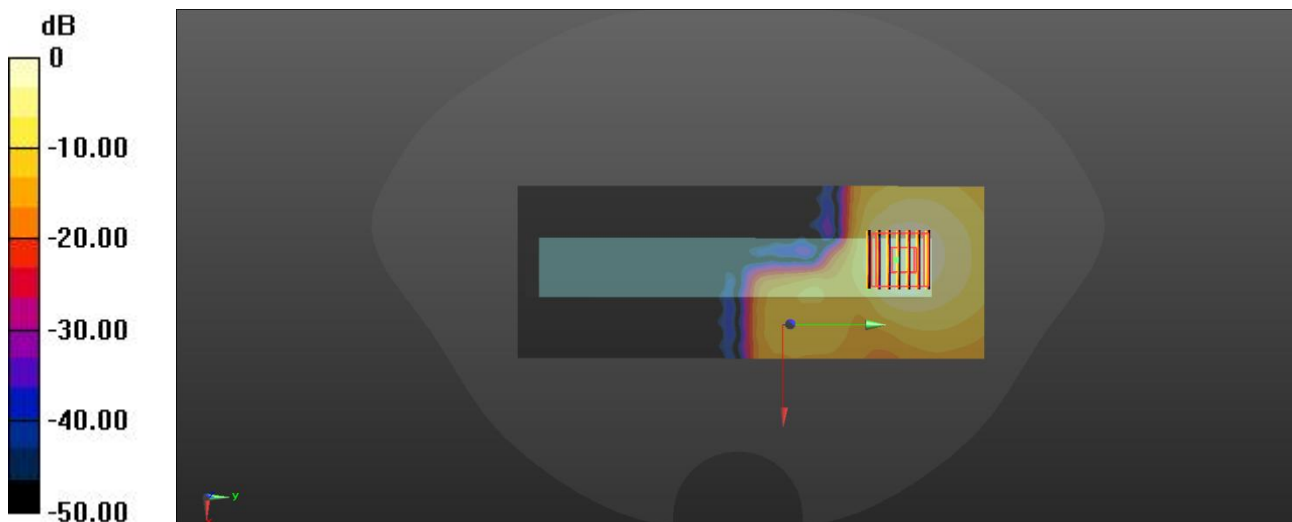

0 dB = 0.833 W/kg

Meas5.Head Left Cheek WALN 5.3G Ch52

Date: 2026/8/14

Communication System Band: Band 2; Frequency: 5260 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.798$ S/m; $\epsilon_r = 36.014$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature:22.3°C Liquid Temperature:21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(5.54, 5.49, 5.65); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch52/Area Scan (101x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.00 W/kg

Ch52/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.121 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 55.1%

Maximum value of SAR (measured) = 0.972 W/kg

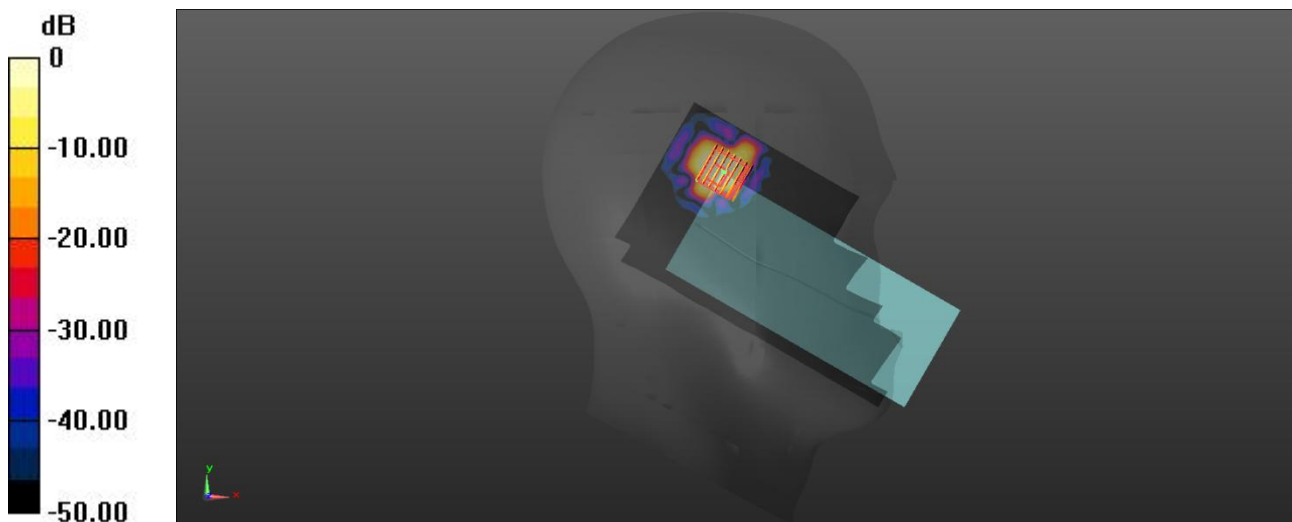

0 dB = 0.972 W/kg

Meas6.Body-worn& Hotspot Right Side 10mm WLAN 5.3G Ch52

Date: 2026/8/14

Communication System Band: Band 2; Frequency: 5260 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.798$ S/m; $\epsilon_r = 36.014$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3°C Liquid Temperature:21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(5.54, 5.49, 5.65); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch52/Area Scan (71x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.957 W/kg

Ch52/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.414 W/kg; SAR(10 g) = 0.157 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 0.908 W/kg

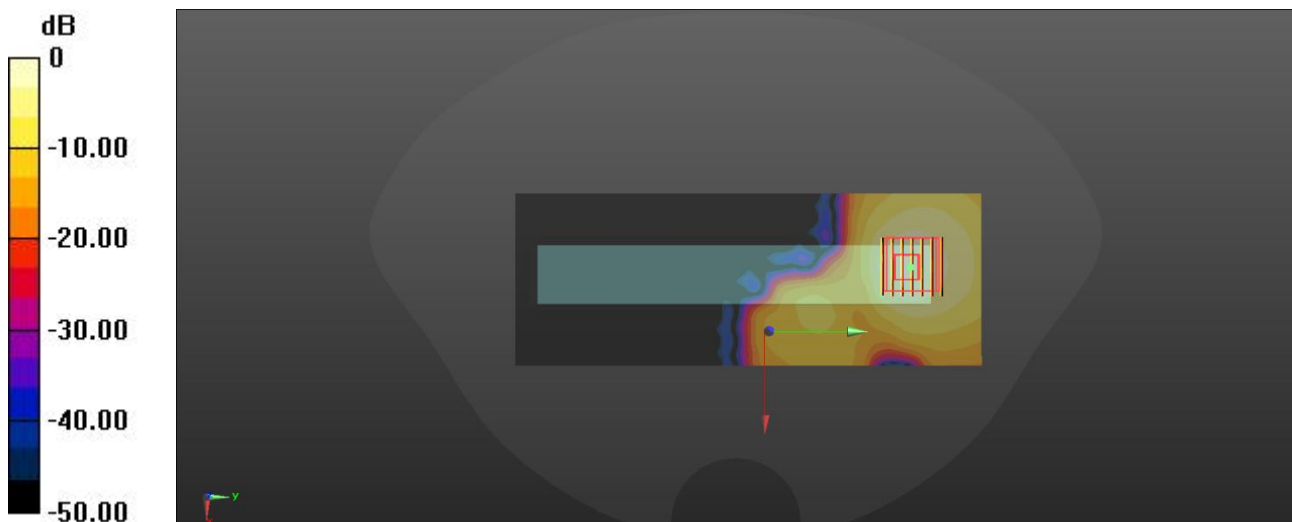

0 dB = 0.908 W/kg

Meas7.Head Right Tilt WLAN 5.6G Ch100

Date: 2026/8/15

Communication System Band: Band 3; Frequency: 5500 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.105$ S/m; $\epsilon_r = 35.492$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature:22.1°C Liquid Temperature:20.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(5.07, 5.03, 5.17); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch100/Area Scan (101x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.541 W/kg

Ch100/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.559 W/kg

SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.040 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 48.7%

Maximum value of SAR (measured) = 0.325 W/kg

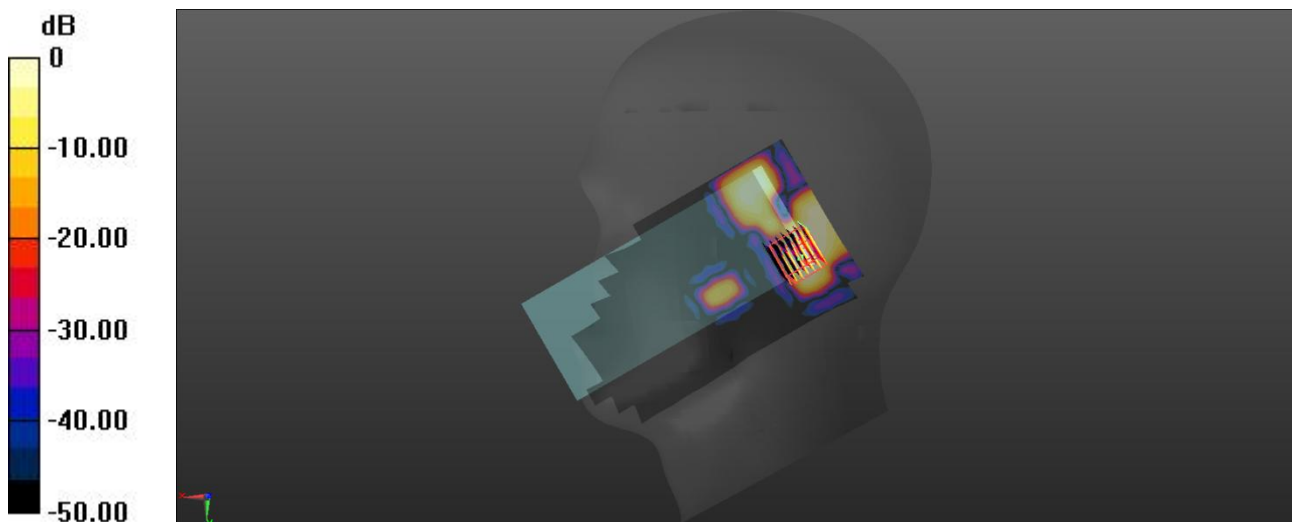

0 dB = 0.325 W/kg

Meas8.Body-worn& Hotspot Right Side 10mm WLAN 5.6G Ch100

Date: 2026/8/15

Communication System Band: Band 3; Frequency: 5500 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.105$ S/m; $\epsilon_r = 35.492$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.1°C Liquid Temperature:20.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(5.07, 5.03, 5.17); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch100/Area Scan (71x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.724 W/kg

Ch100/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.446 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.301 W/kg; SAR(10 g) = 0.106 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 51.8%

Maximum value of SAR (measured) = 0.698 W/kg

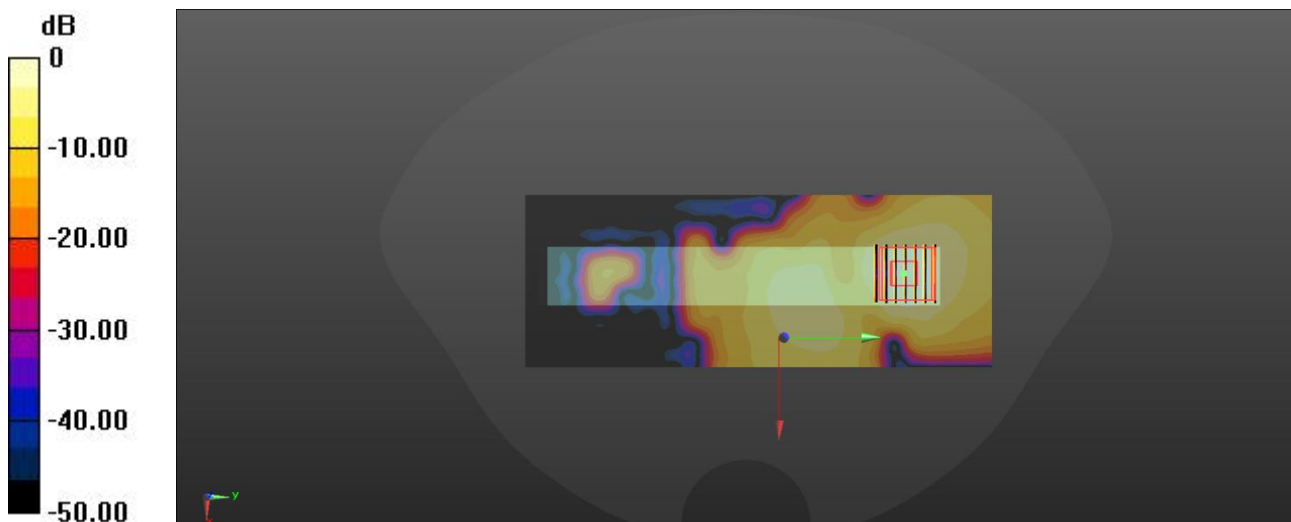

0 dB = 0.698 W/kg

Meas9.Head Left Cheek WALN 5.8G Ch149

Date: 2026/8/15

Communication System Band: Band 4; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.422$ S/m; $\epsilon_r = 34.968$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.1°C Liquid Temperature: 20.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(5.19, 5.15, 5.3); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch149/Area Scan (101x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.652 W/kg

Ch149/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.829 W/kg

SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.048 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 45.4%

Maximum value of SAR (measured) = 0.471 W/kg

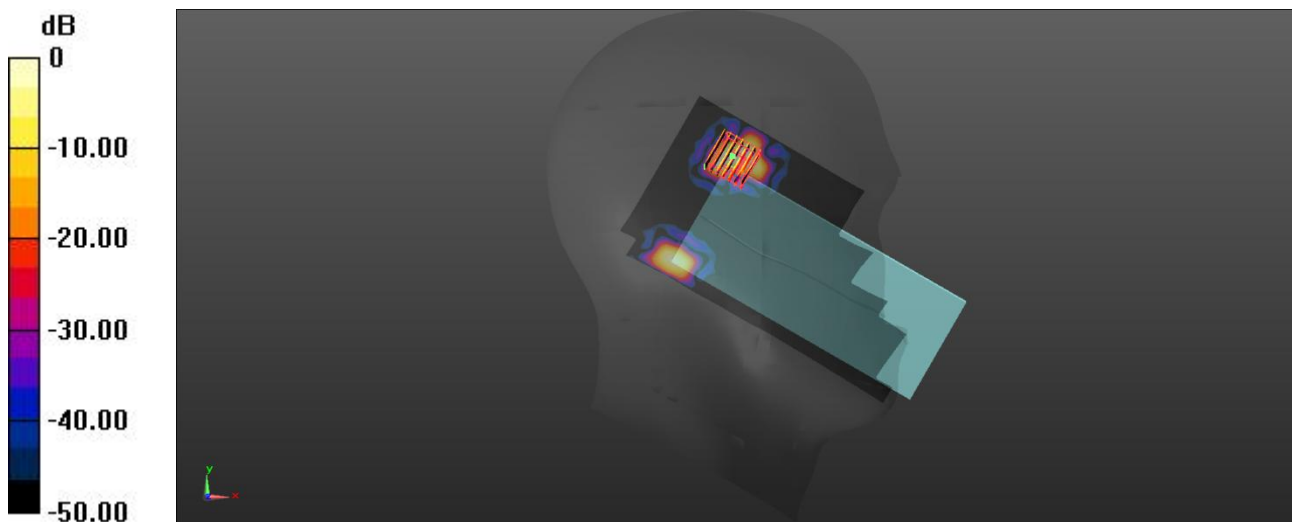

0 dB = 0.471 W/kg

Meas10.Body-worn& Hotspot Right Side 10mm WLAN 5.8G Ch149

Date: 2026/8/15

Communication System Band: Band 4; Frequency: 5745 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.422$ S/m; $\epsilon_r = 34.968$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.1°C Liquid Temperature:20.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(5.19, 5.15, 5.3); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch149/Area Scan (71x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.13 W/kg

Ch149/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.880 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 0.458 W/kg; SAR(10 g) = 0.158 W/kg

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 49.1%

Maximum value of SAR (measured) = 1.08 W/kg

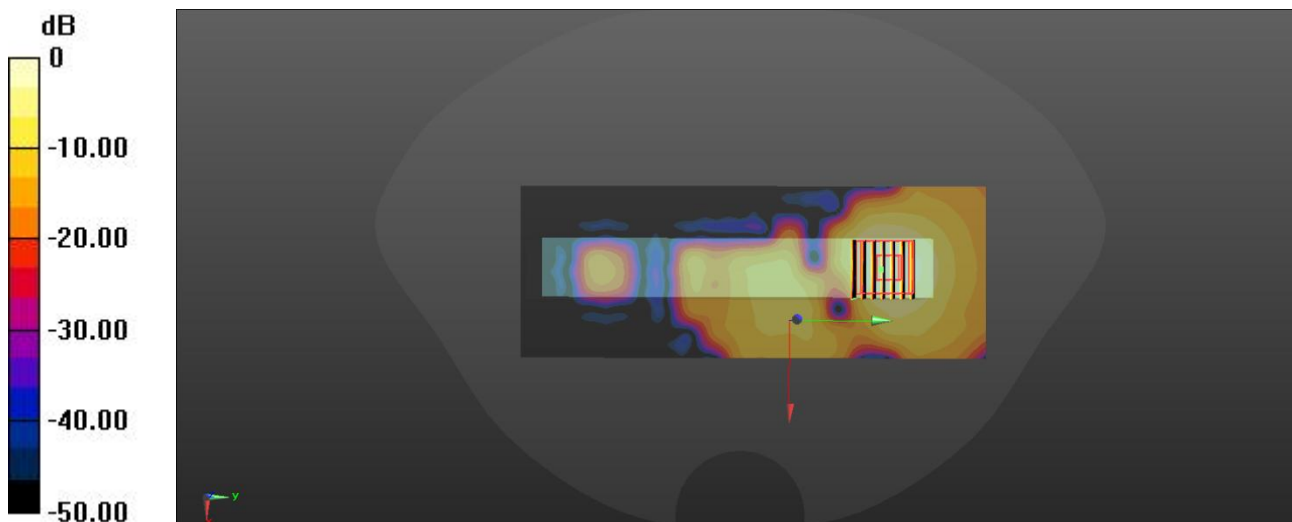

0 dB = 1.08 W/kg

Meas11.Head Right Tilt BT Ch39

Date: 2026/8/13

Communication System Band: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.749$ S/m; $\epsilon_r = 40.334$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(7.07, 7.02, 7.22); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch39/Area Scan (81x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0853 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.550 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.0990 W/kg

SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.030 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 58.2%

Maximum value of SAR (measured) = 0.0833 W/kg

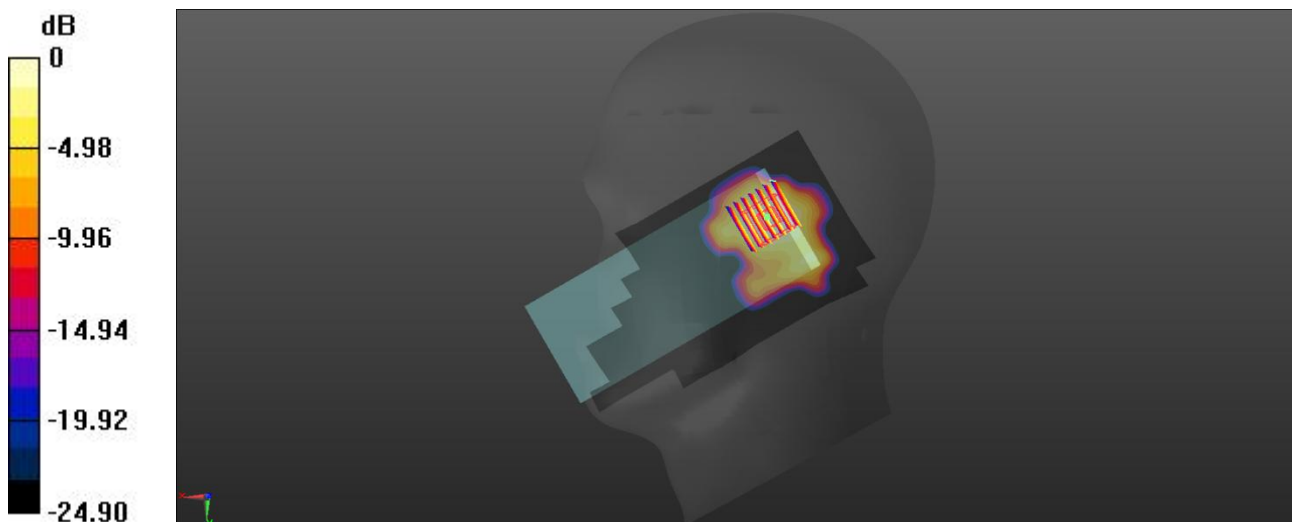

0 dB = 0.0833 W/kg

Meas12.Body-worn& Hotspot Back Side 10mm BT Ch39

Date: 2026/8/13

Communication System Band: Bluetooth; Frequency: 2441 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.749$ S/m; $\epsilon_r = 40.334$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.8°C Liquid Temperature:21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(7.07, 7.02, 7.22); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch39/Area Scan (81x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0440 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.0440 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.011 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 51.5%

Maximum value of SAR (measured) = 0.0341 W/kg

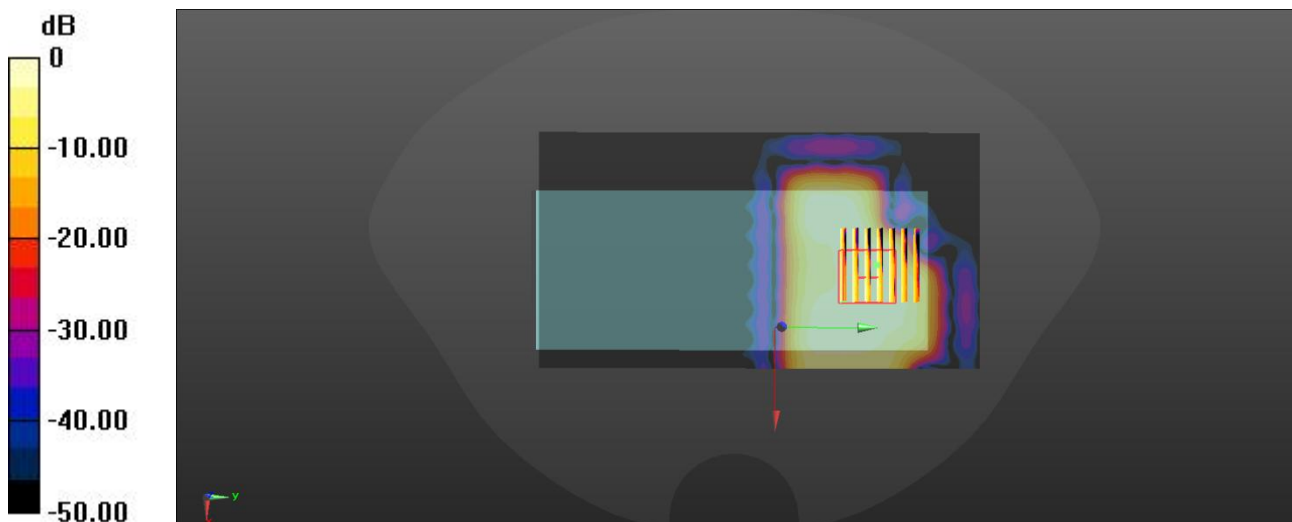

0 dB = 0.0341 W/kg