


Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant1	1.396	1.428	97.76	0.1	0.72
NVNT	a	5200	Ant1	1.392	1.436	96.94	0.13	0.72
NVNT	a	5240	Ant1	1.396	1.44	96.94	0.13	0.72
NVNT	a	5180	Ant2	1.392	1.436	96.94	0.13	0.72
NVNT	a	5200	Ant2	1.396	1.436	97.21	0.12	0.72
NVNT	a	5240	Ant2	1.392	1.436	96.94	0.13	0.72
NVNT	n20	5180	MIMO	1.305	1.344	97.1	0.13	0.77
NVNT	n20	5200	MIMO	1.302	1.335	97.53	0.11	0.77
NVNT	n20	5240	MIMO	1.302	1.335	97.53	0.11	0.77
NVNT	n40	5190	MIMO	0.651	0.681	95.59	0.2	1.54
NVNT	n40	5230	MIMO	0.651	0.684	95.18	0.21	1.54
NVNT	ac20	5180	MIMO	1.317	1.347	97.77	0.1	0.76
NVNT	ac20	5200	MIMO	1.314	1.347	97.55	0.11	0.76
NVNT	ac20	5240	MIMO	1.317	1.35	97.56	0.11	0.76
NVNT	ac40	5190	MIMO	0.654	0.688	95.06	0.22	1.53
NVNT	ac40	5230	MIMO	0.654	0.688	95.06	0.22	1.53
NVNT	ac80	5210	MIMO	0.326	0.359	90.81	0.42	3.07
NVNT	ax20	5180	MIMO	1.016	1.048	96.95	0.13	0.98
NVNT	ax20	5200	MIMO	1.016	1.05	96.76	0.14	0.98
NVNT	ax20	5240	MIMO	1.016	1.05	96.76	0.14	0.98
NVNT	ax40	5190	MIMO	0.536	0.57	94.04	0.27	1.87
NVNT	ax40	5230	MIMO	0.536	0.568	94.37	0.25	1.87
NVNT	ax80	5210	MIMO	0.288	0.322	89.44	0.48	3.47

Test Graphs


Duty Cycle NVNT a 5180MHz Ant1

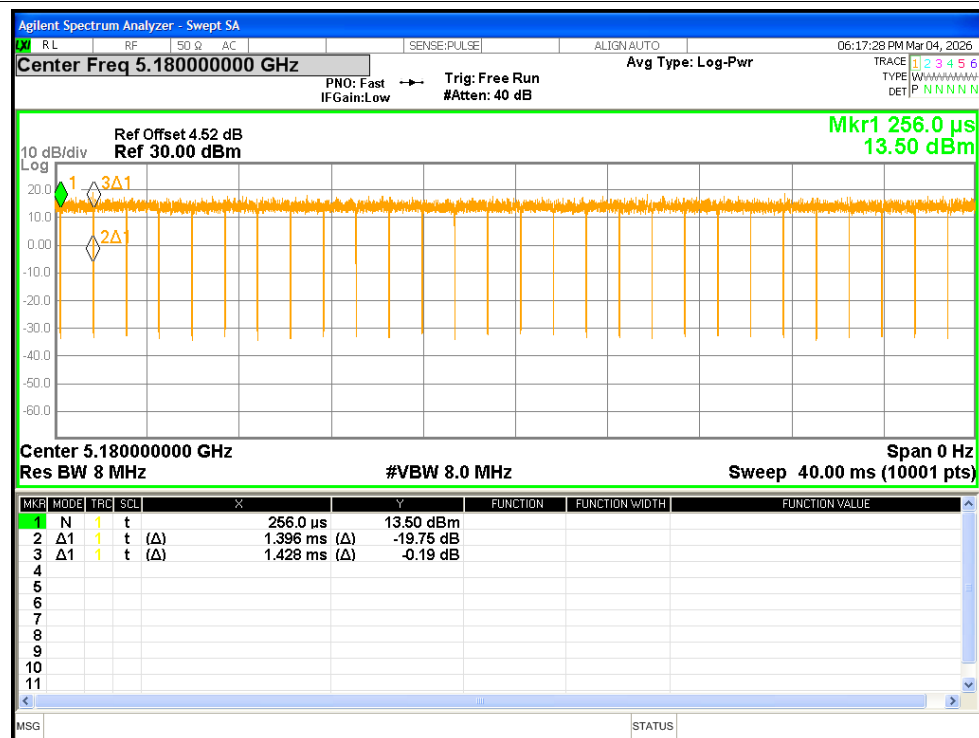


Duty Cycle NVNT a 5200MHz Ant1

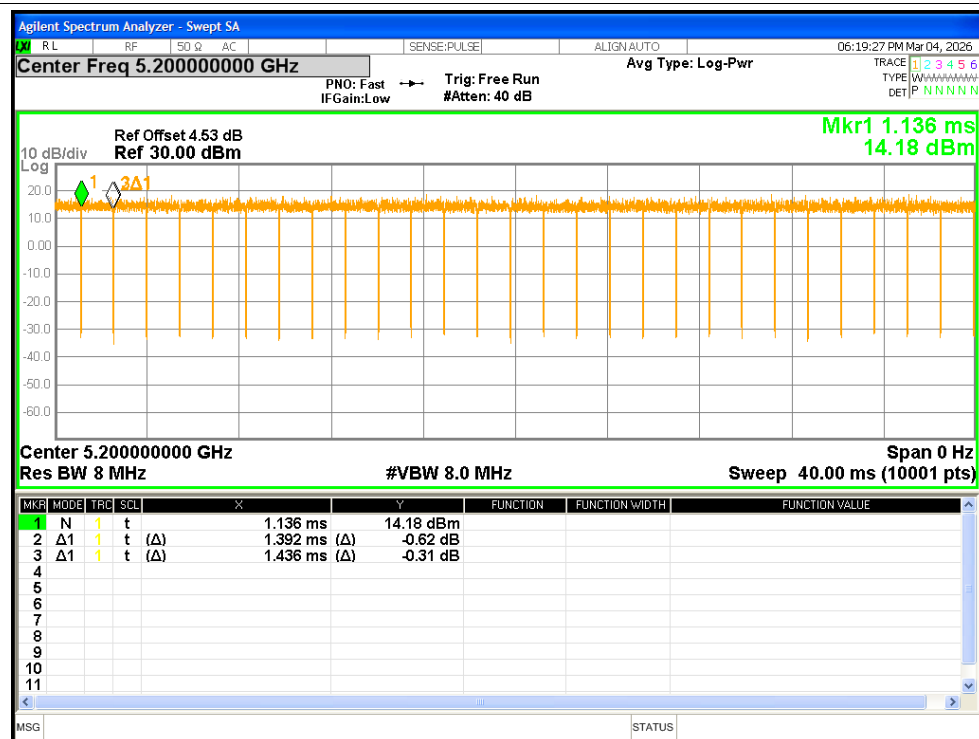


Duty Cycle NVNT a 5240MHz Ant1

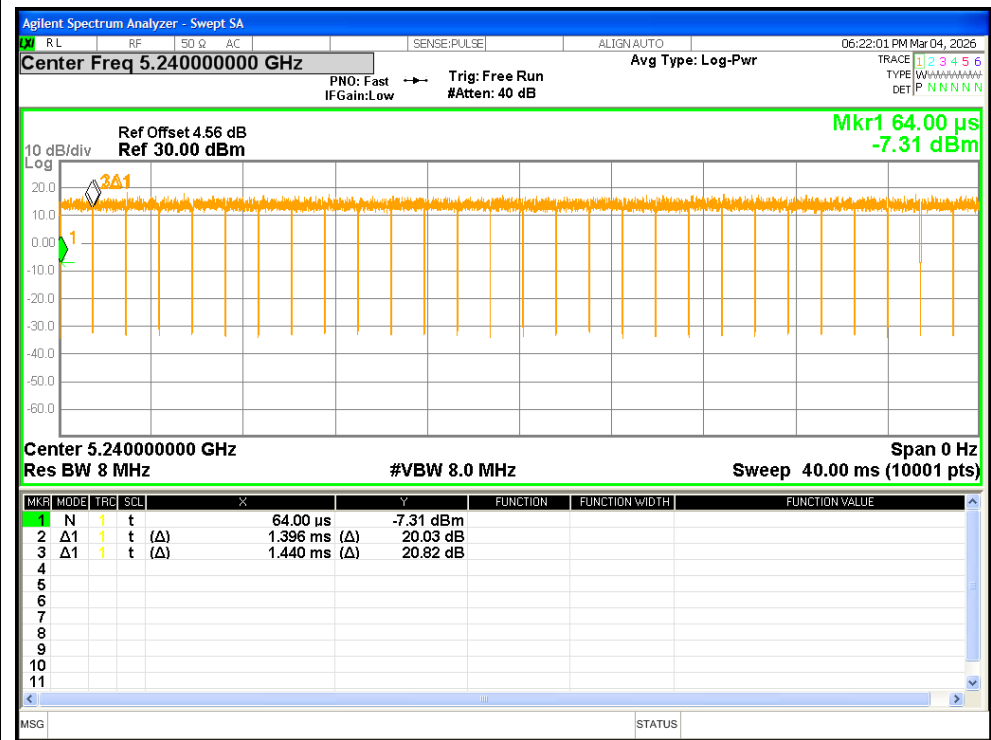


Duty Cycle NVNT a 5180MHz Ant2

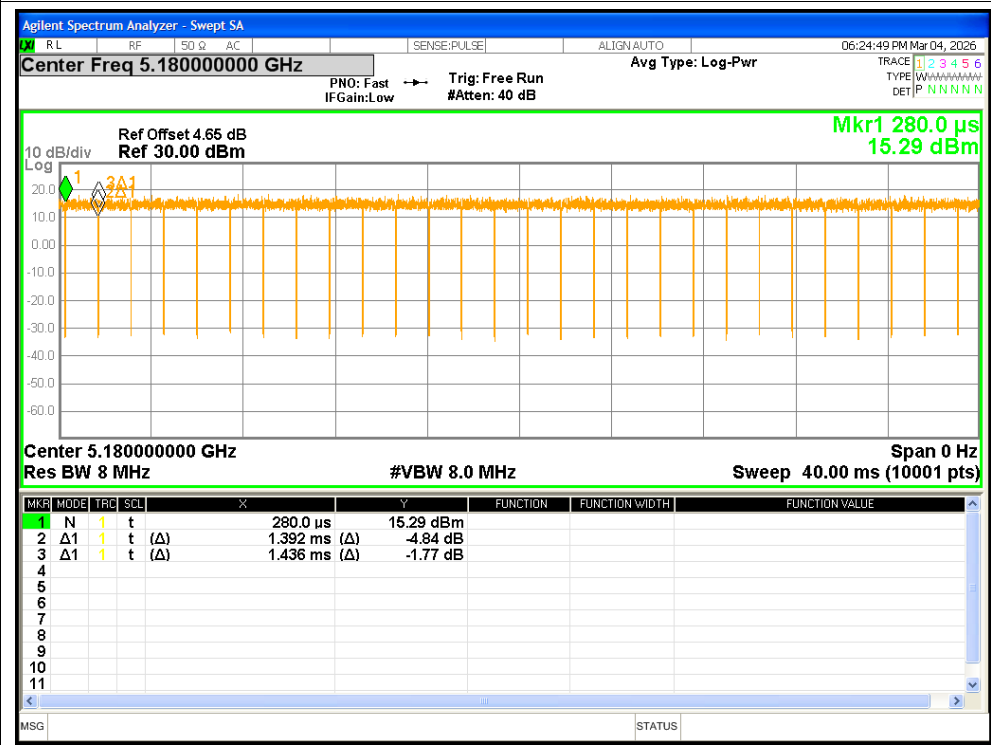

Duty Cycle NVNT a 5200MHz Ant2

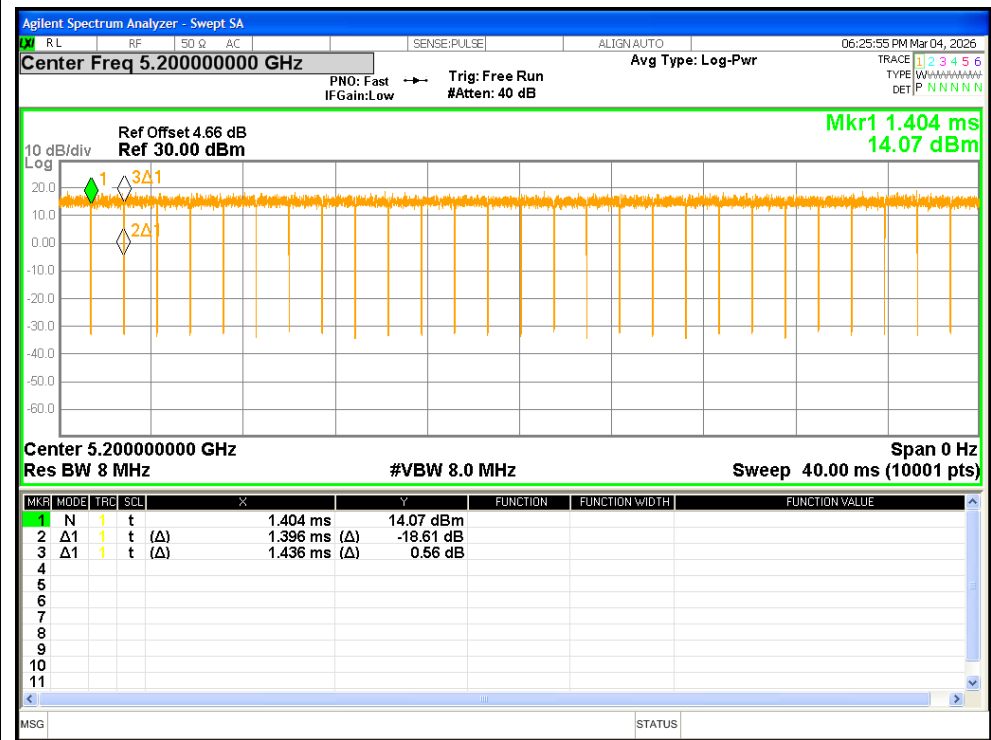


Duty Cycle NVNT a 5240MHz Ant2

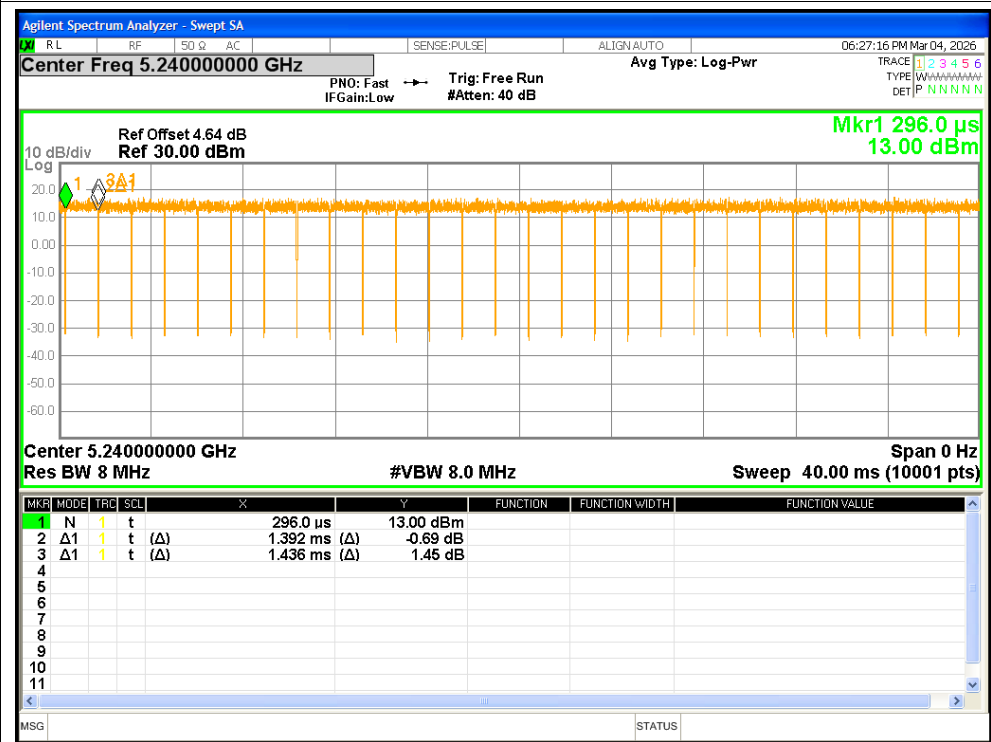


Duty Cycle NVNT n20 5180MHz MIMO

Duty Cycle NVNT n20 5240MHz MIMO


Duty Cycle NVNT n40 5230MHz MIMO

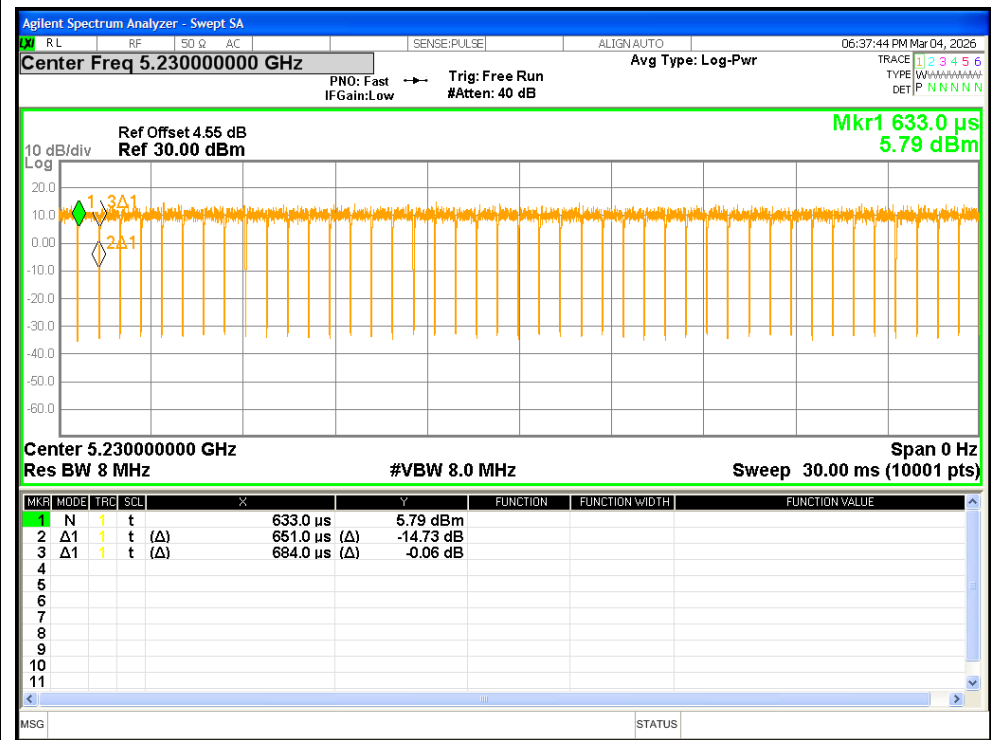


Duty Cycle NVNT ac20 5180MHz MIMO


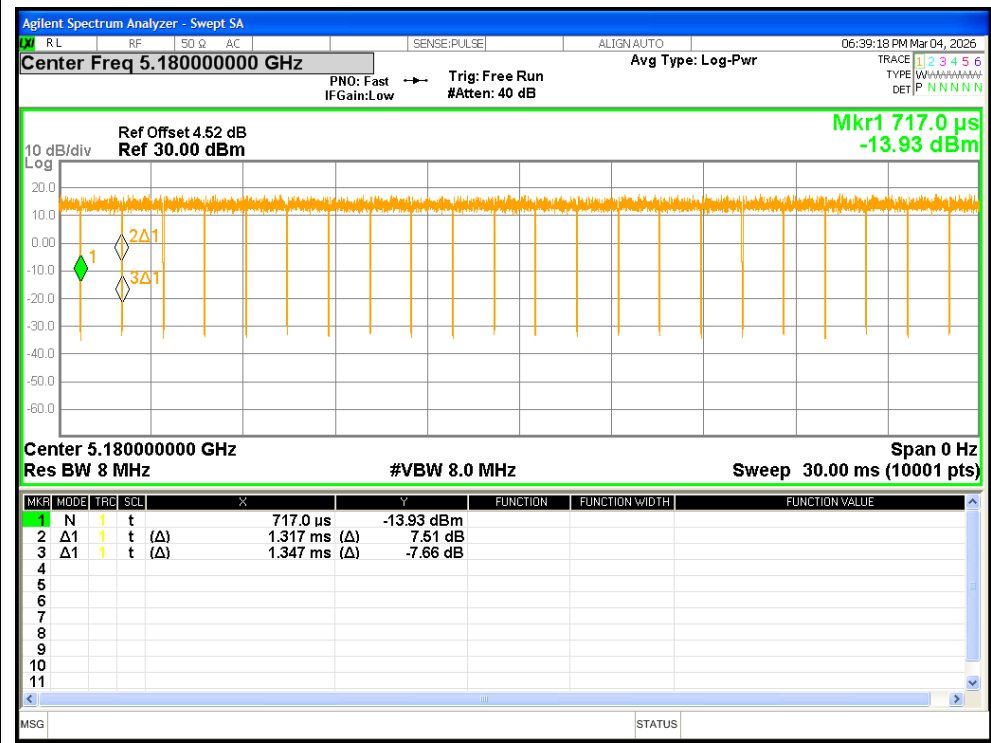


Duty Cycle NVNT ac20 5200MHz MIMO

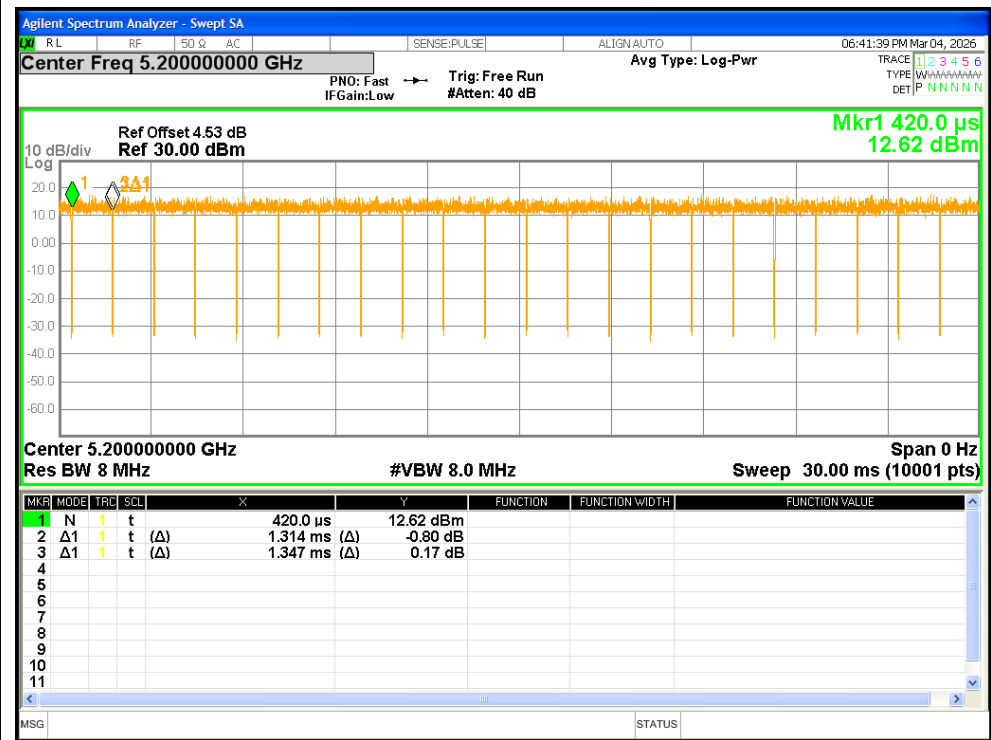


Duty Cycle NVNT ac20 5240MHz MIMO

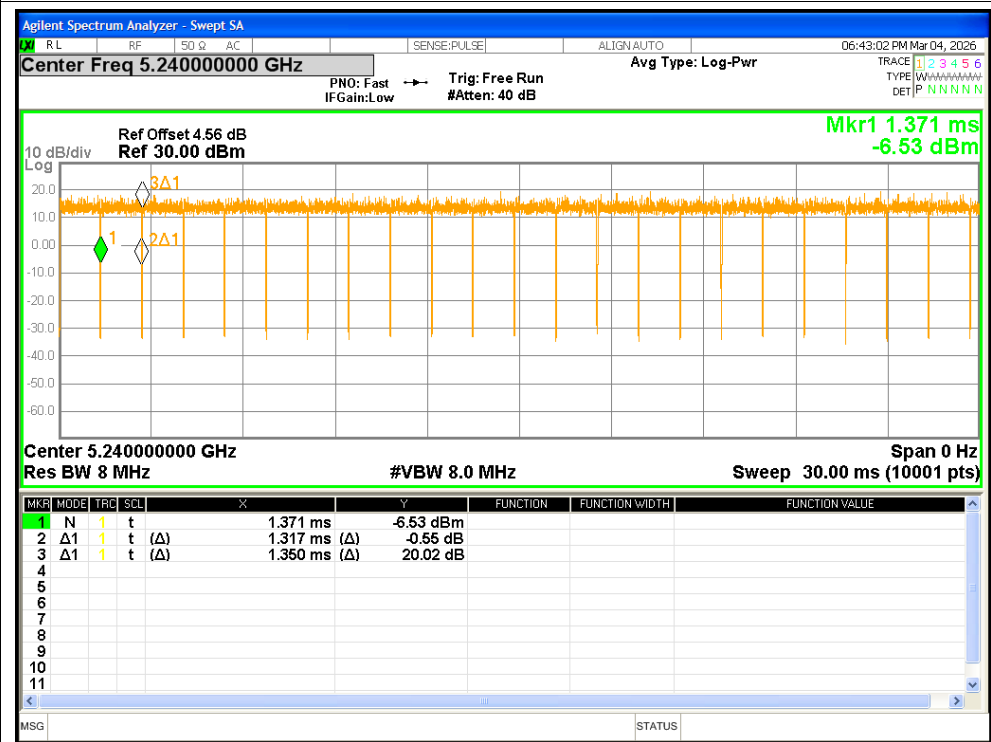


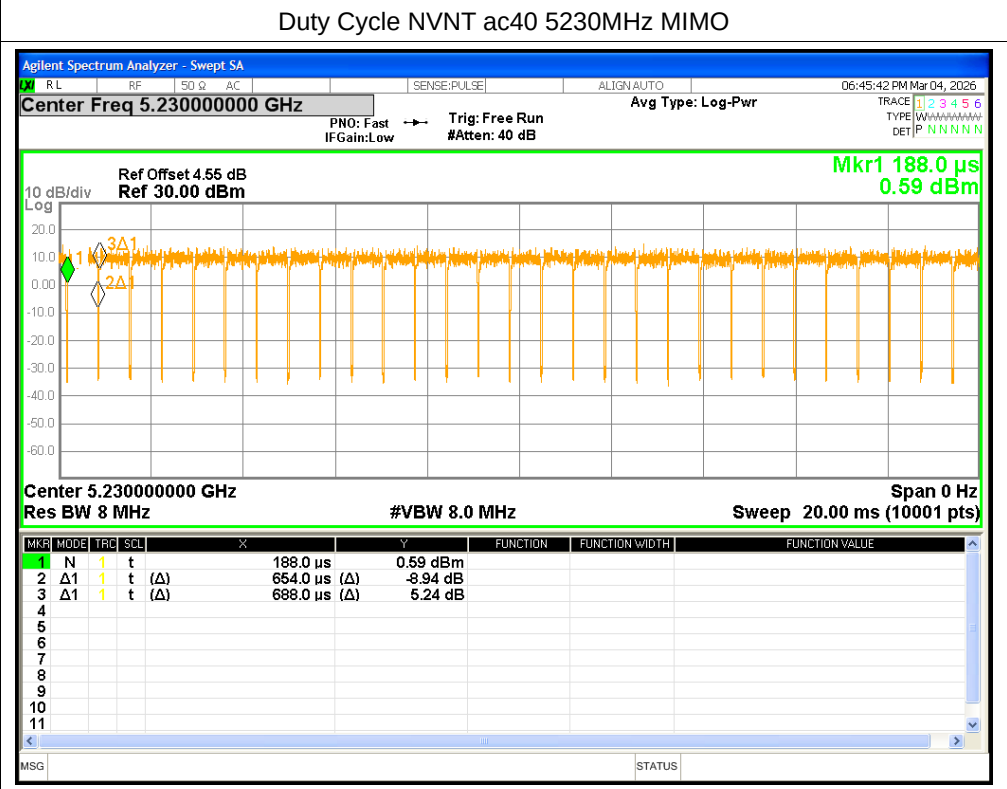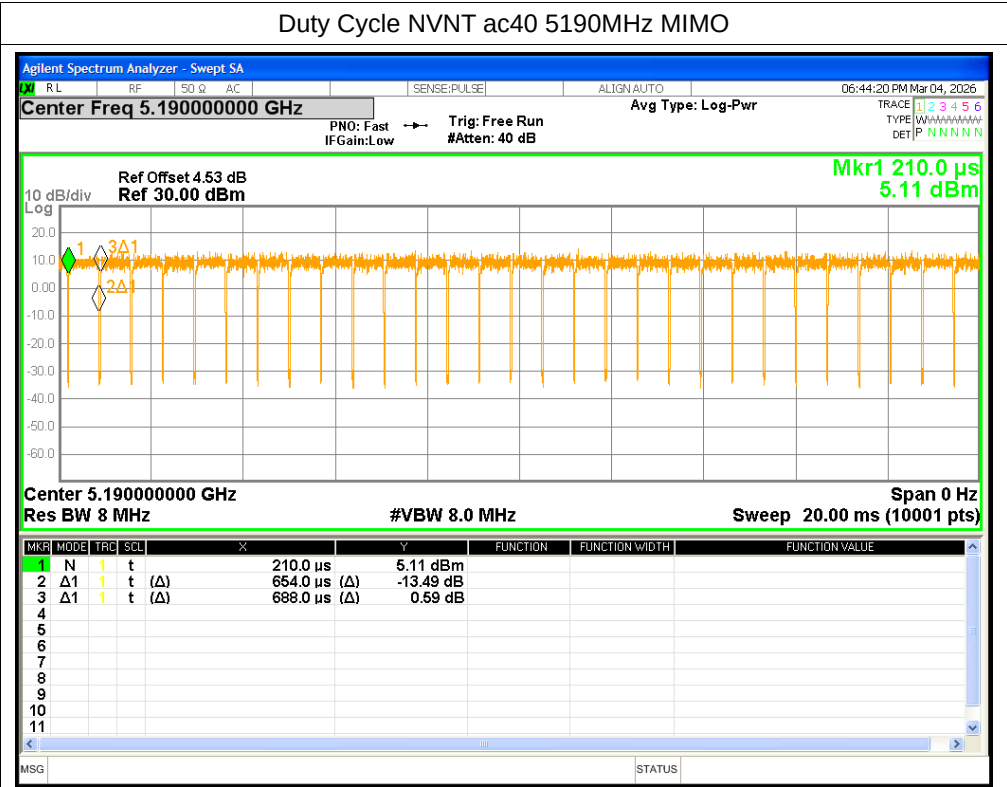


Duty Cycle NVNT ac80 5210MHz MIMO

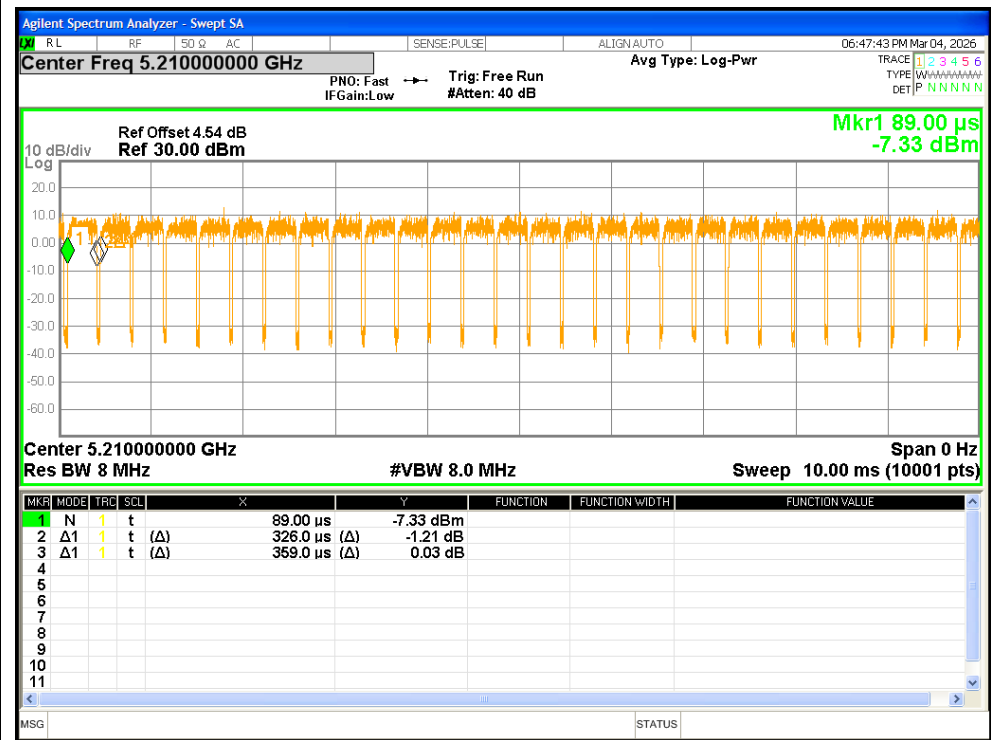


Duty Cycle NVNT ax20 5180MHz MIMO

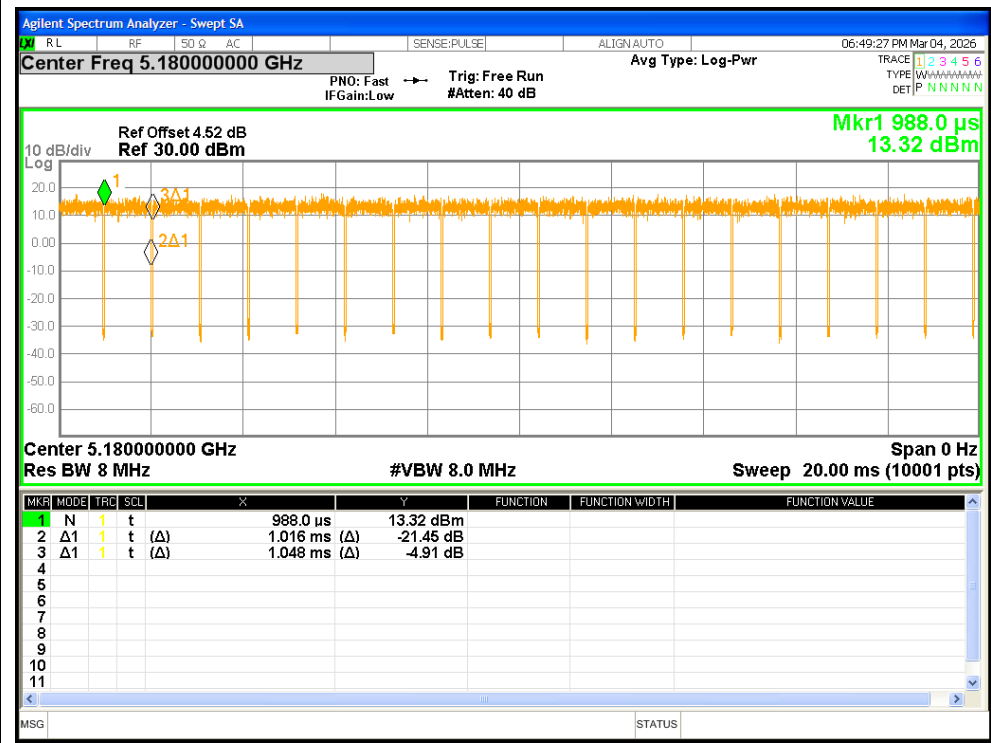


Duty Cycle NVNT ax20 5200MHz MIMO

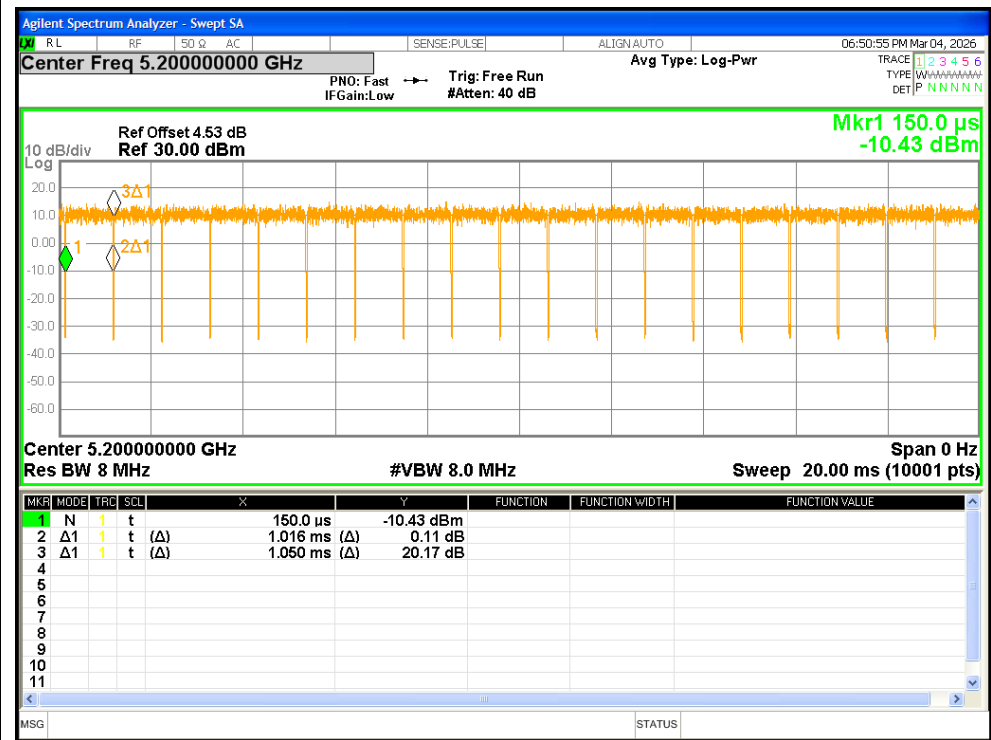

Duty Cycle NVNT ax20 5240MHz MIMO

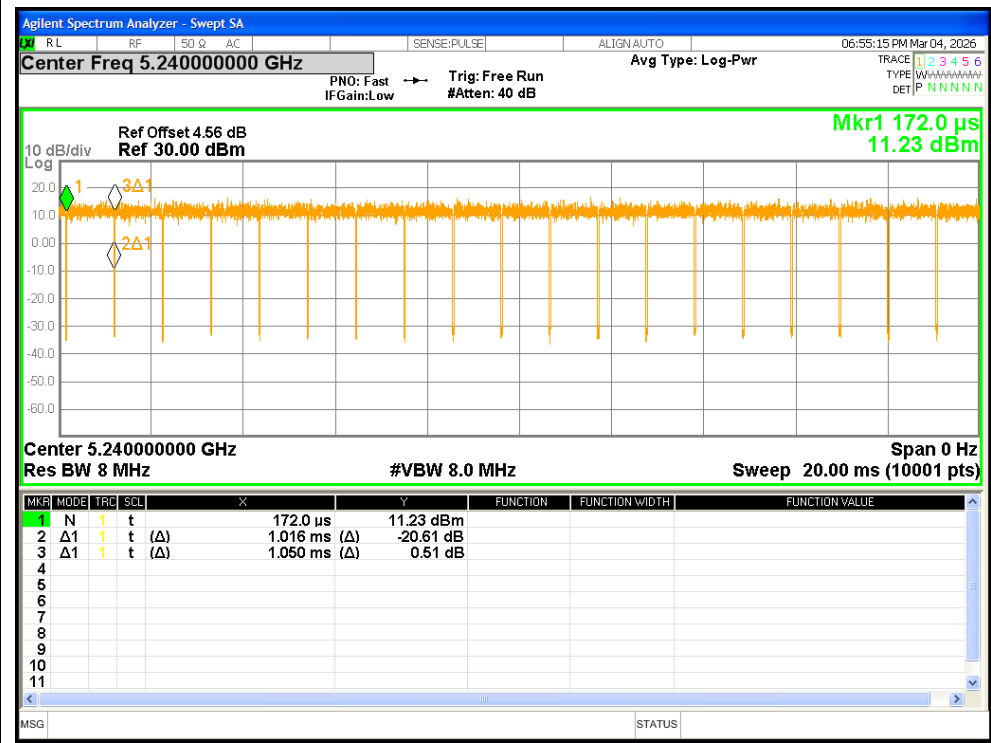

Duty Cycle NVNT ax40 5190MHz MIMO

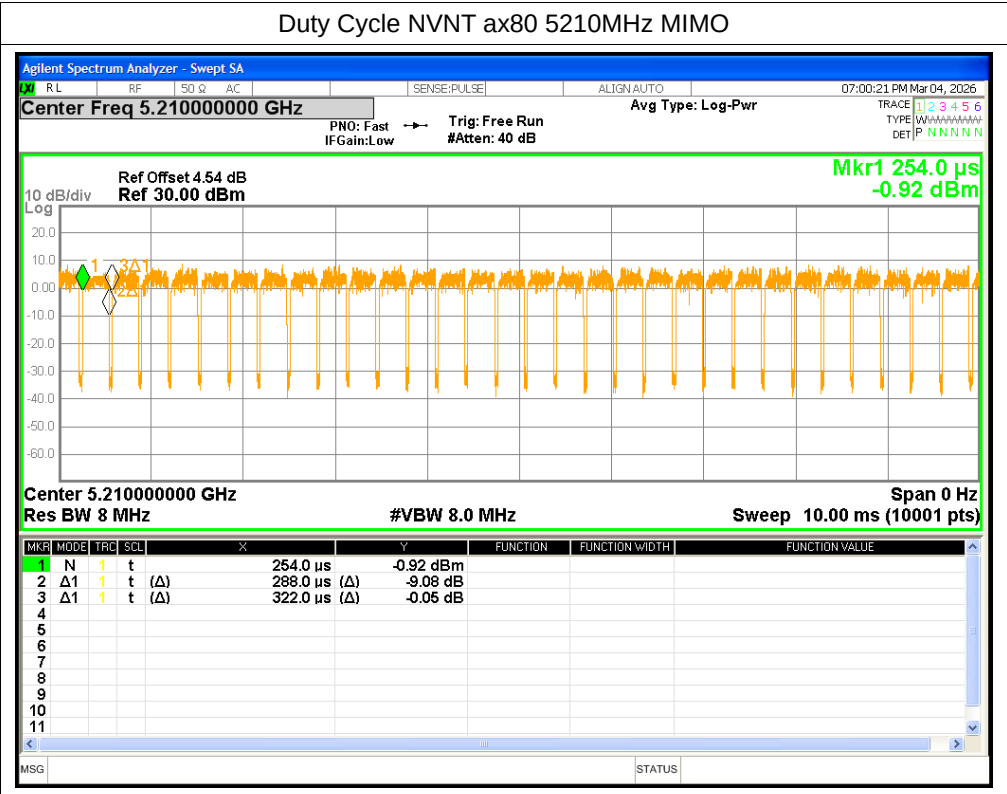


Maximum Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	10.57	0.1	10.67	<=24	Pass
NVNT	a	5200	Ant1	10.96	0.13	11.09	<=24	Pass
NVNT	a	5240	Ant1	10.19	0.13	10.32	<=24	Pass
NVNT	a	5180	Ant2	10.98	0.13	11.11	<=24	Pass
NVNT	a	5200	Ant2	11.54	0.12	11.66	<=24	Pass
NVNT	a	5240	Ant2	10.37	0.13	10.5	<=24	Pass
NVNT	n20	5180	Ant1	10.83	0.13	10.96	<=24	Pass
NVNT	n20	5180	Ant2	12.28	0.13	12.41	<=24	Pass
NVNT	n20	5180	MIMO	-	-	14.76	<=24	Pass
NVNT	n20	5200	Ant1	11	0.11	11.11	<=24	Pass
NVNT	n20	5200	Ant2	12.69	0.11	12.8	<=24	Pass
NVNT	n20	5200	MIMO	-	-	15.05	<=24	Pass
NVNT	n20	5240	Ant1	10.27	0.11	10.38	<=24	Pass
NVNT	n20	5240	Ant2	11.52	0.11	11.63	<=24	Pass
NVNT	n20	5240	MIMO	-	-	14.06	<=24	Pass
NVNT	n40	5190	Ant1	9.77	0.2	9.97	<=24	Pass
NVNT	n40	5190	Ant2	11.15	0.2	11.35	<=24	Pass
NVNT	n40	5190	MIMO	-	-	13.72	<=24	Pass
NVNT	n40	5230	Ant1	9.22	0.21	9.43	<=24	Pass
NVNT	n40	5230	Ant2	11.33	0.21	11.54	<=24	Pass
NVNT	n40	5230	MIMO	-	-	13.62	<=24	Pass
NVNT	ac20	5180	Ant1	10.64	0.1	10.74	<=24	Pass
NVNT	ac20	5180	Ant2	11.9	0.1	12	<=24	Pass
NVNT	ac20	5180	MIMO	-	-	14.43	<=24	Pass
NVNT	ac20	5200	Ant1	9.71	0.11	9.82	<=24	Pass
NVNT	ac20	5200	Ant2	11.34	0.11	11.45	<=24	Pass
NVNT	ac20	5200	MIMO	-	-	13.72	<=24	Pass
NVNT	ac20	5240	Ant1	10.32	0.11	10.43	<=24	Pass
NVNT	ac20	5240	Ant2	11.37	0.11	11.48	<=24	Pass
NVNT	ac20	5240	MIMO	-	-	14	<=24	Pass
NVNT	ac40	5190	Ant1	8.92	0.22	9.14	<=24	Pass
NVNT	ac40	5190	Ant2	10.34	0.22	10.56	<=24	Pass
NVNT	ac40	5190	MIMO	-	-	12.92	<=24	Pass
NVNT	ac40	5230	Ant1	9.15	0.22	9.37	<=24	Pass
NVNT	ac40	5230	Ant2	11.33	0.22	11.55	<=24	Pass
NVNT	ac40	5230	MIMO	-	-	13.61	<=24	Pass
NVNT	ac80	5210	Ant1	8.49	0.42	8.91	<=24	Pass
NVNT	ac80	5210	Ant2	10.65	0.42	11.07	<=24	Pass
NVNT	ac80	5210	MIMO	-	-	13.13	<=24	Pass
NVNT	ax20	5180	Ant1	9.75	0.13	9.88	<=24	Pass


NVNT	ax20	5180	Ant2	11.01	0.13	11.14	<=24	Pass
NVNT	ax20	5180	MIMO	-	-	13.57	<=24	Pass
NVNT	ax20	5200	Ant1	10.14	0.14	10.28	<=24	Pass
NVNT	ax20	5200	Ant2	11.58	0.14	11.72	<=24	Pass
NVNT	ax20	5200	MIMO	-	-	14.07	<=24	Pass
NVNT	ax20	5240	Ant1	9.26	0.14	9.4	<=24	Pass
NVNT	ax20	5240	Ant2	10.37	0.14	10.51	<=24	Pass
NVNT	ax20	5240	MIMO	-	-	13	<=24	Pass
NVNT	ax40	5190	Ant1	8.94	0.27	9.21	<=24	Pass
NVNT	ax40	5190	Ant2	10.22	0.27	10.49	<=24	Pass
NVNT	ax40	5190	MIMO	-	-	12.91	<=24	Pass
NVNT	ax40	5230	Ant1	8.36	0.25	8.61	<=24	Pass
NVNT	ax40	5230	Ant2	10.6	0.25	10.85	<=24	Pass
NVNT	ax40	5230	MIMO	-	-	12.88	<=24	Pass
NVNT	ax80	5210	Ant1	7.71	0.48	8.19	<=24	Pass
NVNT	ax80	5210	Ant2	8.84	0.48	9.32	<=24	Pass
NVNT	ax80	5210	MIMO	-	-	11.8	<=24	Pass



Test Graphs



Power NVNT a 5180MHz Ant1

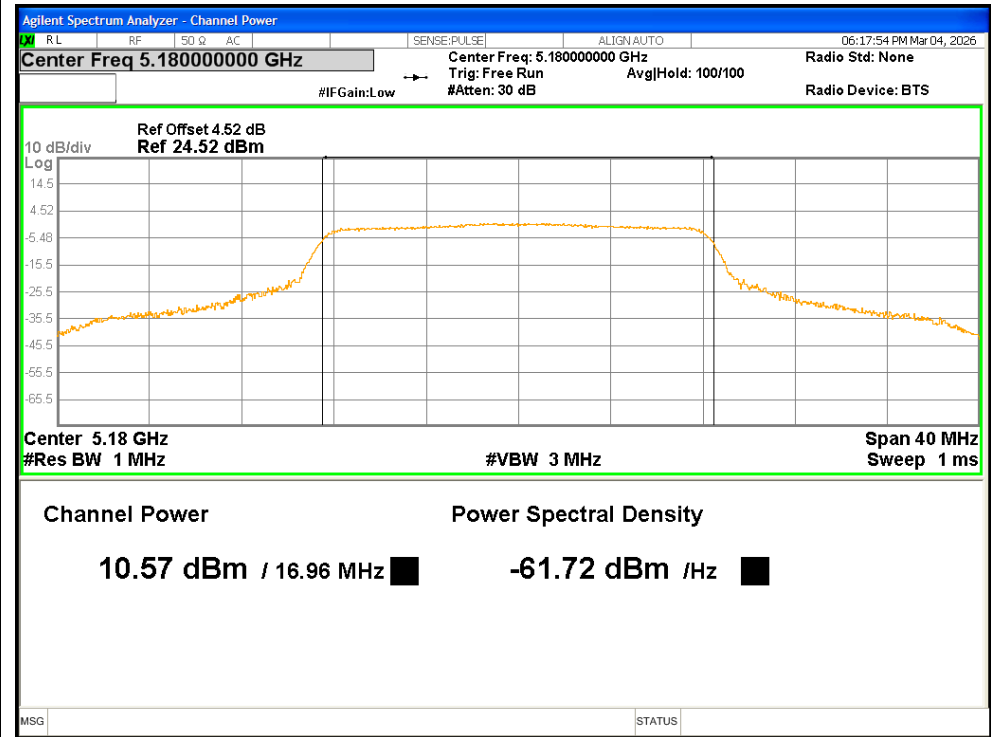


Power NVNT a 5200MHz Ant1

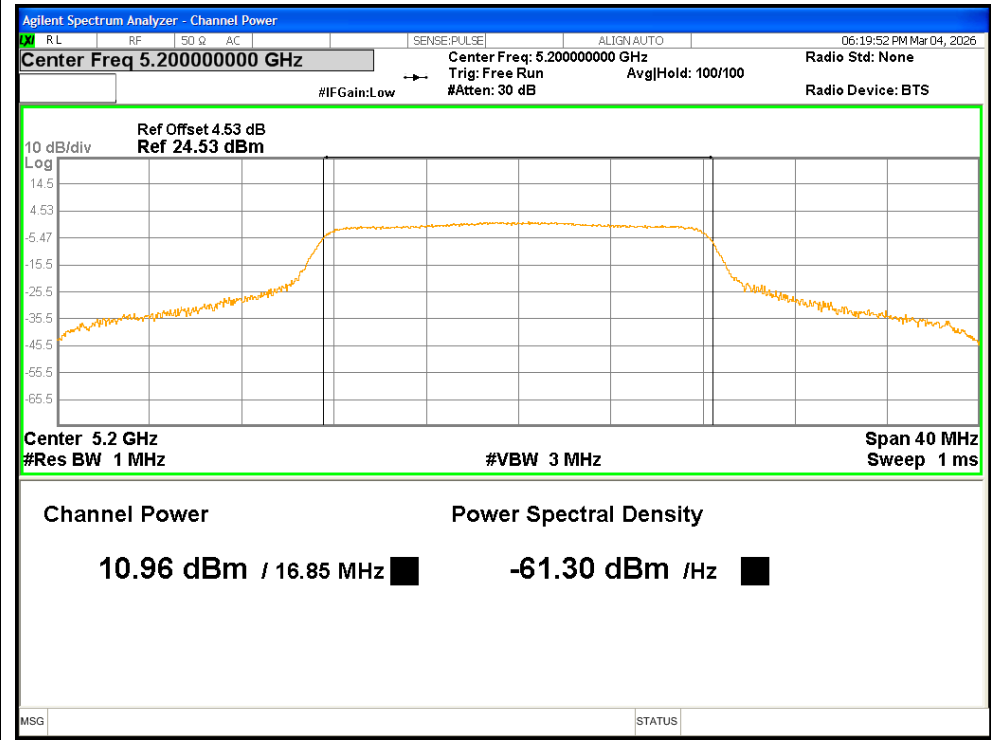

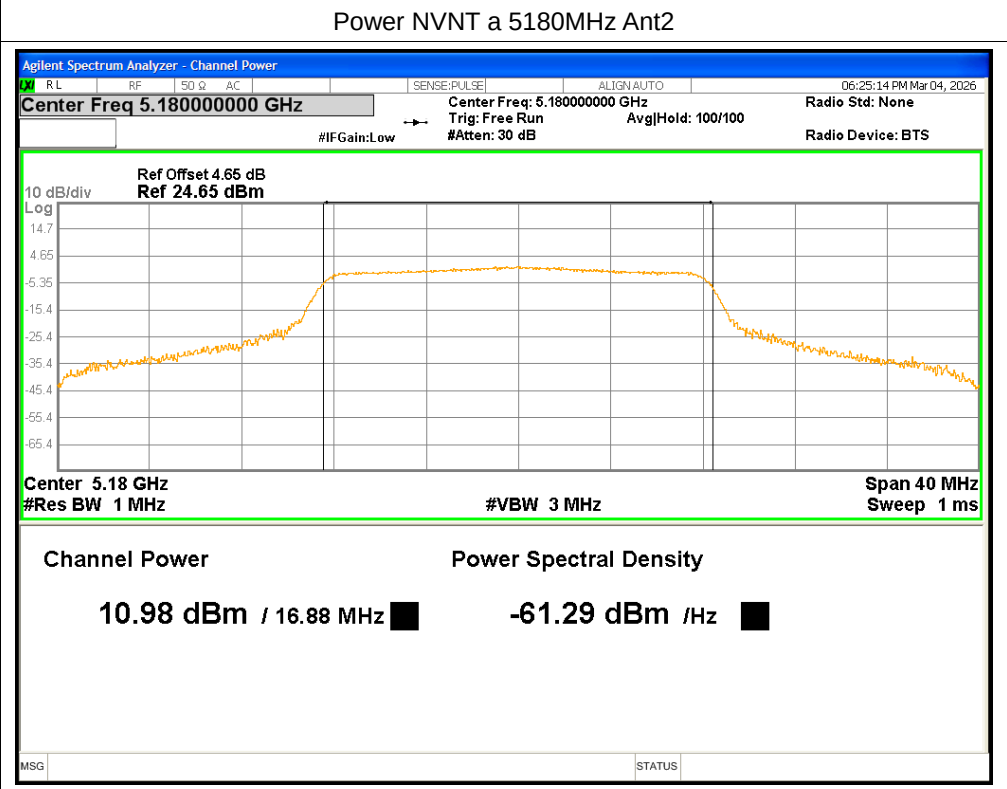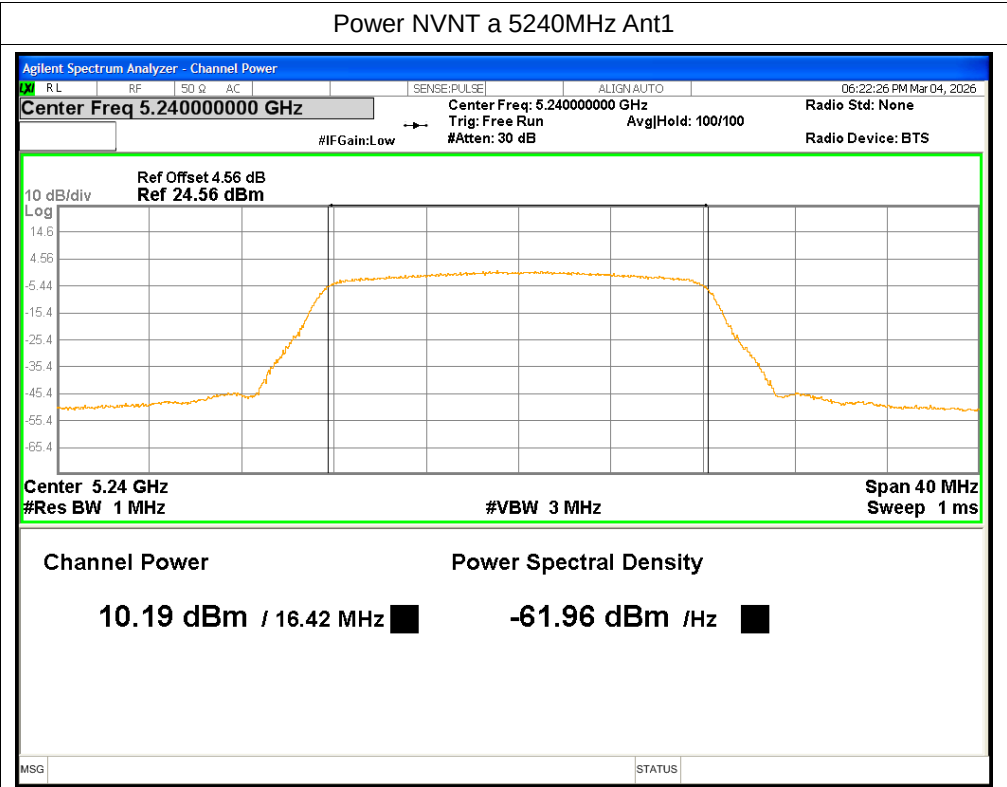


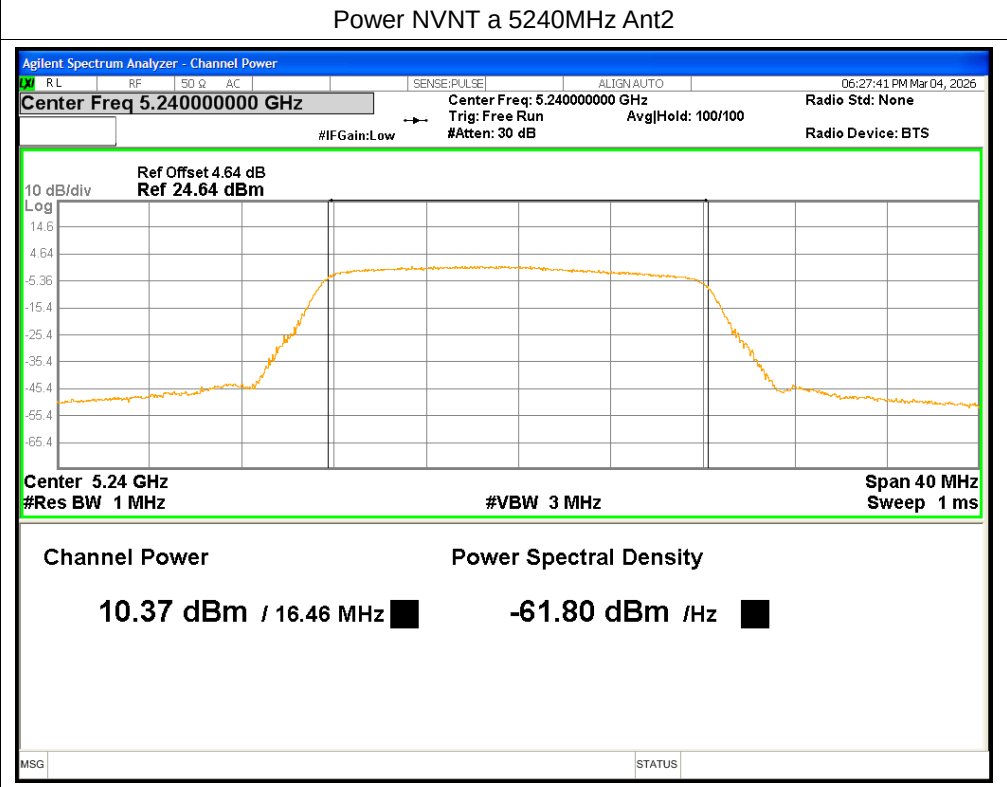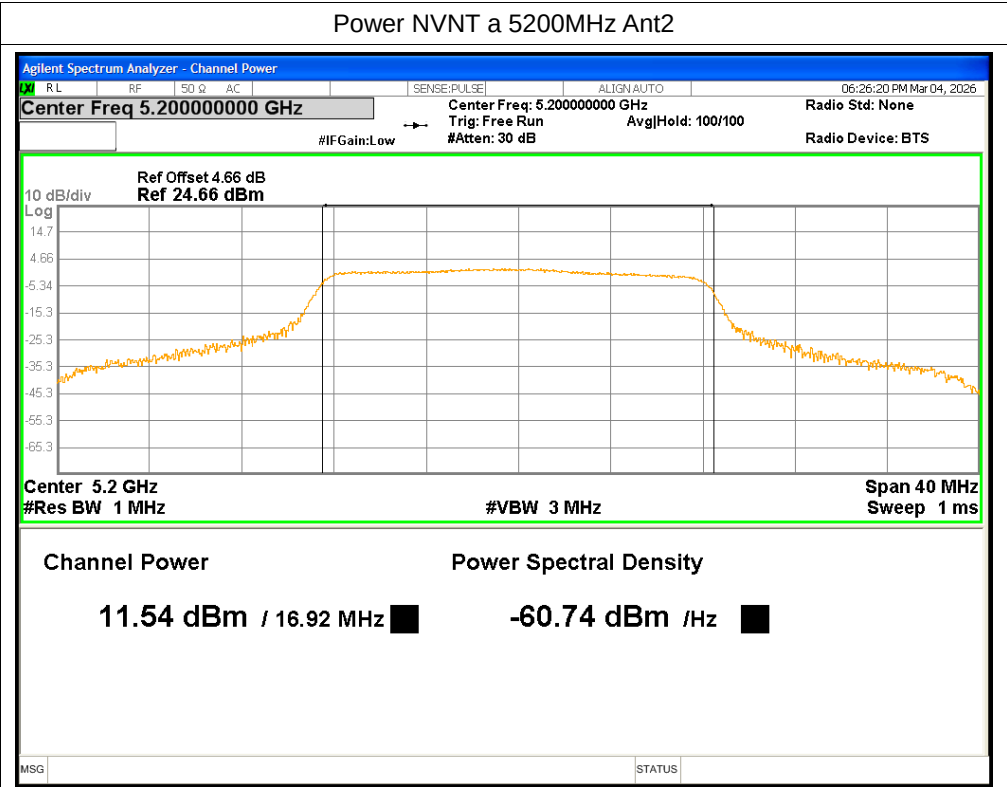


Power NVNT n20 5180MHz Ant1

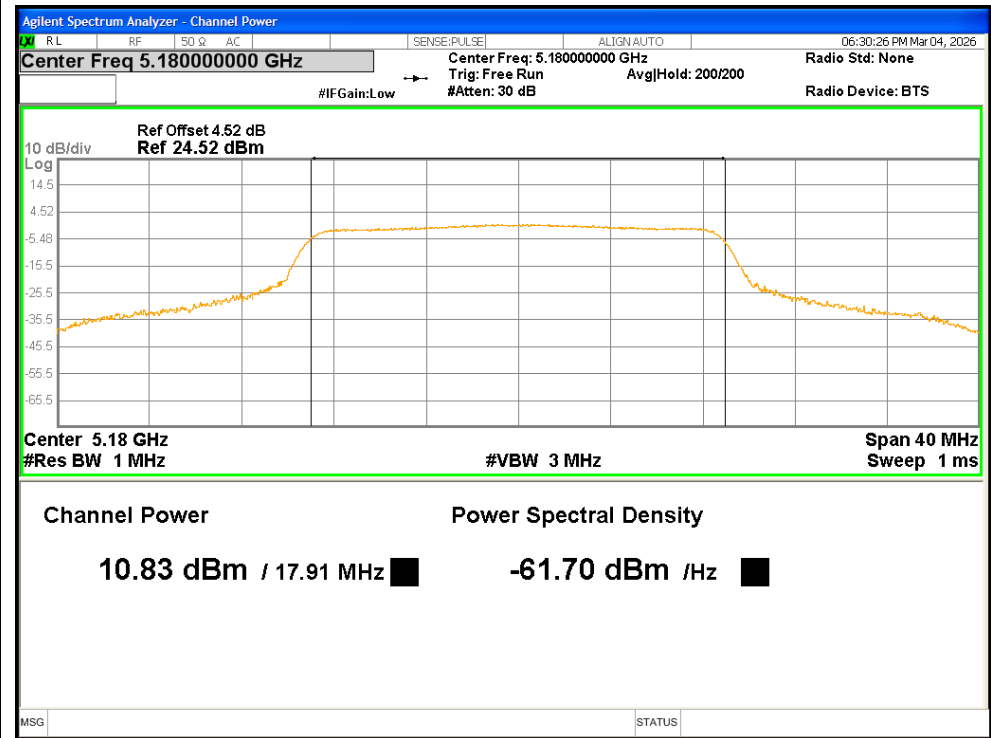


Power NVNT n20 5180MHz Ant2


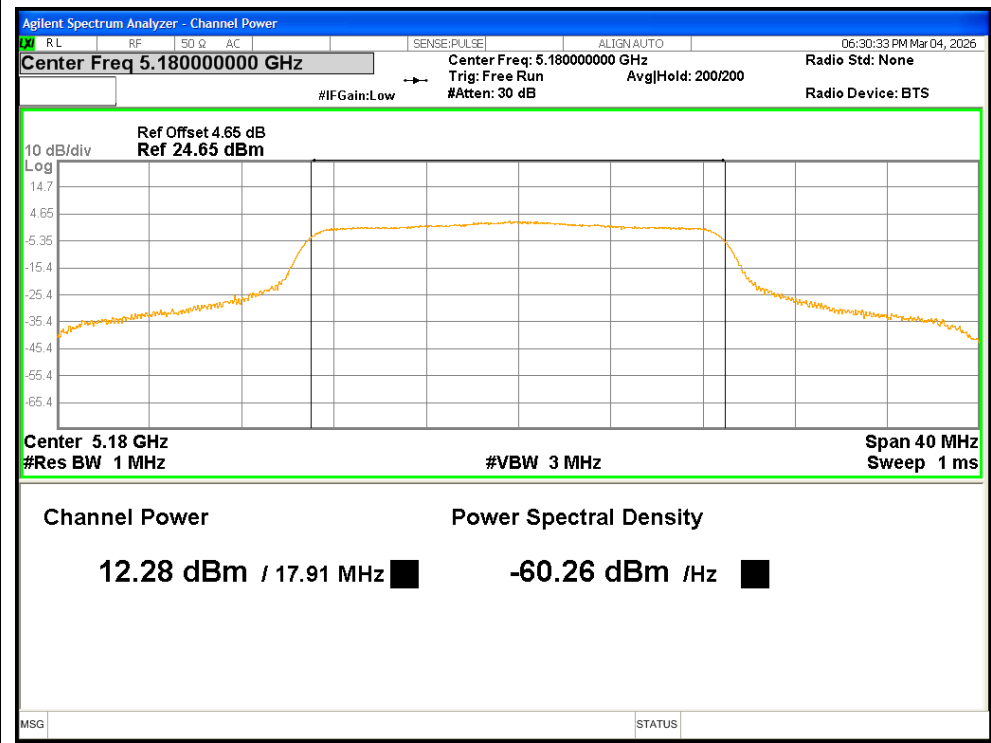


Power NVNT n20 5200MHz Ant1

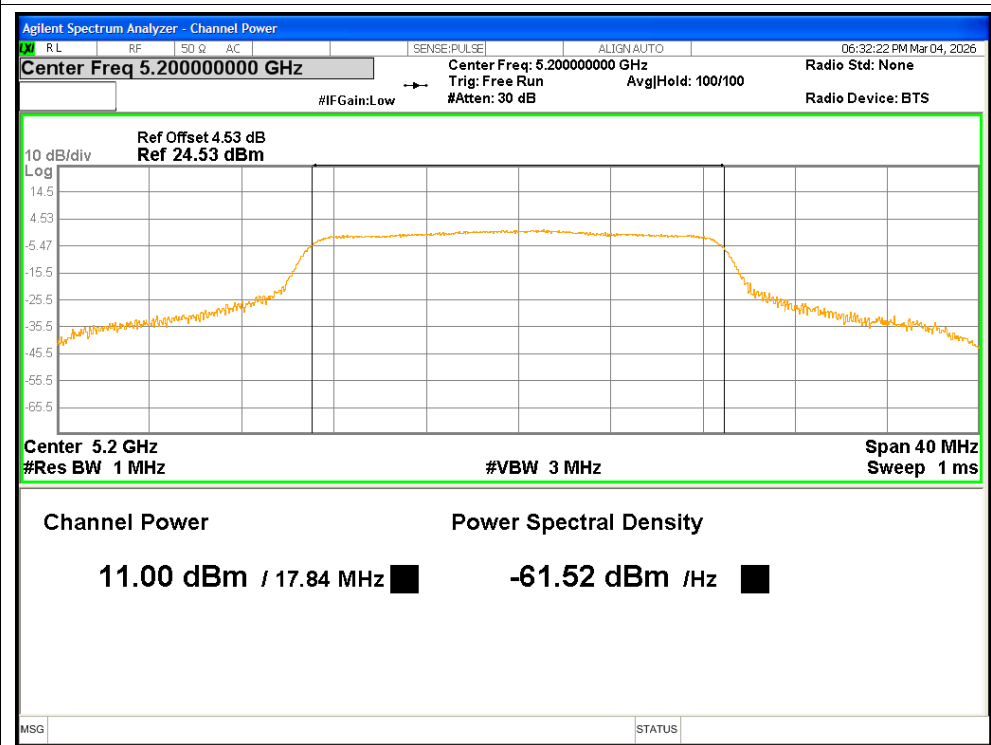


Power NVNT n20 5200MHz Ant2

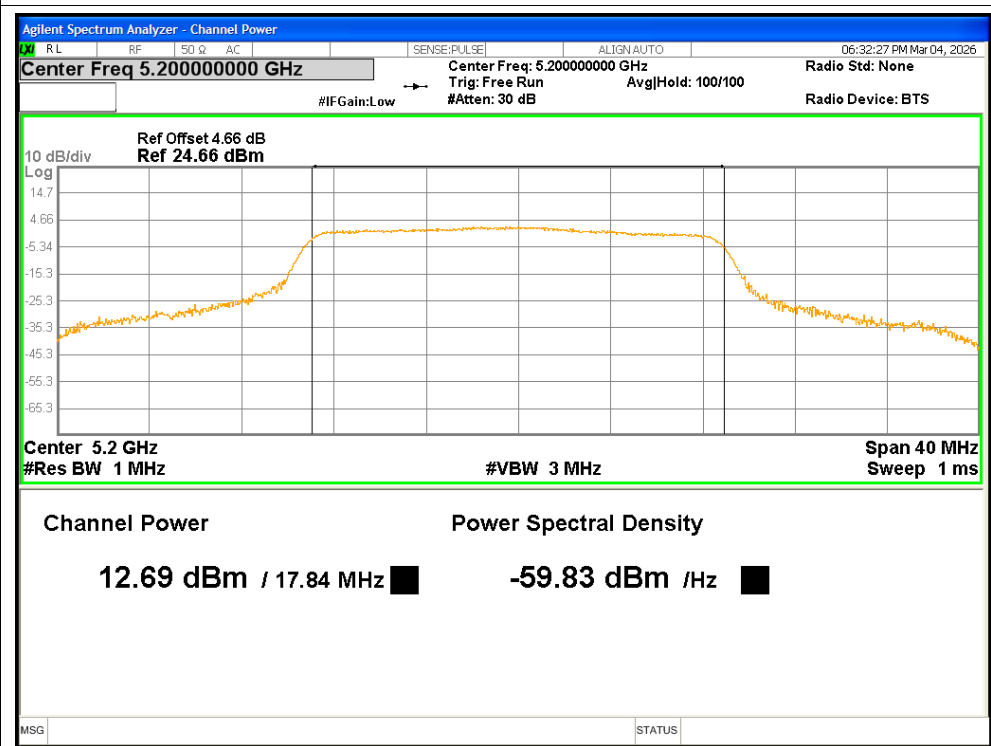


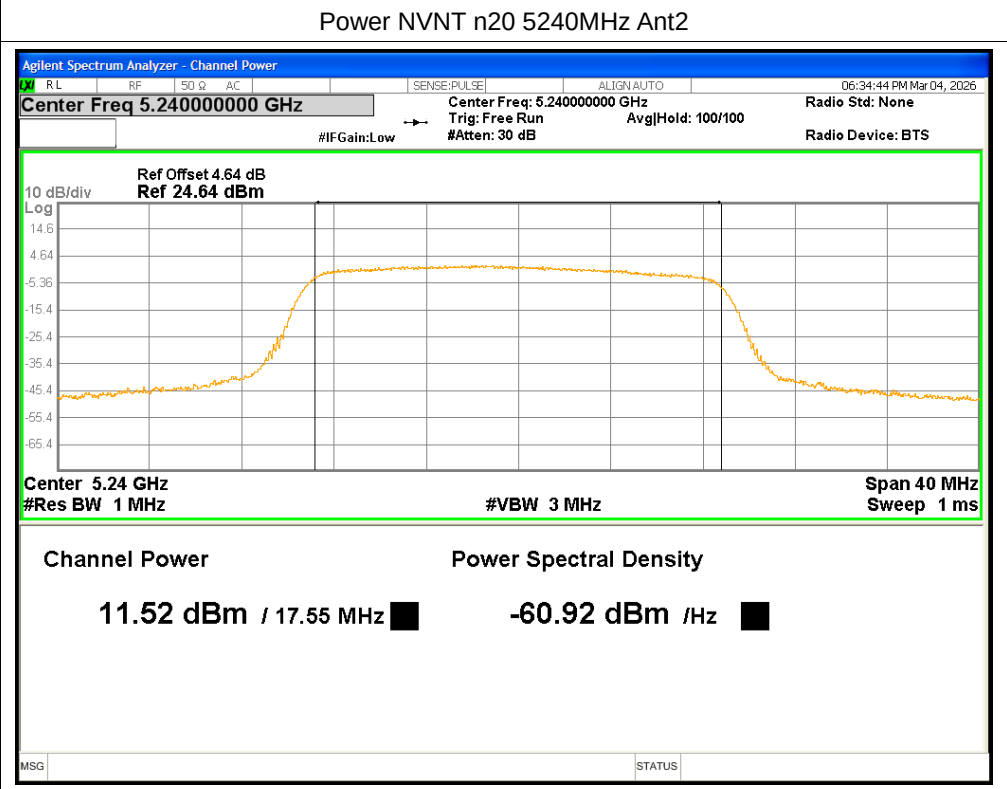
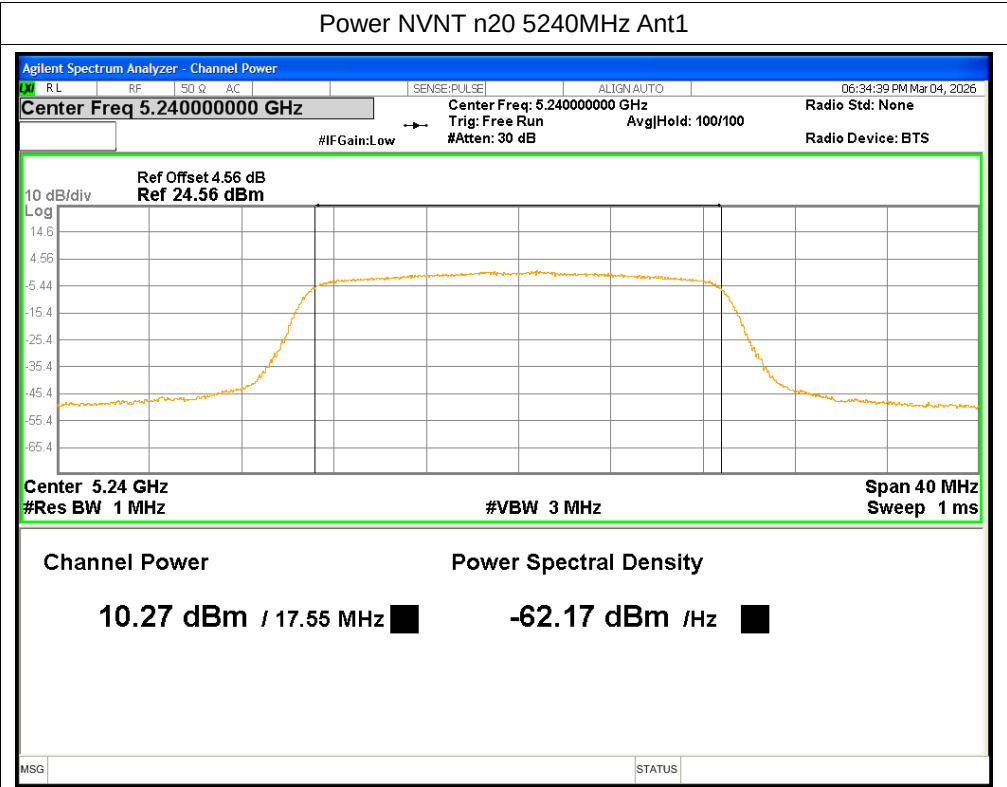


Power NVNT n40 5190MHz Ant1

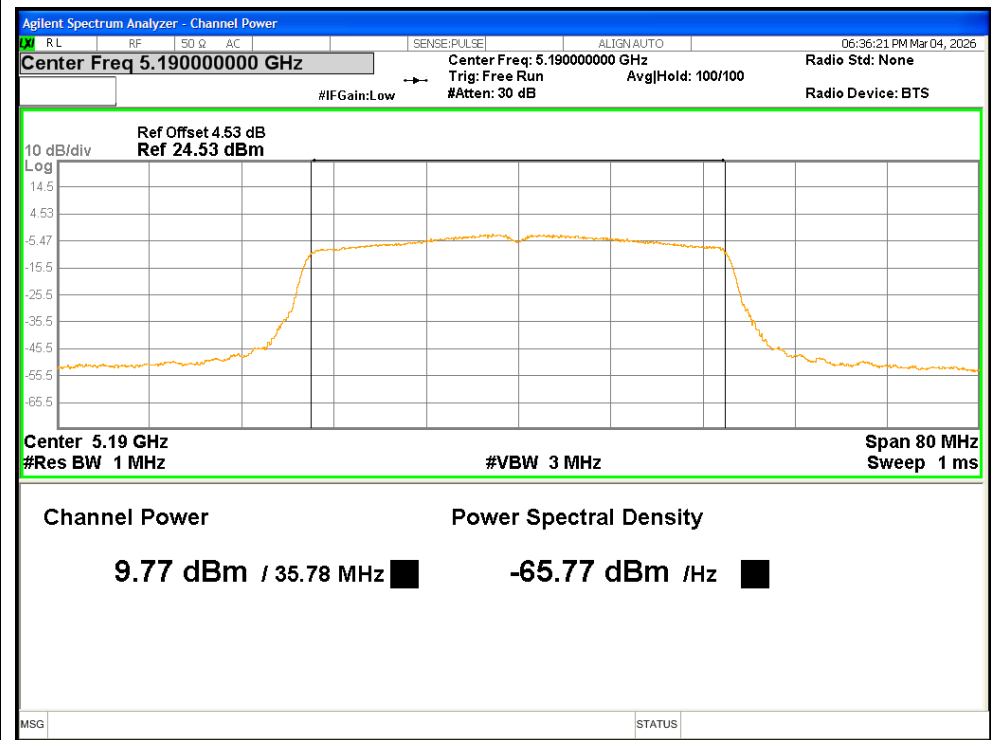


Power NVNT n40 5190MHz Ant2

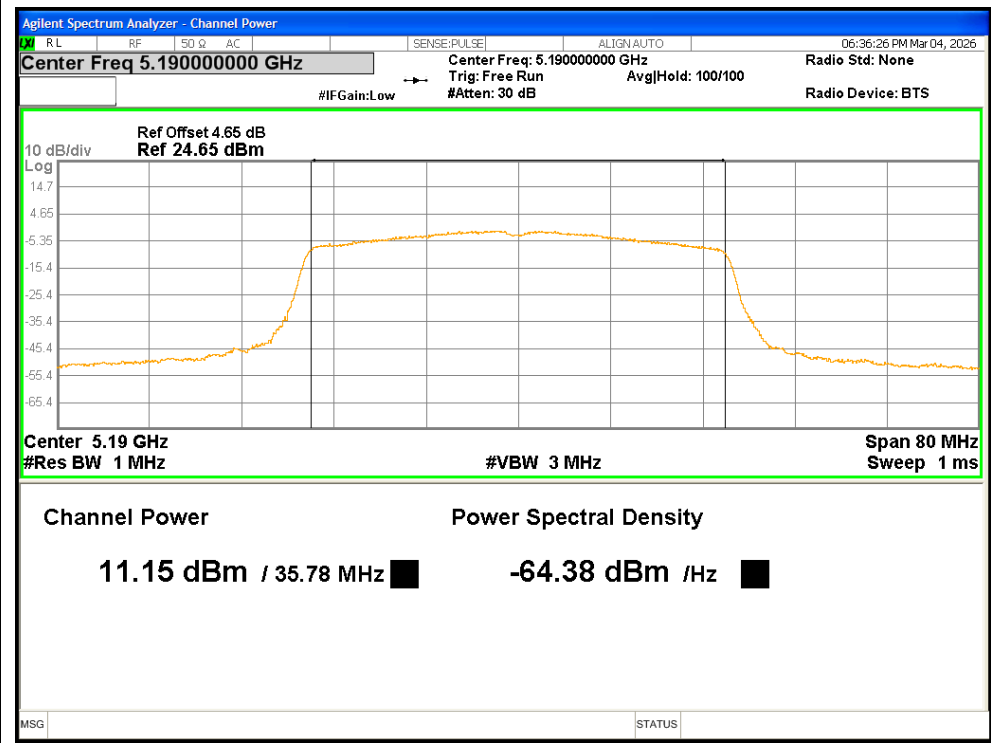


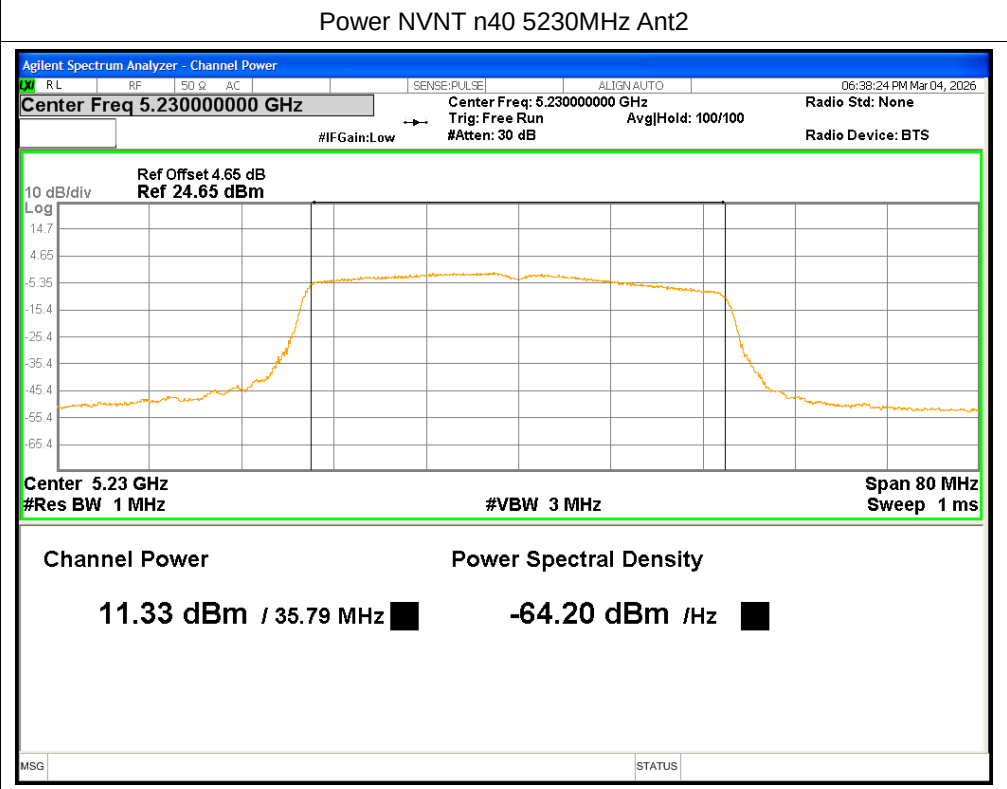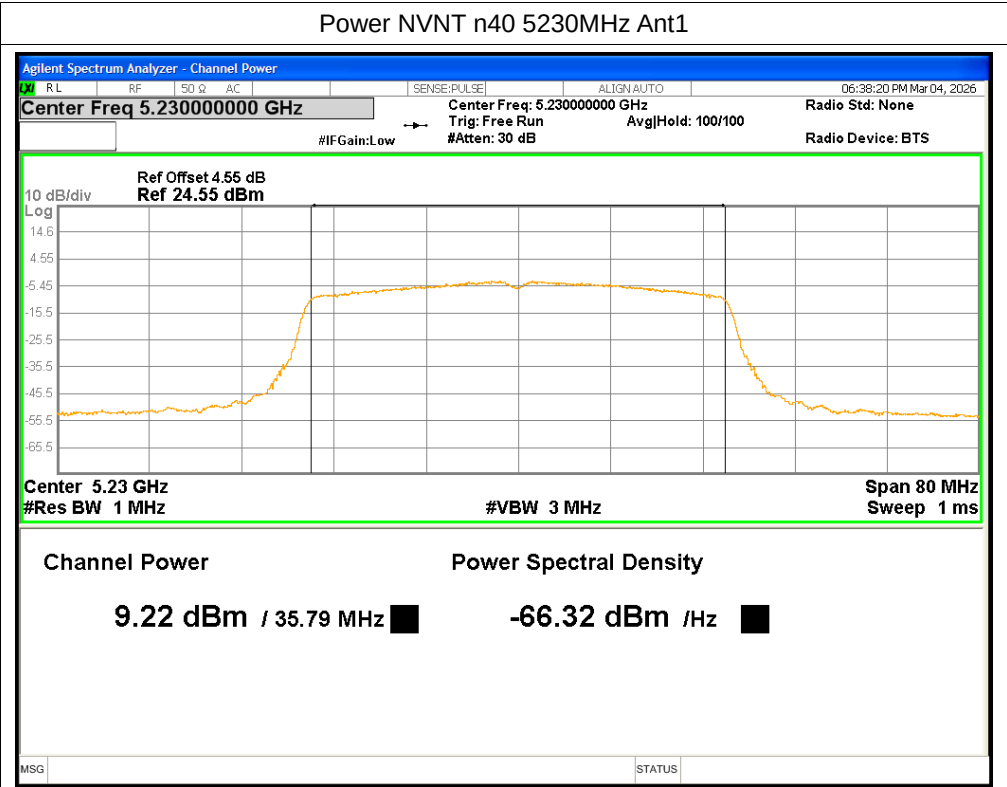


Power NVNT ac20 5180MHz Ant1

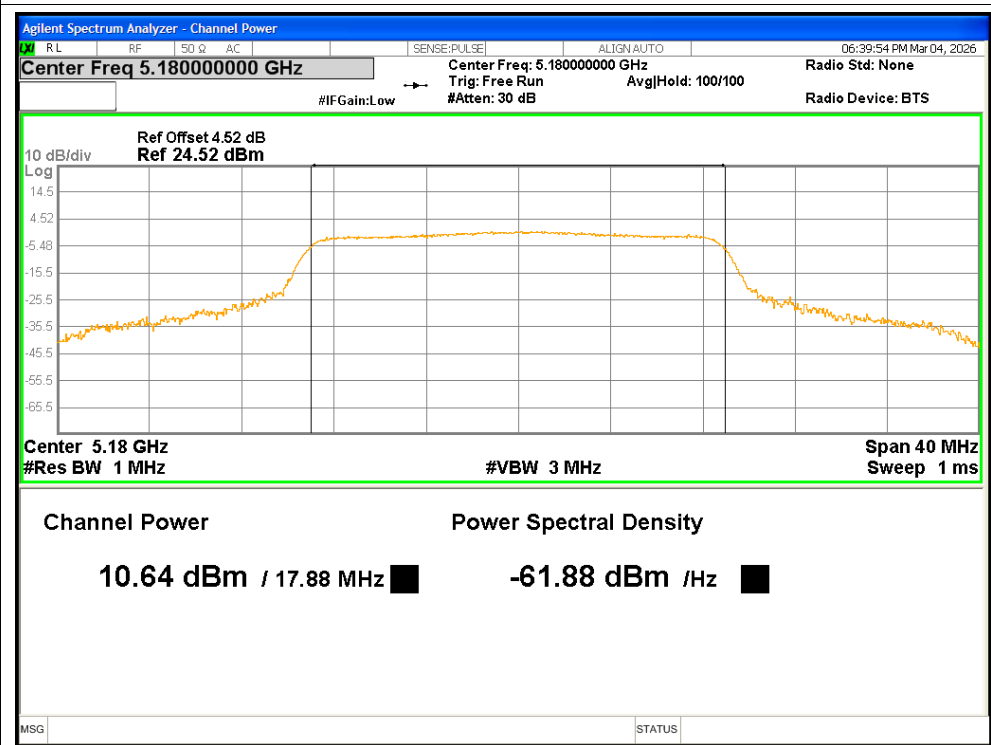


Power NVNT ac20 5180MHz Ant2

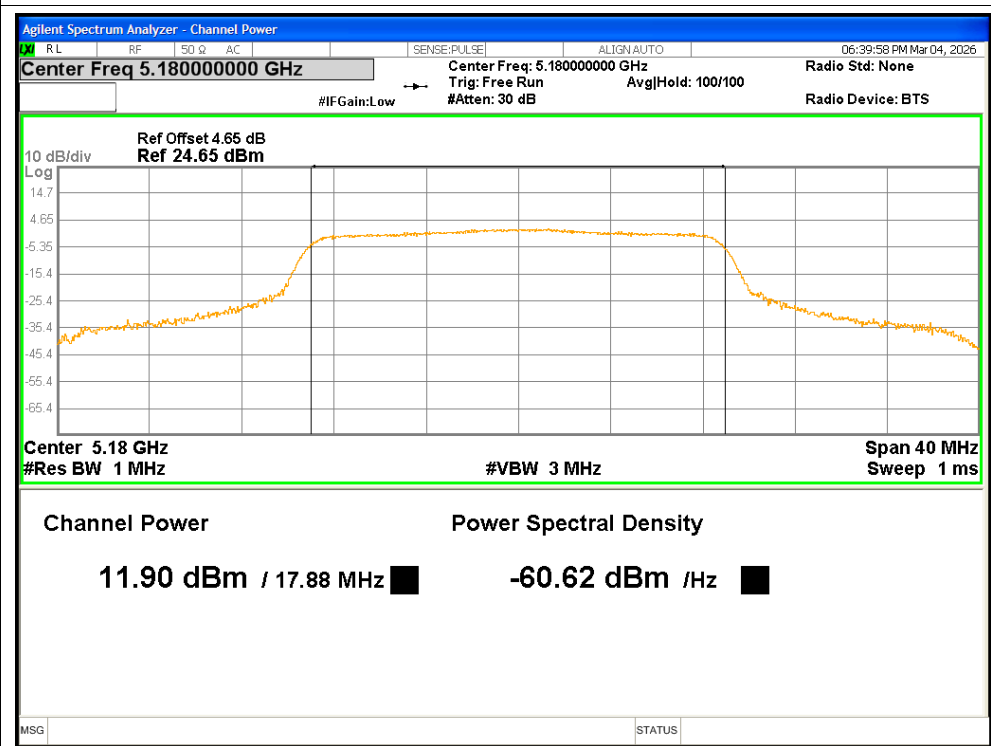


Power NVNT ac20 5200MHz Ant1

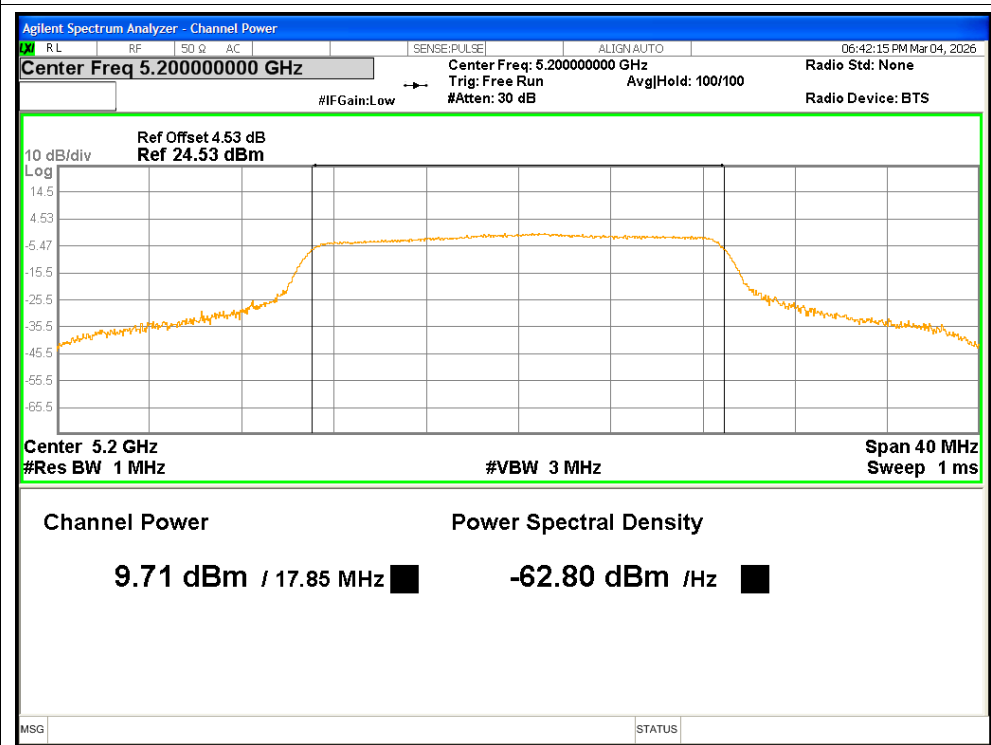


Power NVNT ac20 5200MHz Ant2

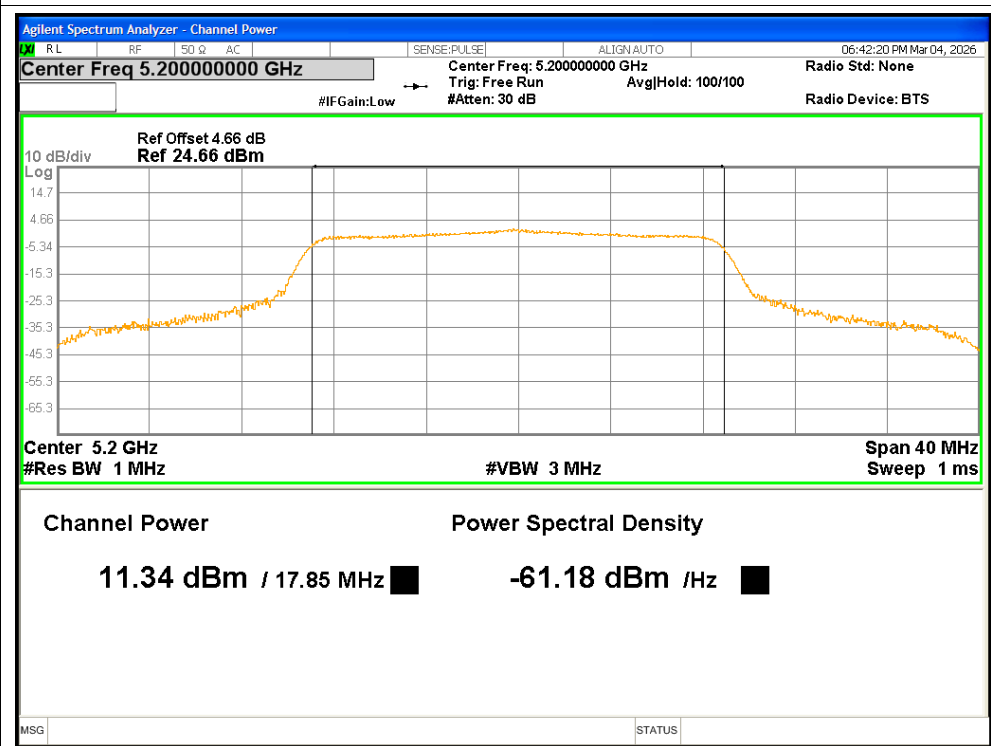


Power NVNT ac20 5240MHz Ant1

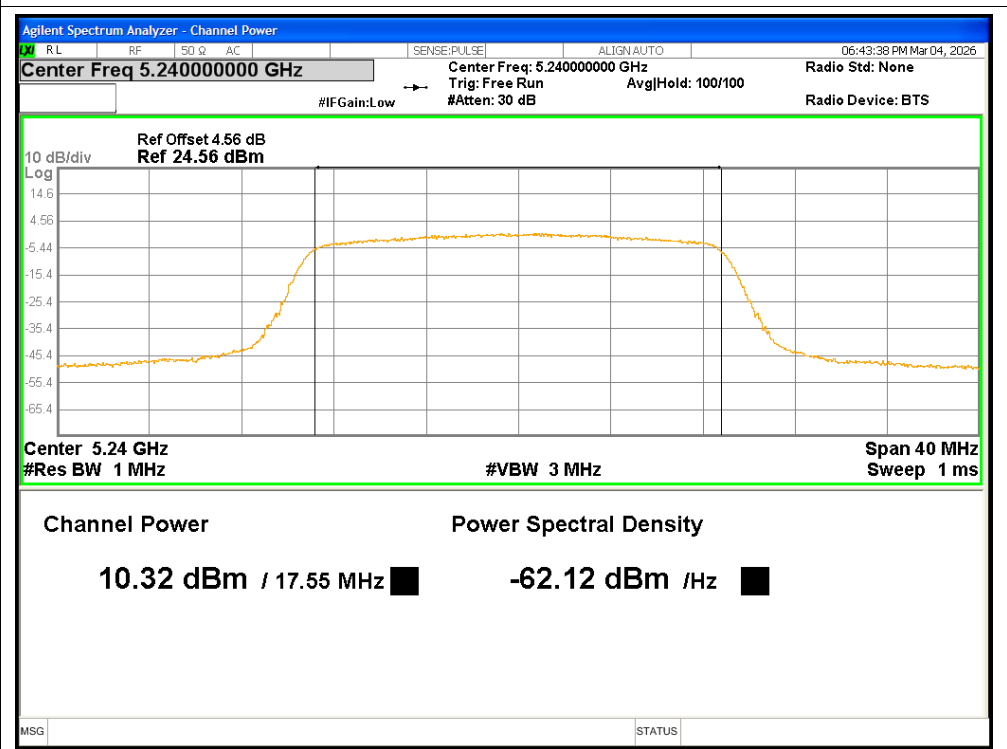


Power NVNT ac20 5240MHz Ant2

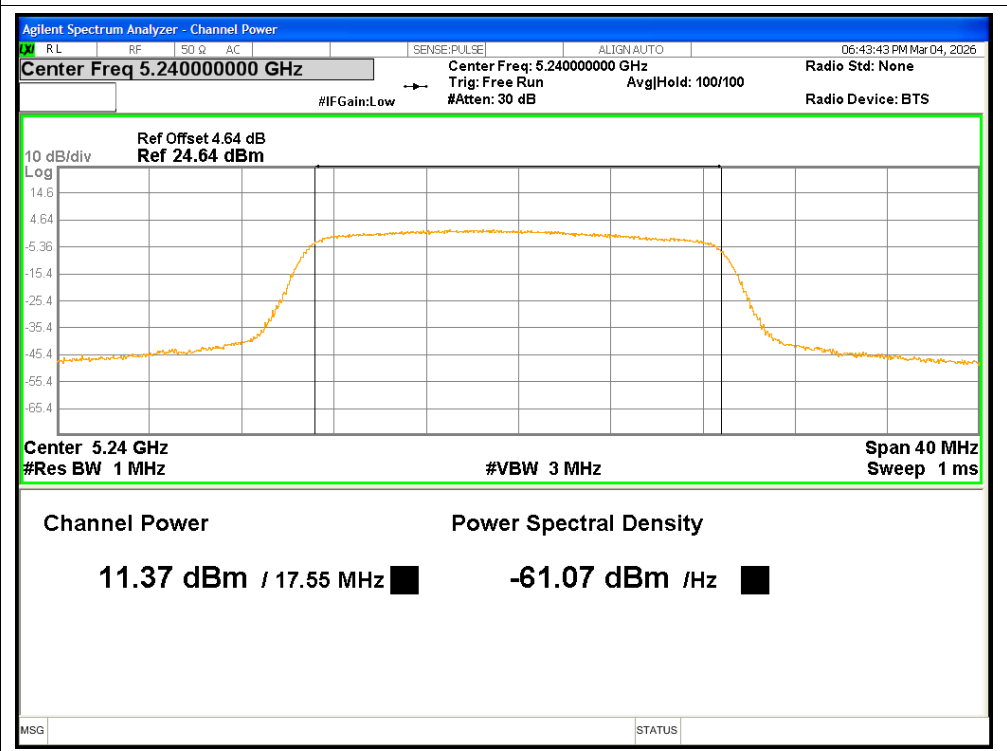


Power NVNT ac40 5190MHz Ant1

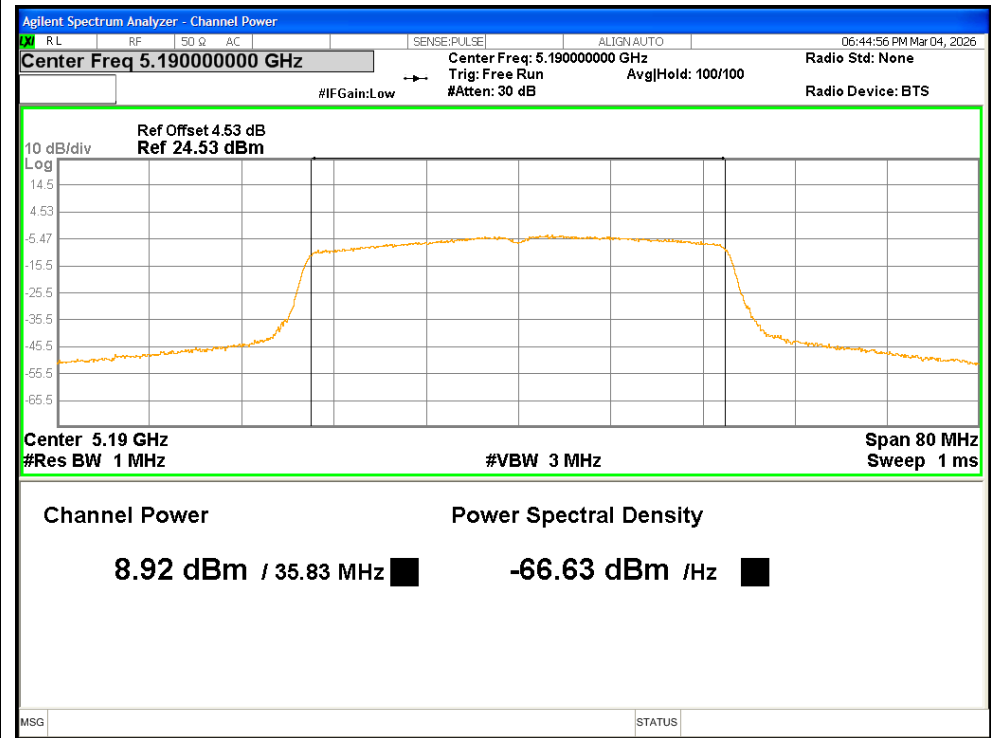


Power NVNT ac40 5190MHz Ant2

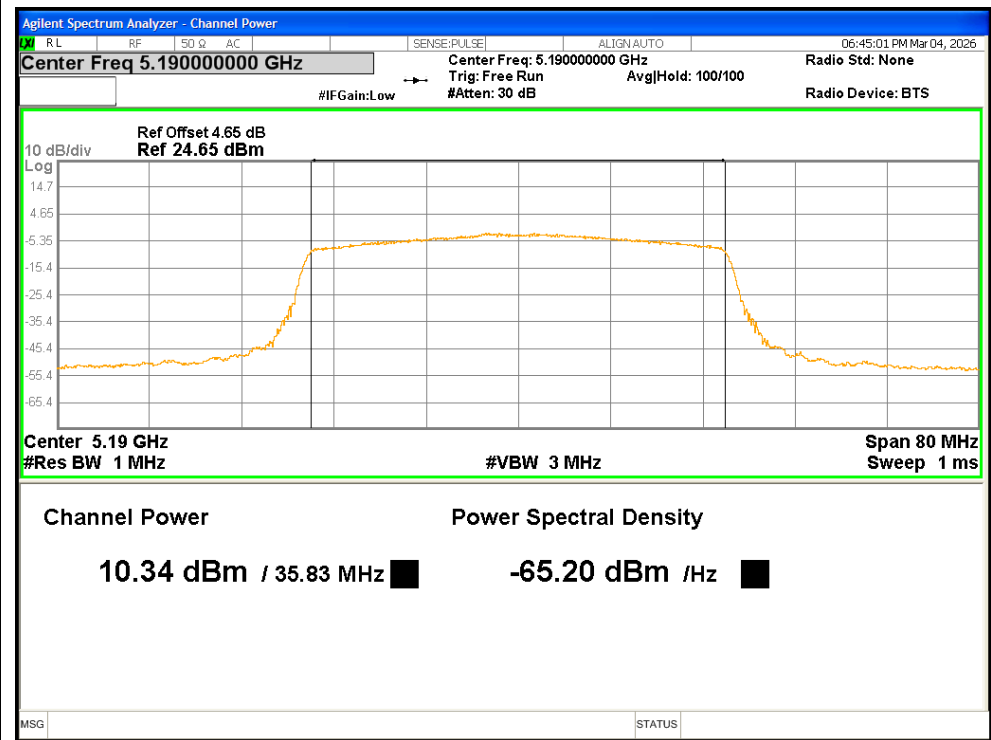


Power NVNT ac40 5230MHz Ant1

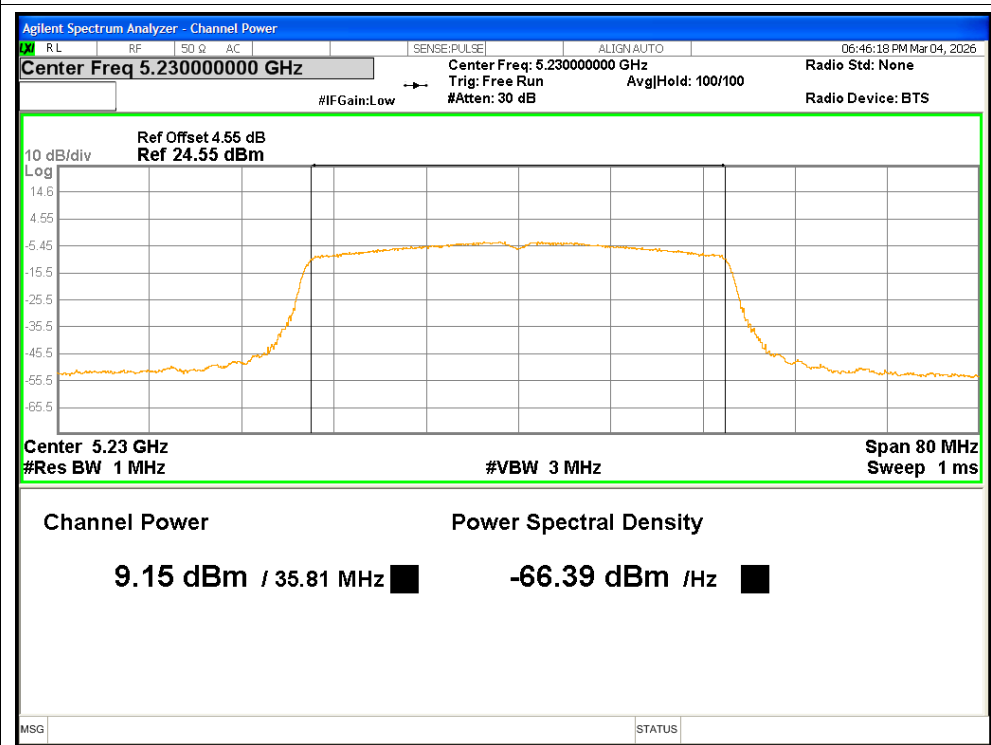


Power NVNT ac40 5230MHz Ant2

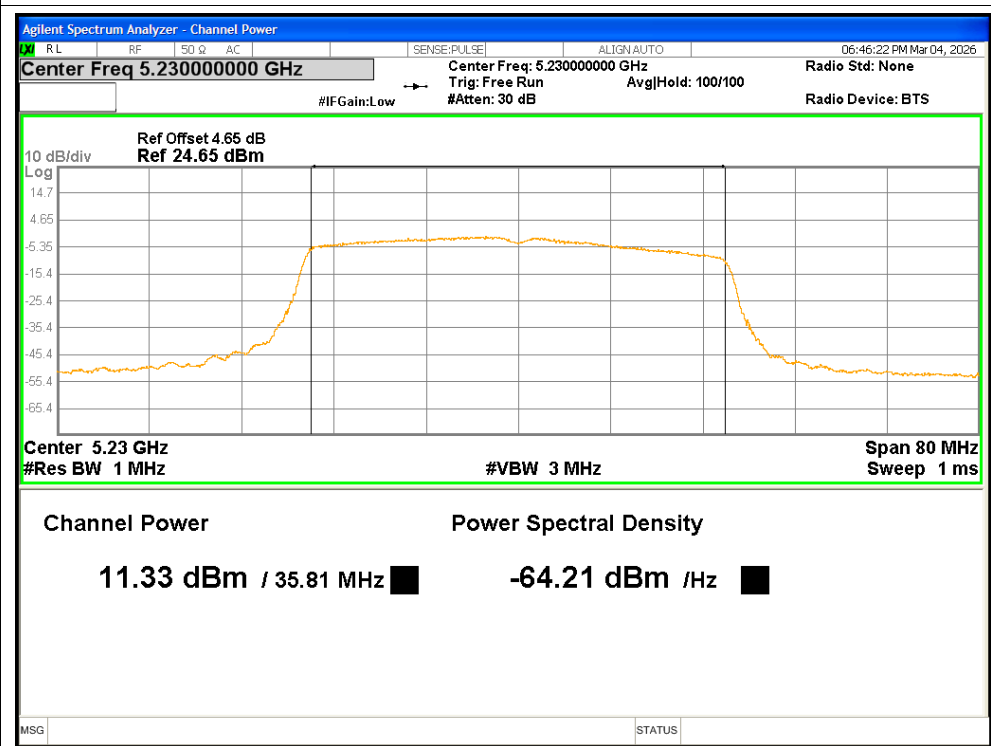


Power NVNT ac80 5210MHz Ant1

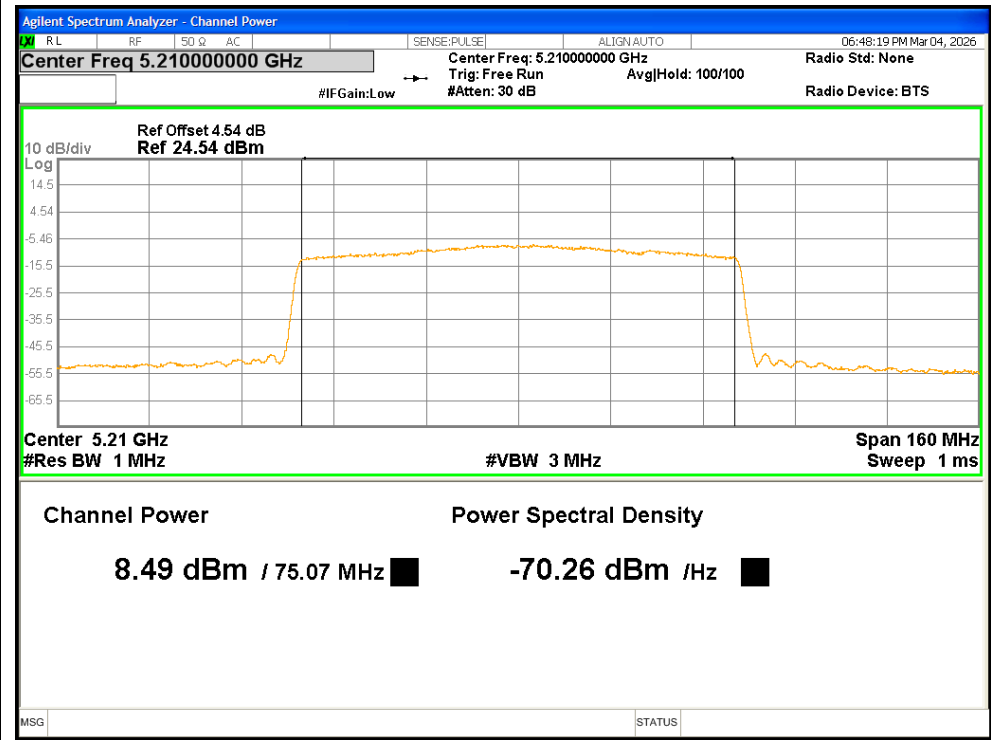


Power NVNT ac80 5210MHz Ant2

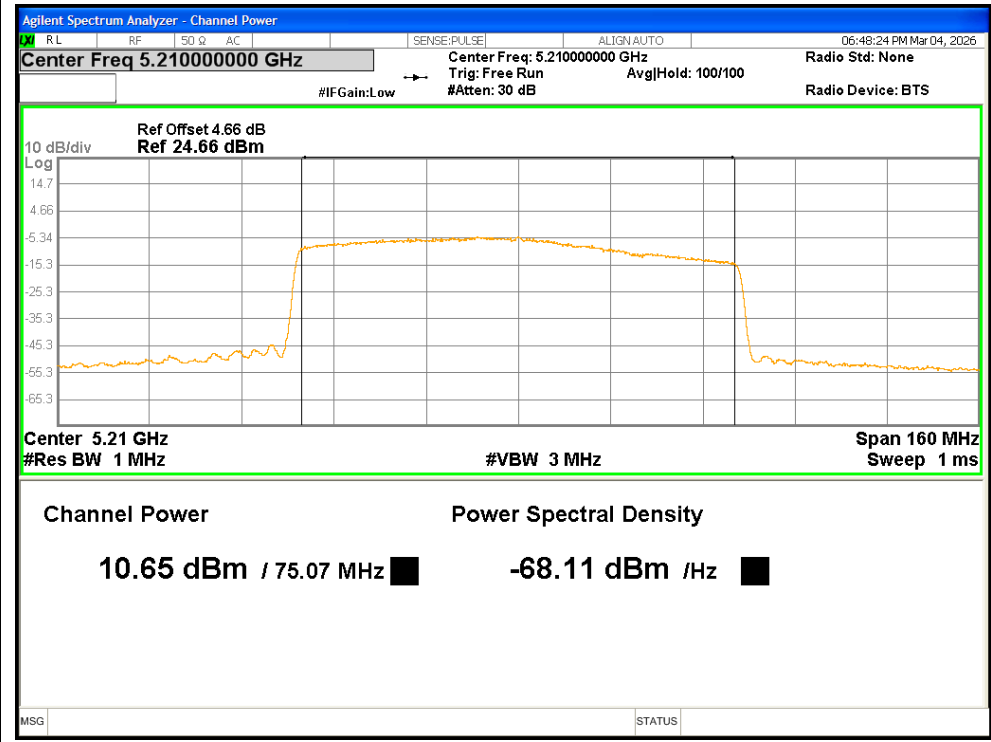


Power NVNT ax20 5180MHz Ant1

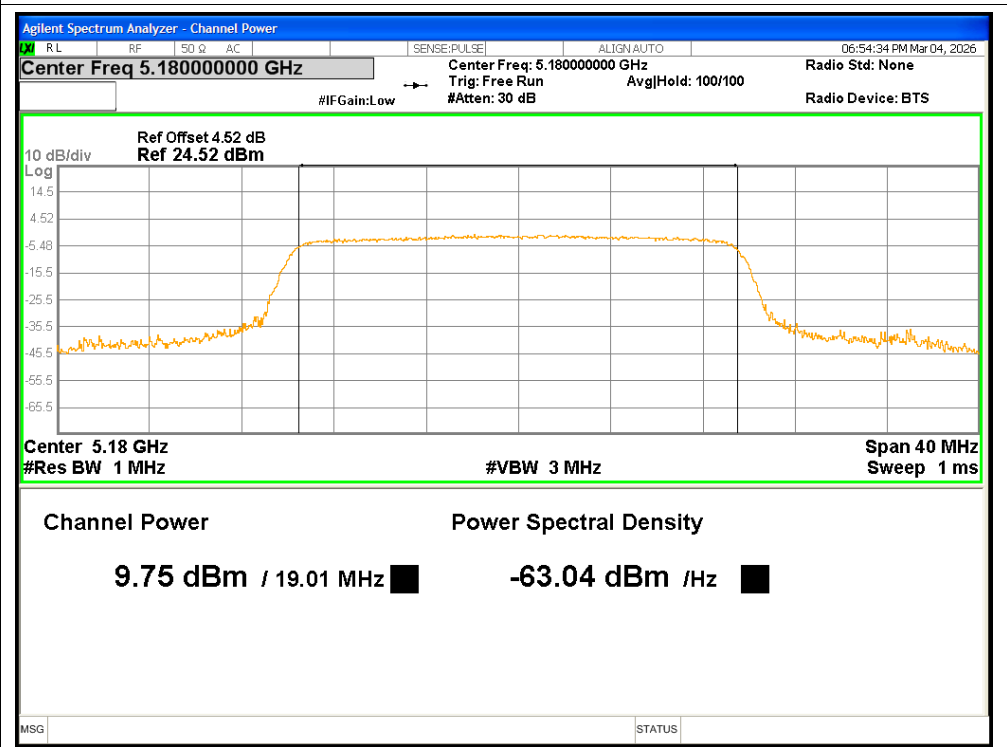


Power NVNT ax20 5180MHz Ant2


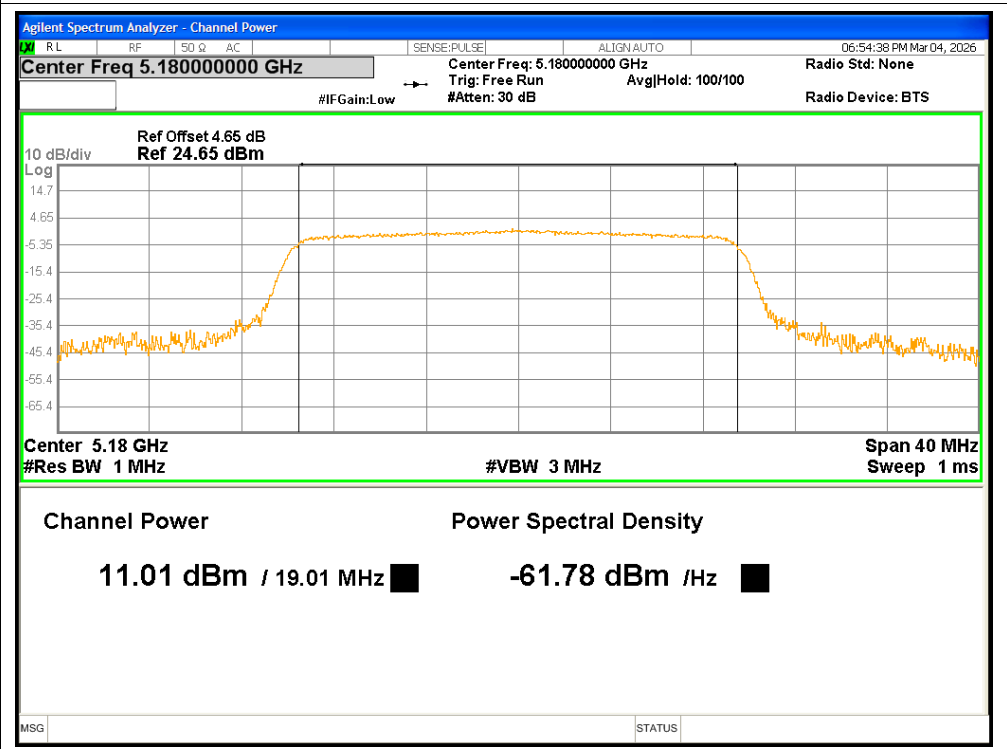




Power NVNT ax20 5200MHz Ant1


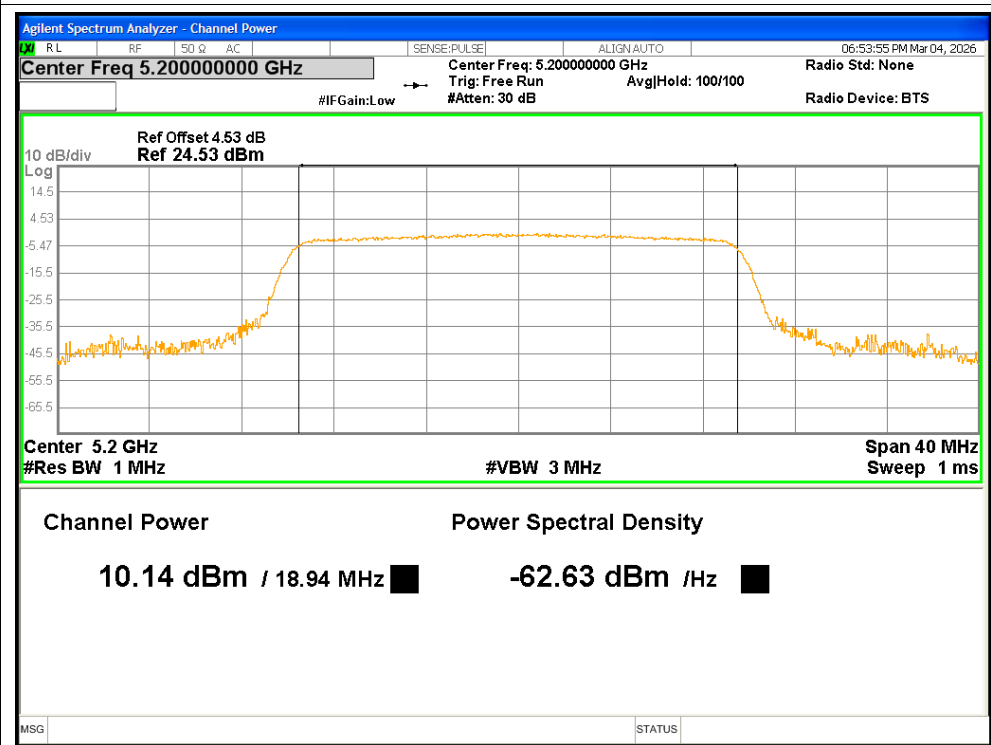




Power NVNT ax20 5200MHz Ant2

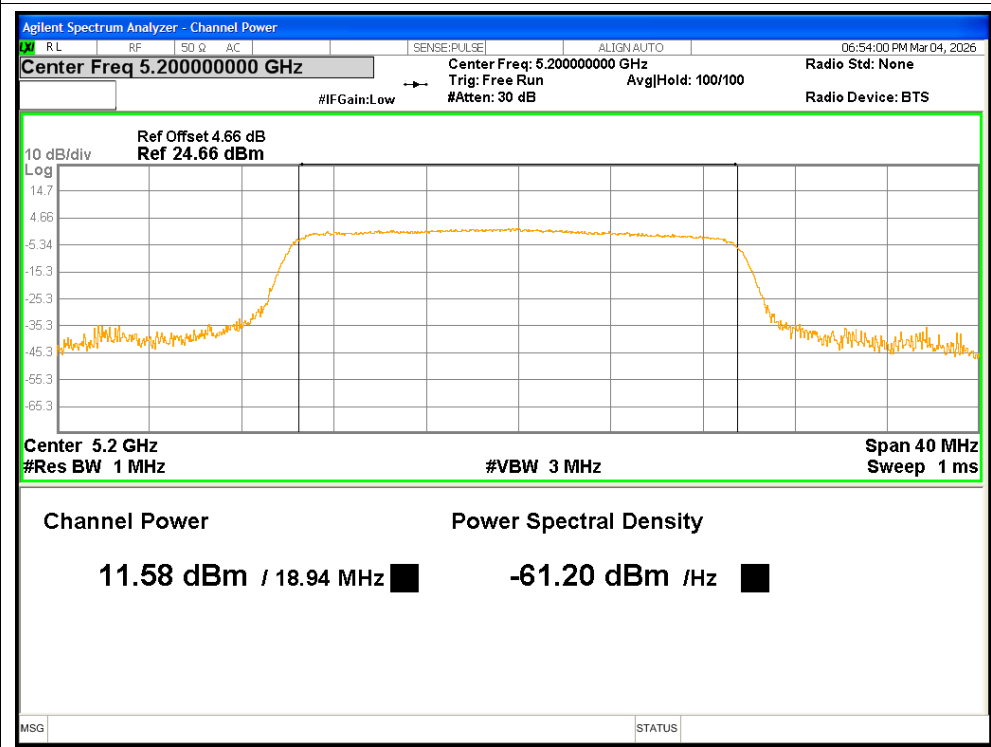

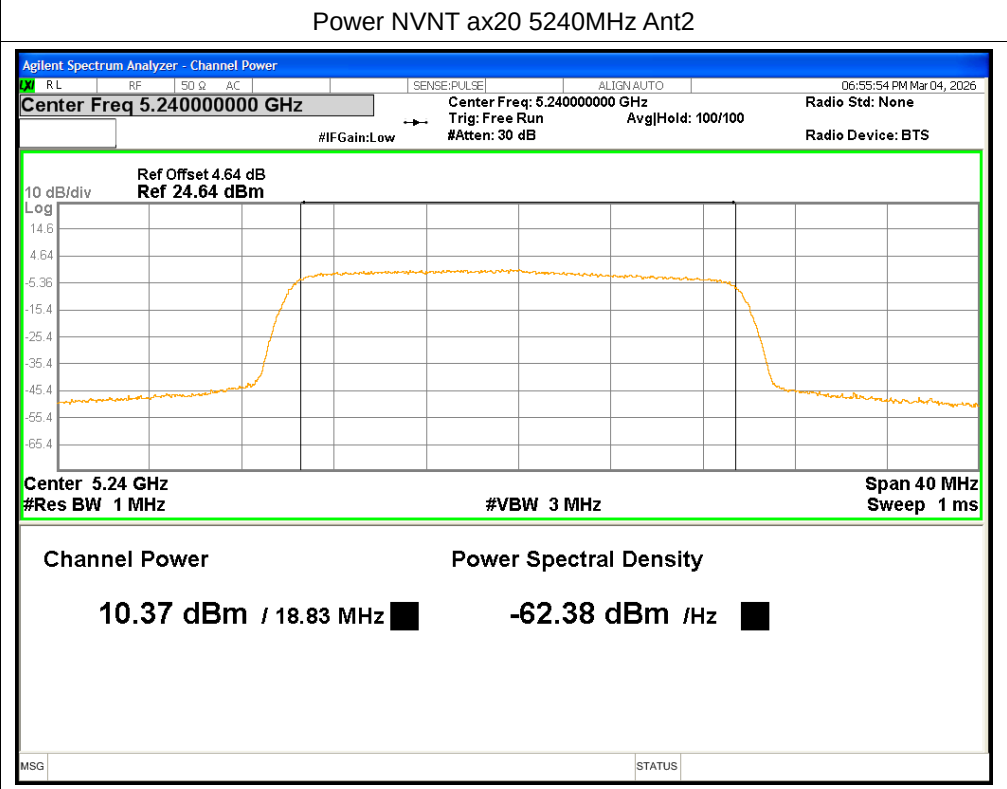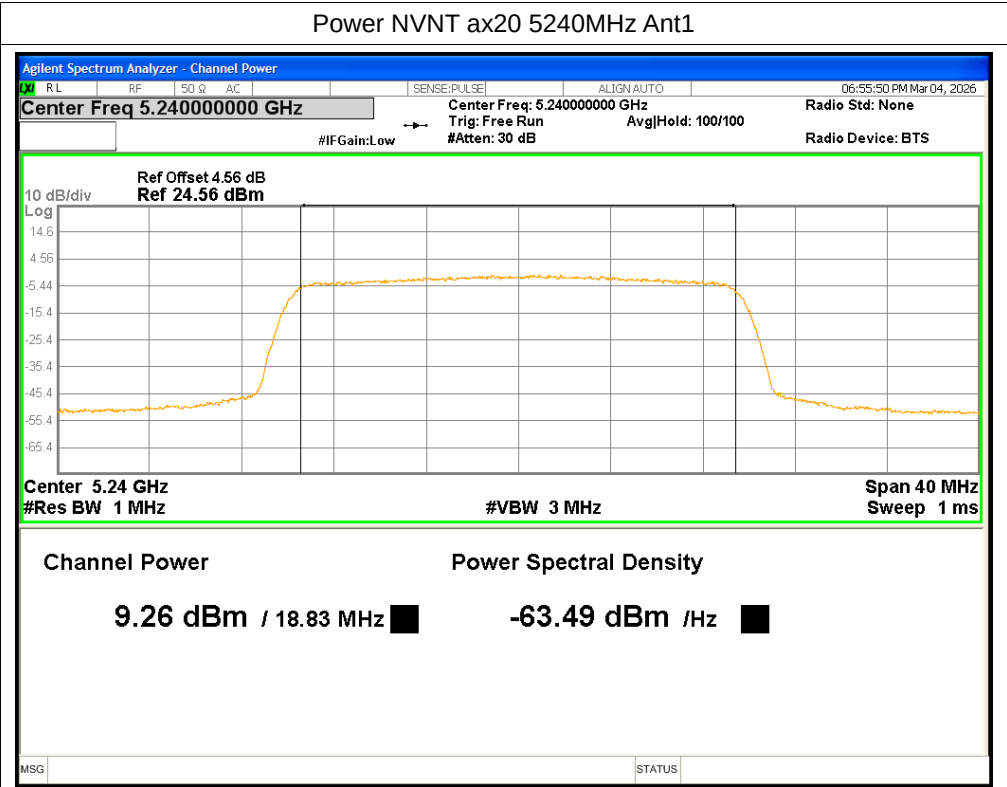

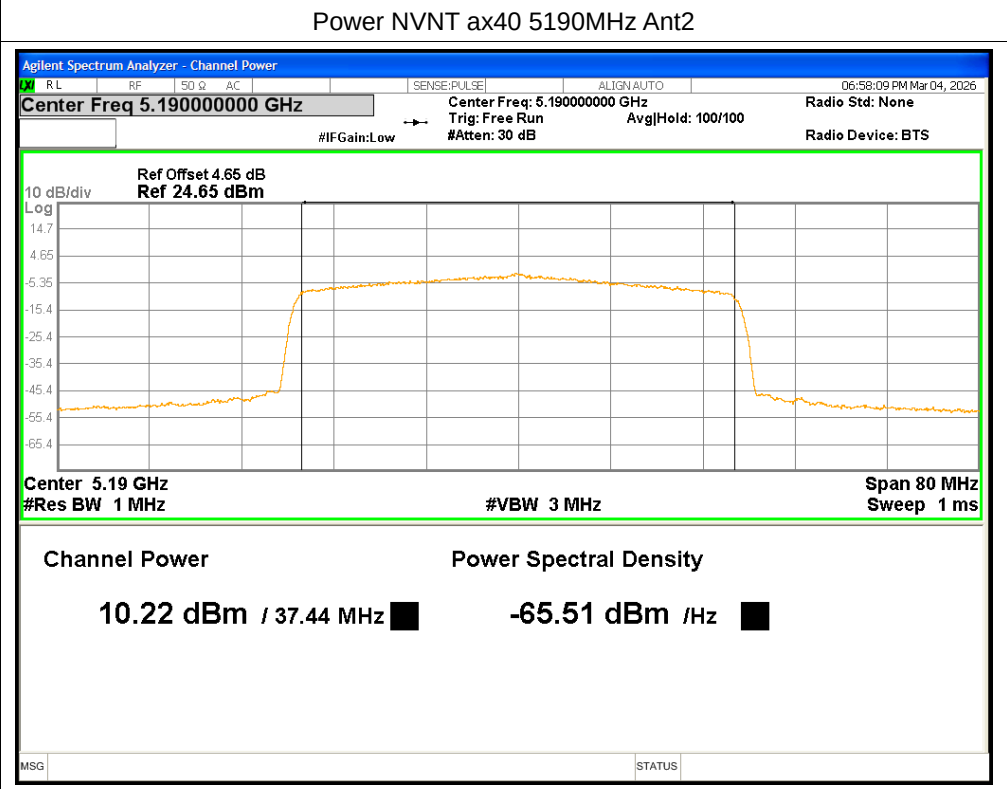
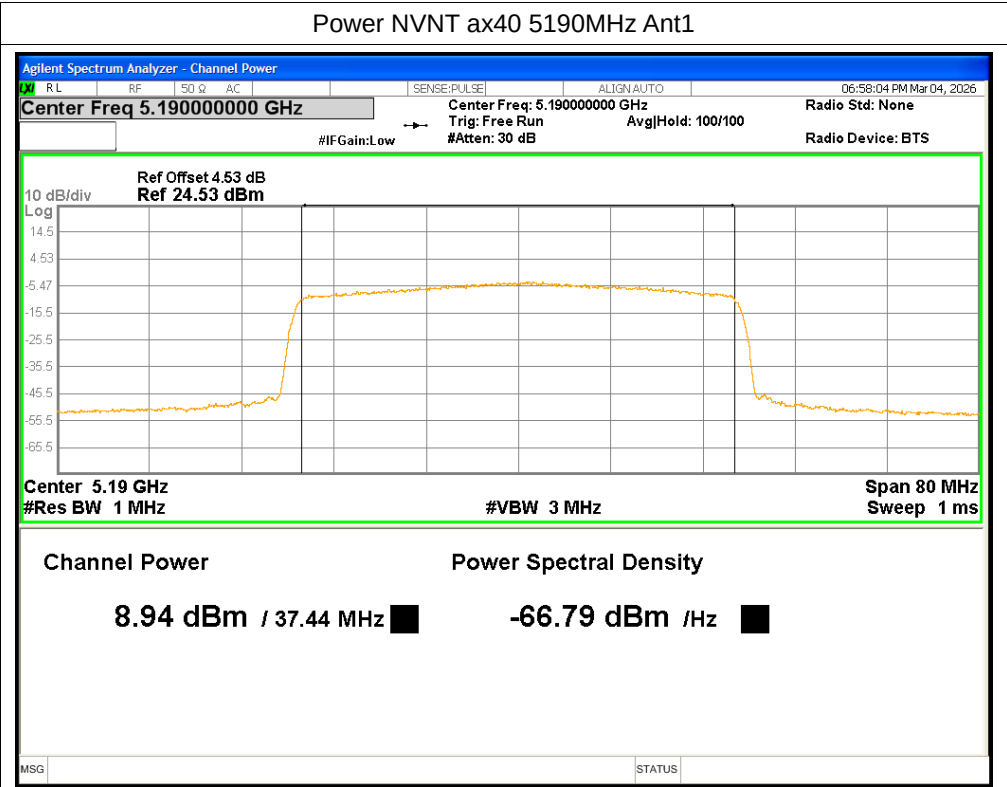


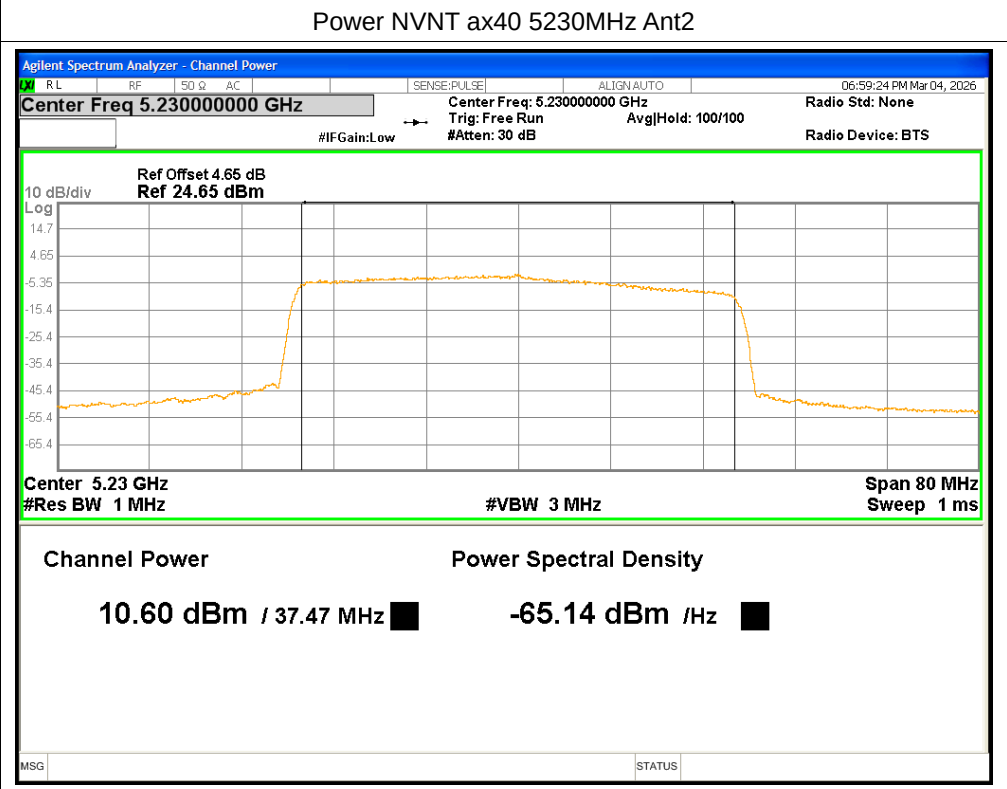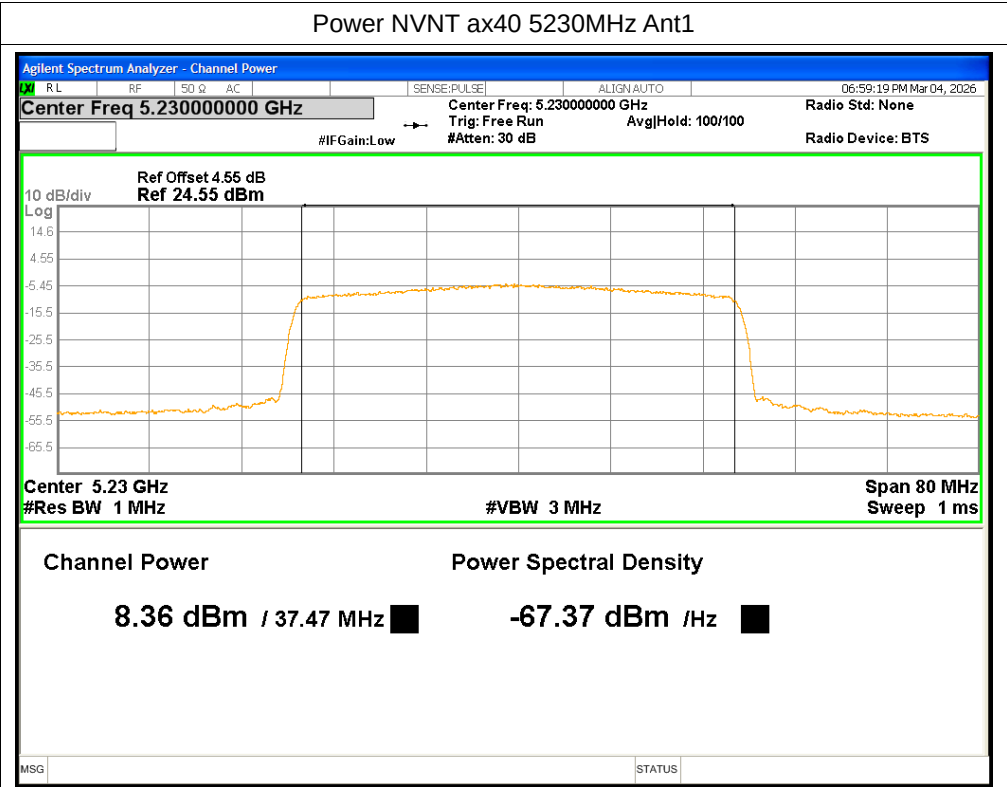

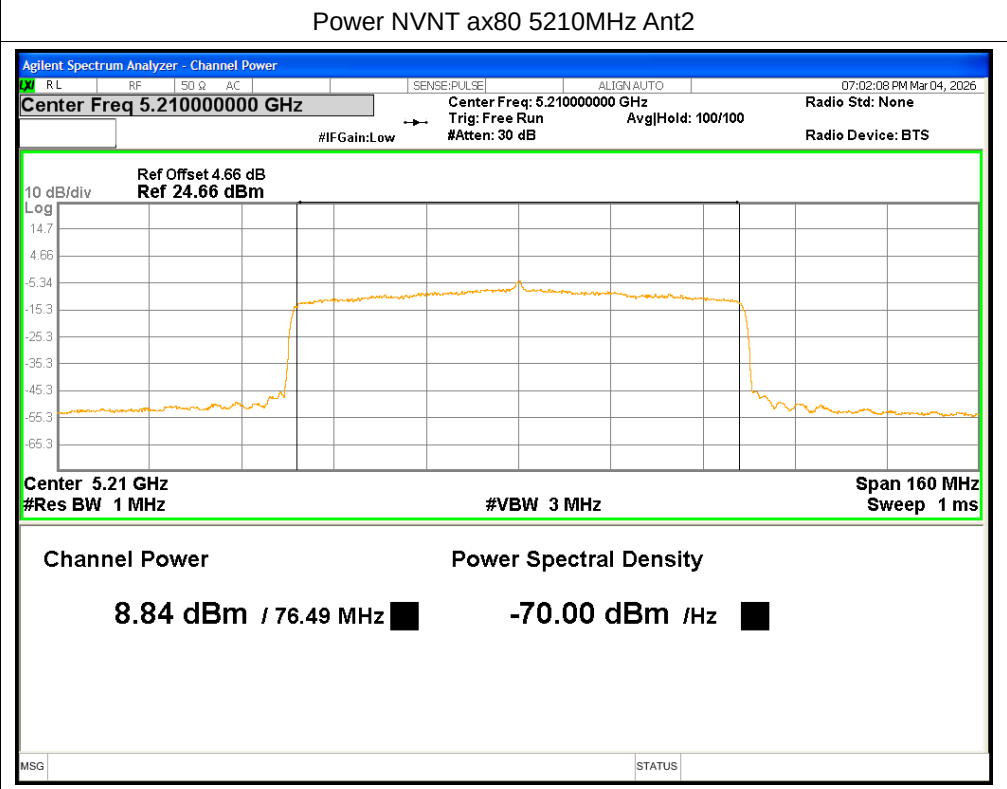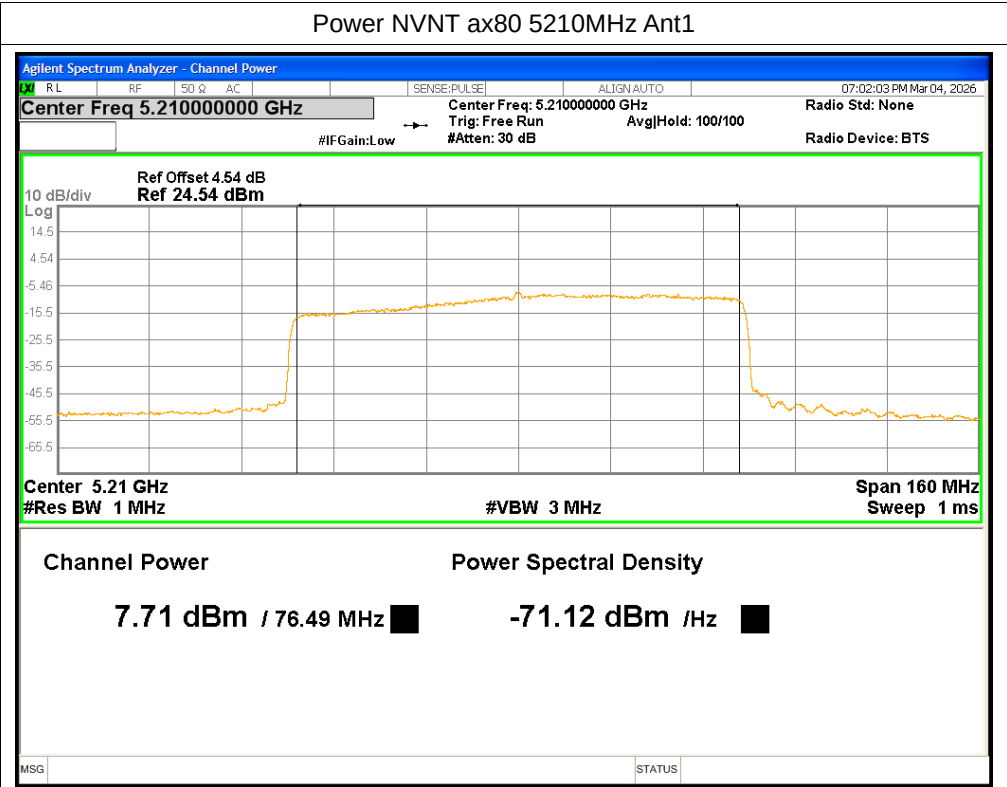


-26dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	26.32	Pass
NVNT	a	5200	Ant1	26.32	Pass
NVNT	a	5240	Ant1	19.91	Pass
NVNT	a	5180	Ant2	26.18	Pass
NVNT	a	5200	Ant2	26.78	Pass
NVNT	a	5240	Ant2	19.97	Pass
NVNT	n20	5180	Ant1	27.54	Pass
NVNT	n20	5180	Ant2	23.96	Pass
NVNT	n20	5200	Ant1	26.5	Pass
NVNT	n20	5200	Ant2	24.13	Pass
NVNT	n20	5240	Ant1	20.31	Pass
NVNT	n20	5240	Ant2	19.96	Pass
NVNT	n40	5190	Ant1	40.2	Pass
NVNT	n40	5190	Ant2	39.31	Pass
NVNT	n40	5230	Ant1	40.16	Pass
NVNT	n40	5230	Ant2	39.81	Pass
NVNT	ac20	5180	Ant1	27.43	Pass
NVNT	ac20	5180	Ant2	24.22	Pass
NVNT	ac20	5200	Ant1	26.87	Pass
NVNT	ac20	5200	Ant2	23.61	Pass
NVNT	ac20	5240	Ant1	20.18	Pass
NVNT	ac20	5240	Ant2	19.89	Pass
NVNT	ac40	5190	Ant1	40.44	Pass
NVNT	ac40	5190	Ant2	39.71	Pass
NVNT	ac40	5230	Ant1	39.99	Pass
NVNT	ac40	5230	Ant2	39.55	Pass
NVNT	ac80	5210	Ant1	80.87	Pass
NVNT	ac80	5210	Ant2	79.7	Pass
NVNT	ax20	5180	Ant1	23.22	Pass
NVNT	ax20	5180	Ant2	22.78	Pass
NVNT	ax20	5200	Ant1	22.42	Pass
NVNT	ax20	5200	Ant2	24.83	Pass
NVNT	ax20	5240	Ant1	19.95	Pass
NVNT	ax20	5240	Ant2	19.93	Pass
NVNT	ax40	5190	Ant1	39.66	Pass
NVNT	ax40	5190	Ant2	39.6	Pass
NVNT	ax40	5230	Ant1	39.62	Pass
NVNT	ax40	5230	Ant2	39.59	Pass
NVNT	ax80	5210	Ant1	81.75	Pass
NVNT	ax80	5210	Ant2	81.81	Pass

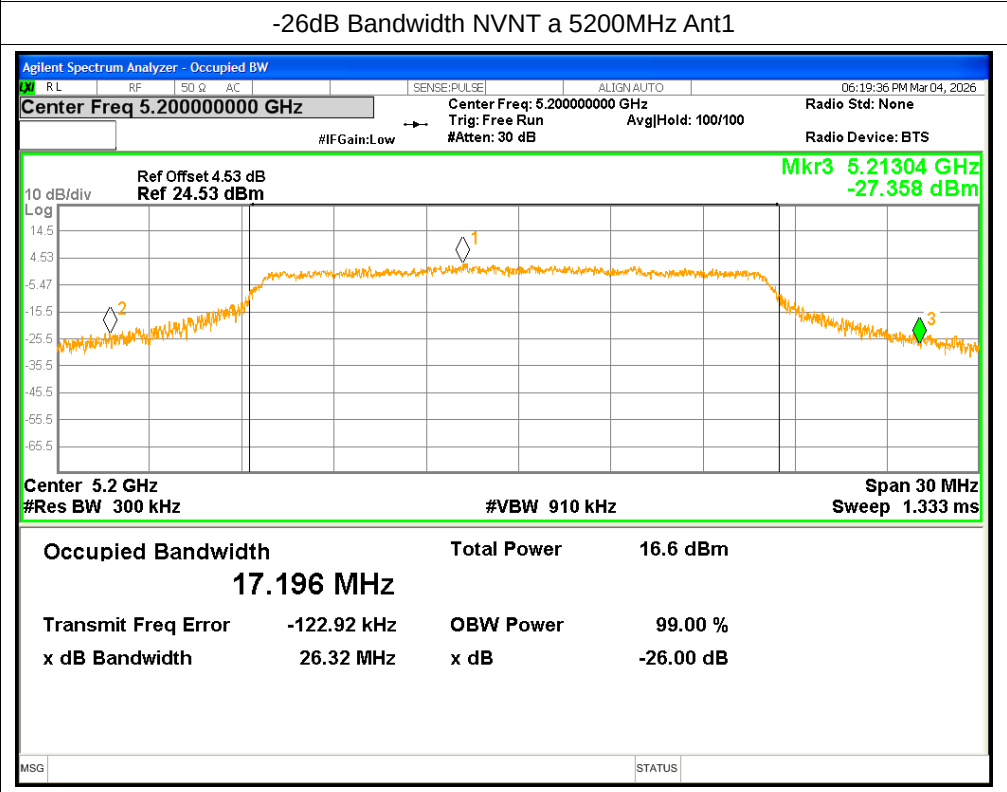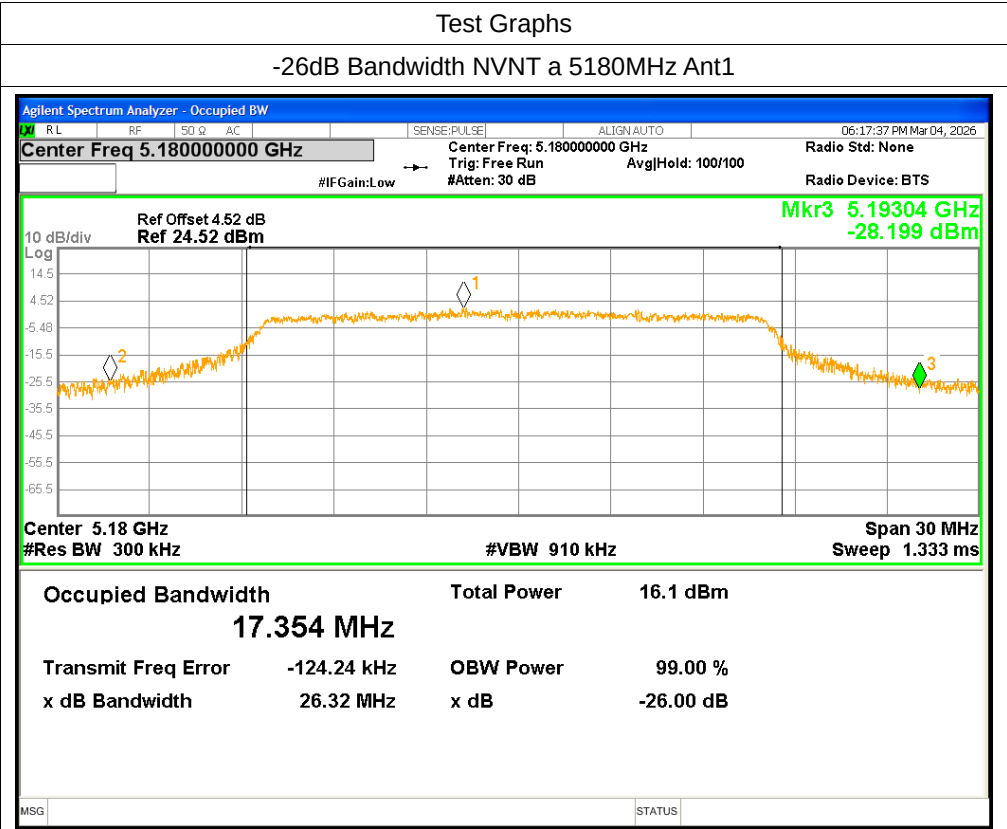


-26dB Bandwidth NVNT a 5240MHz Ant1

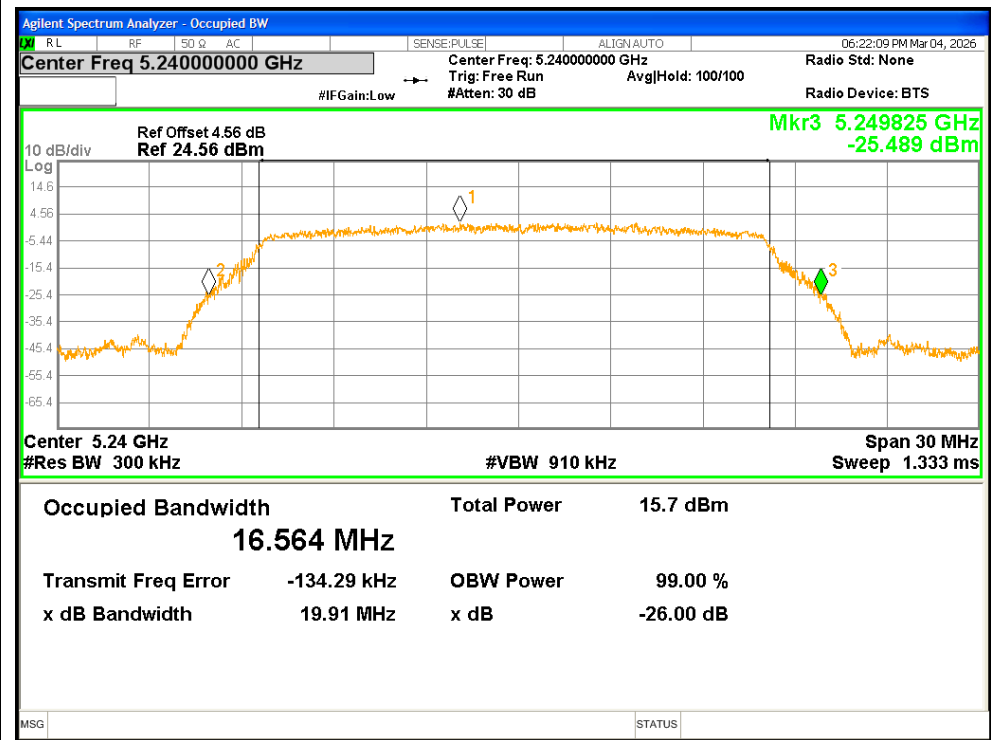


-26dB Bandwidth NVNT a 5180MHz Ant2

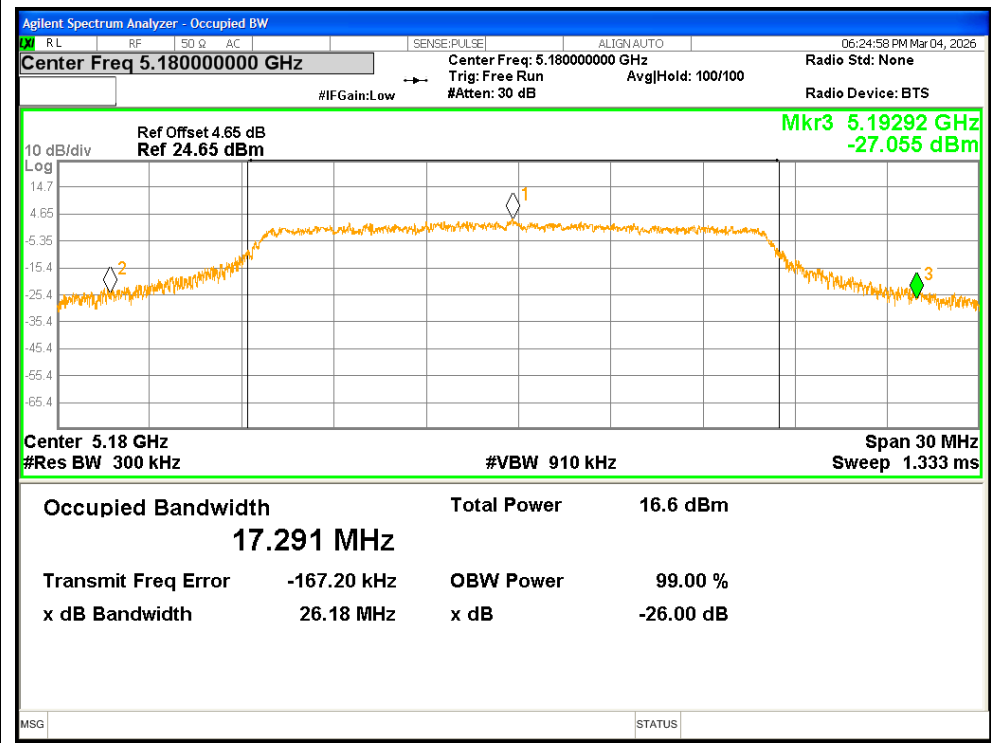


-26dB Bandwidth NVNT a 5200MHz Ant2

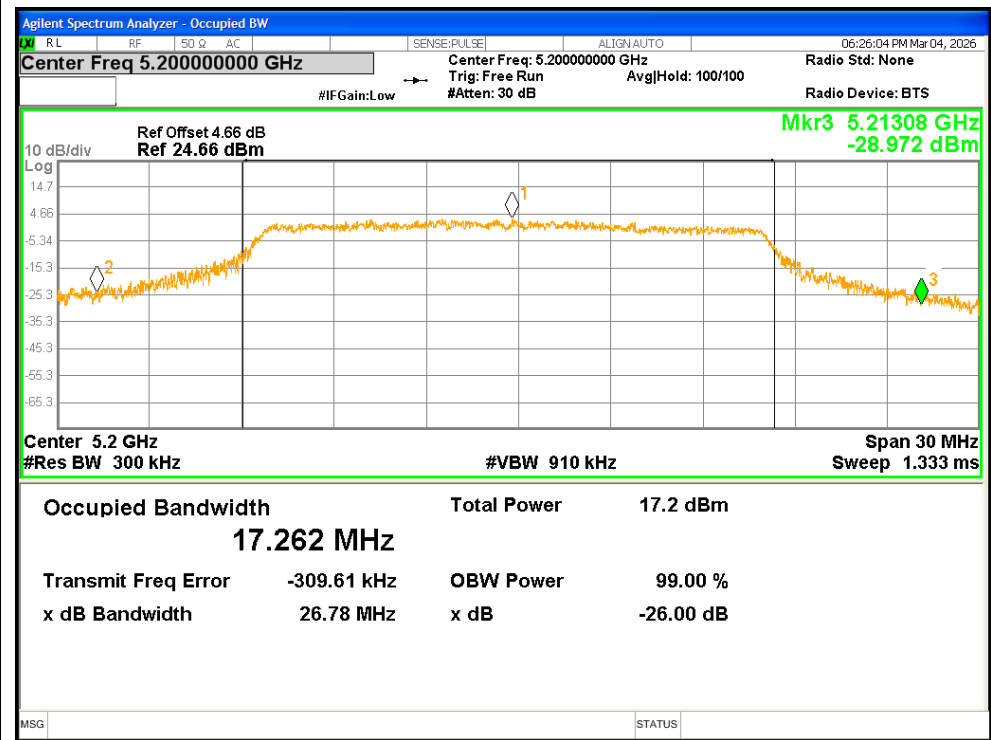


-26dB Bandwidth NVNT a 5240MHz Ant2

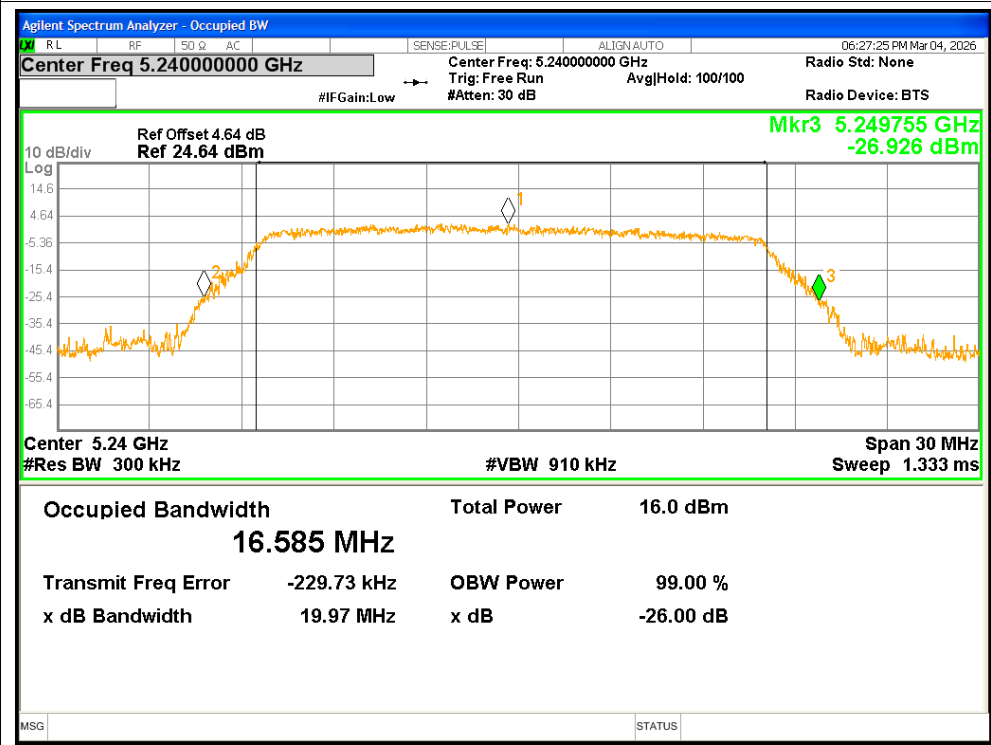


-26dB Bandwidth NVNT n20 5180MHz Ant1

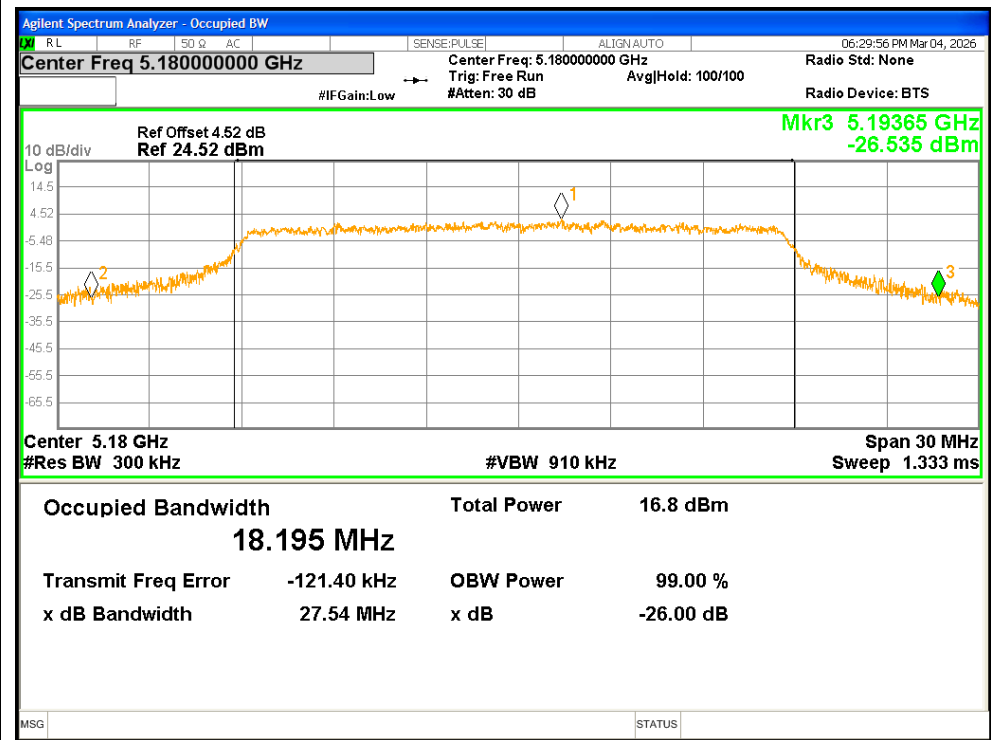


-26dB Bandwidth NVNT n20 5180MHz Ant2

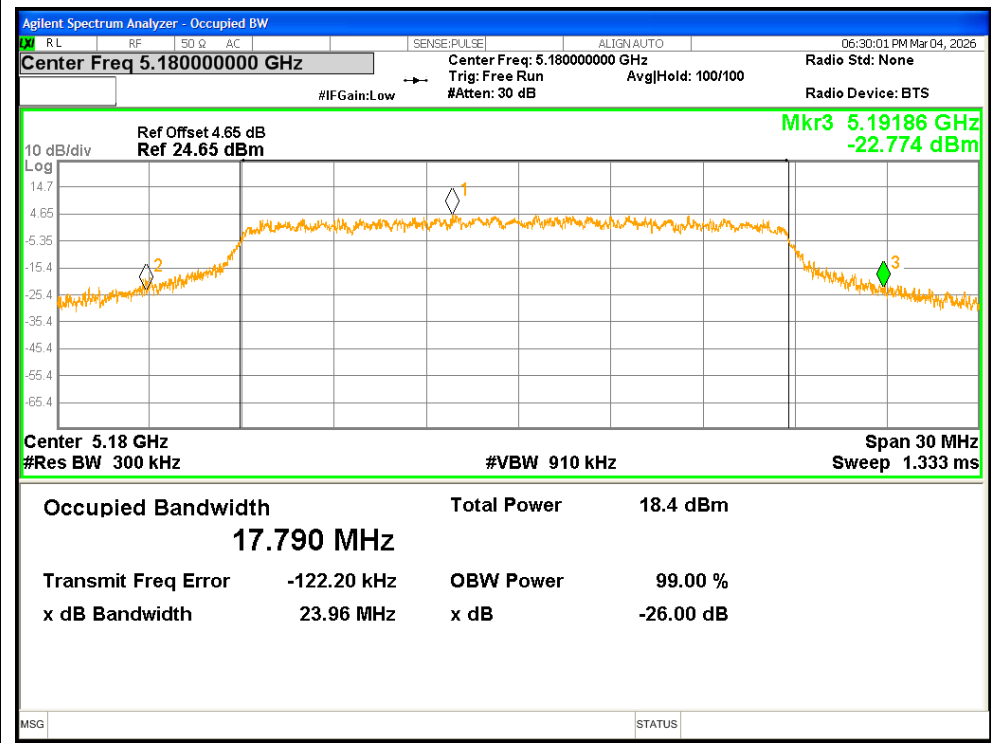


-26dB Bandwidth NVNT n20 5200MHz Ant1

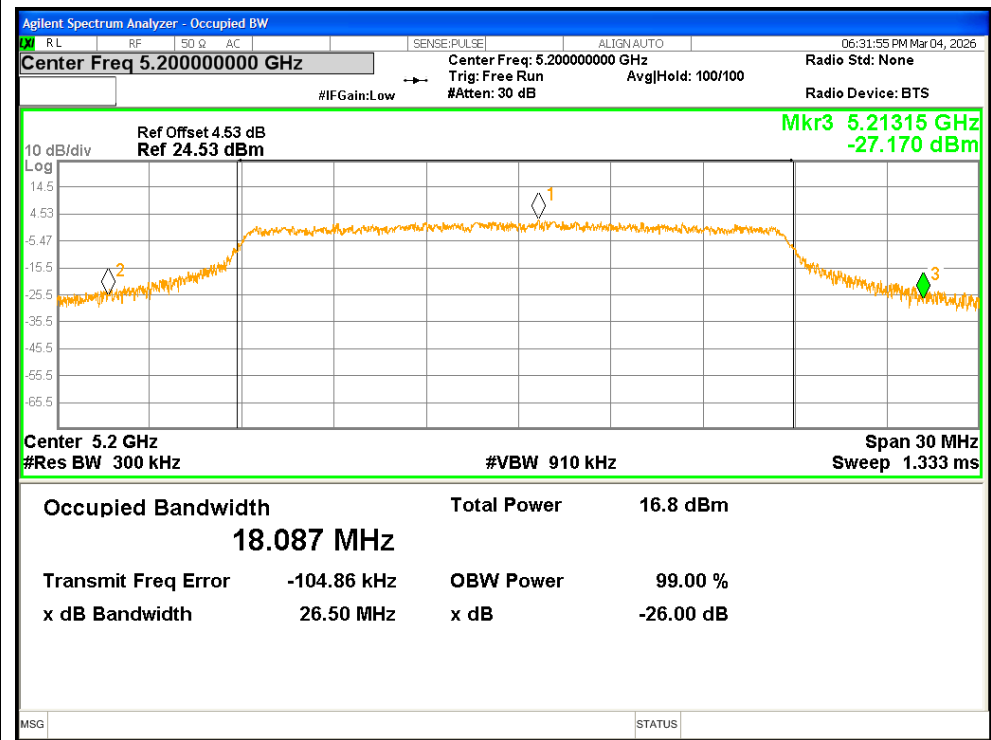


-26dB Bandwidth NVNT n20 5200MHz Ant2

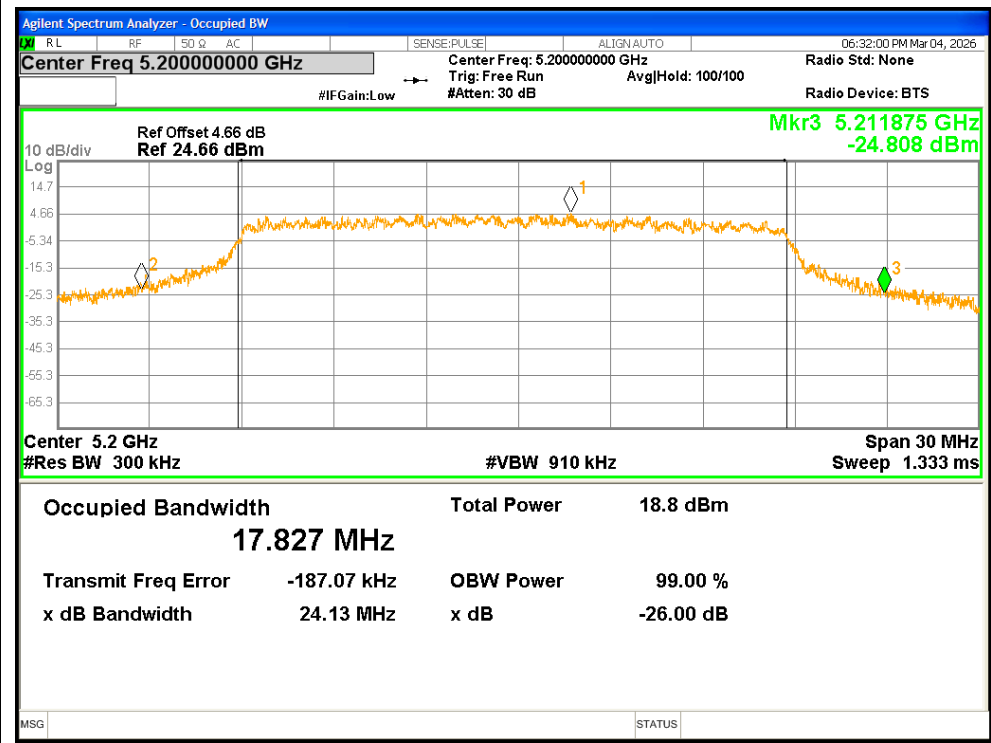


-26dB Bandwidth NVNT n20 5240MHz Ant1

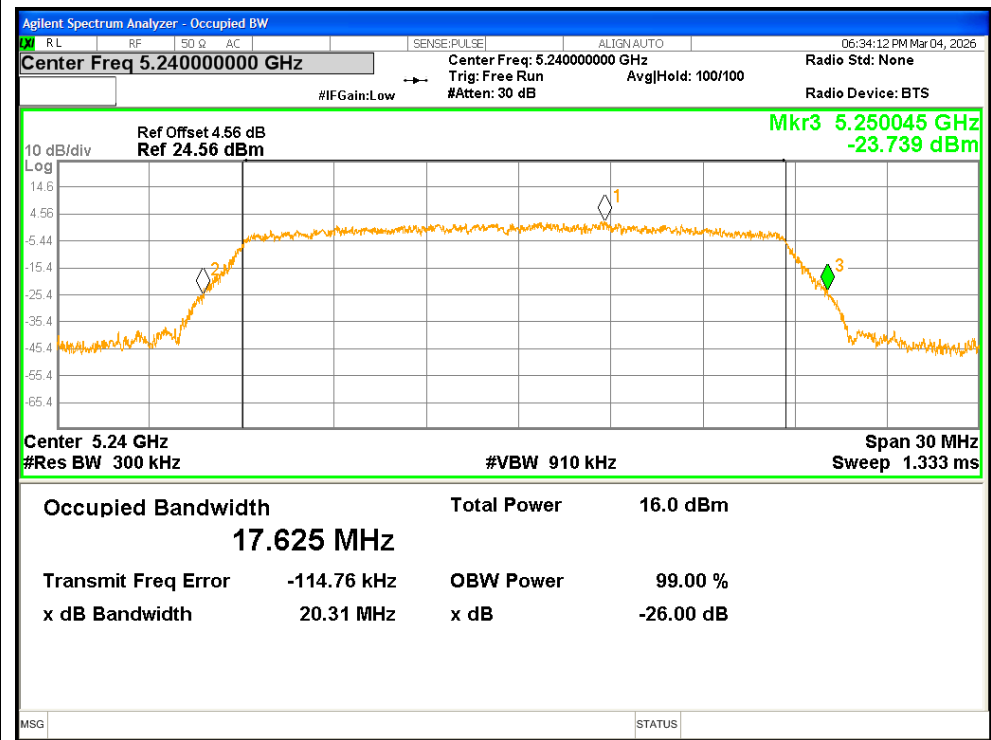


-26dB Bandwidth NVNT n20 5240MHz Ant2

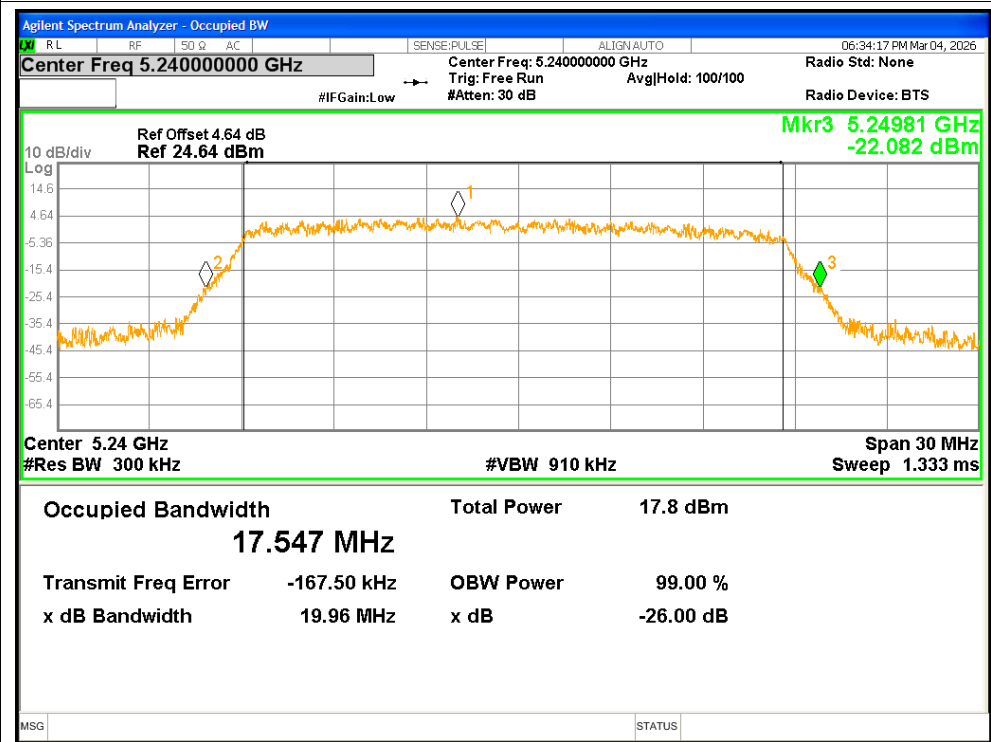


-26dB Bandwidth NVNT n40 5190MHz Ant1

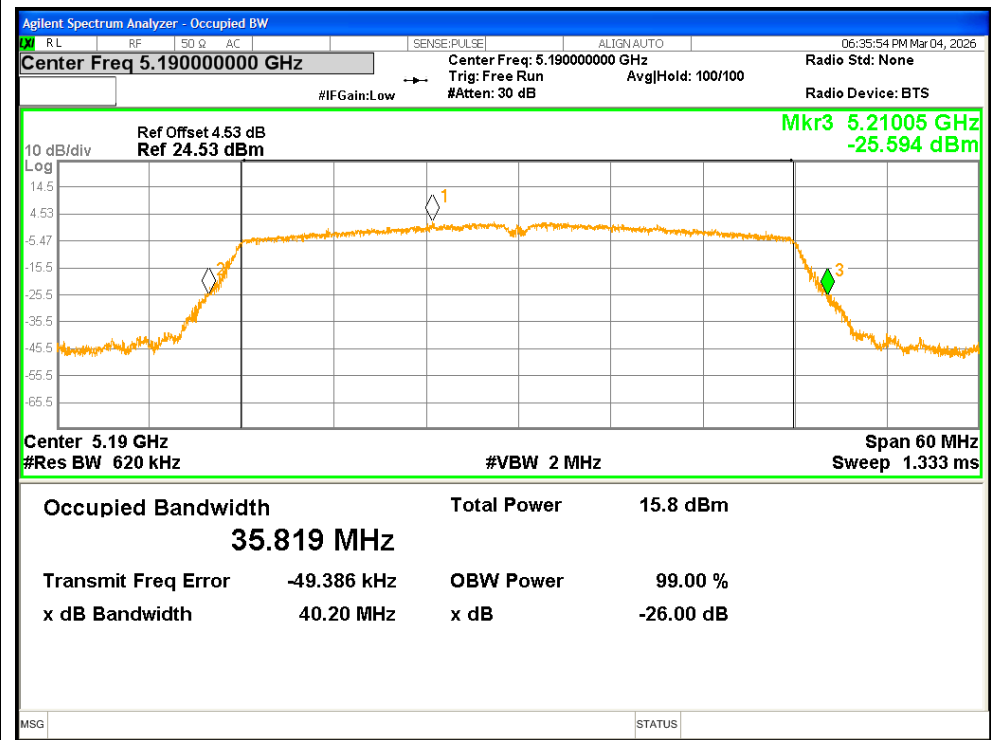


-26dB Bandwidth NVNT n40 5190MHz Ant2

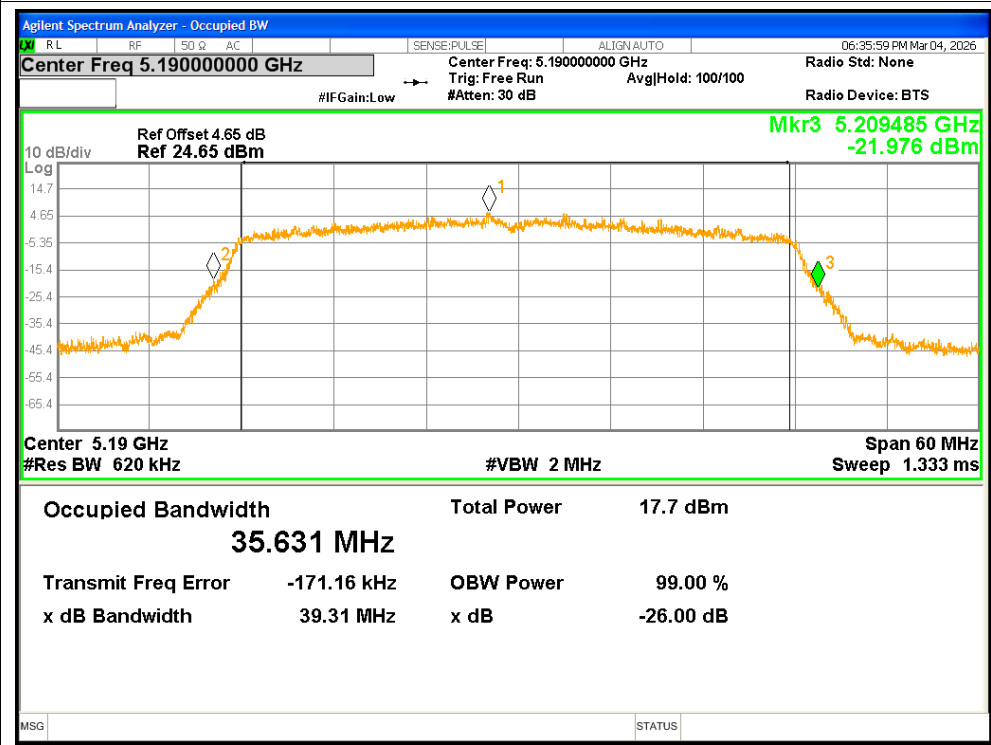


-26dB Bandwidth NVNT n40 5230MHz Ant1

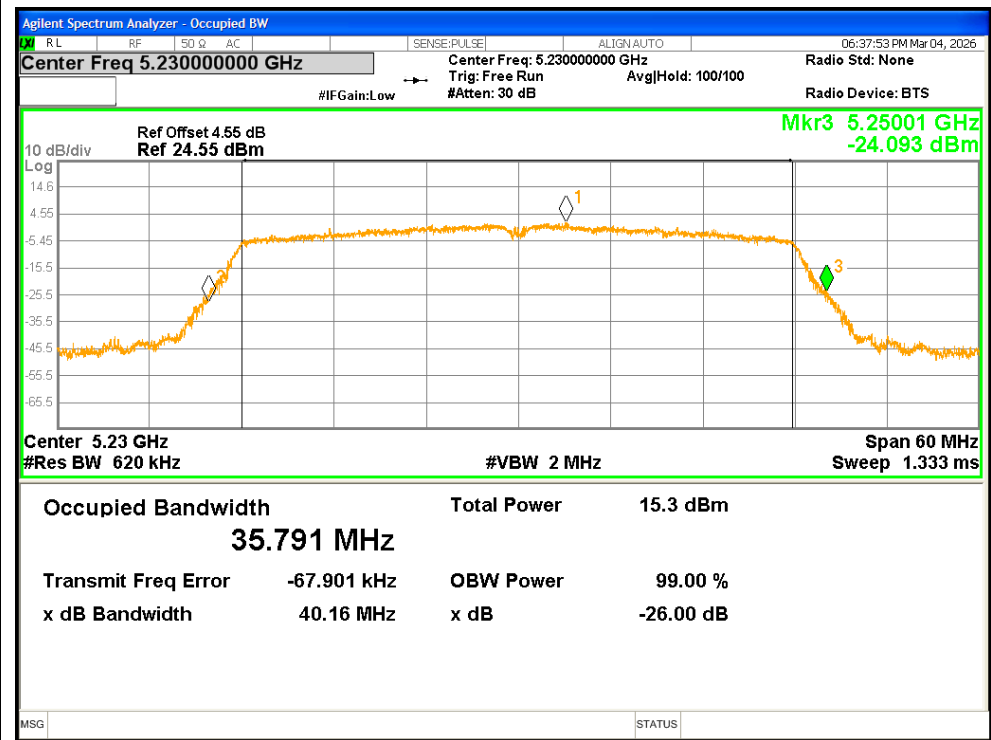


-26dB Bandwidth NVNT n40 5230MHz Ant2

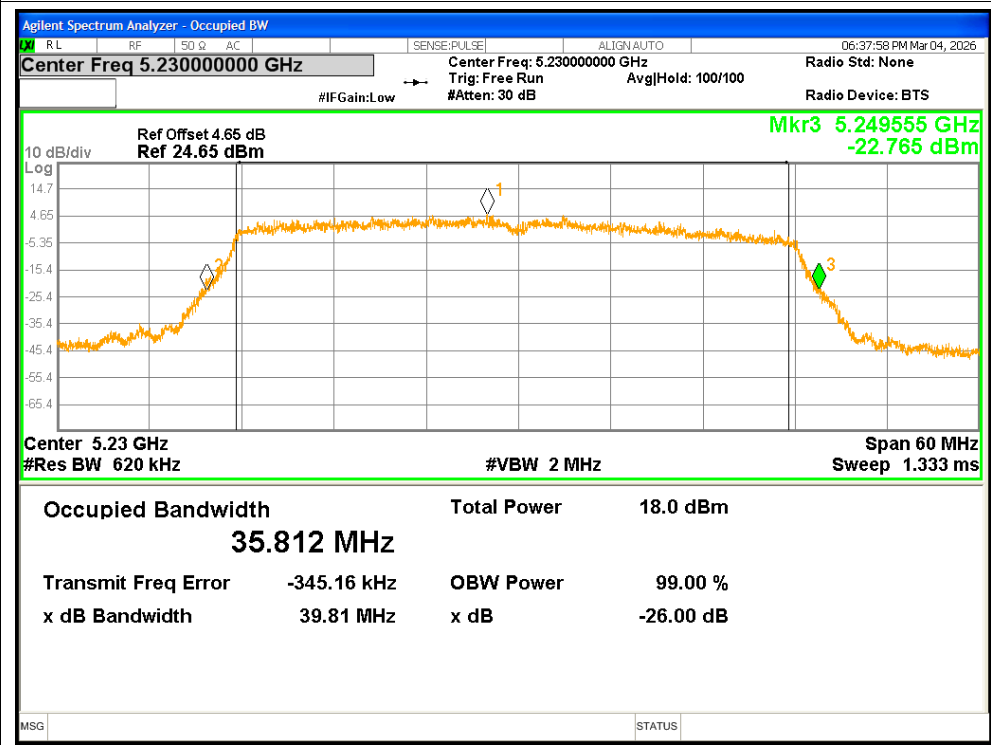


-26dB Bandwidth NVNT ac20 5180MHz Ant1

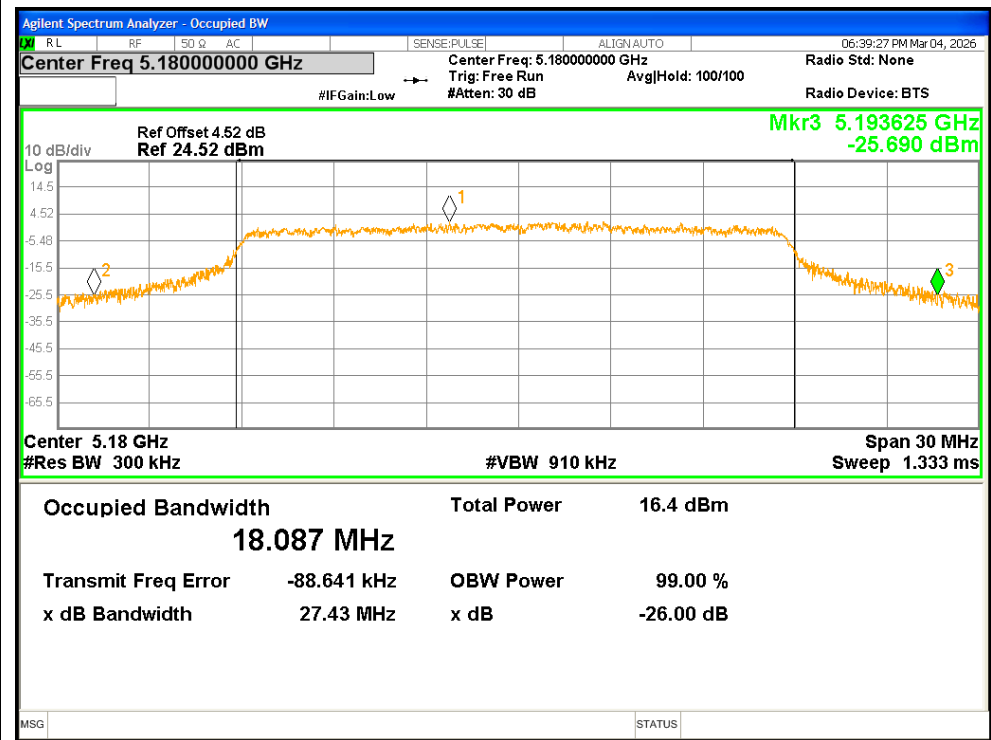


-26dB Bandwidth NVNT ac20 5180MHz Ant2

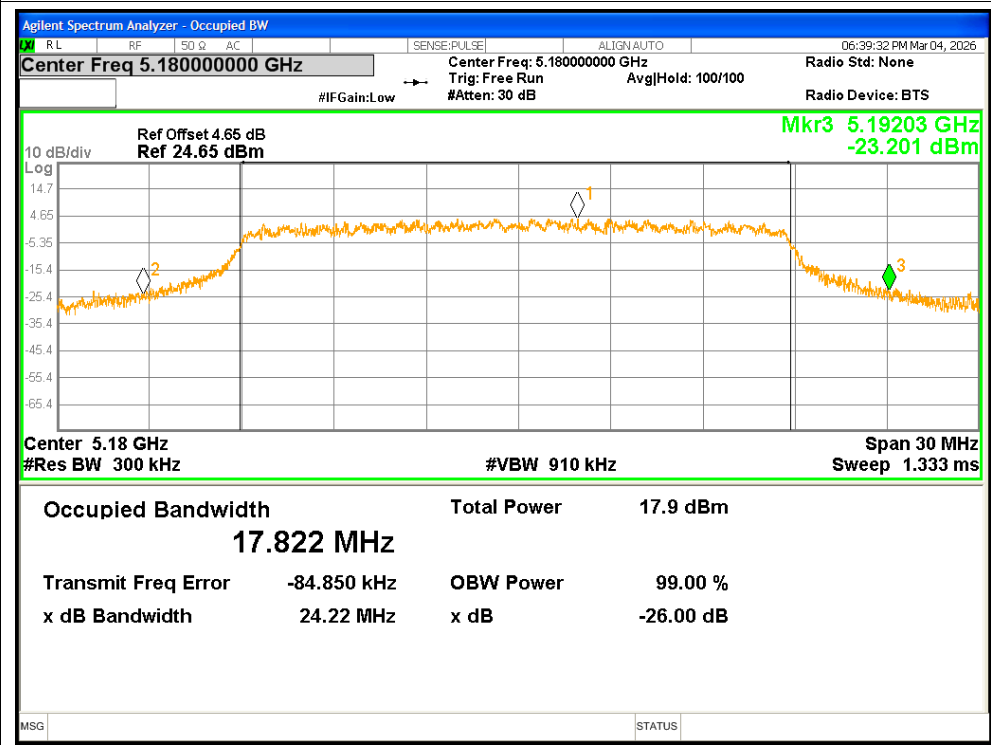


-26dB Bandwidth NVNT ac20 5200MHz Ant1

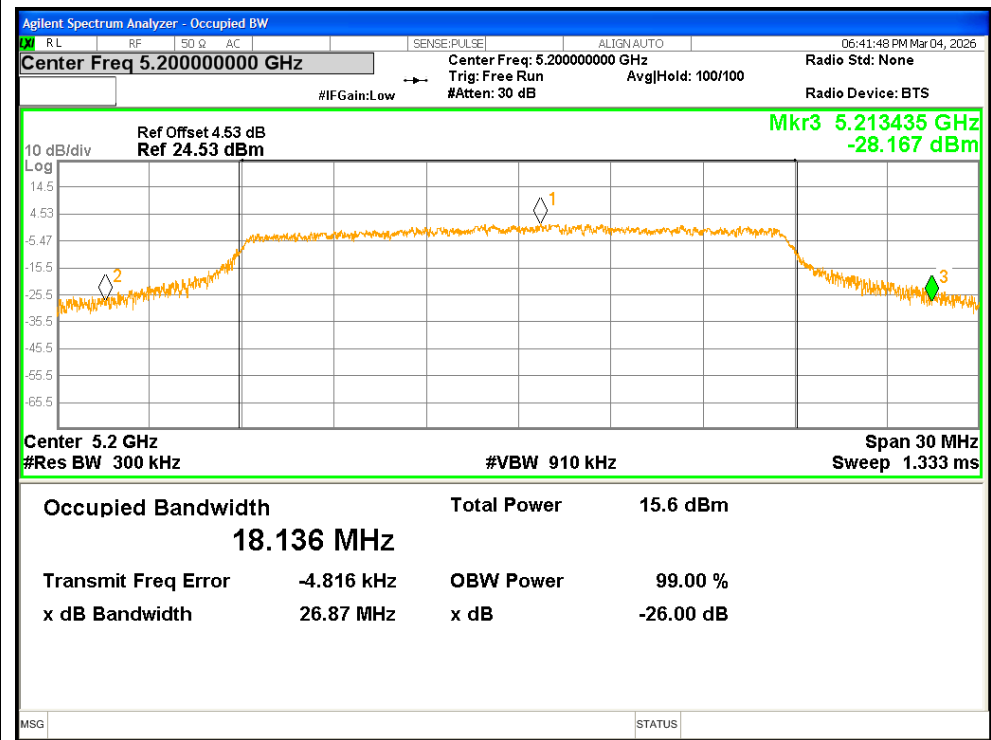


-26dB Bandwidth NVNT ac20 5200MHz Ant2

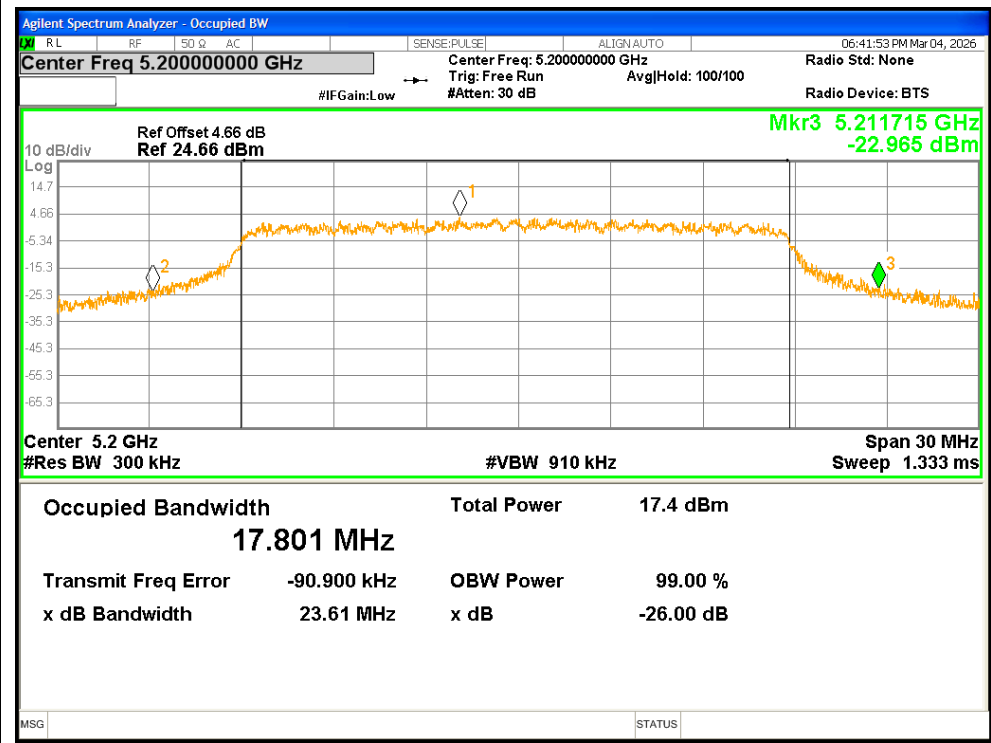


-26dB Bandwidth NVNT ac20 5240MHz Ant1

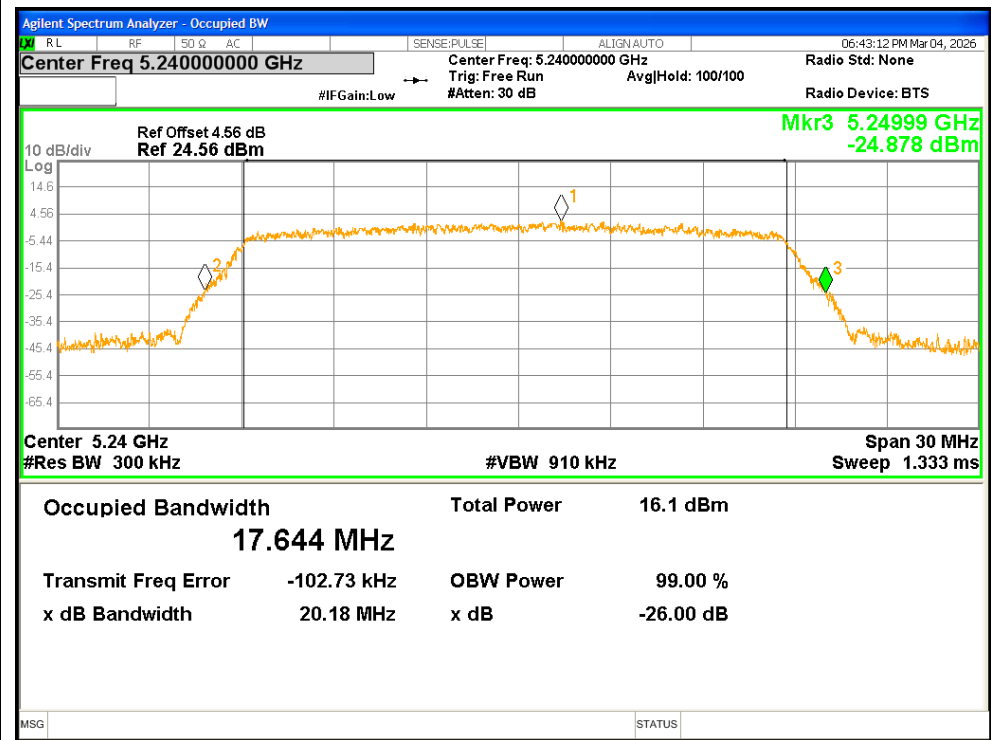


-26dB Bandwidth NVNT ac20 5240MHz Ant2

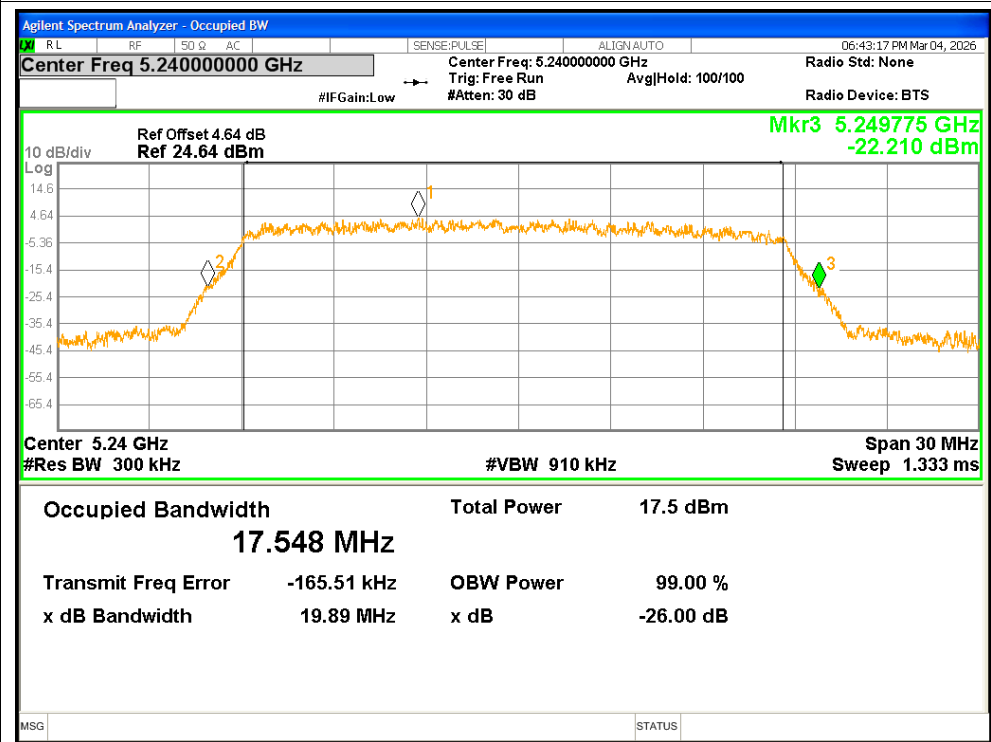


-26dB Bandwidth NVNT ac40 5190MHz Ant1

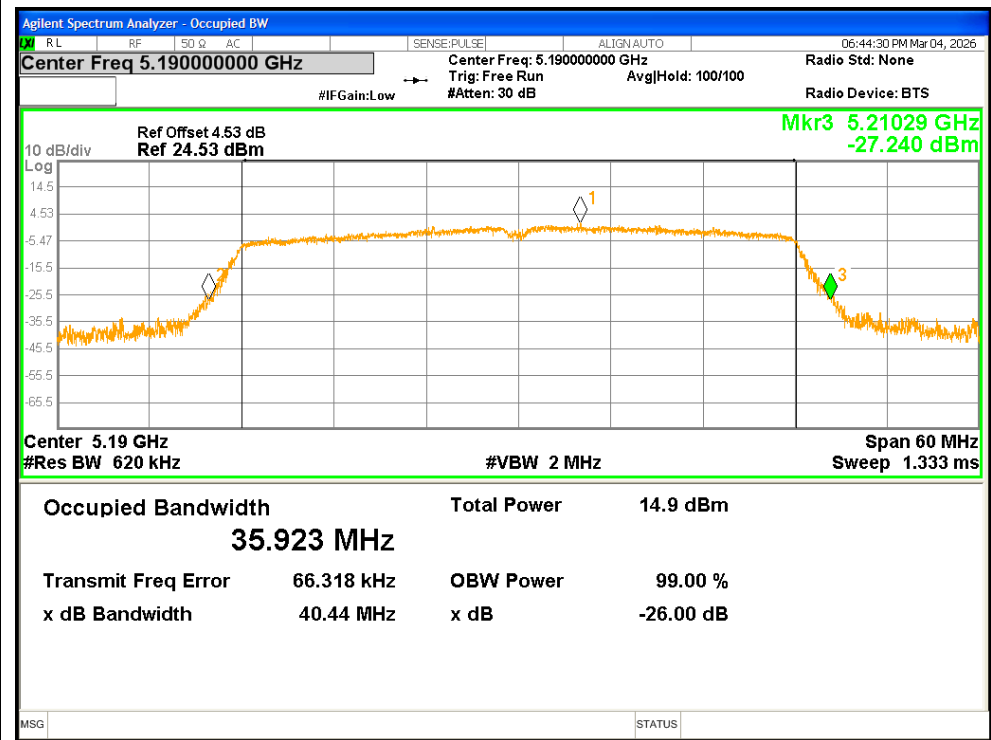


-26dB Bandwidth NVNT ac40 5190MHz Ant2

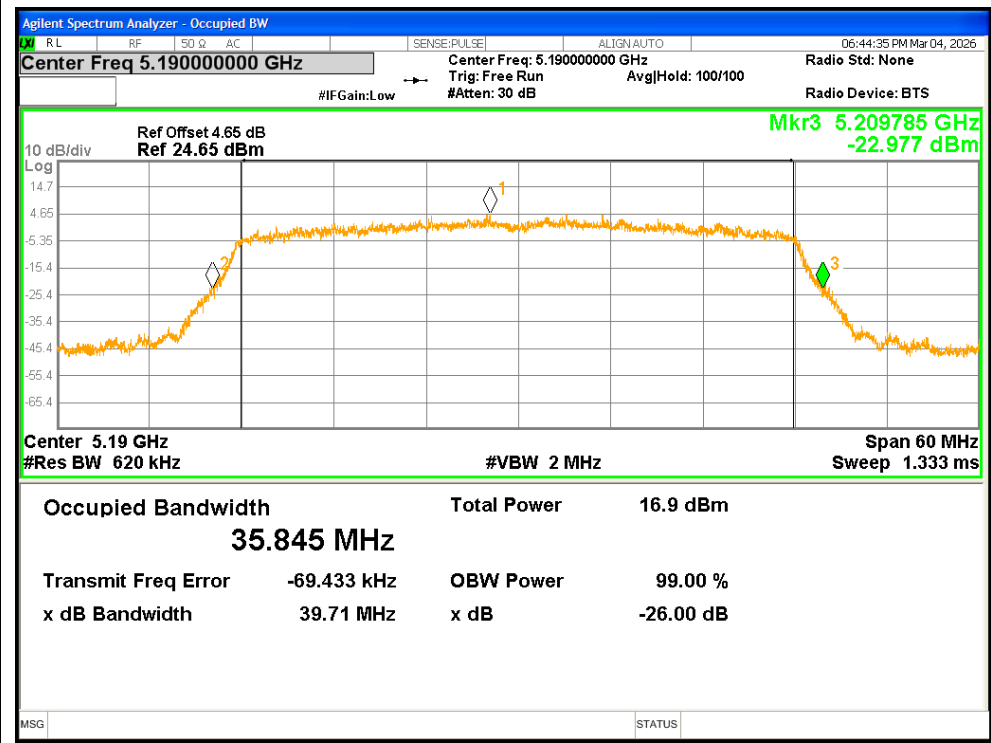


-26dB Bandwidth NVNT ac40 5230MHz Ant1

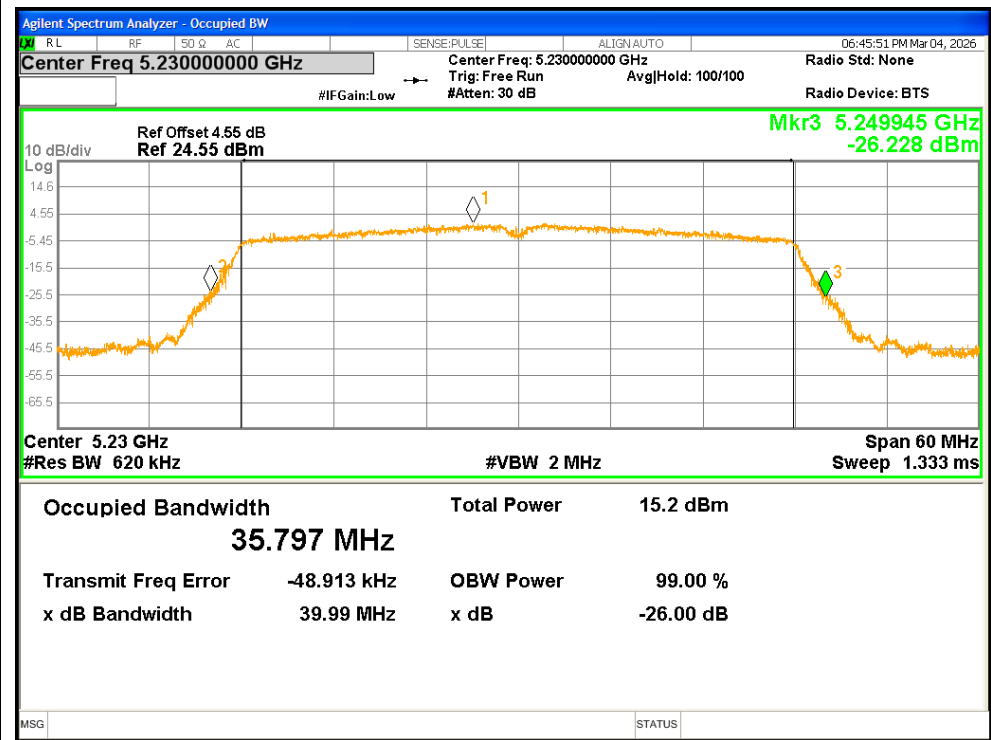


-26dB Bandwidth NVNT ac40 5230MHz Ant2

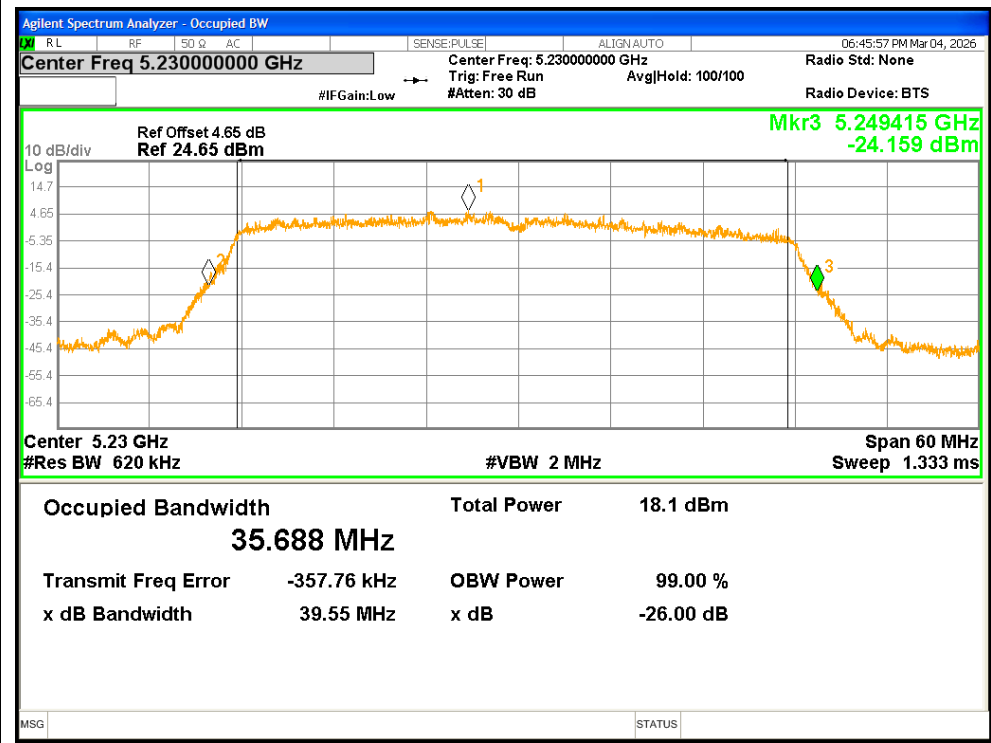


-26dB Bandwidth NVNT ac80 5210MHz Ant1

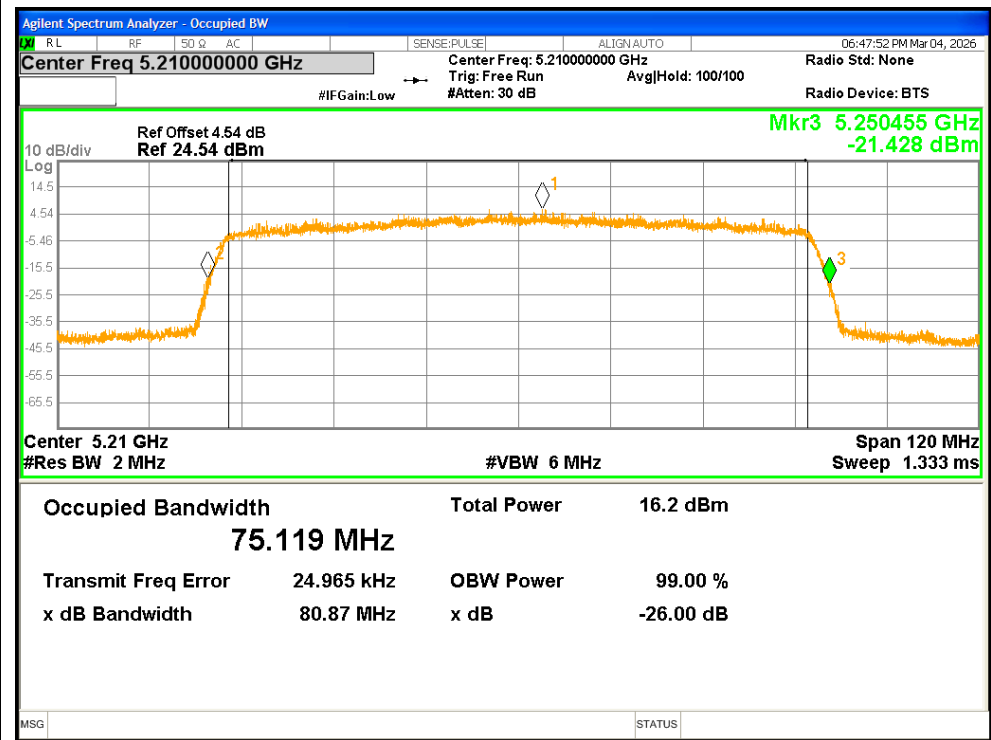


-26dB Bandwidth NVNT ac80 5210MHz Ant2

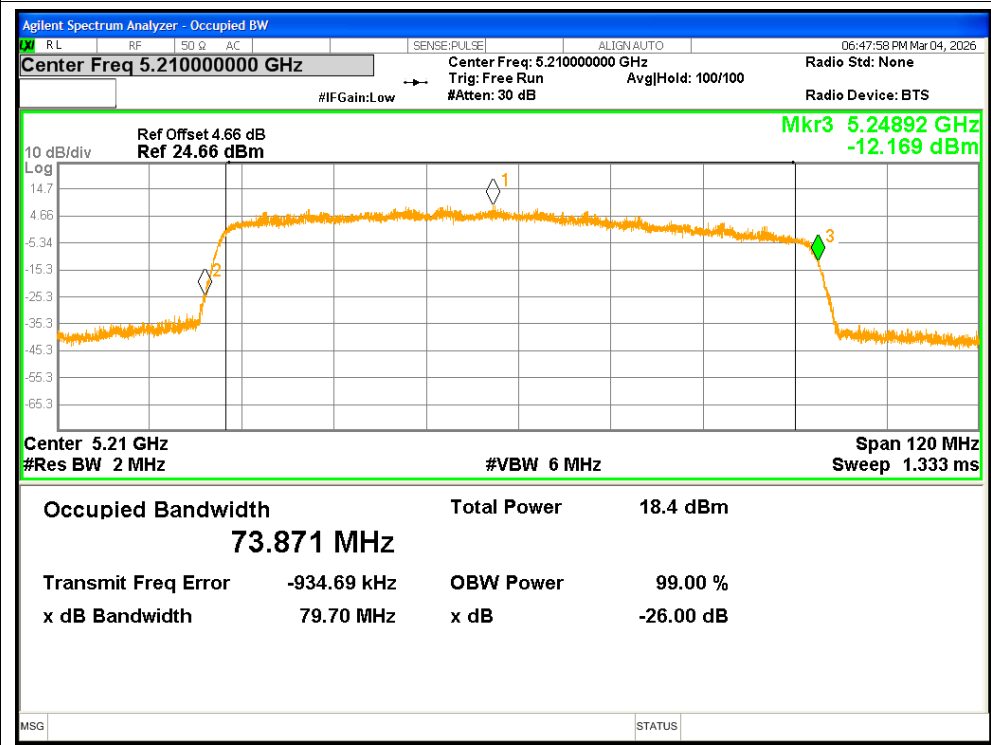


-26dB Bandwidth NVNT ax20 5180MHz Ant1

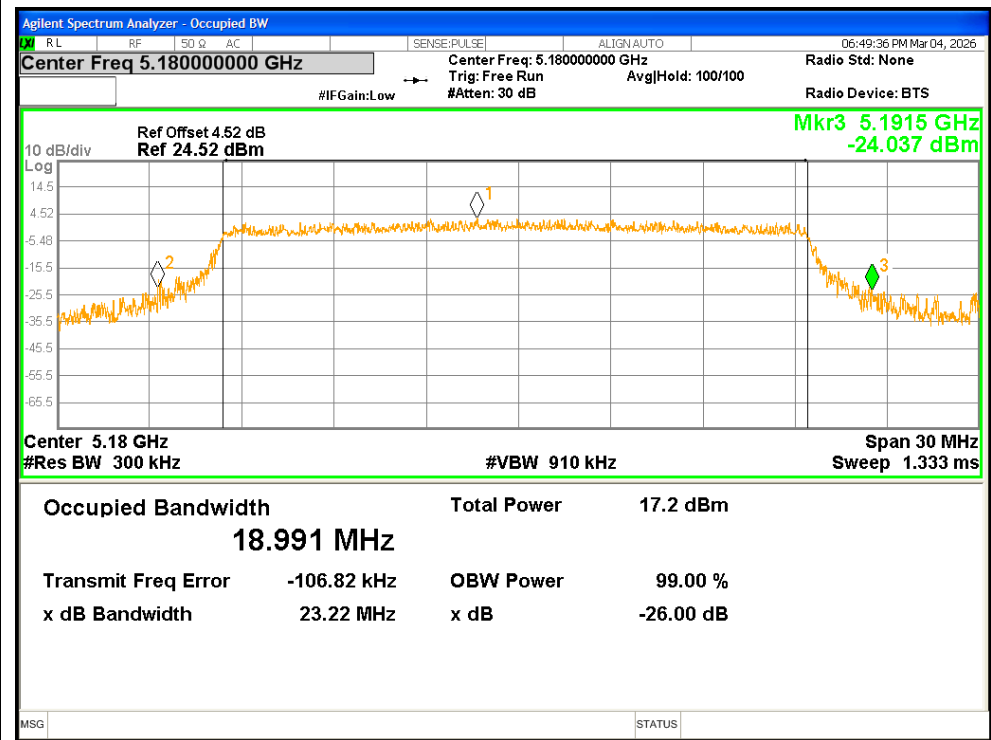


-26dB Bandwidth NVNT ax20 5180MHz Ant2

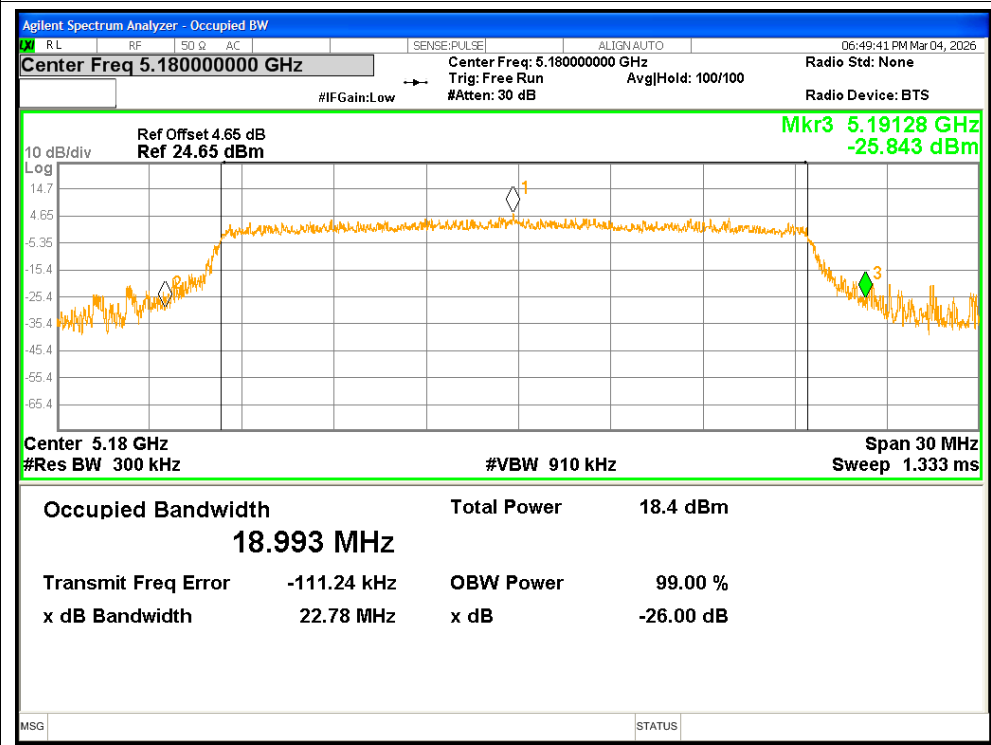


-26dB Bandwidth NVNT ax20 5200MHz Ant1

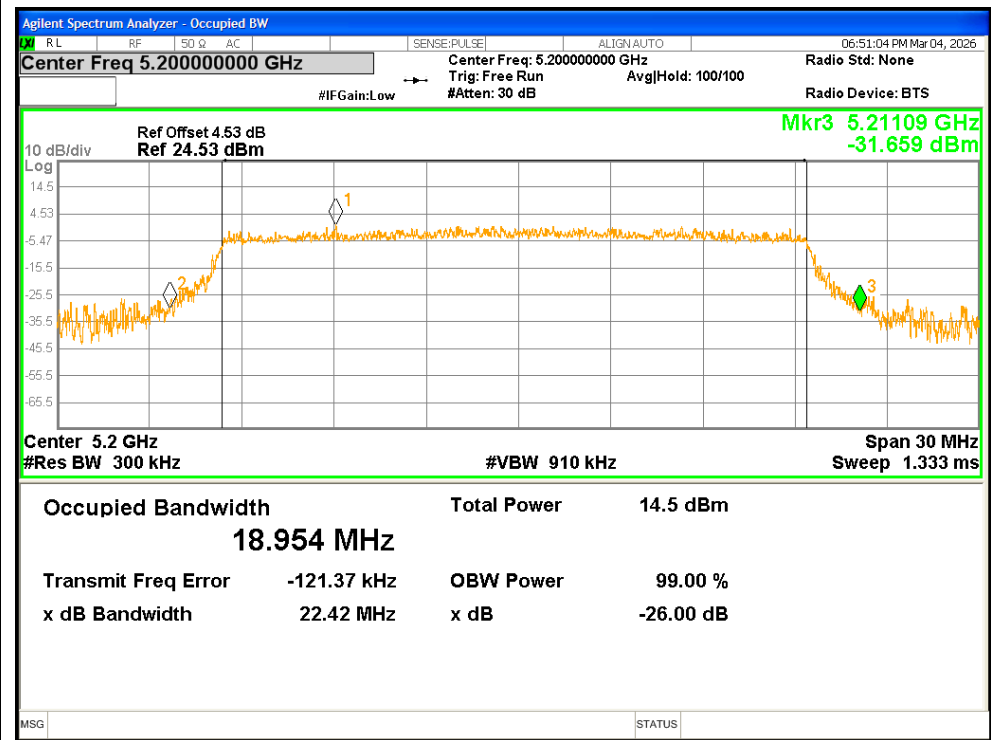


-26dB Bandwidth NVNT ax20 5200MHz Ant2

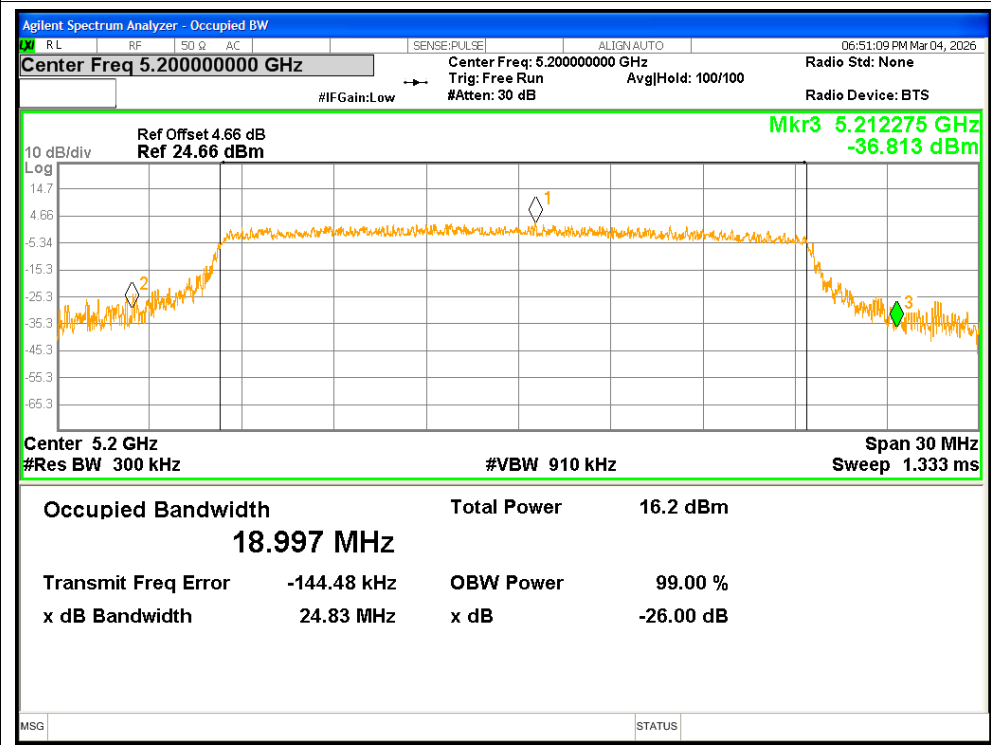


-26dB Bandwidth NVNT ax20 5240MHz Ant1

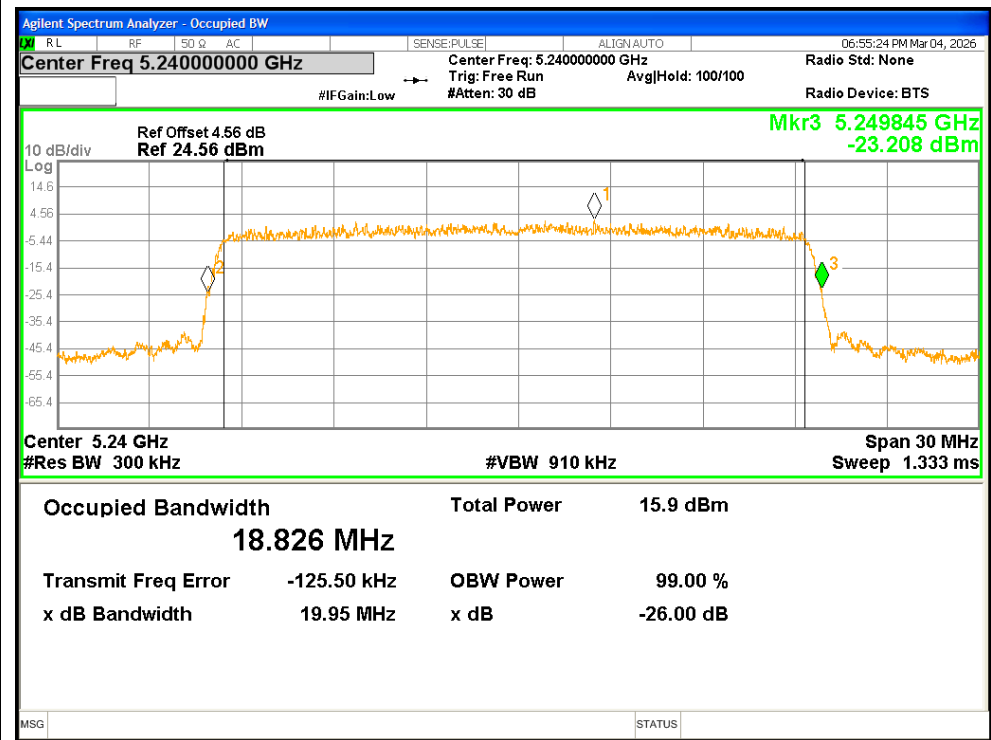


-26dB Bandwidth NVNT ax20 5240MHz Ant2

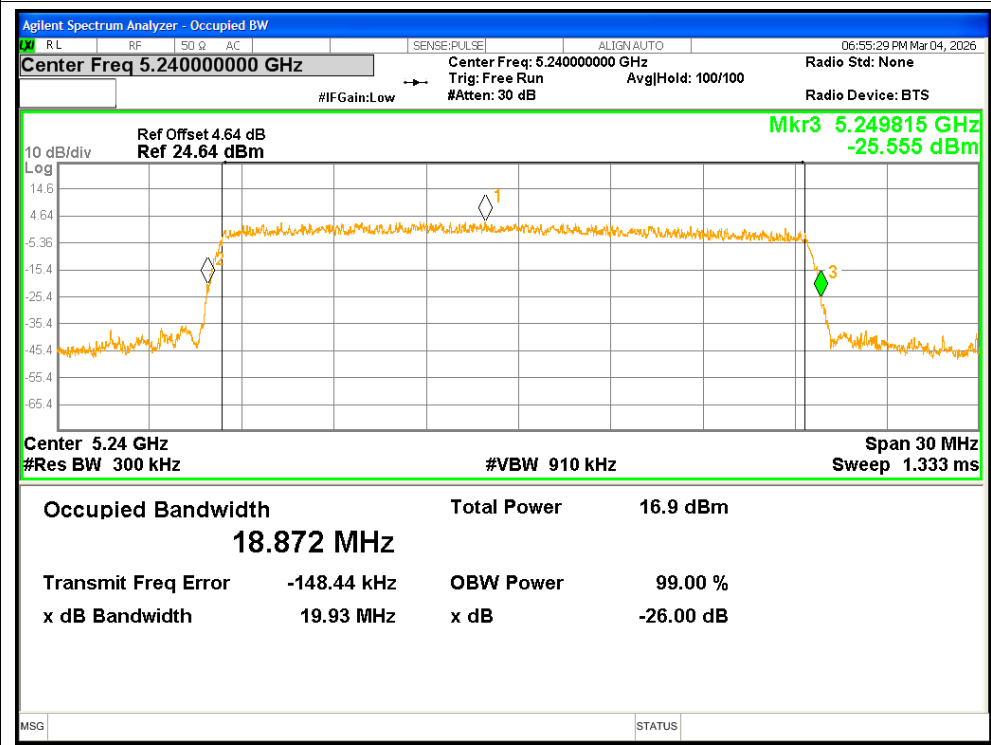


-26dB Bandwidth NVNT ax40 5190MHz Ant1

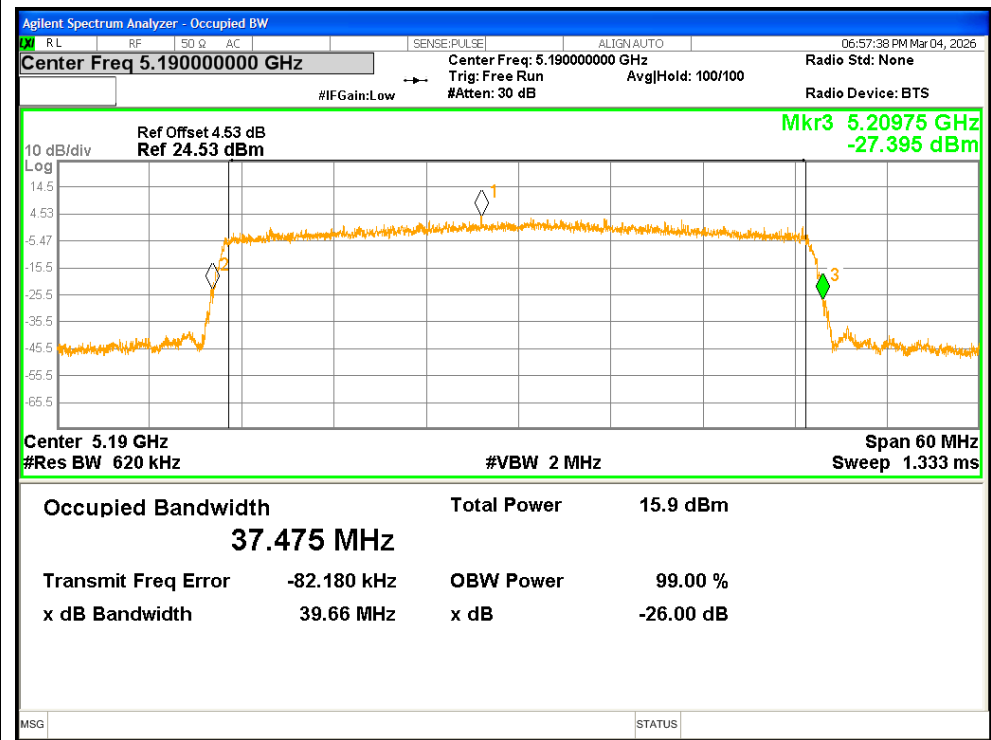


-26dB Bandwidth NVNT ax40 5190MHz Ant2

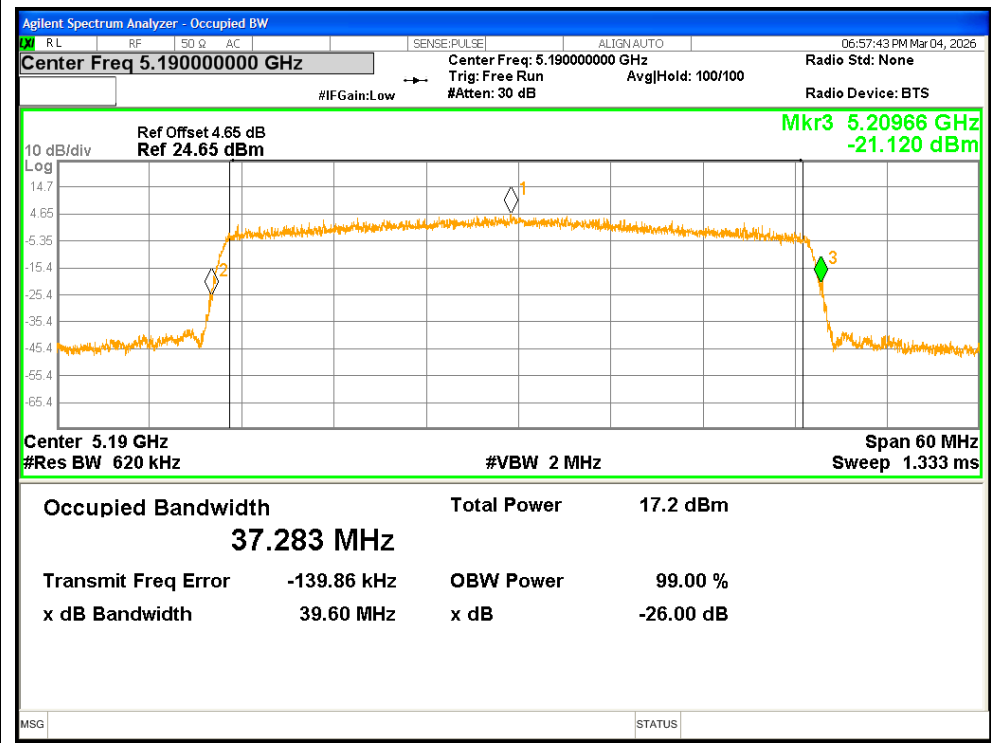


-26dB Bandwidth NVNT ax40 5230MHz Ant1

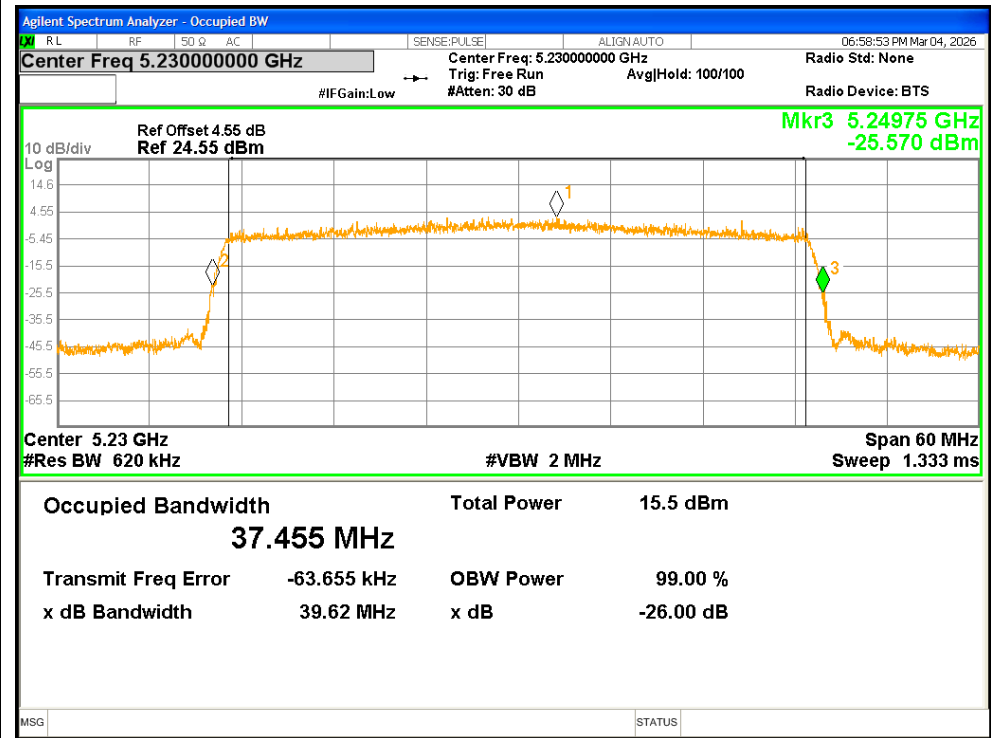


-26dB Bandwidth NVNT ax40 5230MHz Ant2

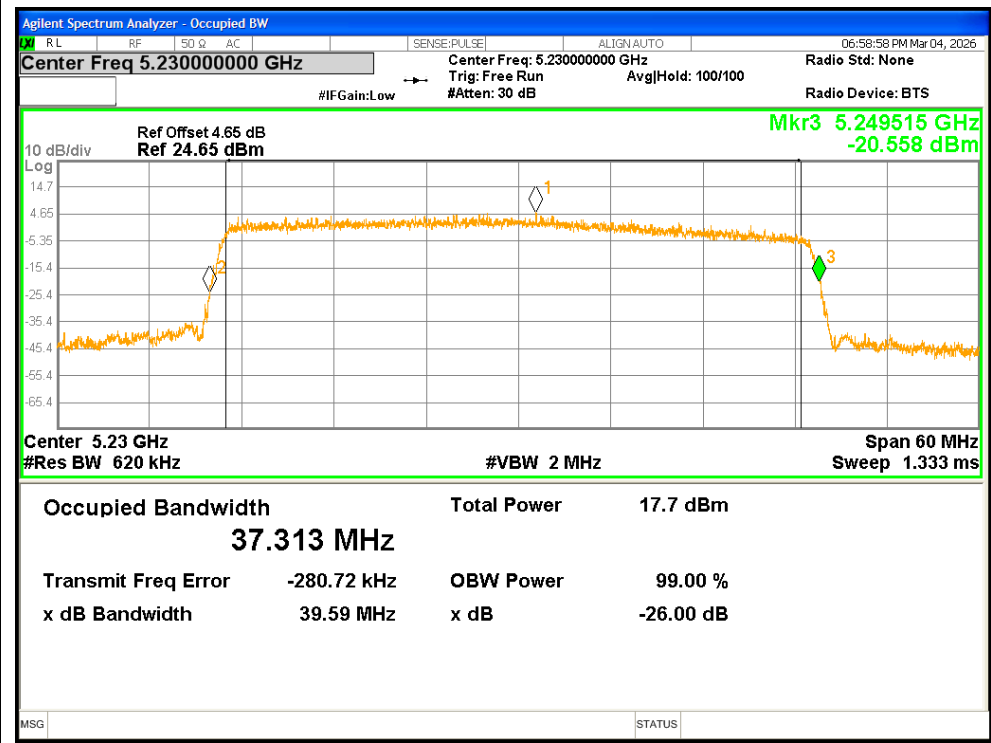

-26dB Bandwidth NVNT ax80 5210MHz Ant1

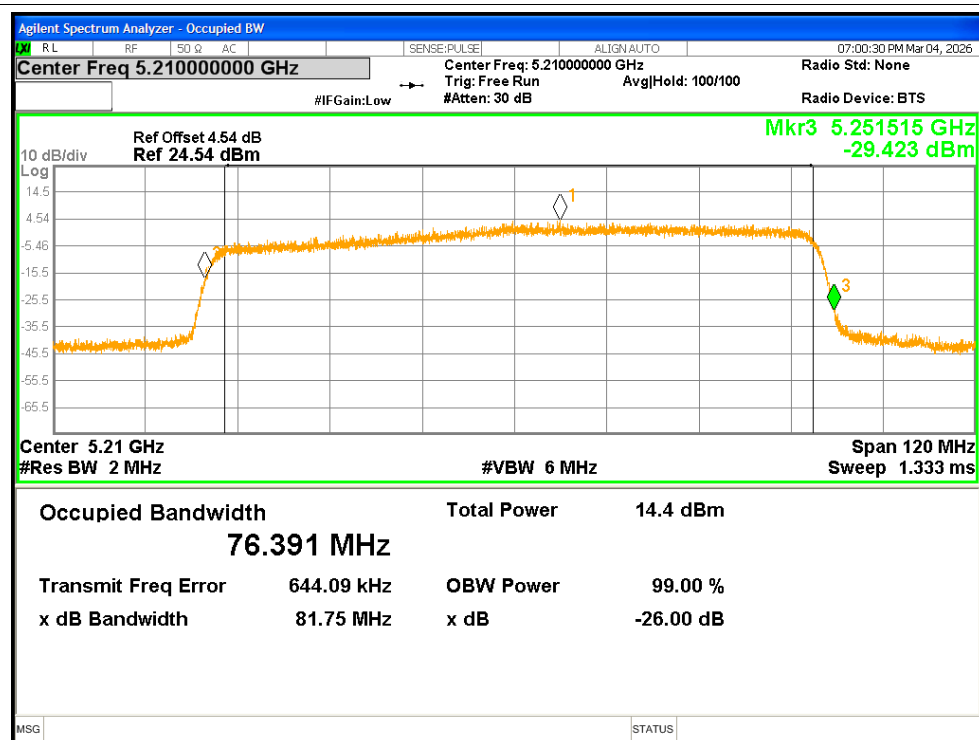


-26dB Bandwidth NVNT ax80 5210MHz Ant2

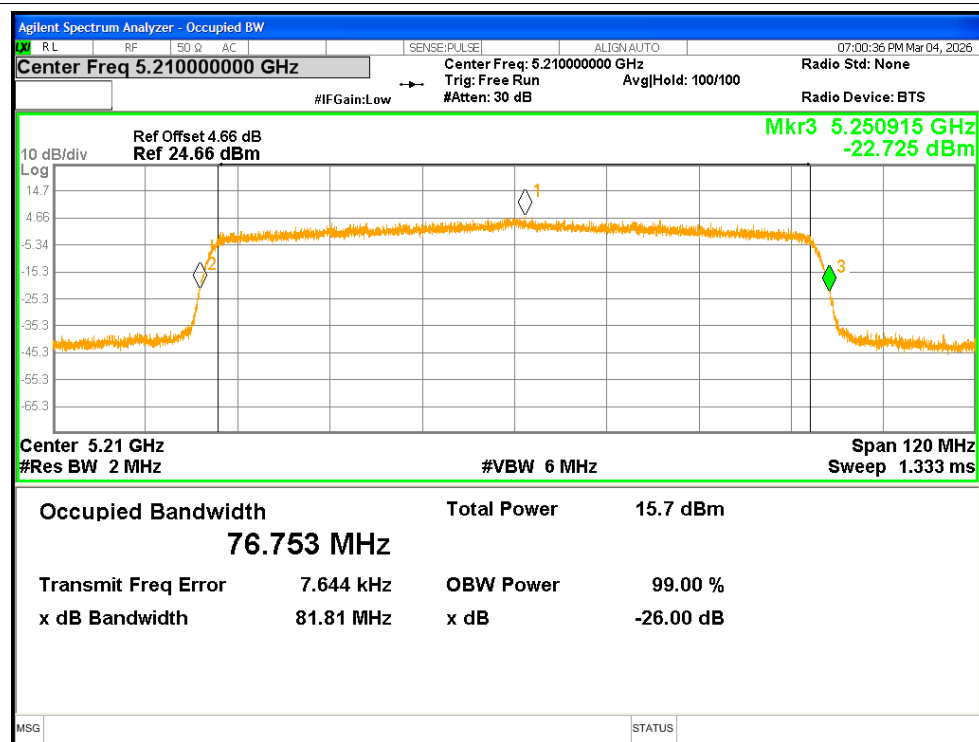


Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5180	Ant1	16.955
NVNT	a	5200	Ant1	16.853
NVNT	a	5240	Ant1	16.418
NVNT	a	5180	Ant2	16.876
NVNT	a	5200	Ant2	16.924
NVNT	a	5240	Ant2	16.46
NVNT	n20	5180	Ant1	17.909
NVNT	n20	5180	Ant2	17.711
NVNT	n20	5200	Ant1	17.842
NVNT	n20	5200	Ant2	17.717
NVNT	n20	5240	Ant1	17.554
NVNT	n20	5240	Ant2	17.512
NVNT	n40	5190	Ant1	35.783
NVNT	n40	5190	Ant2	35.587
NVNT	n40	5230	Ant1	35.785
NVNT	n40	5230	Ant2	35.661
NVNT	ac20	5180	Ant1	17.881
NVNT	ac20	5180	Ant2	17.719
NVNT	ac20	5200	Ant1	17.85
NVNT	ac20	5200	Ant2	17.705
NVNT	ac20	5240	Ant1	17.55
NVNT	ac20	5240	Ant2	17.504
NVNT	ac40	5190	Ant1	35.828
NVNT	ac40	5190	Ant2	35.804
NVNT	ac40	5230	Ant1	35.811
NVNT	ac40	5230	Ant2	35.7
NVNT	ac80	5210	Ant1	75.071
NVNT	ac80	5210	Ant2	73.971
NVNT	ax20	5180	Ant1	19.009
NVNT	ax20	5180	Ant2	18.932
NVNT	ax20	5200	Ant1	18.931
NVNT	ax20	5200	Ant2	18.939
NVNT	ax20	5240	Ant1	18.798
NVNT	ax20	5240	Ant2	18.829
NVNT	ax40	5190	Ant1	37.436
NVNT	ax40	5190	Ant2	37.345
NVNT	ax40	5230	Ant1	37.473
NVNT	ax40	5230	Ant2	37.327
NVNT	ax80	5210	Ant1	76.282
NVNT	ax80	5210	Ant2	76.489


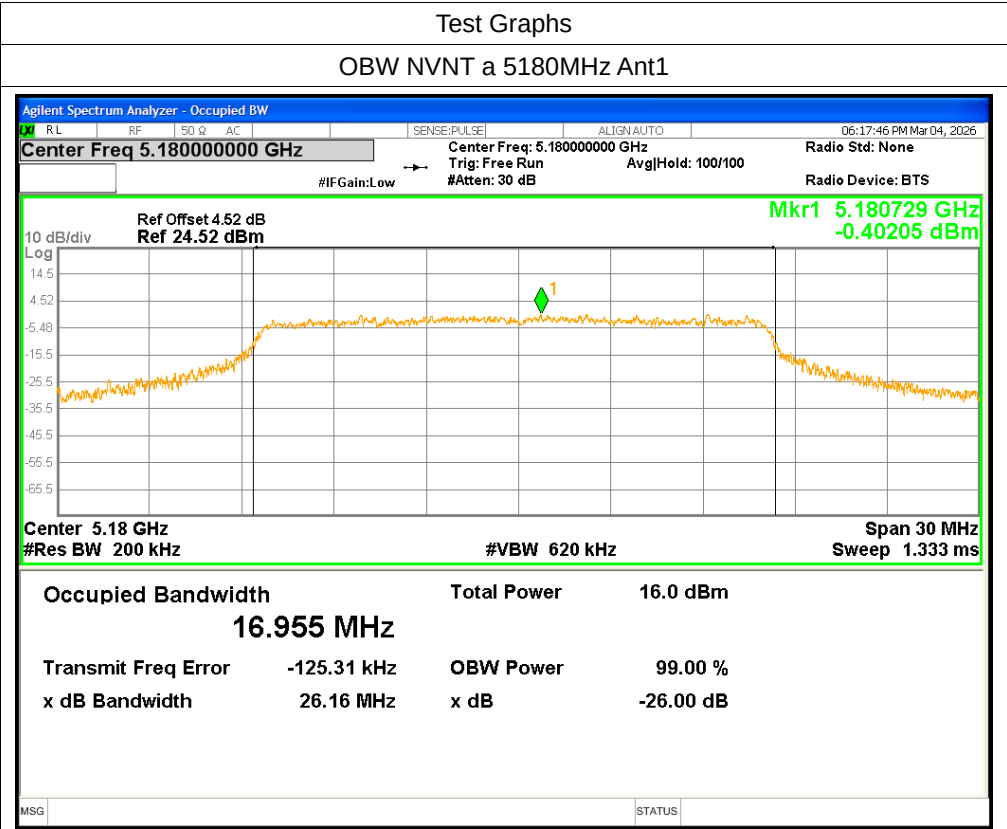




OBW NVNT a 5240MHz Ant1


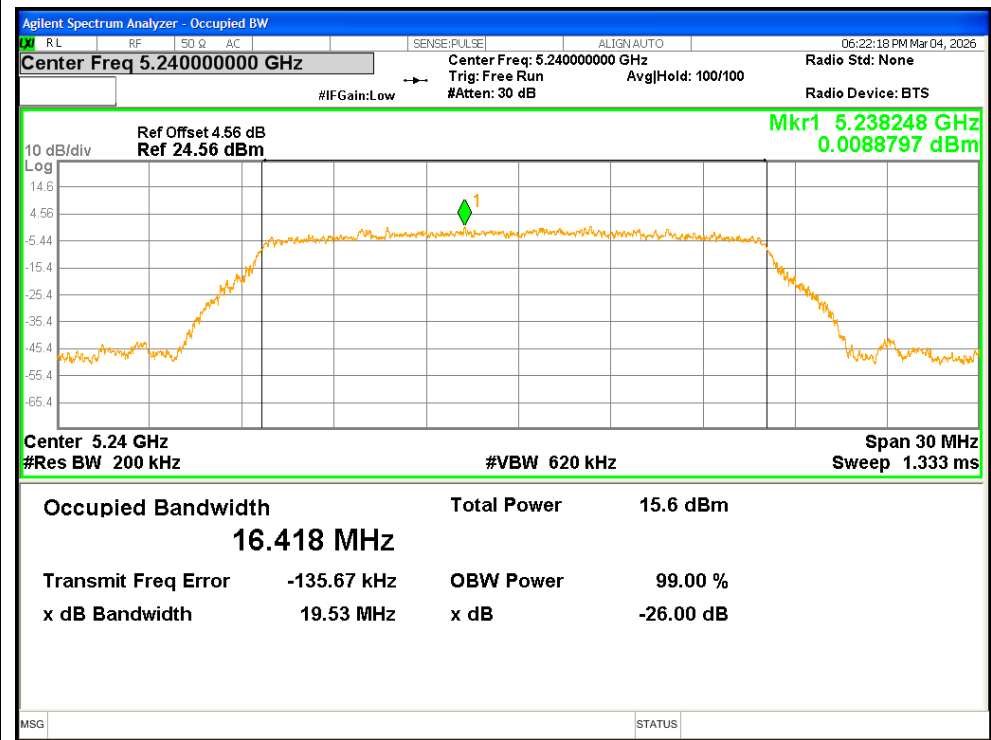


OBW NVNT a 5180MHz Ant2

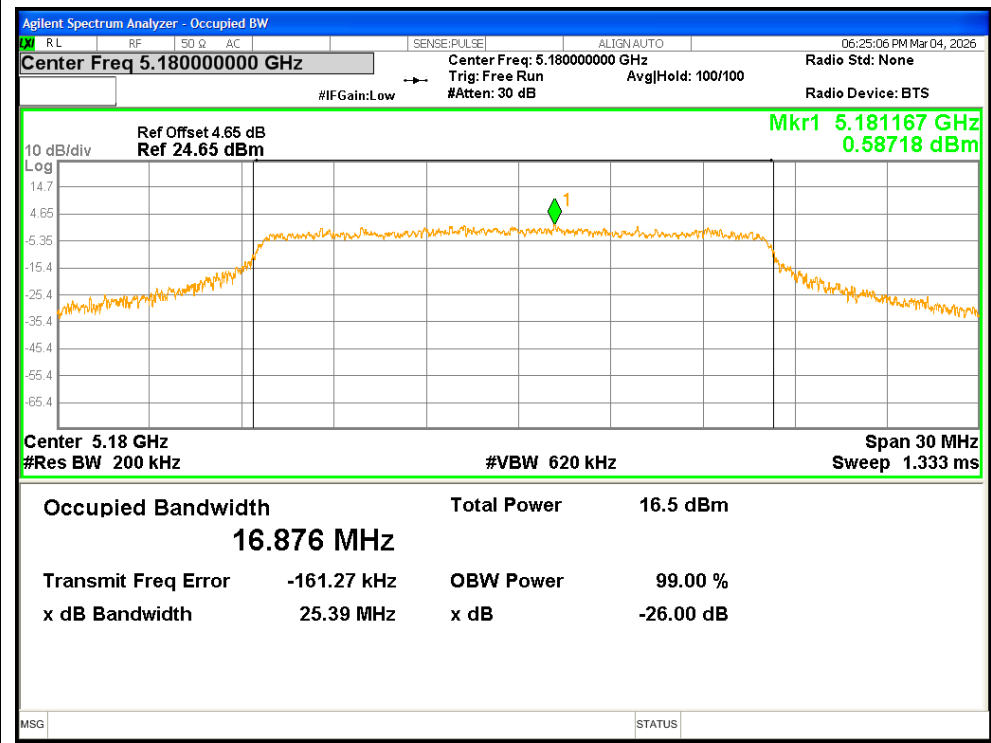


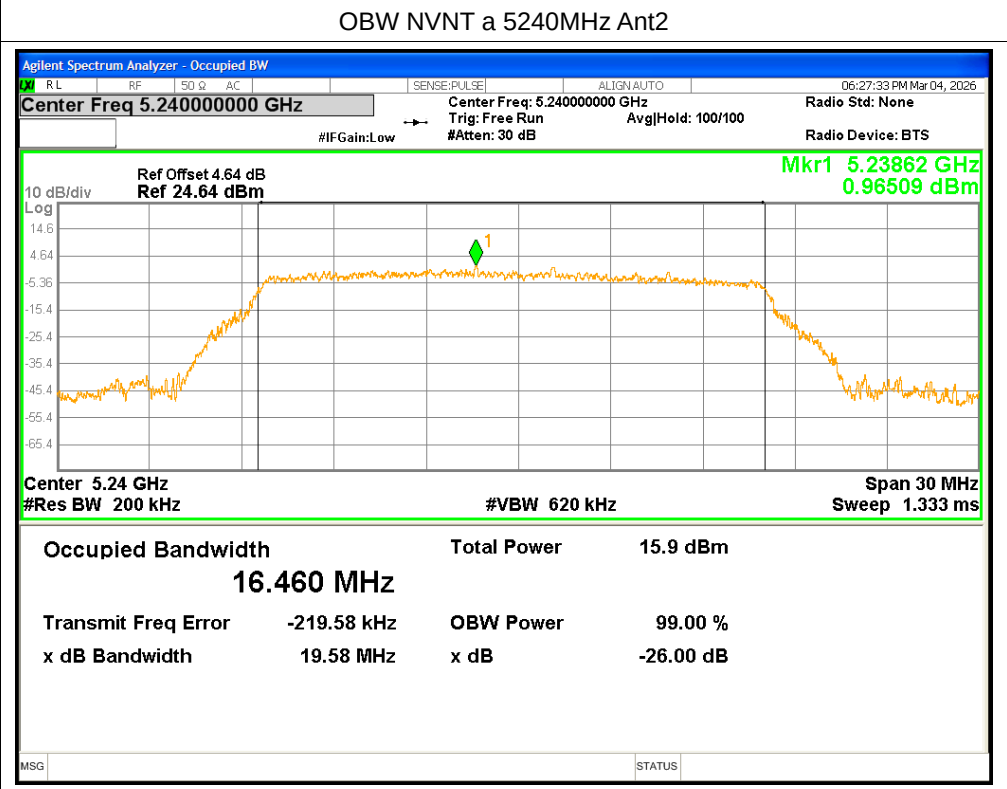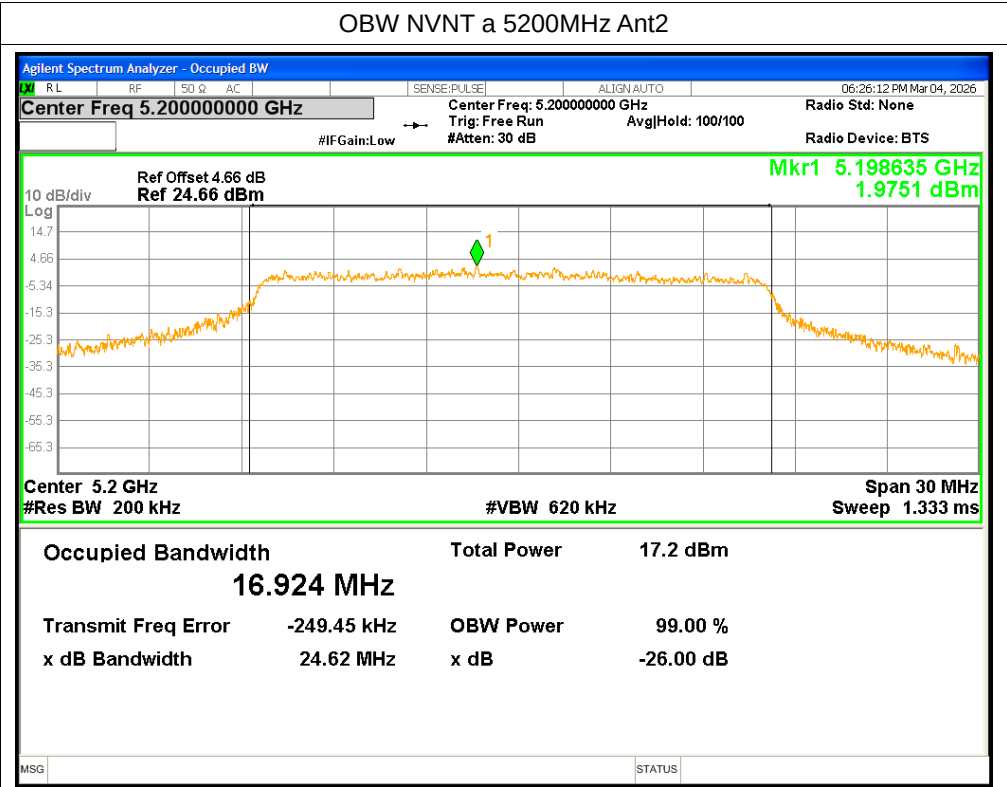

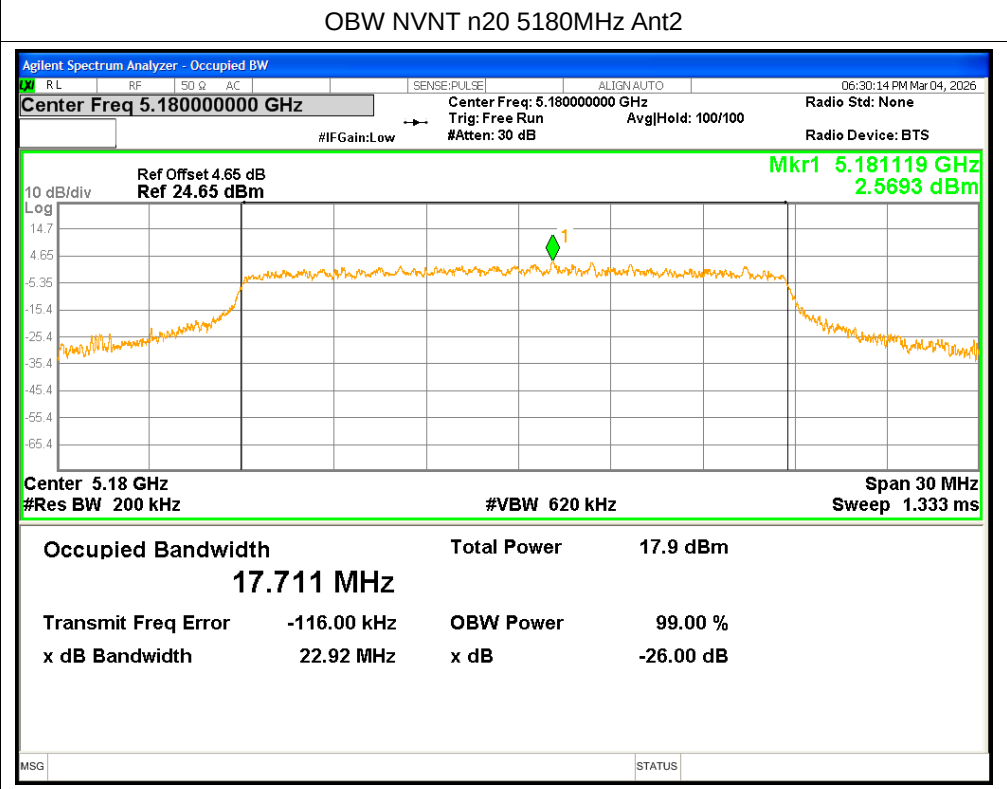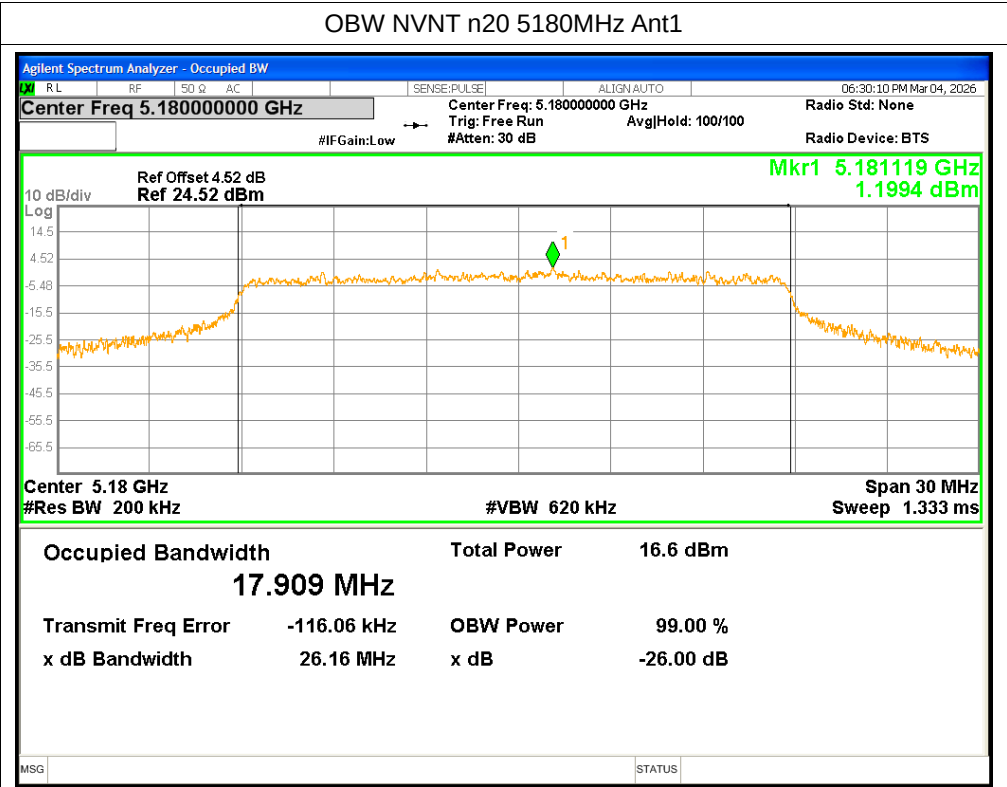


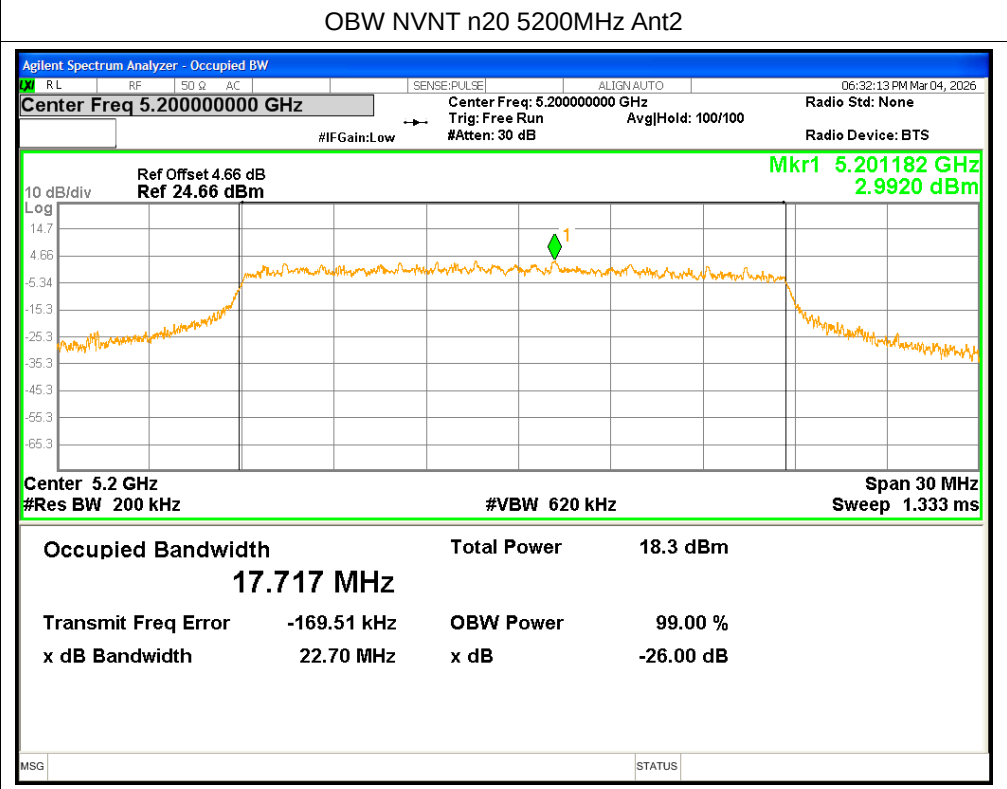
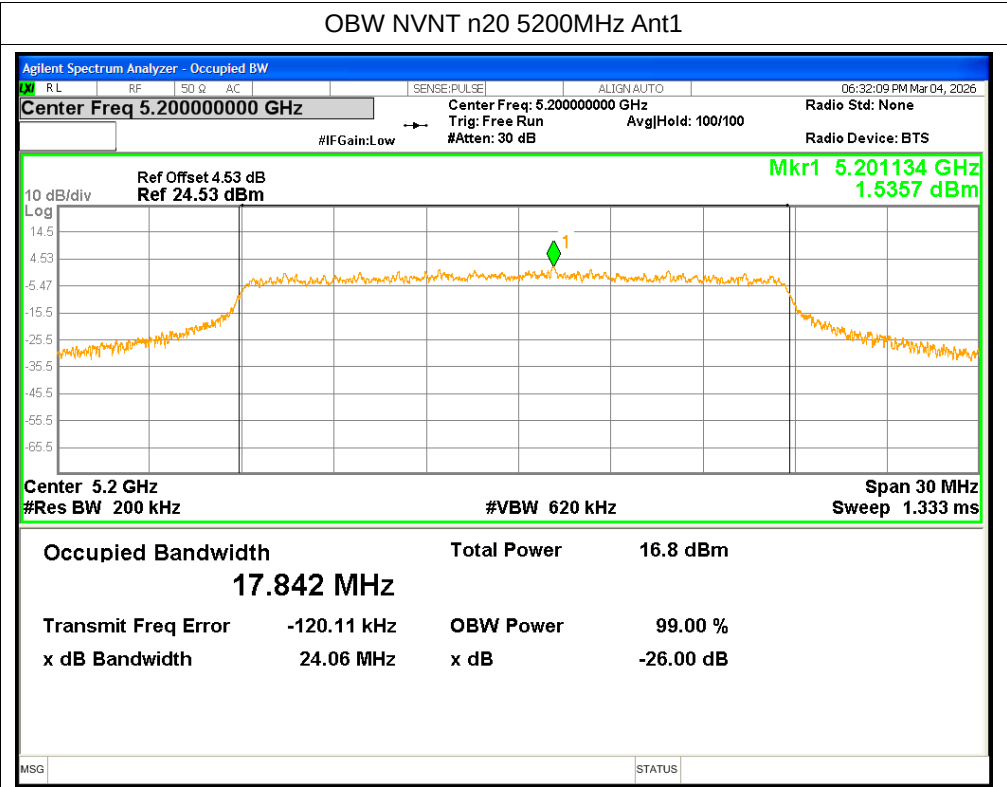




OBW NVNT n20 5240MHz Ant1

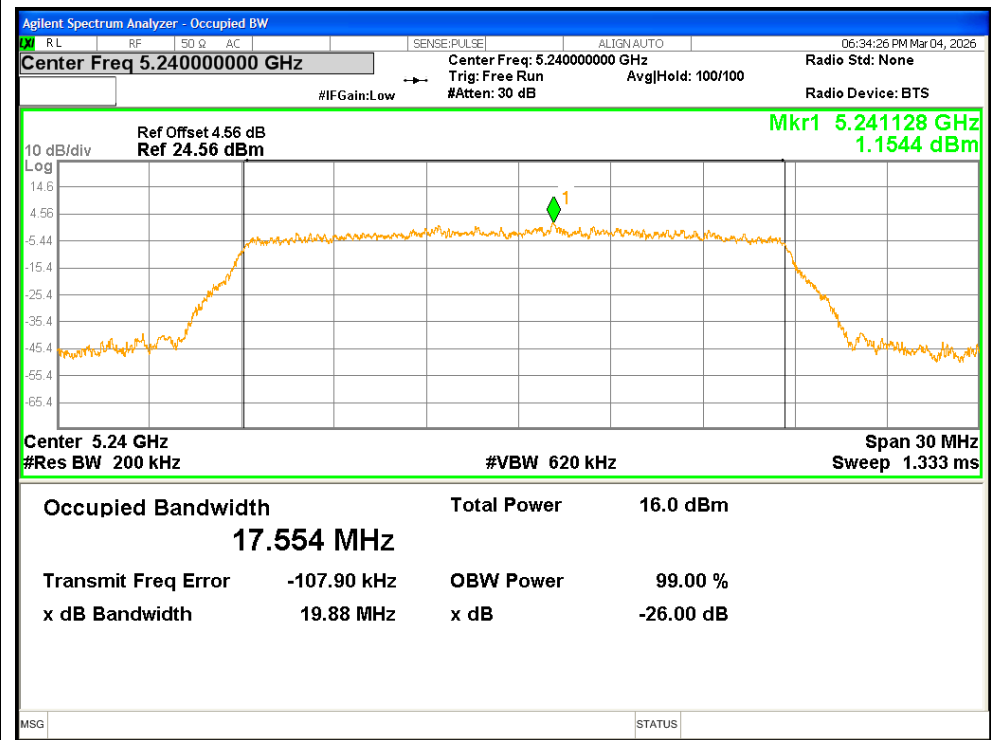


OBW NVNT n20 5240MHz Ant2

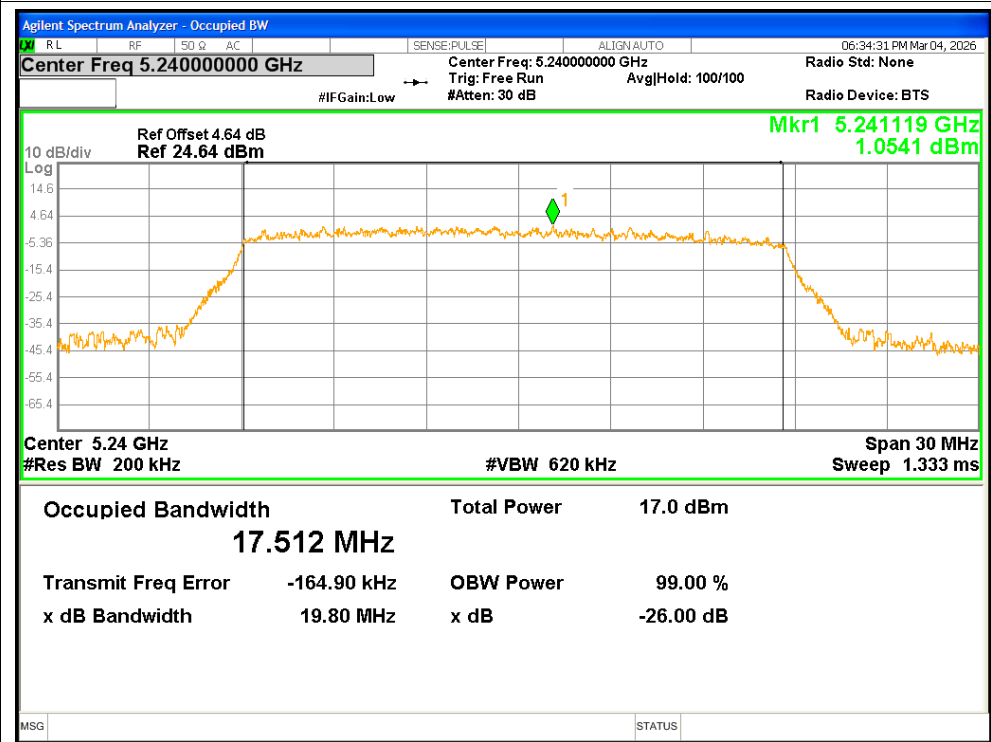

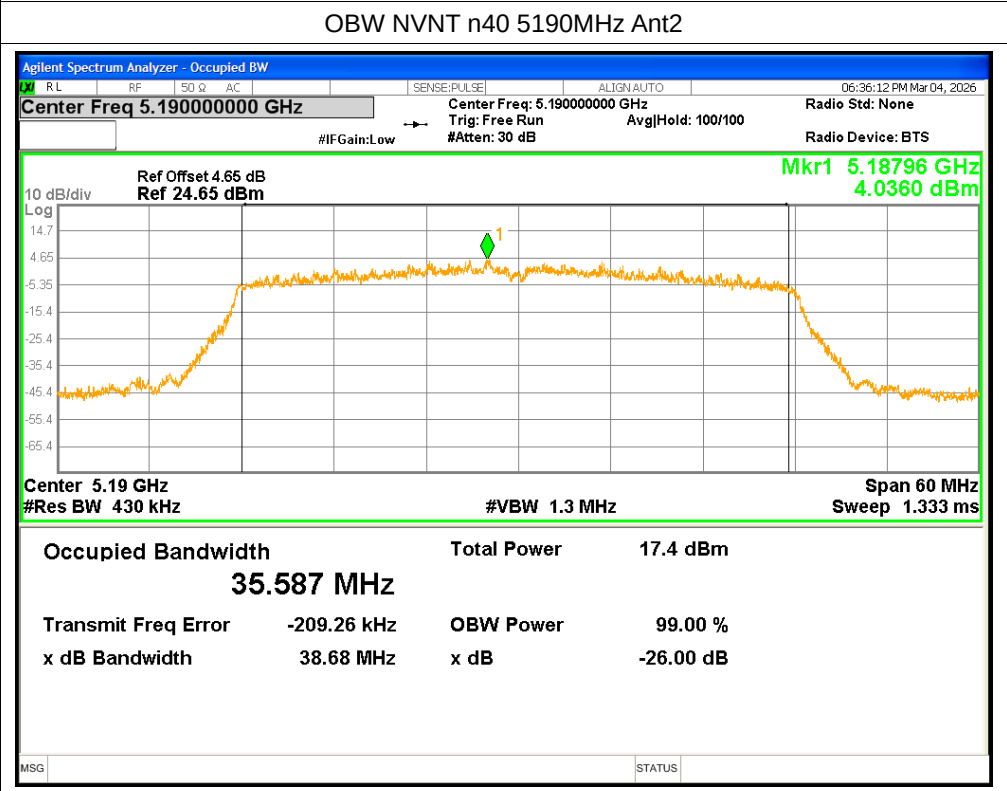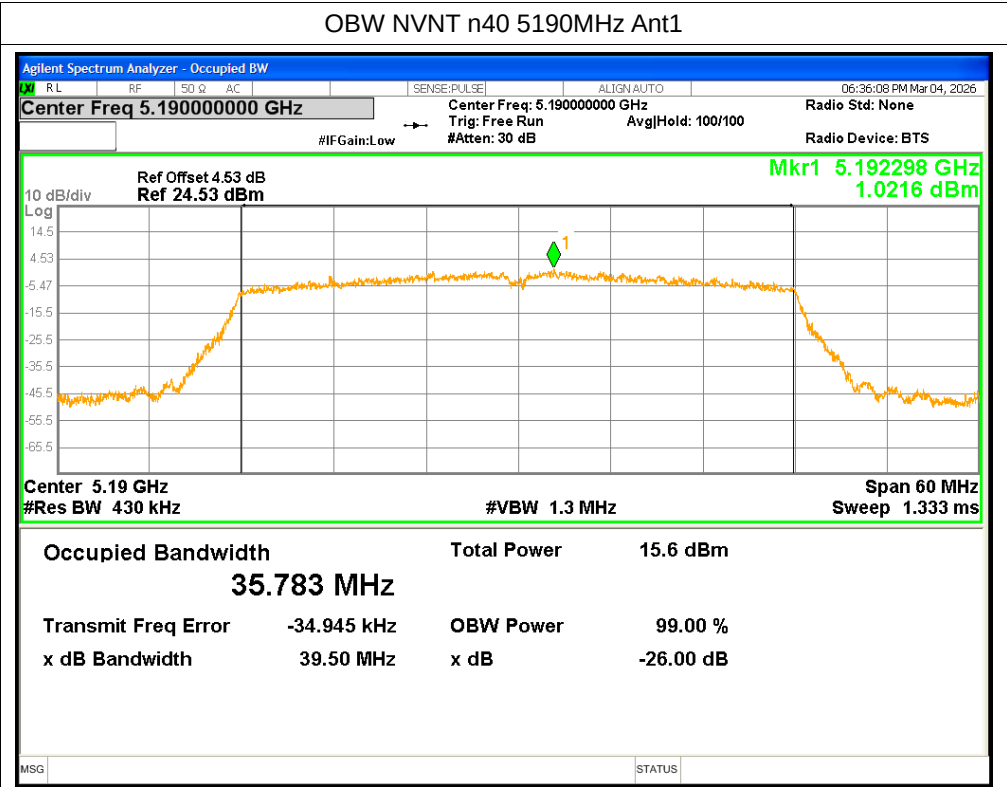


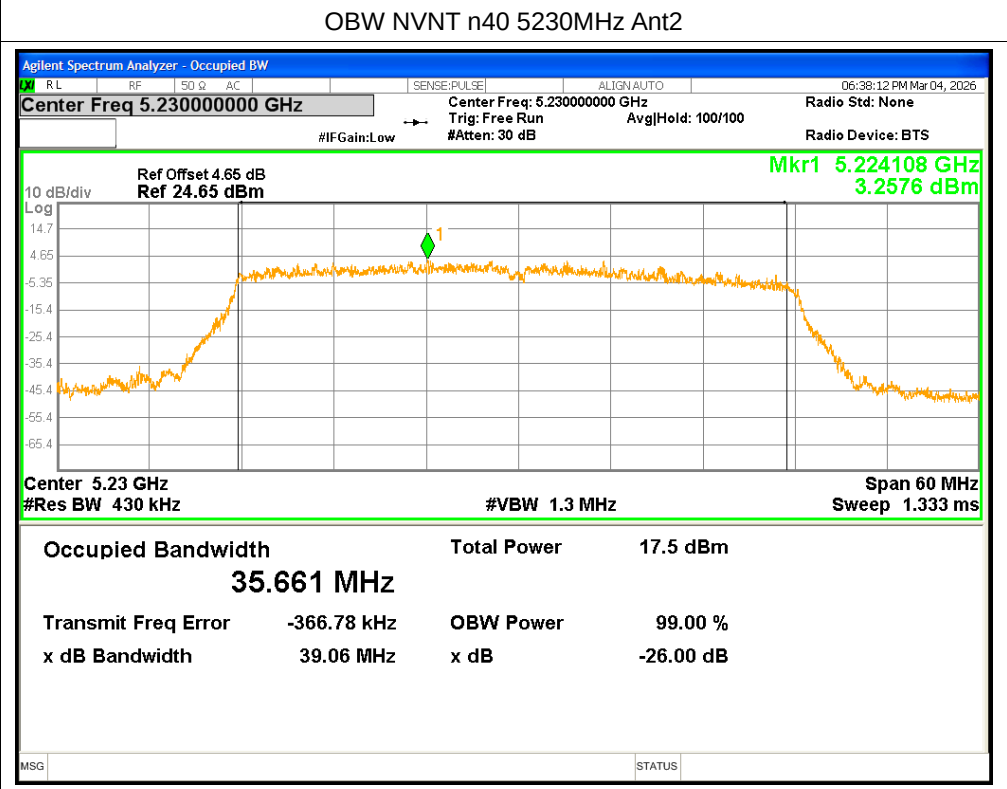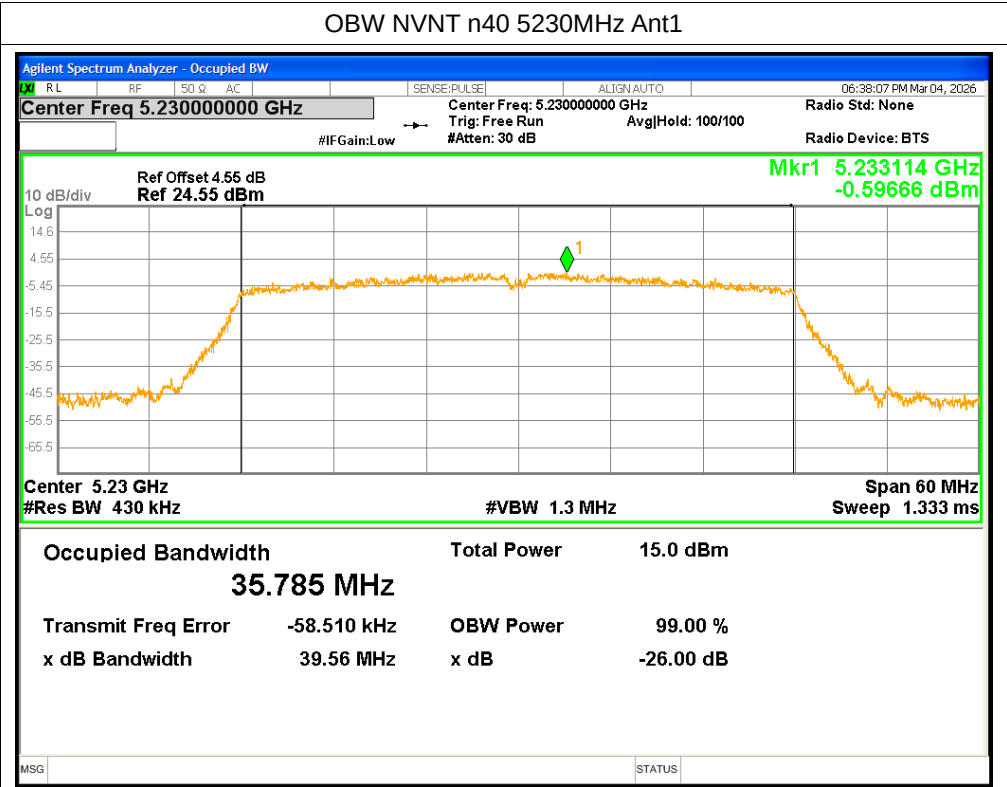


OBW NVNT ac20 5180MHz Ant1

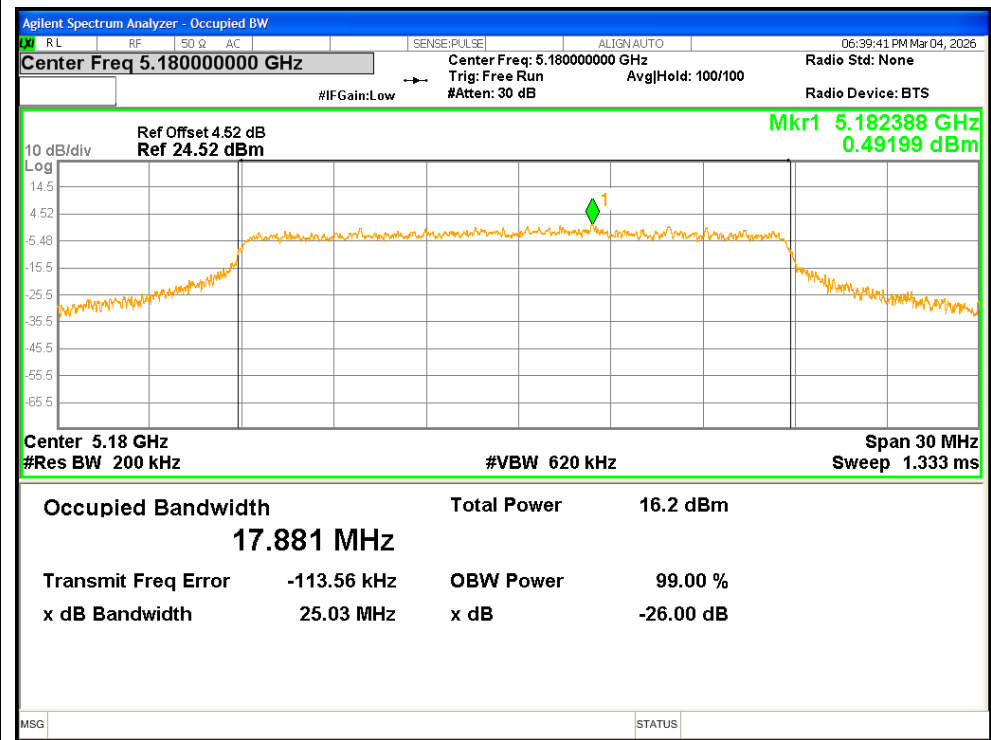


OBW NVNT ac20 5180MHz Ant2

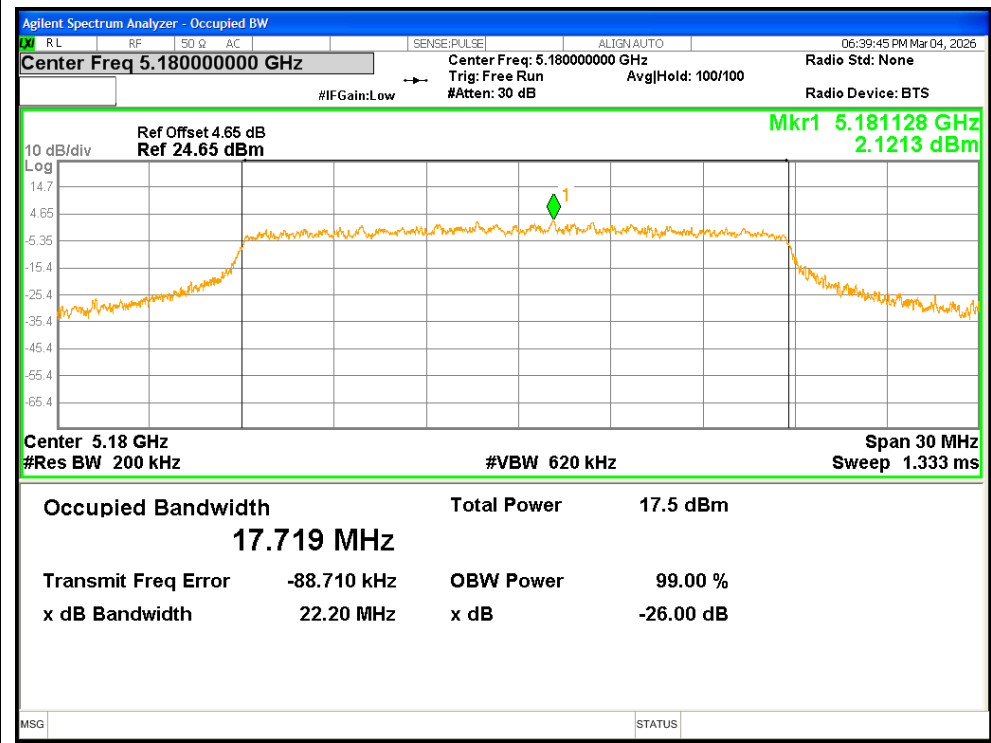


OBW NVNT ac20 5200MHz Ant1

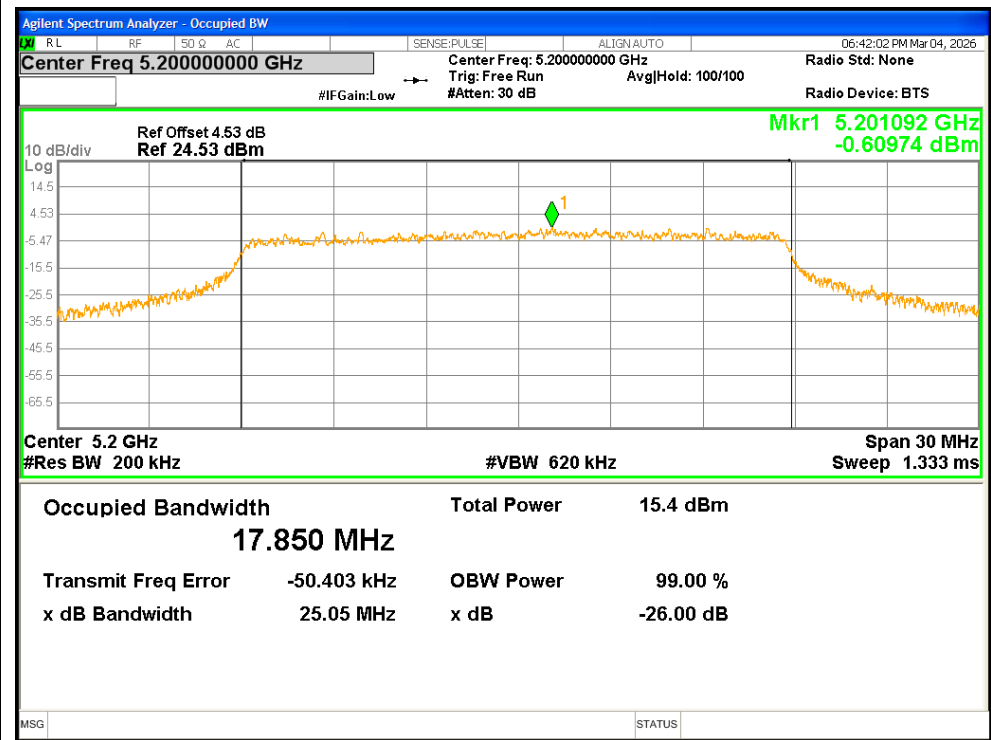


OBW NVNT ac20 5200MHz Ant2

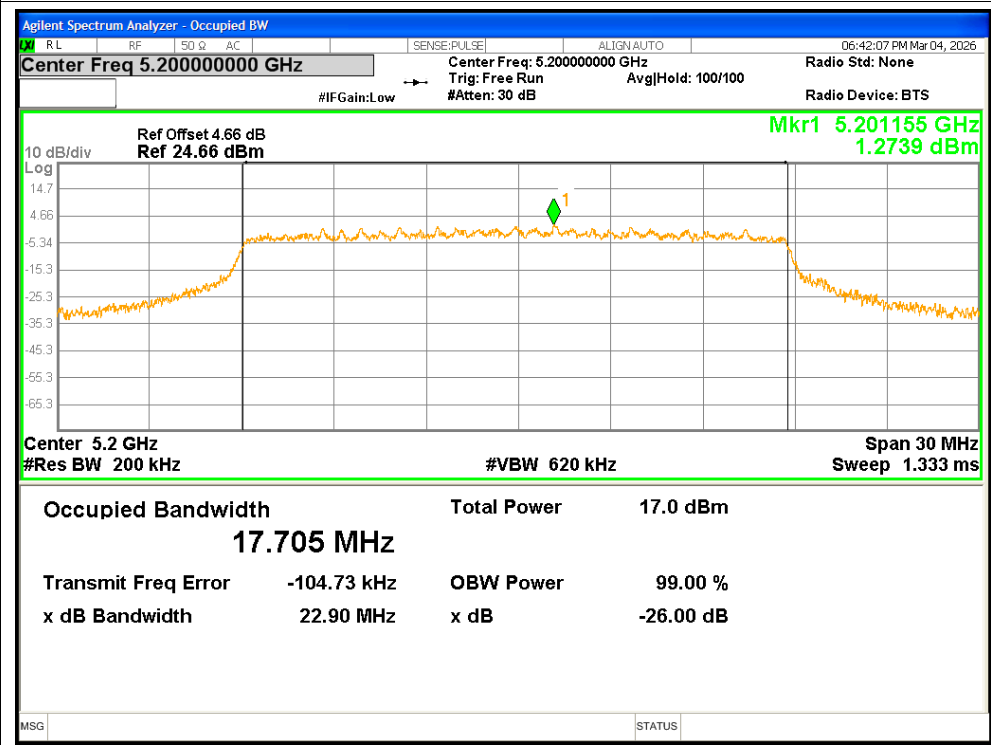


OBW NVNT ac20 5240MHz Ant1

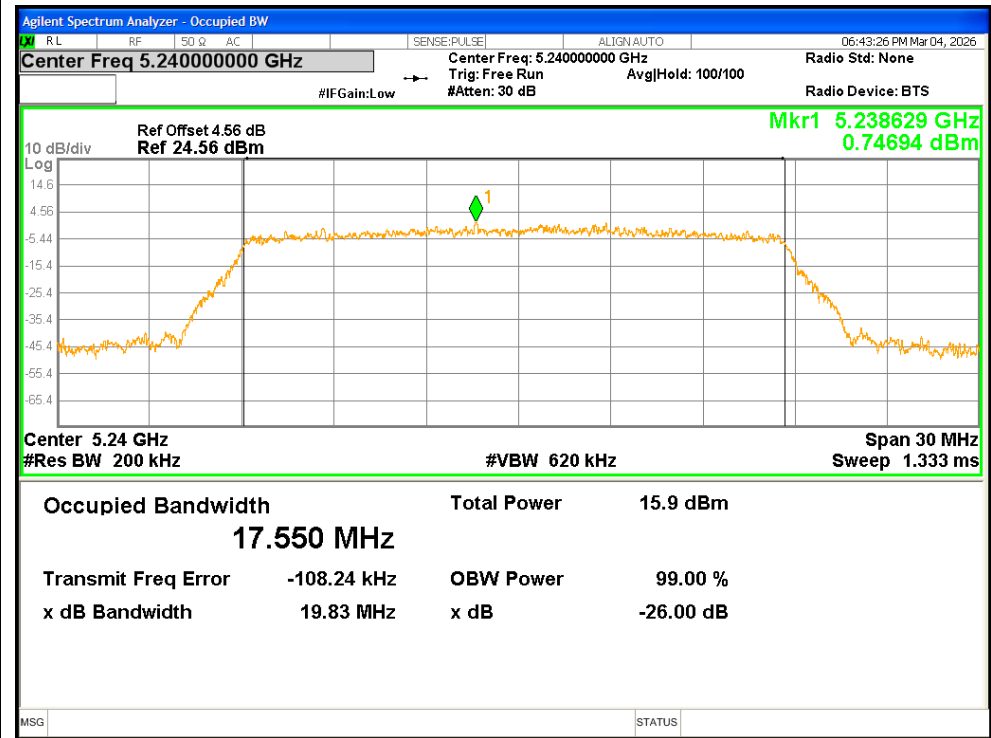


OBW NVNT ac20 5240MHz Ant2

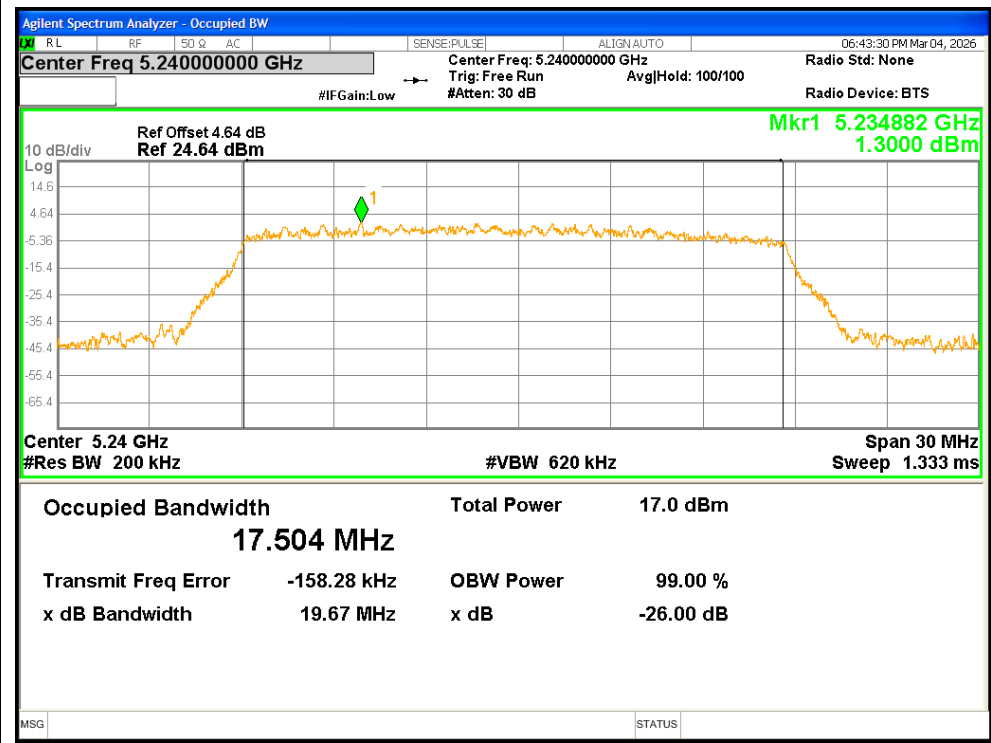


OBW NVNT ac40 5190MHz Ant1

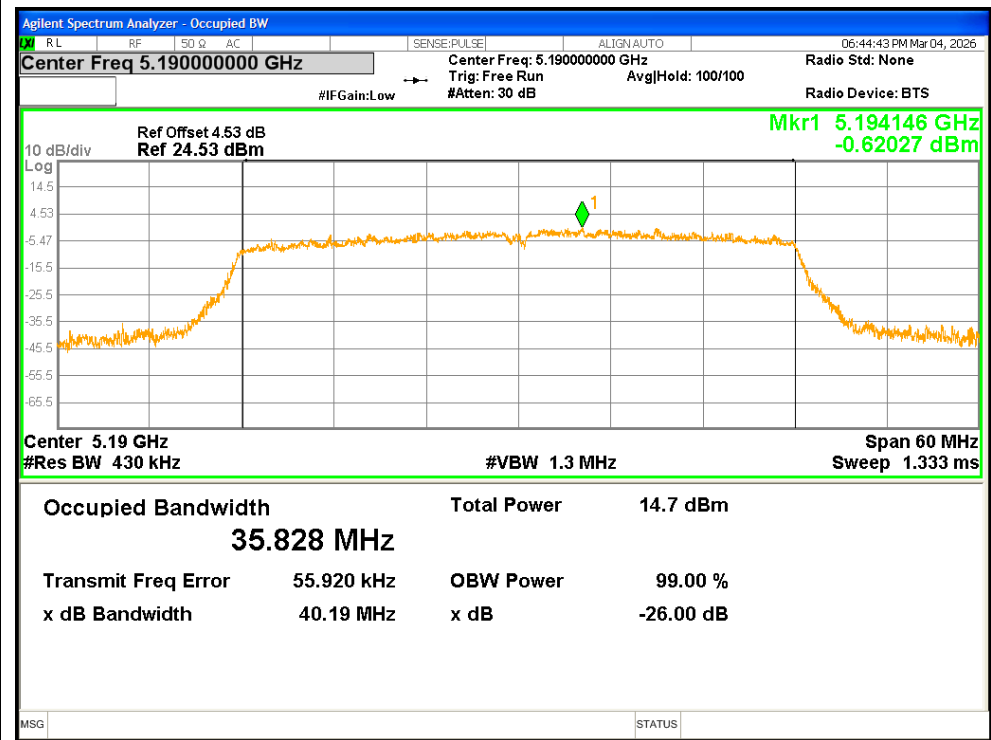


OBW NVNT ac40 5190MHz Ant2

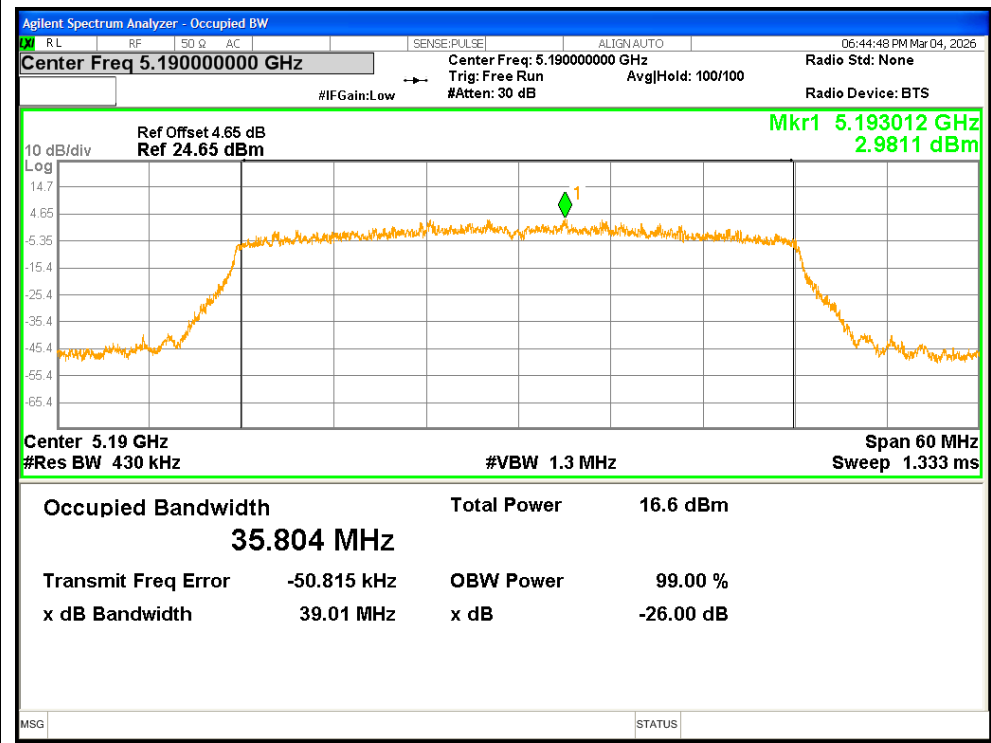


OBW NVNT ac40 5230MHz Ant1

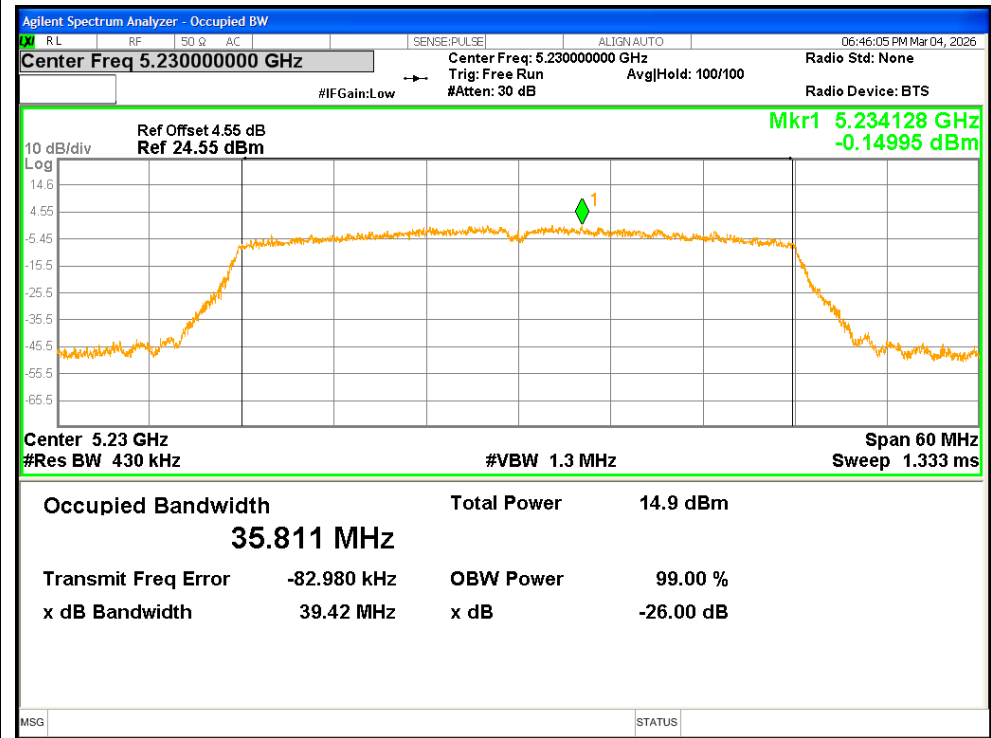


OBW NVNT ac40 5230MHz Ant2

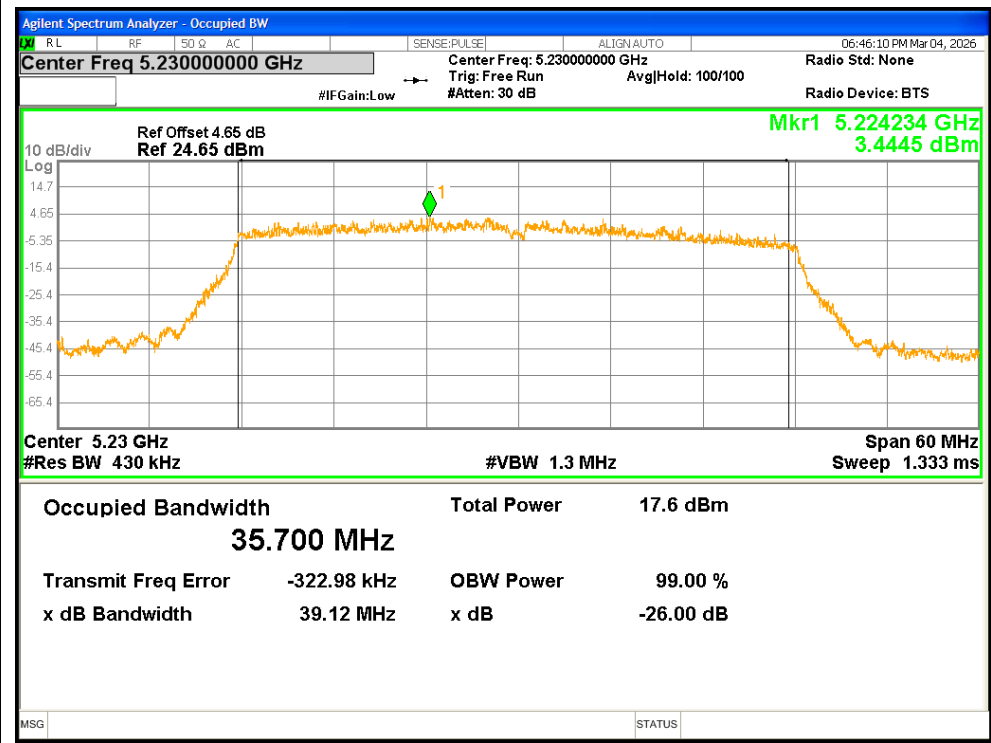


OBW NVNT ac80 5210MHz Ant1

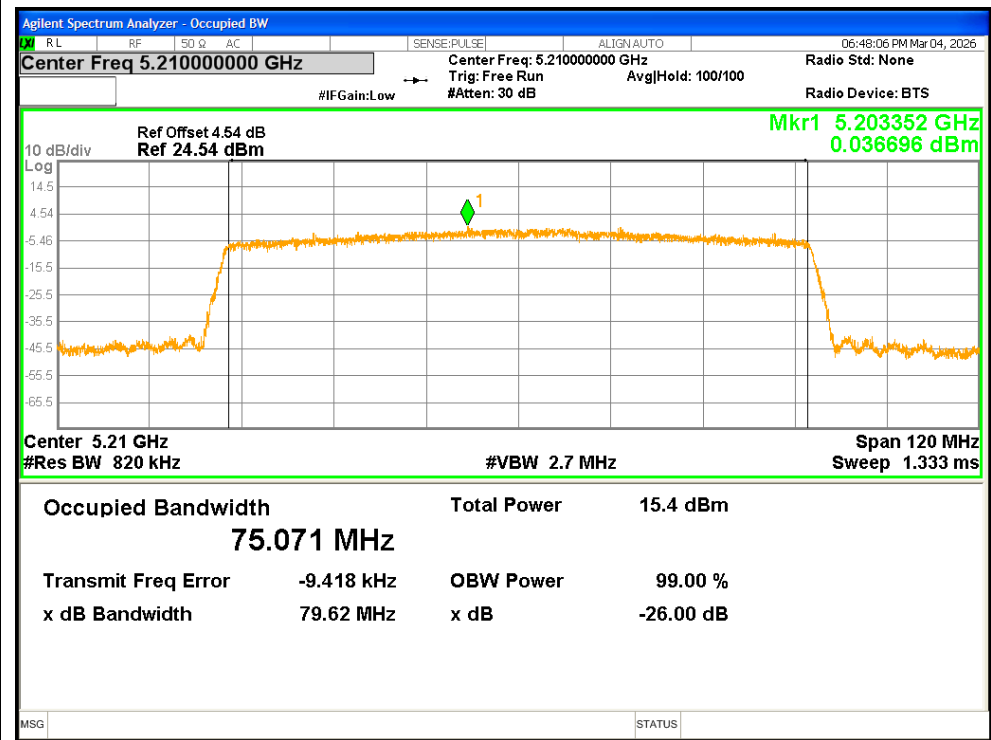


OBW NVNT ac80 5210MHz Ant2

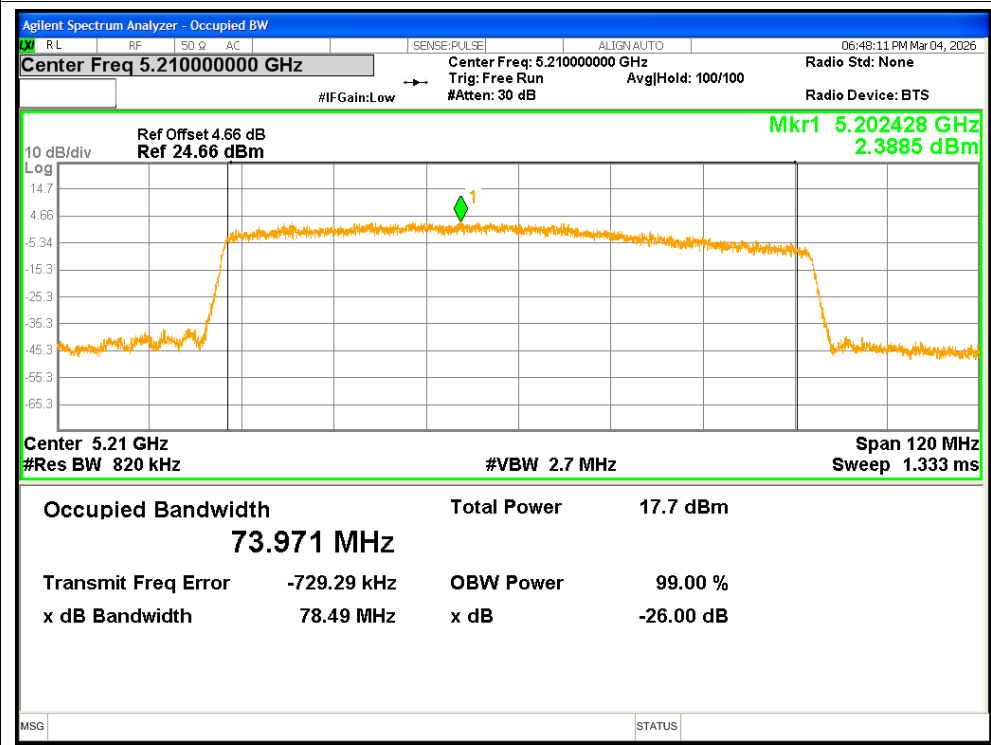


OBW NVNT ax20 5180MHz Ant1

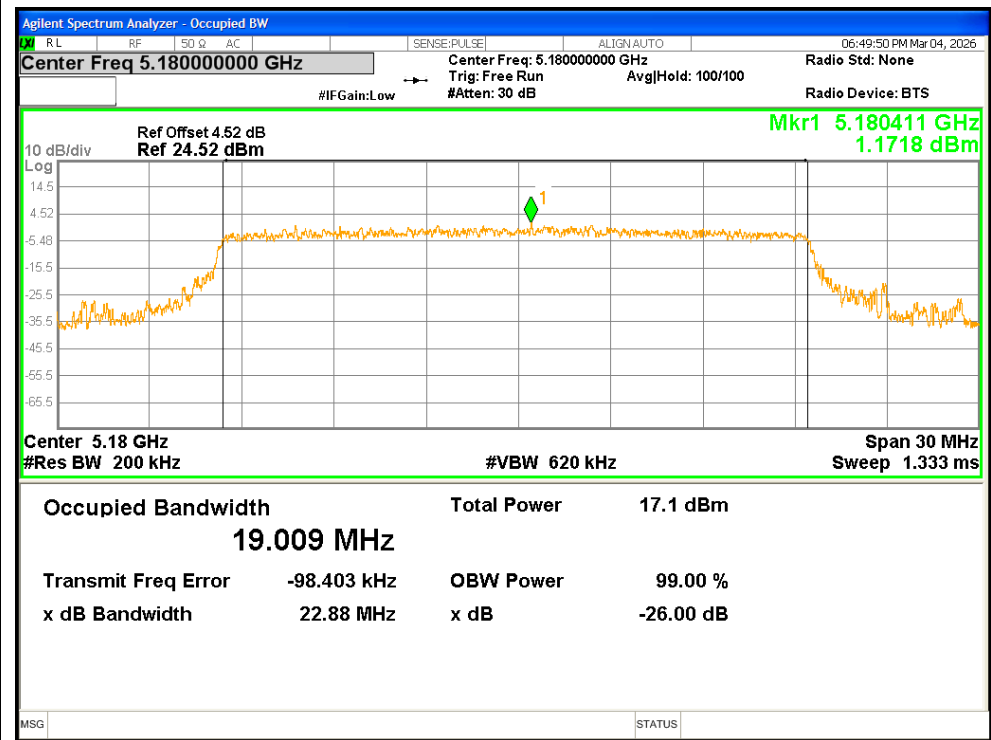


OBW NVNT ax20 5180MHz Ant2

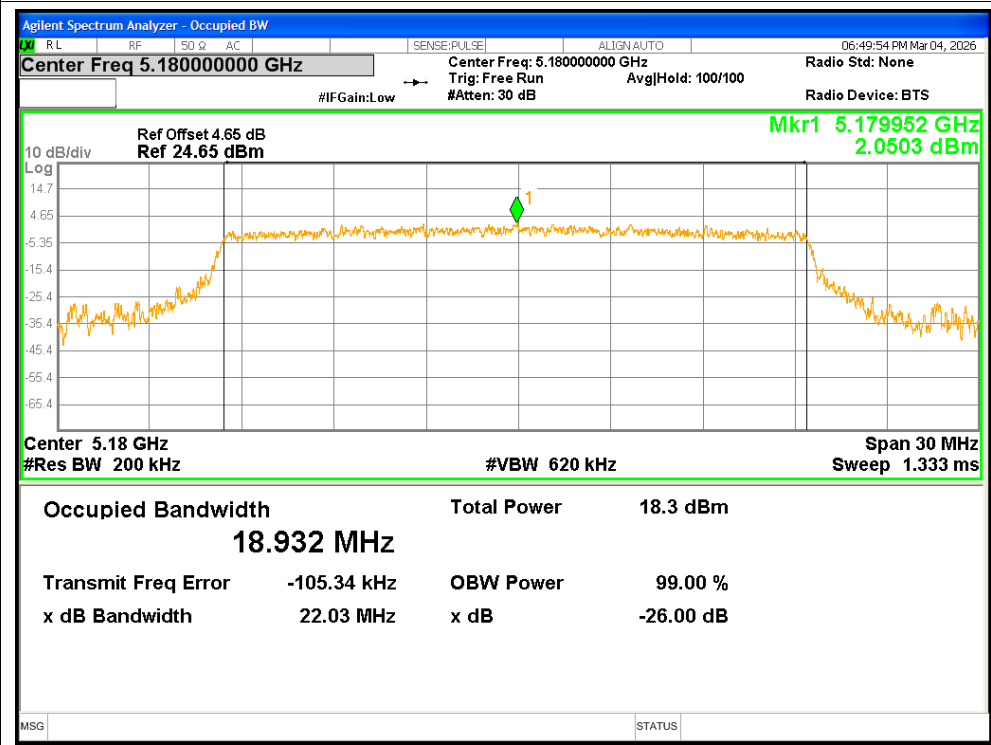


OBW NVNT ax20 5200MHz Ant1

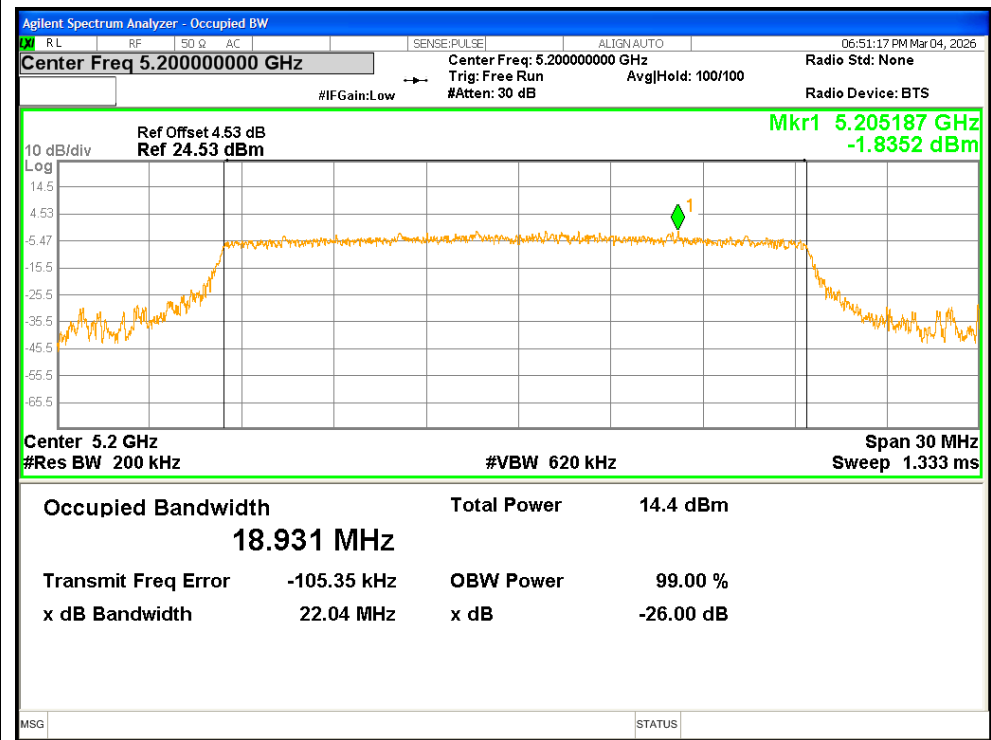


OBW NVNT ax20 5200MHz Ant2

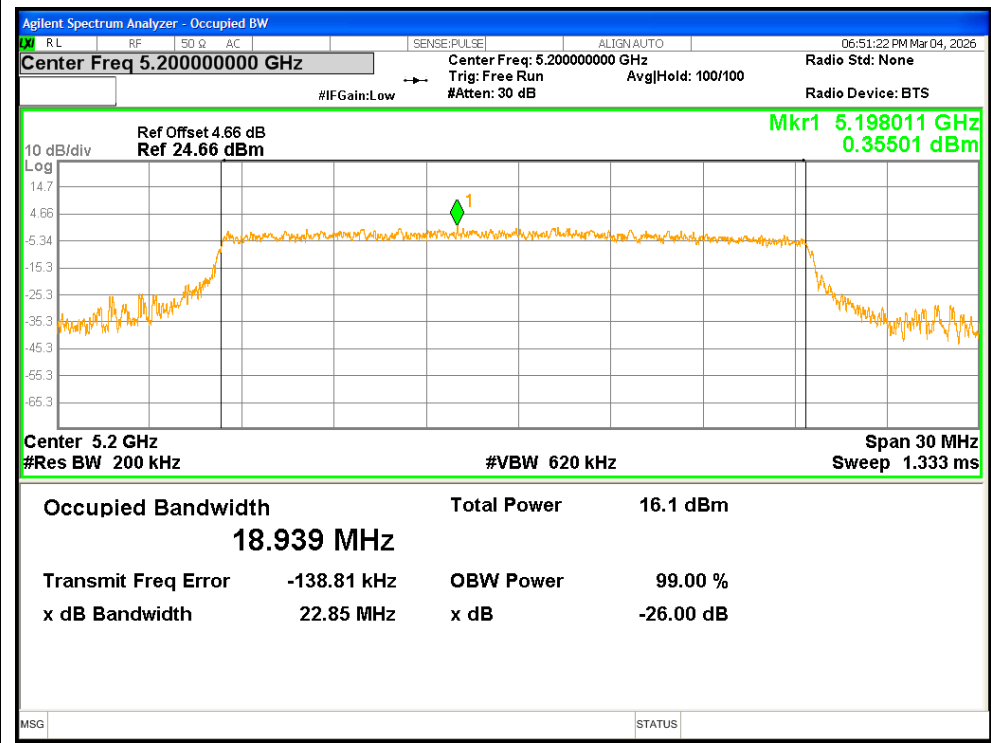


OBW NVNT ax20 5240MHz Ant1

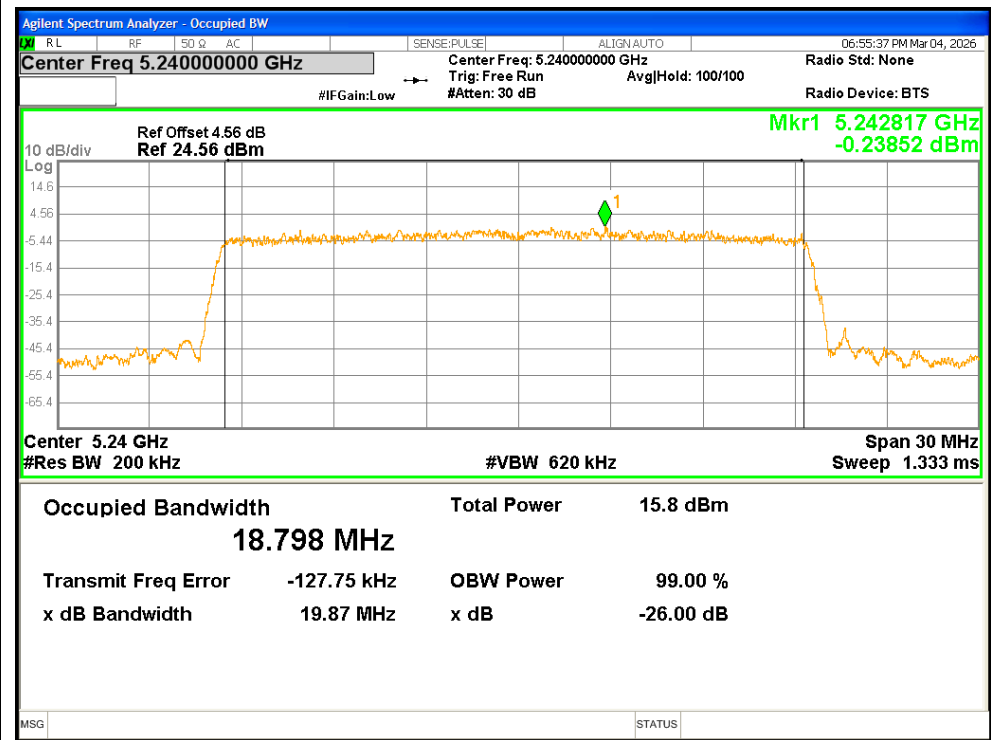


OBW NVNT ax20 5240MHz Ant2

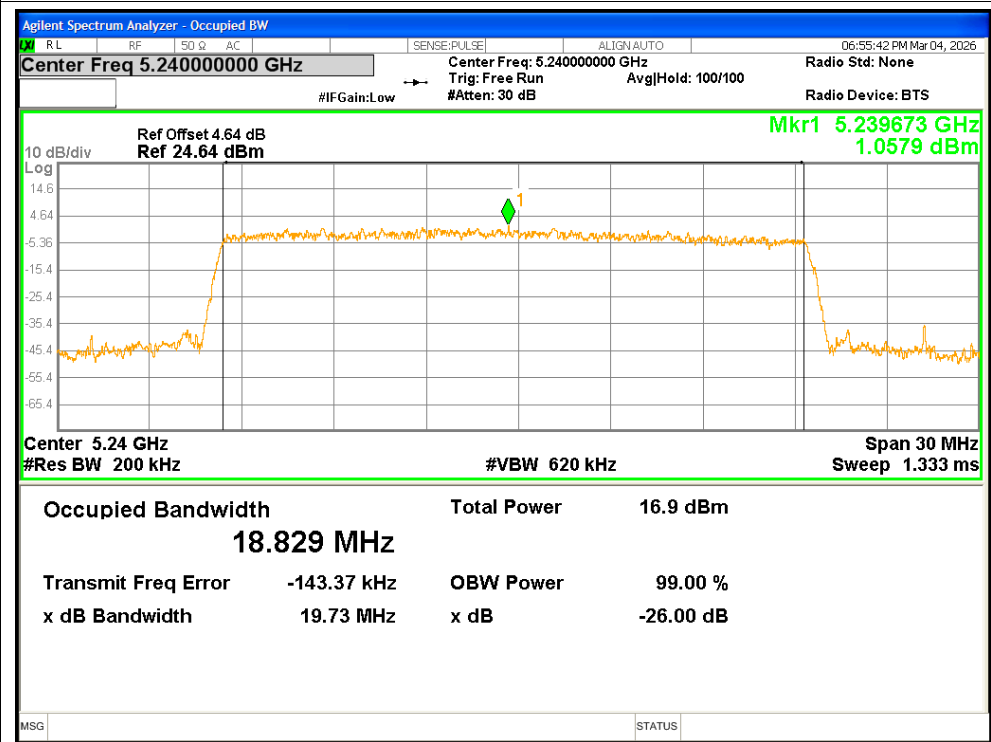


OBW NVNT ax40 5190MHz Ant1

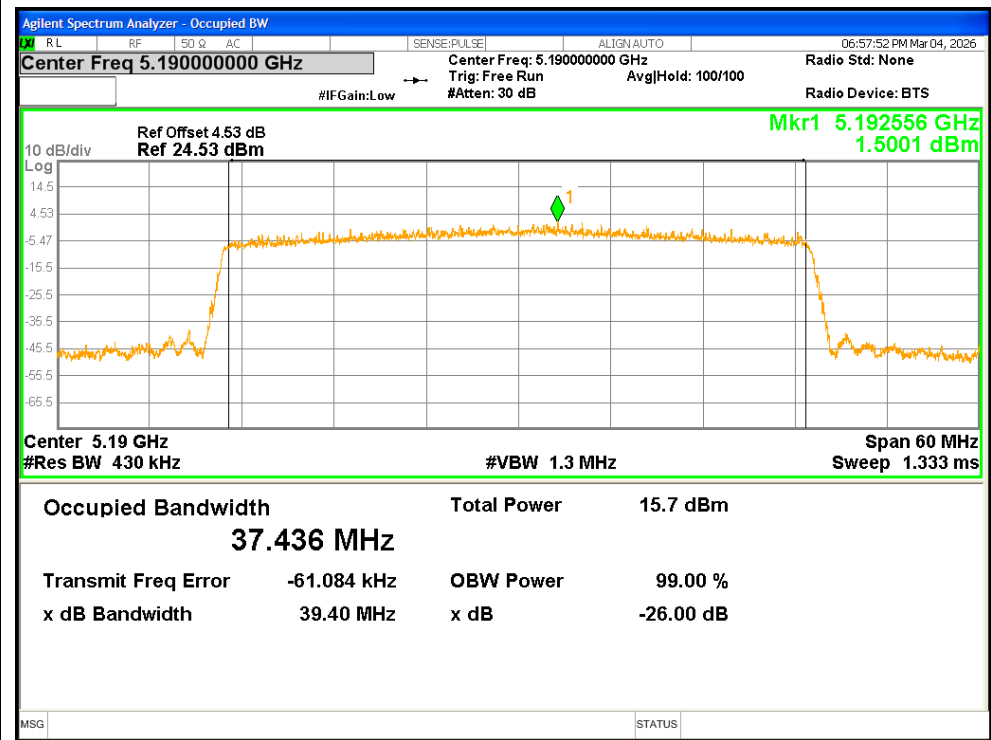


OBW NVNT ax40 5190MHz Ant2

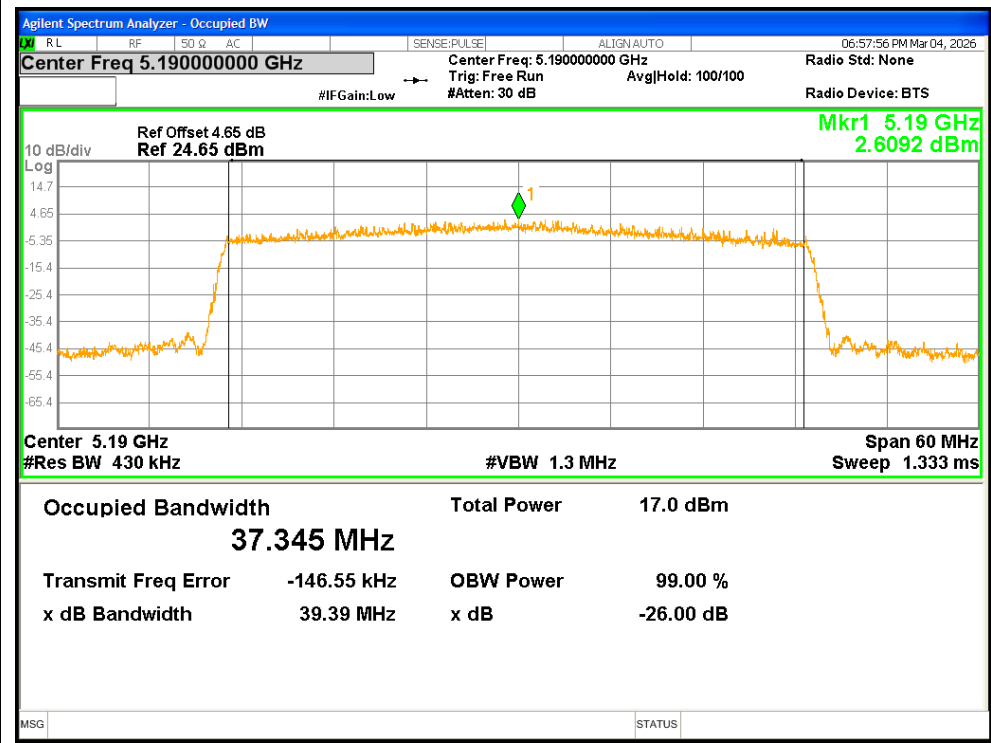


OBW NVNT ax40 5230MHz Ant1

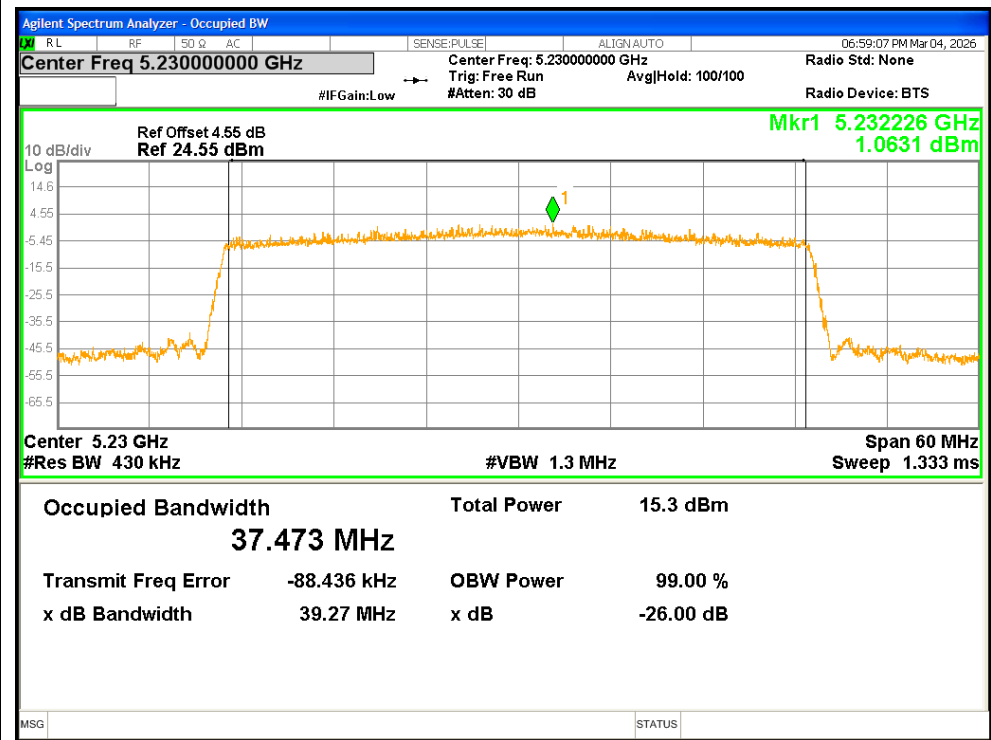


OBW NVNT ax40 5230MHz Ant2

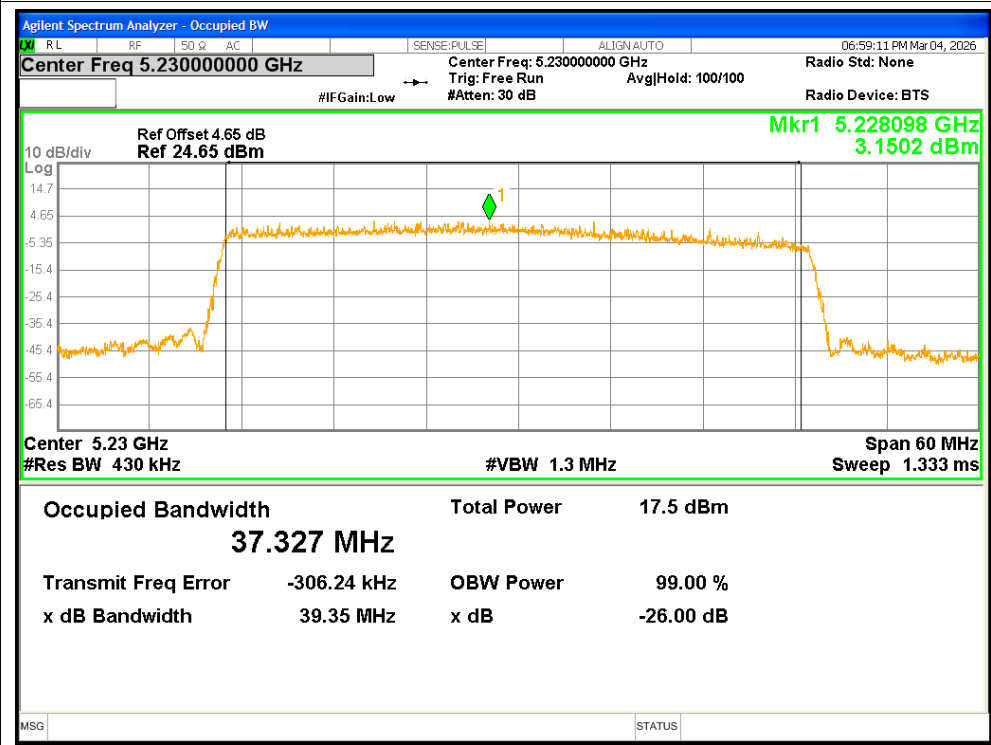

OBW NVNT ax80 5210MHz Ant1

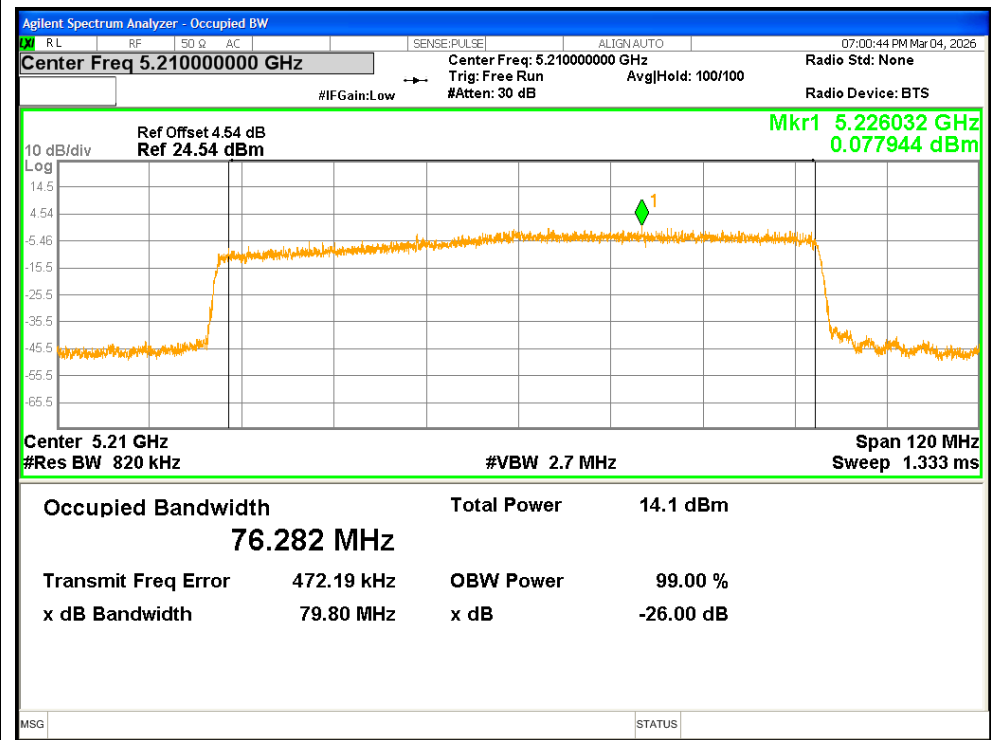

OBW NVNT ax80 5210MHz Ant2

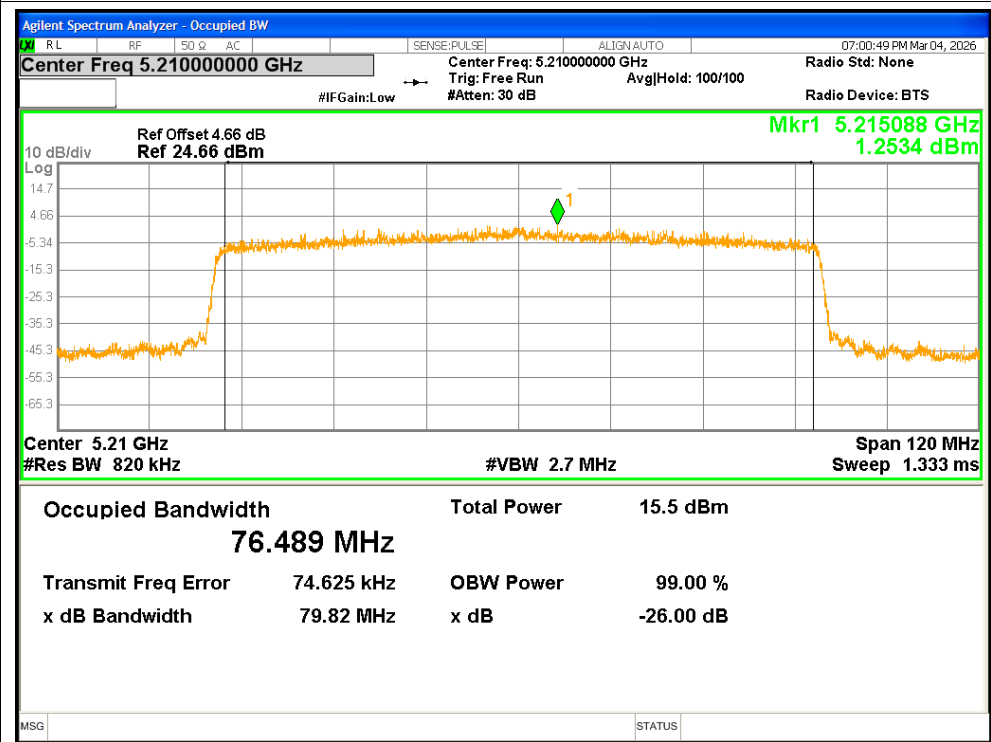


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	0.649	0.1	0.749	<=11	Pass
NVNT	a	5200	Ant1	0.982	0.13	1.112	<=11	Pass
NVNT	a	5240	Ant1	0.675	0.13	0.805	<=11	Pass
NVNT	a	5180	Ant2	1.353	0.13	1.483	<=11	Pass
NVNT	a	5200	Ant2	1.924	0.12	2.044	<=11	Pass
NVNT	a	5240	Ant2	0.429	0.13	0.559	<=11	Pass
NVNT	n20	5180	Ant1	1.038	0.13	1.168	<=11	Pass
NVNT	n20	5180	Ant2	2.353	0.13	2.483	<=11	Pass
NVNT	n20	5180	MIMO	4.755	0.13	4.885	<=11	Pass
NVNT	n20	5200	Ant1	0.82	0.11	0.93	<=11	Pass
NVNT	n20	5200	Ant2	2.449	0.11	2.559	<=11	Pass
NVNT	n20	5200	MIMO	4.721	0.11	4.831	<=11	Pass
NVNT	n20	5240	Ant1	0.584	0.11	0.694	<=11	Pass
NVNT	n20	5240	Ant2	1.538	0.11	1.648	<=11	Pass
NVNT	n20	5240	MIMO	4.097	0.11	4.207	<=11	Pass
NVNT	n40	5190	Ant1	-2.696	0.2	-2.496	<=11	Pass
NVNT	n40	5190	Ant2	-0.724	0.2	-0.524	<=11	Pass
NVNT	n40	5190	MIMO	1.411	0.2	1.611	<=11	Pass
NVNT	n40	5230	Ant1	-3.075	0.21	-2.865	<=11	Pass
NVNT	n40	5230	Ant2	-0.927	0.21	-0.717	<=11	Pass
NVNT	n40	5230	MIMO	1.141	0.21	1.351	<=11	Pass
NVNT	ac20	5180	Ant1	0.448	0.1	0.548	<=11	Pass
NVNT	ac20	5180	Ant2	1.838	0.1	1.938	<=11	Pass
NVNT	ac20	5180	MIMO	4.209	0.1	4.309	<=11	Pass
NVNT	ac20	5200	Ant1	-0.457	0.11	-0.347	<=11	Pass
NVNT	ac20	5200	Ant2	1.603	0.11	1.713	<=11	Pass
NVNT	ac20	5200	MIMO	3.704	0.11	3.814	<=11	Pass
NVNT	ac20	5240	Ant1	0.333	0.11	0.443	<=11	Pass
NVNT	ac20	5240	Ant2	1.644	0.11	1.754	<=11	Pass
NVNT	ac20	5240	MIMO	4.048	0.11	4.158	<=11	Pass
NVNT	ac40	5190	Ant1	-3.725	0.22	-3.505	<=11	Pass
NVNT	ac40	5190	Ant2	-2.075	0.22	-1.855	<=11	Pass
NVNT	ac40	5190	MIMO	0.188	0.22	0.408	<=11	Pass
NVNT	ac40	5230	Ant1	-2.97	0.22	-2.75	<=11	Pass
NVNT	ac40	5230	Ant2	-1.101	0.22	-0.881	<=11	Pass
NVNT	ac40	5230	MIMO	1.075	0.22	1.295	<=11	Pass
NVNT	ac80	5210	Ant1	-6.736	0.42	-6.316	<=11	Pass
NVNT	ac80	5210	Ant2	-4.572	0.42	-4.152	<=11	Pass
NVNT	ac80	5210	MIMO	-2.51	0.42	-2.09	<=11	Pass
NVNT	ax20	5180	Ant1	-0.865	0.13	-0.735	<=11	Pass

NVNT	ax20	5180	Ant2	0.737	0.13	0.867	<=11	Pass
NVNT	ax20	5180	MIMO	3.02	0.13	3.15	<=11	Pass
NVNT	ax20	5200	Ant1	-0.346	0.14	-0.206	<=11	Pass
NVNT	ax20	5200	Ant2	1.301	0.14	1.441	<=11	Pass
NVNT	ax20	5200	MIMO	3.565	0.14	3.705	<=11	Pass
NVNT	ax20	5240	Ant1	-1.173	0.14	-1.033	<=11	Pass
NVNT	ax20	5240	Ant2	0.303	0.14	0.443	<=11	Pass
NVNT	ax20	5240	MIMO	2.638	0.14	2.778	<=11	Pass
NVNT	ax40	5190	Ant1	-3.594	0.27	-3.324	<=11	Pass
NVNT	ax40	5190	Ant2	-1.103	0.27	-0.833	<=11	Pass
NVNT	ax40	5190	MIMO	0.838	0.27	1.108	<=11	Pass
NVNT	ax40	5230	Ant1	-4.297	0.25	-4.047	<=11	Pass
NVNT	ax40	5230	Ant2	-1.548	0.25	-1.298	<=11	Pass
NVNT	ax40	5230	MIMO	0.302	0.25	0.552	<=11	Pass
NVNT	ax80	5210	Ant1	-8.362	0.48	-7.882	<=11	Pass
NVNT	ax80	5210	Ant2	-5.775	0.48	-5.295	<=11	Pass
NVNT	ax80	5210	MIMO	-3.868	0.48	-3.388	<=11	Pass

Test Graphs

PSD NVNT a 5180MHz Ant1

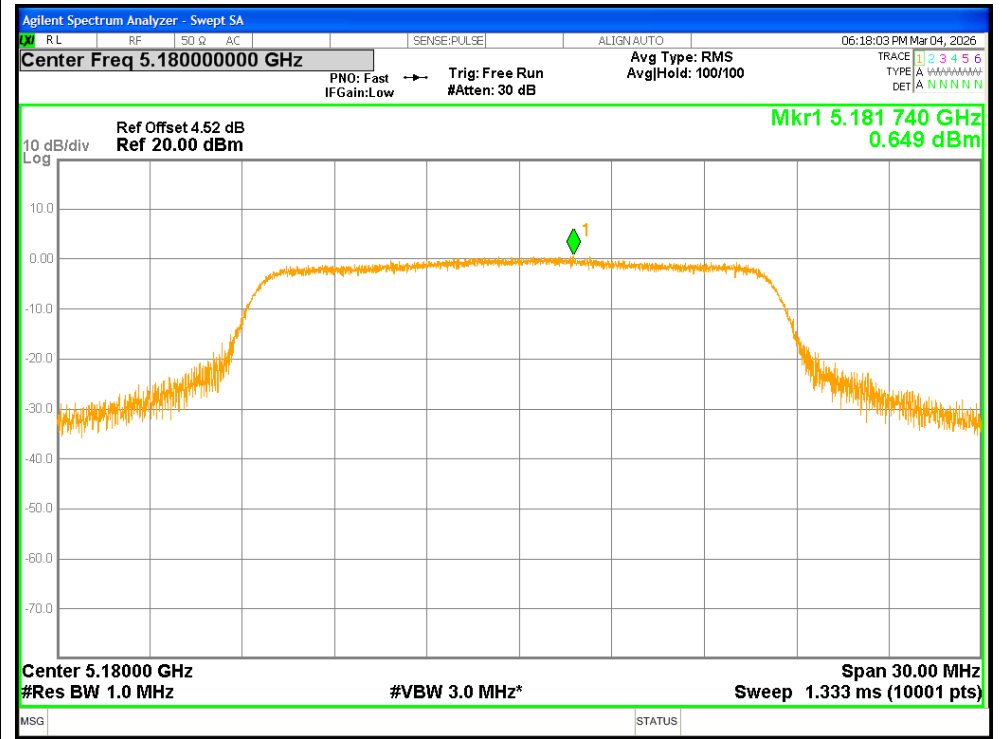

PSD NVNT a 5200MHz Ant1

