



Rincon ZonePlayer Measurement


Sonos PROPRIETARY

Toyon Research Corporation

75 Aero Camino, Suite A
Goleta, California 93117
805-968-6787 x 121
805-685-8089 (FAX)
arichen@toyon.com
www.toyon.com




Model Orientation

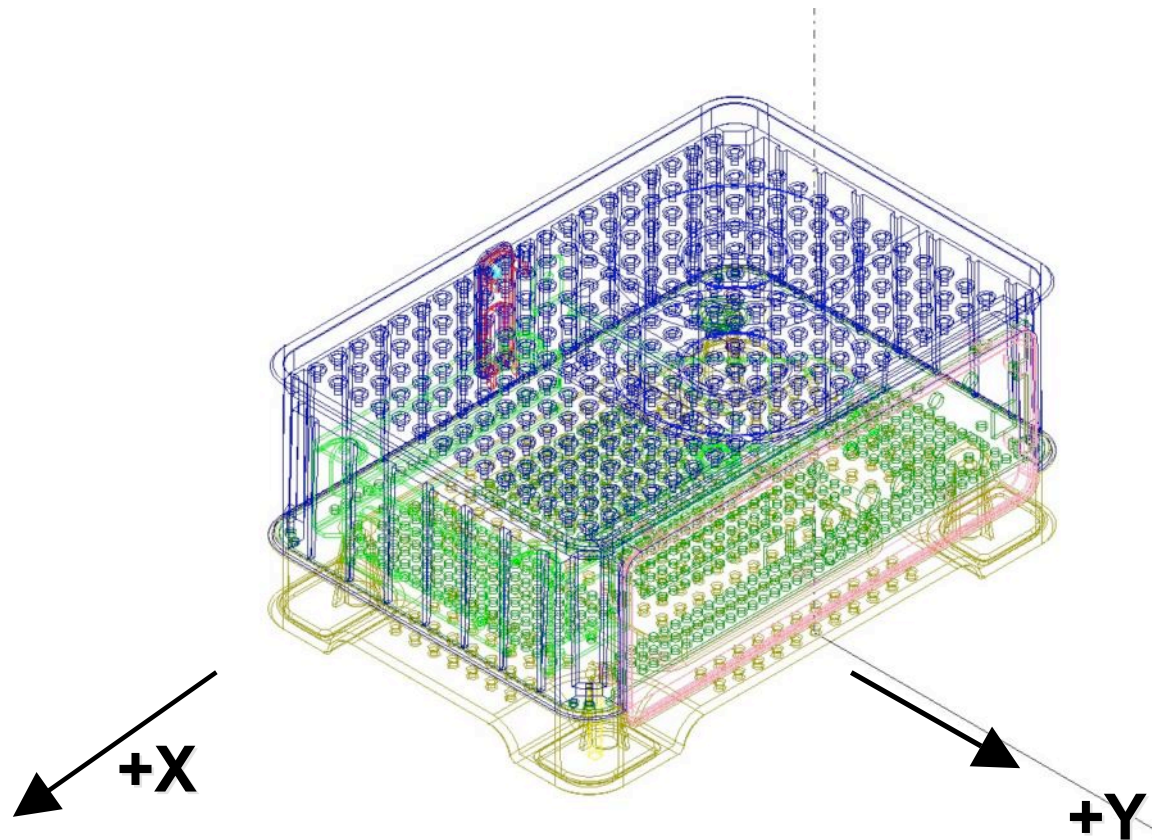

- Model as originally imported



Model Orientation

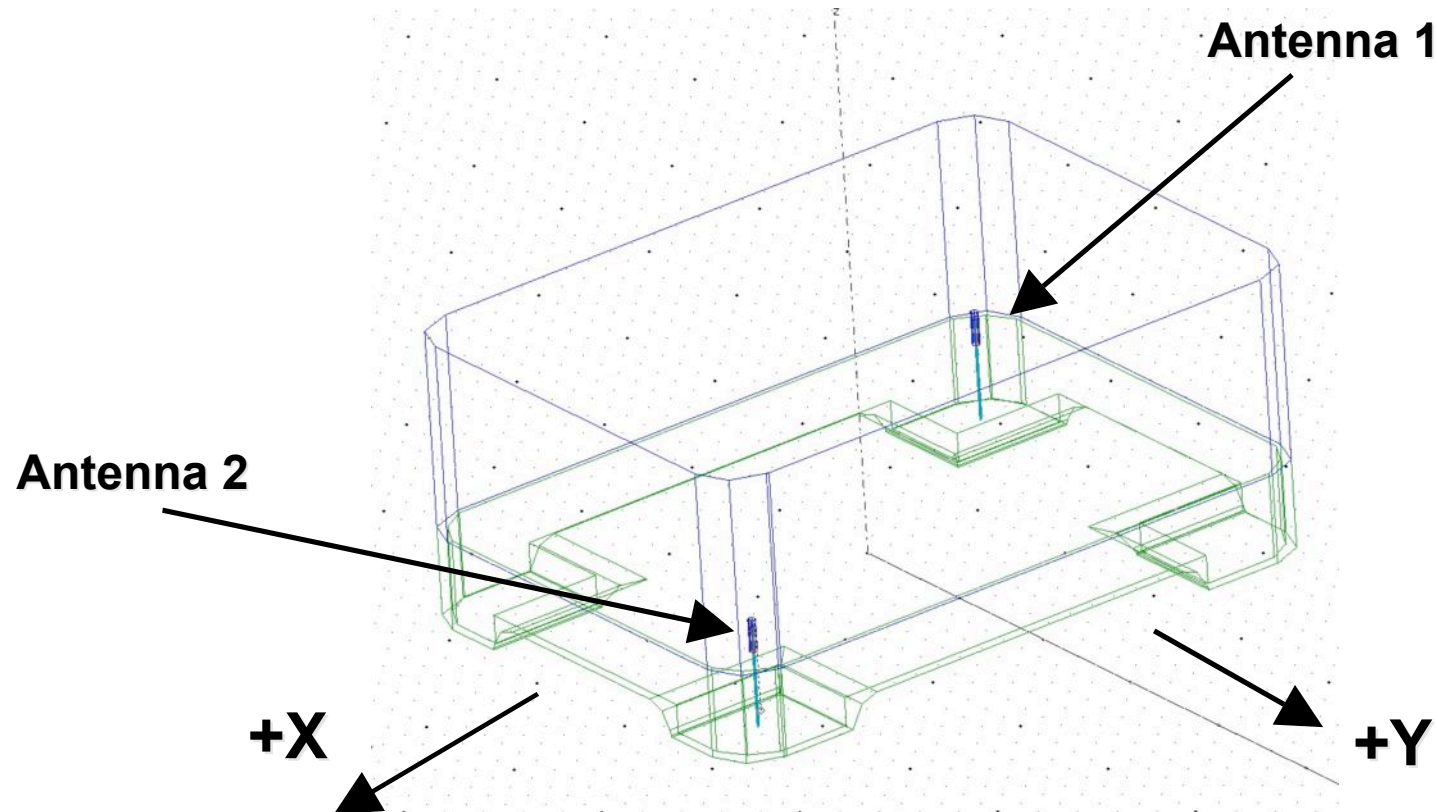

- Model as simplified for FEA modeling
- Chassis top is modeled as solid metal
- Chassis bottom is ABS/PC Blend




Antenna Description

- **Monopole antennas extend 29.75 mm below the bottom of the metal part of the chassis.**
- **Antennas are placed at the front left (below the toroid) and back right of the ZonePlayer**
- **Wire diameter corresponds to the center conductor of RG-402 (.141 inch outer diameter) cable.**



Antenna Patterns - Orientation

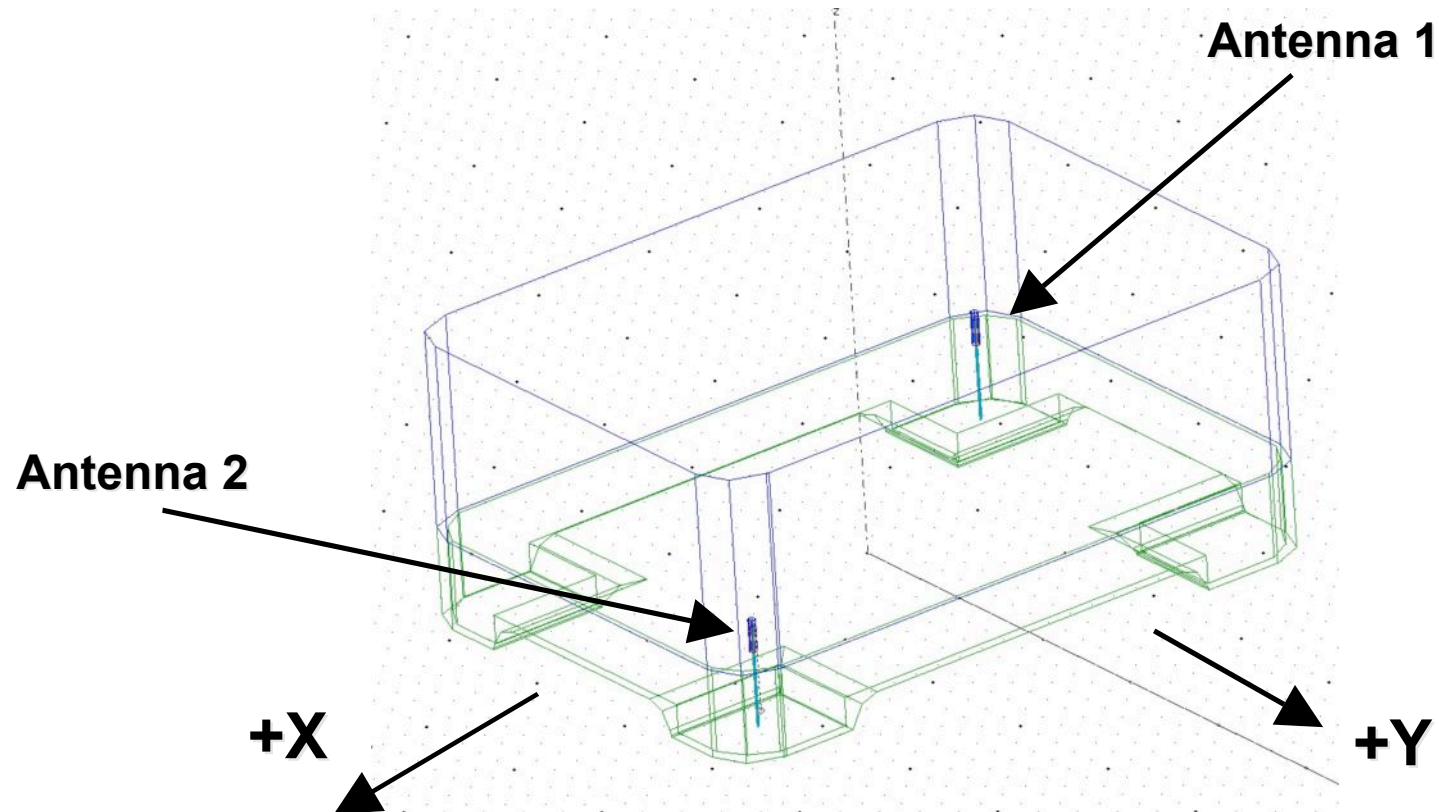

- +Y is back of ZonePlayer, +X is right of ZonePlayer



Measurements in Toyon's Anechoic Chamber

- We measured return loss for both ZonePlayer antennas as well as patterns over the three principal planes (XY, XZ, and YZ)
- Pattern measurements are realized gain measured at the receiver, including the losses due to the cable and connector of roughly 1-1.25 dB.
- As in the computer modeling, Antenna 1 is at the front left of the ZonePlayer and Antenna 2 is at the back right.
- Both horizontal and vertical polarizations are plotted.
- Polarization convention is in the reference frame of the ZonePlayer, not the chamber.
 - If the ZonePlayer is resting on its side, then vertical polarization in the ZonePlayer reference frame is horizontal in the chamber reference frame.




Pattern Orientation

- The first four patterns are measured with the ZonePlayer sitting on its feet on a rotating pedestal.
 - Both Antenna 1 and Antenna 2 are measured, and both standard linear polarizations are shown for each.
- The second four patterns are measured with the ZonePlayer on its back (not on its top).
- The last four patterns are measured with the ZonePlayer on its side.



Measured Return Loss

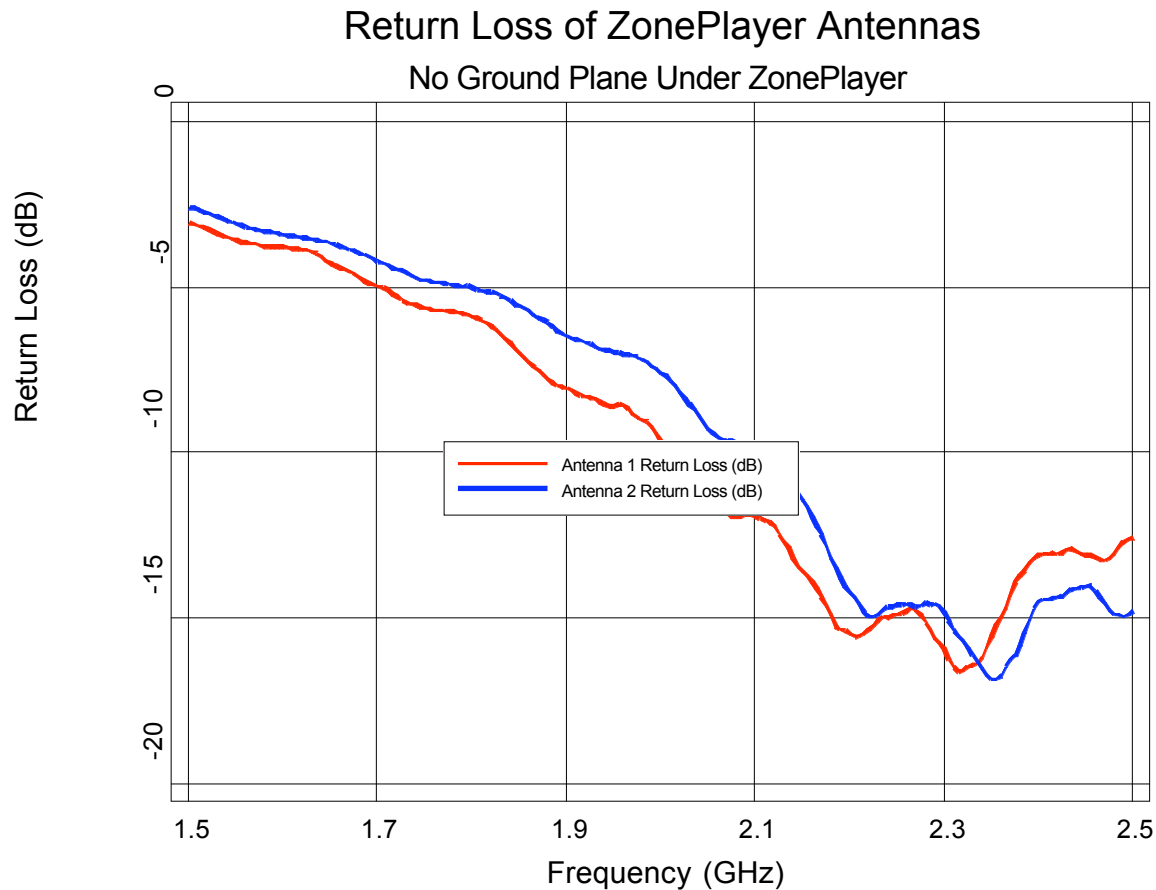



- Antennas are well matched (better than -10 dB return loss) through the 2.4 – 2.48 GHz band.



Azimuth Cut (XY Plane)



Realized Gain (dBiL) - Antenna 1 - Horizontal Polarization

Azimuth Cut Through Theta = 0

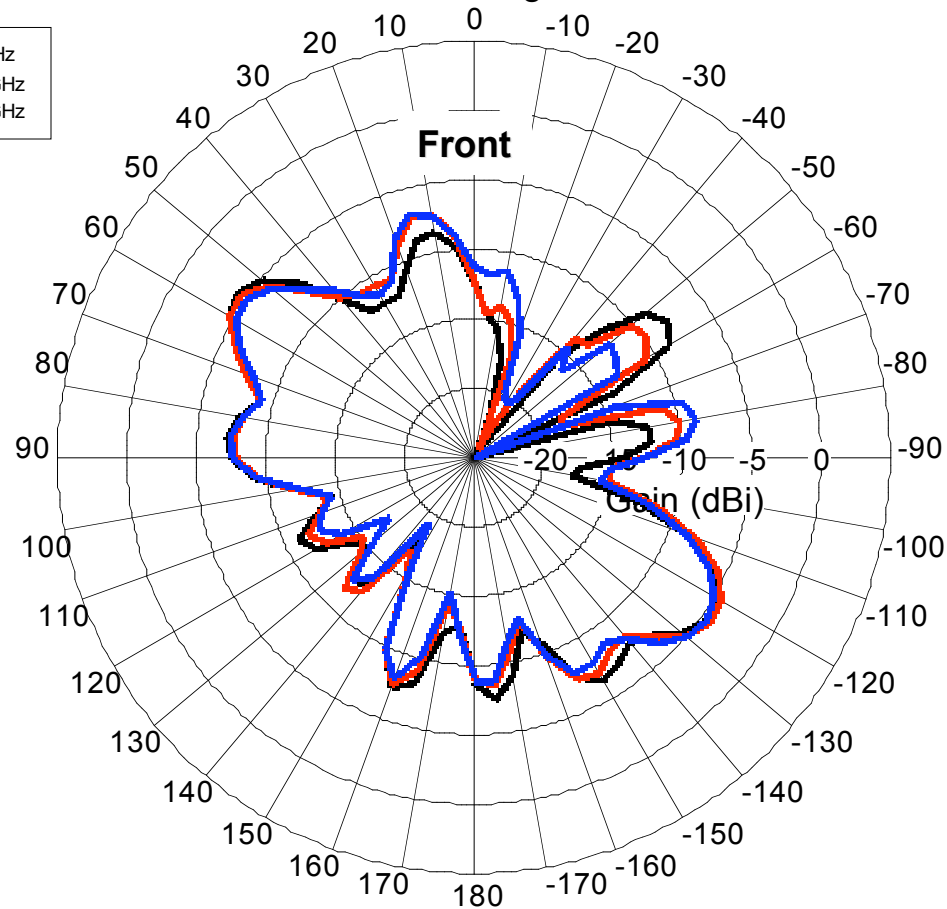

Right Side

Theta is the
elevation angle
above the XY Plane



Left Side




Back



Azimuth Cut (XY Plane)

Realized Gain (dBiL) - Antenna 1 - Vertical Polarization

Azimuth Cut Through Theta = 0

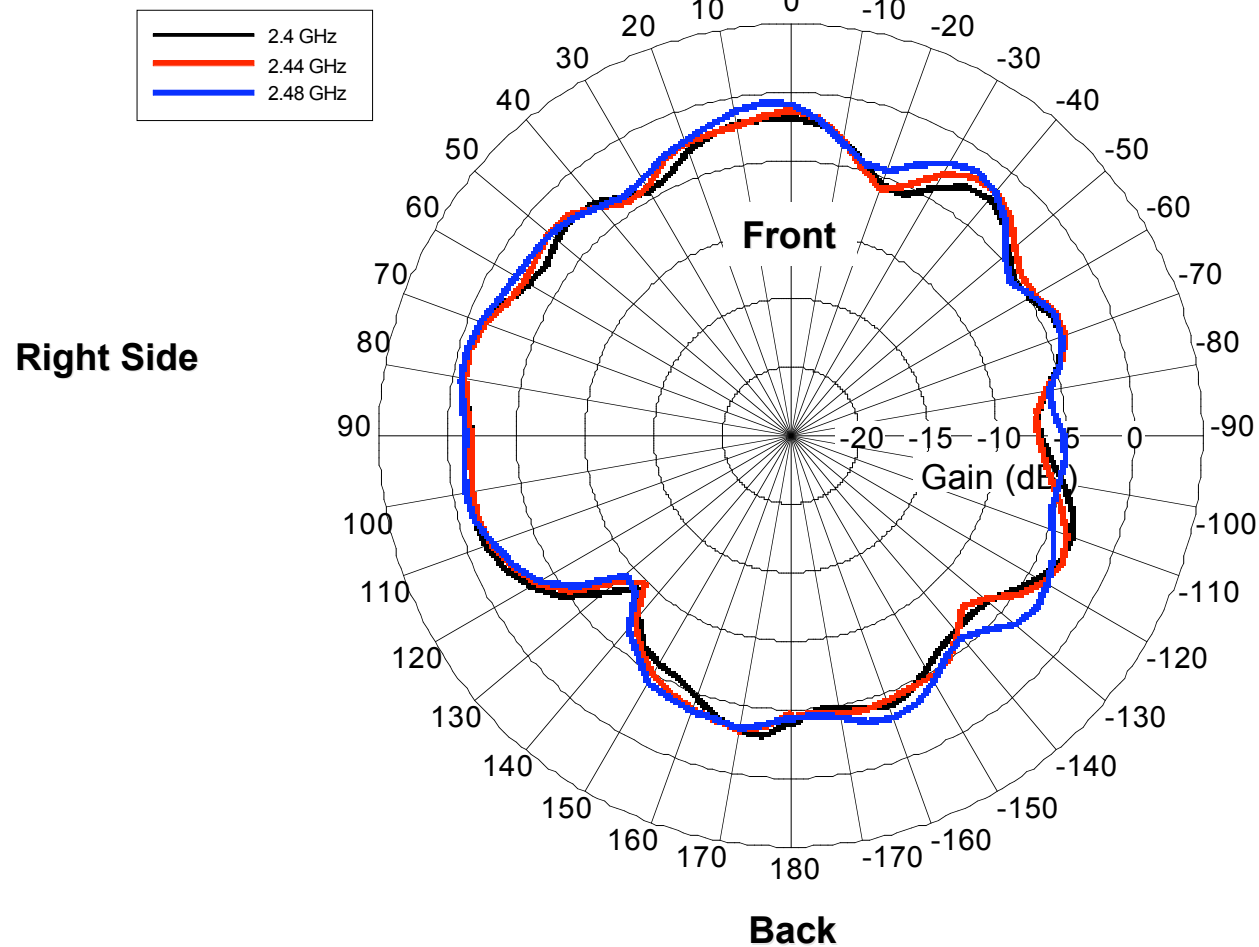


Left Side



Azimuth Cut (XY Plane)

Realized Gain (dBiL) - Antenna 2 - Horizontal Polarization


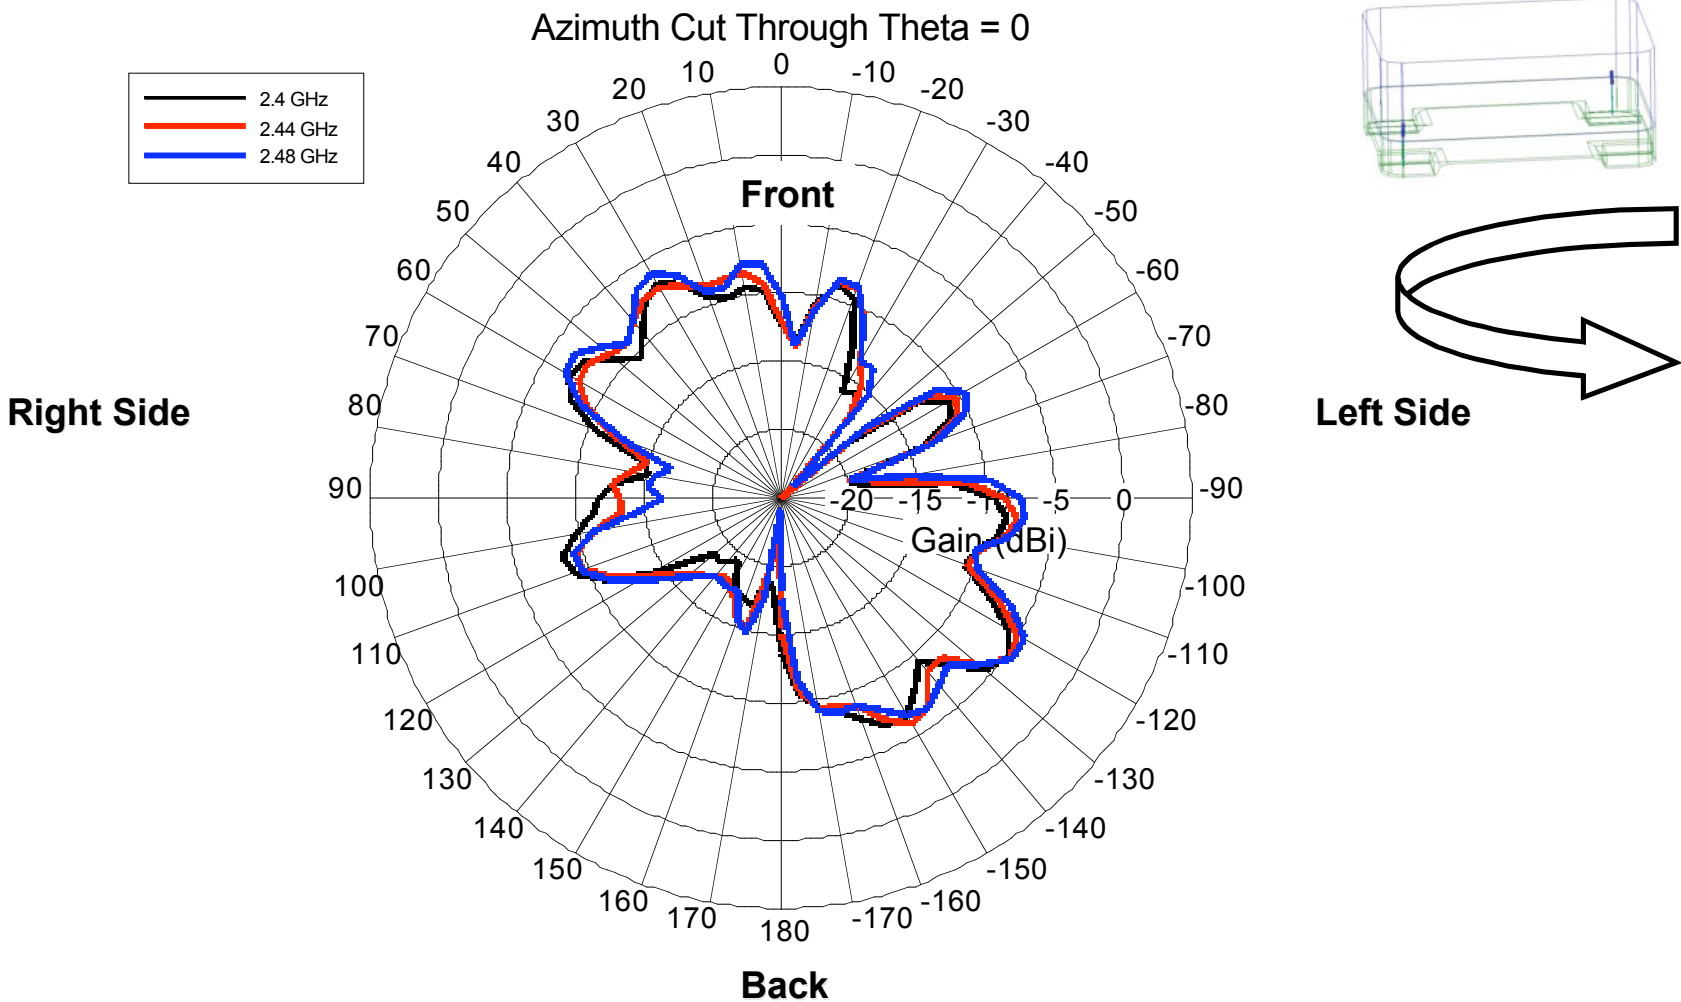




Azimuth Cut (XY Plane)

Realized Gain (dBiL) - Antenna 2 - Vertical Polarization

Azimuth Cut Through Theta = 0

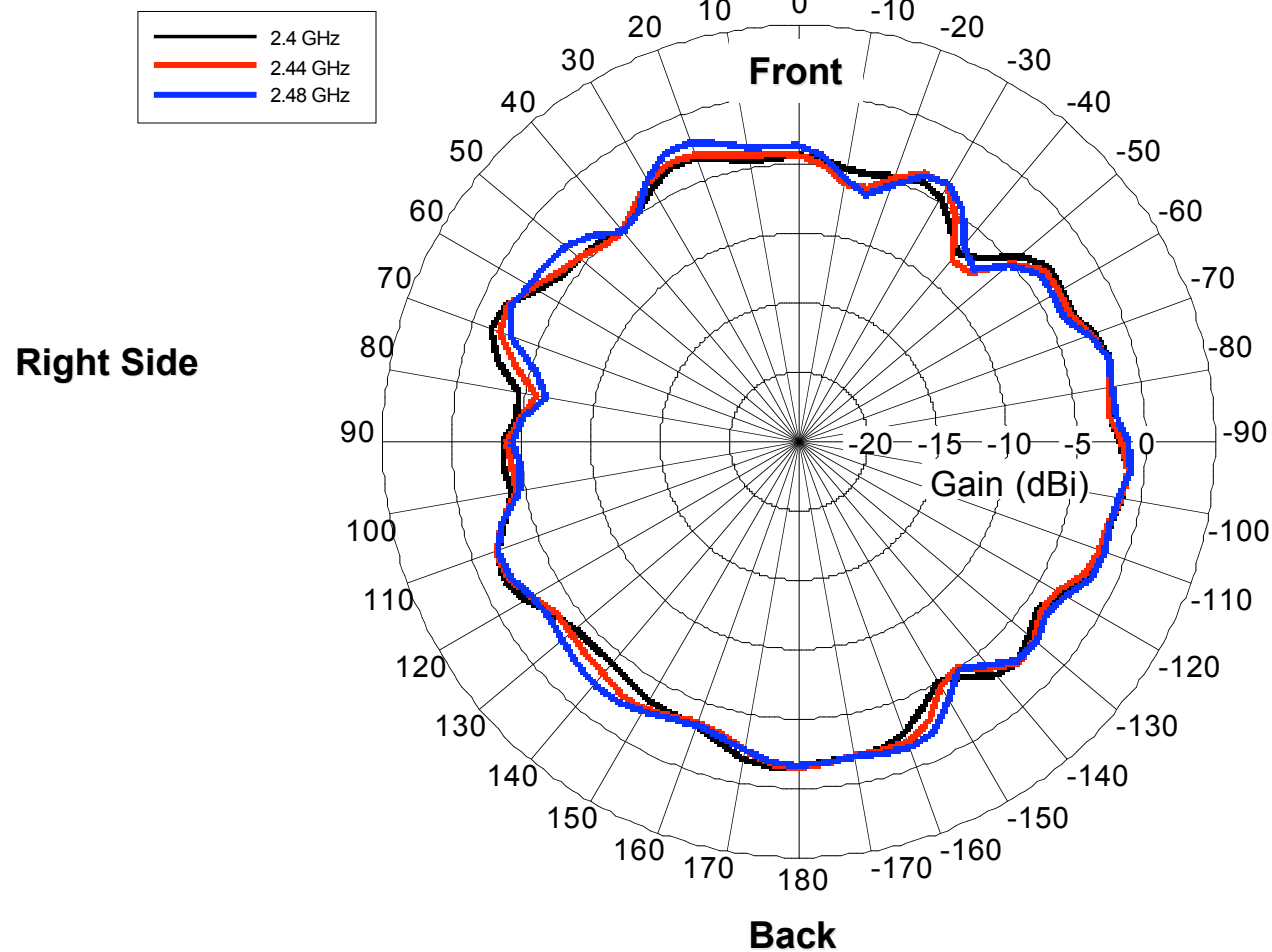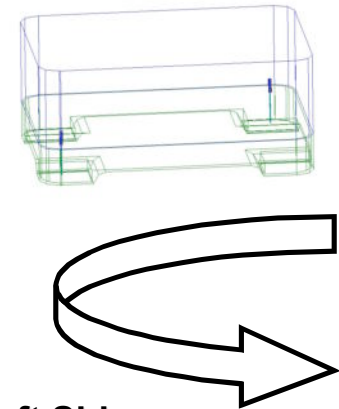




Elevation Cut (XZ Plane)

Realized Gain (dBiL) - Antenna 1 - Horizontal Polarization


Elevation Cut Through Sides of ZonePlayer

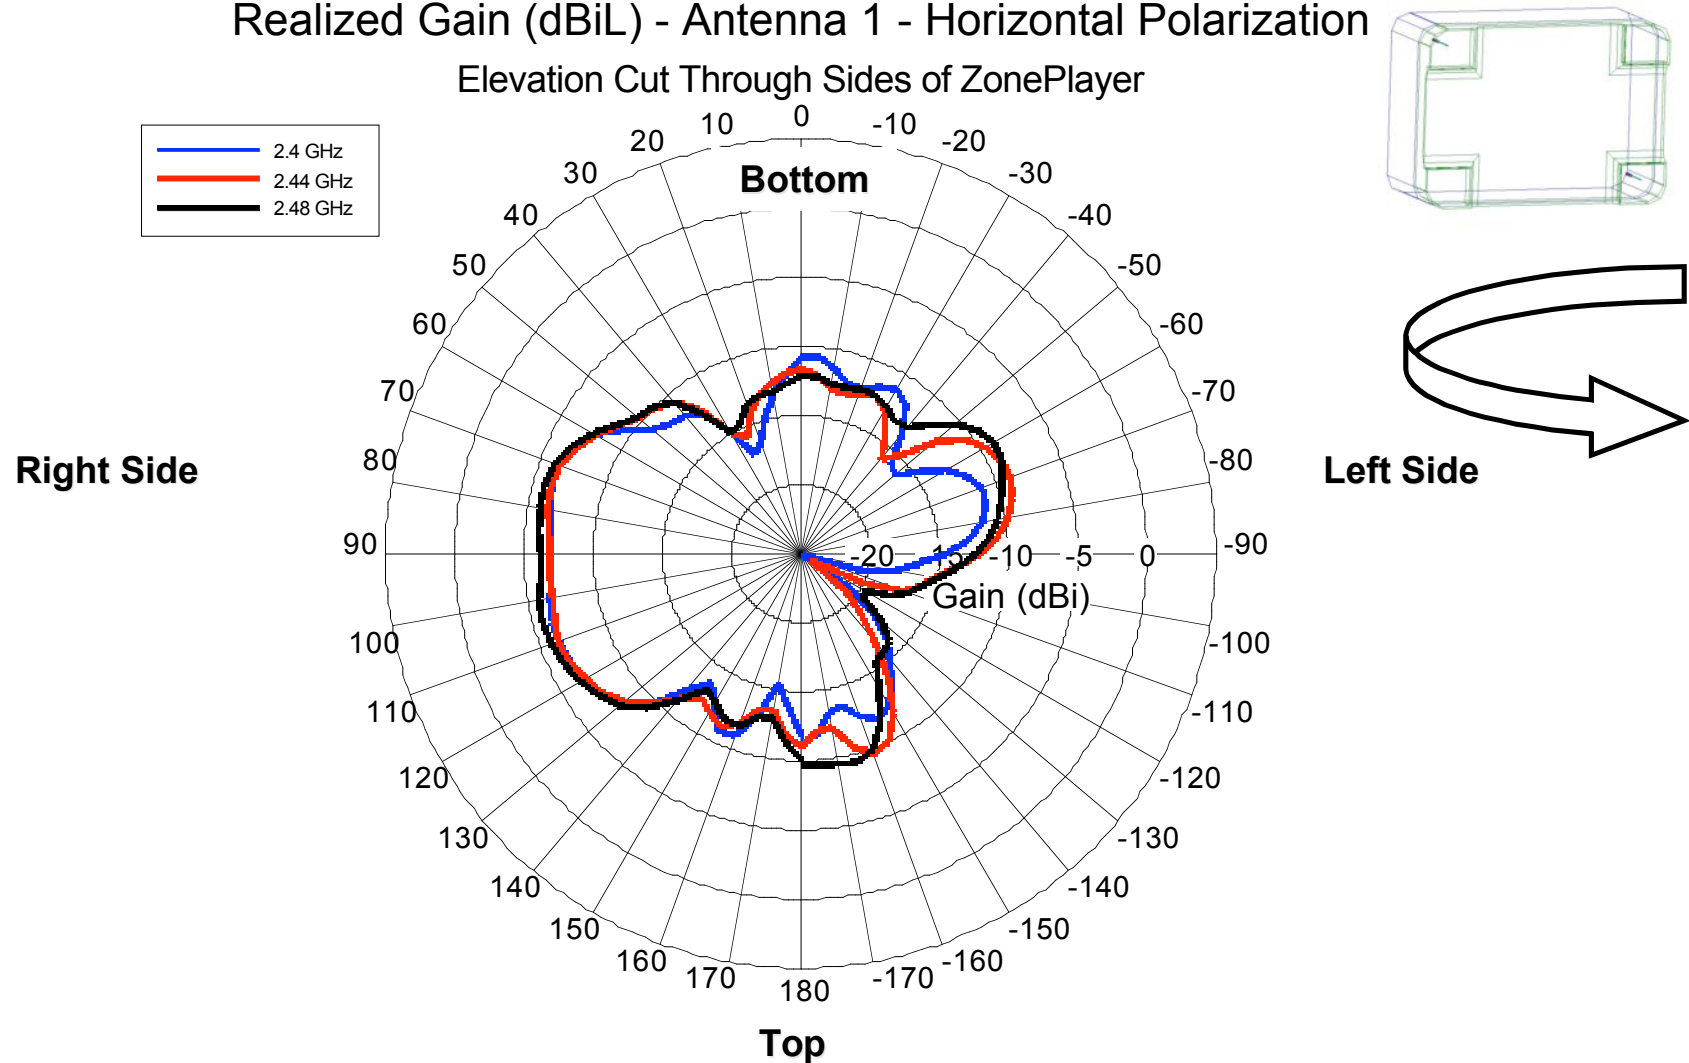



Elevation Cut (XZ Plane)

Realized Gain (dBiL) - Antenna 1 - Vertical Polarization
Elevation Cut Through Sides of ZonePlayer



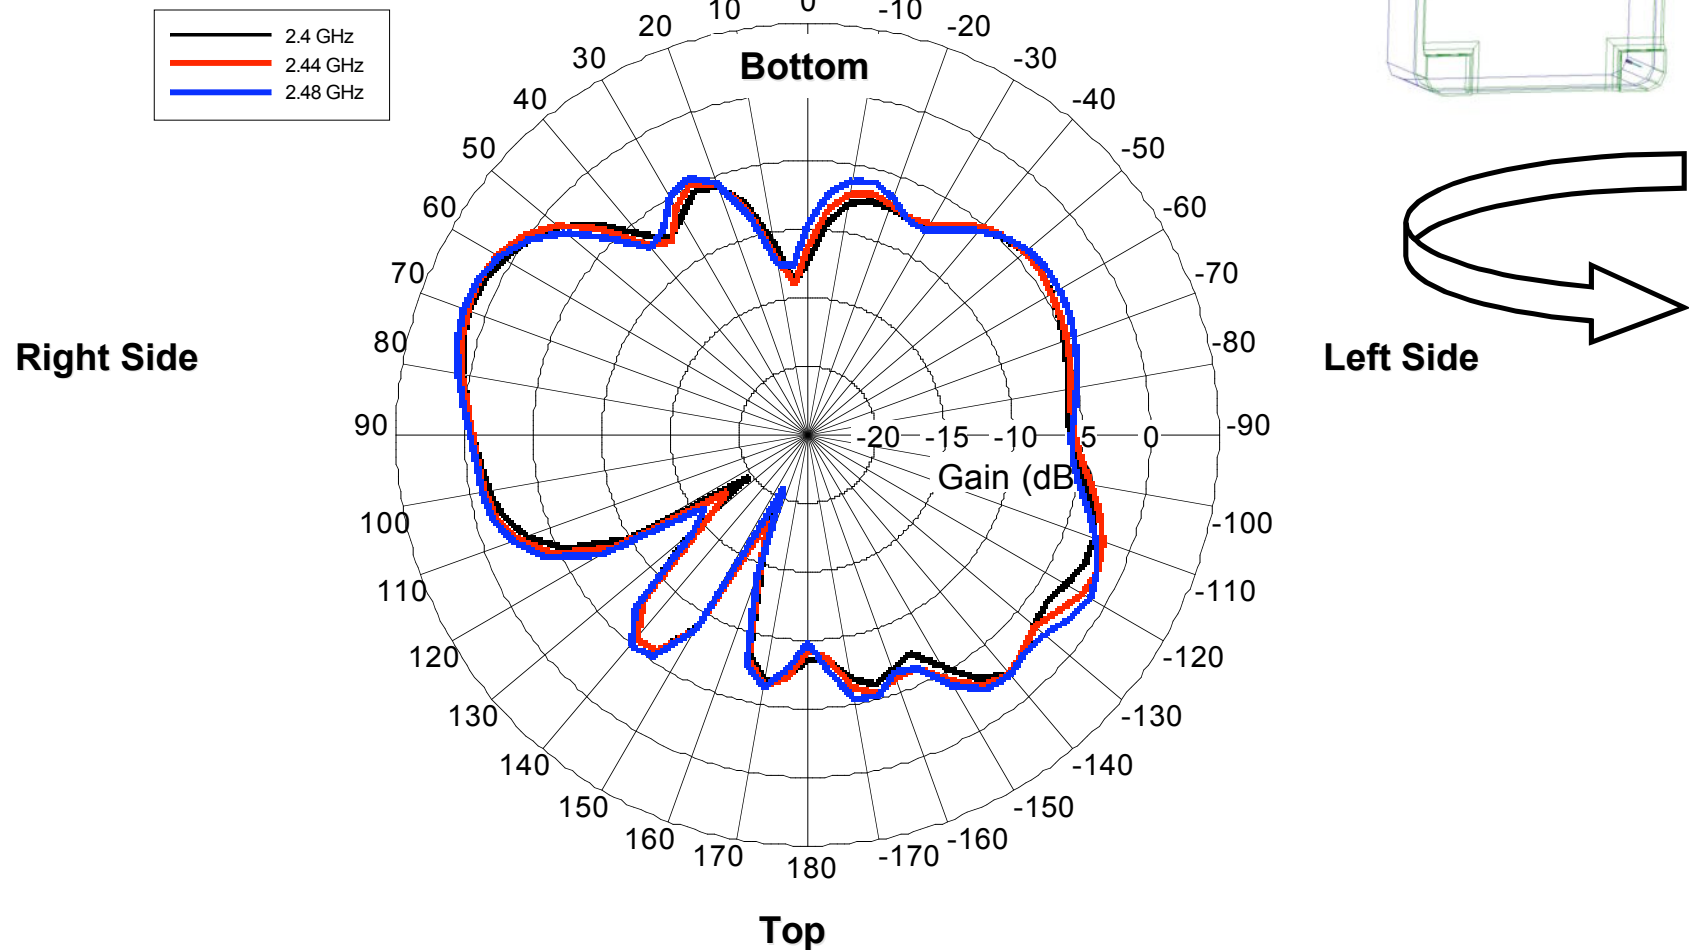




Elevation Cut (XZ Plane)

Realized Gain (dBiL) - Antenna 2 - Horizontal Polarization

Elevation Cut Through Sides of ZonePlayer

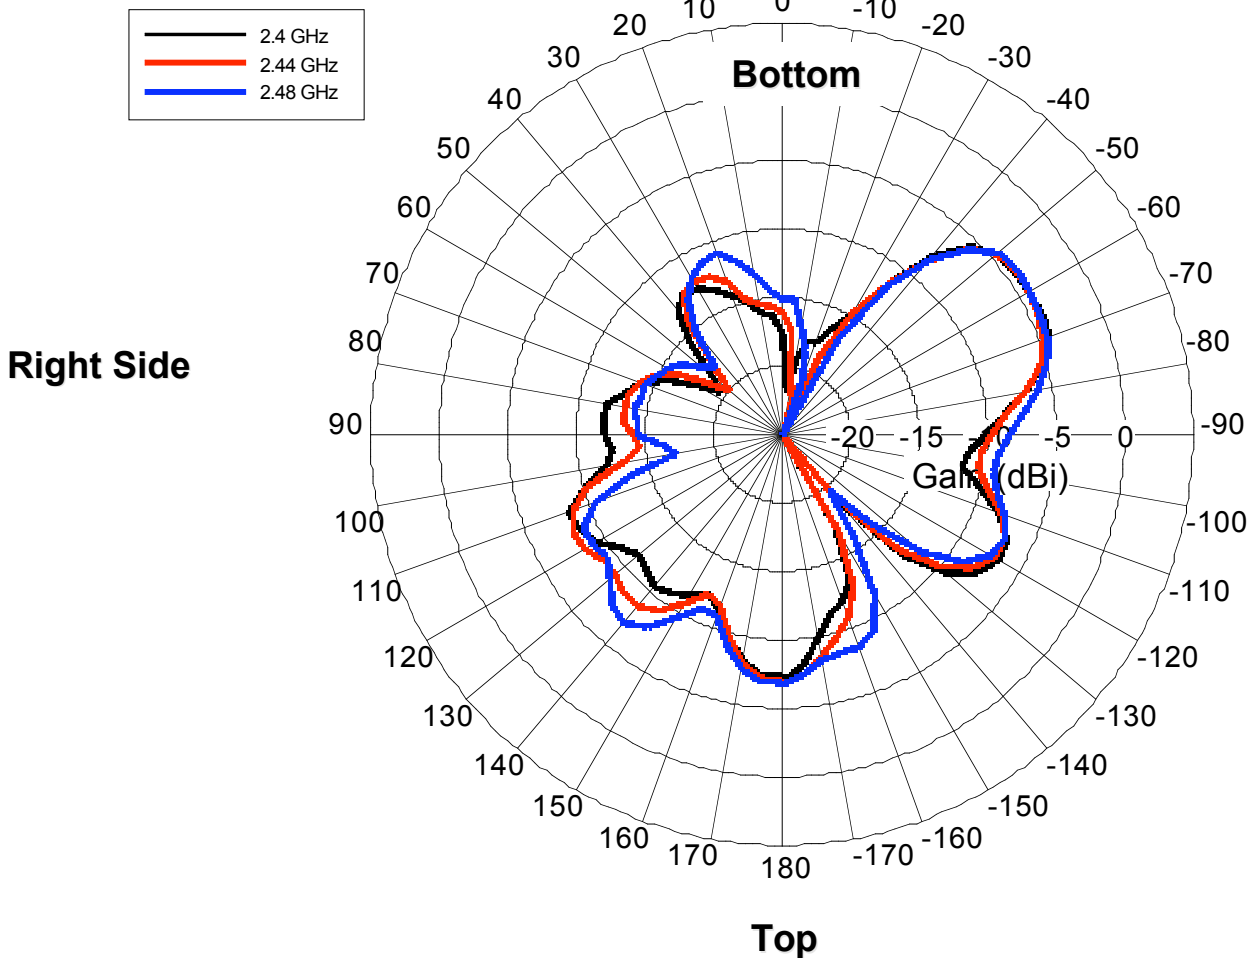




Elevation Cut (XZ Plane)

Realized Gain (dBiL) - Antenna 2 - Vertical Polarization



Elevation Cut Through Sides of ZonePlayer

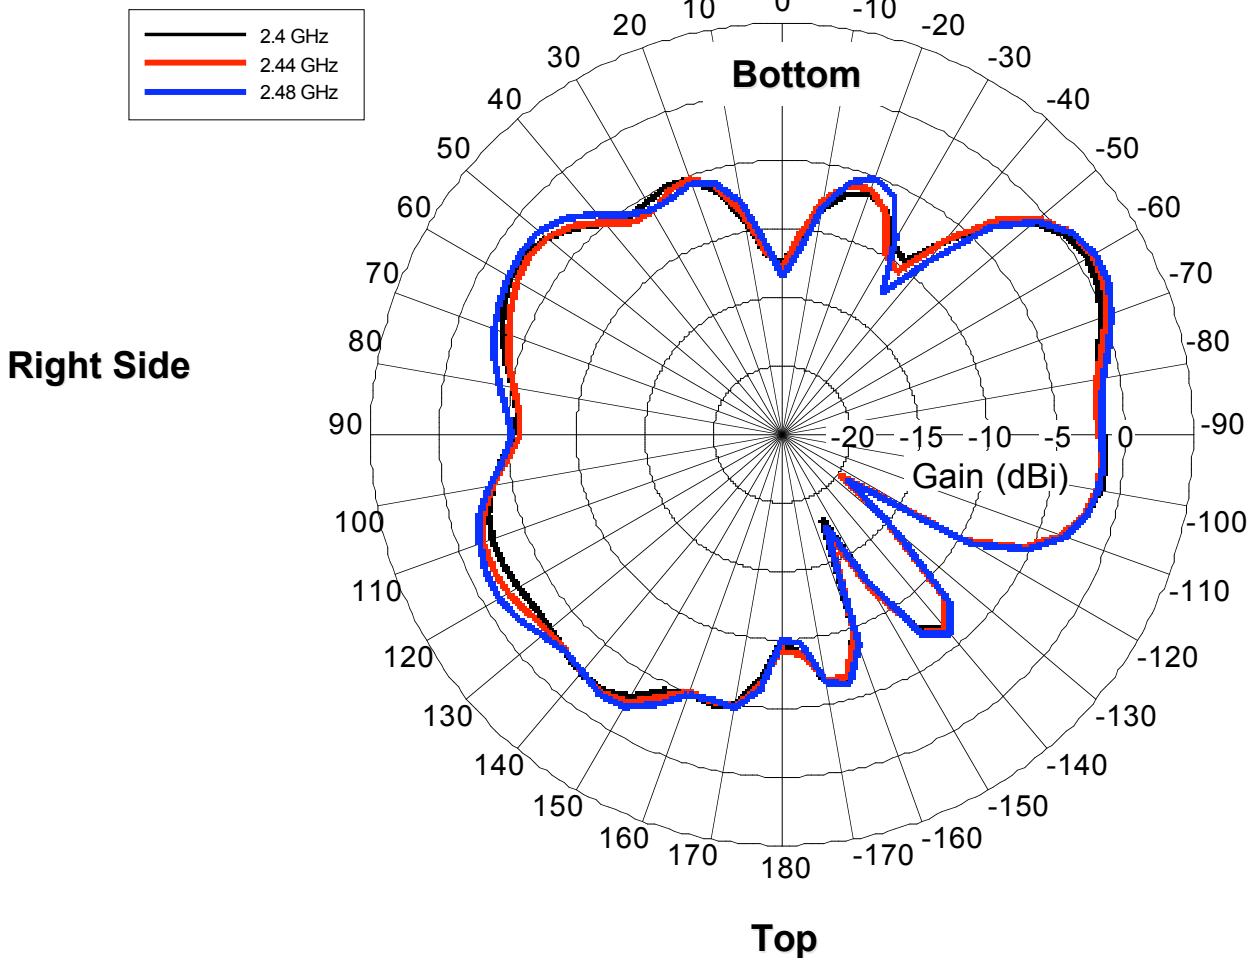



Elevation Cut (YZ Plane)

Realized Gain (dBiL) - Antenna 1 - Horizontal Polarization
Elevation Cut Through Top and Bottom of ZonePlayer

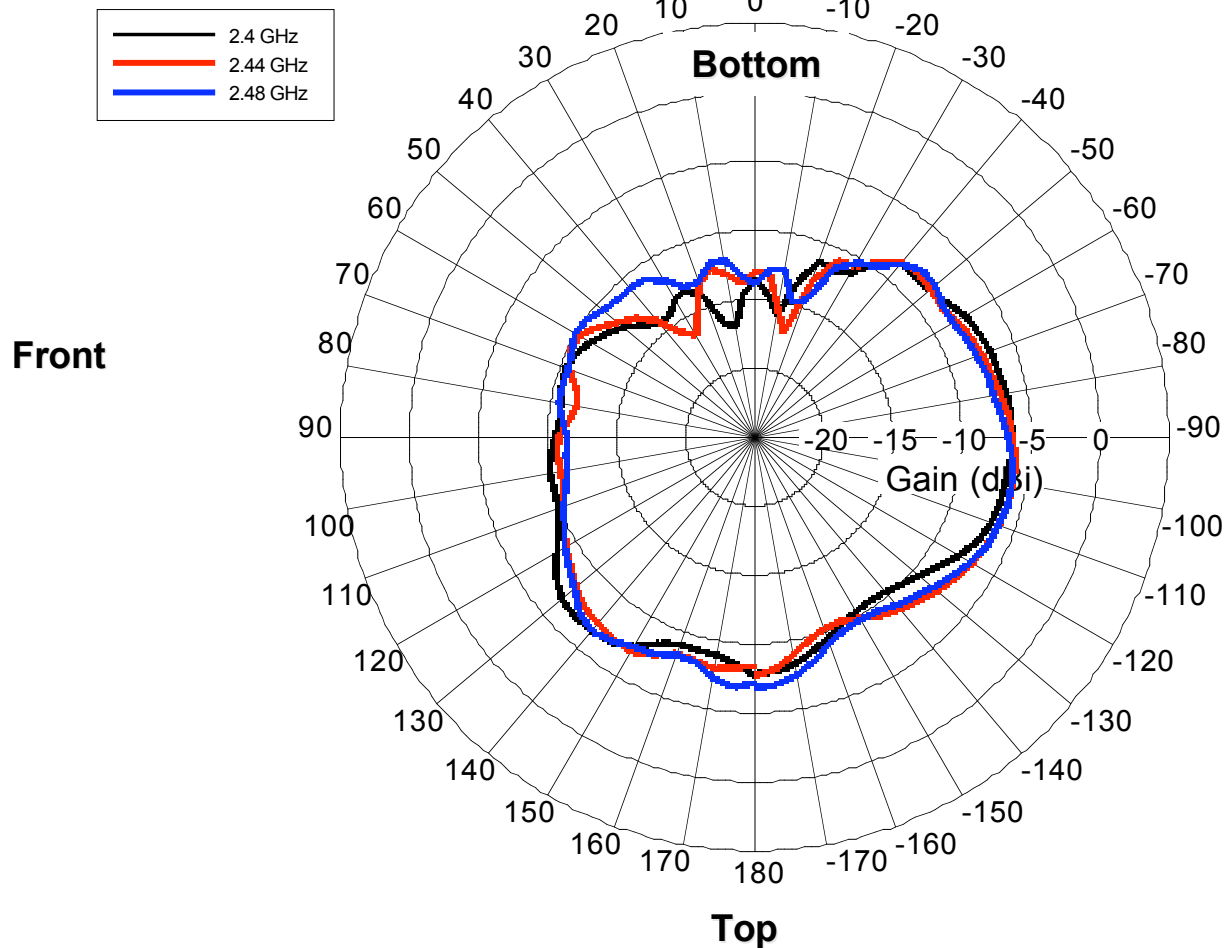




Elevation Cut (YZ Plane)

Realized Gain (dBiL) - Antenna 1 - Vertical Polarization



Elevation Cut Through Top and Bottom of ZonePlayer

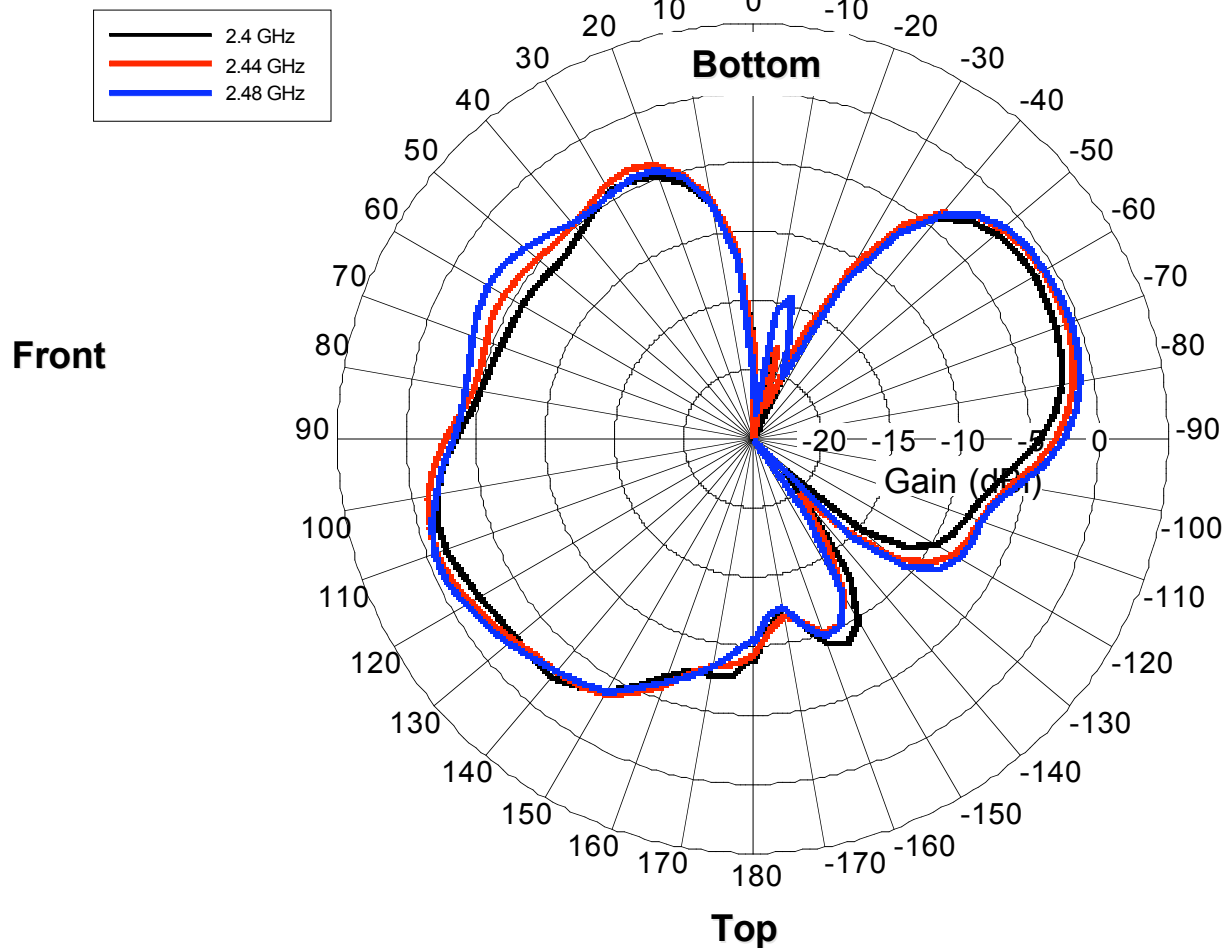



Elevation Cut (YZ Plane)

Realized Gain (dBiL) - Antenna 2 - Horizontal Polarization
Elevation Cut Through Top and Bottom of ZonePlayer

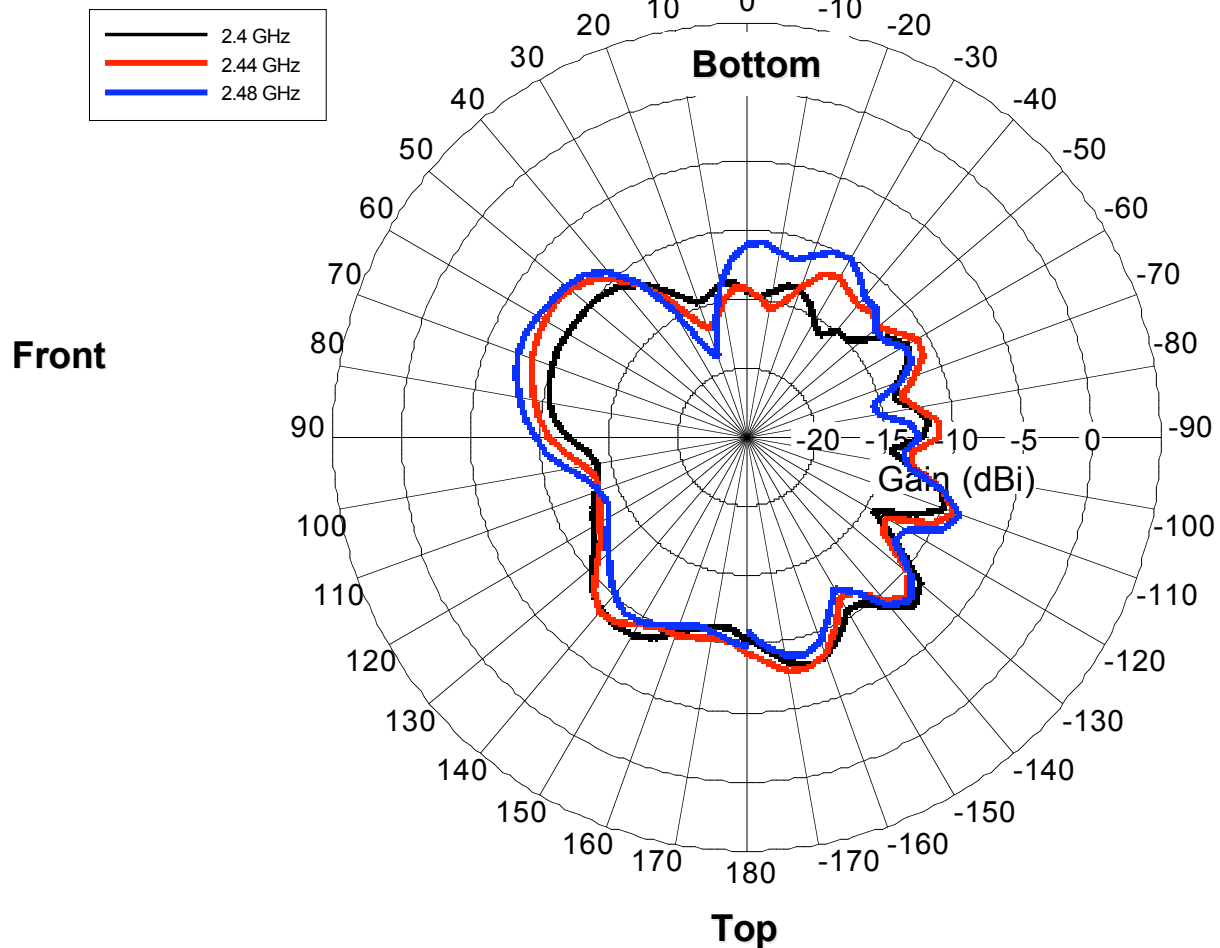




Elevation Cut (YZ Plane)

Realized Gain (dBiL) - Antenna 2 - Vertical Polarization

Elevation Cut Through Top and Bottom of ZonePlayer

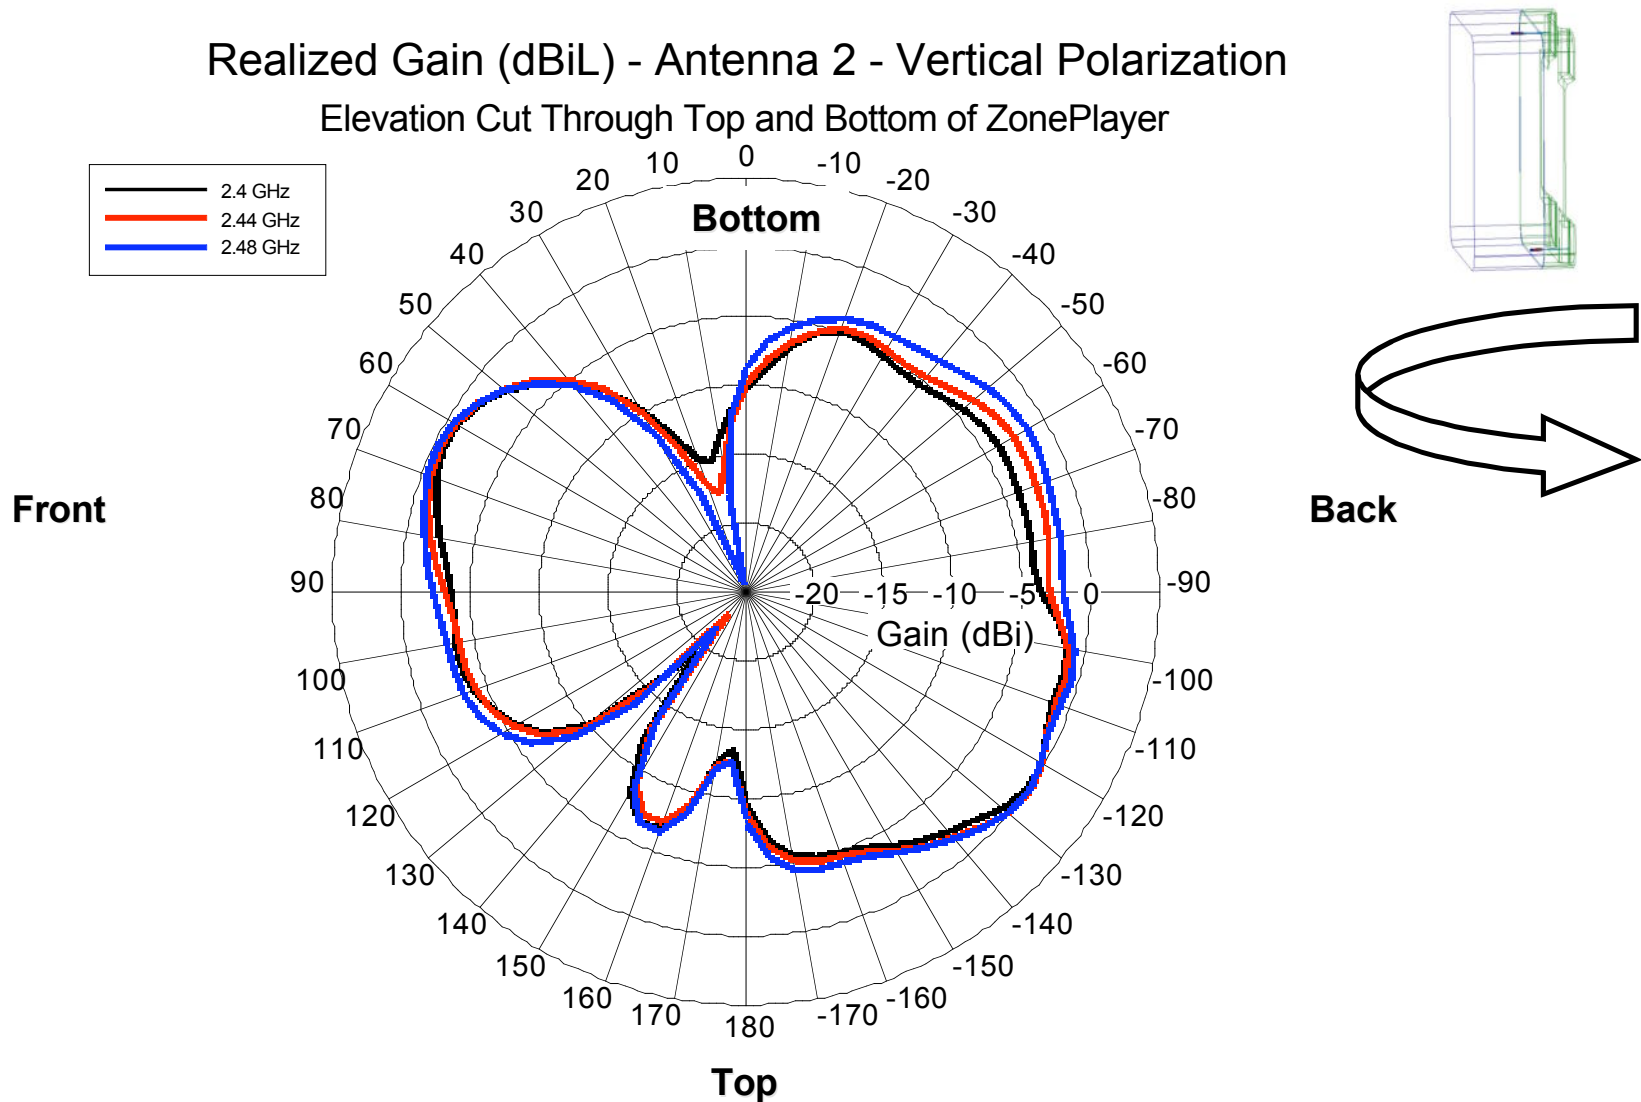



Results

- **Radiation is mainly vertically polarized as expected.**
 - **Horizontal polarization is lower by 5-10 dB.**
- **Pattern coverage shows some masking due to the ZonePlayer chassis but is generally broad.**
 - **This is about as close to ideal as you can get without putting the antennas outside and on top of the chassis.**
- **The second set of patterns shows that the highest gain for each antenna is actually out the side opposite the antenna.**
 - **This is not intuitive, but it matches the simulation results.**