

Meas1.Head Left cheek GSM 850 Ch190 ANT5

Date: 2026/8/11

Communication System Band: GPRS850; Frequency: 836.6 MHz; Duty Cycle: 1:2.08

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 42.192$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(9.25, 9.17, 9.43); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch190/Area Scan (71x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.204 W/kg

Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.380 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.213 W/kg

SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.129 W/kg

Smallest distance from peaks to all points 3 dB below = 21.9 mm

Ratio of SAR at M2 to SAR at M1 = 77.9%

Maximum value of SAR (measured) = 0.197 W/kg

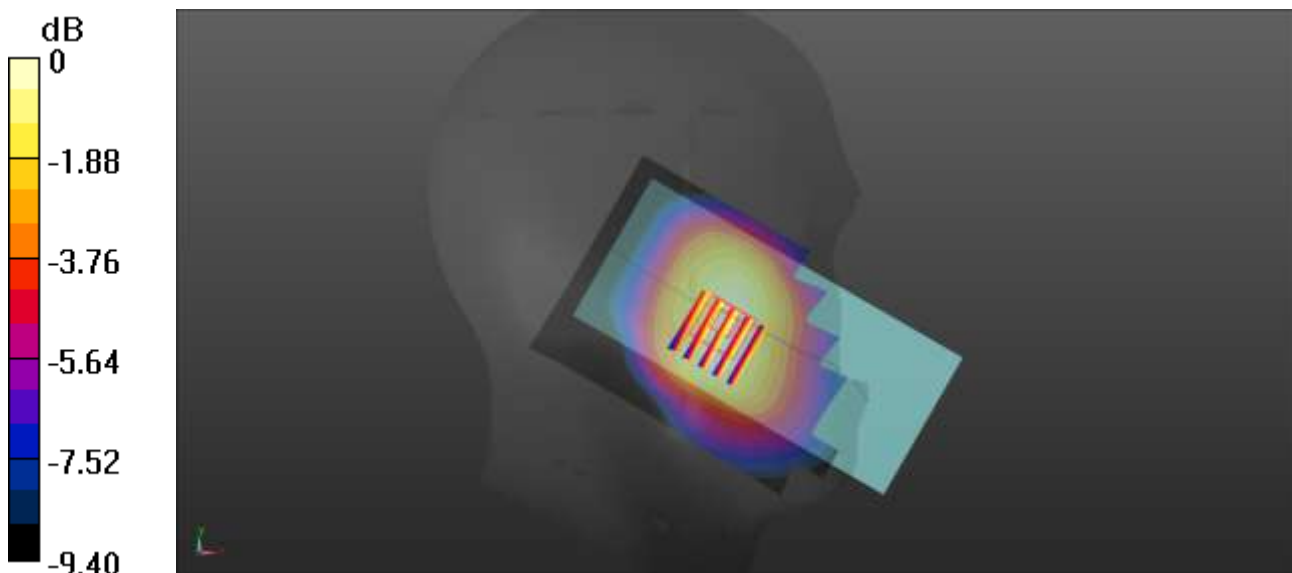

0 dB = 0.197 W/kg

Meas2.Body-worn&Hotspot Back Side 10mm GSM 850 Ch190 Ant5

Date: 2026/8/11

Communication System Band: GPRS850; Frequency: 836.6 MHz; Duty Cycle: 1:2.08

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 42.192$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(9.25, 9.17, 9.43); Calibrated: 2026/4/7
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch190/Area Scan (61x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.208 W/kg

Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.65 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.266 W/kg

SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.115 W/kg

Smallest distance from peaks to all points 3 dB below = 23.8 mm

Ratio of SAR at M2 to SAR at M1 = 66.5%

Maximum value of SAR (measured) = 0.197 W/kg

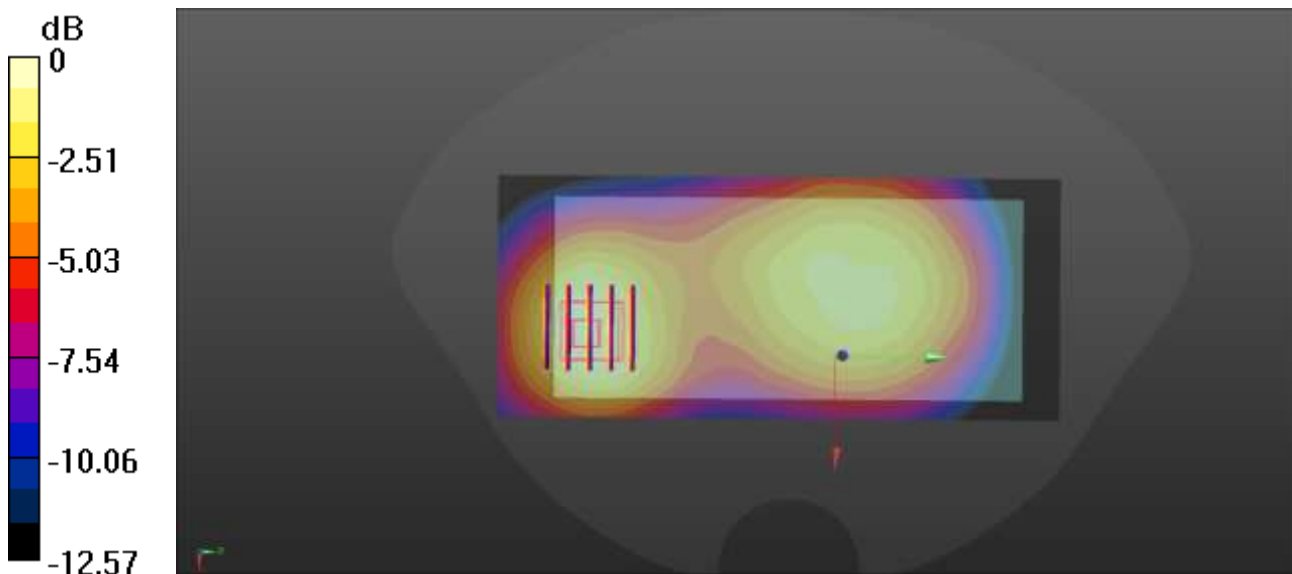

0 dB = 0.197 W/kg

Meas3.Head Left cheek GSM 1900 Ch661 ANT5

Date: 2026/8/12

Communication System Band: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.08

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 39.309$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(7.58, 7.52, 7.74); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch661/Area Scan (71x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0814 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.0750 W/kg

SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.029 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 65.7%

Maximum value of SAR (measured) = 0.0643 W/kg

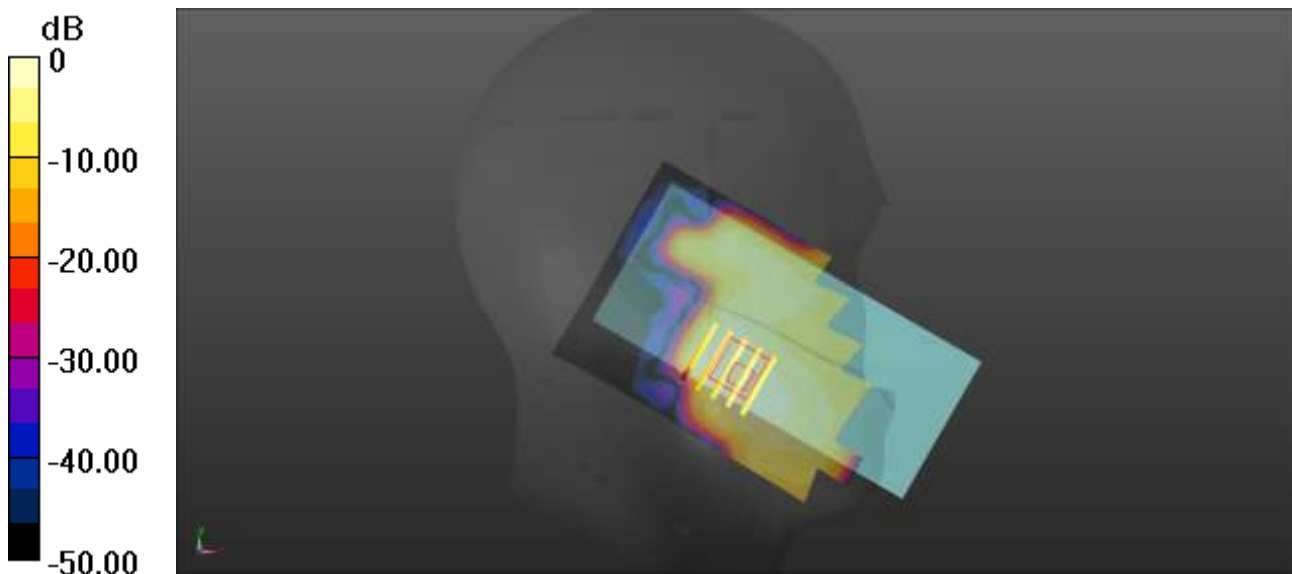

0 dB = 0.0643 W/kg

Meas4.Body-worn&Hotspot Back Side 10mm GSM 1900 Ch661 Ant5

Date: 2026/8/12

Communication System Band: GPRS 1900; Frequency: 1880 MHz;Duty Cycle: 1:2.08

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 39.309$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.5°C Liquid Temperature:21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(7.58, 7.52, 7.74); Calibrated: 2026/4/7
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch661/Area Scan (61x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.155 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.064 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.218 W/kg

SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.083 W/kg

Smallest distance from peaks to all points 3 dB below = 22.2 mm

Ratio of SAR at M2 to SAR at M1 = 61%

Maximum value of SAR (measured) = 0.150 W/kg

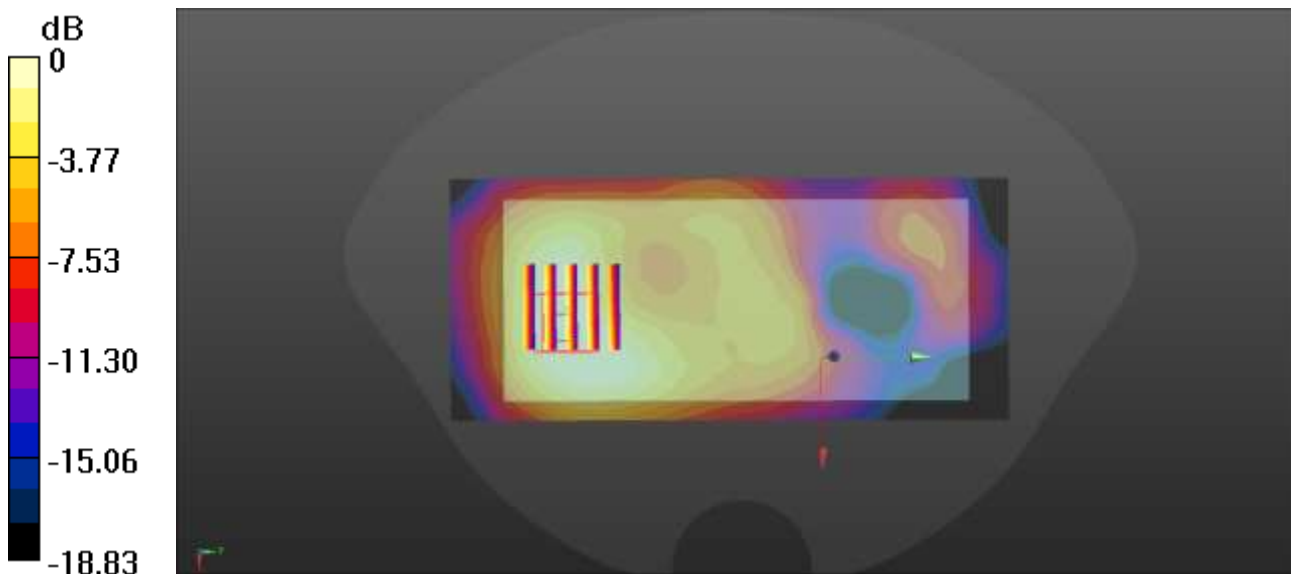

0 dB = 0.150 W/kg

Meas5.Head Left cheek WCDMA B2 Ch9400 ANT5

Date: 2026/8/12

Communication System Band: Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 39.309$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(7.58, 7.52, 7.74); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch9400/Area Scan (71x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.136 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0.2970 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.137 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.051 W/kg

Smallest distance from peaks to all points 3 dB below = 11.8 mm

Ratio of SAR at M2 to SAR at M1 = 62.8%

Maximum value of SAR (measured) = 0.118 W/kg

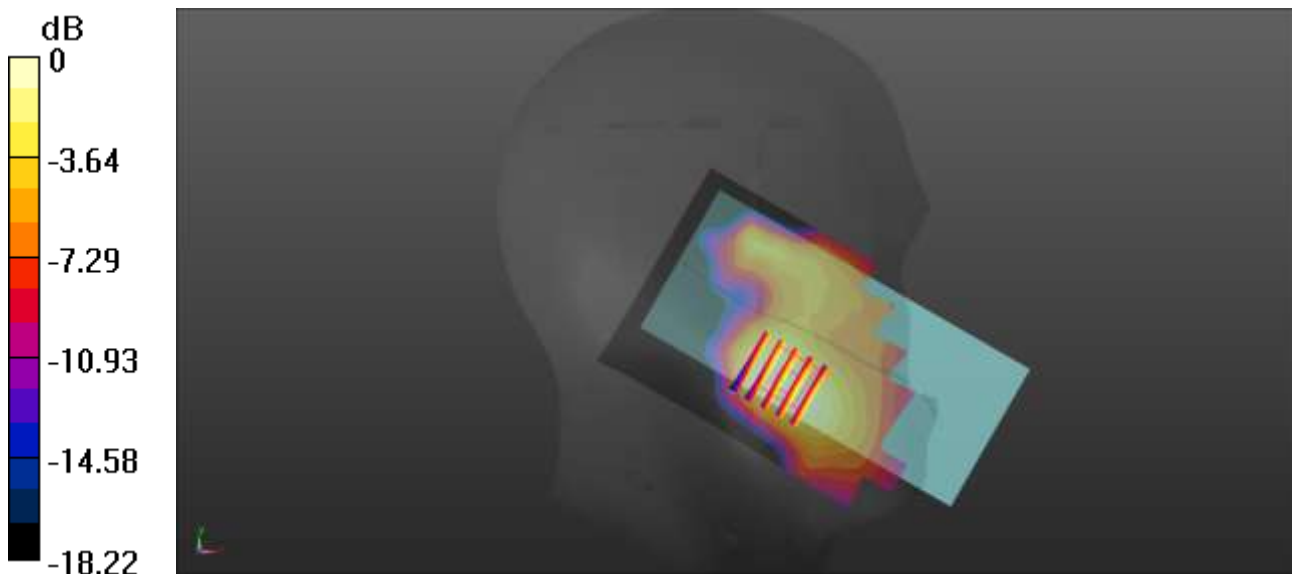

0 dB = 0.118 W/kg

Meas6.Body-worn&Hotspot Back Side 10mm WCDMA B2 Ch9400 Ant5

Date: 2026/8/12

Communication System Band: II; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 39.309$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.5°C Liquid Temperature:21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(7.58, 7.52, 7.74); Calibrated: 2026/4/7
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CD; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch9400/Area Scan (61x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.264 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.730 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.385 W/kg

SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.147 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 59.8%

Maximum value of SAR (measured) = 0.263 W/kg

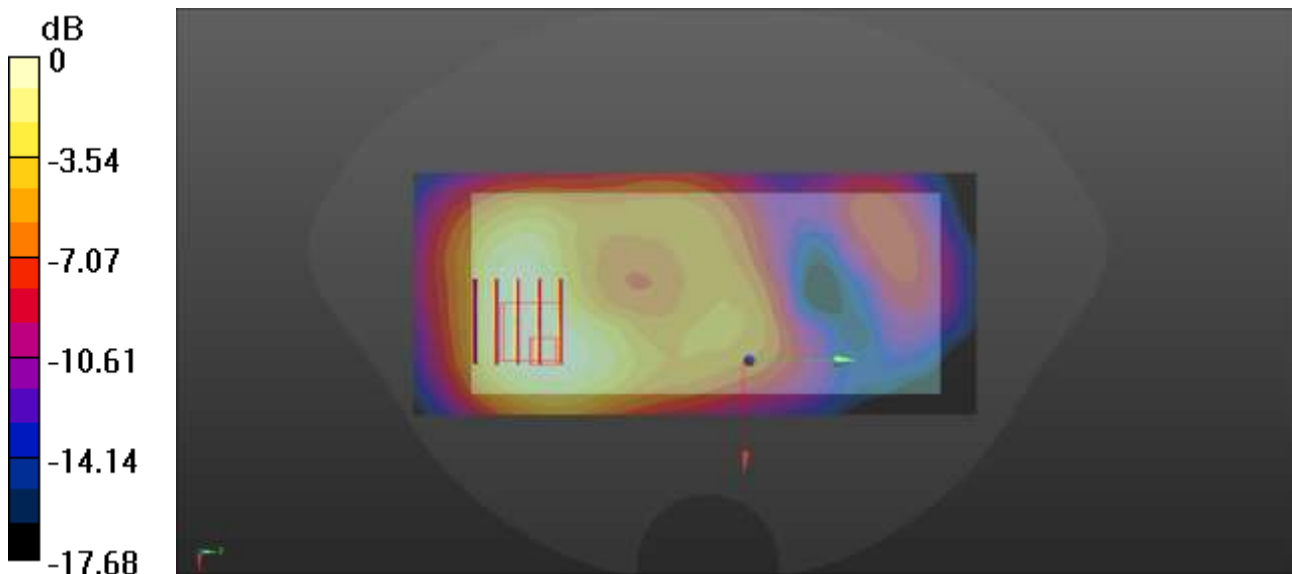

0 dB = 0.263 W/kg

Meas7.Head Left cheek WCDMA B4 Ch1413 ANT5

Date: 2026/8/13

Communication System Band: Band IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.328$ S/m; $\epsilon_r = 39.571$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(7.86, 7.8, 8.02); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1413/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.141 W/kg

Ch1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.656 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 0.162 W/kg

SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.064 W/kg

Smallest distance from peaks to all points 3 dB below = 13 mm

Ratio of SAR at M2 to SAR at M1 = 64.2%

Maximum value of SAR (measured) = 0.137 W/kg

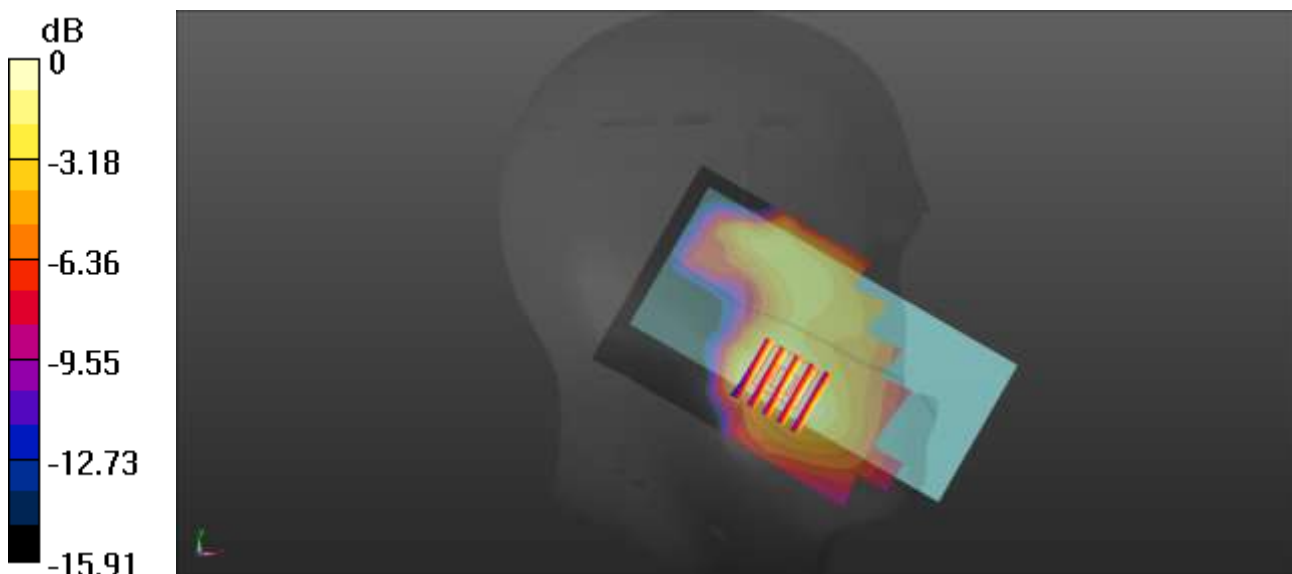

0 dB = 0.137 W/kg

Meas8.Body-worn&Hotspot Back Side 10mm WCDMA B4 Ch1413 Ant5

Date: 2026/8/13

Communication System Band: IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.328$ S/m; $\epsilon_r = 39.571$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(7.86, 7.8, 8.02); Calibrated: 2026/4/7
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CD; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1413/Area Scan (61x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.345 W/kg

Ch1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.988 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.449 W/kg

SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.178 W/kg

Smallest distance from peaks to all points 3 dB below = 17.2 mm

Ratio of SAR at M2 to SAR at M1 = 63.2%

Maximum value of SAR (measured) = 0.311 W/kg

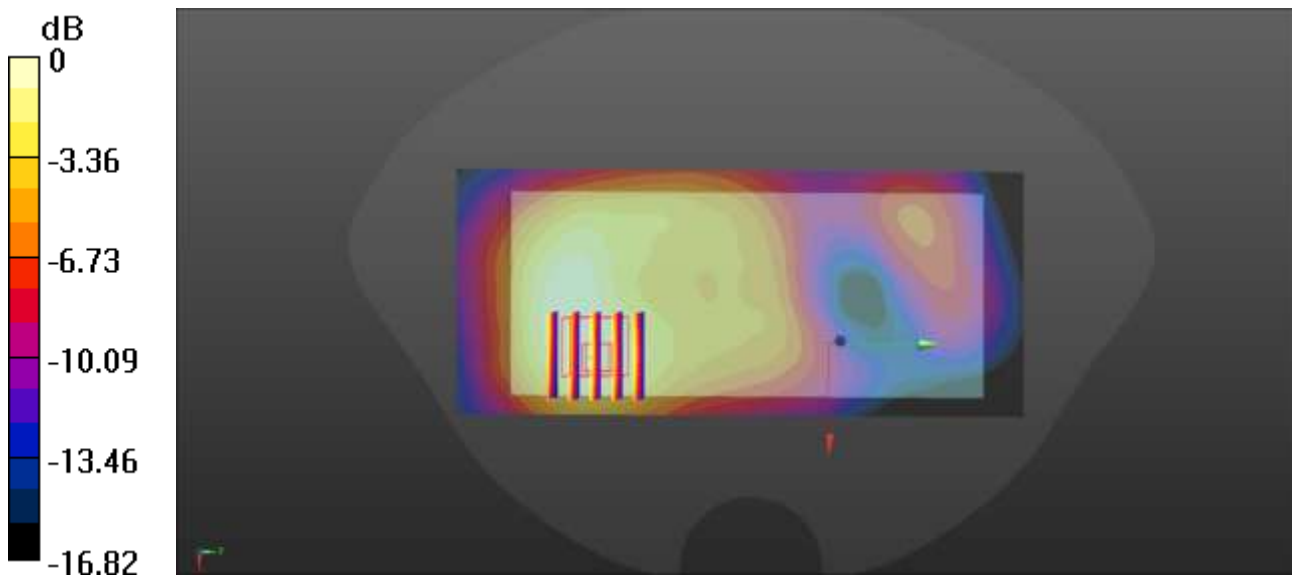

0 dB = 0.311 W/kg

Meas9.Head Left cheek WCDMA B5 Ch4182 ANT5

Date: 2026/8/11

Communication System Band: Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 42.193$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(9.25, 9.17, 9.43); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch4182/Area Scan (71x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.0955 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.081 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.0940 W/kg

SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.057 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 78.3%

Maximum value of SAR (measured) = 0.0859 W/kg

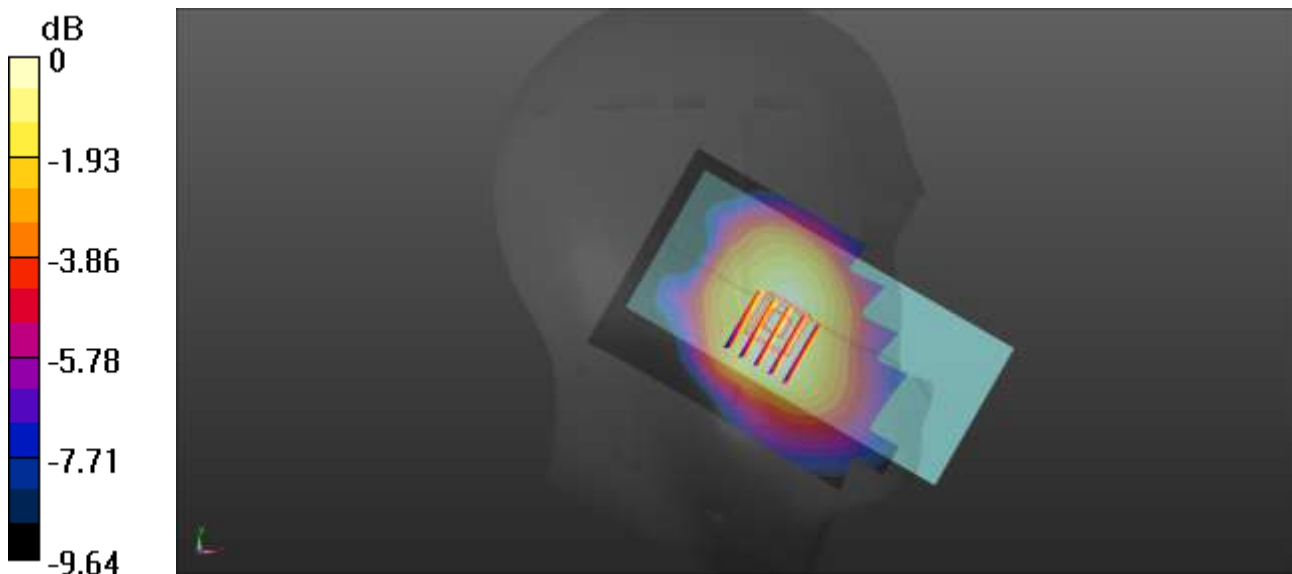

0 dB = 0.0859 W/kg

Meas10.Body-worn&Hotspot Back Side 10mm WCDMA B5 Ch4182 Ant5

Date: 2026/8/11

Communication System Band: V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 42.193$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(9.25, 9.17, 9.43); Calibrated: 2026/4/7
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CD; Serial: 1811
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch4182/Area Scan (61x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0895 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.390 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.118 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.055 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 71.8%

Maximum value of SAR (measured) = 0.0887 W/kg

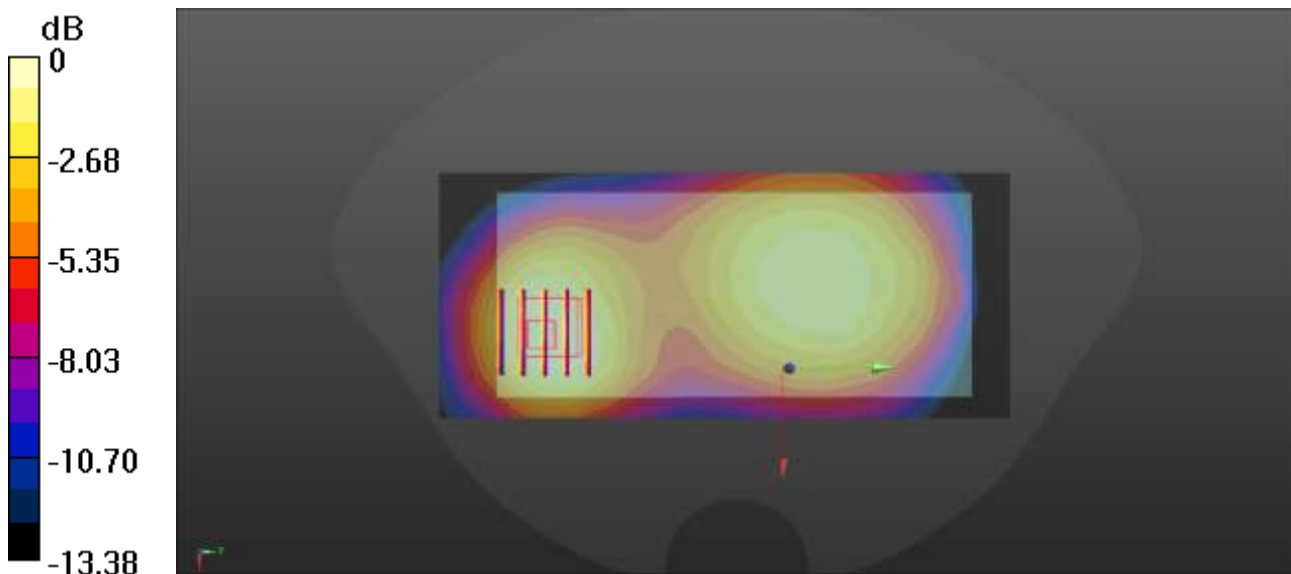

0 dB = 0.0887 W/kg

Meas11.Head Left cheek LTE B7 Ch21100 ANT5

Date: 2026/8/10

Communication System Band: Band 7; Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.852$ S/m; $\epsilon_r = 40.118$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature:22.2°C Liquid Temperature:21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(6.93, 6.88, 7.08); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch21100/Area Scan (81x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.157 W/kg

Ch21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.048 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 51.8%

Maximum value of SAR (measured) = 0.154 W/kg

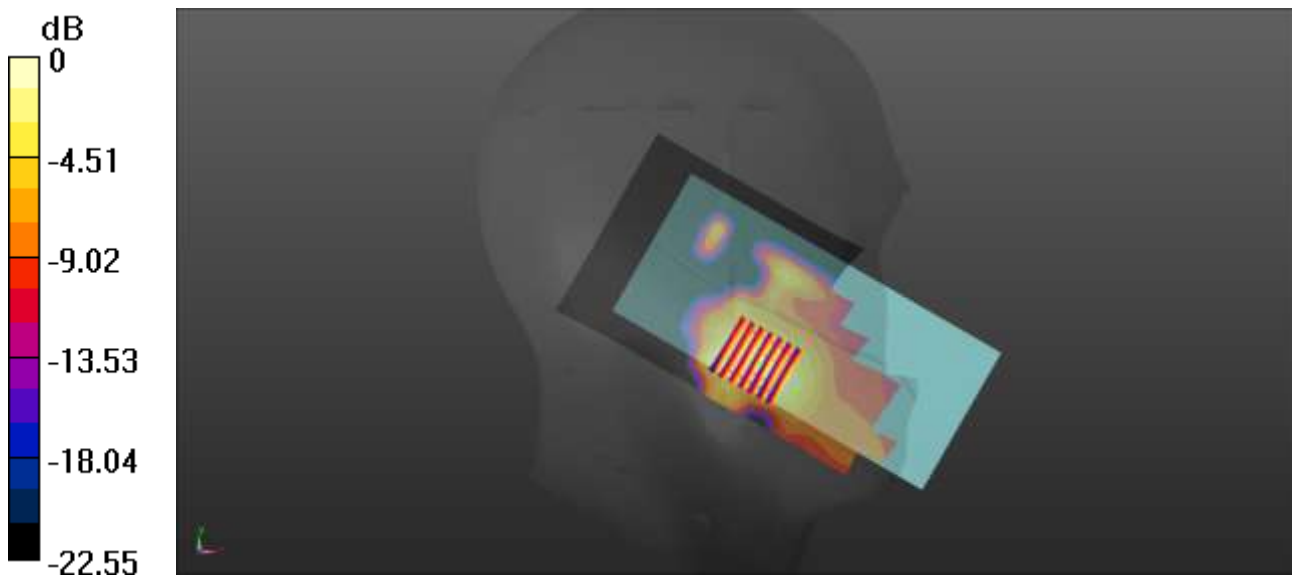

0 dB = 0.154 W/kg

Meas12.Body-worn&Hotspot Back side 10mm LTE B7 Ch21100 ANT5

Date: 2026/8/10

Communication System Band: Band 7; Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.852$ S/m; $\epsilon_r = 40.118$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.2°C Liquid Temperature:21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(6.93, 6.88, 7.08); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch21100/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.629 W/kg

Ch21100/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.288 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.739 W/kg

SAR(1 g) = 0.382 W/kg; SAR(10 g) = 0.197 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 52.2%

Maximum value of SAR (measured) = 0.605 W/kg

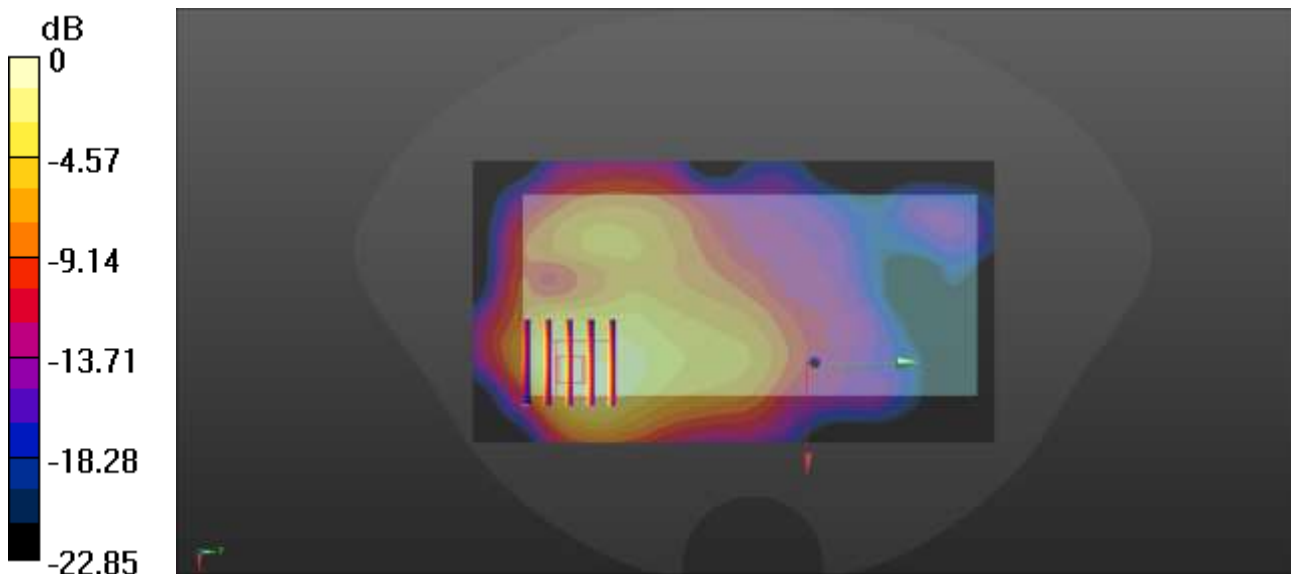

0 dB = 0.605 W/kg

Meas13.Head Left cheek LTE B25 Ch26365 ANT5

Date: 2026/8/12

Communication System Band: Band 25; Frequency: 1882.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 39.304$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature:22.5°C Liquid Temperature:21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(7.58, 7.52, 7.74); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch26365/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.158 W/kg

Ch26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.093 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.162 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.061 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 62.6%

Maximum value of SAR (measured) = 0.140 W/kg

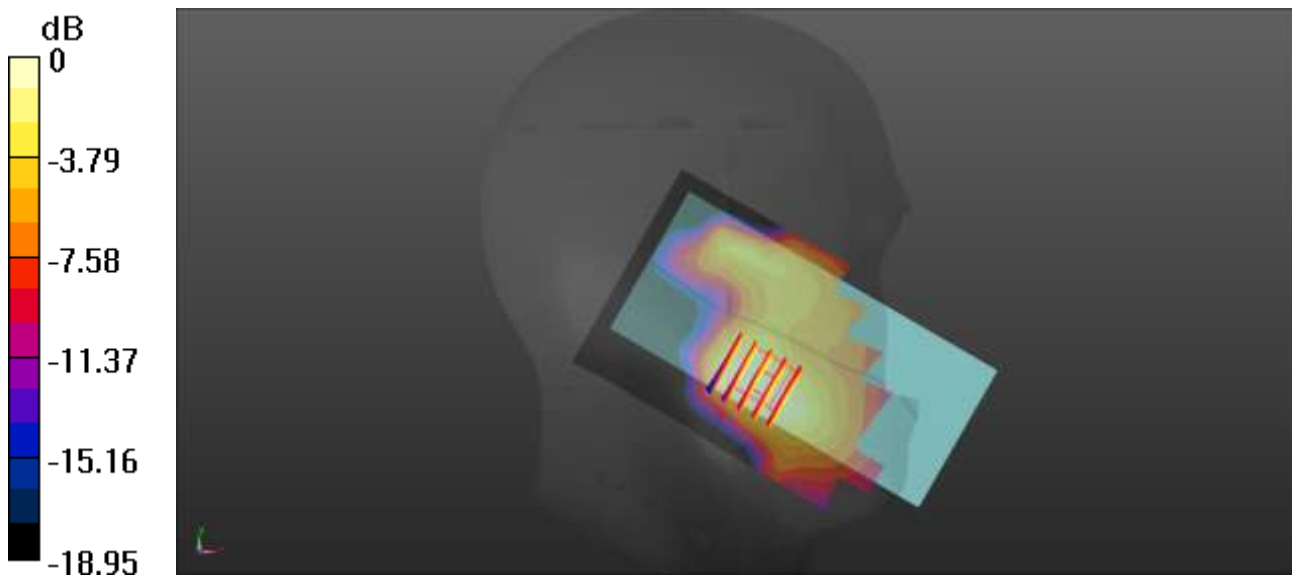

0 dB = 0.140 W/kg

Meas14.Body-worn&Hotspot Back side 10mm LTE B25 Ch26365 ANT5

Date: 2026/8/12

Communication System Band: Band 25; Frequency: 1882.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 39.304$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.5°C Liquid Temperature:21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(7.58, 7.52, 7.74); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch26365/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.836 W/kg

Ch26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.53 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.728 W/kg

SAR(1 g) = 0.456 W/kg; SAR(10 g) = 0.285 W/kg

Smallest distance from peaks to all points 3 dB below = 17 mm

Ratio of SAR at M2 to SAR at M1 = 62.4%

Maximum value of SAR (measured) = 0.617 W/kg

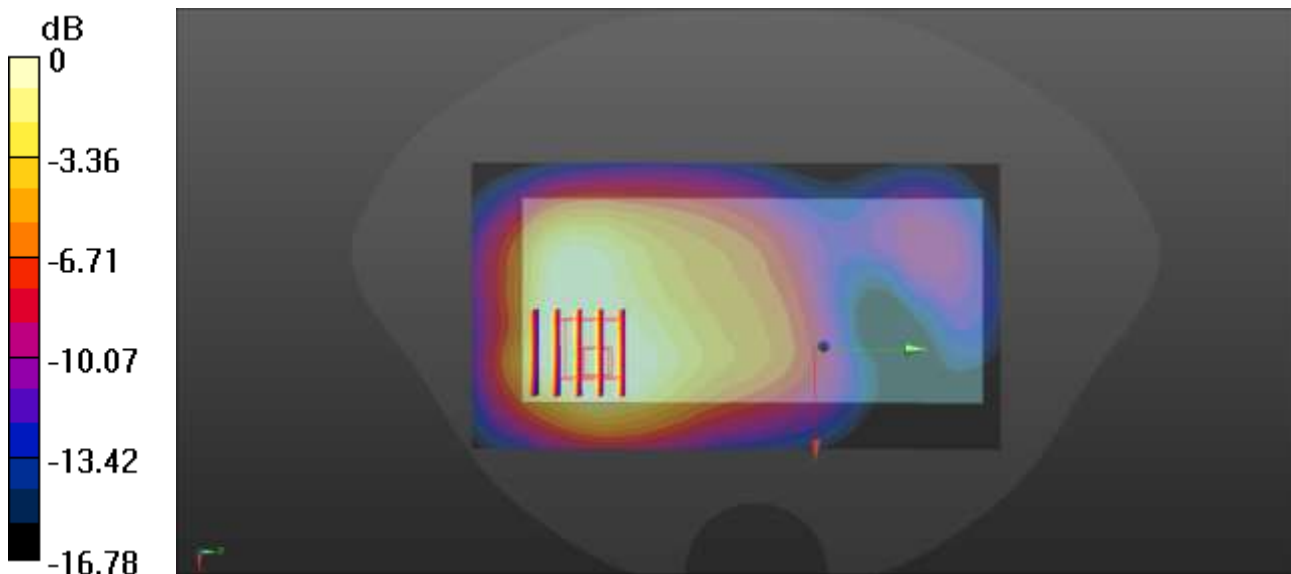

0 dB = 0.617 W/kg

Meas15.Head Left cheek LTE B26 Ch26865 ANT5

Date: 2026/8/11

Communication System Band: Band 26; Frequency: 831.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 42.222$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature:22.3°C Liquid Temperature:21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(9.25, 9.17, 9.43); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch26865/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0938 W/kg

Ch26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.050 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.102 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.064 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 79.6%

Maximum value of SAR (measured) = 0.0935 W/kg

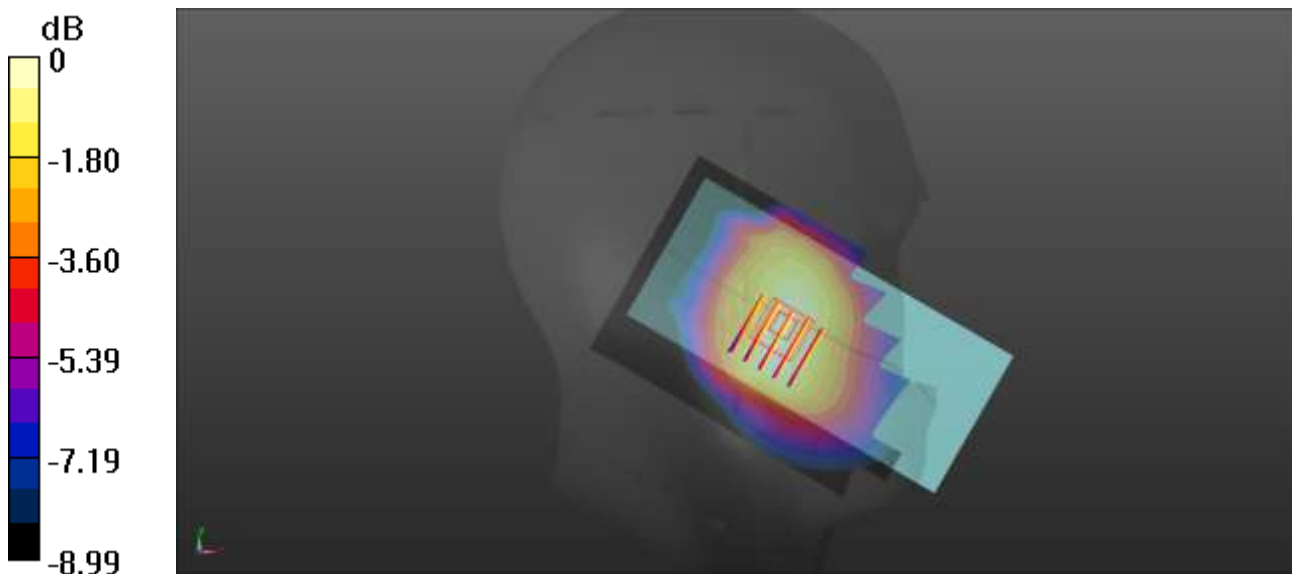

0 dB = 0.0935 W/kg

Meas16.Body-worn&Hotspot Back side 10mm LTE B26 Ch26865 ANT5

Date: 2026/8/11

Communication System Band: Band 26; Frequency: 831.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 42.222$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3°C Liquid Temperature:21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(9.25, 9.17, 9.43); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch26865/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.174 W/kg

Ch26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.347 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.199 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.084 W/kg

Smallest distance from peaks to all points 3 dB below = 18.1 mm

Ratio of SAR at M2 to SAR at M1 = 65.3%

Maximum value of SAR (measured) = 0.171 W/kg

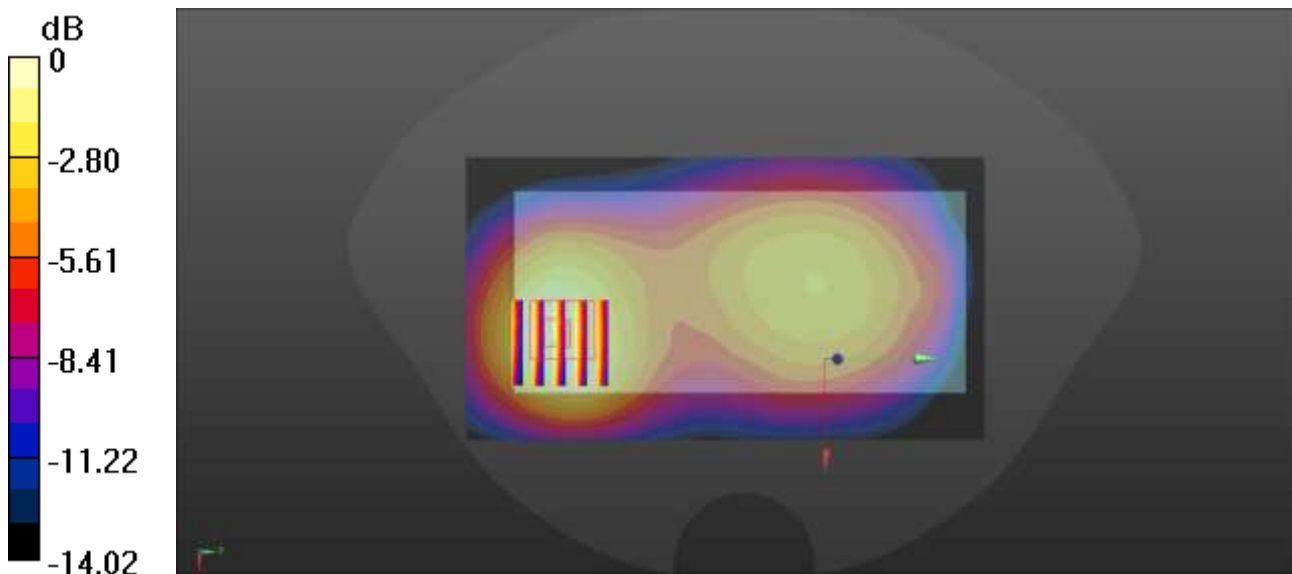

0 dB = 0.171 W/kg

Meas17.Head Left Cheek LTE B66 Ch132322 Ant.5

Date: 2026/8/13

Communication System Band: Band 66; Frequency: 1745 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.336$ S/m; $\epsilon_r = 39.552$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature:22.4°C Liquid Temperature:21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(7.86, 7.8, 8.02); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch132322/Area Scan (61x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.147 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.103 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.158 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.058 W/kg

Smallest distance from peaks to all points 3 dB below = 16.3 mm

Ratio of SAR at M2 to SAR at M1 = 60.3%

Maximum value of SAR (measured) = 0.132 W/kg

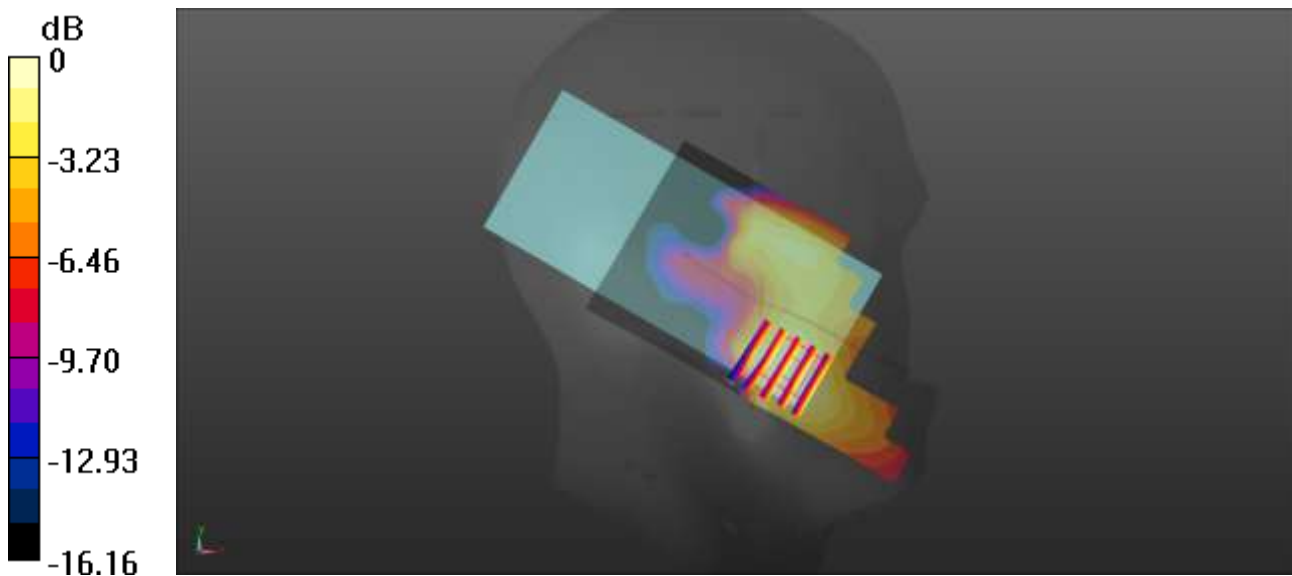

0 dB = 0.132 W/kg

Meas18.Body-worn&Hotspot Back Side 10mm LTE B66 Ch132322 Ant5

Date: 2026/8/13

Communication System Band: Band 66; Frequency: 1745 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.336$ S/m; $\epsilon_r = 39.552$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.4°C Liquid Temperature:21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(7.86, 7.8, 8.02); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch132322/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.501 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.00 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.589 W/kg

SAR(1 g) = 0.342 W/kg; SAR(10 g) = 0.208 W/kg

Smallest distance from peaks to all points 3 dB below = 19.3 mm

Ratio of SAR at M2 to SAR at M1 = 57.9%

Maximum value of SAR (measured) = 0.493 W/kg

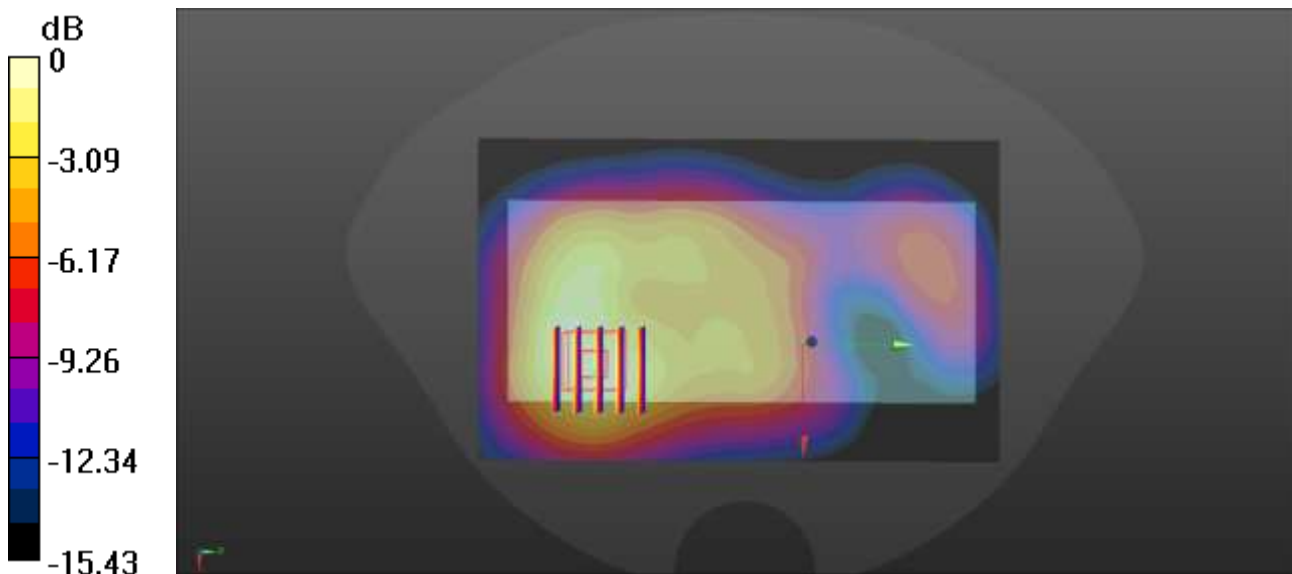

0 dB = 0.493 W/kg

Meas19.Head Left cheek LTE B40 Ch39150 ANT5

Date: 2026/8/14

Communication System Band: Band 40; Frequency: 2350 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2350$ MHz; $\sigma = 1.708$ S/m; $\epsilon_r = 40.352$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(7.23, 7.17, 7.37); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch39150/Area Scan (81x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.129 W/kg

Ch39150/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.3650 V/m; Power Drift = -0.1 dB


Peak SAR (extrapolated) = 0.148 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.042 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 57.1%

Maximum value of SAR (measured) = 0.121 W/kg

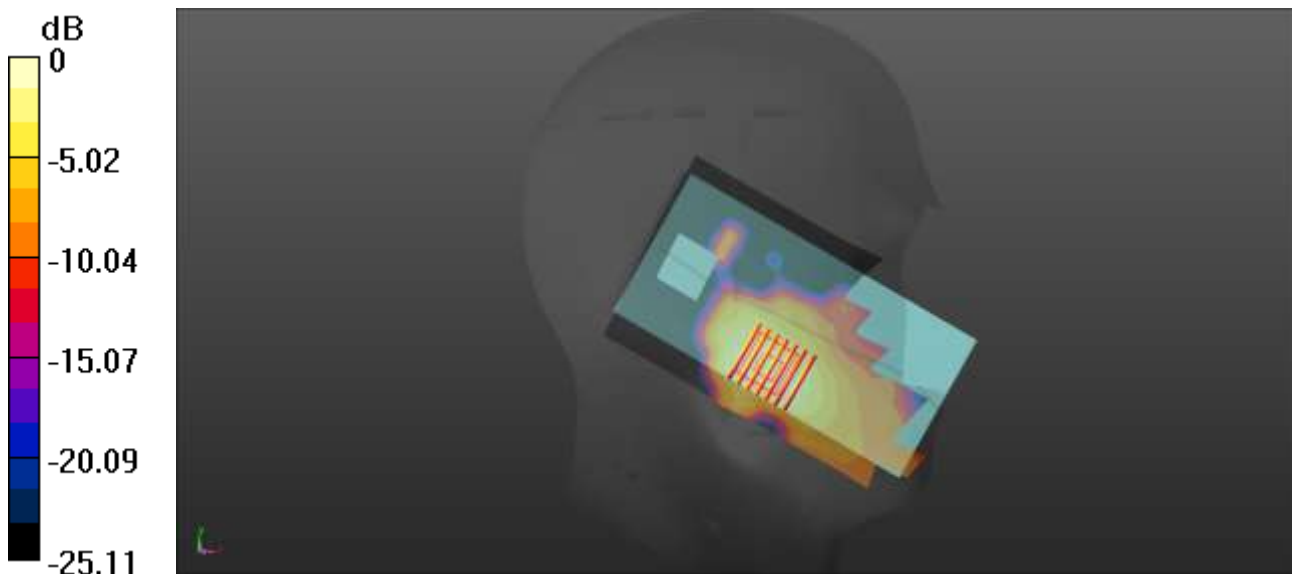

0 dB = 0.121 W/kg

Meas20.Body-worn&Hotspot Back side 10mm LTE B40 Ch39150 ANT5

Date: 2026/8/14

Communication System Band: Band 40; Frequency: 2350 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2350$ MHz; $\sigma = 1.708$ S/m; $\epsilon_r = 40.352$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3°C Liquid Temperature:21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(7.23, 7.17, 7.37); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch39150/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.248 W/kg

Ch39150/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.279 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.328 W/kg

SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.088 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 53.9%

Maximum value of SAR (measured) = 0.270 W/kg

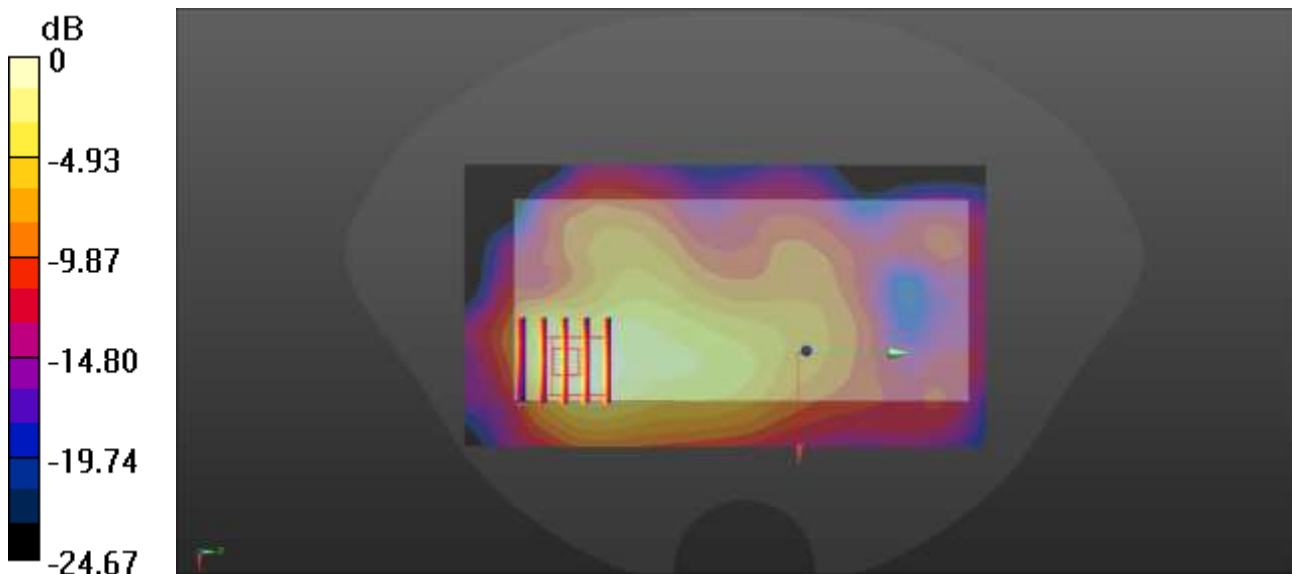

0 dB = 0.270 W/kg

Meas21.Head Left cheek LTE B41 Ch40620 ANT5

Date: 2026/8/10

Communication System Band: Band 41; Frequency: 2593 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2593$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 40.048$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature:22.2°C Liquid Temperature:21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(6.93, 6.88, 7.08); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch40620/Area Scan (81x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.116 W/kg

Ch40620/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.032 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 52.3%

Maximum value of SAR (measured) = 0.113 W/kg

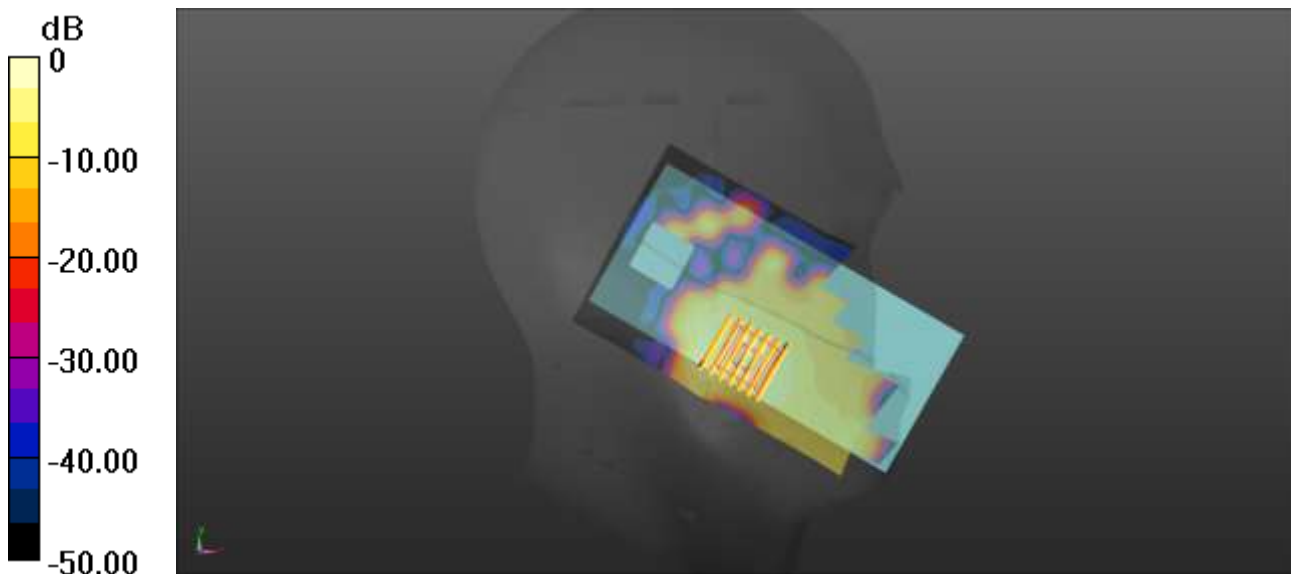

0 dB = 0.113 W/kg

Meas22.Body-worn&Hotspot Back side 10mm LTE B41 Ch40620 ANT5

Date: 2026/8/10

Communication System Band: Band 41; Frequency: 2593 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2593$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 40.048$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.2°C Liquid Temperature:21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(6.93, 6.88, 7.08); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch40620/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.300 W/kg

Ch40620/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.353 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.357 W/kg

SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.091 W/kg

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 49.2%

Maximum value of SAR (measured) = 0.287 W/kg

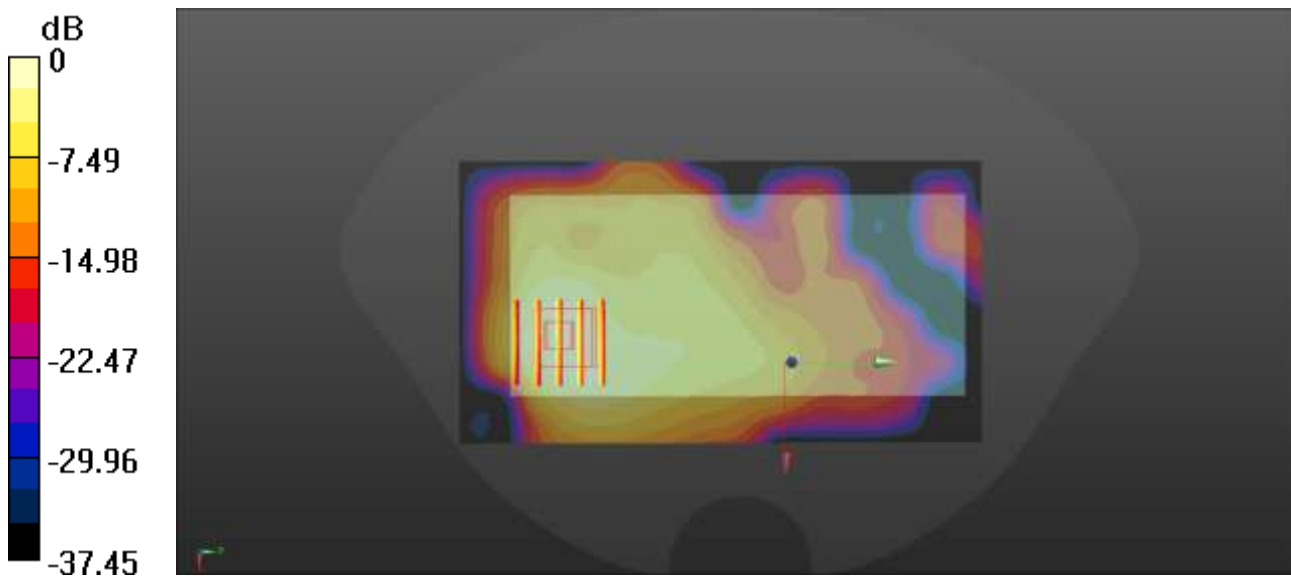

0 dB = 0.287 W/kg

Meas23.Head Left Cheek WLAN2.4G Ch11 Ant.1

Date: 2026/8/14

Communication System Band: WLAN(b); Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.794$ S/m; $\epsilon_r = 40.21$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature:22.3°C Liquid Temperature:21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(7.07, 7.02, 7.22); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch11/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.178 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.163 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.227 W/kg

SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.049 W/kg

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 43.4%

Maximum value of SAR (measured) = 0.183 W/kg

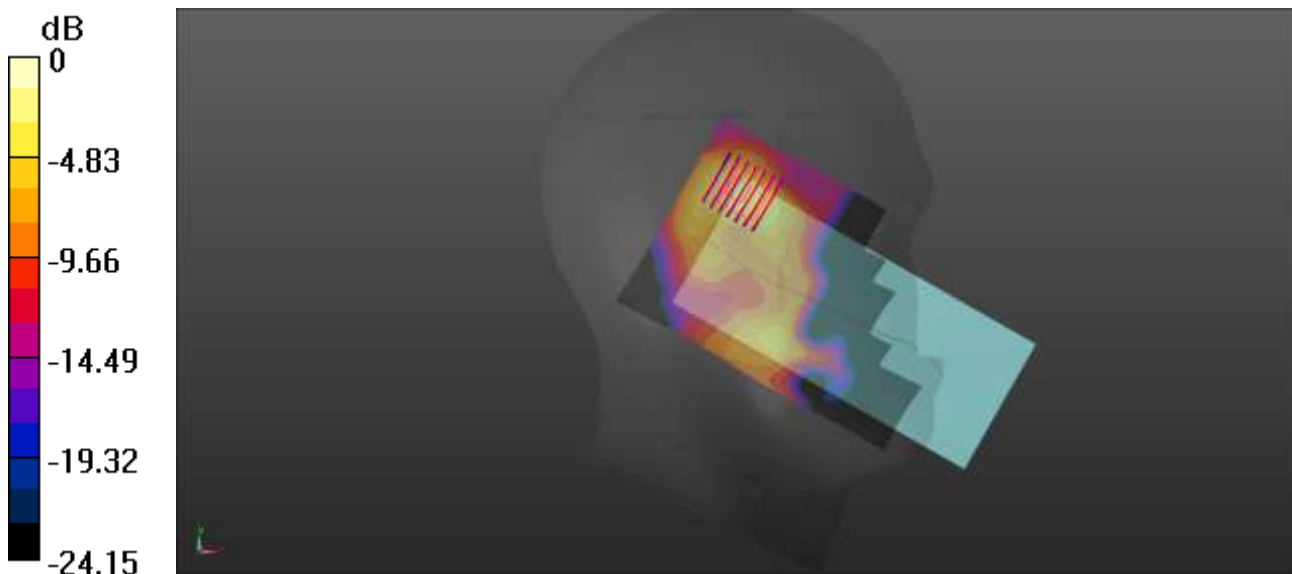

0 dB = 0.178 W/kg

Meas24.Body-worn&Hotspot Back Side 10mm WLAN2.4G Ch6 MIMO

Date: 2026/8/14

Communication System Band: WLAN(b); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.774$ S/m; $\epsilon_r = 40.248$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3°C Liquid Temperature:21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(7.07, 7.02, 7.22); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch6/Area Scan (91x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.372 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.383 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.527 W/kg

SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.094 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 39.4%

Maximum value of SAR (measured) = 0.387 W/kg

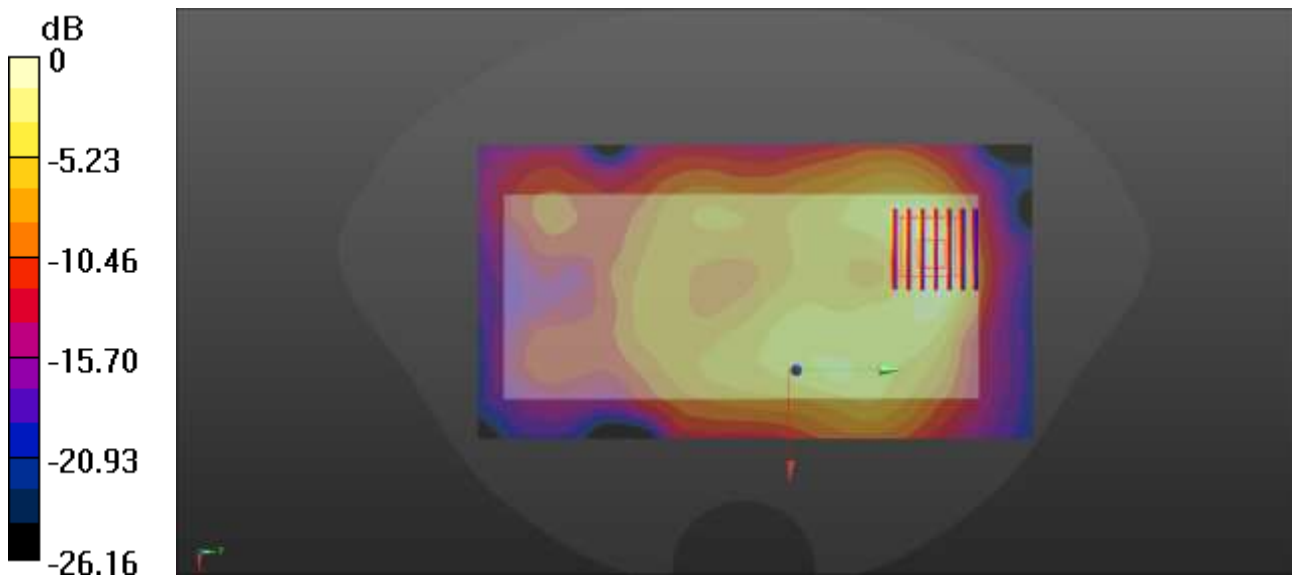

0 dB = 0.387 W/kg

Meas25.Head Left Tilt WLAN5.2G Ch36 MIMO

Date: 2026/8/25

Communication System Band: WLAN(ax)-HE20; Frequency: 5180 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.713$ S/m; $\epsilon_r = 36.183$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature:22.1°C Liquid Temperature:21.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(5.54, 5.49, 5.65); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch36/Area Scan (101x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.490 W/kg

Ch36/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.838 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.877 W/kg

SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.067 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 53.3%

Maximum value of SAR (measured) = 0.522 W/kg

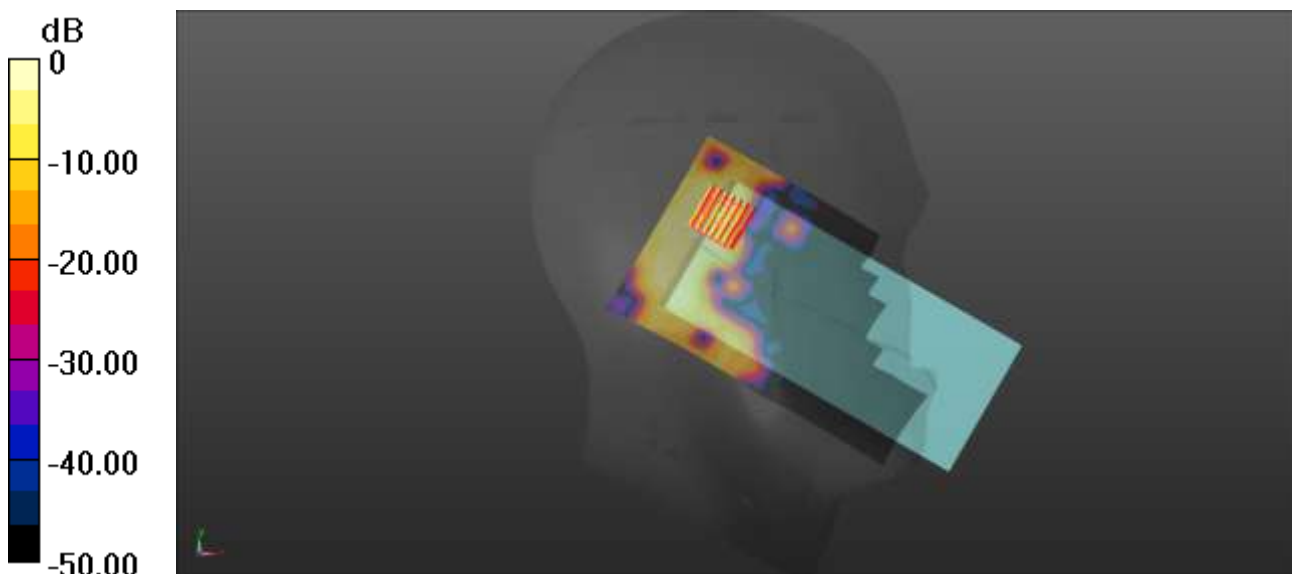

0 dB = 0.490 W/kg

Meas26.Head Right Cheek WLAN5.3G Ch58 Ant.1

Date: 2026/8/25

Communication System Band: WLAN(ax)80Mhz; Frequency: 5290 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5290$ MHz; $\sigma = 4.858$ S/m; $\epsilon_r = 35.956$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature:22.1°C Liquid Temperature:21.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(5.54, 5.49, 5.65); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch58/Area Scan (101x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.552 W/kg

Ch58/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.387 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.736 W/kg

SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.077 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 59.2%

Maximum value of SAR (measured) = 0.466 W/kg

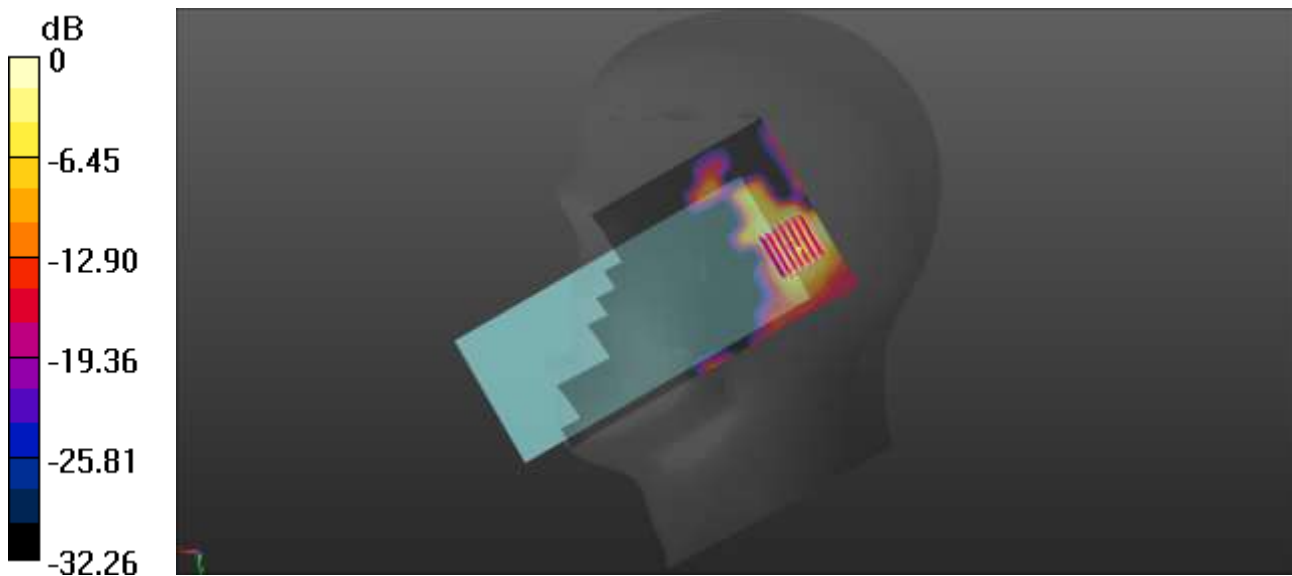

0 dB = 0.466 W/kg

Meas27.Head Right Cheek WLAN5.6G Ch122 MIMO

Date: 2026/8/26

Communication System Band: WLAN(ax)80Mhz; Frequency: 5610 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5610$ MHz; $\sigma = 5.253$ S/m; $\epsilon_r = 35.227$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature:22.0°C Liquid Temperature:21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(5.07, 5.03, 5.17); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch122/Area Scan (101x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.928 W/kg

Ch122/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.217 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.073 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 46%

Maximum value of SAR (measured) = 0.670 W/kg

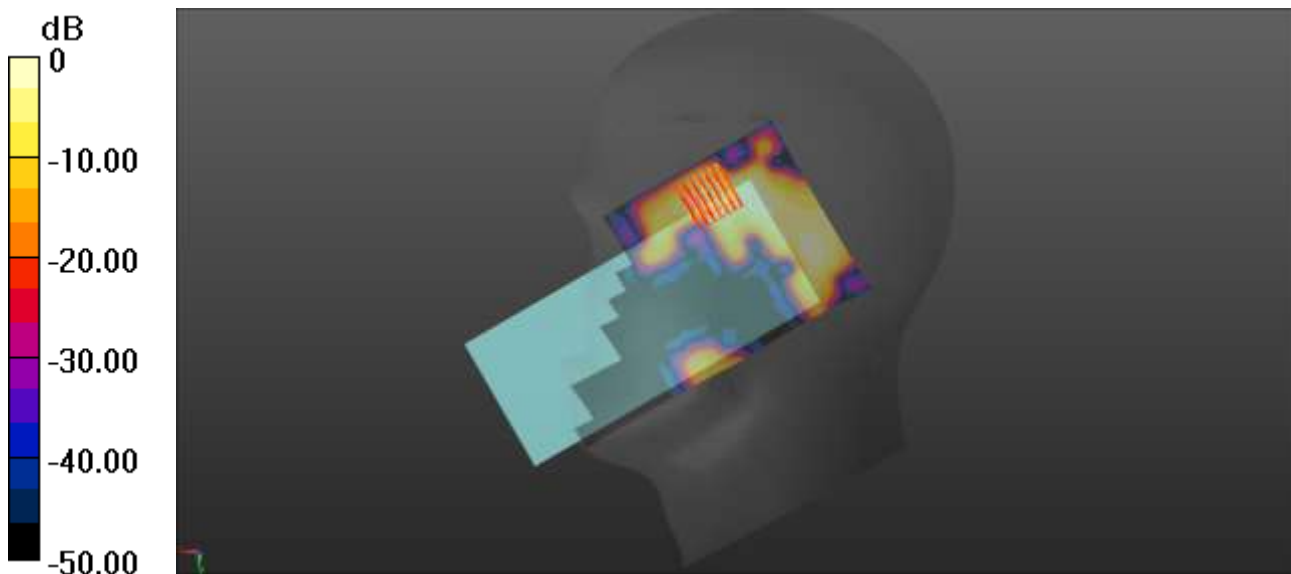

0 dB = 0.670 W/kg

Meas28.Head Right Cheek WLAN5.8G Ch159 MIMO

Date: 2026/8/26

Communication System Band: WLAN(ac) 40Mhz; Frequency: 5795 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5795$ MHz; $\sigma = 5.49$ S/m; $\epsilon_r = 34.832$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature:22.0°C Liquid Temperature:21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(5.19, 5.15, 5.3); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch159/Area Scan (101x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.786 W/kg

Ch159/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.337 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.851 W/kg

SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.040 W/kg

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 48.4%

Maximum value of SAR (measured) = 0.515 W/kg

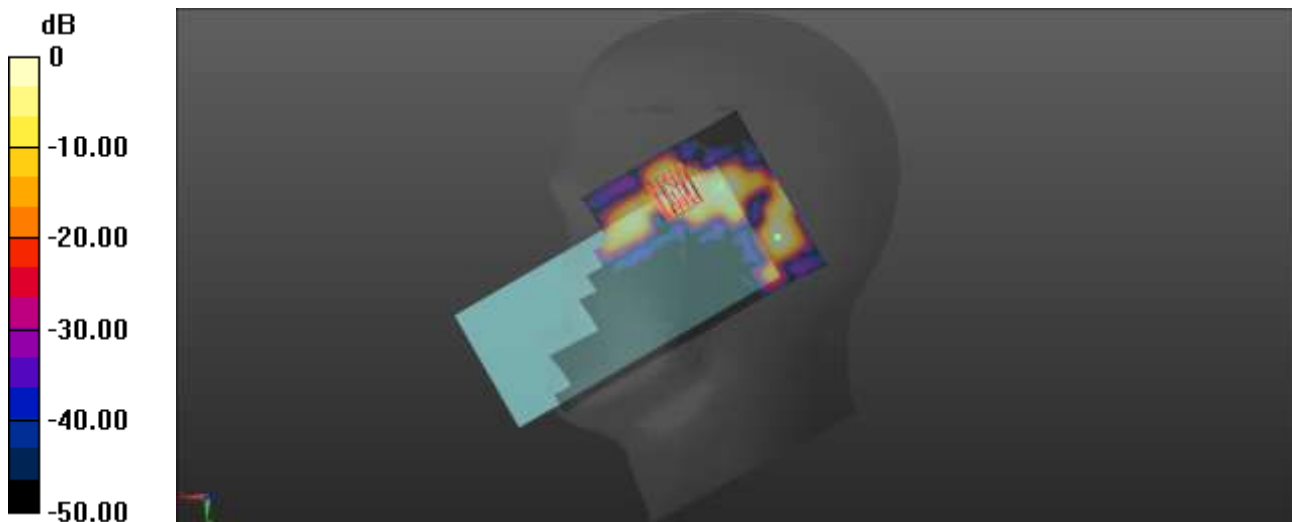

0 dB = 0.515 W/kg = -2.88 dBW/kg

Meas29.Body-worn&Hotspot Back Side 10mm WLAN5.2G Ch36 Ant1

Date: 2026/8/25

Communication System Band: WLAN(ax)-HE20; Frequency: 5180 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.713$ S/m; $\epsilon_r = 36.183$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.1°C Liquid Temperature:21.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(5.54, 5.49, 5.65); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch36/Area Scan (111x201x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.16 W/kg

Ch36/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.1430 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 0.507 W/kg; SAR(10 g) = 0.188 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.3%

Maximum value of SAR (measured) = 1.07 W/kg

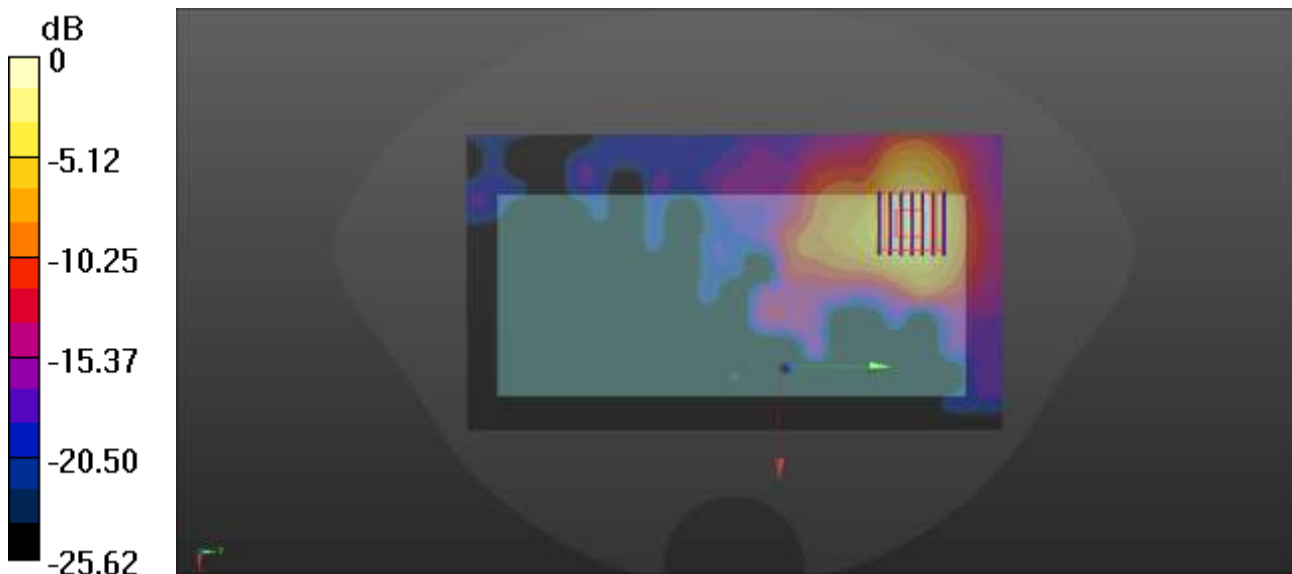

0 dB = 1.07 W/kg

Meas30.Body-worn Back Side 10mm WLAN5.3G Ch58 Ant1

Date: 2026/8/25

Communication System Band: WLAN(ax)80Mhz; Frequency: 5290 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5290$ MHz; $\sigma = 4.858$ S/m; $\epsilon_r = 35.956$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.1°C Liquid Temperature:21.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(5.54, 5.49, 5.65); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch58/Area Scan (111x201x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.14 W/kg

Ch58/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 0.523 W/kg; SAR(10 g) = 0.190 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 53.4%

Maximum value of SAR (measured) = 1.18 W/kg

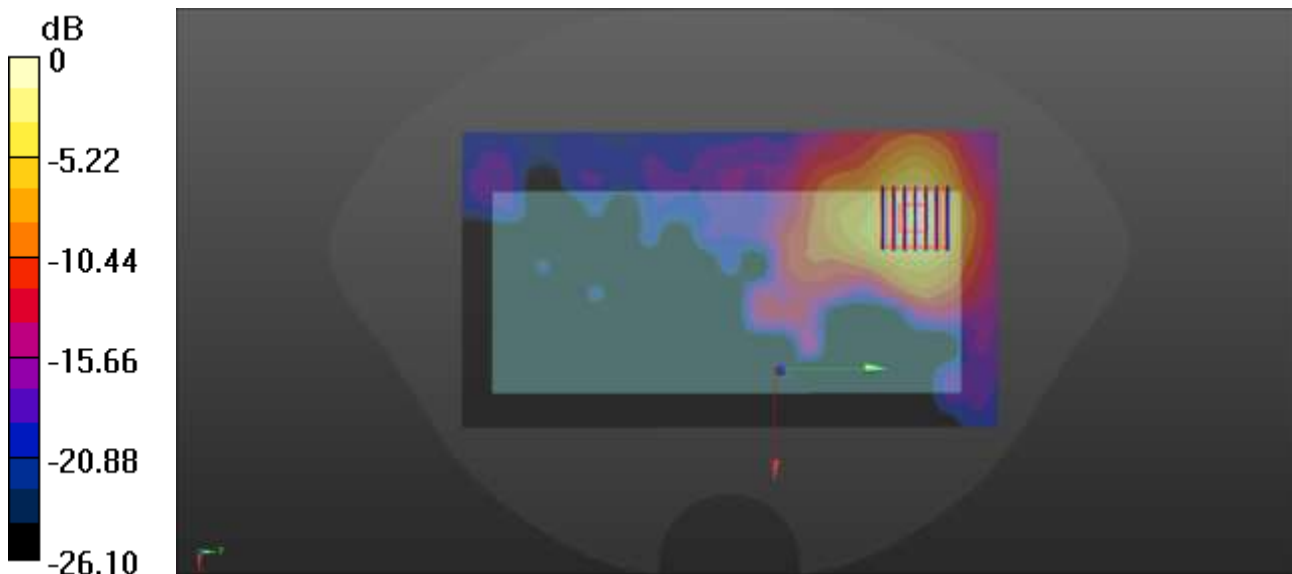

0 dB = 1.18 W/kg

Meas31.Body-worn Back Side 10mm WLAN5.6G Ch122 MIMO

Date: 2026/8/26

Communication System Band: WLAN(ax)80Mhz; Frequency: 5610 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5610$ MHz; $\sigma = 5.253$ S/m; $\epsilon_r = 35.227$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.0°C Liquid Temperature:21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(5.07, 5.03, 5.17); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch122/Area Scan (111x201x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.28 W/kg

Ch122/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.7570 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 2.45 W/kg

SAR(1 g) = 0.637 W/kg; SAR(10 g) = 0.231 W/kg

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 51.6%

Maximum value of SAR (measured) = 1.41 W/kg

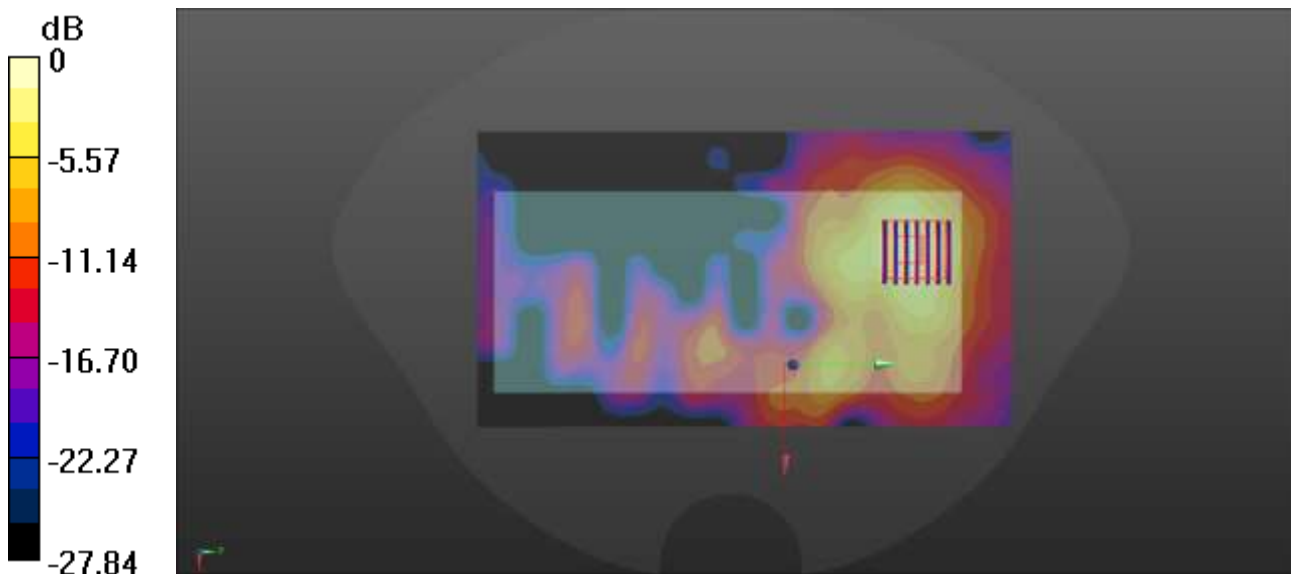

0 dB = 1.41 W/kg

Meas32.Body-worn&Hotspot Back Side 10mm WLAN5.8G Ch159 MIMO

Date: 2026/8/26

Communication System Band: WLAN(ac) 40Mhz; Frequency: 5795 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5795$ MHz; $\sigma = 5.49$ S/m; $\epsilon_r = 34.832$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.0°C Liquid Temperature:21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(5.19, 5.15, 5.3); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch159/Area Scan (111x201x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.61 W/kg

Ch159/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 2.81 W/kg

SAR(1 g) = 0.667 W/kg; SAR(10 g) = 0.221 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 52.3%

Maximum value of SAR (measured) = 1.69 W/kg

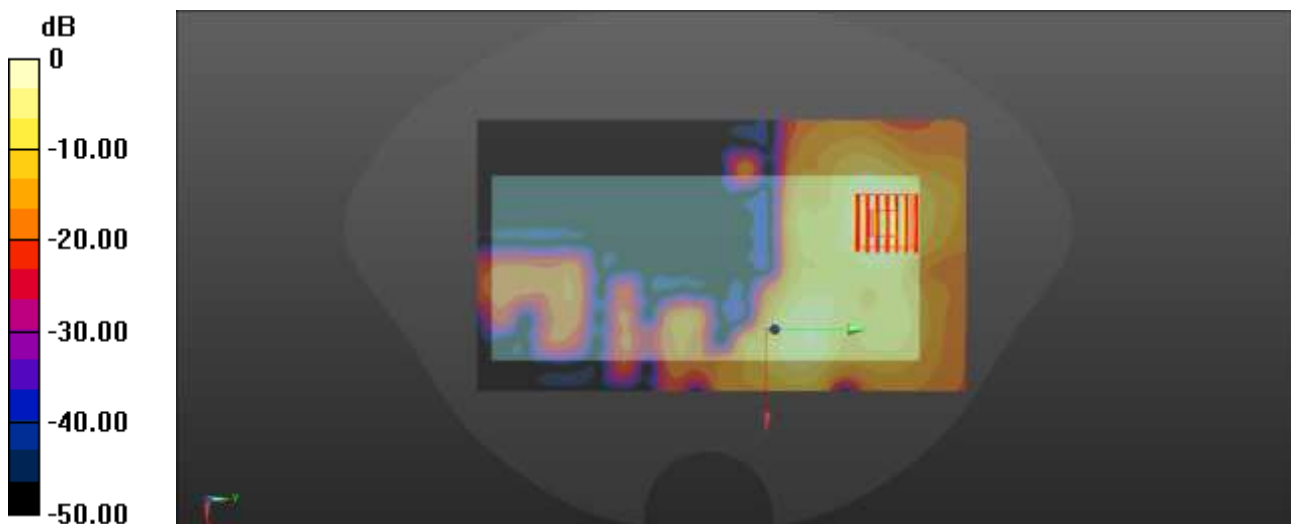

0 dB = 1.69 W/kg

Meas33.Limb Left Side 0mm WLAN5.3G Ch60 Ant4

Date: 2026/8/25

Communication System Band: Band 2; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 4.862$ S/m; $\epsilon_r = 35.945$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(5.54, 5.49, 5.65); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch60/Area Scan (61x201x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 4.82 W/kg

Ch60/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.493 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 9.57 W/kg

SAR(1 g) = 2.11 W/kg; SAR(10 g) = 0.642 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 47.5%

Maximum value of SAR (measured) = 5.45 W/kg

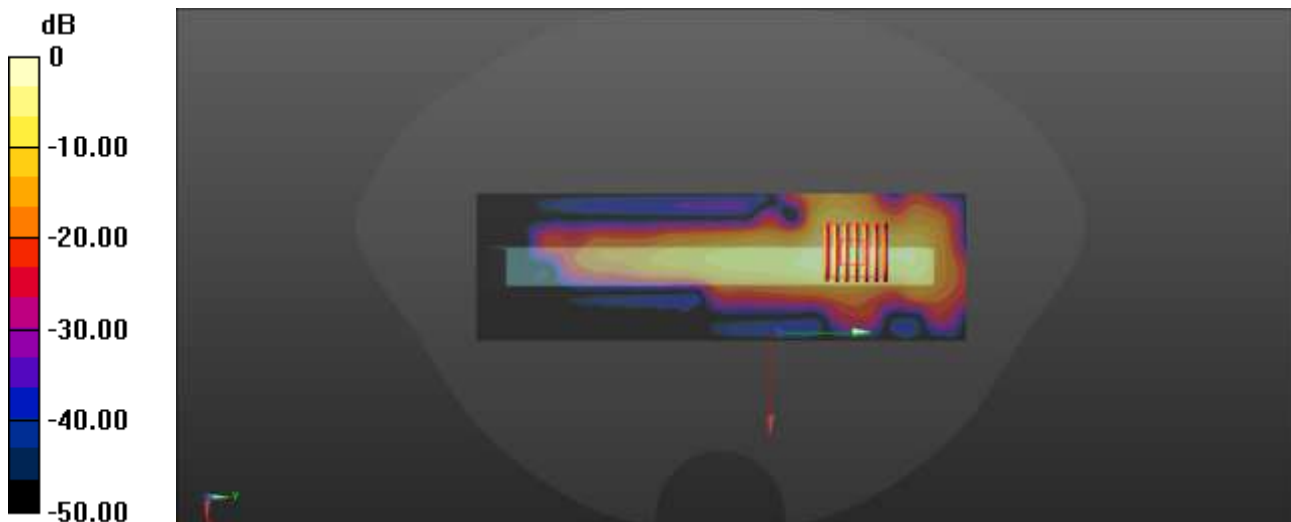

0 dB = 5.45 W/kg

Meas34.Limb Left Side 0mm WLAN5.6G Ch122 MIMO

Date: 2026/8/26

Communication System Band: WLAN(ax)80Mhz; Frequency: 5610 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5610$ MHz; $\sigma = 5.253$ S/m; $\epsilon_r = 35.227$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.0°C Liquid Temperature:21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(5.07, 5.03, 5.17); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch122/Area Scan (61x201x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 7.55 W/kg

Ch122/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.61 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 3.1 W/kg; SAR(10 g) = 0.893 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 46.7%

Maximum value of SAR (measured) = 9.03 W/kg

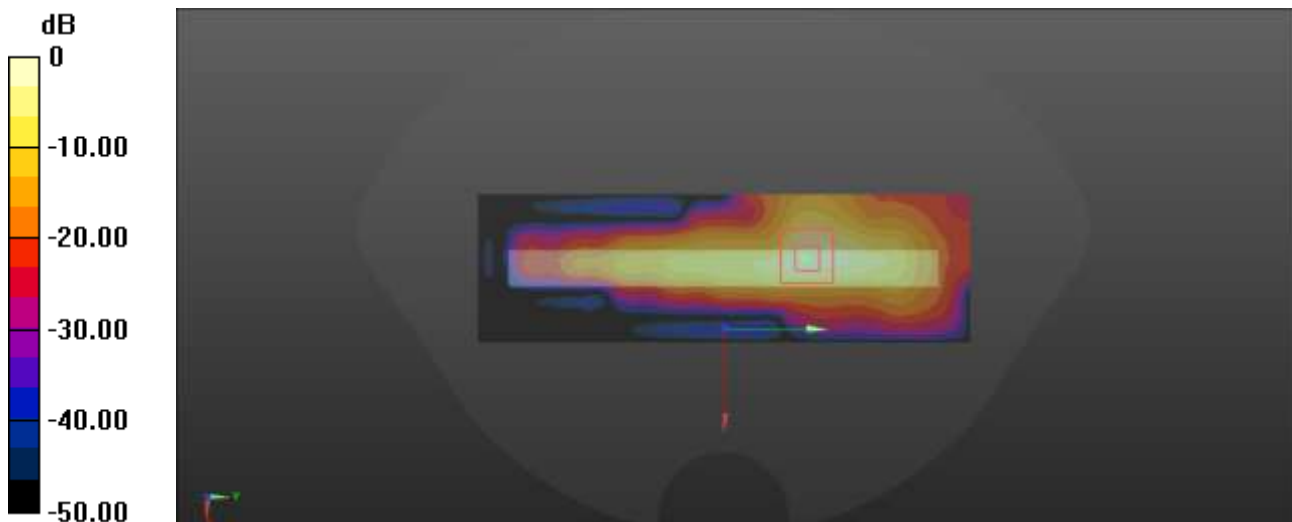

0 dB = 9.03 W/kg

Meas35.Head Left Cheek BT Ch39 Ant.1

Date: 2026/8/14

Communication System Band: BT; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.777$ S/m; $\epsilon_r = 40.241$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7986; ConvF(7.07, 7.02, 7.22); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch39/Area Scan (81x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0278 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.997 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.0200 W/kg

SAR(1 g) = 0.002 W/kg; SAR(10 g) = 0.000 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 45.3%

Maximum value of SAR (measured) = 0.0134 W/kg

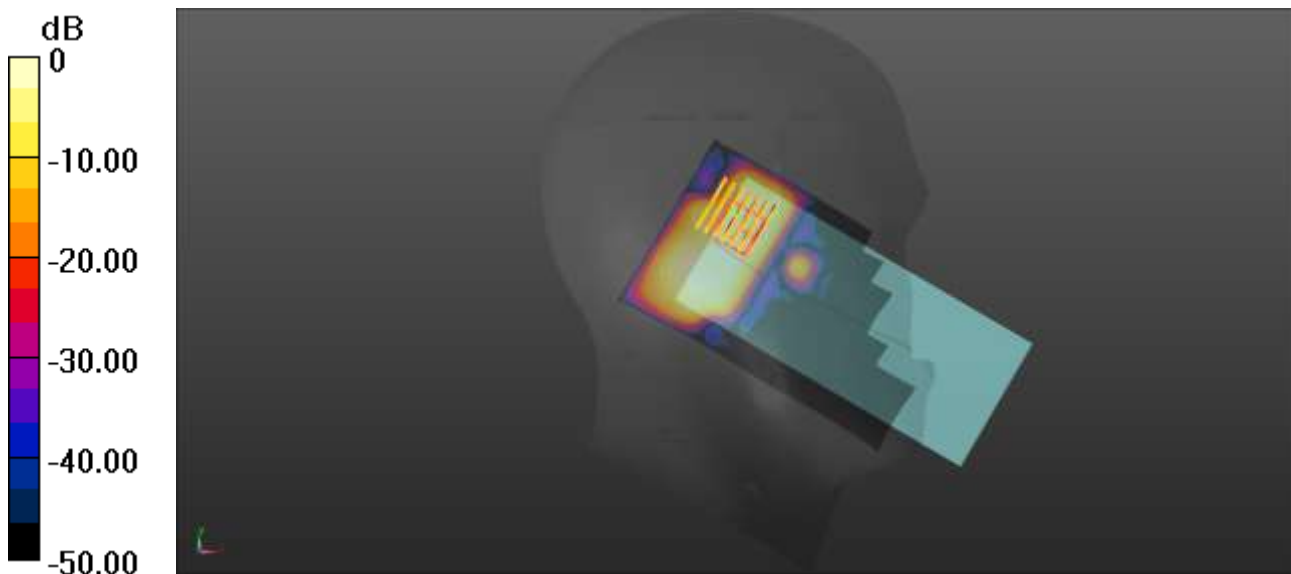

0 dB = 0.0278 W/kg

Meas36.Body-worn&Hotspot Right Side 10mm BT Ch39 Ant.1

Date: 2026/8/14

Communication System Band: BT; Frequency: 2441 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.777$ S/m; $\epsilon_r = 40.241$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3°C Liquid Temperature:21.5°C

DASY5 Configuration:

- Probe:EX3DV4 - SN7986; ConvF(7.07, 7.02, 7.22); Calibrated: 2026/4/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2026/5/8
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch39 2/Area Scan (61x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0256 W/kg

Ch39 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.7590 V/m; Power Drift = 0.20 dB


Peak SAR (extrapolated) = 0.0318 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.003 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 87.9%

Maximum value of SAR (measured) = 0.0277 W/kg

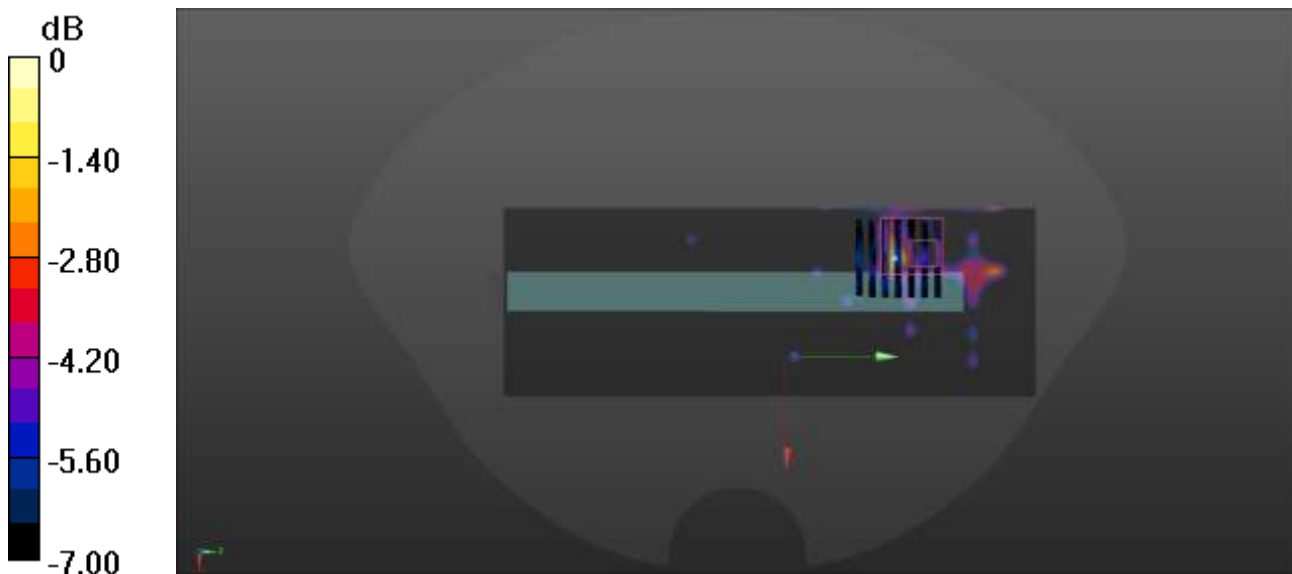

0 dB = 0.0277 W/kg

Meas37.Head Left Tilt WLAN6G Ch103 MIMO

Exposure Conditions

Phantom	Position, Test	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section, TSL	Distance		UID	[MHz],	Factor	Conductivity	Permittivity	Temperature	Temperature
	[mm]			Channel		[S/m]		[°C]	[°C]
				Number					
LeftHead,	CHEEK,	U-NII-6	WLAN,	6465.0,	5.49	6.04	34.7	22.6	21.7
HSL	0.00		10731-AAC	103					

Hardware Setup


Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 2090	HBBL-600-10000	2026-08-20	EX3DV4 - SN7893,	2026-07-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	136.0 x 187.0	27.2 x 27.2 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	Unknown method	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-08-20	2026-08-20
psSAR1g [W/kg]	0.058	0.059
psSAR10g [W/kg]	0.023	0.023
APD4cm² [W/m²]		0.513
Power Drift [dB]	-0.03	0.15
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		57.7
Dist 3dB Peak [mm]		10.2

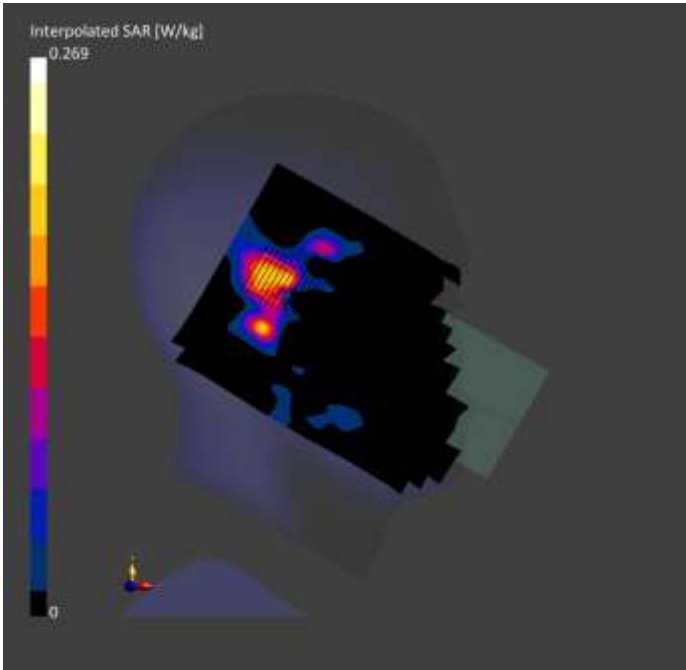

Meas38. Body-worn Back Side 10mm WLAN6G Ch119 MIMO

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 10.00	U-NII-7	WLAN, 10731-AAC	6545.0, 119	5.49	6.15	34.5	22.6	21.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-08-20	EX3DV4 - SN7893, 2026-07-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 153.0	27.2 x 27.2 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-08-20	2026-08-20
psSAR1g [W/kg]	0.530	0.518
psSAR10g [W/kg]	0.201	0.195
APD4cm² [W/m²]		4.37
Power Drift [dB]	-0.04	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		51.5
Dist 3dB Peak [mm]		8.7

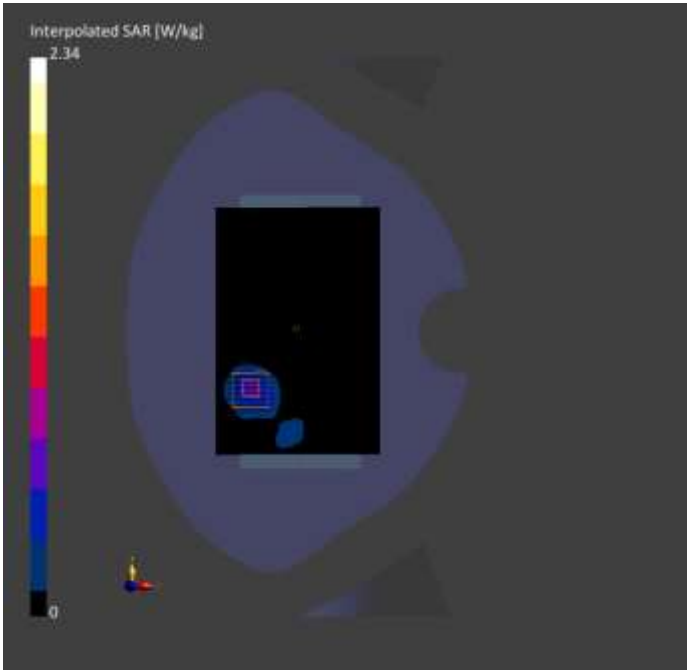

Meas39. Body-worn Back Side 0mm WLAN6G Ch167 MIMO

Exposure Conditions

Phantom	Position, Test	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section, TSL	Distance		UID	[MHz],	Factor	Conductivity	Permittivity	Temperature	Temperature
	[mm]			Channel		[S/m]		[°C]	[°C]
				Number					
Flat,	BACK,	U-NII-7	WLAN,	6785.0,	5.49	6.58	33.7	22.4	21.5
HSL	0.00		10731-AAC	167					

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 2090	HBBL-600-10000 2026-08-21	EX3DV4 - SN7893, 2026-07-30	DAE4 Sn878, 2026-03-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 153.0	27.2 x 27.2 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-08-21	2026-08-21
psSAR1g [W/kg]	0.764	0.750
psSAR10g [W/kg]	0.252	0.247
APD4cm² [W/m²]		5.64
Power Drift [dB]	-0.11	-0.13
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		50.6
Dist 3dB Peak [mm]		8.7

