

RF TEST REPORT

FCC ID: SMC-K931AO

Test Report No.....: RF251223045-03-004

Product(s) Name.....: Smart Projector

Model(s).....: J91-9K2, J91-9K0, J91-9K1, J91-9K3, J91-9K4, J91-9K5, J91-9K6,
J91-9K7, J91-9K8, J91-9K9, J91-9KA, J91-9KB, J91-9KC, J91-9KD,
J91-9KE, J91-9KF, J91-9KG, J91-9KH, J91-9KI, J91-9KJ, J91-9KK

Trade Mark.....: JMGO

Applicant.....: SHENZHEN HOLATEK CO., LTD.

Address.....: #12, Building 1, Chongwen Park, Nanshan Zhiyuan, 3370 Liuxian
Ave, Nanshan District, Shenzhen, China.

Receipt Date.....: 2025.12.30

Test Date.....: 2026.01.04 ~ 2026.01.23

Issued Date.....: 2026.01.24

Standards.....: 47 CFR FCC Part 15, Subpart E(Section 15.407);
ANSI C63.10:2020

Testing Laboratory.....: Shenzhen Haiyun Standard Technical Co., Ltd.

Prepared By:	Checked By:	Approved By:	
Jason Huang	Black Ding	Tim Zhang	
<i>Jason Huang</i>	<i>Black Ding</i>	<i>Tim Zhang</i>	

Table of Contents

History of this test report.....	4
1. General Information.....	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Basic Description of Equipment Under Test	5
1.4 Working Frequencies	6
2. Summary of Test Results.....	7
2.1 Summary of Test Items.....	7
2.2 Standards or specification	7
2.3 Test Instruments	8
2.4 Test Mode	9
2.5 Test Condition.....	9
2.6 Duty Cycle of Test Signal.....	9
2.7 Measurement Uncertainty	11
2.8 Test Location	11
2.9 Deviation from Standards.....	11
3. Test Procedure And Results.....	12
3.1 26dB & 99% Bandwidth Measurement.....	12
3.1.1 Limit	12
3.1.2 Test Procedure	12
3.1.3 Test Setting	12
3.1.4 Test Setup	13
3.1.5 Test Result	13
3.2 Transmitter power.....	67
3.2.1 Limit	67
3.2.2 Test Procedure	67
3.2.3 Test Setup	67
3.2.4 Table of Parameters of Text Software Setting	68
3.2.5 Test Result	69
3.3 Power Spectral Density Measurement	72
3.3.1 Limit	72
3.3.2 Test Procedure	72
3.3.3 Test Setting	72

3.3.4 Test Setup	72
3.3.5 Result.....	73
3.4 In-Band Emission Measurement	101
3.4.1 Test Limit.....	101
3.4.2 Test Procedure	101
3.4.3 Test Setting	101
3.4.5 The Result.....	103
3.5 Contention Based Protocol Measurement.....	130
3.5.1 Test Limit.....	130
3.5.2 Test Procedure	130
3.5.3 Test Setting	130
3.5.4 Test Setup	131
3.5.5 Test Result	132
3.6 Radiated Spurious Emission Measurement	137
3.6.1 Test Limit.....	137
3.6.2 Test Procedure	137
3.6.3 Test Setting	138
3.6.4 Test Setup	139
3.6.5 Test Result	140
3.7 AC Conducted Emissions Measurement	145
3.7.1 Test Limit.....	145
3.7.2 Test Setup	145
3.7.3 Test Result	146

History of this test report

Original Report Issue Date: 2026.01.24

- ☒ No additional attachment
- ☐ Additional attachments were issued following record

Attachment No.	Issue Date	Description

1. General Information

1.1 Applicant

SHENZHEN HOLATEK CO., LTD.

#12, Building 1, Chongwen Park, Nanshan Zhiyuan, 3370 Liuxian Ave, Nanshan District, Shenzhen, China.

1.2 Manufacturer

SHENZHEN HOLATEK CO., LTD.

#12, Building 1, Chongwen Park, Nanshan Zhiyuan, 3370 Liuxian Ave, Nanshan District, Shenzhen, China.

1.3 Basic Description of Equipment Under Test

Sample No.	POC251223045-S001	
Product name	Smart Projector	
Model name	J91-9K2, J91-9K0, J91-9K1, J91-9K3, J91-9K4, J91-9K5, J91-9K6, J91-9K7, J91-9K8, J91-9K9, J91-9KA, J91-9KB, J91-9KC, J91-9KD, J91-9KE, J91-9KF, J91-9KG, J91-9KH, J91-9KI, J91-9KJ, J91-9KK	
Test model	J91-9K2	
Model difference	Only the model name, product appearance and colors are different	
Trade Mark	JMGO	
Power supply	DC 24V from adapter	
Adapter information	Model name: NSA300EF-24012500 Input: 100-240V~, 50-60Hz, 3.5A Max Output: 24.0V===12.5A	
Operate temperature	0°C-45°C	
EUT Stage	○ Product Unit	● Final-Sample
Frequency Range	For 802.11ax20: 5955 ~ 7115MHz For 802.11ax40: 5965 ~ 7085MHz For 802.11ax80: 5985 ~ 7025MHz	
Max power	IEEE 802.11ax80: 13.44dBm(0.0221W)	
Modulation	OFDM	
Data Rate (Mbps)	IEEE 802.11ax mode: up to 1201	
Antenna gain	ANT1: 3.40dBi; ANT2: 3.30dBi	
Antenna type	FPC Antenna	

1.4 Working Frequencies

802.11ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	5955 MHz	05	5975 MHz	09	5995 MHz
13	6015 MHz	17	6035 MHz	21	6055 MHz
25	6075 MHz	29	6095 MHz	33	6115 MHz
37	6135 MHz	41	6155 MHz	45	6175 MHz
49	6195 MHz	53	6215 MHz	57	6235 MHz
61	6255 MHz	65	6275 MHz	69	6295 MHz
73	6315 MHz	77	6335 MHz	81	6355 MHz
85	6375 MHz	89	6395 MHz	93	6415 MHz
97	6435 MHz	101	6455 MHz	105	6475 MHz
109	5495 MHz	113	6515 MHz	117	6535 MHz
121	6555 MHz	125	6575 MHz	129	6595 MHz
133	6615 MHz	137	6635 MHz	141	6655 MHz
145	6675 MHz	149	6695 MHz	153	6715 MHz
157	6735 MHz	161	6755 MHz	165	6775 MHz
169	6795 MHz	173	6815 MHz	177	6835 MHz
181	6855 MHz	185	6875 MHz	189	6895 MHz
193	6915 MHz	197	6935 MHz	201	6955 MHz
205	6975 MHz	209	6995 MHz	213	7015 MHz
217	7035 MHz	221	7055 MHz	225	7075 MHz
229	7095 MHz	233	7115 MHz	--	--

802.11ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	5965 MHz	11	6005 MHz	19	6045 MHz
27	6085 MHz	35	6125 MHz	43	6165 MHz
51	6205 MHz	59	6245 MHz	67	6285 MHz
75	6325 MHz	83	6365 MHz	91	6405 MHz
99	6445 MHz	107	6485 MHz	115	6525 MHz
123	6565 MHz	131	6605 MHz	139	6645 MHz
147	6685 MHz	155	6725 MHz	163	6765 MHz
171	6805 MHz	179	6845 MHz	187	6885 MHz
195	6925 MHz	203	6965 MHz	211	7005 MHz
219	7045 MHz	227	7085 MHz	--	--

802.11ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
07	5985 MHz	23	6065 MHz	39	6145 MHz
55	6225 MHz	71	6305 MHz	87	6385 MHz
103	6465 MHz	119	6545 MHz	135	6625 MHz
151	6705 MHz	167	6785 MHz	183	6865 MHz
199	6945 MHz	215	7025 MHz	--	--

2. Summary of Test Results

2.1 Summary of Test Items

FCC Section(s)	Test project	Test method	Verdict
15.407(a)	26dB & 99% Bandwidth	Conducted	Pass
15.407(b)(7)	In-Band Emission		Pass
15.407(a)(5)	Transmitter power		Pass
15.407(a)(5)	Peak Power Spectral Density (E.I.R.P)		Pass
15.407(d)(6)	Contention-Based Protocol		Pass
15.407(b)(6) 15.205 15.209	Unwanted Emissions	Radiated	Pass
15.207	AC Conducted Emissions	Line Conducted	Pass
15.203	Antenna Requirements	/	Note4

Remark:

1. The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
2. Output power test was verified over all data rates of each mode, and then choose the maximum power output (low data rate) for final test of each channel.
3. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
4. The EUT have two FPC antennas arrangement which was permanently attached.
5. For 802.11ax mode only support full RU mode.

2.2 Standards or specification

47 CFR FCC Part 15, Subpart E

KDB 662911 D01 Multiple Transmitter Output v02r01

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 987594 D01 U-NII 6GHz General Requirements v03r01

KDB 414788 D01 Radiated Test Site v01r01

ANSI C63.10:2020

2.3 Test Instruments

No.	Name of Equipment	Manufacturer	Model Number	Serial Number	Inventory No.	Last Calibration	Due Calibration
Radiated Emission							
1	Test receiver	Rohde&Schwarz	ESU	100184	JLE011	2025/3/1	2026/2/28
2	Log periodic antenna	Schwarzbeck	VULB 9168	1151	JLE012	2025/4/12	2026/4/11
3	Low frequency amplifier	/	LNA 0920N	2014	JLE023	2025/3/1	2026/2/28
4	High frequency amplifier	Schwarzbeck	BBV 9718	9718-284	JLE024	2025/3/1	2026/2/28
5	Horn Antenna	SCHWARZBECK	BBHA 9120 D	02670	JLE028	2025/4/12	2026/4/11
6	Temp&Humidity Recorder	Meideshi	JR900	/	JLE021	2025/4/15	2026/4/14
7	Horn Antenna	SCHWARZBECK	BBHA 9170	9170#685	JLE029	2024/7/15	2027/7/14
8	Loop Antenna	SCHWARZBECK	FMZB1519B	00029	JLE030	2024/7/15	2027/7/14
9	Broadband preamplifier	Schwarzbeck	BBV9721	9721-019	JLE025	2025/3/1	2026/2/28
10	Test software	Farad Technology Co., Ltd	EZ-EMC Ver.TW-03A2				
Conducted Emission							
1	LISN	Rohde&Schwarz	ENV216	100075	JLE002	2025/3/1	2026/2/28
2	ISN	Schwarzbeck	CATE 5 8158	#171	JLE003	2025/2/21	2026/2/20
3	ISN	Schwarzbeck	CAT 3 8158	00187	JLE032	2025/2/21	2026/2/20
4	Test receiver	Rohde&Schwarz	ESCI	100718	JLE010	2025/3/1	2026/2/28
5	Pulse limiter	Rohde&Schwarz	ESH3-Z2	102299	JLE047	2025/3/1	2026/2/28
6	Temp&Humidity Recorder	Meideshi	JR900	/	JLE020	2025/4/15	2026/4/14
7	Test software	Farad Technology Co., Ltd	EZ-EMC Ver.TW-03A2				
RF Conducted Emissions							
1	MXA Signal Analyzer	Keysight	N9021B	MY60080169	JLE050	2025/3/1	2026/2/28
2	MXA Signal Analyzer	Keysight	N9010A	MY51440158	JLE087	2025/9/15	2026/9/14
3	RF Control Unit	dsusoft	JS0806-2	21G8060449	JLE053	2025/3/1	2026/2/28
4	power supply unit	dsusoft	JS0806-4ADC	N/A	JLE055	2025/3/1	2026/2/28
5	VXG Signal Generator	Keysight	N5182B	MY59100855	JLE068	2025/4/15	2026/4/14
6	VXG Signal Generator	Keysight	M9384B	MY61270787	JLE051	2025/6/10	2026/6/9
7	EXG Analog Signal Generator	Keysight	N5173B	MY59101282	JLE052	2025/3/1	2026/2/28
8	Wideband Radio Communication Tester	Rohde&Schwarz	CMW500	1201.0002K5 0-116064-Dt	JLE054	2025/3/1	2026/2/28
9	Test software	dsusoft	JS1120-3 Ver.3.2.22.0				

2.4 Test Mode

The EUT was supplied by and it was run in TX mode that was controlled by Master provided RF testing program. The worst case test result was showed in the report.

Mode 1: Transmit by 802.11AX20MIMO(MCS0)
Mode 2: Transmit by 802.11AX40MIMO(MCS0)
Mode 3: Transmit by 802.11AX80 MIMO(MCS0)

2.5 Test Condition

Applicable to	Environmental conditions	Input Power	Tested by
26dB & 99% Bandwidth	23.3°C, 51% RH	DC 24V	Elio Lin
In-Band Emission	23.3°C, 51% RH	DC 24V	Elio Lin
Contention-Based Protocol	23.3°C, 51% RH	DC 24V	Elio Lin
Transmitter power	23.3°C, 51% RH	DC 24V	Elio Lin
Peak Power Spectral Density	23.3°C, 51% RH	DC 24V	Elio Lin
Unwanted Emissions	23.8°C, 52% RH	AC 120V/60Hz	Lemon He
AC Conducted Emissions	23.9°C, 50% RH	AC 120V/60Hz	Keith Huang

Note: Adapter supply voltage AC 120V/60Hz.

The applicant declare the operating environment of EUT as below:

Normal conditions: DC 24V, 0~45°C


2.6 Duty Cycle of Test Signal

If duty cycle is $\geq 98\%$, duty factor is not required.


If duty cycle is $< 98\%$, duty factor shall be considered.

All the duty factor of other test mode have been considered.


Test Mode	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11AX20MIMO	5955	1.01	1.05	96.19
11AX40MIMO	5965	0.07	0.09	77.78
11AX80MIMO	5985	0.04	0.06	66.67

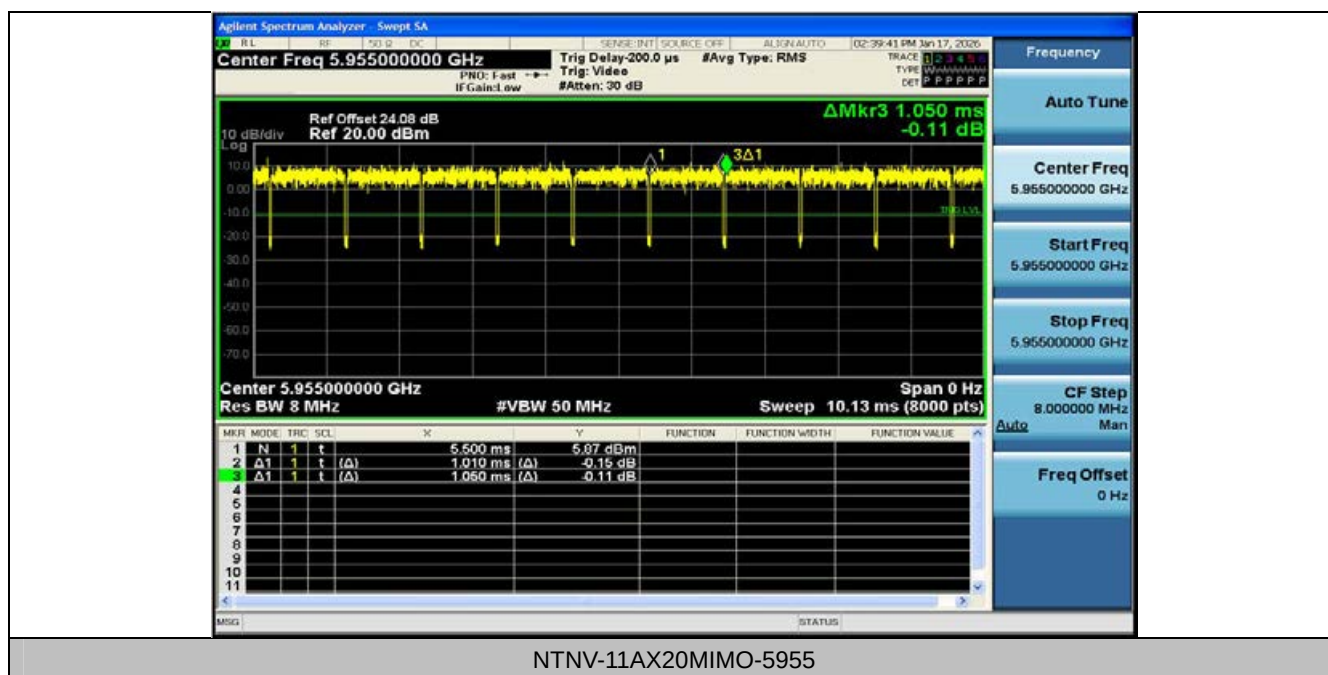

NTNV-11AX20MIMO-5955

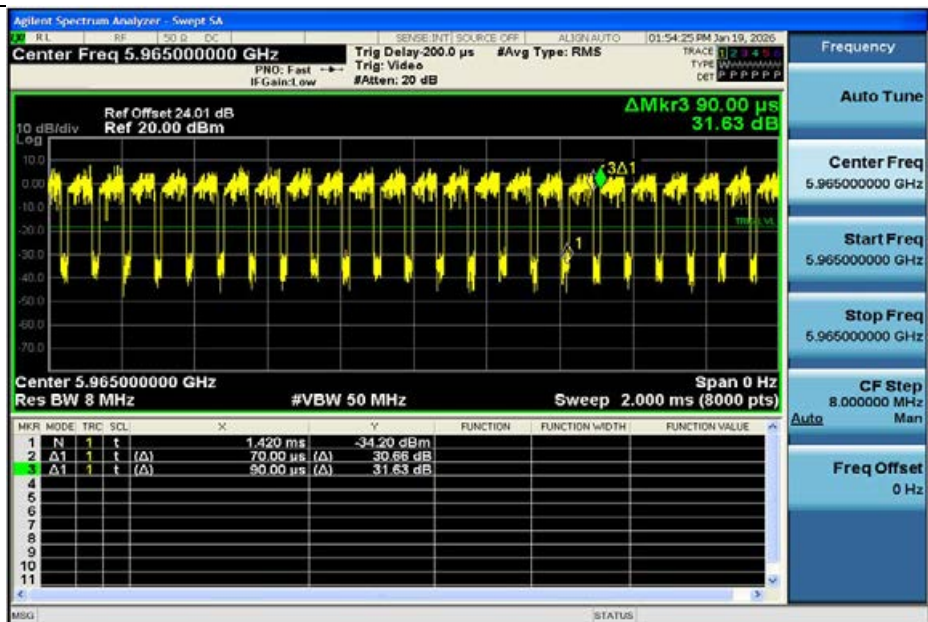

NTNV-11AX40MIMO-5965

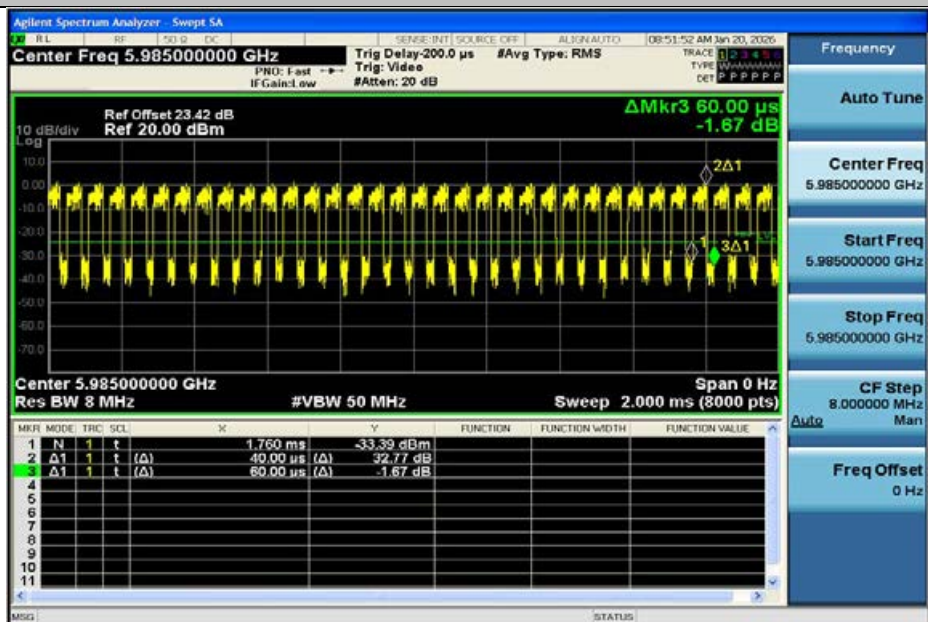

NTNV-11AX80MIMO-5985

2.7 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 102\text{kHz}$
Power Spectral Density	$\pm 0.243\text{dB}$
Conducted Spurious Emission	$\pm 0.743\text{dB}$
RF power conducted	$\pm 1.328\text{dB}$
Conducted emission(9kHz~30MHz) AC main	$\pm 2.68\text{dB}$
Radiated emission(9kHz~30MHz)	$\pm 3.50\text{dB}$
Radiated emission (30MHz~1GHz)	$\pm 4.20\text{dB}$
Radiated emission (1GHz~18GHz)	$\pm 5.10\text{dB}$
Radiated emission (18GHz~40GHz)	$\pm 5.26\text{dB}$

2.8 Test Location

Company:	Shenzhen Haiyun Standard Technical Co., Ltd.
Address:	No. 110-113, 115, 116, Block B, Jinyuan Business Building, Bao'an District, Shenzhen, China
CNAS Registration Number:	CNAS L18252
CAB identifier:	CN0145
A2LA Certificate Number:	6823.01
Telephone:	0755-26024411

2.9 Deviation from Standards

No.	Equipment	Model	Manufacturer	Series No
/	/	/	/	/

3. Test Procedure And Results

3.1 26dB & 99% Bandwidth Measurement

3.1.1 Limit

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.

3.1.2 Test Procedure

KDB 789033 D02v02r01- Section II)C)1) (26dB Bandwidth)

KDB 789033 D02v02r01- Section II)D) (99% Bandwidth)

3.1.3 Test Setting


26dB Bandwidth

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth
2. RBW = approximately 1% of the emission bandwidth.
3. VBW > RBW
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

99% Bandwidth

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 1% to 5% of the OBW
3. VBW $\geq$ 3 RBW
4. Span = 1.5 times to 5 times the OBW
5. Detector = peak
6. Trace mode = max hold
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument.

3.1.4 Test Setup

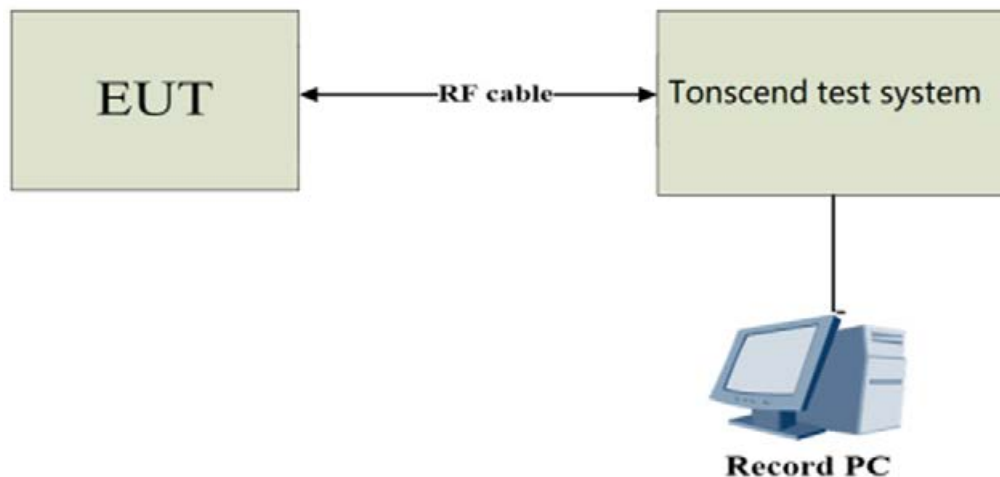


3.1.5 Test Result

Emission Bandwidth

Test Mode	Antenna	Frequency[MHz]	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11AX20MIMO	Ant1	5955	22.120	5943.640	5965.760	---	---
11AX20MIMO	Ant2	5955	22.520	5943.480	5966.000	---	---
11AX20MIMO	Ant1	6175	21.520	6164.160	6185.680	---	---
11AX20MIMO	Ant2	6175	22.680	6164.160	6186.840	---	---
11AX20MIMO	Ant1	6415	24.640	6401.080	6425.720	---	---
11AX20MIMO	Ant2	6415	22.160	6403.680	6425.840	---	---
11AX20MIMO	Ant1	6435	21.440	6424.280	6445.720	---	---
11AX20MIMO	Ant2	6435	23.600	6422.240	6445.840	---	---
11AX20MIMO	Ant1	6475	21.600	6464.200	6485.800	---	---
11AX20MIMO	Ant2	6475	25.640	6463.200	6488.840	---	---
11AX20MIMO	Ant1	6515	23.160	6502.840	6526.000	---	---
11AX20MIMO	Ant2	6515	24.480	6501.800	6526.280	---	---
11AX20MIMO	Ant1	6535	24.400	6524.080	6548.480	---	---
11AX20MIMO	Ant2	6535	22.920	6524.000	6546.920	---	---
11AX20MIMO	Ant1	6695	24.440	6683.640	6708.080	---	---
11AX20MIMO	Ant2	6695	25.920	6683.960	6709.880	---	---
11AX20MIMO	Ant1	6855	25.600	6841.240	6866.840	---	---
11AX20MIMO	Ant2	6855	24.360	6844.240	6868.600	---	---
11AX20MIMO	Ant1	6875	23.040	6863.000	6886.040	---	---
11AX20MIMO	Ant2	6875	24.640	6863.600	6888.240	---	---
11AX20MIMO	Ant1	6895	21.600	6883.960	6905.560	---	---
11AX20MIMO	Ant2	6895	21.920	6883.880	6905.800	---	---
11AX20MIMO	Ant1	6995	26.560	6981.800	7008.360	---	---
11AX20MIMO	Ant2	6995	23.240	6982.520	7005.760	---	---
11AX20MIMO	Ant1	7115	23.240	7104.040	7127.280	---	---
11AX20MIMO	Ant2	7115	22.840	7103.280	7126.120	---	---
11AX40MIMO	Ant1	5965	40.320	5944.600	5984.920	---	---
11AX40MIMO	Ant2	5965	39.520	5945.240	5984.760	---	---

11AX40MIMO	Ant1	6165	39.600	6145.240	6184.840	---	---
11AX40MIMO	Ant2	6165	41.440	6144.200	6185.640	---	---
11AX40MIMO	Ant1	6405	39.760	6384.840	6424.600	---	---
11AX40MIMO	Ant2	6405	40.880	6384.920	6425.800	---	---
11AX40MIMO	Ant1	6445	41.200	6424.520	6465.720	---	---
11AX40MIMO	Ant2	6445	40.960	6424.120	6465.080	---	---
11AX40MIMO	Ant1	6485	39.520	6465.240	6504.760	---	---
11AX40MIMO	Ant2	6485	40.720	6464.600	6505.320	---	---
11AX40MIMO	Ant1	6525	40.560	6504.600	6545.160	---	---
11AX40MIMO	Ant2	6525	39.680	6505.320	6545.000	---	---
11AX40MIMO	Ant1	6565	40.080	6544.840	6584.920	---	---
11AX40MIMO	Ant2	6565	40.720	6544.600	6585.320	---	---
11AX40MIMO	Ant1	6685	40.320	6664.680	6705.000	---	---
11AX40MIMO	Ant2	6685	39.440	6665.320	6704.760	---	---
11AX40MIMO	Ant1	6845	39.360	6825.160	6864.520	---	---
11AX40MIMO	Ant2	6845	41.520	6824.280	6865.800	---	---
11AX40MIMO	Ant1	6885	40.000	6865.240	6905.240	---	---
11AX40MIMO	Ant2	6885	41.520	6864.520	6906.040	---	---
11AX40MIMO	Ant1	6925	40.160	6904.760	6944.920	---	---
11AX40MIMO	Ant2	6925	40.720	6904.360	6945.080	---	---
11AX40MIMO	Ant1	6965	39.680	6945.080	6984.760	---	---
11AX40MIMO	Ant2	6965	40.080	6945.240	6985.320	---	---
11AX40MIMO	Ant1	7085	40.400	7064.440	7104.840	---	---
11AX40MIMO	Ant2	7085	39.840	7064.840	7104.680	---	---
11AX80MIMO	Ant1	5985	83.680	5944.520	6028.200	---	---
11AX80MIMO	Ant2	5985	81.280	5944.360	6025.640	---	---
11AX80MIMO	Ant1	6145	83.360	6104.680	6188.040	---	---
11AX80MIMO	Ant2	6145	81.760	6104.200	6185.960	---	---
11AX80MIMO	Ant1	6385	83.680	6344.520	6428.200	---	---
11AX80MIMO	Ant2	6385	81.760	6344.040	6425.800	---	---
11AX80MIMO	Ant1	6465	82.560	6424.840	6507.400	---	---
11AX80MIMO	Ant2	6465	81.280	6424.360	6505.640	---	---
11AX80MIMO	Ant1	6545	82.560	6504.680	6587.240	---	---
11AX80MIMO	Ant2	6545	81.440	6504.200	6585.640	---	---
11AX80MIMO	Ant1	6625	82.240	6584.520	6666.760	---	---
11AX80MIMO	Ant2	6625	81.440	6584.200	6665.640	---	---
11AX80MIMO	Ant1	6705	82.560	6664.680	6747.240	---	---
11AX80MIMO	Ant2	6705	81.440	6664.200	6745.640	---	---
11AX80MIMO	Ant1	6785	84.800	6744.520	6829.320	---	---
11AX80MIMO	Ant2	6785	81.920	6744.040	6825.960	---	---
11AX80MIMO	Ant1	6865	82.880	6824.680	6907.560	---	---
11AX80MIMO	Ant2	6865	82.400	6823.720	6906.120	---	---
11AX80MIMO	Ant1	6945	83.200	6904.520	6987.720	---	---
11AX80MIMO	Ant2	6945	82.240	6903.720	6985.960	---	---
11AX80MIMO	Ant1	7025	82.720	6984.680	7067.400	---	---
11AX80MIMO	Ant2	7025	81.600	6984.200	7065.800	---	---

Test Graphs

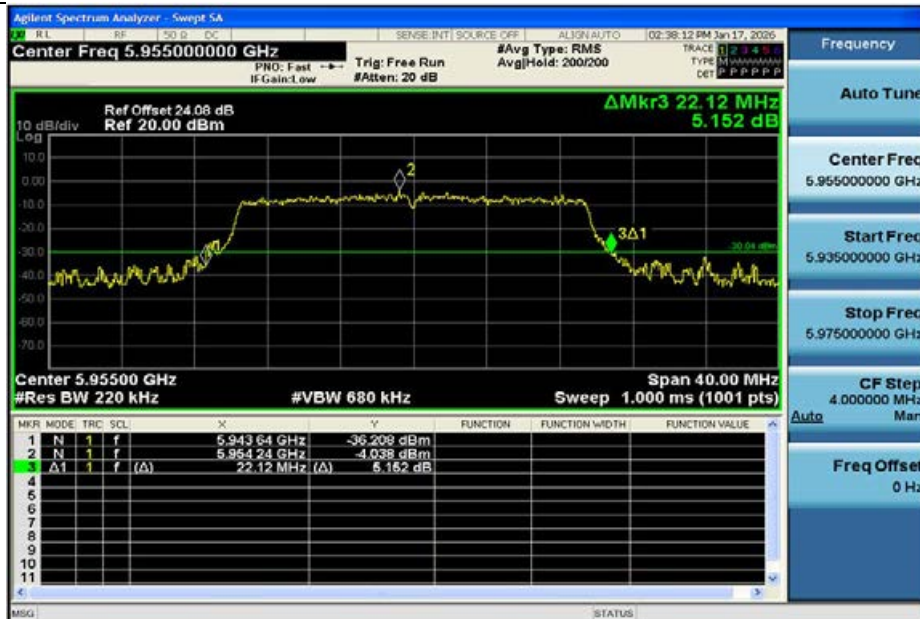

11AX20MIMO-Ant1-5955



11AX20MIMO-Ant2-5955



11AX20MIMO-Ant1-6175



11AX20MIMO-Ant2-6175



11AX20MIMO-Ant1-6415



11AX20MIMO-Ant2-6415



11AX20MIMO-Ant1-6435



11AX20MIMO-Ant2-6435



11AX20MIMO-Ant1-6475



11AX20MIMO-Ant2-6475



11AX20MIMO-Ant1-6515



11AX20MIMO-Ant2-6515



11AX20MIMO-Ant1-6535



11AX20MIMO-Ant2-6535



11AX20MIMO-Ant1-6695



11AX20MIMO-Ant2-6695



11AX20MIMO-Ant1-6855



11AX20MIMO-Ant2-6855



11AX20MIMO-Ant1-6875



11AX20MIMO-Ant2-6875



11AX20MIMO-Ant1-6895



11AX20MIMO-Ant2-6895



11AX20MIMO-Ant1-6995



11AX20MIMO-Ant2-6995



11AX20MIMO-Ant1-7115



11AX20MIMO-Ant2-7115



11AX40MIMO-Ant1-5965



11AX40MIMO-Ant2-5965



11AX40MIMO-Ant1-6165



11AX40MIMO-Ant2-6165



11AX40MIMO-Ant1-6405



11AX40MIMO-Ant2-6405




11AX40MIMO-Ant1-6445



11AX40MIMO-Ant2-6445



11AX40MIMO-Ant1-6485

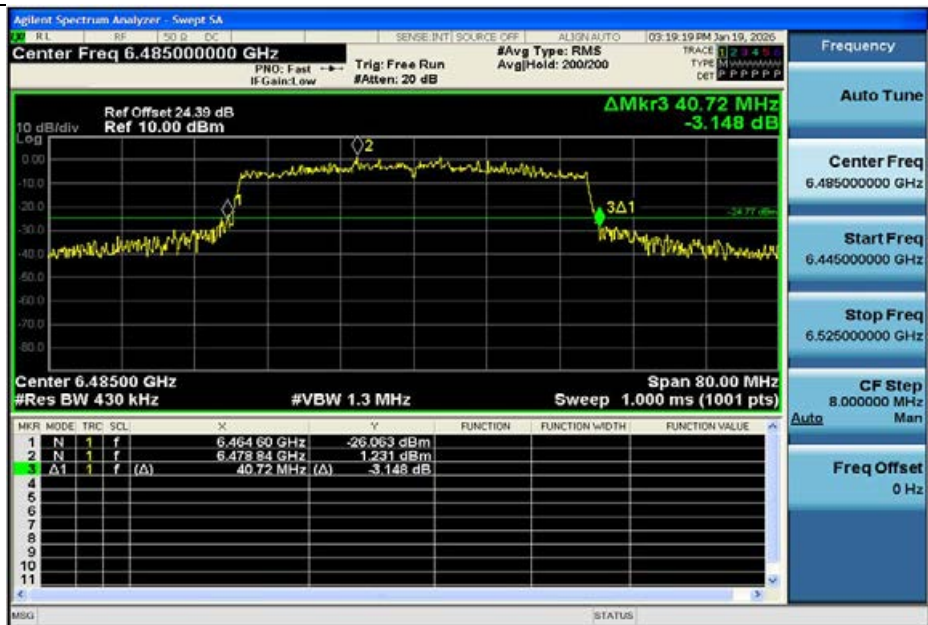

11AX40MIMO-Ant2-6485



11AX40MIMO-Ant1-6525



11AX40MIMO-Ant2-6525



11AX40MIMO-Ant1-6565



11AX40MIMO-Ant2-6565



11AX40MIMO-Ant1-6685



11AX40MIMO-Ant2-6685



11AX40MIMO-Ant1-6845



11AX40MIMO-Ant2-6845



11AX40MIMO-Ant1-6885



11AX40MIMO-Ant2-6885



11AX40MIMO-Ant1-6925



11AX40MIMO-Ant2-6925




11AX40MIMO-Ant1-6965



11AX40MIMO-Ant2-6965



11AX40MIMO-Ant1-7085

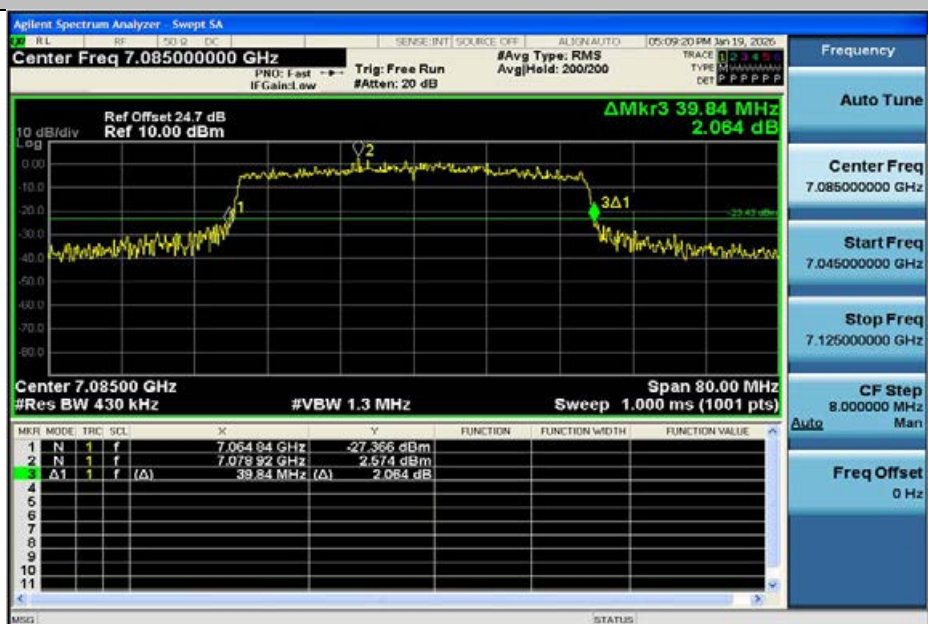

11AX40MIMO-Ant2-7085



11AX80MIMO-Ant1-5985



11AX80MIMO-Ant2-5985



11AX80MIMO-Ant1-6145



11AX80MIMO-Ant2-6145



11AX80MIMO-Ant1-6385



11AX80MIMO-Ant2-6385



11AX80MIMO-Ant1-6465



11AX80MIMO-Ant2-6465



11AX80MIMO-Ant1-6545



11AX80MIMO-Ant2-6545



11AX80MIMO-Ant1-6625



11AX80MIMO-Ant2-6625



11AX80MIMO-Ant1-6705



11AX80MIMO-Ant2-6705



11AX80MIMO-Ant1-6785



11AX80MIMO-Ant2-6785



11AX80MIMO-Ant1-6865



11AX80MIMO-Ant2-6865



11AX80MIMO-Ant1-6945



11AX80MIMO-Ant2-6945



11AX80MIMO-Ant1-7025




11AX80MIMO-Ant2-7025


Occupied channel bandwidth

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11AX20MIMO	Ant1	5955	19.103	5945.4247	5964.5277	≤320	PASS
11AX20MIMO	Ant2	5955	19.071	5945.4472	5964.5182	≤320	PASS
11AX20MIMO	Ant1	6175	19.116	6165.3773	6184.4933	≤320	PASS
11AX20MIMO	Ant2	6175	19.093	6165.4101	6184.5031	≤320	PASS
11AX20MIMO	Ant1	6415	19.115	6405.4003	6424.5153	≤320	PASS
11AX20MIMO	Ant2	6415	19.131	6405.3850	6424.5160	≤320	PASS
11AX20MIMO	Ant1	6435	19.177	6425.3862	6444.5632	≤320	PASS
11AX20MIMO	Ant2	6435	19.144	6425.3885	6444.5325	≤320	PASS
11AX20MIMO	Ant1	6475	19.118	6465.3677	6484.4857	≤320	PASS
11AX20MIMO	Ant2	6475	19.097	6465.3761	6484.4731	≤320	PASS
11AX20MIMO	Ant1	6515	19.100	6505.3926	6524.4926	≤320	PASS
11AX20MIMO	Ant2	6515	19.123	6505.3721	6524.4951	≤320	PASS
11AX20MIMO	Ant1	6535	19.102	6525.4031	6544.5051	≤320	PASS
11AX20MIMO	Ant2	6535	19.115	6525.3960	6544.5110	≤320	PASS
11AX20MIMO	Ant1	6695	19.151	6685.3797	6704.5307	≤320	PASS
11AX20MIMO	Ant2	6695	19.162	6685.3730	6704.5350	≤320	PASS
11AX20MIMO	Ant1	6855	19.150	6845.3685	6864.5185	≤320	PASS
11AX20MIMO	Ant2	6855	19.181	6845.3694	6864.5504	≤320	PASS
11AX20MIMO	Ant1	6875	19.123	6865.3893	6884.5123	≤320	PASS
11AX20MIMO	Ant2	6875	19.126	6865.3831	6884.5091	≤320	PASS
11AX20MIMO	Ant1	6895	19.136	6885.3723	6904.5083	≤320	PASS
11AX20MIMO	Ant2	6895	19.118	6885.3973	6904.5153	≤320	PASS
11AX20MIMO	Ant1	6995	19.103	6985.3820	7004.4850	≤320	PASS
11AX20MIMO	Ant2	6995	19.135	6985.3785	7004.5135	≤320	PASS
11AX20MIMO	Ant1	7115	19.107	7105.3632	7124.4702	≤320	PASS
11AX20MIMO	Ant2	7115	19.171	7105.3163	7124.4873	≤320	PASS
11AX40MIMO	Ant1	5965	37.996	5945.9967	5983.9927	≤320	PASS
11AX40MIMO	Ant2	5965	37.979	5946.0017	5983.9807	≤320	PASS
11AX40MIMO	Ant1	6165	37.811	6146.0820	6183.8930	≤320	PASS
11AX40MIMO	Ant2	6165	37.804	6146.0616	6183.8656	≤320	PASS
11AX40MIMO	Ant1	6405	37.762	6386.0754	6423.8374	≤320	PASS
11AX40MIMO	Ant2	6405	37.770	6386.0674	6423.8374	≤320	PASS
11AX40MIMO	Ant1	6445	37.767	6426.0720	6463.8390	≤320	PASS
11AX40MIMO	Ant2	6445	37.718	6426.1483	6463.8663	≤320	PASS
11AX40MIMO	Ant1	6485	37.763	6466.0547	6503.8177	≤320	PASS
11AX40MIMO	Ant2	6485	37.710	6466.1160	6503.8260	≤320	PASS
11AX40MIMO	Ant1	6525	37.729	6506.0774	6543.8064	≤320	PASS
11AX40MIMO	Ant2	6525	37.692	6506.0980	6543.7900	≤320	PASS
11AX40MIMO	Ant1	6565	37.729	6546.0997	6583.8287	≤320	PASS
11AX40MIMO	Ant2	6565	37.660	6546.1316	6583.7916	≤320	PASS
11AX40MIMO	Ant1	6685	37.704	6666.1475	6703.8515	≤320	PASS
11AX40MIMO	Ant2	6685	37.755	6666.1123	6703.8673	≤320	PASS
11AX40MIMO	Ant1	6845	37.834	6826.0445	6863.8785	≤320	PASS
11AX40MIMO	Ant2	6845	37.871	6826.0299	6863.9009	≤320	PASS


11AX40MIMO	Ant1	6885	37.875	6866.0302	6903.9052	≤320	PASS
11AX40MIMO	Ant2	6885	37.721	6866.0928	6903.8138	≤320	PASS
11AX40MIMO	Ant1	6925	37.738	6906.0696	6943.8076	≤320	PASS
11AX40MIMO	Ant2	6925	37.806	6906.0486	6943.8546	≤320	PASS
11AX40MIMO	Ant1	6965	37.754	6946.0420	6983.7960	≤320	PASS
11AX40MIMO	Ant2	6965	37.760	6946.0946	6983.8546	≤320	PASS
11AX40MIMO	Ant1	7085	37.718	7066.0464	7103.7644	≤320	PASS
11AX40MIMO	Ant2	7085	37.766	7066.0637	7103.8297	≤320	PASS
11AX80MIMO	Ant1	5985	76.959	5946.5932	6023.5522	≤320	PASS
11AX80MIMO	Ant2	5985	76.907	5946.4836	6023.3906	≤320	PASS
11AX80MIMO	Ant1	6145	76.926	6106.4641	6183.3901	≤320	PASS
11AX80MIMO	Ant2	6145	76.893	6106.4955	6183.3885	≤320	PASS
11AX80MIMO	Ant1	6385	77.025	6346.4504	6423.4754	≤320	PASS
11AX80MIMO	Ant2	6385	76.967	6346.3868	6423.3538	≤320	PASS
11AX80MIMO	Ant1	6465	76.817	6426.5335	6503.3505	≤320	PASS
11AX80MIMO	Ant2	6465	76.845	6426.4760	6503.3210	≤320	PASS
11AX80MIMO	Ant1	6545	76.916	6506.4774	6583.3934	≤320	PASS
11AX80MIMO	Ant2	6545	76.898	6506.3748	6583.2728	≤320	PASS
11AX80MIMO	Ant1	6625	76.894	6586.4772	6663.3712	≤320	PASS
11AX80MIMO	Ant2	6625	76.920	6586.3518	6663.2718	≤320	PASS
11AX80MIMO	Ant1	6705	76.855	6666.5632	6743.4182	≤320	PASS
11AX80MIMO	Ant2	6705	76.823	6666.4591	6743.2821	≤320	PASS
11AX80MIMO	Ant1	6785	76.991	6746.4931	6823.4841	≤320	PASS
11AX80MIMO	Ant2	6785	76.994	6746.3674	6823.3614	≤320	PASS
11AX80MIMO	Ant1	6865	76.952	6826.5115	6903.4635	≤320	PASS
11AX80MIMO	Ant2	6865	76.957	6826.3983	6903.3553	≤320	PASS
11AX80MIMO	Ant1	6945	76.934	6906.5119	6983.4459	≤320	PASS
11AX80MIMO	Ant2	6945	76.942	6906.4065	6983.3485	≤320	PASS
11AX80MIMO	Ant1	7025	76.801	6986.5373	7063.3383	≤320	PASS
11AX80MIMO	Ant2	7025	76.804	6986.4816	7063.2856	≤320	PASS

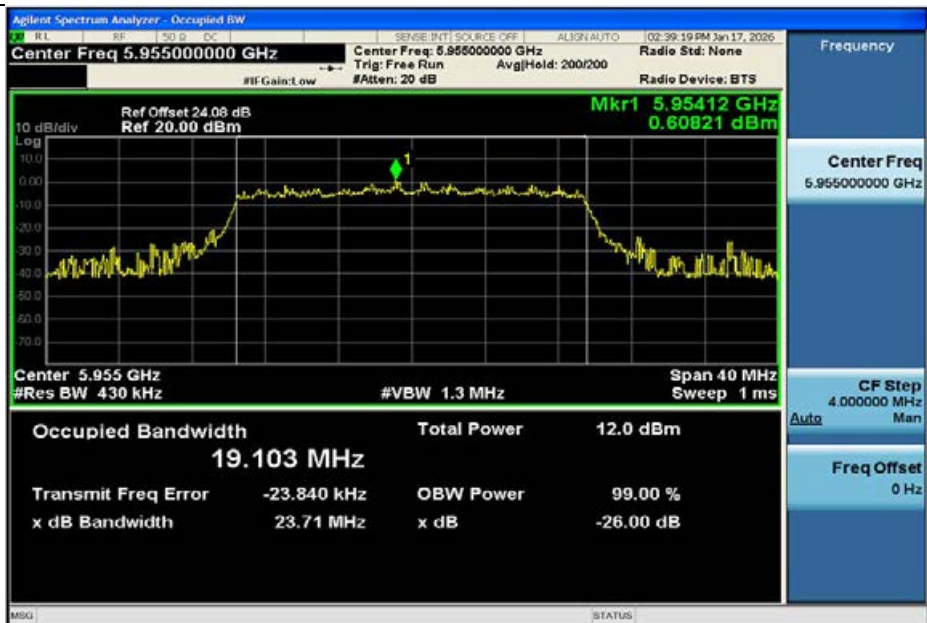

11AX20MIMO-Ant1-5955-PASS

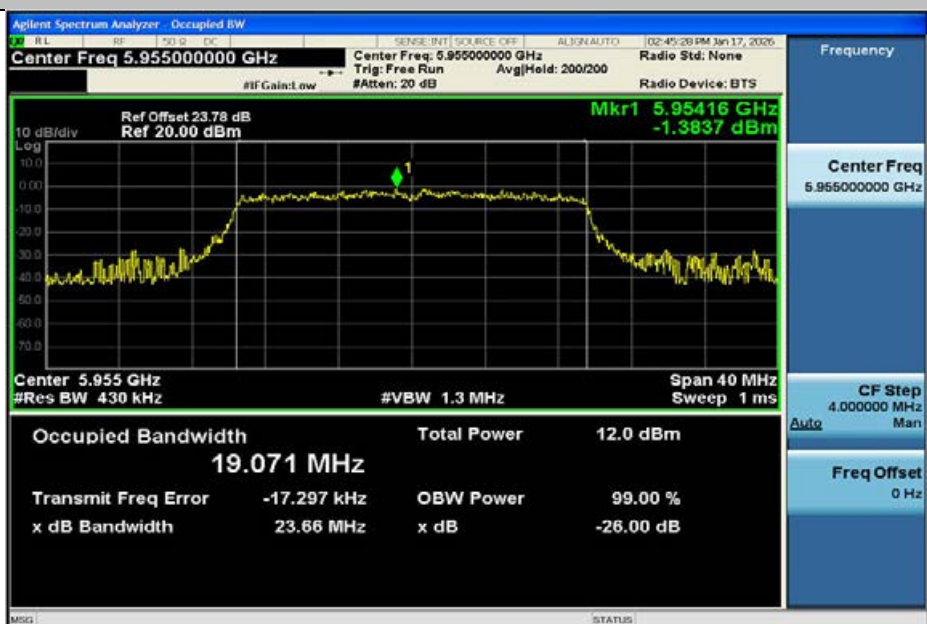


11AX20MIMO-Ant2-5955-PASS

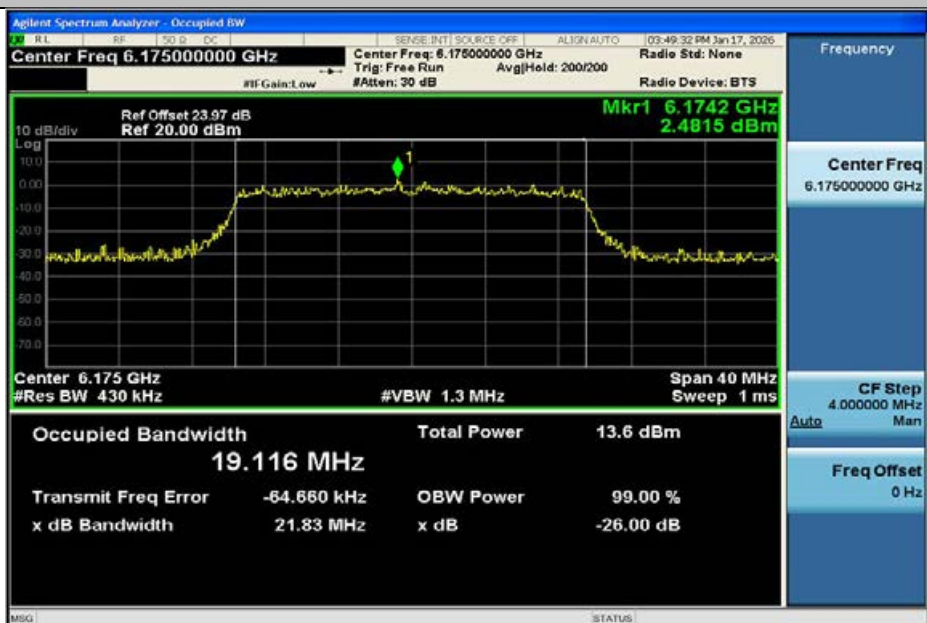

11AX20MIMO-Ant1-6175-PASS




11AX20MIMO-Ant2-6175-PASS

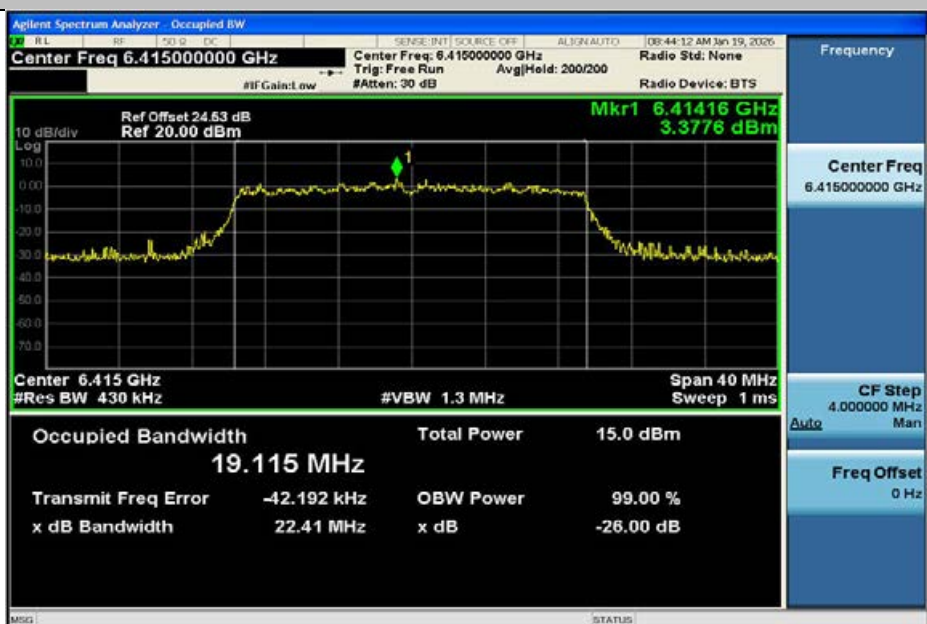


11AX20MIMO-Ant1-6415-PASS




11AX20MIMO-Ant2-6415-PASS

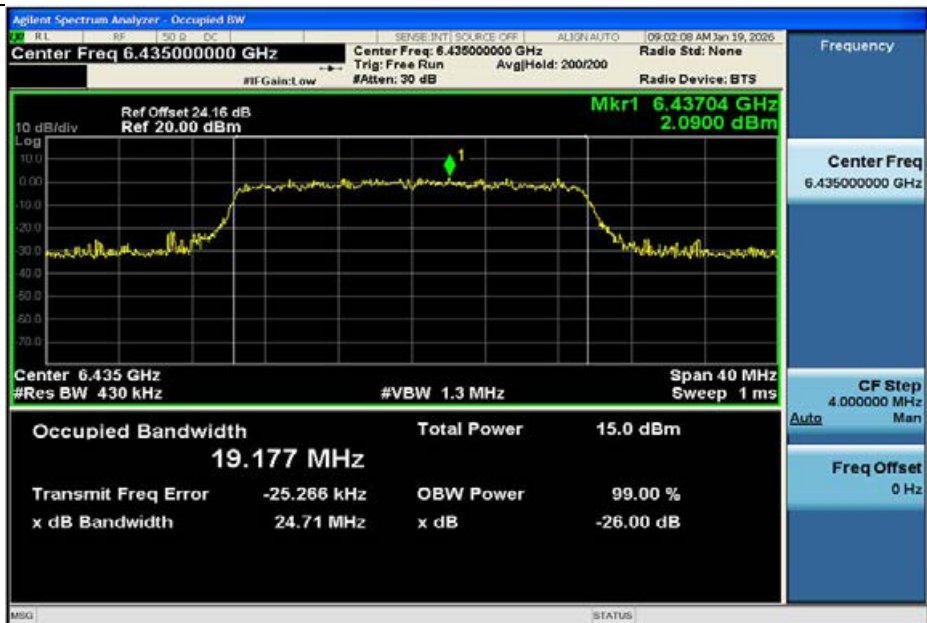


11AX20MIMO-Ant1-6435-PASS

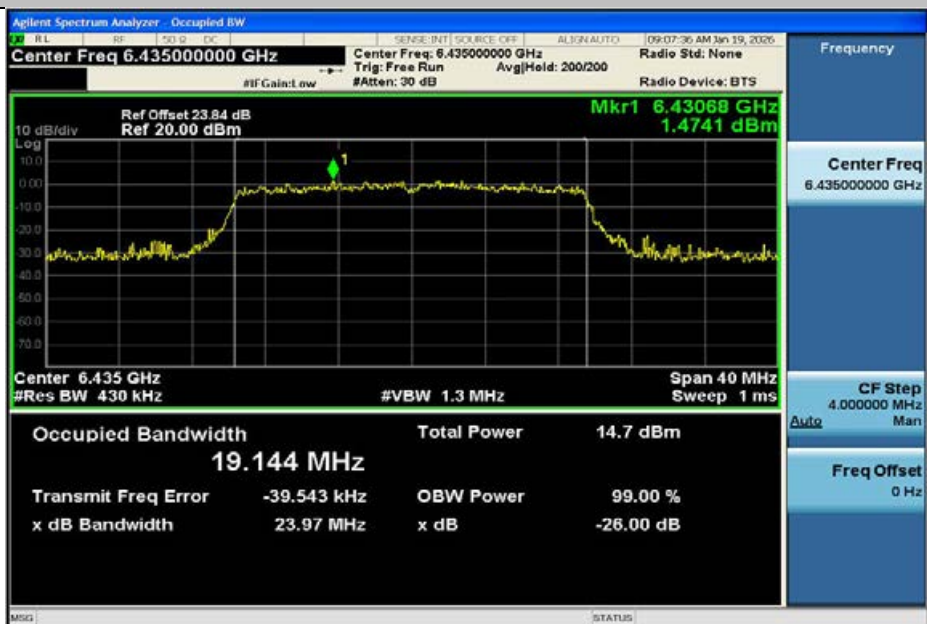


11AX20MIMO-Ant2-6435-PASS

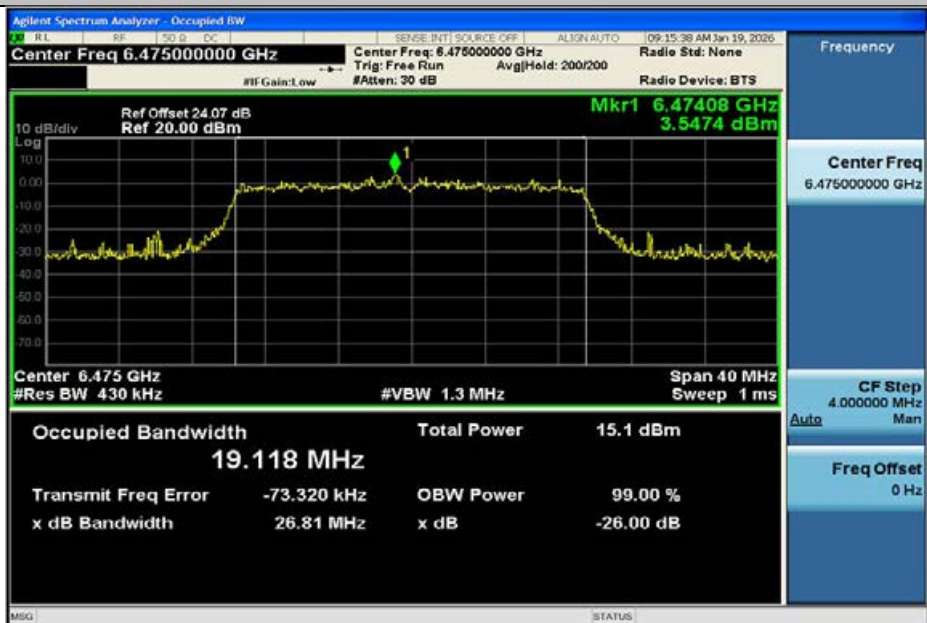

11AX20MIMO-Ant1-6475-PASS

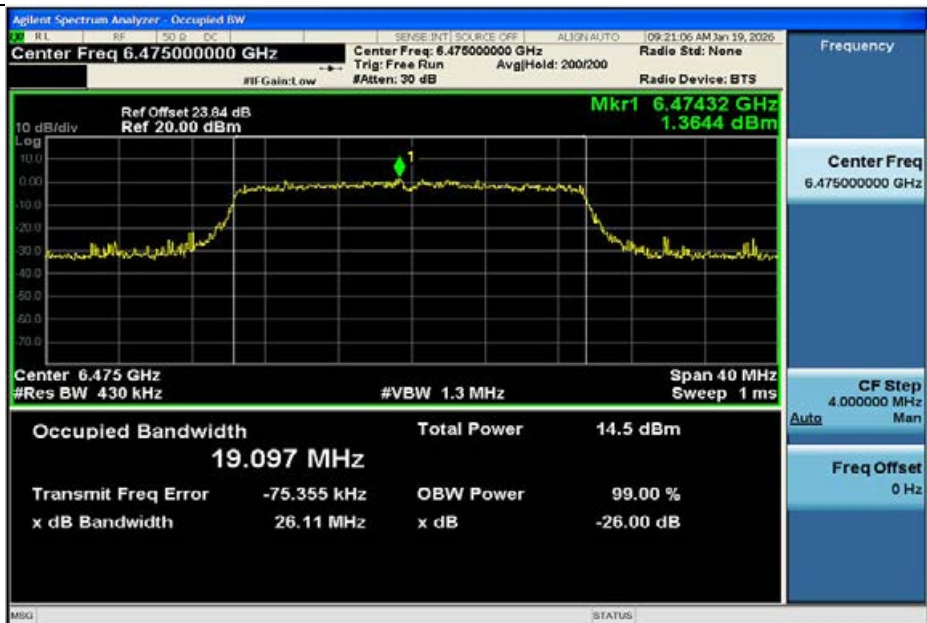


11AX20MIMO-Ant2-6475-PASS

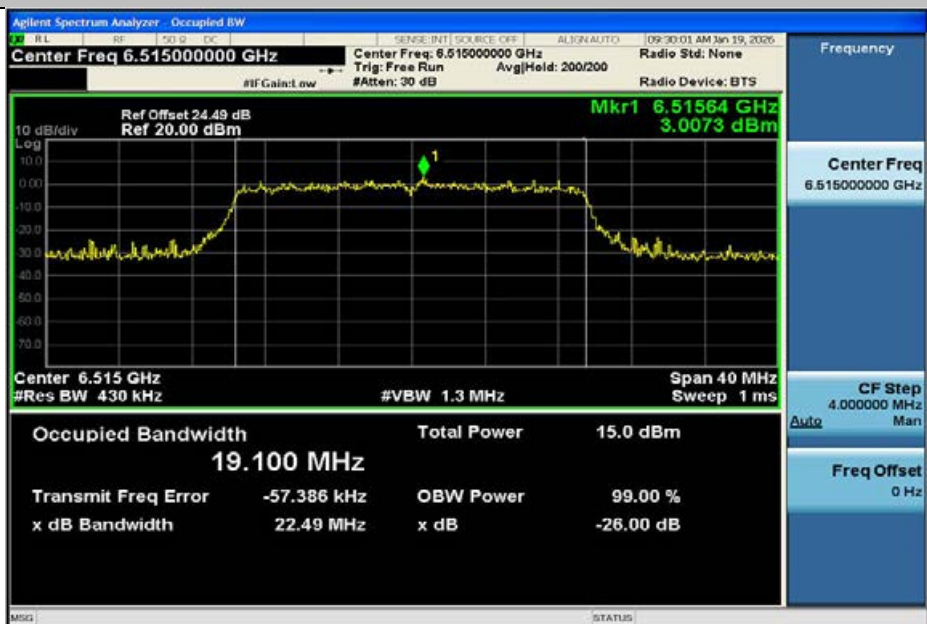


11AX20MIMO-Ant1-6515-PASS




11AX20MIMO-Ant2-6515-PASS

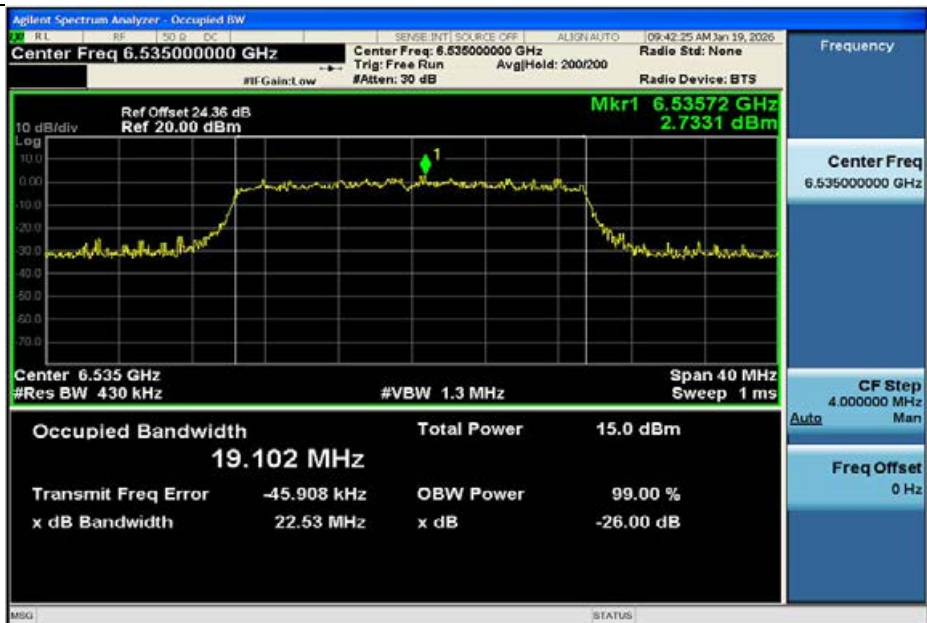


11AX20MIMO-Ant1-6535-PASS

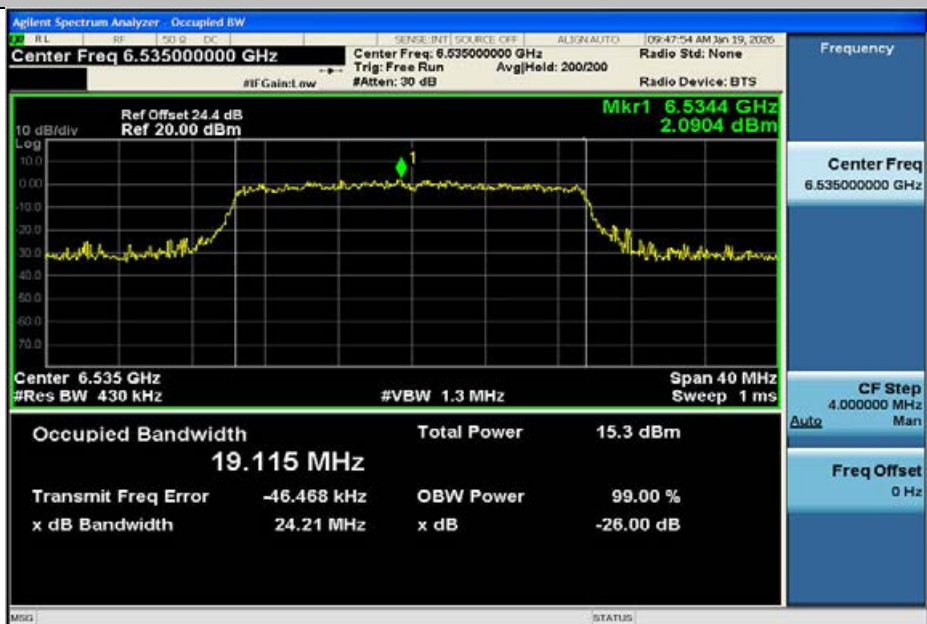


11AX20MIMO-Ant2-6535-PASS

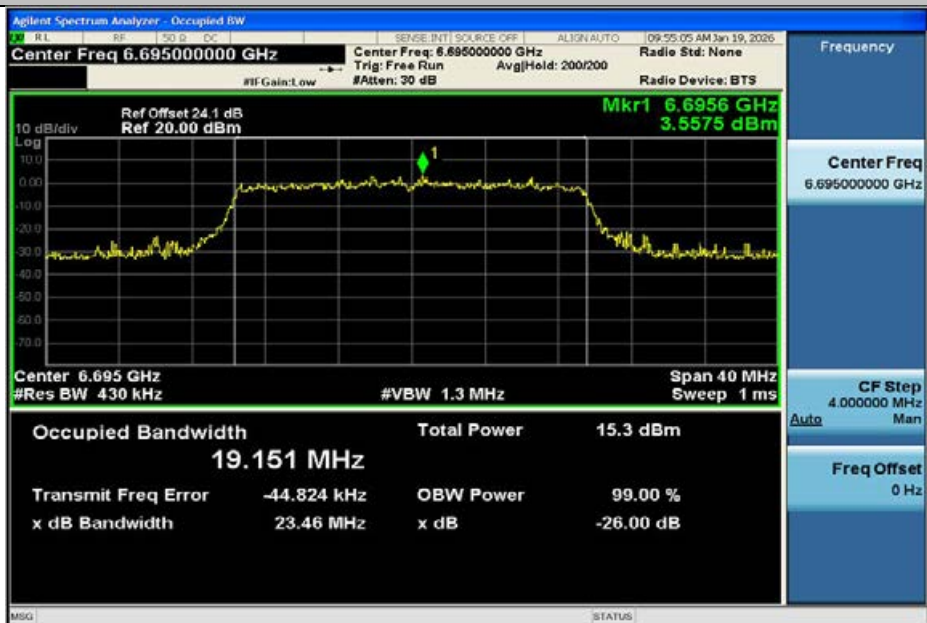


11AX20MIMO-Ant1-6695-PASS

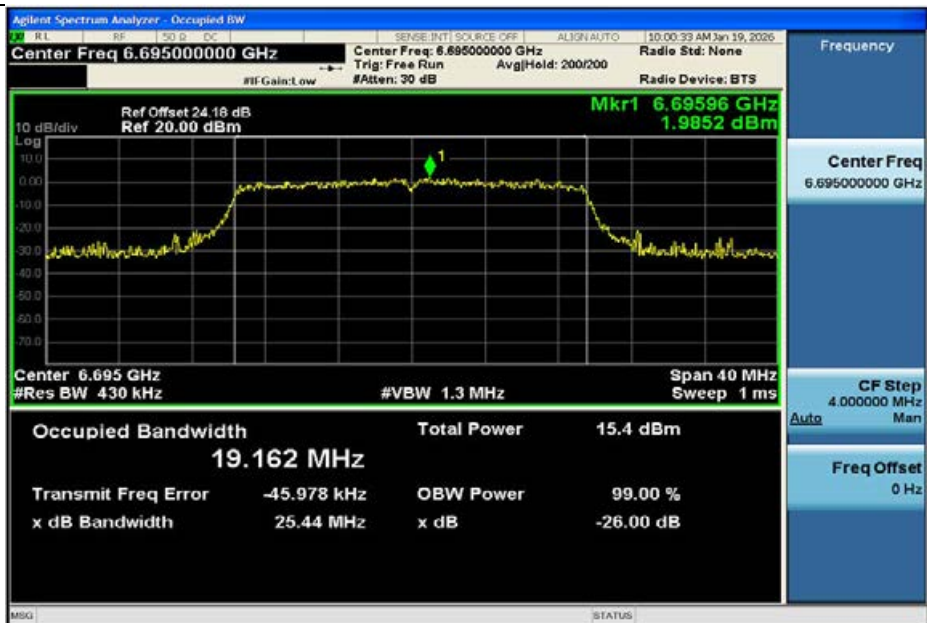


11AX20MIMO-Ant2-6695-PASS

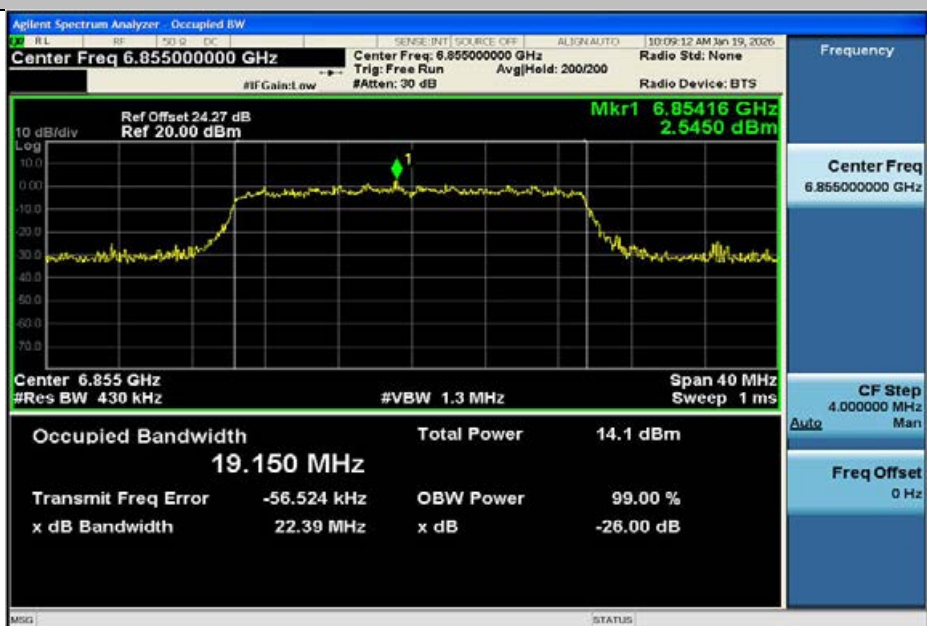


11AX20MIMO-Ant1-6855-PASS

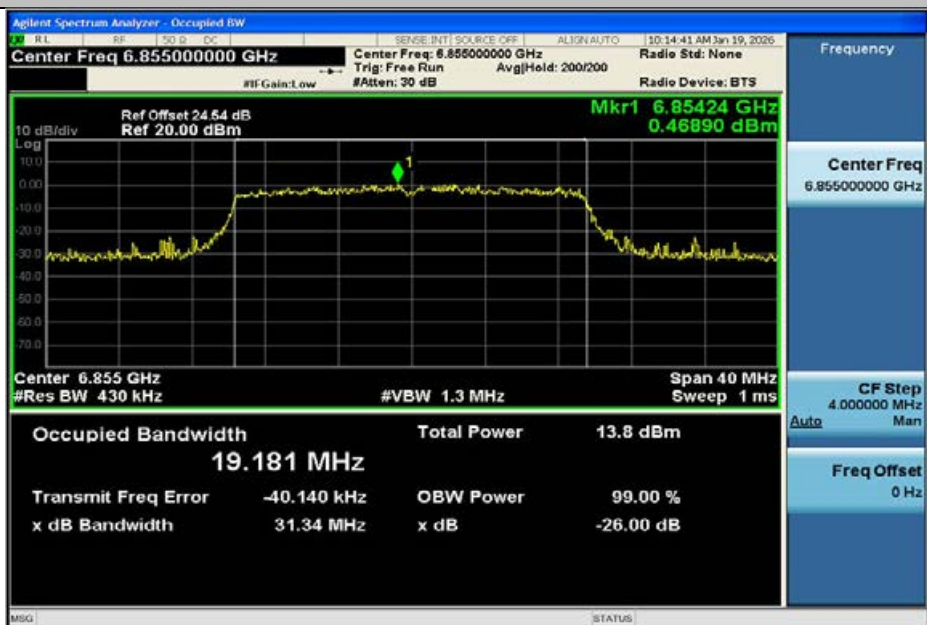


11AX20MIMO-Ant2-6855-PASS

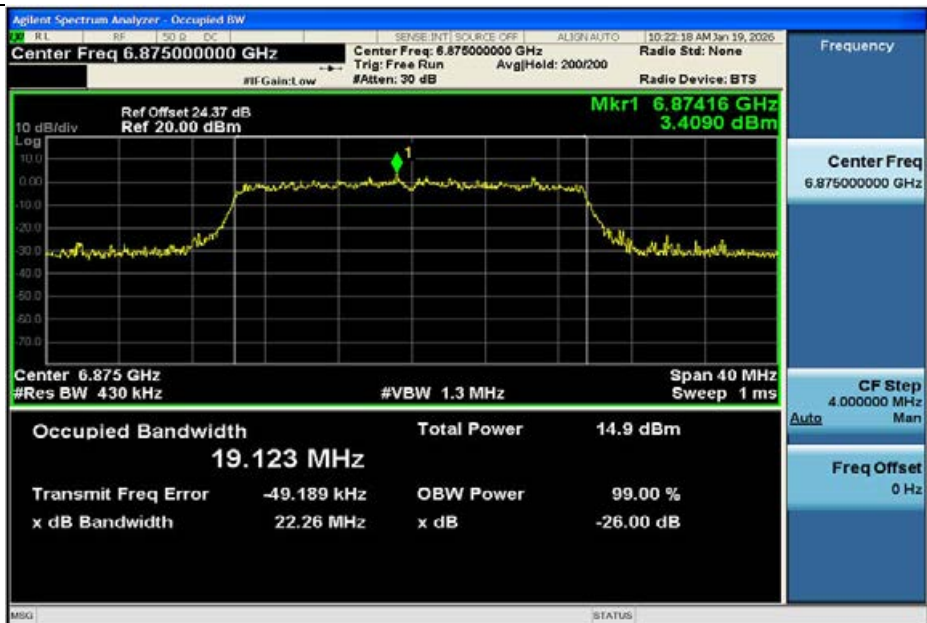


11AX20MIMO-Ant1-6875-PASS

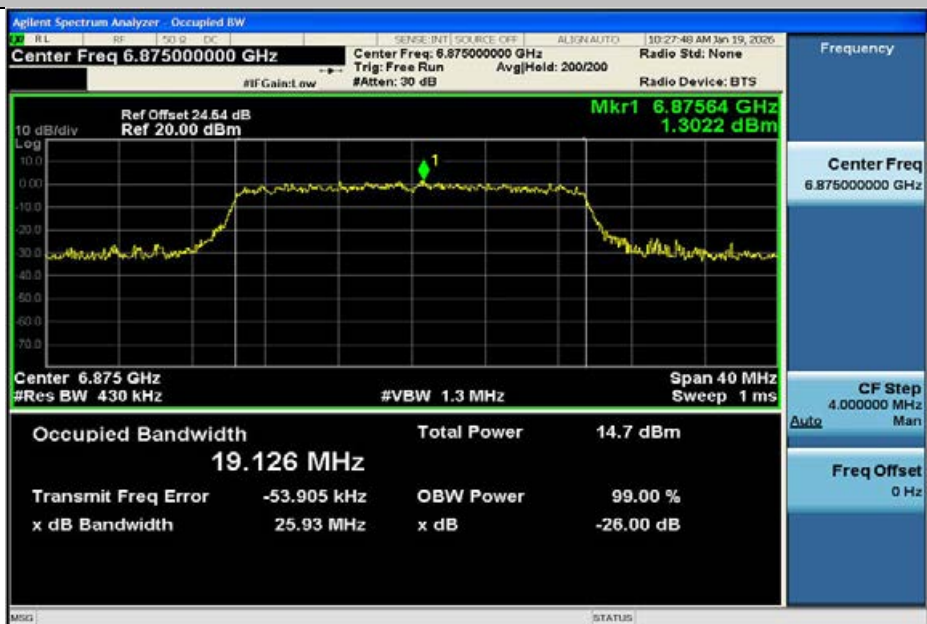


11AX20MIMO-Ant2-6875-PASS

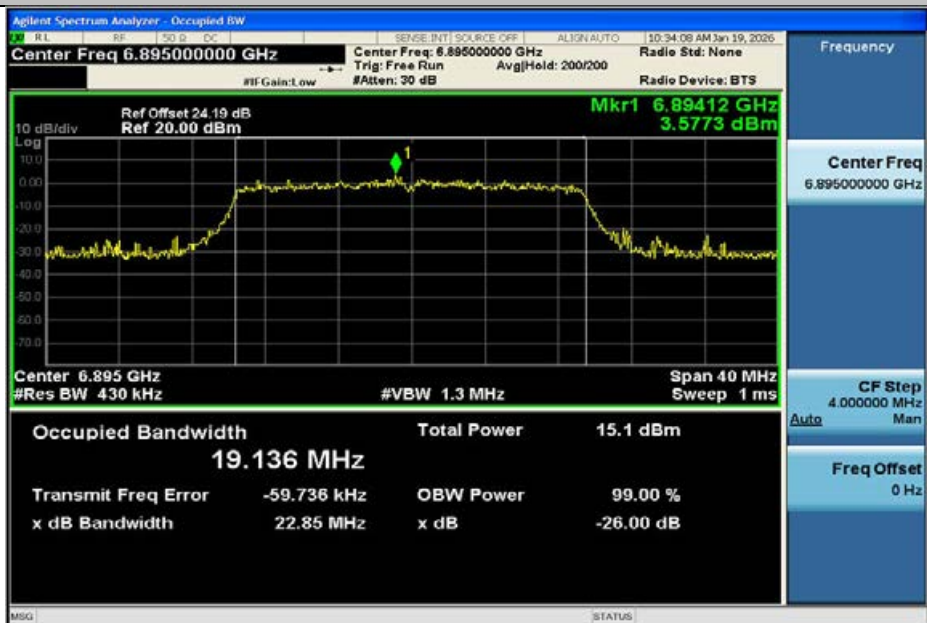

11AX20MIMO-Ant1-6895-PASS

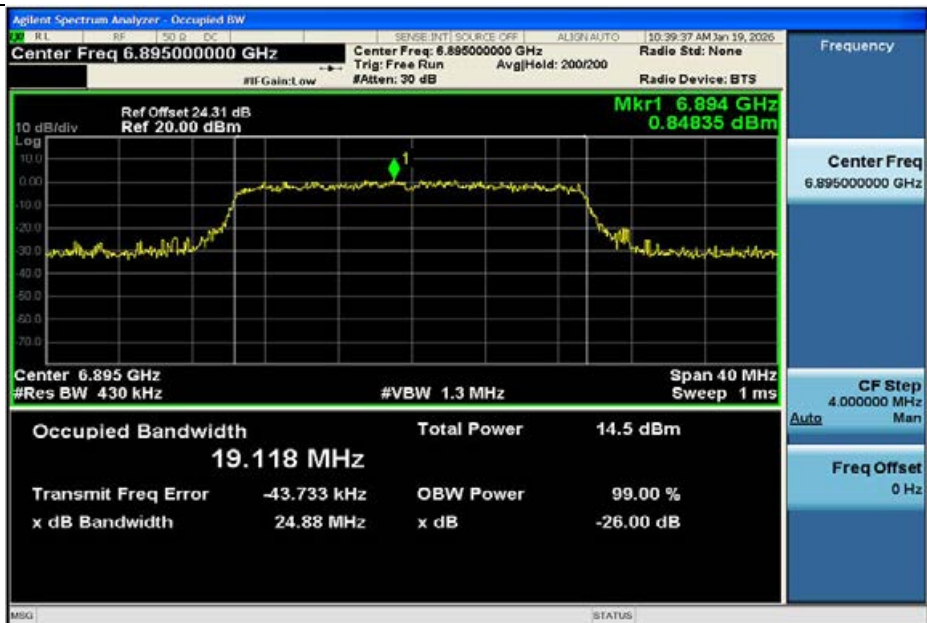


11AX20MIMO-Ant2-6895-PASS

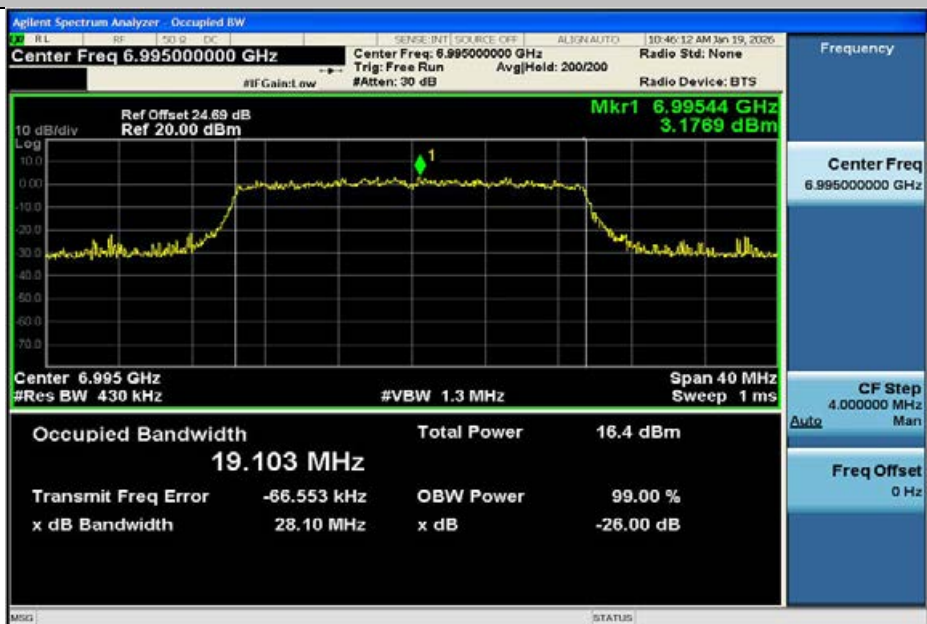


11AX20MIMO-Ant1-6995-PASS



11AX20MIMO-Ant2-6995-PASS

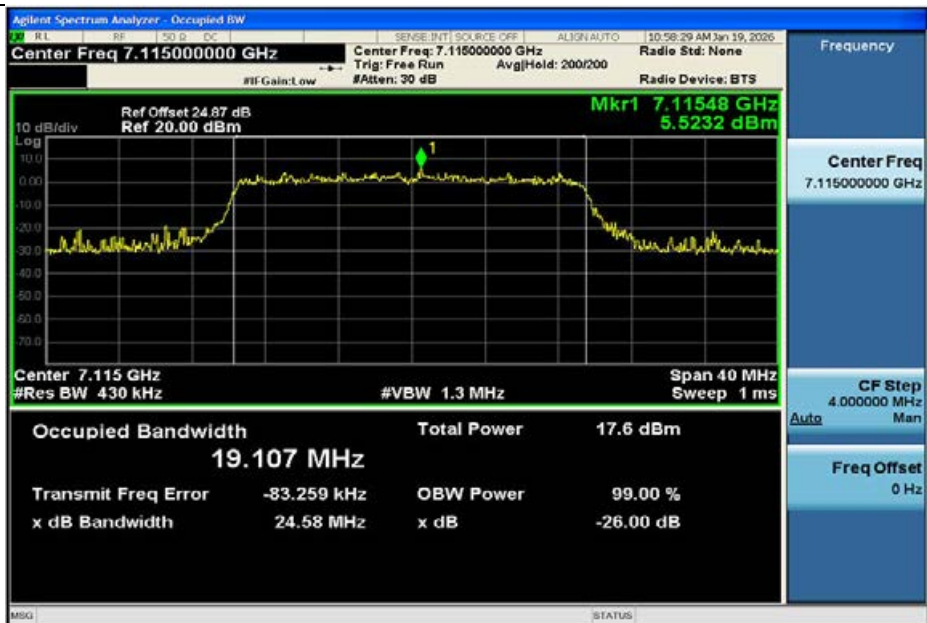

11AX20MIMO-Ant1-7115-PASS

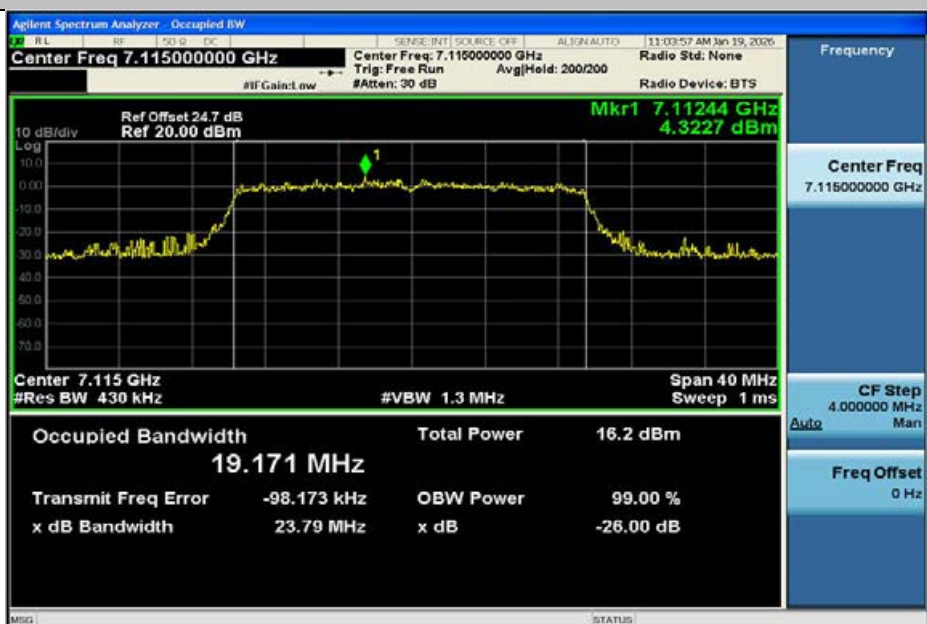

11AX20MIMO-Ant2-7115-PASS



11AX40MIMO-Ant1-5965-PASS