

DQ-MINI

User Manual

DUALi Inc.

Document Version: 1.00

Last Revised Date: 16th. Oct 2018

Copyright © 2016 DUALi Inc. All rights reserved. You are strictly prohibited to copy, disclose, distribute, or use this document in part or as a whole for any purposes other than those for which this document is disclosed. This document is copyrighted and contains confidential information and other intellectual property rights of DUALi Inc. Any unauthorized use, copy, disclosure or distribution constitutes infringement of DUALi's intellectual property rights.

Revision History

- 2018.10.16 (Ver. 1.00) : First Release

DUALi Inc. reserves the right to make changes to its applications or services or to discontinue any application or service at any time without notice. DUALi provides customer assistance in various technical areas, but does not have full access to data concerning the use and applications of customer's products.

Therefore, DUALi assumes no liability and is not responsible for customer applications or software design or performance relating to systems or applications incorporating DUALi products. In addition, DUALi assumes no liability and is not responsible for infringement of patents and/or any other intellectual or industrial property rights of third parties, which may result from assistance provided by DUALi.

Composition of the information in this manual has been done to the best of our knowledge. DUALi does not guarantee the correctness and completeness of the details given in this manual and may not be held liable for damages ensuing from incorrect or incomplete information. Since, despite all our efforts, errors may not be completely avoided, we are always grateful for your useful tips.

We have our development center in South Korea to provide technical support. For any technical assistance can contact our technical support team as below;

Tel: +82 31 213 0074

e-mail : lab@duali.com

FeliCa™ is registered trademark of SONY Corporation.

Mifare® is registered trademarks of NXP Semiconductors

CONTENTS

01.	Introduction	5
02.	Specification	5
03.	Contents Confirmation	6
04.	Appearance & Installation.....	7
04.1	DQ MINI Feature & Dimension.....	7
04.2	Mounting DQ Mini on the wall.....	7
05.	Connection Diagram	9
06.	Operation & Usage.....	10
07.	Output Format	11
08.	Function configuration (Communication setting).....	12
08.1	QR Mode option set.....	13
08.2	QR Reading timeout.....	14
08.3	QR scan interval set.....	15
08.4	QR Maximum length set.....	16
08.5	QR data send channel set.....	17
08.6	RF Scan option set	18
09.	Certifications.....	19
10.	Warranty & Service	20

01. Introduction

DQ-MINI is a wiegand access control reader based on 13.56 Mhz contactless card communication technology with stylish and rugged design. And it also can read QR code and 1D/2D barcode. **It can be installed stably both indoor and outdoor.** The ideal combination of NFC & QR reader could upgrade your application into another level. The reader is designed for wall mounting type of Access / Time attendance & parking management systems, and etc.

02. Specification

Communication Interface	RS-232 – 115200bps
Operating Frequency	13.56MHz
Credential Type	Contactless > ISO 14443 TYPE A and B
1D/2D QR Recognizable spec	UPC/EAN, UPC/EAn with Supplementals, Bookland EAN, ISSN, UCC Coupon Extended Code, Code128, GS1-128, ISBT 128, Code 39, PDF417, MicroPDF417, Composite Codes, Data Matrix, Maxicode, Qr Code, micro QR, Aztec
Indicator	LED (RED /BLUE) Magnetic Buzzer
Power Supply	12VDC Linear supply recommended, 200 mA @ 12 VDC
Operating Condition	> -4° to 158°F (-20° to 55°C guaranteed) > 5% to 90% relative humidity
Storage Condition	> -4° to 158°F (-20° to 80°C) > > 5% to 90% relative humidity
Housing Material	PC (polycarbonate)
Dimensions	99.3(mm) x 91.9(mm) x 88.4(mm)
Cable length	1000(mm)
Certifications	FCC Certification (US), CE(EU)

03. Contents Confirmation



< DQ Mini >



< Wall bracket >




< Zig Board >





< USB to Serial cable>

04. Appearance & Installation

04.1 DQ MINI Feature & Dimension

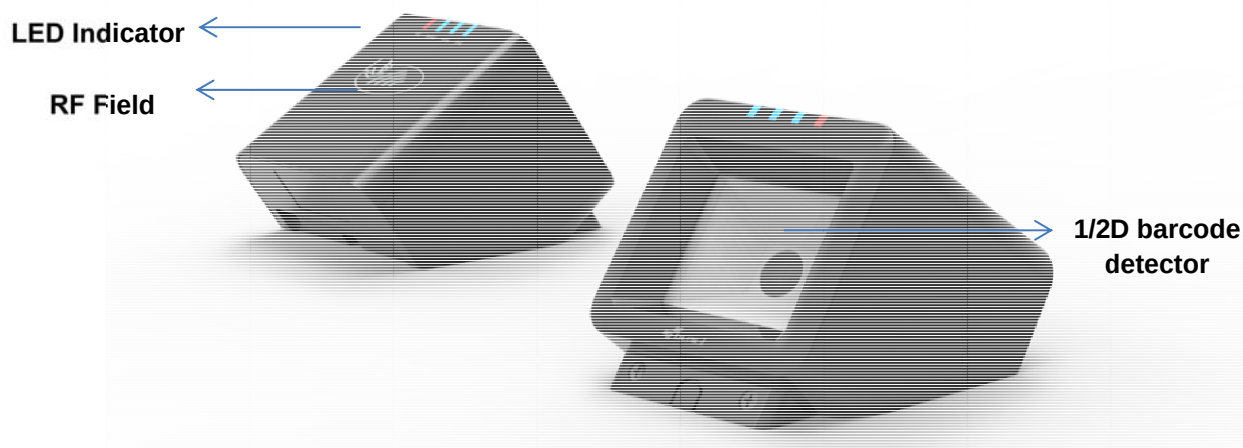

04.2 Mounting DQ Mini on the wall

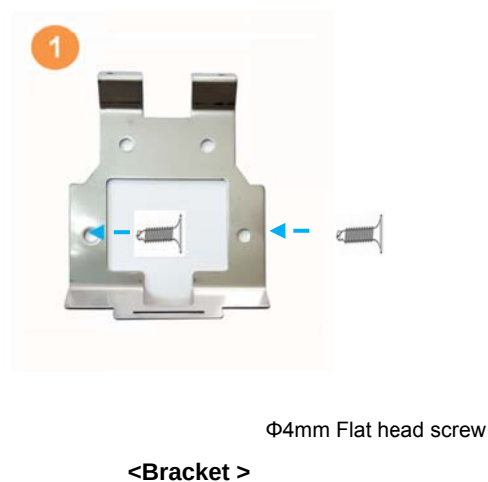


Connect the power and communication cable to DQ MINI's terminal block.

In case you don't use the cable as it is shipped, you could cut off the end of the cable and use only the wire that you need for connection.

Place the provided wall mount bracket on the wall and fix it tightly with screw ($\Phi 4$ mm Flat head)

3

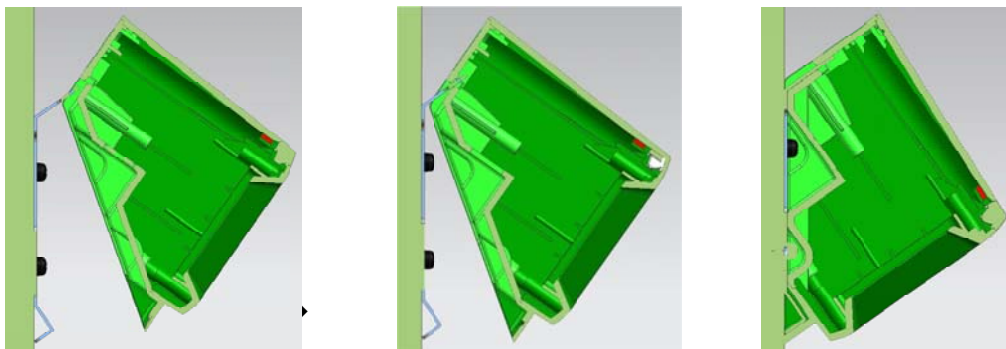

< Side View >

Tilt the device slightly and insert to the wall mount from the top as above step. Fix it tightly with 3*4 flat head machine screw.


※ **Caution**

- Do not push the bracket too hard when fixing it to the wall.
- Screw has to be selected depending on the wall's material and condition
- Place the reader to flat panel between the wall mount bracket and the wall.

It could cause a problem to assemble the device if the bracket is bent.

- Card reading distance can be short if the wall is made of steel or metal.

05. Connection Diagram

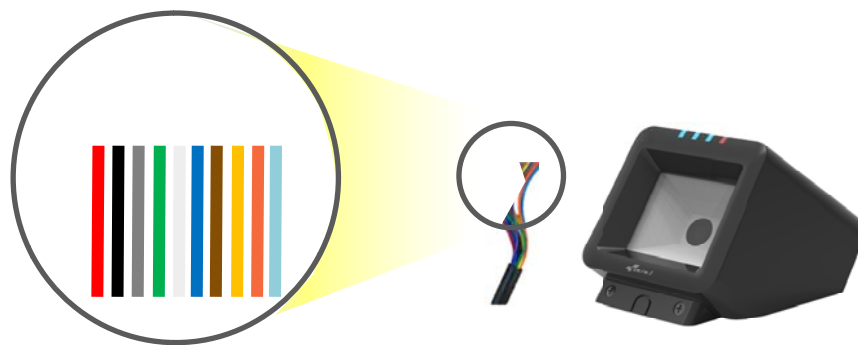

PIN NAME	COLOR	NUMBER
PWR_IN	RED	1
PWR_GND	BLACK	2
RS232_RX	GRAY	3
RS232_TX	PINK or JADE	4
WGD_D0	GREEN	5
WGD_D1	WHITE	6
PWR_GND	BLUE	7
LED	BROWN	8
BEEP	YELLOW	9
TAMPER	VIOLET	10

06. Operation & Usage

Tamper (TAMP):

Reader makes alarm when its CASE is forced to open. It also makes TAMPER signal to access controller. In case of closed CASE, TAMPER line (VIOLET) shows 0V and otherwise (open) shows 5V.



LED Control:

Reader turns on RED LED when LED Signal (BROWN) with 0V. In case of 5V, BLUE LED will be on.



Buzzer Control:

Reader makes beep sound when BEEP Signal (YELLOW) with 0V.



07. Output Format

[Data format]

- Data format can be decided by setting. (Refer to chapter 10)
- <34 bit>

Parity Bit (1bit)	Data [1~32] (32bit)	Parity Bit (1bit)
Bit 1	Bit 2	Bit 33
		Bit 34

First Bit (Parity) : Even parity of bit 2 ~ bit 17

Data [1-32] : ID number (transmission data)

Last Bit (Parity) : Odd parity of bit 18 ~ bit 33

<66 bit>

Parity Bit (1bit)	Data [1~64] (64bit)	Parity Bit (1bit)
Bit 1	Bit 2	Bit 65
		Bit 66

First Bit (Parity): Even parity of bit 2 ~ bit 33

Data[1-64] : ID number(transmission data)

FeliCa™ card – IDM data(8bytes)

Mifare® card – Card serial number(4bytes)+0x00(4bytes)

Last Bit (Parity) : Odd parity of bit 34 ~ bit 65

<32bit>

Data[1-32] : ID number(transmission data)

<64bit>


Data[1-64] :

FeliCa™ card – IDM data(8bytes)

Mifare® card – Card serial number(4bytes)+0x00(4bytes)

08. Function configuration (Communication setting)

Changing the reader settings is also possible using the SDK (DualCard program) provided by DUALi. You can easily change the setting of DQ-MINI by executing the corresponding command referring to the communication frame below. (For more information on dual cards, please refer to DUALi SDK Manual.)

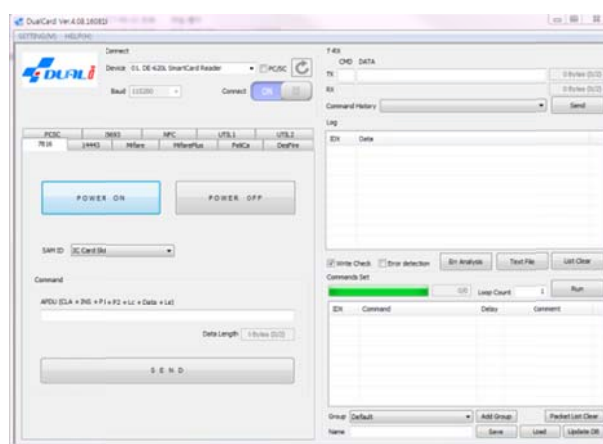

※ STX, LENH (Length High) and LENL (Length Low) value of each communication frame are automatically calculated in the dual card program. Just input corresponding value on each CMD/ DATA fields.

08.1 QR Mode option set

Following is the communication frame for QR mode setting. Since it is saved in flash memory after the first setting, the reader does not need to be set again.

(115,200bps, 8 data, no parity, 1 stop bit)

STX	LENH	LENL	CMD	DATA[0]	DATA[1]	LRC
0x02	0x00	0x02	0xE3	0x00	DATA[1]	$\text{LENH} \wedge \text{LENL} \wedge \text{CMD} \wedge \text{DATA}[0] \wedge \text{DATA}[1]$

(^: exclusive oring)

DATA[1]	State	Description
0x00	Presentation mode	QR scan mode change to Presentation mode
0x01	Manual Trigger mode	QR scan mode change to Manual trigger mode



Tip – To change the QR Mode to Presentation mode

T-RX

	CMD	DATA	
TX	E3	0001	2 Bytes (2/2)
RX	00		0 Bytes (0/2)

Command History ▼ Send

Log

IDX	Data
1	=>E30001
2	<=00

08.2 QR Reading timeout

Following is the communication frame for same QR reading timeout setting. Since it is saved in flash memory after the first setting, the reader does not need to be set again.

(115,200bps, 8 data, no parity, 1 stop bit)

STX	LENH	LENL	CMD	DATA[0]	DATA[1]	LRC
0x02	0x00	0x02	0xE3	0x01	DATA[1]	$\text{LENH} \oplus \text{LENL} \oplus \text{CMD} \oplus \text{DATA}[0] \oplus \text{DATA}[1] \oplus \text{DATA}[2]$

(^: exclusive oring)

DATA[1]	State	Description
0x05~0x32	Timeout Parameter	Set same QR reading timeout (Range: 05~0x32(=50)) Each numbers are automatically multiplied by DQ-MINI



Tip – To set the same QR read timeout for 1.6s(1600ms)

T-RX

	CMD	DATA	
TX	E3	0110	2 Bytes (2/2)
RX	00		0 Bytes (0/2)

Command History ▼ Send

Log

IDX	Data
1	=>E30110
2	<=00

08.3 QR scan interval set

Following is the communication frame for QR Scan interval option setting. Since it is saved in flash memory after the first setting, the reader does not need to be set again.

(115,200bps, 8 data, no parity, 1 stop bit)

STX	LENH	LENL	CMD	DATA[0]	DATA[1]	LRC
0x02	0x00	0x02	0xE3	0x02	DATA[1]	$\text{LENH} \wedge \text{LENL} \wedge \text{CMD} \wedge \text{DATA}[0] \wedge \text{DATA}[1]$

(^ : exclusive oring)

DATA[1]	State	Description
0x02~0x1E	QR Scan interval	QR Scan Interval setting(Range: 0x02~0x1E(=30)) Each numbers are automatically multiplied by DQ-MINI

*** THIS MODE IS ONLY WORK ON QR MANUAL TRIGGER MODE**



Tip – To set the QR scan interval to 0.5s(500ms)



The screenshot shows a software interface for sending commands. The 'TX' field is highlighted with a red box, containing 'E3' in the 'CMD' column and '0205' in the 'DATA' column. The 'RX' field shows '00'. A 'Send' button is visible. Below the interface, a log table shows the transmission details.

IDX	Data
1	=>E30205
2	<=>00

08.4 QR Maximum length set

Following is the communication frame for QR maximum length setting. Since it is saved in flash memory after the first setting, the reader does not need to be set again.

(115,200bps, 8 data, no parity, 1 stop bit)

STX	LENH	LENL	CMD	DATA[0]	DATA[1]	LRC
0x02	0x00	0x02	0xE3	0x03	DATA[1]	$\text{LENH} \wedge \text{LENL} \wedge \text{CMD} \wedge \text{DATA}[0] \wedge \text{DATA}[1]$

(^: exclusive oring)

DATA[1]	State	Description
0x01~0x10	QR Maximum length	QR Maximum length setting(Range: 0x01~0x10(=16))



Tip – To set the maximum QR length to 16



The screenshot shows a software interface for T-RX communication. The 'TX' section is highlighted with a red box, showing the command 'E3' and data '0310'. The 'RX' section shows '00'. The 'Command History' dropdown is set to 'Send'. The 'Log' section shows a table with two entries: '1' with data '=>E30310' and '2' with data '<=>00'.

IDX	Data
1	=>E30310
2	<=>00

08.5 QR data send channel set

Following is the communication frame for QR data send channel set. Since it is saved in flash memory after the first setting, the reader does not need to be set again

(115,200bps, 8 data, no parity, 1 stop bit)

STX	LENH	LENL	CMD	DATA[0]	DATA[1]	LRC
0x02	0x00	0x02	0xE3	0x04	DATA[1]	$\text{LENH} \wedge \text{LENL} \wedge \text{CMD} \wedge \text{DATA}[0] \wedge \text{DATA}[1]$

(^: exclusive oring)

DATA[1]	Description
0x02	RS-232 Send ON

※ Default setting is RS-232 send ON



Tip – To set the QR data send via Wiegand and RS-232



T-RX

	CMD	DATA	
TX	E3	0403	2 Bytes (2/2)
RX	00		0 Bytes (0/2)

Command History ▼ Send

Log

IDX	Data
1	=>E30403
2	<=>00

08.6 RF Scan option set

Following is the communication frame for RF Scan setting. Since it is saved in flash memory after the first setting, the reader does not need to be set again

(115,200bps, 8 data, no parity, 1 stop bit)

STX	LENH	LENL	CMD	DATA[0]	DATA[1]	LRC
0x02	0x00	0x02	0xE3	0x06	DATA[1]	$\text{LENH} \wedge \text{LENL} \wedge \text{CMD} \wedge \text{DATA}[0] \wedge \text{DATA}[1]$


(^: exclusive oring)

DATA[1]	Description
0x40	TYPE-B Scan ON
0x20	Felica Scan ON
0x08	15693 Scan ON

※ Reading Mifare Type A can not be turned off



Tip – To set the reader to read Mifare type A , FeliCa™ and TypeB

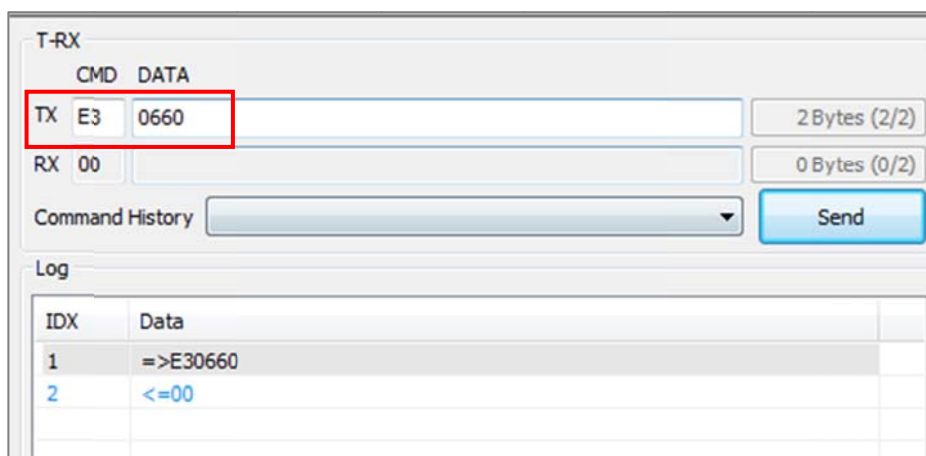

The screenshot shows a software interface for sending commands to a reader. Under the 'T-RX' tab, the 'CMD' field is set to 'E3' and the 'DATA' field is set to '0660'. The 'TX' button is highlighted with a red box. To the right, it shows '2 Bytes (2/2)' for TX and '0 Bytes (0/2)' for RX. Below the input fields is a 'Command History' dropdown and a 'Send' button. At the bottom, a 'Log' section displays a table with two entries: '1' with data '=>E30660' and '2' with data '<=00'.

Idx	Data
1	=>E30660
2	<=00

09. Certifications

Symbol	Description
	Communaute Europeenne Marking
	Korea Certification Marking
	Federal Communication Commission Marking
	Electrical waste and electronics equipment

- FCC STATEMENT
 - CAUTION: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
 - NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
 - Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.
- *Please contact our service team for the technical/ sales supports

10. Warranty & Service

Warranty and Repair service

- DUALi Inc. warrants to the original consumer or other end user that this product, **DQ MINI**, is free from defects in materials and workmanship for a period of 1 year from the date of purchase.

※ **Note** Warranty/non-warranty repair fees do not include shipping charges.

- The damages(defaults) prescribed below are NOT to be covered by warranty.
- User's misuse of part/component against the provided manual.
- Fault by the unqualified user's own intention of repairs.
- Adding certain functions or extension of system.

PRECAUTIONS

- Do not drop the device.
- Do not modify, repair, or disassemble.
- Do not expose directly to water, alcohol, benzene, etc for cleaning.
- Do not expose directly to flammables.
- Do not place or keep the device near flammables.
- Keep the device away from excessive humidity and dust.
- Do not place heavy objects on the device.
- Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

*Please contact our service team for the technical/ sales supports.

DUALi Inc.

1-309 Innoplex, 552 Woncheon-dong, Youngtong-gu, Suwon, Gyeonggi-do, South Korea
443-824

Tel : +82 31-213-0074

Fax : +82 31-213-0078

E-mail : lab@duali.com

Web-site : <http://www.duali.com>