

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
FCC PART 15 SUBPART C REQUIREMENT**

OF

Floodlight Cam Pro

**Model No.: L5P2CA11, DL5P2CA11, DL5P2CA12, DL5P3CA14, L5P3CA14,
DL5P2CA14, L5P2CA14, DL5P3CA13, L5P3CA13, DL5P2CA13, L5P2CA13,
DL5P3CA15, L5P3CA15, DL5P2CA15, L5P2CA15, DL5P3CA17, L5P3CA17,
DL5P2CA17, L5P2CA17**

Trademark: AOSU, DEKCO, Saato, zoohi

FCC ID: 2A2VW-L5P

Report No.: E01A23060128F00202

Issue Date: August 22, 2023

Prepared for

**Shenzhen Zhiling Technology Co., Ltd
Room 201, Building A, No1 Qianwan Road, Qianhai Shenzhen-Hong Kong
Cooperation Zone, Shenzhen, Guangdong, China**

Prepared by

**Dong Guan Anci Electronic Technology Co., Ltd.
1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan, Lake Hi-tech
Industrial Development Zone, Dongguan City, Guangdong Pr., China.**

**This report shall not be reproduced, except in full, without the written approval of
Dong Guan Anci Electronic Technology Co., Ltd.**

VERIFICATION OF COMPLIANCE

Applicant:	Shenzhen Zhiling Technology Co., Ltd Room 201, Building A, No1 Qianwan Road, Qianhai Shenzhen-Hong Kong Cooperation Zone, Shenzhen, Guangdong, China
Manufacturer:	Shenzhen Zhiling Technology Co., Ltd Room 201, Building A, No1 Qianwan Road, Qianhai Shenzhen-Hong Kong Cooperation Zone, Shenzhen, Guangdong, China
Product Description:	Floodlight Cam Pro
Trade Mark:	AOSU, DEKCO, Saato, zoohi
Model Number:	L5P2CA11, DL5P2CA11, DL5P2CA12, DL5P3CA14, L5P3CA14, DL5P2CA14, L5P2CA14, DL5P3CA13, L5P3CA13, DL5P2CA13, L5P2CA13, DL5P3CA15, L5P3CA15, DL5P2CA15, L5P2CA15, DL5P3CA17, L5P3CA17, DL5P2CA17, L5P2CA17 (Note: All models are the same, except the model name and Trade Mark are different, We choose model L5P2CA11 to do all tests)
Sample number:	A23030827 001

We hereby certify that:

The above equipment was tested by Dong Guan Anci Electronic Technology Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247(2022).

Date of Test : July 13, 2023 to July 18, 2023

Prepared By:

Checked By:

Luke Li

Dyson Dai

Luke

Dyson

Project Engineer

Project Engineer

Approved By:

Tiger Xu



Tiger

Laboratory Supervisor

Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	E01A23060128F00202

Table of Contents

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF	0
1. GENERAL INFORMATION.....	5
1.1 PRODUCT DESCRIPTION	5
1.2 TEST METHODOLOGY	5
2. TEST FACILITY	6
3. DESCRIPTION OF TEST MODES.....	7
4. SUMMARY OF TEST RESULTS	10
6DB BANDWIDTH MEASUREMENT	10
5. TEST SYSTEM UNCERTAINTY	11
6. CONDUCTED EMISSIONS TEST	12
6.1 MEASUREMENT PROCEDURE:	12
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	12
6.3 MEASUREMENT EQUIPMENT USED:	12
6.4 CONDUCTED EMISSION LIMIT	13
6.5 MEASUREMENT RESULT:	14
6.5 CONDUCTED MEASUREMENT PHOTOS:.....	16
7. RADIATED EMISSION TEST	17
7.1 MEASUREMENT PROCEDURE	17
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	19
7.3 MEASUREMENT EQUIPMENT USED:	20
7.4 RADIATED EMISSION LIMIT	21
7.5 MEASUREMENT RESULT	22
7.6 RADIATED MEASUREMENT PHOTOS:.....	28
8. 6DB BANDWIDTH MEASUREMENT	29
8.1 MEASUREMENT PROCEDURE	29
8.2 MEASUREMENT EQUIPMENT USED:	29
8.3 LIMIT	29
8.4 MEASUREMENT RESULTS:	29
9. MAXIMUM PEAK OUTPUT POWER TEST	32
9.1 MEASUREMENT PROCEDURE	32
9.2 MEASUREMENT EQUIPMENT USED:	32
9.3 PEAK POWER OUTPUT LIMIT	32
9.4 MEASUREMENT RESULTS:.....	32
10. POWER SPECTRAL DENSITY MEASUREMENT	33
10.1 MEASUREMENT PROCEDURE	33
10.2 MEASUREMENT EQUIPMENT USED:	33
10.3 MEASUREMENT PROCEDURE	33

10.4 MEASUREMENT RESULTS:	34
11. BAND EDGE TEST.....	37
11.1 MEASUREMENT PROCEDURE	37
11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	38
11.3 MEASUREMENT EQUIPMENT USED:	38
11.4 MEASUREMENT RESULTS:	39
12 ANTENNA APPLICATION	46
12.1 ANTENNA REQUIREMENT.....	46
12.2 RESULT	46
APPENDIX (PHOTOS OF EUT)	

1. GENERAL INFORMATION

1.1 Product Description

Characteristics	Description
Product Name	Floodlight Cam Pro
Model number	L5P2CA11, DL5P2CA11, DL5P2CA12, DL5P3CA14, L5P3CA14, DL5P2CA14, L5P2CA14, DL5P3CA13, L5P3CA13, DL5P2CA13, L5P2CA13, DL5P3CA15, L5P3CA15, DL5P2CA15, L5P2CA15, DL5P3CA17, L5P3CA17, DL5P2CA17, L5P2CA17
Input Rating	100-240V~ 50/60Hz
Test Power Supply	120V a.c. 60Hz
Kind of Device	Bluetooth Ver.5.0 BLE
Modulation	GFSK
Operating Frequency Range	2402-2480MHz
Number of Channels	40
Maximum Peak Power:	3.43dBm
Antenna Type	External Antenna
Antenna Gain	2.55 dBi
Date of Sample Received	July 12, 2023
Hardware version:	V1.0
Software version:	V1.0
Date of Sample Received	A23060128 002

1.2 Test Methodology

All the test program has follow FCC new test procedure KDB 558074 D01 DTS Meas Guidance v05 and in accordance with the procedures given in ANSI C63.10-2013.

2. Test Facility

Site Description

EMC Lab. : Accredited by FCC, May 30, 2019
Designation Number: CN1230
Test Firm Registration Number: 991798

Name of Firm : Dong Guan Anci Electronic Technology Co., Ltd.

Site Location : 1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan,
Lake Hi-tech Industrial Development Zone, Dongguan City,
Guangdong Pr., China.

3. Description of test modes

The EUT has been tested under its typical operating condition and fully-charged battery for EUT tested alone. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

For Radiated: The EUT's antenna was pre-tested under the following modes:


Test Mode	Description
Mode A	X-Y axis
Mode B	Y-Z axis
Mode C	X-Z axis

From the above modes, the worst case was found in Mode C. Therefore only the test data of the mode was recorded in this report.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

Configuration of Tested System


AC conducted emission :



Radiated Emission:



RF conducted:



Equipment Used in Tested System

Item	Equipment	Trademark	Model No.	FCC ID	Note
1.	Floodlight Cam Pro	/	L5P2CA11	2A2VW-L5P	<i>EUT</i>

The EUT has been tested under TX operating condition.

Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		

Note:

1. Test of channel was included the lowest 2402MHz, middle 2440MHz and highest frequency 2480MHz in highest data rate and to perform the test, then record on this report.

4. Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207	AC Power Conducted Emission	Compliant
§15.247(d),§15.209	Radiated Emission	Compliant
§15.247(a)(2)	6dB Bandwidth Measurement	Compliant
§15.247(b)	MAXIMUM PEAK OUTPUT POWER TEST	Compliant
§15.247(e)	Power Spectral Density Measurement	Compliant
§15.247(d)	Band EDGE test	Compliant
§15.203	Antenna Requirement	Compliant
Remark: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.		

5. TEST SYSTEM UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Items	k	Uncertainty
DTS Bandwidth	1.96	±9.2 PPM
20dB Emission Bandwidth	1.96	±9.2 PPM
Carrier Frequency Separation	1.96	±9.2 PPM
Number of Hopping Channel	1.96	±9.2 PPM
Time of Occupancy	1.96	±0.57%
Maximum Conducted Output Power	1.96	± 0.73 dB
Max Peak Conducted Output Power	1.96	±1.5 dB
Maximum Power Spectral Density Level	1.96	±1.9 dB
Conducted Band edge	1.96	±9.2 PPM
Conducted spurious emission	1.96	9 kHz-30 MHz: ± 0.95 dB 30 MHz-1 GHz: ± 1.5 dB 1GHz-12.75GHz: ± 1.8 dB 12.75 GHz-26.5 GHz: ± 2.1dB
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.		


Test Item	Measurement Frequency Range	K	U(dB)
Conducted emissions from the AC mains power ports (AMN)	150 kHz ~ 30 MHz	2	3.37
Radiated emissions	30 MHz ~ 1 GHz	2	3.79
Radiated emissions	1 GHz ~ 18 GHz	2	5.62
Radiated emissions	18 GHz ~ 40 GHz	2	5.54
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.			

6. Conducted Emissions Test

6.1 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

6.2 Test SET-UP (Block Diagram of Configuration)

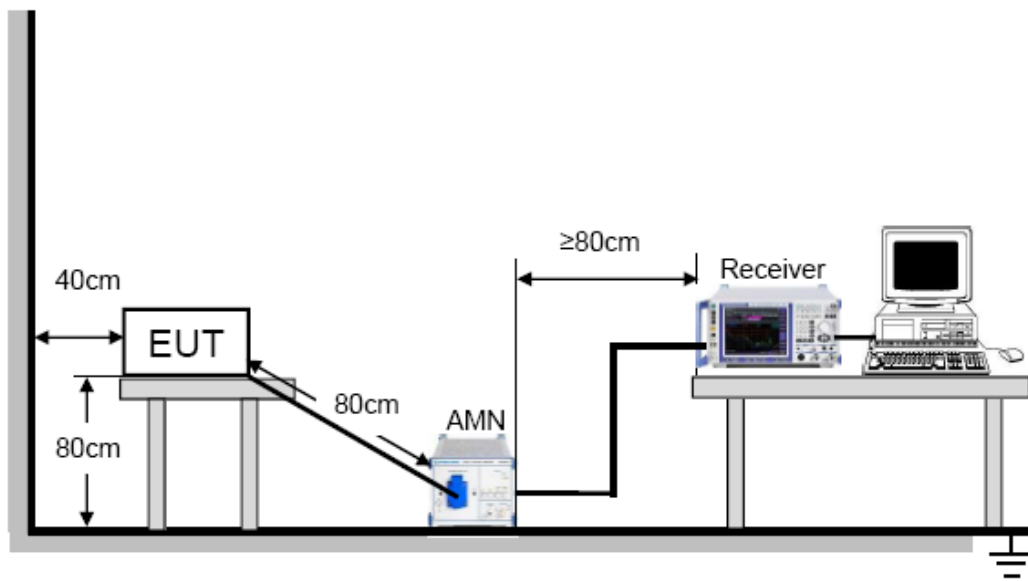

6.3 Measurement Equipment Used:

Item	EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Calibrated until
1.	LISN	ROHDE&SCHWARZ	ENV216	101413	2023-10-07
2.	RF Cable	N/A	ZT06S-NJ-NJ-2.5M	19044022	2024-05-09
3.	EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101358	2024-05-09
4.	1# Shielded Room	chengyu	8m*4m*3.3m	N/A	2025-11-21
5.	Test Software	Farad	EZ-EMC (Ver.ANCI-3A1)	N/A	N/A

6.4 Conducted Emission Limit

(7) Conducted Emission

Frequency(MHz)

Quasi-peak

Average

0.15-0.5

66-56

56-46

0.5-5.0

56

46

5.0-30.0

60


50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.


6.5 Measurement Result:

All the modulation modes were tested the data of the worst mode (TX2402) are recorded in the following pages and the others modulation methods do not exceed the limits. Please refer to following pages.

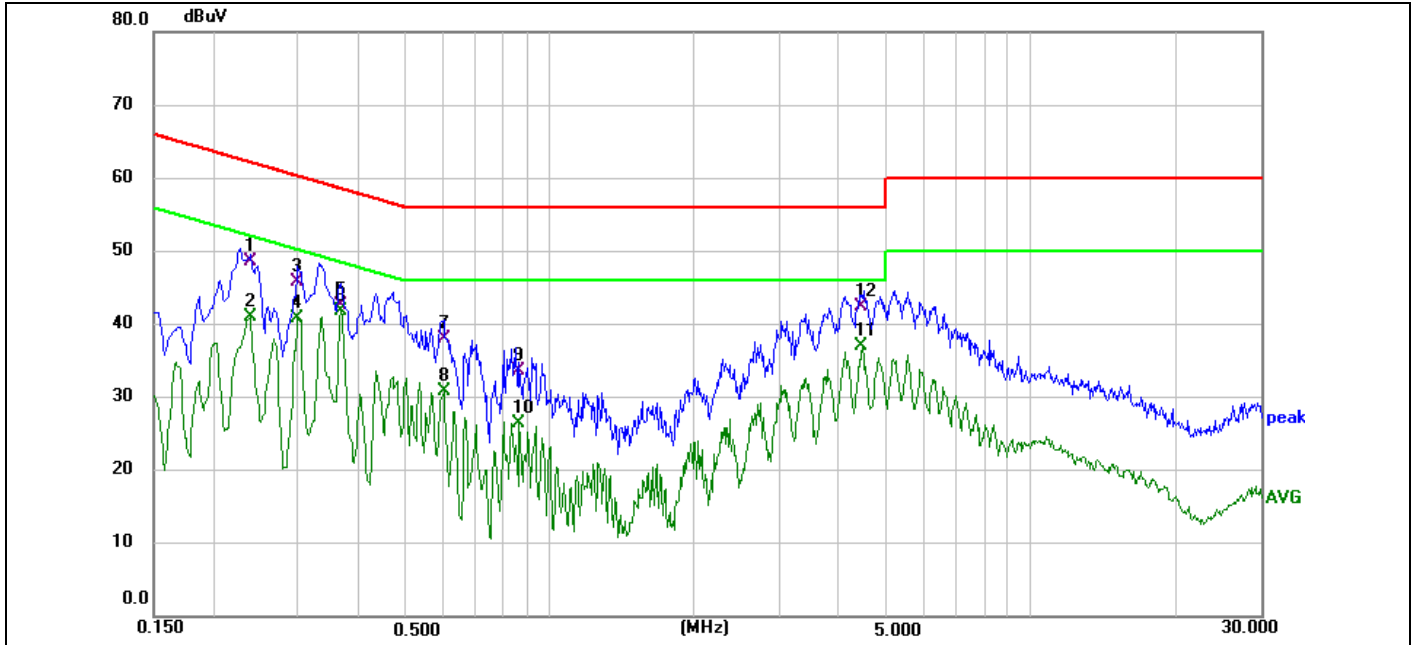

Site:	843	Phase:L1	Temperature(C):24.2(C)
Limit:	FCC Part 15 C Conduction(QP)		Humidity(%):51.9%
EUT:	Floodlight Cam Pro	Test Time:	2023-07-13
M/N.:	L5P2CA11	Power Rating:	AC 120V
Mode:	TX2402	Test Engineer:	Luffy
Note:			

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	0.2380	38.57	10.03	48.60	62.17	-13.57	QP	
2	0.2380	30.87	10.03	40.90	52.17	-11.27	AVG	
3	0.2980	35.54	10.16	45.70	60.30	-14.60	QP	
4	0.2980	30.55	10.16	40.71	50.30	-9.59	AVG	
5	0.3660	32.29	10.31	42.60	58.59	-15.99	QP	
6 *	0.3660	31.40	10.31	41.71	48.59	-6.88	AVG	
7	0.6020	27.33	10.77	38.10	56.00	-17.90	QP	
8	0.6020	19.96	10.77	30.73	46.00	-15.27	AVG	
9	0.8660	24.00	9.60	33.60	56.00	-22.40	QP	
10	0.8660	16.77	9.60	26.37	46.00	-19.63	AVG	
11	4.4699	27.29	9.69	36.98	46.00	-9.02	AVG	
12	4.4699	32.71	9.69	42.40	56.00	-13.60	QP	

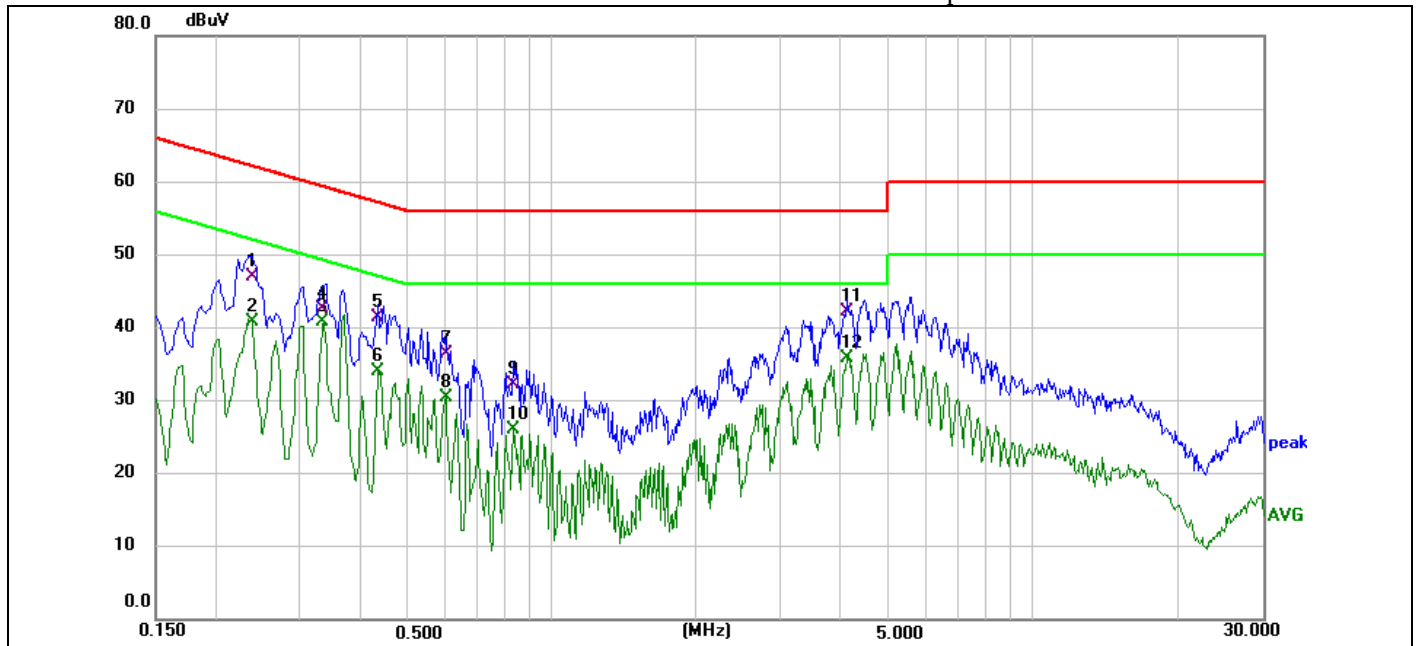

Site:	843	Phase:	N	Temperature(C):	24.2(C)
Limit:	FCC Part 15 C Conduction(QP)			Humidity(%):	51.9%
EUT:	Floodlight Cam Pro	Test Time:			2023-07-13
M/N.:	L5P2CA11	Power Rating:			AC 120V
Mode:	TX2402	Test Engineer:			Luffy
Note:					

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	0.2380	36.86	10.04	46.90	62.17	-15.27	QP	
2	0.2380	30.72	10.04	40.76	52.17	-11.41	AVG	
3 *	0.3339	30.53	10.22	40.75	49.35	-8.60	AVG	
4	0.3339	32.28	10.22	42.50	59.35	-16.85	QP	
5	0.4340	30.87	10.43	41.30	57.18	-15.88	QP	
6	0.4340	23.54	10.43	33.97	47.18	-13.21	AVG	
7	0.6020	25.73	10.77	36.50	56.00	-19.50	QP	
8	0.6020	19.63	10.77	30.40	46.00	-15.60	AVG	
9	0.8340	22.71	9.59	32.30	56.00	-23.70	QP	
10	0.8340	16.49	9.59	26.08	46.00	-19.92	AVG	
11	4.1060	32.42	9.68	42.10	56.00	-13.90	QP	
12	4.1060	26.06	9.68	35.74	46.00	-10.26	AVG	

*:Maximum data x:Over limit !:over margin

6.5 Conducted Measurement Photos:



7. Radiated Emission Test

7.1 Measurement Procedure

1. The testing follows the guidelines in ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. The EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
5. For measurement below 1GHz, if the emission level of the EUT measured by the peak detector is 3dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.

Use the following spectrum analyzer settings:

When spectrum scanned from 30MHz to 1GHz setting resolution bandwidth 120KHz and video bandwidth 300KHz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	120KHz
VB	300KHz
Detector	QP
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Average
Trace	Max hold

For Average Measurement:


VBW=10Hz, when duty cycle is no less than 98 percent.

$VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(μ s)	1/T(KHz)	Average Correction Factor	VBW Setting
2402-2480	100	-	-	0	10Hz

7.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

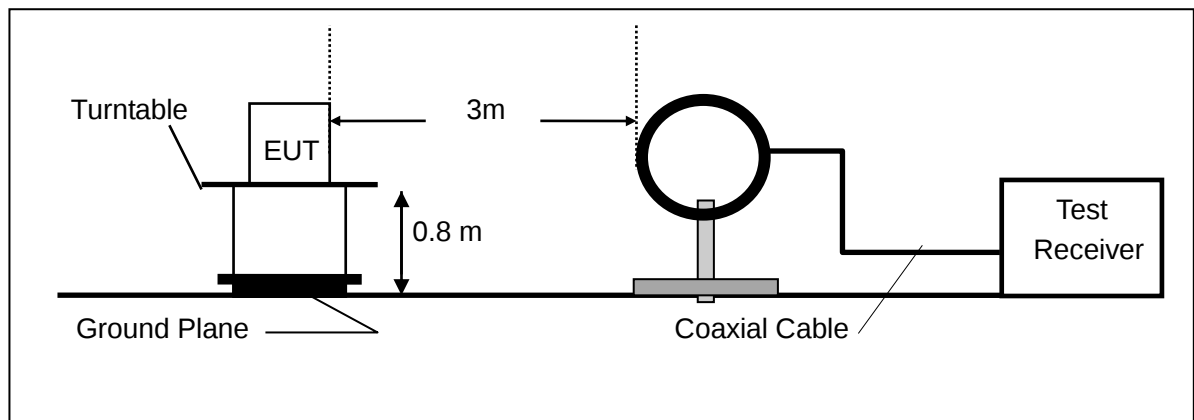

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

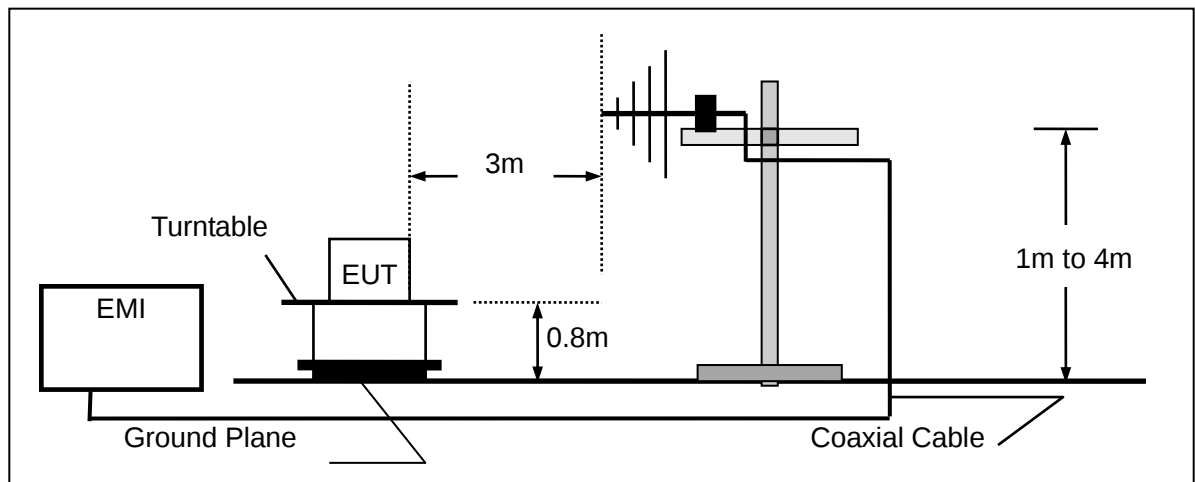

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

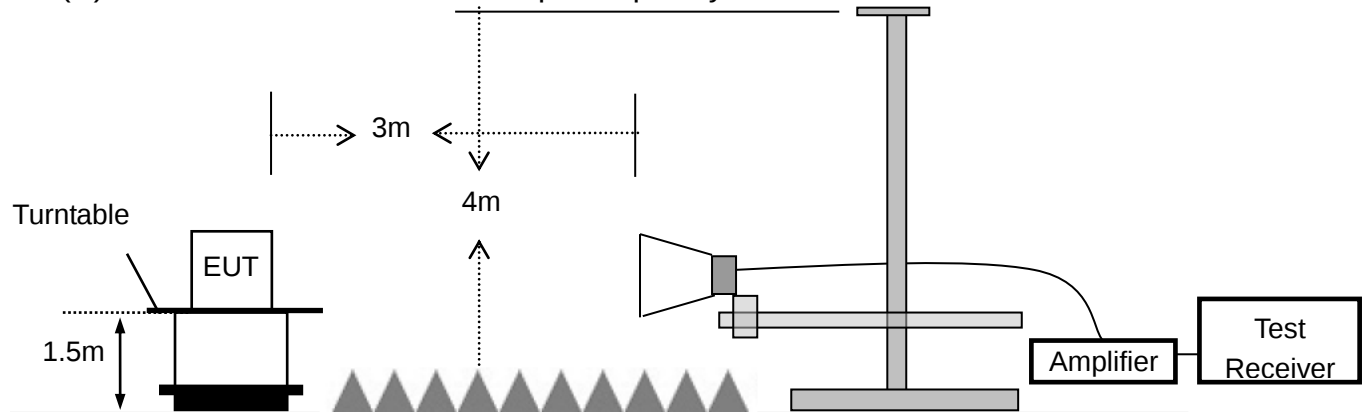

7.3 Measurement Equipment Used:

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1.	EMI Test Receiver	Rohde & Schwarz	ESPI7	100502	2023-10-07
	Pre-Amplifier	Anritsu	MH648A	M57886	2024-05-09
	Bilog Antenna	Schwarzbeck	VULB9163	VULB9163-1290	2023-12-11
	RF Cable	N/A	ZT06S-NJ-NJ-11M	19060398	2024-05-09
	RF Cable	N/A	ZT06S-NJ-NJ-0.5M	19060400	2024-05-09
	RF Cable	N/A	ZT06S-NJ-NJ-2.5M	19060404	2024-05-09
	Spectrum Analyzer	Rohde & Schwarz	FSV40	101413	2023-10-07
	Low noise Amplifiers	A-INFO	LA1018N4009	J101313052400 1	2024-05-09
	Horn antenna	A-INFO	LB-10180-SF	J203109061212 3	2024-05-14
	RF Cable	N/A	ZT26-NJ-NJ-11M	19060401	2024-05-09
	RF Cable	N/A	ZT26-NJ-NJ-2.5M	19060402	2024-05-09
	RF Cable	N/A	ZT26-NJ-NJ-0.5M	19060403	2024-05-09
	3m Semi-anechoic Chamber	chengyu	9m*6m*6m	N/A	2024-11-12
	Test Software	Farad	EZ-EMC (Ver.FA-03A2 RE)	N/A	N/A

7.4 Radiated emission limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

Remark 1. Emission level in dBuV/m=20 log (uV/m)

- :
- Measurement was performed at an antenna to the closed point of EUT distance of meters.
 - Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

7.5 Measurement Result

Below 30MHz:

Operation Mode:	--	Test Date :	--
Frequency Range:	--	Temperature :	--
Test Result:	--	Humidity :	--
Measured Distance:	--	Test By:	--


Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	--

Note: The low frequency, which started from 9KHz-30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Below 1000MHz:


The data of the mode (GFSK 2402MHz) are recorded in the following pages.
The data of the mode (GFSK 2402MHz) are recorded in the following pages.

The worst result as bellow:

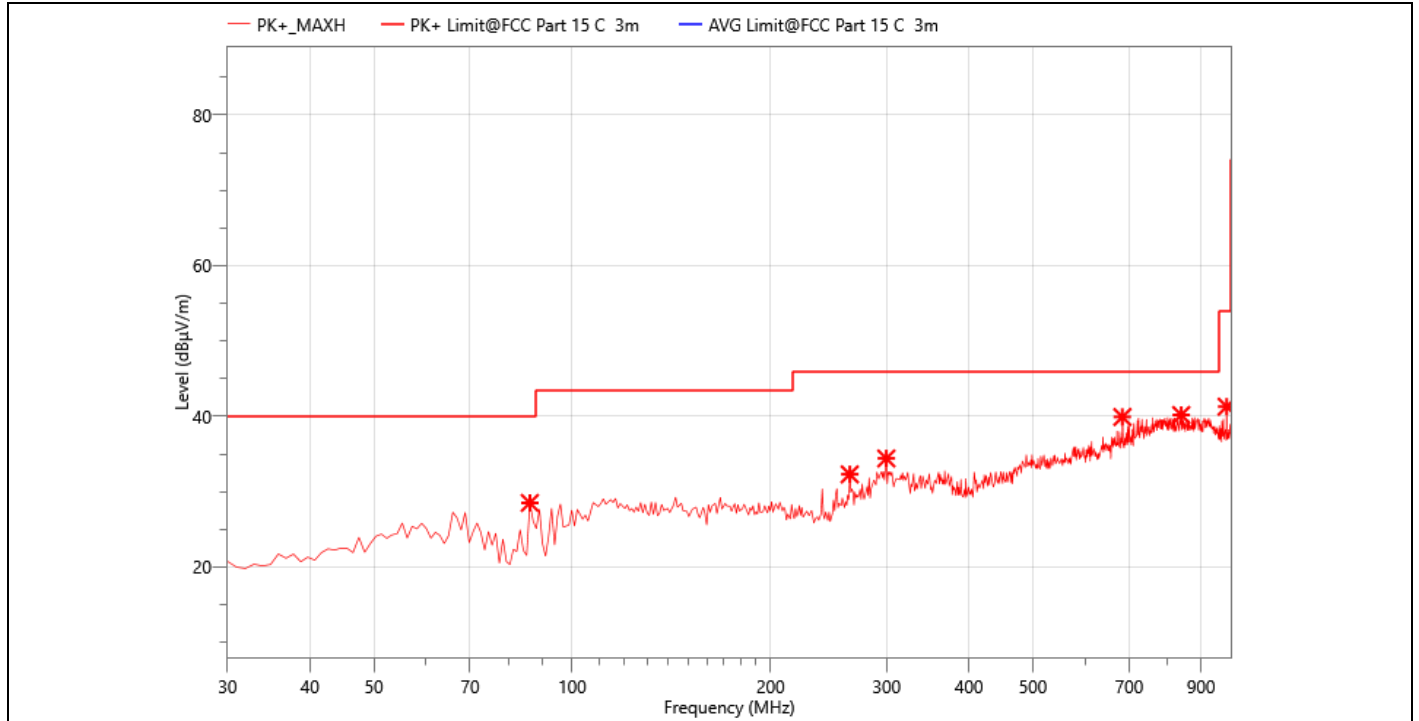

Site:	LAB	Antenna:	Horizontal	Temperature(C):	23(C)
Limit:	FCC Part 15 C 3m Radiation(QP)			Humidity(%):	57%
EUT:	Floodlight Cam Pro	Test Time:			2023-07-13
M/N.:	L5P2CA11	Power Rating:			AC 120V
Mode:	TX2402	Test Engineer:			Luffy
Note:					

Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dBμV/m)	Det.	Pol.	Corr. (dB)
86.260	35.49	28.51	40.00	11.49	PK+	H	-6.98
263.770	34.57	32.30	46.00	13.70	PK+	H	-2.27
299.660	34.85	34.41	46.00	11.59	PK+	H	-0.44
683.780	30.25	39.91	46.00	6.09	PK+	H	9.66
839.950	26.28	40.18	46.00	5.82	PK+	H	13.9
984.480	29.80	41.28	53.90	12.62	PK+	H	11.48

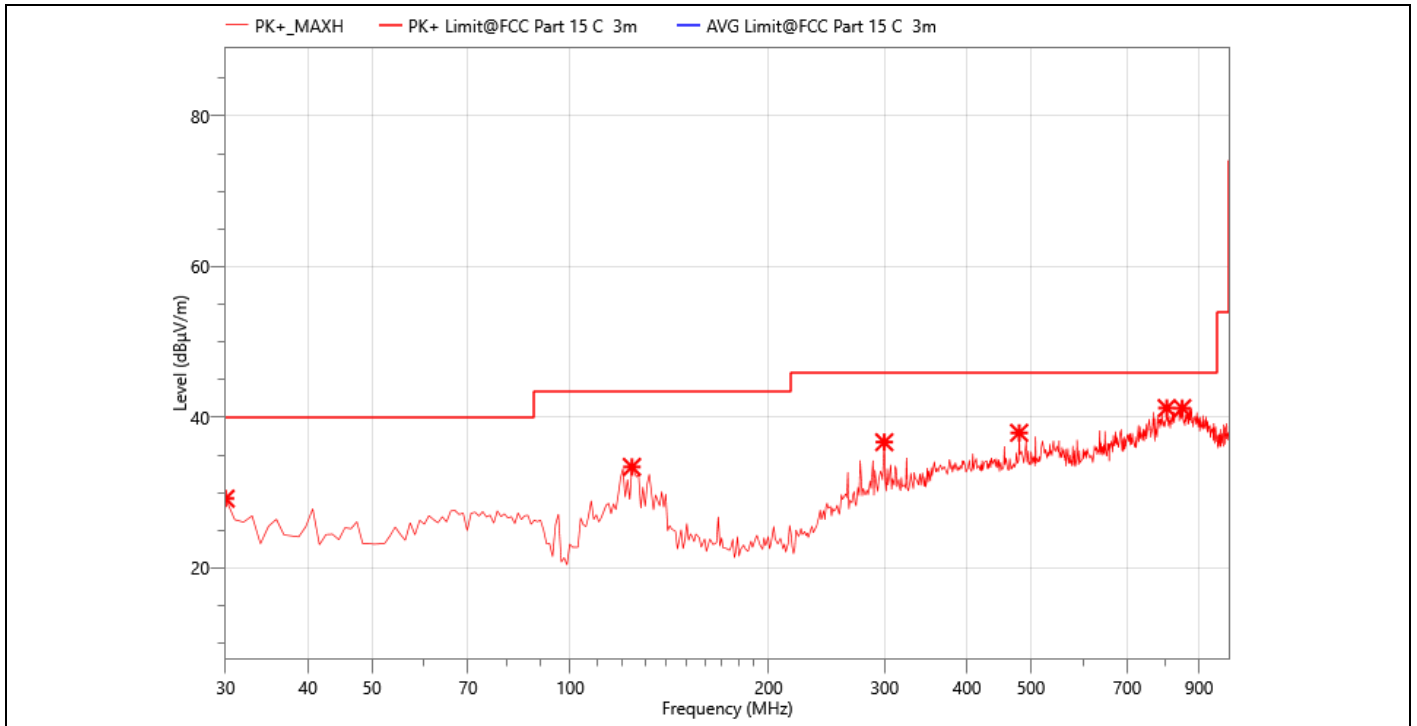

Site:	LAB	Antenna:Vertical	Temperature(C):23(C)
Limit:	FCC Part 15 C 3m Radiation(QP)		Humidity(%):57%
EUT:	Floodlight Cam Pro	Test Time:	2023-07-13
M/N.:	L5P2CA11	Power Rating:	AC 120V
Mode:	TX2402	Test Engineer:	Luffy
Note:			

Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dBμV/m)	Det.	Pol.	Corr. (dB)
30.000	35.53	29.21	40.00	10.79	PK+	V	-6.32
124.090	39.17	33.42	43.50	10.08	PK+	V	-5.75
299.660	37.14	36.70	46.00	9.30	PK+	V	-0.44
480.080	33.17	37.94	46.00	8.06	PK+	V	4.77
804.060	28.45	41.23	46.00	4.77	PK+	V	12.78
848.680	27.27	41.22	46.00	4.78	PK+	V	13.95

Note: 1. Result Level = Read Level+ Antenna Factor+ Cable Loss- Amp. Factor

*:Maximum data x:Over limit !:over margin

Above 1000MHz~10th Harmonics:

Operation Mode: TX Mode (CH00: 2402MHz) Test Date : 2023-07-13
 Frequency Range: 1-25GHz Temperature : 23°C
 Test Result: PASS Humidity : 57 %
 Measured Distance: 3m Test By: Luffy

Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dBμV/m)	Det.	Pol.	Corr. (dB)
3550.000	55.34	41.21	74.00	32.79	PK+	V	-14.13
6049.000	51.34	46.00	74.00	28.00	PK+	V	-5.34
9211.000	49.33	48.96	74.00	25.04	PK+	V	-0.37
11523.000	48.74	48.77	74.00	25.23	PK+	V	0.03
13537.500	48.42	49.74	74.00	24.26	PK+	V	1.32
15909.000	46.84	50.13	74.00	23.87	PK+	V	3.29
1858.500	58.14	34.84	74.00	39.16	PK+	H	-23.3
2751.000	56.52	37.45	74.00	36.55	PK+	H	-19.07
5896.000	50.82	45.69	74.00	28.31	PK+	H	-5.13
9670.000	49.48	48.43	74.00	25.57	PK+	H	-1.05
13486.500	48.67	49.64	74.00	24.36	PK+	H	0.97
16453.000	47.03	50.71	74.00	23.29	PK+	H	3.68

Other harmonics emissions are lower than 20dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.

(2) Emission Level= Reading Level+ Probe Factor +Cable Loss.

(3) The average measurement was not performed when the peak measured data under the limit of average detection.

(4) Measuring frequencies from 1GHz to 25GHz.

Operation Mode: TX Mode (CH19: 2440MHz) Test Date : 2023-07-13
 Frequency Range: 1-25GHz Temperature : 23 °C
 Test Result: PASS Humidity : 57 %
 Measured Distance: 3m Test By: Luffy

Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dBμV/m)	Det.	Pol.	Corr. (dB)
3660.500	54.86	41.11	74.00	32.89	PK+	V	-13.75
5471.000	53.12	45.98	74.00	28.02	PK+	V	-7.14
9219.500	49.53	49.20	74.00	24.80	PK+	V	-0.33
11208.500	48.97	49.98	74.00	24.02	PK+	V	1.01
13622.500	48.03	49.94	74.00	24.06	PK+	V	1.91
15441.500	47.73	50.12	74.00	23.88	PK+	V	2.39
1858.500	57.78	34.48	74.00	39.52	PK+	H	-23.3
3779.500	56.60	43.27	74.00	30.73	PK+	H	-13.33
5573.000	52.57	45.49	74.00	28.51	PK+	H	-7.08
9347.000	49.41	48.34	74.00	25.66	PK+	H	-1.07
15433.000	48.28	50.64	74.00	23.36	PK+	H	2.36
16606.000	47.00	50.89	74.00	23.11	PK+	H	3.89

Other harmonics emissions are lower than 20dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.

(2) Emission Level= Reading Level+ Probe Factor +Cable Loss.

(3) The average measurement was not performed when the peak measured data under the limit of average detection.

(4) Measuring frequencies from 1GHz to 25GHz.

Operation Mode: TX Mode (CH39: 2480MHz) Test Date : 2023-07-13
 Frequency Range: 1-25GHz Temperature : 23 °C
 Test Result: PASS Humidity : 57 %
 Measured Distance: 3m Test By: Luffy

Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dBμV/m)	Det.	Pol.	Corr. (dB)
1357.000	59.59	33.42	74.00	40.58	PK+	V	-26.17
2470.500	61.76	41.42	74.00	32.58	PK+	V	-20.34
4230.000	55.85	44.28	74.00	29.72	PK+	V	-11.57
5853.500	51.61	46.14	74.00	27.86	PK+	V	-5.47
9891.000	49.82	48.72	74.00	25.28	PK+	V	-1.1
17277.500	48.30	51.87	74.00	22.13	PK+	V	3.57
4434.000	54.41	43.64	74.00	30.36	PK+	H	-10.77
5904.500	51.74	46.50	74.00	27.50	PK+	H	-5.24
9347.000	49.50	48.43	74.00	25.57	PK+	H	-1.07
11217.000	47.97	49.37	74.00	24.63	PK+	H	1.4
13503.500	48.18	49.21	74.00	24.79	PK+	H	1.03
16172.500	45.29	50.31	74.00	23.69	PK+	H	5.02

Other harmonics emissions are lower than 20dB below the allowable limit.

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
 - (4) Measuring frequencies from 1GHz to 25GHz.

7.6 Radiated Measurement Photos:



8. 6dB Bandwidth Measurement

8.1 Measurement Procedure

The EUT was operating in Bluetooth mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

8.2 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL
Spectrum Analyzer	KEYSIGHT	N9020A	MY61250185	2023-10-07
RF Test Software	MWRF-test	MTS 8310	N/A	N/A
Radio Frequency control box	MWRF-test	MW200-RFCB	MW220111ANCI	2024-05-09

8.3 Limit


The minimum 6dB bandwidth shall be at least 500kHz.


8.4 Measurement Results:

Refer to attached data chart.

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.661	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.702	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.685	0.5	Pass

Test Graphs
-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

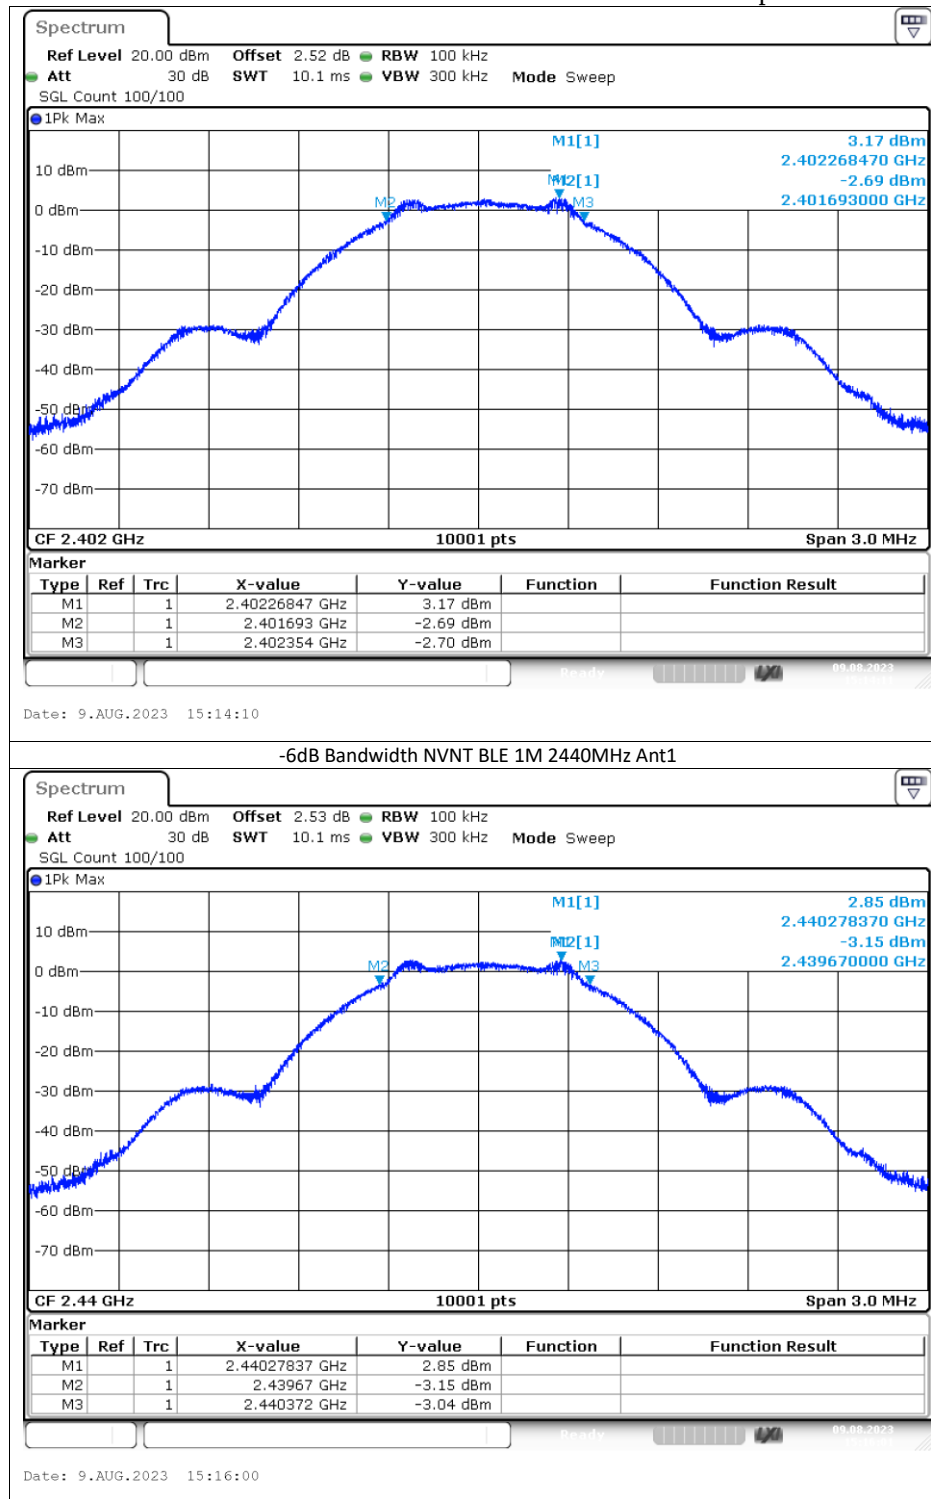

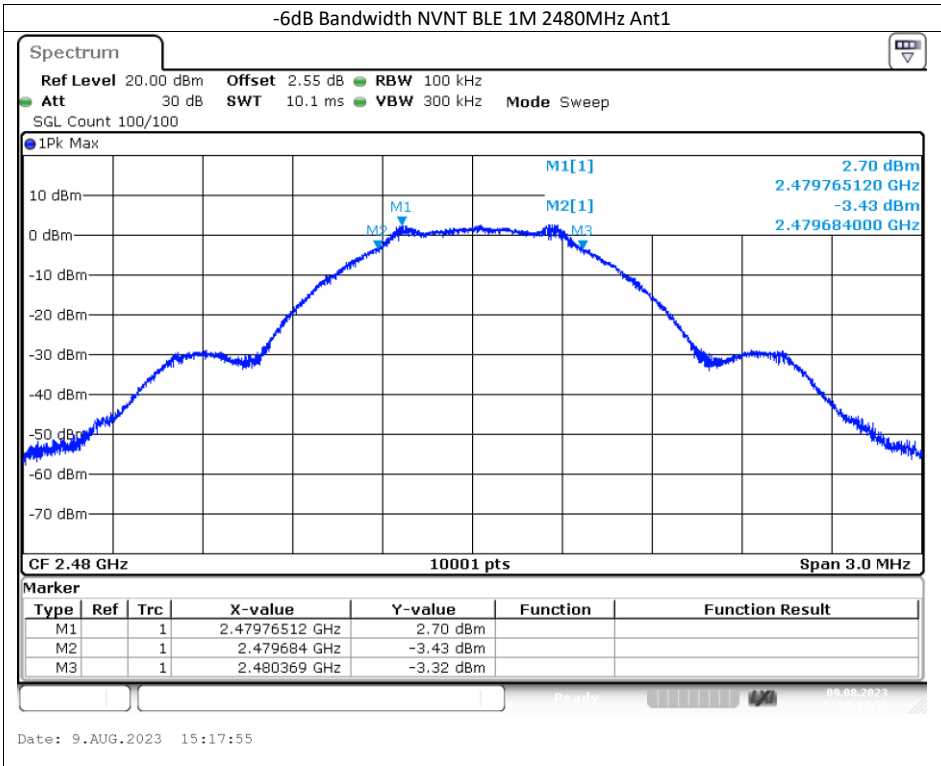

9. MAXIMUM PEAK OUTPUT POWER TEST

9.1 Measurement Procedure

- The Transmitter output (antenna port) was connected to the spectrum Analyzer.
- Turn on the EUT and then record the peak power value.
- Repeat above procedures on all channels needed to be tested.

9.2 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL
Spectrum Analyzer	KEYSIGHT	N9020A	MY61250185	2023-10-07
RF Test Software	MWRF-test	MTS 8310	N/A	N/A
Radio Frequency control box	MWRF-test	MW200-RFCB	MW220111ANCI	2024-05-09

9.3 Peak Power output limit

The maximum peak power shall be less 1Watt.

9.4 Measurement Results:

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	EIRP (dBm)	EIRP Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	3.42	0	5.97	36	Pass
NVNT	BLE 1M	2440	Ant1	3.43	0	5.98	36	Pass
NVNT	BLE 1M	2480	Ant1	3.18	0	5.73	36	Pass

10. Power Spectral Density Measurement

10.1 Measurement Procedure

The EUT was operating in Bluetooth mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

10.2 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL
Spectrum Analyzer	KEYSIGHT	N9020A	MY61250185	2023-10-07
RF Test Software	MWRF-test	MTS 8310	N/A	N/A
Radio Frequency control box	MWRF-test	MW200-RFCB	MW220111ANCI	2024-05-09

10.3 Measurement Procedure

10.4.1 The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

10.4.2. Set to the maximum power setting and enable the EUT transmit continuously.

10.4.3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)

10.4.4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.

10.4.5. Measure and record the results in the test report.

10.4.6. The Measured power density (dBm)/ 100KHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

10.4 Measurement Results:

The following table is the setting of spectrum analyzer.

Spectrum analyzer	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS bandwidth.
RB	3KHz
VB	10KHz
Detector	Peak
Trace	Max hold
Sweep Time	Automatic

Refer to attached data chart.

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-6.94	0	-6.94	8	Pass
NVNT	BLE 1M	2440	Ant1	-8.27	0	-8.27	8	Pass
NVNT	BLE 1M	2480	Ant1	-8.9	0	-8.9	8	Pass


Note:

1. Measured power density(dBm) has offset with cable loss.
2. The measured power density(dBm)/100KHz is reference level and used as 20dBc down for Conducted Band Edges and Conducted Spurious Emission limit line.

PSD NVNT BLE 1M 2402MHz Ant1

Date: 9.AUG.2023 15:15:02

Date: 9.AUG.2023 15:16:14

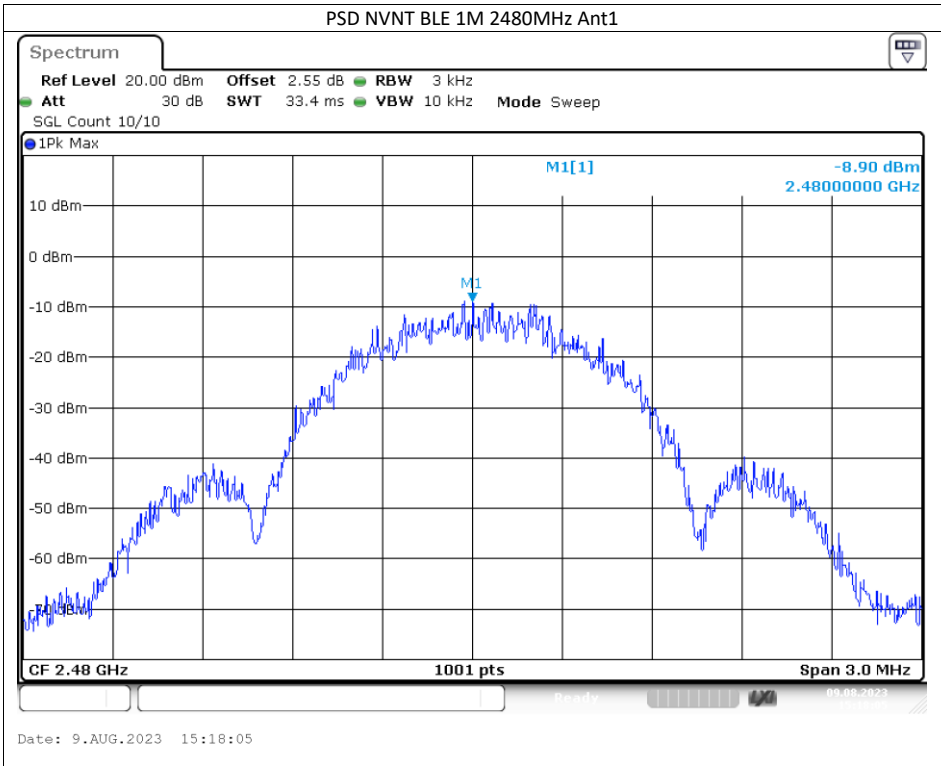

11. Band EDGE test

11.1 Measurement Procedure

For Conducted Test

1. The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100KHz. The video bandwidth is set to 300KHz.
2. The spectrum from 30MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold

For Radiated emission Test

The EUT was placed on a styrofoam table which is 1.5m above ground plane.

The measurement procedure at the band edges was simplified by performing the measurement in just one plot. Both, the in-band-emission and the unwanted emission were encompassed by the span. After trace stabilization, the maximum peak was determined by a peak detector and the value was marked by an appropriate limit line. The second limit line, which is 20dB below the first, marks the limit for the emissions in the unrestricted band. A maximum-peak-detector marks the highest emission in the unrestricted band next to the band edge.

The measurements were performed at the lower end of the 2.4GHz band.

Use the following spectrum analyzer settings:

For Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:


EMI Test Receiver	Setting
Attenuation	Auto
RBW	1MHz
VBW	3MHz
Detector	Peak
Trace	Max hold

For Non-Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 100KHz, video bandwidth 300KHz:

EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold

11.2 Test SET-UP (Block Diagram of Configuration)

For Radiated emission Test

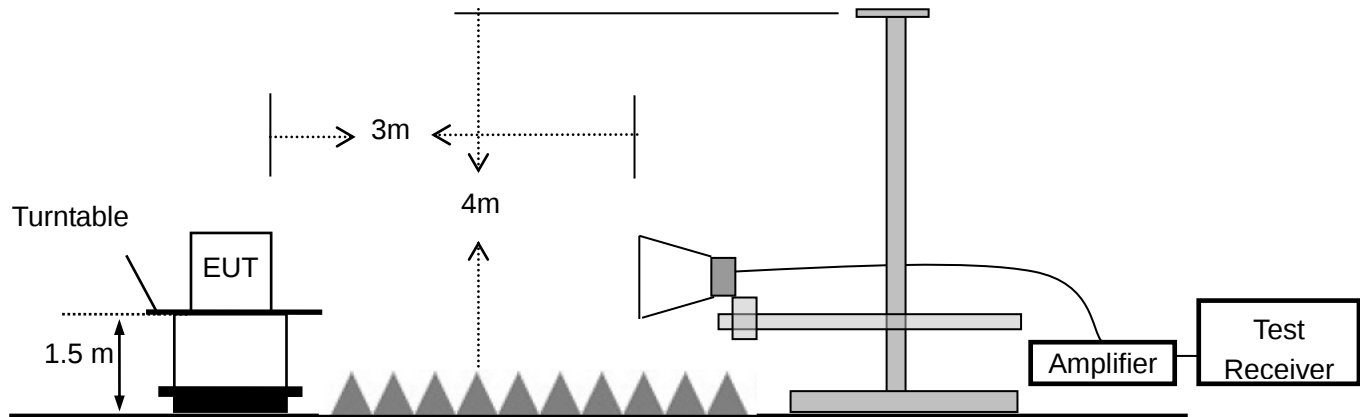

11.3 Measurement Equipment Used:

For Conducted Test

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL
Spectrum Analyzer	KEYSIGHT	N9020A	MY61250185	2023-10-07
RF Test Software	MWRF-test	MTS 8310	N/A	N/A
Radio Frequency control box	MWRF-test	MW200-RFCB	MW220111ANCI	2024-05-09

For Radiated emission Test


Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
Spectrum Analyzer	Rohde & Schwarz	FSV40	101413	2023-10-07
Low noise Amplifiers	A-INFO	LA1018N4009	J1013130524001	2024-05-09
Horn antenna	A-INFO	LB-10180-SF	J2031090612123	2024-05-14
RF Cable	N/A	ZT26-NJ-NJ-11M	19060401	2024-05-09
RF Cable	N/A	ZT26-NJ-NJ-2.5M	19060402	2024-05-09
3m Semi-anechoic Chamber	chengyu	9m*6m*6m	N/A	2024-11-12
Test Software	Farad	EZ-EMC (Ver.FA-03A2 RE)	N/A	N/A


11.4 Measurement Results:


Refer to attached data chart.

Conducted Test


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-57.97	-20	Pass
NVNT	BLE 1M	2480	Ant1	-58.05	-20	Pass

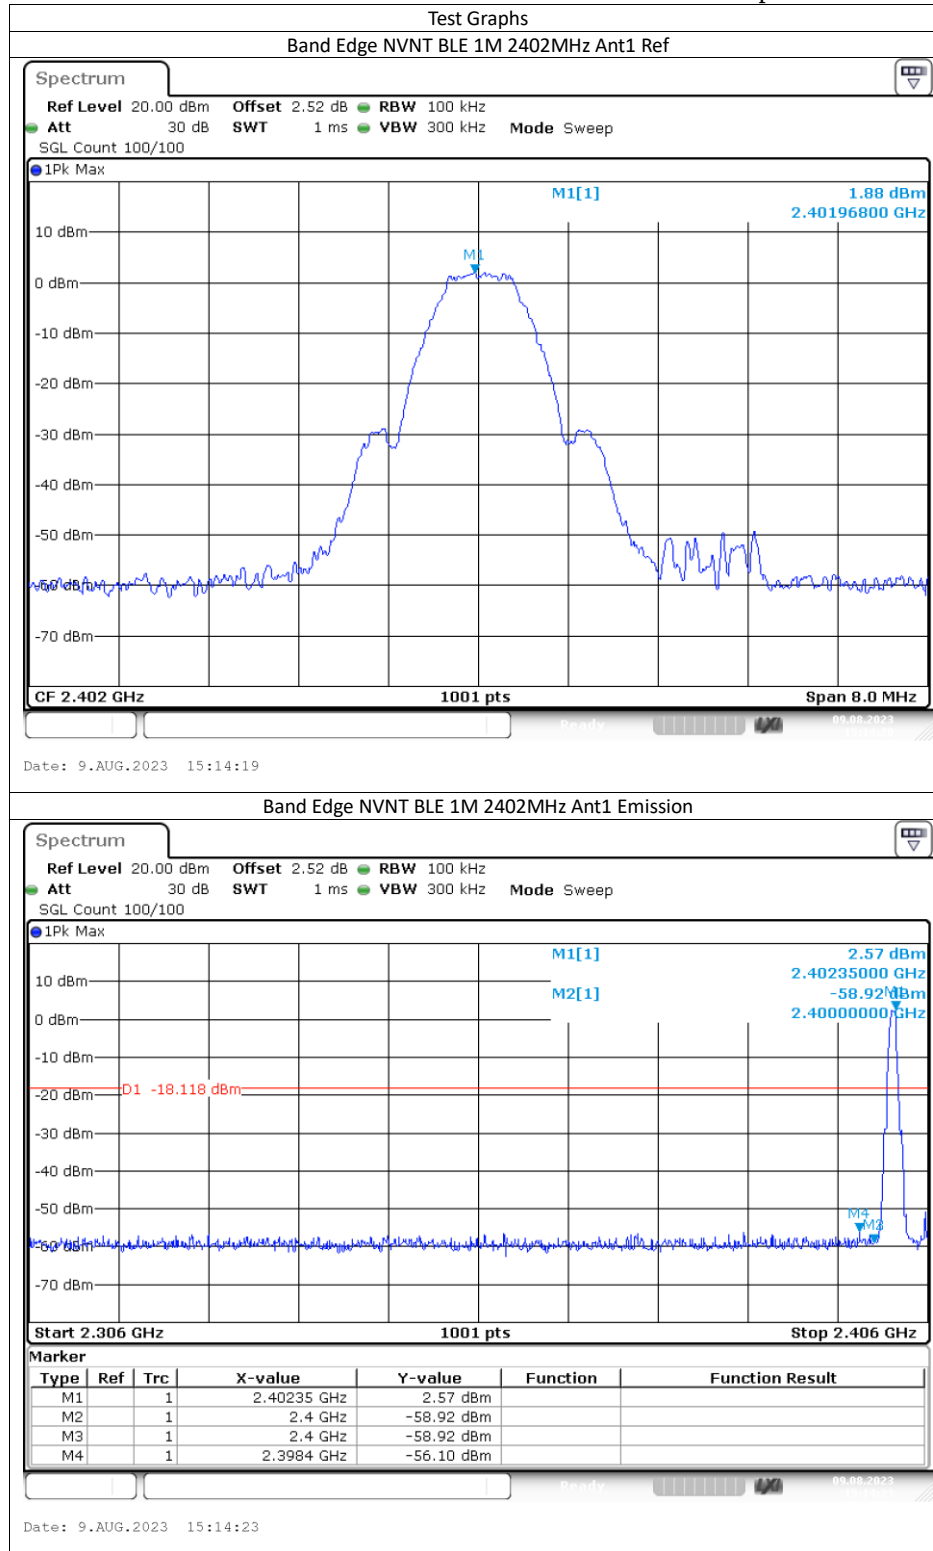

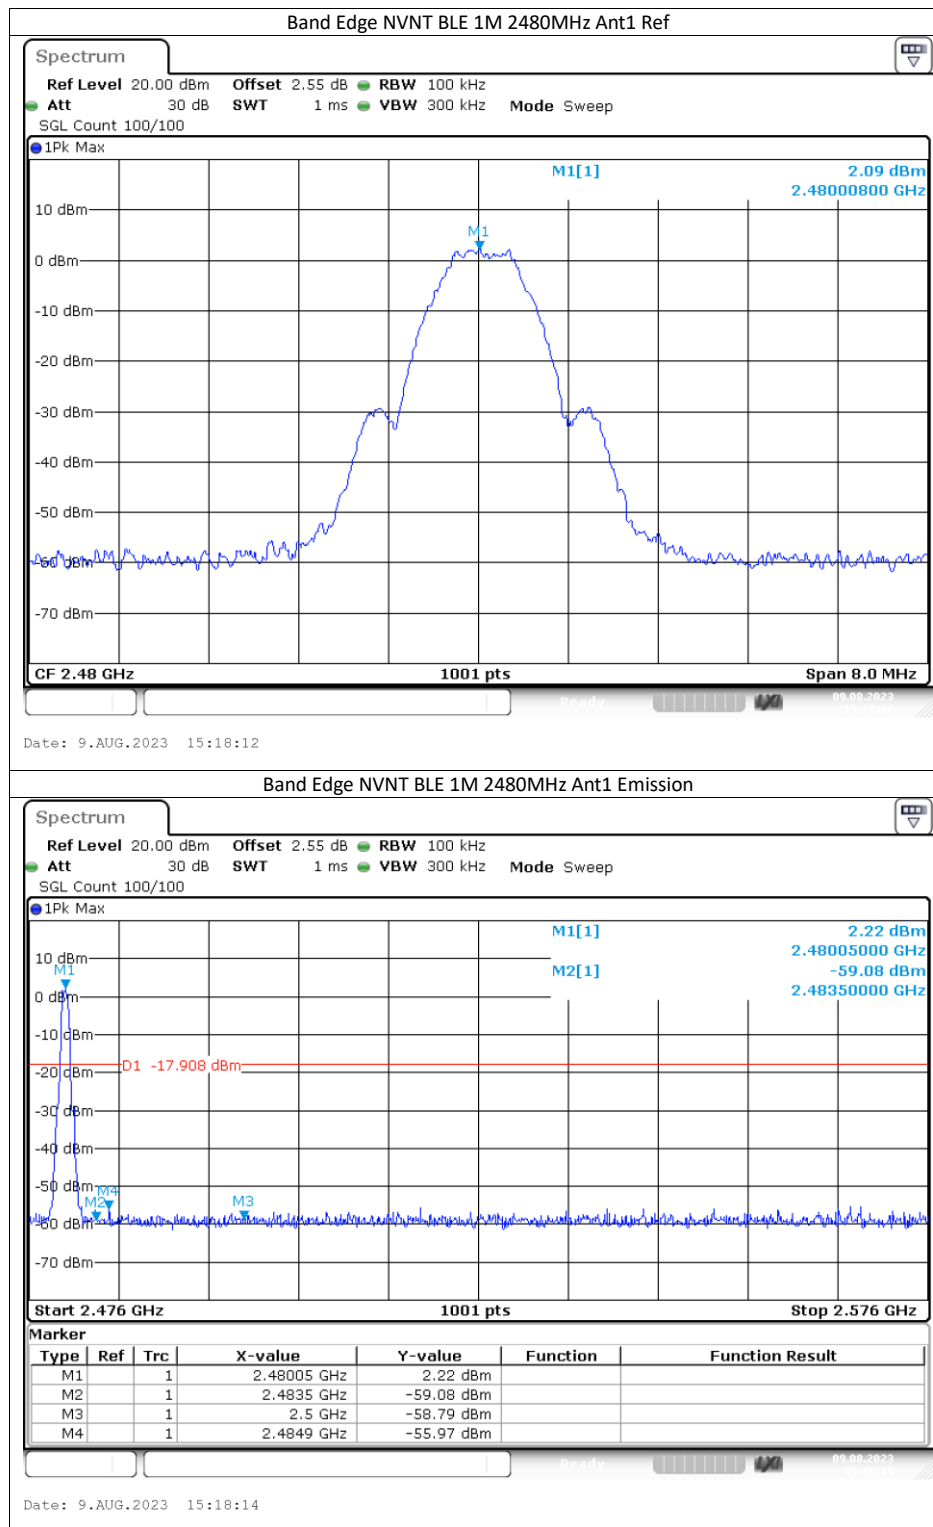

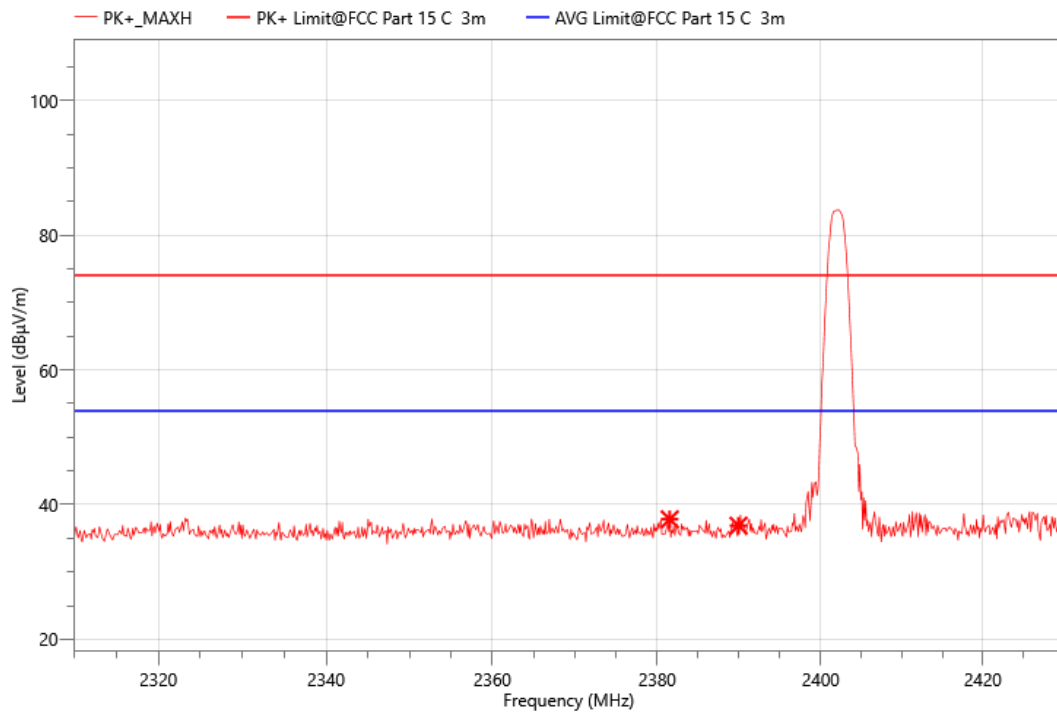
Band Edge (Radiated Test)**TX Mode (CH00: 2402MHz)**

Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dBμV/m)	Det.	Pol.	Corr. (dB)
2381.520	58.57	37.82	74.00	36.18	PK+	H	-20.75
2389.920	57.61	36.88	74.00	37.12	PK+	H	-20.73

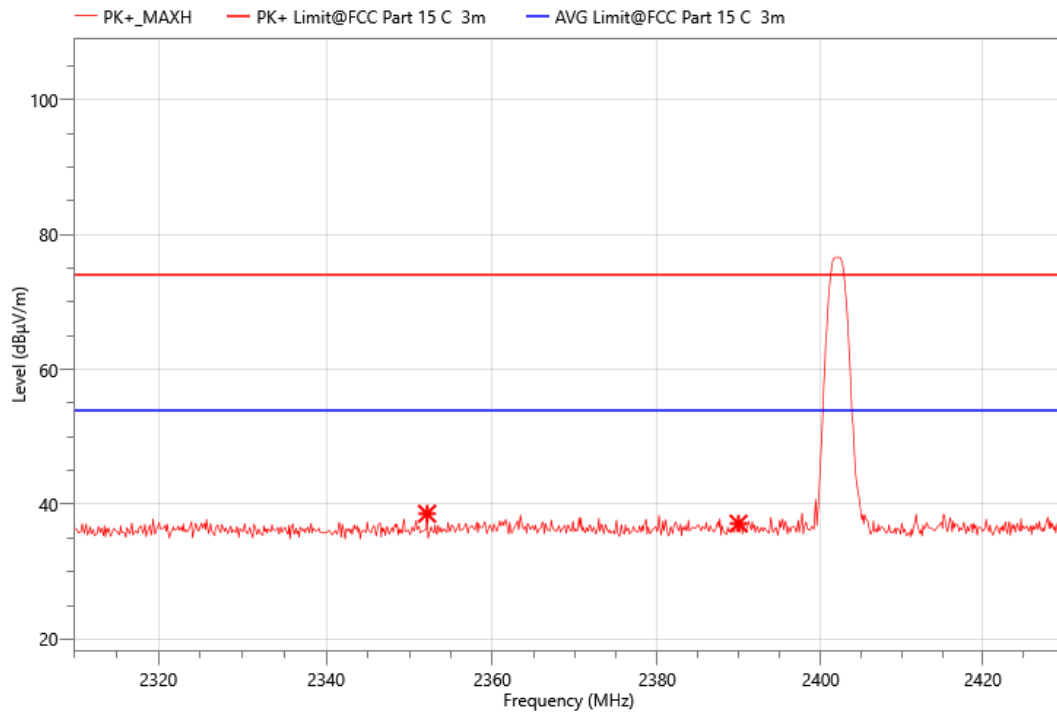


Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dBμV/m)	Det.	Pol.	Corr. (dB)
2352.120	59.37	38.60	74.00	35.40	PK+	V	-20.77
2389.920	57.87	37.14	74.00	36.86	PK+	V	-20.73

TX Mode (CH39: 2480MHz)

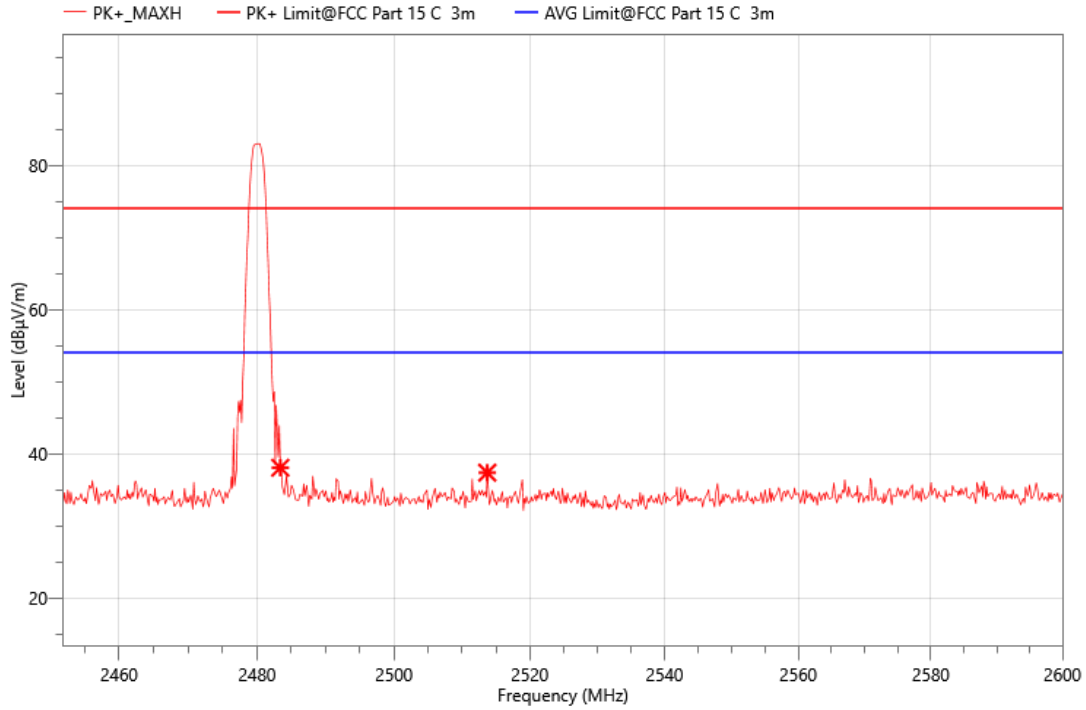

Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dBμV/m)	Det.	Pol.	Corr. (dB)
2483.376	58.39	38.09	74.00	35.91	PK+	H	-20.3
2513.716	57.61	37.41	74.00	36.59	PK+	H	-20.2

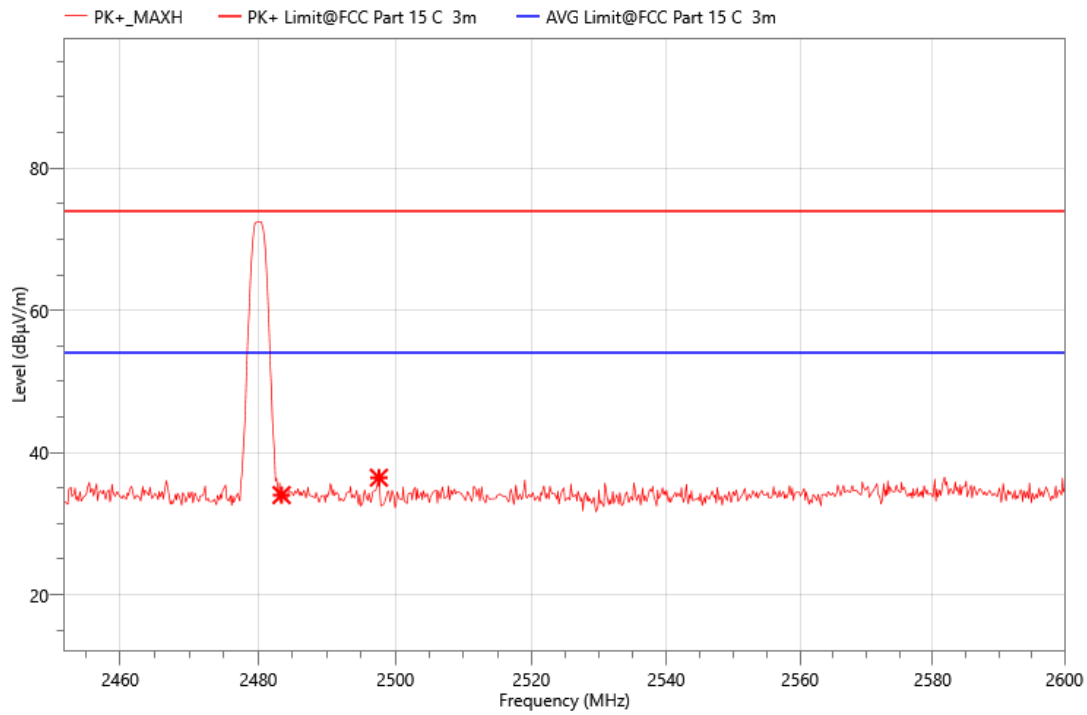

Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dBμV/m)	Det.	Pol.	Corr. (dB)
2483.376	54.31	34.01	74.00	39.99	PK+	V	-20.3
2497.584	56.72	36.46	74.00	37.54	PK+	V	-20.26

12 Antenna Application

12.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247.

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

12.2 Result

The EUT's antenna, permanent attached antenna, External Antenna, The antenna's gain is 2.55dBi and meets the requirement.


APPENDIX I


(Photos of EUT)



External










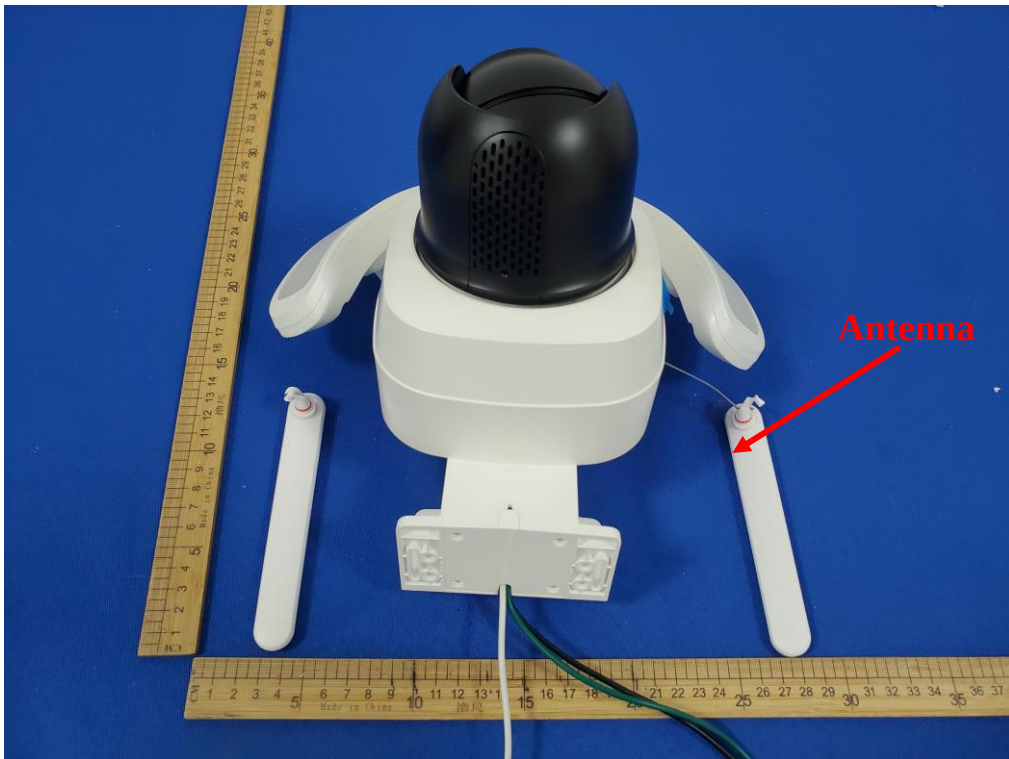



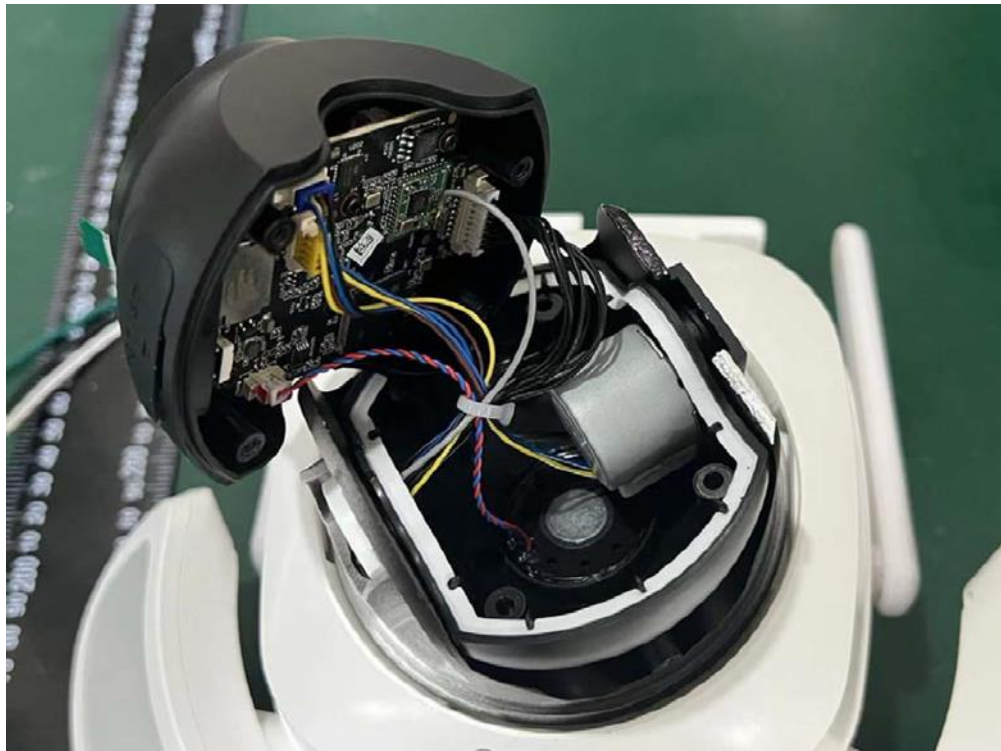


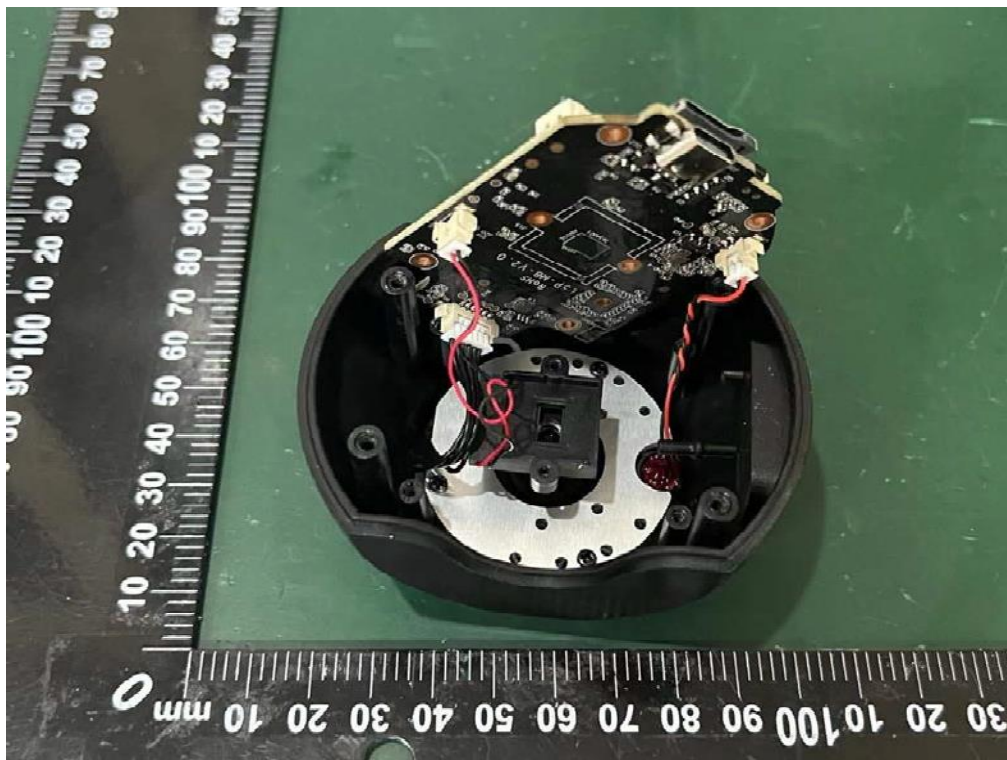
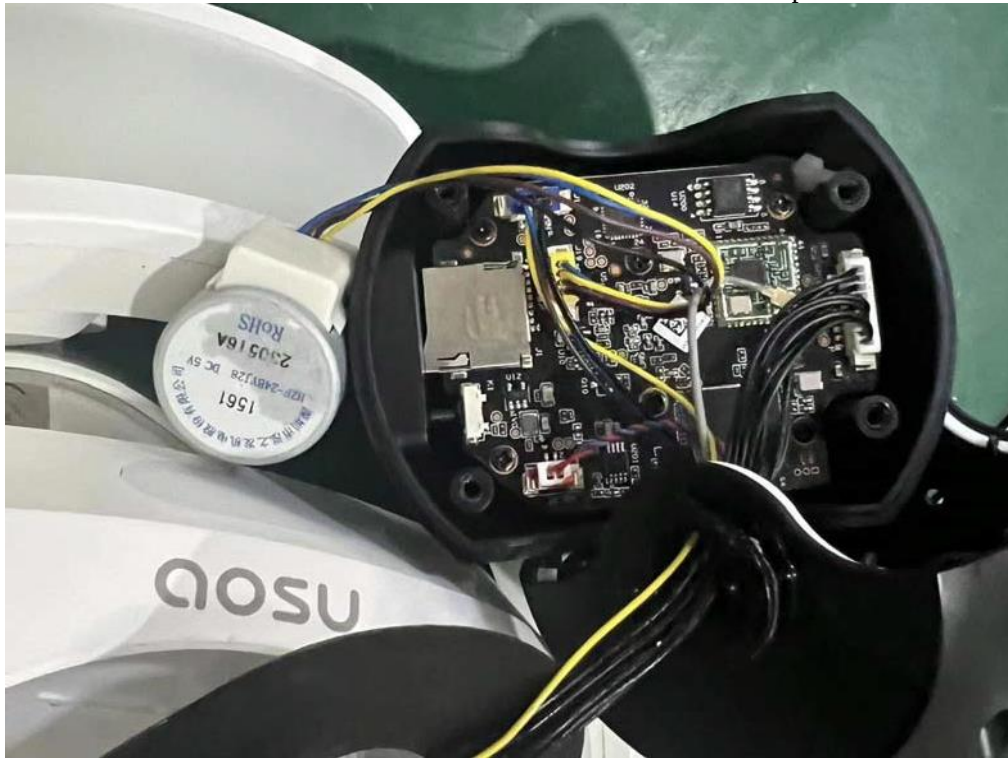


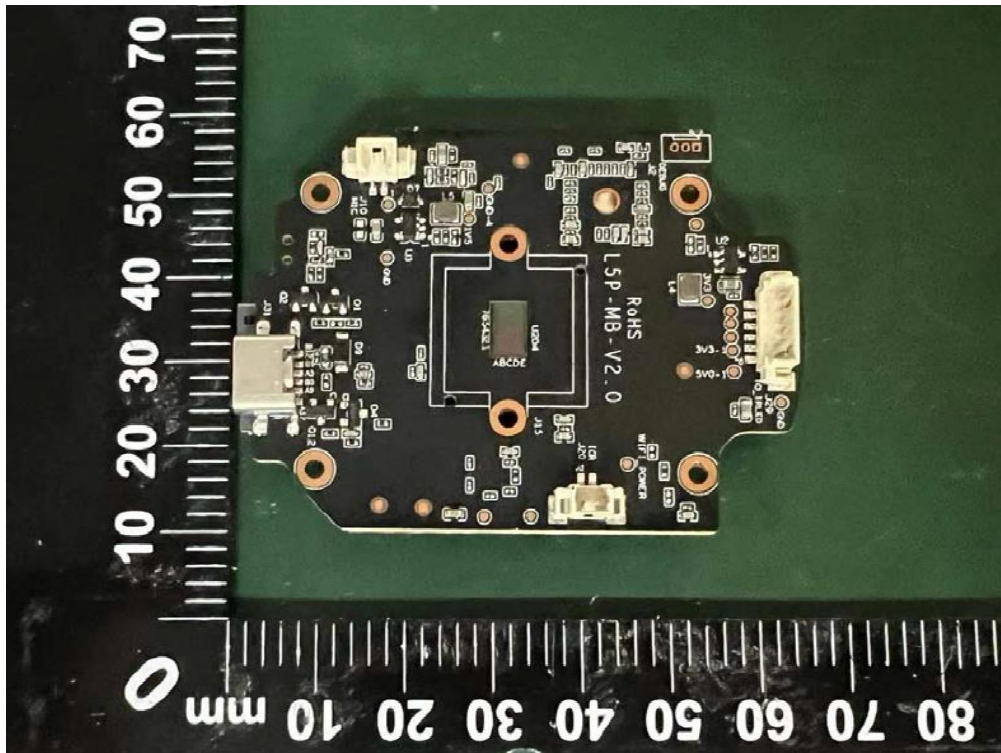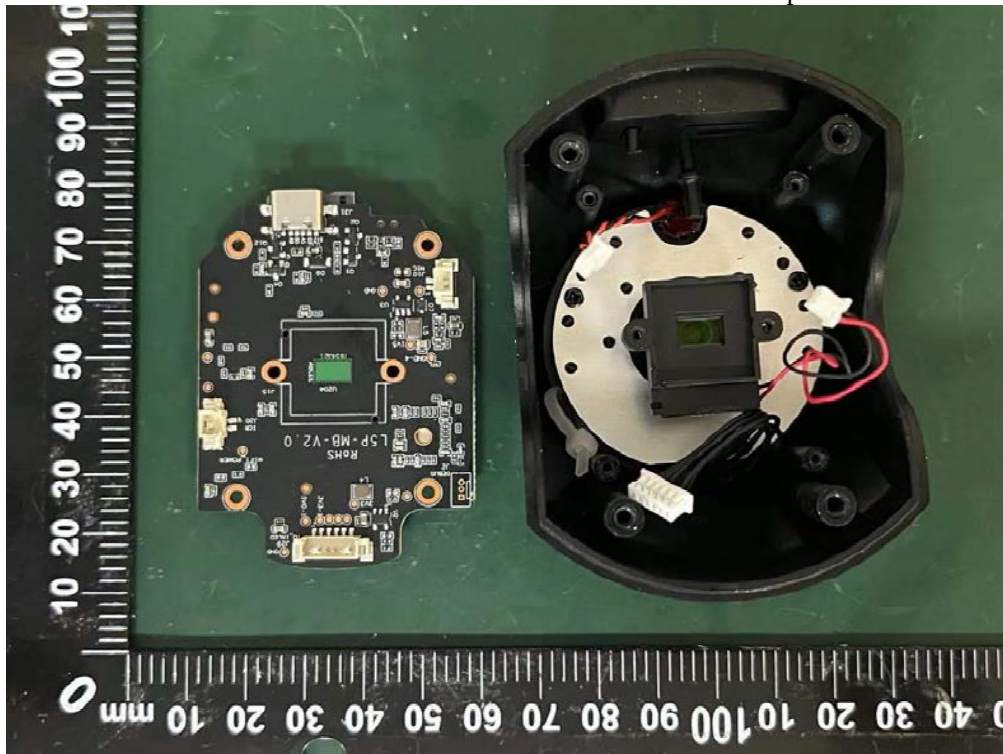

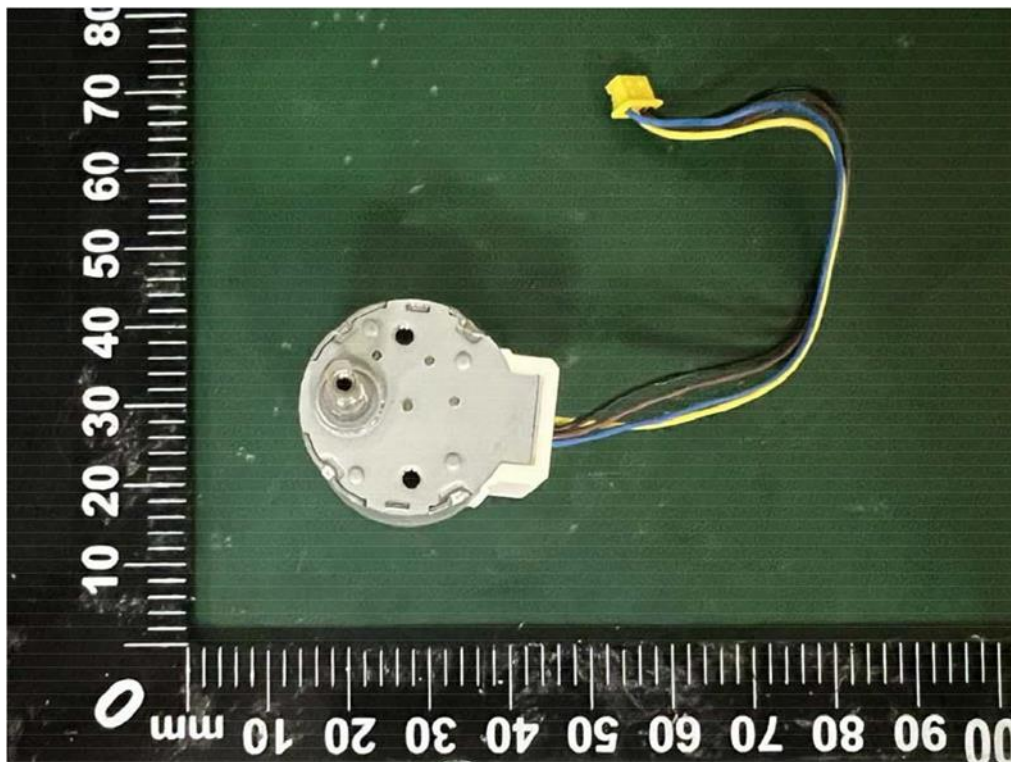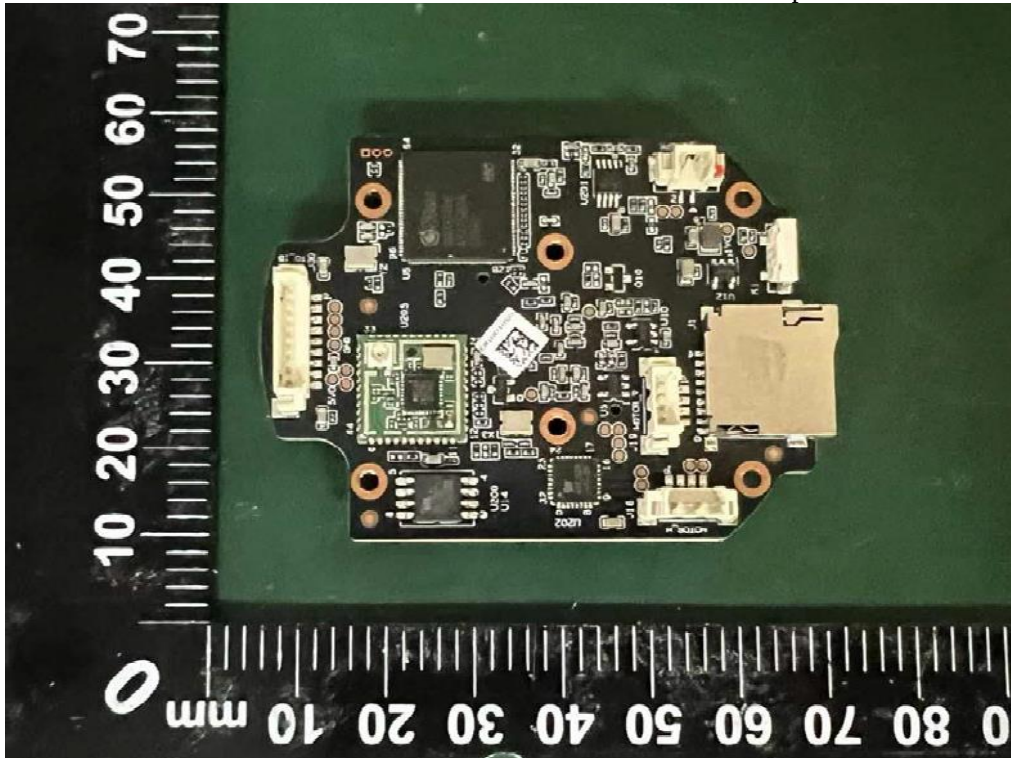

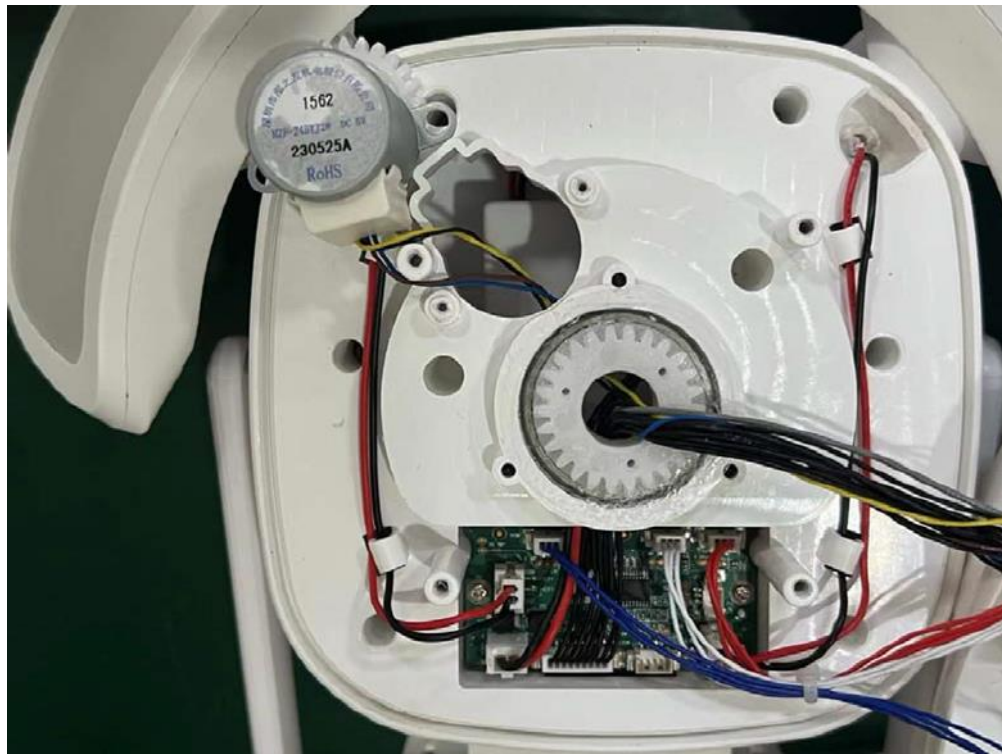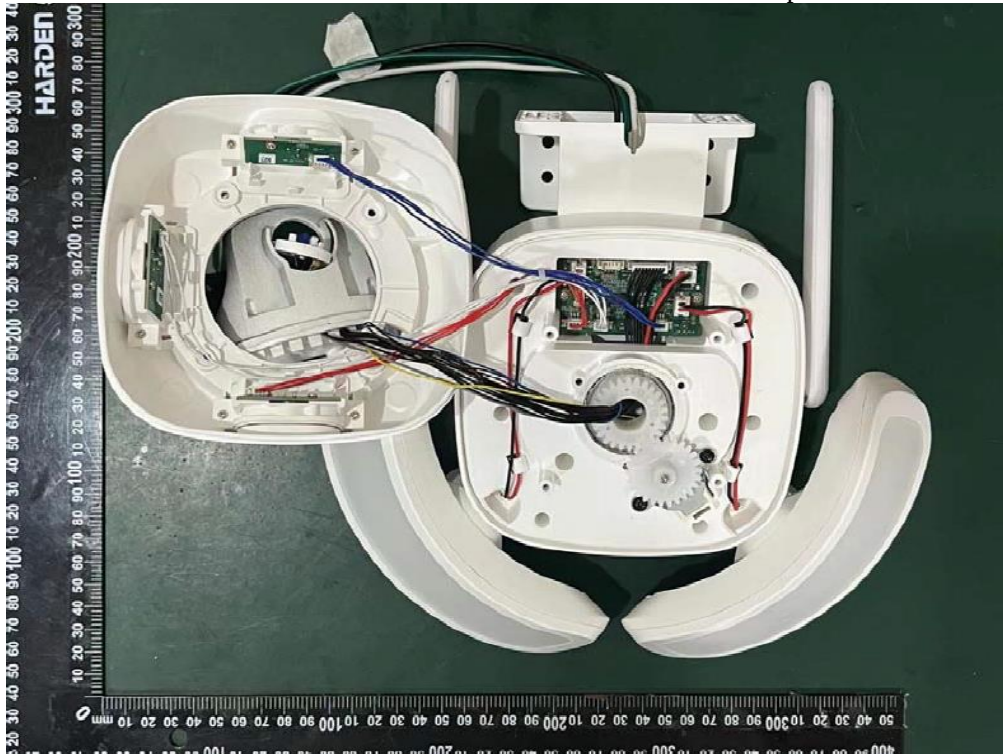

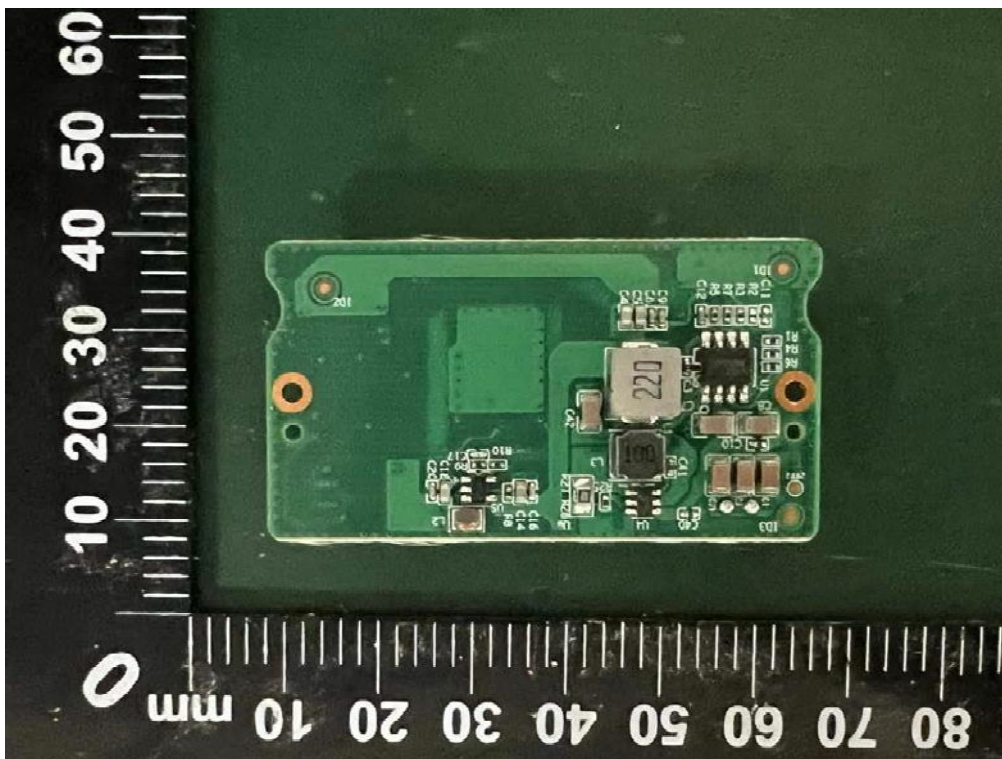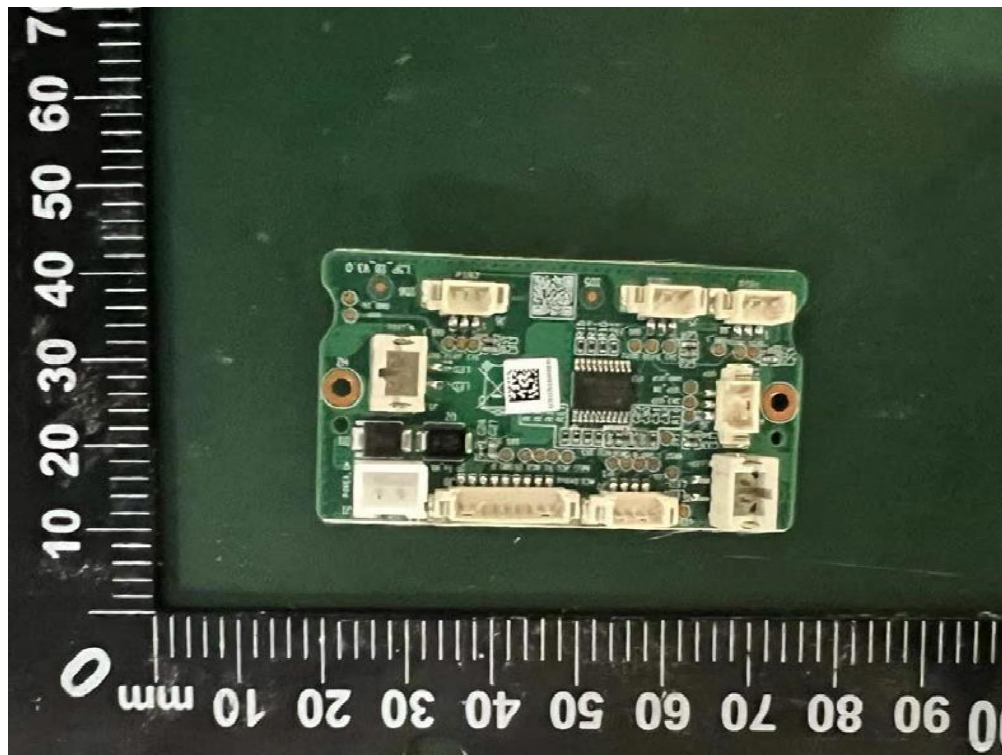

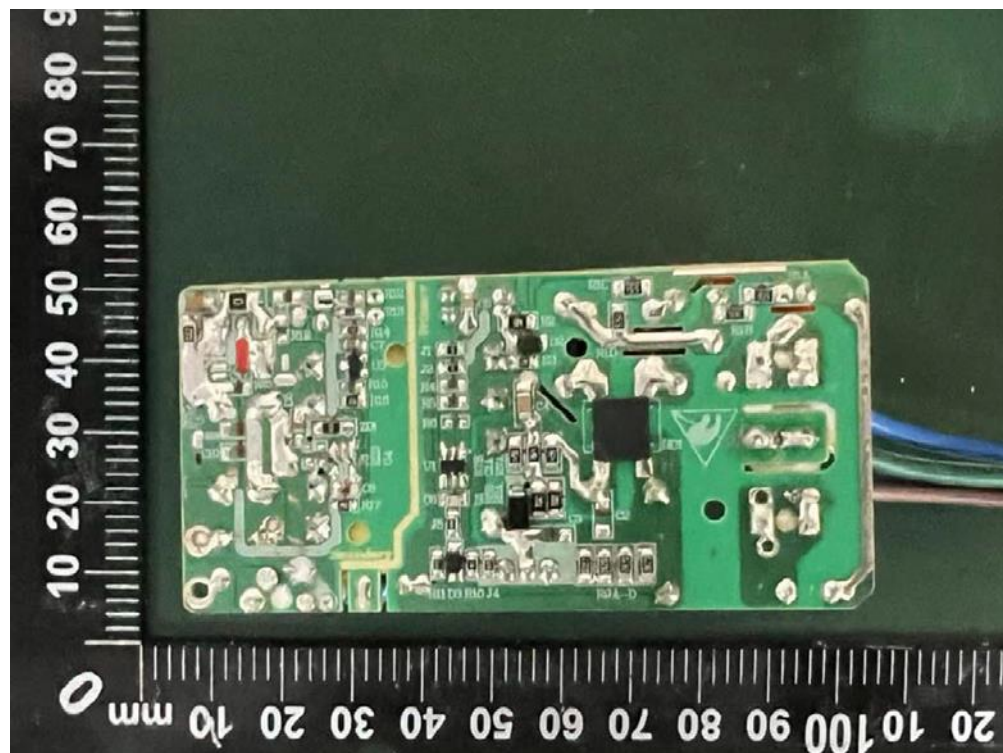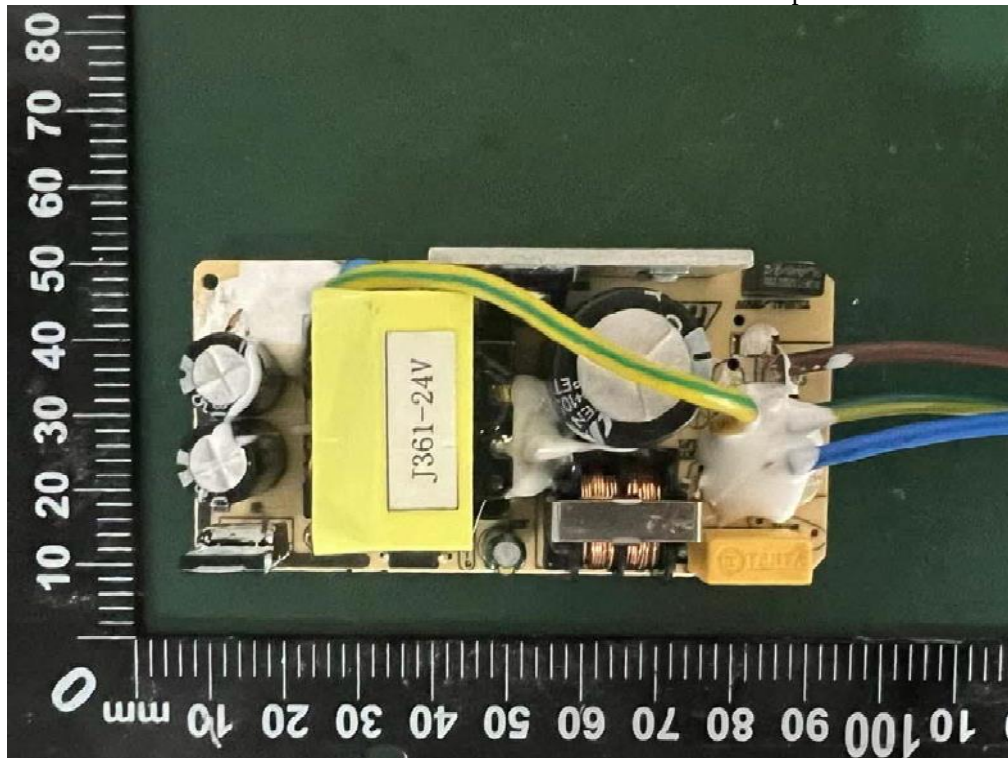

---The end of report---