

TEST REPORT

Application No.: GZCR2511001772MD
Applicant: Shenzhen Star Instrument Co., Ltd
Address of Applicant: Star Industry Park, Baolong Industry City, Longgang District, Shenzhen, China
Manufacturer: Shenzhen Star Instrument Co., Ltd
Address of Manufacturer: Star Industry Park, Baolong Industry City, Longgang District, Shenzhen, China
Factory: Shenzhen Star Instrument Co., Ltd
Address of Factory: Star Industry Park, Baolong Industry City, Longgang District, Shenzhen, China
Product Name: DTS27 (Direct Meter)
Model No.: DTS27 (Direct Meter)
Trade Mark: Shenzhen Star Instrument Co., Ltd
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2025-11-11
Date of Test: 2025-12-01 to 2026-03-13
Date of Issue: 2026-03-20

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch, Testing Center, EEC Laboratory.

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Revision Record			
Version	Report No.	Date	Remark
01	GZCR251100177202	2026-03-20	Original

Authorized for issue by:			
		Key Liang	
		Key Liang/Project Engineer	
Approved By		Vico Cui	
		Vico Cui/Reviewer	



2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass
Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence		N/A	47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2020) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2020) Section 6.10.5 & 7.8.8	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2020) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass**
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2020) Section 6.6 & 7.8.8	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass**
Maximum Conducted Output Power		ANSI C63.10 (2020) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(2)	Pass
20dB Bandwidth		ANSI C63.10 (2020) Section 6.9.2	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Carrier Frequencies Separation		ANSI C63.10 (2020) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
Hopping Channel Number		ANSI C63.10 (2020) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(i)	Pass
Dwell Time		ANSI C63.10 (2020) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(i)	Pass
Conducted Band Edges Measurement		ANSI C63.10 (2020) Section 7.8.7.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10 (2020) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(d)	Pass

Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.

**： The EUT passed Radiated Spurious Emissions Below 1GHz, Radiated Spurious Emissions and Above 1GHz tests after modifications.



3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units	6
4.3 Measurement Uncertainty	7
4.4 Test Location	7
4.5 Test Facility	8
4.6 Deviation from Standards	8
4.7 Abnormalities from Standard Conditions	8
5 Equipment List	9
6 Radio Spectrum Technical Requirement	11
6.1 Antenna Requirement	11
6.1.1 Test Requirement:	11
6.1.2 Conclusion	11
6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence	12
6.2.1 Test Requirement:	12
6.2.2 Conclusion	12
7 Radio Spectrum Matter Test Results	14
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	14
7.1.1 E.U.T. Operation	14
7.1.2 Test Mode Description	14
7.1.3 Test Setup Diagram	14
7.1.4 Measurement Procedure and Data	15
7.2 Radiated Emissions which fall in the restricted bands	20
7.2.1 E.U.T. Operation	20
7.2.2 Test Mode Description	20
7.2.3 Test Setup Diagram	20
7.2.4 Measurement Procedure and Data	21
7.3 Radiated Spurious Emissions Below 1GHz	28
7.3.1 E.U.T. Operation	28
7.3.2 Test Mode Description	28
7.3.3 Test Setup Diagram	29
7.3.4 Measurement Procedure and Data	29
7.4 Radiated Spurious Emissions Above 1GHz	36
7.4.1 E.U.T. Operation	36
7.4.2 Test Mode Description	36
7.4.3 Test Setup Diagram	36
7.4.4 Measurement Procedure and Data	37
7.5 Maximum Conducted Output Power	44



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.5.1	E.U.T. Operation	44
7.5.2	Test Mode Description	44
7.5.3	Test Setup Diagram	44
7.5.4	Measurement Procedure and Data	44
7.6	20dB Bandwidth	45
7.6.1	E.U.T. Operation	45
7.6.2	Test Mode Description	45
7.6.3	Test Setup Diagram	45
7.6.4	Measurement Procedure and Data	45
7.7	Carrier Frequencies Separation	46
7.7.1	E.U.T. Operation	46
7.7.2	Test Mode Description	46
7.7.3	Test Setup Diagram	46
7.7.4	Measurement Procedure and Data	46
7.8	Hopping Channel Number	47
7.8.1	E.U.T. Operation	47
7.8.2	Test Mode Description	47
7.8.3	Test Setup Diagram	47
7.8.4	Measurement Procedure and Data	47
7.9	Dwell Time	48
7.9.1	E.U.T. Operation	48
7.9.2	Test Mode Description	48
7.9.3	Test Setup Diagram	48
7.9.4	Measurement Procedure and Data	48
7.10	Conducted Band Edges Measurement	49
7.10.1	E.U.T. Operation	49
7.10.2	Test Mode Description	49
7.10.3	Test Setup Diagram	49
7.10.4	Measurement Procedure and Data	49
7.11	Conducted Spurious Emissions	50
7.11.1	E.U.T. Operation	50
7.11.2	Test Mode Description	50
7.11.3	Test Setup Diagram	50
7.11.4	Measurement Procedure and Data	50
8	Test Setup Photo	51
9	EUT Constructional Details (EUT Photos)	52
10	Appendix	53



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (EMC) EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply: AC 3*57.7/110-3*277/480V, 50Hz
Battery operation: DC 3.6V for internal lithium battery as below:
Model: ER14250
Rated: DC 3.6 V
Size: 1/2AA

Test voltage: AC 3*277/480V, 50Hz & DC 3.6V
Cable(s): AC mains ports.
Operation Frequency: 902.2MHz-927.8MHz
Modulation Type: FSK
Number of Channels: 129
Channel Spacing: 200kHz
Antenna Type: External suction cup antenna (Monopole antenna)
Antenna Gain: 0.1 dBi according to antenna specification
Antenna Number: 1

Remark: The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
AC mains cable	SGS	0.8m x 3 wires unscreened	--
Micro-power Isolated Power Supply	Shenzhen Star Instrument Co., Ltd.	STA4101BT-A1	--



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch, EMC EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	±3.22dB
Radiated Emissions which fall in the restricted bands	±5.14dB (3m); ±4.90dB (10m); ±4.88dB (1GHz-6GHz); ±5.06dB (6GHz-18GHz); ±5.30dB (18GHz-40GHz)
Radiated Spurious Emissions Below 1GHz	±3.08dB (9kHz to 150kHz); ±3.19dB (150kHz to 30MHz); ±5.14dB (30MHz-1GHz) (3m); ±4.90dB (30MHz-1GHz) (10m)
Radiated Spurious Emissions Above 1GHz	±4.88dB (1GHz-6GHz); ±5.06dB (6GHz-18GHz); ±5.30dB (18GHz-40GHz)
Maximum Conducted Output Power	± 0.75dB
20dB Bandwidth	± 0.274%
Carrier Frequencies Separation	± 7.25 x 10 ⁻⁸
Hopping Channel Number	± 7.25 x 10 ⁻⁸
Dwell Time	± 0.029%
Conducted Band Edges Measurement	± 0.75dB
Conducted Spurious Emissions	± 0.75dB
Remark: The U_{lab} (lab Uncertainty) is less than U_{CISPR} (CISPR Uncertainty) or U_{ETSI} (ETSI Uncertainty). Emission decision rule: – Compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit, marked as Pass in the report. – Non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit, marked as Fail in the report.	

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou,
Guangdong, China 510663

Tel: +86 20 82155555

No tests were sub-contracted.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch EMC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● ACMA

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian/New Zealand Regulatory Compliance Mark (RCM).

● SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

● FCC Recognized Accredited Test Firm(Registration No.: 486818)

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818.

● ISED (Registration No.: 4620B, CAB identifier: CN0052)

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

● VCCI (Registration No.: R-12460, C-12584, G-20107 and T-11179)

The 10m Semi-anechoic chamber, 966 Anechoic Chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584, G-20107 and T-11179 respectively.

● CBTL (Lab Code: TL129)

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2017, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch EMC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Coaxial Cable	HangTianXing	BL03-NMM-6.00M	EMC0107	2025-08-12	2026-08-11
Shielding Room	ChangZhou ZhongYu	8m x 3m x 3.8m	EMC0306	2025-08-14	2028-08-13
Two-Line V-Network-GZ	Rohde & Schwarz	ENV216	EMC2135	2025-08-13	2026-08-12
EMI Test Receiver (9kHz-3.6GHz)	Rohde & Schwarz	ESR3	EMC2221	2025-11-18	2026-11-17
Test Software E3r	Audix	Ver.6.191211	GZE100-77	N/A	N/A
Artificial Mains Network (LISN)	AFJ Instruments	LT32C	EMC2046	2025-08-12	2026-08-11

Radiated Spurious Emissions Below 1GHz & Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
966 Anechoic Chamber	Shenzhen C.R.T	CRTSGSSAC966	EMC2230	2025-03-22	2028-03-21
EMI Test Receiver(1Hz-8GHz)	Rohde & Schwarz	ESW8	EMC2229	2025-11-18	2026-11-17
Amplifier(9k-1000MHz)	SONOMA	310	EMC2237	2025-11-25	2026-11-24
Trilog Broadband Antenna (25MHz-2GHz)	Schwarzbeck Mess-Elektronik	VULB 9168	EMC2238	2025-03-24	2027-03-23
Coaxial Cable	Mirco-COAX UTIFLEX ve	LA2-C125-8000	EMC2239	2025-11-25	2026-11-24
Test Software E3	Audix	Ver.6.191211	GZE100-81	N/A	N/A
Active Loop Antenna-RED	ETS-Lindgren	6502	EMC2190	2024-04-16	2026-04-15



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (EMC) EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Radiated Spurious Emissions Above 1GHz					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
1-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2025-08-11	2026-08-10
EMI Test Receiver (10Hz-26.5GHz)	Rohde & Schwarz	ESIB26	EMC0522	2025-08-11	2026-08-10
Chamber cable (Above 1GHz)	Scoflex	KMKM-8.0m	EMC0545	2024-08-19	2026-08-18
Horn Antenna (1-18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2025-05-13	2027-05-12
Horn Antenna (14-40GHz)	SCHWARZBECK	BBHA 9170	EMC2041	2023-06-18	2026-06-17
EXA Signal Analyzer (10Hz-44GHz)	Keysight	N9010A	EMC2138	2025-08-12	2026-08-11
MXE EMI Receiver (10Hz-8.4GHz)	Keysight	N9038A	EMC2139	2025-08-11	2026-08-10
966 Anechoic Chamber	Shenzhen C.R.T	CRTSGSSAC966	EMC2230	2025-03-22	2028-03-21
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A

RF Conducted Test					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
MI CABLE	SGS-EMC	0.8M	EMC2136	2025-11-02	2026-11-01
4X4 Power sensor Unit	TST	TSPS2023R	EMC2257	2025-08-12	2026-08-11
Test Software	TST	V2.0	GZE100-82	N/A	N/A
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2222	2025-11-25	2026-11-24

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DMM	Fluke	73	EMC0006	2025-06-03	2026-06-02



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (EMC) EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.1 dBi.

Antenna location: Refer to internal photo.

6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)

6.2.2 Conclusion

Frequency hopping (FH) is one of the core technologies in the physical layer and MAC layer of Wi-SUN (Wireless Smart Ubiquitous Network). It directly contributes to Wi-SUN's outstanding anti-interference capability, reliability, and scalability in the crowded ISM bands (such as 920–928 MHz).

The essence of pseudo-random frequency hopping is:

Two or more communicating devices switch synchronously among multiple channels based on a pre-negotiated "sequence" that appears random. The term "pseudo-random" means that although the sequence is deterministic and predictable for network members, it appears random to external observers.

1. Channel Plan

Wi-SUN divides its operating band (e.g., 902–928 MHz) into dozens or even more than a hundred independent, equally-spaced channels.

For example, in the North American 900 MHz band, the Wi-SUN FAN specification defines up to 75 channels (50 primary channels + 25 secondary channels).

A large pool of available channels is the foundation of frequency hopping.

2. Generation of the Pseudo-Random Sequence

The core of the hopping mechanism is a pseudo-random sequence generator.

The sequence is generated from several key "seed" parameters:

PAN ID: The identifier of the Personal Area Network.

Network key / master key: Used for security encryption and also as one of the sequence inputs.

Channel-plan parameters: Total channel count, excluded channels (due to regulation or known interference), etc.

Time synchronization information: Usually derived from a globally synchronized timeslot counter.

These parameters are entered into a standard pseudo-random algorithm (such as a hash function) to produce a deterministic, long-period channel index sequence.

All synchronized devices within the same network, using the same seed parameters and algorithm, will compute the exact same hopping sequence.

3. Frequency Hopping and Time Synchronization

Wi-SUN FAN combines TDMA (Time Division Multiple Access) with frequency hopping. Time is divided into superframes, frames, and timeslots.

Timeslot: The smallest communication time unit (e.g., 10 ms). Communication occurs within specific slots.

Hopping clock: Hopping usually occurs every timeslot or every two timeslots. This rhythm is the "hopping clock."

Synchronization: All network devices must maintain strict clock synchronization with the Border Router.

They know the current hopping-clock counter. By feeding this counter into the pseudo-random generator, a device computes the exact channel to listen or transmit on for the current period.



4. Example of the Communication Process

Assume Device A wants to send data to Device B:

Synchronization

Both A and B have joined the network, share the same PAN ID and network key, and are time-synchronized with the Border Router (knowing the current timeslot count).

Channel computation

At the scheduled communication timeslot, A and B independently compute the channel index for that timeslot using the same algorithm and seed parameters — for example, Channel 35.

Switching and communication

Both devices switch their RF modules to Channel 35.

A transmits and B receives during that slot.

Next hop

In the next hopping-clock period, both calculate again and obtain the next channel (e.g., Channel 18), then switch to Channel 18 for further communication.

5. Key Advantages of Pseudo-Random Frequency Hopping

Superior anti-interference capability

If a particular channel (e.g., Channel 35) suffers from continuous interference (Wi-Fi, Bluetooth, etc.), Wi-SUN devices will dwell on it only for a very short timeslot (e.g., 10 ms).

They hop to another potentially clean channel (e.g., Channel 18) immediately afterward.

Interferers have great difficulty tracking this rapid, irregular hopping.

Avoiding self-interference and collisions

In large-scale, high-density mesh networks, many links may communicate concurrently.

Pseudo-random hopping disperses these links across different channels, significantly reducing collision probability and improving network capacity and parallelism.

Frequency diversity

Wireless signals may suffer deep fading at certain frequencies due to multipath effects.

Hopping ensures communication does not rely on any single channel but benefits from statistical properties of multiple channels, improving link reliability.

Basic physical-layer security enhancement

Since the hopping sequence depends on the network key, devices outside the network cannot predict the next channel.

This provides a degree of physical-layer security, making eavesdropping or malicious jamming more difficult (though upper-layer encryption remains necessary for full security).



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2020) Section 6.2

Test Engineer: Sunny Yang

Limit:

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23.8 °C

Humidity: 53.3 % RH


Atmospheric Pressure: 1020 mbar

7.1.2 Test Mode Description

Pre-scan / Mode
Final test Code Description

Final test 05 TX_non-Hop mode_Keep the EUT in continuously transmitting mode with FSK modulation.

7.1.3 Test Setup Diagram

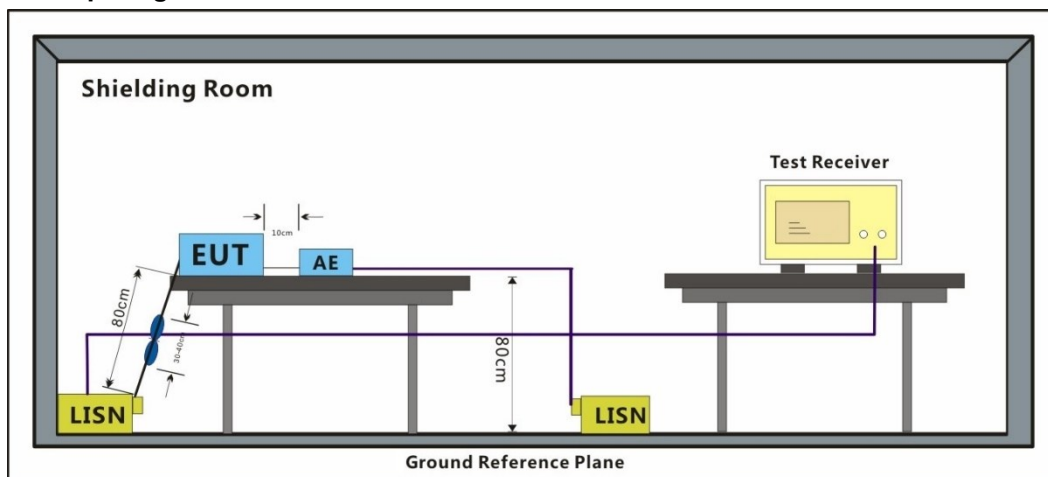

7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch EMC EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com


Test Mode: 05; Line: Live line 1

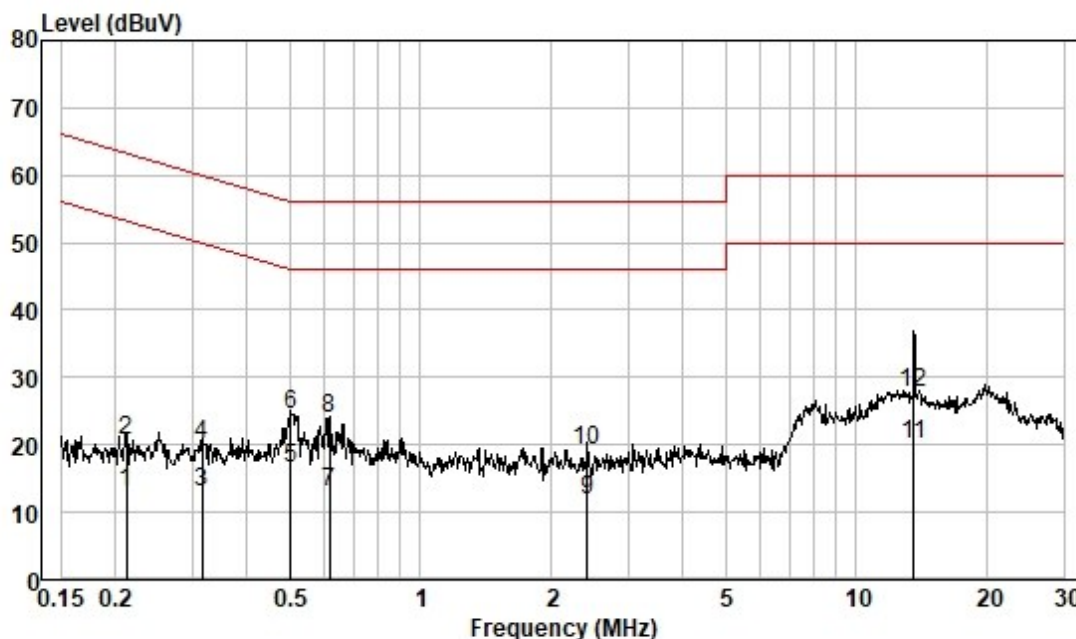

Pol : LINE
Mode :
Model :
Power : L1

	Frequency MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Measured Level dBuV	Limit Line dBuV	Over Limit dB	Remark
1	0.212	12.64	0.04	0.28	12.96	53.14	-40.18	Average
2	0.212	20.22	0.04	0.28	20.54	63.14	-42.60	QP
3	0.315	12.52	0.04	0.33	12.89	49.84	-36.95	Average
4	0.315	19.73	0.04	0.33	20.10	59.84	-39.74	QP
5	0.505	16.06	0.05	0.38	16.49	46.00	-29.51	Average
6	0.505	24.18	0.05	0.38	24.61	56.00	-31.39	QP
7	0.617	12.50	0.06	0.38	12.94	46.00	-33.06	Average
8	0.617	23.54	0.06	0.38	23.98	56.00	-32.02	QP
9	2.409	11.41	0.14	0.25	11.80	46.00	-34.20	Average
10	2.409	18.92	0.14	0.25	19.31	56.00	-36.69	QP
11	13.551	19.25	0.31	0.66	20.22	50.00	-29.78	Average
12	13.551	26.82	0.31	0.66	27.79	60.00	-32.21	QP

Test Mode: 05; Line: Live line 2

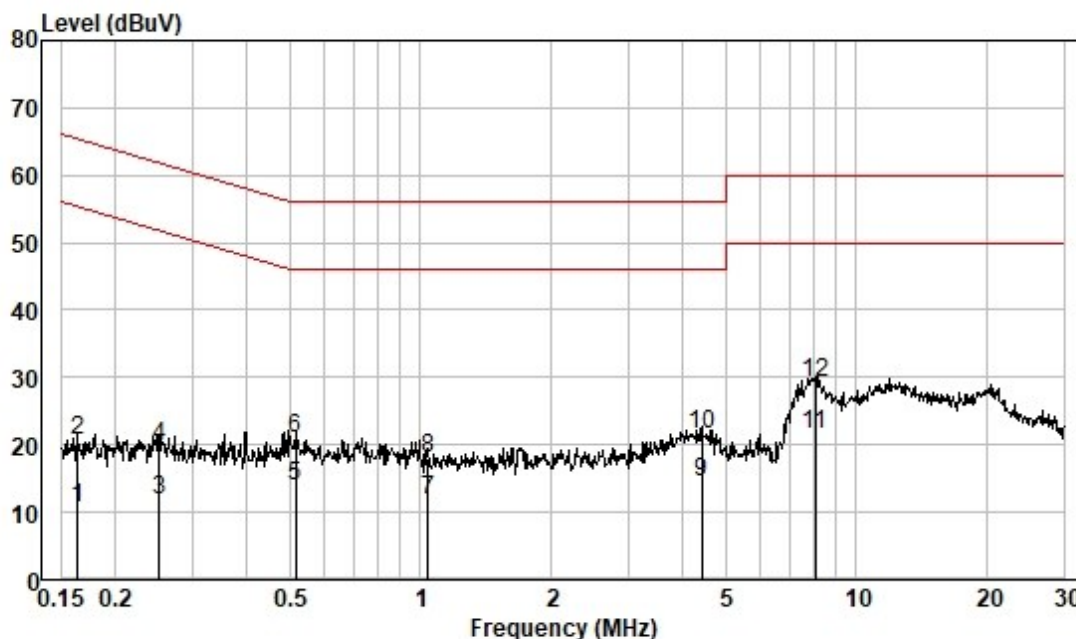


Pol : LINE
Mode :
Model :
Power : L2

	Frequency MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Measured Level dBuV	Limit Line dBuV	Over Limit dB	Remark
1	0.163	10.45	0.04	0.22	10.71	55.30	-44.59	Average
2	0.163	20.44	0.04	0.22	20.70	65.30	-44.60	QP
3	0.252	11.47	0.04	0.28	11.79	51.69	-39.90	Average
4	0.252	19.38	0.04	0.28	19.70	61.69	-41.99	QP
5	0.518	13.55	0.05	0.22	13.82	46.00	-32.18	Average
6	0.518	20.55	0.05	0.22	20.82	56.00	-35.18	QP
7	1.043	11.46	0.07	0.23	11.76	46.00	-34.24	Average
8	1.043	17.62	0.07	0.23	17.92	56.00	-38.08	QP
9	4.407	13.96	0.19	0.17	14.32	46.00	-31.68	Average
10	4.407	21.25	0.19	0.17	21.61	56.00	-34.39	QP
11	8.062	21.10	0.23	0.17	21.50	50.00	-28.50	Average
12	8.062	28.90	0.23	0.17	29.30	60.00	-30.70	QP




Test Mode: 05; Line: Live line 3

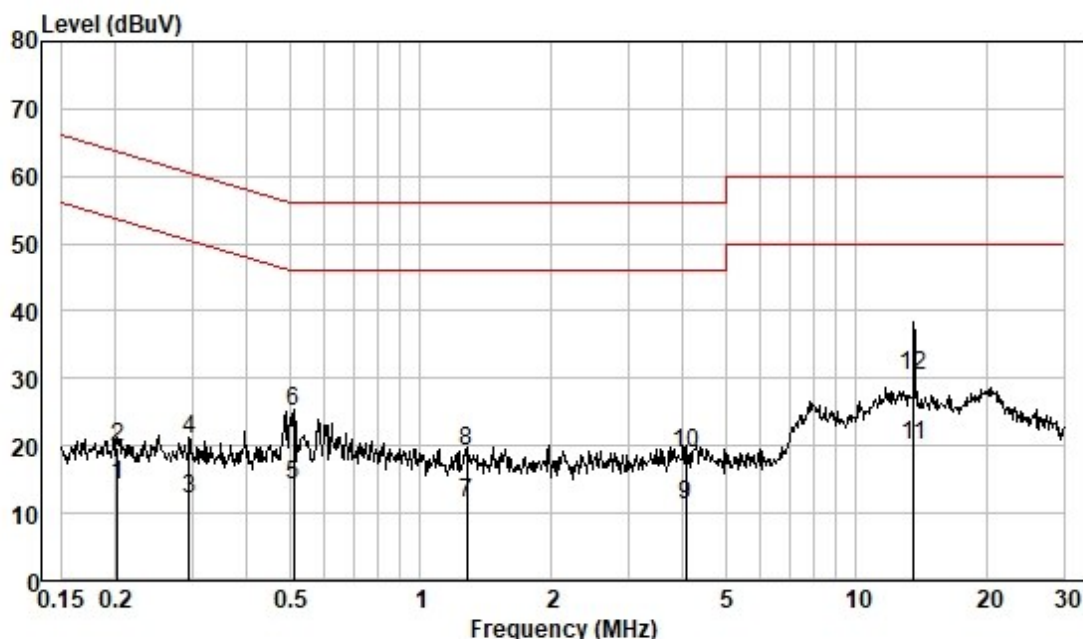

Pol : LINE
Mode :
Model :
Power : L3

	Freque	Read	Cable	LISN	Measured	Limit	Over	Remark
	nc	Level	Loss	Factor	Level	Line	Limit	
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.202	14.01	0.04	0.14	14.19	53.54	-39.35	Average
2	0.202	19.68	0.04	0.14	19.86	63.54	-43.68	QP
3	0.294	12.06	0.04	0.12	12.22	50.41	-38.19	Average
4	0.294	20.74	0.04	0.12	20.90	60.41	-39.51	QP
5	0.513	14.16	0.05	0.00	14.21	46.00	-31.79	Average
6	0.513	24.92	0.05	0.00	24.97	56.00	-31.03	QP
7	1.276	11.45	0.09	0.01	11.55	46.00	-34.45	Average
8	1.276	18.98	0.09	0.01	19.08	56.00	-36.92	QP
9	4.070	11.12	0.18	0.04	11.34	46.00	-34.66	Average
10	4.070	18.58	0.18	0.04	18.80	56.00	-37.20	QP
11	13.551	19.30	0.31	0.34	19.95	50.00	-30.05	Average
12	13.551	29.80	0.31	0.34	30.45	60.00	-29.55	QP

Test Mode: 05; Line: Neutral Line

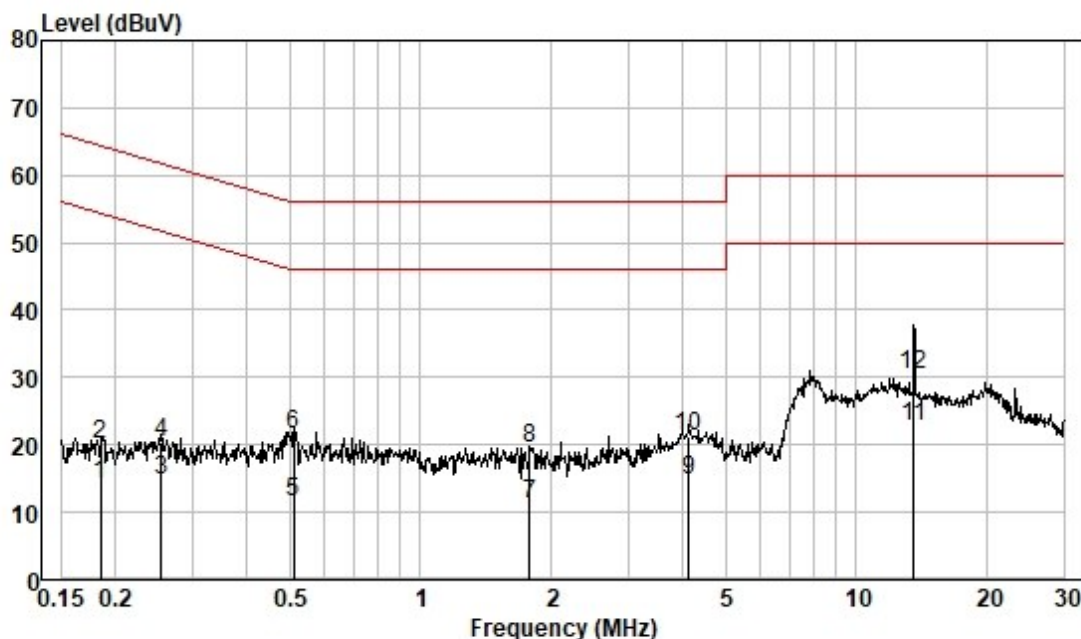

Pol : NEUTRAL
Mode :
Model :
Power : N

	Frequency MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Measured Level dBuV	Limit Line dBuV	Over Limit dB	Remark
1	0.184	13.83	0.04	0.24	14.11	54.28	-40.17	Average
2	0.184	19.90	0.04	0.24	20.18	64.28	-44.10	QP
3	0.255	14.51	0.04	0.25	14.80	51.60	-36.80	Average
4	0.255	20.20	0.04	0.25	20.49	61.60	-41.11	QP
5	0.513	11.22	0.05	0.33	11.60	46.00	-34.40	Average
6	0.513	21.18	0.05	0.33	21.56	56.00	-34.44	QP
7	1.781	10.71	0.12	0.36	11.19	46.00	-34.81	Average
8	1.781	18.90	0.12	0.36	19.38	56.00	-36.62	QP
9	4.136	14.21	0.18	0.32	14.71	46.00	-31.29	Average
10	4.136	20.64	0.18	0.32	21.14	56.00	-34.86	QP
11	13.551	22.29	0.31	0.23	22.83	50.00	-27.17	Average
12	13.551	29.79	0.31	0.23	30.33	60.00	-29.67	QP



7.2 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
 Test Method: ANSI C63.10 (2020) Section 6.10.5 & 7.8.8
 Test Engineer: Lin Liao
 Limit:
 Test Distance: 3 m

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.


7.2.1 E.U.T. Operation

Operating Environment:
 Temperature: 23.8 °C Humidity: 54.5 % RH Atmospheric Pressure: 1020 mbar

7.2.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	
Final test 05	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with FSK modulation.

7.2.3 Test Setup Diagram

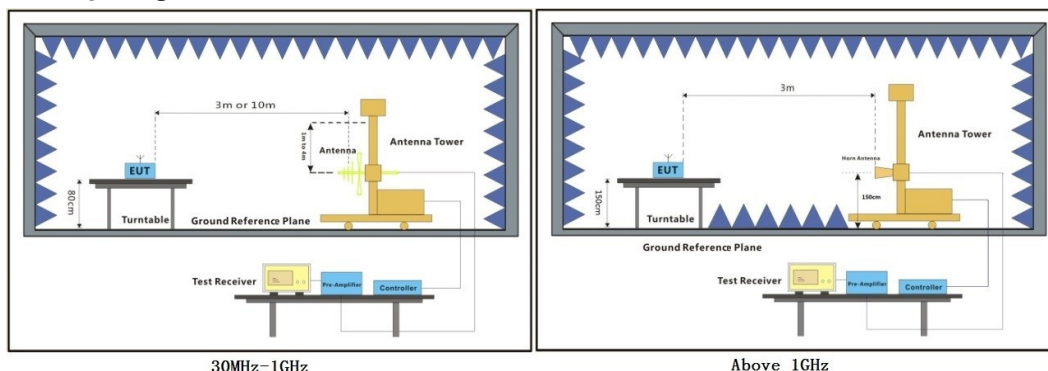

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



7.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Remark 3: The point 6 in each test plot was the fundamental frequency of the EUT and please refer to section 7.5 for details.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (EMC) EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Test Mode: 05; Polarity: Horizontal

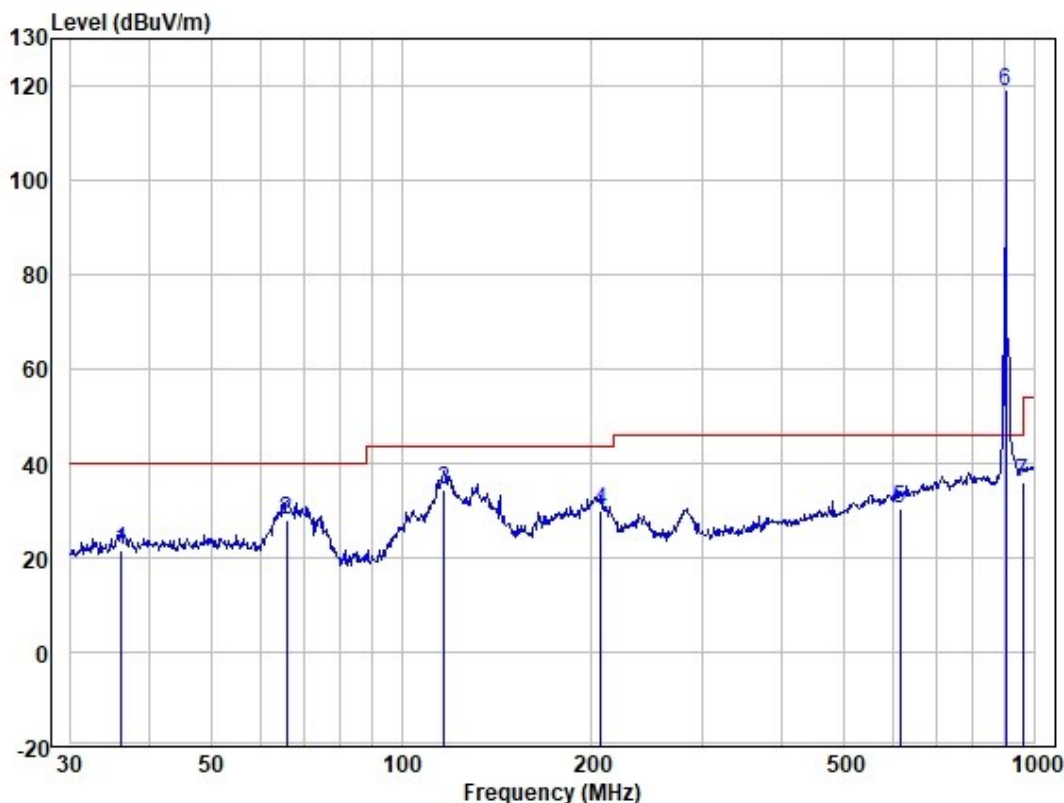


Site : 966 Chamber
Job :
Model :
Power :
Test Mode : 902

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	36.127	33.87	18.70	0.23	31.07	21.73	40.00	-18.27	HORIZONTAL	QP
2	65.803	40.67	18.00	0.45	31.17	27.95	40.00	-12.05	HORIZONTAL	QP
3	116.950	48.19	16.71	0.71	31.41	34.20	43.52	-9.32	HORIZONTAL	QP
4	206.398	45.10	15.58	0.96	31.50	30.14	43.52	-13.38	HORIZONTAL	QP
5	614.000	34.02	25.88	1.88	31.37	30.41	46.02	-15.61	HORIZONTAL	QP
6	903.309	117.82	29.00	2.19	30.12	118.89	46.02	72.87	HORIZONTAL	Peak
7	960.000	33.34	30.12	2.34	29.63	36.17	46.02	-9.85	HORIZONTAL	QP



Test Mode: 05; Polarity: Horizontal

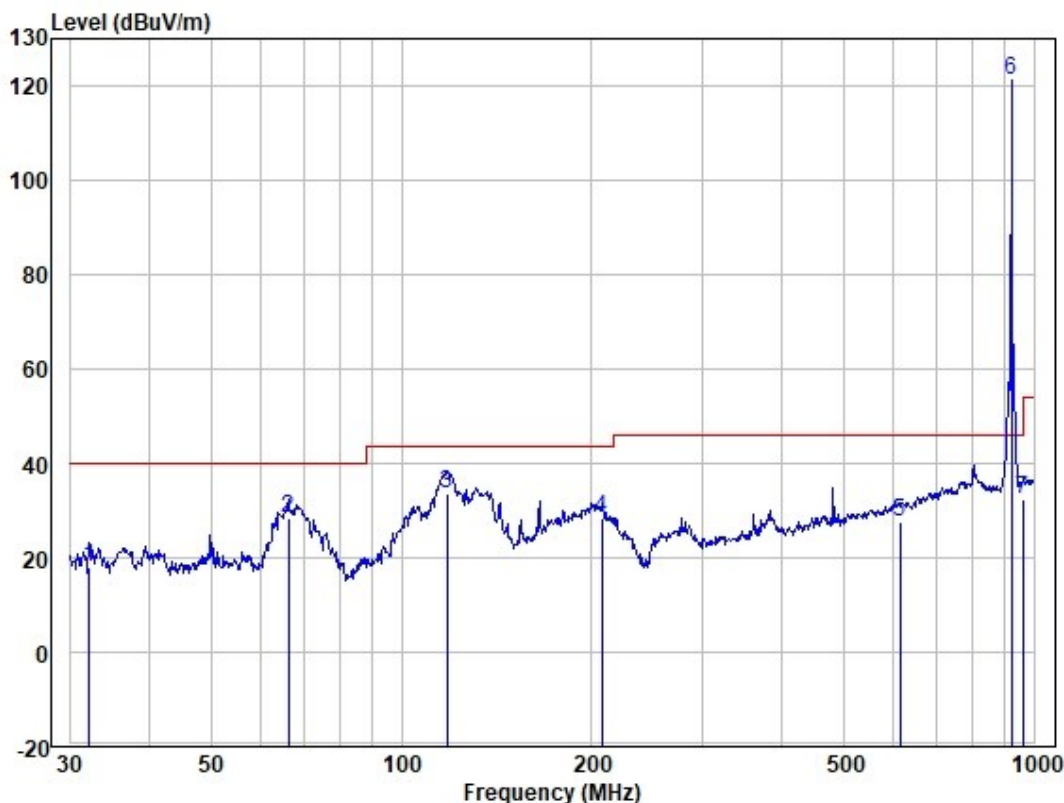


Site : 966 Chamber
Job :
Model :
Power :
Test Mode : 918

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	32.179	30.85	18.07	0.19	31.06	18.05	40.00	-21.95	HORIZONTAL	QP
2	66.266	41.31	18.00	0.45	31.17	28.59	40.00	-11.41	HORIZONTAL	QP
3	118.186	47.50	16.79	0.72	31.41	33.60	43.52	-9.92	HORIZONTAL	QP
4	207.123	43.53	15.56	0.96	31.50	28.55	43.52	-14.97	HORIZONTAL	QP
5	614.000	31.03	25.88	1.88	31.37	27.42	46.02	-18.60	HORIZONTAL	QP
6	919.287	119.15	29.57	2.21	29.89	121.04	46.02	75.02	HORIZONTAL	Peak
7	960.000	29.69	30.12	2.34	29.63	32.52	46.02	-13.50	HORIZONTAL	QP



Test Mode: 05; Polarity: Horizontal

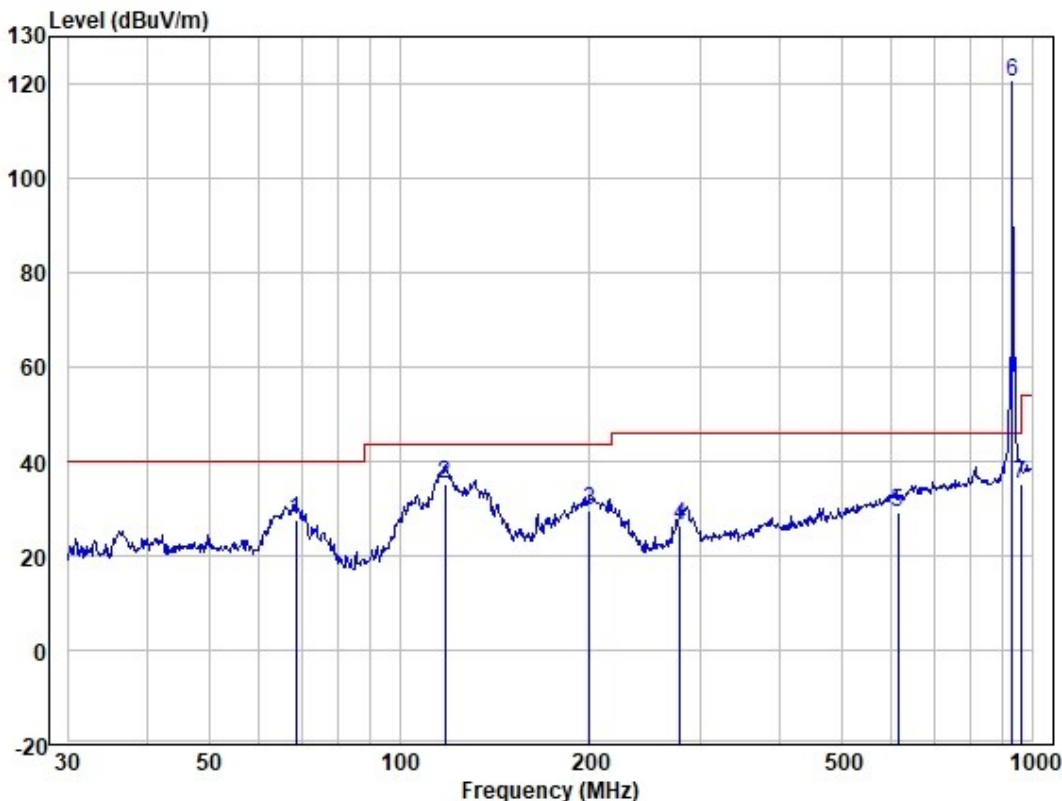


Site : 966 Chamber
Job :
Model :
Power :
Test Mode : 927

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	68.631	40.81	17.50	0.47	31.19	27.59	40.00	-12.41	HORIZONTAL	QP
2	118.186	48.96	16.79	0.72	31.41	35.06	43.52	-8.46	HORIZONTAL	QP
3	199.986	44.55	15.76	0.95	31.50	29.76	43.52	-13.76	HORIZONTAL	QP
4	278.067	38.03	18.70	1.19	31.50	26.42	46.02	-19.60	HORIZONTAL	QP
5	614.000	32.62	25.88	1.88	31.37	29.01	46.02	-17.01	HORIZONTAL	QP
6	929.008	118.00	29.77	2.23	29.80	120.20	46.02	74.18	HORIZONTAL	Peak
7	960.000	32.23	30.12	2.34	29.63	35.06	46.02	-10.96	HORIZONTAL	QP



Test Mode: 05; Polarity: Vertical

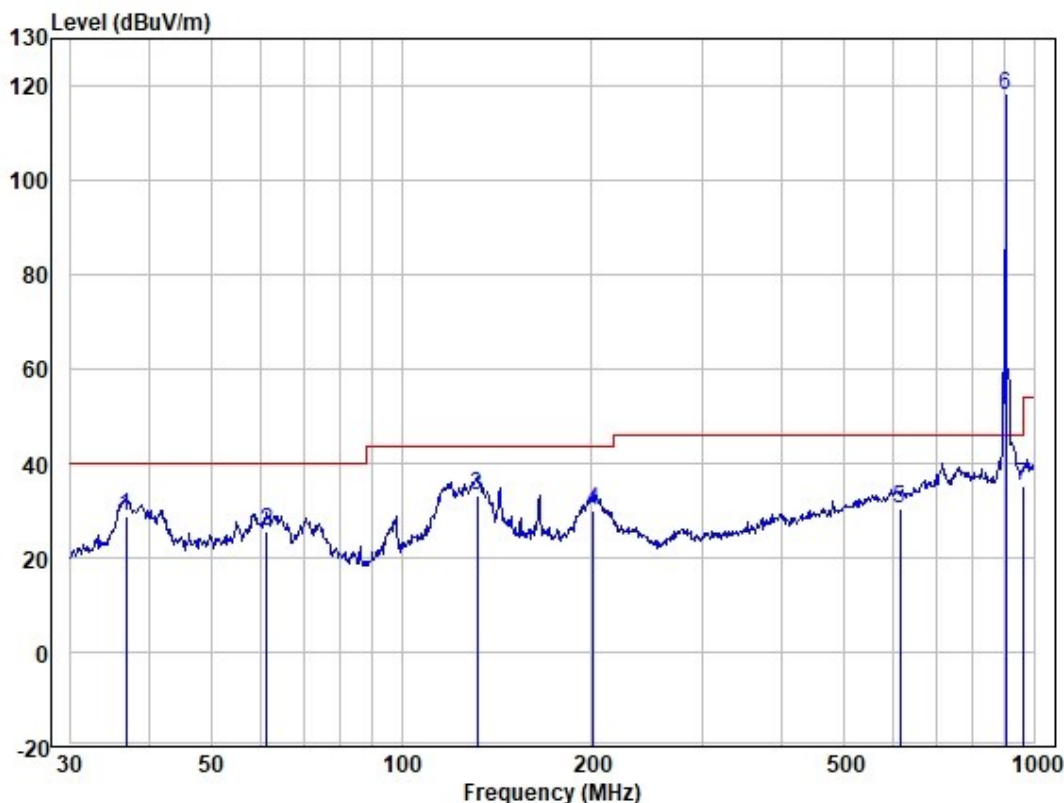


Site : 966 Chamber
Job :
Model :
Power :
Test Mode : 902

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	36.766	40.60	18.84	0.24	31.07	28.61	40.00	-11.39	VERTICAL	QP
2	61.346	37.38	18.82	0.42	31.15	25.47	40.00	-14.53	VERTICAL	QP
3	131.758	45.72	18.03	0.78	31.42	33.11	43.52	-10.41	VERTICAL	QP
4	201.393	44.82	15.71	0.95	31.50	29.98	43.52	-13.54	VERTICAL	QP
5	614.000	34.00	25.88	1.88	31.37	30.39	46.02	-15.63	VERTICAL	QP
6	903.309	117.04	29.00	2.19	30.12	118.11	46.02	72.09	VERTICAL	Peak
7	960.000	32.42	30.12	2.34	29.63	35.25	46.02	-10.77	VERTICAL	QP



Test Mode: 05; Polarity: Vertical

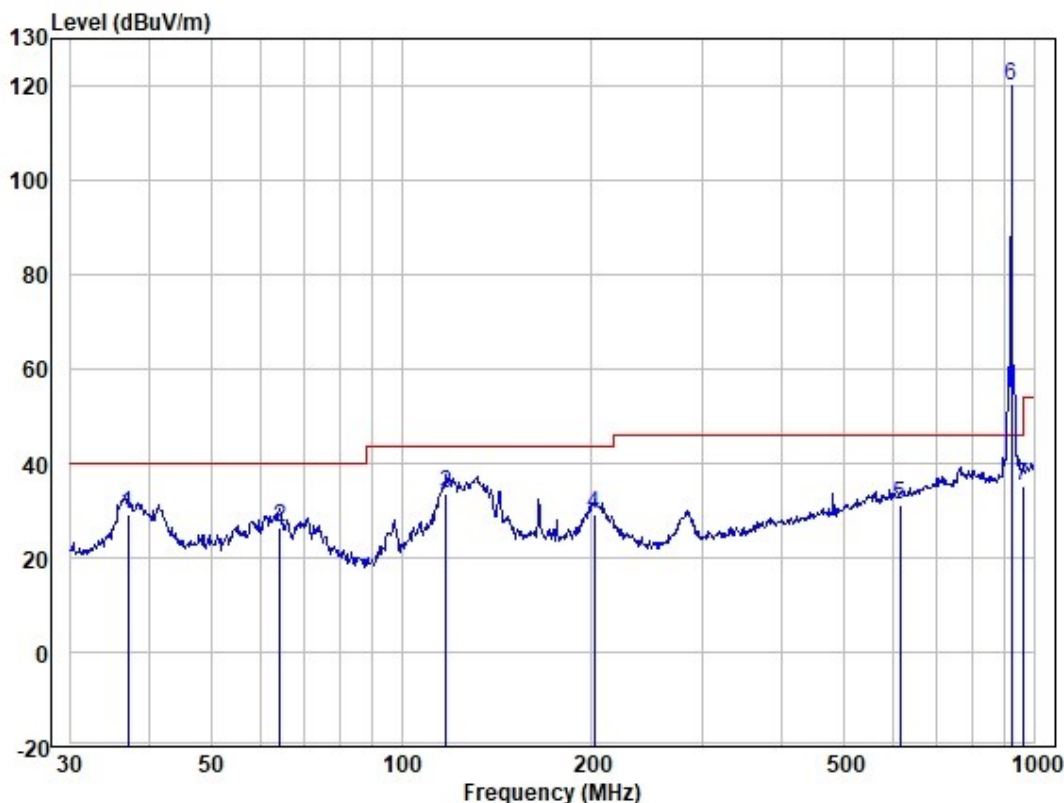


Site : 966 Chamber
Job :
Model :
Power :
Test Mode : 918

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	37.025	41.02	18.84	0.24	31.07	29.03	40.00	-10.97	VERTICAL	QP
2	64.208	38.79	18.37	0.44	31.16	26.44	40.00	-13.56	VERTICAL	QP
3	117.773	47.42	16.71	0.72	31.41	33.44	43.52	-10.08	VERTICAL	QP
4	202.100	44.05	15.71	0.95	31.50	29.21	43.52	-14.31	VERTICAL	QP
5	614.000	34.76	25.88	1.88	31.37	31.15	46.02	-14.87	VERTICAL	QP
6	919.287	118.05	29.57	2.21	29.89	119.94	46.02	73.92	VERTICAL	Peak
7	960.000	32.45	30.12	2.34	29.63	35.28	46.02	-10.74	VERTICAL	QP



Test Mode: 05; Polarity: Vertical

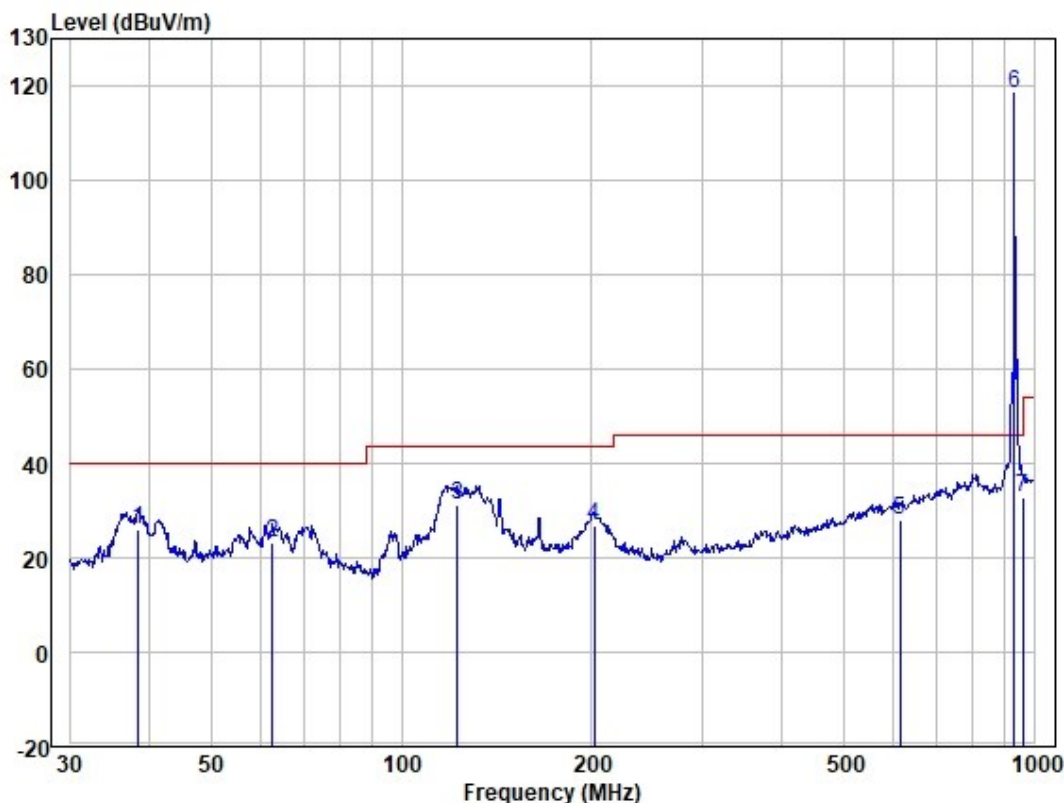

Site : 966 Chamber
Job :
Model :
Power :
Test Mode : 927

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	38.481	37.64	19.09	0.25	31.08	25.90	40.00	-14.10	VERTICAL	QP
2	62.651	35.44	18.57	0.43	31.16	23.28	40.00	-16.72	VERTICAL	QP
3	122.834	44.69	17.17	0.77	31.41	31.22	43.52	-12.30	VERTICAL	QP
4	202.100	41.50	15.71	0.95	31.50	26.66	43.52	-16.86	VERTICAL	QP
5	614.000	31.46	25.88	1.88	31.37	27.85	46.02	-18.17	VERTICAL	QP
6	929.008	116.28	29.77	2.23	29.80	118.48	46.02	72.46	VERTICAL	Peak
7	960.000	30.15	30.12	2.34	29.63	32.98	46.02	-13.04	VERTICAL	QP



7.3 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.4,6.5

Test Engineer: Jarry Li

Limit:

Test Distance: 3m

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

Note

1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

2. At frequencies below 1GHz, measurements may be performed at a distance different to specified in the regulations.

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Below 30MHz, Aux Factor = 40 dB/decade of distance, the aux factor is $40\log(3/300) = -80\text{dB}$ (for 3m test distance).

EX. Above 30MHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(10/3) = 10.46\text{dB}$ (for 10m test distance).

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 54.1 % RH


Atmospheric Pressure: 1007 mbar

7.3.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	
Final test 05	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with FSK modulation.



7.3.3 Test Setup Diagram

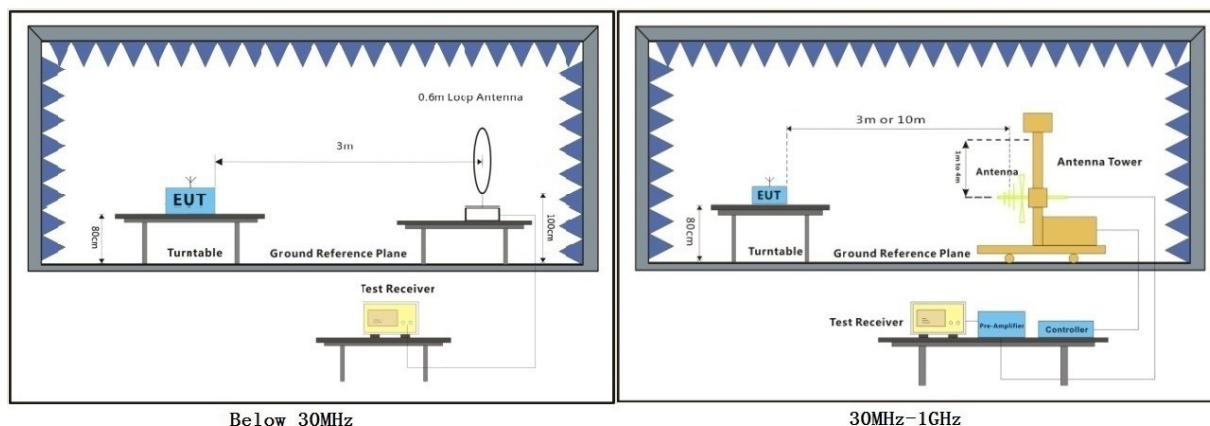

7.3.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8m above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3m or 10m away from the interference-receiving antenna, which was mounted on the variable-height antenna tower.
- The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1m) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark:


- Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only below points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the worst-case test curve is displayed.
- The point 6 in each test plot was the fundamental frequency of the EUT and please refer to section 7.5 for details.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 05; Polarity: Horizontal

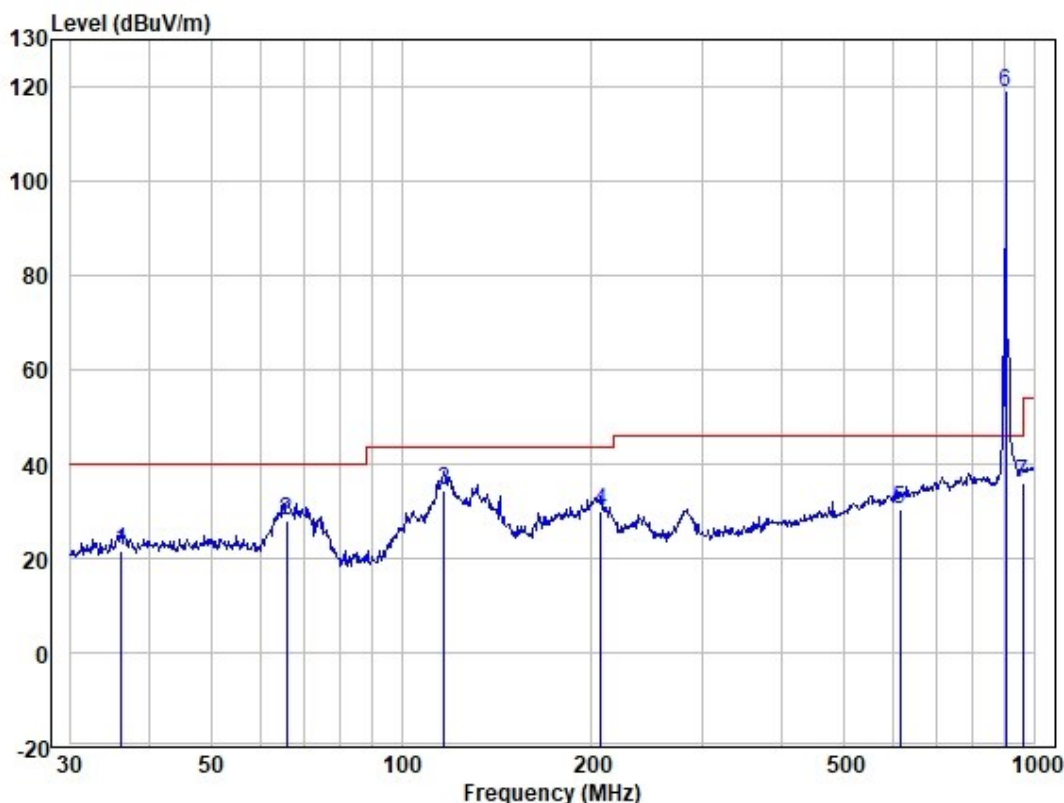


Site : 966 Chamber
Job :
Model :
Power :
Test Mode : 902

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	36.127	33.87	18.70	0.23	31.07	21.73	40.00	-18.27	HORIZONTAL	QP
2	65.803	40.67	18.00	0.45	31.17	27.95	40.00	-12.05	HORIZONTAL	QP
3	116.950	48.19	16.71	0.71	31.41	34.20	43.52	-9.32	HORIZONTAL	QP
4	206.398	45.10	15.58	0.96	31.50	30.14	43.52	-13.38	HORIZONTAL	QP
5	614.000	34.02	25.88	1.88	31.37	30.41	46.02	-15.61	HORIZONTAL	QP
6	903.309	117.82	29.00	2.19	30.12	118.89	46.02	72.87	HORIZONTAL	Peak
7	960.000	33.34	30.12	2.34	29.63	36.17	46.02	-9.85	HORIZONTAL	QP



Test Mode: 05; Polarity: Horizontal

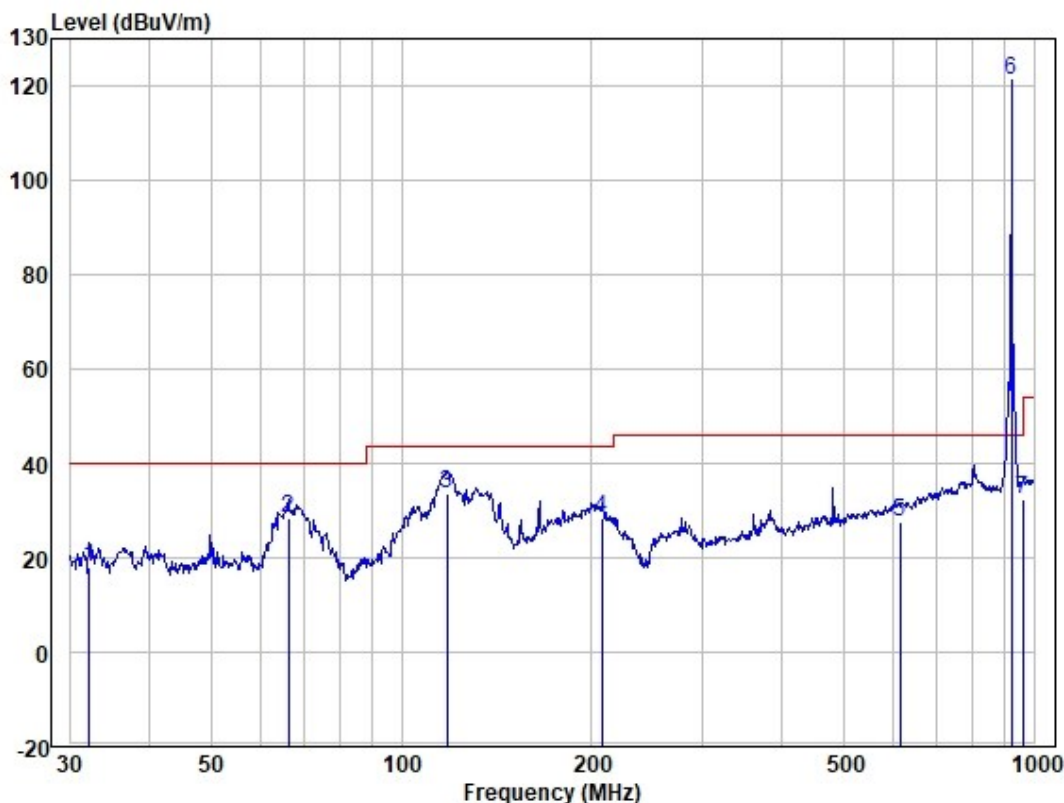


Site : 966 Chamber
Job :
Model :
Power :
Test Mode : 918

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	32.179	30.85	18.07	0.19	31.06	18.05	40.00	-21.95	HORIZONTAL	QP
2	66.266	41.31	18.00	0.45	31.17	28.59	40.00	-11.41	HORIZONTAL	QP
3	118.186	47.50	16.79	0.72	31.41	33.60	43.52	-9.92	HORIZONTAL	QP
4	207.123	43.53	15.56	0.96	31.50	28.55	43.52	-14.97	HORIZONTAL	QP
5	614.000	31.03	25.88	1.88	31.37	27.42	46.02	-18.60	HORIZONTAL	QP
6	919.287	119.15	29.57	2.21	29.89	121.04	46.02	75.02	HORIZONTAL	Peak
7	960.000	29.69	30.12	2.34	29.63	32.52	46.02	-13.50	HORIZONTAL	QP



Test Mode: 05; Polarity: Horizontal

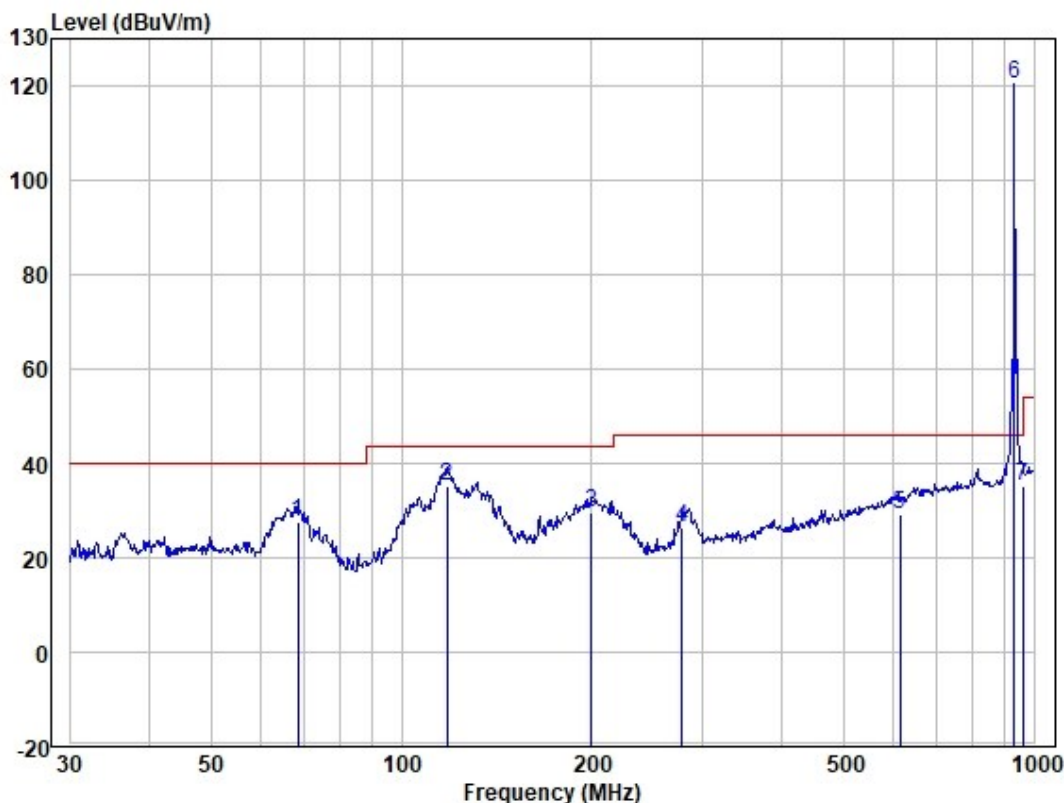


Site : 966 Chamber
Job :
Model :
Power :
Test Mode : 927

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	68.631	40.81	17.50	0.47	31.19	27.59	40.00	-12.41	HORIZONTAL	QP
2	118.186	48.96	16.79	0.72	31.41	35.06	43.52	-8.46	HORIZONTAL	QP
3	199.986	44.55	15.76	0.95	31.50	29.76	43.52	-13.76	HORIZONTAL	QP
4	278.067	38.03	18.70	1.19	31.50	26.42	46.02	-19.60	HORIZONTAL	QP
5	614.000	32.62	25.88	1.88	31.37	29.01	46.02	-17.01	HORIZONTAL	QP
6	929.008	118.00	29.77	2.23	29.80	120.20	46.02	74.18	HORIZONTAL	Peak
7	960.000	32.23	30.12	2.34	29.63	35.06	46.02	-10.96	HORIZONTAL	QP



Test Mode: 05; Polarity: Vertical

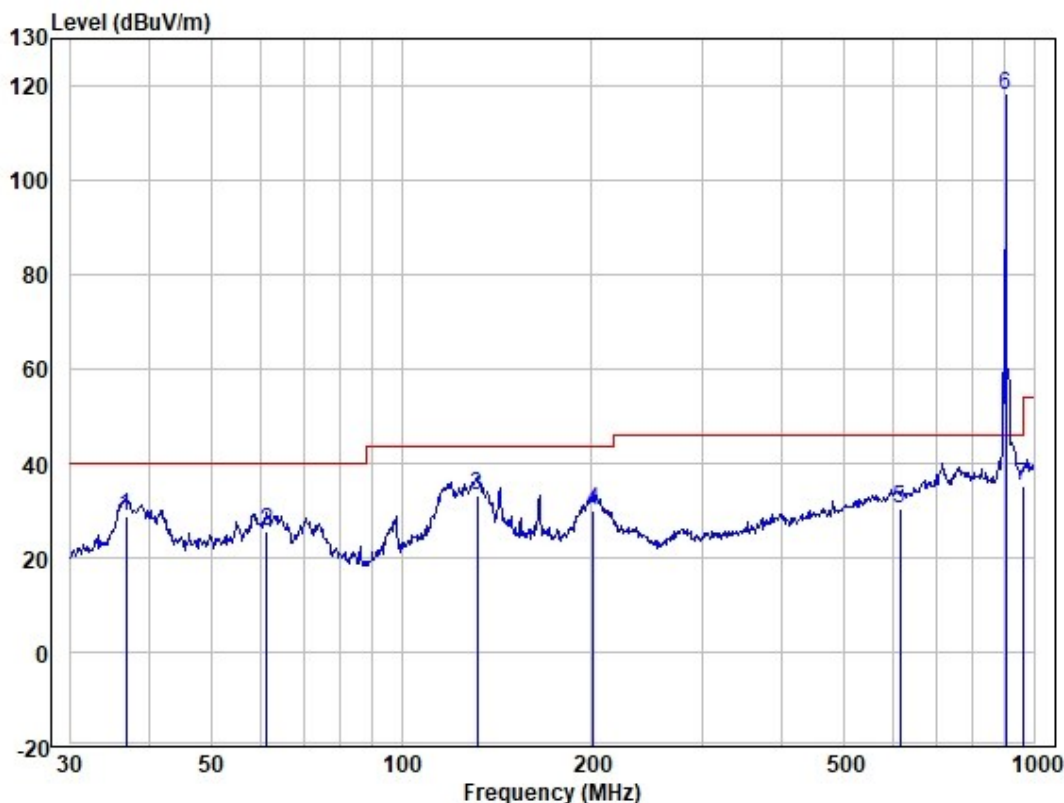


Site : 966 Chamber
Job :
Model :
Power :
Test Mode : 902

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	36.766	40.60	18.84	0.24	31.07	28.61	40.00	-11.39	VERTICAL	QP
2	61.346	37.38	18.82	0.42	31.15	25.47	40.00	-14.53	VERTICAL	QP
3	131.758	45.72	18.03	0.78	31.42	33.11	43.52	-10.41	VERTICAL	QP
4	201.393	44.82	15.71	0.95	31.50	29.98	43.52	-13.54	VERTICAL	QP
5	614.000	34.00	25.88	1.88	31.37	30.39	46.02	-15.63	VERTICAL	QP
6	903.309	117.04	29.00	2.19	30.12	118.11	46.02	72.09	VERTICAL	Peak
7	960.000	32.42	30.12	2.34	29.63	35.25	46.02	-10.77	VERTICAL	QP



Test Mode: 05; Polarity: Vertical

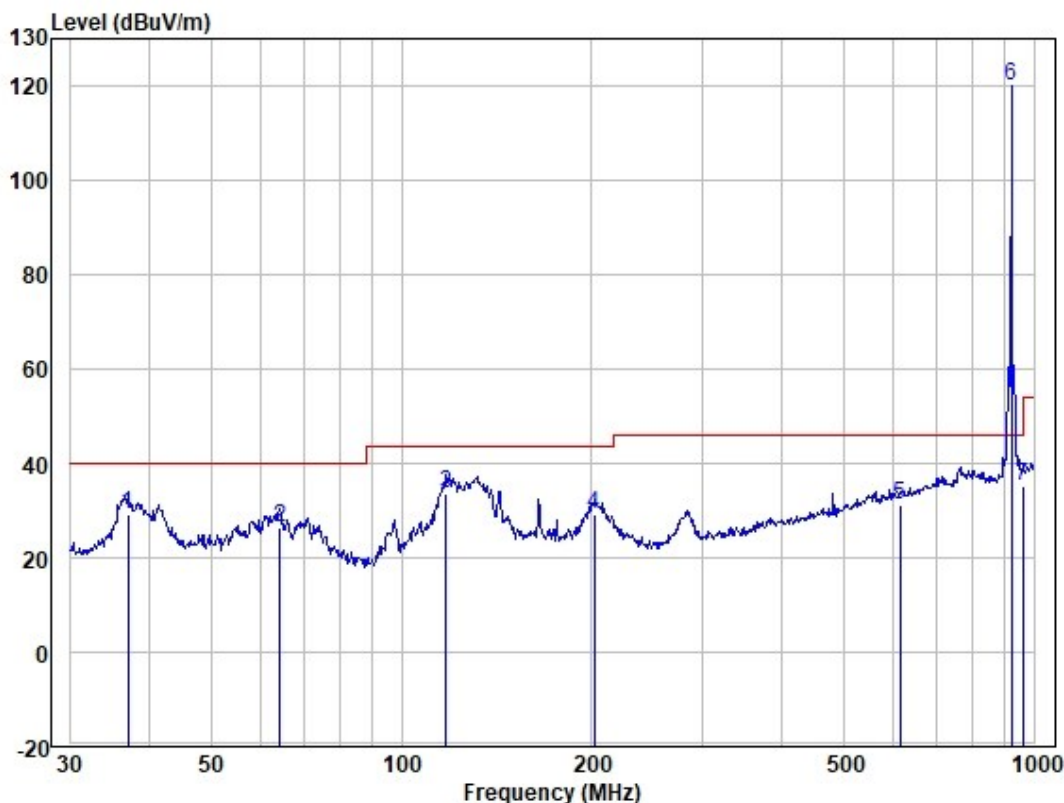


Site : 966 Chamber
Job :
Model :
Power :
Test Mode : 918

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	37.025	41.02	18.84	0.24	31.07	29.03	40.00	-10.97	VERTICAL	QP
2	64.208	38.79	18.37	0.44	31.16	26.44	40.00	-13.56	VERTICAL	QP
3	117.773	47.42	16.71	0.72	31.41	33.44	43.52	-10.08	VERTICAL	QP
4	202.100	44.05	15.71	0.95	31.50	29.21	43.52	-14.31	VERTICAL	QP
5	614.000	34.76	25.88	1.88	31.37	31.15	46.02	-14.87	VERTICAL	QP
6	919.287	118.05	29.57	2.21	29.89	119.94	46.02	73.92	VERTICAL	Peak
7	960.000	32.45	30.12	2.34	29.63	35.28	46.02	-10.74	VERTICAL	QP



Test Mode: 05; Polarity: Vertical

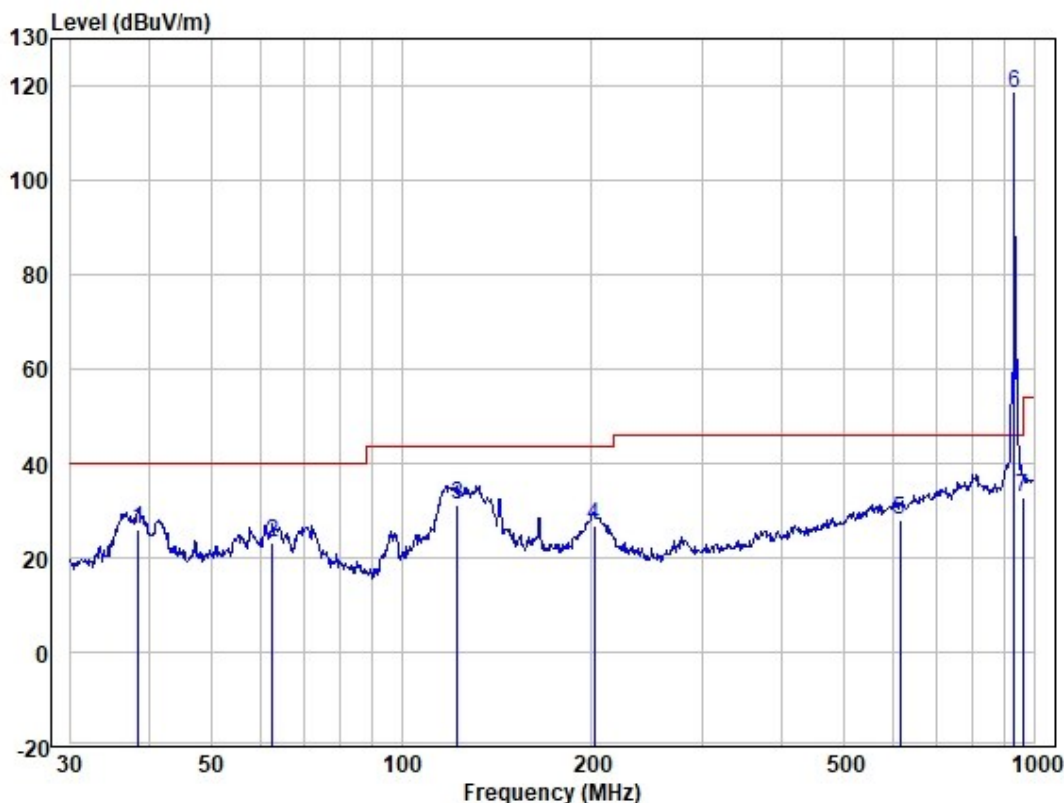

Site : 966 Chamber
Job :
Model :
Power :
Test Mode : 927

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	38.481	37.64	19.09	0.25	31.08	25.90	40.00	-14.10	VERTICAL	QP
2	62.651	35.44	18.57	0.43	31.16	23.28	40.00	-16.72	VERTICAL	QP
3	122.834	44.69	17.17	0.77	31.41	31.22	43.52	-12.30	VERTICAL	QP
4	202.100	41.50	15.71	0.95	31.50	26.66	43.52	-16.86	VERTICAL	QP
5	614.000	31.46	25.88	1.88	31.37	27.85	46.02	-18.17	VERTICAL	QP
6	929.008	116.28	29.77	2.23	29.80	118.48	46.02	72.46	VERTICAL	Peak
7	960.000	30.15	30.12	2.34	29.63	32.98	46.02	-13.04	VERTICAL	QP



7.4 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.6 & 7.8.8

Test Engineer:

Limit:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
Above 1000	500	3

Note:

At Above 18GHz, measurements may be performed at a distance shorter than that specified in the regulations

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Above 18GHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(1/3) = -9.54\text{dB}$ (for 1m test distance).

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 24.1 °C

Humidity: 53.3 % RH


Atmospheric Pressure: 1007 mbar

7.4.2 Test Mode Description

Pre-scan / Mode
Final test Code Description

Final test 05 TX_non-Hop mode_Keep the EUT in continuously transmitting mode with FSK modulation.

7.4.3 Test Setup Diagram

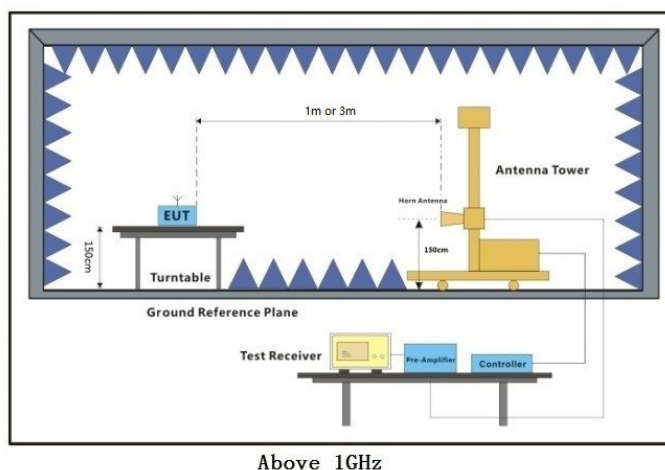

7.4.4 Measurement Procedure and Data


- For above 1GHz, the EUT was placed on the top of a rotating table 1.5m above the ground at a 3m fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3m away from the interference-receiving antenna from 1GHz to 18GHz, and 1m away from the interference-receiving antenna above 18GHz.
- The interference-receiving antenna was mounted on the variable-height antenna tower, with its boresight facing the EUT throughout the test.
- The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark:

- Scan from 1GHz to 10th harmonic of the highest frequency or 40 GHz, whichever is lower.
- As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
- For the frequency above 18GHz, testing had been executed under all test modes, only the worst-case test curve is displayed in the report.
- For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst-case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.




Test Mode: 06; Polarity: Vertical; Modulation:FSK; Channel:Low

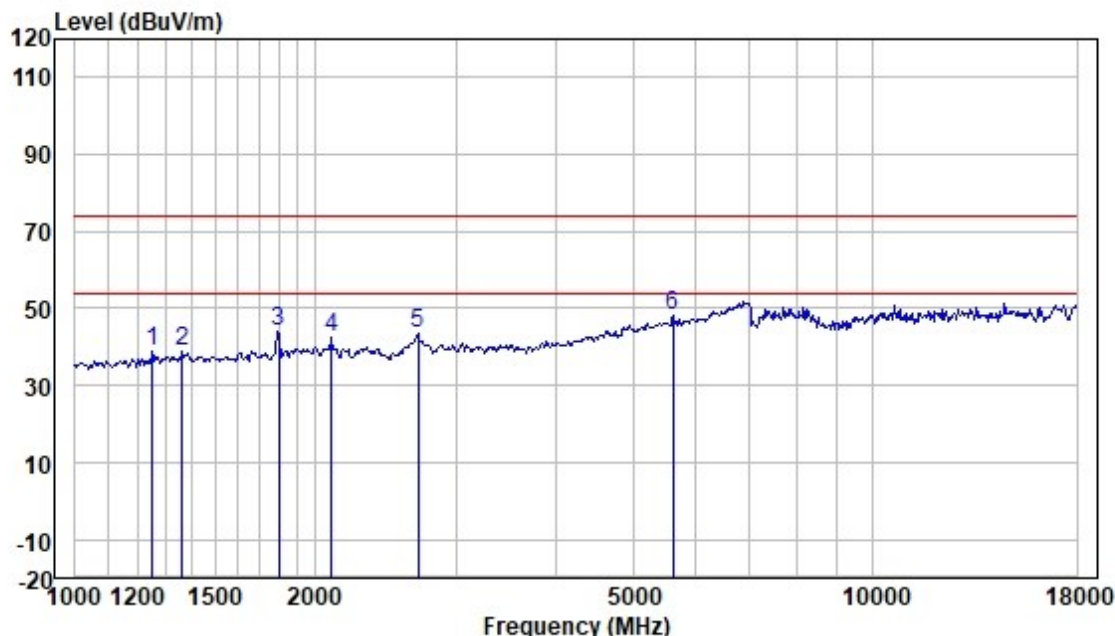

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1252.89	49.46	25.42	2.52	38.63	38.77	74.00	-35.23	VERTICAL	Peak
2	1366.37	48.95	25.74	2.64	38.51	38.82	74.00	-35.18	VERTICAL	Peak
3	1804.40	52.59	26.46	3.01	37.94	44.12	74.00	-29.88	VERTICAL	Peak
4	2095.80	50.33	26.79	3.17	37.79	42.50	74.00	-31.50	VERTICAL	Peak
5	2695.00	49.44	28.10	3.60	37.73	43.41	74.00	-30.59	VERTICAL	Peak
6	5615.62	47.69	32.23	5.21	37.14	47.99	74.00	-26.01	VERTICAL	Peak




Test Mode: 06; Polarity: Horizontal; Modulation:FSK; Channel:Low

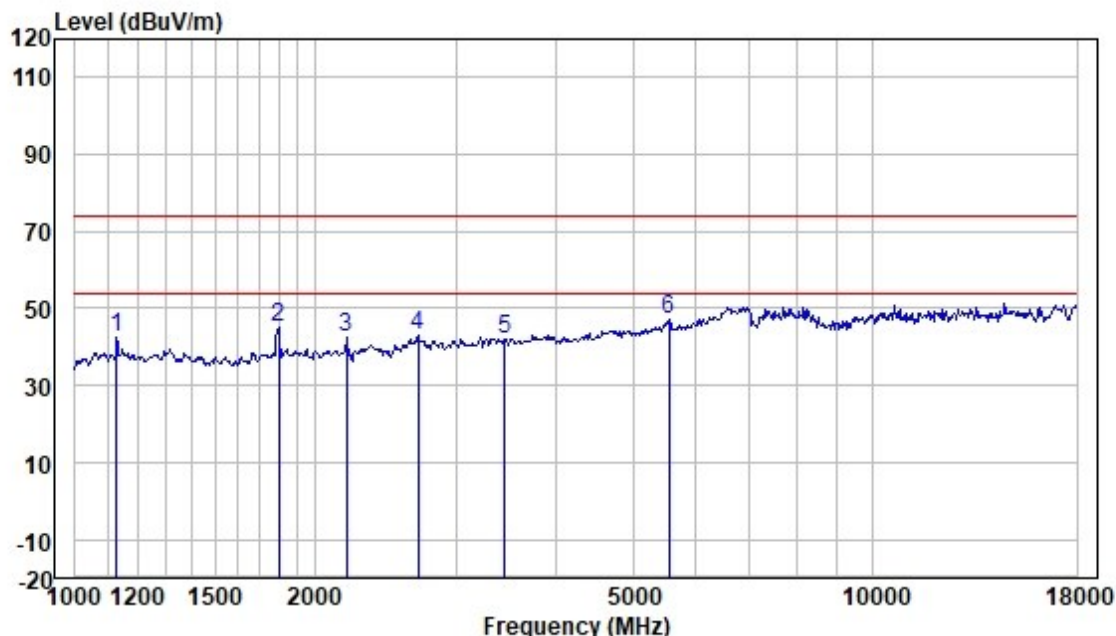

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1129.07	54.01	24.79	2.30	38.72	42.38	74.00	-31.62	HORIZONTAL	Peak
2	1804.40	53.79	26.46	3.01	37.94	45.32	74.00	-28.68	HORIZONTAL	Peak
3	2188.66	50.02	27.02	3.24	37.79	42.49	74.00	-31.51	HORIZONTAL	Peak
4	2695.00	49.09	28.10	3.60	37.73	43.06	74.00	-30.94	HORIZONTAL	Peak
5	3455.51	46.59	28.96	4.08	37.55	42.08	74.00	-31.92	HORIZONTAL	Peak
6	5551.07	47.00	32.15	5.18	37.15	47.18	74.00	-26.82	HORIZONTAL	Peak




Test Mode: 06; Polarity: Vertical; Modulation:FSK; Channel:middle

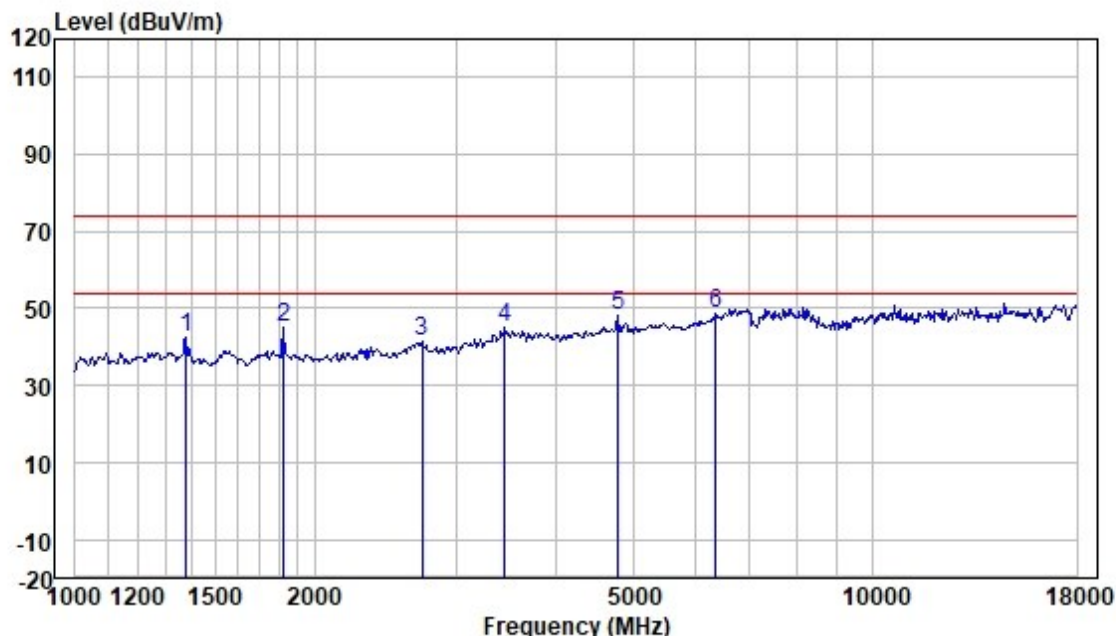

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1378.27	52.48	25.76	2.65	38.51	42.38	74.00	-31.62	VERTICAL	Peak
2	1830.00	53.38	26.50	3.03	37.91	45.00	74.00	-29.00	VERTICAL	Peak
3	2726.34	47.45	28.20	3.64	37.72	41.57	74.00	-32.43	VERTICAL	Peak
4	3455.51	49.61	28.96	4.08	37.55	45.10	74.00	-28.90	VERTICAL	Peak
5	4790.25	49.06	31.48	4.80	37.38	47.96	74.00	-26.04	VERTICAL	Peak
6	6340.44	46.34	33.81	5.59	37.11	48.63	74.00	-25.37	VERTICAL	Peak




Test Mode: 06; Polarity: Horizontal; Modulation:FSK; Channel:middle

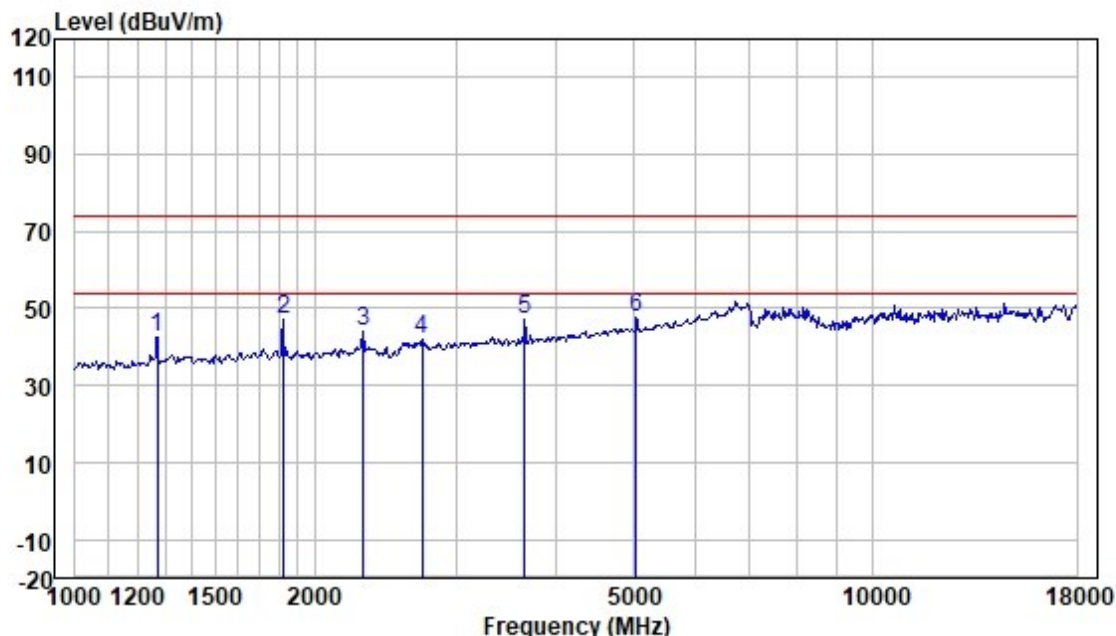

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1271.12	53.07	25.50	2.55	38.62	42.50	74.00	-31.50	HORIZONTAL	Peak
2	1830.00	55.69	26.50	3.03	37.91	47.31	74.00	-26.69	HORIZONTAL	Peak
3	2298.89	51.12	27.45	3.39	37.78	44.18	74.00	-29.82	HORIZONTAL	Peak
4	2726.34	47.84	28.20	3.64	37.72	41.96	74.00	-32.04	HORIZONTAL	Peak
5	3661.15	51.04	29.26	4.20	37.53	46.97	74.00	-27.03	HORIZONTAL	Peak
6	5046.06	48.28	31.80	4.92	37.27	47.73	74.00	-26.27	HORIZONTAL	Peak




Test Mode: 06; Polarity: Vertical; Modulation:FSK; Channel:High

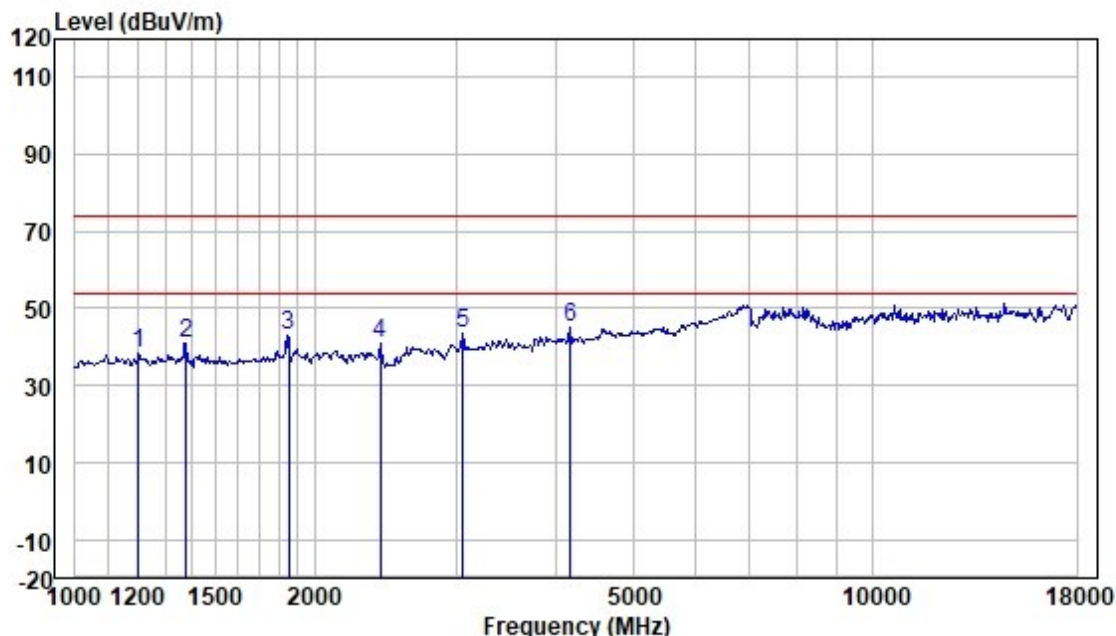

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1203.20	49.42	25.07	2.40	38.67	38.22	74.00	-35.78	VERTICAL	Peak
2	1378.27	51.31	25.76	2.65	38.51	41.21	74.00	-32.79	VERTICAL	Peak
3	1855.60	51.54	26.53	3.05	37.90	43.22	74.00	-30.78	VERTICAL	Peak
4	2414.67	47.42	27.67	3.46	37.77	40.78	74.00	-33.22	VERTICAL	Peak
5	3060.49	48.41	28.71	3.83	37.63	43.32	74.00	-30.68	VERTICAL	Peak
6	4181.77	47.88	30.29	4.54	37.48	45.23	74.00	-28.77	VERTICAL	Peak



Test Mode: 06; Polarity: Horizontal; Modulation:FSK; Channel:High

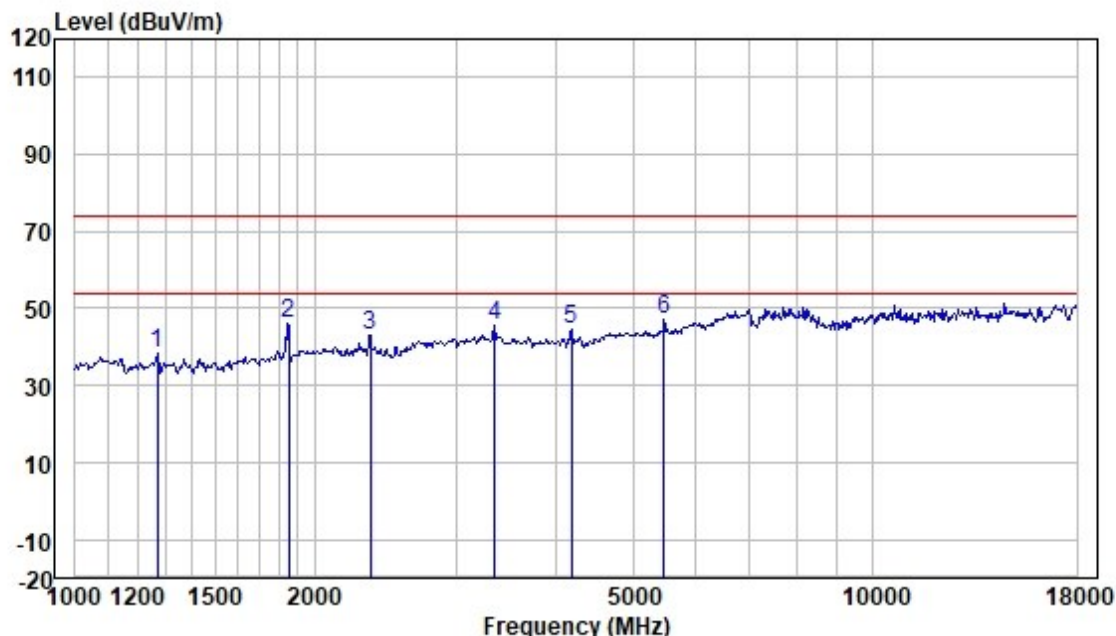

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1271.12	49.04	25.50	2.55	38.62	38.47	74.00	-35.53	HORIZONTAL	Peak
2	1855.62	54.41	26.53	3.05	37.90	46.09	74.00	-27.91	HORIZONTAL	Peak
3	2345.88	49.88	27.56	3.42	37.77	43.09	74.00	-30.91	HORIZONTAL	Peak
4	3357.06	50.15	28.92	4.04	37.56	45.55	74.00	-28.45	HORIZONTAL	Peak
5	4193.87	47.01	30.32	4.54	37.48	44.39	74.00	-29.61	HORIZONTAL	Peak
6	5471.42	47.12	32.09	5.15	37.16	47.20	74.00	-26.80	HORIZONTAL	Peak



7.5 Maximum Conducted Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(2)

Test Method: ANSI C63.10 (2020) Section 7.8.5

Test Engineer: Banna Ban

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 21.7 °C


Humidity: 67.0 % RH

Atmospheric Pressure: 1007 mbar

7.5.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	
Final test 05	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with FSK modulation.

7.5.3 Test Setup Diagram

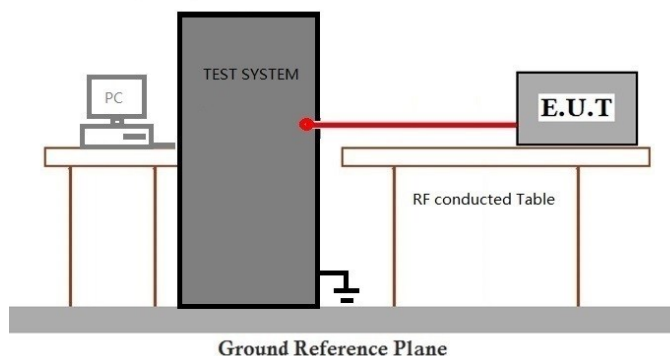

7.5.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (EMC) EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

7.6 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247(a)(1)

Test Method: ANSI C63.10 (2020) Section 6.9.2

Test Engineer: Banna Ban

Limit:

20 dB bandwidth of the hopping channel	Hopping frequencies	Average time of occupancy
less than 250 kHz	least 50 hopping frequencies	shall not be greater than 0.4 seconds within a 20 second period
250 kHz to 500kHz	least 25 hopping frequencies	shall not be greater than 0.4 seconds within a 10 second period.

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 21.7 °C

Humidity: 67.0 % RH


Atmospheric Pressure: 1007 mbar

7.6.2 Test Mode Description

Pre-scan / Mode Description
Final test Code

Final test 05 TX_non-Hop mode_Keep the EUT in continuously transmitting mode with FSK modulation.

7.6.3 Test Setup Diagram

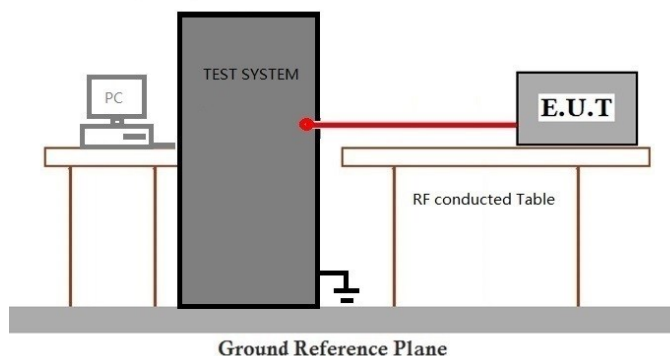

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Carrier Frequencies Separation

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)

Test Method: ANSI C63.10 (2020) Section 7.8.2

Test Engineer: Banna Ban

Limit:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 21.7 °C


Humidity: 67.0 % RH

Atmospheric Pressure: 1007 mbar

7.7.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	
Final test 04	TX_Hop mode_Keep the EUT in frequency hopping mode with FSK modulation.

7.7.3 Test Setup Diagram

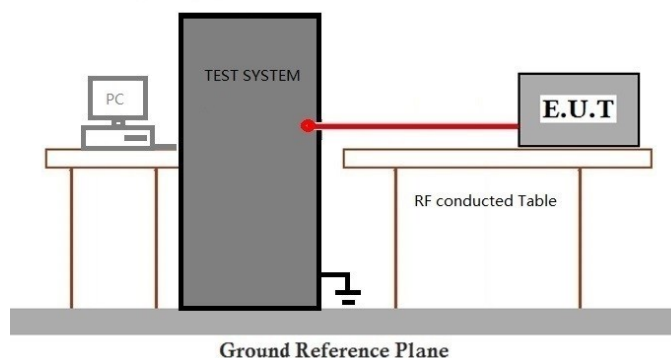

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Hopping Channel Number

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(i)

Test Method: ANSI C63.10 (2020) Section 7.8.3

Test Engineer: Banna Ban

Limit:

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 21.7 °C

Humidity: 67.0 % RH


Atmospheric Pressure: 1007 mbar

7.8.2 Test Mode Description

Pre-scan / Mode Description
Final test Code

Final test 04 TX_Hop mode_Keep the EUT in frequency hopping mode with FSK modulation.

7.8.3 Test Setup Diagram

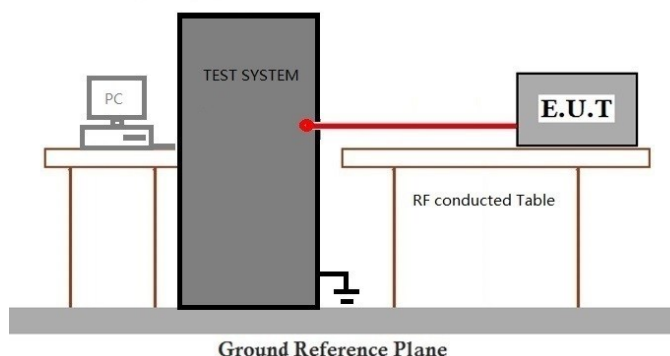

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch
Inspection & Testing Services
中国·广东·广州高新技术产业开发区科学城科珠路198号

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

7.9 Dwell Time

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(i)

Test Method: ANSI C63.10 (2020) Section 7.8.4

Test Engineer: Banna Ban

Limit:

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 21.7 °C

Humidity: 67.0 % RH


Atmospheric Pressure: 1007 mbar

7.9.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	

Final test	04	TX_Hop mode_Keep the EUT in frequency hopping mode with FSK modulation.
------------	----	---

7.9.3 Test Setup Diagram

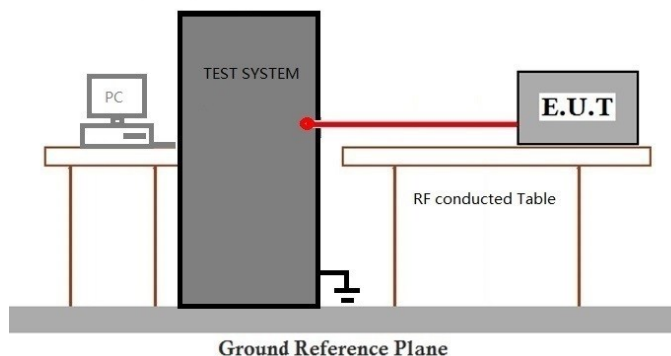

7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Inspection & Testing Services

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

7.10 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2020) Section 7.8.7.2

Test Engineer: Banna Ban

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 21.7 °C


Humidity: 67.0 % RH

Atmospheric Pressure: 1007 mbar

7.10.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	
Final test 04	TX_Hop mode_Keep the EUT in frequency hopping mode with FSK modulation.
Final test 05	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with FSK modulation.

7.10.3 Test Setup Diagram

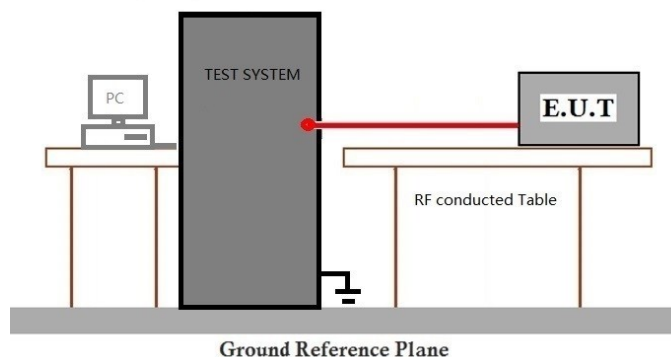

7.10.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.11 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2020) Section 7.8.7

Test Engineer: Banna Ban

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.11.1 E.U.T. Operation

Operating Environment:

Temperature: 21.7 °C


Humidity: 67.0 % RH

Atmospheric Pressure: 1007 mbar

7.11.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	
Final test 05	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with FSK modulation.

7.11.3 Test Setup Diagram

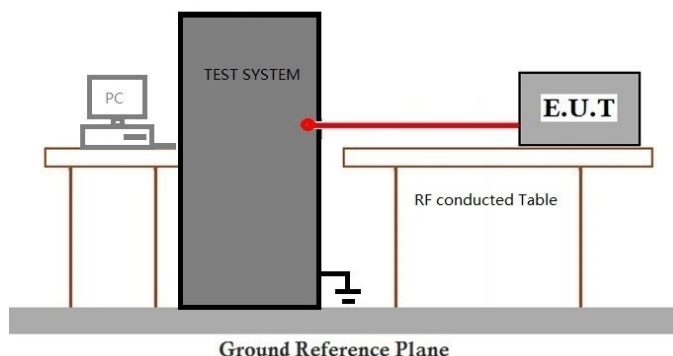

7.11.4 Measurement Procedure and Data

Please Refer to Appendix for Details

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for GZCR251100177202



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

9 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for GZCR2511001772MD



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch, EMC EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

10 Appendix

1. Bandwidth


1.1 Test Result

1.1.1 20dB BW


Mode	TX Type	Frequency (MHz)	ANT	20dB Bandwidth (MHz)		Verdict
				Result	Limit	
TX	SISO	902.2	1	0.108	/	Pass
		918	1	0.102	/	Pass
		927.8	1	0.105	/	Pass

1.2 Test Graph


1.2.1 20dB BW

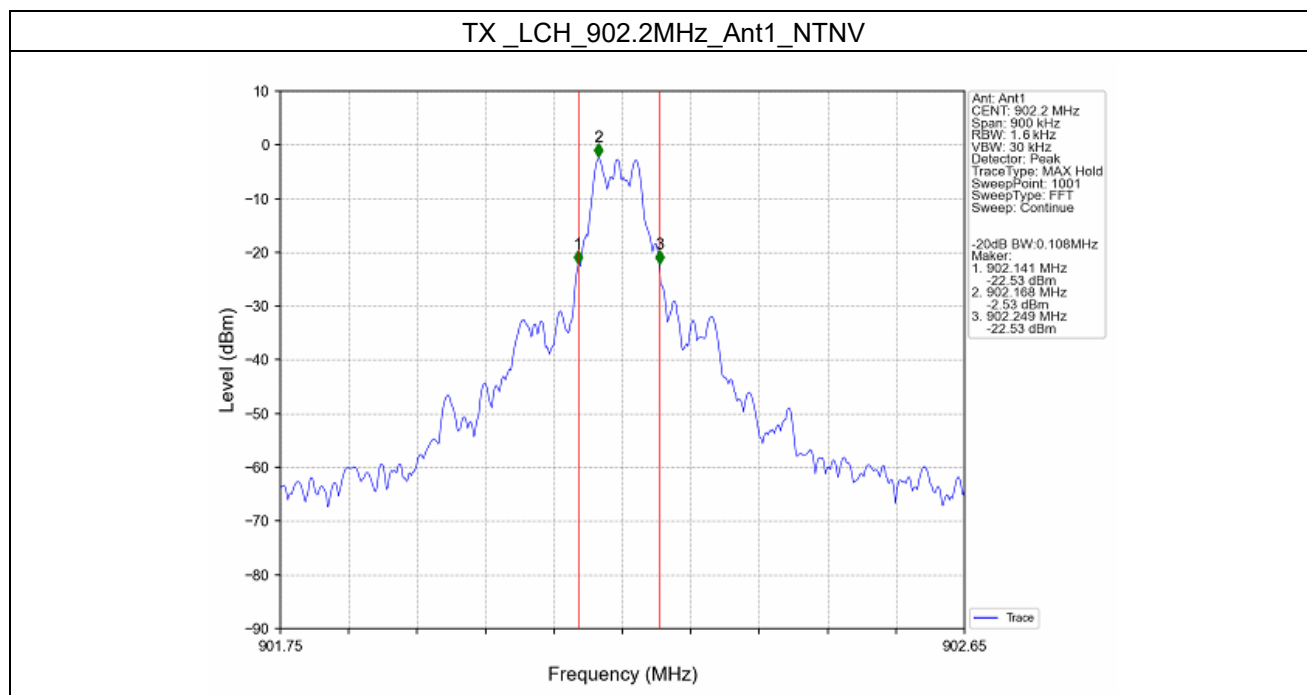

TX_MCH_918MHz_Ant1_NTNV

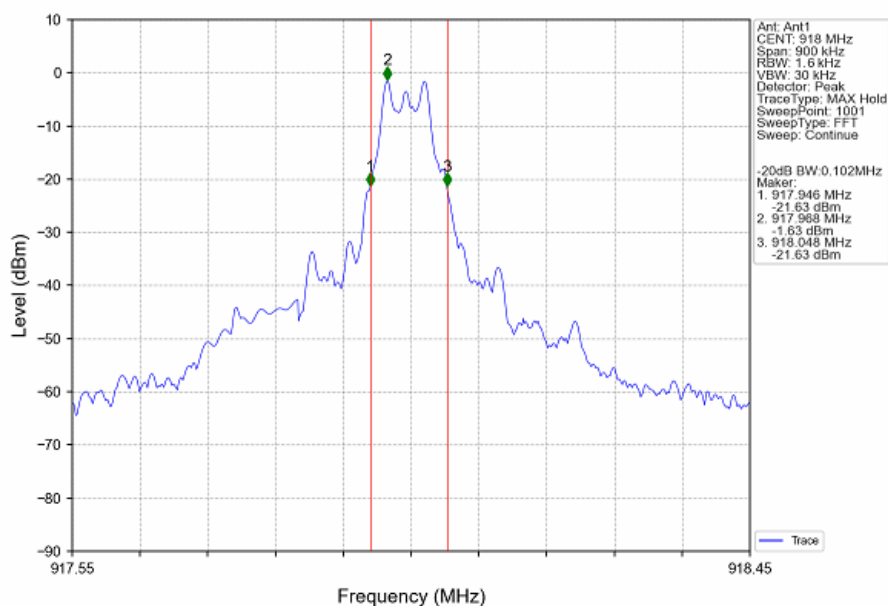

TX_HCH_927.8MHz_Ant1_NTNV

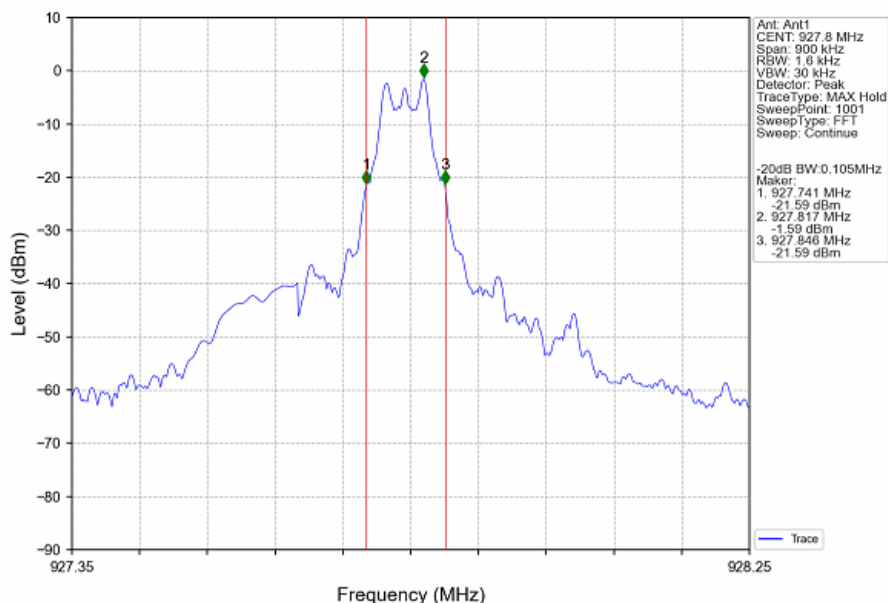

2. Maximum Conducted Output Power

2.1 Test Result

2.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
TX	SISO	902.2	28.49	<=30	Pass
		918	28.64	<=30	Pass
		927.8	28.27	<=30	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Testing Center EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

3. Carrier Frequency Separation


3.1 Test Result

3.1.1 Ant1

Ant1						
Mode	TX Type	Frequency (MHz)	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
TX	SISO	HOPP	0.273	0.104	≥ 0.104	Pass

3.2 Test Graph

3.2.1 Ant1

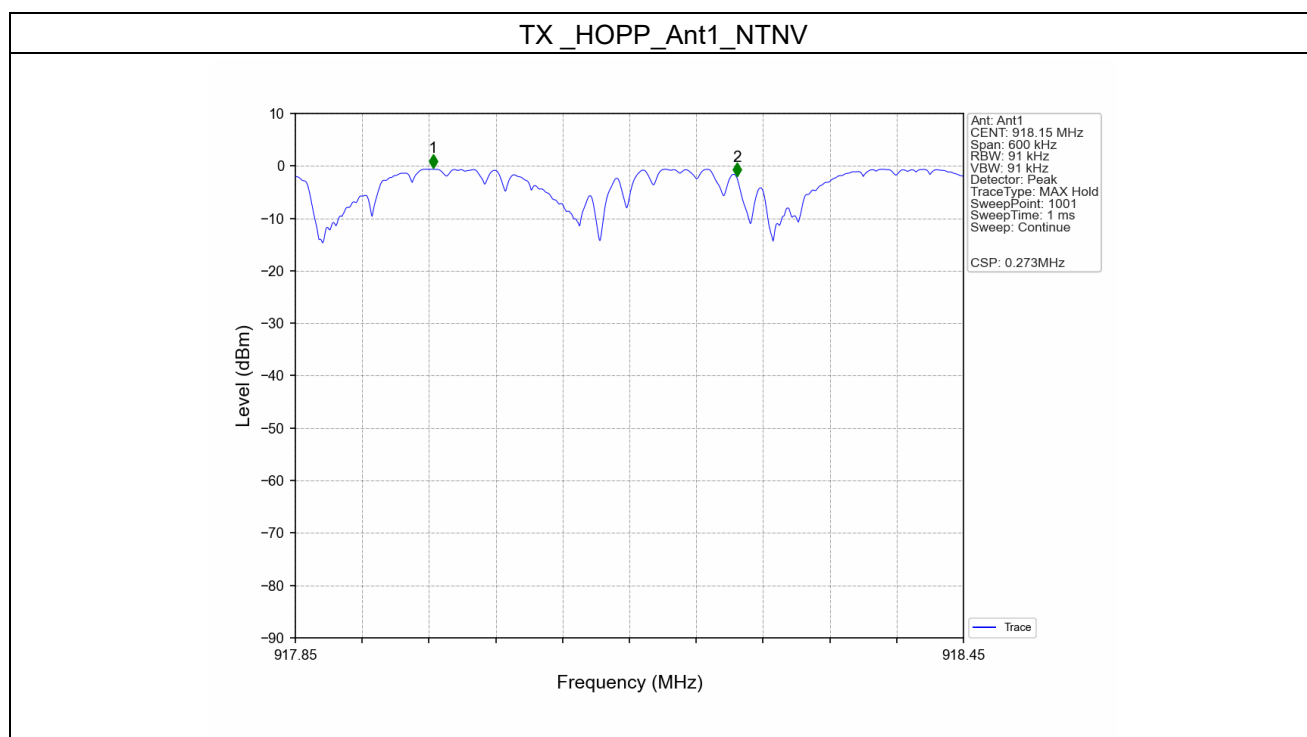

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4. Number of Hopping Frequencies


4.1 Test Result

4.1.1 HoppNum

Mode	TX Type	Frequency (MHz)	Num of Hopping Frequencies		Verdict
			ANT1	Limit	
TX	SISO	HOPP	129	>=50	Pass

4.2 Test Graph

4.2.1 HoppNum

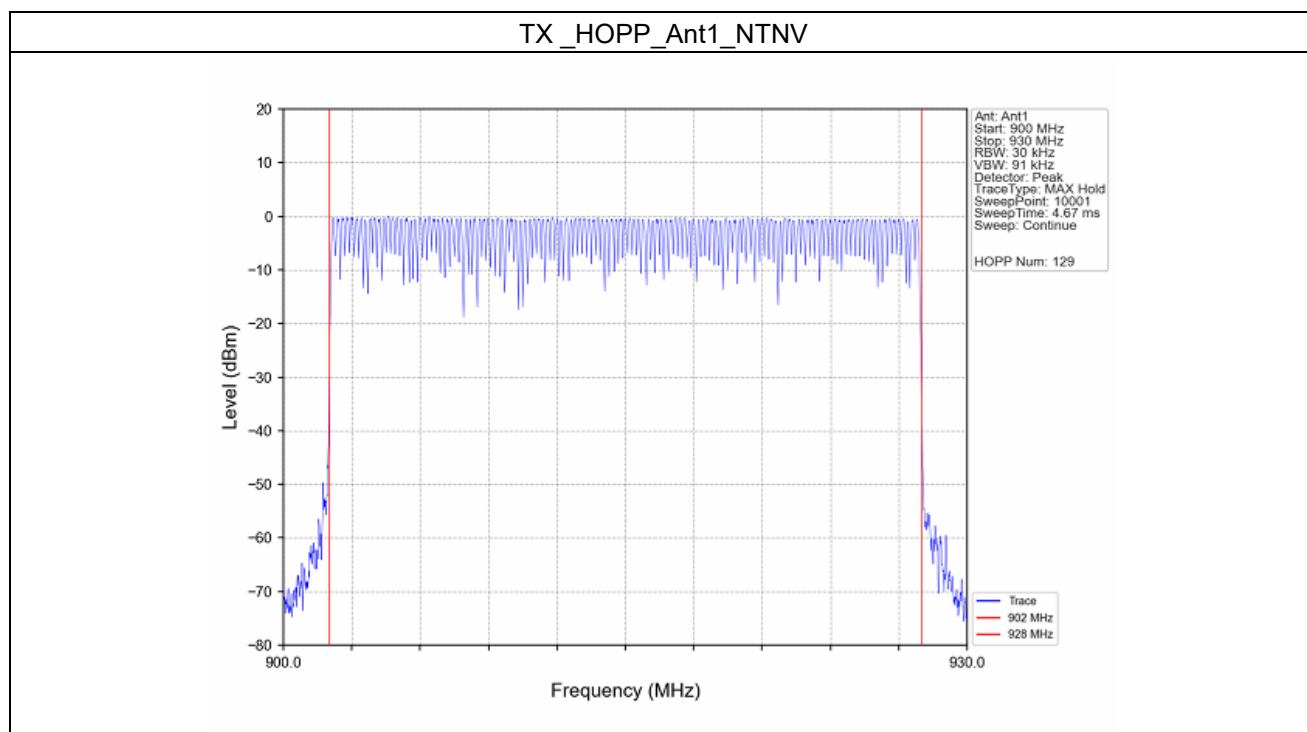

5. Time of Occupancy (Dwell Time)

5.1 Test Result

5.1.1 Ant1

Ant1								
Mode	TX Type	Frequency (MHz)	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
TX	SISO	HOPP	14.93	20.000	2	29.86	<=400	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch, EMC EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

5.2 Test Graph

5.2.1 Ant1

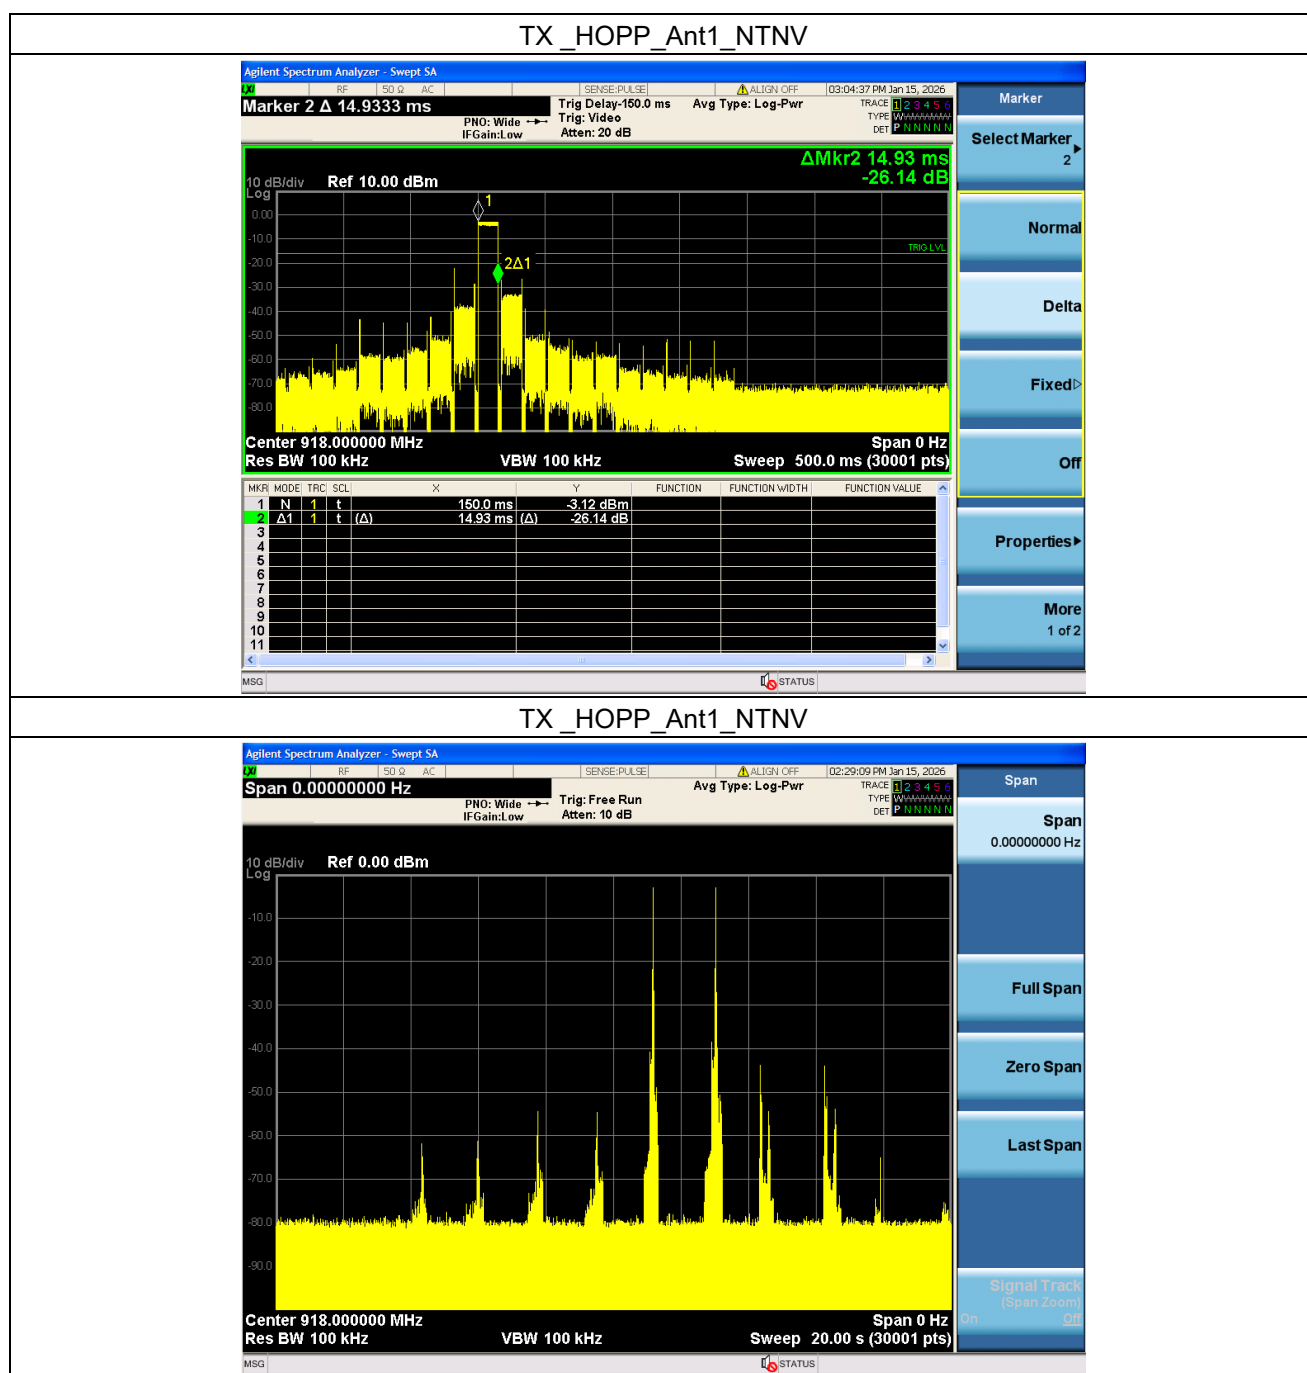

6. Unwanted Emissions In Non-restricted Frequency Bands

6.1 Test Result

6.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
TX	SISO	902.2	1	28.69
		918	1	28.38
		927.8	1	28.09

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


6.1.2 CSE and Band Edges

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
TX	SISO	902.2	1	28.69	8.69	Pass
		918	1	28.69	8.69	Pass
		927.8	1	28.69	8.69	Pass
		HOPP	1	28.69	8.69	Pass
				28.69	8.69	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

6.2 Test Graph

6.2.1 Ref

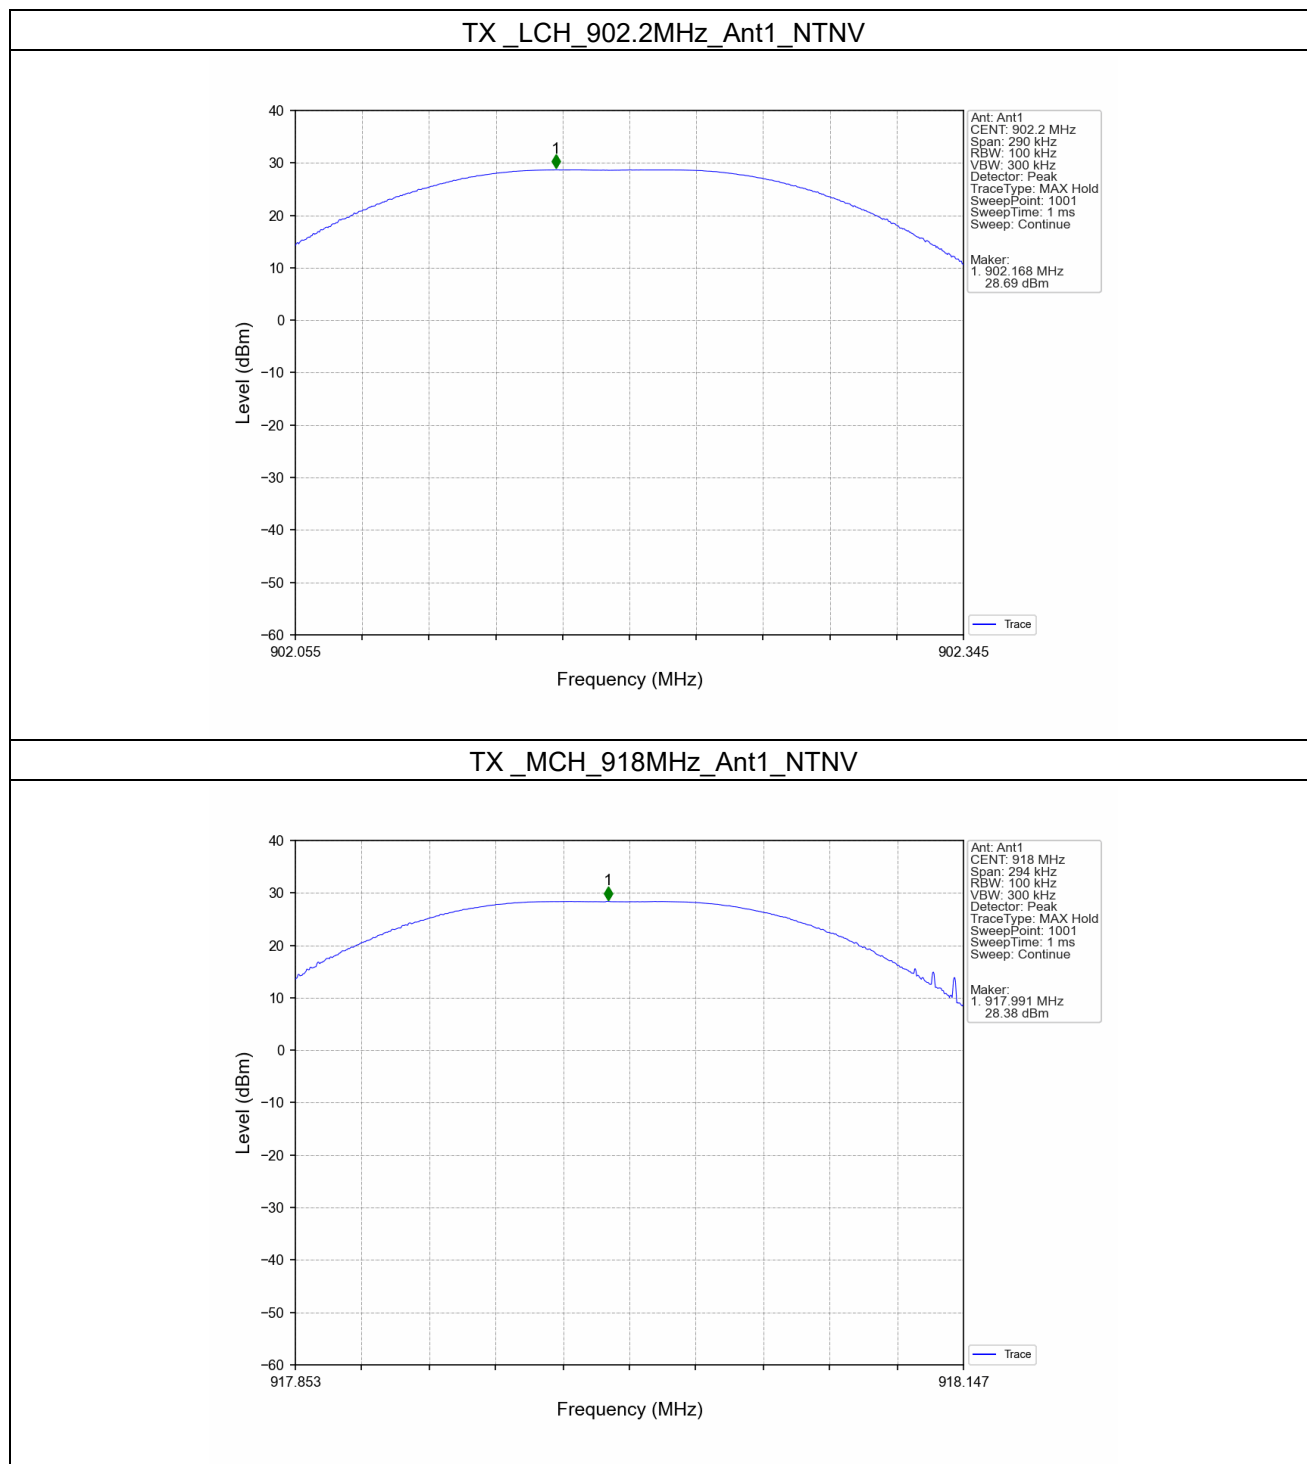

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch, EMC Laboratory


No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com


TX_HCH_927.8MHz_Ant1_NTNV

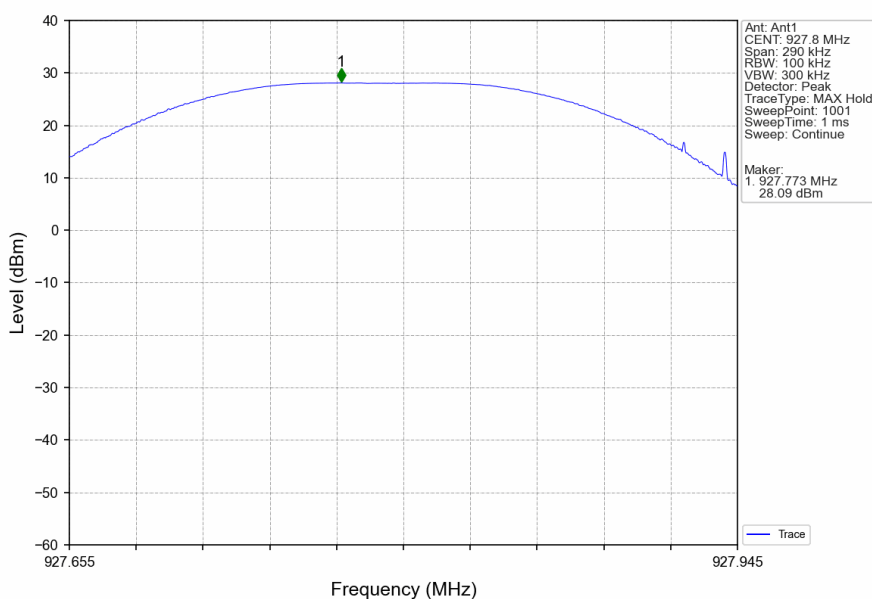


6.2.2 CSE and Band Edges

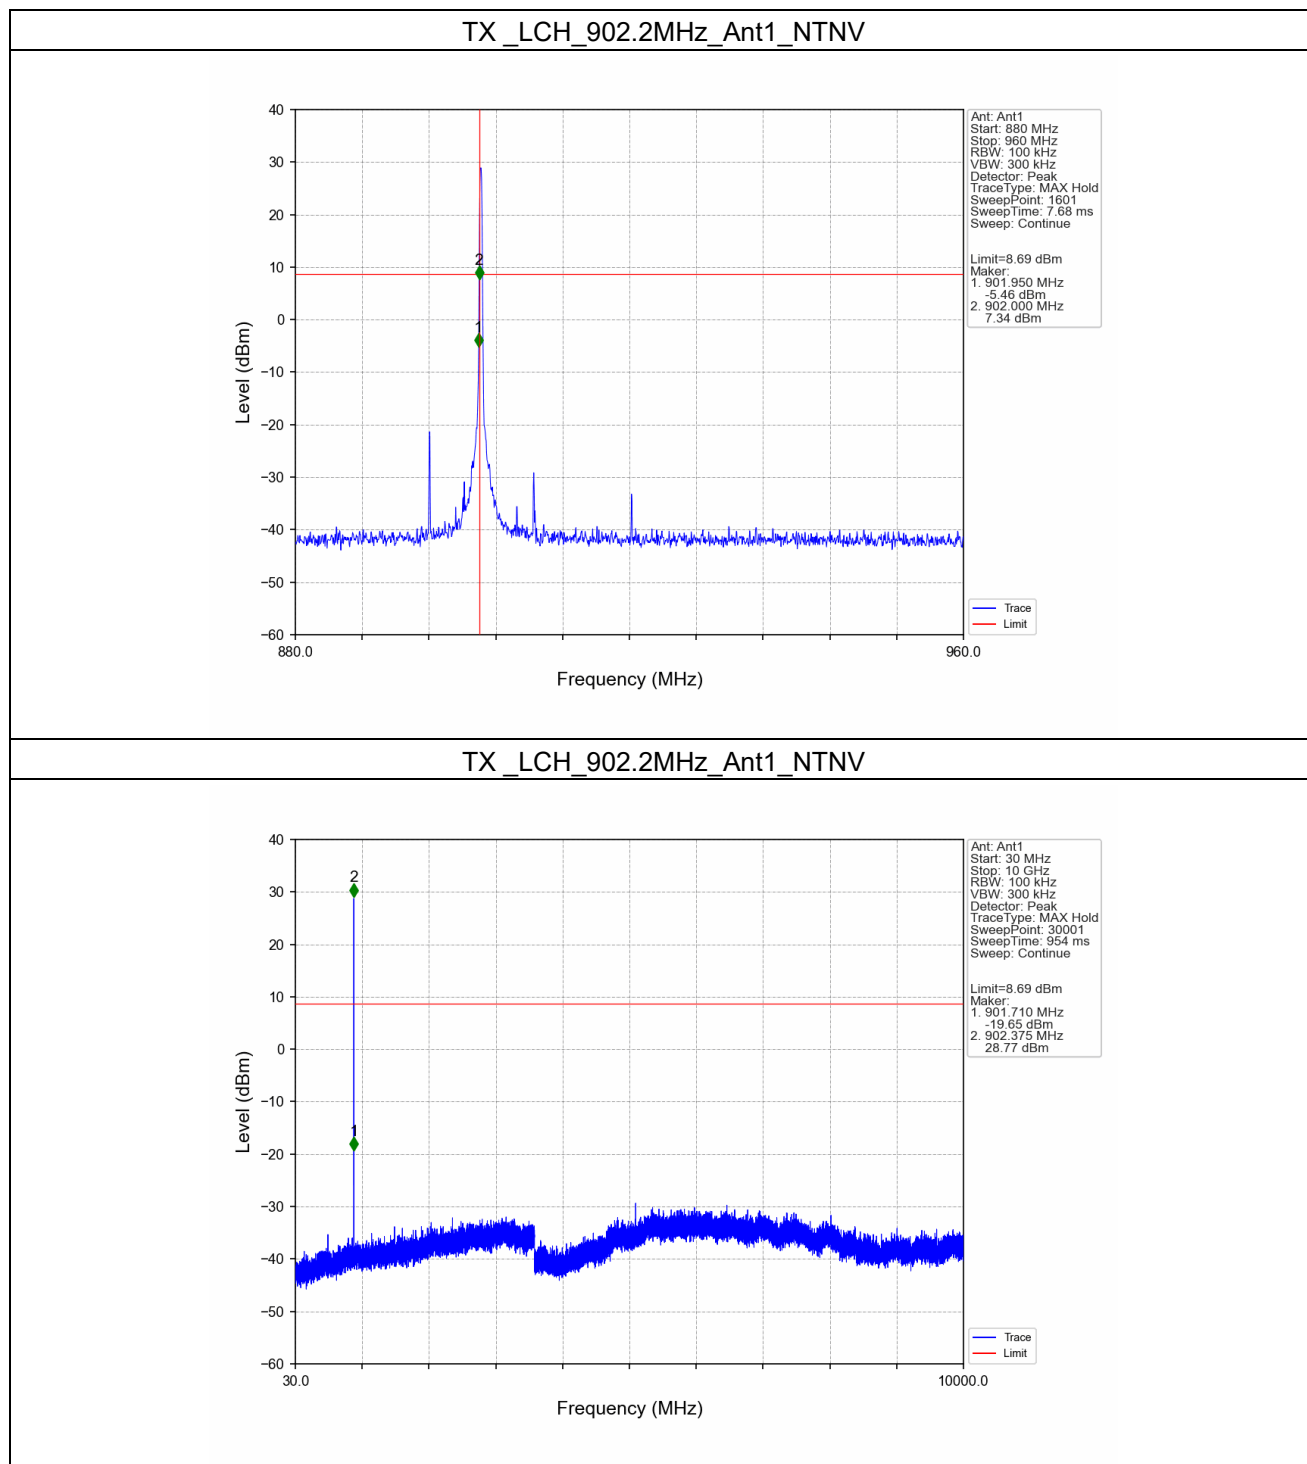


TX_MCH_918MHz_Ant1_NTNV

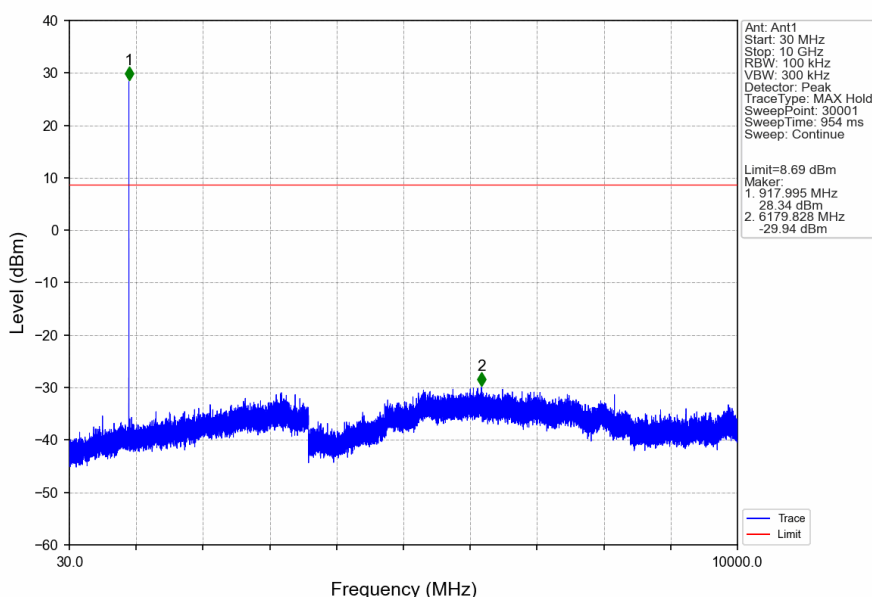


TX_HCH_927.8MHz_Ant1_NTNV

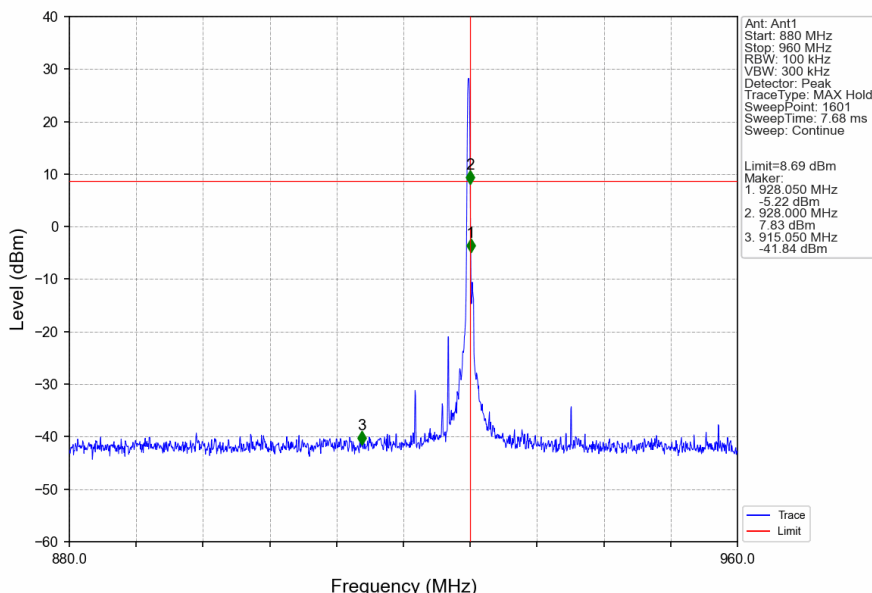


TX_HCH_927.8MHz_Ant1_NTNV

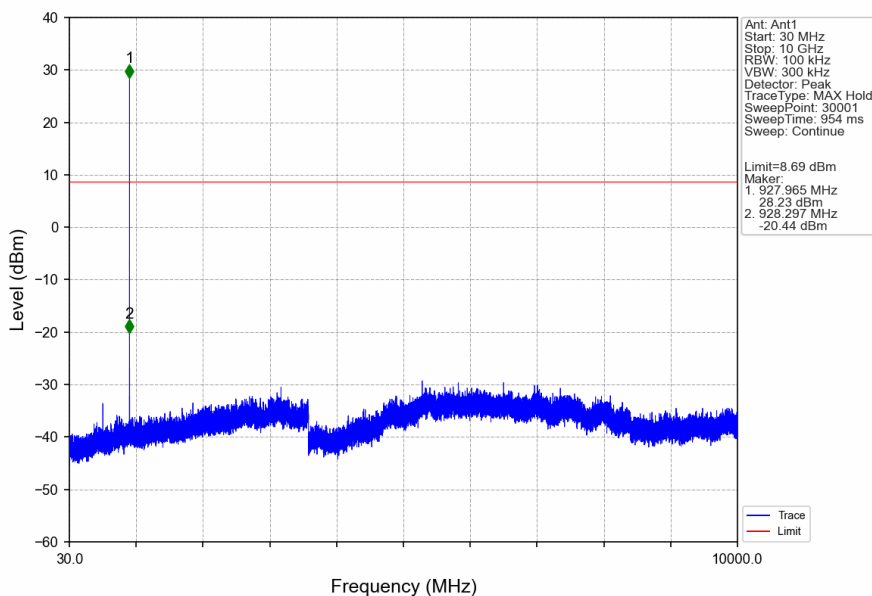

TX_HOPP_Ant1_NTNV

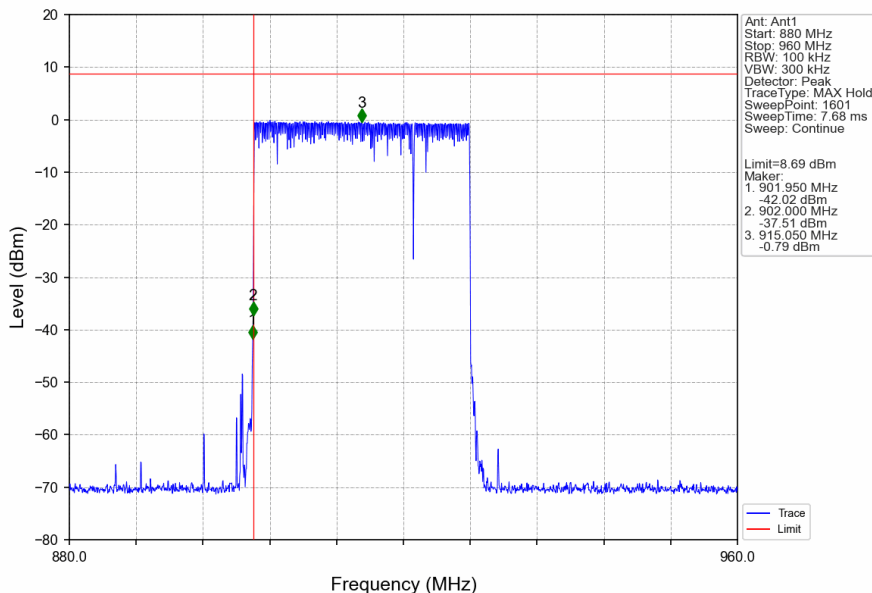

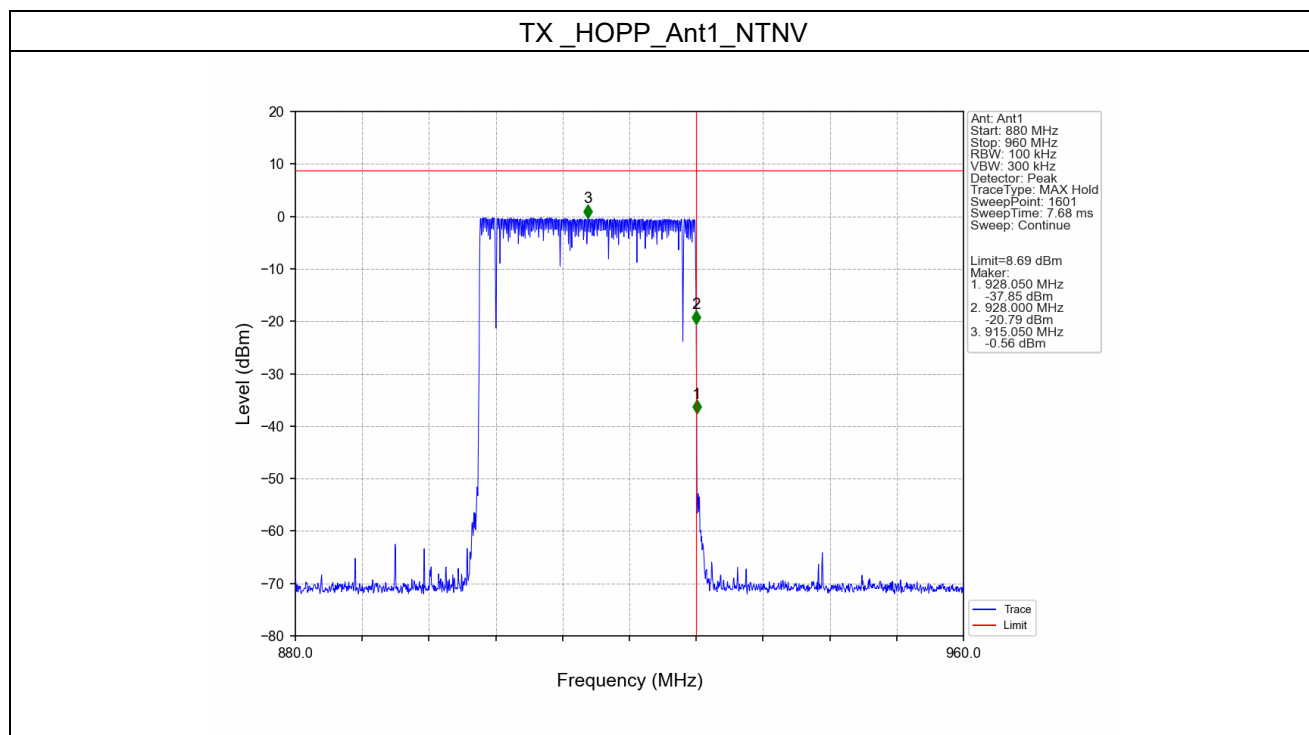

- End of the Report -