


TECHNICAL INFORMATION MANUAL

Revision 0.1 – 14 December 2016

Slate R1260UB

RFID UHF Desktop Reader

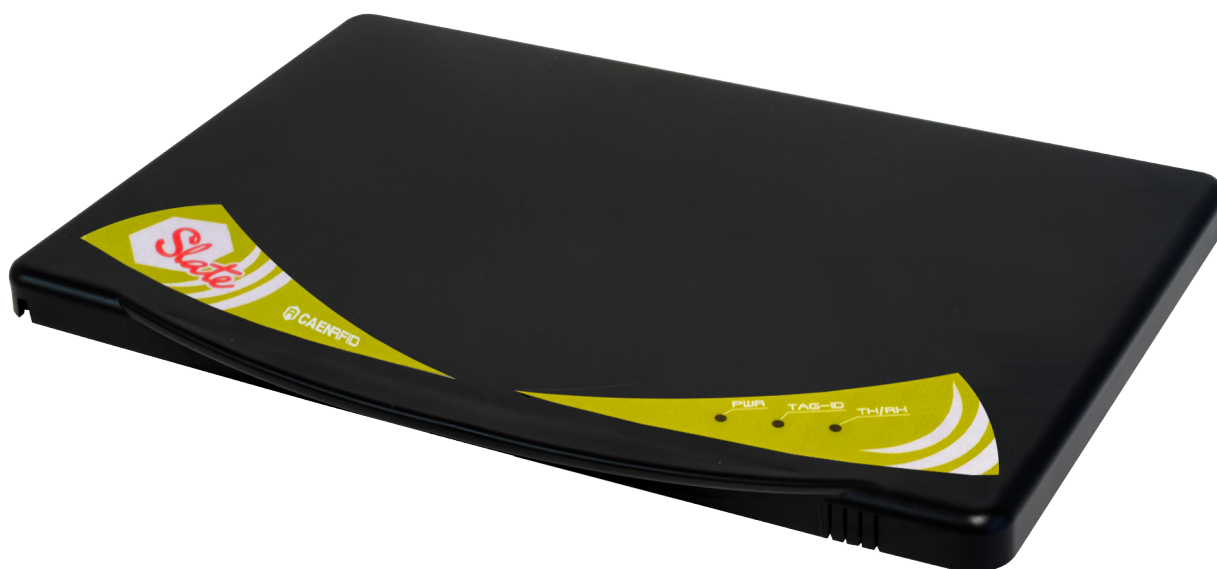

easy2read[®]

PRELIMINARY

Scope of Manual

The goal of this manual is to provide the basic information to work with the Slate R1260UB RFID UHF Desktop Reader.

Change Document Record

Date	Revision	Changes	Pages
14 December 2016	0.1	Preliminary release	-

Reference Document

[RD1] EPCglobal: EPC Radio-Frequency Identity Protocols Class-1 Generation-2 UHF RFID Protocol for Communications at 860 MHz – 960 MHz, Version 1.1.0 (December 17, 2005).

CAEN RFID srl

Via Vetraia, 11 55049 Viareggio (LU) - ITALY
Tel. +39.0584.388.398 Fax +39.0584.388.959
info@caenrfid.com
www.caenrfid.com

© CAEN RFID srl – 2016

Disclaimer

No part of this manual may be reproduced in any form or by any means, electronic, mechanical, recording, or otherwise, without the prior written permission of CAEN RFID.

The information contained herein has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies. CAEN RFID reserves the right to modify its products specifications without giving any notice; for up to date information please visit www.caenrfid.com.


Preliminary Product Information

This document contains information for a new product. CAEN RFID reserves the right to modify this product without notice.

“Preliminary” product information describes products that are ready for production, but for which full characterization data is not yet available. CAEN RFID believes that the information contained in this document is accurate and reliable. However, the information is subject to change without notice and is provided “AS IS” without warranty of any kind (Express or implied). You are advised to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability. No responsibility is assumed by CAEN RFID for the use of this information, including use of this information as the basis for manufacture or sale of any items, or for infringement of patents or other rights of third parties.

Disposal of the product

Do not dispose the product in municipal or household waste. Please check your local regulations for disposal/recycle of electronic products.



Index

Scope of Manual	2
Change Document Record	2
Reference Document	2
Index	3
List of Figures	3
List of Tables	3
1 INTRODUCTION	4
Product Description	4
Accessories	5
Installation Notice	5
2 FUNCTIONAL DESCRIPTION	7
Main Features	7
External Connection	7
Front Panel LEDs	7
Serial Port Emulator	8
Driver installation	8
Firmware Upgrade	12
3 TECHNICAL SPECIFICATIONS	13
Technical Specifications Table	13
Reader – Tag Link Profiles	14
Radiation Patterns	15

List of Figures

Fig. 1.1: Slate R1260UB RFID UHF Desktop Reader	4
Fig. 1.2: Slate R1260UB Technical drawings: top view	5
Fig. 1.3: Slate R1260UB Wall mounting	6
Fig. 3.1: Slate R1260UB Radiation pattern H plane	15
Fig. 3.2: Slate R1260UB Radiation pattern V plane	15

List of Tables

Tab. 2.1: Slate R1260UB Front Panel LEDs	7
Tab. 3.1: Slate R1260UB Technical Specifications	13
Tab. 3.2: Slate R1260UB Reader to tag link profiles	14

1 INTRODUCTION

Product Description

The Slate (Model R1260UB), the new desktop reader of the easy2read® Family, is an UHF RFID reader with integrated antenna for short range applications.

The Slate Reader is powered and controlled directly by an USB cable, thus allowing to read EPC Class 1 Gen 2 UHF RFID tags in an easy desktop environment.

Thanks to its low profile (15 mm) and its size (approximately an A4 page), the Slate reader is the perfect choice for various applications such as point-of-sales, document tracking, RFID programming stations, access control and so on. It can be used as a building block for smart shelves and smart displays.

The core component of the Slate is the new CAEN RFID Quark module, the smallest and lowest power consuming module available on the market.

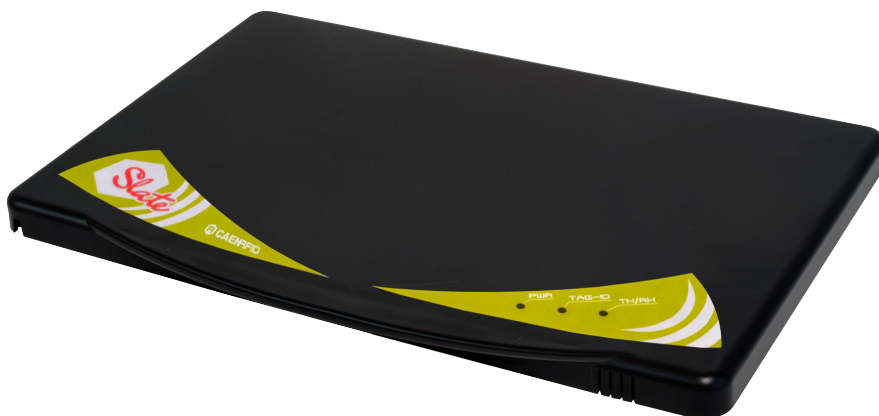





Fig. 1.1: Slate R1260UB RFID UHF Desktop Reader

Accessories

Check for the supplied accessories below:

 No.2 wall hooks	 No. 4 rubber feet
 No.2 rawlplugs (ø 4 mm) +screws	 No. 2 small screws (ø 3 mm)

Installation Notice

The Slate R1260UB can be easily placed on a table for desktop applications or it is possible to hang it on the wall.

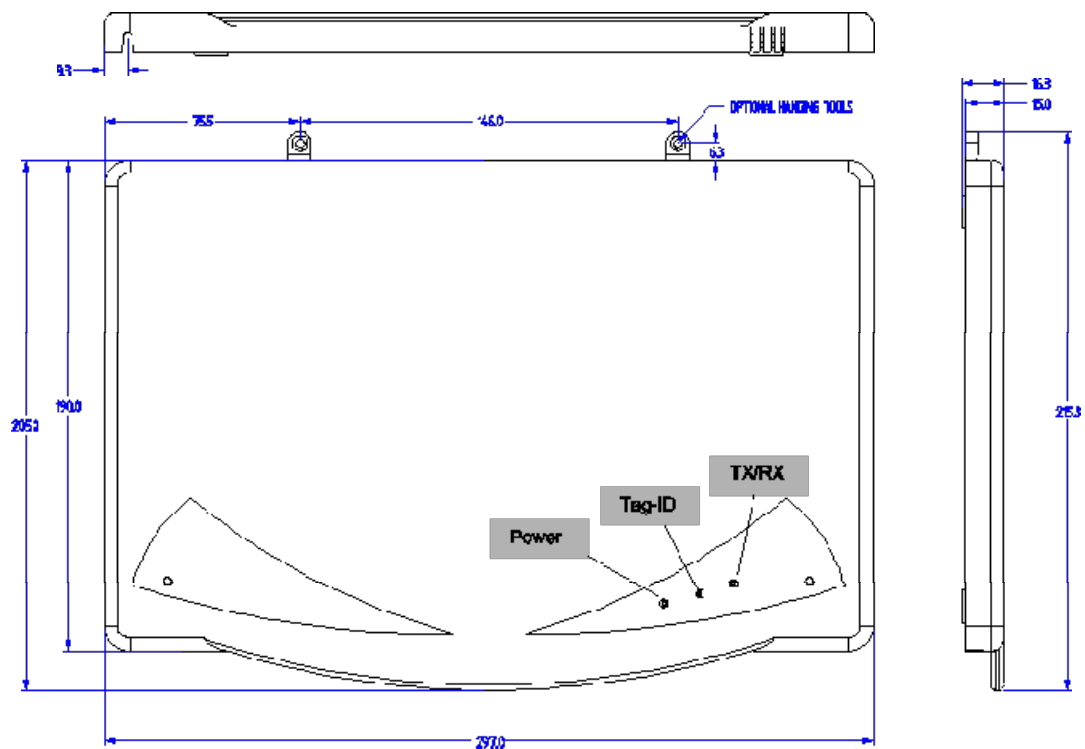


Fig. 1.2: Slate R1260UB Technical drawings: top view

Horizontal Installation:

The Slate can be easily placed on a table for desktop applications affixing the 4 rubber feet to the bottom of the Slate R1260UB to prevent it from sliding.

Vertical Installation:

The Slate can be hung on the wall (see *Fig. 1.3: Slate R1260UB Wall mounting*).

First of all, use the two small screws ($\varnothing$ 3 mm) to fix the 2 hooks on the Slate.

Then, to hang the Slate on the wall, fix the hooks to the wall using the 2 rawlplugs ($\varnothing$ 4 mm) + screws at a distance of 146 mm each others.

If you want to hang the Slate on a wood panelling, fix the hooks to the wall just using the 2 screws.

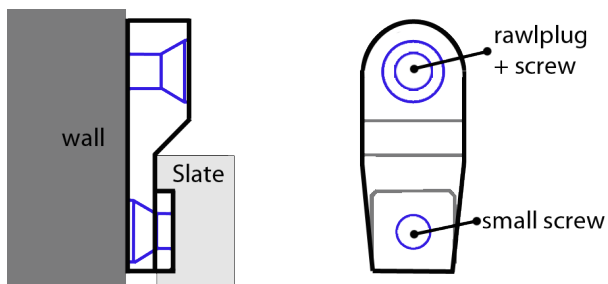


Fig. 1.3: Slate R1260UB Wall mounting

2 FUNCTIONAL DESCRIPTION

Main Features

- FCC part 15 compliant
- SRRC RFID national standards compliant
- EPC C1 G2/ISO18000-6C compliant
- Integrated circular polarized antenna
- Programmable output RF power
- Powered by USB
- Low profile

External Connection

The external connection is via USB port.

The USB cable is located in the back side of the Slate. You can pass the USB cable through the opening at the bottom or at the top of the Slate back side. The mechanical specification of the USB Port is as follows:

- USB Port: USB Type A plug connector

The Slate R1260UB is powered through the USB host.

Front Panel LEDs

The Slate R1260UB front panel houses the following LEDs (see *Fig. 1.2: Slate R1260UB Technical drawings: top view*):

LEDS	FUNCTION	TYPE
POWER	Power ON	Green LED
TAG-ID	Tag detection	Blinking Red LED
TX/RX	USB communication activity	Blinking Yellow LED

Tab. 2.1: Slate R1260UB Front Panel LEDs

Serial Port Emulator

The SLATE R1260UB can be connected to a PC via USB connection. The RFID reader emulates a serial port. In the next paragraph the procedure to install the required driver is presented.

Driver installation

The procedure to install the USB driver is presented below:

1. Verify that the USB cable is correctly plugged into the PC.
2. If the USB to Serial driver is not installed on the PC the following pop-up window is displayed.



3. Insert the CD provided together with the SLATE R1260UB. Select “No, not this time” and click on next.
4. Select “Install from a list or specific location and click on next.



5. Select "Search removable media" and click on next.




6. When the installation is successfully terminated, press on Finish.




7. Now the driver installation procedure is completed. Open the System properties (right click on "My computer" icon) → Hardware → Device Manager.



8. See the emulated serial port in the "USB serial port(COM X)", in the case below COM4.

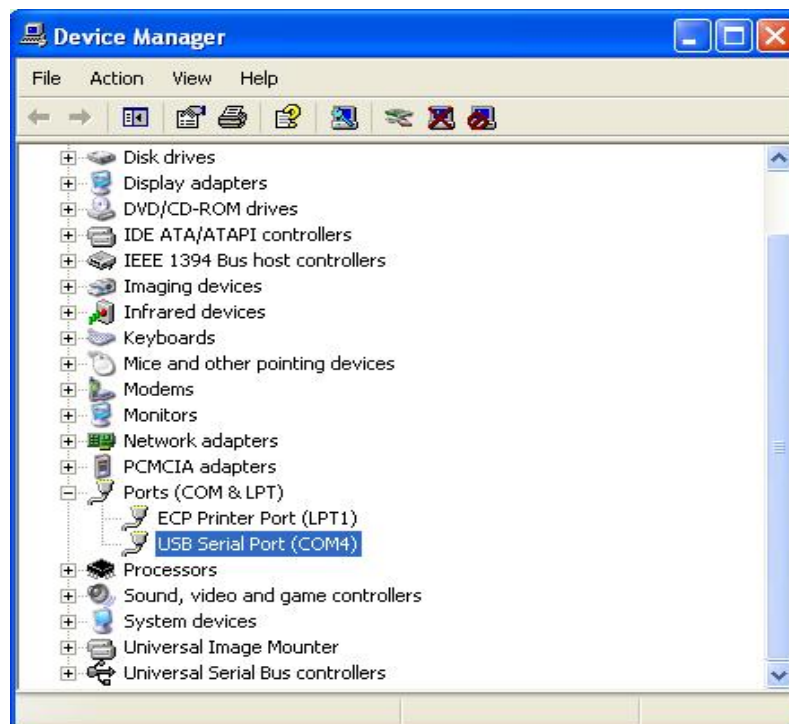

9. Once the serial port connection is established, CAEN RFID Show software can be used to interface the reader:
- Open CAEN RFID Show
 - Click on File -> Connect
 - Type the COM port the reader is using (in the example COM4) and click on Connect button.

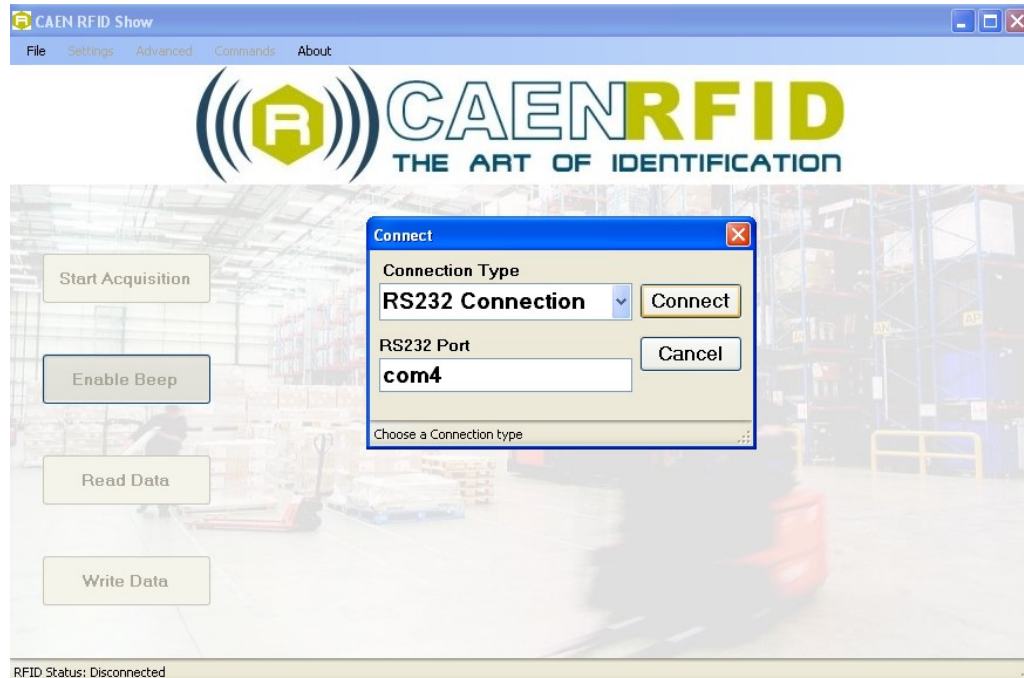


10. Now the Slate R1260UB is ready to perform tag scanning and read/write operations.

Firmware Upgrade


The Slate R1260UB firmware upgrade can be managed via USB.

In order to upgrade the firmware follow the steps below:

- Verify the virtual COM port associated to the reader
- Open the FW upgrade program
- Select the COM port
- Select the image file by clicking on "Open" button

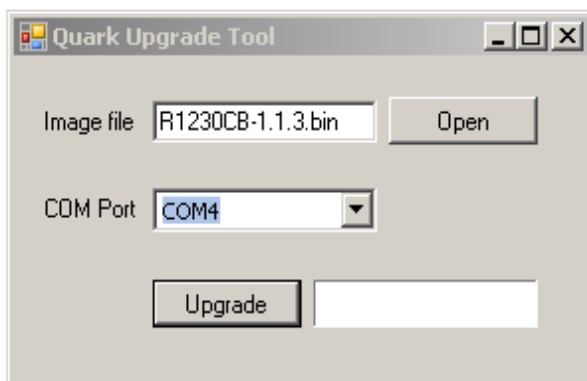

- Click on "Upgrade" button
- Wait for the upgrade to be completed

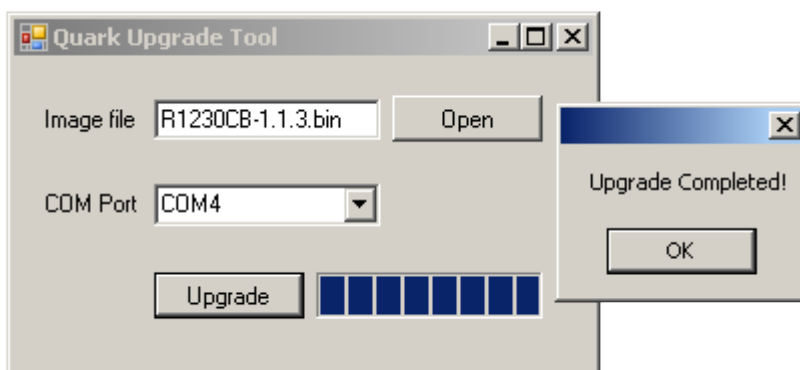

- Disconnect the USB cable
- Connect again the USB cable: now the reader is ready

3 TECHNICAL SPECIFICATIONS

Technical Specifications Table

Frequency Band¹	902÷928 MHz (FCC part 15) 920.625÷924.375 MHz (SRRC RFID national standards)
RF Power	Programmable in 15 levels (1dB step) from 4dBm ERP to 18dBm ERP (from 2.5mW ERP to 67mW ERP)
Antenna	Integrated Circular Polarized Antenna
Number of Channels	50 hopping channels (compliant to FCC part 15.247). 16 hopping channels (compliant to SRRC RFID national standards). All subsets of FCC band are supported via FW upgrade
Standard Compliance	EPC C1G2/ISO 18000-6C
User Interface	Green LED: Power Blinking red LED: Tag detection Blinking yellow LED: USB communication activity Buzzer: user programmable event signaling
USB Device Port	USB Type A plug connector Bus powered USB 2.0 device Must be connected to Hight-power Port (500 mA @ VBUS) It appears as USB serial port Virtual Com Port (VCP) drivers for Windows XP/Vista/Seven (7), Windows CE 4.2, Linux 2.40 and greater Baudrate: 115200 Databits: 8 Stopbits: 1 Parity: none Flow control: none
Dimensions	(W)297 x (L)205 x (H)15 mm ³ (11.7 x 8 x 0.6 inch ³)
Electrical Power	5 V DC bus powered (USB) Max 400 mA
Operating Temperature	-10 °C to +55 °C
Weight	525 g
Length of USB cable	1.5 m

Tab. 3.1: Slate R1260UB Technical Specifications



Warning: The RF settings must match the country/region of operating to comply with local laws and regulations.

The usage of the reader in different countries/regions from the one in which the device has been sold is not allowed.

¹ Requested operating frequency band shall be specified in the purchase order and it is factory locked

Reader – Tag Link Profiles

Slate R1260UB reader supports different modulation and return link profiles according to EPC Class1 Gen2 protocol.

In the following table are reported all profiles that have been tested for the compliance with FCC regulation.

Link profile #	Regulation	Modulation	Return Link
0	FCC	DSB-ASK; f=40kHz	FMO; f = 40kHz
1	FCC	DSB-ASK; f=40kHz	Miller (M=4); f = 256kHz

Tab. 3.2: Slate R1260UB Reader to tag link profiles

Radiation Patterns

The radiation patterns of Slate R1260UB are shown in the following figures.

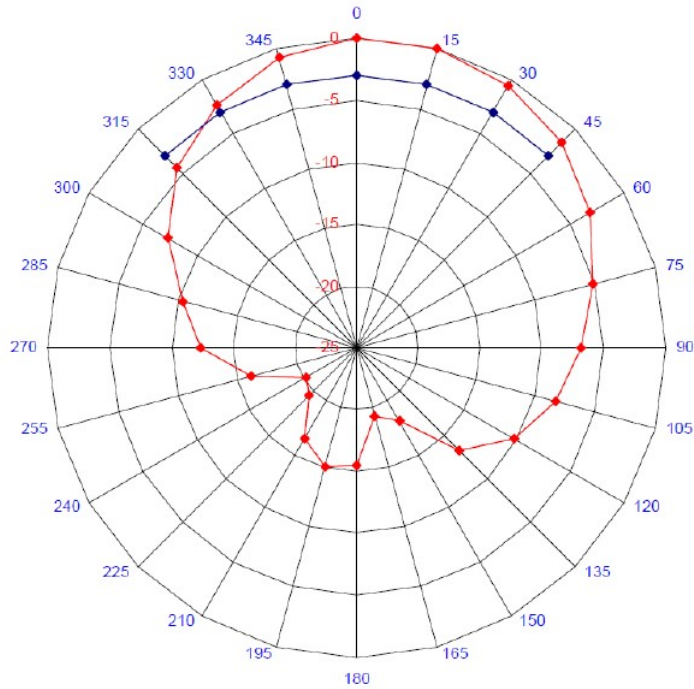


Fig. 3.1: Slate R1260UB Radiation pattern H plane

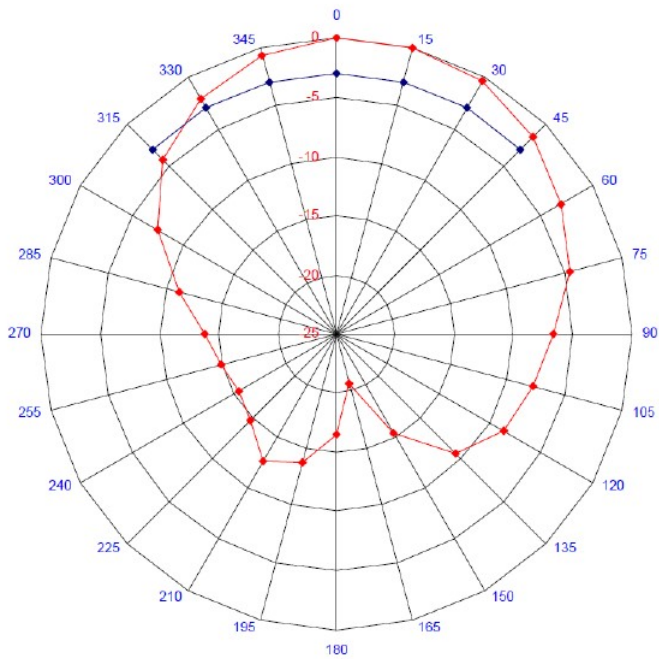
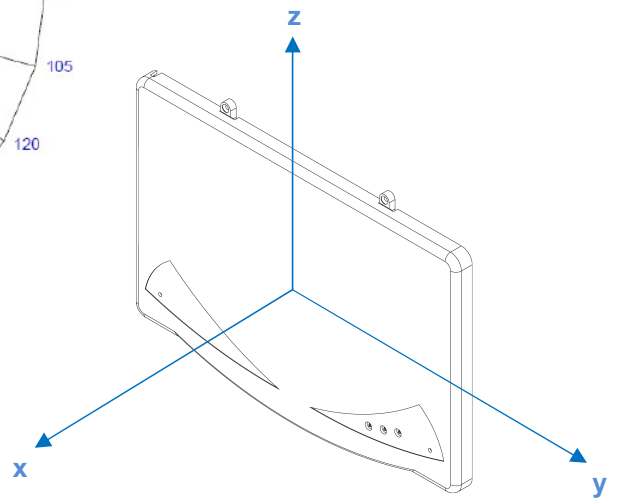


Fig. 3.2: Slate R1260UB Radiation pattern V plane

FCC Compliance

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modification not approved by CAEN RFID could void the user's authority to operate the equipment.

The device shall be used such that a minimum separation distance of 20cm is maintained between the reader and user's/nearby people's body.