



# Test Report



中国认可  
国际互认  
检测  
TESTING  
CNAS L4735

No.: AJT210825053E-1

Applicant Name : RODEO DRIVE TOYS LIMITED  
Applicant Address : UNIT 5, 13/F, HOUSTON CENTRE, NO. 63 MODY ROAD, TSIM SHA TSUI EAST, KOWLOON, HONGKONG  
Manufacturer : RODEO DRIVE TOYS LIMITED  
Manufacturer Address : UNIT 5, 13/F, HOUSTON CENTRE, NO. 63 MODY ROAD, TSIM SHA TSUI EAST, KOWLOON, HONGKONG

The following samples were submitted and identified by/on behalf of the client as:

Sample Description : PREDATOR BLUE RED STUNT RC  
Model No. : RD19H008  
Sample Received Date : 25 Aug, 2021  
Testing Completed Date : 08 Sep, 2021

Tests conducted: For compliance with application, refer to attached page(s) for details.

| Assess standard used:                                     | Conclusion |
|-----------------------------------------------------------|------------|
| FCC Part 15, Subpart C, Section 15.249 & ANSI C63,10-2013 | PASS       |

Tested by:

*Glory*

Reviewed by:

*Fly Liang*

Approved by:

Position: Technical Supervisor  
Date: 2021-09-08



This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: [www.ajtesting.com](http://www.ajtesting.com) Email: [info@ajtesting.com](mailto:info@ajtesting.com)

Page 1 of 25





# Test Report



中国认可  
国际互认  
检测  
TESTING  
CNAS L4735

No.: AJT210825053E-1

## TABLE OF CONTENTS

|                                                               |    |
|---------------------------------------------------------------|----|
| 1 Test Standards .....                                        | 3  |
| 2 Summary .....                                               | 3  |
| 2.1 General Remarks .....                                     | 3  |
| 2.2 Final Assessment .....                                    | 3  |
| 3 Equipment Under Test .....                                  | 3  |
| 3.1 Short description of the Equipment Under Test (EUT) ..... | 3  |
| 3.3 Description of Test Modes .....                           | 4  |
| 4 Test Environment .....                                      | 5  |
| 4.1 Address of the test Laboratory .....                      | 5  |
| 4.2 Test Facility .....                                       | 5  |
| 4.3 Environmental Conditions .....                            | 5  |
| 4.4 Statement of the Measurement Uncertainty .....            | 6  |
| 4.5 Test Types and Results .....                              | 6  |
| 5 Test Conditions and Results .....                           | 6  |
| 5.1 Radiated Emission (RE) .....                              | 6  |
| 5.2 20dB Bandwidth .....                                      | 19 |
| 5.3 Conducted Emission (CE) .....                             | 22 |
| 5.4 Antenna Requirements .....                                | 23 |
| 6 Test Equipment .....                                        | 24 |
| 7 Test Photographs .....                                      | 25 |
| 8 Photos of the EUT .....                                     | 25 |
| 9 Manufacturer/ Approval Holder Declaration .....             | 25 |

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: [www.ajtesting.com](http://www.ajtesting.com) Email: [info@ajtesting.com](mailto:info@ajtesting.com)

Page 2 of 25





# Test Report



中国认可  
国际互认  
检测  
TESTING  
CNAS L4735

No.: AJT210825053E-1

## 1 Test Standards

|                                                                                                                                    |
|------------------------------------------------------------------------------------------------------------------------------------|
| The tests were performed according to following standards:                                                                         |
| FCC Part 15, Subpart C, Section 15.249: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHZ, and 24.0-24.25 GHz |
| ANSI C63,10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices                   |

## 2 Summary

### 2.1 General Remarks

|                                |                                |
|--------------------------------|--------------------------------|
| Date of receipt of test sample | 25 Aug, 2021                   |
| Testing commenced on           | 25 Aug, 2021 ---- 08 Sep, 2021 |
| Testing concluded on           | 08 Sep, 2021                   |

### 2.2 Final Assessment

| Test Content:                                                                            | Assessment                    |
|------------------------------------------------------------------------------------------|-------------------------------|
| The RF requirements pertaining to the technical standards and tested operation modes are | Fulfilled                     |
| The equipment under test                                                                 | Fulfilled the RF requirements |

## 3 Equipment Under Test

### 3.1 Short description of the Equipment Under Test (EUT)

|                                                                                                                                                                                                                                                                                    |                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| EUT Name                                                                                                                                                                                                                                                                           | PREDATOR BLUE RED STUNT RC |
| Model No.                                                                                                                                                                                                                                                                          | RD19H008                   |
| FCC ID                                                                                                                                                                                                                                                                             | 2A2XJ-RD19H008             |
| Number of Tested Samples                                                                                                                                                                                                                                                           | 1                          |
| Power Supply Voltage                                                                                                                                                                                                                                                               | DC: 3.0V(AAA*2)            |
| Operating Mode                                                                                                                                                                                                                                                                     | TX Mode                    |
| Operation Frequency                                                                                                                                                                                                                                                                | 2405-2475MHz               |
| Number of Channel                                                                                                                                                                                                                                                                  | 71                         |
| Modulation                                                                                                                                                                                                                                                                         | GFSK                       |
| Antenna Type                                                                                                                                                                                                                                                                       | Wire Antenna               |
| Antenna Gain                                                                                                                                                                                                                                                                       | 0dBi                       |
| NOTE:<br>1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual. The laboratory is not responsible for the accuracy of the information provided by manufacturer. |                            |

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: [www.ajtesting.com](http://www.ajtesting.com) Email: [info@ajtesting.com](mailto:info@ajtesting.com)

Page 3 of 25





# Test Report



中国认可  
国际互认  
检测  
TESTING  
CNAS L4735

No.: AJT210825053E-1

## 3.2 EUT Configuration

(The CDF filled by the applicant can be viewed at the test laboratory.)

The following peripheral devices and interface cables were connected during the measurement:

Not Applicable



## 3.3 Description of Test Modes

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and packet type. The worst case was found when the EUT was positioned on Y axis for radiated emission. The EUT was tested under the following mode.

| EUT Configure Mode | Applicable to |         |     |    | Description    |
|--------------------|---------------|---------|-----|----|----------------|
|                    | RE < 1G       | RE ≥ 1G | PLC | BW | DC 3.0V(AAA*2) |
| A                  | √             | √       | N/A | √  |                |

Where RE<1G: Radiated Emission below 1GHz RE ≥ 1G: Radiated Emission above 1GHz

PLC: Power Line Conducted Emission BW: 20dB bandwidth

Following channel(s) was (were) selected for the test as listed below.

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| 1       | 2405            | 19      | 2423            | 37      | 2441            | 55      | 2459            |
| 2       | 2406            | 20      | 2424            | 38      | 2442            | 56      | 2460            |
| 3       | 2407            | 21      | 2425            | 39      | 2443            | 57      | 2461            |
| 4       | 2408            | 22      | 2426            | 40      | 2444            | 58      | 2462            |
| 5       | 2409            | 23      | 2427            | 41      | 2445            | 59      | 2463            |
| 6       | 2410            | 24      | 2428            | 42      | 2446            | 60      | 2464            |
| 7       | 2411            | 25      | 2429            | 43      | 2447            | 61      | 2465            |
| 8       | 2412            | 26      | 2430            | 44      | 2448            | 62      | 2466            |
| 9       | 2413            | 27      | 2431            | 45      | 2449            | 63      | 2467            |
| 10      | 2414            | 28      | 2432            | 46      | 2450            | 64      | 2468            |
| 11      | 2415            | 29      | 2433            | 47      | 2451            | 65      | 2469            |
| 12      | 2416            | 30      | 2434            | 48      | 2452            | 66      | 2470            |
| 13      | 2417            | 31      | 2435            | 49      | 2453            | 67      | 2471            |
| 14      | 2418            | 32      | 2436            | 50      | 2454            | 68      | 2472            |
| 15      | 2419            | 33      | 2437            | 51      | 2455            | 69      | 2473            |
| 16      | 2420            | 34      | 2438            | 52      | 2456            | 70      | 2474            |
| 17      | 2421            | 35      | 2439            | 53      | 2457            | 71      | 2475            |
| 18      | 2422            | 36      | 2440            | 54      | 2458            |         |                 |

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: [www.ajtesting.com](http://www.ajtesting.com) Email: [info@ajtesting.com](mailto:info@ajtesting.com)

Page 4 of 25





# Test Report



中国认可  
国际互认  
检测  
TESTING  
CNAS L4735

No.: AJT210825053E-1

## Channel List

| Channel             | Frequency (MHz) |
|---------------------|-----------------|
| The lowest channel  | 2405            |
| The middle channel  | 2440            |
| The highest channel | 2475            |

Note: The more detailed channel, please refer to the product specifications

## 4 Test Environment

### 4.1 Address of the test Laboratory

|                  |                                                                                                                  |
|------------------|------------------------------------------------------------------------------------------------------------------|
| Test Laboratory: | AJT Testing Services Limited                                                                                     |
| Test Site:       | 1/F, NO.1, WENHUA SOUTH ROAD, CHENGHUA INDUSTRIAL ZONE, CHENGHAI DISTRICT, GUANGDONG, PEOPLE'S REPUBLIC OF CHINA |
| Tel:             | 86-754-85860999                                                                                                  |
| Fax:             | 86-754-86984098                                                                                                  |

### 4.2 Test Facility

|                                                                                           |            |
|-------------------------------------------------------------------------------------------|------------|
| The test facility is recognized, certified, or accredited by the following organizations: |            |
| CNAS Accreditation NO.:                                                                   | L4735      |
| A2LA Accreditation NO.:                                                                   | 5443.01    |
| Designation Number:                                                                       | CN1263     |
| Test Firm Registration Number:                                                            | 127385     |
| Industry Canada Site Registration Number:                                                 | 25345      |
| FCC Registration NO.:                                                                     | 0028094555 |

### 4.3 Environmental Conditions

|                                                                                    |         |
|------------------------------------------------------------------------------------|---------|
| During the measurement the environmental conditions were within the listed ranges: |         |
| Temperature                                                                        | 15~35°C |
| Humidity                                                                           | 30~75%  |

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: [www.ajtesting.com](http://www.ajtesting.com) Email: [info@ajtesting.com](mailto:info@ajtesting.com)

Page 5 of 25





# Test Report



中国认可  
国际互认  
检测  
TESTING  
CNAS L4735

No.: AJT210825053E-1

## 4.4 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. Furthermore, component and process variability of devices are similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

| Measurement Uncertainty (Standard: ETSI TR 100 028) |         |
|-----------------------------------------------------|---------|
| Conducted Emission (CE)                             | ±2.14dB |
| Radiated Emission below 1GHz                        | ±4.44dB |
| Radiated Emission above 1GHz                        | ±5.26dB |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 4.5 Test Types and Results

| Standard: FCC PART 15, SUBPART C (SECTION 15.249) |                                              |        |
|---------------------------------------------------|----------------------------------------------|--------|
| Standard section                                  | Test Type                                    | Result |
| §15.209 & §15.249(a)                              | Radiated Emission (RE)                       | PASS   |
| §15.215(c)                                        | 20dB Bandwidth                               | PASS   |
| §15.207(a)                                        | Conducted Emission (CE)                      | N/A    |
| §15.203                                           | Antenna Requirement                          | PASS   |
| §15.205                                           | Restricted Band Around Fundamental Frequency | PASS   |

## 5 Test Conditions and Results

### 5.1 Radiated Emission (RE)

For test instruments and accessories used see section 6

#### 5.1.1 Test Procedures

- (1) The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- (3) The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: [www.ajtesting.com](http://www.ajtesting.com) Email: [info@ajtesting.com](mailto:info@ajtesting.com)




No.: AJT210825053E-1

- (5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- (6) For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- (7) If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported
4. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

## 5.1.2 Test Setup

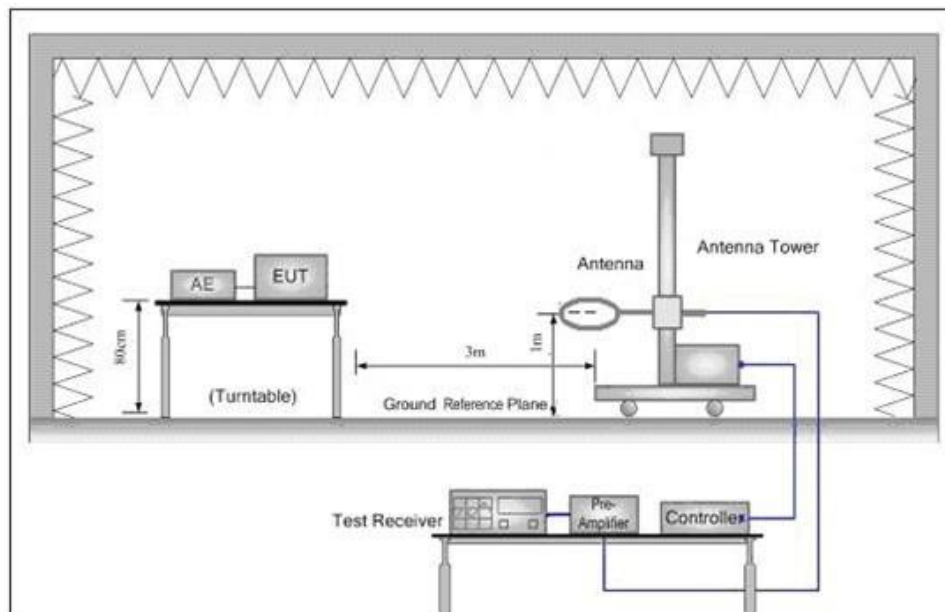

Below 30MHz


This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

**AJT TESTING SERVICES LIMITED**


Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: [www.ajtesting.com](http://www.ajtesting.com) Email: [info@ajtesting.com](mailto:info@ajtesting.com)



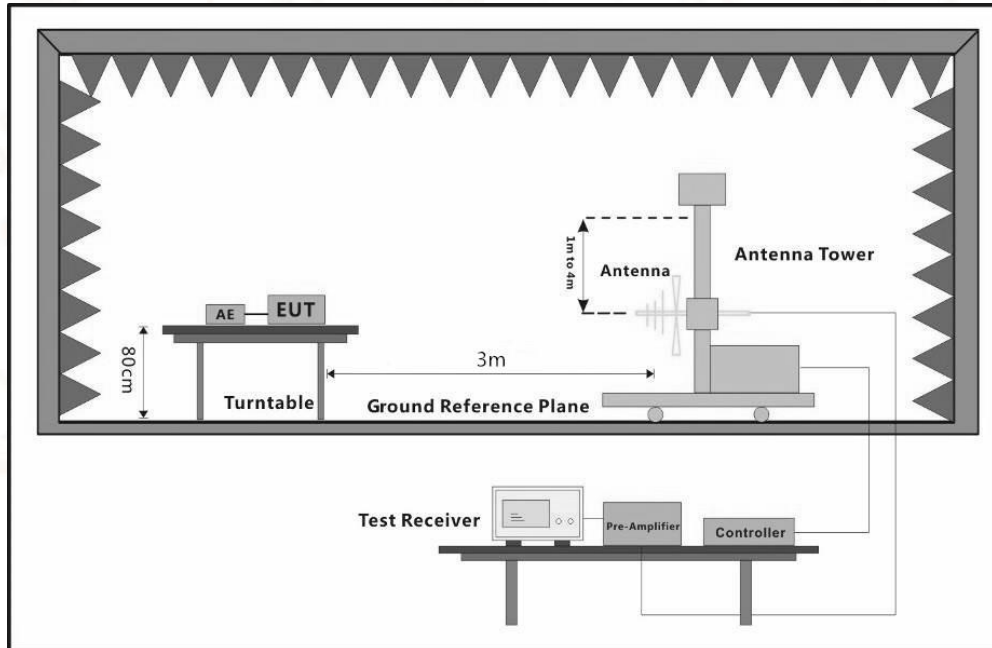

30MHz-1000MHz

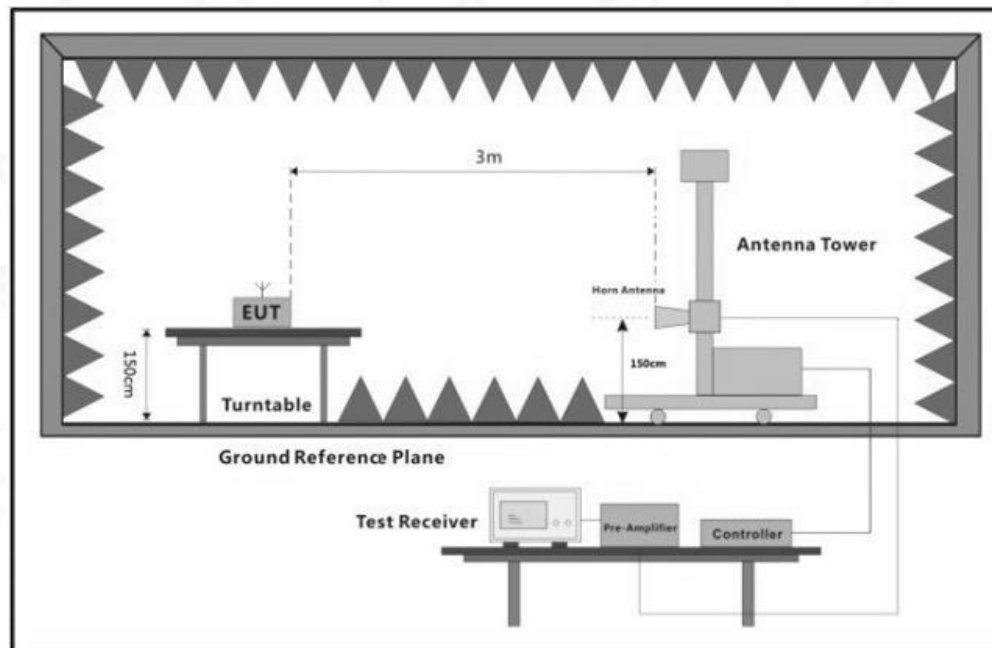

Above 1GHz

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098

Website: [www.ajtesting.com](http://www.ajtesting.com)

Email: [info@ajtesting.com](mailto:info@ajtesting.com)





# Test Report



中国认可  
国际互认  
检测  
TESTING  
CNAS L4735

No.: AJT210825053E-1

## 5.1.3 Test Limits

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490     | 2400/F(kHz)                       | 300                           |
| 0.490 ~ 1.705     | 24000/F(kHz)                      | 30                            |
| 1.705 ~ 30.0      | 30                                | 30                            |
| 30 ~ 88           | 100                               | 3                             |
| 88 ~ 216          | 150                               | 3                             |
| 216 ~ 960         | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

| Fundamental Frequency | Filed Strength of Fundamental (milli-volts/meter) | Field Strength of Harmonics (micro-volts/meter) |
|-----------------------|---------------------------------------------------|-------------------------------------------------|
| 902 ~ 928 MHz         | 50                                                | 500                                             |
| 2400 ~ 2483.5 MHz     | 50                                                | 500                                             |
| 5725 ~5875 MHz        | 50                                                | 500                                             |
| 24.0 ~24.25 GHz       | 250                                               | 2500                                            |

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

### Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBμV/m) = 20 log Emission level (μV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. Emission from 9kHz to 30MHz is more than 20dB below the limit.

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: [www.ajtesting.com](http://www.ajtesting.com) Email: [info@ajtesting.com](mailto:info@ajtesting.com)





# Test Report



中国认可  
国际互认  
检测  
TESTING  
CNAS L4735

No.: AJT210825053E-1


## 5.1.4 Test Results

The disturbance below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

### 5.1.4.1 Radiated Emissions Test (Below 1GHz)

| Test Point | Operation Mode | Result |
|------------|----------------|--------|
| Horizontal | TX mode        | PASS   |

|                     |                                           |
|---------------------|-------------------------------------------|
| EUT Name            | PREDATOR BLUE RED STUNT RC                |
| Operating Condition | DC: 3.0V(AAA*2)                           |
| Test Condition      | Ambient Temperature: 27°C Humidity: 60%RH |

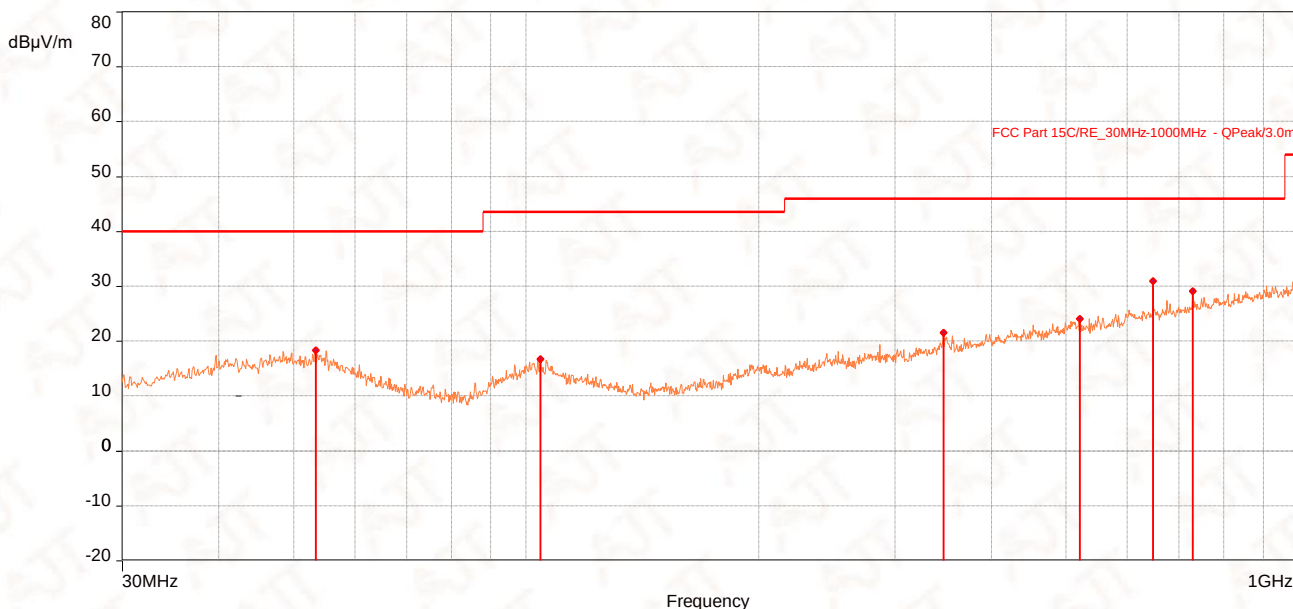

| Frequency (MHz) | Peak (dBμV/m) | QP (dBμV/m) | QP Lim. (dBμV/m) | Margin (dB) | Angle (°) | Height (m) | Polarization |
|-----------------|---------------|-------------|------------------|-------------|-----------|------------|--------------|
| 53.474          | 18.33         | /           | 40.00            | -21.67      | 178.00    | 1.00       | Horizontal   |
| 104.302         | 16.75         | /           | 43.50            | -26.75      | 346.00    | 1.00       | Horizontal   |
| 346.899         | 21.49         | /           | 46.00            | -24.51      | 247.00    | 1.99       | Horizontal   |
| 520.82          | 24.06         | /           | 46.00            | -21.94      | 331.00    | 1.99       | Horizontal   |
| 648.084         | 30.89         | /           | 46.00            | -15.11      | 22.00     | 1.00       | Horizontal   |
| 728.691         | 29.12         | /           | 46.00            | -16.88      | 356.00    | 1.00       | Horizontal   |

- 1.QP is abbreviation of Quasi-Peak
- 2.Margin = Emission Level - Limit Value
- 3.The emission levels of other frequencies were more than 20dB margin against the limit

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: [www.ajtesting.com](http://www.ajtesting.com) Email: [info@ajtesting.com](mailto:info@ajtesting.com)





# Test Report




中国认可  
国际互认  
检测  
TESTING  
CNAS L4735

No.: AJT210825053E-1

| Test Point | Operation Mode | Result |
|------------|----------------|--------|
| Vertical   | TX mode        | PASS   |

|                     |                                           |
|---------------------|-------------------------------------------|
| EUT Name            | PREDATOR BLUE RED STUNT RC                |
| Operating Condition | DC: 3.0V(AAA*2)                           |
| Test Condition      | Ambient Temperature: 27°C Humidity: 60%RH |

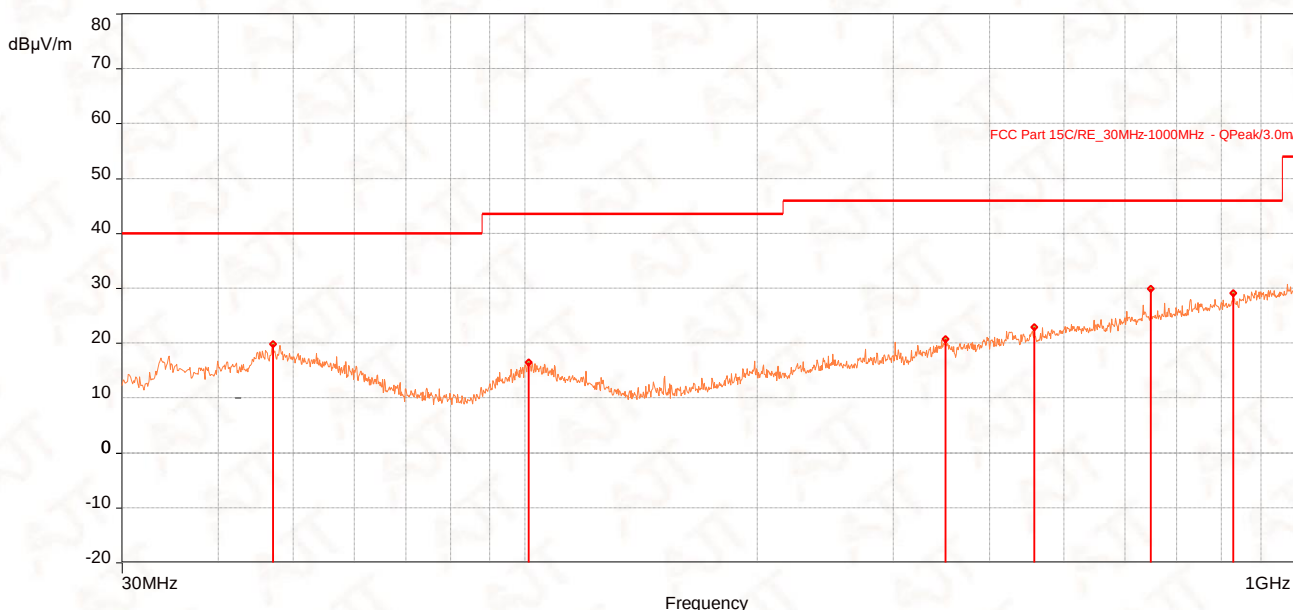

| Frequency (MHz) | Peak (dBμV/m) | QP (dBμV/m) | QP Lim. (dBμV/m) | Margin (dB) | Angle (°) | Height (m) | Polarization |
|-----------------|---------------|-------------|------------------|-------------|-----------|------------|--------------|
| 47.072          | 19.84         | /           | 40.00            | -20.16      | 285.00    | 1.01       | Vertical     |
| 101.004         | 16.45         | /           | 43.50            | -27.05      | 354.00    | 2.00       | Vertical     |
| 350.682         | 20.68         | /           | 46.00            | -25.32      | 9.00      | 2.00       | Vertical     |
| 457.576         | 22.85         | /           | 46.00            | -23.15      | 258.00    | 2.00       | Vertical     |
| 647.987         | 29.90         | /           | 46.00            | -16.10      | 74.00     | 2.00       | Vertical     |
| 828.698         | 29.05         | /           | 46.00            | -16.95      | 65.00     | 2.00       | Vertical     |

- 1.QP is abbreviation of Quasi-Peak
- 2.Margin = Emission Level - Limit Value
- 3.The emission levels of other frequencies were more than 20dB margin against the limit

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: [www.ajtesting.com](http://www.ajtesting.com) Email: [info@ajtesting.com](mailto:info@ajtesting.com)





# Test Report



中国认可  
国际互认  
检测  
TESTING  
CNAS L4735

No.: AJT210825053E-1

## 5.1.4.2 Radiated Emissions Test (Above 1GHz)

|                 |                              |                   |                           |
|-----------------|------------------------------|-------------------|---------------------------|
| EUT Name        | PREDATOR BLUE RED STUNT RC   |                   |                           |
| Channel         | The Lowest Channel (2405MHz) | Detector Function | Peak (PK)<br>Average (AV) |
| Frequency Range | Above 1GHz                   | Result            | PASS                      |

| Antenna Polarity & Test Distance: Horizontal At 3m |                         |                |             |            |           |              |                 |          |
|----------------------------------------------------|-------------------------|----------------|-------------|------------|-----------|--------------|-----------------|----------|
| Frequency (MHz)                                    | Emission Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (m) | Angle (°) | Polarization | Correction (dB) | Detector |
| 2397.6                                             | 17.74                   | 54.00          | -36.26      | 1.48       | 239.00    | Horizontal   | -28.43          | Average  |
| 2400                                               | 14.54                   | 54.00          | -39.46      | 1.48       | 245.00    | Horizontal   | -28.43          | Average  |
| *2405.04                                           | 41.68                   | 94.00          | -52.32      | 1.48       | 250.00    | Horizontal   | -28.43          | Average  |
| 4809.7                                             | 27.75                   | 54.00          | -26.25      | 1.99       | 315.00    | Horizontal   | -28.43          | Average  |
| 7215.2                                             | 14.87                   | 54.00          | -39.13      | 1.99       | 40.00     | Horizontal   | -28.43          | Average  |
| 2397.6                                             | 46.17                   | 74.00          | -27.83      | 1.48       | 239.00    | Horizontal   | -2.54           | Peak     |
| 2400                                               | 42.97                   | 74.00          | -31.03      | 1.48       | 245.00    | Horizontal   | -2.53           | Peak     |
| *2405.04                                           | 70.11                   | 114.00         | -43.89      | 1.48       | 250.00    | Horizontal   | -2.48           | Peak     |
| 4809.7                                             | 56.18                   | 74.00          | -17.82      | 1.99       | 315.00    | Horizontal   | 2.48            | Peak     |
| 7215.2                                             | 43.30                   | 74.00          | -30.70      | 1.99       | 40.00     | Horizontal   | 8.14            | Peak     |

| Antenna Polarity & Test Distance: Vertical At 3m |                         |                |             |            |           |              |                 |          |
|--------------------------------------------------|-------------------------|----------------|-------------|------------|-----------|--------------|-----------------|----------|
| Frequency (MHz)                                  | Emission Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (m) | Angle (°) | Polarization | Correction (dB) | Detector |
| 2397.6                                           | 17.28                   | 54.00          | -36.72      | 1.50       | 13.00     | Vertical     | -28.43          | Average  |
| 2400                                             | 13.76                   | 54.00          | -40.24      | 1.50       | 178.00    | Vertical     | -28.43          | Average  |
| *2405.04                                         | 41.95                   | 94.00          | -52.05      | 1.50       | 19.00     | Vertical     | -28.43          | Average  |
| 4809.7                                           | 25.96                   | 54.00          | -28.04      | 2.00       | 38.00     | Vertical     | -28.43          | Average  |
| 7215.2                                           | 14.56                   | 54.00          | -39.44      | 2.00       | 21.00     | Vertical     | -28.43          | Average  |
| 2397.6                                           | 45.71                   | 74.00          | -28.29      | 1.50       | 13.00     | Vertical     | -2.54           | Peak     |
| 2400                                             | 42.19                   | 74.00          | -31.81      | 1.50       | 178.00    | Vertical     | -2.53           | Peak     |
| *2405.04                                         | 70.38                   | 114.00         | -43.62      | 1.50       | 19.00     | Vertical     | -2.48           | Peak     |
| 4809.7                                           | 54.39                   | 74.00          | -19.61      | 2.00       | 38.00     | Vertical     | 2.48            | Peak     |
| 7215.2                                           | 42.99                   | 74.00          | -31.01      | 2.00       | 21.00     | Vertical     | 8.14            | Peak     |

### Remarks:

1. Emission level (dBμV/m) = Raw Value (dBμV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The emission levels of other frequencies were more than 20dB margin against the limit.
4. Margin = Emission level - Limit value
5. " \* ": Fundamental frequency.
6. The average value of fundamental frequency is: Average value = Peak value +AV factor, where the AV factor is calculated from following formula: AV factor=20 log (Duty cycle) = 20 log (3.8%) = -28.43dB, please see 5.1.4.3.

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: [www.ajtesting.com](http://www.ajtesting.com) Email: [info@ajtesting.com](mailto:info@ajtesting.com)





# Test Report




中国认可  
国际互认  
检测  
TESTING  
CNAS L4735


No.: AJT210825053E-1

## Band Edge Plot

### 2405MHz Horizontal

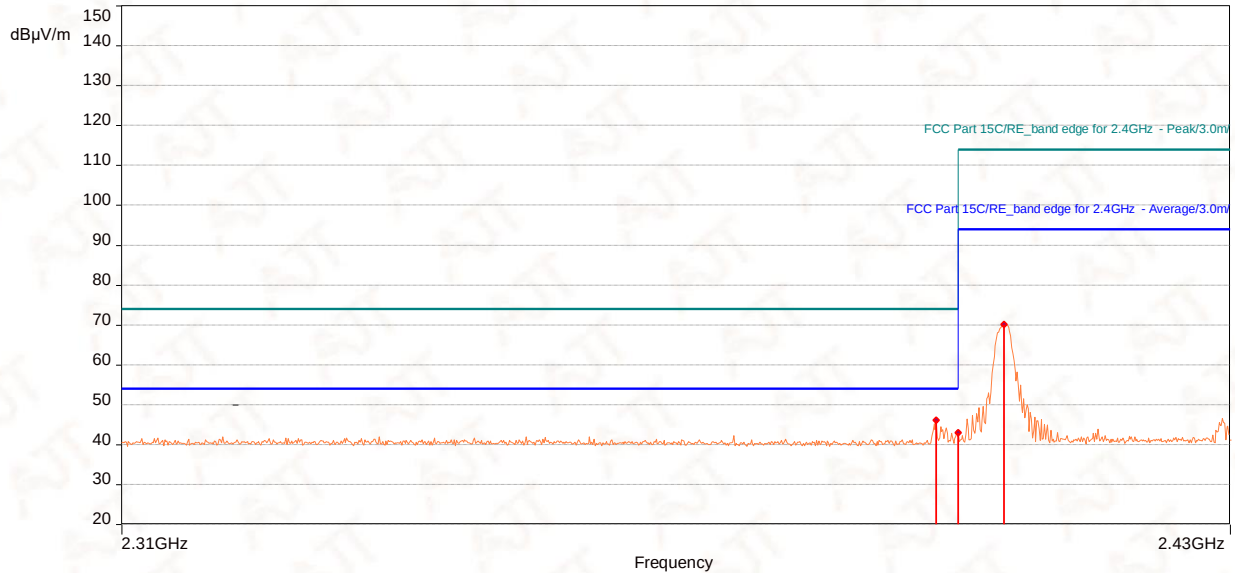

### 2405MHz Vertical

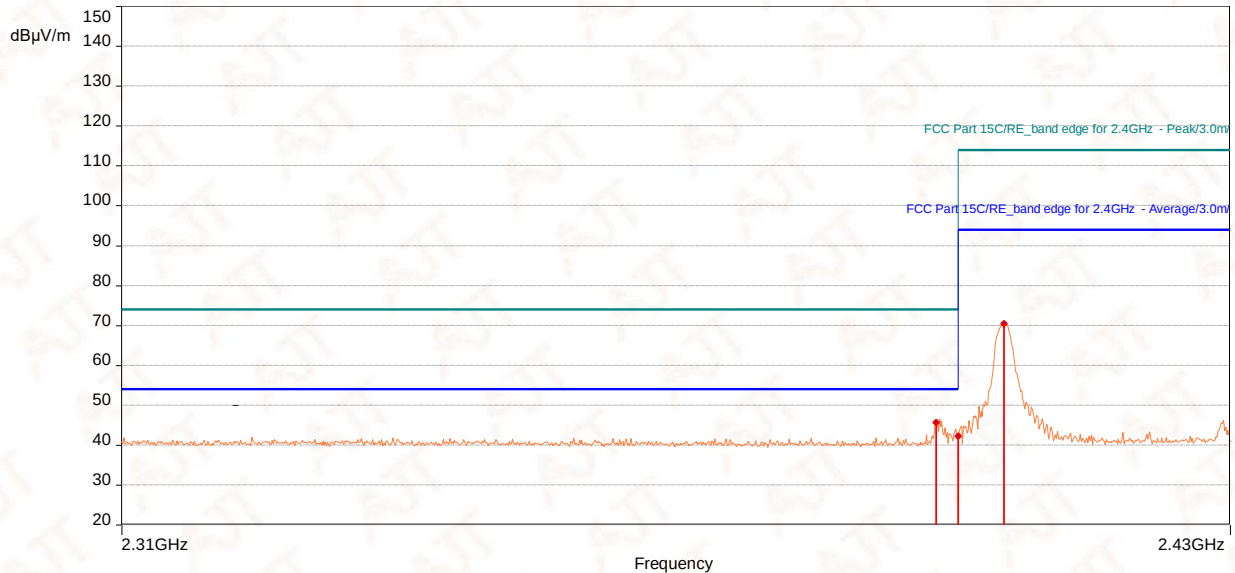

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: [www.ajtesting.com](http://www.ajtesting.com) Email: [info@ajtesting.com](mailto:info@ajtesting.com)





# Test Report



中国认可  
国际互认  
检测  
TESTING  
CNAS L4735

No.: AJT210825053E-1

|                 |                              |                   |                           |
|-----------------|------------------------------|-------------------|---------------------------|
| EUT Name        | PREDATOR BLUE RED STUNT RC   |                   |                           |
| Channel         | The Middle Channel (2440MHz) | Detector Function | Peak (PK)<br>Average (AV) |
| Frequency Range | Above 1GHz                   | Result            | PASS                      |

| Antenna Polarity & Test Distance: Horizontal At 3m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                         |                |             |            |           |              |                 |          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|----------------|-------------|------------|-----------|--------------|-----------------|----------|
| Frequency (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Emission Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (m) | Angle (°) | Polarization | Correction (dB) | Detector |
| *2439.9965                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 41.96                   | 94.00          | -52.04      | 1.51       | 253.00    | Horizontal   | -28.43          | Average  |
| 4881.1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 26.23                   | 54.00          | -27.77      | 1.99       | 240.00    | Horizontal   | -28.43          | Average  |
| 7364.8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 16.27                   | 54.00          | -37.73      | 1.01       | 342.00    | Horizontal   | -28.43          | Average  |
| *2439.9965                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 70.39                   | 114.00         | -43.61      | 1.51       | 253.00    | Horizontal   | -2.55           | Peak     |
| 4881.1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 54.66                   | 74.00          | -19.34      | 1.99       | 240.00    | Horizontal   | 1.69            | Peak     |
| 7364.8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 44.70                   | 74.00          | -29.30      | 1.01       | 342.00    | Horizontal   | 8.11            | Peak     |
| Antenna Polarity & Test Distance: Vertical At 3m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                         |                |             |            |           |              |                 |          |
| Frequency (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Emission Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (m) | Angle (°) | Polarization | Correction (dB) | Detector |
| *2439.9965                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 40.66                   | 94.00          | -53.34      | 1.50       | 40.00     | Vertical     | -28.43          | Average  |
| 4881.1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 26.75                   | 54.00          | -27.25      | 1.00       | 32.00     | Vertical     | -28.43          | Average  |
| 7320.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 16.30                   | 54.00          | -37.70      | 1.99       | 345.00    | Vertical     | -28.43          | Average  |
| *2439.9965                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 69.09                   | 114.00         | -44.91      | 1.50       | 40.00     | Vertical     | -2.55           | Peak     |
| 4881.1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 55.18                   | 74.00          | -18.82      | 1.00       | 32.00     | Vertical     | 1.69            | Peak     |
| 7320.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 44.73                   | 74.00          | -29.27      | 1.99       | 345.00    | Vertical     | 7.93            | Peak     |
| Remarks:<br>1. Emission level (dBμV/m) = Raw Value (dBμV) + Correction Factor (dB/m)<br>2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)<br>3. The emission levels of other frequencies were more than 20dB margin against the limit.<br>4. Margin = Emission level - Limit value<br>5. " * ": Fundamental frequency.<br>6. The average value of fundamental frequency is: Average value = Peak value +AV factor, where the AV factor is calculated from following formula: AV factor=20 log (Duty cycle) = 20 log (3.8%) = -28.43dB, please see 5.1.4.3. |                         |                |             |            |           |              |                 |          |

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: [www.ajtesting.com](http://www.ajtesting.com) Email: [info@ajtesting.com](mailto:info@ajtesting.com)





# Test Report



中国认可  
国际互认  
检测  
TESTING  
CNAS L4735

No.: AJT210825053E-1

|                 |                               |                   |                           |
|-----------------|-------------------------------|-------------------|---------------------------|
| EUT Name        | PREDATOR BLUE RED STUNT RC    |                   |                           |
| Channel         | The Highest Channel (2475MHz) | Detector Function | Peak (PK)<br>Average (AV) |
| Frequency Range | Above 1GHz                    | Result            | PASS                      |

| Antenna Polarity & Test Distance: Horizontal At 3m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                         |                |             |            |           |              |                 |          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|----------------|-------------|------------|-----------|--------------|-----------------|----------|
| Frequency (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Emission Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (m) | Angle (°) | Polarization | Correction (dB) | Detector |
| *2475                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 40.69                   | 94.00          | -53.31      | 1.50       | 273.00    | Horizontal   | -28.43          | Average  |
| 2483.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11.64                   | 54.00          | -42.36      | 1.50       | 314.00    | Horizontal   | -28.43          | Average  |
| 4950.8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 27.99                   | 54.00          | -26.01      | 1.99       | 17.00     | Horizontal   | -28.43          | Average  |
| 7424.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 16.64                   | 54.00          | -37.36      | 1.99       | 205.00    | Horizontal   | -28.43          | Average  |
| *2475                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 69.12                   | 114.00         | -44.88      | 1.50       | 273.00    | Horizontal   | -2.48           | Peak     |
| 2483.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 40.07                   | 74.00          | -33.93      | 1.50       | 314.00    | Horizontal   | -2.51           | Peak     |
| 4950.8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 56.42                   | 74.00          | -17.58      | 1.99       | 17.00     | Horizontal   | 2.09            | Peak     |
| 7424.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 45.07                   | 74.00          | -28.93      | 1.99       | 205.00    | Horizontal   | 8.30            | Peak     |
| Antenna Polarity & Test Distance: Vertical At 3m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                         |                |             |            |           |              |                 |          |
| Frequency (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Emission Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (m) | Angle (°) | Polarization | Correction (dB) | Detector |
| *2475                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 40.11                   | 94.00          | -53.89      | 1.50       | 161.00    | Vertical     | -28.43          | Average  |
| 2483.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11.45                   | 54.00          | -42.55      | 1.50       | 277.00    | Vertical     | -28.43          | Average  |
| 4950.8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 26.44                   | 54.00          | -27.56      | 1.00       | 49.00     | Vertical     | -28.43          | Average  |
| 7424.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 16.62                   | 54.00          | -37.38      | 1.99       | 235.00    | Vertical     | -28.43          | Average  |
| *2475                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 68.54                   | 114.00         | -45.46      | 1.50       | 161.00    | Vertical     | -2.48           | Peak     |
| 2483.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 39.88                   | 74.00          | -34.12      | 1.50       | 277.00    | Vertical     | -2.51           | Peak     |
| 4950.8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 54.87                   | 74.00          | -19.13      | 1.00       | 49.00     | Vertical     | 2.09            | Peak     |
| 7424.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 45.05                   | 74.00          | -28.95      | 1.99       | 235.00    | Vertical     | 8.30            | Peak     |
| Remarks:<br>1. Emission level (dBμV/m) = Raw Value (dBμV) + Correction Factor (dB/m)<br>2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)<br>3. The emission levels of other frequencies were more than 20dB margin against the limit.<br>4. Margin = Emission level - Limit value<br>5. " * ": Fundamental frequency.<br>6. The average value of fundamental frequency is: Average value = Peak value +AV factor, where the AV factor is calculated from following formula: AV factor=20 log (Duty cycle) = 20 log (3.8%) = -28.43dB, please see 5.1.4.3. |                         |                |             |            |           |              |                 |          |

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: [www.ajtesting.com](http://www.ajtesting.com) Email: [info@ajtesting.com](mailto:info@ajtesting.com)





# Test Report




中国认可  
国际互认  
检测  
TESTING  
CNAS L4735


No.: AJT210825053E-1

## Band Edge Plot

### 2475MHz Horizontal

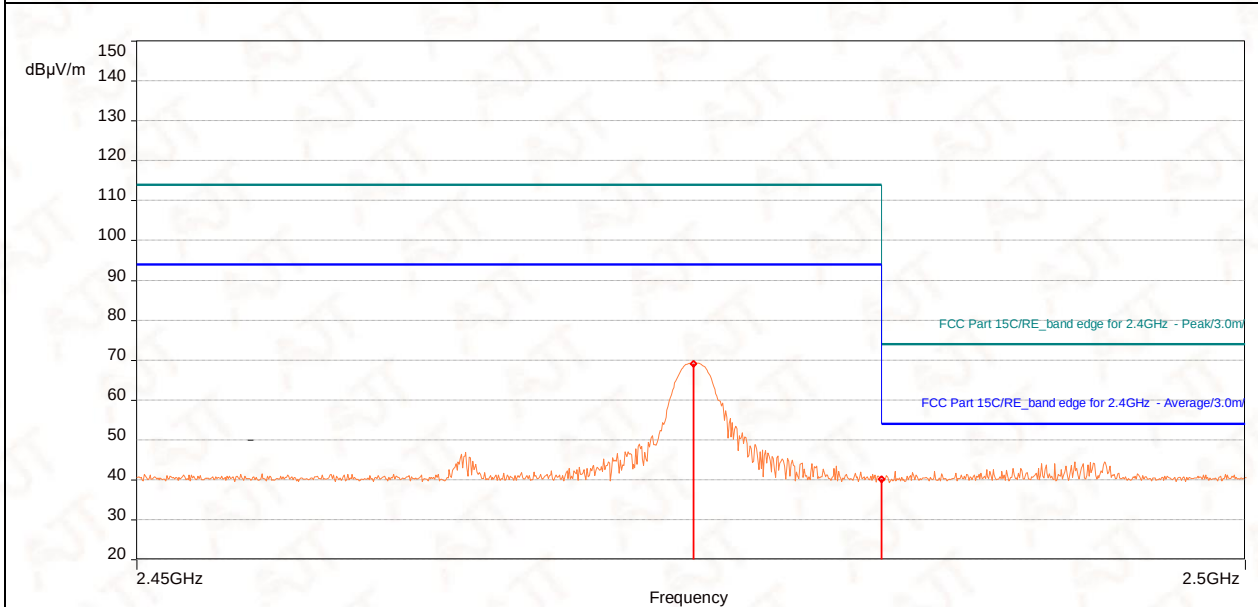

### 2475MHz Vertical

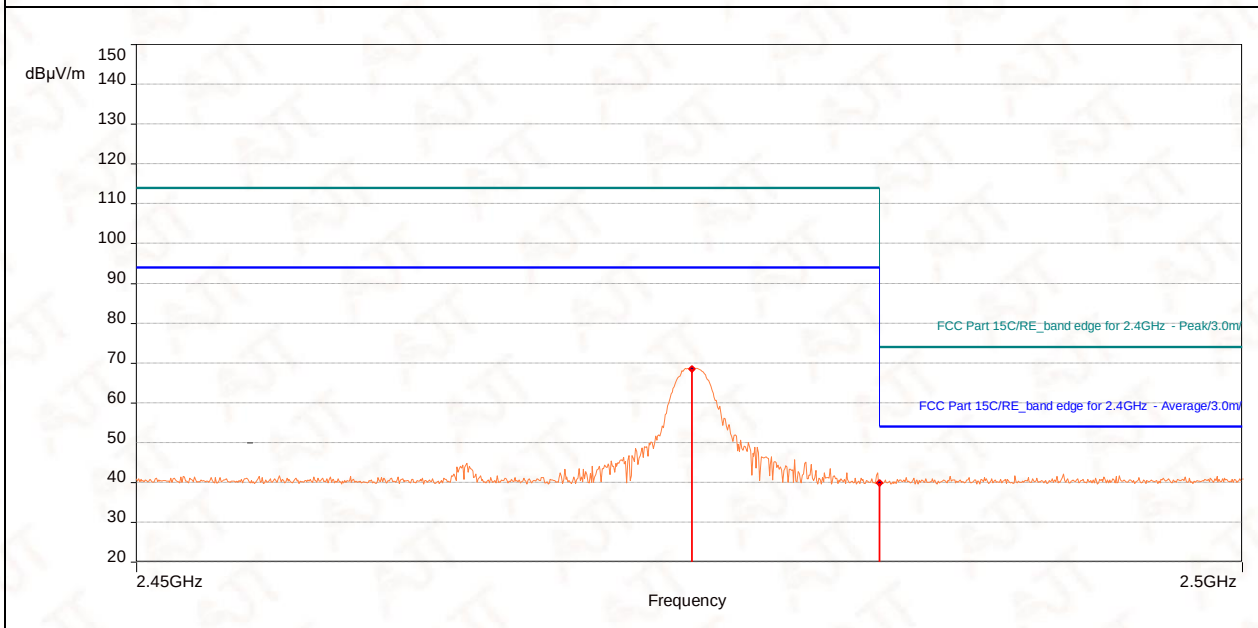

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: [www.ajtesting.com](http://www.ajtesting.com) Email: [info@ajtesting.com](mailto:info@ajtesting.com)





# Test Report



中国认可  
国际互认  
检测  
TESTING  
CNAS L4735

No.: AJT210825053E-1

## 5.1.4.3 Calculation of Average Factor


Effective period of the cycle = 0.75ms

The duration of one cycle = 19.85ms

Duty Cycle = 0.75ms / 19.85ms = 3.8%

Averaging factor in dB =  $20 \log(\text{duty cycle}) = 20 \log(3.8\%) = -28.43\text{dB}$

100ms Duty Cycle

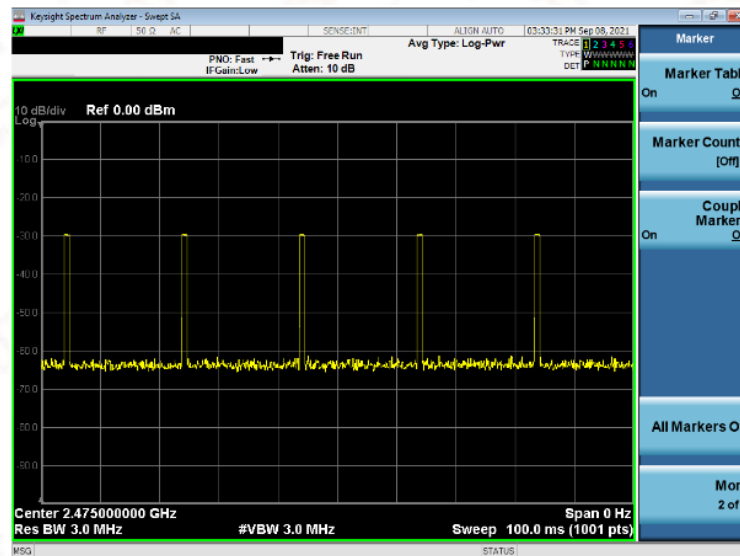

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: [www.ajtesting.com](http://www.ajtesting.com) Email: [info@ajtesting.com](mailto:info@ajtesting.com)






# Test Report




中国认可  
国际互认  
检测  
TESTING  
CNAS L4735

No.: AJT210825053E-1

Ton of one cycle

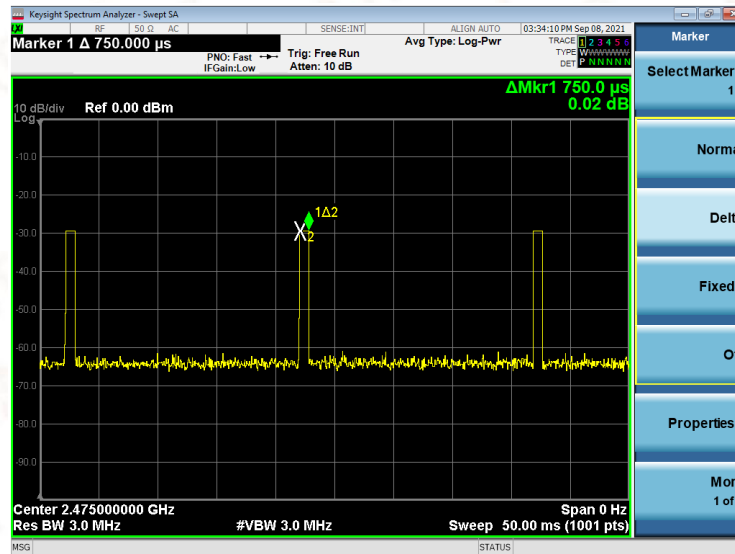

The duration of one cycle

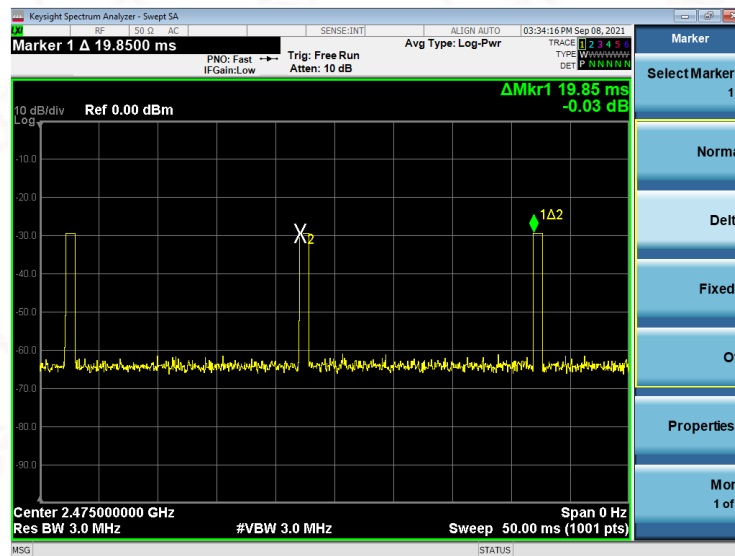

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: [www.ajtesting.com](http://www.ajtesting.com) Email: [info@ajtesting.com](mailto:info@ajtesting.com)

Page 18 of 25




## 5.2 20dB Bandwidth

For test instruments and accessories used see section 6

### 5.2.1 Test Procedures

- (1) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- (2) Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- (3) Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- (4) Repeat above procedures until all frequencies measured were complete.

### 5.2.2 Test Setup



### 5.2.3 Test Limits

According to FCC 15.215(c), must be designed to ensure that the 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### 5.2.4 Test Results

| Channel             | frequency (MHz) | F <sub>L</sub> (MHz) | F <sub>H</sub> (MHz) | 20dB Bandwidth (MHz) |
|---------------------|-----------------|----------------------|----------------------|----------------------|
| The lowest channel  | 2405            | 2404.740             | 2405.320             | 0.580                |
| The middle channel  | 2440            | 2439.725             | 2440.320             | 0.595                |
| The highest channel | 2475            | 2474.735             | 2475.320             | 0.585                |

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: [www.ajtesting.com](http://www.ajtesting.com) Email: [info@ajtesting.com](mailto:info@ajtesting.com)






# Test Report



中国认可  
国际互认  
检测  
TESTING  
CNAS L4735

No.: AJT210825053E-1

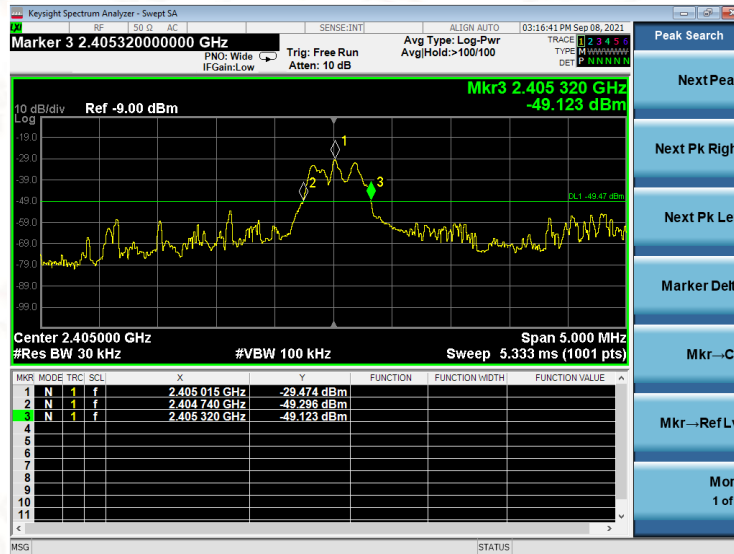

2405MHz



2440MHz

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: [www.ajtesting.com](http://www.ajtesting.com) Email: [info@ajtesting.com](mailto:info@ajtesting.com)

Page 20 of 25






# Test Report



中国认可  
国际互认  
检测  
TESTING  
CNAS L4735

No.: AJT210825053E-1

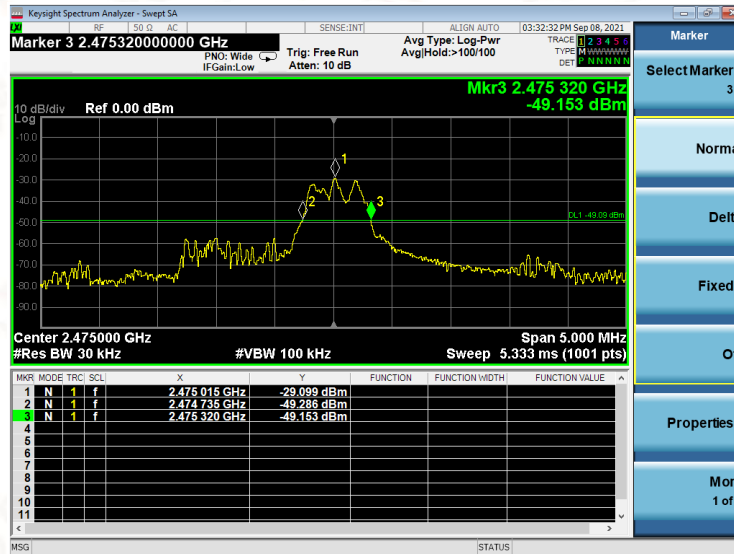

2475MHz

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: [www.ajtesting.com](http://www.ajtesting.com) Email: [info@ajtesting.com](mailto:info@ajtesting.com)




### 5.3 Conducted Emission (CE)

For test instruments and accessories used see section 6

### 5.3.1 Test Procedures

The PC Power connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). This provides a 50 ohm coupling impedance for the EUT. Please refer the block diagram of the test setup and photographs. The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#1). Power on the PC and let it work normally, we use a keyboard test software, let EUT working in test mode, then test it. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to RSS-Gen issue 5 on Conducted Emission Test.

### 5.3.2 Test Setup

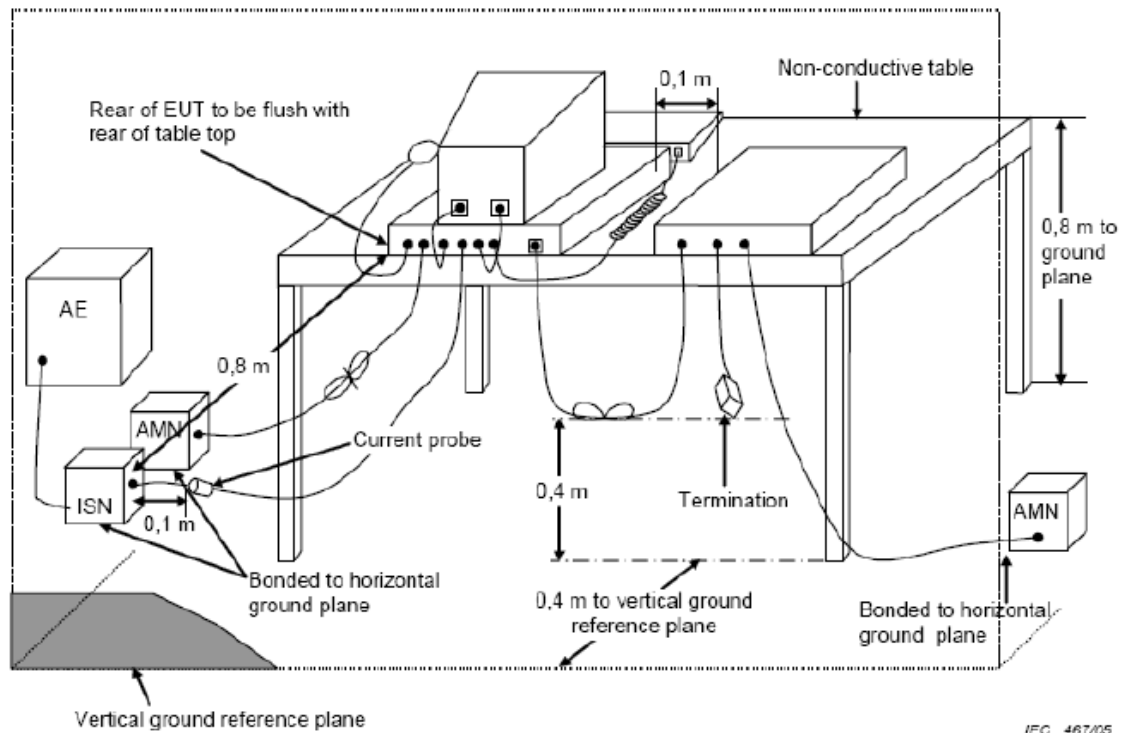

IEC 467/05

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999    Fax: 86-754-86984098    Website: [www.aitestings.com](http://www.aitestings.com)    Email: [info@aitesting.com](mailto:info@aitesting.com)

Page 22 of 25





# Test Report



中国认可  
国际互认  
检测  
TESTING  
CNAS L4735

No.: AJT210825053E-1

## 5.3.3 Test Limits

| Standard: RSS-Gen Issue 5 clause 8.8 |                         |                      |
|--------------------------------------|-------------------------|----------------------|
| Frequency of emission (MHz)          | Maximum RF Line Voltage |                      |
|                                      | Quasi-Peak Level dB(μV) | Average Level dB(μV) |
| 0.15-0.5                             | 66 to 56*               | 56 to 46*            |
| 0.5-5                                | 56                      | 46                   |
| 5-30                                 | 60                      | 50                   |

Notes: 1. \* Decreasing linearly with logarithm of frequency.  
2. The lower limit shall apply at the transition frequencies.

## 5.3.4 Test Results

Not Applicable

Note: The device is a DC power supply and does not apply to conducted emissions.

## 5.4 Antenna Requirements

### 5.4.1 Test Standard:

FCC Part 15, Subpart C 15.203

### 5.4.2 Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user. but the use of a standard antenna jack or electrical connector is prohibited.

### 5.4.3 EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi. Antenna location: Refer to Appendix (Internal photos).

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: [www.ajtesting.com](http://www.ajtesting.com) Email: [info@ajtesting.com](mailto:info@ajtesting.com)





# Test Report



中国认可  
国际互认  
检测  
TESTING  
CNAS L4735

No.: AJT210825053E-1

## 6 Test Equipment

| Item | Test Equipment                       | Manufacturer                    | Model No.  | Serial No.           | Last Cal.  | Next Cal.  |
|------|--------------------------------------|---------------------------------|------------|----------------------|------------|------------|
| 1    | Spectrum Analyzer                    | Keysight                        | N9010A     | MY51120099           | 2020/06/22 | 2022/06/22 |
| 2    | JS0806-2 RF Control Unit             | Tonscend                        | JS0806-2   | 188060124            | 2021/07/16 | 2022/07/16 |
| 3    | Broadband Preamplifier               | SCHWARZBECK                     | BBV 9743B  | 00067                | 2021/03/28 | 2022/03/28 |
| 4    | Broadband Preamplifier               | SCHWARZBECK                     | BBV 9718B  | 00002                | 2021/03/28 | 2022/03/28 |
| 5    | EMI Test Receiver                    | ROHDE & SCHWARZ                 | ESR3       | 102452               | 2021/07/16 | 2022/07/16 |
| 6    | Trilog Broadband Antenna             | SCHWARZBECK                     | VULB 9163  | 9163-1127            | 2021/07/12 | 2022/07/12 |
| 7    | Horn Antenna                         | SCHWARZBECK                     | BBHA 9120D | 01829                | 2021/06/28 | 2022/06/28 |
| 8    | DC Power Supply                      | SIGLENT                         | SPD1168X   | SPD1XEAD3 R 0167     | 2021/07/16 | 2022/07/16 |
| 9    | Vector Signal Generator              | Keysight                        | N5172B     | MY53052255           | 2021/07/16 | 2022/07/16 |
| 10   | Analog Signal Generator              | Keysight                        | N5171B     | MY53051692           | 2021/07/16 | 2022/07/16 |
| 11   | Temperature Humidity Chamber         | Yiheng                          | BPS-50CB   | 191005684            | 2020/12/07 | 2021/12/07 |
| 12   | Temperature and Humidity Indicator   | JianDaRenKe                     | Cos-03     | 612058               | 2021/06/23 | 2022/06/23 |
| 13   | BAT-EMC Testing (Test Software)      | NEXIO                           | BAT-EMC    | Version: 3.16.0.74   | N/A        | N/A        |
| 14   | JS1120-3 Test System (Test Software) | Tonscend                        | JS1120-3   | Version: 2.5.77.0418 | N/A        | N/A        |
| 15   | Double Ridge Guide Horn Antennas     | A.H.Systems                     | SAS-574    | 588                  | 2021/07/16 | 2022/07/16 |
| 16   | Active Loop Antenna                  | BeiJing DaZe technology co. LTD | ZN30900C   | 15015                | 2021/04/08 | 2022/04/08 |

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: [www.ajtesting.com](http://www.ajtesting.com) Email: [info@ajtesting.com](mailto:info@ajtesting.com)





# Test Report



中国认可  
国际互认  
检测  
TESTING  
CNAS L4735

No.: AJT210825053E-1

## 7 Test Photographs

Referring to – “Test Setup Photos of PREDATOR BLUE RED STUNT RC (2008)”.

## 8 Photos of the EUT

Referring to – “External Photos of PREDATOR BLUE RED STUNT RC (2008)” and “Internal Photos of PREDATOR BLUE RED STUNT RC (2008)”.

## 9 Manufacturer/ Approval Holder Declaration

The following identical model(s):

/

Belong to the tested device:

Product Description: PREDATOR BLUE RED STUNT RC  
Model No.: RD19H008

END OF TEST REPORT

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Disagreement against this test report, if any, should be filed with to our company in writing within 15 days of receiving the report. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission.

AJT TESTING SERVICES LIMITED

Add: 1/F, No.1, Wenhua South Road, Chenghua Industrial Zone, Chenghai District, Guangdong, China

Tel: 86-754-85860999 Fax: 86-754-86984098 Website: [www.ajtesting.com](http://www.ajtesting.com) Email: [info@ajtesting.com](mailto:info@ajtesting.com)

Page 25 of 25

