



Appendix B. Test Result of Occupied Bandwidth & DTS Bandwidth

Modulation	Frequency (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	Limit (MHz)	
				99% Occupied Bandwidth	DTS Bandwidth
GFSK (1Mbps)	2402	1.02	0.66	-	≥ 0.5
	2440	1.01	0.66	-	≥ 0.5
	2480	1.01	0.66	-	≥ 0.5
GFSK (2Mbps)	2402	2.03	1.13	-	≥ 0.5
	2440	2.03	1.13	-	≥ 0.5
	2480	2.03	1.13	-	≥ 0.5

For 99% Occupied Bandwidth:

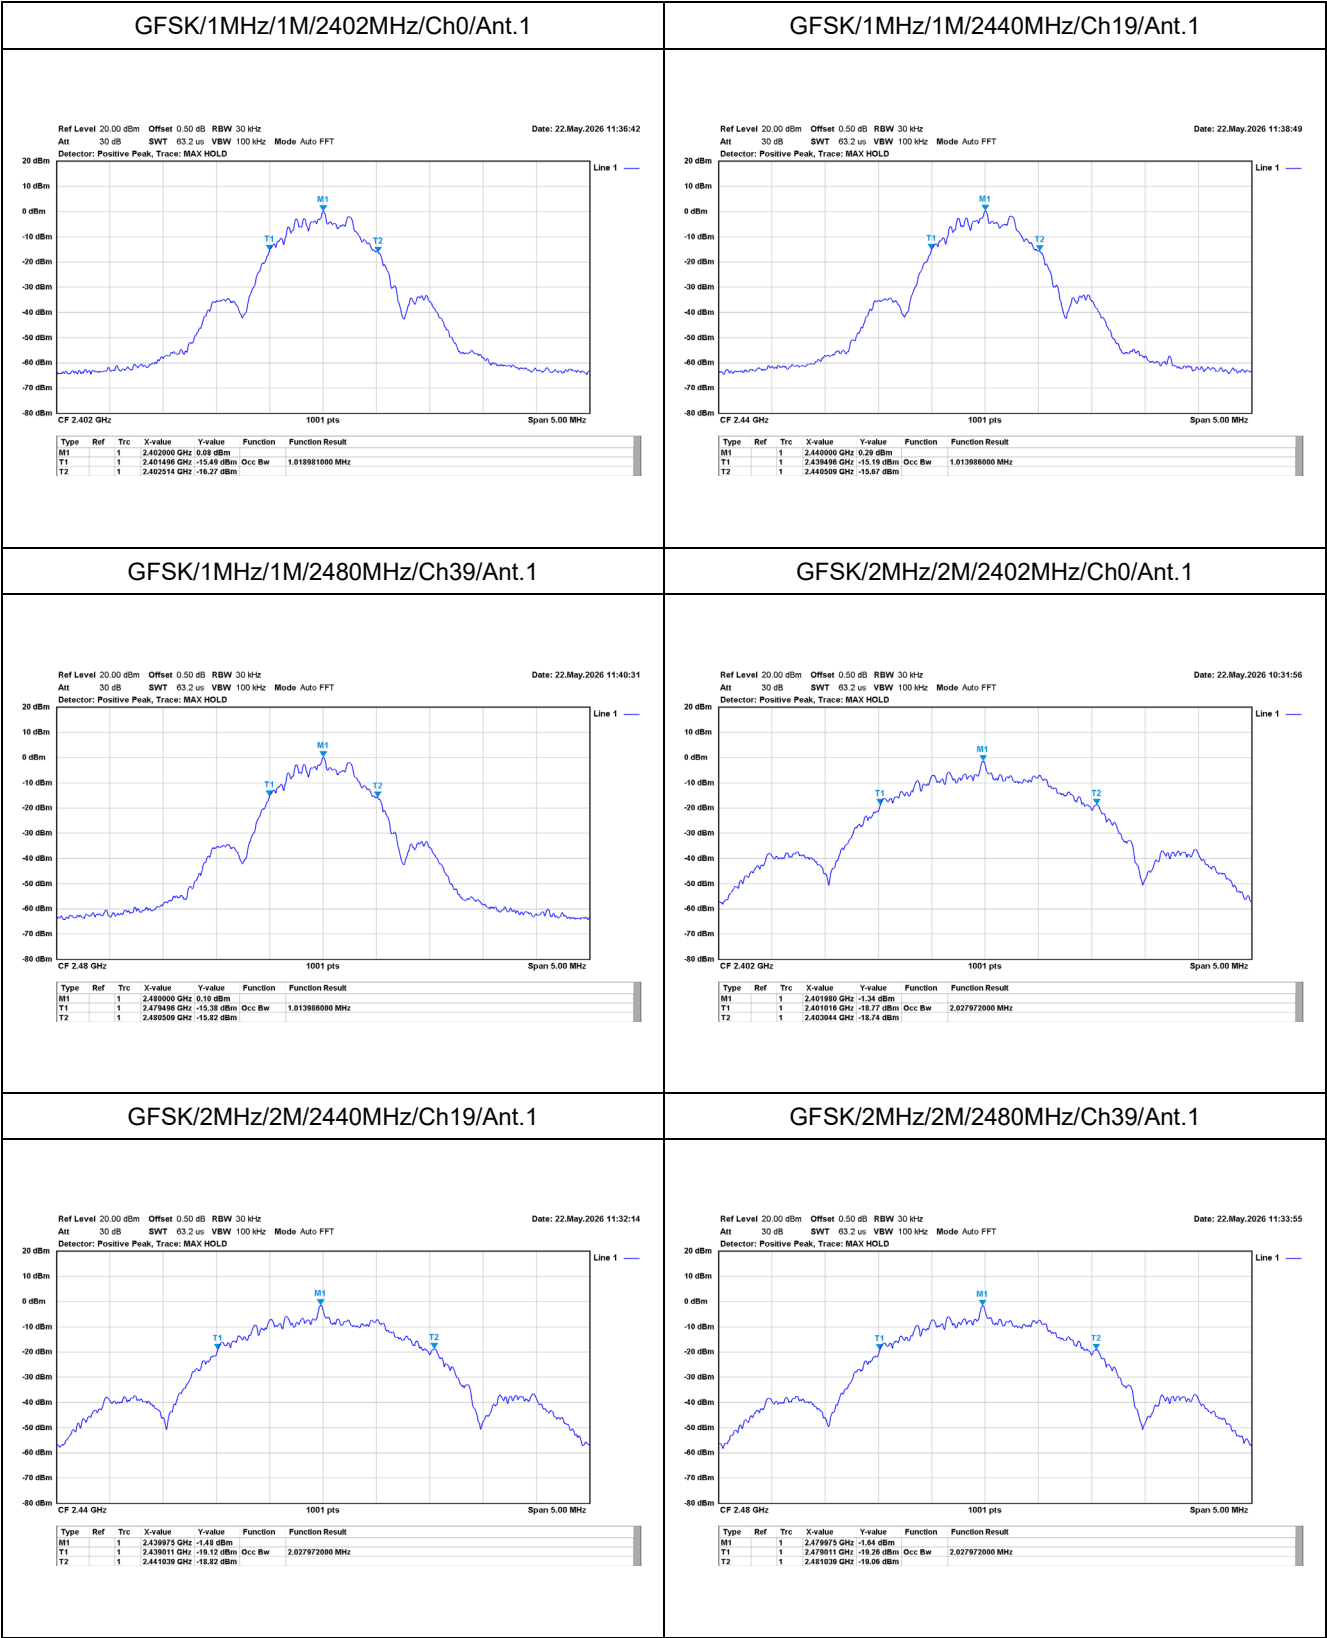

For DTS Bandwidth:

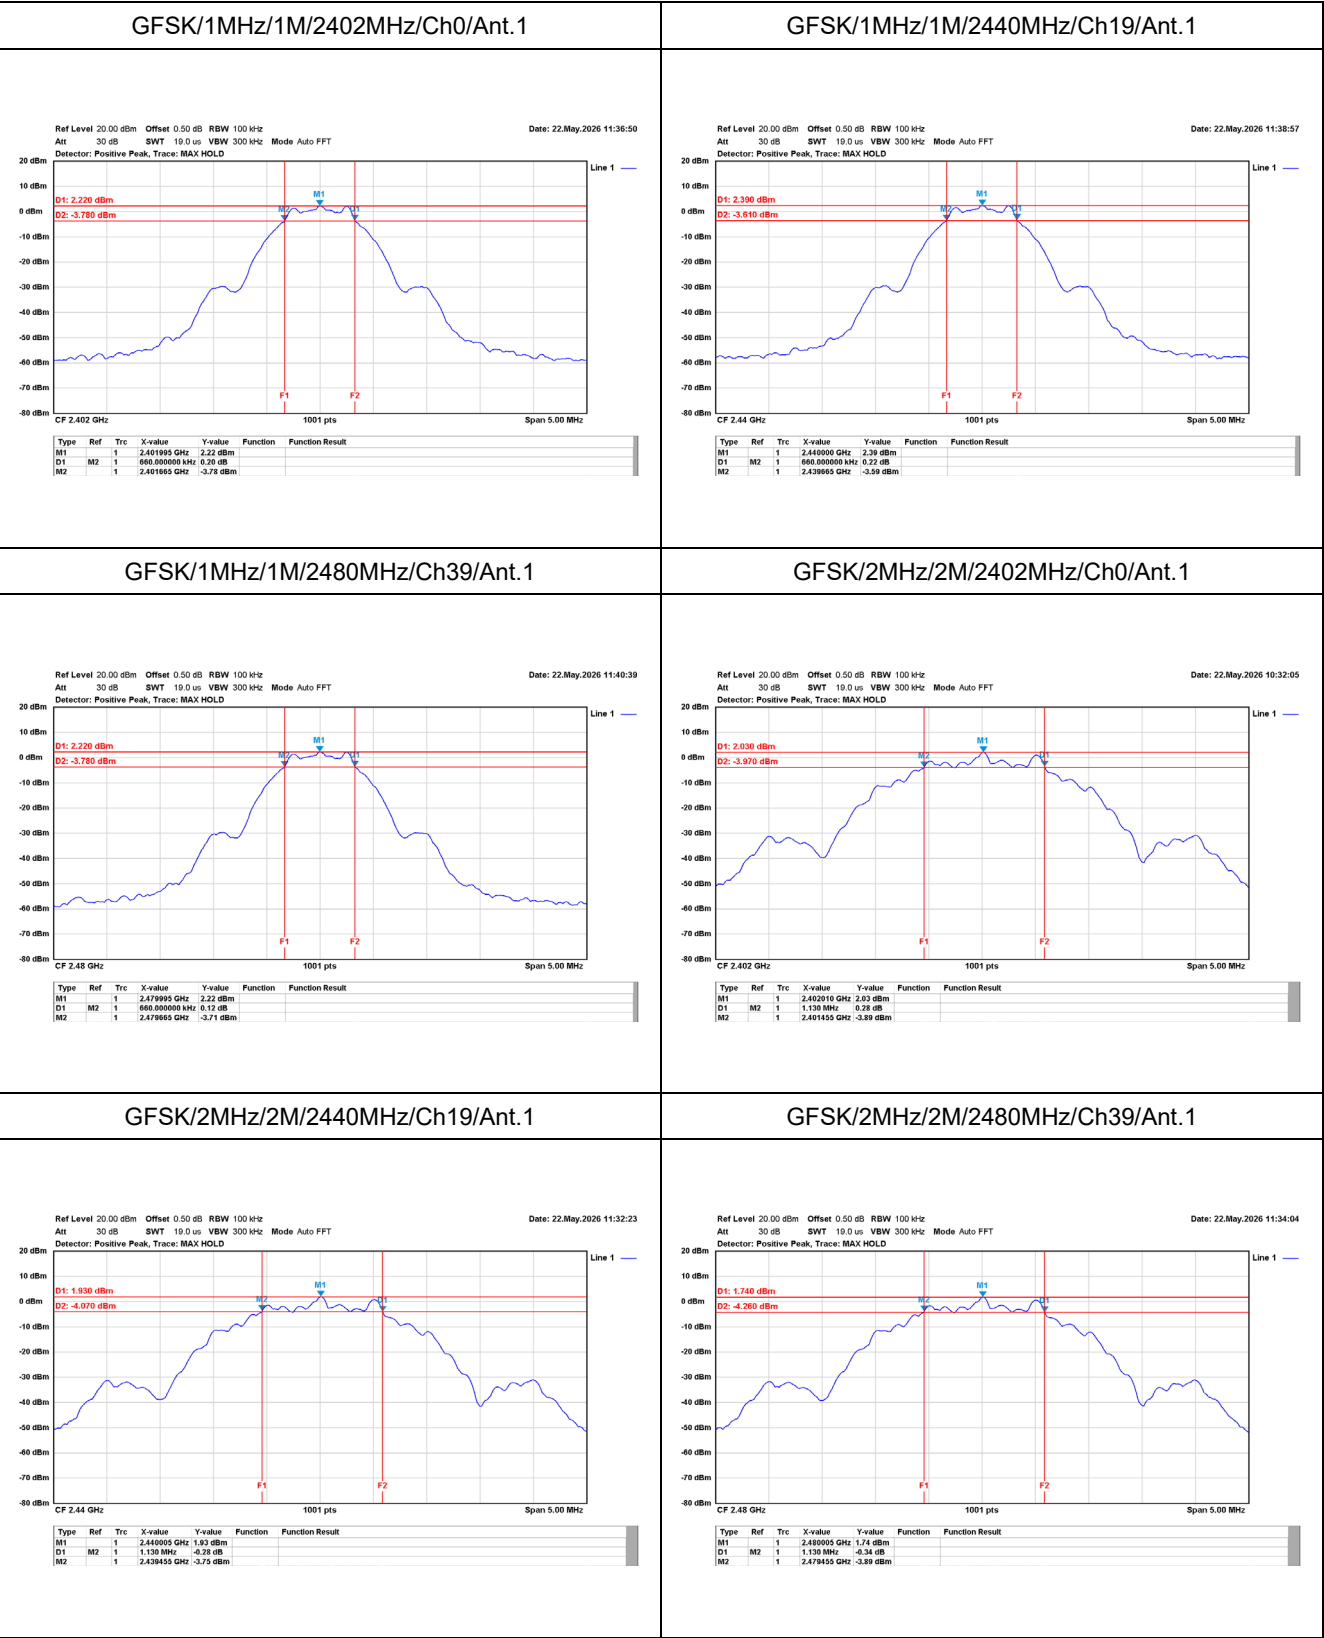


Appendix C. Test Result of Maximum Peak Conducted Output Power


Modulation	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)	Result
GFSK (1Mbps)	2402	2.30	30.00	Pass
	2440	2.12	30.00	Pass
	2480	2.11	30.00	Pass
GFSK (2Mbps)	2402	2.11	30.00	Pass
	2440	2.41	30.00	Pass
	2480	2.39	30.00	Pass


Appendix D. Test Result of Maximum Power Spectral Density


Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK (1Mbps)	2402	-14.45	8.00	Pass
	2440	-14.20	8.00	Pass
	2480	-14.40	8.00	Pass
GFSK (2Mbps)	2402	-15.00	8.00	Pass
	2440	-15.09	8.00	Pass
	2480	-15.29	8.00	Pass

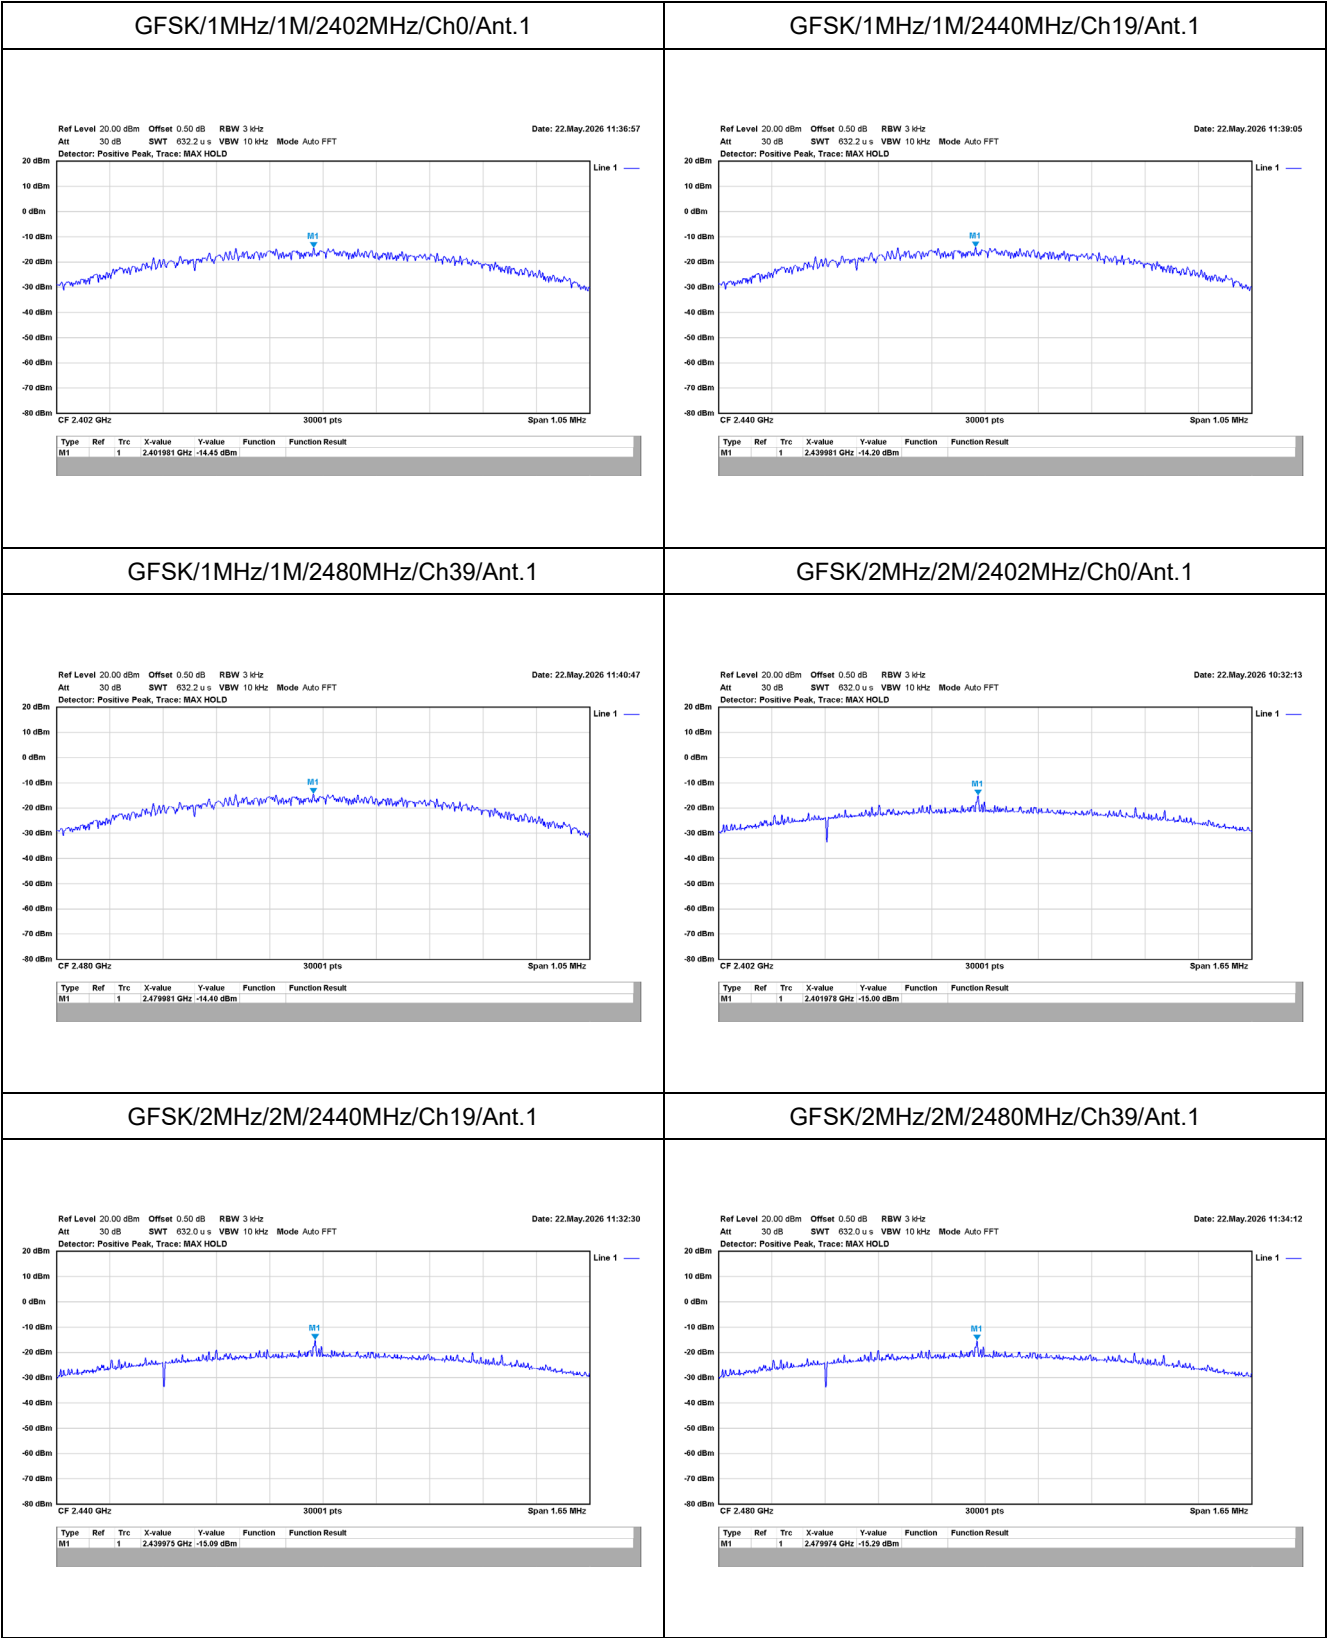


Appendix E. Test Result of Antenna Port Conducted Emission

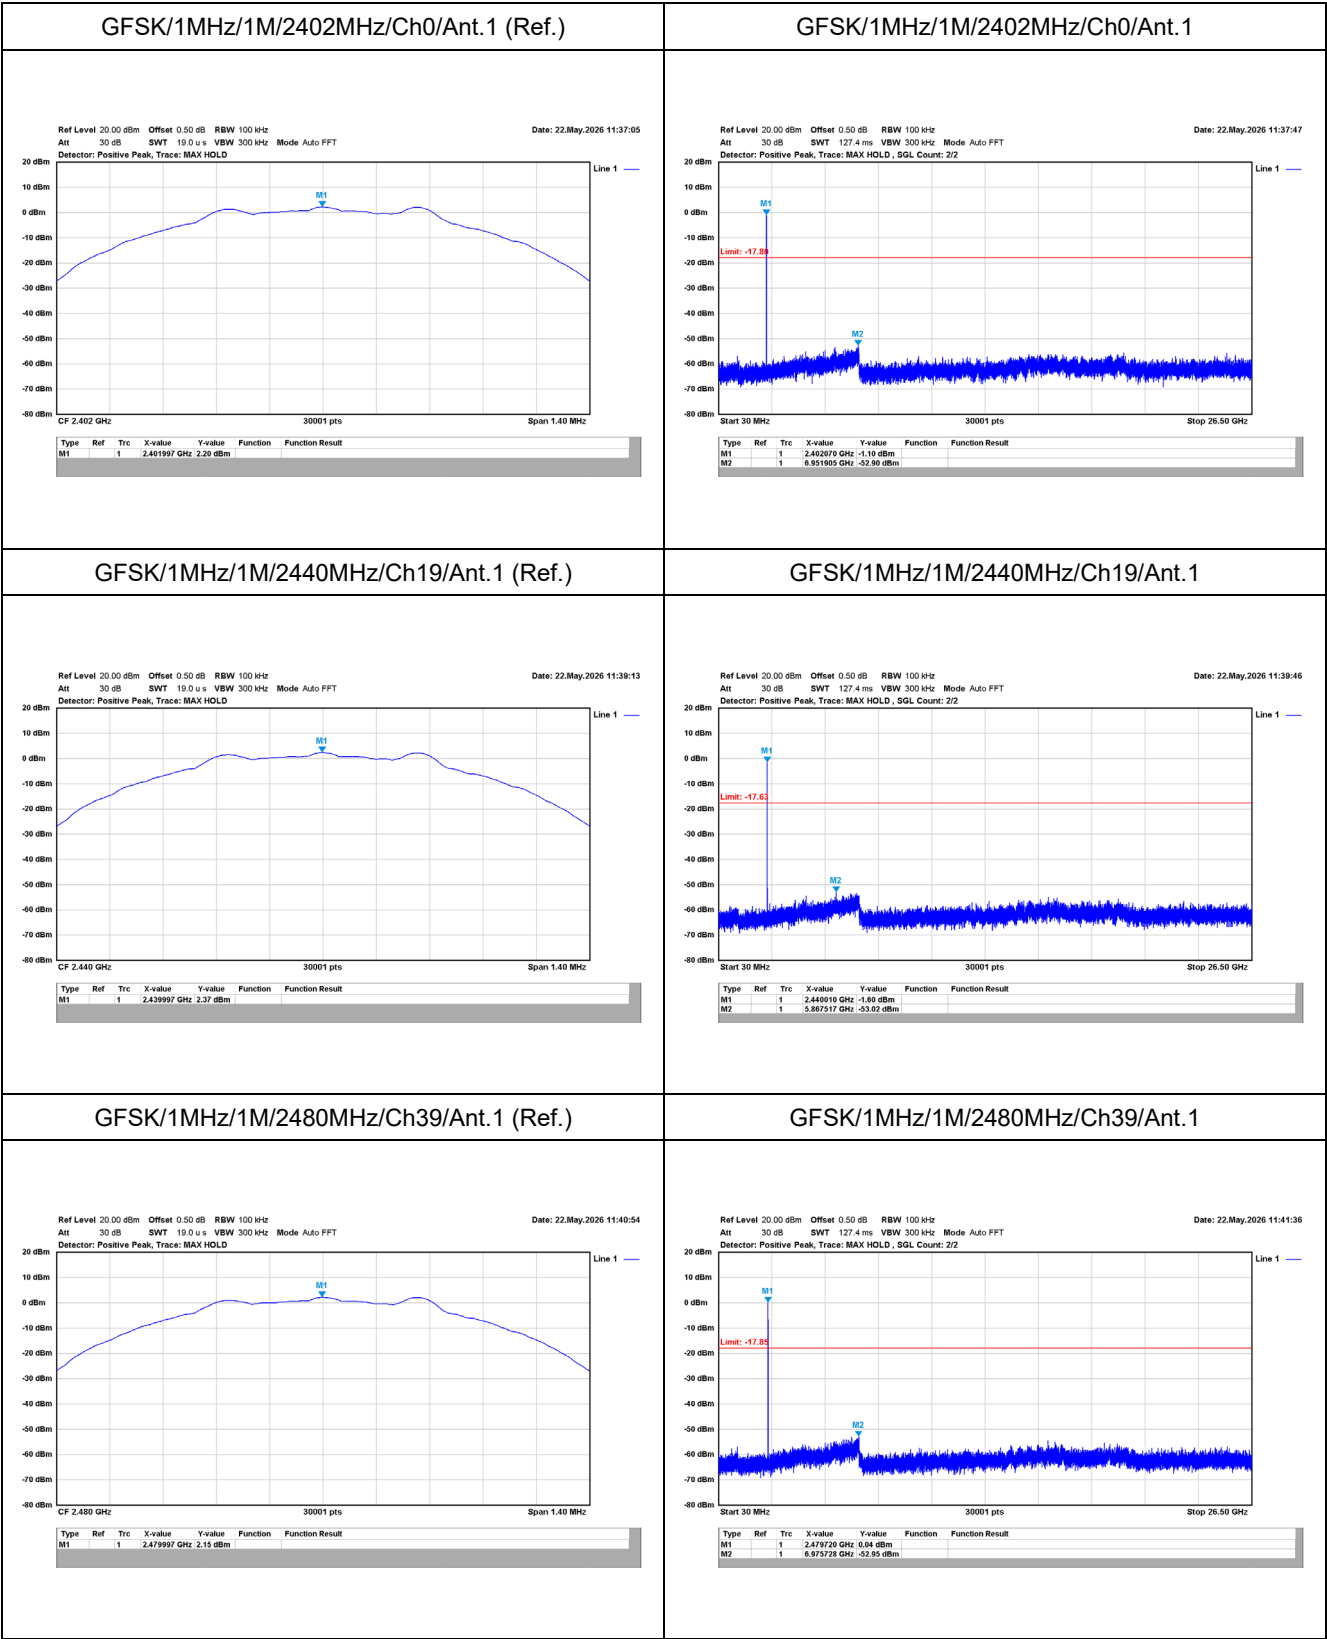


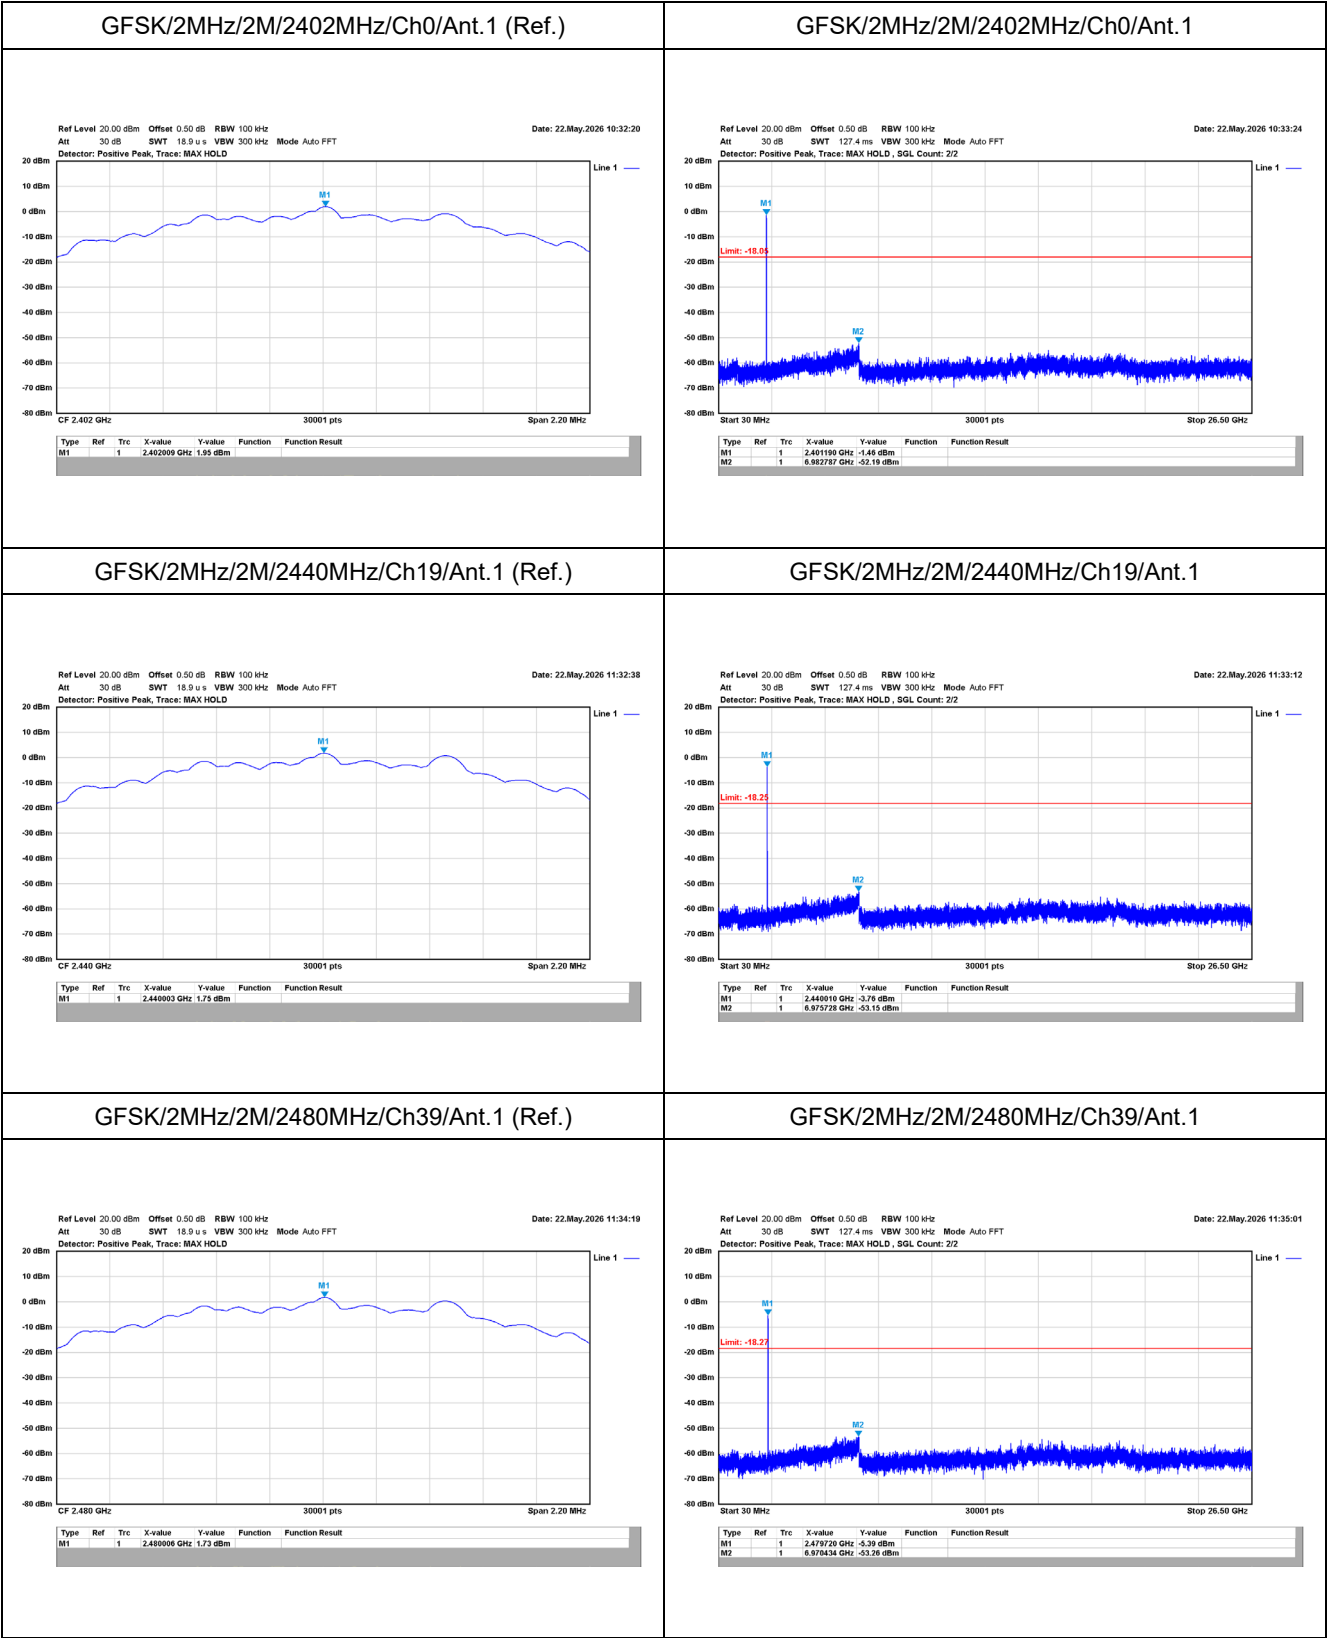

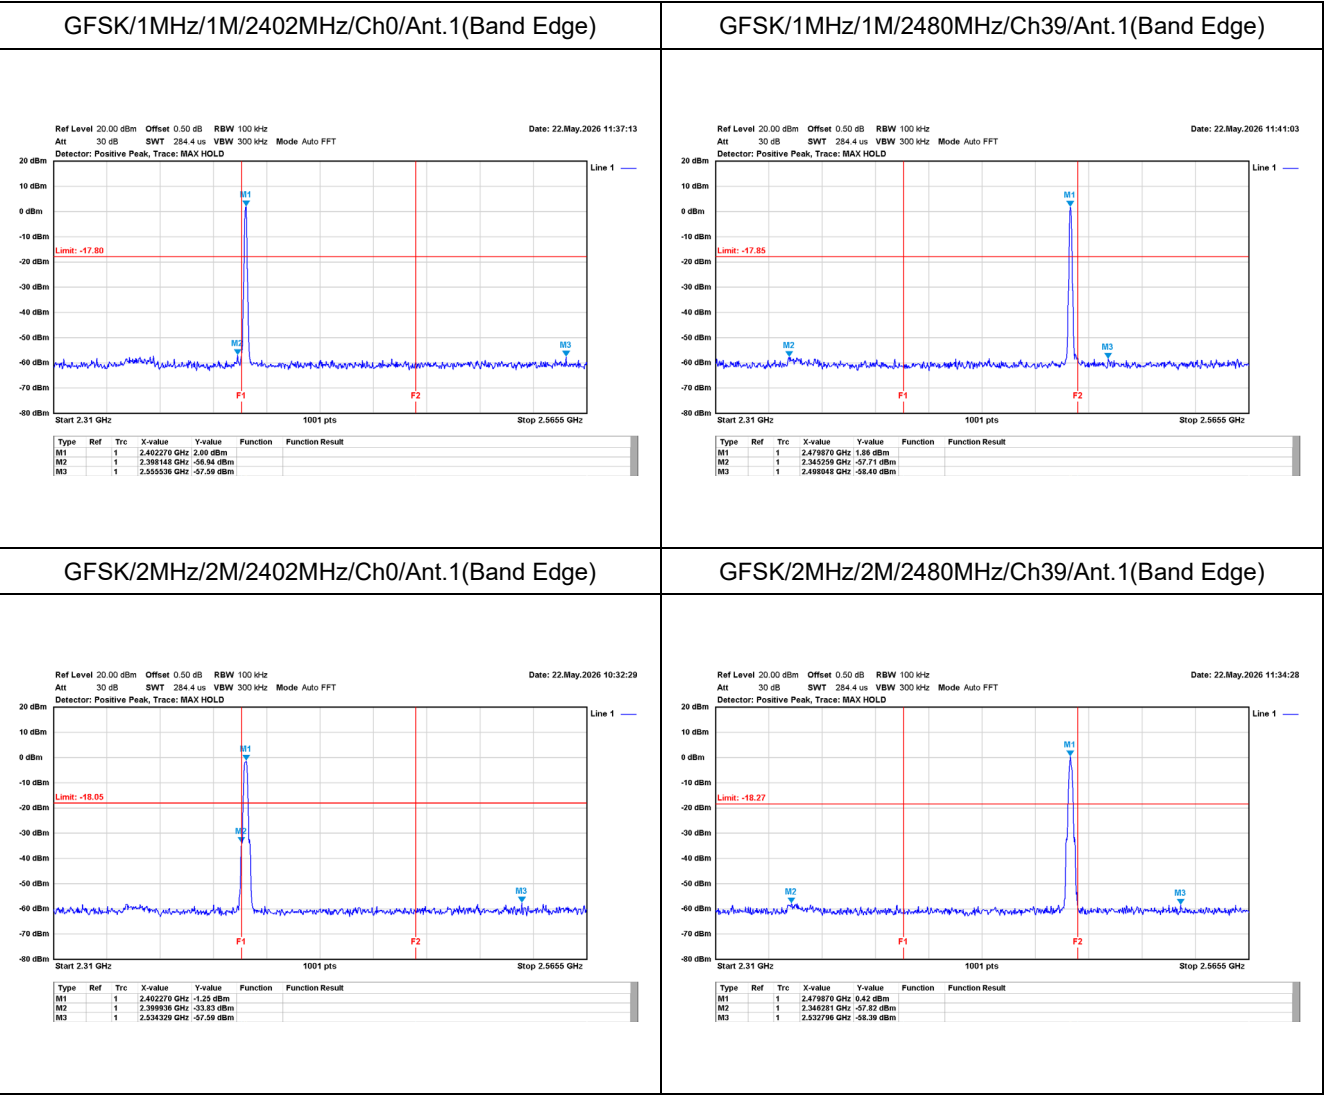


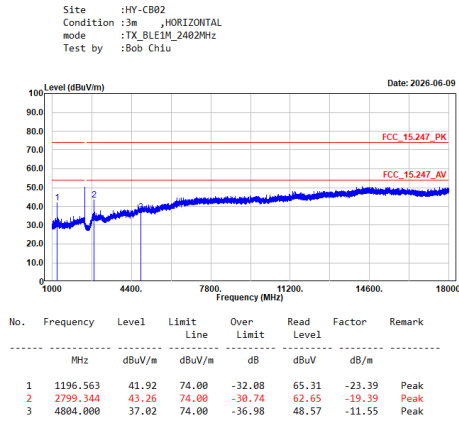Appendix F. Test Result of Radiated Emission**TX_BLE1M_2402MHz_H**


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

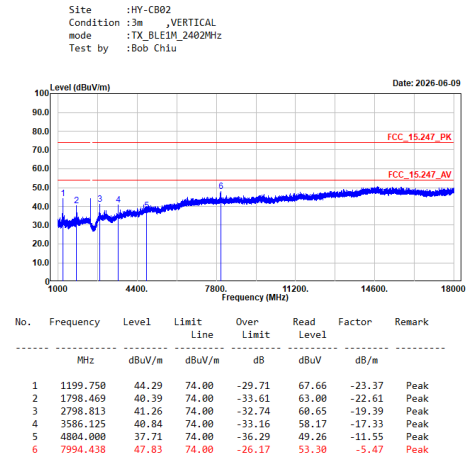TX_BLE1M_2402MHz_V

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

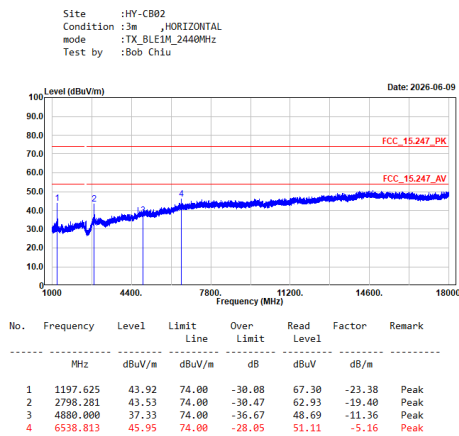TX_BLE1M_2440MHz_H


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

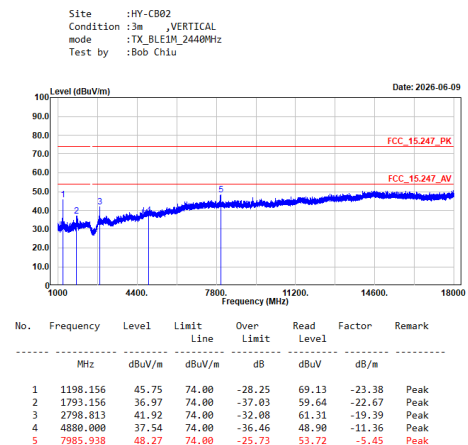TX_BLE1M_2440MHz_V

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE1M_2480MHz
Test by :Bob Chiu

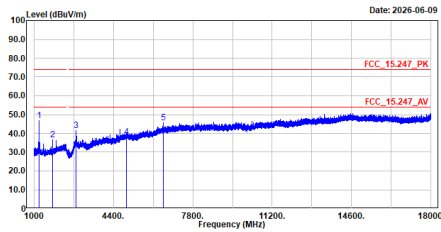


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1197.094	46.97	74.00	-27.03	70.36	-23.39	Peak
2	1794.219	36.43	74.00	-37.57	59.09	-22.66	Peak
3	2799.344	41.34	74.00	-32.66	60.73	-19.39	Peak
4	4960.000	37.96	74.00	-36.04	48.79	-10.83	Peak
5	6538.281	45.81	74.00	-28.19	50.97	-5.16	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE1M_2480MHz
Test by :Bob Chiu

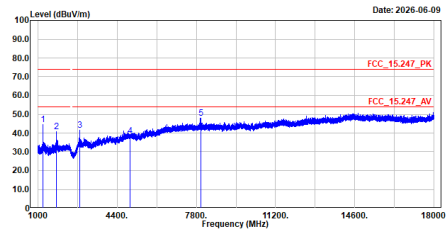


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1197.625	44.41	74.00	-29.59	67.79	-23.38	Peak
2	1800.063	40.88	74.00	-33.12	63.47	-22.59	Peak
3	2798.813	41.33	74.00	-32.67	60.72	-19.39	Peak
4	4960.000	38.63	74.00	-35.37	49.46	-10.83	Peak
5	7994.969	47.80	74.00	-26.20	53.28	-5.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE2M_2402MHz
Test by :Bob Chiu

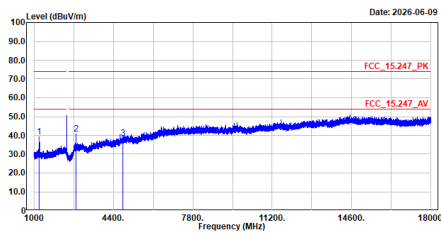


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1198.156	39.09	74.00	-34.91	62.47	-23.38	Peak
2	2798.813	40.66	74.00	-33.34	60.05	-19.39	Peak
3	4804.000	38.50	74.00	-35.50	50.05	-11.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE2M_2402MHz
Test by :Bob Chiu

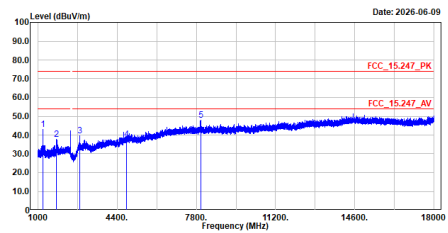


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1199.219	43.12	74.00	-30.88	66.50	-23.38	Peak
2	1796.344	37.66	74.00	-36.34	60.29	-22.63	Peak
3	2799.344	39.72	74.00	-34.28	59.11	-19.39	Peak
4	4804.000	37.82	74.00	-36.18	49.37	-11.55	Peak
5	7982.219	47.89	74.00	-26.11	53.34	-5.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE2M_2440MHz
Test by :Bob Chiu

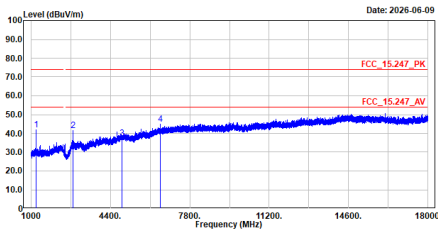


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1198.156	41.76	74.00	-32.24	65.14	-23.38	Peak
2	2798.281	41.46	74.00	-32.54	60.86	-19.40	Peak
3	4880.000	37.30	74.00	-36.70	48.66	-11.36	Peak
4	6538.281	45.09	74.00	-28.91	50.25	-5.16	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE2M_2440MHz
Test by :Bob Chiu

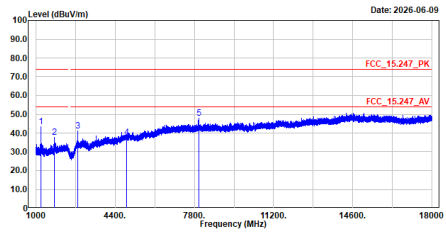


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1199.219	43.51	74.00	-30.49	66.89	-23.38	Peak
2	1796.875	37.88	74.00	-36.12	60.50	-22.62	Peak
3	2798.813	41.05	74.00	-32.95	60.44	-19.39	Peak
4	4880.000	37.86	74.00	-36.14	49.22	-11.36	Peak
5	8000.281	47.99	74.00	-26.01	53.48	-5.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE2M_2480MHz
Test by :Bob Chiu

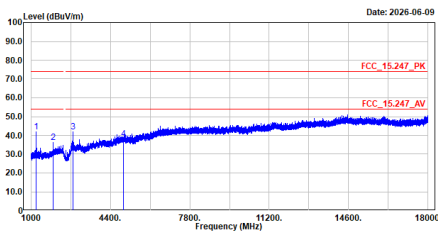


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1198.688	41.89	74.00	-32.11	65.26	-23.37	Peak
2	1928.625	36.34	74.00	-37.66	58.43	-22.09	Peak
3	2798.813	41.85	74.00	-32.15	61.24	-19.39	Peak
4	4960.000	38.01	74.00	-35.99	48.84	-10.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE2M_2480MHz
Test by :Bob Chiu

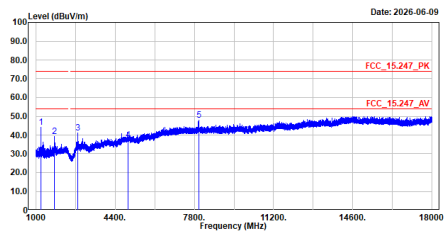


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1198.688	44.12	74.00	-29.88	67.49	-23.37	Peak
2	1794.750	39.25	74.00	-34.75	61.90	-22.65	Peak
3	2798.813	41.22	74.00	-32.78	60.61	-19.39	Peak
4	4960.000	37.21	74.00	-36.79	48.04	-10.83	Peak
5	7981.156	47.92	74.00	-26.08	53.35	-5.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_H


Site :HY-CB02
Condition :HORIZONTAL
mode :TX_BLE2M_2440MHz
Test by :Bob Chiu

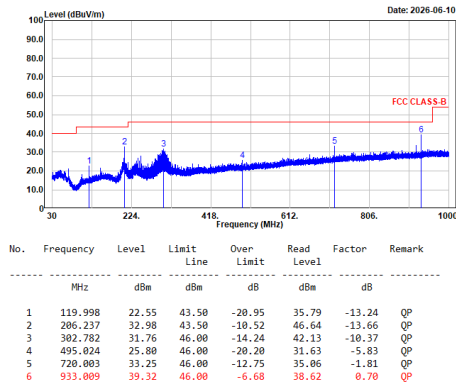

Note:
1. Level = Read Level + Factor
2. Over Limit = Level - Limit Line

TX_BLE2M_2440MHz_V


Site :HY-CB02
Condition :VERTICAL
mode :TX_BLE2M_2440MHz
Test by :Bob Chiu

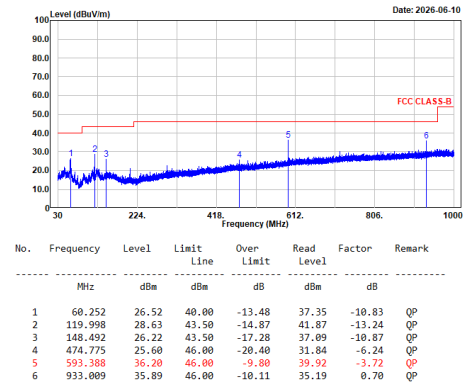

Note:
1. Level = Read Level + Factor
2. Over Limit = Level - Limit Line

TX_BLE1M_2402MHz_H_Average


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BLE1M_2402MHz
Test by :Bob Chiu

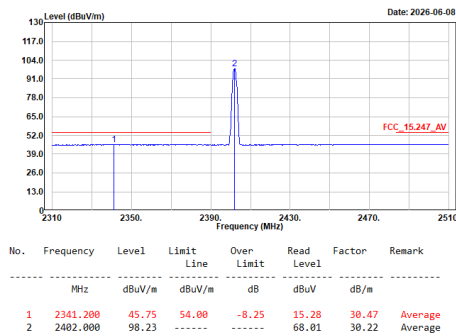

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_BLE1M_2402MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BLE1M_2402MHz
Test by :Bob Chiu

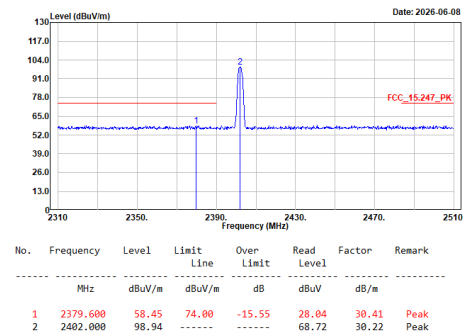


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_BLE1M_2402MHz_V_Average

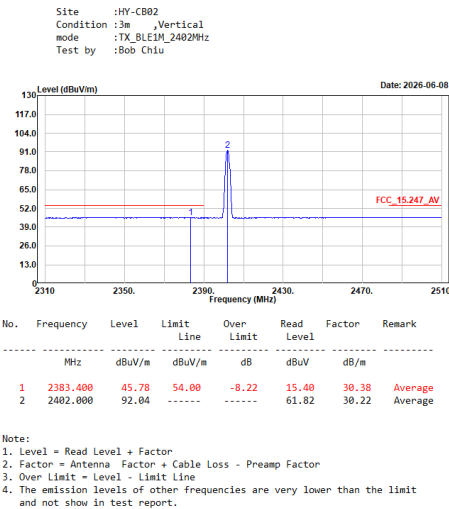


TX_BLE1M_2402MHz_V_Peak

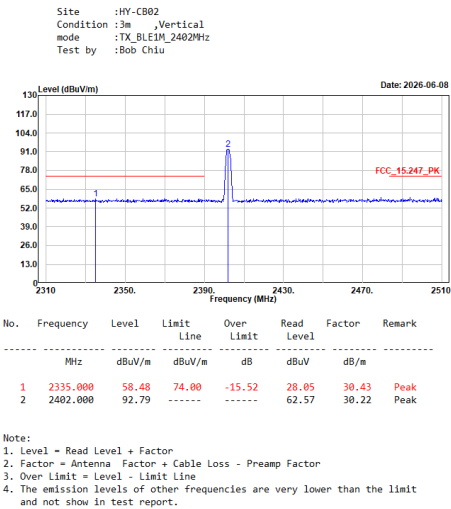

TX_BLE1M_2480MHz_H_Average

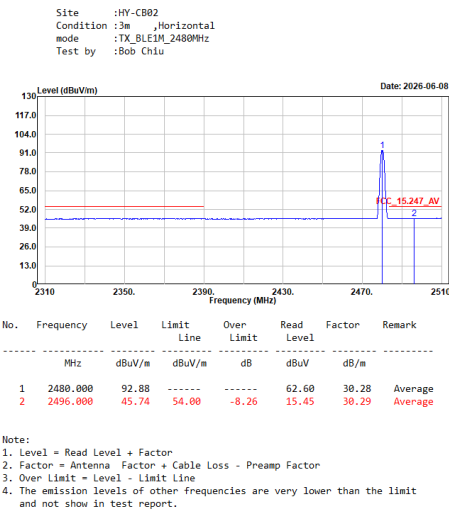


TX_BLE1M_2480MHz_H_Peak

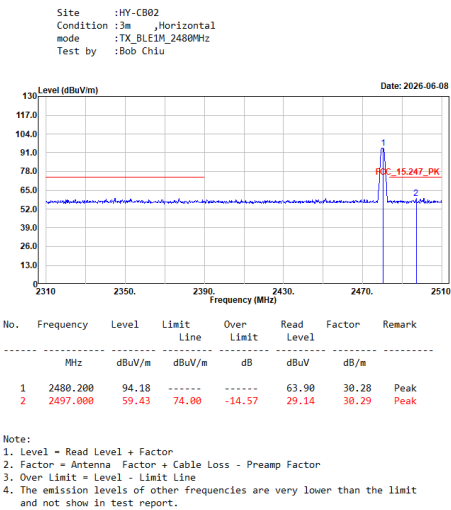

TX_BLE1M_2480MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BLE1M_2480MHz
Test by :Bob Chiu

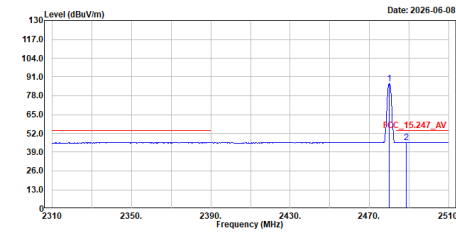


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.000	86.45	-----	-----	56.17	30.28	Average
2	2488.600	45.84	54.00	-8.16	15.55	30.29	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BLE1M_2480MHz
Test by :Bob Chiu

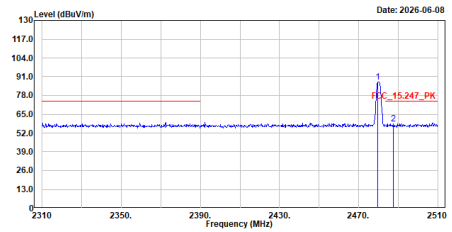


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2479.800	87.26	-----	-----	56.98	30.28	Peak
2	2487.600	58.56	74.00	-15.44	28.27	30.29	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BLE2M_2402MHz
Test by :Bob Chiu

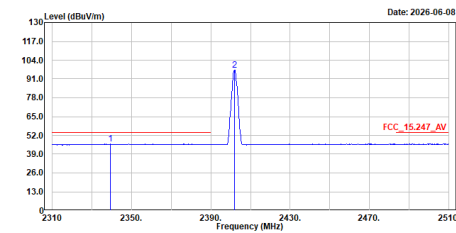


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2339.200	45.92	54.00	-8.08	15.45	30.47	Average
2	2402.000	97.31	-----	-----	67.09	30.22	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H_Peak


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BLE2M_2402MHz
Test by :Bob Chiu

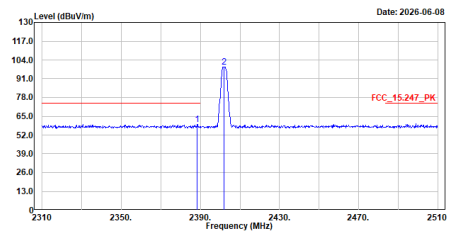


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2388.400	59.19	74.00	-14.81	28.86	30.33	Peak
2	2402.000	99.23	-----	-----	69.01	30.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_BLE2M_2402MHz_V_Average

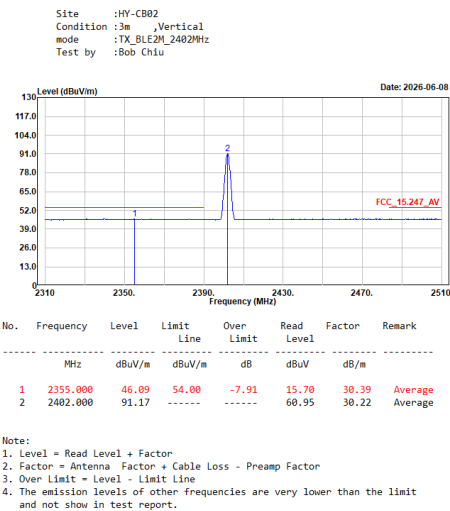


TX_BLE2M_2402MHz_V_Peak

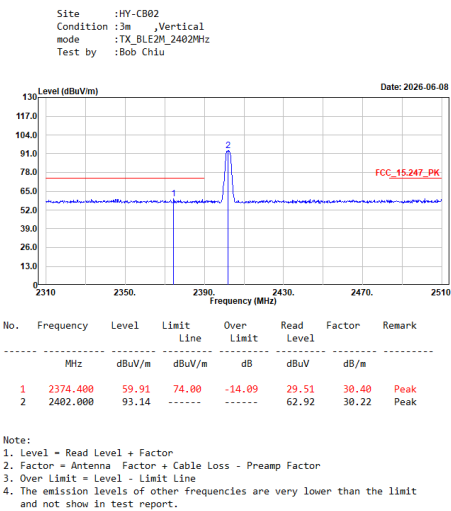

TX_BLE2M_2480MHz_H_Average

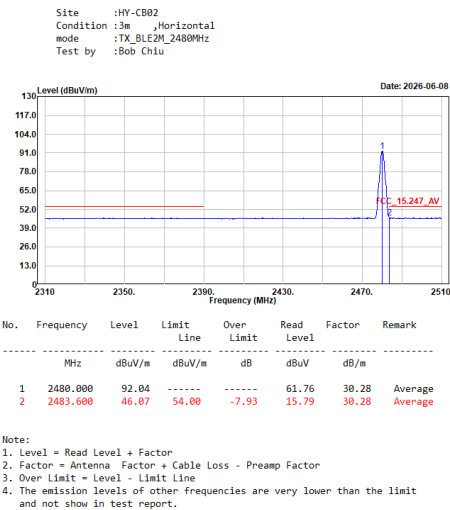


TX_BLE2M_2480MHz_H_Peak

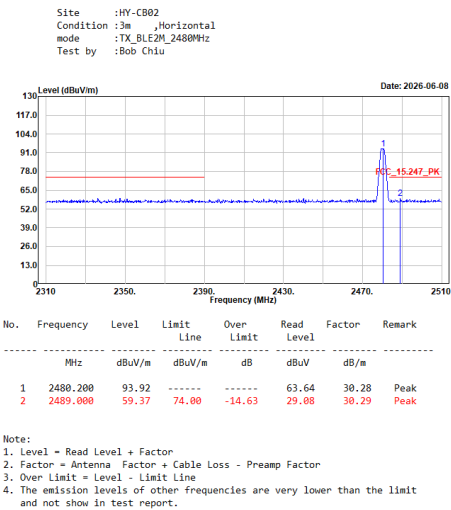

TX_BLE2M_2480MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BLE2M_2480MHz
Test by :Bob Chiu

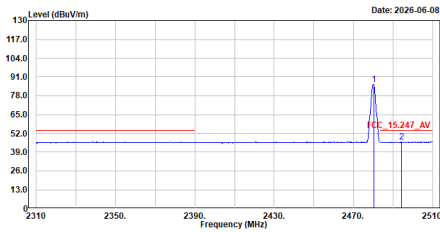


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	85.62	-----		55.34	30.28	Average
2	2494.200	45.97	54.00	-8.03	15.68	30.29	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BLE2M_2480MHz
Test by :Bob Chiu

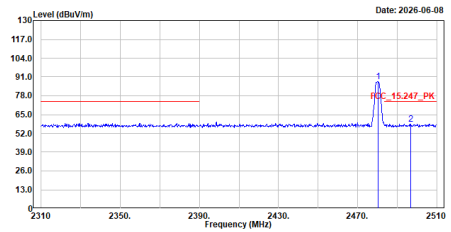

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	87.60	-----		57.32	30.28	Peak
2	2496.800	58.56	-74.00	-15.44	28.27	30.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Worst-Case Emissions Above 18 GHz

