85*120mm,100g书写纸，
白底黑字+双面印刷



封页

GEEZER®

蓝牙折叠键盘充电版
BT folding keyboard charging version

Instruction Manual
使用说明书

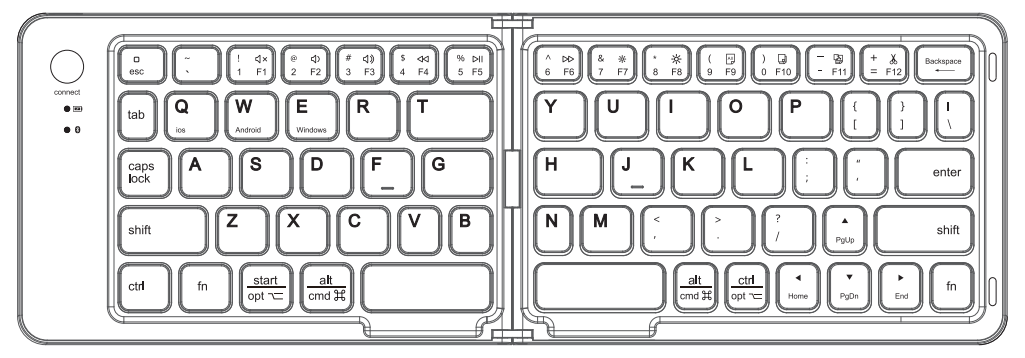

Z1

English

Thank you for your support of GEEZER products, in order to make you know more.Please read this manual carefully before using the product.

1.Packaging contents

wireless keyboard 1PCS
hop-pocket 1PCS
USB to Type C data line 1PCS
Instruction manual (including warranty card) ...1PCS

2.Product description

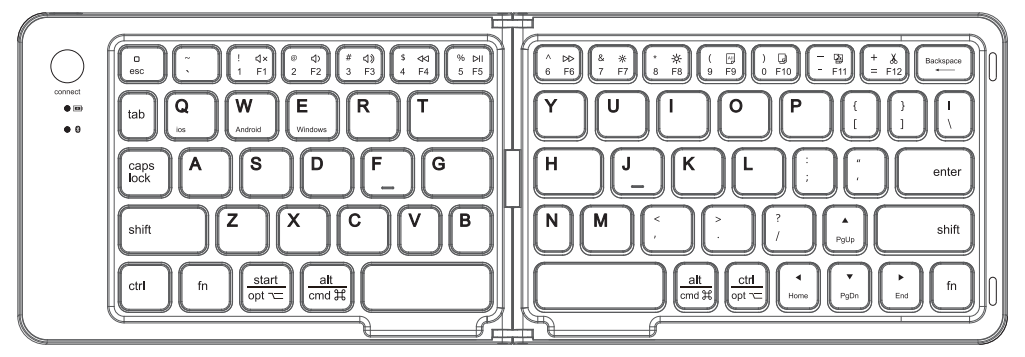

Multimedia description:

Default function	Key combination icon	IOS system function	Android System work	Windows System function	Under three systems FN+shif Combined function
	Fn + Q	IOS system			
	Fn + W		Android system		

	Fn + E			Windows system	
All three systems The default is back. Go to the home page (WIN is the desktop)	Fn + Esc	ESC	ESC	ESC	
1	Fn + 1 F1	mute	mute	mute	F1
2	Fn + 2 F2	Volume reduction	Volume reduction	Volume reduction	F2
3	Fn + 3 F3	Volume plus	Volume plus	Volume plus	F3
4	Fn + 4 F4	Last song	Last song	Last song	F4
5	Fn + 5 F5	Play/ pause	Play/ pause	Play/ pause	F5
6	Fn + 6 F6	Next song	Next song	Next song	F6
7	Fn + 7 F7	Brightness reduction	Brightness reduction	Brightness reduction	F7
8	Fn + 8 F8	Brightness plus	Brightness plus	Brightness plus	F8
9	Fn + 9 F9	check all (Command+A)	check all (CTRL+A)	check all (CTRL+A)	F9
0	Fn + 0 F10	copy (Command+C)	copy (CTRL+C)	copy (CTRL+C)	F10
-	Fn + - F11	paste (Command+V)	paste (CTRL+V)	paste (CTRL+V)	F11
=	Fn + = F12	shear (Command+X)	shear (CTRL+X)	shear (CTRL+X)	F12
放向上键	Fn + PgUp	PGUP page heading	PGUP Page up	PGUP Page up	No function
放向下键	Fn + PgDn	PGDN page footing	PGDN Page down	PGDN Page down	No function
放向左键	Fn + Home	HOME Head of line	HOME page heading	HOME page heading	No function
放向右键	Fn + End	END Hangwei	END page footing	END page footing	No function

3.Description of Bluetooth keyboard code and status indicator.

1.Boot indicator light：
When the keyboard is turned on, the Hall switch will be turned on, the red light will be turned off for 2S, and the blue light will flash to enter the code, slowly.When the flashback keyboard is folded, the keyboard stops working;

2. Check code connection mode：
When you press the code alignment key, the BT blue light flashes at intervals of 1 second. After the code alignment is successful, the blue LED is often Turn it off after 2 seconds, and the longest code checking time is 2 minutes. If there is no pairing for more than 2 minutes, the keyboard goes to sleep.Dormant state;

3. Tie-back indicator light：
After the pairing is successfully turned off, it will be turned on again, the red light will be turned off for 2S, the blue light will blink and connect back, and the keyboard will connect back automatically. After the reconnection function, the blue light goes out; The reconnection time shall not exceed 5s; 30S callback failed. Bluetooth turned off.Go into hibernation

4.Charging indicator:
When T/C is charging, the power indicator light is always red, and it goes out directly after it is full.Low battery indicator: when the battery voltage is lower than 3.3V, the red indicator of power supply will start flashing for 0.5s..
Interval; Flashes for 10 times and then goes out, and flashes again when the key is activated.

5. Caps indicator light：
Upper/lower case on/off, the blue indicator light is always on/off, and it doesn't need to be off for one minute.

6. NUM indicator light：without

7 .The keyboard goes to sleep.：
When the keyboard is not paired for 3 minutes, the keyboard stops pairing and enters the sleep state. Pairing is norma After using the keyboard for 10 minutes without operation, the keyboard enters a dormant state, and press any key to wake up the keyboard immediately.

4、Specifications

1. Bluetooth 5.0
2. Power supply: 3.7V 150mAh, charging current 100mA.
3. Support to WINDOWS, IOS, Android；Driver-free and Bluetooth-free pairing
4. Bluetooth device name: GEEZER Z1 BT

质 保 卡

保修期限：	
购买日期：	
购买地点：	
产品序列号：	
盖　　章	

产 品 维 修 记 录	
日　　期	维 修 情 况

备注：请清楚填写各条目，请勿擅自涂改，并妥善保管好本保修卡，以维护您的合法权益。如需服务或有任何疑问，请与我们联系。

封底

合
格
证

深圳摩天手科技有限公司
Shenzhen Mofii Electronics Co.,Ltd

深圳市宝安区沙井街道新沙路正诚丰科技园
ZhengChengFeng Technology Zone, Xinsha Road,
ShaJing Town, BaoAn Area, Shenzhen,China.
电话/Tel: 86-755-82507904　400-6788-010
邮箱/E-ail: mofii@mofii.com
网址/website: www.geezer.com.cn

FCC Warning Statement
Changes or modifications not expressly approved by the party responsible for compliance could void the user’ s authority to operate the equipment.
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: - - Reorient or relocate the receiving antenna.
- - Increase the separation between the equipment and receiver.
- - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- - Consult the dealer or an experienced radio/TV technician for help.

使用说明书

感谢您对GEEZER产品的支持，为了使您更进一步了解产品的使用，请您在使用前认真阅读此说明书

1.包装内容物

无线键盘..1PCS
布袋..1PCS
USB 转 Type C 数据线 1PCS
使用说明书(含质保卡） 1PCS

2.产品描述

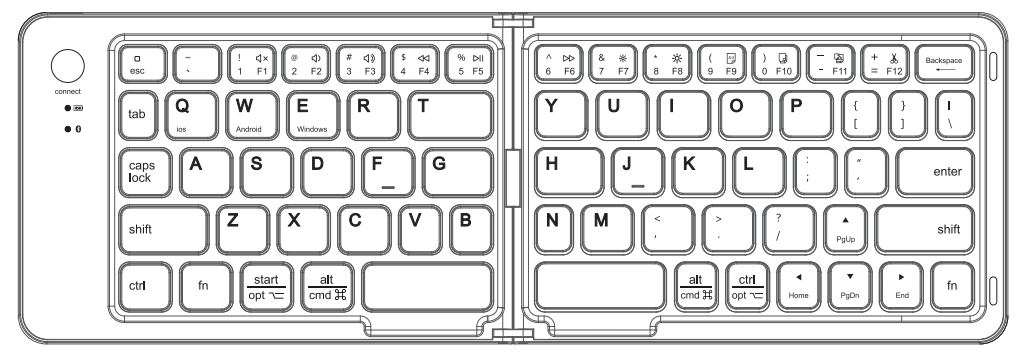

多媒体说明：

默认功能	组合键图标	IOS系统功能	Android 系统功能	Windows 系统功能	三个系统下 FN+shif 组合功能
	Fn + Q	IOS系统			
	Fn + W		Android 系统		

	Fn + E			Windows 系统	
三个系统都为默认为回到主页 (WIN为桌面)	Fn + Esc	ESC	ESC	ESC	
1	Fn + 1 F1	静音	静音	静音	F1
2	Fn + 2 F2	音量减	音量减	音量减	F2
3	Fn + 3 F3	音量加	音量加	音量加	F3
4	Fn + 4 F4	上一曲	上一曲	上一曲	F4
5	Fn + 5 F5	播放/暂停	播放/暂停	播放/暂停	F5
6	Fn + 6 F6	下一曲	下一曲	下一曲	F6
7	Fn + 7 F7	亮度减	亮度减	亮度减	F7
8	Fn + 8 F8	亮度加	亮度加	亮度加	F8
9	Fn + 9 F9	全选 (Command+A)	全选 (CTRL+A)	全选 (CTRL+A)	F9
0	Fn + 0 F10	复制 (Command+C)	复制 (CTRL+C)	复制 (CTRL+C)	F10
-	Fn + - F11	粘贴 (Command+V)	粘贴 (CTRL+V)	粘贴 (CTRL+V)	F11
=	Fn + = F12	剪切 (Command+X)	剪切 (CTRL+X)	剪切 (CTRL+X)	F12
放向上键	Fn + PgUp	PGUP页首	PGUP向上翻页	PGUP向上翻页	无功能
放向下键	Fn + PgDn	PGDN页尾	PGDN向下翻页	PGDN向下翻页	无功能
放向左键	Fn + Home	HOME行首	HOME页首	HOME页首	无功能
放向右键	Fn + End	END行尾	END页尾	END页尾	无功能

3.蓝牙键盘对码及状态指示灯等相关描述

1.开机指示灯：
键盘打开时，霍尔开关启动开机，红灯亮2S熄灭,蓝灯快闪进入对码，慢闪回连键盘折叠起来时，键盘停止工作；

2. 对码连接方式：
按下对码键时，BT蓝色灯闪烁，1秒间隔，对码成功成功后，蓝色LED常亮2秒后熄灭，对码时间最长为2分钟，超过2分钟没有配对，键盘进入睡休眠状态；

3. 回连指示灯：
配对成功关机后再开机，红灯亮2S熄灭,蓝灯闪烁回连，键盘自动回连，回连成功能后，蓝灯熄灭；回连时间不超过5S；30S回连不成功蓝牙熄灭进入休眠

4.充电指示灯：
T/C充电时，电源指示灯红色常亮，充满后直接熄灭；
低电指示灯：当电池电压低于3.3V时，电源红色指示灯开始闪烁，0.5秒间隔；闪10次后熄灭，按键有动作时再次闪烁

5. Caps指示灯：
大/小写开启/关，蓝色指示灯常亮/熄灭,一分钟不用蓝灯熄灭

6. NUM指示灯：无

7 .键盘进入休眠状态：
键盘开机3分钟未配对时键盘停止配对，此时进入休眠状态。配对正常使用后键盘10分钟无操作，键盘进入休眠状态，按任意键立即唤醒键盘。

4、规格

1. 蓝牙5.0
2. 供电：3.7V 150mAh，充电电流100mA
3. 支持到WINDOWS , IOS, Android；免驱动程序和蓝牙免密配对
4. 蓝牙设备名：GEEZER Z1 BT

产品中有害物质含量

部件名称	有害物质					
	铅（Pb）	汞（Hg）	镉（Cd）	六价铬（Cr（VI））	多溴联苯（PBB）	多溴二苯醚（PBDE）
印刷电路板组件*	×	○	○	○	○	○
外壳及附件	×	○	○	○	○	○

本表格依据SJ/T 11364的规定编制。
○：表示该有害物质在该部件所有均质材料中的含量均在GB/T 26572规定的限量要求以下。
×：表示该有害物质至少在该部件的某一均质材料中的含量超出GB/T 26572规定的限量要求。
表中标记“×”的部件，皆因全球技术发展水平限制而无法实现有害物质的替代。

印刷电路板组件*：包括印刷电路板及其零部件，电子元器件等

根据产品型号不同，您所购买的产品可能不会含有以上所有部件

10 在中华人民共和国境内销售的电子电气产品必须标识此标志，标志内的数字代表在正常的使用状态下的产品的环保使用期限。

国家执行标
鼠标垫：Q/NZXJ 030-2017；键盘膜：Q/HRH 001-2018；
电池：GB/T 8897.2-2021；清洁刷：Q/MJDZ 001-2023；
贴纸：Q/WZQY001-2019;接收器:GB 9254-2008

实物以包装为准

合格证
检验员：QC PASS