


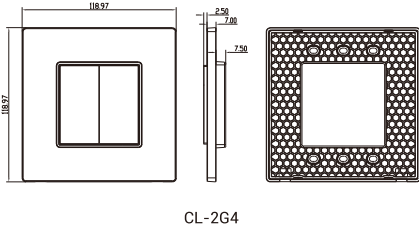
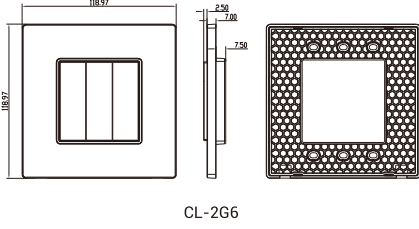





A	1. 名称:U6 定制说明书 2. 材质:128g铜版纸 彩色印刷 风琴折 3. 尺寸:80*80mm 4.印刷字印清晰,不断线、拖笔画不得有重线,杂点等缺陷。 5. 尺寸公差±0.2mm	<table><tr><th colspan="5">REVISION</th></tr><tr><th>ISSUE</th><th>ZONE</th><th>DESCRIPTION</th><th>DATE</th><th>REVISER</th></tr><tr><td>A</td><td></td><td></td><td>2026/01/20</td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr></table>										REVISION					ISSUE	ZONE	DESCRIPTION	DATE	REVISER	A			2026/01/20																																																		
		REVISION																																																																									
		ISSUE	ZONE	DESCRIPTION	DATE	REVISER																																																																					
		A			2026/01/20																																																																						
B																																																																											
C	 INSTRUCTIONS WIRELESS KINETIC SWITCH Product Description Wireless Kinetic Switch is a push-button self-powered switch with MEA (Micro Energy Acquisition) module inside, which transform mechanical energy into electricity to drive RF chipset work. The Wireless Kinetic Switch can be paired with a compatible controller. Through operations such as single press, double press, or long press, it can control a variety of lighting functions – including but not limited to on/off, dimming, and RGB color adjustment. Specific available features depend on the controller model. For detailed operation instructions, please refer to the user manual of the corresponding controller. CL-204 CL-206 Product Parameters Product Series: CL-204 / CL-206 Work Type: Push Button Type Number of Button: 4/6 buttons Power Supply: Self-powered Working Frequency: RF 433MHz Lifetime: ≥100,000 times Modulation Mode: FSK Dimensions: L119*W118*H17mm Operating Temperature: -20℃~+55℃ Control Distance: 80m(outdoor) 25m(indoor) Use Method: Pairing with wireless receiving controller Note: The effective distance data is measured by Lab and it will vary due to the changes of the environment in the actual use. Installation Instructions  1. Pry open the button assembly of this product.  2. Lock the product into the mounting box.  3. Reinstall the pried-open button assembly.																																																																										
	D	FCC Warning This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: --Reorient or relocate the receiving antenna. --Increase the separation between the equipment and receiver. --Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. --Consult the dealer or an experienced radio/TV technician for help. Note: The Giarantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. Such modifications could void the user's authority to operate the equipment. The device has been evaluated to meet general RF exposure requirement. To maintain compliance with FCC's RF exposure guidelines, the distance must be at least 20 cm between the radiator and your body, and fully supported by the operating and installation. Product Dimensions  CL-204  CL-206 CERTIFICATE INSPECTED																																																																									
E																																																																											
F	<table><tr><th><i>tem</i> \ <i>Dimension</i></th><th><i>0 ~ 10</i></th><th><i>0 ~ 50</i></th><th><i>50 ~</i></th><td rowspan="2">广东易百珑智能科技有限公司</td><th><i>MODEL NO.</i></th><th colspan="2"><i>PART NO.</i></th><th><i>DWG.DATE</i></th><th><i>MATERIAL</i></th><th><i>PART NAME</i></th><th><i>UNIT</i></th><th><i>mm</i></th></tr><tr><td><i>center distance (metal)</i></td><td><i>±0.05</i></td><td><i>±0.10</i></td><td><i>±0.15</i></td><th>U6</th><th colspan="2">XXX</th><td></td><td></td><td></td><th>SCALE</th><td></td></tr><tr><td><i>center distance(resin)</i></td><td><i>±0.08</i></td><td><i>±0.10</i></td><td><i>±0.15</i></td><td rowspan="3"></td><th><i>DESIGN</i></th><th><i>CHECKED</i></th><th><i>SAFETY</i></th><th><i>APPROVED</i></th><th><i>REV.DATE</i></th><th><i>FILE NO.</i></th><th><i>DRAWING NO.</i></th><th><i>SIZE</i></th><td></td></tr><tr><td><i>general dimensions(metal)</i></td><td><i>±0.05</i></td><td><i>0.10</i></td><td><i>±0.15</i></td><td rowspan="2">陈萍</td><td></td><td></td><td></td><td></td><td></td><td></td><th>20260112</th><th>REV.</th><td></td></tr><tr><td><i>general dimensions(resin)</i></td><td><i>±0.08</i></td><td><i>±0.10</i></td><td><i>±0.15</i></td><td></td><td></td><td></td><td></td><td></td><td colspan="3">+0-0.2mm</td></tr></table>										<i>tem</i> \ <i>Dimension</i>	<i>0 ~ 10</i>	<i>0 ~ 50</i>	<i>50 ~</i>	广东易百珑智能科技有限公司	<i>MODEL NO.</i>	<i>PART NO.</i>		<i>DWG.DATE</i>	<i>MATERIAL</i>	<i>PART NAME</i>	<i>UNIT</i>	<i>mm</i>	<i>center distance (metal)</i>	<i>±0.05</i>	<i>±0.10</i>	<i>±0.15</i>	U6	XXX					SCALE		<i>center distance(resin)</i>	<i>±0.08</i>	<i>±0.10</i>	<i>±0.15</i>		<i>DESIGN</i>	<i>CHECKED</i>	<i>SAFETY</i>	<i>APPROVED</i>	<i>REV.DATE</i>	<i>FILE NO.</i>	<i>DRAWING NO.</i>	<i>SIZE</i>		<i>general dimensions(metal)</i>	<i>±0.05</i>	<i>0.10</i>	<i>±0.15</i>	陈萍							20260112	REV.		<i>general dimensions(resin)</i>	<i>±0.08</i>	<i>±0.10</i>	<i>±0.15</i>						+0-0.2mm		
	<i>tem</i> \ <i>Dimension</i>	<i>0 ~ 10</i>	<i>0 ~ 50</i>	<i>50 ~</i>	广东易百珑智能科技有限公司	<i>MODEL NO.</i>	<i>PART NO.</i>		<i>DWG.DATE</i>	<i>MATERIAL</i>	<i>PART NAME</i>	<i>UNIT</i>	<i>mm</i>																																																														
	<i>center distance (metal)</i>	<i>±0.05</i>	<i>±0.10</i>	<i>±0.15</i>		U6	XXX					SCALE																																																															
	<i>center distance(resin)</i>	<i>±0.08</i>	<i>±0.10</i>	<i>±0.15</i>		<i>DESIGN</i>	<i>CHECKED</i>	<i>SAFETY</i>	<i>APPROVED</i>	<i>REV.DATE</i>	<i>FILE NO.</i>	<i>DRAWING NO.</i>	<i>SIZE</i>																																																														
	<i>general dimensions(metal)</i>	<i>±0.05</i>	<i>0.10</i>	<i>±0.15</i>		陈萍							20260112	REV.																																																													
<i>general dimensions(resin)</i>	<i>±0.08</i>	<i>±0.10</i>	<i>±0.15</i>								+0-0.2mm																																																																
1	2	3	4	5	6	7	8	9																																																																			