

A

B

C

D

E

F

A

B

C

D

E

F

4. Install SIM Card

Insert the micro SIM into the card socket follow the symbol on the side.
Attention:
❌ Install or remove SIM card, make sure the terminal is turned off to avoid damage to the SIM.
❌ Stickers or adhesives are not allowed on the SIM as they may damage the SIM and SIM socket.



3. Function description

Function description of status indicator:

Status LED	Description
Red light is always on	Network not connected
Red light flickering	Network is being connected
Green light flickering	Working fine


Key function description:

Key	Operation	Description
⏻ Power Key	Device On, long press 2 seconds	Power on
	Device On, long press 2 seconds	Power off
	Device On, short press	Play what percentage of the current battery level
🔊 Function Key	Short press	Play the amount of most recent transaction
🔊 Volume +	Short press	Volume up
🔊 Volume -	Short press	Volume down/ cancel network configure
🔊 🔊 Combination: function key and volume +		Switch SIM and WIFI network mode
🔊 🔊 Combination: function key and volume -		WIFI Web Connect mode (Device is WIFI Access Point)

WIFI Connecting

WIFI is optional feature and check the back label to confirm if device has WIFI.


Step 1: Power on device, hold the function buttons "🔊" and "🔊" at the same time, and voice prompts "Please configure WIFI to enable WIFI connection settings."
Step 2: Search for a hotspot named "NEXGO-XXXXX" in the Settings>WLAN->AVAILABLE list on your mobile phone, click to connect it. "XXXXX" is the last 5 digits of the device SN number.
Step 3: The mobile device will pop up the IP 192.168.1.1 web page, select an available SSID from drop-down menu, enter the password, and click "Start". Waiting for the device voice prompt "Configure is successful".
Step 4: WIFI connection successful, WIFI signal icon will be displayed on the screen.

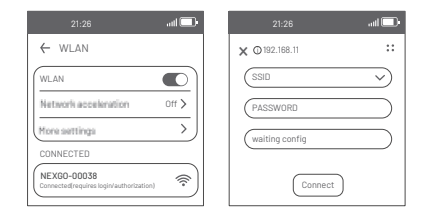

❌ Contactless IC Card

❌ Contact IC Card(Optional)

Power Charging
Connect the adapter, mobile power or PC with terminal using USB cable. Plug the adapter into a power outlet. Power on the terminal. The terminal screen will display charging progress. After the terminal is fully charged "100%" will display on screen.

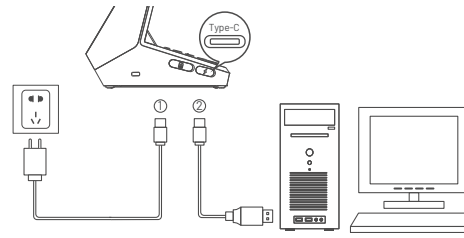


2. Structure Description

Power On/Off
Power on: Hold "⏻" key for 2~3 seconds to power on terminal.
Power off: Hold "⏻" key until shows menu "power off", "restart" and "Cancel", select "power off" to shutdown terminal.

❌ Dynamic QR Code Payment

❌ Static QR Code Payment

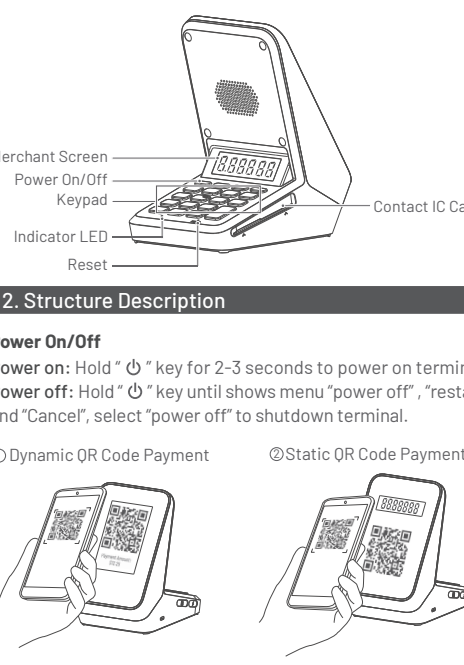

1. Product Introduction

KD70 is two-in-one soundbox series that supports QR and card payment. It supports 4G and WIFI(Optional) and has a built-in rechargeable lithium battery. It can be widely and efficiently used in various payment scenarios, medium, small and micro merchants.

Structure Description

Dynamic QR Model

Static QR Model

Contactless NFC


QR Sticker

QR Screen


Amount Screen

Type C

SIM

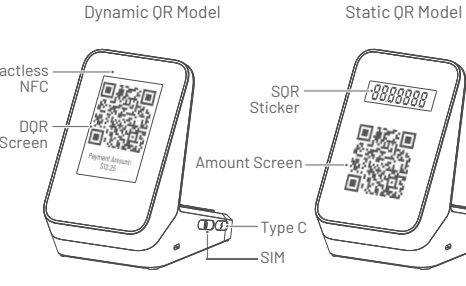



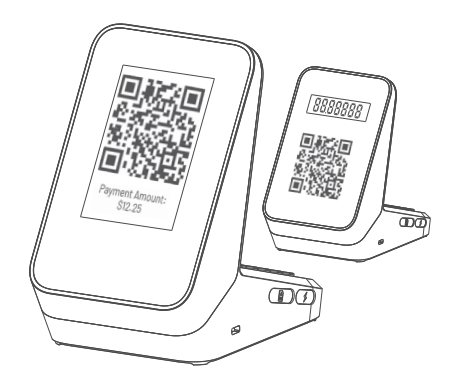

QR and Card Payment Soundbox
KD70 Series

Operation Manual

*80mm

*90mm

9. Special statement

Shenzhen Xinguodu Technology Co., Ltd. reserves the right to modify this manual without prior notice, and reserves the right to continuously improve the accuracy, sufficiency and completeness of the information in the manual.
Shenzhen Xinguodu Technology Co., Ltd. does not assume any legal responsibility for the adverse consequences caused by the use of this product or the use of accessories not provided by our company in accordance with the requirements of this manual.
This manual is copyright©Shenzhen Xinguodu Technology Co., Ltd.



SHENZHEN XINGUODU TECHNOLOGY CO.,LTD.
Company address: 178 JinSong Mansion, Tairan 4th Road, Shatou Street, Futian District, Shenzhen, Guangdong, China.
Hotline: 86-755-25067135
<https://www.nexgoglobal.com>

guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.
SAR tests are conducted using standard operating positions accepted by the FCC with the device transmitting at its highest certified power level in all tested frequency bands, although the SAR is determined at the highest certified power level, the actual SAR level of the device while operating can be well below the maximum value. Before a new device is available for sale to the public, it must be tested and certified to the FCC that it does not exceed the exposure limit established by the FCC. Tests for each device are performed in positions and locations as required by the FCC.
For limits worn operation, this device has been tested and meets the FCC RF exposure guidelines.
Non-compliance with the above restrictions may result in violation of RF exposure guidelines.

8. FCC Compliance Statements

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
Caution: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no

LTE Band 1: 24.93dBm
LTE Band 3: 25.36dBm
LTE Band 5: 24.19dBm
LTE Band 7: 25.46dBm
LTE Band 8: 23.79dBm
LTE Band 20: 24.91dBm
LTE Band 28: 23.64dBm
NFC: -10.42dBuA/mip3m

Transmitter Frequency:

2.4G WIFI:2412~2472MHz
LTE Band 1: 1920~1980MHz
LTE Band 3: 1710~1785MHz
LTE Band 5: 824~849MHz
LTE Band 7: 2500~2570MHz
LTE Band 8: 880~915MHz
LTE Band 20: 832~862MHz
LTE Band 28: 703~748MHz
NFC:13.56MHz

Receiver Frequency:

2.4G WIFI:2412~2472MHz
LTE Band 1:2110~2170MHz
LTE Band 3: 1805~1880MHz
LTE Band 5: 809~894MHz
LTE Band 7: 2620~2690MHz
LTE Band 8: 925~960MHz
LTE Band 20: 791~821MHz
LTE Band 28: 759~803MHz
NFC:13.56MHz

RF-Output Power :

ERP/EIRP/Conducted
2.4G WIFI: 18.33dBm



above table are all due to current industry technology The level of development is limited and the substitution of toxic and hazardous substances or elements cannot be achieved.
[Environmental protection reminder] Products that have reached or exceeded the environmental protection service life should be recycled and roused in accordance with the "Administrative Measures for the Control of Electronic Information Products" and should not be discarded at will.
Hereby, [Shenzhen Xinguodu Technology Co., Ltd.] declares that the radio equipment type [KD70] is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following Internet address:<https://www.xinguodu.com/pdf/71d-218>

defeat a safeguard (for example, in the case of some lithium battery types):

• Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion;

• Leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas;

• A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.

7. List of Toxic and Hazardous Substances or Elements

Parts	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Chromium (Cr(VI))	Polybrominated Biphenyls (PBBs)	Polybrominated Diphenyl Ethers (PBDEs)
Circuits and components	○	○	○	○	○	○

Description:
1"Q" means that the content of the toxic and hazardous substance in all homogeneous materials of the part is below the limit requirement of the SJ/T11363-2006 standard;
2 "X" means that the content of the toxic and hazardous substance in at least one of the homogeneous materials of the part exceeds the limit requirement of the SJ/T11363-2006 standard; but the parts marked as "X" in the

• The terminal can just use specified power adaptor, cannot replace by other, otherwise it will cause the terminal to work abnormally or even damage the terminal.

• Do not damage the power cable and power adaptor. It can't be used any more if the power cable or power adaptor is damaged.

• Before plugging into the AC socket, please check whether the power outlet matches the set voltage of the device. It is recommended to choose a fuse socket and have a good grounding.

• Please keep the terminal away from liquids, and it is forbidden to splash any liquid or conductive material, otherwise it will cause a short-circuit or damage the terminal.

• Do not insert any foreign objects into any ports, otherwise the terminals will be seriously damaged.

• Please contact the professional devices maintainer when the terminal fails, users or other unqualified devices maintainer are not allowed to repair the terminal.

• Do not use or place flammable sprays, paints, etc. near this product to avoid fire.

• Forbid to disassemble or remake the terminal. Forbidden to use the terminal in illegal way, offenders will stand legal responsibility.

Attention of battery

• Replacement of a battery with an incorrect type that can