


Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)	Max Variation (%)
NVNT	a	5500	Ant1	1.36	1.464	92.9	0.32	0.74	0.23
NVNT	a	5580	Ant1	1.362	1.466	92.91	0.32	0.73	0.28
NVNT	a	5700	Ant1	1.36	1.464	92.9	0.32	0.74	0.32
NVNT	a	5500	Ant2	1.36	1.464	92.9	0.32	0.74	0.28
NVNT	a	5580	Ant2	1.362	1.466	92.91	0.32	0.73	0.22
NVNT	a	5700	Ant2	1.36	1.464	92.9	0.32	0.74	0.23
NVNT	n20	5500	MIMO	1.148	1.254	91.55	0.38	0.87	0.25
NVNT	n20	5580	MIMO	1.148	1.252	91.69	0.38	0.87	0.22
NVNT	n20	5700	MIMO	1.148	1.252	91.69	0.38	0.87	0.22
NVNT	n40	5510	MIMO	0.573	0.677	84.64	0.72	1.75	0.26
NVNT	n40	5550	MIMO	0.572	0.677	84.49	0.73	1.75	0.18
NVNT	n40	5670	MIMO	0.572	0.677	84.49	0.73	1.75	0.23
NVNT	ac20	5500	MIMO	1.154	1.258	91.73	0.37	0.87	0.21
NVNT	ac20	5580	MIMO	1.152	1.258	91.57	0.38	0.87	0.21
NVNT	ac20	5700	MIMO	1.154	1.258	91.73	0.37	0.87	0.18
NVNT	ac40	5510	MIMO	0.577	0.681	84.73	0.72	1.73	0.21
NVNT	ac40	5550	MIMO	0.577	0.682	84.6	0.73	1.73	0.20
NVNT	ac40	5670	MIMO	0.577	0.681	84.73	0.72	1.73	0.23
NVNT	ac80	5530	MIMO	0.289	0.393	73.54	1.33	3.47	0.28
NVNT	ac80	5610	MIMO	0.289	0.394	73.35	1.35	3.47	0.32

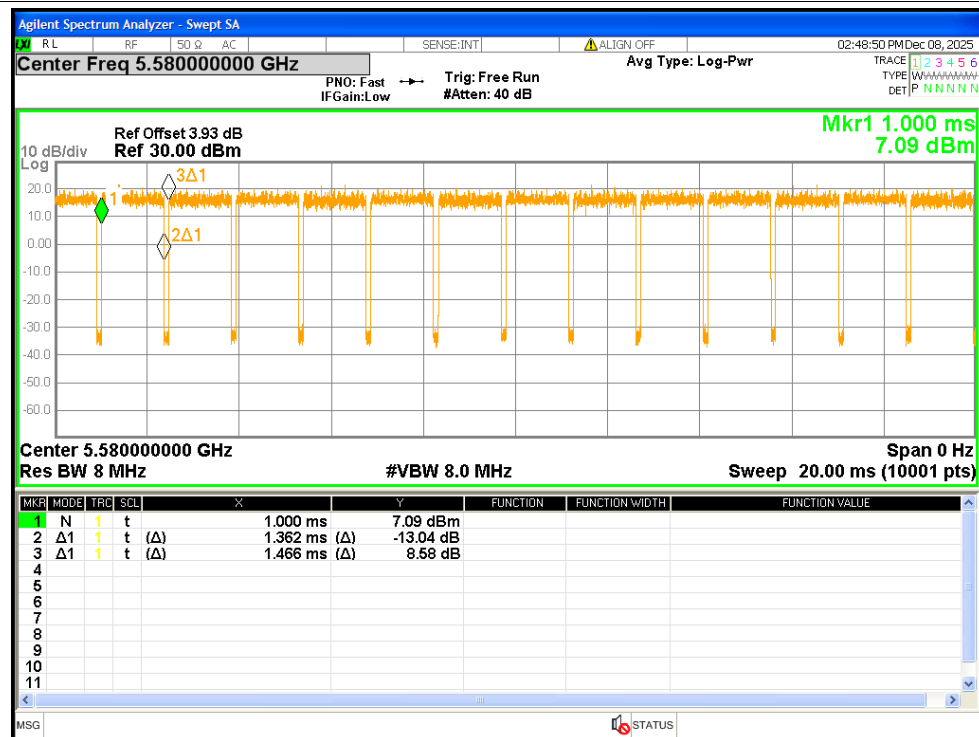


Duty Cycle NVNT a 5700MHz Ant1


Duty Cycle NVNT a 5580MHz Ant2

Duty Cycle NVNT n20 5500MHz MIMO

Duty Cycle NVNT n20 5700MHz MIMO

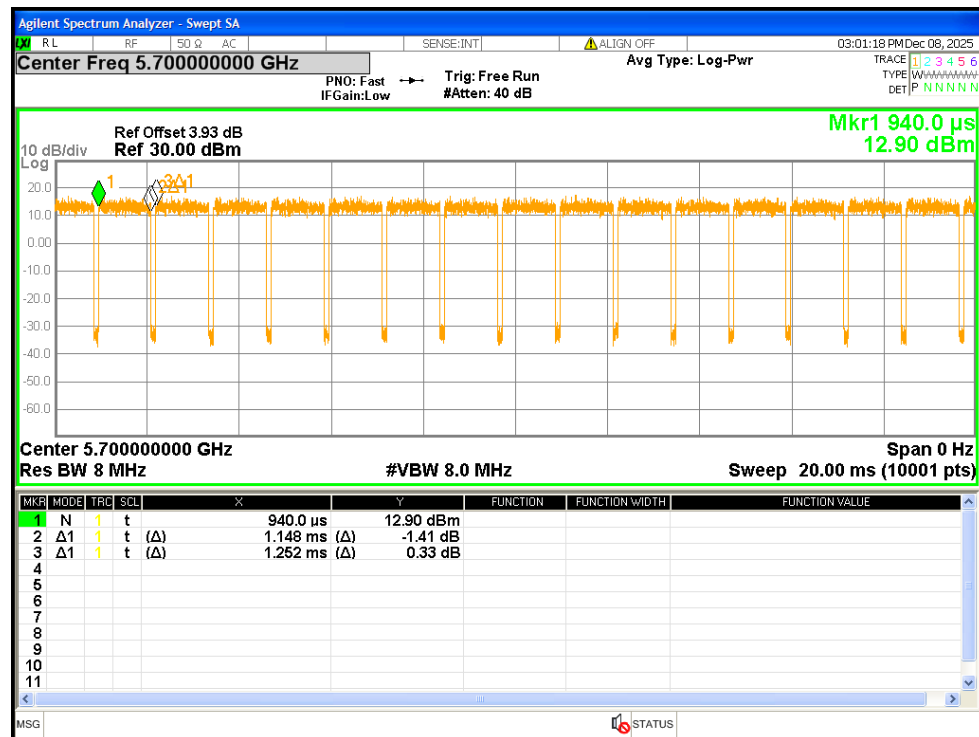

Duty Cycle NVNT n40 5510MHz MIMO

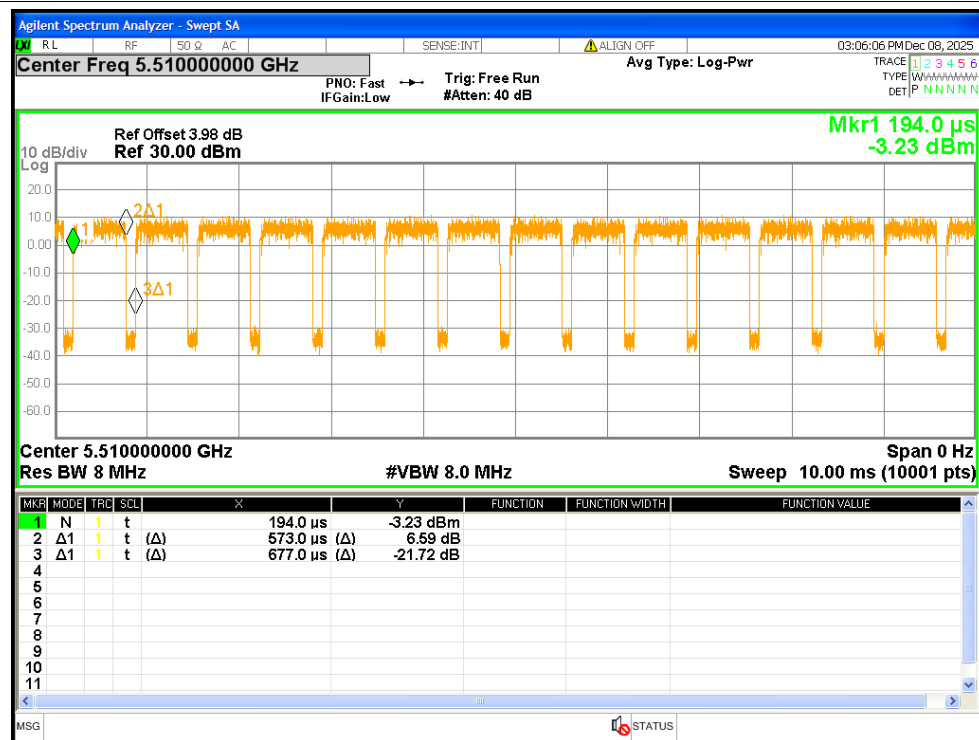

Duty Cycle NVNT n40 5550MHz MIMO

Duty Cycle NVNT ac20 5500MHz MIMO

Duty Cycle NVNT ac20 5700MHz MIMO

Duty Cycle NVNT ac40 5550MHz MIMO

Duty Cycle NVNT ac80 5530MHz MIMO


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5500	Ant1	13.08	0.32	13.4	<=23.68	Pass
NVNT	a	5580	Ant1	13.37	0.32	13.69	<=23.72	Pass
NVNT	a	5700	Ant1	12.26	0.32	12.58	<=23.72	Pass
NVNT	a	5500	Ant2	12.77	0.32	13.09	<=23.7	Pass
NVNT	a	5580	Ant2	13.58	0.32	13.9	<=23.71	Pass
NVNT	a	5700	Ant2	12.78	0.32	13.1	<=23.67	Pass
NVNT	n20	5500	Ant1	10.83	0.38	11.21	<=23.92	Pass
NVNT	n20	5500	Ant2	9.34	0.38	9.72	<=23.92	Pass
NVNT	n20	5500	MIMO	-	-	13.54	<=23.92	Pass
NVNT	n20	5580	Ant1	11.27	0.38	11.65	<=23.98	Pass
NVNT	n20	5580	Ant2	10.95	0.38	11.33	<=23.98	Pass
NVNT	n20	5580	MIMO	-	-	14.5	<=23.98	Pass
NVNT	n20	5700	Ant1	10.22	0.38	10.6	<=24	Pass
NVNT	n20	5700	Ant2	10.54	0.38	10.92	<=24	Pass
NVNT	n20	5700	MIMO	-	-	13.77	<=24	Pass
NVNT	n40	5510	Ant1	7.52	0.72	8.24	<=24	Pass
NVNT	n40	5510	Ant2	7.71	0.72	8.43	<=24	Pass
NVNT	n40	5510	MIMO	-	-	11.35	<=24	Pass
NVNT	n40	5550	Ant1	7.52	0.73	8.25	<=24	Pass
NVNT	n40	5550	Ant2	11.35	0.73	12.08	<=24	Pass
NVNT	n40	5550	MIMO	-	-	13.58	<=24	Pass
NVNT	n40	5670	Ant1	6.9	0.73	7.63	<=24	Pass
NVNT	n40	5670	Ant2	11.6	0.73	12.33	<=24	Pass
NVNT	n40	5670	MIMO	-	-	13.6	<=24	Pass
NVNT	ac20	5500	Ant1	9.54	0.37	9.91	<=23.91	Pass
NVNT	ac20	5500	Ant2	8.38	0.37	8.75	<=23.91	Pass
NVNT	ac20	5500	MIMO	-	-	12.38	<=23.91	Pass
NVNT	ac20	5580	Ant1	10.13	0.38	10.51	<=24	Pass
NVNT	ac20	5580	Ant2	9.45	0.38	9.83	<=24	Pass
NVNT	ac20	5580	MIMO	-	-	13.19	<=24	Pass
NVNT	ac20	5700	Ant1	8.84	0.37	9.21	<=24	Pass
NVNT	ac20	5700	Ant2	9.42	0.37	9.79	<=24	Pass
NVNT	ac20	5700	MIMO	-	-	12.52	<=24	Pass
NVNT	ac40	5510	Ant1	7.06	0.72	7.78	<=24	Pass
NVNT	ac40	5510	Ant2	7.63	0.72	8.35	<=24	Pass
NVNT	ac40	5510	MIMO	-	-	11.08	<=24	Pass
NVNT	ac40	5550	Ant1	7.23	0.73	7.96	<=24	Pass
NVNT	ac40	5550	Ant2	11.2	0.73	11.93	<=24	Pass
NVNT	ac40	5550	MIMO	-	-	13.39	<=24	Pass


NVNT	ac40	5670	Ant1	6.52	0.72	7.24	<=24	Pass
NVNT	ac40	5670	Ant2	11.4	0.72	12.12	<=24	Pass
NVNT	ac40	5670	MIMO	-	-	13.34	<=24	Pass
NVNT	ac80	5530	Ant1	6.86	1.33	8.19	<=24	Pass
NVNT	ac80	5530	Ant2	10.46	1.33	11.79	<=24	Pass
NVNT	ac80	5530	MIMO	-	-	13.36	<=24	Pass
NVNT	ac80	5610	Ant1	6.81	1.35	8.16	<=24	Pass
NVNT	ac80	5610	Ant2	4.51	1.35	5.86	<=24	Pass
NVNT	ac80	5610	MIMO	-	-	10.17	<=24	Pass

Test Graphs


Power NVNT a 5500MHz Ant1

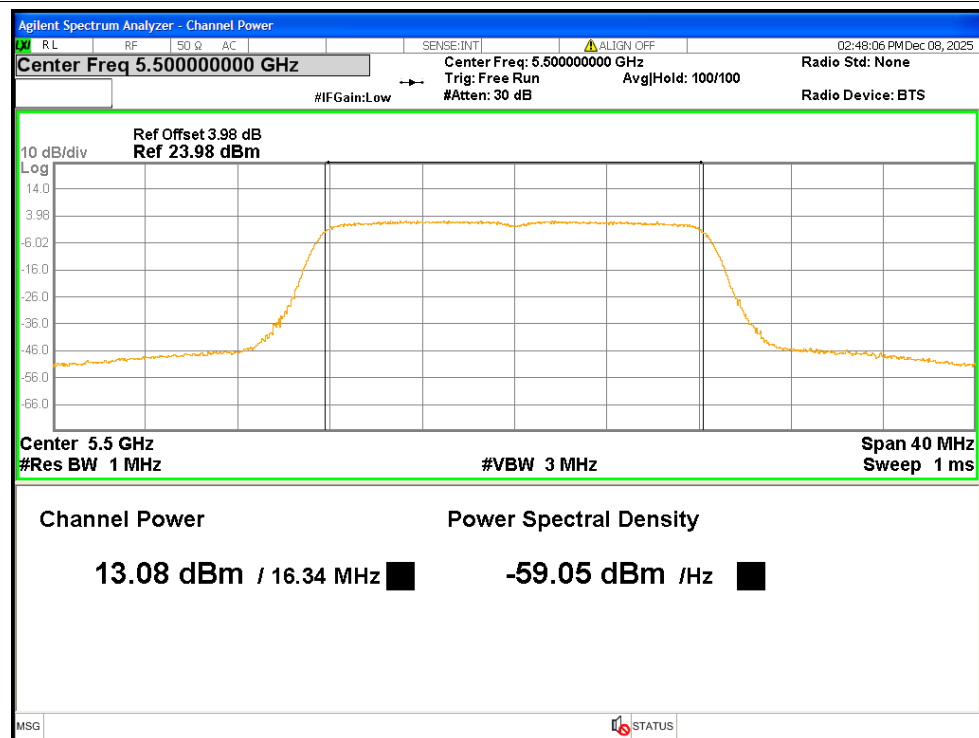


Power NVNT a 5580MHz Ant1

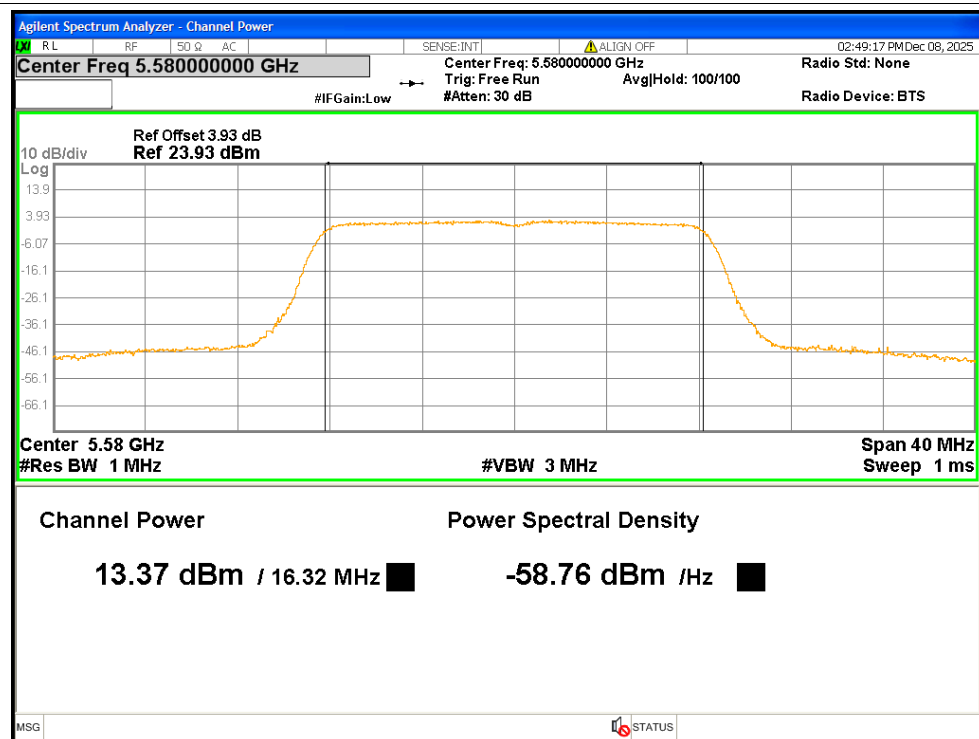


Power NVNT a 5700MHz Ant1

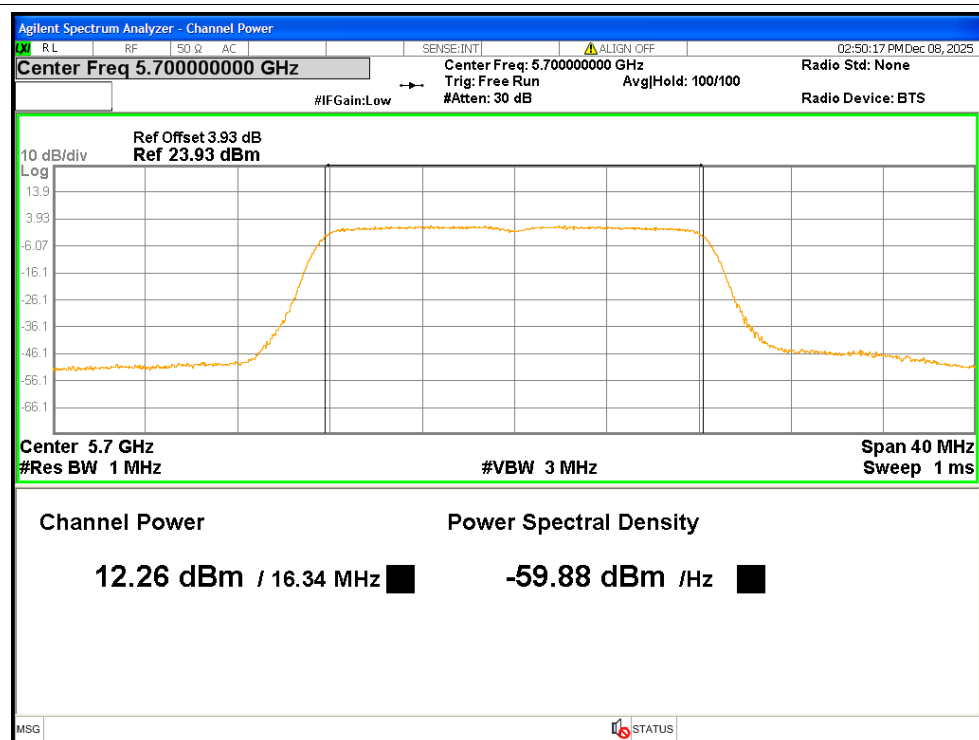


Power NVNT a 5500MHz Ant2

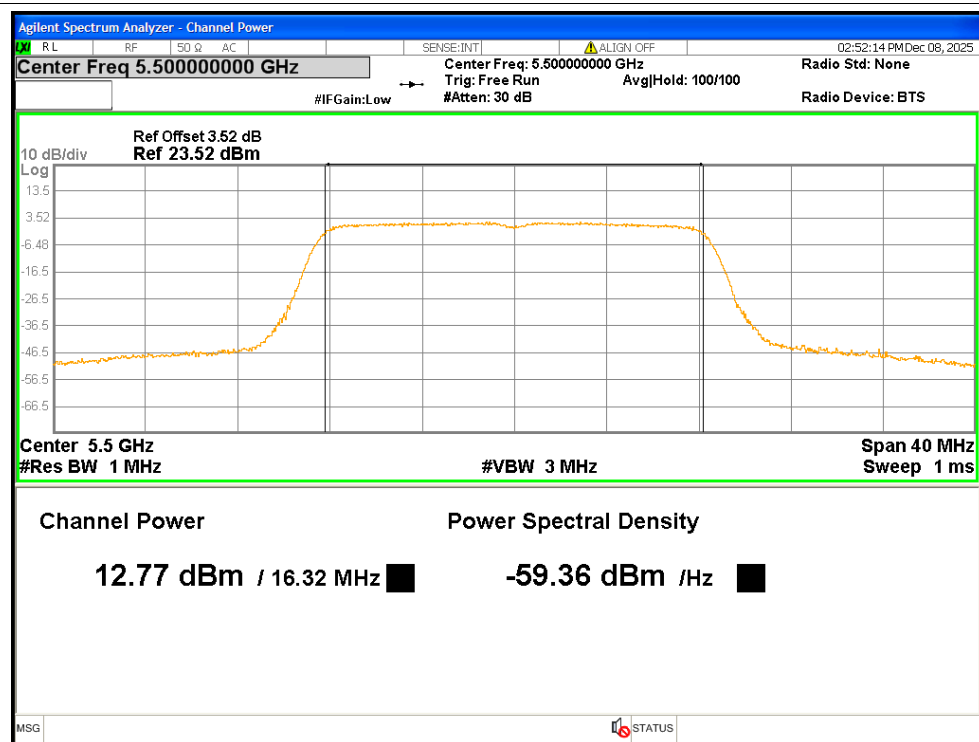


Power NVNT a 5580MHz Ant2

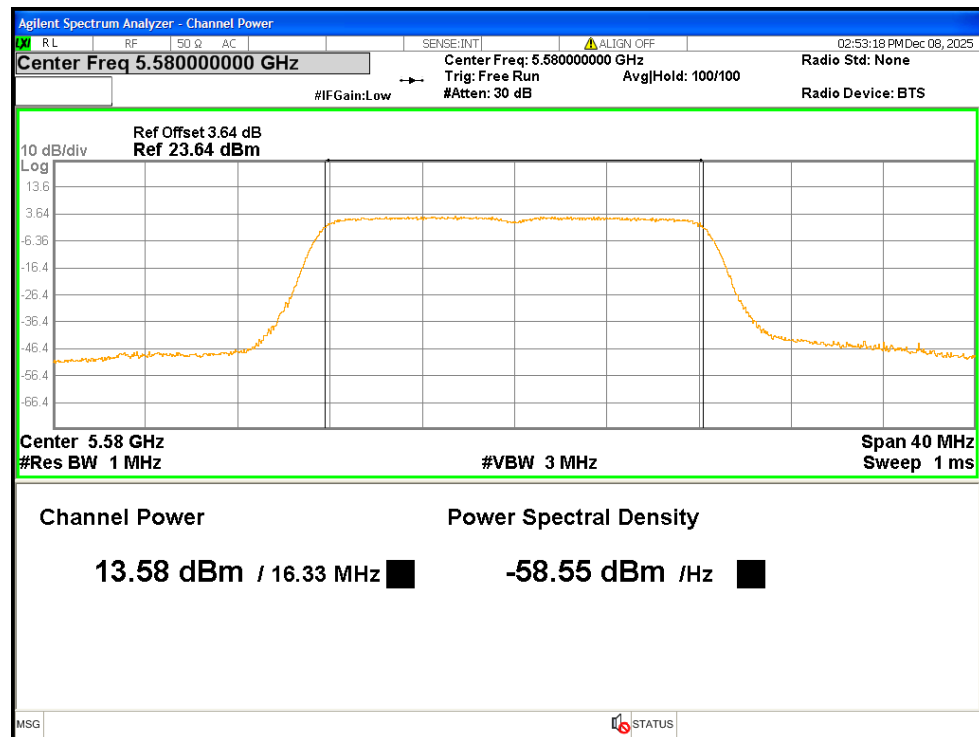


Power NVNT a 5700MHz Ant2

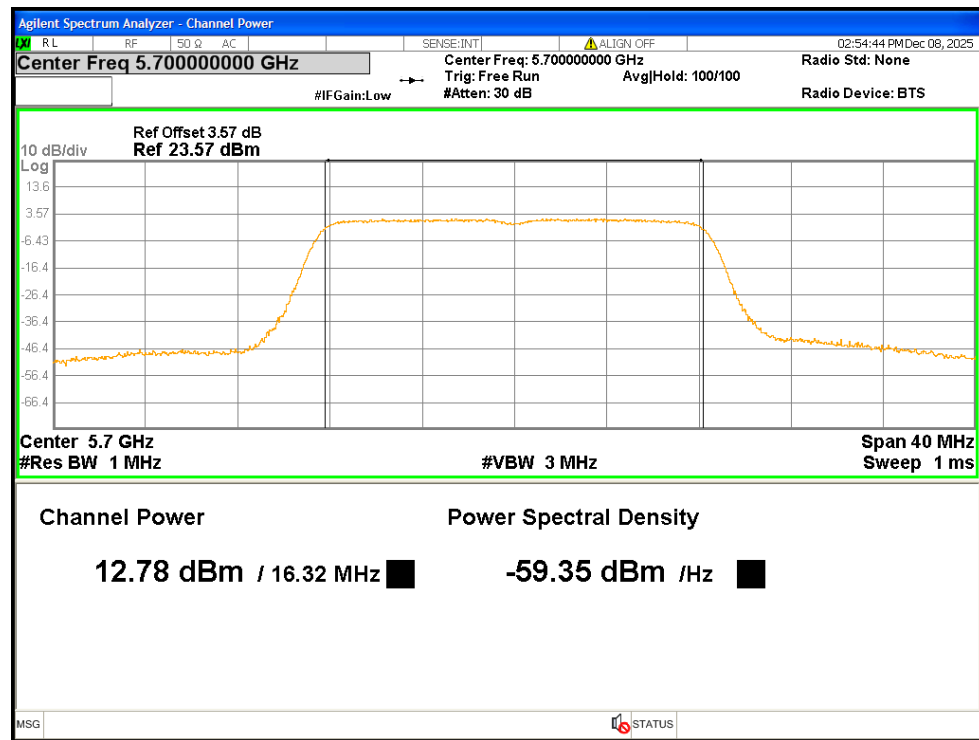


Power NVNT n20 5500MHz Ant1

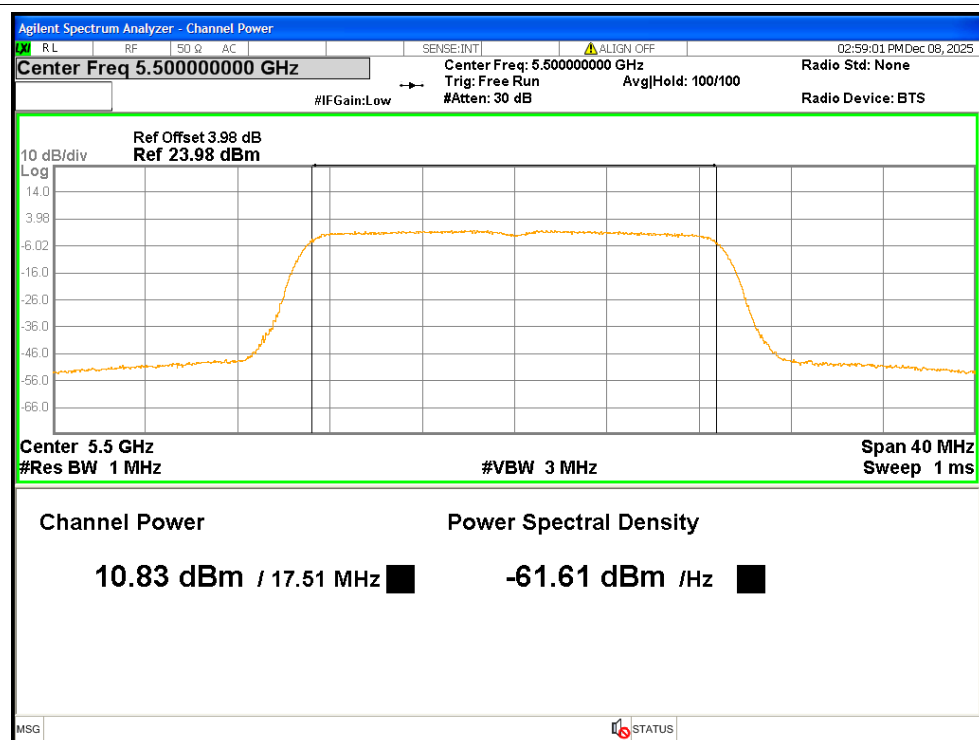


Power NVNT n20 5500MHz Ant2

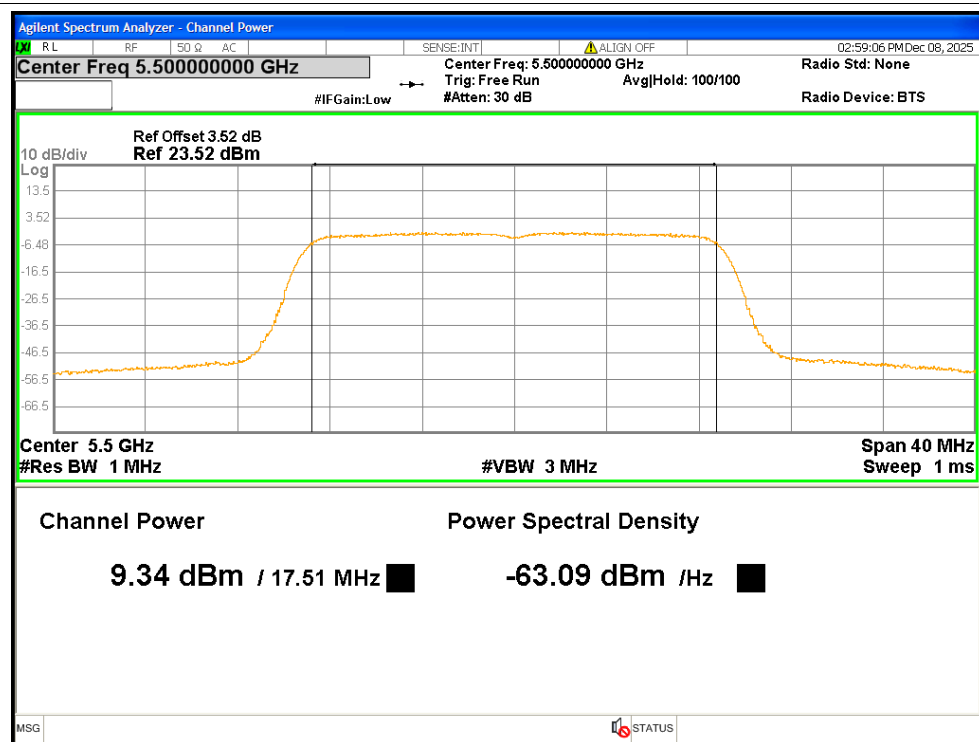


Power NVNT n20 5580MHz Ant1

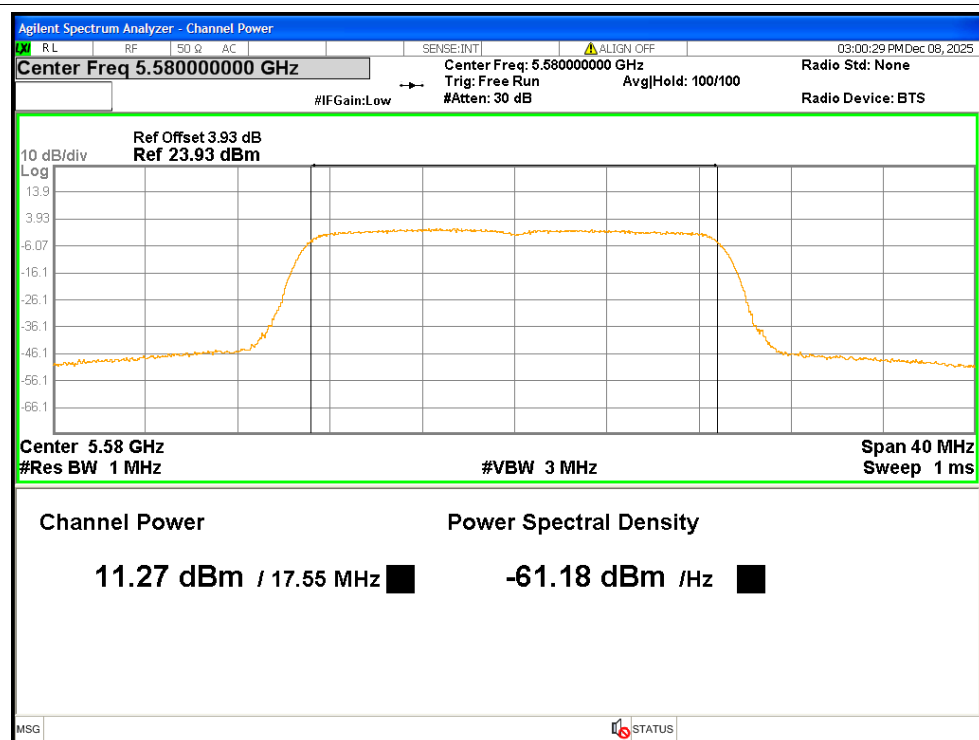


Power NVNT n20 5580MHz Ant2

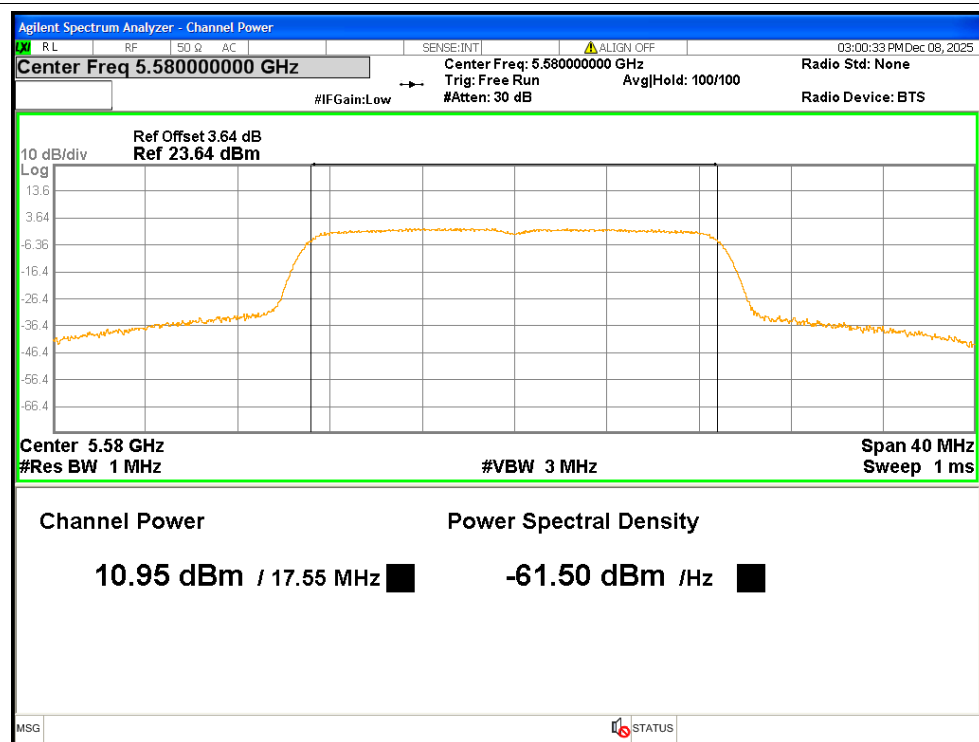


Power NVNT n20 5700MHz Ant1

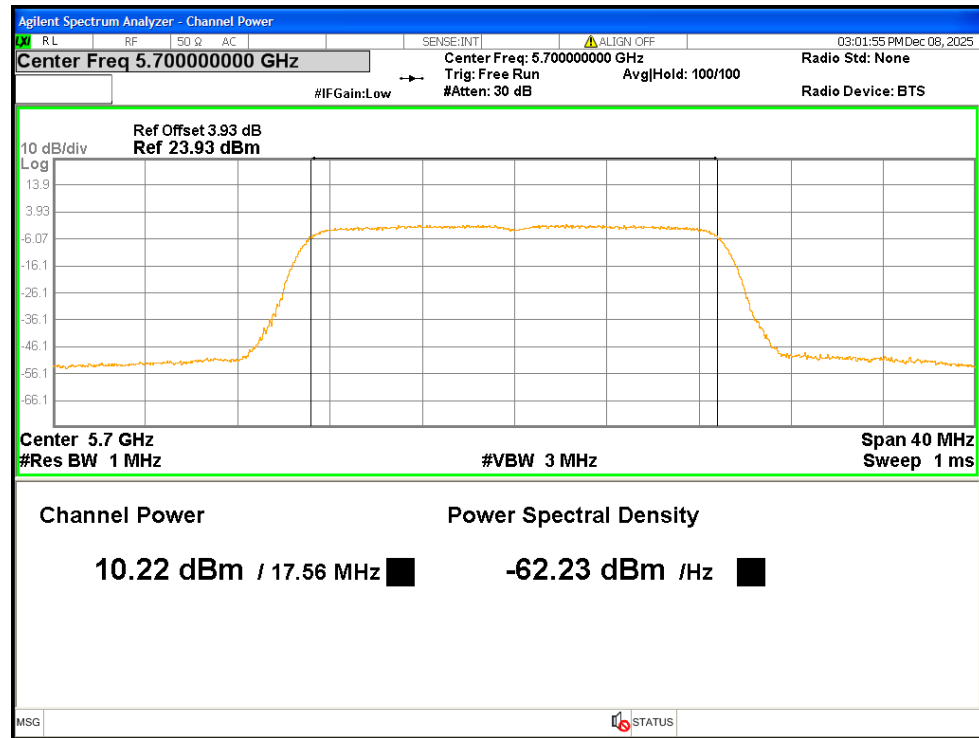


Power NVNT n20 5700MHz Ant2

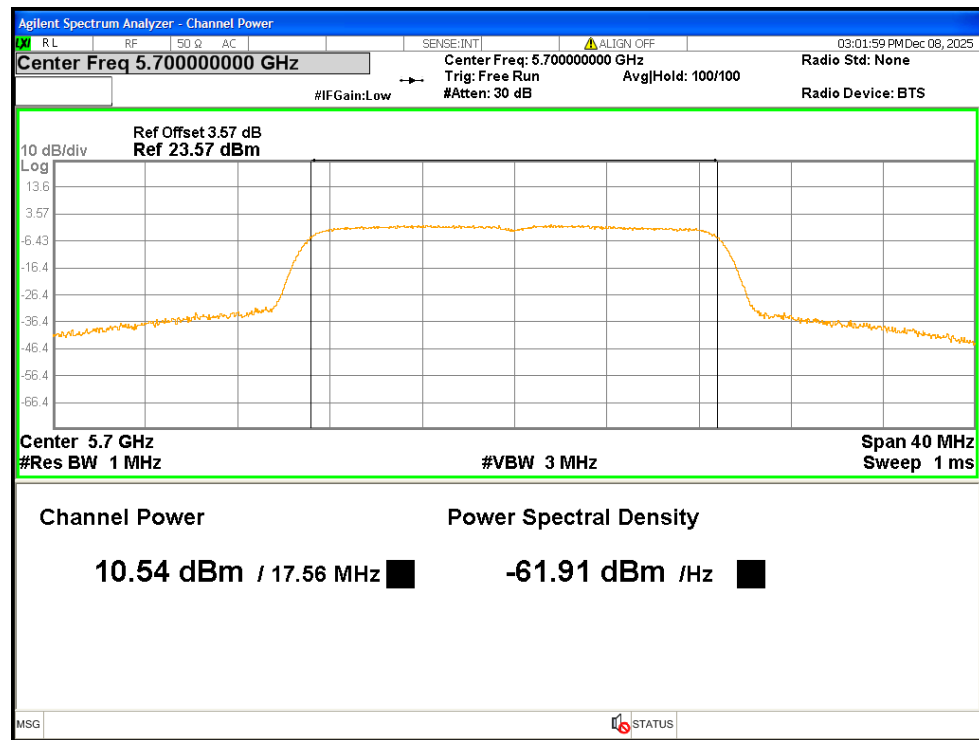


Power NVNT n40 5510MHz Ant1

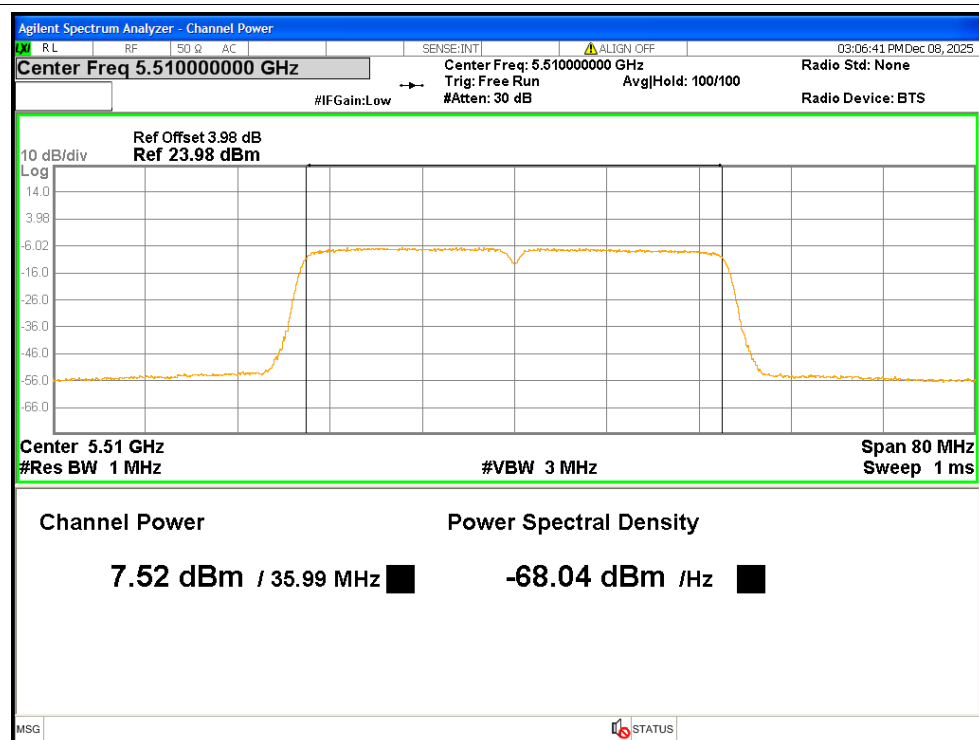


Power NVNT n40 5510MHz Ant2

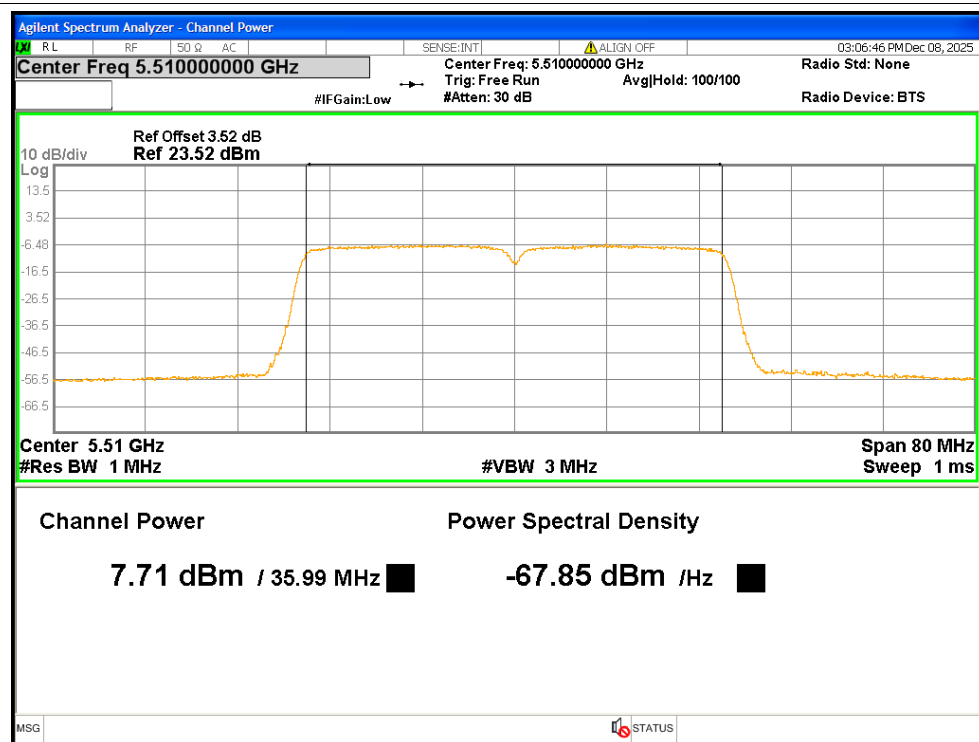


Power NVNT n40 5550MHz Ant1

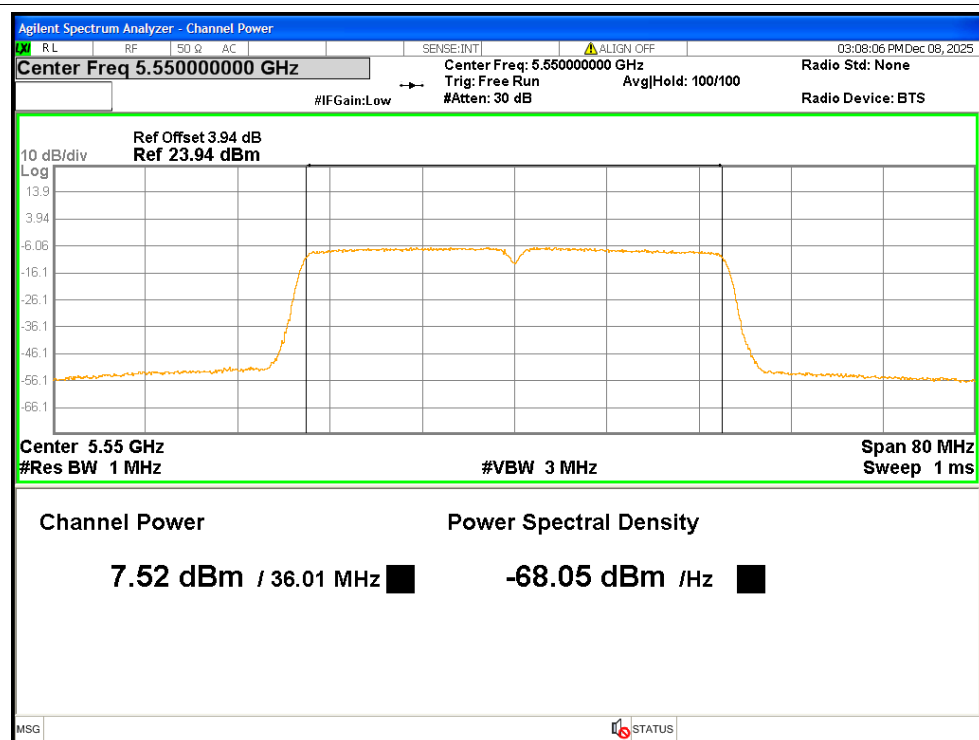


Power NVNT n40 5550MHz Ant2

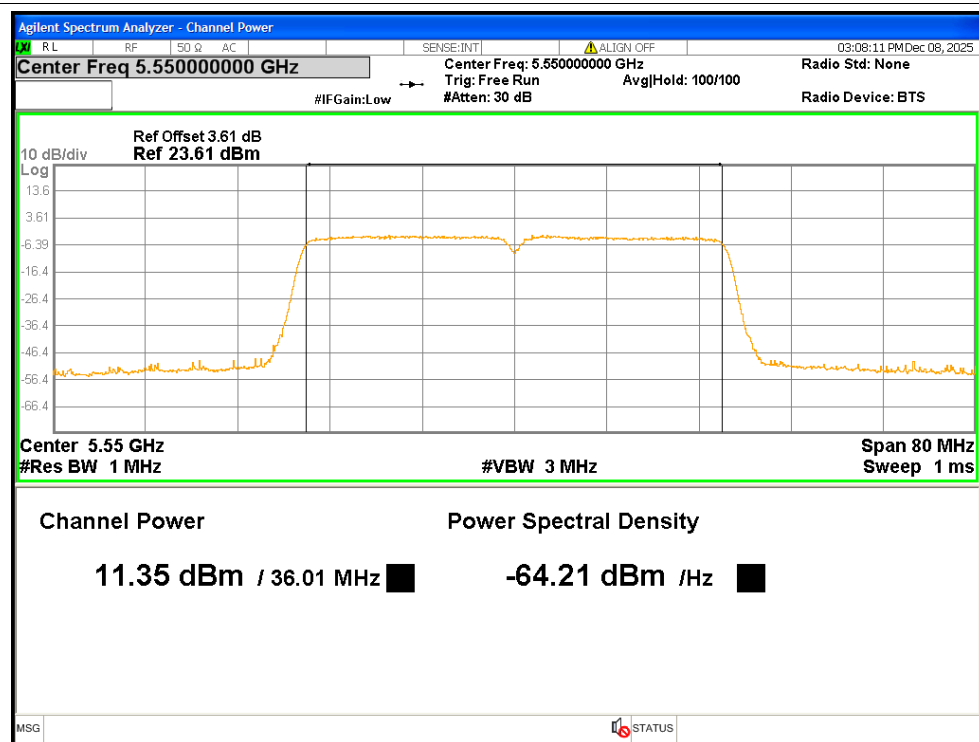


Power NVNT n40 5670MHz Ant1

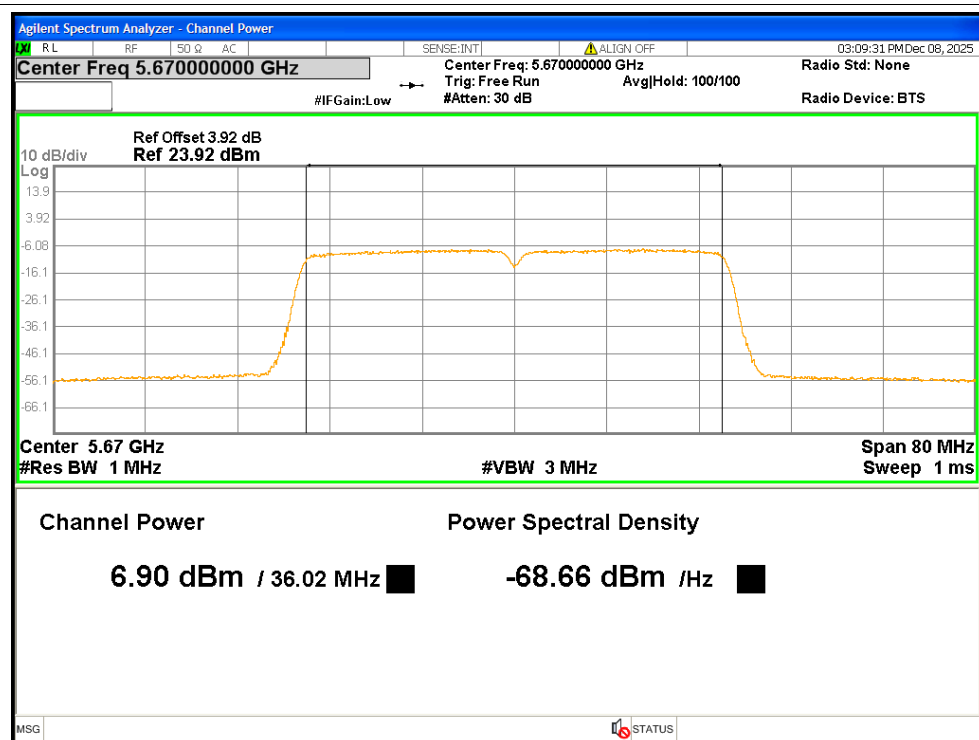


Power NVNT n40 5670MHz Ant2

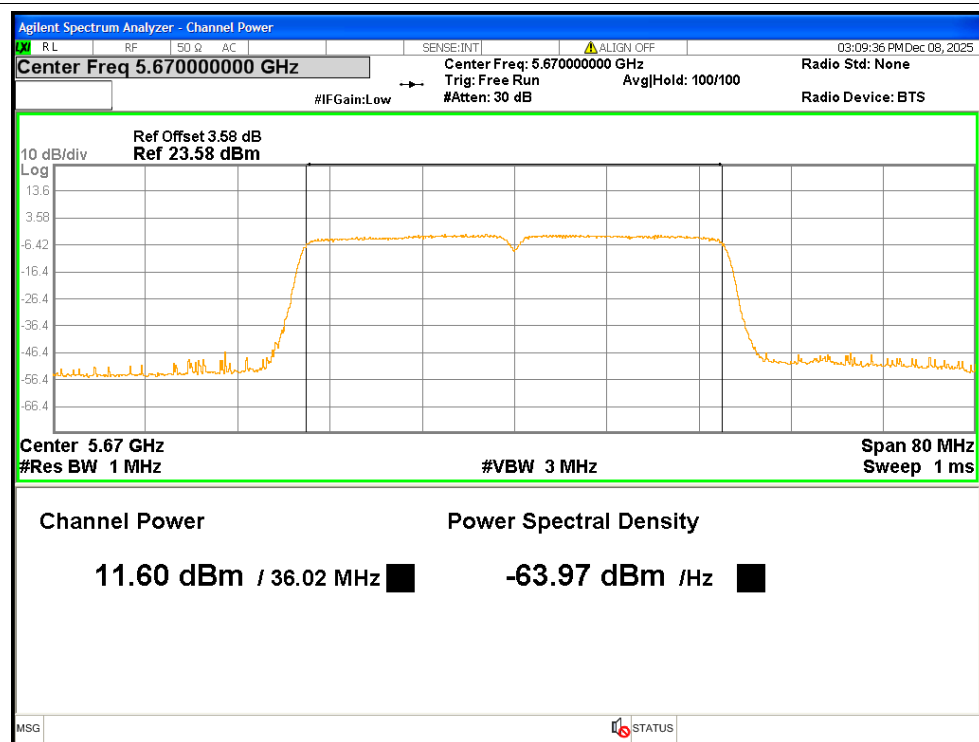


Power NVNT ac20 5500MHz Ant1

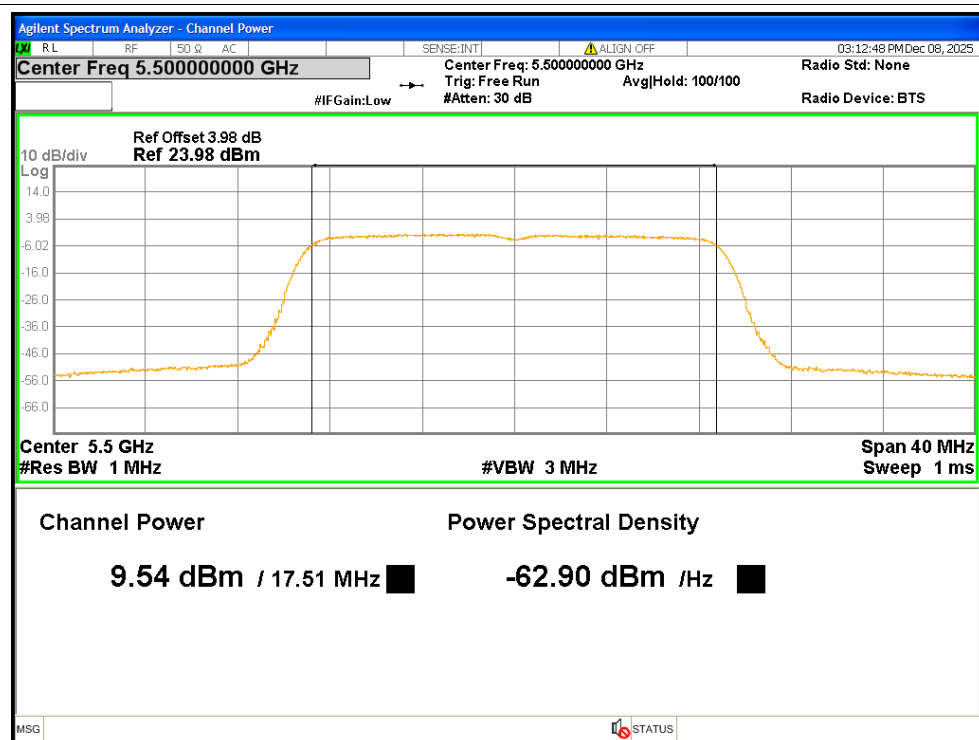


Power NVNT ac20 5500MHz Ant2

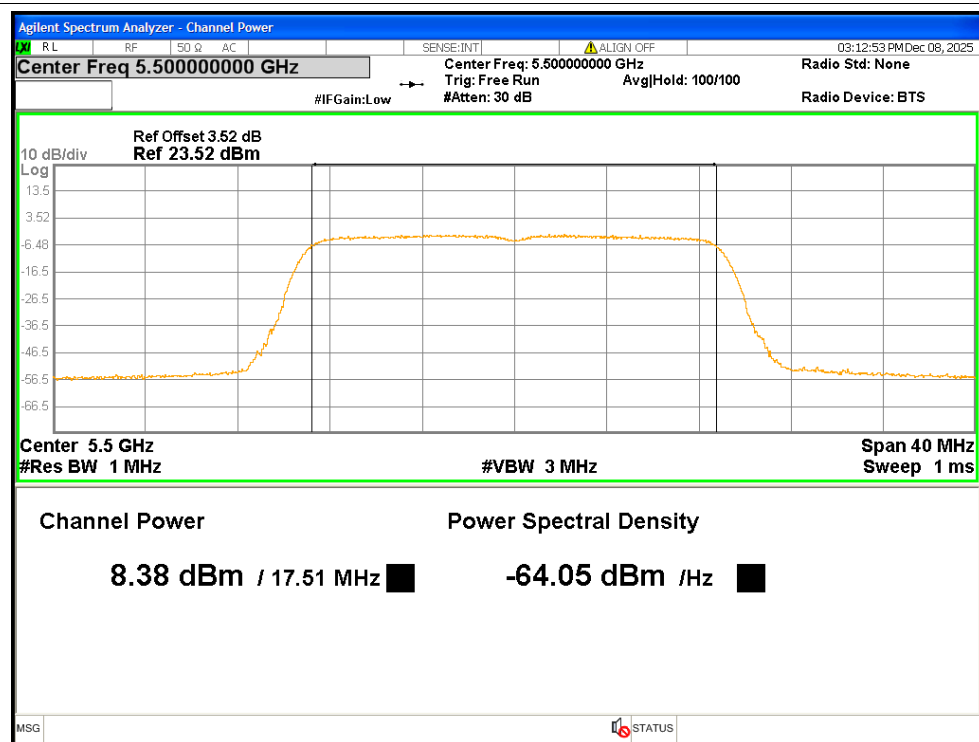


Power NVNT ac20 5580MHz Ant1

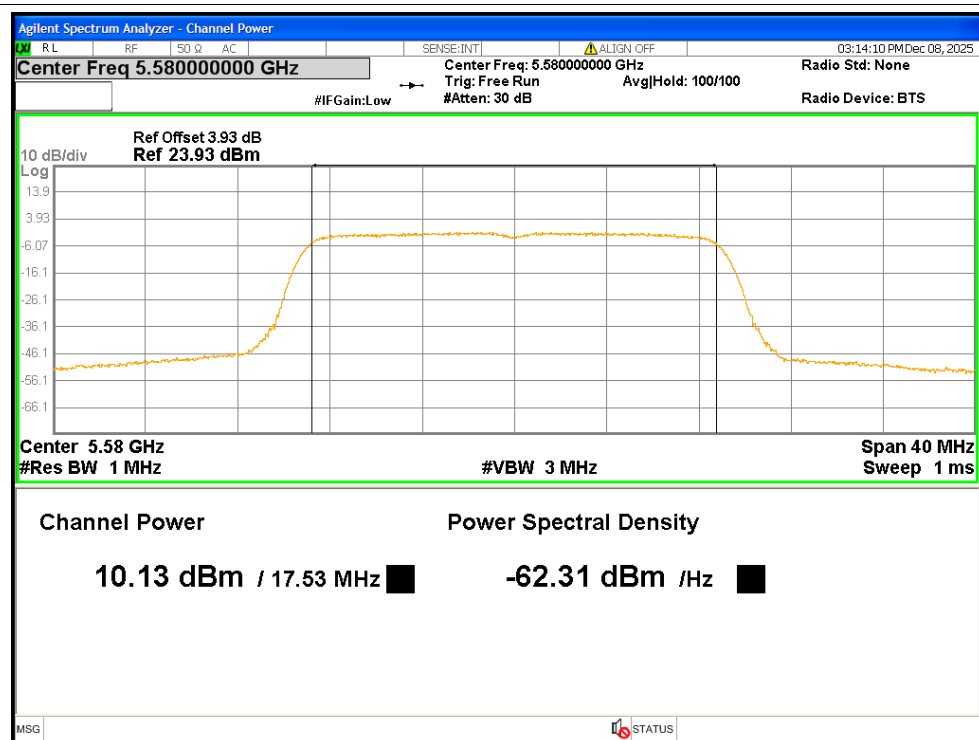


Power NVNT ac20 5580MHz Ant2

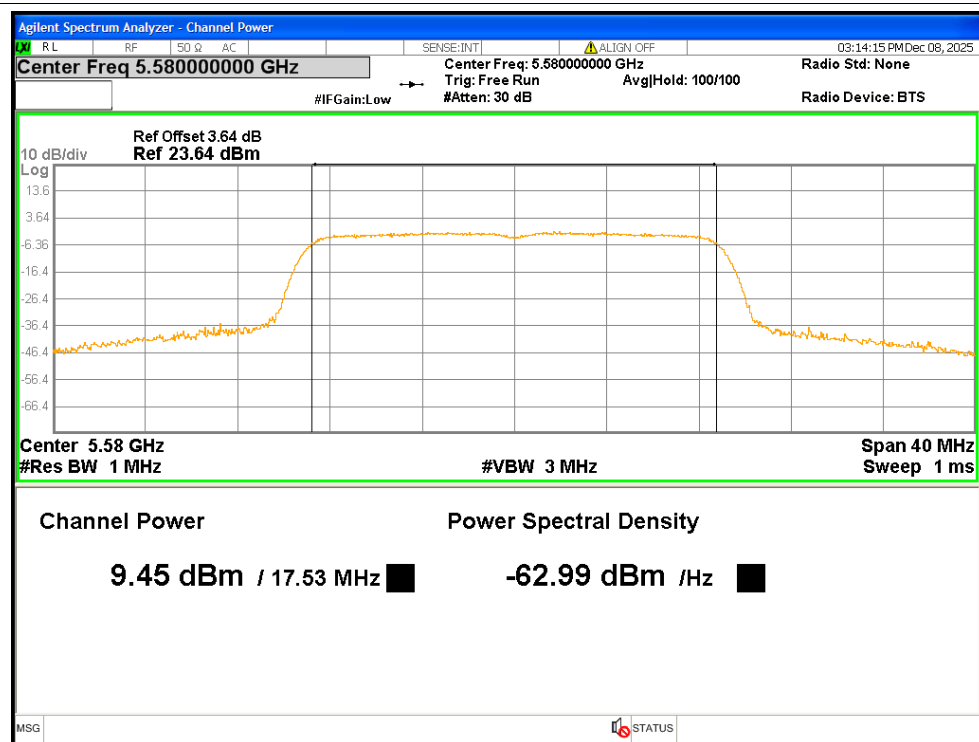


Power NVNT ac20 5700MHz Ant1

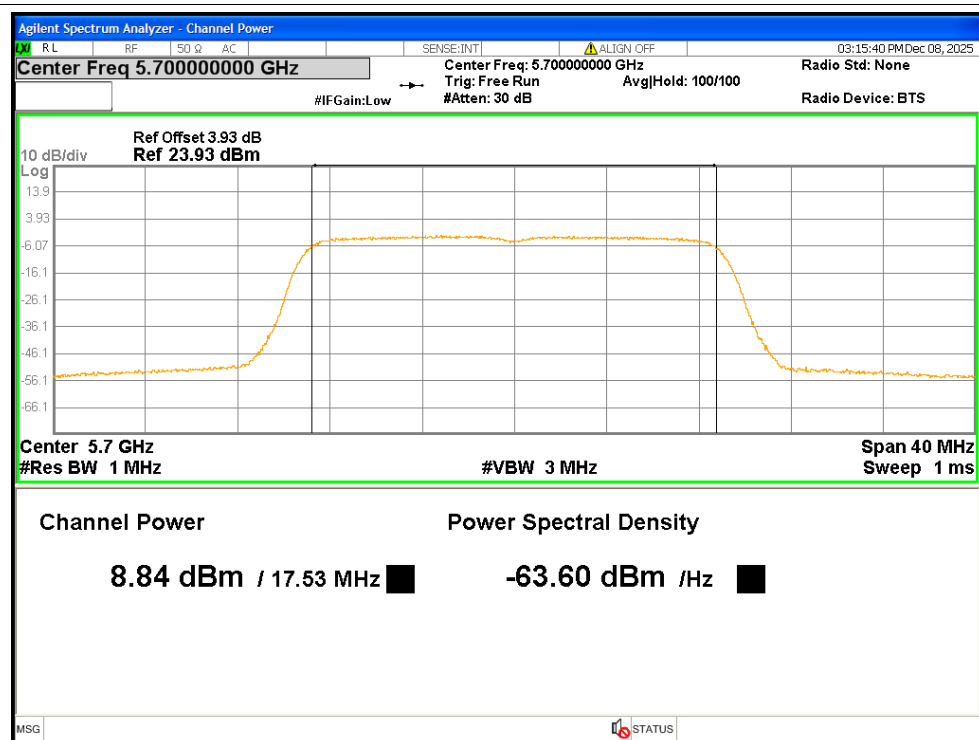


Power NVNT ac20 5700MHz Ant2

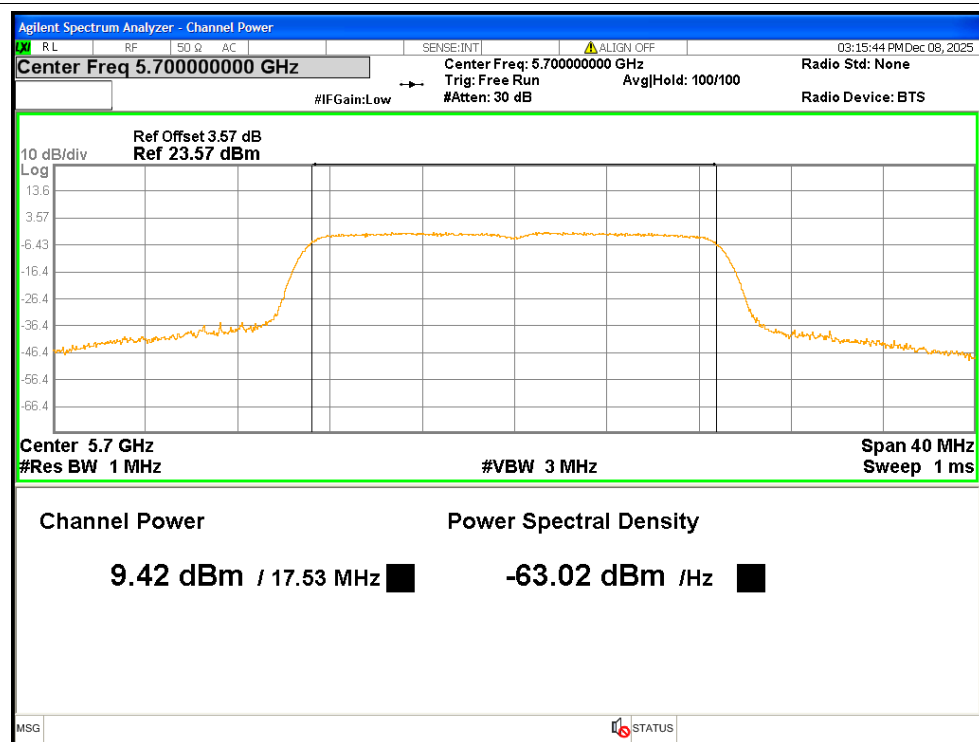


Power NVNT ac40 5510MHz Ant1

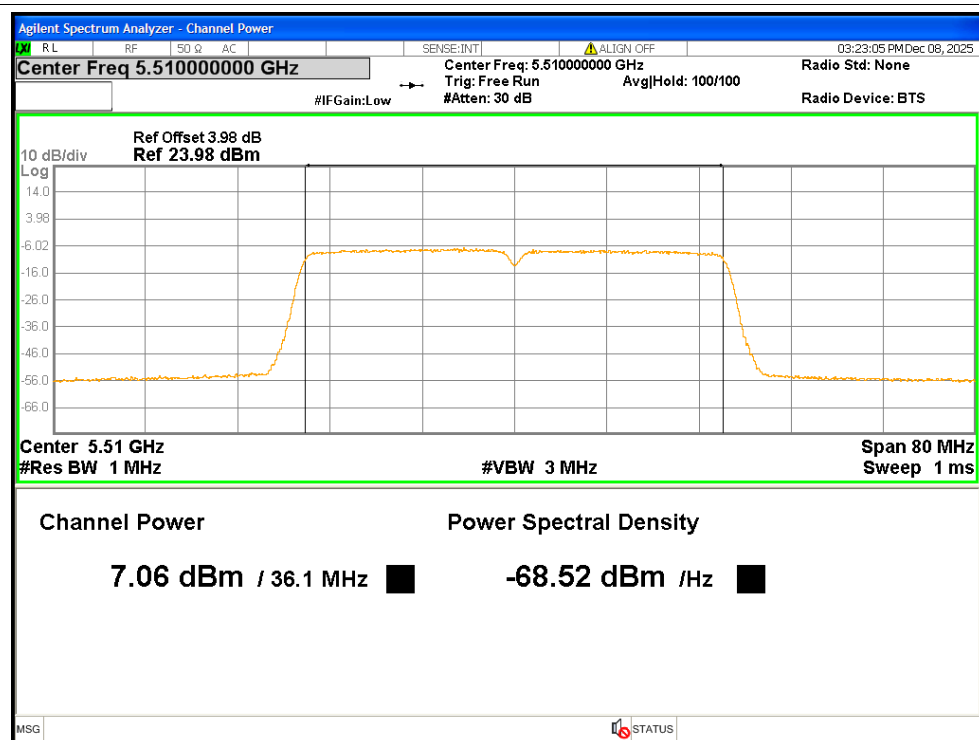


Power NVNT ac40 5510MHz Ant2

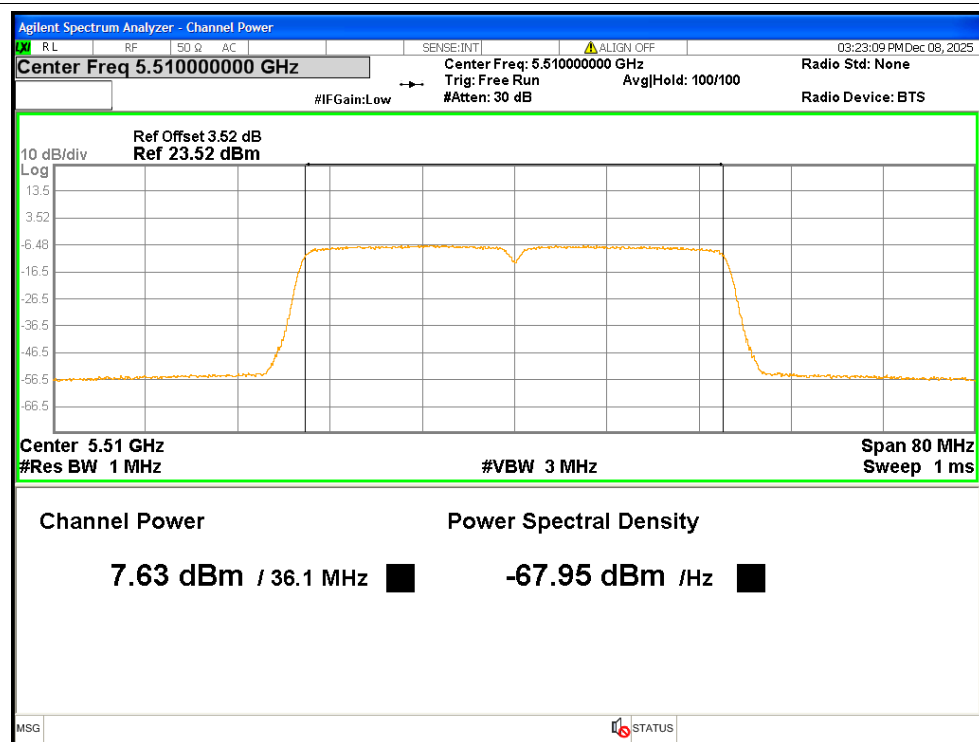


Power NVNT ac40 5550MHz Ant1

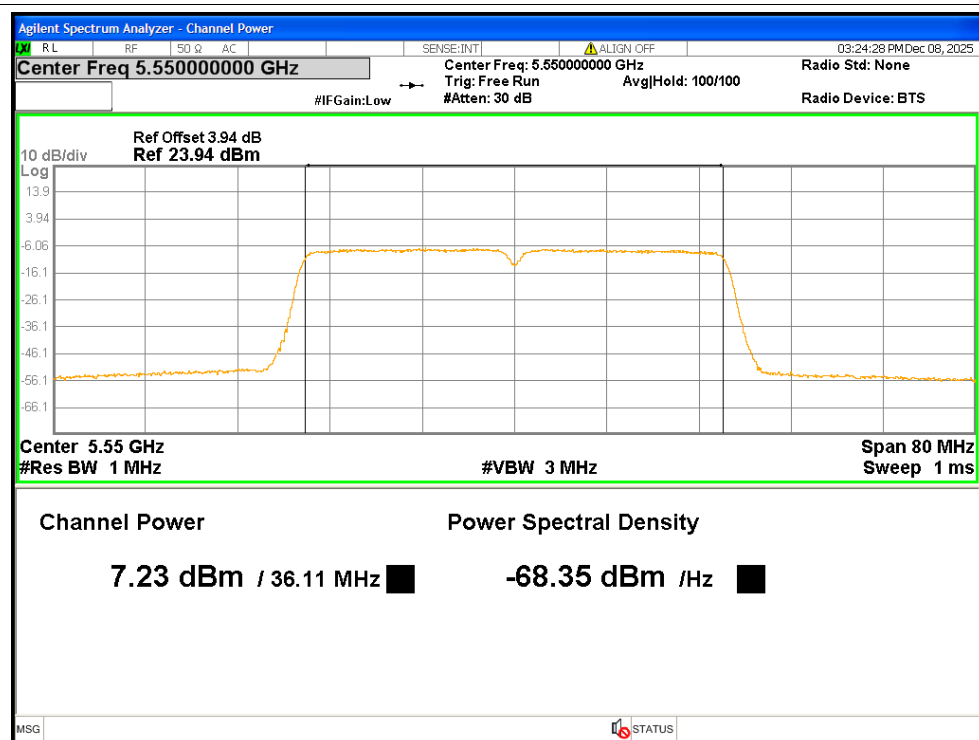


Power NVNT ac40 5550MHz Ant2

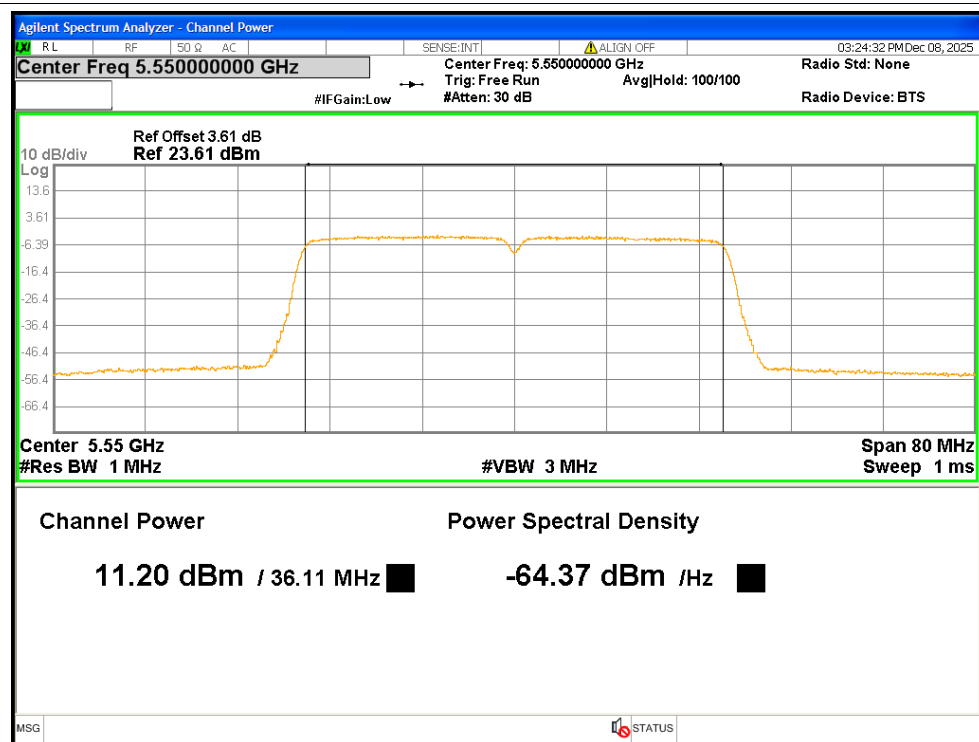


Power NVNT ac40 5670MHz Ant1

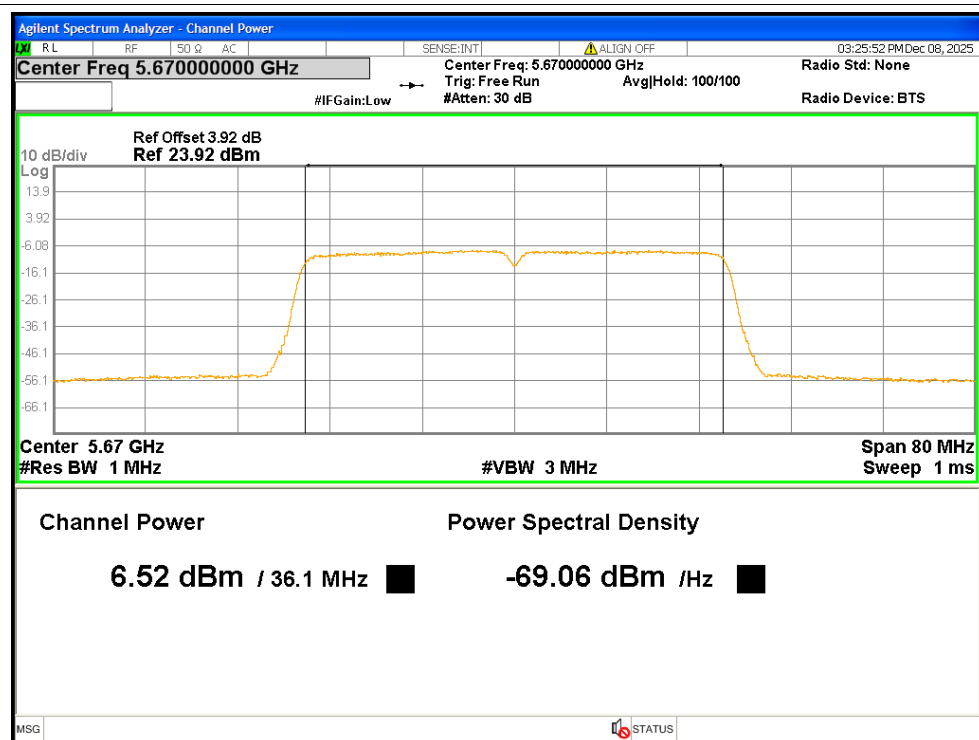


Power NVNT ac40 5670MHz Ant2

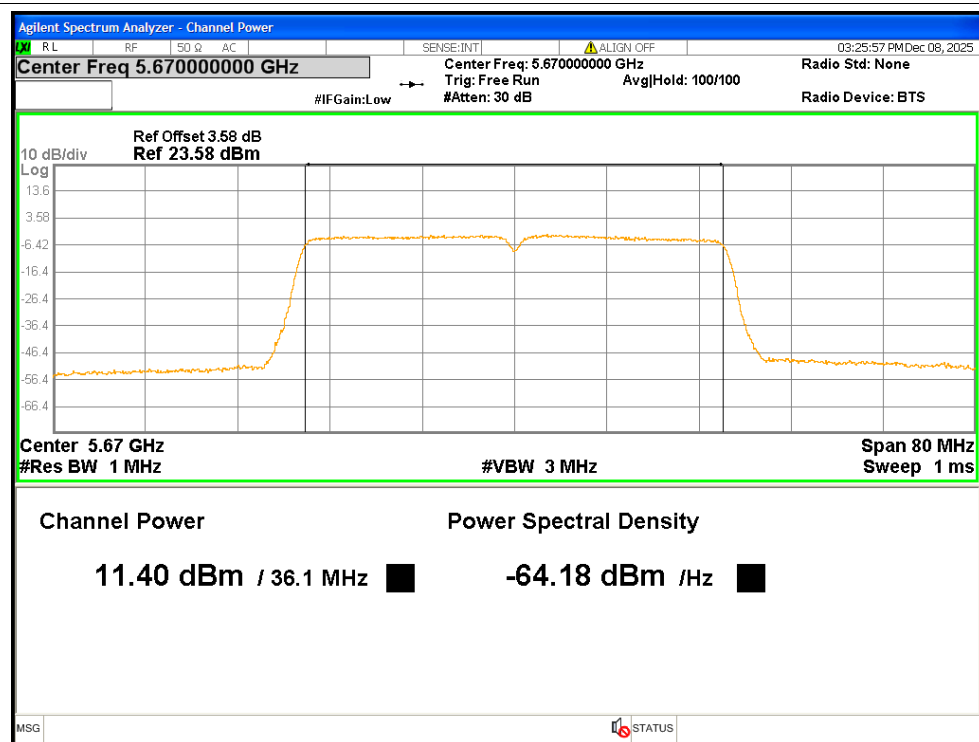


Power NVNT ac80 5530MHz Ant1

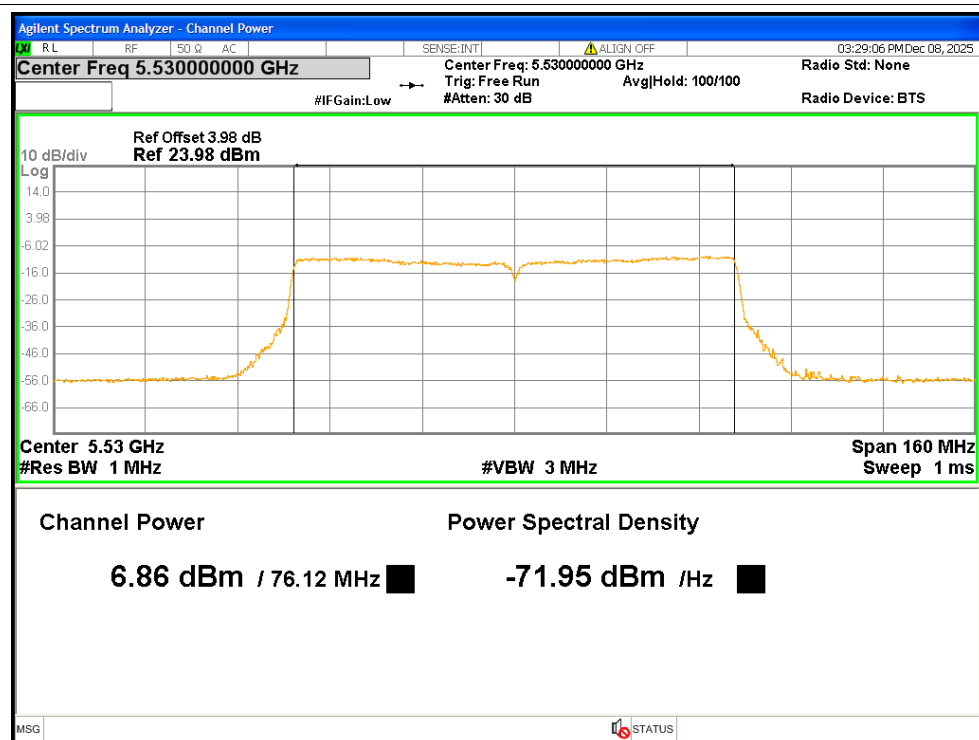


Power NVNT ac80 5530MHz Ant2

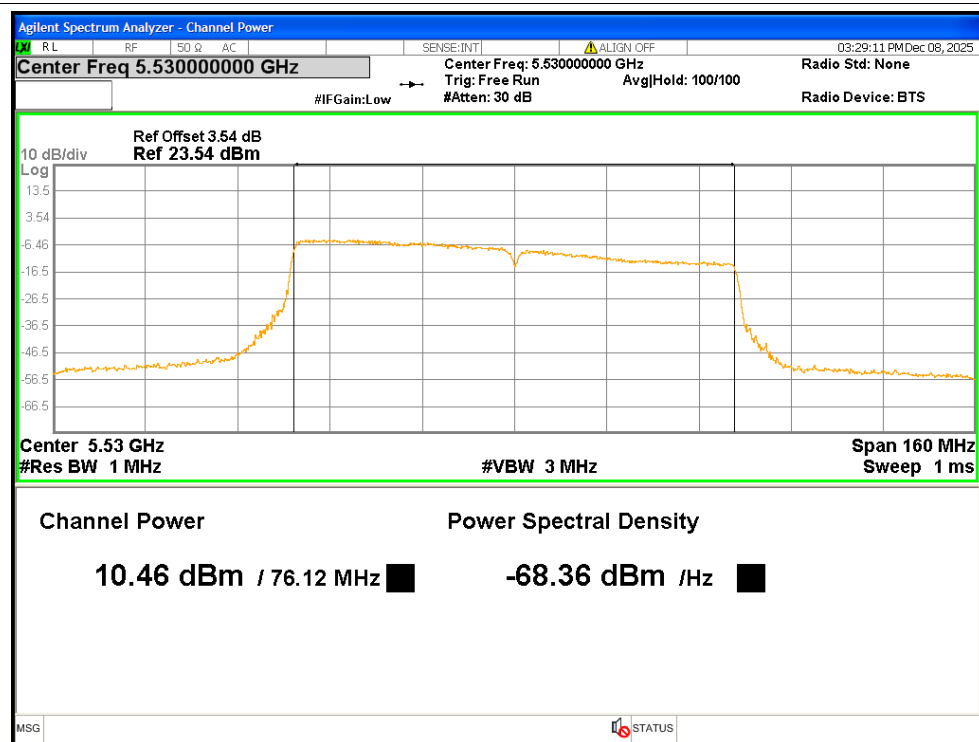

Power NVNT ac80 5610MHz Ant1

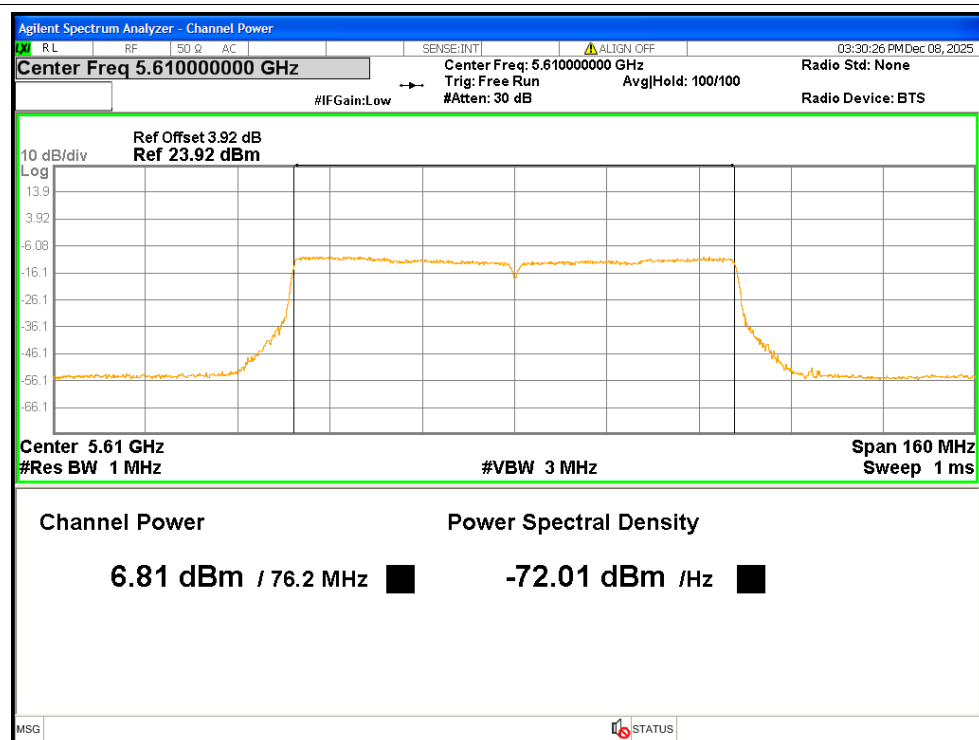

Power NVNT ac80 5610MHz Ant2

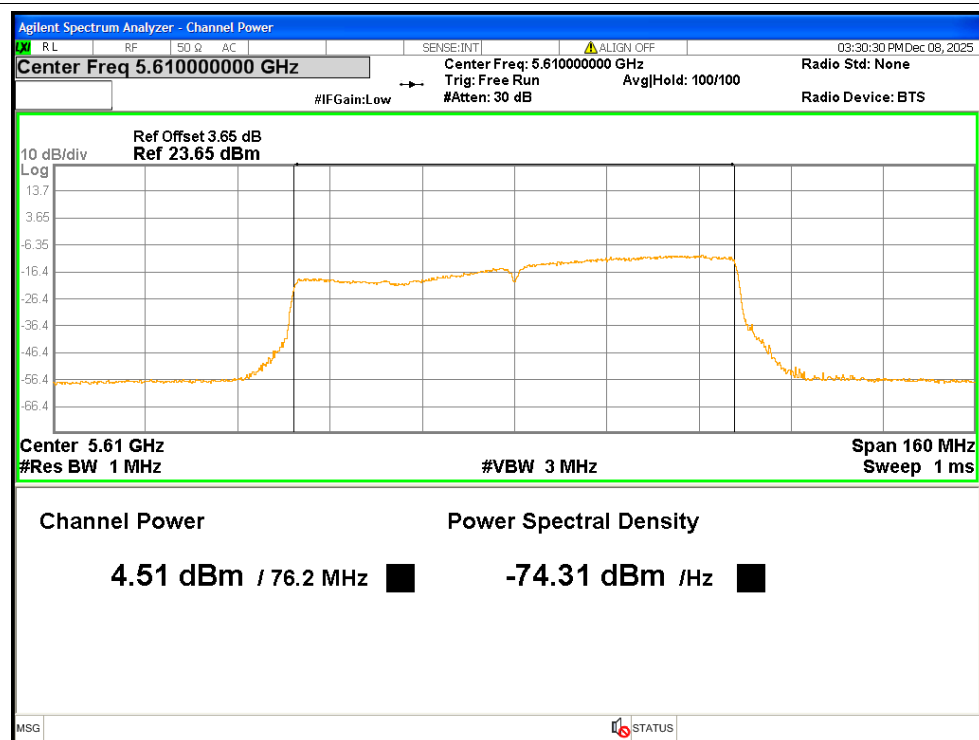


-26dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5500	Ant1	18.55	Pass
NVNT	a	5580	Ant1	18.71	Pass
NVNT	a	5700	Ant1	18.7	Pass
NVNT	a	5500	Ant2	18.62	Pass
NVNT	a	5580	Ant2	18.66	Pass
NVNT	a	5700	Ant2	18.48	Pass
NVNT	n20	5500	Ant1	19.54	Pass
NVNT	n20	5500	Ant2	19.58	Pass
NVNT	n20	5580	Ant1	19.61	Pass
NVNT	n20	5580	Ant2	19.85	Pass
NVNT	n20	5700	Ant1	19.57	Pass
NVNT	n20	5700	Ant2	22.11	Pass
NVNT	n40	5510	Ant1	39.08	Pass
NVNT	n40	5510	Ant2	39.12	Pass
NVNT	n40	5550	Ant1	39.11	Pass
NVNT	n40	5550	Ant2	39.1	Pass
NVNT	n40	5670	Ant1	39.18	Pass
NVNT	n40	5670	Ant2	39.27	Pass
NVNT	ac20	5500	Ant1	19.54	Pass
NVNT	ac20	5500	Ant2	19.44	Pass
NVNT	ac20	5580	Ant1	19.62	Pass
NVNT	ac20	5580	Ant2	22.71	Pass
NVNT	ac20	5700	Ant1	19.52	Pass
NVNT	ac20	5700	Ant2	22.48	Pass
NVNT	ac40	5510	Ant1	39.14	Pass
NVNT	ac40	5510	Ant2	39.1	Pass
NVNT	ac40	5550	Ant1	39.17	Pass
NVNT	ac40	5550	Ant2	39.19	Pass
NVNT	ac40	5670	Ant1	39.01	Pass
NVNT	ac40	5670	Ant2	38.95	Pass
NVNT	ac80	5530	Ant1	87.33	Pass
NVNT	ac80	5530	Ant2	86.01	Pass
NVNT	ac80	5610	Ant1	88.21	Pass
NVNT	ac80	5610	Ant2	84.92	Pass

Test Graphs


-26dB Bandwidth NVNT a 5500MHz Ant1

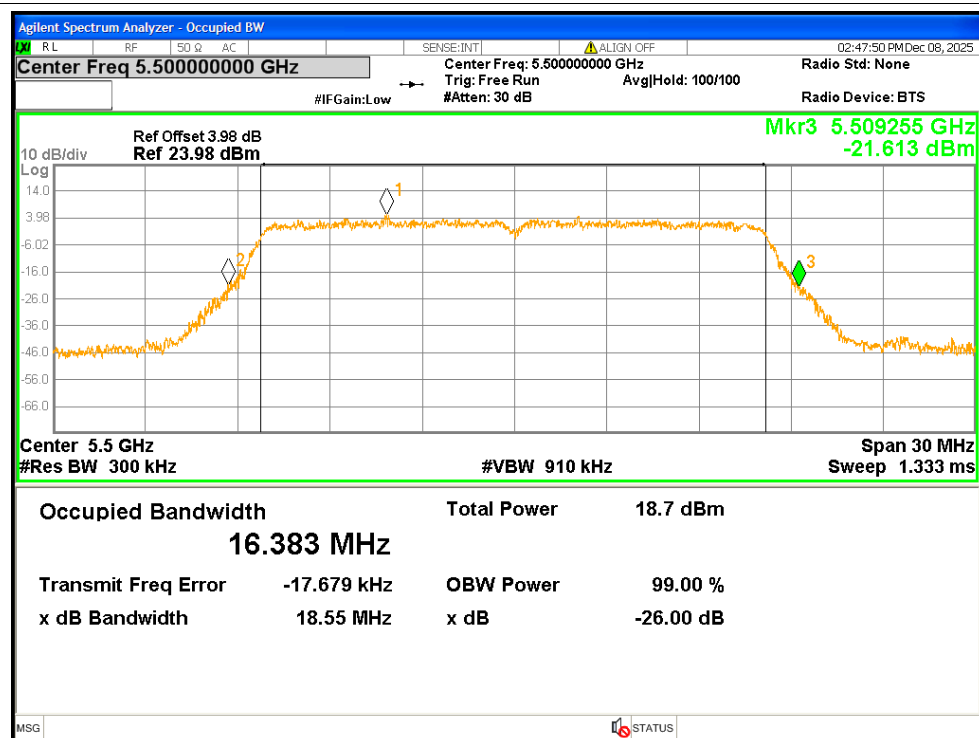


-26dB Bandwidth NVNT a 5580MHz Ant1

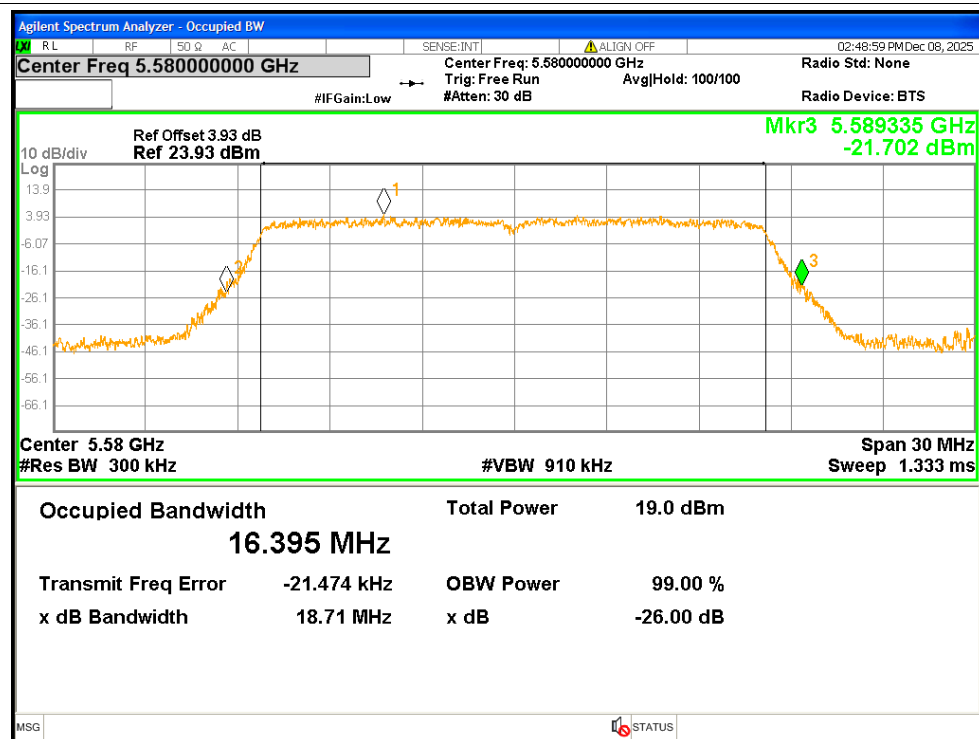


-26dB Bandwidth NVNT a 5700MHz Ant1

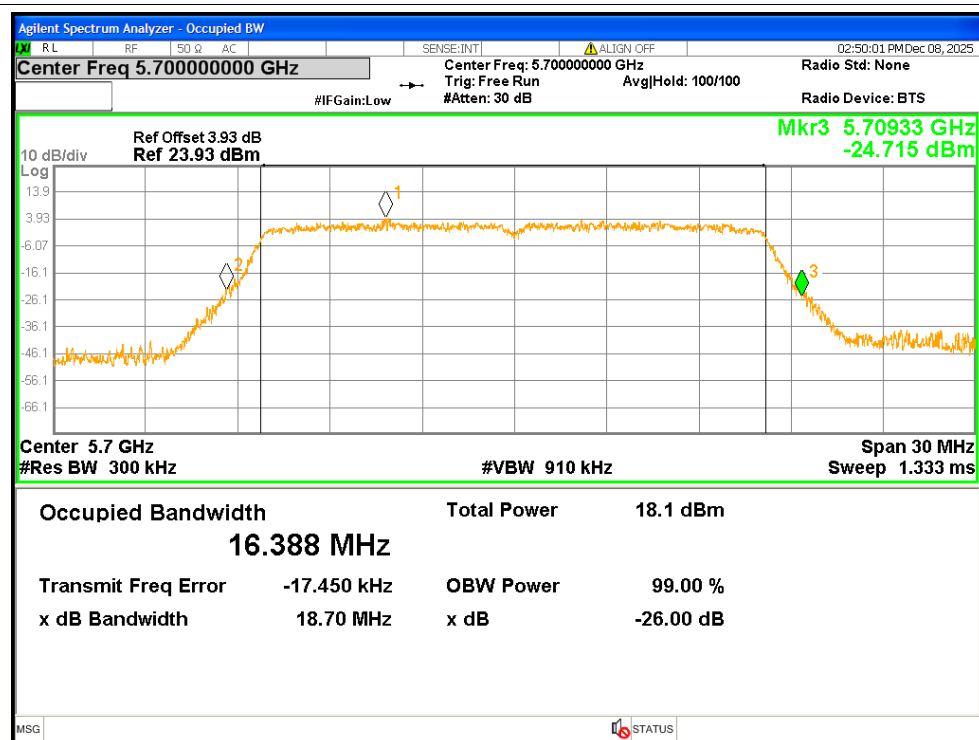


-26dB Bandwidth NVNT a 5500MHz Ant2

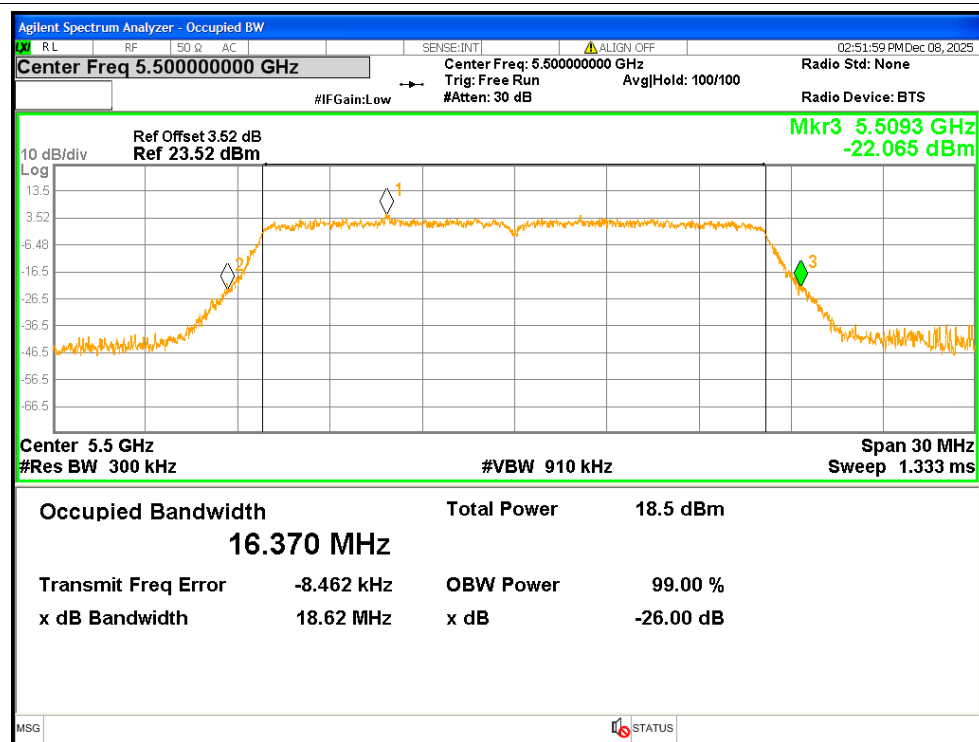


-26dB Bandwidth NVNT a 5580MHz Ant2

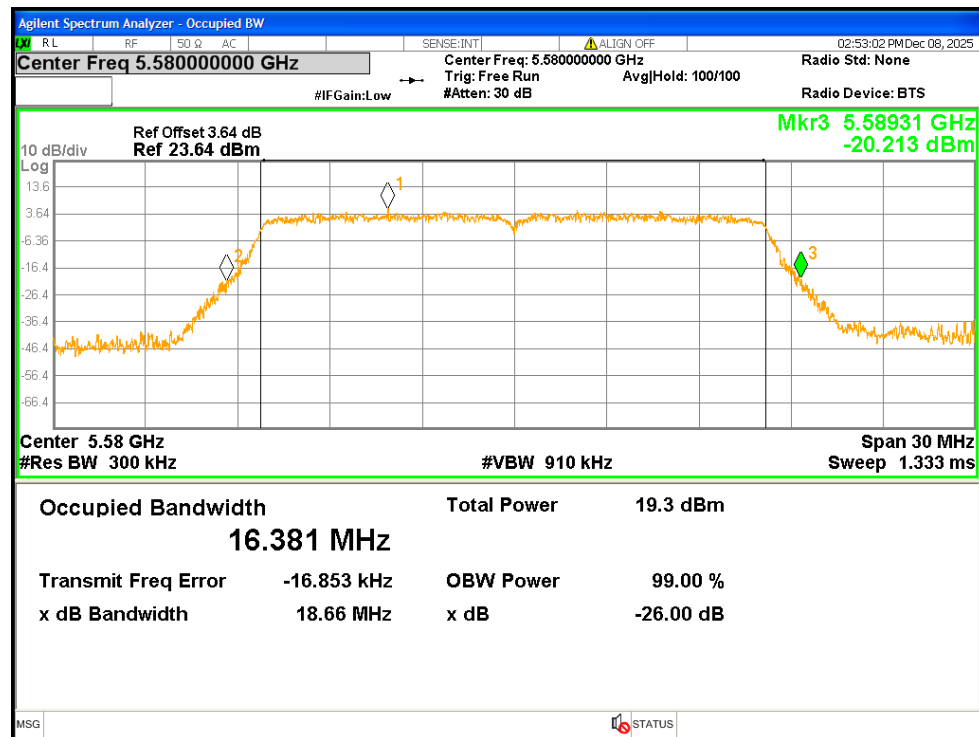


-26dB Bandwidth NVNT a 5700MHz Ant2

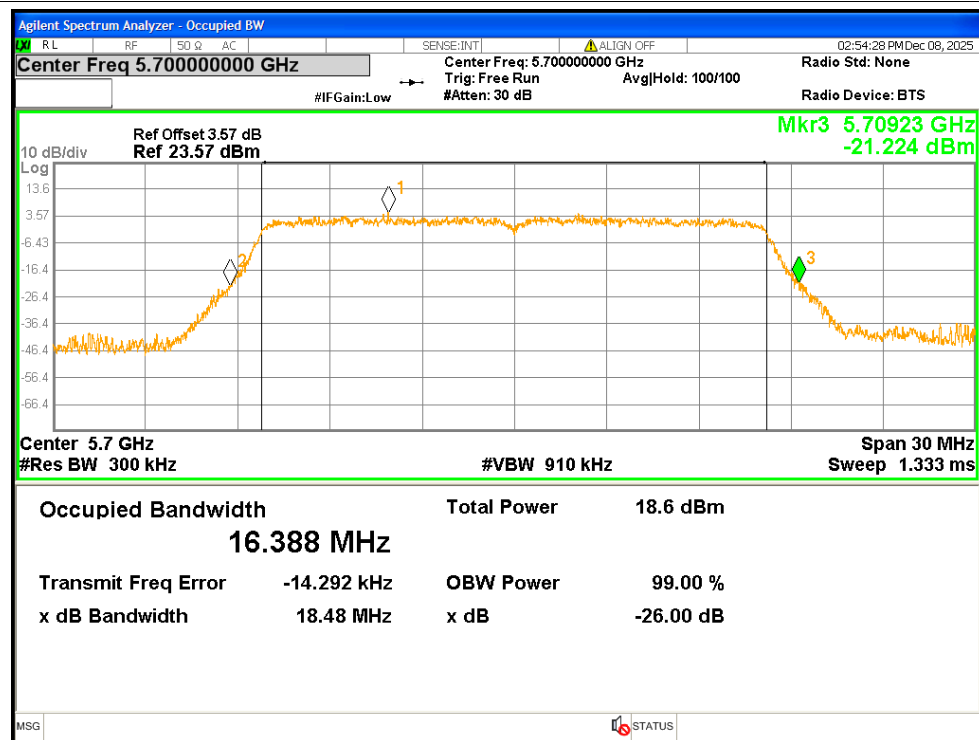


-26dB Bandwidth NVNT n20 5500MHz Ant1

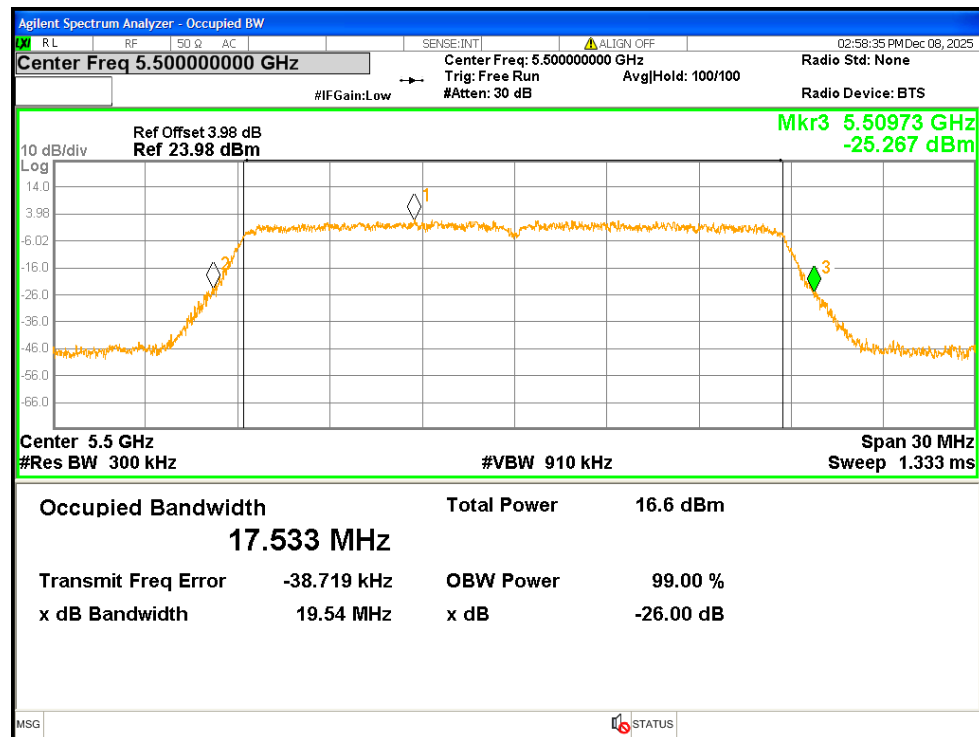


-26dB Bandwidth NVNT n20 5500MHz Ant2

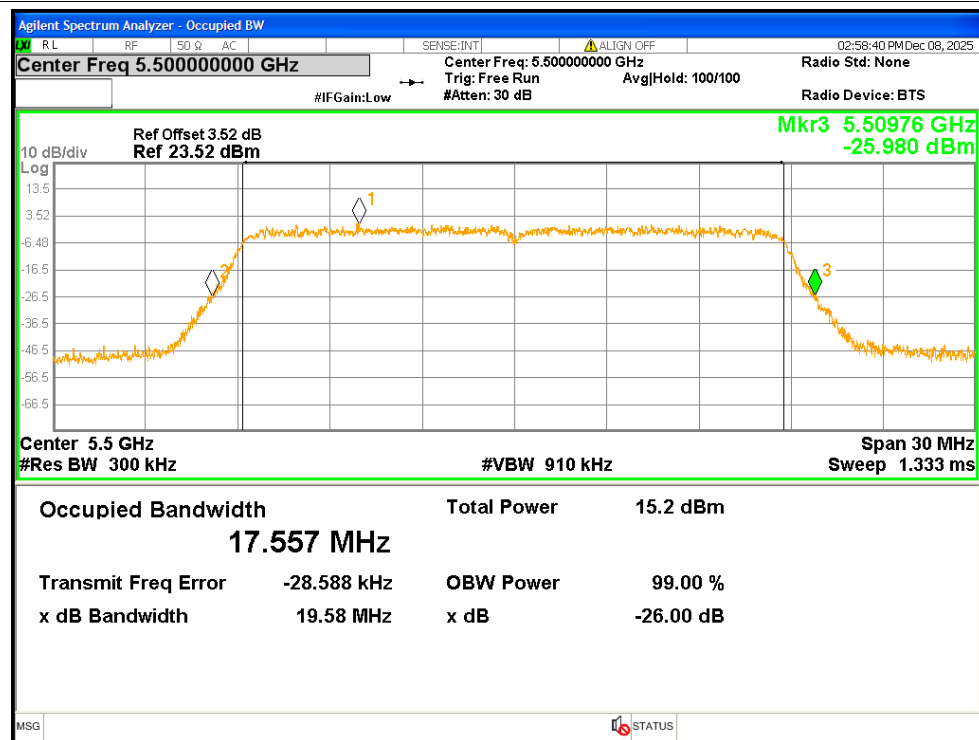


-26dB Bandwidth NVNT n20 5580MHz Ant1

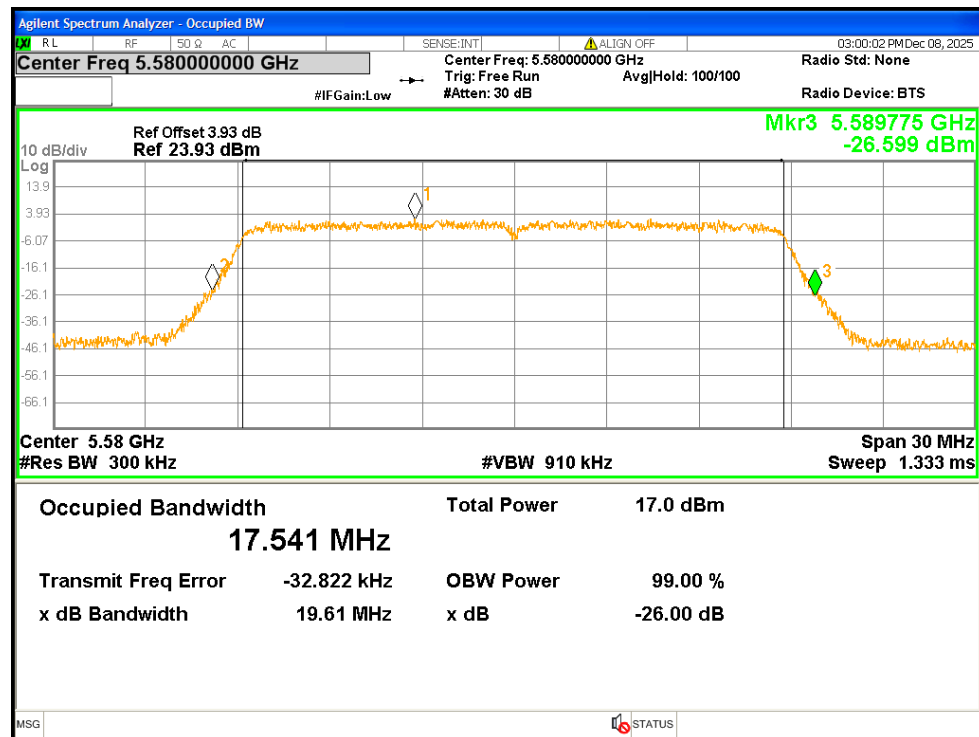


-26dB Bandwidth NVNT n20 5580MHz Ant2

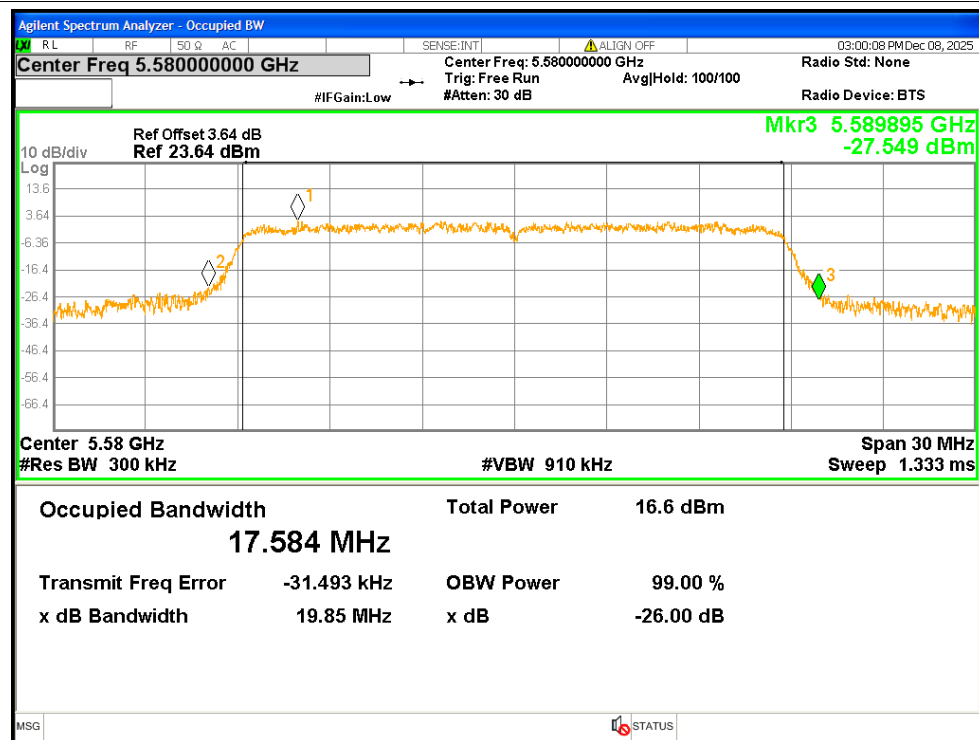


-26dB Bandwidth NVNT n20 5700MHz Ant1

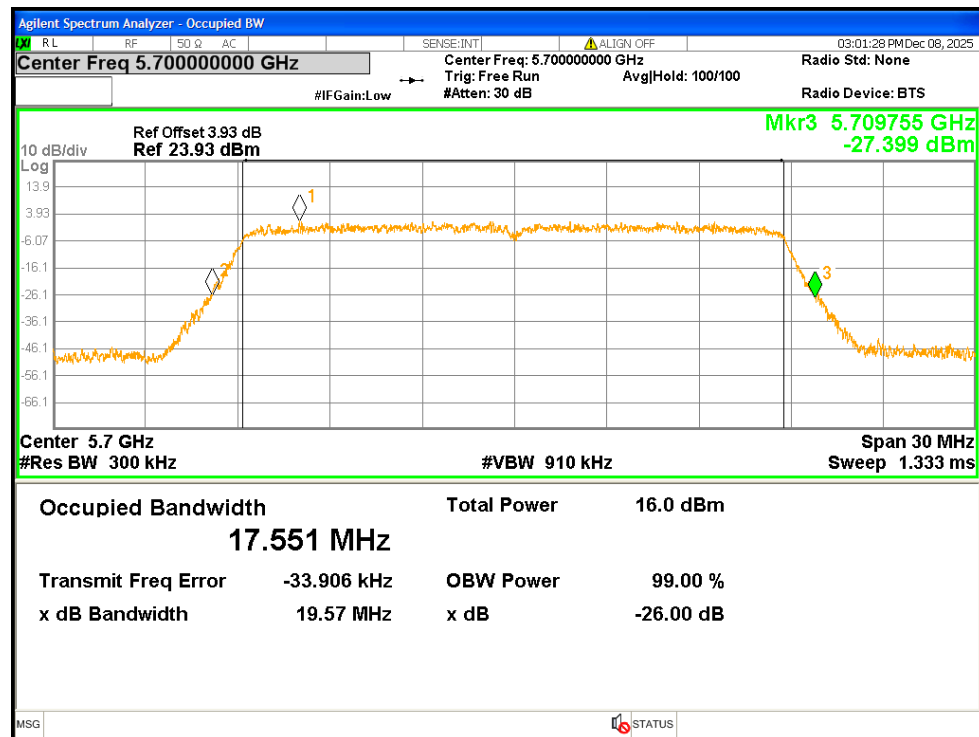


-26dB Bandwidth NVNT n20 5700MHz Ant2

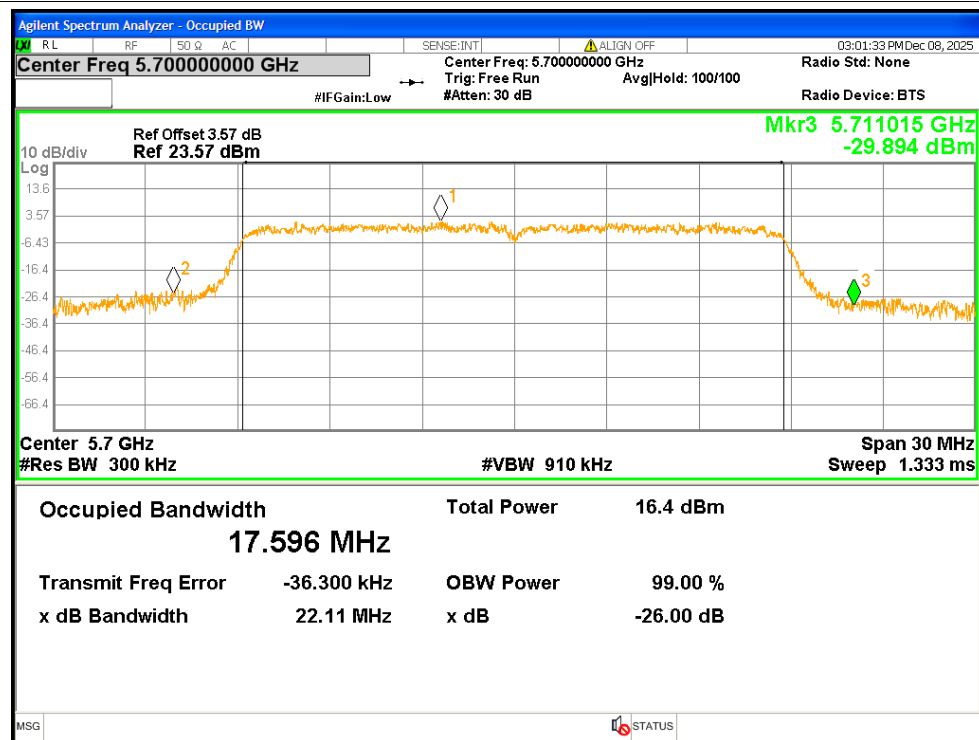


-26dB Bandwidth NVNT n40 5510MHz Ant1

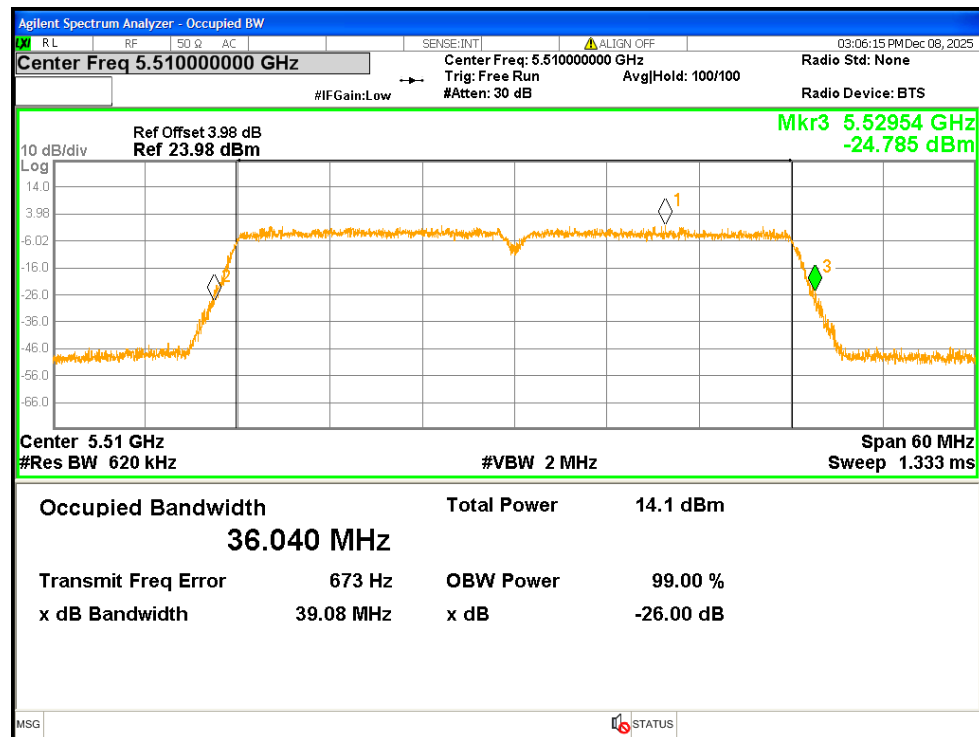


-26dB Bandwidth NVNT n40 5510MHz Ant2

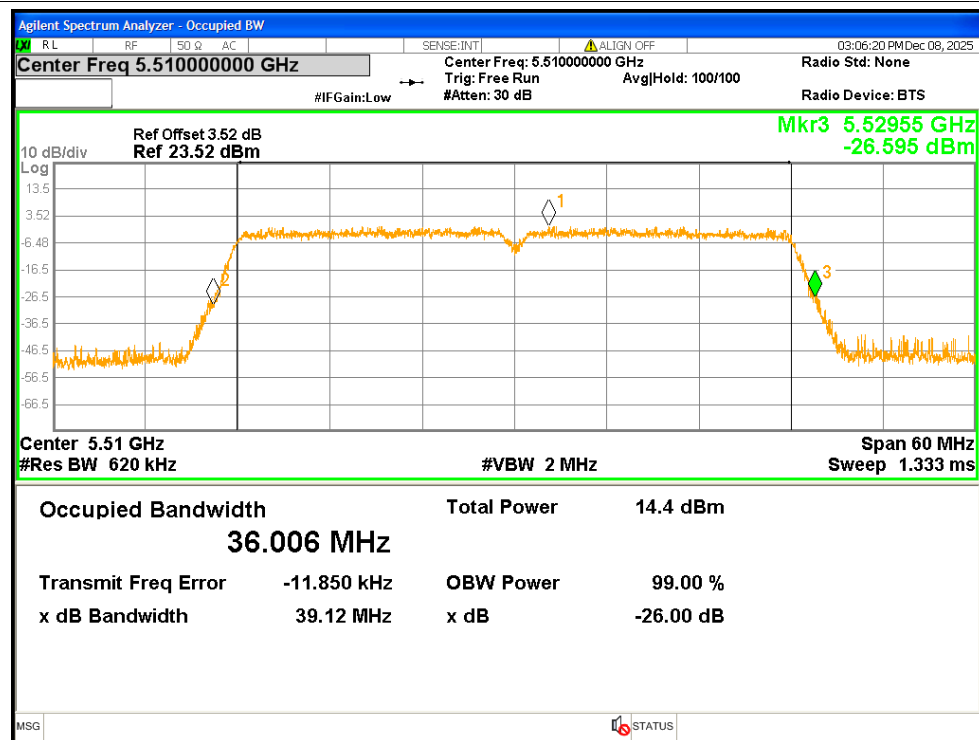


-26dB Bandwidth NVNT n40 5550MHz Ant1

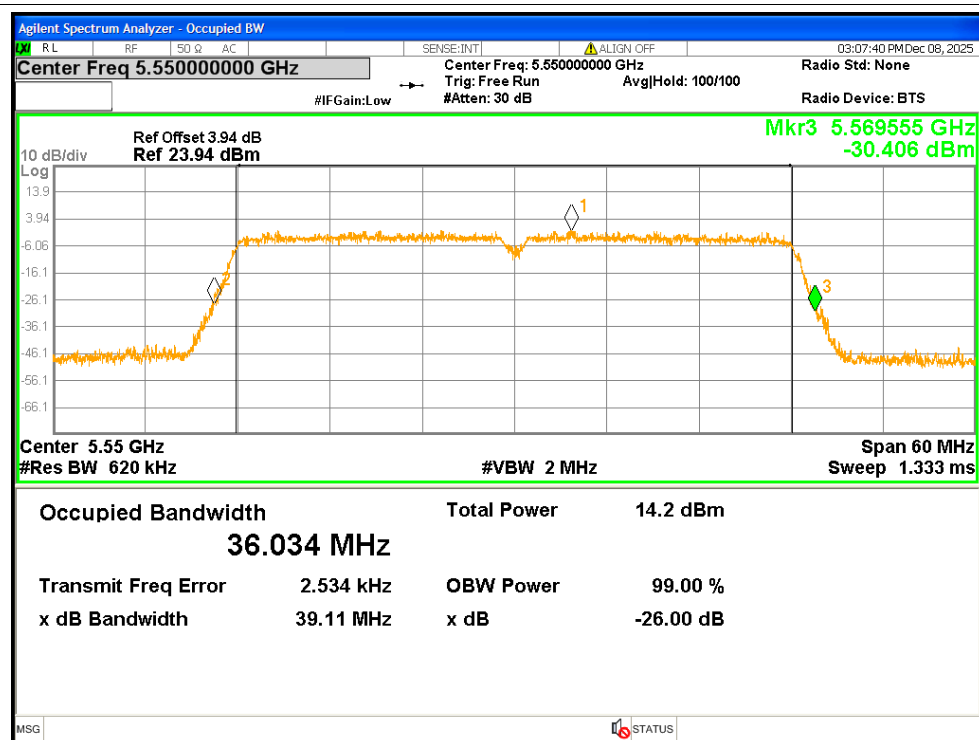


-26dB Bandwidth NVNT n40 5550MHz Ant2

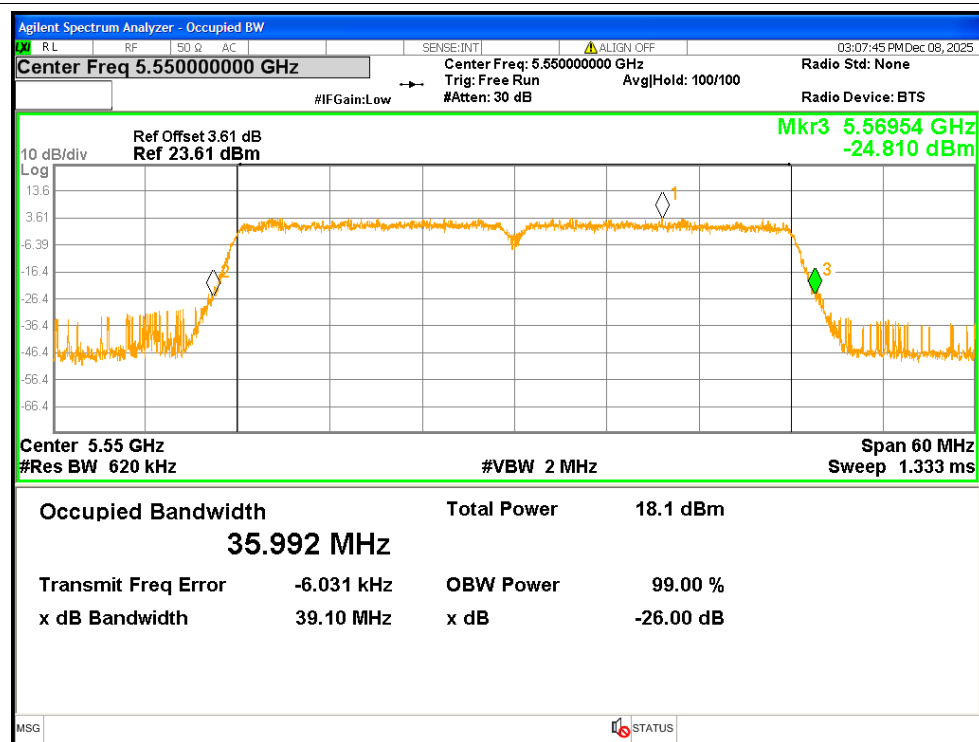


-26dB Bandwidth NVNT n40 5670MHz Ant1

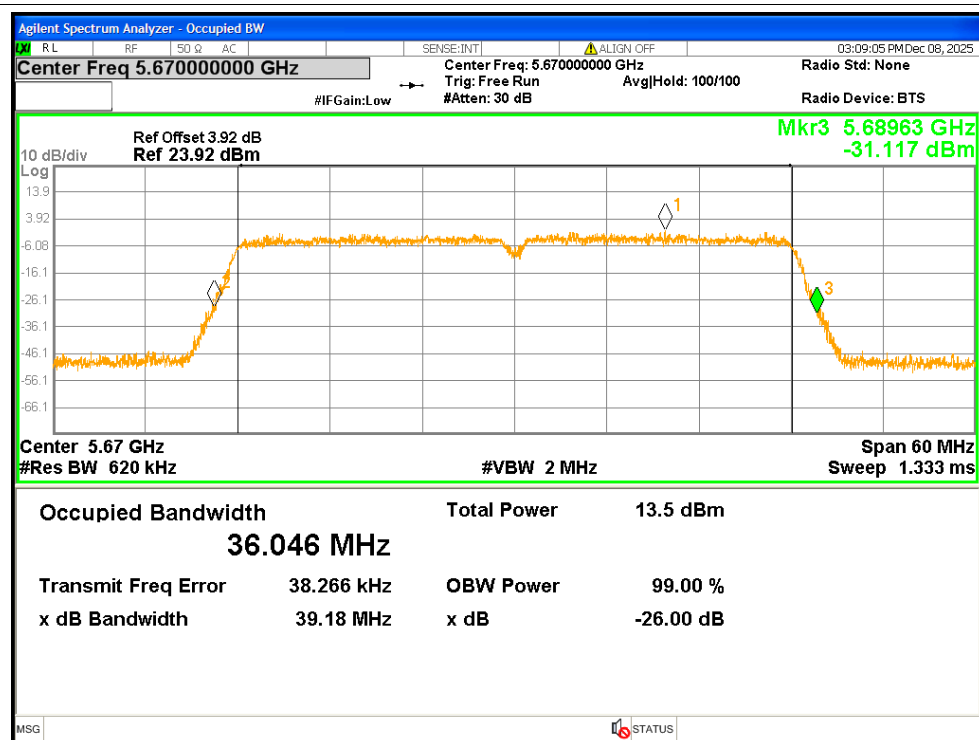


-26dB Bandwidth NVNT n40 5670MHz Ant2

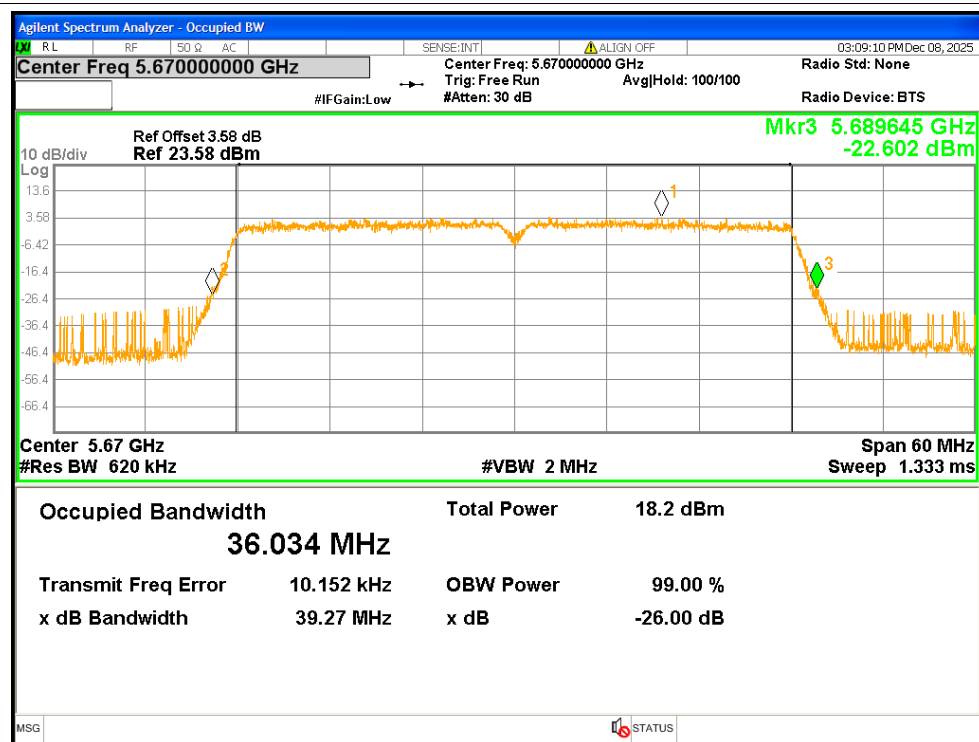


-26dB Bandwidth NVNT ac20 5500MHz Ant1

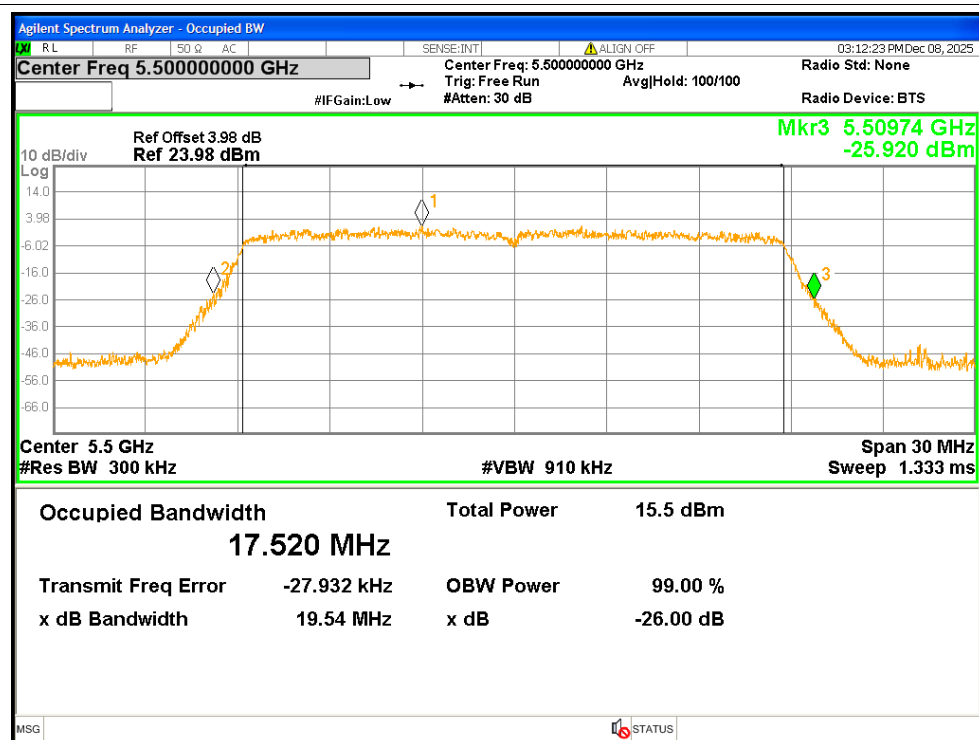


-26dB Bandwidth NVNT ac20 5500MHz Ant2

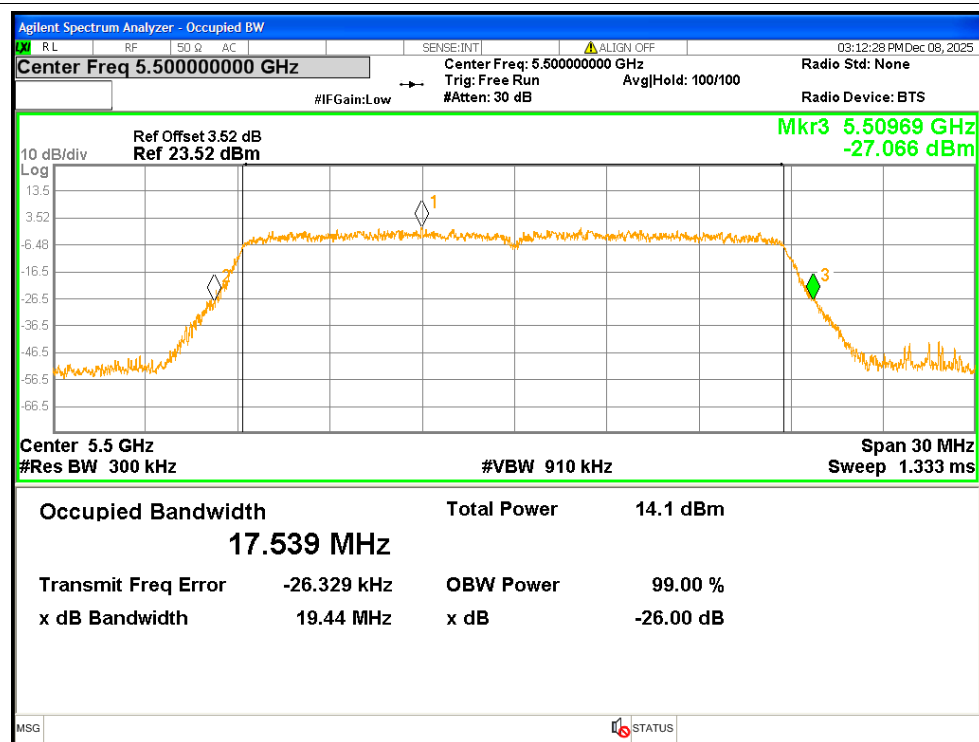


-26dB Bandwidth NVNT ac20 5580MHz Ant1

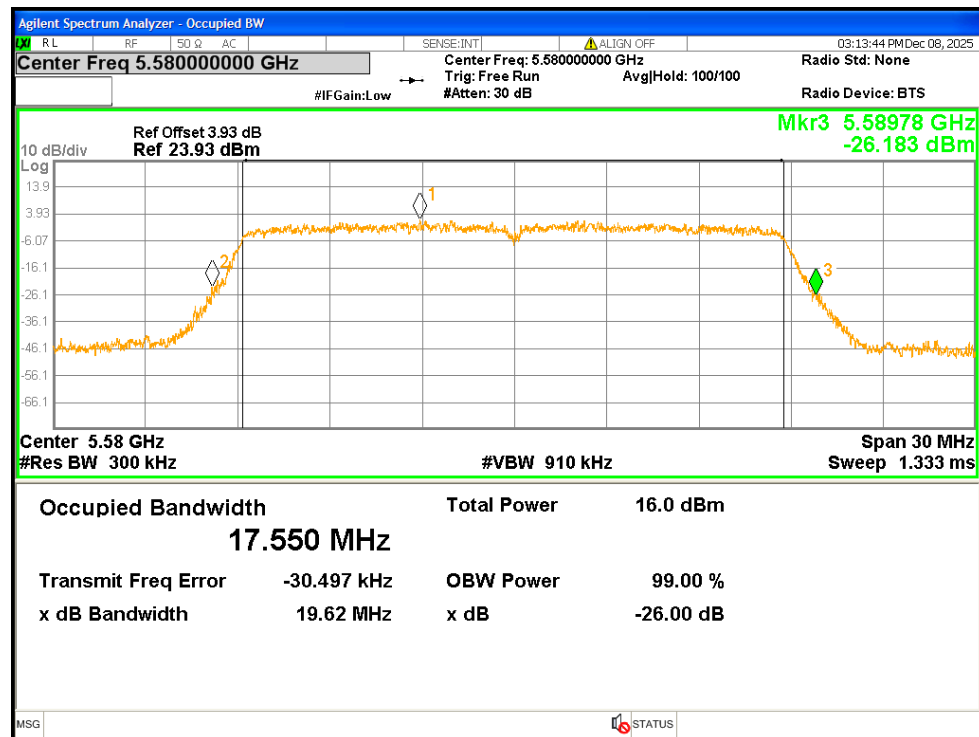


-26dB Bandwidth NVNT ac20 5580MHz Ant2

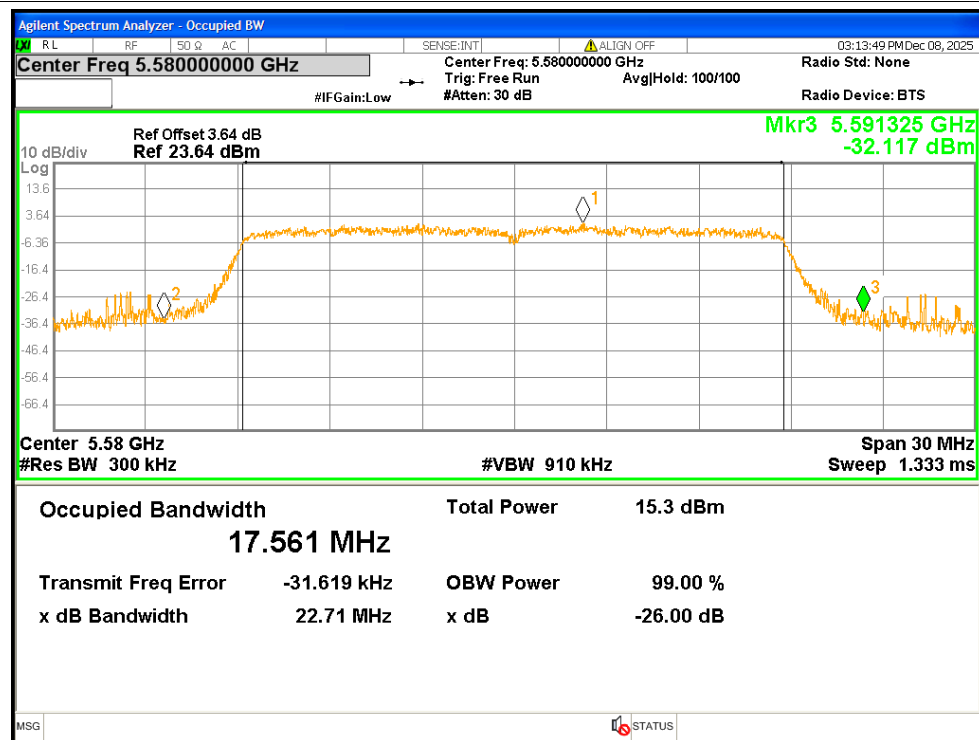


-26dB Bandwidth NVNT ac20 5700MHz Ant1

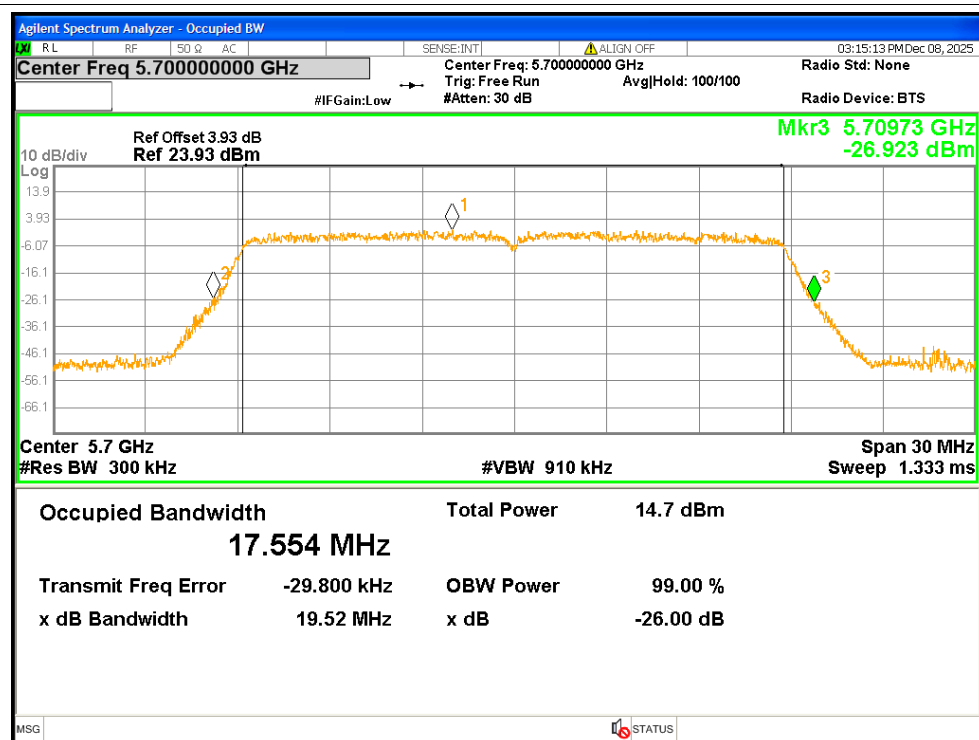


-26dB Bandwidth NVNT ac20 5700MHz Ant2

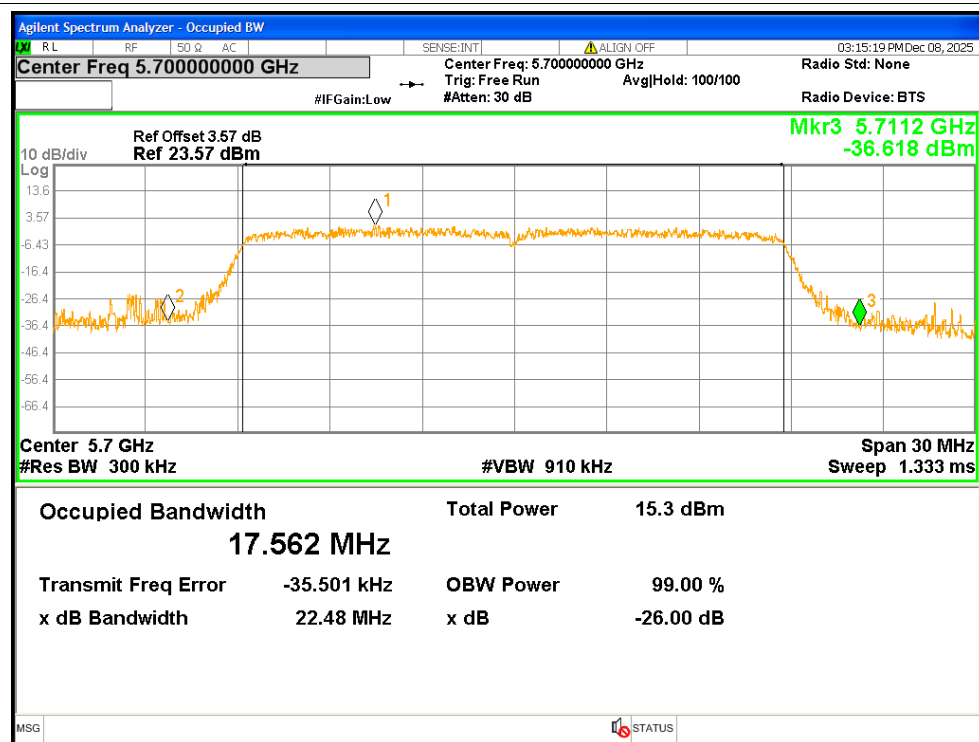


-26dB Bandwidth NVNT ac40 5510MHz Ant1

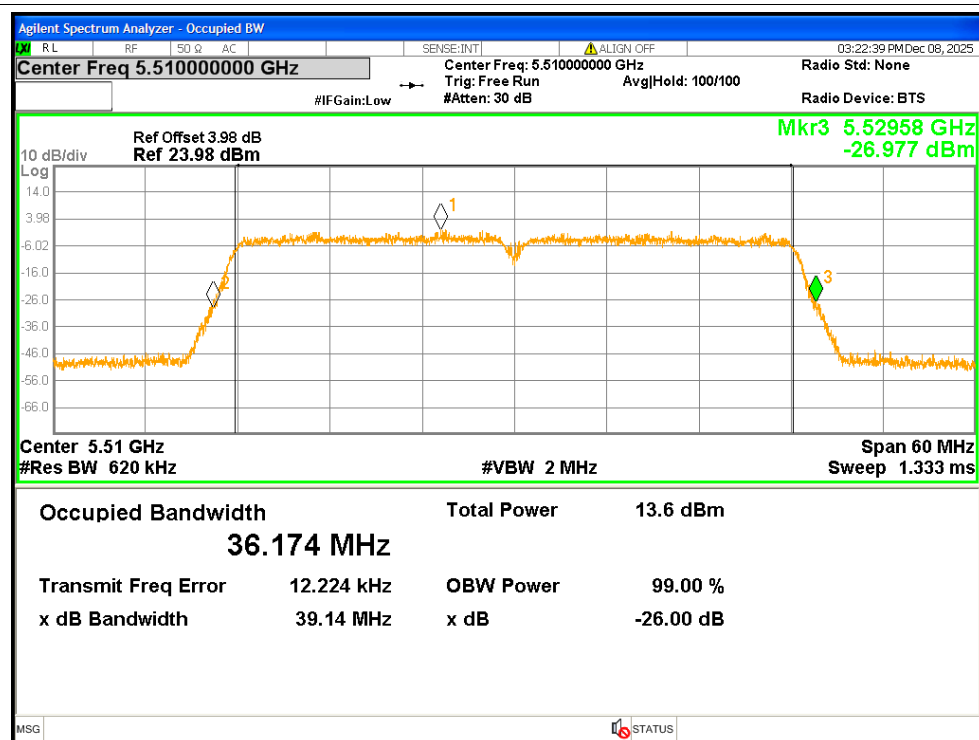


-26dB Bandwidth NVNT ac40 5510MHz Ant2

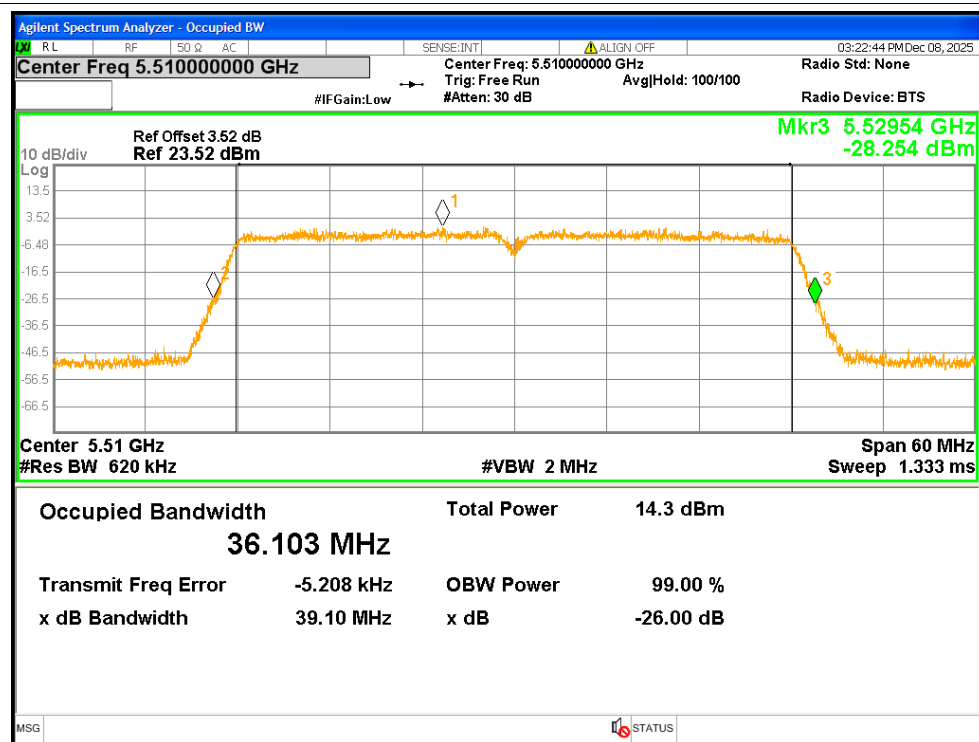


-26dB Bandwidth NVNT ac40 5550MHz Ant1

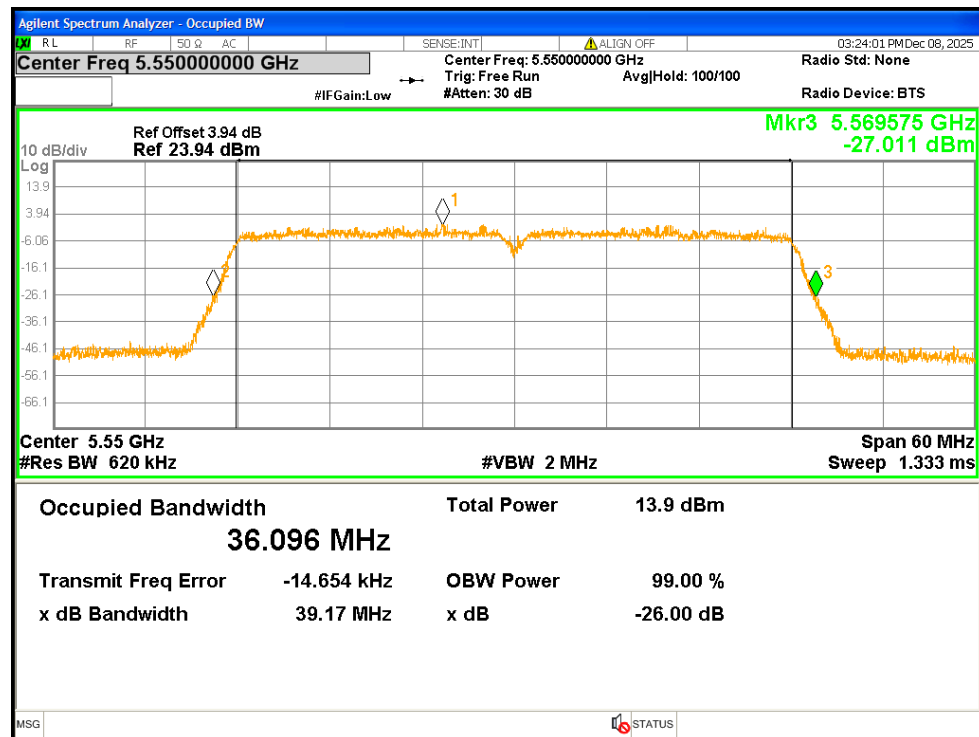


-26dB Bandwidth NVNT ac40 5550MHz Ant2

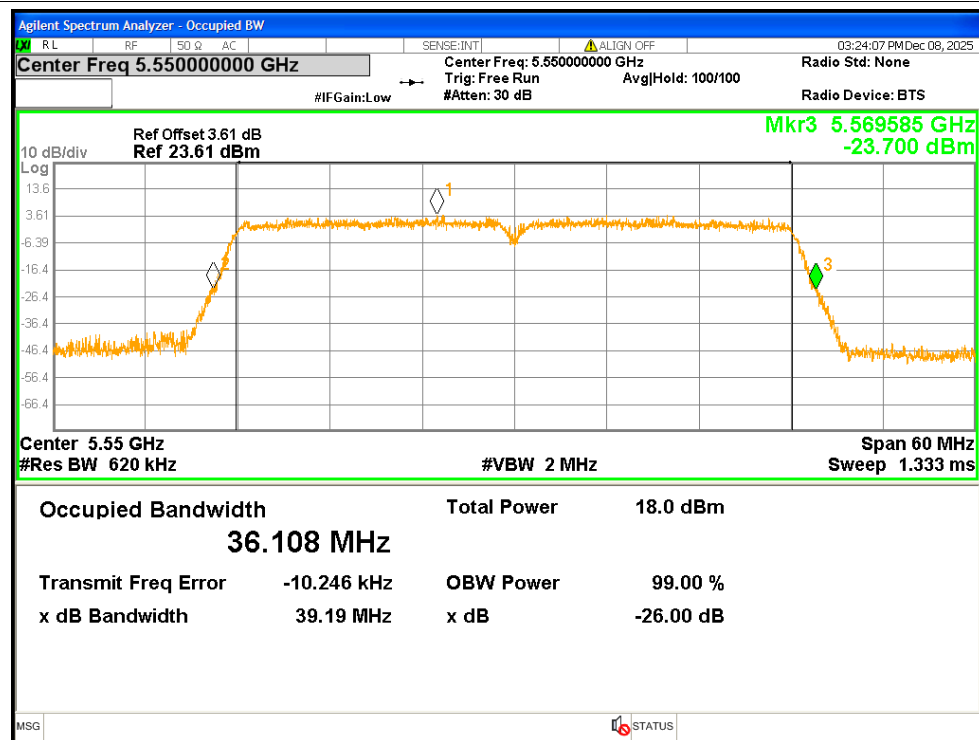


-26dB Bandwidth NVNT ac40 5670MHz Ant1

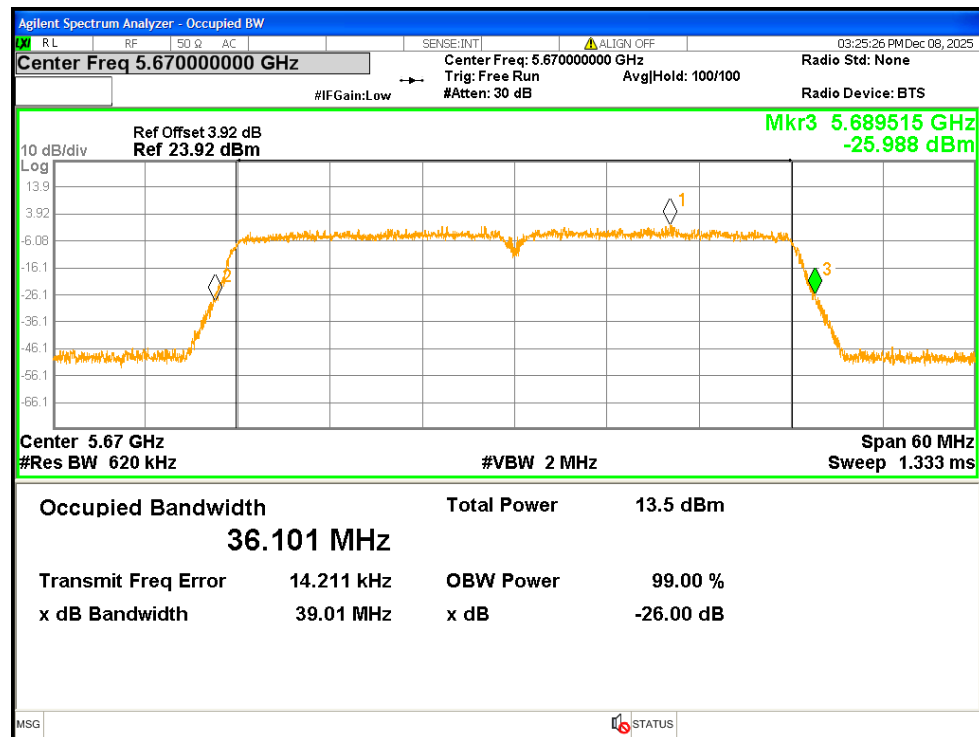


-26dB Bandwidth NVNT ac40 5670MHz Ant2

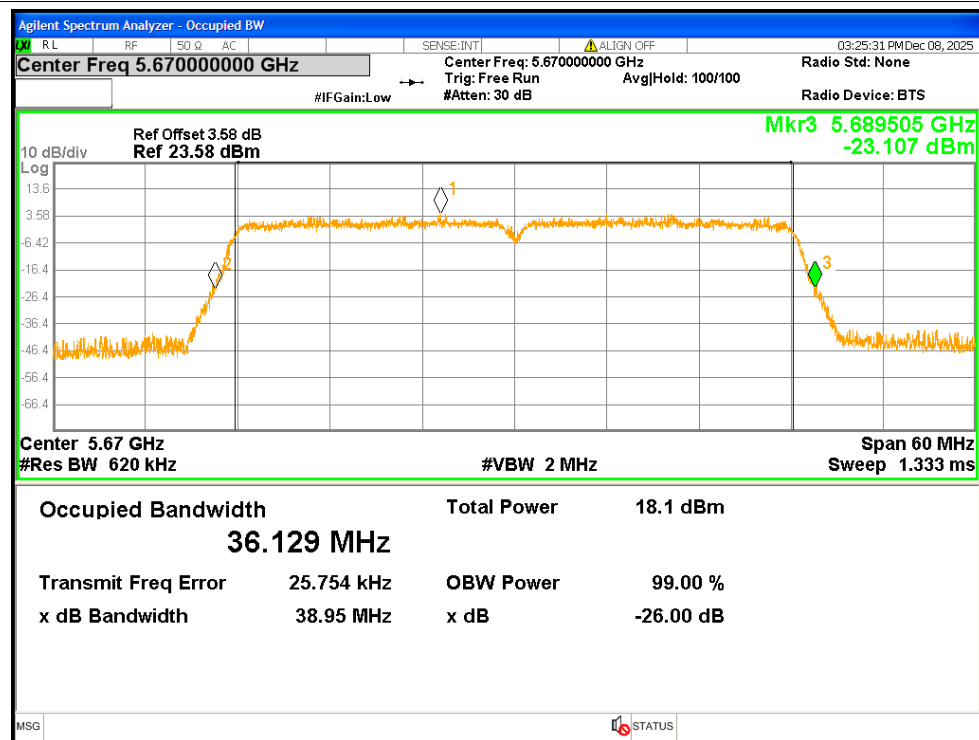


-26dB Bandwidth NVNT ac80 5530MHz Ant1

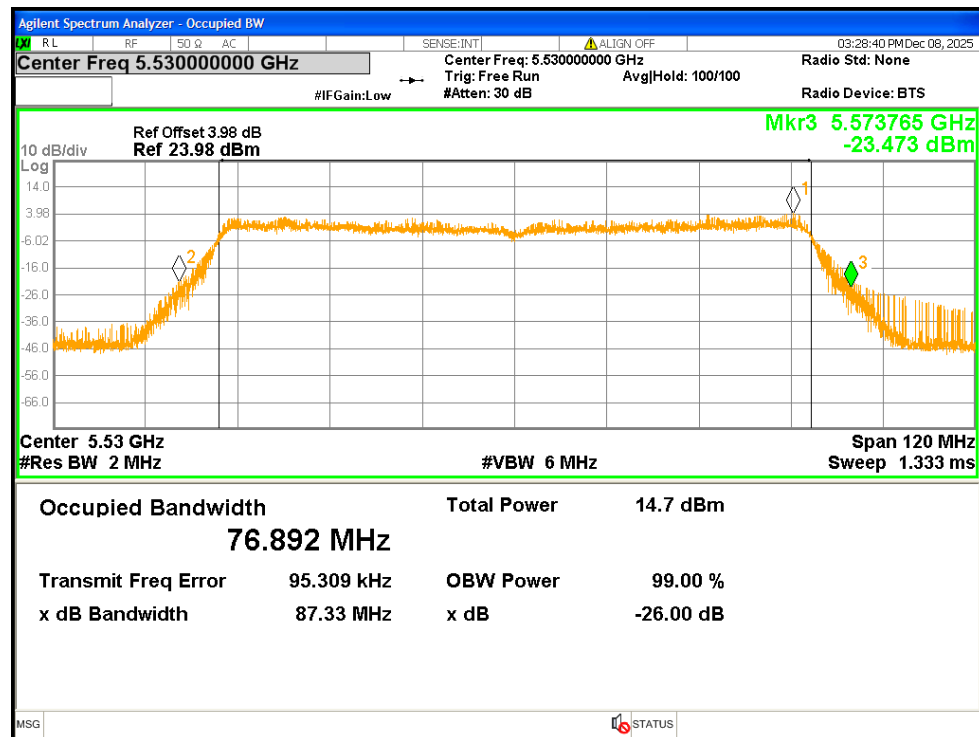


-26dB Bandwidth NVNT ac80 5530MHz Ant2

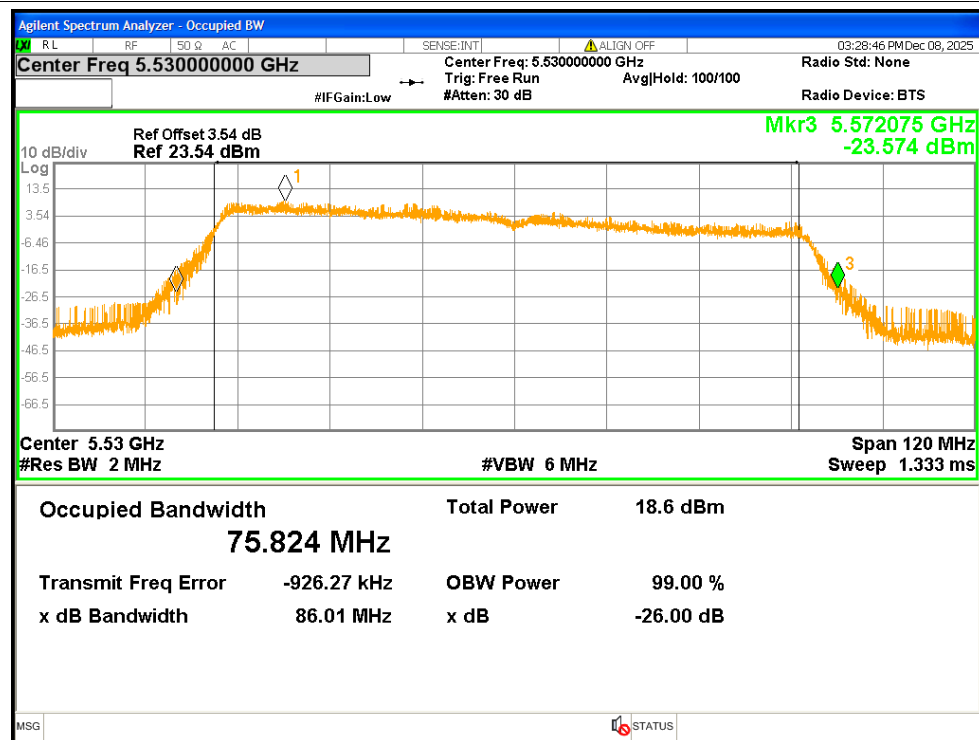

-26dB Bandwidth NVNT ac80 5610MHz Ant1

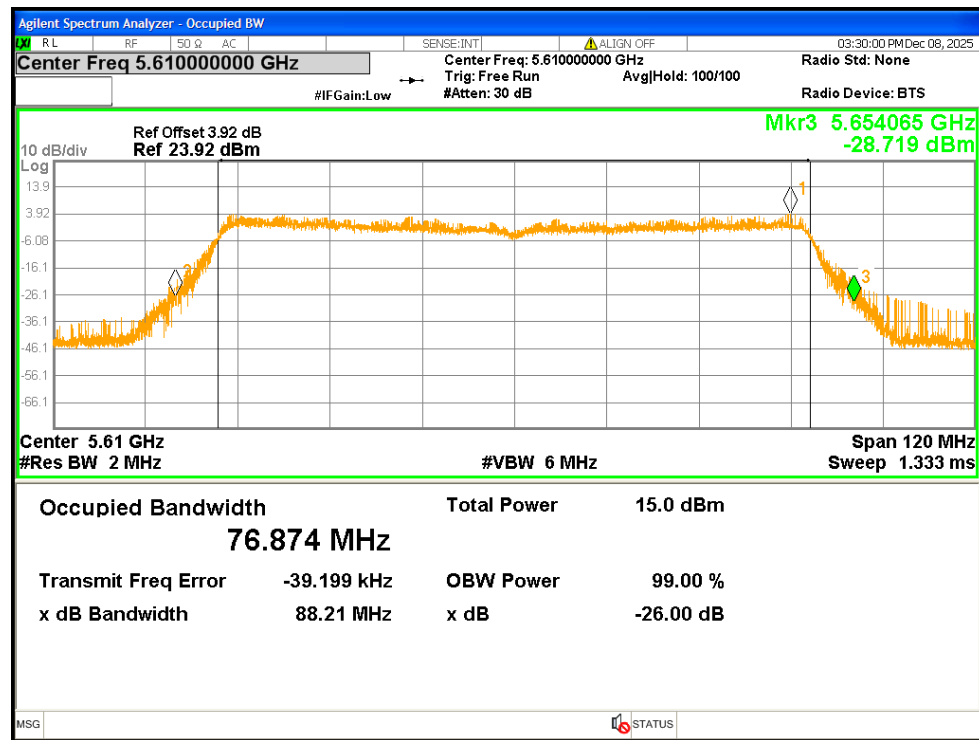

-26dB Bandwidth NVNT ac80 5610MHz Ant2

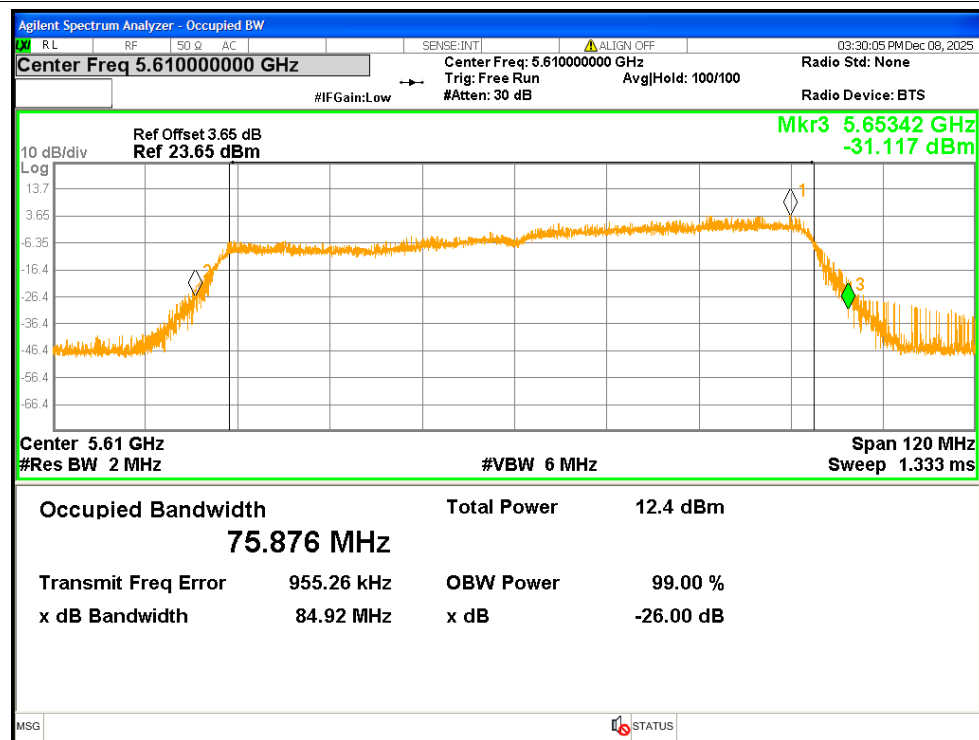


Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5500	Ant1	16.337
NVNT	a	5580	Ant1	16.321
NVNT	a	5700	Ant1	16.339
NVNT	a	5500	Ant2	16.324
NVNT	a	5580	Ant2	16.329
NVNT	a	5700	Ant2	16.319
NVNT	n20	5500	Ant1	17.508
NVNT	n20	5500	Ant2	17.512
NVNT	n20	5580	Ant1	17.519
NVNT	n20	5580	Ant2	17.55
NVNT	n20	5700	Ant1	17.514
NVNT	n20	5700	Ant2	17.563
NVNT	n40	5510	Ant1	35.988
NVNT	n40	5510	Ant2	35.956
NVNT	n40	5550	Ant1	36.005
NVNT	n40	5550	Ant2	36.009
NVNT	n40	5670	Ant1	36.019
NVNT	n40	5670	Ant2	35.994
NVNT	ac20	5500	Ant1	17.497
NVNT	ac20	5500	Ant2	17.511
NVNT	ac20	5580	Ant1	17.503
NVNT	ac20	5580	Ant2	17.533
NVNT	ac20	5700	Ant1	17.514
NVNT	ac20	5700	Ant2	17.533
NVNT	ac40	5510	Ant1	36.041
NVNT	ac40	5510	Ant2	36.101
NVNT	ac40	5550	Ant1	36.073
NVNT	ac40	5550	Ant2	36.112
NVNT	ac40	5670	Ant1	36.098
NVNT	ac40	5670	Ant2	36.087
NVNT	ac80	5530	Ant1	76.121
NVNT	ac80	5530	Ant2	75.359
NVNT	ac80	5610	Ant1	76.202
NVNT	ac80	5610	Ant2	75.203

Test Graphs


OBW NVNT a 5500MHz Ant1

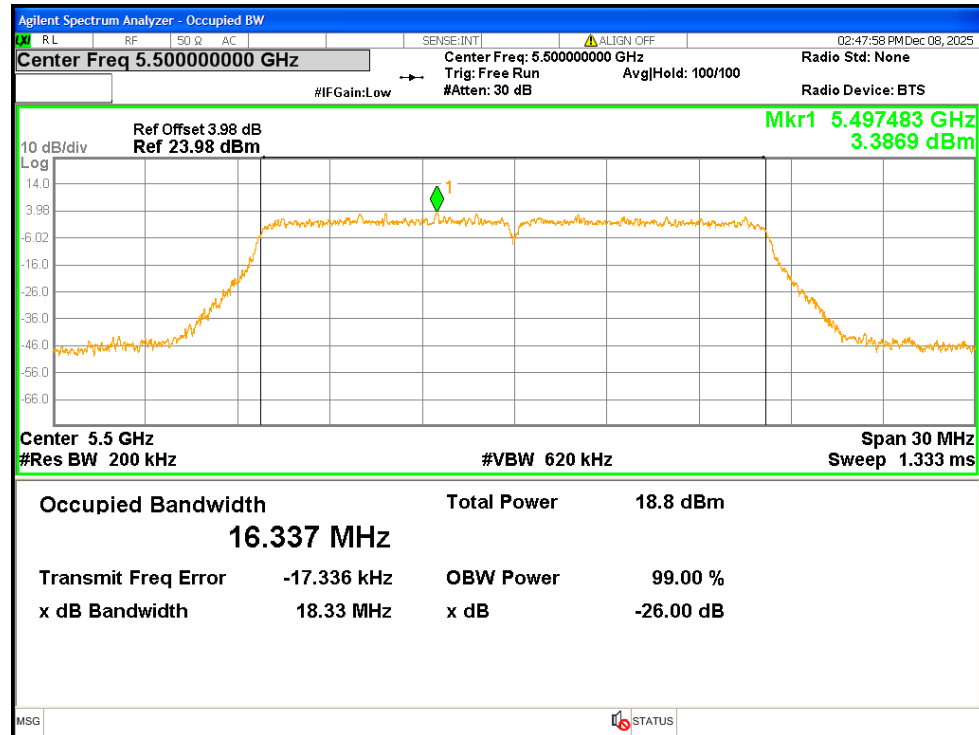


OBW NVNT a 5580MHz Ant1

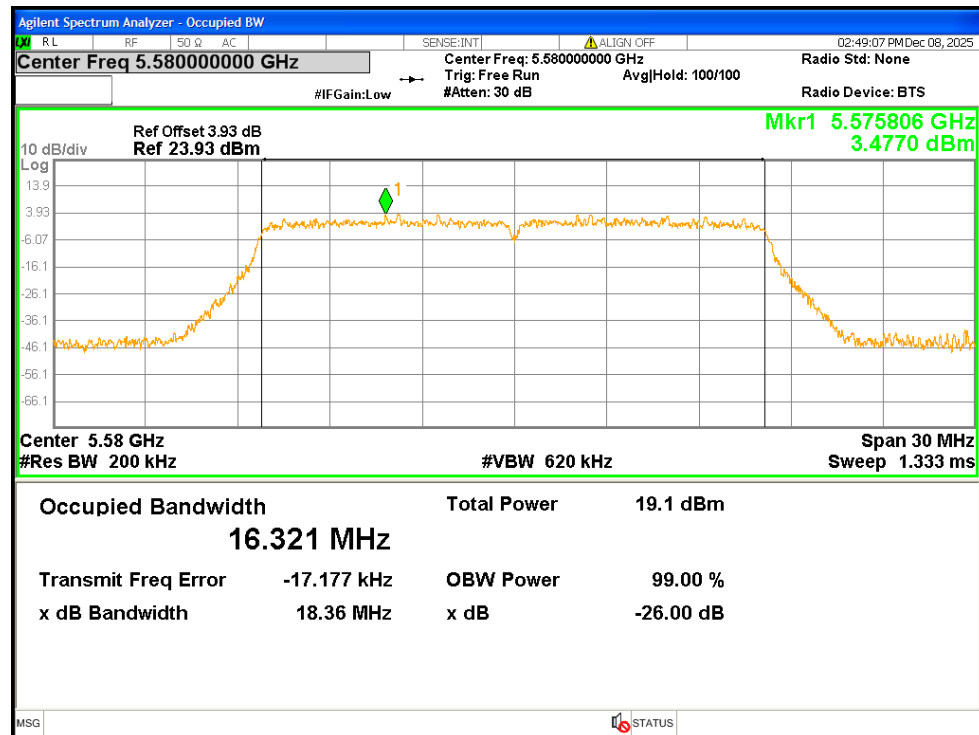


OBW NVNT a 5700MHz Ant1

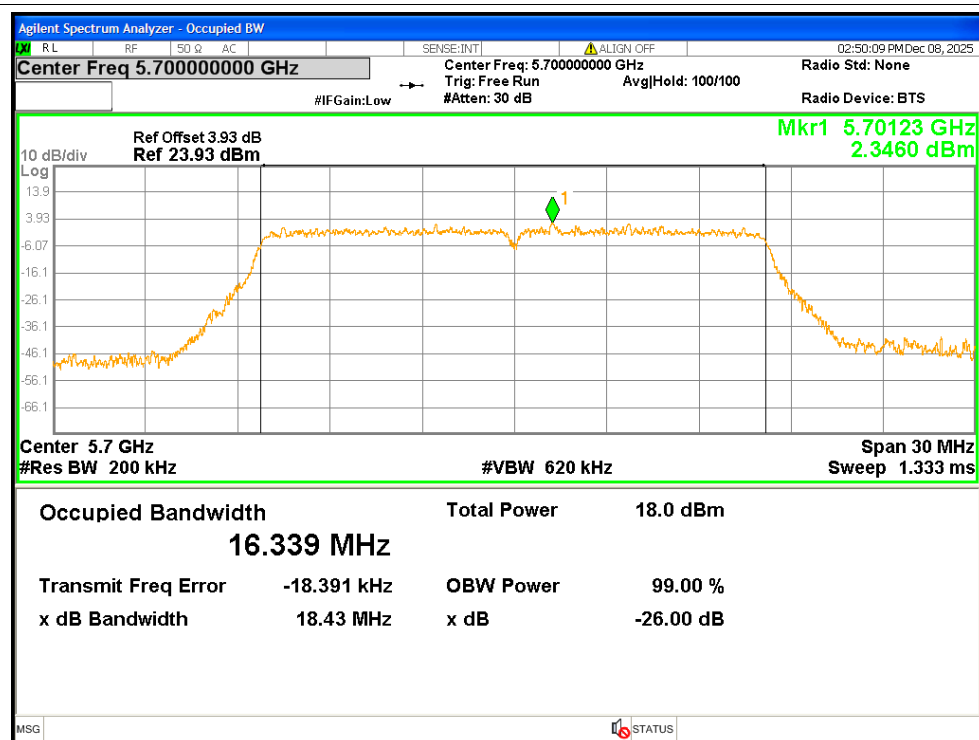


OBW NVNT a 5500MHz Ant2

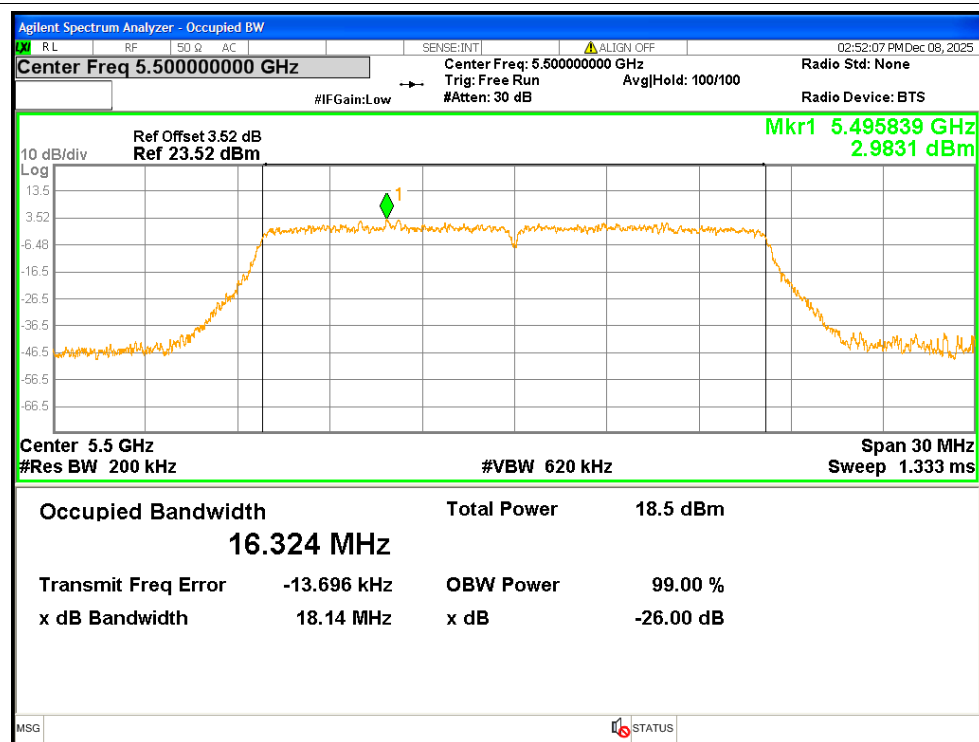


OBW NVNT a 5580MHz Ant2

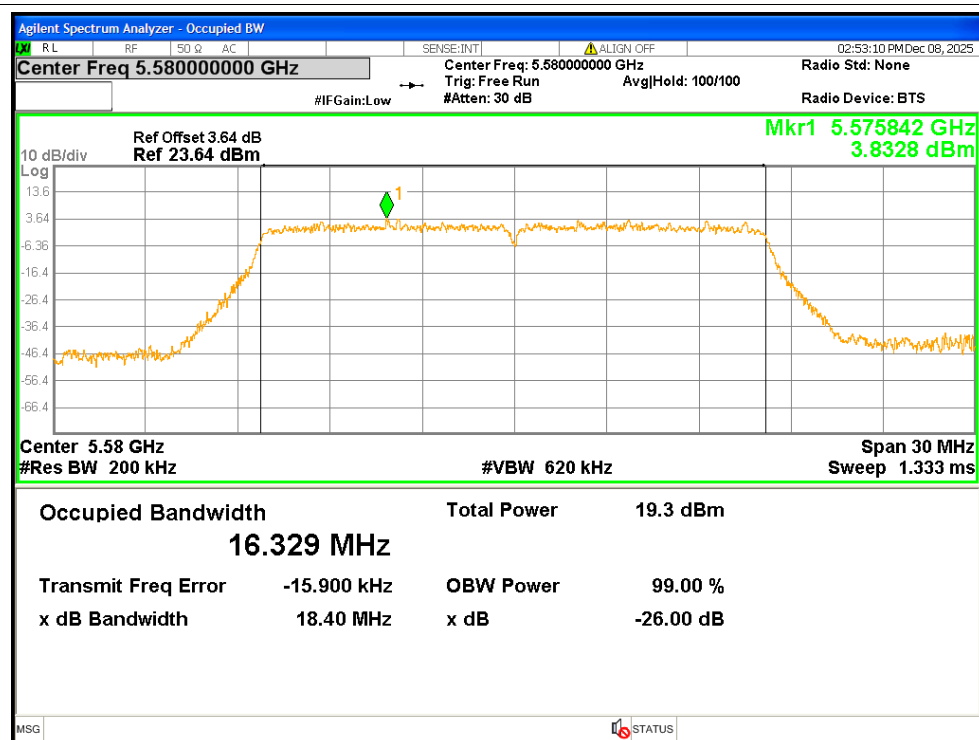


OBW NVNT a 5700MHz Ant2

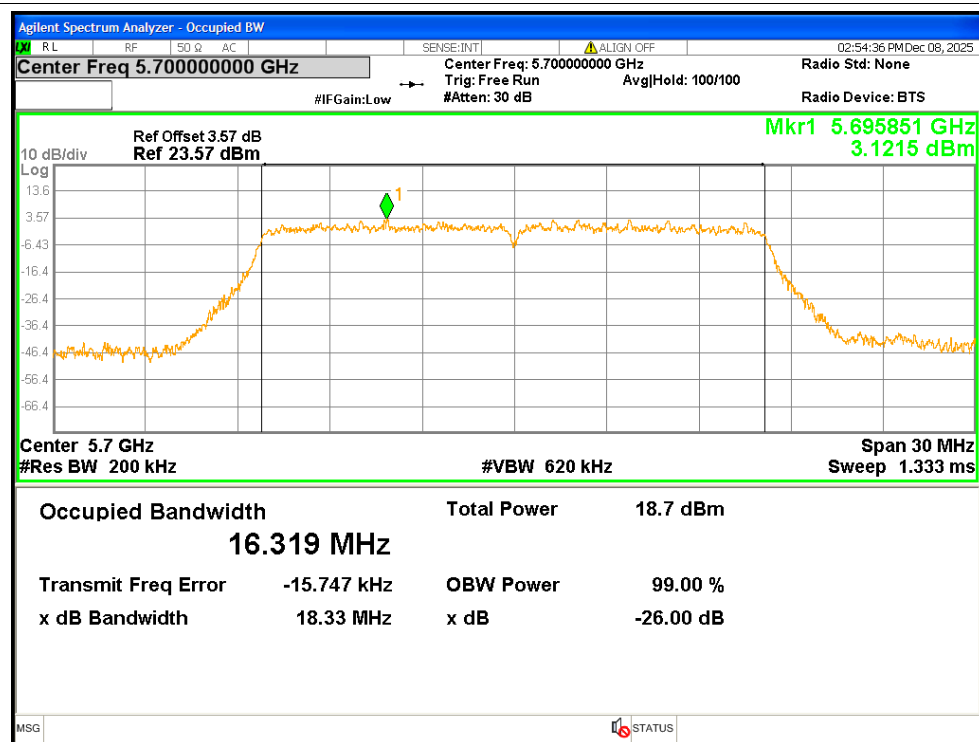


OBW NVNT n20 5500MHz Ant1

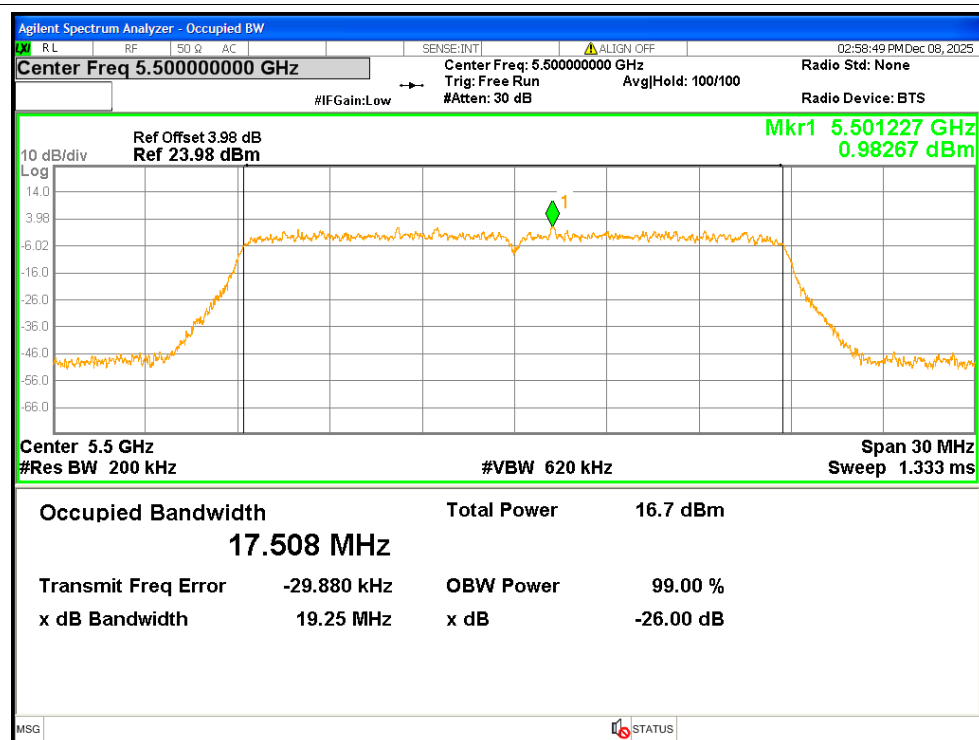


OBW NVNT n20 5500MHz Ant2

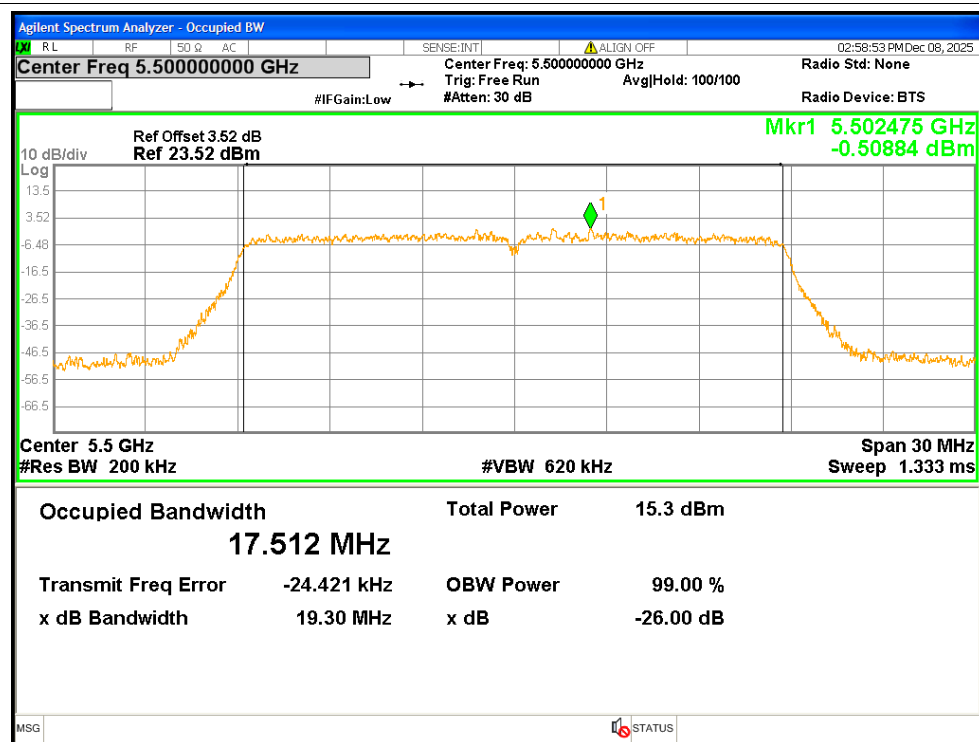


OBW NVNT n20 5580MHz Ant1

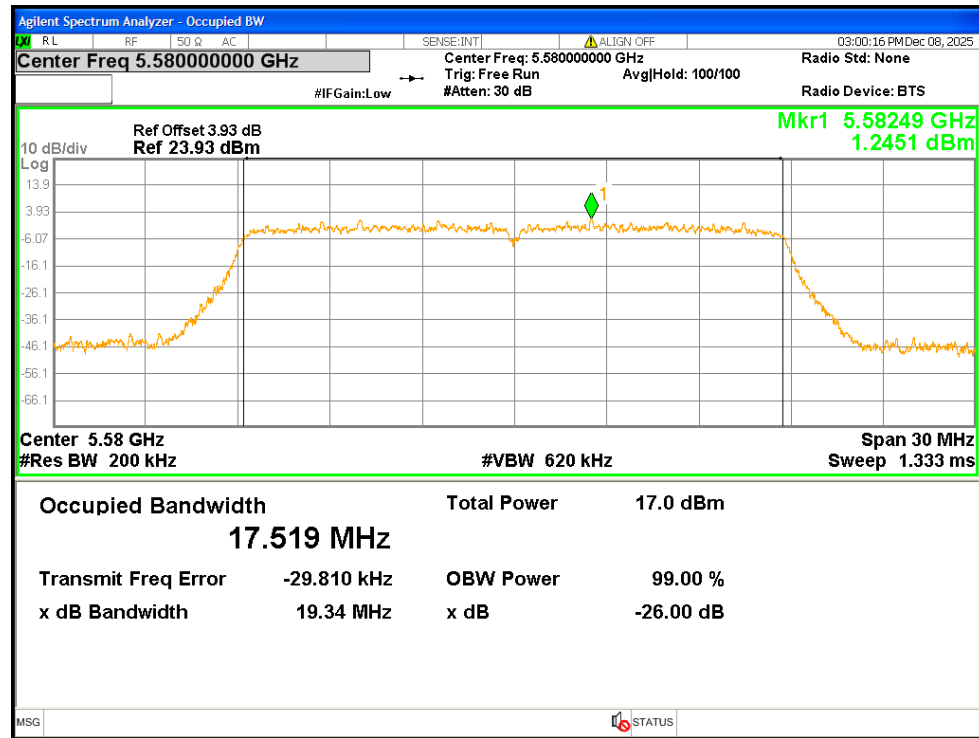


OBW NVNT n20 5580MHz Ant2

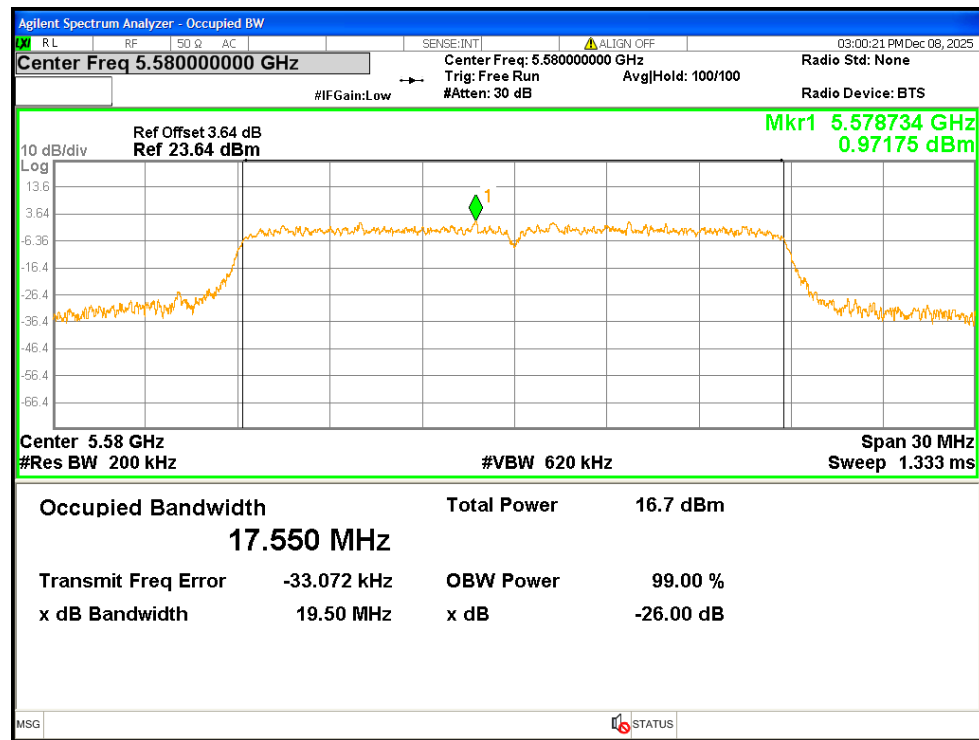


OBW NVNT n20 5700MHz Ant1

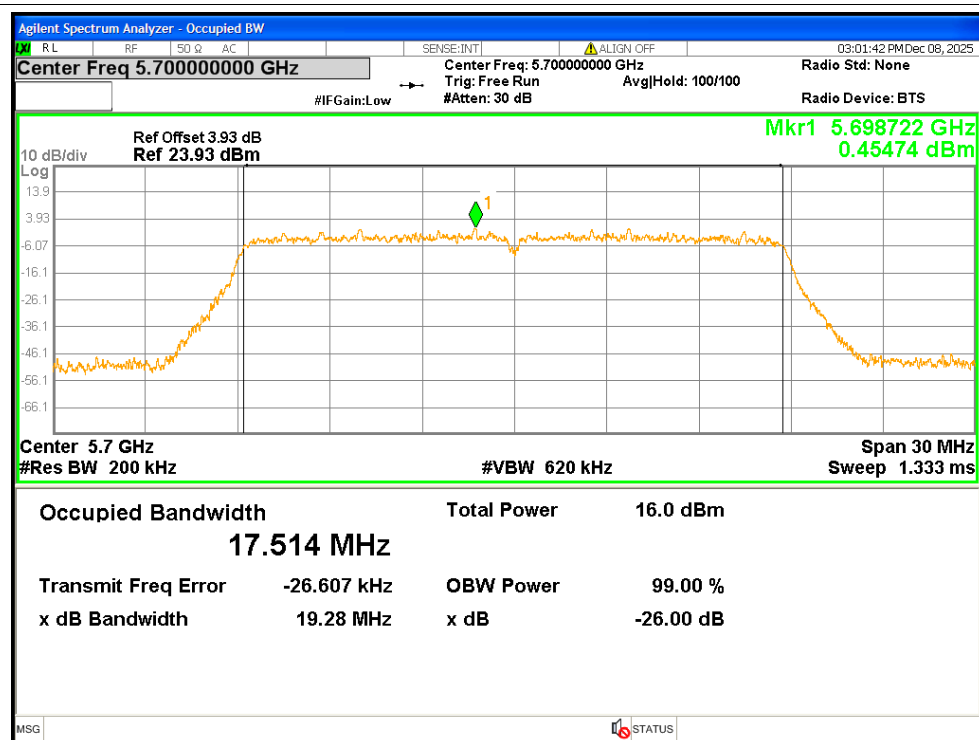


OBW NVNT n20 5700MHz Ant2

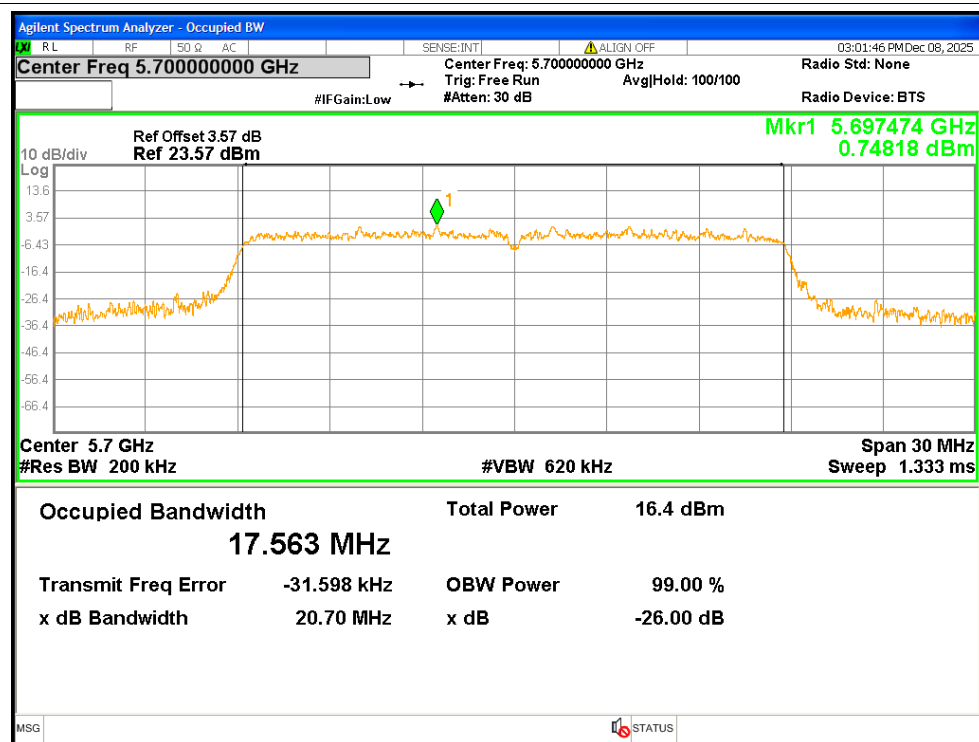


OBW NVNT n40 5510MHz Ant1

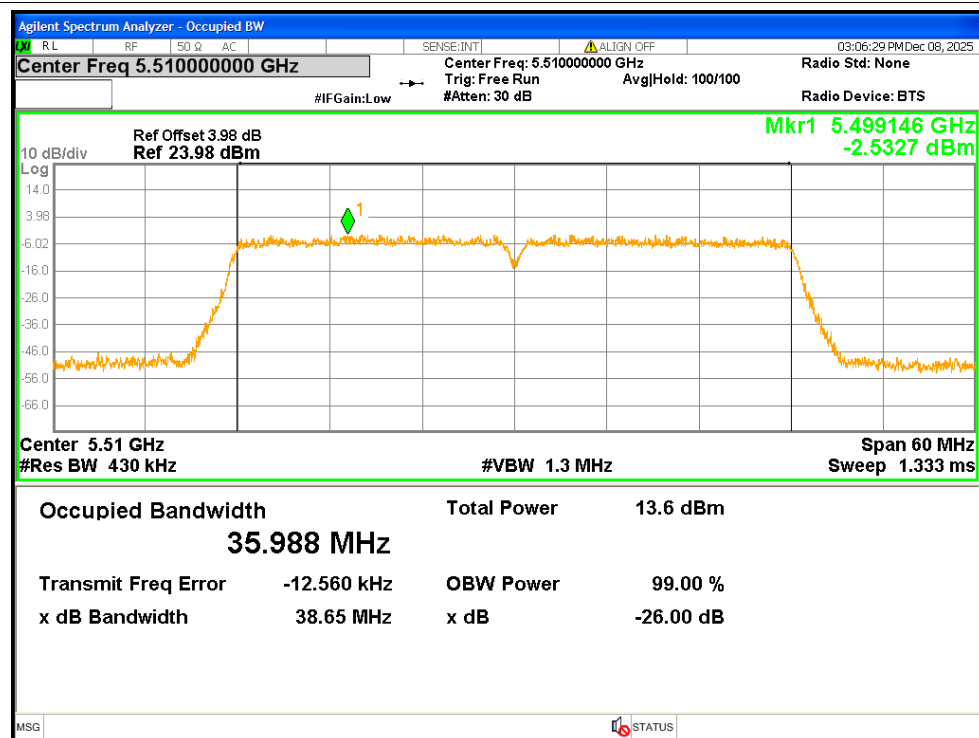


OBW NVNT n40 5510MHz Ant2

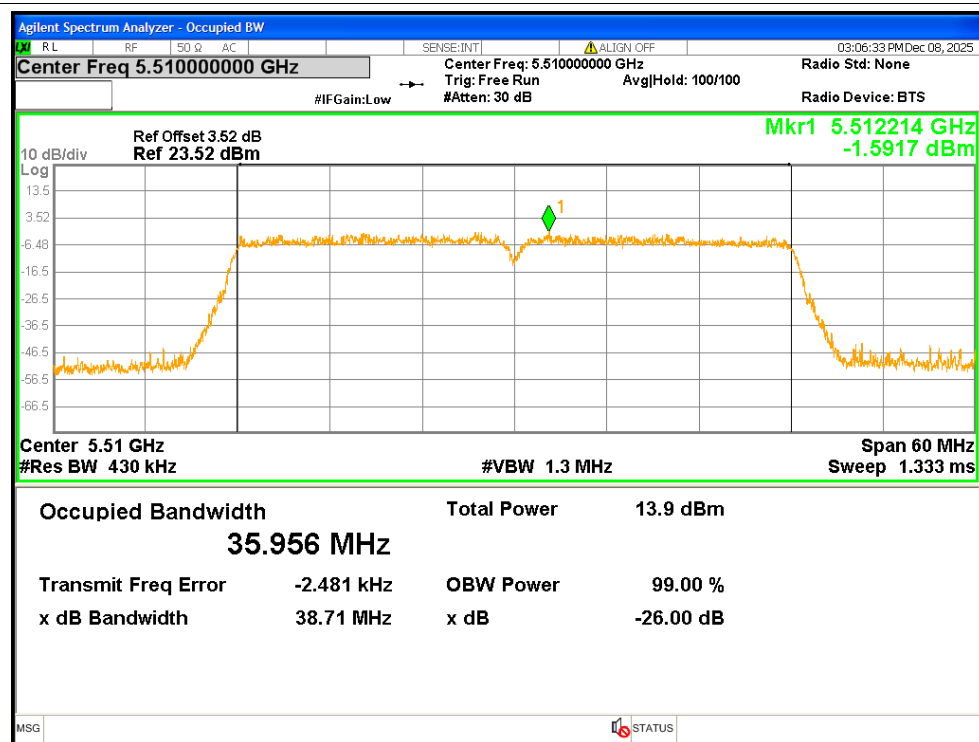


OBW NVNT n40 5550MHz Ant1

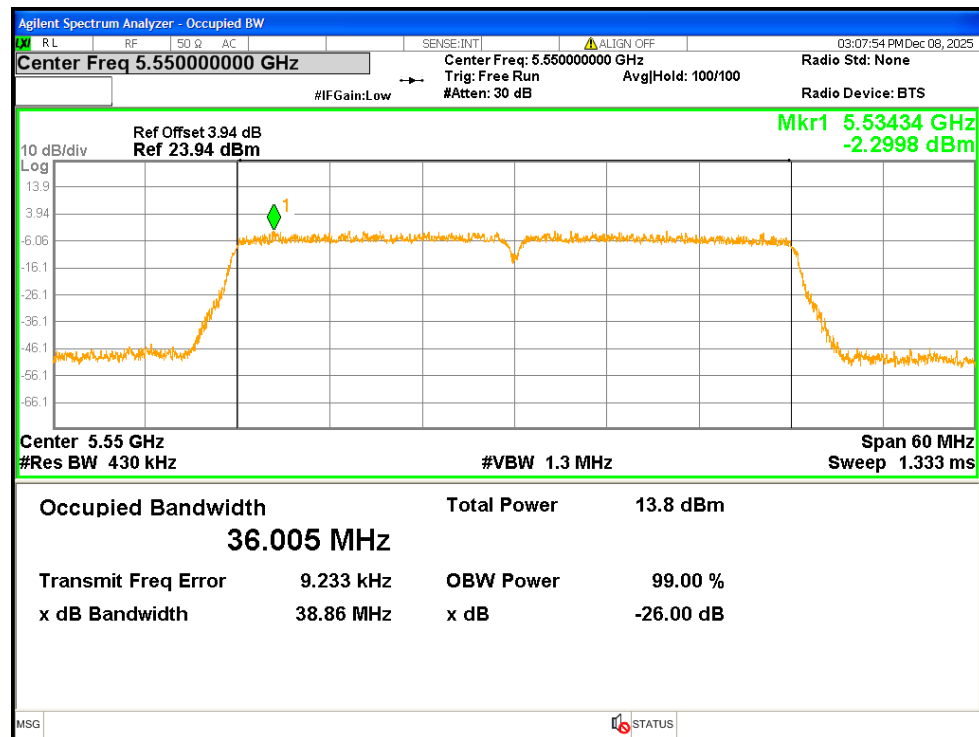


OBW NVNT n40 5550MHz Ant2

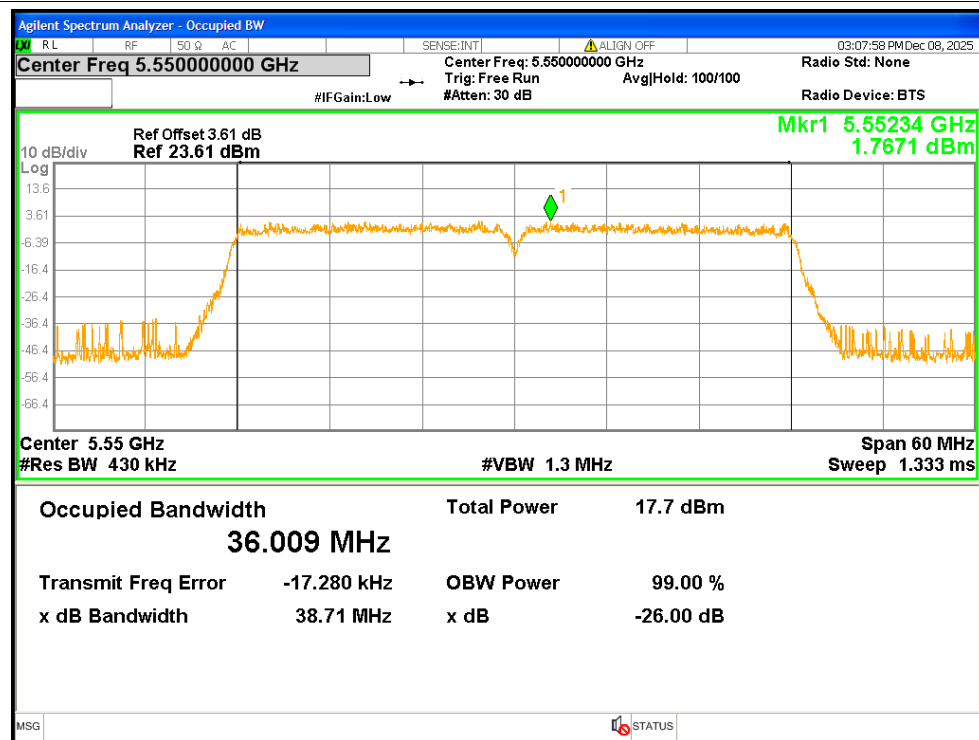


OBW NVNT n40 5670MHz Ant1

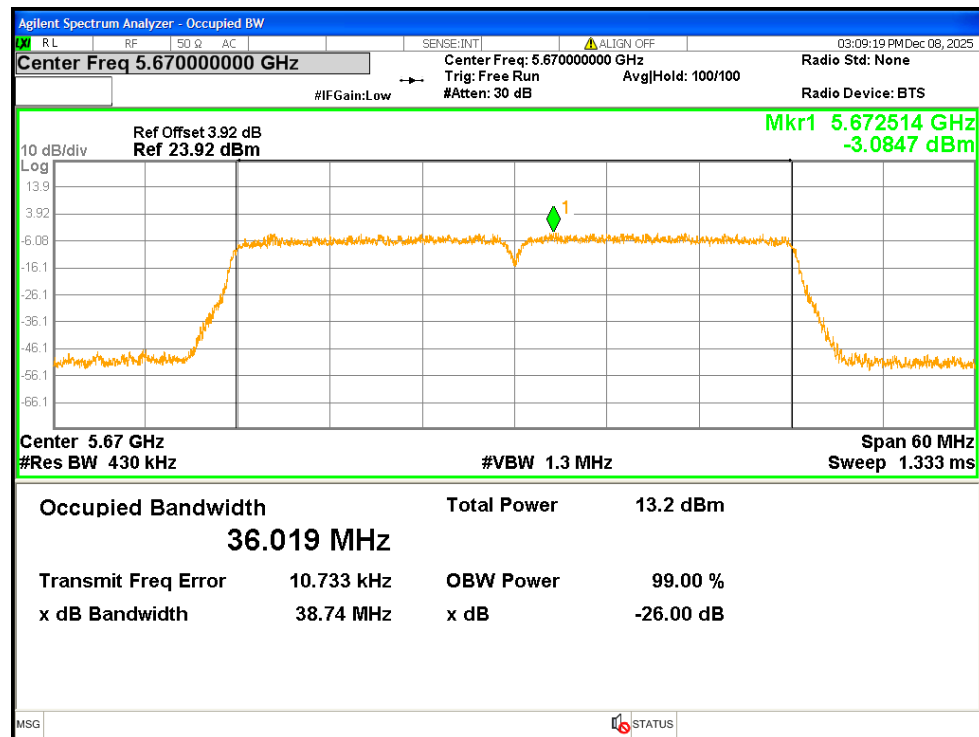


OBW NVNT n40 5670MHz Ant2

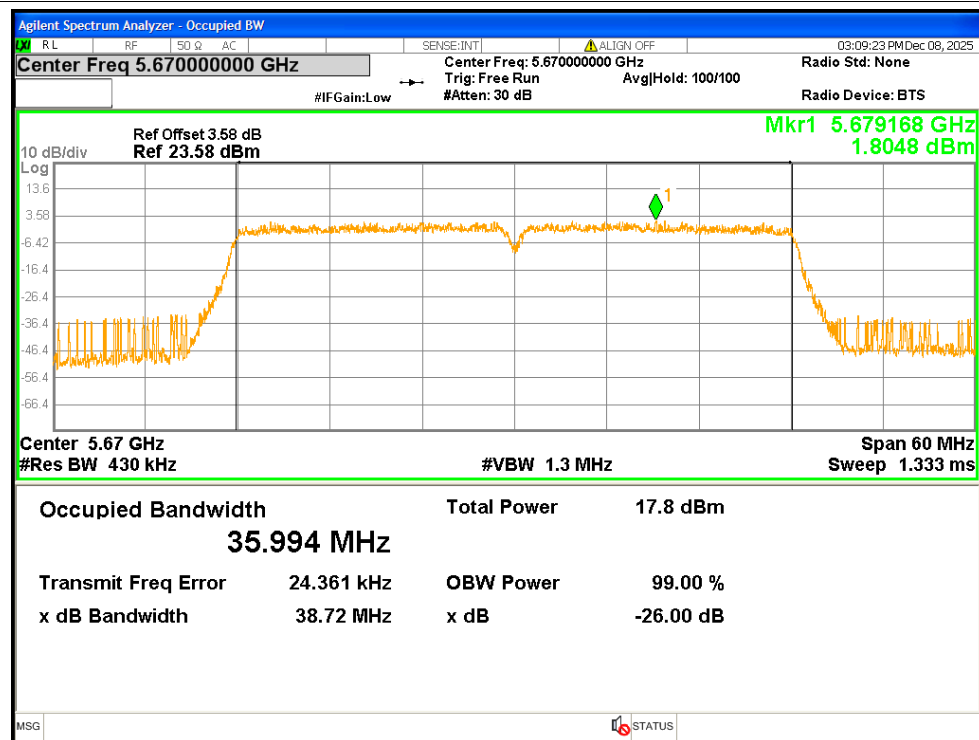


OBW NVNT ac20 5500MHz Ant1

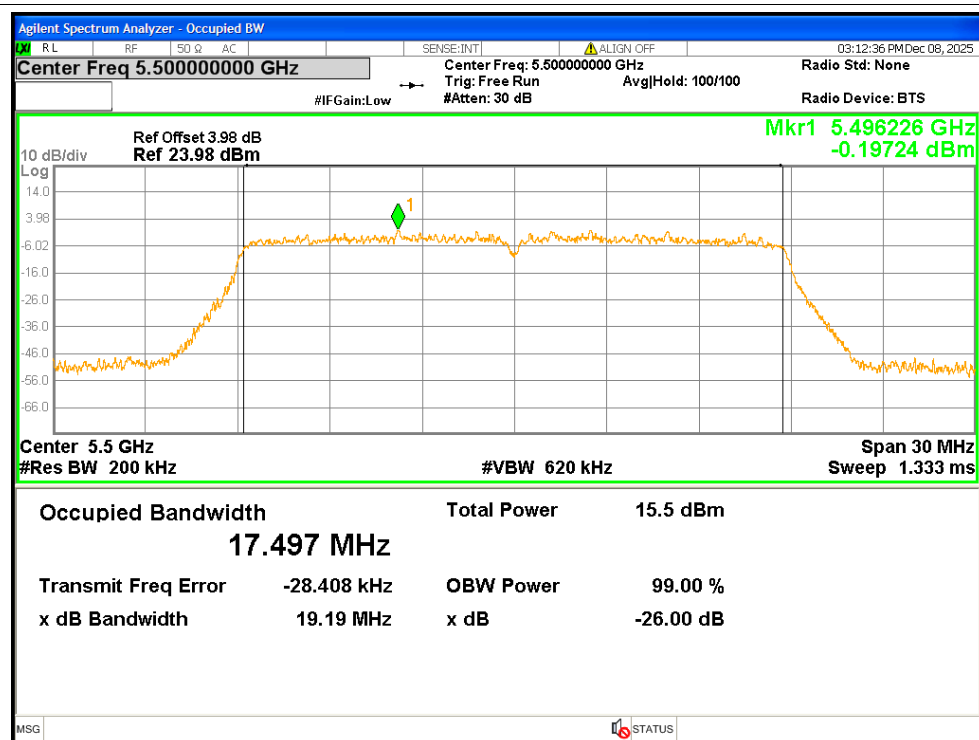


OBW NVNT ac20 5500MHz Ant2

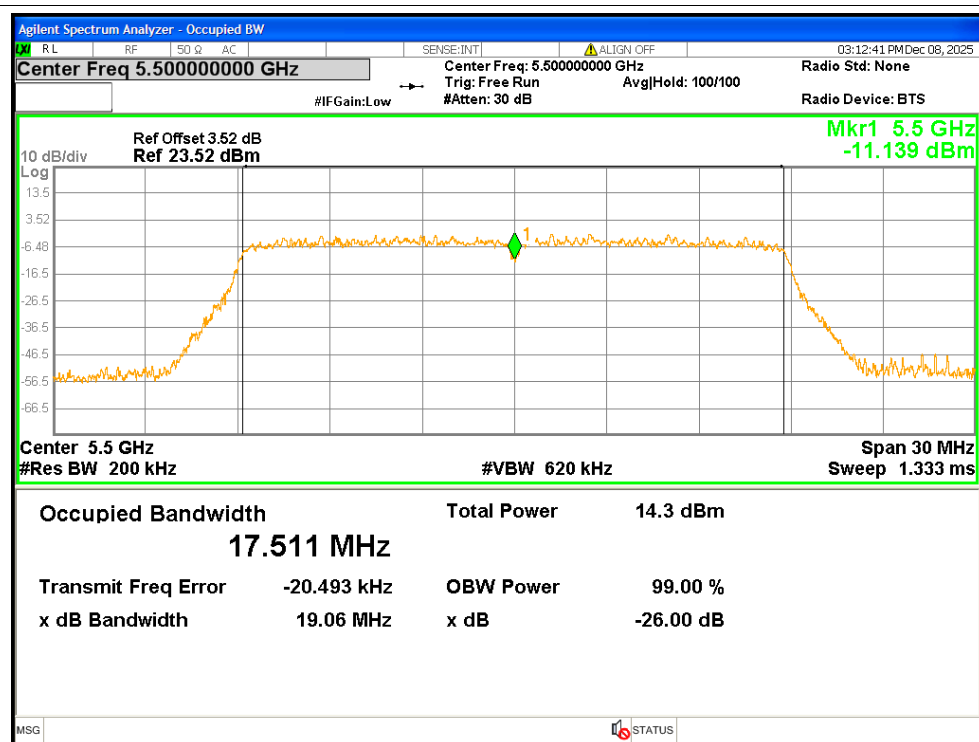


OBW NVNT ac20 5580MHz Ant1

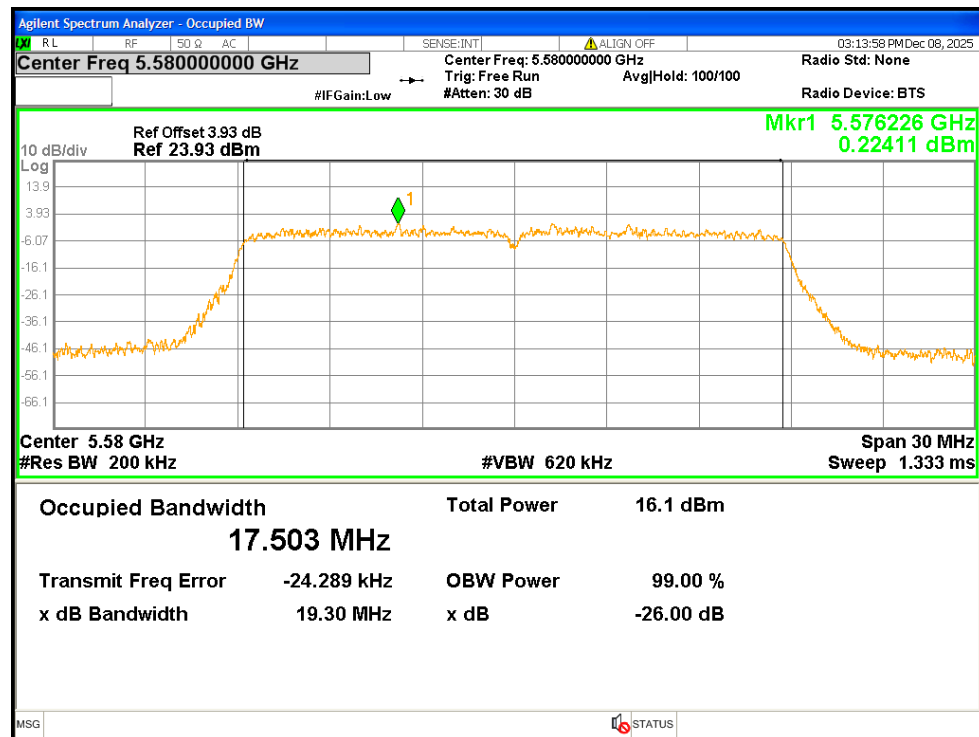


OBW NVNT ac20 5580MHz Ant2

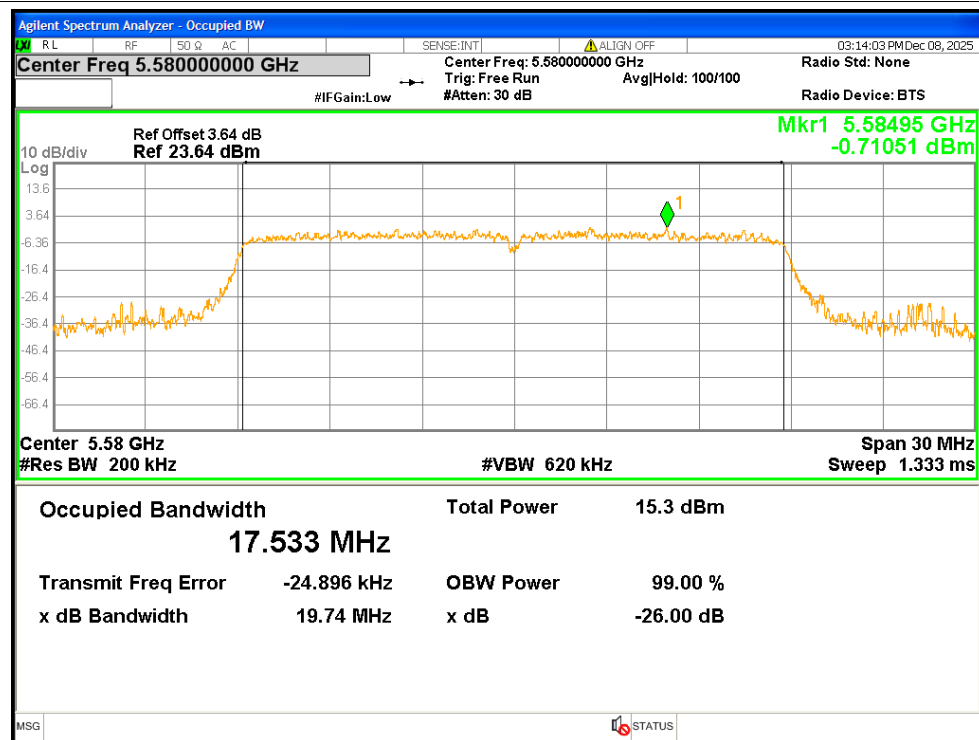


OBW NVNT ac20 5700MHz Ant1

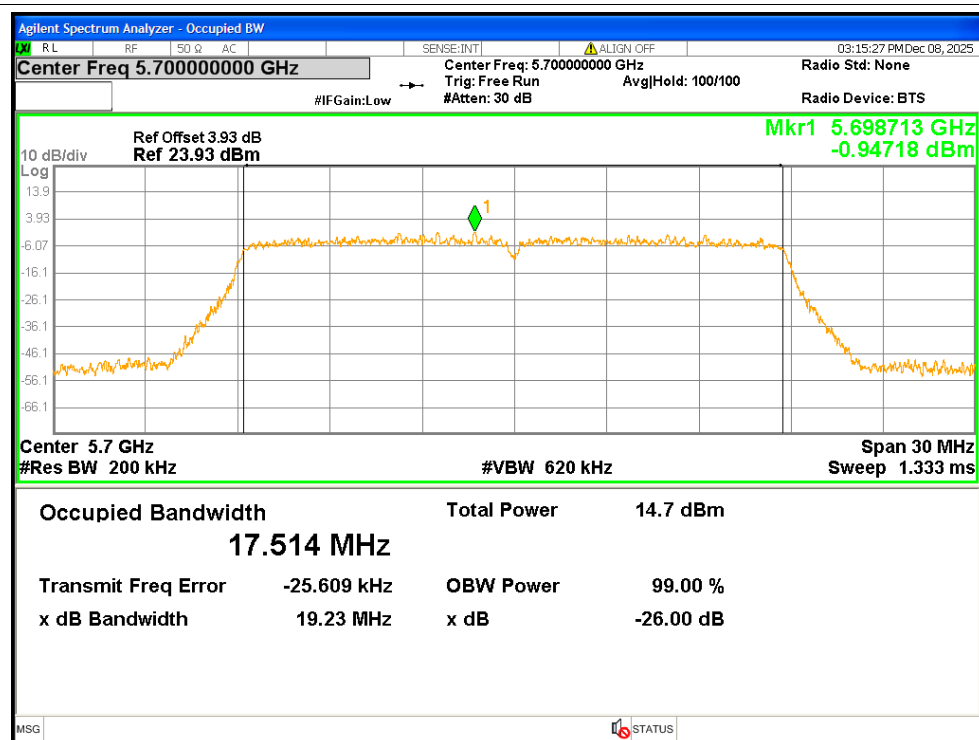


OBW NVNT ac20 5700MHz Ant2

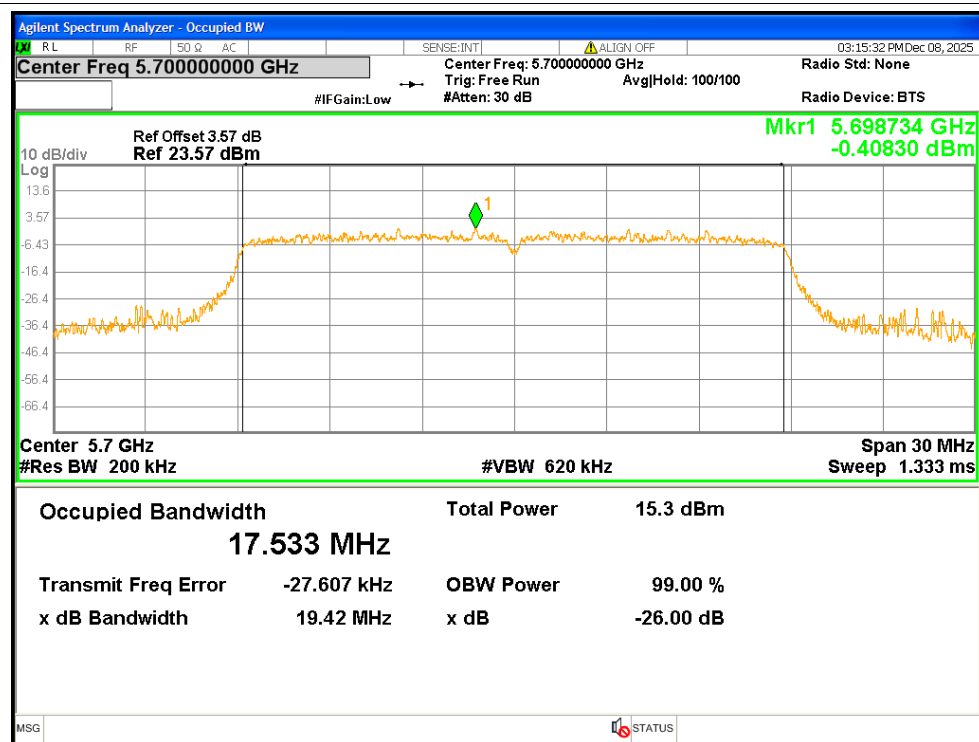


OBW NVNT ac40 5510MHz Ant1

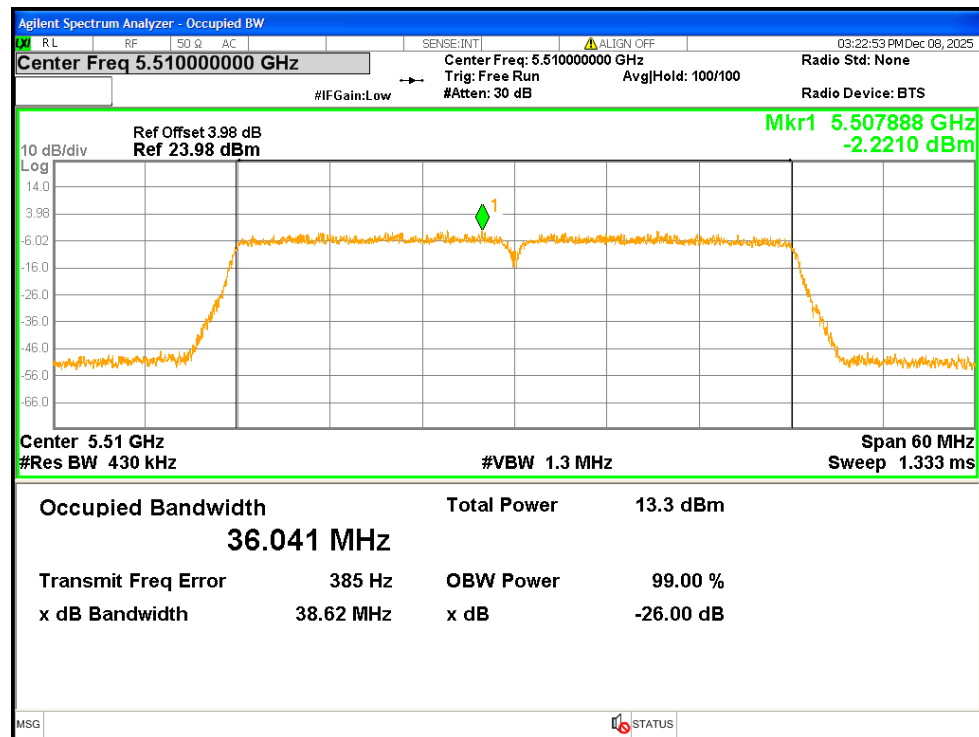


OBW NVNT ac40 5510MHz Ant2

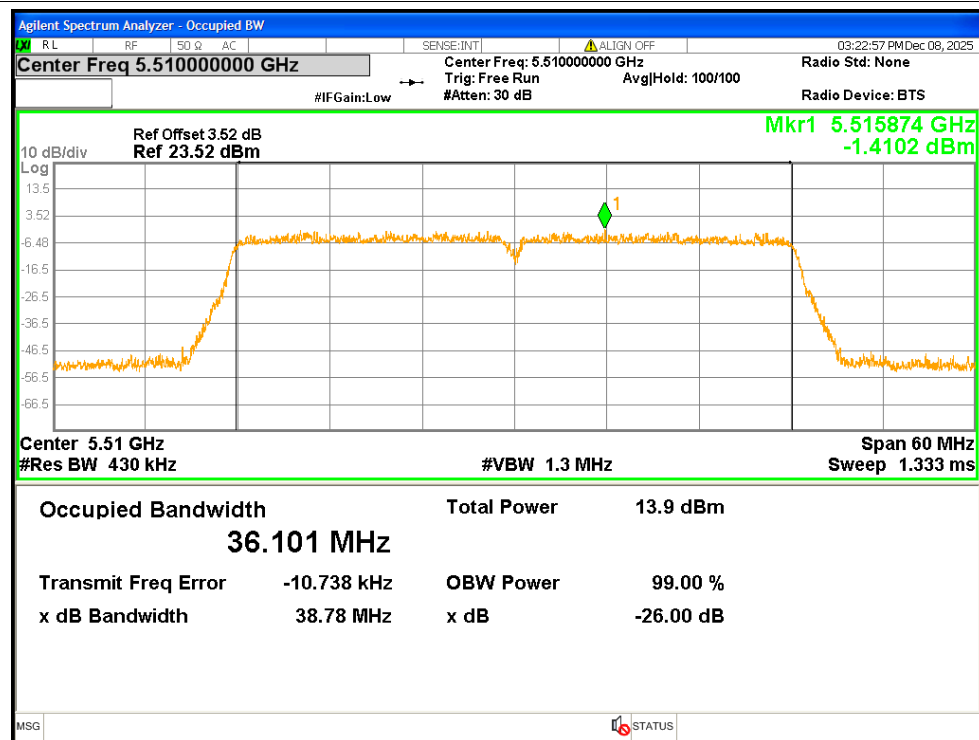


OBW NVNT ac40 5550MHz Ant1

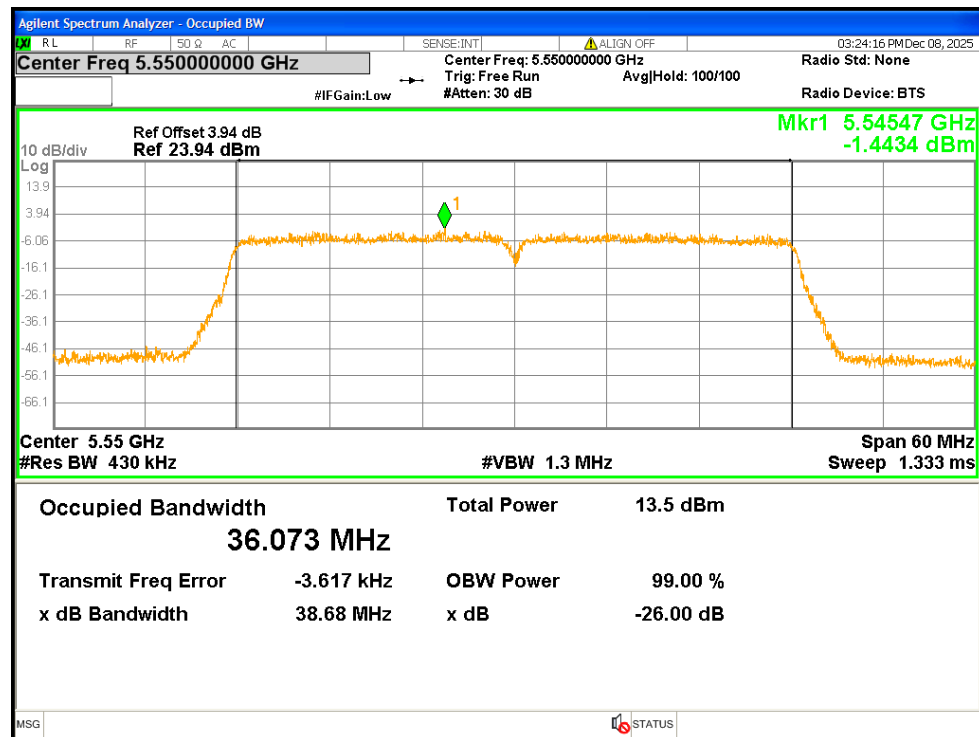


OBW NVNT ac40 5550MHz Ant2

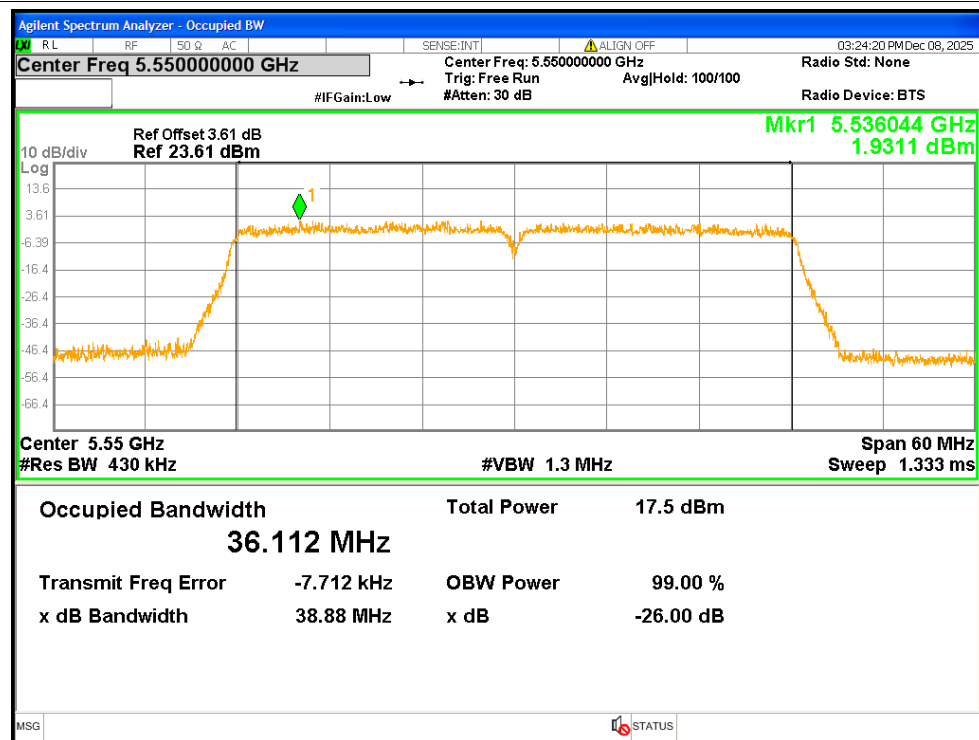


OBW NVNT ac40 5670MHz Ant1

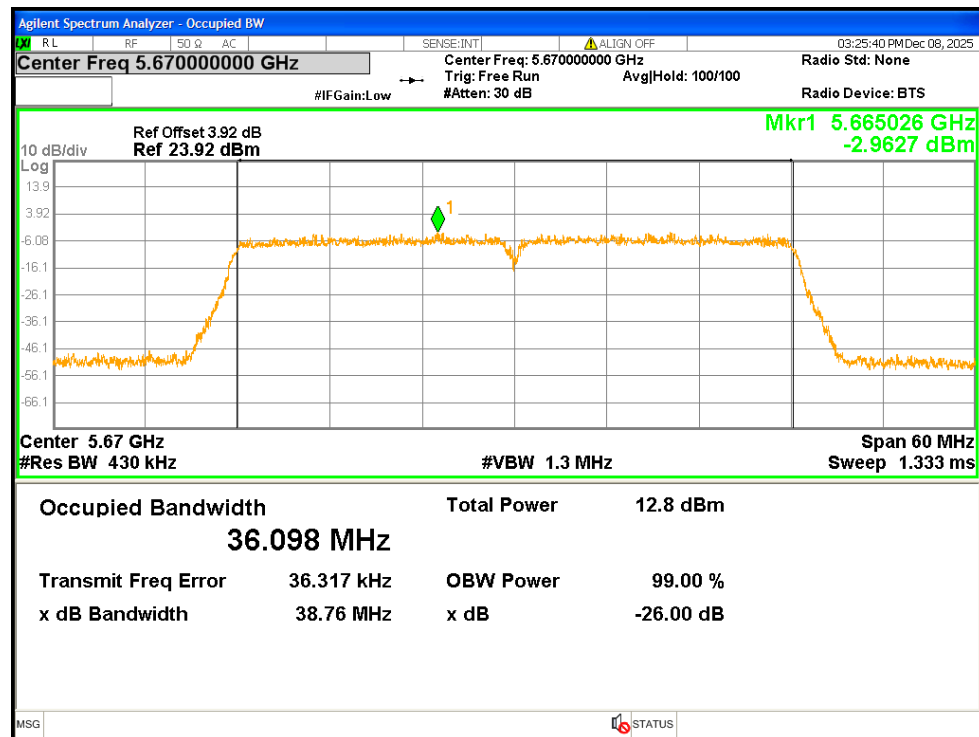


OBW NVNT ac40 5670MHz Ant2

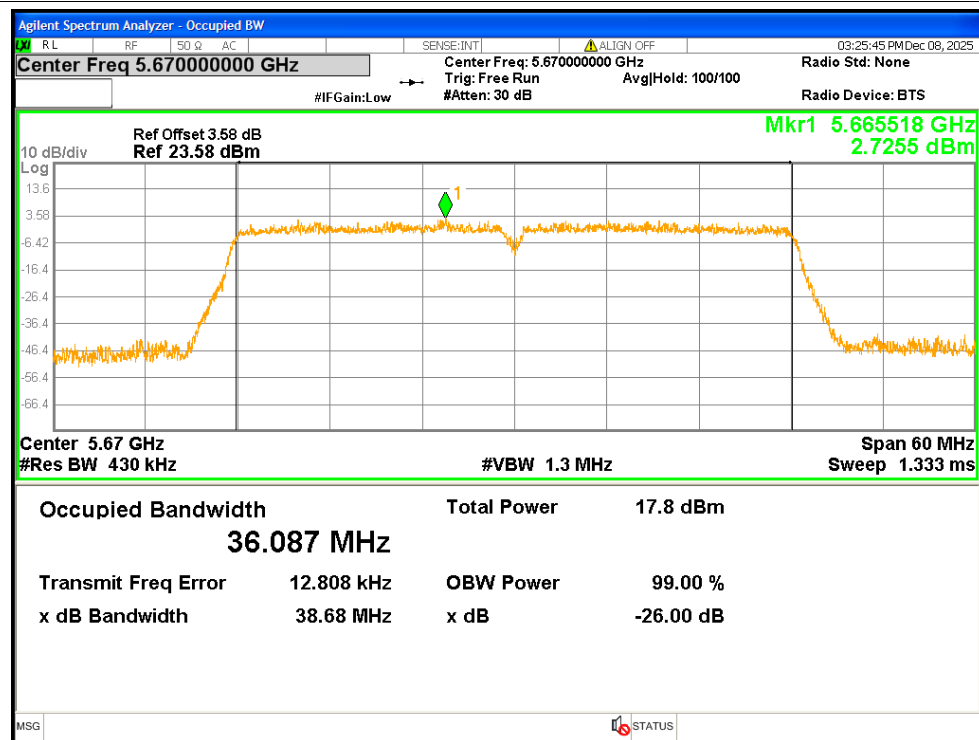


OBW NVNT ac80 5530MHz Ant1

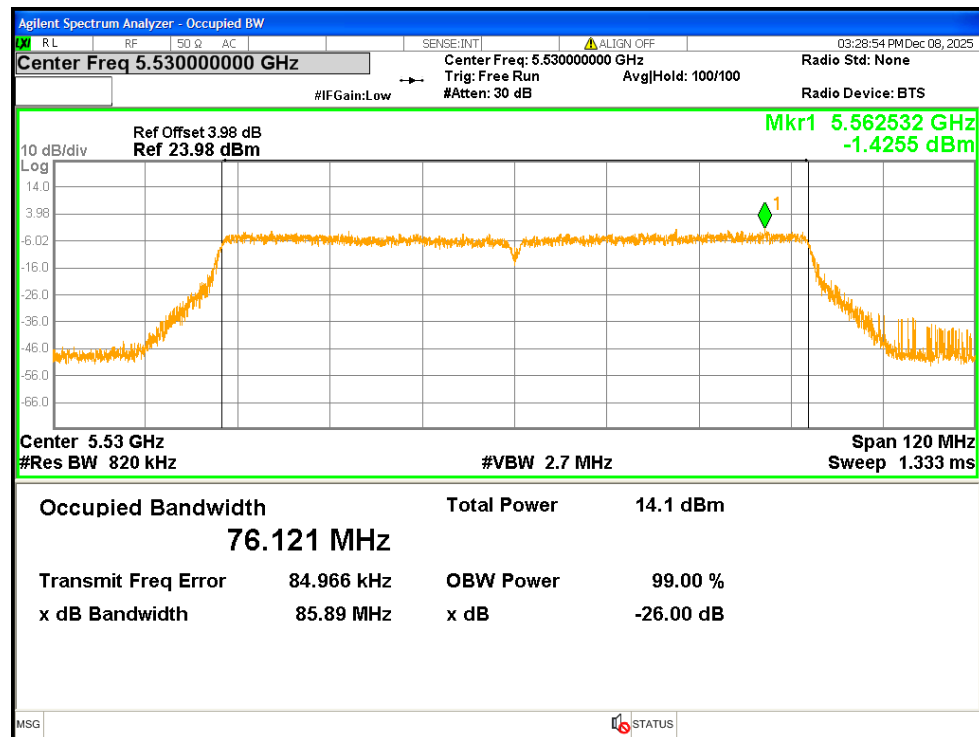


OBW NVNT ac80 5530MHz Ant2

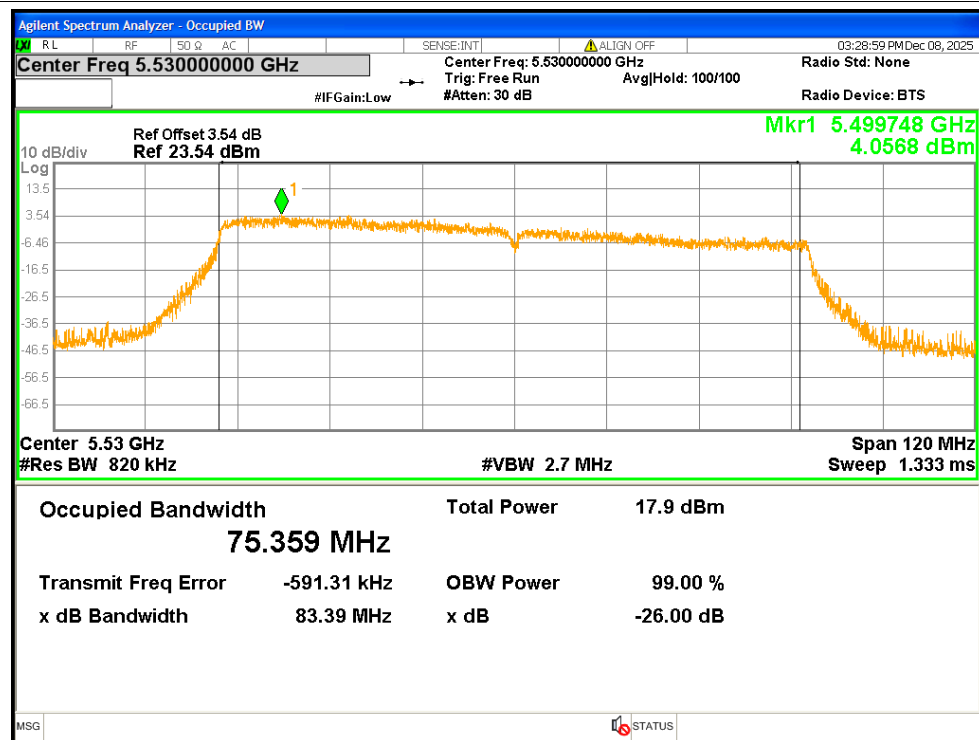

OBW NVNT ac80 5610MHz Ant1

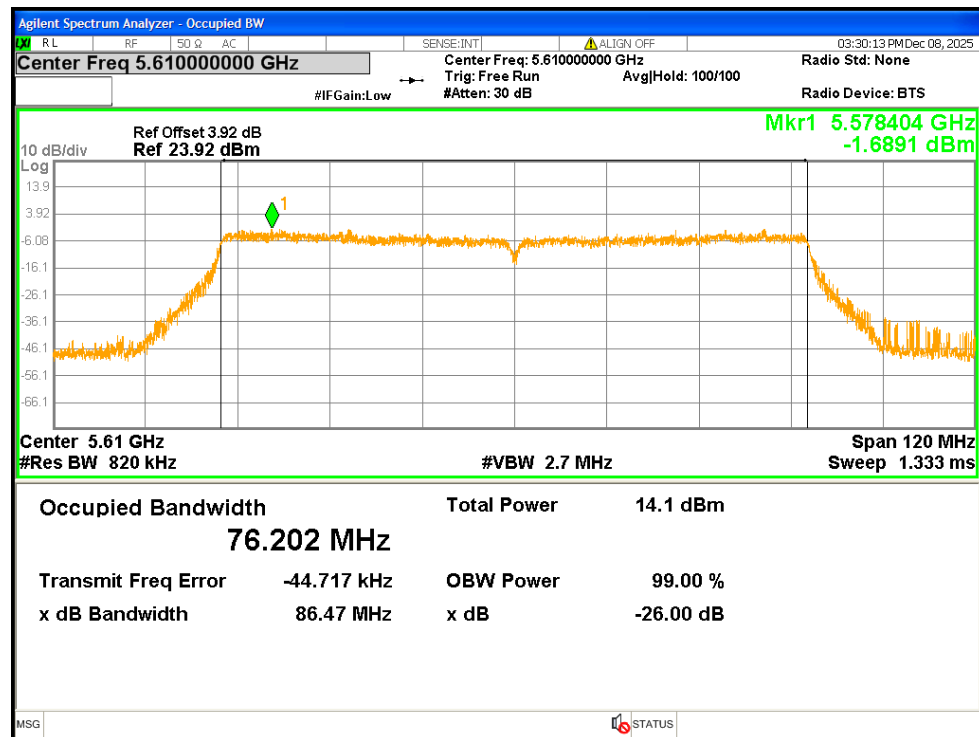

OBW NVNT ac80 5610MHz Ant2

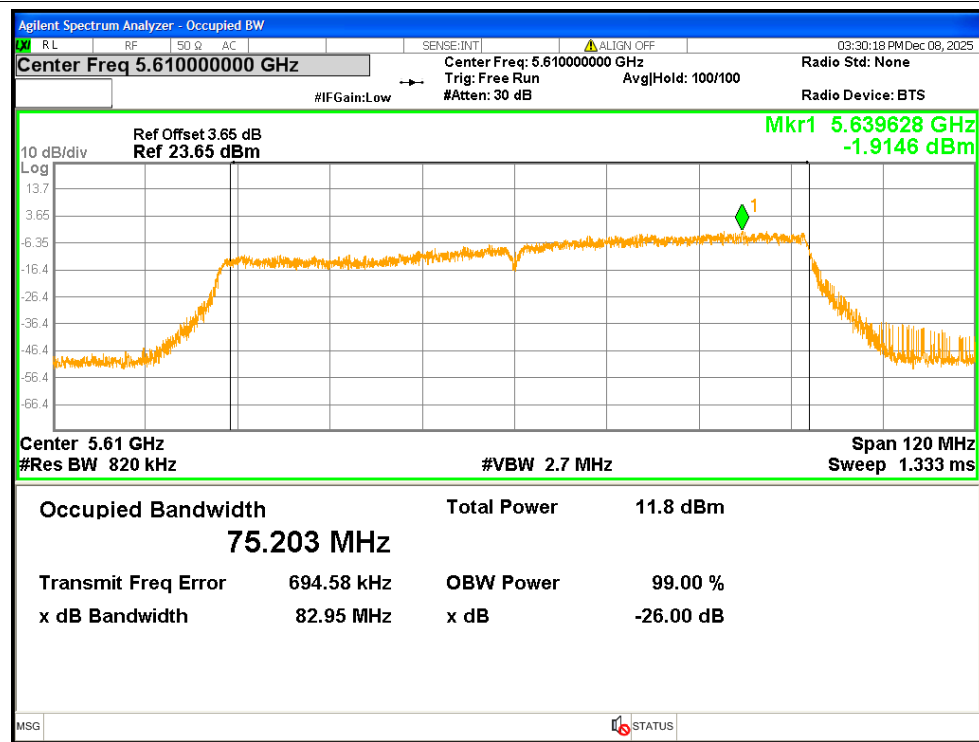


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5500	Ant1	2.911	0.32	3.231	<=11	Pass
NVNT	a	5580	Ant1	3.089	0.32	3.409	<=11	Pass
NVNT	a	5700	Ant1	1.853	0.32	2.173	<=11	Pass
NVNT	a	5500	Ant2	2.534	0.32	2.854	<=11	Pass
NVNT	a	5580	Ant2	3.224	0.32	3.544	<=11	Pass
NVNT	a	5700	Ant2	2.512	0.32	2.832	<=11	Pass
NVNT	n20	5500	Ant1	0.2	0.38	0.58	<=11	Pass
NVNT	n20	5500	Ant2	-1.085	0.38	-0.705	<=11	Pass
NVNT	n20	5500	MIMO	2.615	0.38	2.995	<=11	Pass
NVNT	n20	5580	Ant1	0.708	0.38	1.088	<=11	Pass
NVNT	n20	5580	Ant2	0.455	0.38	0.835	<=11	Pass
NVNT	n20	5580	MIMO	3.594	0.38	3.974	<=11	Pass
NVNT	n20	5700	Ant1	-0.356	0.38	0.024	<=11	Pass
NVNT	n20	5700	Ant2	0.036	0.38	0.416	<=11	Pass
NVNT	n20	5700	MIMO	2.855	0.38	3.235	<=11	Pass
NVNT	n40	5510	Ant1	-6.012	0.72	-5.292	<=11	Pass
NVNT	n40	5510	Ant2	-5.812	0.72	-5.092	<=11	Pass
NVNT	n40	5510	MIMO	-2.901	0.72	-2.181	<=11	Pass
NVNT	n40	5550	Ant1	-5.973	0.73	-5.243	<=11	Pass
NVNT	n40	5550	Ant2	-1.813	0.73	-1.083	<=11	Pass
NVNT	n40	5550	MIMO	-0.403	0.73	0.327	<=11	Pass
NVNT	n40	5670	Ant1	-6.661	0.73	-5.931	<=11	Pass
NVNT	n40	5670	Ant2	-1.953	0.73	-1.223	<=11	Pass
NVNT	n40	5670	MIMO	-0.688	0.73	0.042	<=11	Pass
NVNT	ac20	5500	Ant1	-0.852	0.37	-0.482	<=11	Pass
NVNT	ac20	5500	Ant2	-1.983	0.37	-1.613	<=11	Pass
NVNT	ac20	5500	MIMO	1.63	0.37	2	<=11	Pass
NVNT	ac20	5580	Ant1	-0.336	0.38	0.044	<=11	Pass
NVNT	ac20	5580	Ant2	-0.867	0.38	-0.487	<=11	Pass
NVNT	ac20	5580	MIMO	2.417	0.38	2.797	<=11	Pass
NVNT	ac20	5700	Ant1	-1.523	0.37	-1.153	<=11	Pass
NVNT	ac20	5700	Ant2	-0.719	0.37	-0.349	<=11	Pass
NVNT	ac20	5700	MIMO	1.908	0.37	2.278	<=11	Pass
NVNT	ac40	5510	Ant1	-6.546	0.72	-5.826	<=11	Pass
NVNT	ac40	5510	Ant2	-5.963	0.72	-5.243	<=11	Pass
NVNT	ac40	5510	MIMO	-3.234	0.72	-2.514	<=11	Pass
NVNT	ac40	5550	Ant1	-6.138	0.73	-5.408	<=11	Pass
NVNT	ac40	5550	Ant2	-2.358	0.73	-1.628	<=11	Pass
NVNT	ac40	5550	MIMO	-0.839	0.73	-0.109	<=11	Pass
NVNT	ac40	5670	Ant1	-6.68	0.72	-5.96	<=11	Pass


NVNT	ac40	5670	Ant2	-2.021	0.72	-1.301	<=11	Pass
NVNT	ac40	5670	MIMO	-0.743	0.72	-0.023	<=11	Pass
NVNT	ac80	5530	Ant1	-9.549	1.33	-8.219	<=11	Pass
NVNT	ac80	5530	Ant2	-4.361	1.33	-3.031	<=11	Pass
NVNT	ac80	5530	MIMO	-3.212	1.33	-1.882	<=11	Pass
NVNT	ac80	5610	Ant1	-9.022	1.35	-7.672	<=11	Pass
NVNT	ac80	5610	Ant2	-9.599	1.35	-8.249	<=11	Pass
NVNT	ac80	5610	MIMO	-6.291	1.35	-4.941	<=11	Pass

Test Graphs


PSD NVNT a 5500MHz Ant1

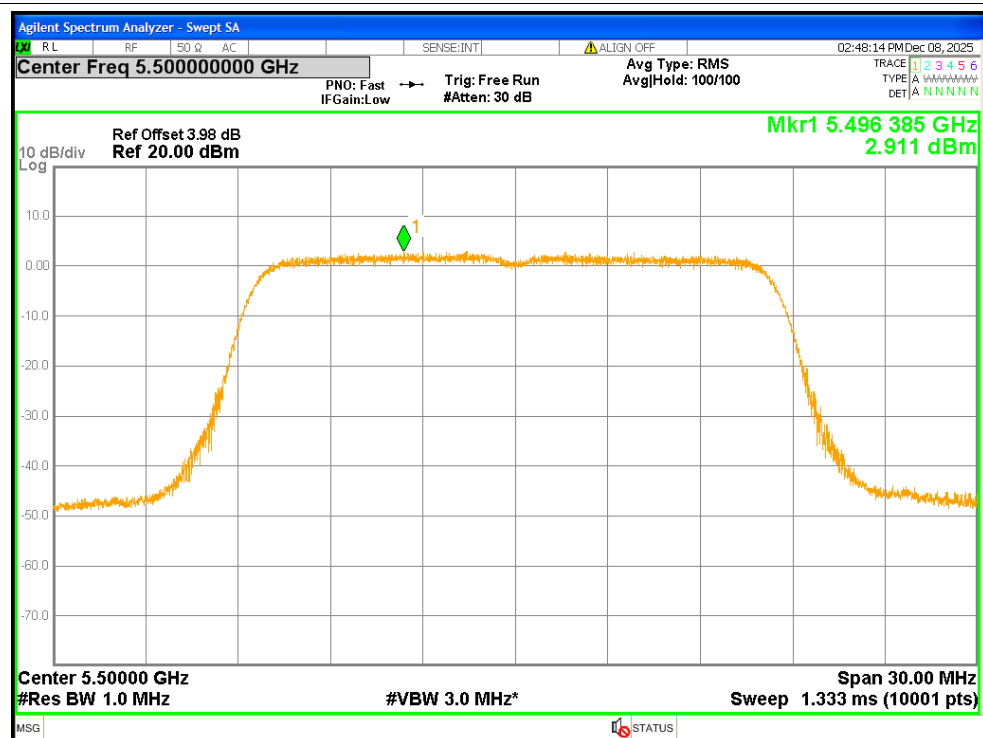


PSD NVNT a 5580MHz Ant1

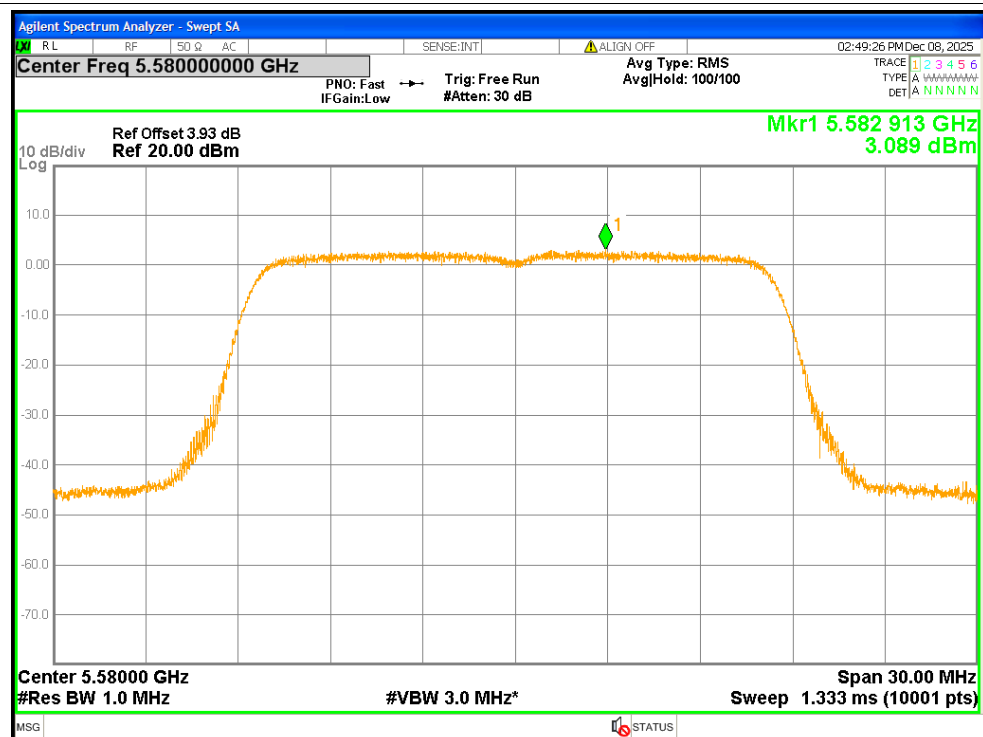


PSD NVNT a 5700MHz Ant1

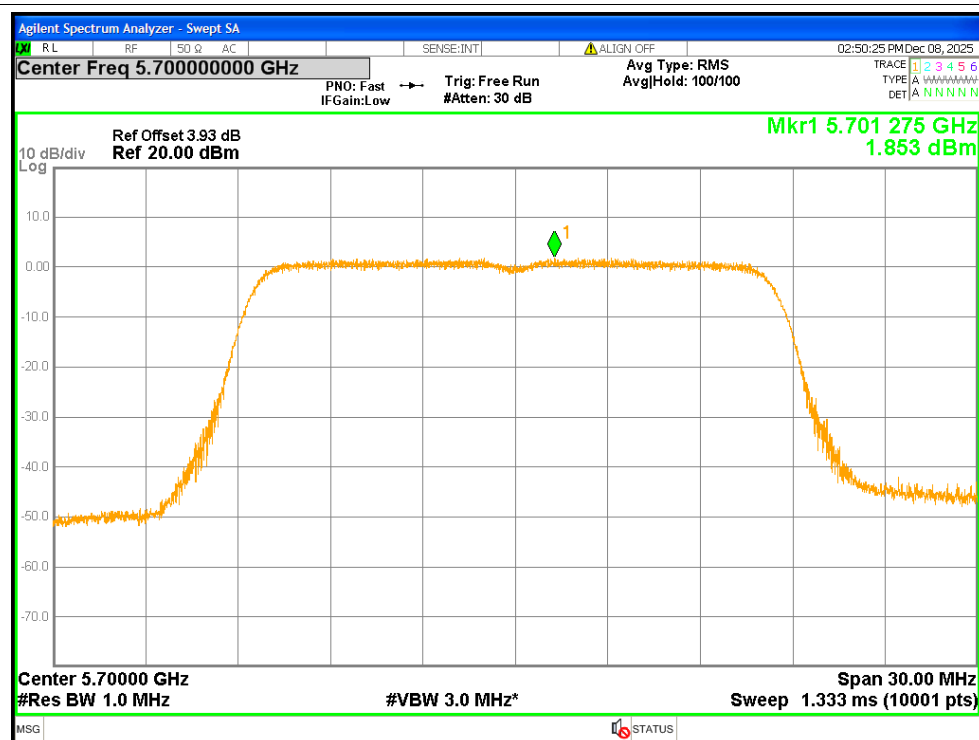


PSD NVNT a 5500MHz Ant2

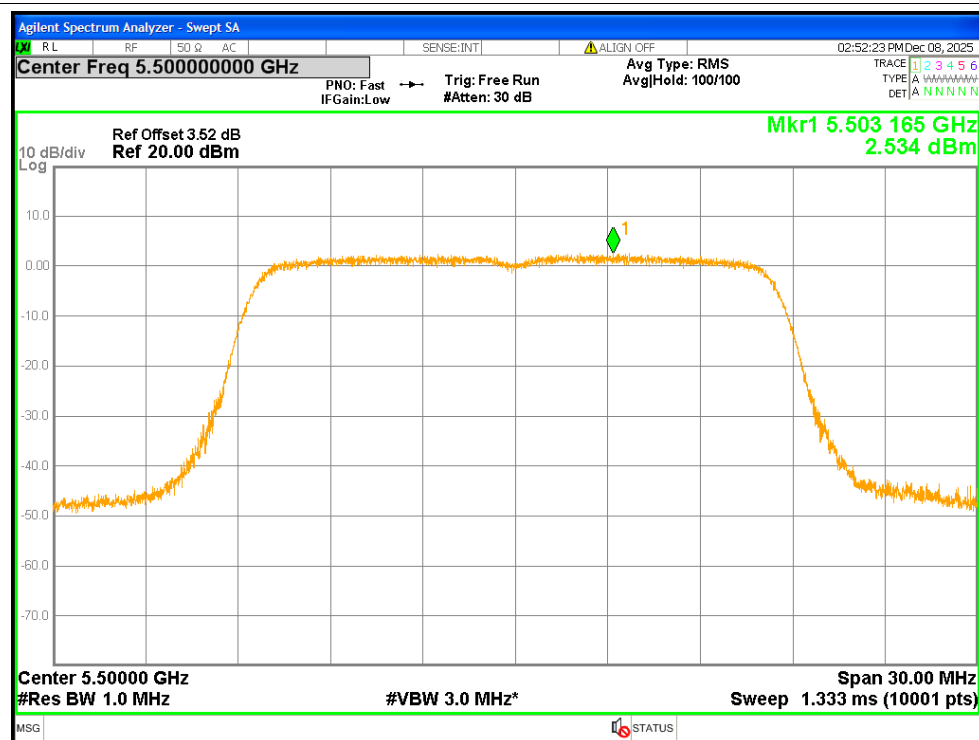


PSD NVNT a 5580MHz Ant2

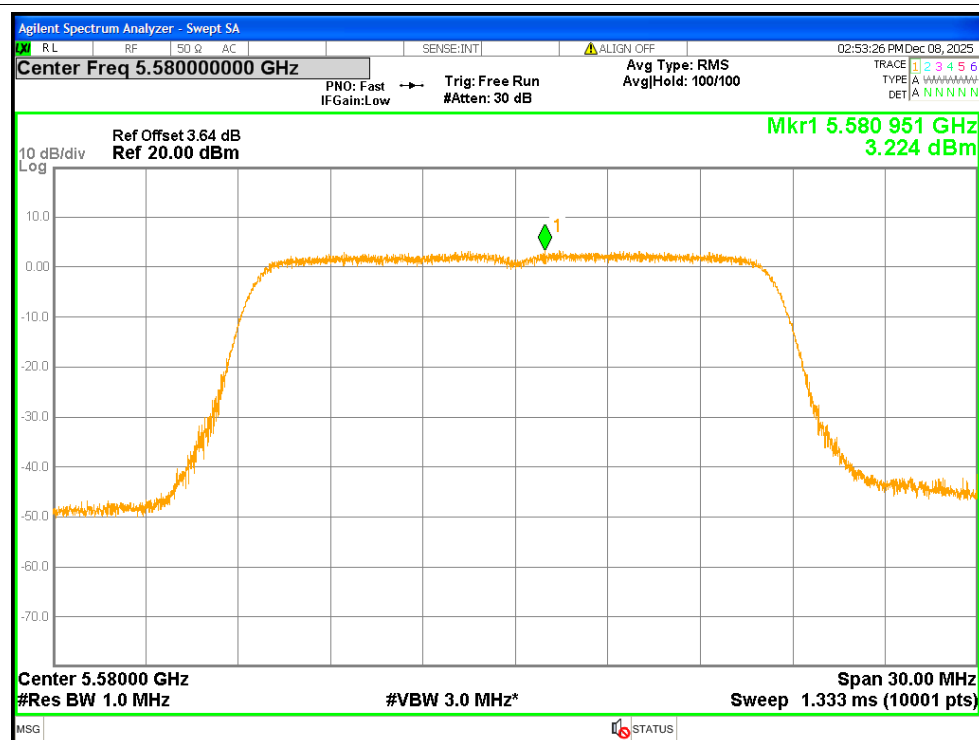


PSD NVNT a 5700MHz Ant2

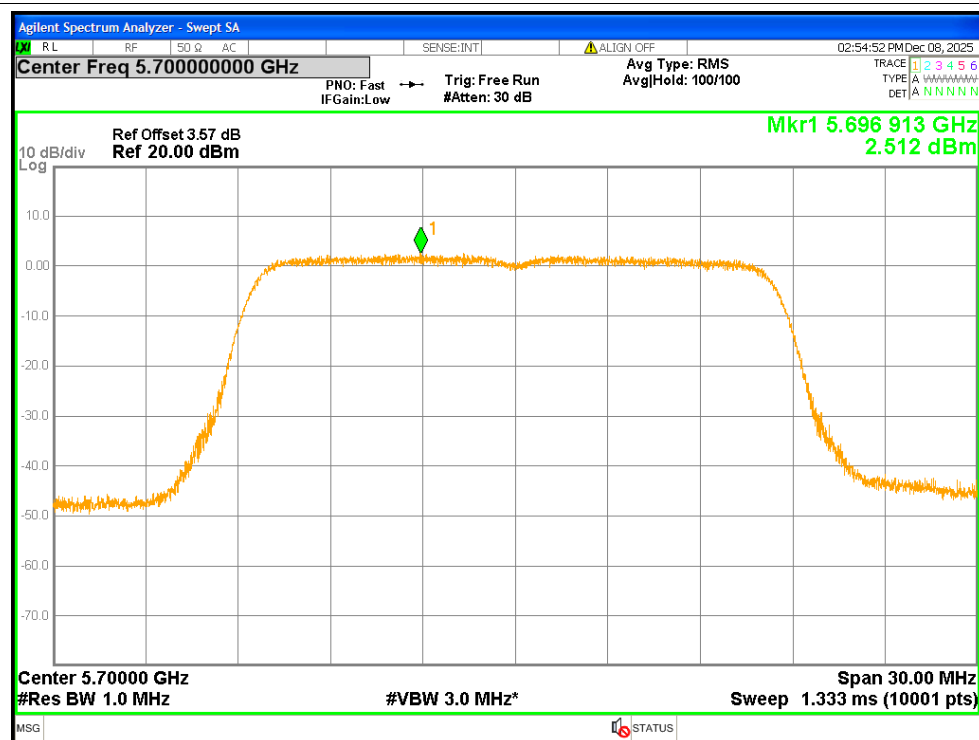


PSD NVNT n20 5500MHz Ant1

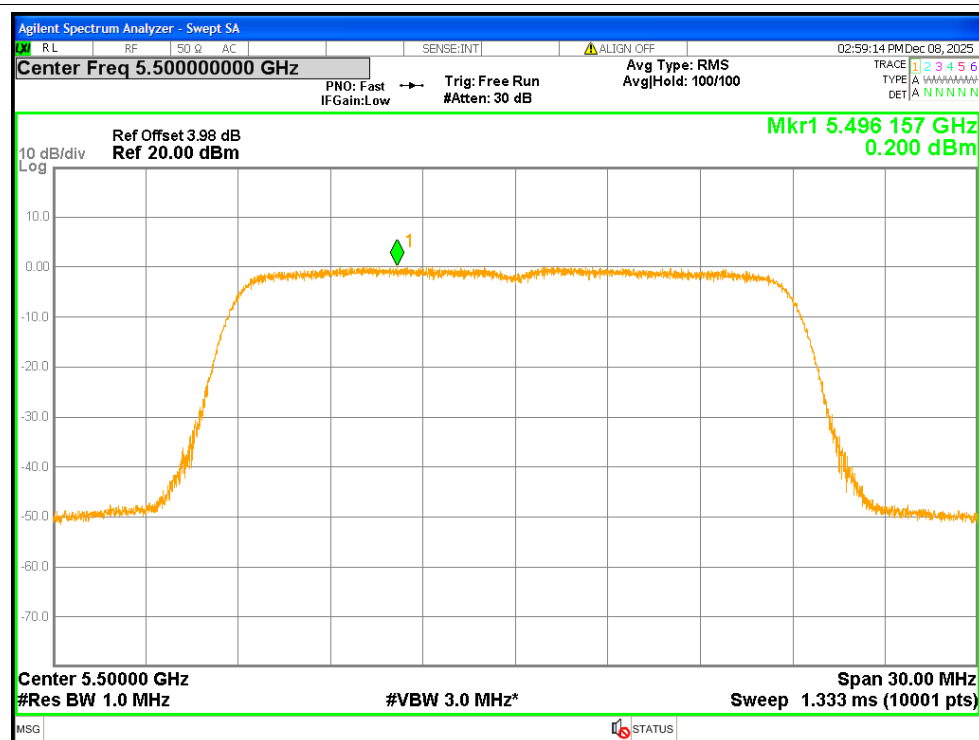


PSD NVNT n20 5500MHz Ant2

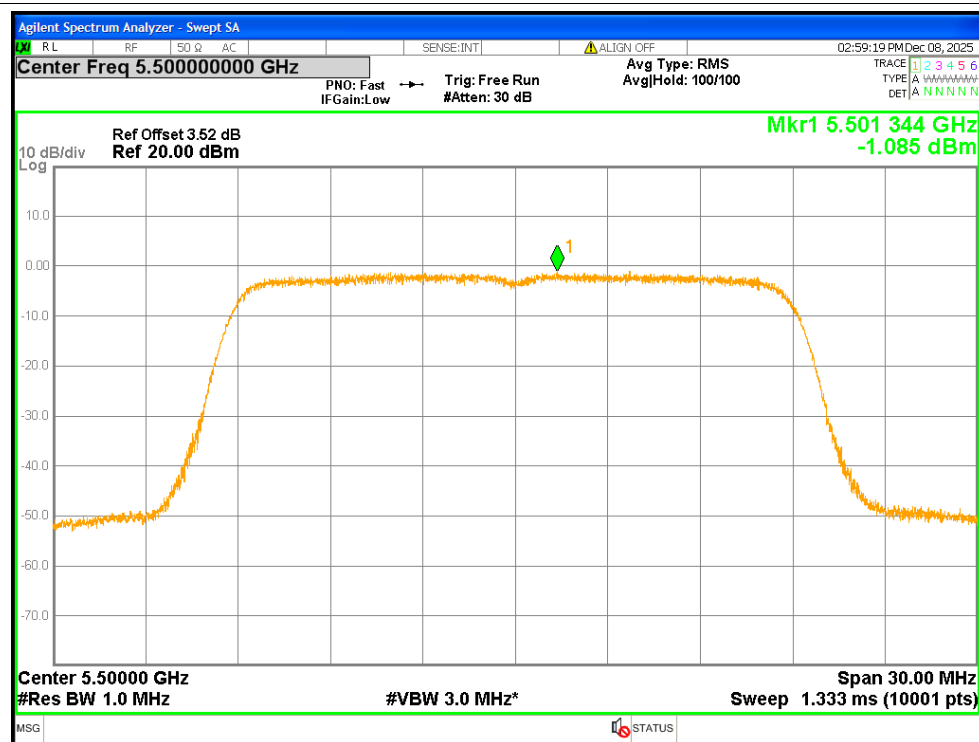


PSD NVNT n20 5580MHz Ant1

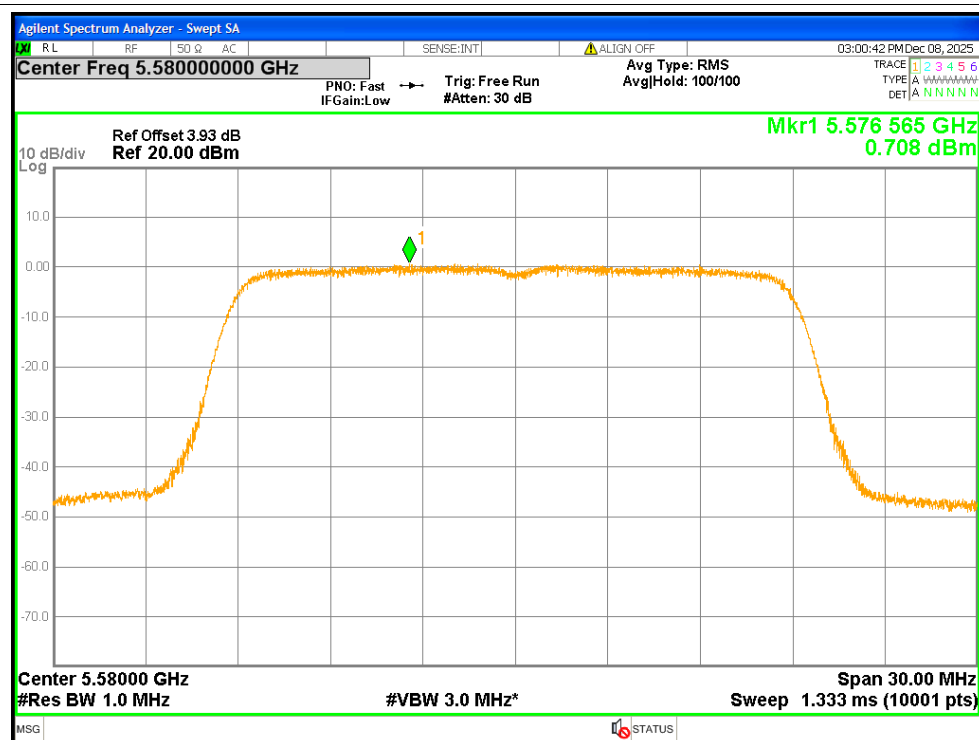


PSD NVNT n20 5580MHz Ant2

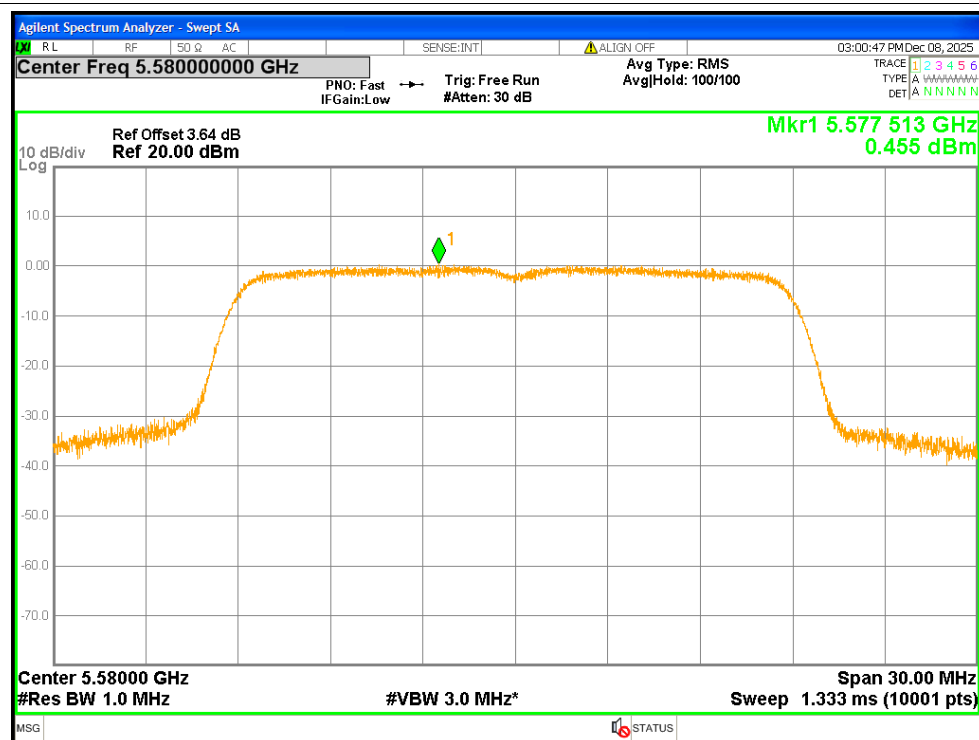


PSD NVNT n20 5700MHz Ant1

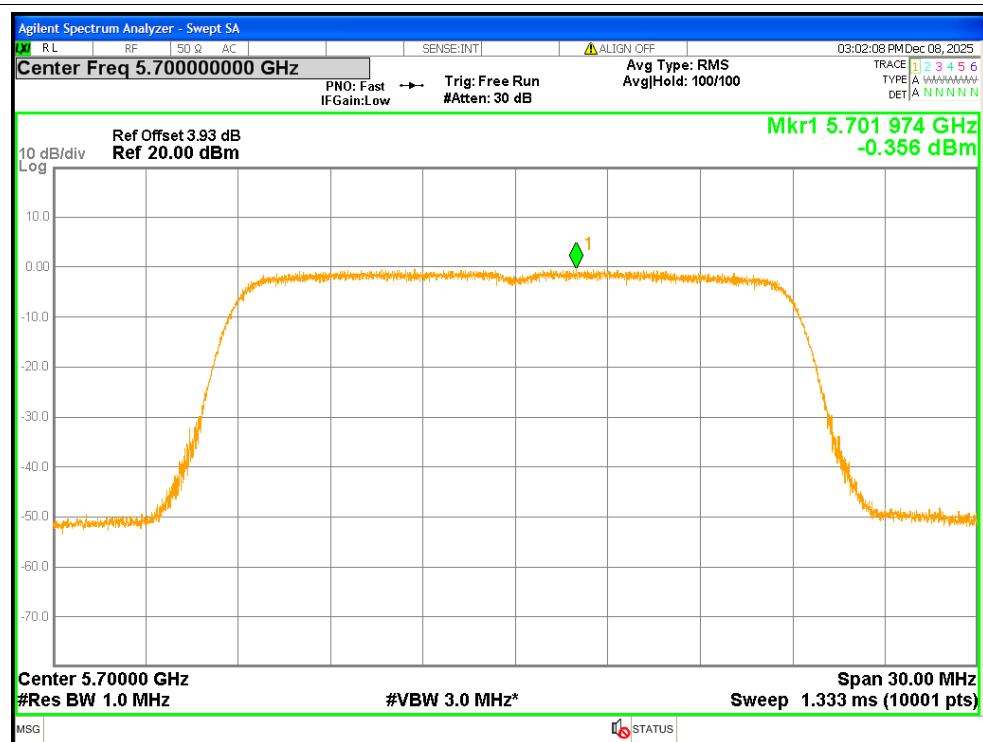


PSD NVNT n20 5700MHz Ant2

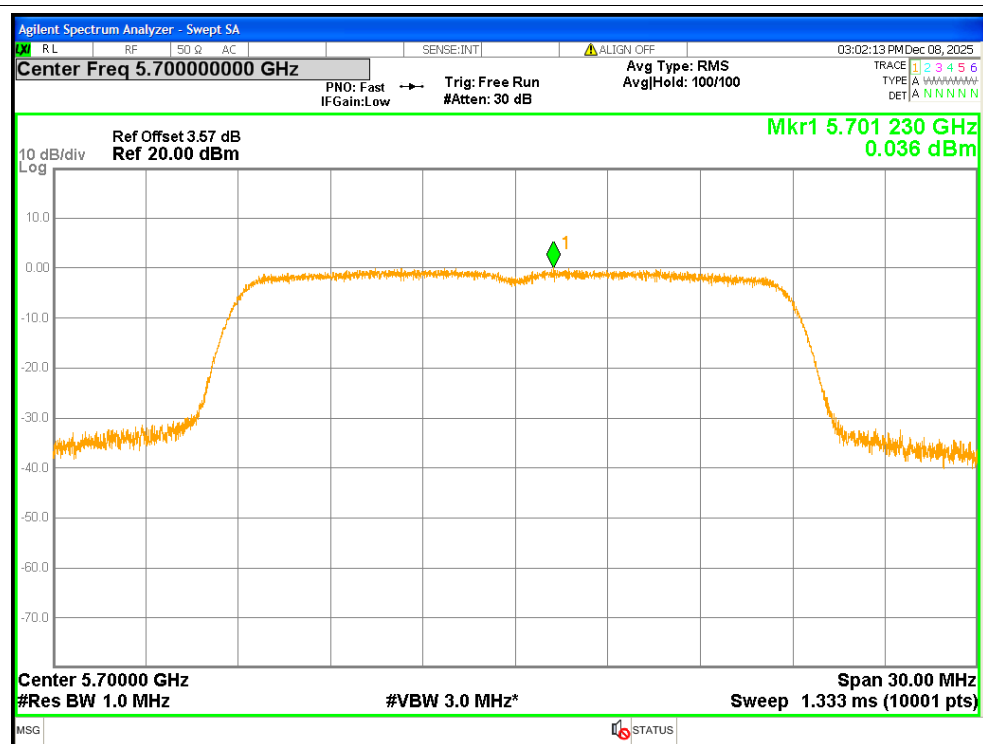


PSD NVNT n40 5510MHz Ant1

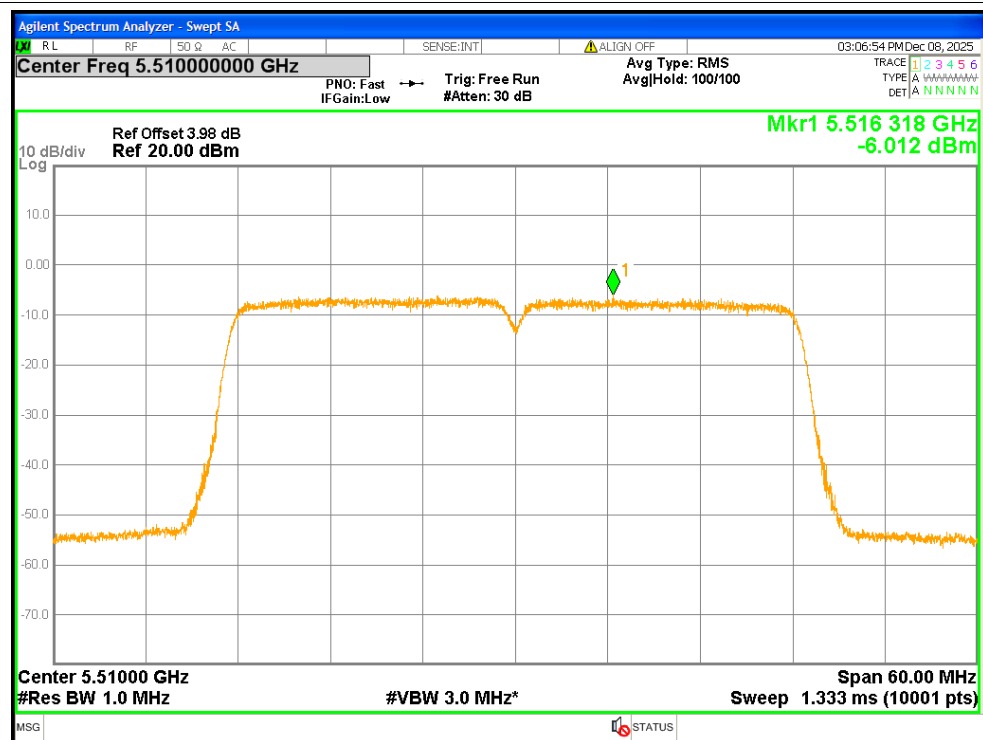


PSD NVNT n40 5510MHz Ant2

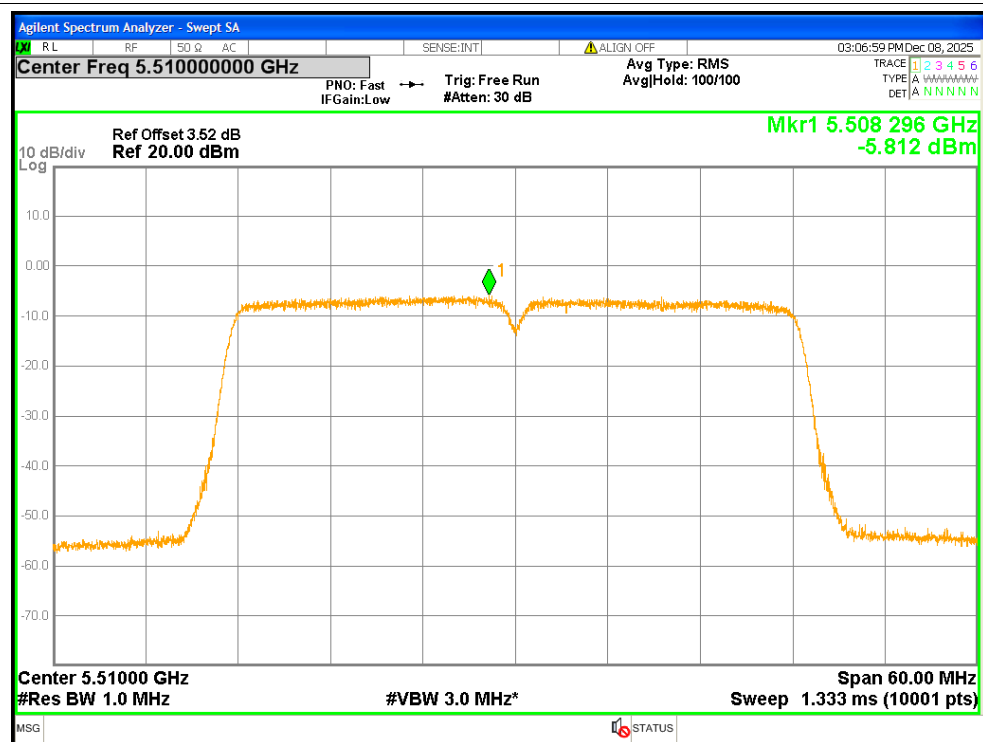


PSD NVNT n40 5550MHz Ant1

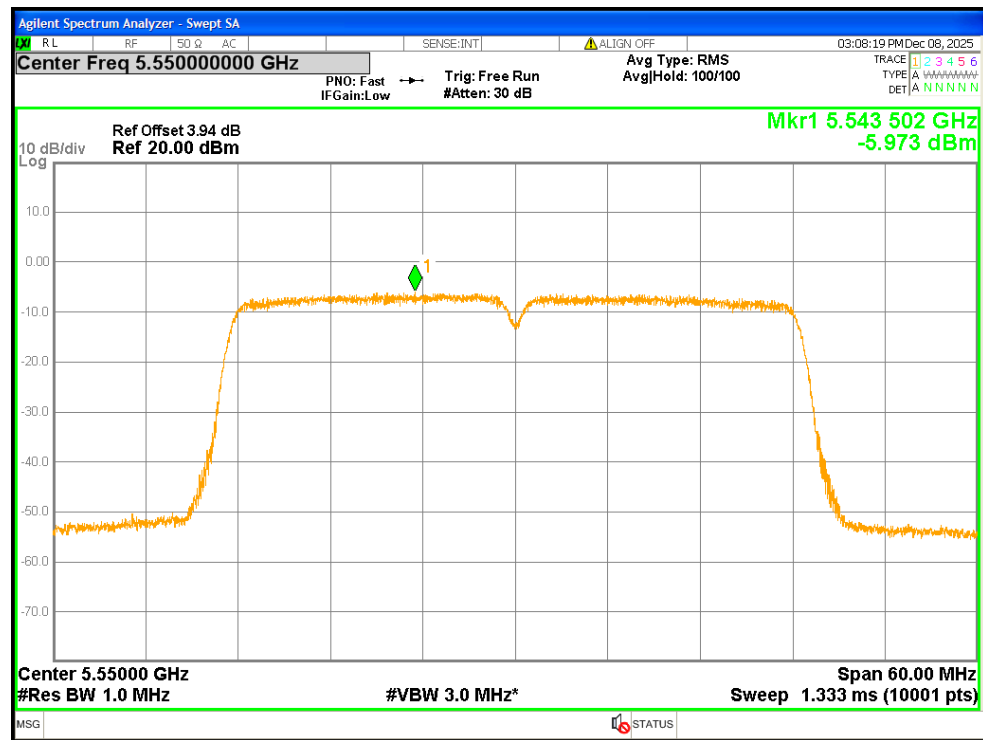


PSD NVNT n40 5550MHz Ant2

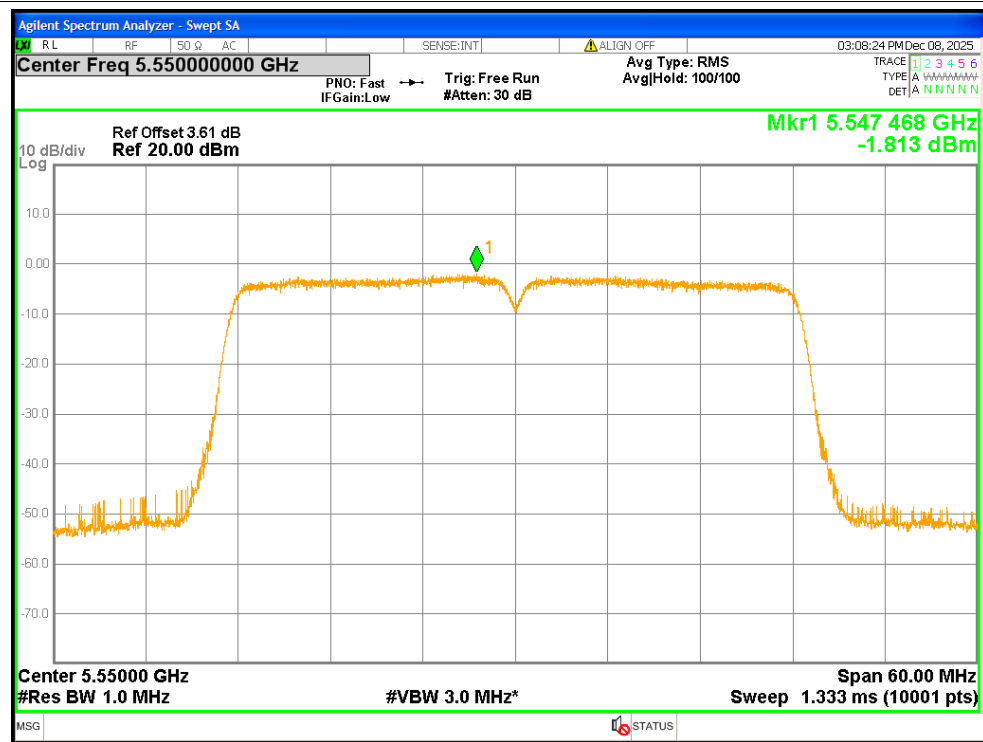


PSD NVNT n40 5670MHz Ant1

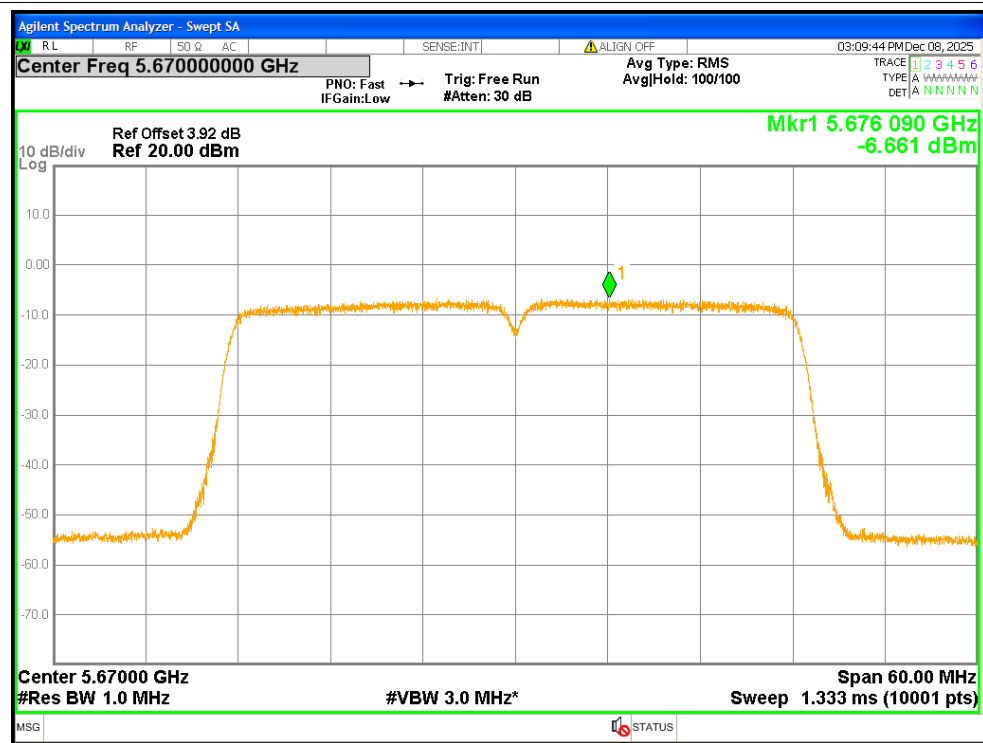


PSD NVNT n40 5670MHz Ant2

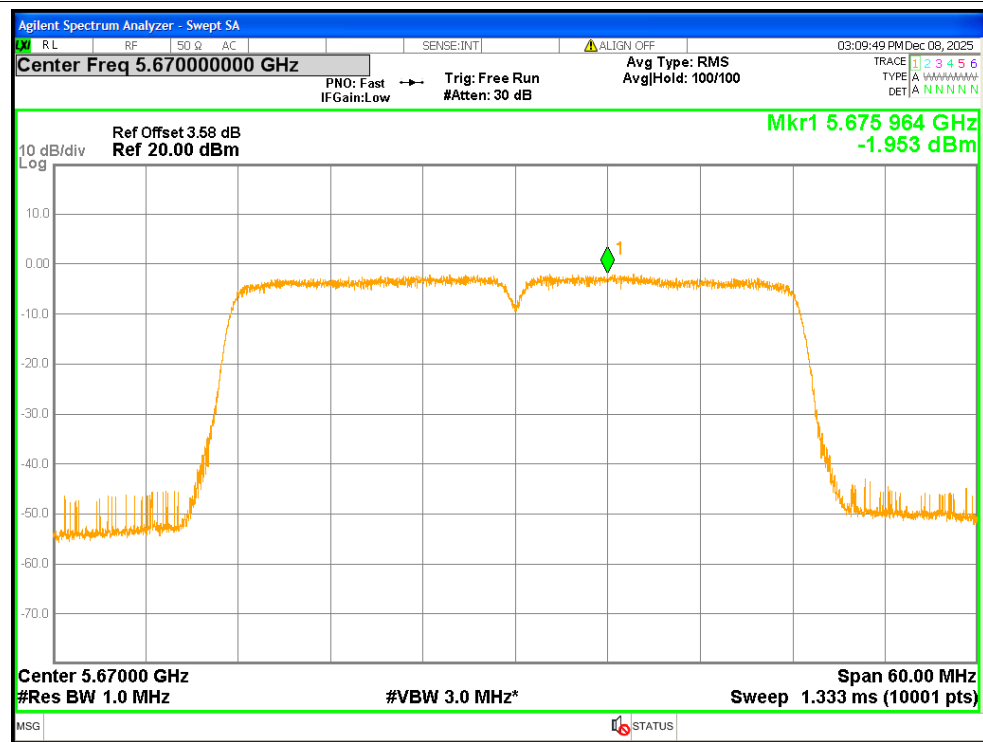


PSD NVNT ac20 5500MHz Ant1

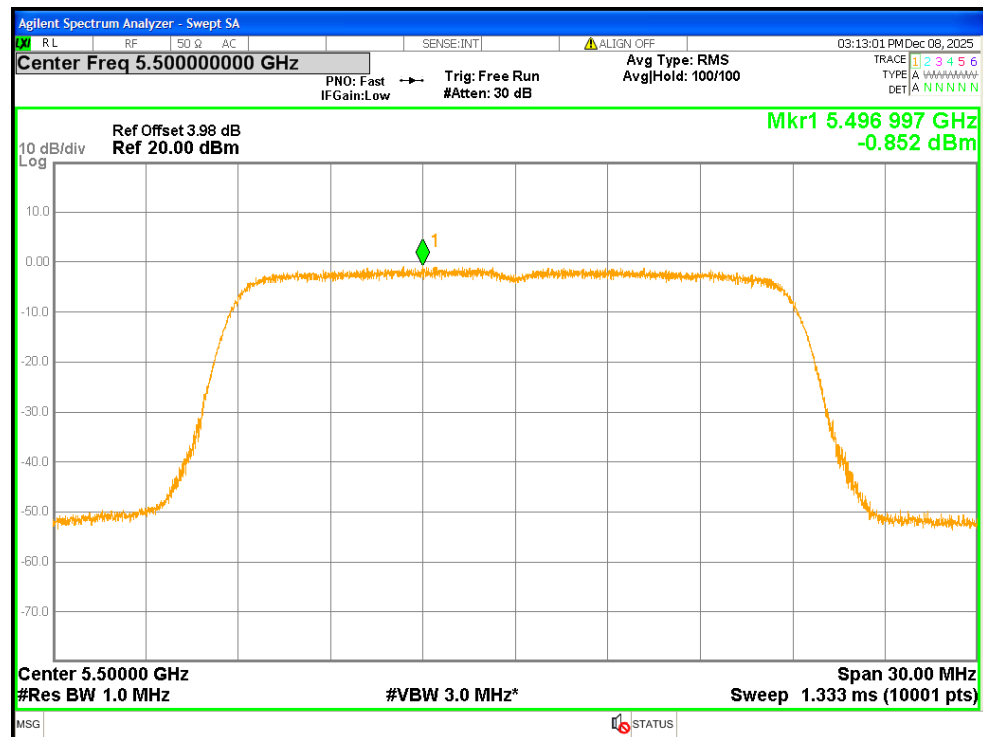


PSD NVNT ac20 5500MHz Ant2

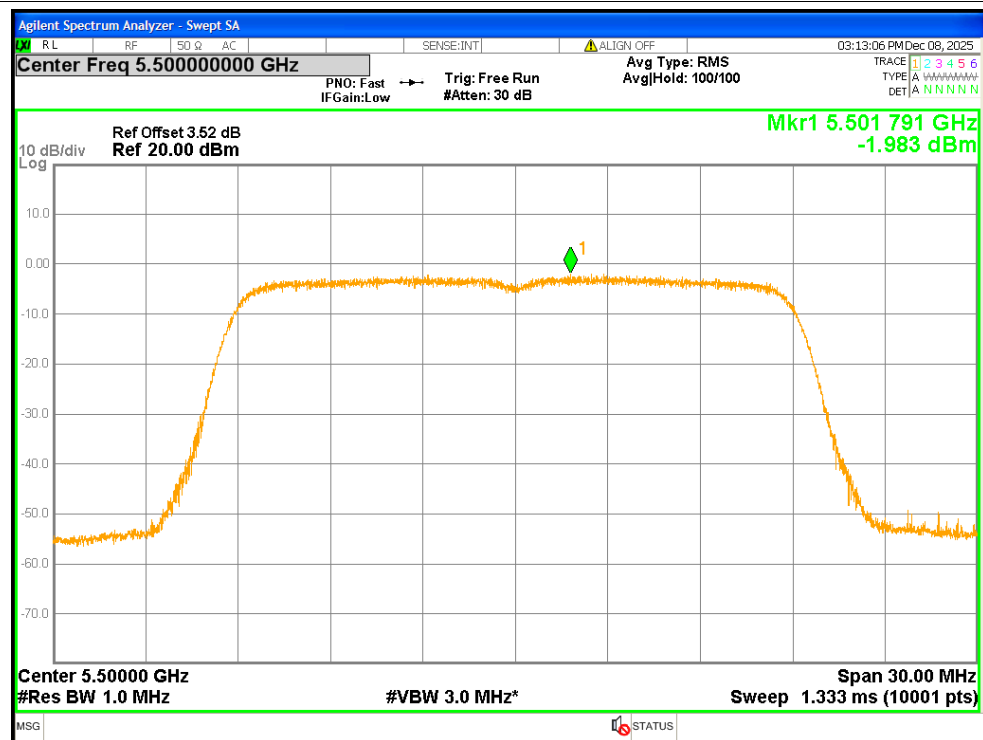


PSD NVNT ac20 5580MHz Ant1

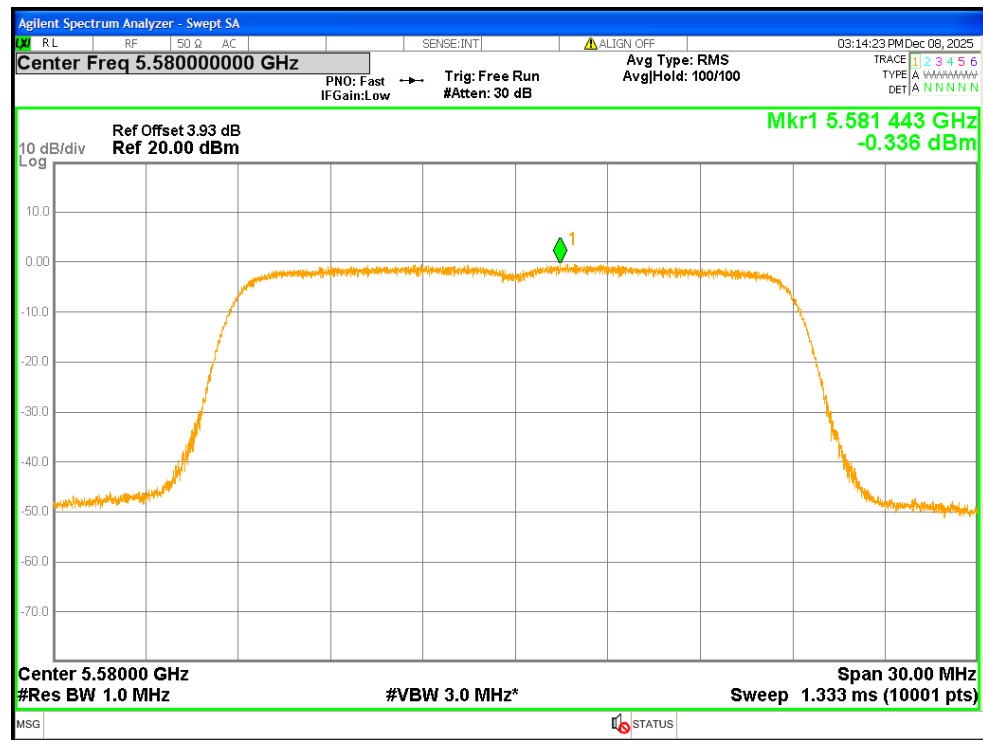


PSD NVNT ac20 5580MHz Ant2

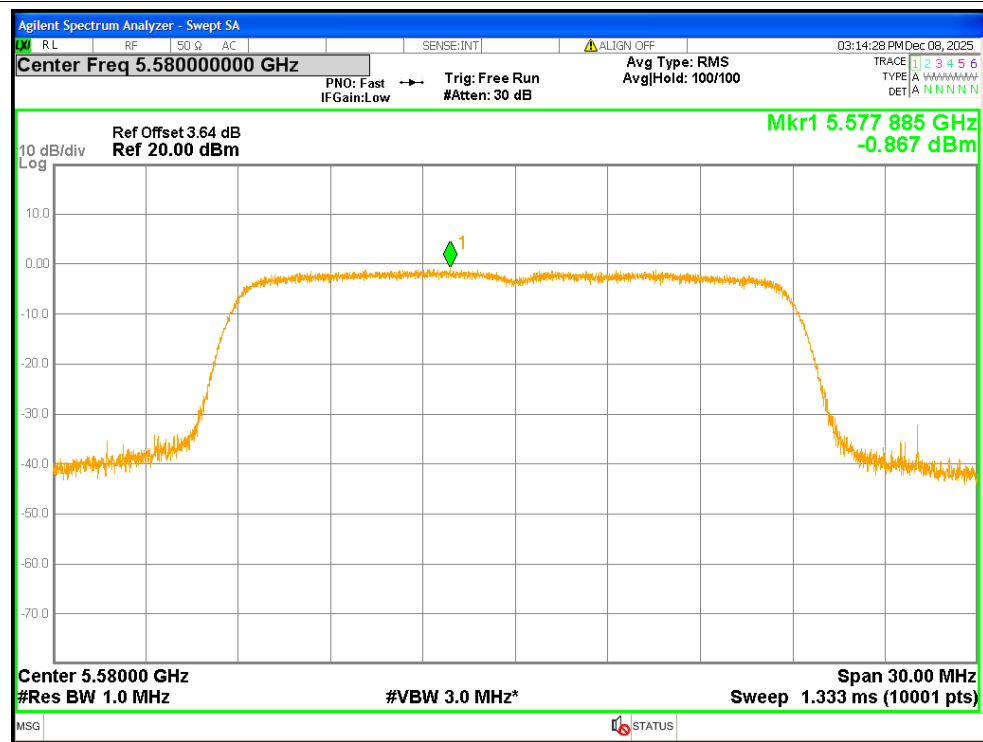


PSD NVNT ac20 5700MHz Ant1

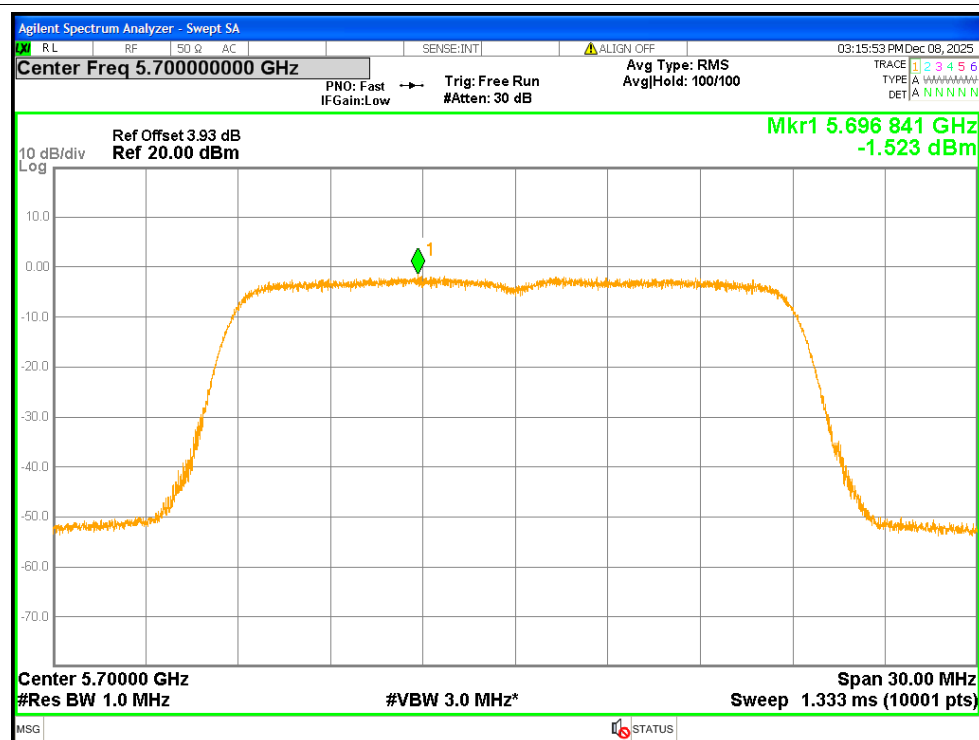


PSD NVNT ac20 5700MHz Ant2

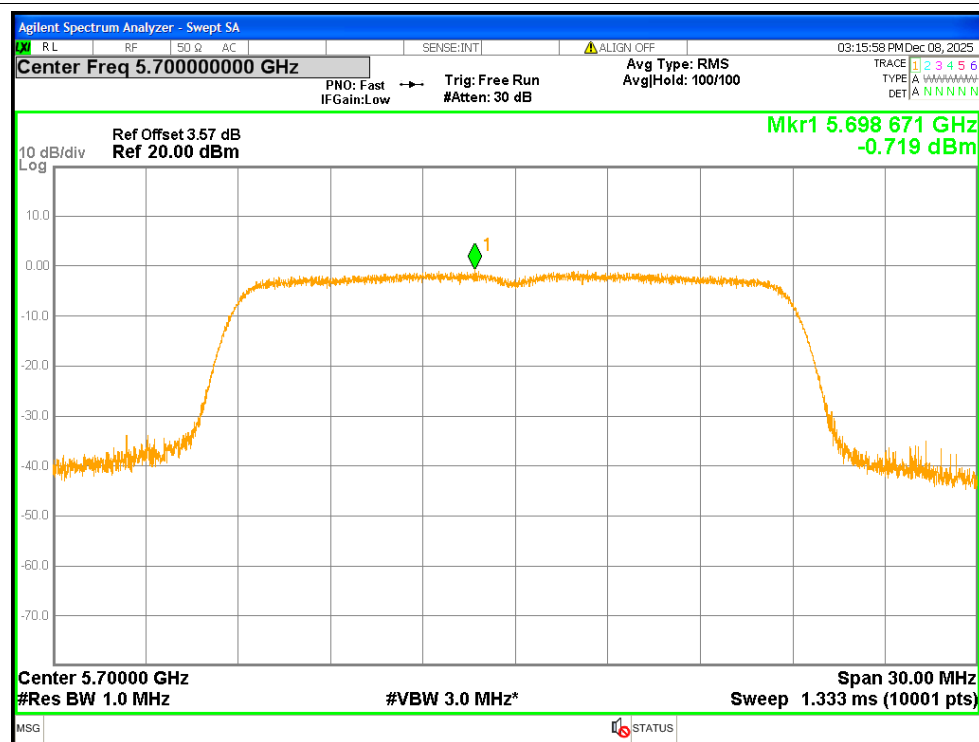


PSD NVNT ac40 5510MHz Ant1

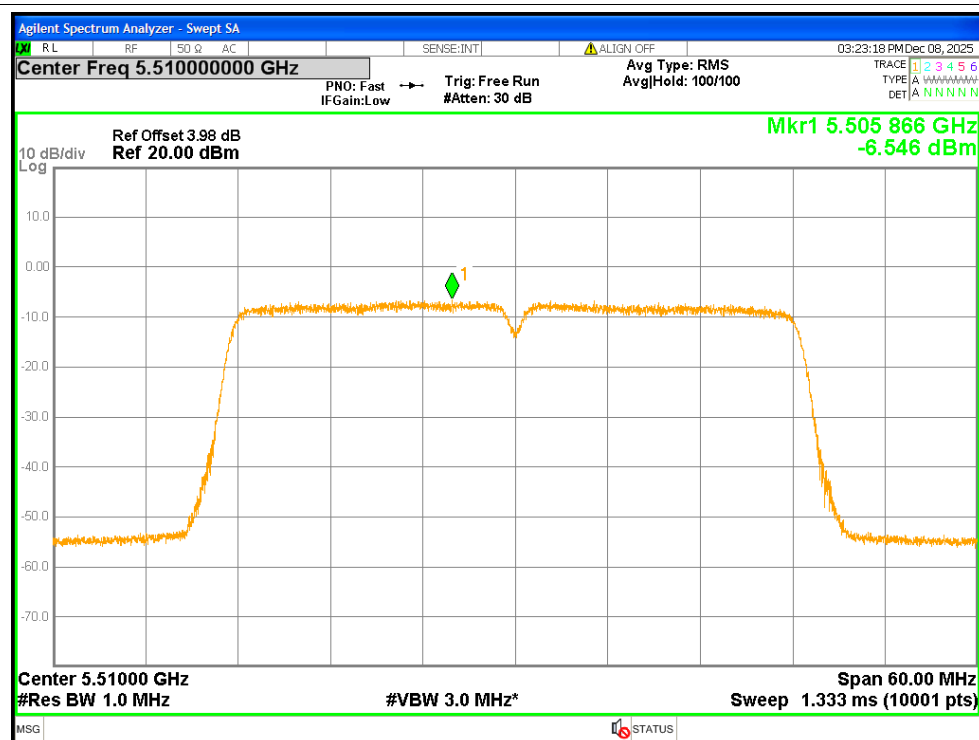


PSD NVNT ac40 5510MHz Ant2

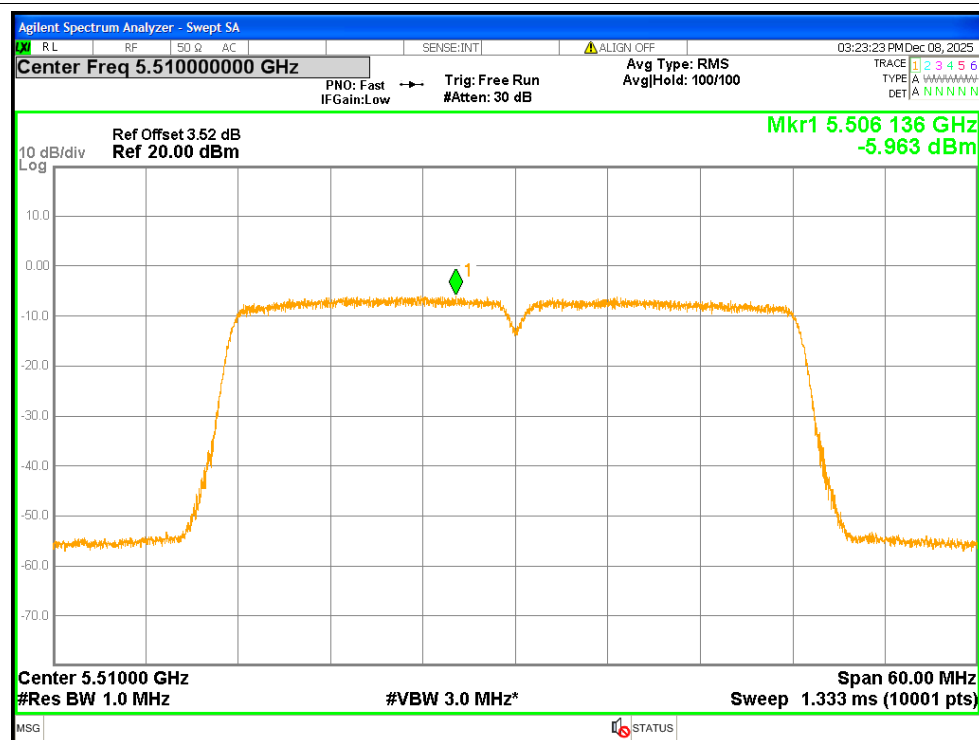


PSD NVNT ac40 5550MHz Ant1

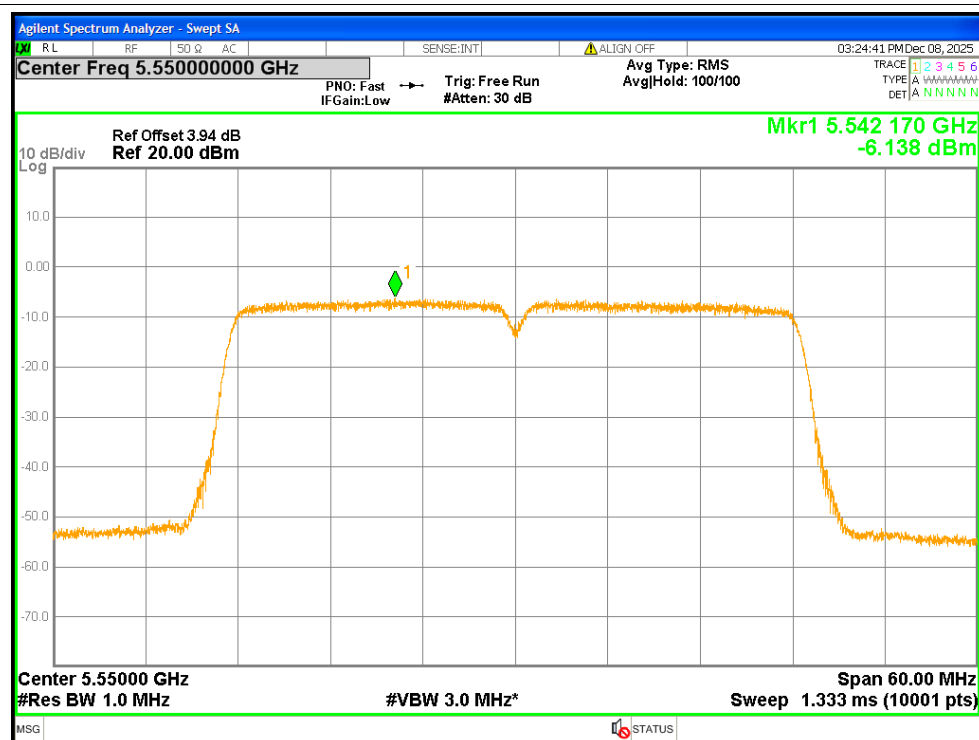


PSD NVNT ac40 5550MHz Ant2

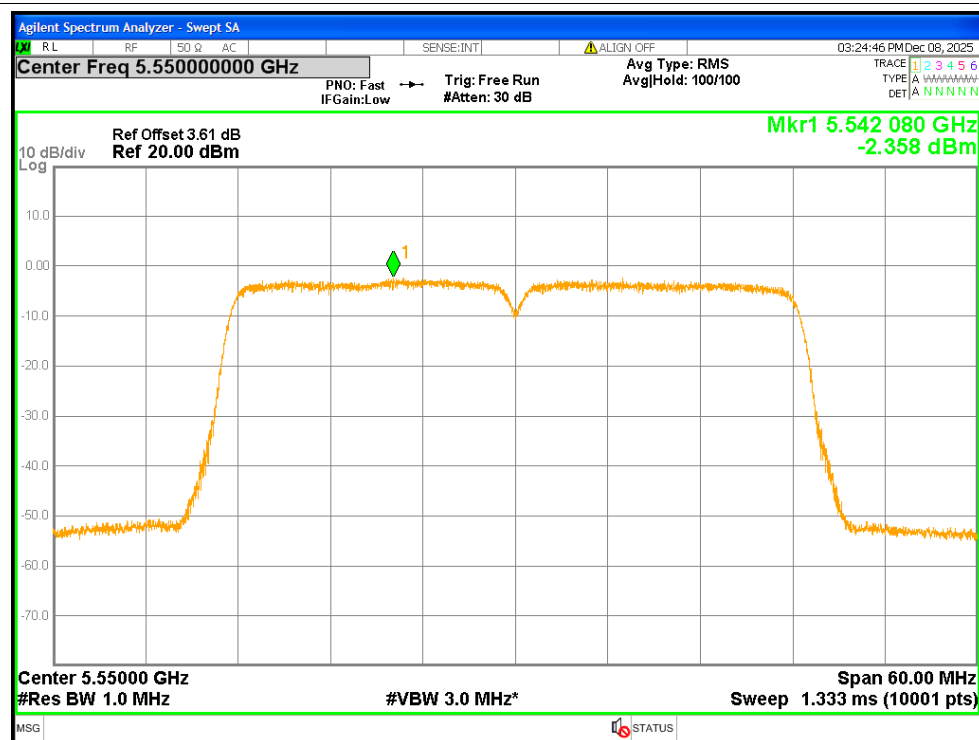


PSD NVNT ac40 5670MHz Ant1

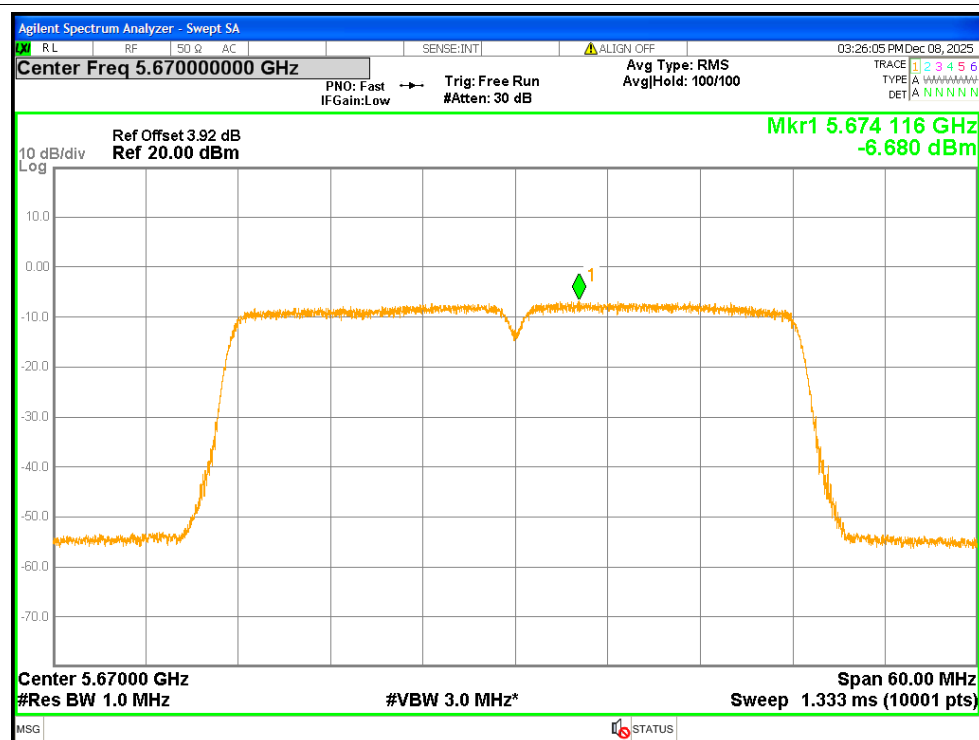


PSD NVNT ac40 5670MHz Ant2

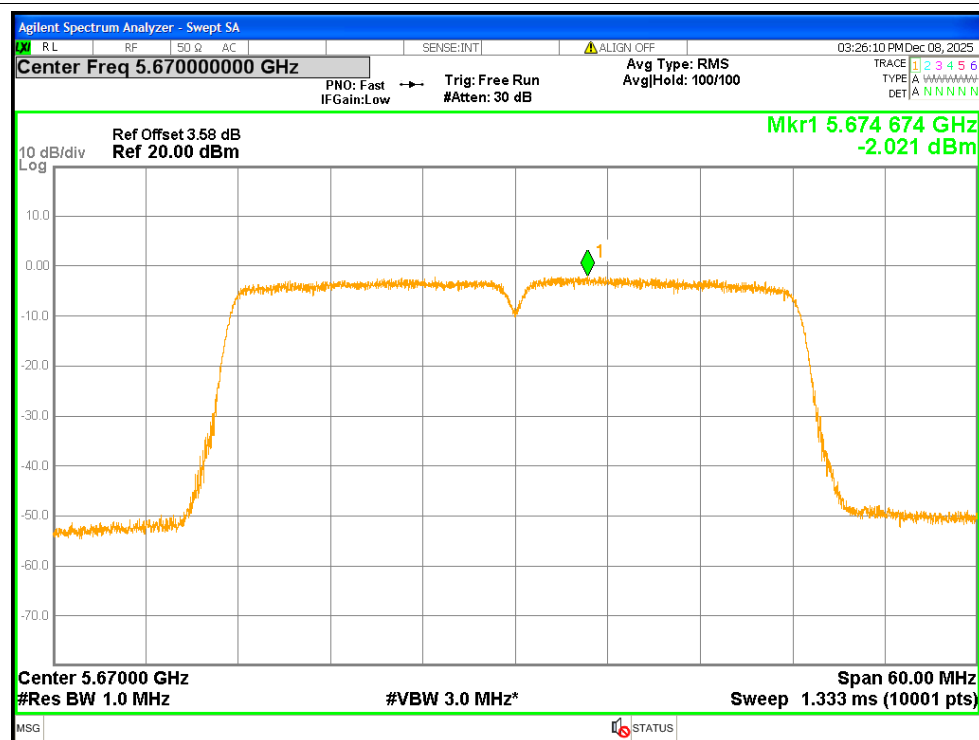


PSD NVNT ac80 5530MHz Ant1

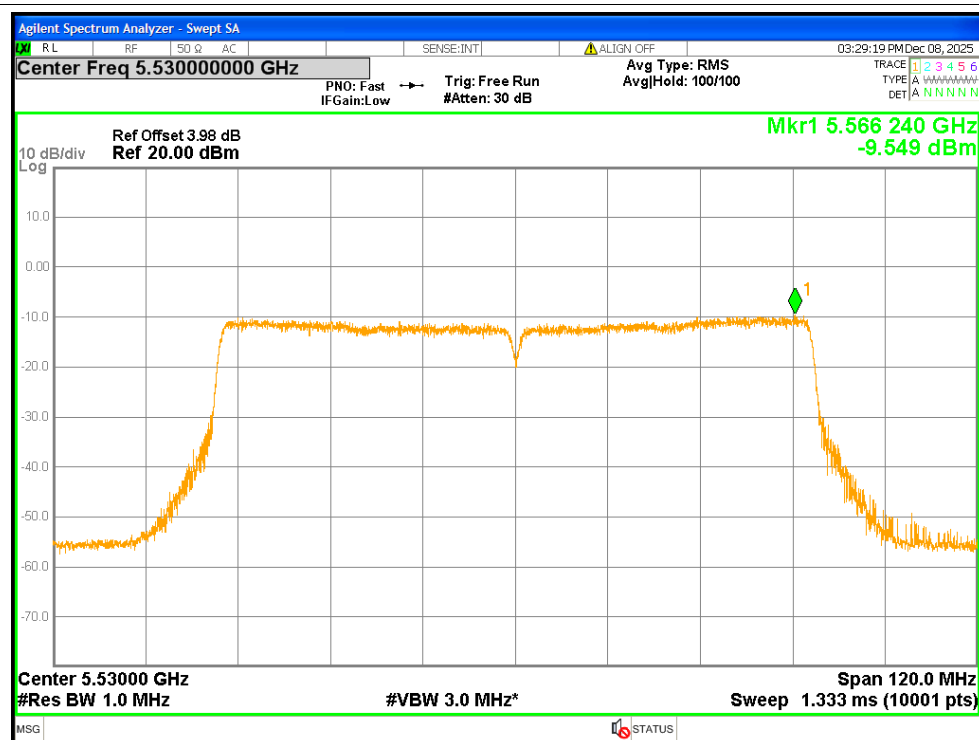

PSD NVNT ac80 5530MHz Ant2

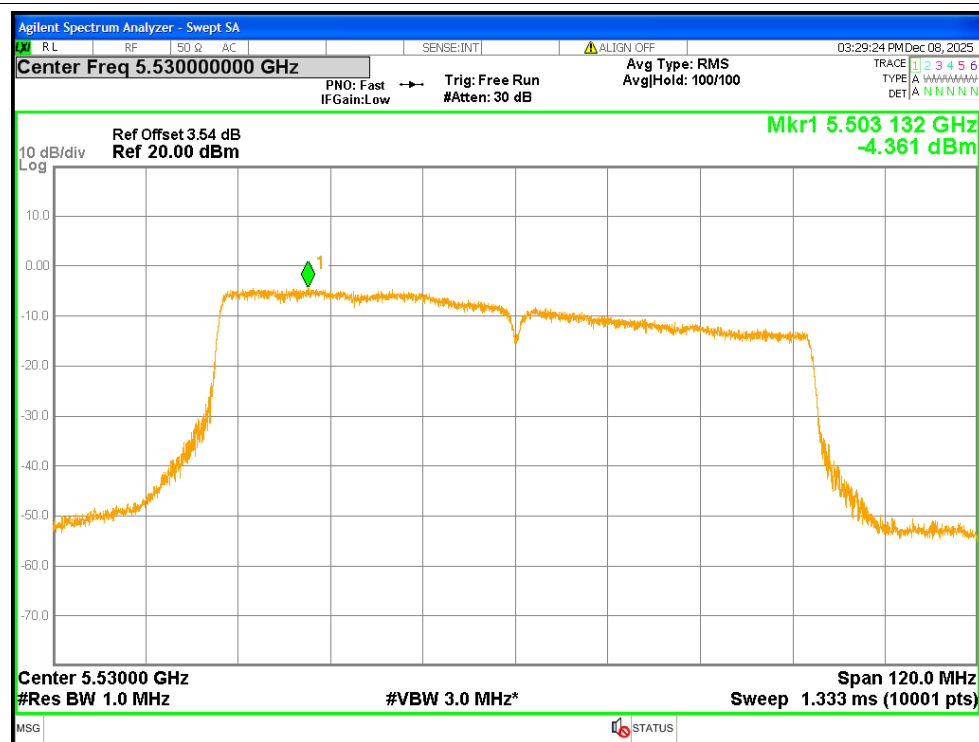

PSD NVNT ac80 5610MHz Ant1

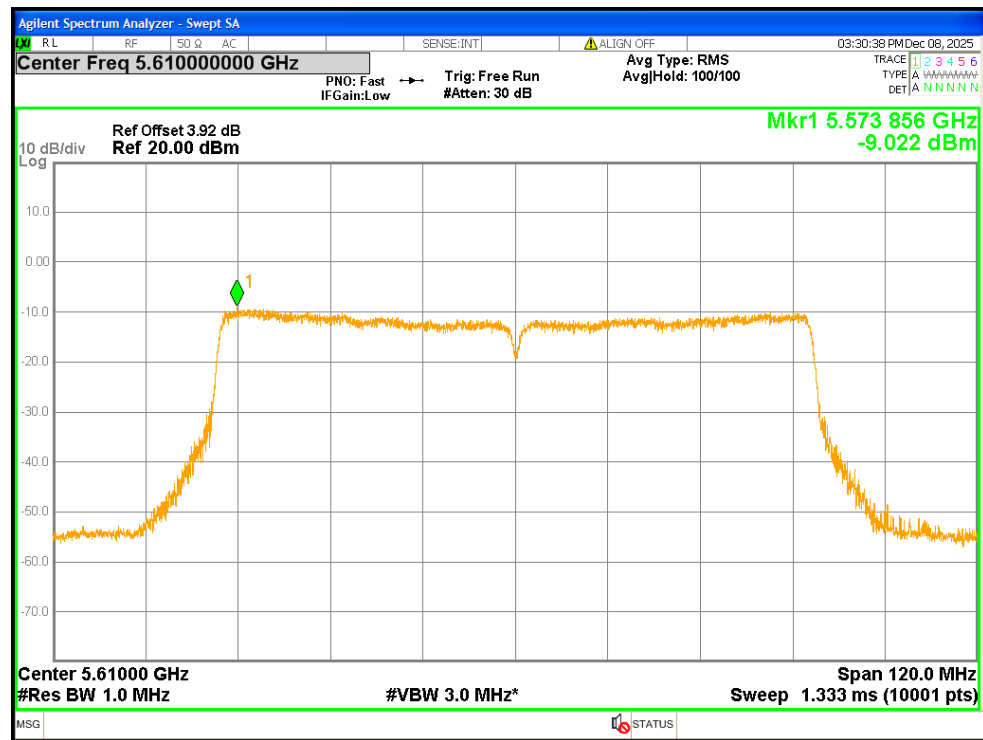

PSD NVNT ac80 5610MHz Ant2

