

## RF Test Data for 6G Wi-Fi (Conducted Measurements)

| General Description of EUT                                                                      |                        |
|-------------------------------------------------------------------------------------------------|------------------------|
| EUT Name:                                                                                       | AP5811SA               |
| Model:                                                                                          | AP5811SA               |
| Sample ID:                                                                                      | HC-C-202503-0077-01-01 |
| Test Standard:                                                                                  | FCC Part 15.407        |
| Environmental Conditions                                                                        |                        |
| Ambient Temperature:                                                                            | 25.5°C                 |
| Ambient Humidity:                                                                               | 46.2%RH                |
| Test Power Supply:                                                                              | DC 3.3V                |
| Test Engineer:                                                                                  | Gold zhang             |
| Note: For a more detailed features description, please refer to the report TBR-C-202503-0077-43 |                        |

## Contents

|                                                                              |    |
|------------------------------------------------------------------------------|----|
| Appendix 1: Emission Bandwidth .....                                         | 3  |
| 1.1 Test Result .....                                                        | 3  |
| 1.2 Test Graphs .....                                                        | 4  |
| Appendix 2: Occupied channel bandwidth .....                                 | 11 |
| 2.1 Test Result .....                                                        | 11 |
| 2.2 Test Graphs .....                                                        | 12 |
| Appendix 3: Duty Cycle .....                                                 | 19 |
| 3.1 Test Result .....                                                        | 19 |
| 3.2 Test Graphs .....                                                        | 20 |
| Appendix 4: Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) ..... | 27 |
| 4.1 Test Result .....                                                        | 27 |
| Appendix 5: Maximum power spectral density(E.I.R.P.) .....                   | 28 |
| 5.1 Test Result .....                                                        | 28 |
| 5.2 Test Graphs .....                                                        | 29 |
| Appendix 6: InBand Emissions .....                                           | 36 |
| 6.1 Test Result .....                                                        | 36 |
| Appendix 7: Conducted Spurious Emission .....                                | 44 |
| 7.1 Test Result .....                                                        | 44 |
| 7.2 Test Graphs .....                                                        | 47 |
| Appendix 8: Contention Based Protocol .....                                  | 66 |
| 8.1 Test Result .....                                                        | 66 |
| 8.2 Test Graphs .....                                                        | 68 |
| Appendix 9: Frequency Stability .....                                        | 79 |
| 9.1 Test Result .....                                                        | 79 |


## Appendix 1: Emission Bandwidth



### 1.1 Test Result

| TestMode   | Antenna | Frequency[MHz] | 26db EBW [MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|------------|---------|----------------|----------------|---------|---------|------------|---------|
| 11AX20SISO | Ant1    | 5955           | 21.24          | 5944.40 | 5965.64 | ---        | ---     |
| 11AX20SISO | Ant1    | 6175           | 21.56          | 6164.16 | 6185.72 | ---        | ---     |
| 11AX20SISO | Ant1    | 6415           | 21.56          | 6404.28 | 6425.84 | ---        | ---     |
| 11AX20SISO | Ant1    | 6435           | 21.44          | 6424.28 | 6445.72 | ---        | ---     |
| 11AX20SISO | Ant1    | 6475           | 21.64          | 6464.24 | 6485.88 | ---        | ---     |
| 11AX20SISO | Ant1    | 6515           | 21.36          | 6504.28 | 6525.64 | ---        | ---     |
| 11AX20SISO | Ant1    | 6535           | 21.44          | 6524.32 | 6545.76 | ---        | ---     |
| 11AX20SISO | Ant1    | 6695           | 21.32          | 6684.24 | 6705.56 | ---        | ---     |
| 11AX20SISO | Ant1    | 6855           | 21.40          | 6844.36 | 6865.76 | ---        | ---     |
| 11AX20SISO | Ant1    | 6875           | 21.32          | 6864.32 | 6885.64 | ---        | ---     |
| 11AX20SISO | Ant1    | 6895           | 21.52          | 6884.16 | 6905.68 | ---        | ---     |
| 11AX20SISO | Ant1    | 6995           | 21.44          | 6984.20 | 7005.64 | ---        | ---     |
| 11AX20SISO | Ant1    | 7115           | 21.60          | 7104.20 | 7125.80 | ---        | ---     |
| 11AX40SISO | Ant1    | 5965           | 40.08          | 5944.84 | 5984.92 | ---        | ---     |
| 11AX40SISO | Ant1    | 6165           | 40.16          | 6144.84 | 6185.00 | ---        | ---     |
| 11AX40SISO | Ant1    | 6405           | 40.56          | 6384.52 | 6425.08 | ---        | ---     |
| 11AX40SISO | Ant1    | 6445           | 40.00          | 6425.00 | 6465.00 | ---        | ---     |
| 11AX40SISO | Ant1    | 6485           | 40.24          | 6464.84 | 6505.08 | ---        | ---     |
| 11AX40SISO | Ant1    | 6525           | 39.92          | 6504.92 | 6544.84 | ---        | ---     |
| 11AX40SISO | Ant1    | 6565           | 40.00          | 6545.00 | 6585.00 | ---        | ---     |
| 11AX40SISO | Ant1    | 6685           | 40.16          | 6664.76 | 6704.92 | ---        | ---     |
| 11AX40SISO | Ant1    | 6845           | 40.08          | 6824.92 | 6865.00 | ---        | ---     |
| 11AX40SISO | Ant1    | 6885           | 40.08          | 6864.84 | 6904.92 | ---        | ---     |
| 11AX40SISO | Ant1    | 6925           | 40.08          | 6904.92 | 6945.00 | ---        | ---     |
| 11AX40SISO | Ant1    | 6965           | 40.32          | 6944.76 | 6985.08 | ---        | ---     |
| 11AX40SISO | Ant1    | 7085           | 40.08          | 7064.92 | 7105.00 | ---        | ---     |
| 11AX80SISO | Ant1    | 5985           | 83.84          | 5943.24 | 6027.08 | ---        | ---     |
| 11AX80SISO | Ant1    | 6145           | 84.48          | 6102.60 | 6187.08 | ---        | ---     |
| 11AX80SISO | Ant1    | 6385           | 84.00          | 6342.92 | 6426.92 | ---        | ---     |
| 11AX80SISO | Ant1    | 6465           | 84.32          | 6422.60 | 6506.92 | ---        | ---     |
| 11AX80SISO | Ant1    | 6545           | 84.00          | 6502.92 | 6586.92 | ---        | ---     |
| 11AX80SISO | Ant1    | 6625           | 84.64          | 6582.60 | 6667.24 | ---        | ---     |
| 11AX80SISO | Ant1    | 6705           | 84.64          | 6662.28 | 6746.92 | ---        | ---     |
| 11AX80SISO | Ant1    | 6785           | 84.48          | 6742.76 | 6827.24 | ---        | ---     |
| 11AX80SISO | Ant1    | 6865           | 84.80          | 6822.44 | 6907.24 | ---        | ---     |
| 11AX80SISO | Ant1    | 6945           | 84.00          | 6902.76 | 6986.76 | ---        | ---     |
| 11AX80SISO | Ant1    | 7025           | 84.80          | 6982.12 | 7066.92 | ---        | ---     |

Note: RF Conducted test Offset= cable loss+ Attenuator(10dB).



## 1.2 Test Graphs

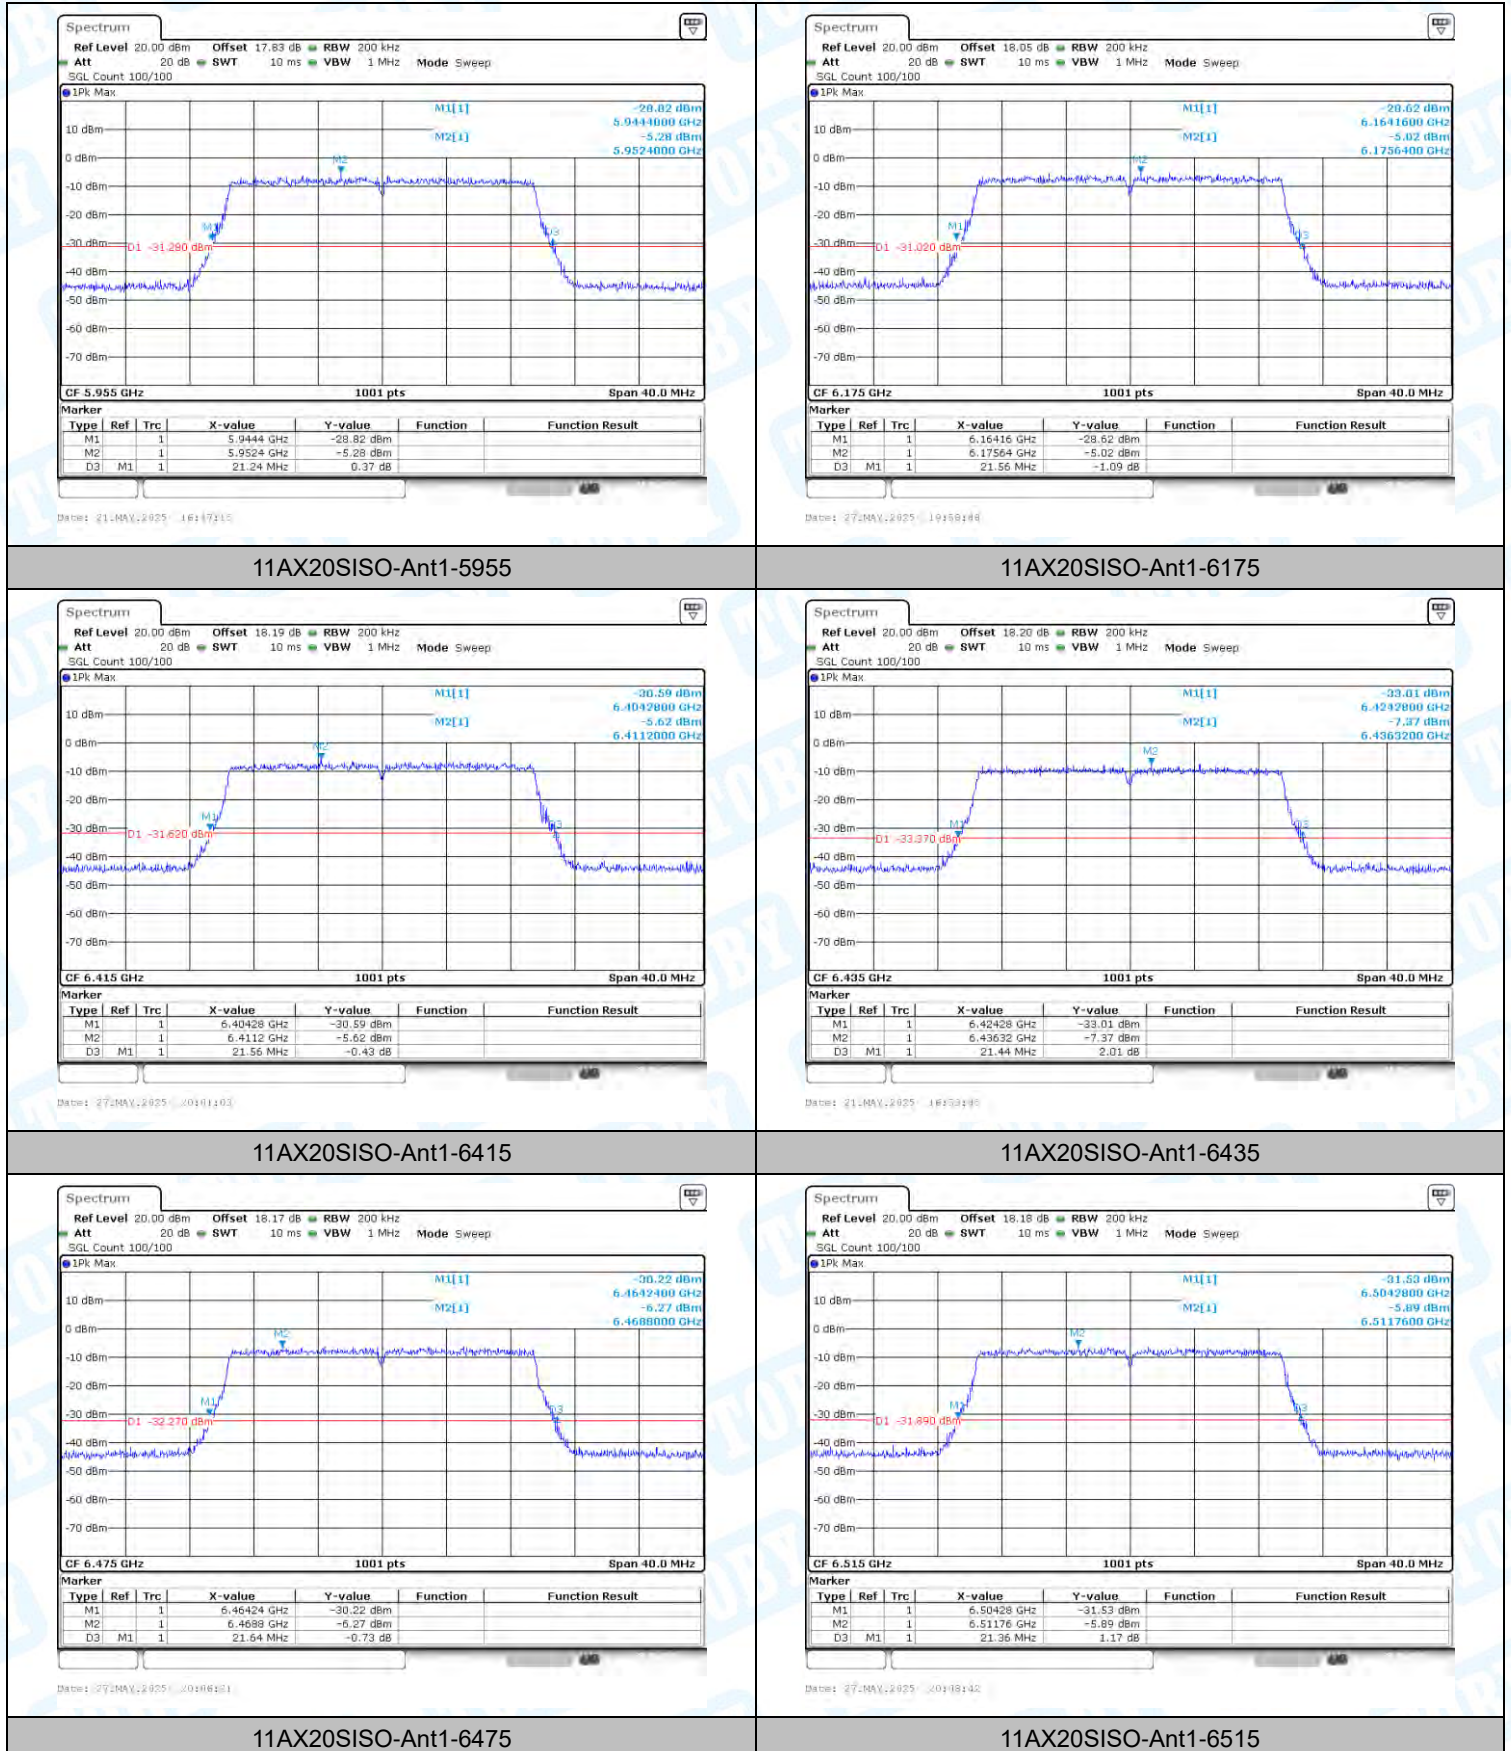

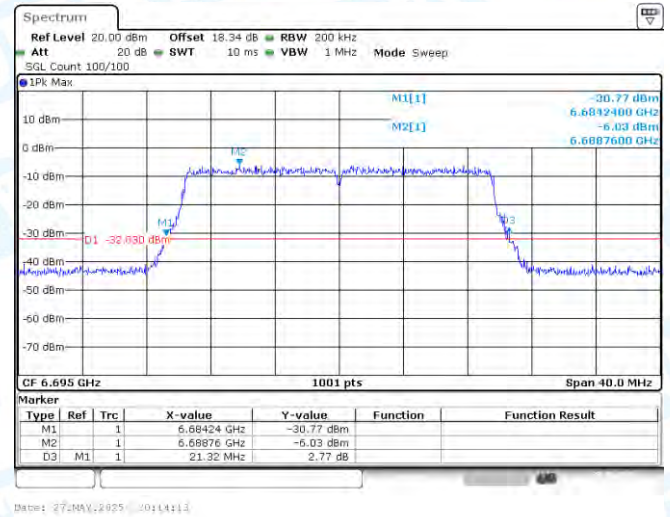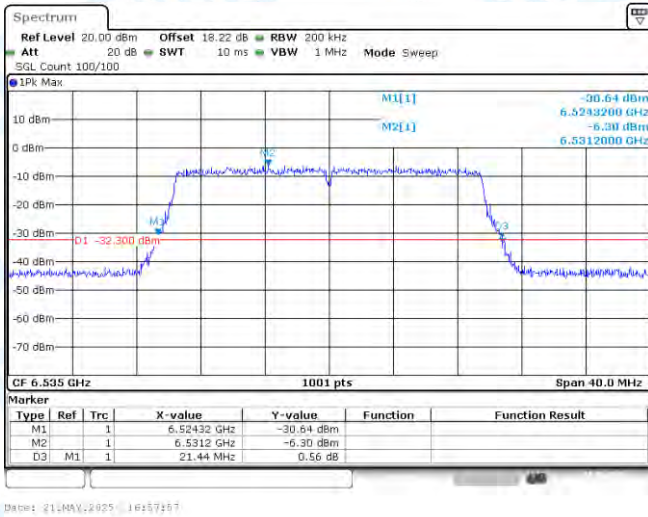



11AX20SISO-Ant1-6535

11AX20SISO-Ant1-6695

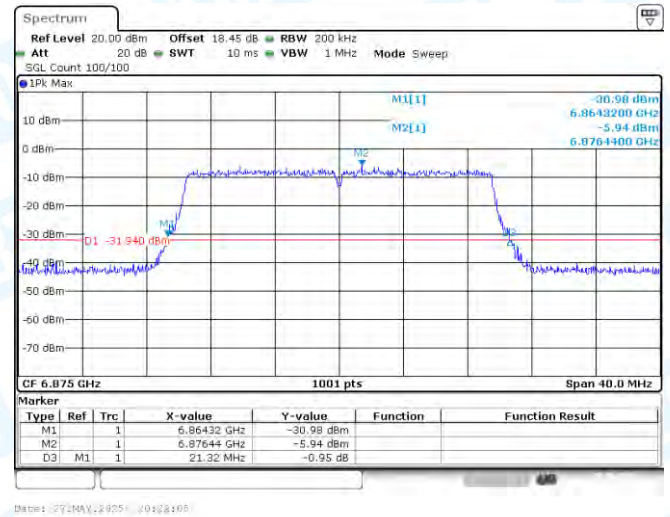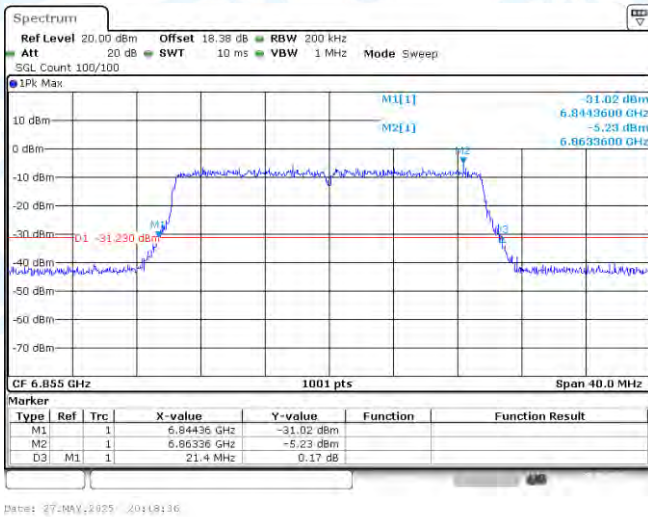



11AX20SISO-Ant1-6855

11AX20SISO-Ant1-6875

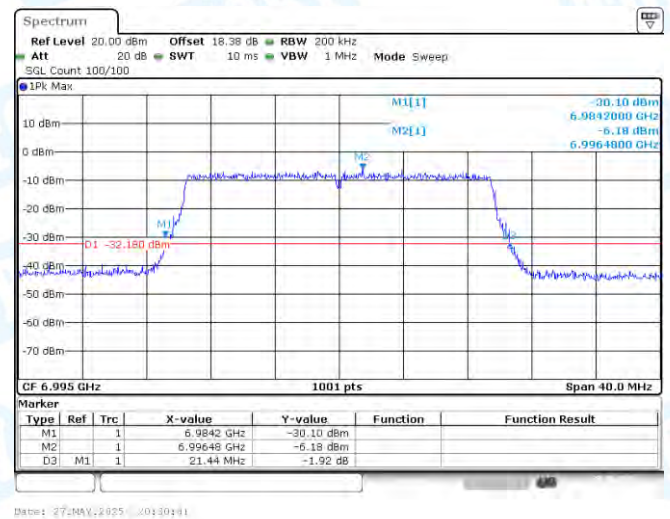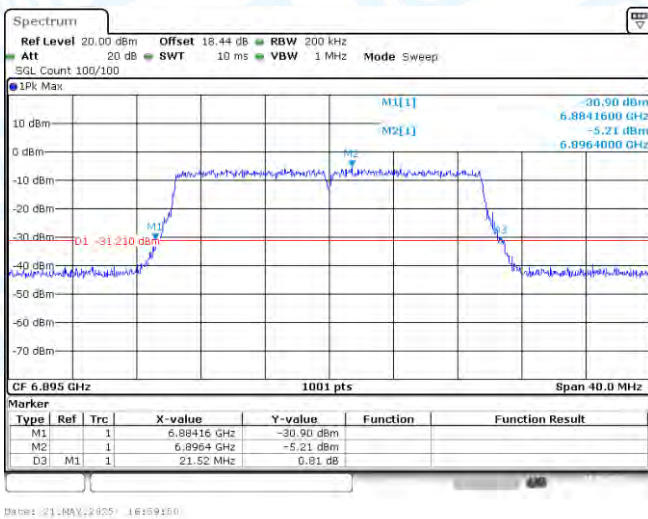



11AX20SISO-Ant1-6895

11AX20SISO-Ant1-6995

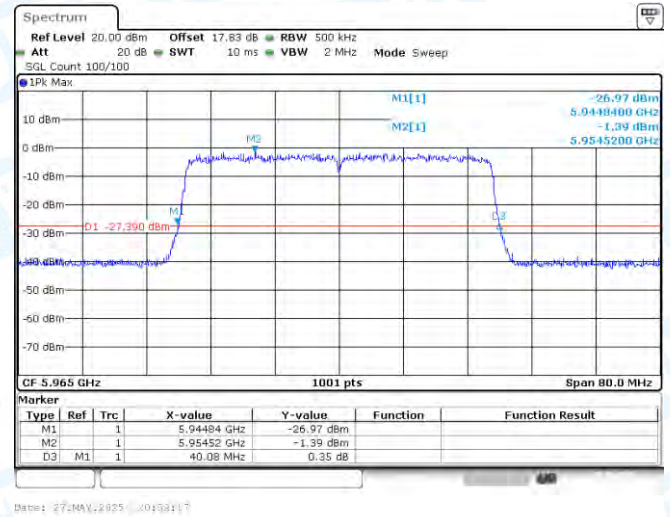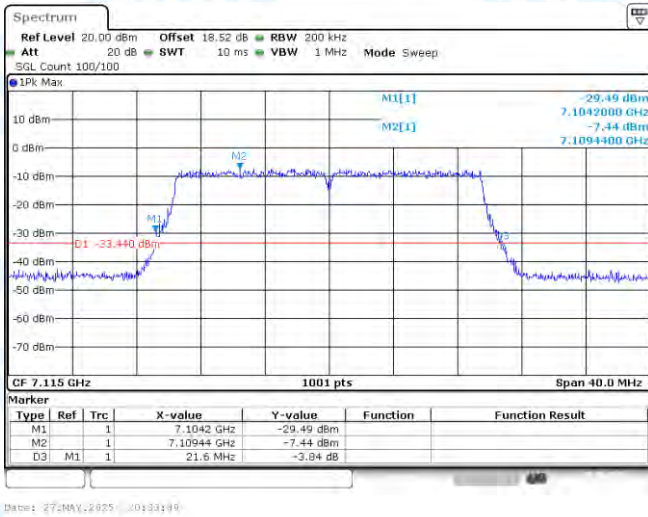



11AX20ISO-Ant1-7115

11AX40ISO-Ant1-5965

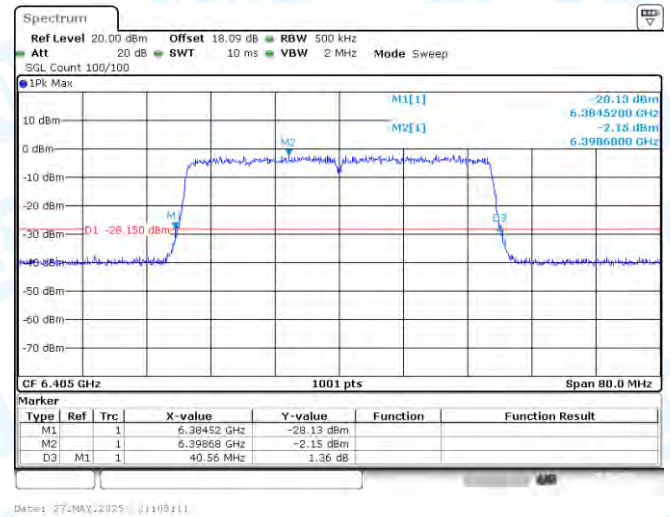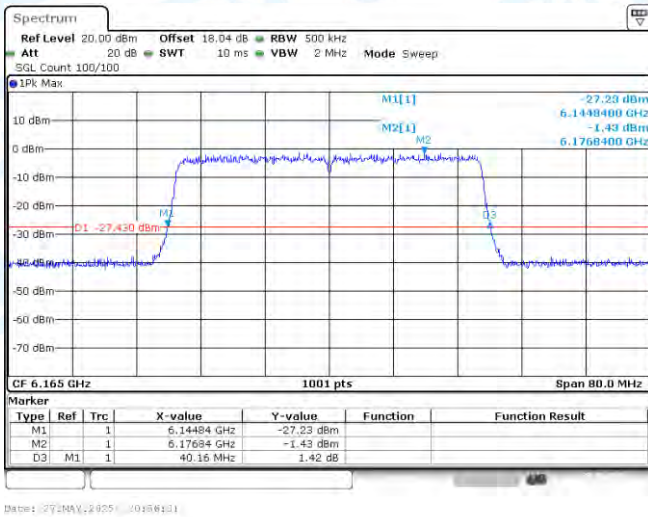



11AX40ISO-Ant1-6165

11AX40ISO-Ant1-6405

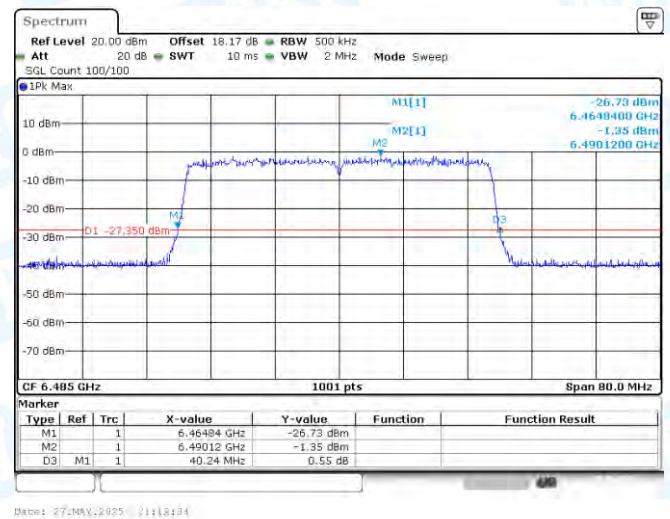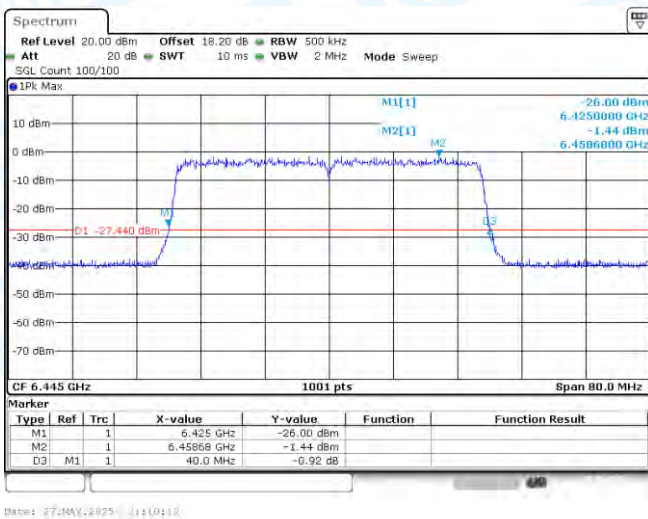



11AX40ISO-Ant1-6445

11AX40ISO-Ant1-6485

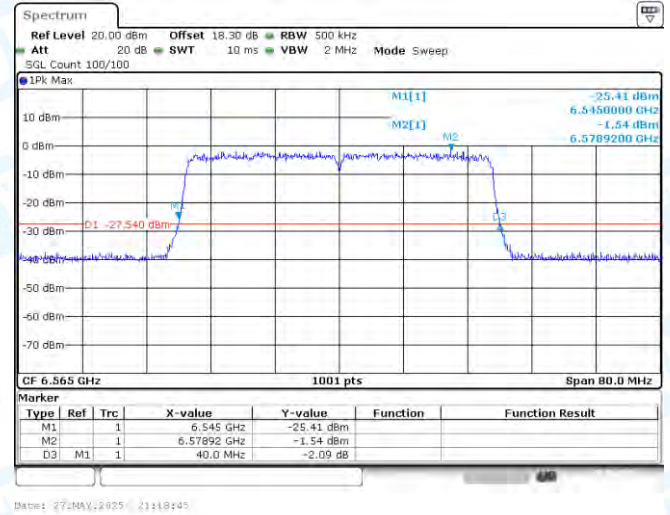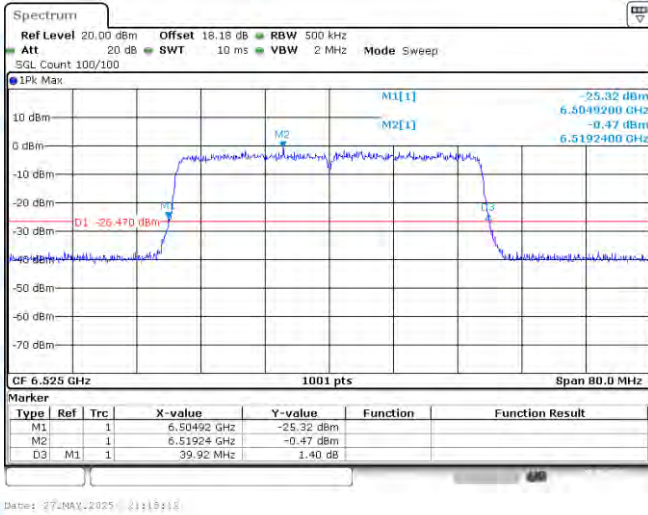



11AX40SISO-Ant1-6525

11AX40SISO-Ant1-6565

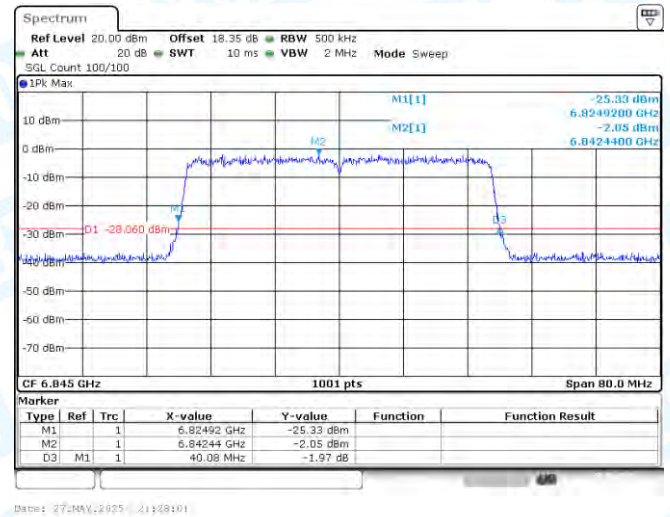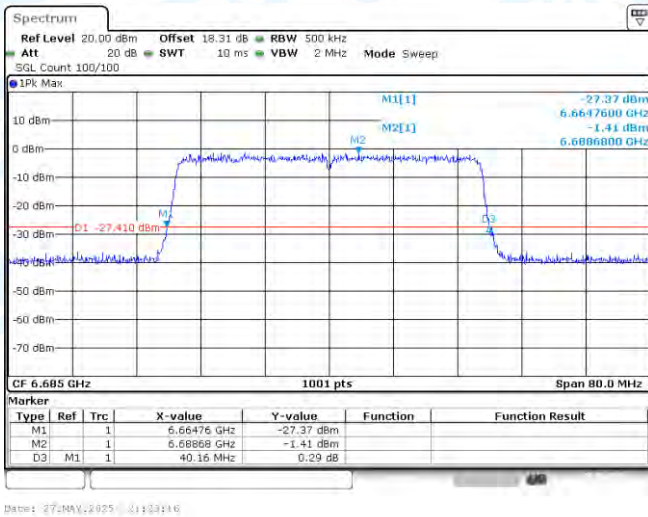



11AX40SISO-Ant1-6685

11AX40SISO-Ant1-6845

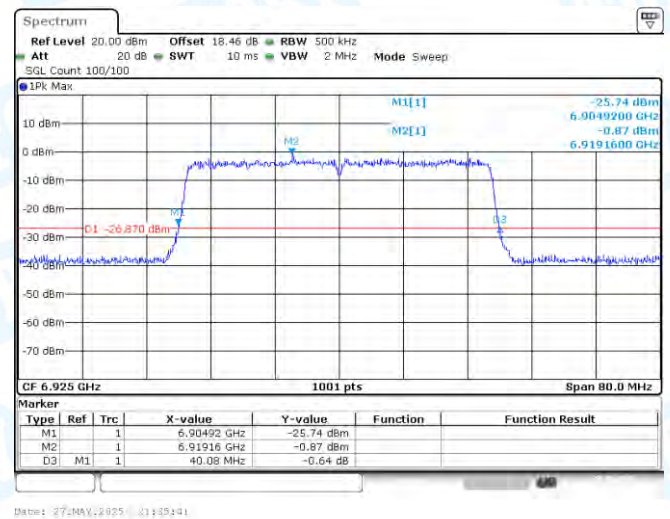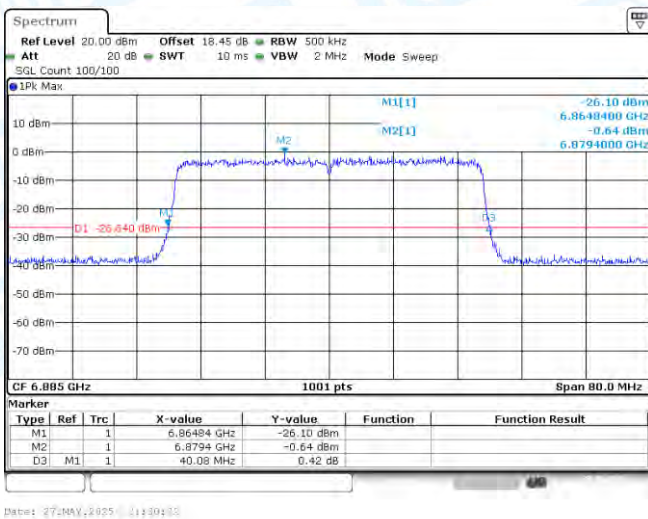



11AX40SISO-Ant1-6885

11AX40SISO-Ant1-6925

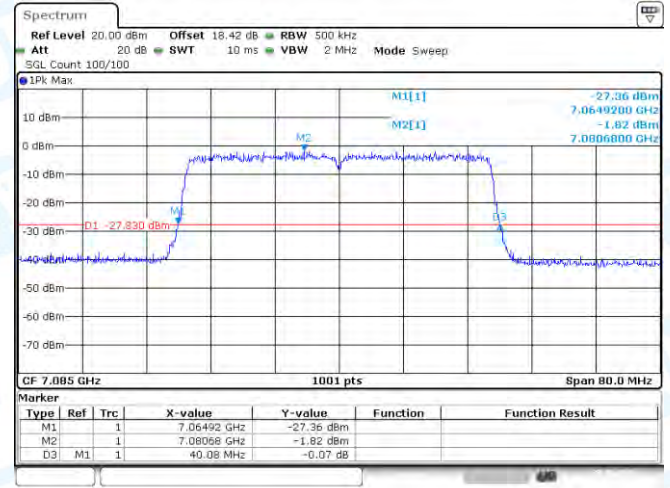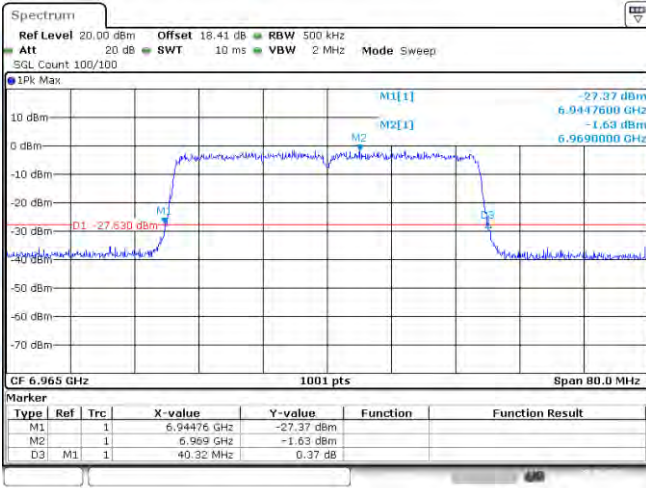



11AX40SISO-Ant1-6965

11AX40SISO-Ant1-7085

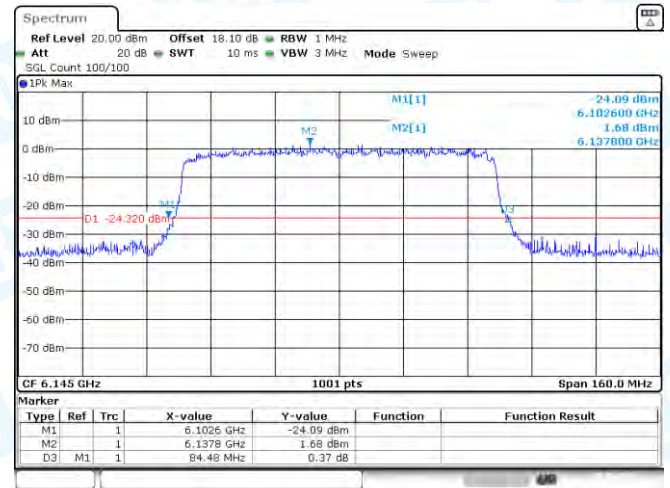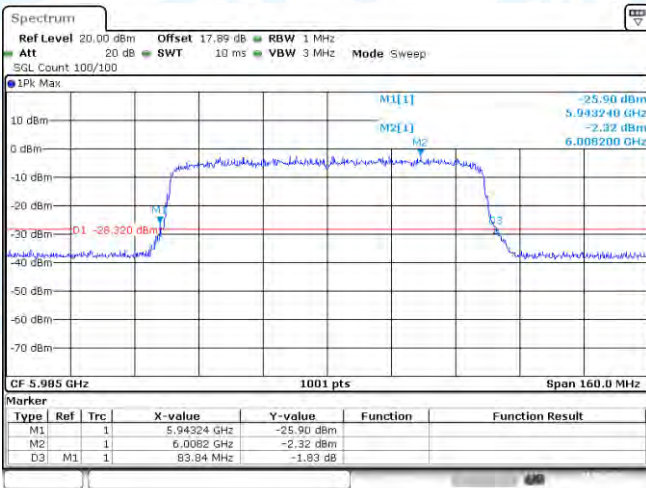


11AX80SISO-Ant1-5985

11AX80SISO-Ant1-6145

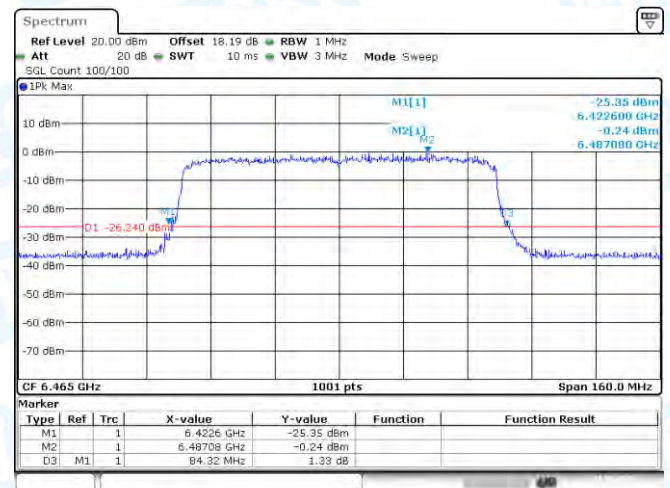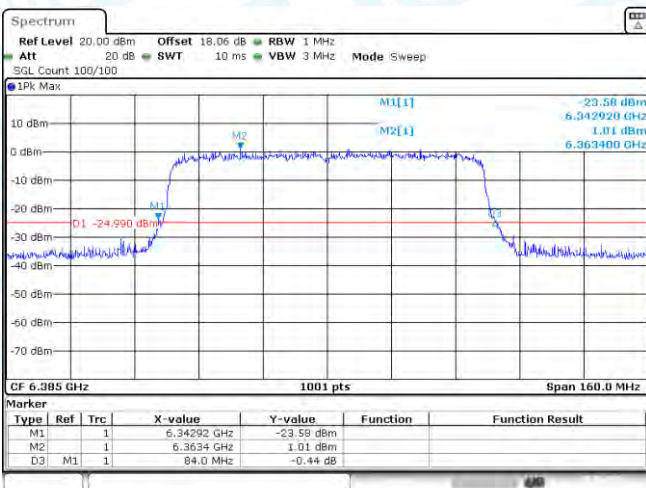


11AX80SISO-Ant1-6385


11AX80SISO-Ant1-6465

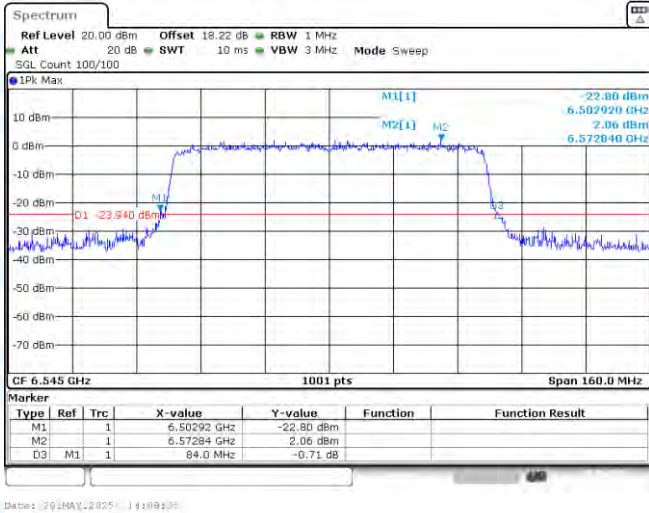


11AX80SISO-Ant1-6545

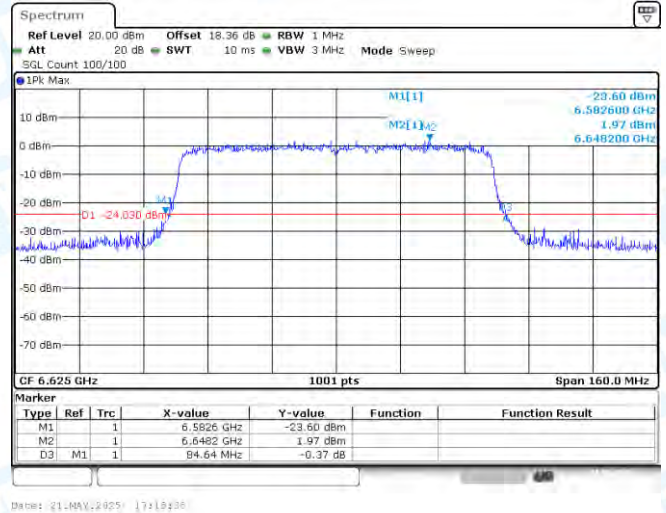


11AX80SISO-Ant1-6625

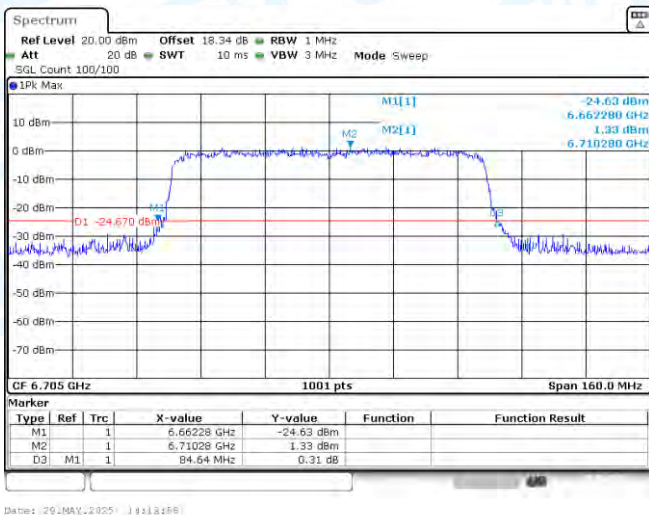


11AX80SISO-Ant1-6705

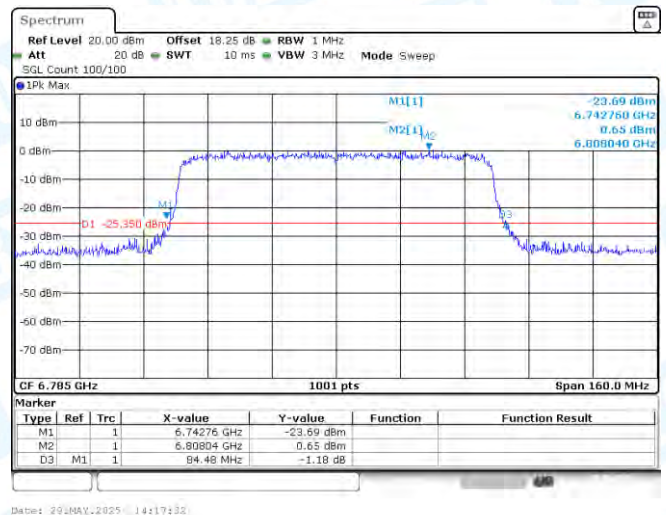


11AX80SISO-Ant1-6785

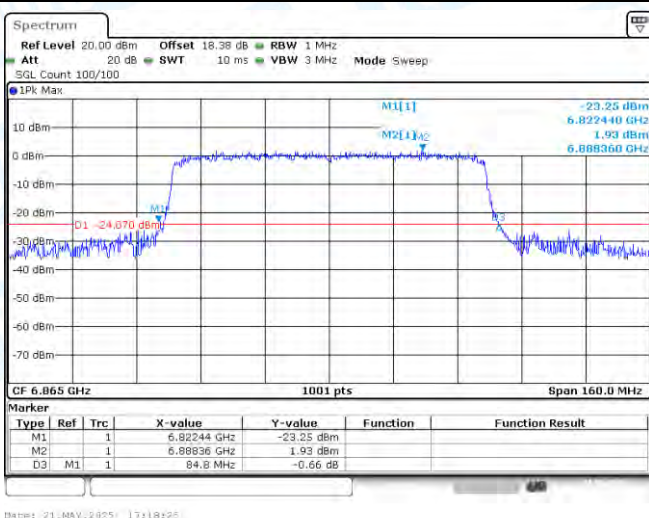

11AX80SISO-Ant1-6865

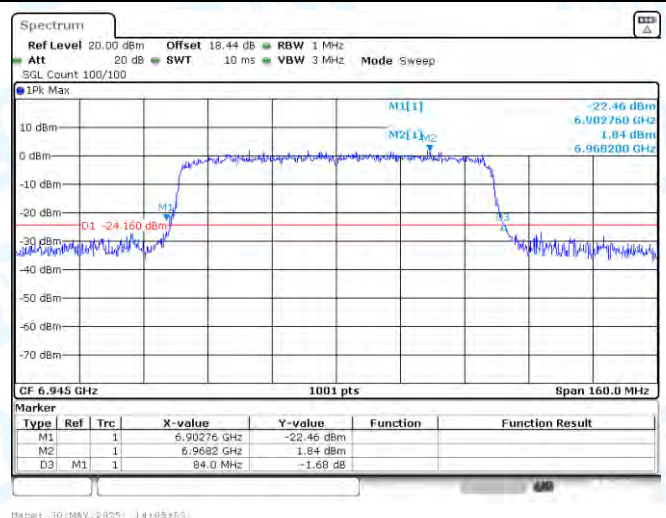

11AX80SISO-Ant1-6945

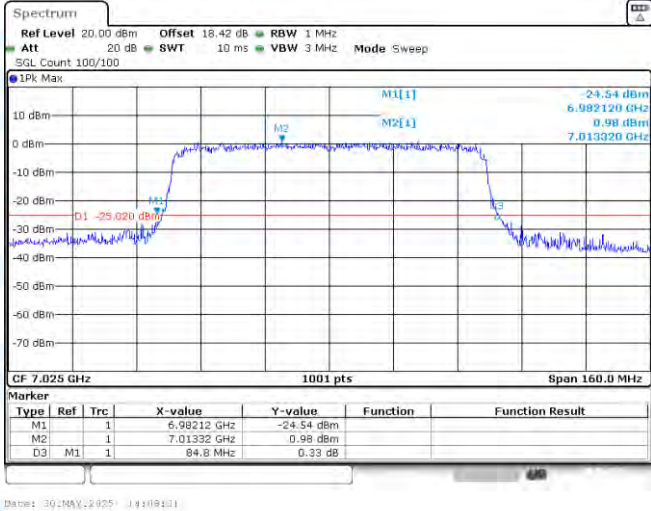

11AX80SISO-Ant1-7025

## Appendix 2: Occupied channel bandwidth

### 2.1 Test Result


| TestMode   | Antenna | Frequency[MHz] | OCB [MHz] | FL[MHz]   | FH[MHz]   | Limit[MHz] | Verdict |
|------------|---------|----------------|-----------|-----------|-----------|------------|---------|
| 11AX20SISO | Ant1    | 5955           | 19.301    | 5945.2897 | 5964.5904 | ≤320       | PASS    |
| 11AX20SISO | Ant1    | 6175           | 19.221    | 6165.3696 | 6184.5904 | ≤320       | PASS    |
| 11AX20SISO | Ant1    | 6415           | 19.181    | 6405.3696 | 6424.5504 | ≤320       | PASS    |
| 11AX20SISO | Ant1    | 6435           | 19.301    | 6425.2897 | 6444.5904 | ≤320       | PASS    |
| 11AX20SISO | Ant1    | 6475           | 19.261    | 6465.3297 | 6484.5904 | ≤320       | PASS    |
| 11AX20SISO | Ant1    | 6515           | 19.341    | 6505.2897 | 6524.6304 | ≤320       | PASS    |
| 11AX20SISO | Ant1    | 6535           | 19.181    | 6525.3696 | 6544.5504 | ≤320       | PASS    |
| 11AX20SISO | Ant1    | 6695           | 19.261    | 6685.3696 | 6704.6304 | ≤320       | PASS    |
| 11AX20SISO | Ant1    | 6855           | 19.221    | 6845.3696 | 6864.5904 | ≤320       | PASS    |
| 11AX20SISO | Ant1    | 6875           | 19.221    | 6865.3696 | 6884.5904 | ≤320       | PASS    |
| 11AX20SISO | Ant1    | 6895           | 19.261    | 6885.3297 | 6904.5904 | ≤320       | PASS    |
| 11AX20SISO | Ant1    | 6995           | 19.301    | 6985.2897 | 7004.5904 | ≤320       | PASS    |
| 11AX20SISO | Ant1    | 7115           | 19.301    | 7105.3297 | 7124.6304 | ≤320       | PASS    |
| 11AX40SISO | Ant1    | 5965           | 37.802    | 5946.0589 | 5983.8611 | ≤320       | PASS    |
| 11AX40SISO | Ant1    | 6165           | 37.802    | 6146.0589 | 6183.8611 | ≤320       | PASS    |
| 11AX40SISO | Ant1    | 6405           | 37.802    | 6386.0589 | 6423.8611 | ≤320       | PASS    |
| 11AX40SISO | Ant1    | 6445           | 37.802    | 6426.0589 | 6463.8611 | ≤320       | PASS    |
| 11AX40SISO | Ant1    | 6485           | 37.802    | 6466.0589 | 6503.8611 | ≤320       | PASS    |
| 11AX40SISO | Ant1    | 6525           | 37.802    | 6506.0589 | 6543.8611 | ≤320       | PASS    |
| 11AX40SISO | Ant1    | 6565           | 37.882    | 6546.0589 | 6583.9411 | ≤320       | PASS    |
| 11AX40SISO | Ant1    | 6685           | 37.802    | 6666.0589 | 6703.8611 | ≤320       | PASS    |
| 11AX40SISO | Ant1    | 6845           | 37.802    | 6826.0589 | 6863.8611 | ≤320       | PASS    |
| 11AX40SISO | Ant1    | 6885           | 37.722    | 6866.1389 | 6903.8611 | ≤320       | PASS    |
| 11AX40SISO | Ant1    | 6925           | 37.802    | 6906.0589 | 6943.8611 | ≤320       | PASS    |
| 11AX40SISO | Ant1    | 6965           | 37.802    | 6946.0589 | 6983.8611 | ≤320       | PASS    |
| 11AX40SISO | Ant1    | 7085           | 37.802    | 7066.0589 | 7103.8611 | ≤320       | PASS    |
| 11AX80SISO | Ant1    | 5985           | 77.043    | 5946.4785 | 6023.5215 | ≤320       | PASS    |
| 11AX80SISO | Ant1    | 6145           | 76.883    | 6106.6384 | 6183.5215 | ≤320       | PASS    |
| 11AX80SISO | Ant1    | 6385           | 77.203    | 6346.4785 | 6423.6813 | ≤320       | PASS    |
| 11AX80SISO | Ant1    | 6465           | 77.203    | 6426.3187 | 6503.5215 | ≤320       | PASS    |
| 11AX80SISO | Ant1    | 6545           | 77.043    | 6506.4785 | 6583.5215 | ≤320       | PASS    |
| 11AX80SISO | Ant1    | 6625           | 77.363    | 6586.3187 | 6663.6813 | ≤320       | PASS    |
| 11AX80SISO | Ant1    | 6705           | 77.203    | 6666.3187 | 6743.5215 | ≤320       | PASS    |
| 11AX80SISO | Ant1    | 6785           | 77.203    | 6746.4785 | 6823.6813 | ≤320       | PASS    |
| 11AX80SISO | Ant1    | 6865           | 77.043    | 6826.4785 | 6903.5215 | ≤320       | PASS    |
| 11AX80SISO | Ant1    | 6945           | 77.203    | 6906.3187 | 6983.5215 | ≤320       | PASS    |
| 11AX80SISO | Ant1    | 7025           | 77.203    | 6986.4785 | 7063.6813 | ≤320       | PASS    |

Note: RF Conducted test Offset= cable loss+ Attenuator(10dB).


## 2.2 Test Graphs




11AX20SISO-Ant1-5955-PASS

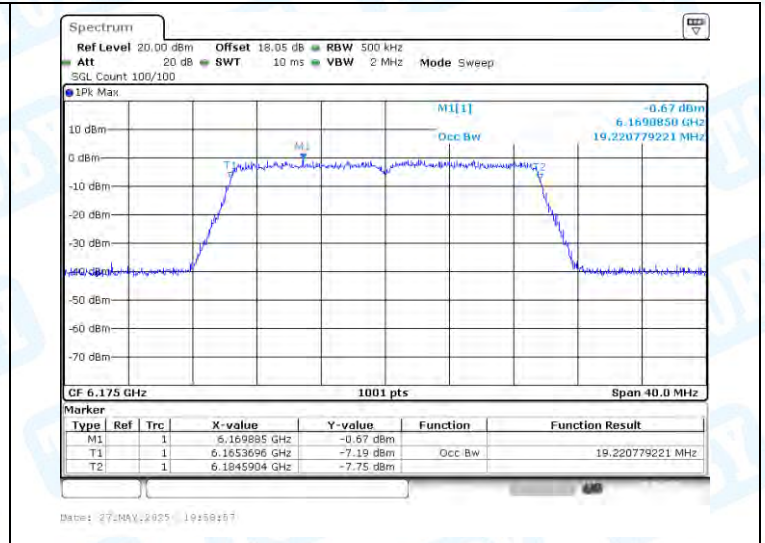


11AX20SISO-Ant1-6175-PASS

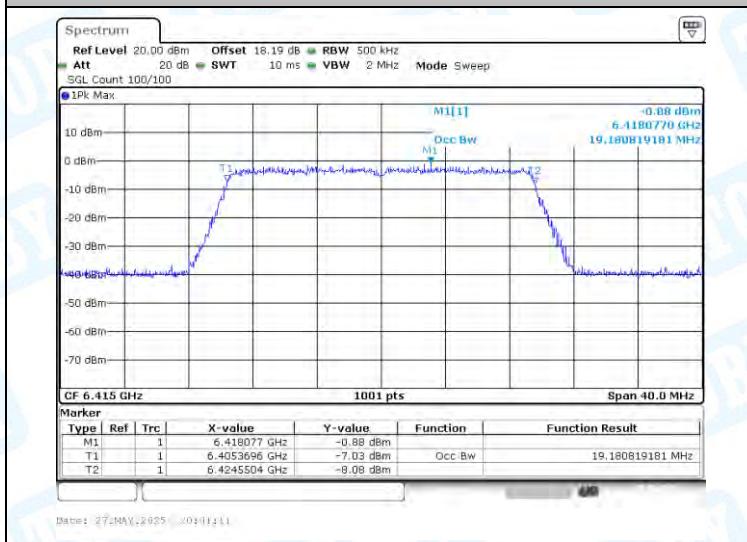


11AX20SISO-Ant1-6415-PASS

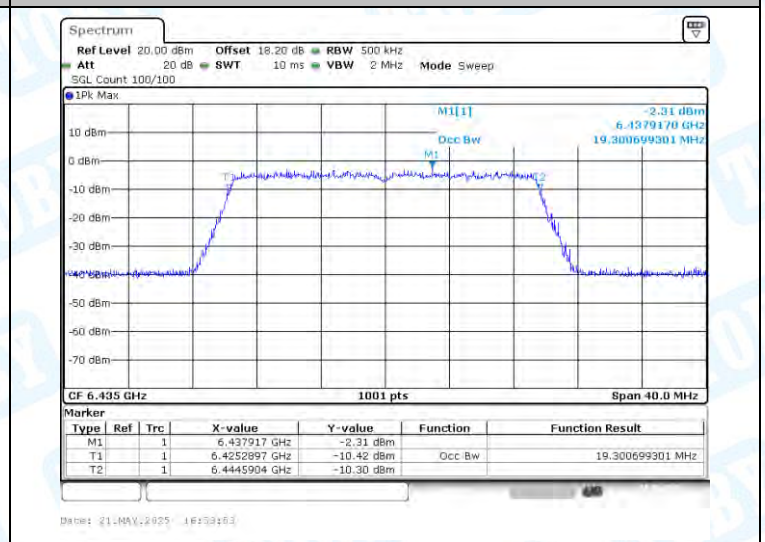



11AX20SISO-Ant1-6435-PASS

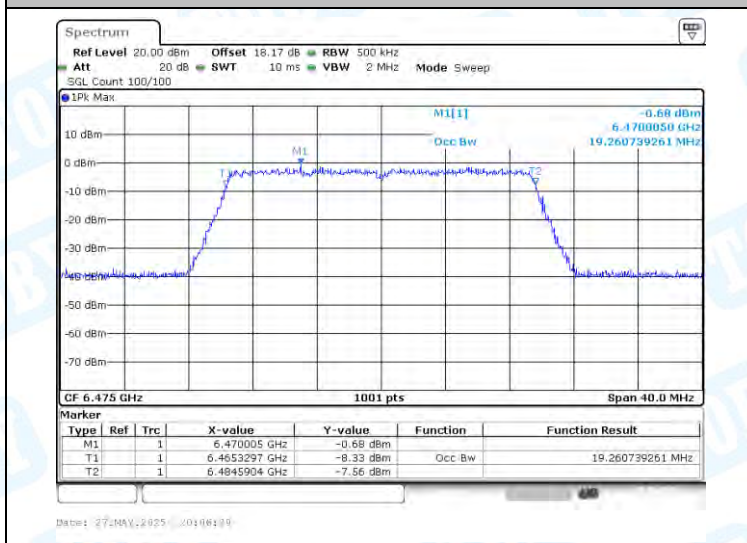

11AX20SISO-Ant1-6475-PASS


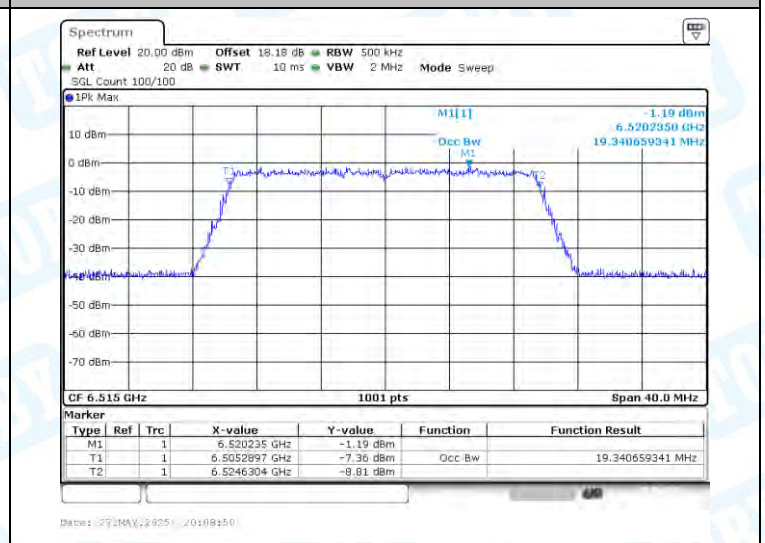


11AX20SISO-Ant1-6515-PASS

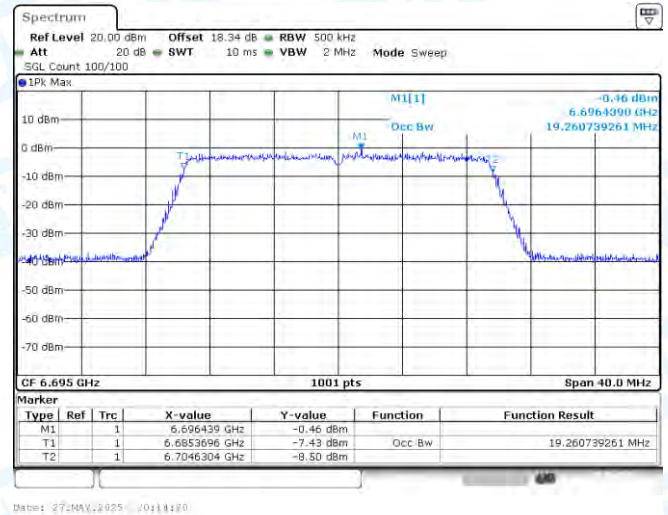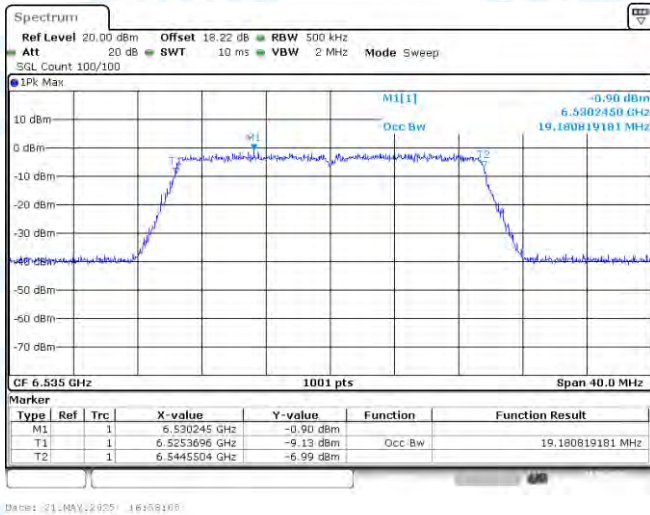



11AX20ISO-Ant1-6535-PASS

11AX20ISO-Ant1-6695-PASS

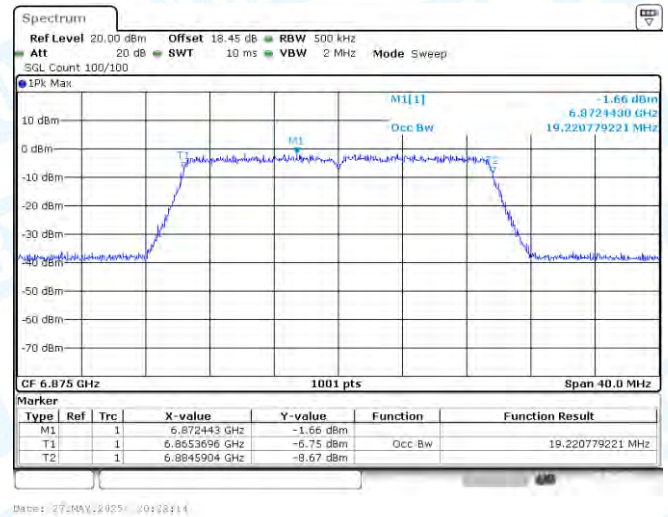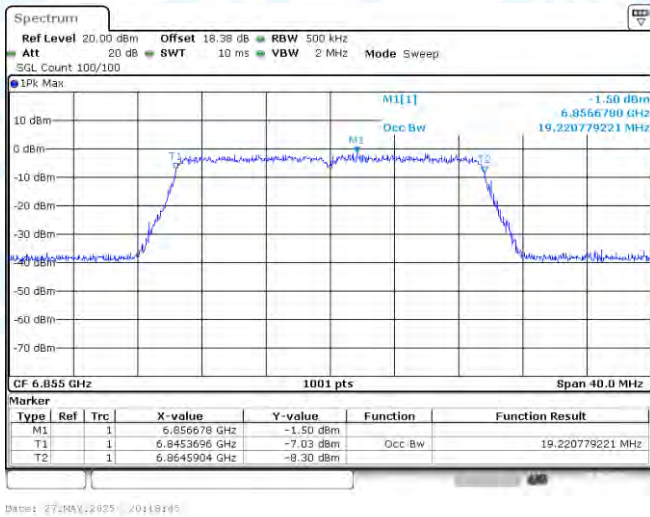



11AX20ISO-Ant1-6855-PASS

11AX20ISO-Ant1-6875-PASS

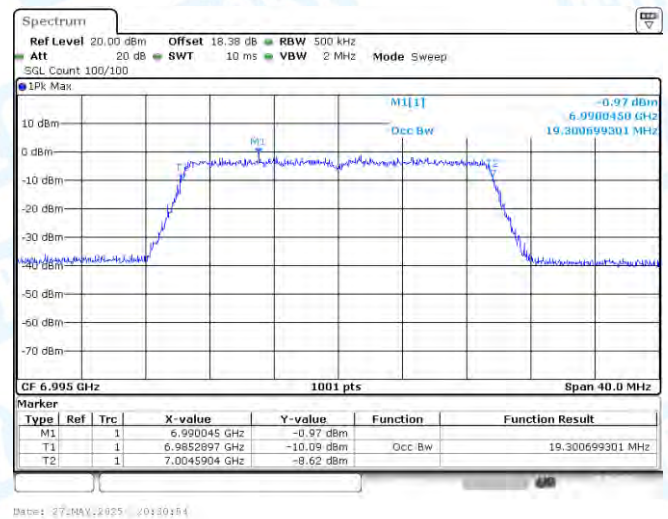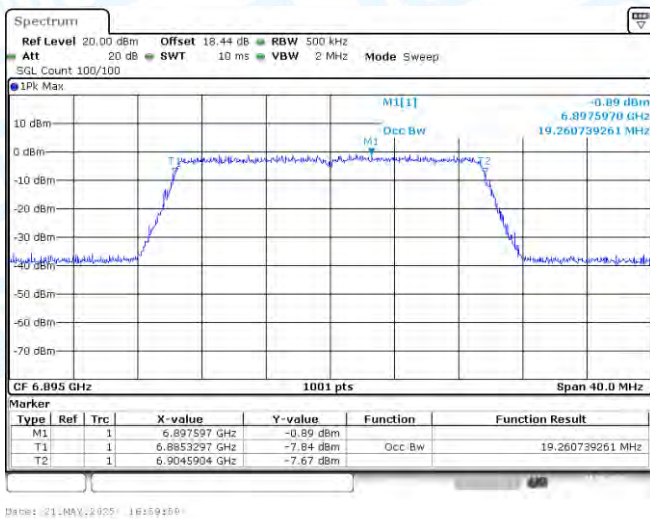



11AX20ISO-Ant1-6895-PASS

11AX20ISO-Ant1-6995-PASS

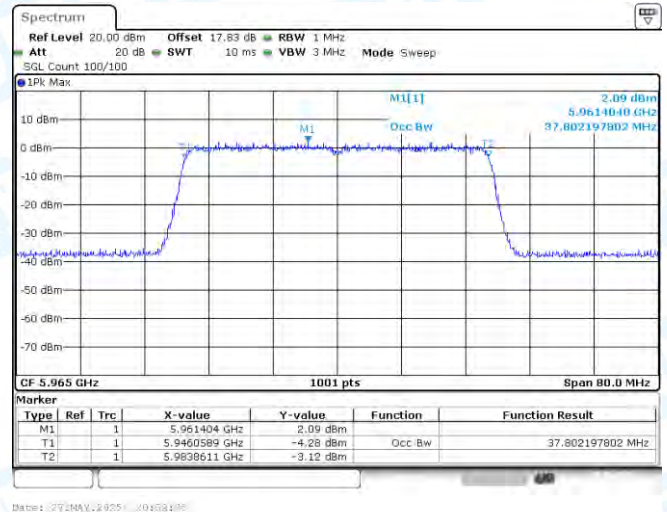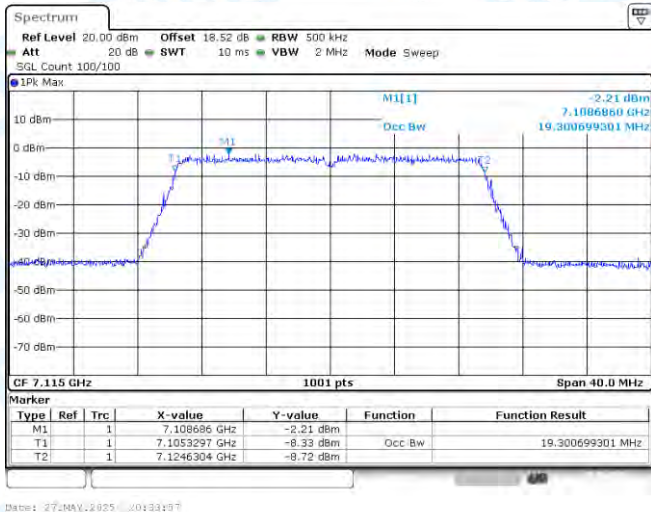



11AX20ISO-Ant1-7115-PASS

11AX40ISO-Ant1-5965-PASS

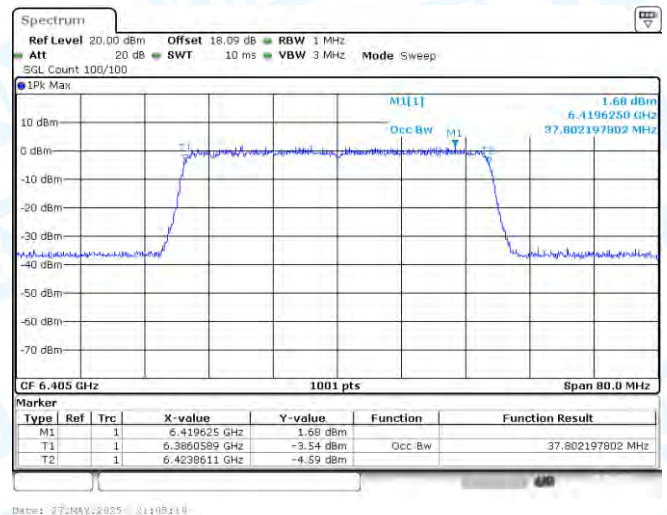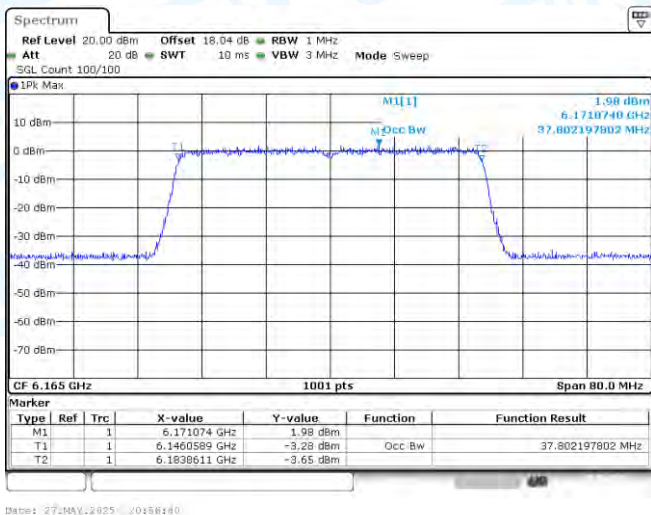


11AX40ISO-Ant1-6165-PASS

11AX40ISO-Ant1-6405-PASS

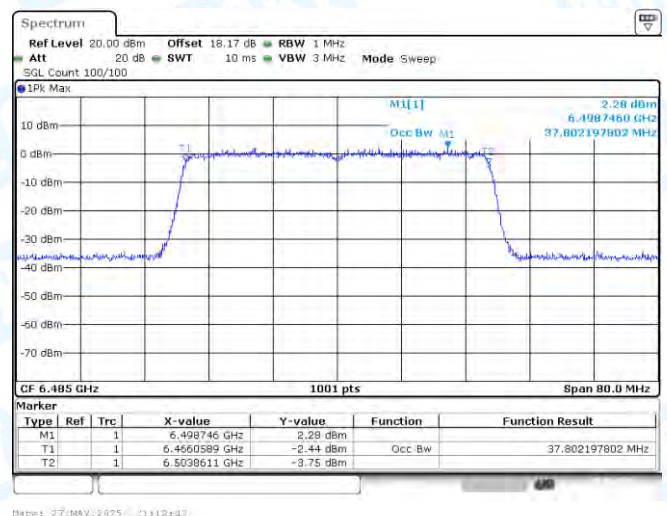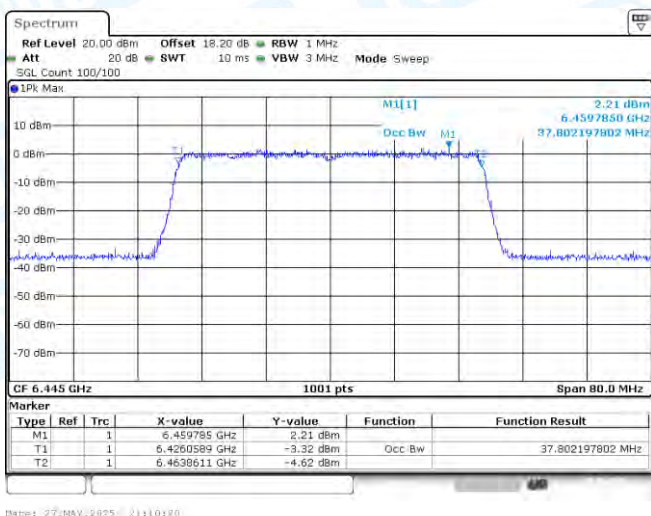


11AX40ISO-Ant1-6445-PASS


11AX40ISO-Ant1-6485-PASS

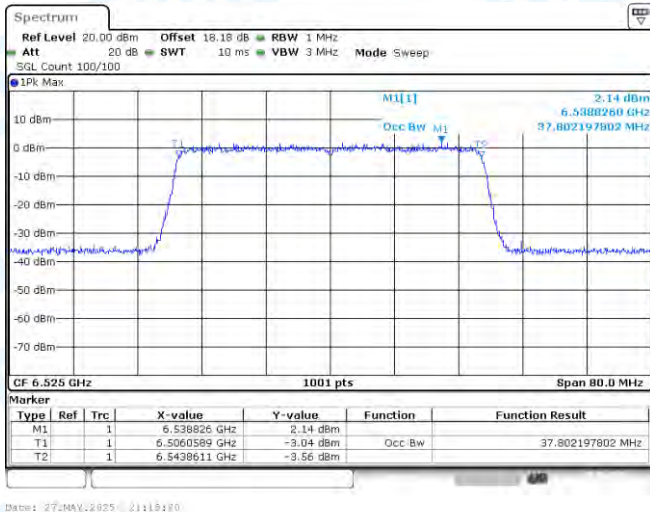


11AX40ISO-Ant1-6525-PASS

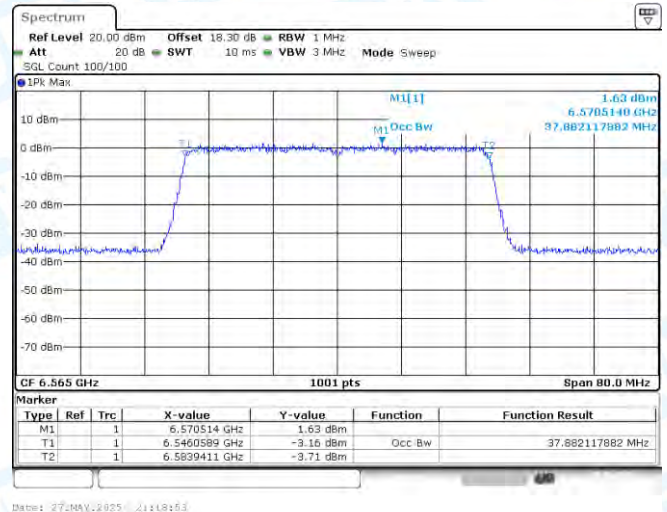


11AX40ISO-Ant1-6565-PASS

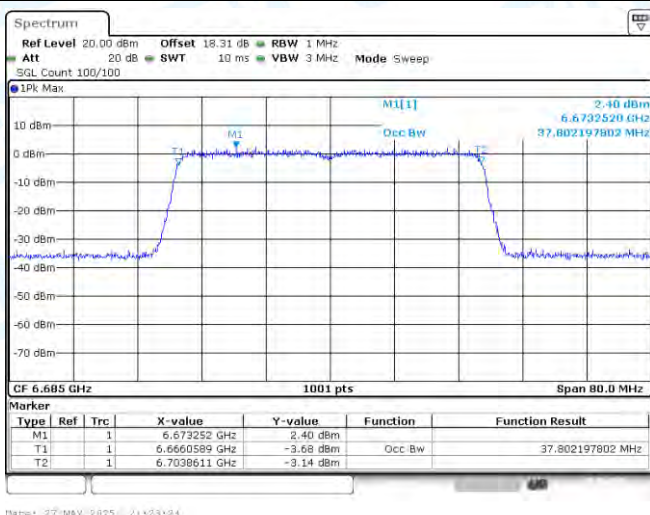


11AX40ISO-Ant1-6685-PASS

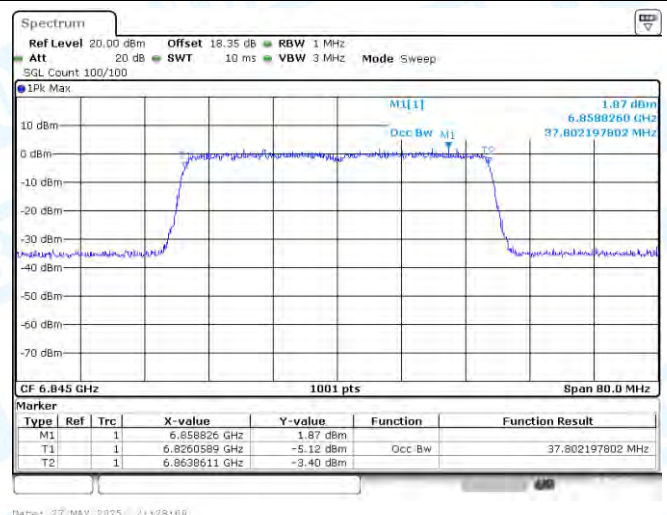



11AX40ISO-Ant1-6845-PASS

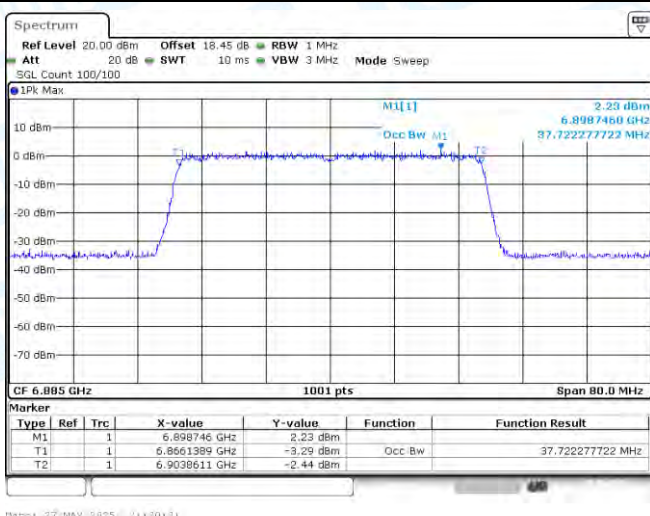

11AX40ISO-Ant1-6885-PASS


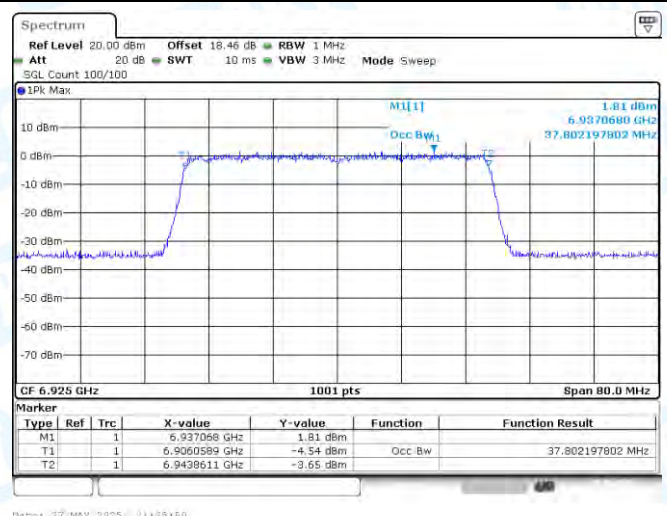


11AX40ISO-Ant1-6925-PASS

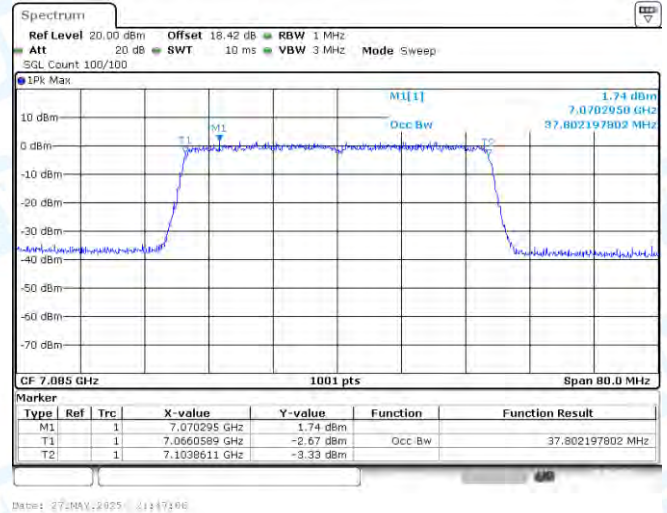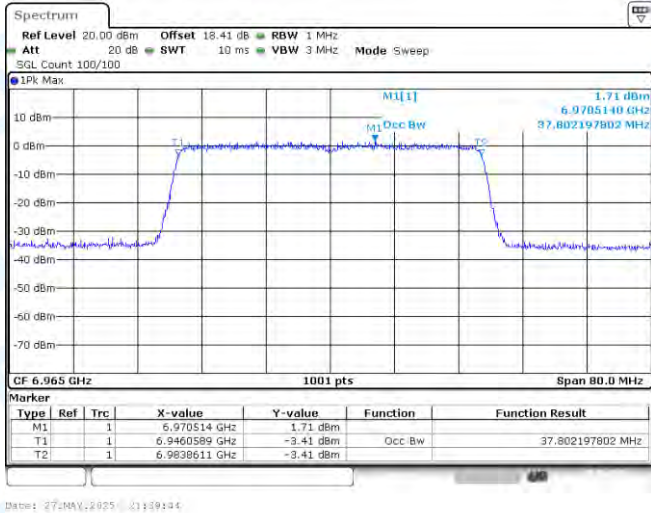



11AX40ISO-Ant1-6965-PASS

11AX40ISO-Ant1-7085-PASS

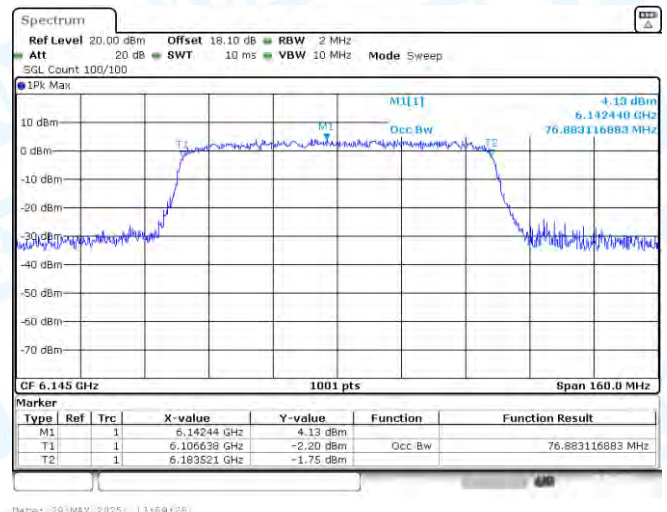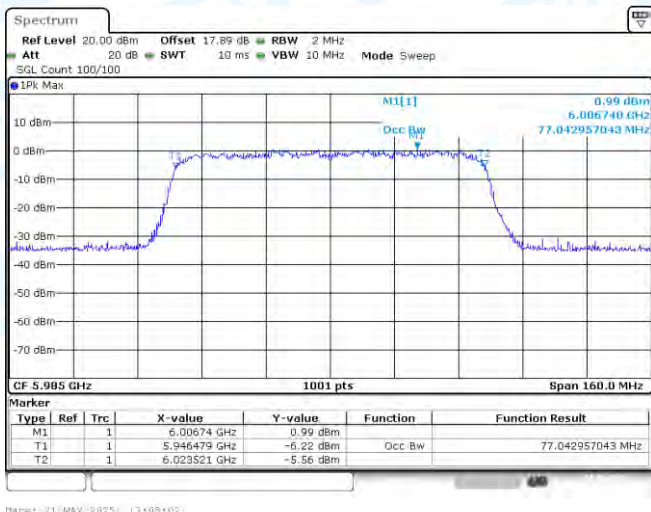


11AX80ISO-Ant1-5985-PASS

11AX80ISO-Ant1-6145-PASS

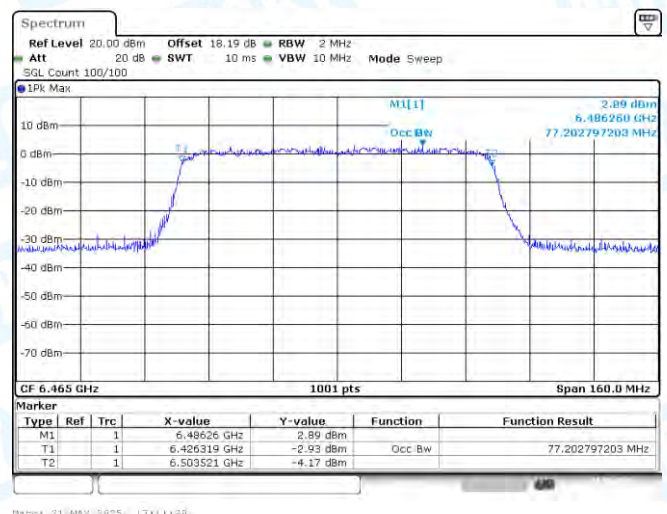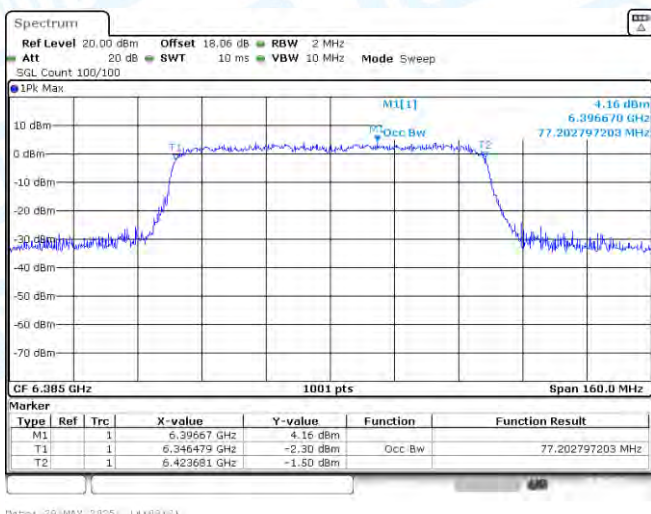


11AX80ISO-Ant1-6385-PASS

11AX80ISO-Ant1-6465-PASS

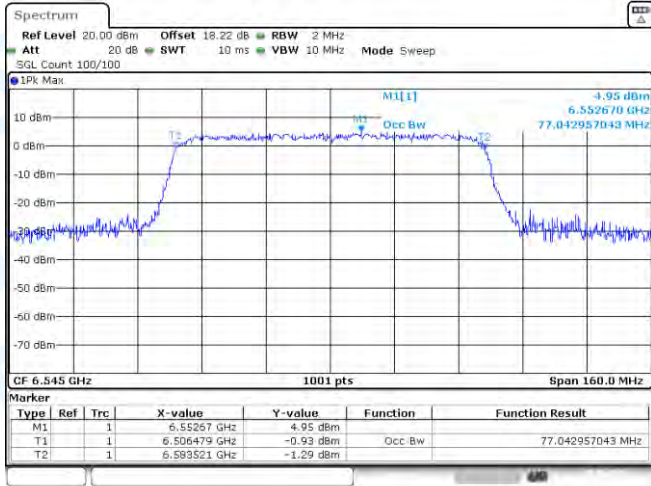


Date: 29-MAY-2025 14:08:42

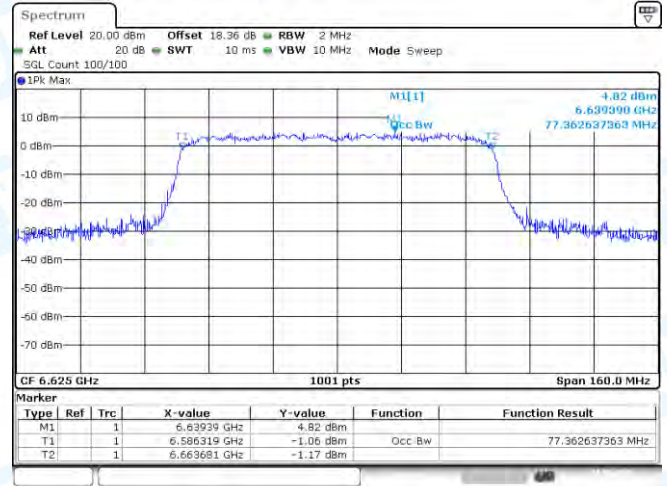


Date: 29-MAY-2025 17:18:48

11AX80SISO-Ant1-6545-PASS

11AX80SISO-Ant1-6625-PASS

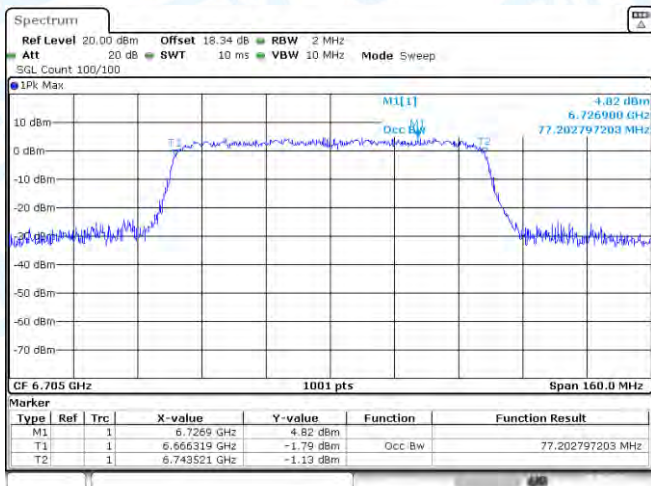


Date: 29-MAY-2025 14:13:06

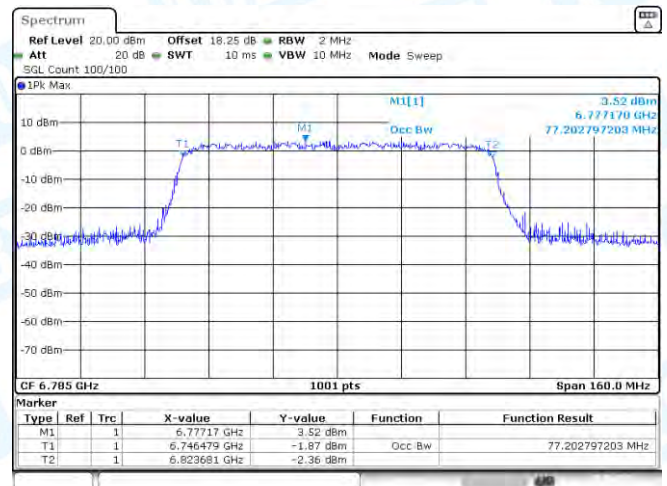


Date: 29-MAY-2025 14:17:41

11AX80SISO-Ant1-6705-PASS

11AX80SISO-Ant1-6785-PASS

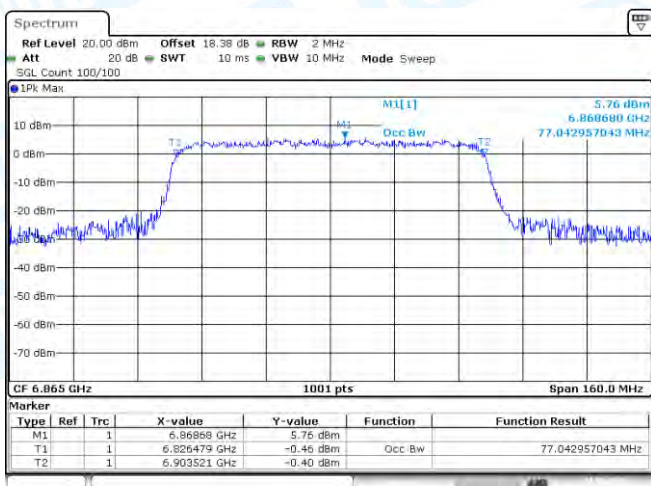


Date: 29-MAY-2025 17:18:08

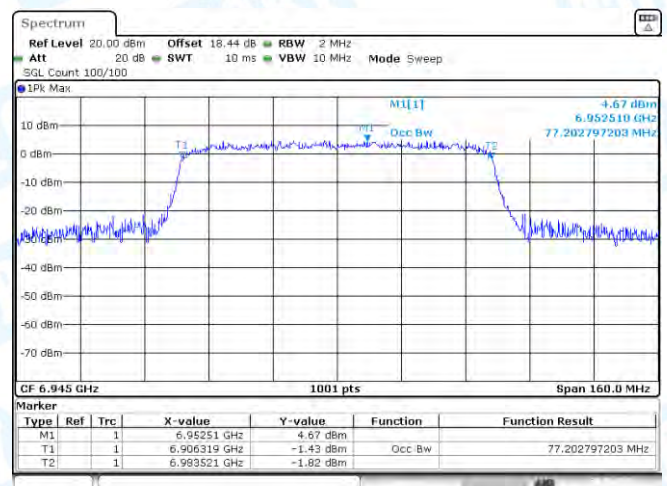

Date: 30-MAY-2025 14:08:06

11AX80SISO-Ant1-6865-PASS

11AX80SISO-Ant1-6945-PASS

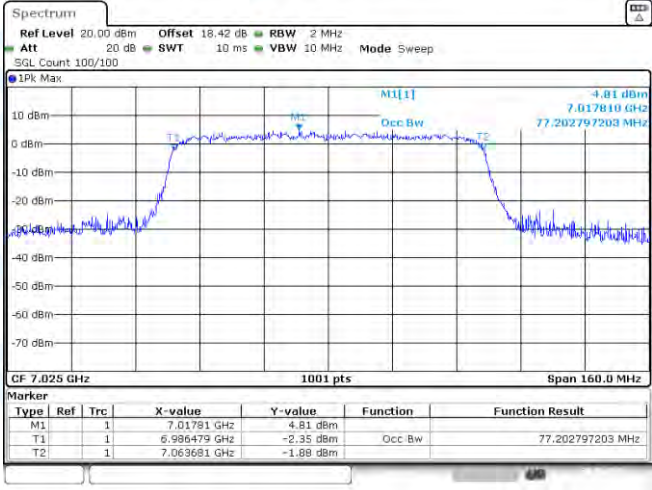

11AX80SISO-Ant1-7025-PASS

## Appendix 3: Duty Cycle

### 3.1 Test Result

| TestMode   | Antenna | Frequency [MHz] | Transmission Duration [ms] | Transmission Period [ms] | Duty Cycle [%] | Duty Cycle [%] | DC Factory | 1/T [kHz] |
|------------|---------|-----------------|----------------------------|--------------------------|----------------|----------------|------------|-----------|
| 11AX20SISO | Ant1    | 5955            | 0.23                       | 0.38                     | 0.23           | 60.53          | 2.18       | 4.35      |
| 11AX20SISO | Ant1    | 6175            | 0.24                       | 0.39                     | 0.24           | 61.54          | 2.11       | 4.17      |
| 11AX20SISO | Ant1    | 6415            | 0.24                       | 0.39                     | 0.24           | 61.54          | 2.11       | 4.17      |
| 11AX20SISO | Ant1    | 6435            | 0.23                       | 0.38                     | 0.23           | 60.53          | 2.18       | 4.35      |
| 11AX20SISO | Ant1    | 6475            | 0.24                       | 0.39                     | 0.24           | 61.54          | 2.11       | 4.17      |
| 11AX20SISO | Ant1    | 6515            | 0.24                       | 0.39                     | 0.24           | 61.54          | 2.11       | 4.17      |
| 11AX20SISO | Ant1    | 6535            | 0.24                       | 0.39                     | 0.24           | 61.54          | 2.11       | 4.17      |
| 11AX20SISO | Ant1    | 6695            | 0.23                       | 0.38                     | 0.23           | 60.53          | 2.18       | 4.35      |
| 11AX20SISO | Ant1    | 6855            | 0.24                       | 0.39                     | 0.24           | 61.54          | 2.11       | 4.17      |
| 11AX20SISO | Ant1    | 6875            | 0.24                       | 0.39                     | 0.24           | 61.54          | 2.11       | 4.17      |
| 11AX20SISO | Ant1    | 6895            | 0.23                       | 0.38                     | 0.23           | 60.53          | 2.18       | 4.35      |
| 11AX20SISO | Ant1    | 6995            | 0.24                       | 0.39                     | 0.24           | 61.54          | 2.11       | 4.17      |
| 11AX20SISO | Ant1    | 7115            | 0.23                       | 0.38                     | 0.23           | 60.53          | 2.18       | 4.35      |
| 11AX40SISO | Ant1    | 5965            | 0.15                       | 0.30                     | 0.15           | 50.00          | 3.01       | 6.67      |
| 11AX40SISO | Ant1    | 6165            | 0.14                       | 0.29                     | 0.14           | 48.28          | 3.16       | 7.14      |
| 11AX40SISO | Ant1    | 6405            | 0.14                       | 0.30                     | 0.14           | 46.67          | 3.31       | 7.14      |
| 11AX40SISO | Ant1    | 6445            | 0.14                       | 0.29                     | 0.14           | 48.28          | 3.16       | 7.14      |
| 11AX40SISO | Ant1    | 6485            | 0.15                       | 0.30                     | 0.15           | 50.00          | 3.01       | 6.67      |
| 11AX40SISO | Ant1    | 6525            | 0.14                       | 0.29                     | 0.14           | 48.28          | 3.16       | 7.14      |
| 11AX40SISO | Ant1    | 6565            | 0.14                       | 0.29                     | 0.14           | 48.28          | 3.16       | 7.14      |
| 11AX40SISO | Ant1    | 6685            | 0.14                       | 0.29                     | 0.14           | 48.28          | 3.16       | 7.14      |
| 11AX40SISO | Ant1    | 6845            | 0.15                       | 0.30                     | 0.15           | 50.00          | 3.01       | 6.67      |
| 11AX40SISO | Ant1    | 6885            | 0.14                       | 0.29                     | 0.14           | 48.28          | 3.16       | 7.14      |
| 11AX40SISO | Ant1    | 6925            | 0.14                       | 0.29                     | 0.14           | 48.28          | 3.16       | 7.14      |
| 11AX40SISO | Ant1    | 6965            | 0.15                       | 0.30                     | 0.15           | 50.00          | 3.01       | 6.67      |
| 11AX40SISO | Ant1    | 7085            | 0.15                       | 0.30                     | 0.15           | 50.00          | 3.01       | 6.67      |
| 11AX80SISO | Ant1    | 5985            | 0.10                       | 0.25                     | 0.10           | 40.00          | 3.98       | 10.00     |
| 11AX80SISO | Ant1    | 6145            | 0.10                       | 0.25                     | 0.10           | 40.00          | 3.98       | 10.00     |
| 11AX80SISO | Ant1    | 6385            | 0.10                       | 0.25                     | 0.10           | 40.00          | 3.98       | 10.00     |
| 11AX80SISO | Ant1    | 6465            | 0.10                       | 0.25                     | 0.10           | 40.00          | 3.98       | 10.00     |
| 11AX80SISO | Ant1    | 6545            | 0.10                       | 0.25                     | 0.10           | 40.00          | 3.98       | 10.00     |
| 11AX80SISO | Ant1    | 6625            | 0.10                       | 0.25                     | 0.10           | 40.00          | 3.98       | 10.00     |
| 11AX80SISO | Ant1    | 6705            | 0.10                       | 0.25                     | 0.10           | 40.00          | 3.98       | 10.00     |
| 11AX80SISO | Ant1    | 6785            | 0.10                       | 0.25                     | 0.10           | 40.00          | 3.98       | 10.00     |
| 11AX80SISO | Ant1    | 6865            | 0.10                       | 0.25                     | 0.10           | 40.00          | 3.98       | 10.00     |
| 11AX80SISO | Ant1    | 6945            | 0.10                       | 0.25                     | 0.10           | 40.00          | 3.98       | 10.00     |
| 11AX80SISO | Ant1    | 7025            | 0.10                       | 0.25                     | 0.10           | 40.00          | 3.98       | 10.00     |


Note: 1, Duty Cycle= Transmission Duration/ Transmission Period

2, DC Factory=10\*Log<sub>10</sub>(1/Duty Cycle)


3, 1/T=1/ Transmission Duration

4: RF Conducted test Offset= cable loss+ Attenuator(10dB).


### 3.2 Test Graphs

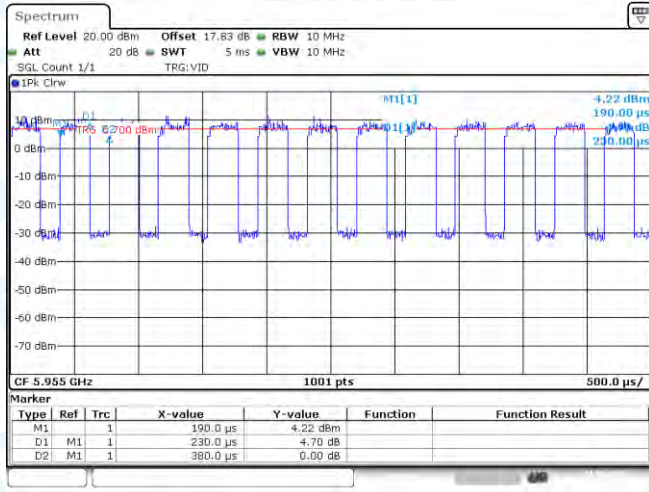


NTVN-11AX20SISO-Ant1-5955

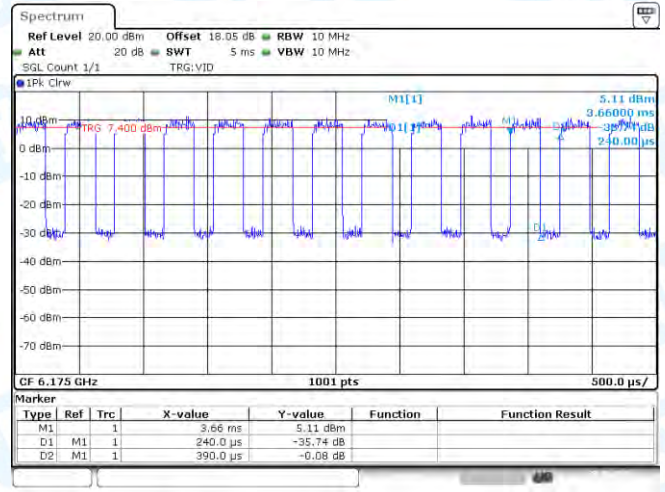


NTVN-11AX20SISO-Ant1-6175

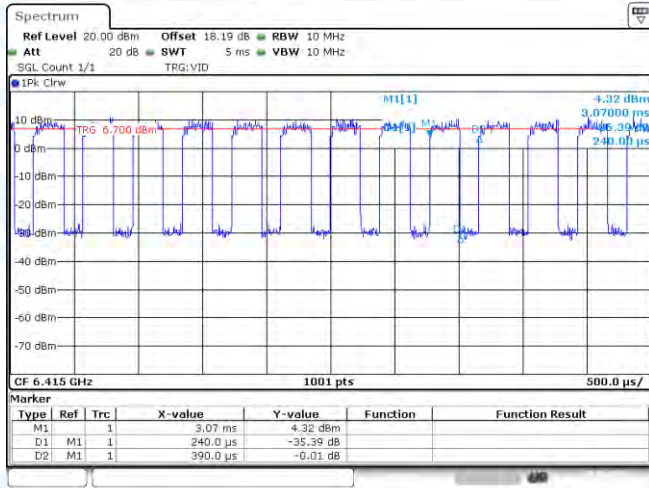


NTVN-11AX20SISO-Ant1-6415

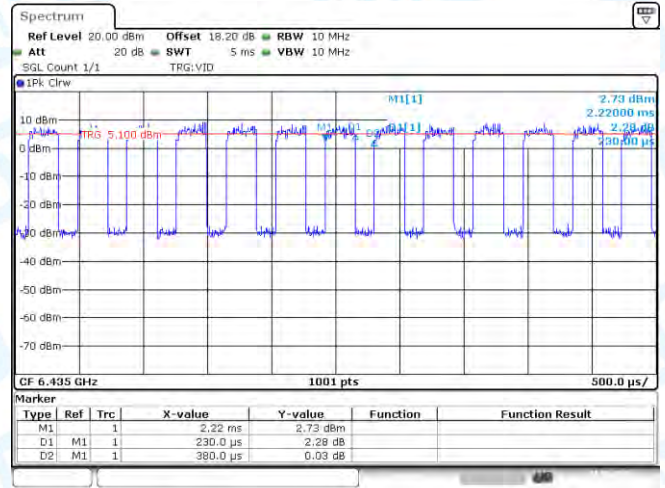


NTVN-11AX20SISO-Ant1-6435

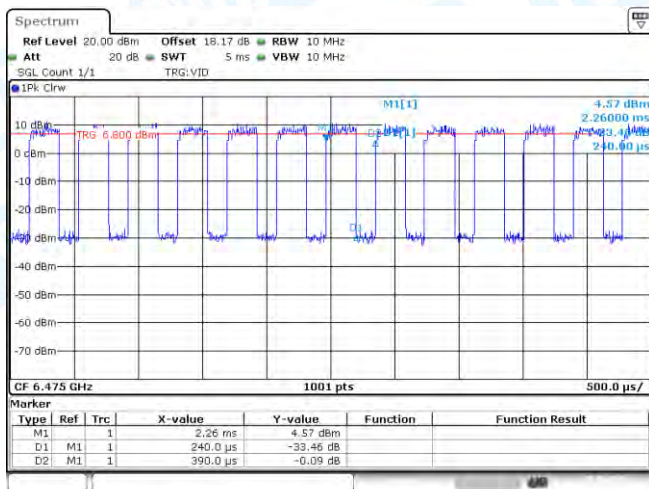


NTVN-11AX20SISO-Ant1-6475

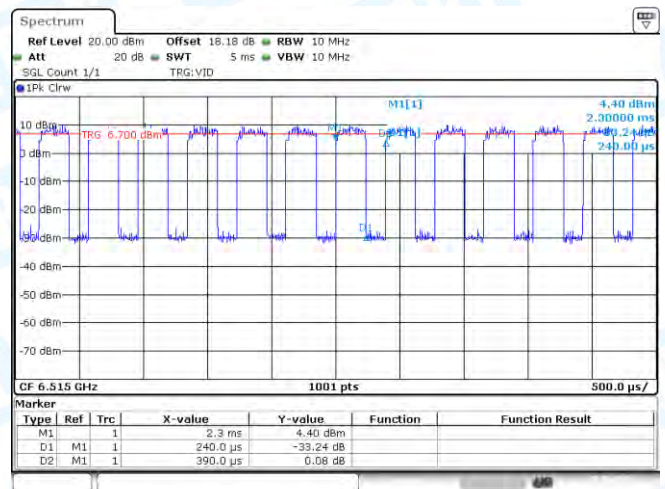

NTVN-11AX20SISO-Ant1-6515

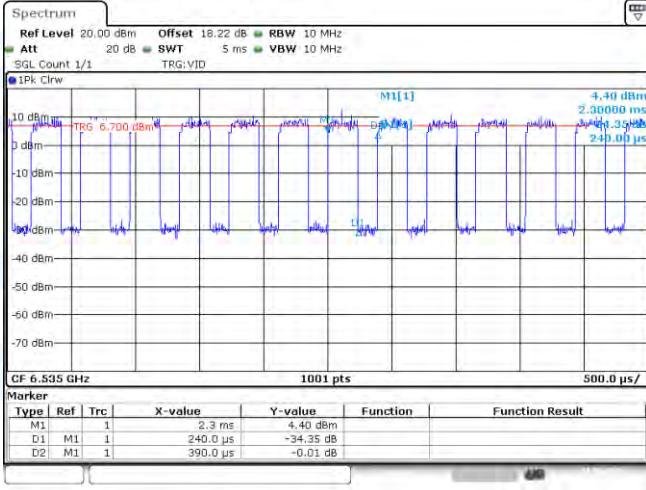


Date: 21-MAY-2025 16:58:18

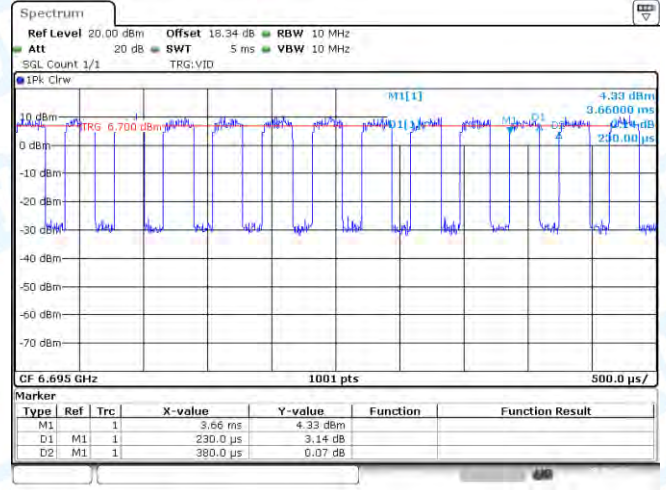


Date: 27-MAY-2025 20:14:34

NTNV-11AX20SISO-Ant1-6535

NTNV-11AX20SISO-Ant1-6695

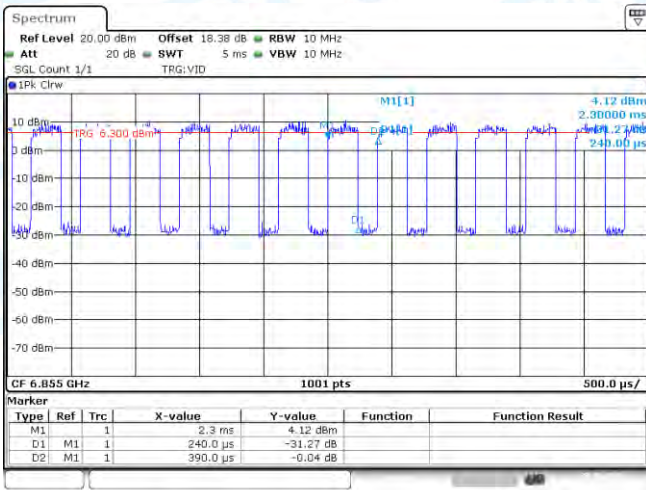


Date: 27-MAY-2025 20:18:58

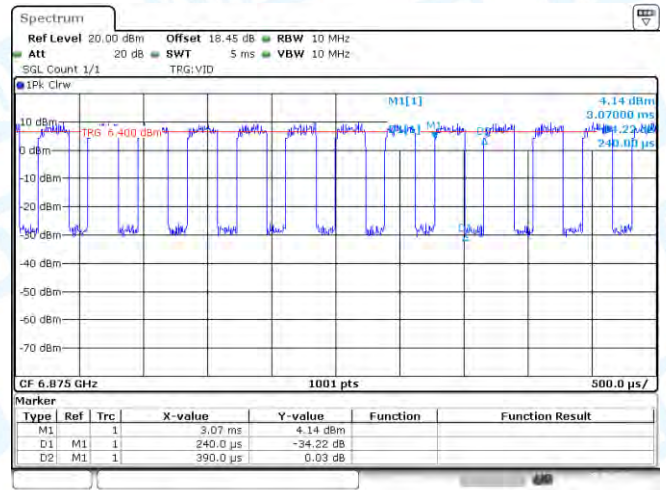


Date: 27-MAY-2025 20:18:17

NTNV-11AX20SISO-Ant1-6855

NTNV-11AX20SISO-Ant1-6875

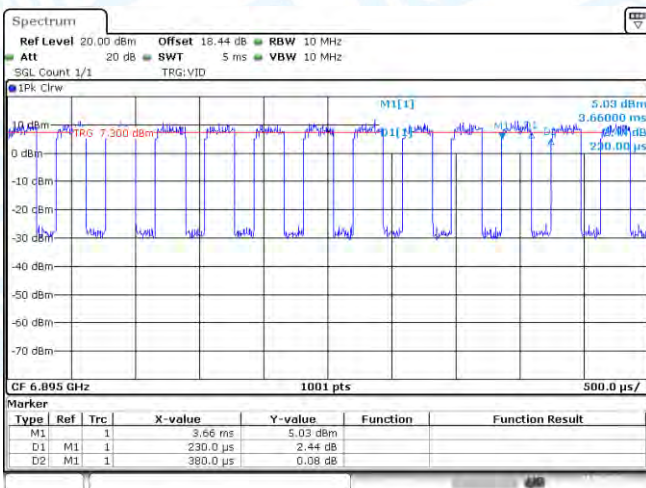


Date: 21-MAY-2025 17:00:12

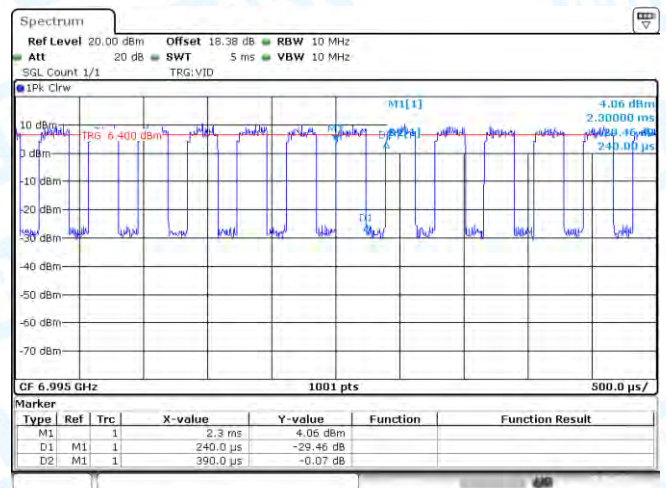


Date: 27-MAY-2025 20:13:07

NTNV-11AX20SISO-Ant1-6895

NTNV-11AX20SISO-Ant1-6995

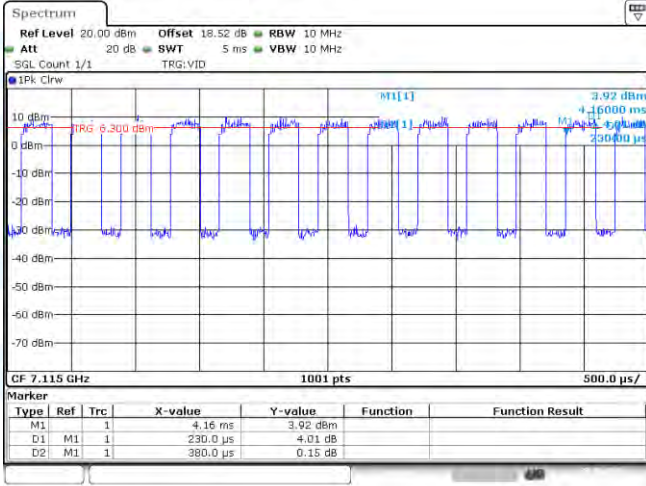


Date: 27-MAY-2025 10:58:11

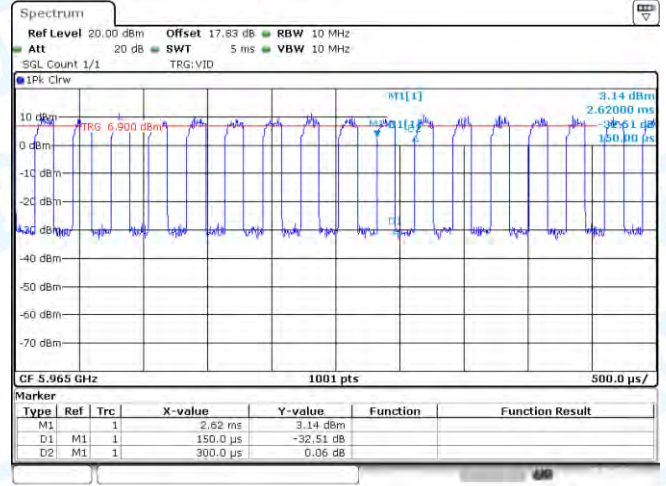


Date: 27-MAY-2025 10:59:38

NTNV-11AX20SISO-Ant1-7115

NTNV-11AX40SISO-Ant1-5965

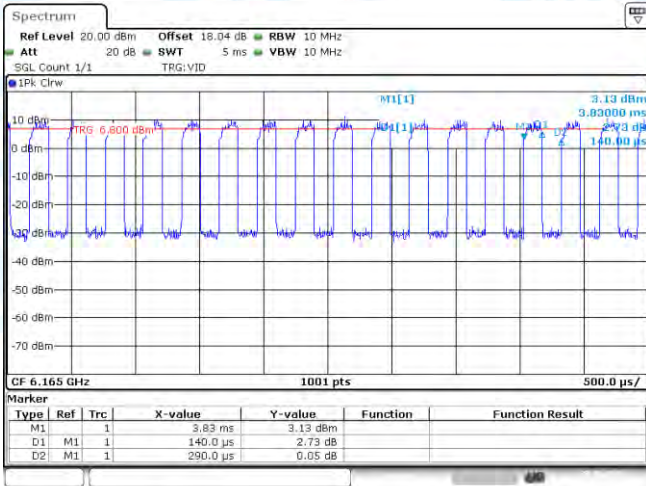


Date: 27-MAY-2025 10:58:54

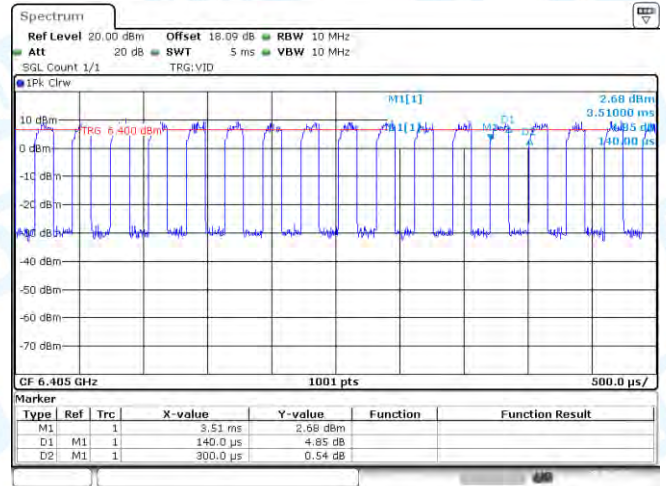


Date: 27-MAY-2025 11:00:33

NTNV-11AX40SISO-Ant1-6165

NTNV-11AX40SISO-Ant1-6405

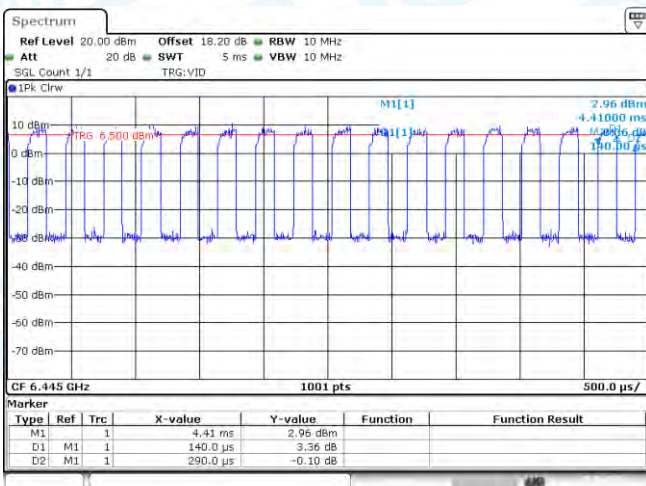

Date: 27-MAY-2025 11:01:31

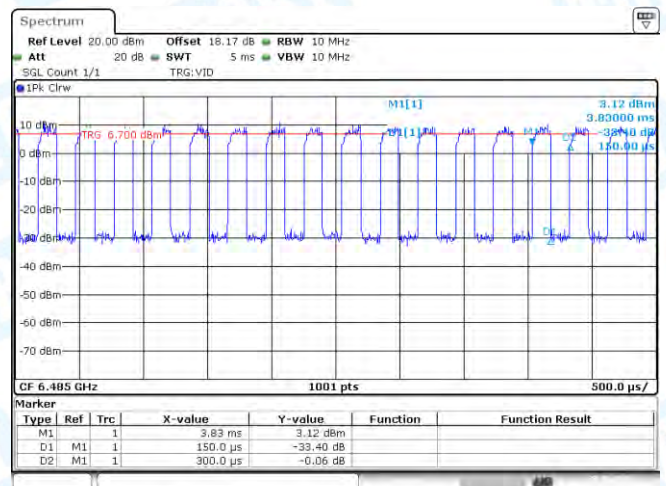

Date: 27-MAY-2025 11:02:55

NTNV-11AX40SISO-Ant1-6445

NTNV-11AX40SISO-Ant1-6485