

Bluetooth Module Datasheet

Model No.型号:TBM-QCC307

版本 Version : V1.0

公布日期 Release Date: 2016-03-08

TONLY ELECTRONICS HOLDINGS LIMITED.通力电子控股有限公司

Address:Section 37, Zhongkai Hi-tech Development Zone, Huizhou Guangdong 516006, P.R.China

地址：中国广东省惠州市仲恺高新区惠风 6 路 37 号小区

网址 <http://www.tonlyele.com>

法律声明 Legal Notice, Disclaimer, Copyright

本手册是通力电子控股有限公司机密，未经通力电子控股有限公司的事先书面许可，任何人不得复制、传播本手册的内容。通力电子控股有限公司不对由于使用本手册或执行本手册内容带来的损害负责。

本手册所涉及的知识产权归通力电子控股有限公司所有（或经合作商授权许可使用），任何人不得侵犯。

本手册是按当前状态提供参考，本公司保留随时更新本手册的权利，恕不另行通知。

本手册不对包括但不限于下列事项担保：适销性、特殊用途的适应性；实施该用途不会侵犯第三方的知识产权等权利。本文档在此未以禁止反言或其它方式授予任何知识产权使用许可，不管是明示许可还是暗示许可。

本手册中提到的所有商标名称、商标和注册商标均属其各自所有者的财产，特此声明。

本协议以中、英文两种语言制作，两种语言文本冲突时，任何时候均以中文为准。

This data sheet contains information that is confidential to TONLY ELECTRONICS HOLDINGS

LIMITED. Unauthorized use or disclosure of the information contained herein is prohibited. You may be held responsible for any loss or damages suffered by TONLY ELECTRONICS HOLDINGS LIMITED for your unauthorized disclosure hereof, in whole or in part.

Information herein is subject to change without noticed. TONLY ELECTRONICS HOLDINGS LIMITED does not assume any responsibility for any use of, or reliance on, the information contained herein

THIS DATA SHEET AND ALL INFORMATION CONTAINED HEREIN IS PROVIDED “AS IS” WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE. **TONLY ELECTRONICS HOLDINGS LIMITED**. SPECIFICALLY DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, AND FITNESS FOR A PARTICULAR PURPOSE. NEITHER DOES **TONLY ELECTRONICS HOLDINGS LIMITED**. PROVIDE ANY WARRANTY WHATSOEVER WITH RESPECT TO THE SOFTWARE OF ANY THIRD PARTY WHICH MAY BE USED BY, INCORPORATED IN, OR SUPPLIED WITH THIS DATA SHEET, AND USER AGREES TO LOOK ONLY TO SUCH THIRD PARTY FOR ANY WARRANTY CLAIM RELATING THERETO. **TONLY ELECTRONICS HOLDINGS LIMITED**. SHALL ALSO NOT BE RESPONSIBLE FOR ANY **TONLY ELECTRONICS HOLDINGS LIMITED** DELIVERABLES MADE TO USER’S SPECIFICATION OR TO CONFORM TO A PARTICULAR STANDARD OR OPEN FORUM.

Tonly is a trademark of TONLY ELECTRONICS HOLDINGS LIMITED. other names mentioned in this document are trademarks/registered trademark of their respective owners.

This data shall be executed in two languages including one Chinese and one English. Any conflict exist between the two languages, the Chinese will prevail in any time.

版本变更说明 Document Revision History

Revision 版本	Date 日期	Author 作者	Checked by 审核	Description 描述
V1.0	2018-8-18	huangzisheng	liweixiong	First release.

目录 Table of Contents

- **法律声明 Legal Notice, Disclaimer, Copyright**
- **文档变更说明 Document Revision History**
- **目录 Table of contents**
- **1.系统概览 System overview**
 - 1.1 通用说明 General Descriptions
 - 1.2 性能特点 Features
 - 1.3 系统方框图 Block Diagram
- **2.产品描述 Production Description**
 - 引脚与功能说明 Pin Layout & Pin Description
 - 外观与尺寸 Appearance& Dimension
- **3.应用说明 Application Explanation**
- **4.电气特性 Electrical Characteristics**
 - 工作条件
 - 直流特性 DC characteristics
 - 热特性 Thermal characteristics
 - 电流消耗 Current consumption
- **5.射频性能 RF Performance**
- **6.认证与法规信息 Certificate& Regulation**
- **7.包装与订货说明 Package& Ordering information**
- **8.环保声明 Green Policy**
- **9 推荐过炉温度 RECOMMENDED TEMPERATURE REFLOW PROFILE**
- **10.抗静电保护 ESD Protection**

1. 系统概览 System overview


1.1 通用说明 General Descriptions

The QCC3007 module is a single-chip flash programmable dual mode Bluetooth v5.0 device with integrated application processor, low-power audio DSP, on-chip ROM and RAM, stereo codec, battery charger, switch-mode and linear regulators, and LED drivers.

1.2 性能特点 Features

- Bluetooth ® v5.0 specification compliant
- Multipoint support for A2DP connection to 2A2DP sources for music playback
- Stereo line-in
- True Wireless Stereo (TWS)
- Low Power Consumption
- Supported Bluetooth Profiles : A2DP v1.3.1 , AVRCP v1.6,HFP v1.7, GAIA, EQs.



1.3 系统方框图Block Diagram

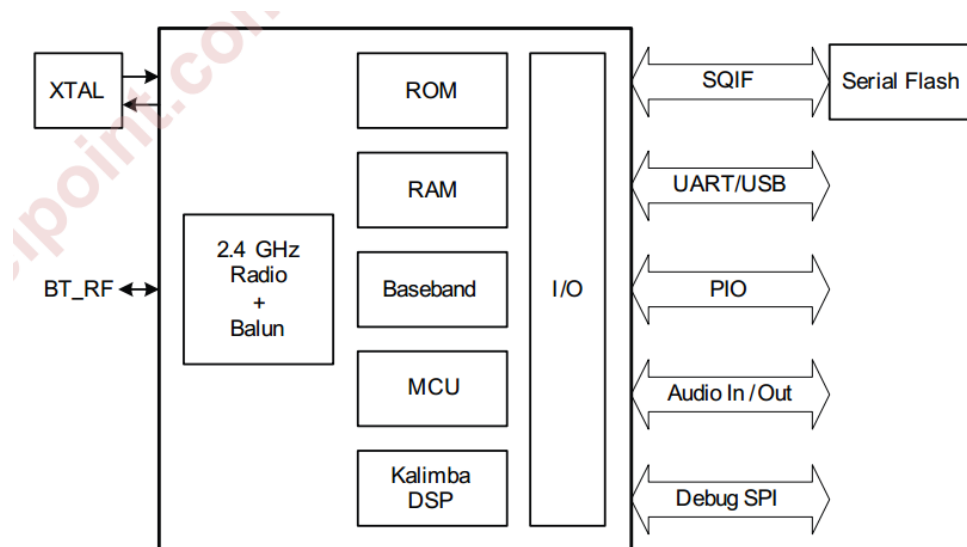


2. 产品描述 Production Description

引脚与功能说明 Apperance & Pin Description& Physical Dimensions

- Description & Apperance:

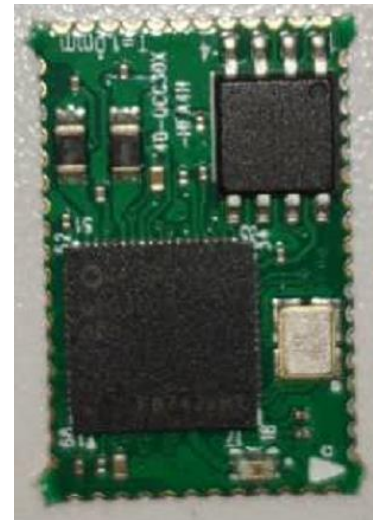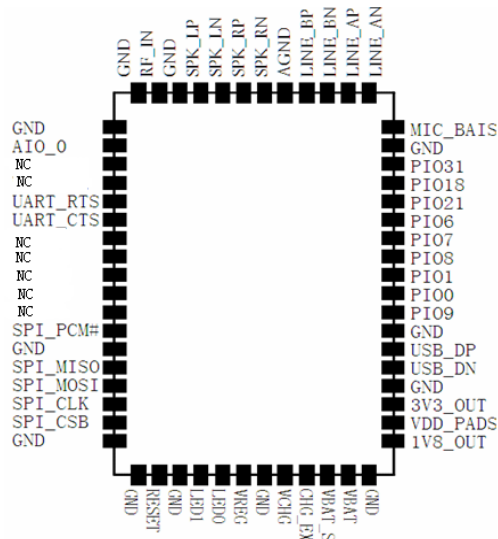

● Physical Dimensions

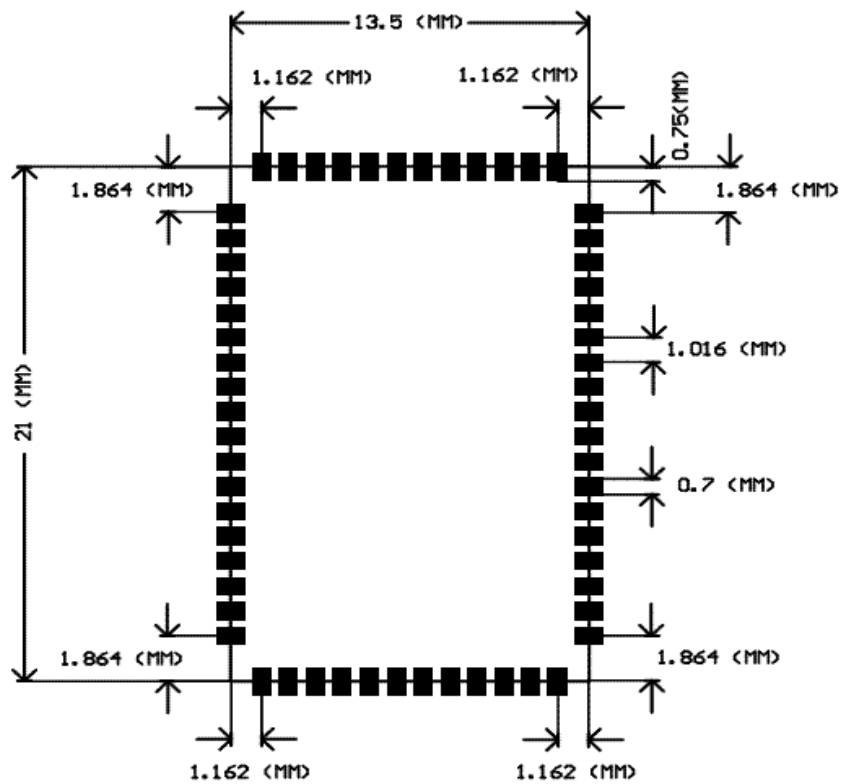

Pin descriptions

PIN NO.	Symbol	Description	Function
1 、 18 、 19 、 21 、	GND	Power supply and control	Ground connections.

25 、 30 、 33 、 37 、 47 、 58			
2	AIO0	Bi-directional with programmable analog I/O.	Analogue Programmable I/O
5	UART_RTS	A CMOS output with a weak internal pull-up. This pin can be used to implement RS232 hardware flow control where RTS (request to send) is an active low indicator. The UART interface requires an external RS232 transceiver chip.	UART request to send, active low Alternative function: PIO16: Programmable input / output line 16. Bidirectional with strong pull-up
6	UART_CTS	A CMOS input with a weak internal pull-down. This pin can be used to implement RS232 hardware flow control where CTS (clear to send) is an active low indicator. The UART interface requires an external RS232 transceiver chip.	UART clear to send, active low; Alternative function: PIO17: Programmable input / output line 17. Bidirectional with strong pull-down. Bidirectional with strong pull-down
3、4、 7、8、 9 、 10 、 11	NC	Leave unconnected	NC
12	SPI_PCM#	Configured PCM/I2S digital audio interface shares the same physical set of pins with the SPI interface. SPI_PCM# is a CMOS input with a weak internal pull-down. When inputs HIGH level, this set of pins is used For SPI interface. When inputs LOW level, this set of pins is used for PCM/PIO/I2S interface.	SPI/PCM select input: 0 = PCM/PIO interface 1 = SPI
14	SPI_MISO	Programmable I/O line or debug	SPI data output

		SPI MISO selected by SPI_PIO#.	
15	SPI_MOSI	Programmable I/O line or debug SPI MOSI selected by SPI_PIO#.	SPI data output
16	SPI_CLK	Programmable I/O line or debug SPI CLK selected by SPI_PIO#.	SPI CLOCK
17	SPI_CSB	Programmable I/O line or debug SPI chip select (CSB) selected by SPI_PIO#.	chip select for SPI, active low
20	RESET	The RESET pin is an active high reset and is internally filter educing the internal low frequency clock oscillator .A reset will be performed between1.5 and 4.0ms following RESET being active.	Reset if low. Pull low for minimum 5ms to cause a reset.
22	LED_1	Bidirectional	Programmable Input/Output Line & LED driver
23	LED_0	Bidirectional	Programmable Input/Output Line & LED driver
24	POWER_VRE G	Enable pin for the internal 1.8V regulator, This pin is only available with production version	Regulator enable input. Can also be sensed as an input. Regulator enable and multifunction button. A high input (tolerant to VBAT) enables the on-chip regulators, which can then be latched on internally and the button used as a multifunction input.
26	VBUS	Power supply and control	Charger input. Typically connected to VBUS (USB supply)
27	CHG_EXT	Power supply and control	External battery charger control. External battery charger transistor base control when using external charger

			boost. Otherwise leave unconnected.
28	VBAT_SENSE	Power supply and control	Battery charger sense input. Connect directly to the battery positive pin.
29	VBAT	Input for an internal 1.8V switched mode regulator combined with output of the internal battery charger.	Battery charger input
31	1.8V_OUT	Power supply and control	1.8V DC/DC convertor output.
32	VDD_IO	Power supply and control	Positive supply input for input/output ports.
33	3V3_OUT	Power supply and control	3.3V bypass linear regulator output. Also supply for USB port.
35	USB_DN	Abi-directional USB data line with a selectable internal 1.5k Ω pull-up implemented as a current source (compliant with USB specification v2.0) An external series resistor is required to match the connection to the characteristic impedance of the USB cable.	USB data minus.
36	USB_PN	A bi-directional USB data line. An external series resistor is required to match the connection to the characteristic impedance of the USB cable.	USB data plus with selectable internal 1.5k Ω pull-up resistor.
38	PIO_9	programmable analog I/O.	Programmable I/O.
39	PIO_0	programmable analog I/O.	Programmable I/O.
40	PIO_1	programmable analog I/O.	Programmable I/O.
41	PIO_8	programmable analog I/O.	Programmable I/O.
42	PIO_7	programmable analog I/O.	Programmable I/O.
43	PIO_6	programmable analog I/O.	Programmable I/O.
44	PIO_21	programmable analog I/O.	Programmable I/O.
45	PIO_18	programmable analog I/O.	Programmable I/O.
46	LED_2	Bidirectional	Programmable input / output line & LED driver.

48	BIAS	Microphone bias	Microphone bias
49	LINE_AN	Analogue in	Line or microphone input negative, channel A
50	LINE_AP		Line or microphone input positive, channel A
51	LINE_BN	Analogue in	Line or microphone input negative, channel B
52	LINE_BP		Line or microphone input positive, channel B
53	AGND	Connect Analog Ground pins	Analogue Ground connections.
54	SPK_RN	Analogue out	Speaker output negative, right
55	SPK_RP		Speaker output positive, right
56	SPK_LN	Analogue out	Speaker output negative, left
57	SPK_LP		Speaker output positive, left
59	RF	This pin can be used when not using a chip antenna or connector of the module.	Bluetooth 50Ω transmitter output / receiver input

3.应用说明 Application Explanations

- Bluetooth stereo speakers
- Speakerphones

4. 电气特性 Electrical Characteristics

Base Characteristics

ELECTRICAL CHARACTERISTICS	
Supply Voltage	1.8 – 3.6V DC (Absolute Maximum Ratings 1.8-4.2V)
Working current	Depends on profiles, 13mA (A2DP)
Standby current(disconnected)	1.05mA~3.1mA
WEIGHT AND DIMENSIONS	
(unit : mm)	
Size (L x W x H)	21*13.5*1.5 mm
Weight	0.9g

Recommended operating conditions

	Min	Max	Unit
--	-----	-----	------

Operating temperature	-40	85	°C
VDD_IO	1.7	3.6	V
VDD_BAT	2.8	4.4	V
VDD_CHG	0	5.5	V
Terminal voltages	0	VDD	V

电池充电 Battery charger

Item	Min	Type	Max	Unit
Input Voltage	4.5	5	5.75	V
Charge Current(CC mode)	194	200	206	mA
Trickle Charge Current		10		mA
Trickle Charge Threshold Voltage		2.92		V
Regulated Output(Float)Voltage		4.2		V

Stereo CODEC Analogue to Digital Converter					
Parameter	Conditions	Min	Typ	Max	Unit
Resolution		-	-	16	Bits
Input Sample Rate,		8	-	48	kHz
Signal to Noise Ratio, SNR	fin=1kHz B/W=20Hz→20kHz A-Weighted THD+N<0.1% 1.6Vpk-pkinput	Fsample			
		8kHz	-	95.3	- dB
		16kHz	-	93.8	- dB
		32kHz	-	94.2	- dB
		44.1kHz	-	92.4	- dB
		44.1kHz	-	91.8	- dB
Digital Gain	Digital Gain Resolution=1/32	-24	-	21.5	dB
Analogue Gain	Analogue Gain Resolution=3dB	-3	-	42	dB
Maximum ADC Input		13	2260	-	mVrms
3dBBandwidth		-	20	-	kHz

Stereo CODEC Digital to Analog Converter					
Parameter	Conditions	Min	Typ	Max	Unit
Resolution		-	-	16	Bits
Input Sample Rate,Fsample		8	-	96	kHz
Signal to Noise Ratio, SNR	fin=1kHz B/W=20Hz→20kHz A-Weighted THD+N<1% 0dBFSinput				
		48KHz Load=100K	-	95.6	- dB
Digital Gain	Digital Gain Resolution=1/32	-24	-	21.5	dB

Analogue Gain	Analogue Gain Resolution=3dB		-	0	dB
Output voltage full scale swing(differential) THD+N100kΩ load		-	-	778	mVrms
		-	-	0.003	%
THD+N16Ω load		-	-	0.0032	%

5.射频性能 RF Performance

Specification	Description
RF performance	
Standard	Bluetooth 5.0
Frequency Band	2.402~ 2.48GHz
Modulation Method	GFSK ; 4/ΠDQPSK;8DQPSK
Maximum Data Rate	1 Mbps/2 Mbps/3 Mbps
Antenna	External antenna
Interface	UART, PIO, AIO, SPI,PCM,SPI
Operation Range	> =10 meters(Free Space)
Sensitivity	-86dBm at 0.1% BER
RF TX Power	<= +10dBm

6.认证与法规信息 Certification& Regulation

The BQB Certification :



Project Details

Project Name	TBM-QCC307 Bluetooth Module					
Product Type	End Product					
TCRL Version:	TCRL 2018-1					
Referenced Qualified Design(s)						
Previously Qualified Design Used in this Qualification(s)	86101 95413					
Listing Date	2018-12-25					
Declaration ID	D043013					
Product Listing(s)						
	Name	Website	Category	Publish Date	Model Number	Description
	TBM-QCC307 Bluetooth Module	www.tonlyele.com	Audio and Visual	12/25/2018 12:00:00 AM	TBM-QCC307	Bluetooth Mbdule.
Member Company	TCL Technoly Electronics (Huizhou) Co., Ltd.					

7.包装与订货说明 Package & Ordering Information

Assembly

- 60Pcs per every Blister tray

- 600Pcs per every Vacuum packing




8.环保声明 Green Policy

This module can meet ROHS&REACH compliance.XXXX

9.推荐过炉温度 RECOMMENDED TEMPERATURE REFLOW PROFILE

The soldering profile depends on various parameters necessitating a set up for each application. The data here is given only for guidance on solder re-flow. There are four zones:

1. Preheat Zone - This zone raises the temperature at a controlled rate, typically 1-2.5°C/s.
2. Equilibrium Zone - This zone brings the board to a uniform temperature and also activates the flux. The duration in this zone (typically 2-3 minutes) will need to be adjusted to optimize the out gassing of the flux.
3. Reflow Zone - The peak temperature should be high enough to achieve good wetting but not so high as to cause component discoloration or damage. Excessive soldering time can lead to inter metallic growth which can result in a brittle joint.
4. Cooling Zone - The cooling rate should be fast, to keep the solder grains small which will give a longer lasting joint. Typical rates will be 2-5°C/s.

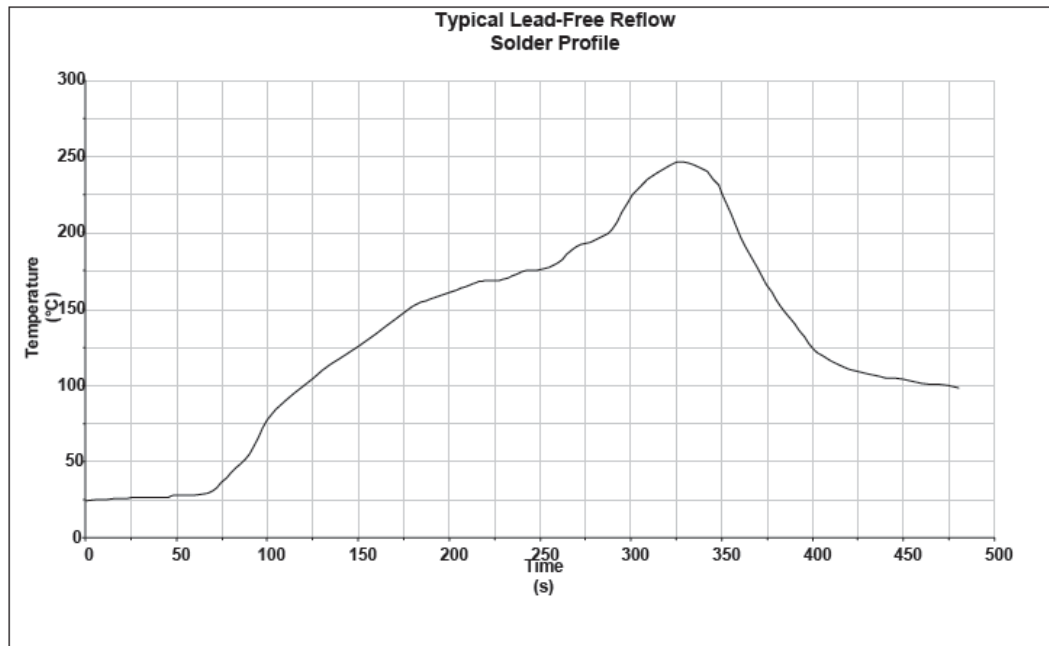

Key features of the profile:

- Initial ramp = 1-2.5°C/sec to 175°C ±25°C equilibrium
- Equilibrium time = 60 to 180 seconds
- Ramp to maximum temperature (245°C) = 3°C/sec max.
- Time above liquidus temperature (217°C): 45-90 seconds
- Device absolute maximum reflow temperature: 260°C

10.抗静电保护 ESD Protection

Condition	Class	Max Rating
Human Body Model Contact Discharge per ANSI/ESDA/JEDEC JS-001	2	2 kV (all pins except CHG_EXT. CHG_EXT is rated at 1 kV)
Charged Device Model Contact Discharge per JEDEC/EIA JESD22-C101	III	500 V (all pins)

-----END-----

For FCC:

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- ☐ Reorient or relocate the receiving antenna.
- ☐ Increase the separation between the equipment and receiver.
- ☐ Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- ☐ Consult the dealer or an experienced radio/TV technician for help.
- ☐

"The device must not be co-located or operating in conjunction with any other antenna or transmitter."

FCC RF Radiation Exposure Statement Caution: To maintain compliance with the FCC's RF exposure guidelines, place the product at least 20cm from nearby persons.

FCC Conditions

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.