



1. Frequency Error


Condition	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	2412	Ant1	2411.958	-42000	-17.41	±50	Pass
NVNT	2437	Ant1	2436.958	-42000	-17.23	±50	Pass
NVNT	2472	Ant1	2471.958	-42000	-16.99	±50	Pass
NVNT	2422	Ant1	2421.959	-41000	-16.93	±50	Pass
NVNT	2462	Ant1	2461.959	-41000	-16.65	±50	Pass

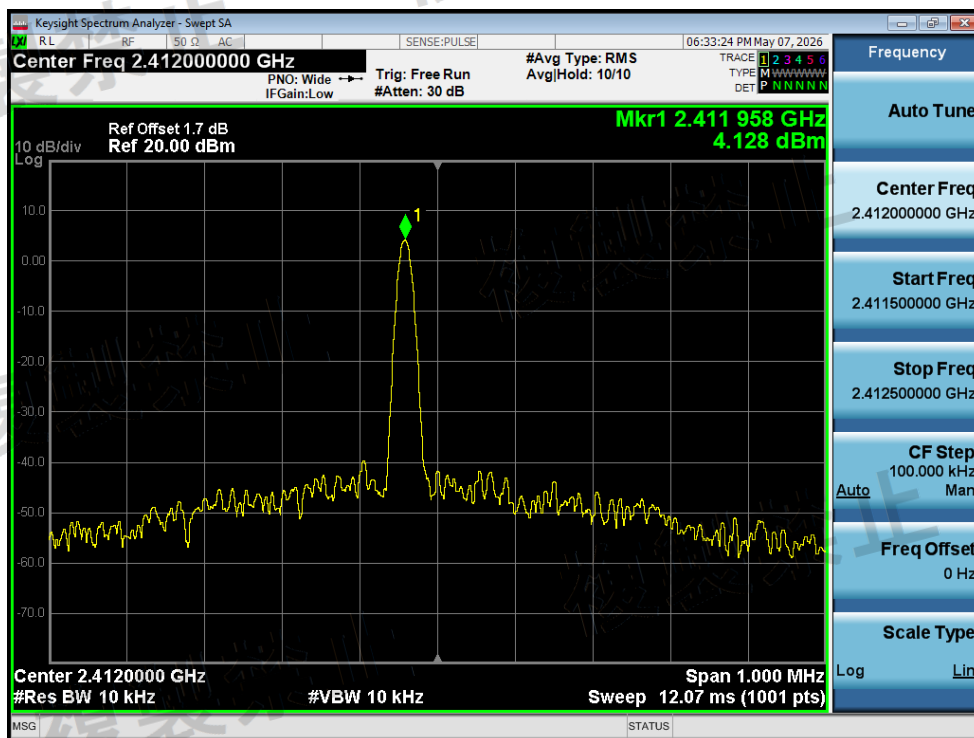


Freq. Error NVNT b 2412MHz Ant1

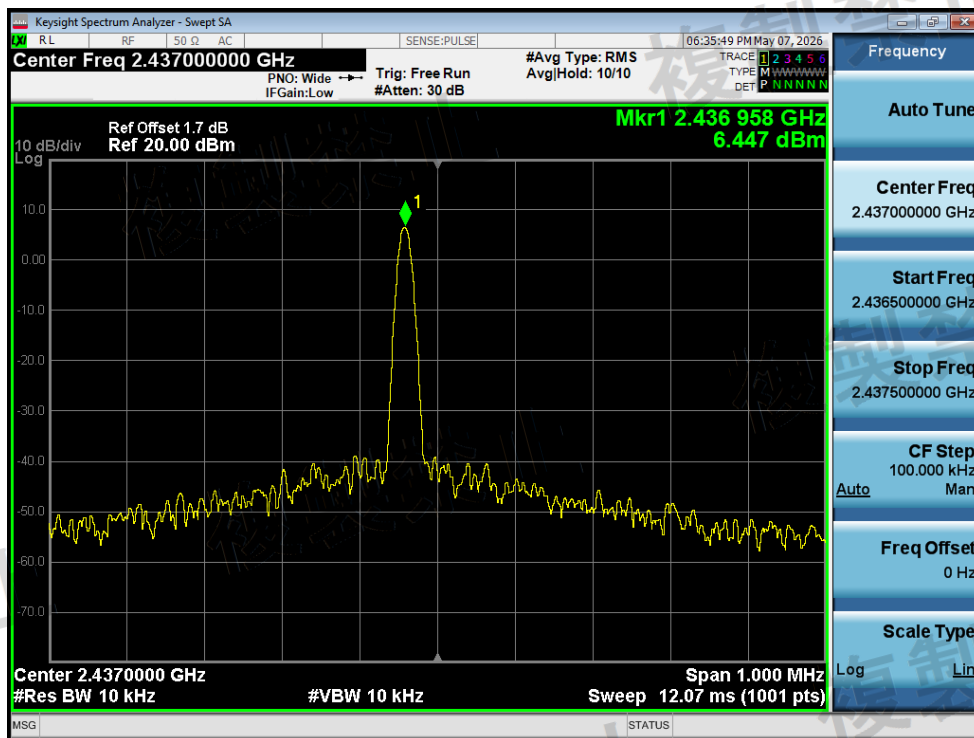


Freq. Error NVNT b 2437MHz Ant1

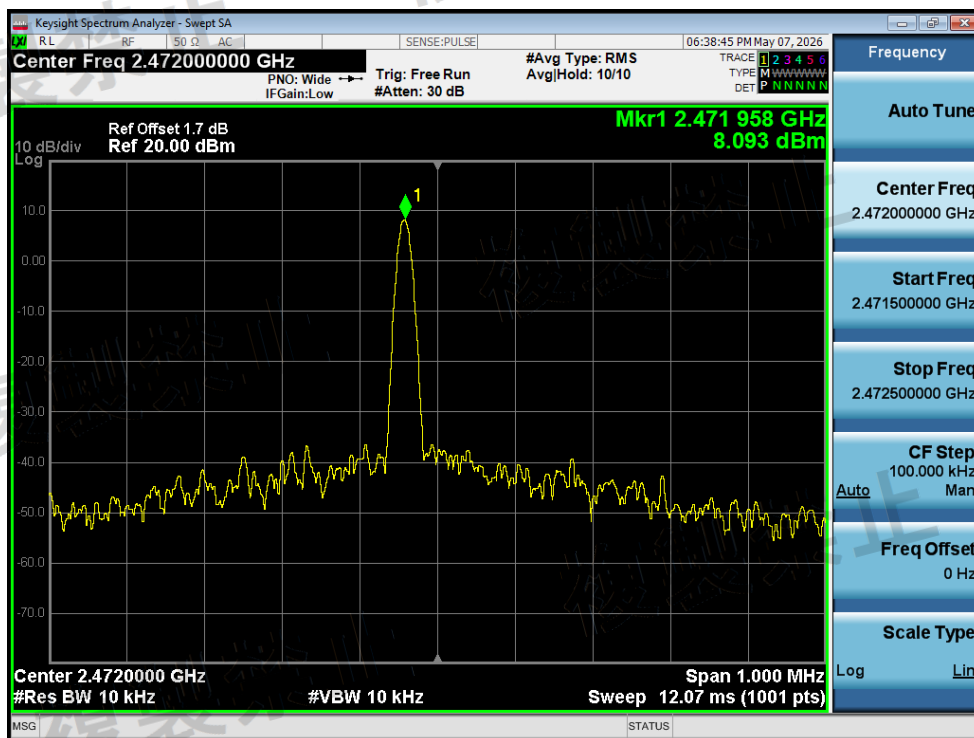

Freq. Error NVNT b 2472MHz Ant1

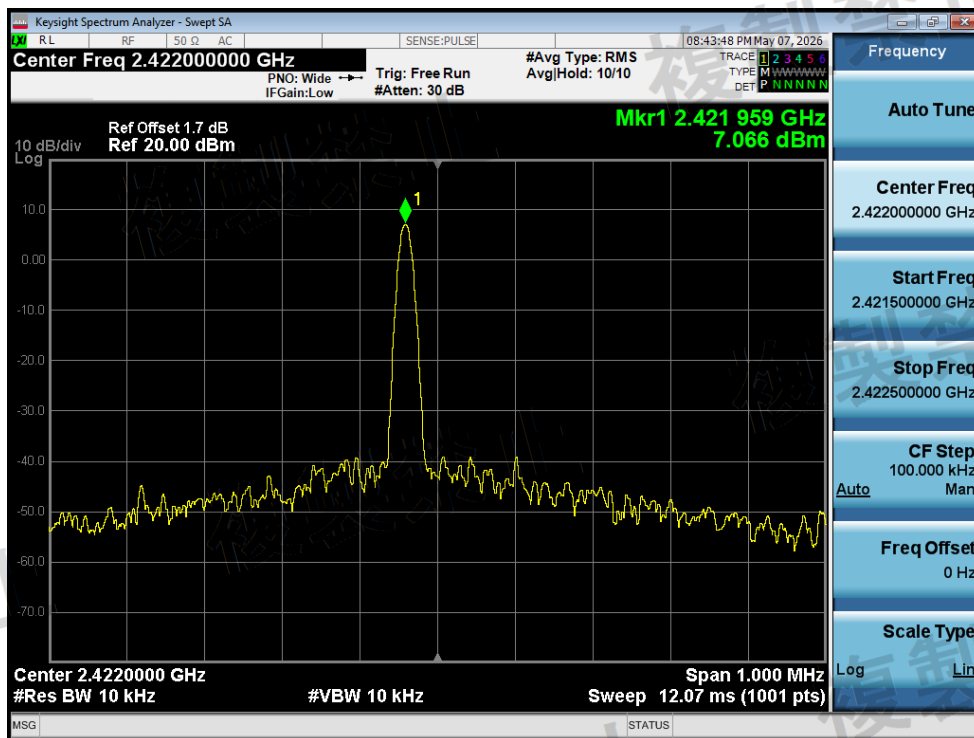


Freq. Error NVNT n40 2422MHz Ant1

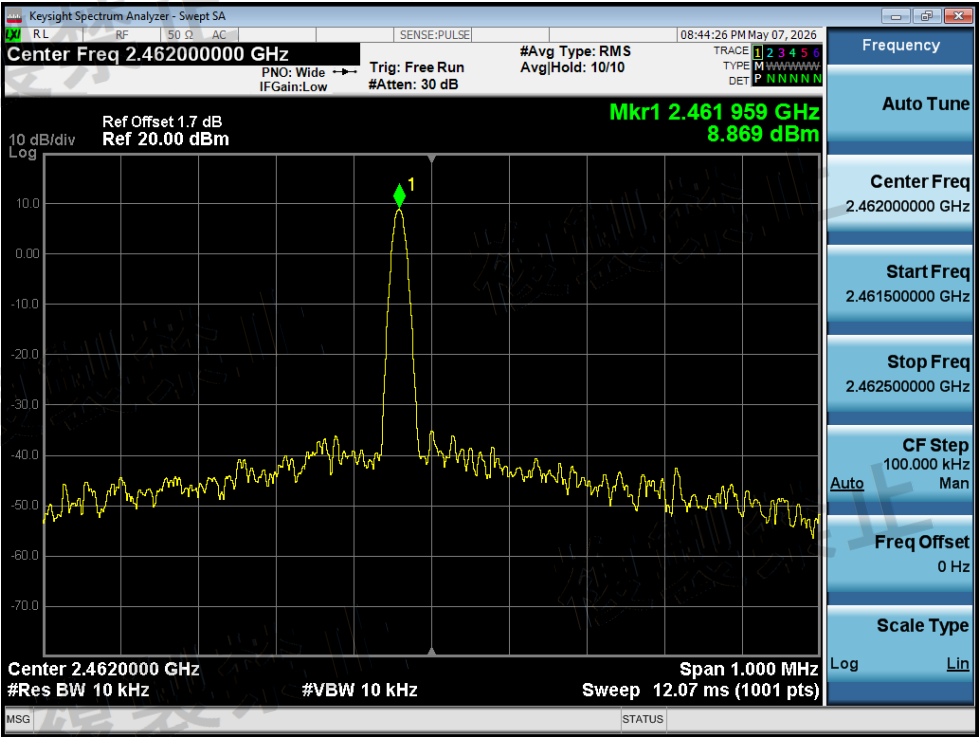


Freq. Error NVNT n40 2462MHz Ant1

2. Antenna and EIRP Power


Condition	Mode	Frequency (MHz)	Antenna	Power (dBm/MHz)	Antenna Power (mW/MHz)	Limit (mW/MHz)	Declared Power (mW/MHz)	Tolerance (%)	Upper Limit (%)	Verdict
NVNT	b	2412	Ant1	6.77	4.75	10	10	-52.5	+20	Pass
NVNT	b	2437	Ant1	7.18	5.23	10	10	-47.7	+20	Pass
NVNT	b	2472	Ant1	7.96	6.24	10	10	-37.6	+20	Pass
NVNT	g	2412	Ant1	4.32	2.71	10	10	-72.9	+20	Pass
NVNT	g	2437	Ant1	5.13	3.26	10	10	-67.4	+20	Pass
NVNT	g	2472	Ant1	5.96	3.95	10	10	-60.5	+20	Pass
NVNT	n20	2412	Ant1	3.73	2.36	10	10	-76.4	+20	Pass
NVNT	n20	2437	Ant1	4.18	2.62	10	10	-73.8	+20	Pass
NVNT	n20	2472	Ant1	4.91	3.1	10	10	-69	+20	Pass
NVNT	n40	2422	Ant1	-0.47	0.9	5	5	-82	+20	Pass
NVNT	n40	2437	Ant1	0.01	1	5	5	-80	+20	Pass
NVNT	n40	2462	Ant1	0.67	1.17	5	5	-76.6	+20	Pass

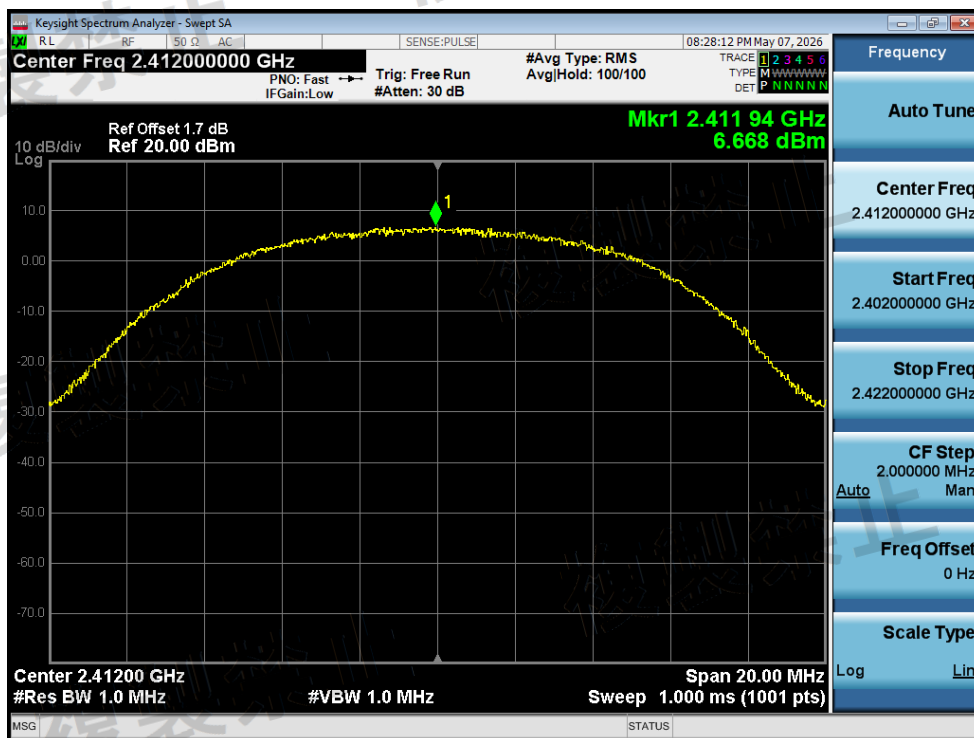


Power NVNT b 2412MHz Ant1 Pre Scan

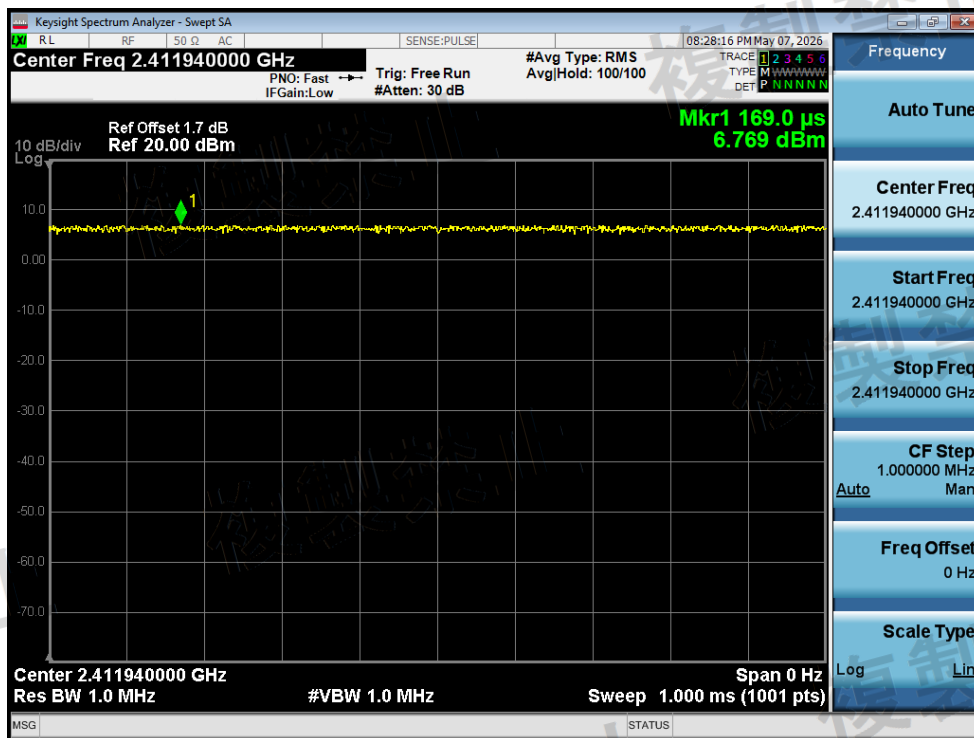


Power NVNT b 2412MHz Ant1 Zero Span

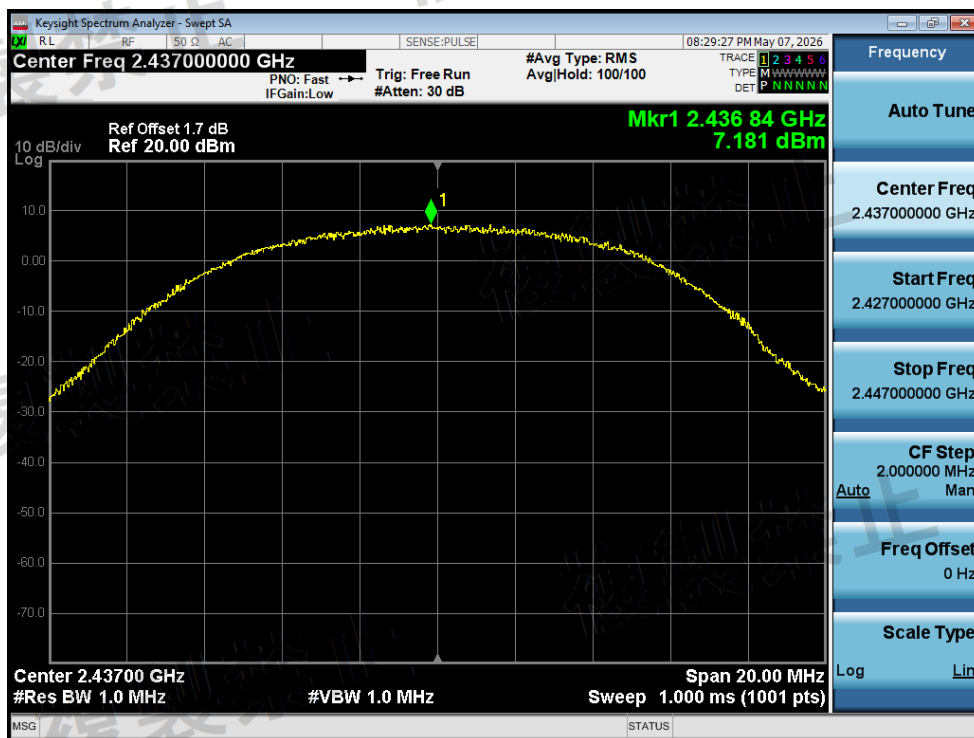


Power NVNT b 2437MHz Ant1 Pre Scan

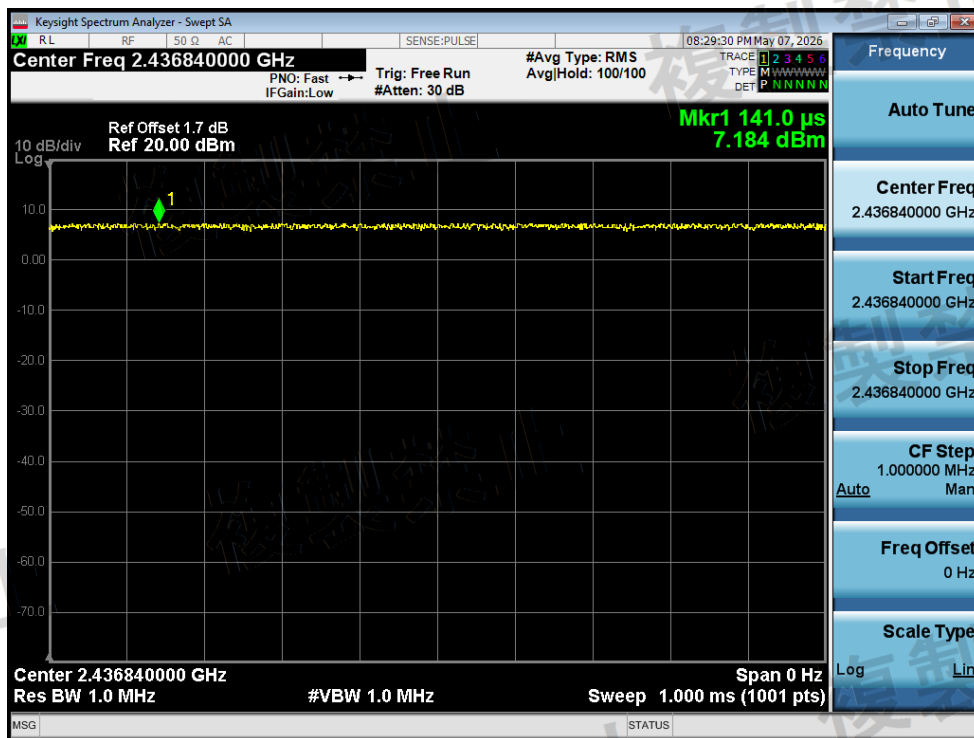


Power NVNT b 2437MHz Ant1 Zero Span

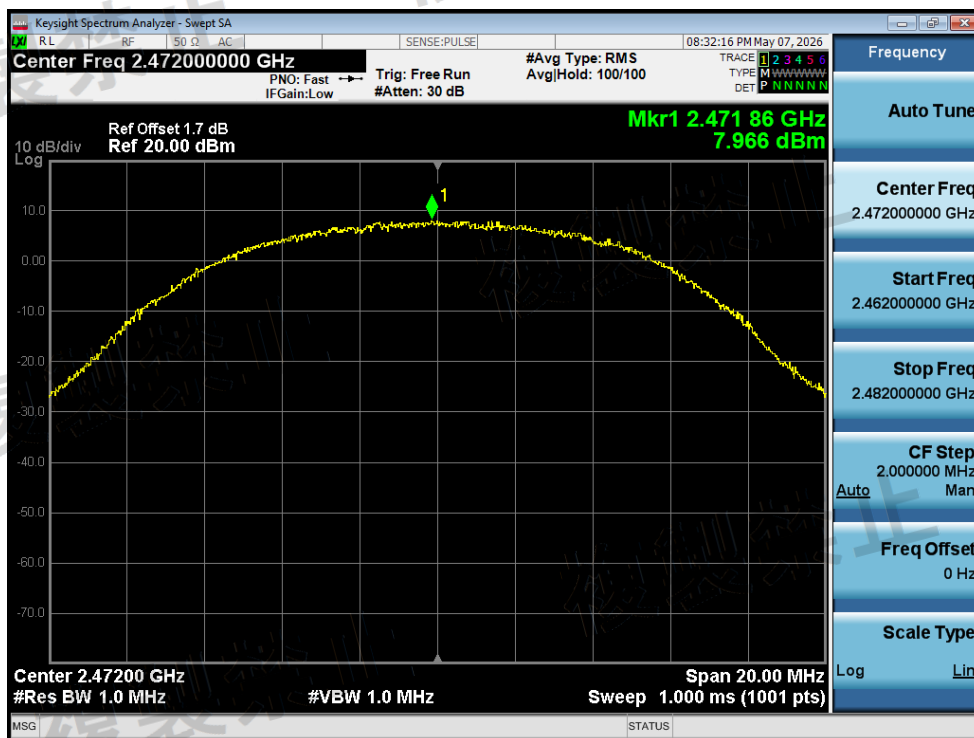


Power NVNT b 2472MHz Ant1 Pre Scan

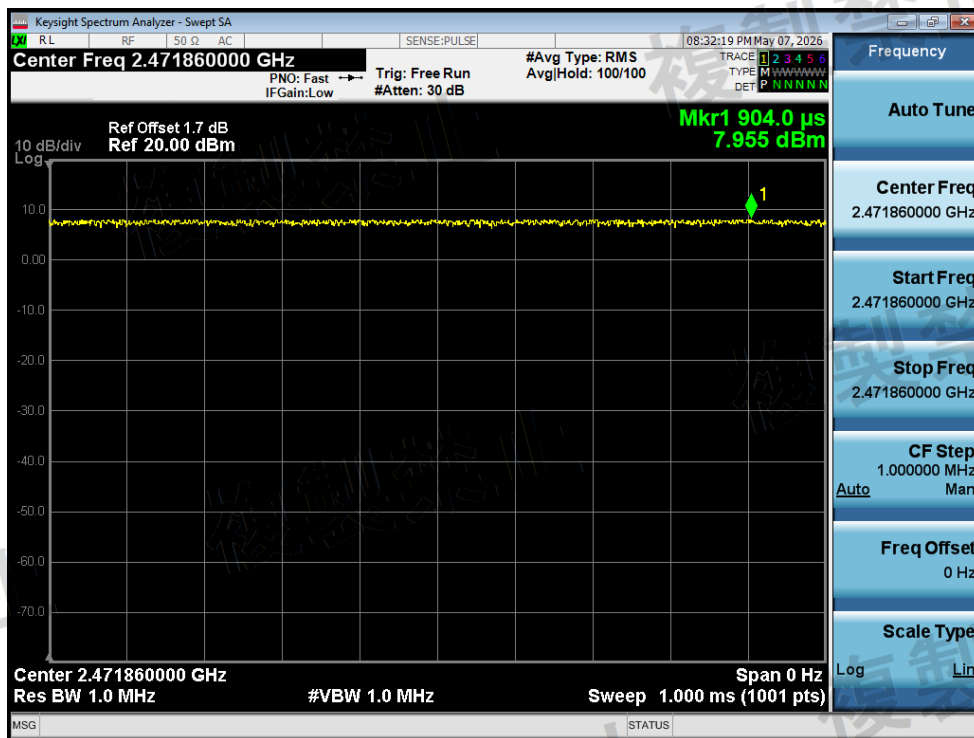

Power NVNT b 2472MHz Ant1 Zero Span

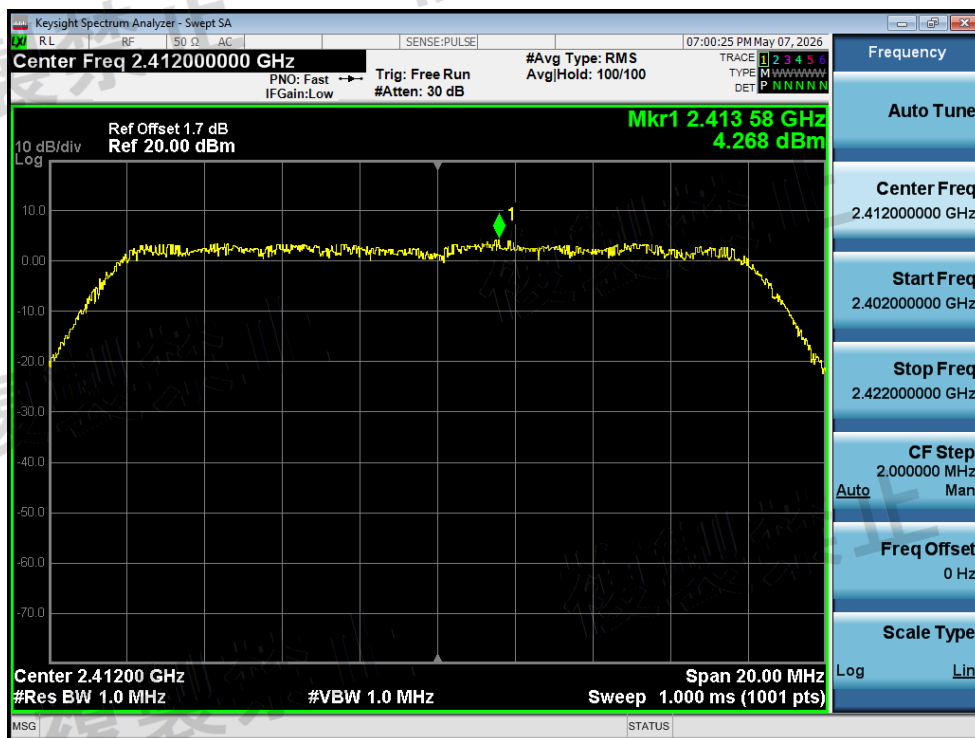


Power NVNT g 2412MHz Ant1 Pre Scan

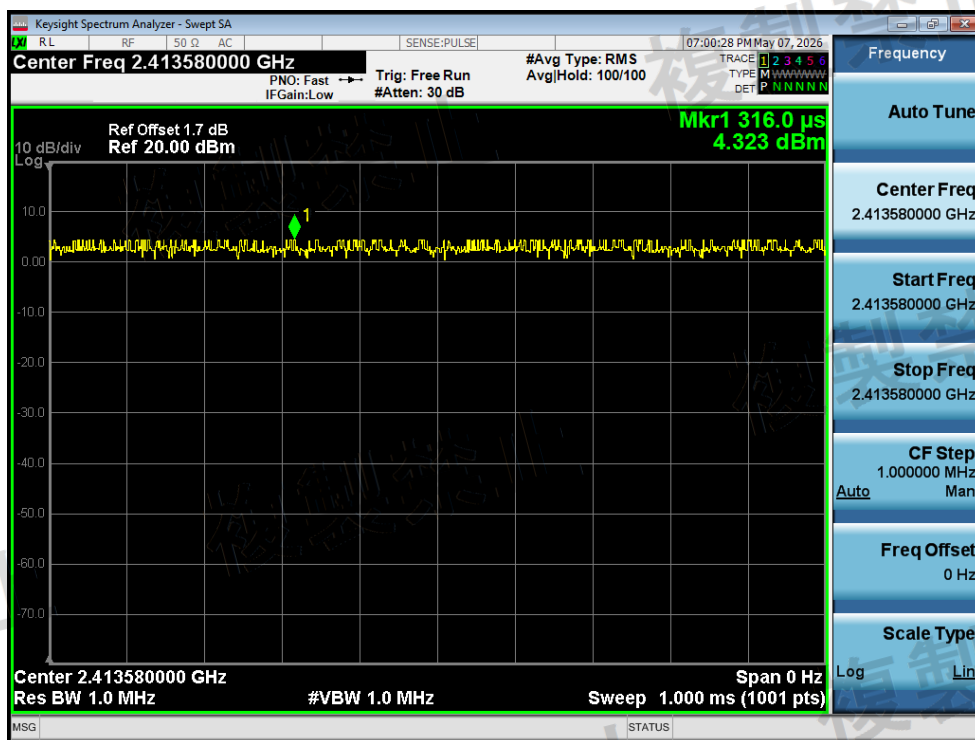


Power NVNT g 2412MHz Ant1 Zero Span




Power NVNT g 2437MHz Ant1 Pre Scan

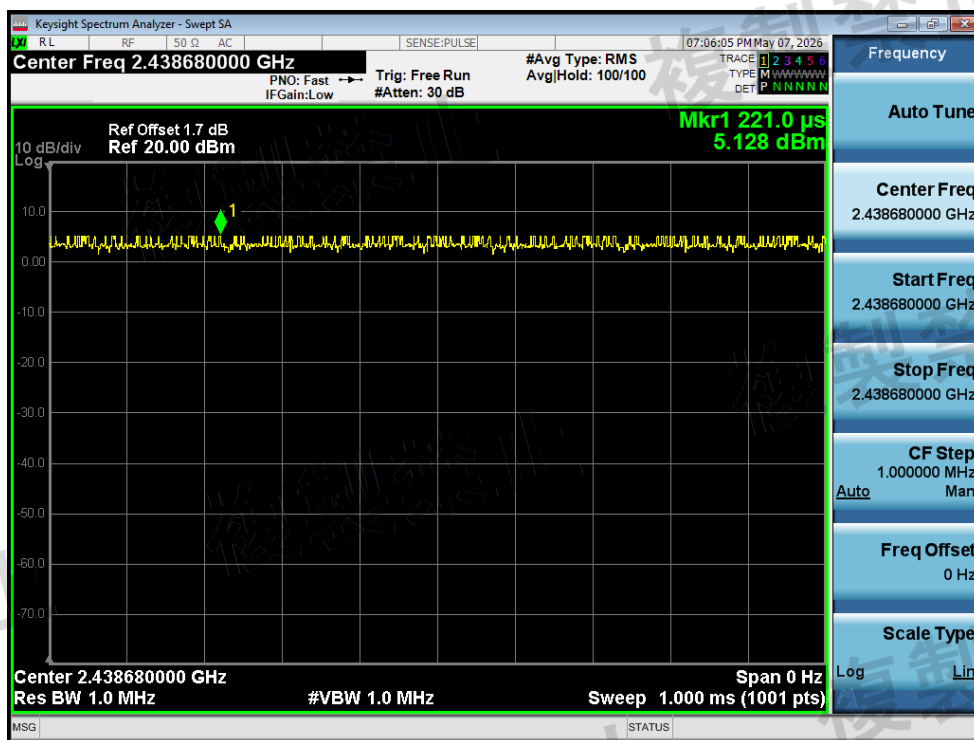


Power NVNT g 2437MHz Ant1 Zero Span

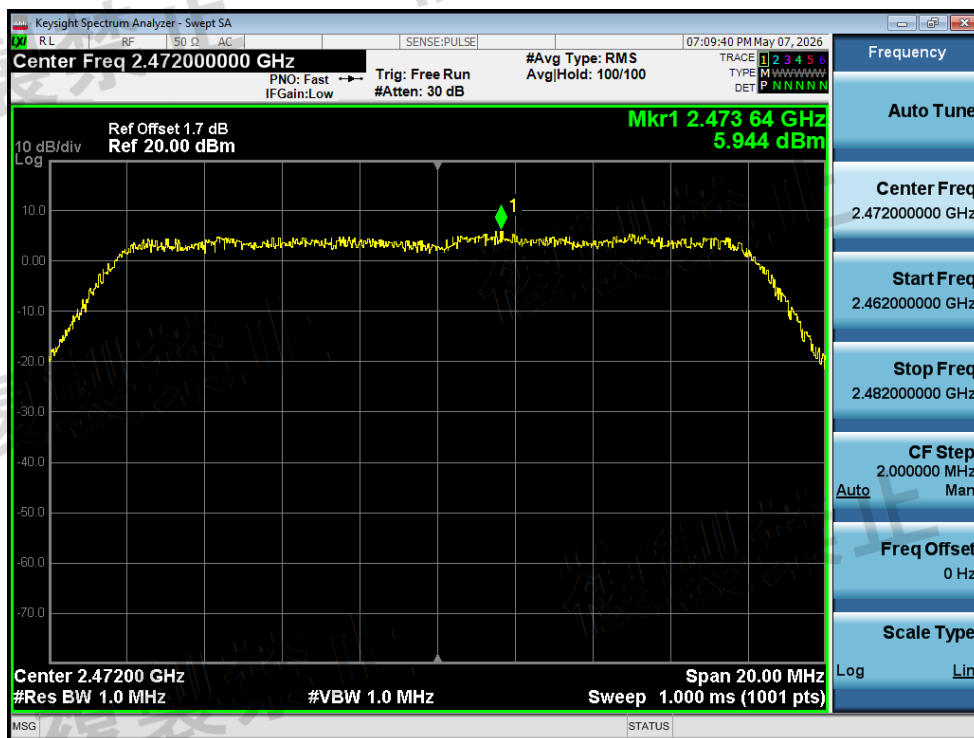


Power NVNT g 2472MHz Ant1 Pre Scan

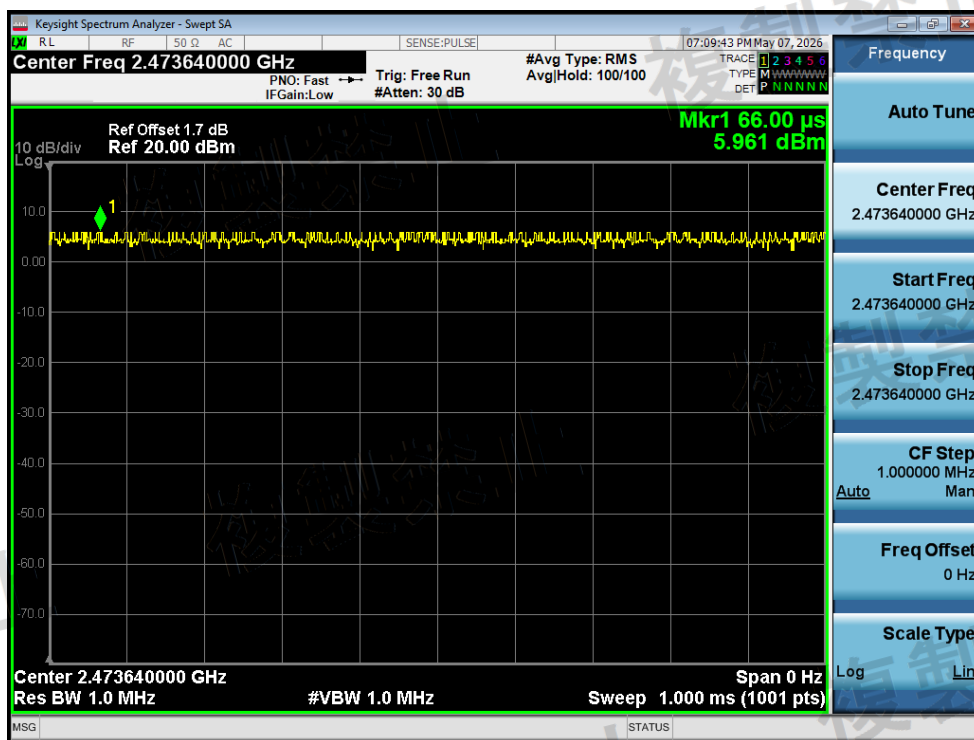


Power NVNT g 2472MHz Ant1 Zero Span

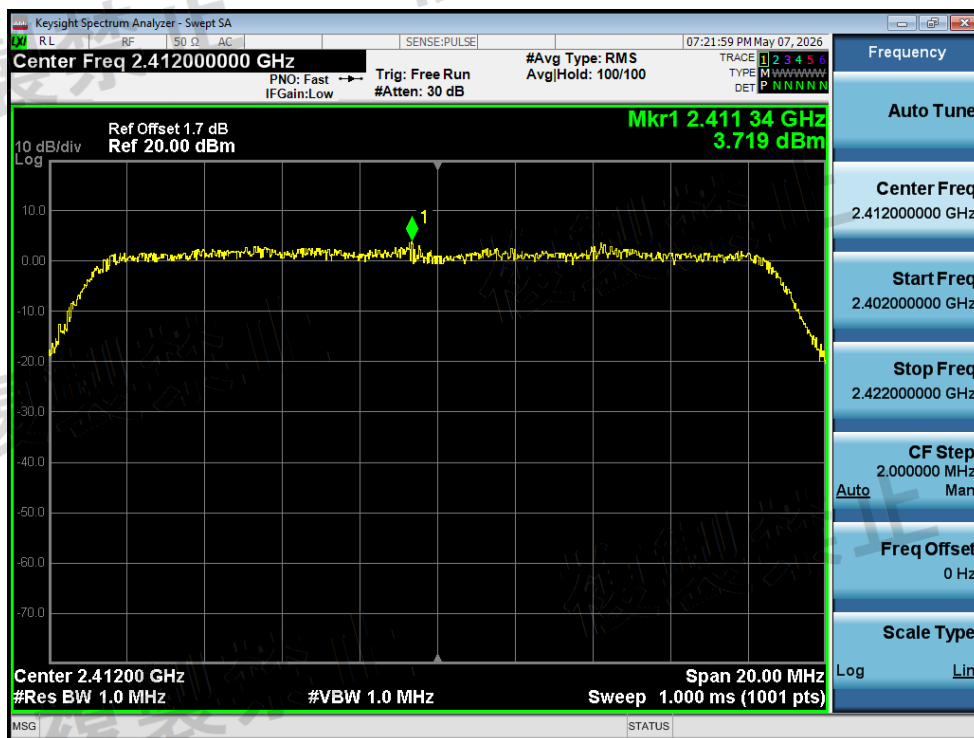


Power NVNT n20 2412MHz Ant1 Pre Scan

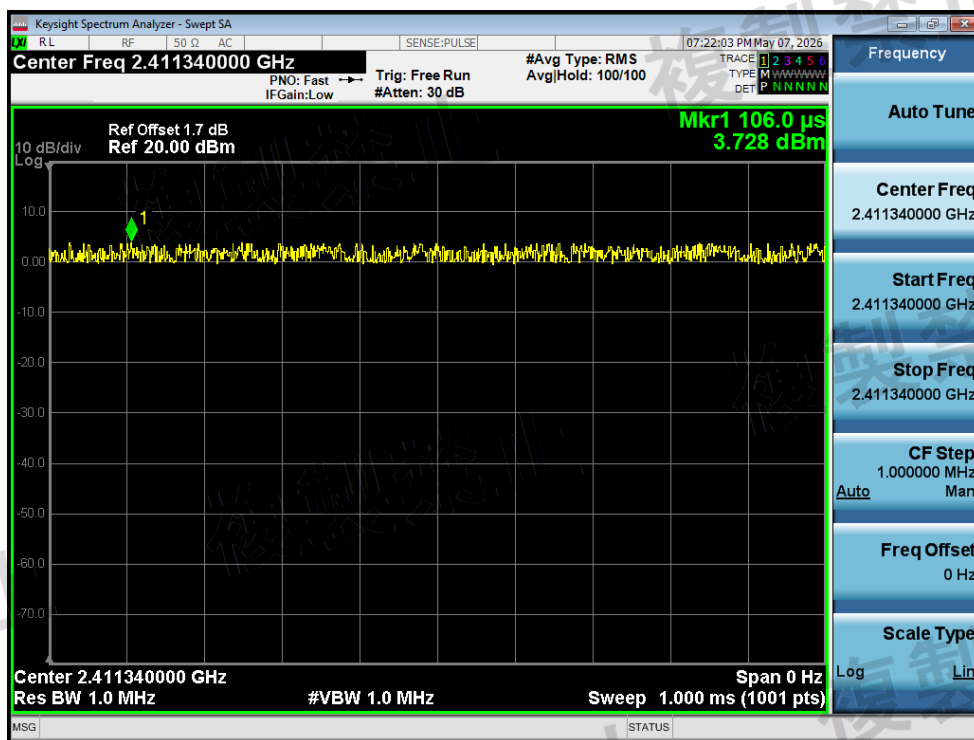


Power NVNT n20 2412MHz Ant1 Zero Span

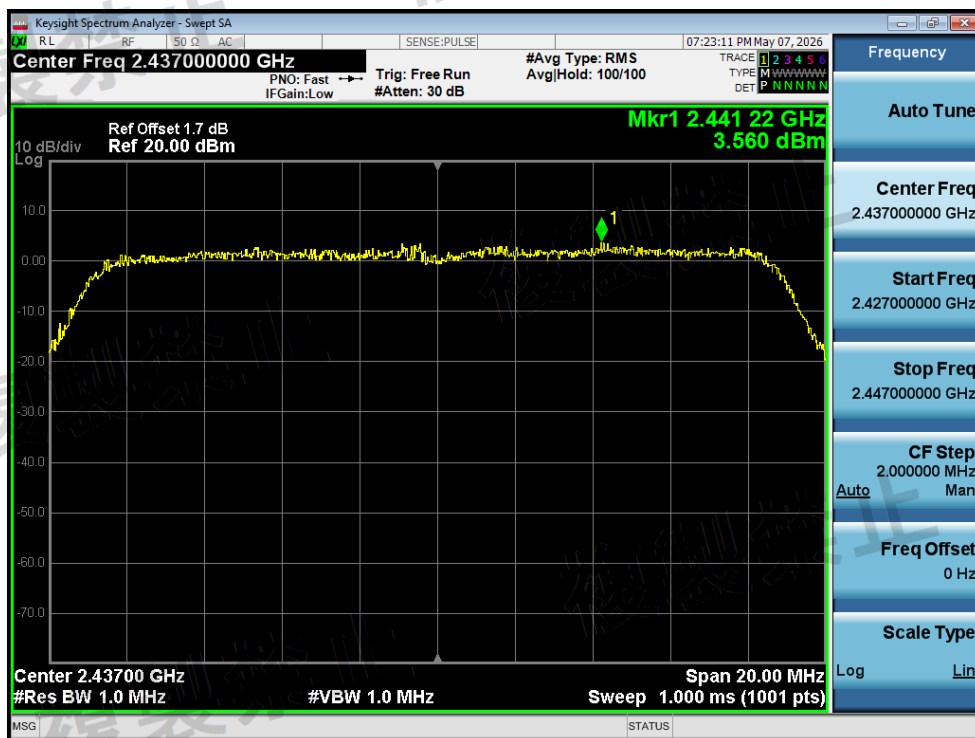


Power NVNT n20 2437MHz Ant1 Pre Scan

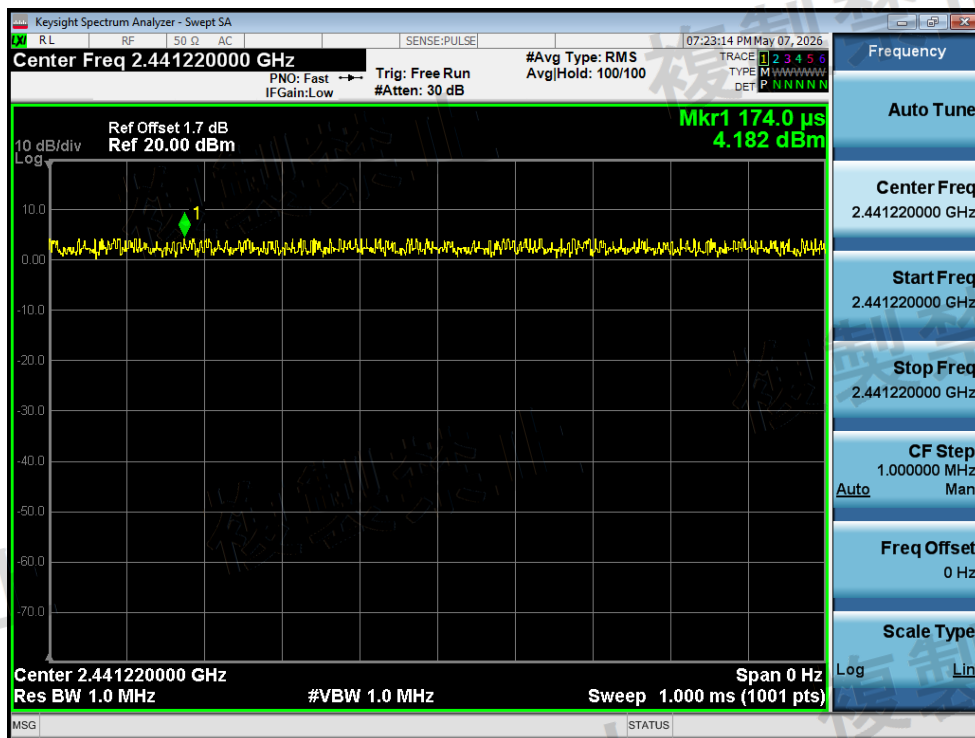


Power NVNT n20 2437MHz Ant1 Zero Span

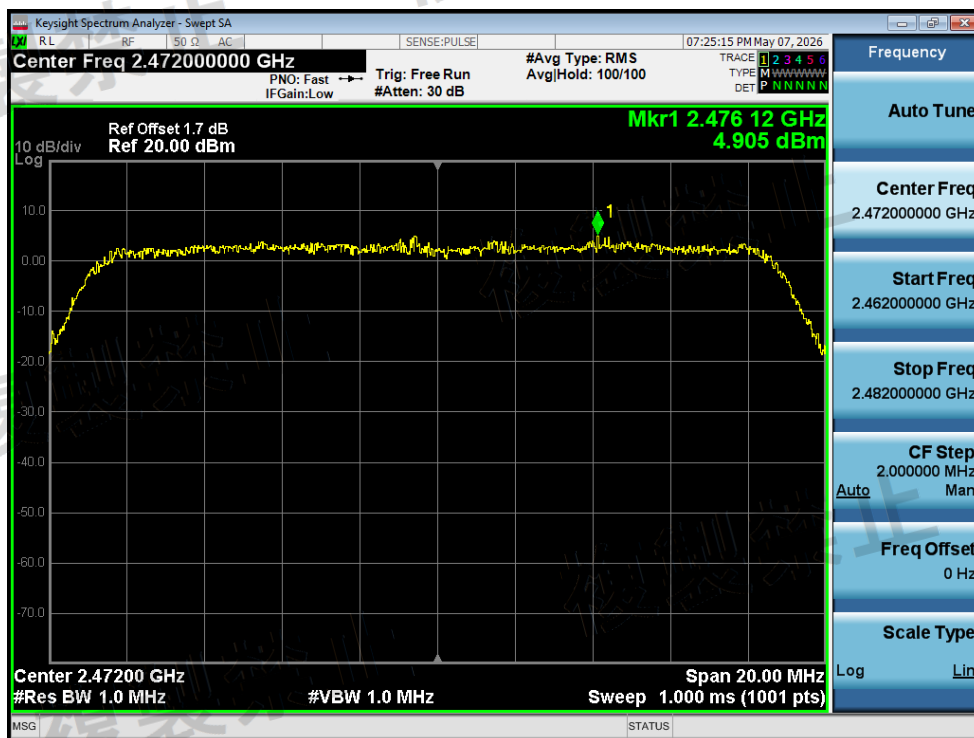


Power NVNT n20 2472MHz Ant1 Pre Scan

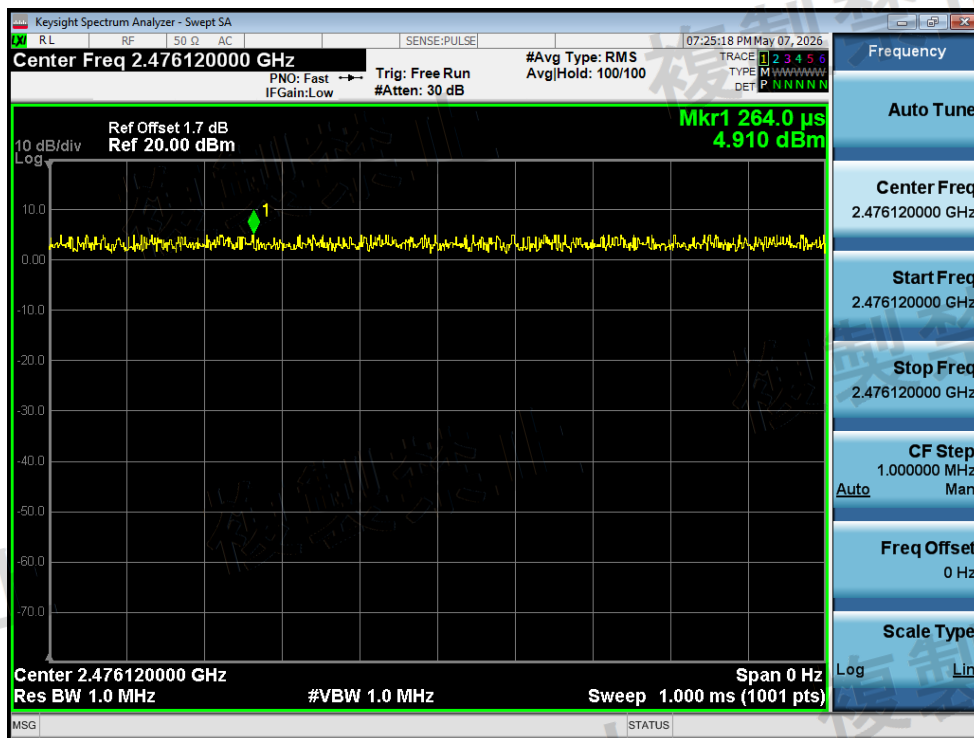


Power NVNT n20 2472MHz Ant1 Zero Span

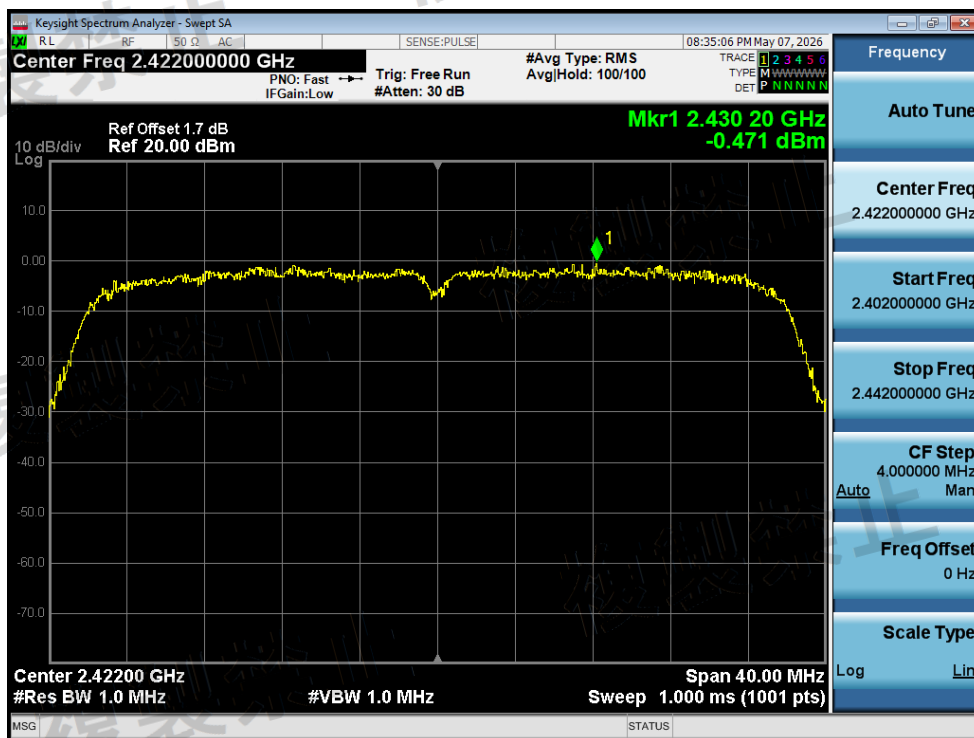


Power NVNT n40 2422MHz Ant1 Pre Scan

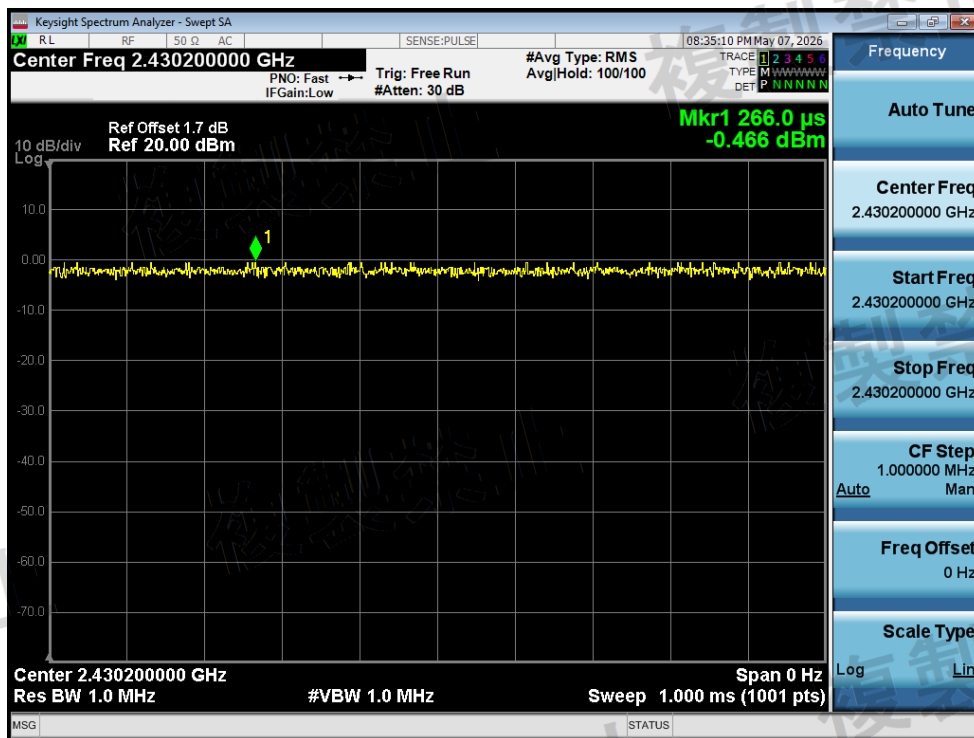


Power NVNT n40 2422MHz Ant1 Zero Span

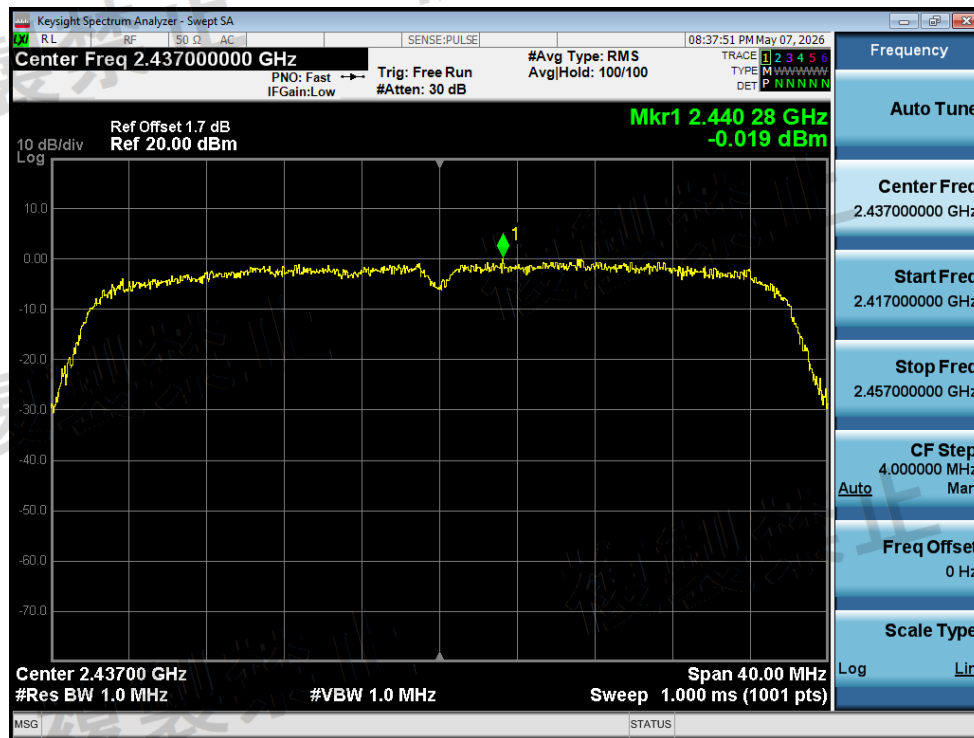


Power NVNT n40 2437MHz Ant1 Pre Scan

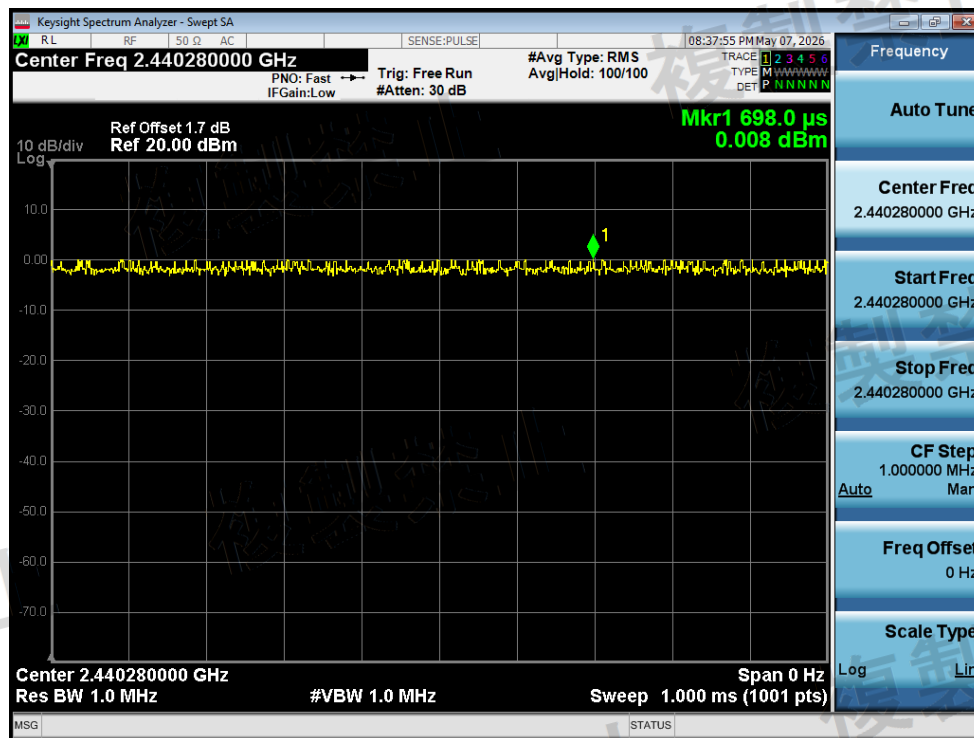

Power NVNT n40 2437MHz Ant1 Zero Span

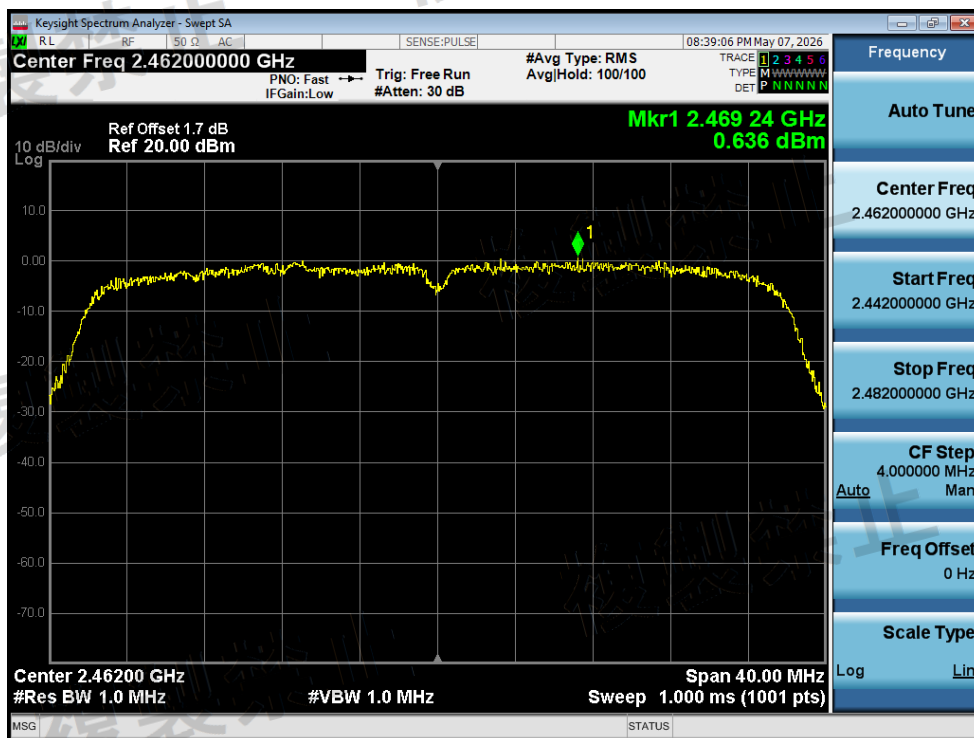

Power NVNT n40 2462MHz Ant1 Pre Scan

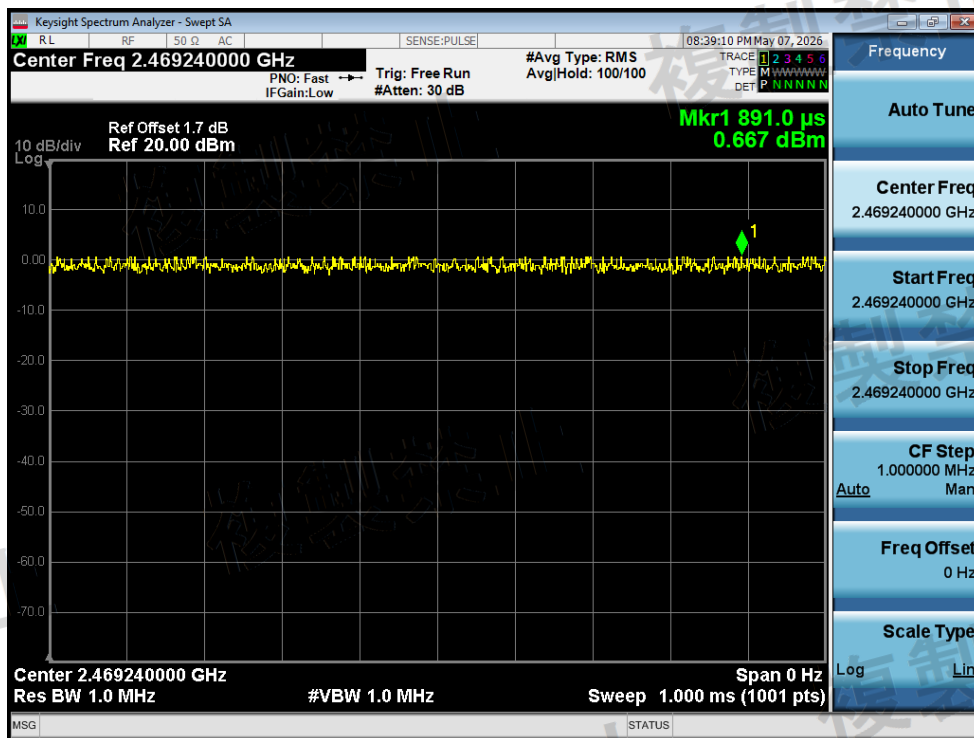


Power NVNT n40 2462MHz Ant1 Zero Span

3. EIRP Power


Condition	Mode	Frequency (MHz)	Antenna	Antenna Power (dBm/MHz)	Gain (dBi)	EIRP Power (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	b	2412	Ant1	6.77	4.1	10.87	12.14	Pass
NVNT	b	2437	Ant1	7.19	4.1	11.29	12.14	Pass
NVNT	b	2472	Ant1	7.95	4.1	12.05	12.14	Pass
NVNT	g	2412	Ant1	4.33	4.1	8.43	12.14	Pass
NVNT	g	2437	Ant1	5.13	4.1	9.23	12.14	Pass
NVNT	g	2472	Ant1	5.97	4.1	10.07	12.14	Pass
NVNT	n20	2412	Ant1	3.73	4.1	7.83	12.14	Pass
NVNT	n20	2437	Ant1	4.18	4.1	8.28	12.14	Pass
NVNT	n20	2472	Ant1	4.91	4.1	9.01	12.14	Pass
NVNT	n40	2422	Ant1	-0.46	4.1	3.64	9.13	Pass
NVNT	n40	2437	Ant1	0.00	4.1	4.1	9.13	Pass
NVNT	n40	2462	Ant1	0.68	4.1	4.78	9.13	Pass

4. Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	13.24
NVNT	b	2437	Ant1	13.3
NVNT	b	2472	Ant1	13.361
NVNT	g	2412	Ant1	16.565
NVNT	g	2437	Ant1	16.537
NVNT	g	2472	Ant1	16.556
NVNT	n20	2412	Ant1	17.496
NVNT	n20	2437	Ant1	17.486
NVNT	n20	2472	Ant1	17.475
NVNT	n40	2422	Ant1	35.211
NVNT	n40	2437	Ant1	35.05
NVNT	n40	2462	Ant1	35.158

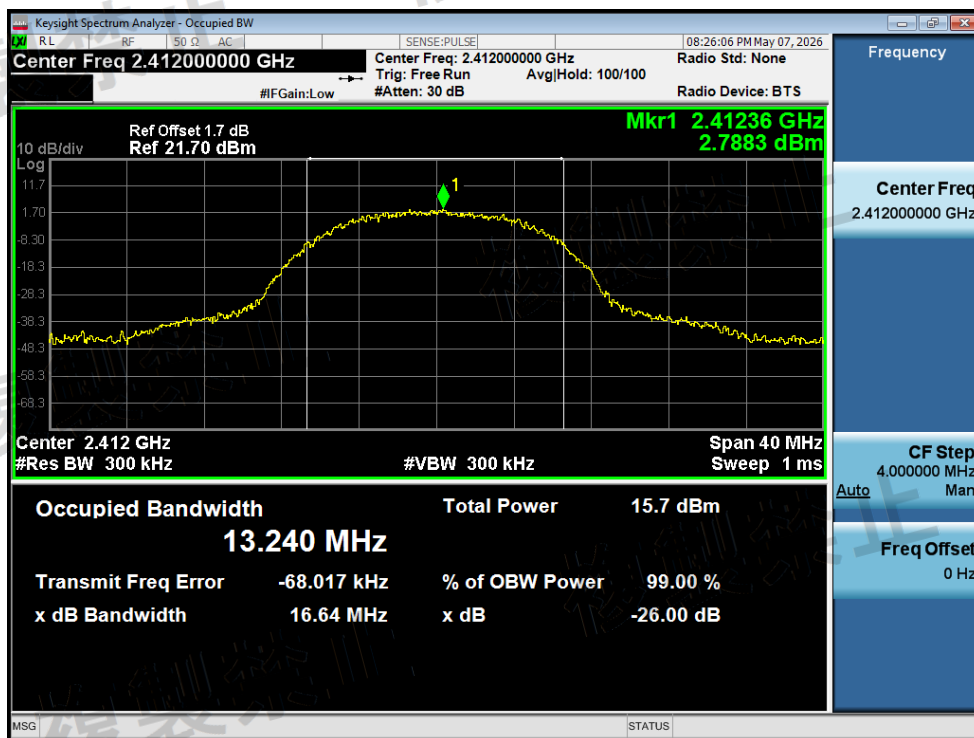


OBW NVNT b 2412MHz Ant1

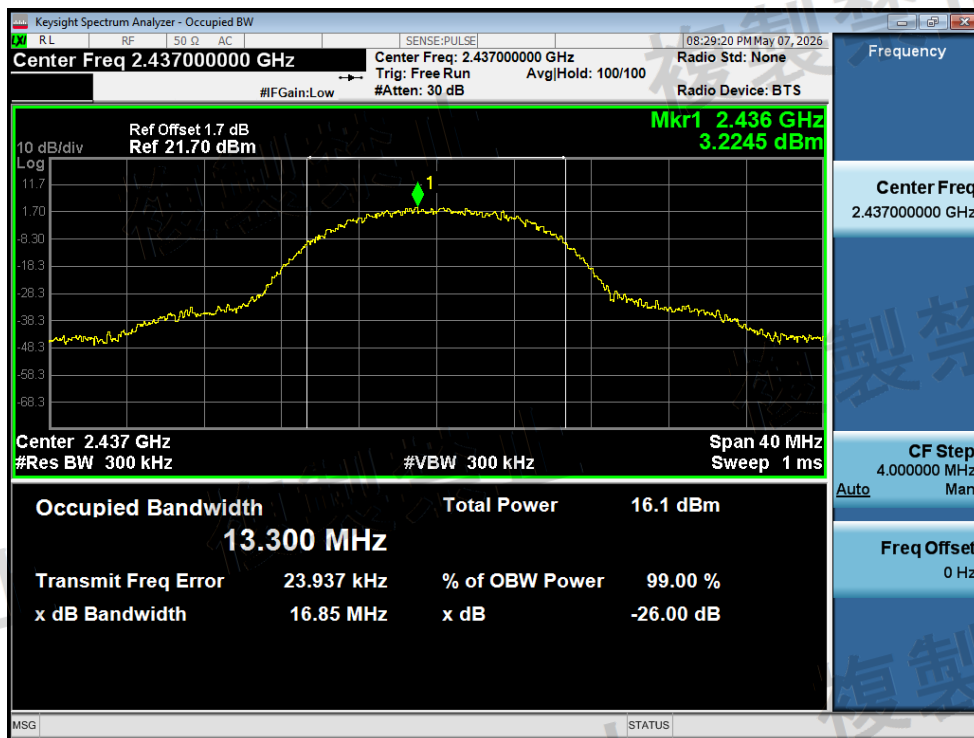


OBW NVNT b 2437MHz Ant1

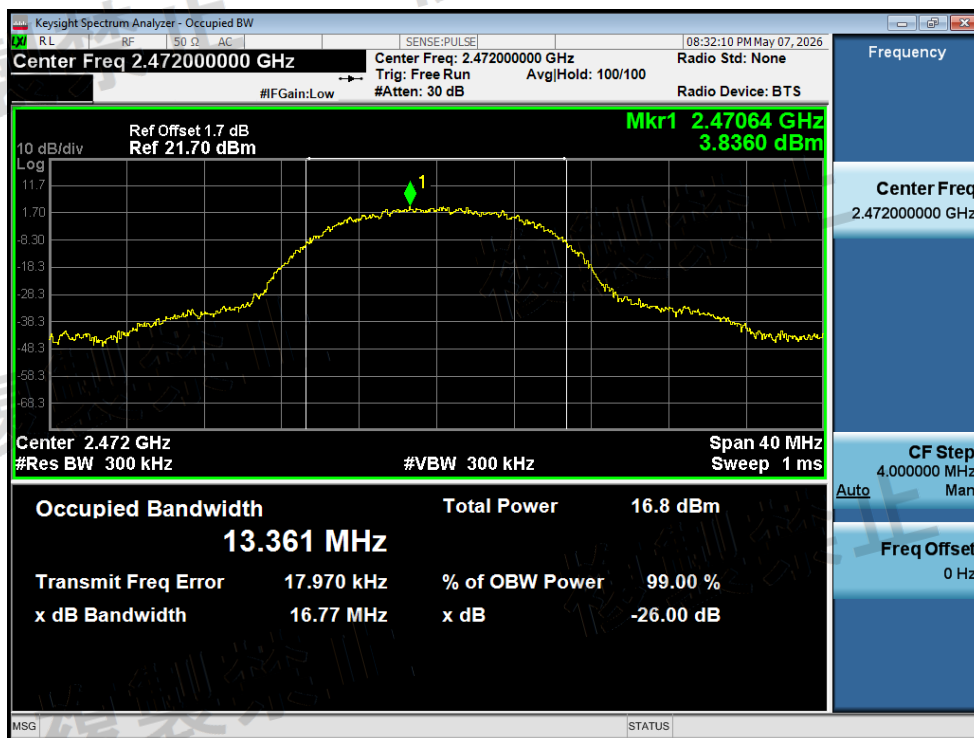


OBW NVNT b 2472MHz Ant1

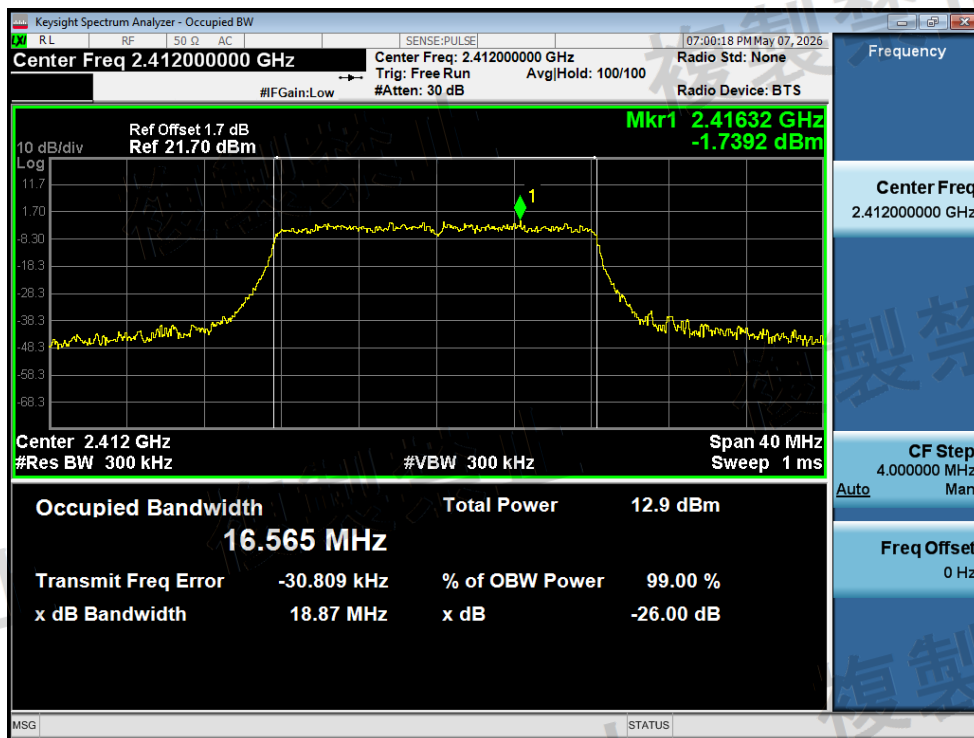


OBW NVNT g 2412MHz Ant1

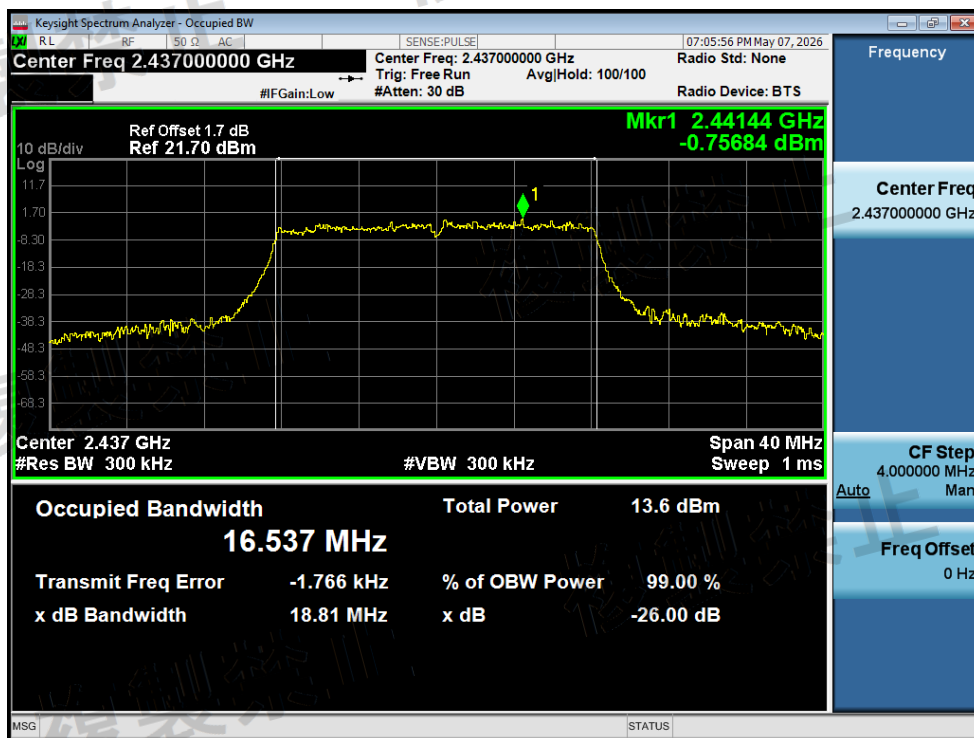


OBW NVNT g 2437MHz Ant1

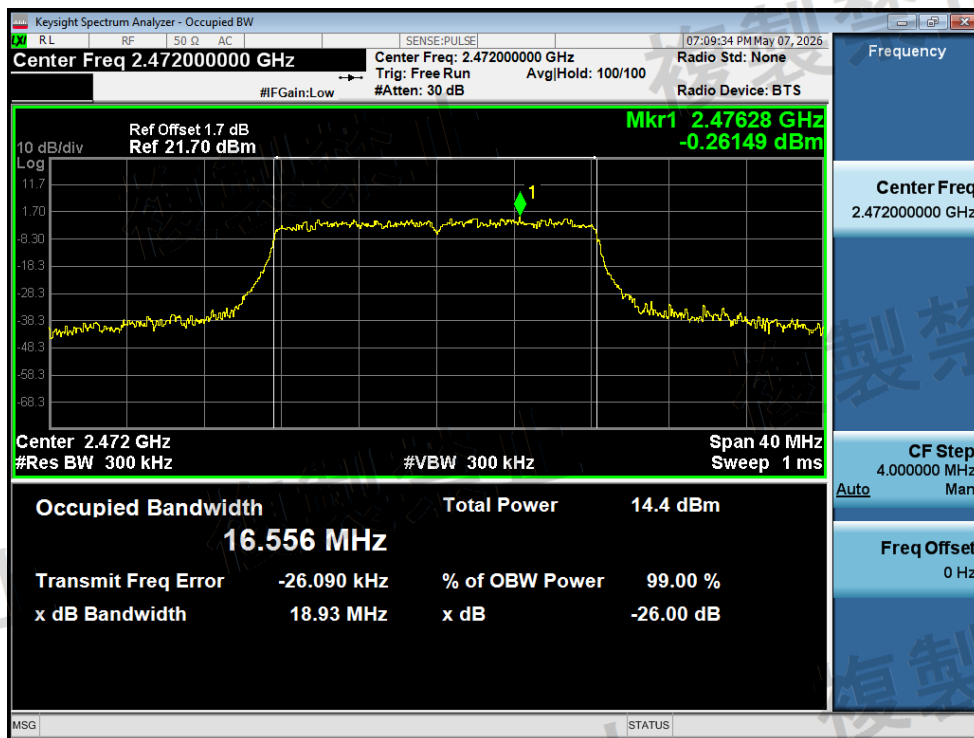


OBW NVNT g 2472MHz Ant1

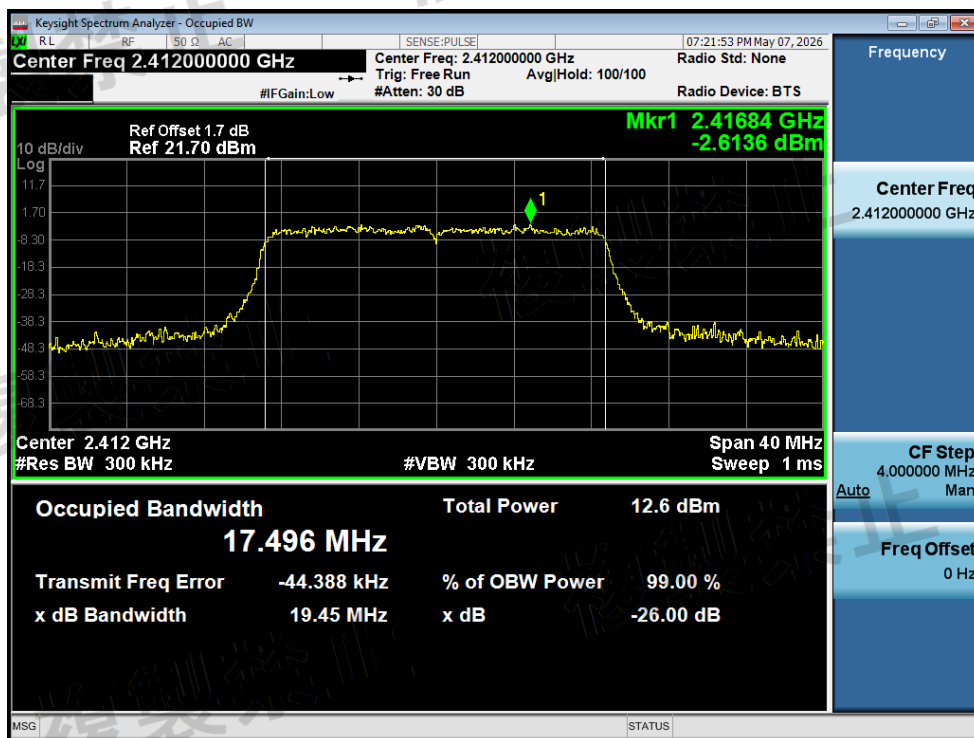


OBW NVNT n20 2412MHz Ant1

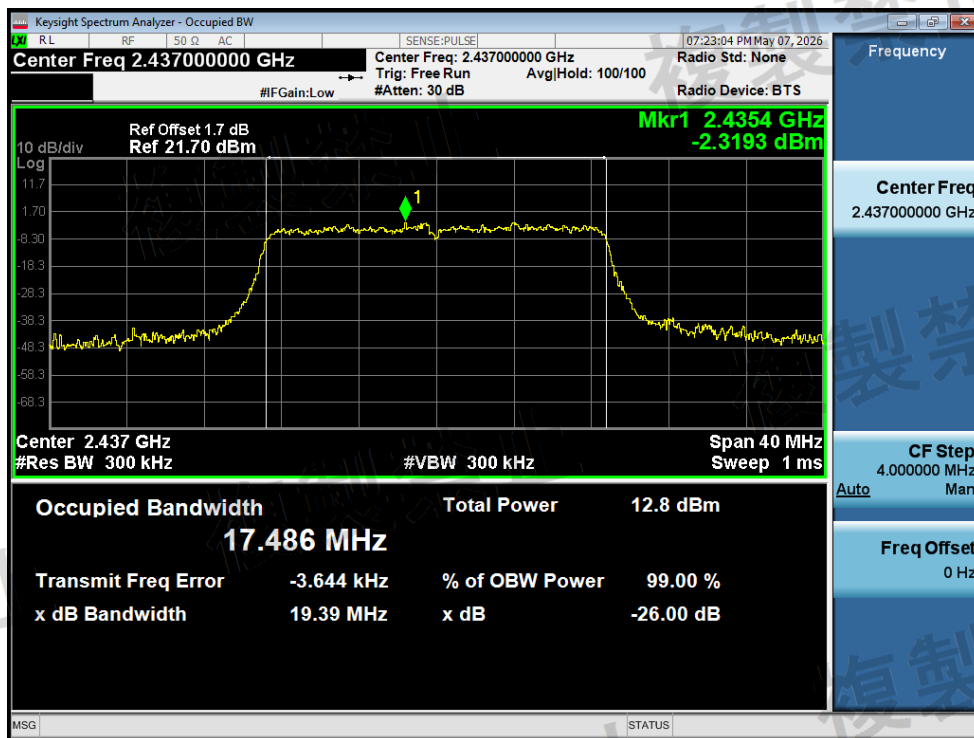


OBW NVNT n20 2437MHz Ant1

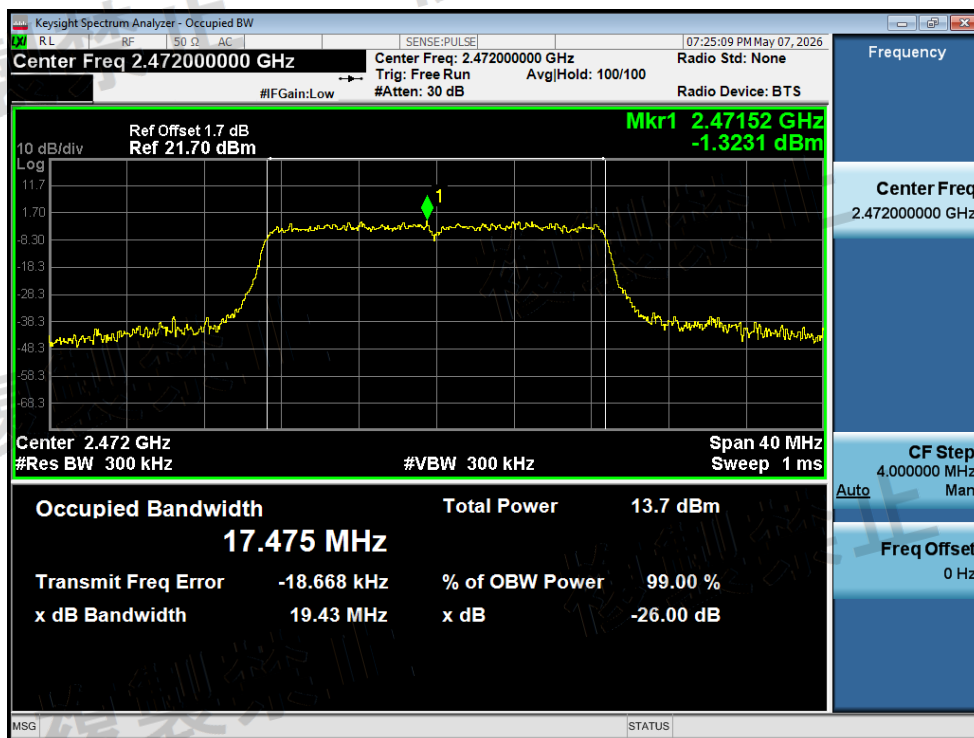


OBW NVNT n20 2472MHz Ant1

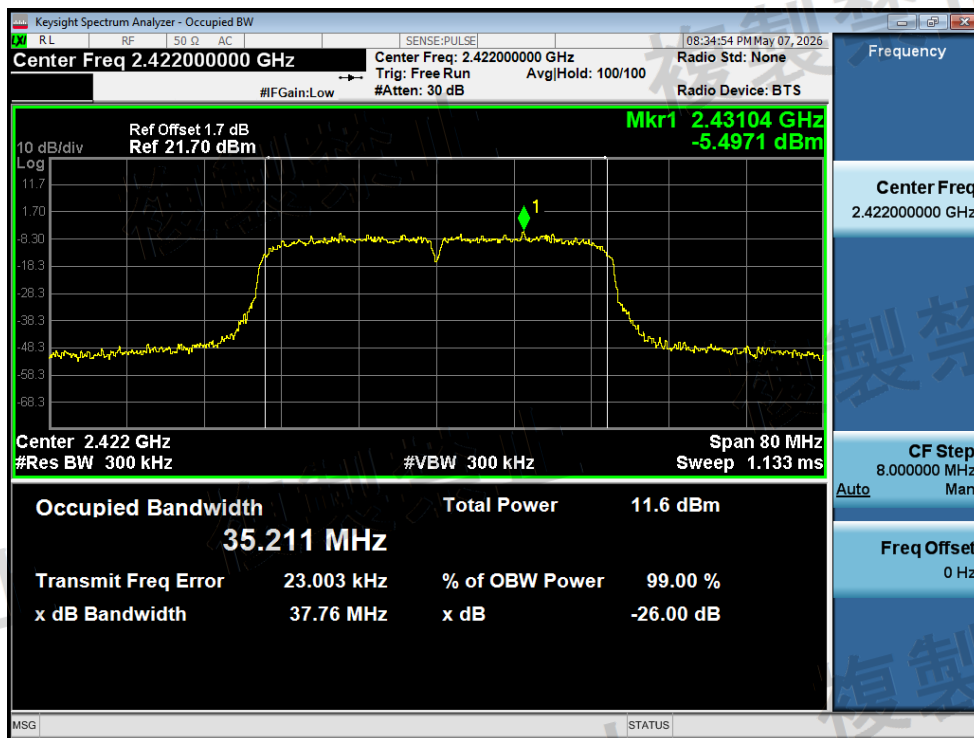

OBW NVNT n40 2422MHz Ant1

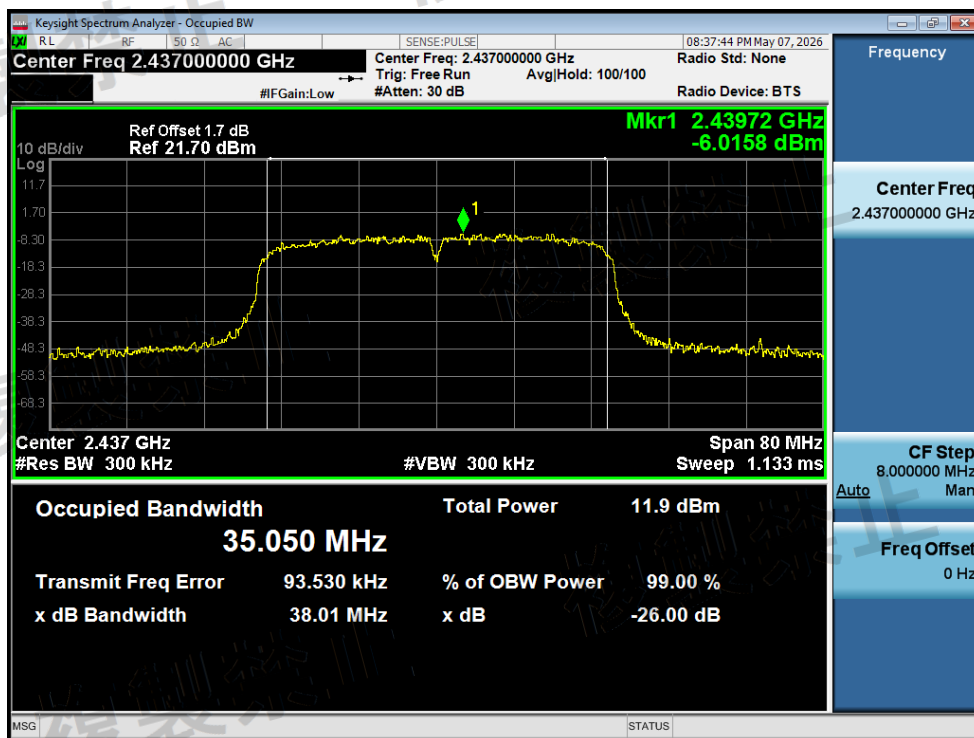

OBW NVNT n40 2437MHz Ant1

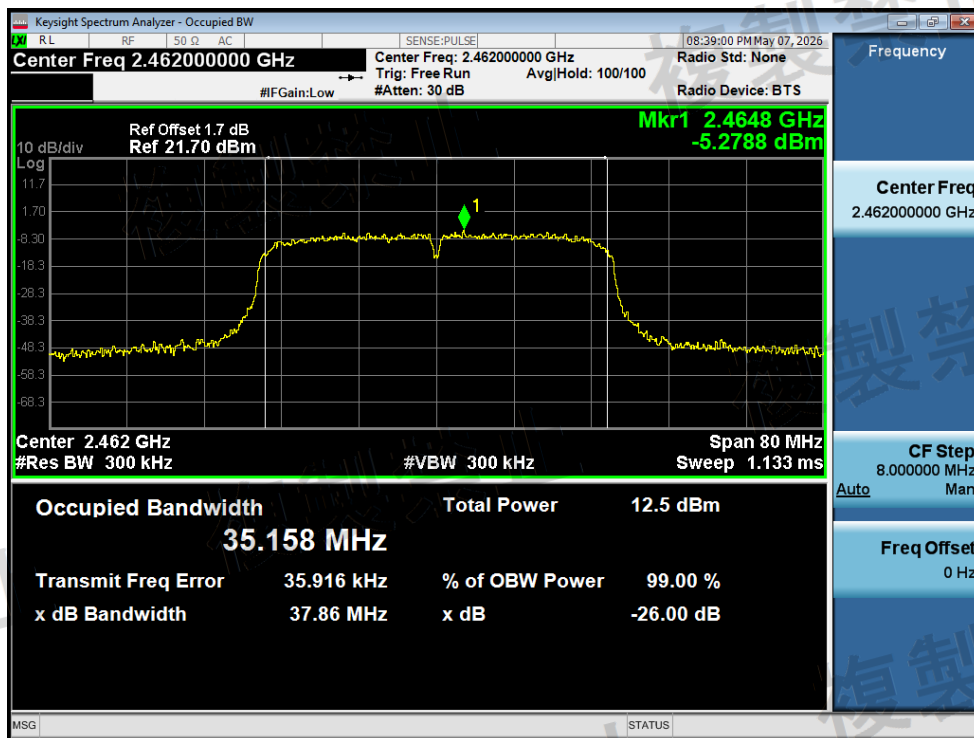


OBW NVNT n40 2462MHz Ant1

5. Tx Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Range (MHz)	Emission Frequency (MHz)	Max Value (dBm)	Max Value (μ W/ MHz)	Limit (μ W/ MHz)	Verdict
NVNT	b	2412	Ant1	30-1000	806	-52.19	0.006	2.5	Pass
NVNT	b	2412	Ant1	1000-2387	2385.61	-40.26	0.094	2.5	Pass
NVNT	b	2412	Ant1	2387-2400	2400	-32.23	0.598	25	Pass
NVNT	b	2412	Ant1	2483.5-2496.5	2495.51	-52.25	0.006	25	Pass
NVNT	b	2412	Ant1	2496.5-13000	4828.28	-28.25	1.496	2.5	Pass
NVNT	b	2437	Ant1	30-1000	810.85	-52.15	0.006	2.5	Pass
NVNT	b	2437	Ant1	1000-2387	1625.54	-55.08	0.003	2.5	Pass
NVNT	b	2437	Ant1	2387-2400	2399.84	-49.4	0.011	25	Pass
NVNT	b	2437	Ant1	2483.5-2496.5	2489.66	-53.12	0.005	25	Pass
NVNT	b	2437	Ant1	2496.5-13000	7307.1	-28.74	1.337	2.5	Pass
NVNT	b	2472	Ant1	30-1000	826.37	-52.24	0.006	2.5	Pass
NVNT	b	2472	Ant1	1000-2387	2367.58	-54.93	0.003	2.5	Pass
NVNT	b	2472	Ant1	2387-2400	2398.13	-54.37	0.004	25	Pass
NVNT	b	2472	Ant1	2483.5-2496.5	2483.5	-28.03	1.574	25	Pass
NVNT	b	2472	Ant1	2496.5-13000	7412.14	-30.9	0.813	2.5	Pass
NVNT	g	2412	Ant1	30-1000	808.91	-51.59	0.007	2.5	Pass
NVNT	g	2412	Ant1	1000-2387	2385.61	-42.82	0.052	2.5	Pass
NVNT	g	2412	Ant1	2387-2400	2399.3	-32.49	0.564	25	Pass
NVNT	g	2412	Ant1	2483.5-2496.5	2496.46	-48.01	0.016	25	Pass
NVNT	g	2412	Ant1	2496.5-13000	4817.77	-36.53	0.222	2.5	Pass
NVNT	g	2437	Ant1	30-1000	812.79	-51.53	0.007	2.5	Pass
NVNT	g	2437	Ant1	1000-2387	2375.9	-50.6	0.009	2.5	Pass
NVNT	g	2437	Ant1	2387-2400	2399.99	-47.46	0.018	25	Pass
NVNT	g	2437	Ant1	2483.5-2496.5	2486.2	-47.78	0.017	25	Pass
NVNT	g	2437	Ant1	2496.5-13000	7328.11	-36.95	0.202	2.5	Pass
NVNT	g	2472	Ant1	30-1000	828.31	-51.54	0.007	2.5	Pass
NVNT	g	2472	Ant1	1000-2387	2377.29	-50.58	0.009	2.5	Pass
NVNT	g	2472	Ant1	2387-2400	2399.64	-49.73	0.011	25	Pass
NVNT	g	2472	Ant1	2483.5-2496.5	2483.71	-25.73	2.673	25	Pass
NVNT	g	2472	Ant1	2496.5-13000	2496.5	-32.58	0.552	2.5	Pass
NVNT	n20	2412	Ant1	30-1000	805.03	-51.72	0.007	2.5	Pass
NVNT	n20	2412	Ant1	1000-2387	2387	-42.83	0.052	2.5	Pass
NVNT	n20	2412	Ant1	2387-2400	2398.82	-30.83	0.826	25	Pass
NVNT	n20	2412	Ant1	2483.5-2496.5	2488.79	-47.11	0.019	25	Pass
NVNT	n20	2412	Ant1	2496.5-13000	4828.28	-36.55	0.221	2.5	Pass
NVNT	n20	2437	Ant1	30-1000	807.94	-51.86	0.007	2.5	Pass
NVNT	n20	2437	Ant1	1000-2387	2381.45	-50.83	0.008	2.5	Pass
NVNT	n20	2437	Ant1	2387-2400	2399.66	-48.63	0.014	25	Pass
NVNT	n20	2437	Ant1	2483.5-2496.5	2489.36	-47.72	0.017	25	Pass

NVNT	n20	2437	Ant1	2496.5-13000	7307.1	-39.57	0.110	2.5	Pass
NVNT	n20	2472	Ant1	30-1000	827.34	-51.88	0.006	2.5	Pass
NVNT	n20	2472	Ant1	1000-2387	2374.52	-50.63	0.009	2.5	Pass
NVNT	n20	2472	Ant1	2387-2400	2399.18	-50.13	0.010	25	Pass
NVNT	n20	2472	Ant1	2483.5-2496.5	2483.89	-26.66	2.158	25	Pass
NVNT	n20	2472	Ant1	2496.5-13000	2496.5	-35.9	0.257	2.5	Pass
NVNT	n40	2422	Ant1	30-1000	817.64	-54.08	0.004	2.5	Pass
NVNT	n40	2422	Ant1	1000-2387	2384.23	-44.6	0.035	2.5	Pass
NVNT	n40	2422	Ant1	2387-2400	2400	-36.93	0.203	25	Pass
NVNT	n40	2422	Ant1	2483.5-2496.5	2483.58	-48.53	0.014	25	Pass
NVNT	n40	2422	Ant1	2496.5-13000	3231.75	-39.25	0.119	2.5	Pass
NVNT	n40	2437	Ant1	30-1000	804.06	-53.96	0.004	2.5	Pass
NVNT	n40	2437	Ant1	1000-2387	2387	-48.16	0.015	2.5	Pass
NVNT	n40	2437	Ant1	2387-2400	2399.31	-43.68	0.043	25	Pass
NVNT	n40	2437	Ant1	2483.5-2496.5	2483.51	-43.39	0.046	25	Pass
NVNT	n40	2437	Ant1	2496.5-13000	3252.75	-39.76	0.106	2.5	Pass
NVNT	n40	2462	Ant1	30-1000	818.61	-54.07	0.004	2.5	Pass
NVNT	n40	2462	Ant1	1000-2387	2378.68	-52.66	0.005	2.5	Pass
NVNT	n40	2462	Ant1	2387-2400	2399.65	-50.28	0.009	25	Pass
NVNT	n40	2462	Ant1	2483.5-2496.5	2483.62	-34.94	0.321	25	Pass
NVNT	n40	2462	Ant1	2496.5-13000	3284.26	-39.24	0.119	2.5	Pass


Note: For 30-1000MHz test data, the RBW of the spectrum analyzer is 100kHz, the data measured with RBW=100kHz needs to add 10db to get the calculated data of RBW=1Mhz.

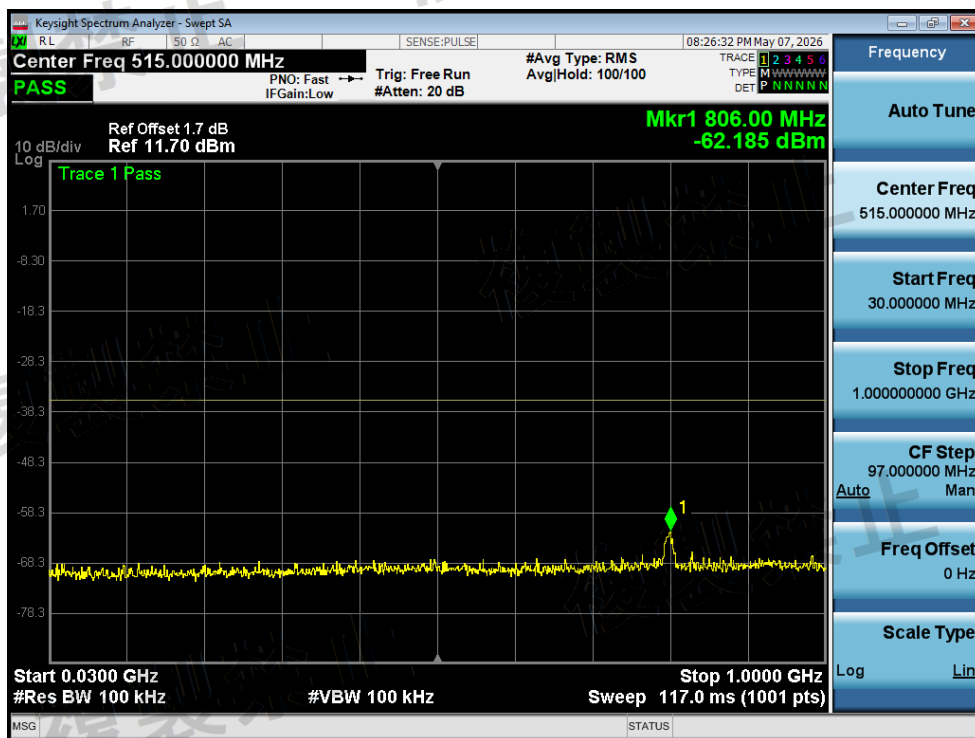


Tx. Spurious NVNT b 2412MHz Ant1 @ 30MHz-1000MHz

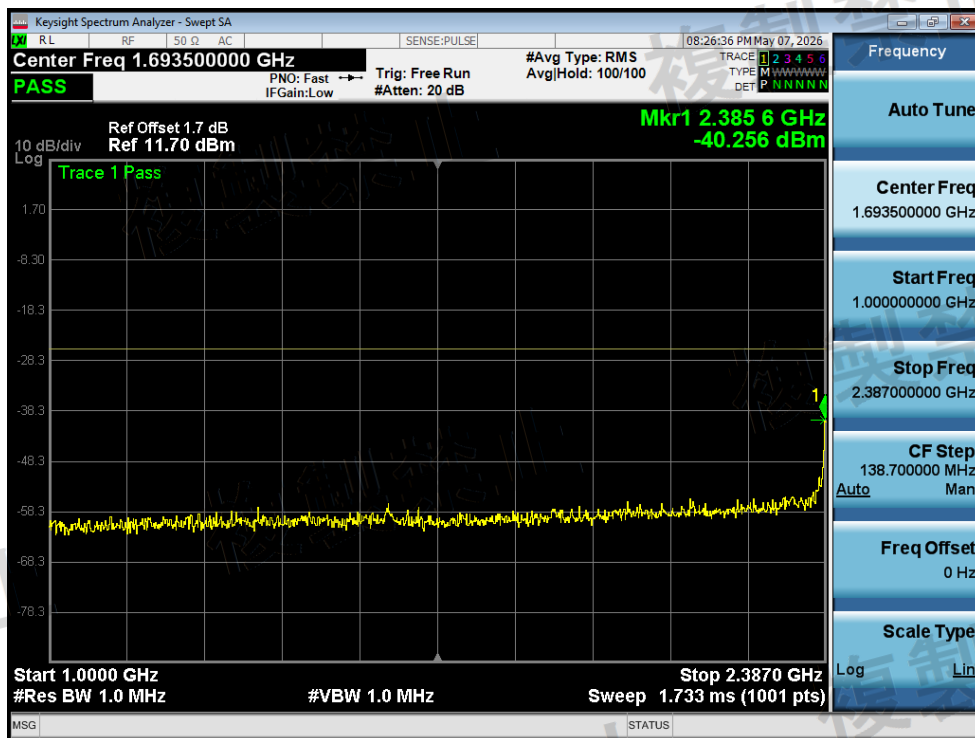


Tx. Spurious NVNT b 2412MHz Ant1 @ 1000MHz-2387MHz

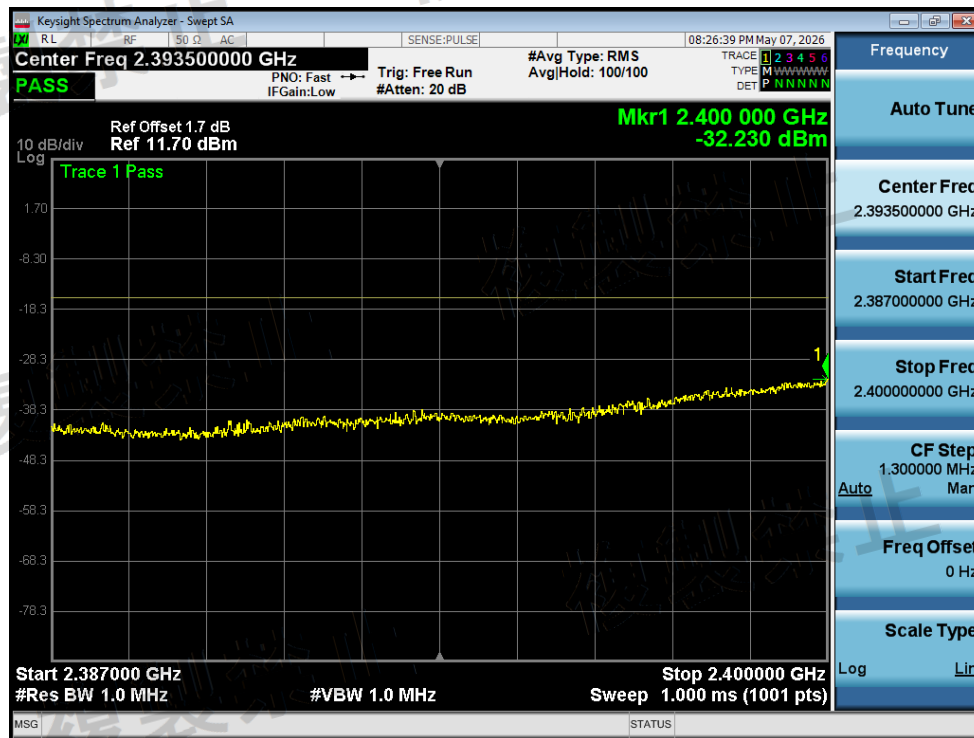


Tx. Spurious NVNT b 2412MHz Ant1 @ 2387MHz-2400MHz

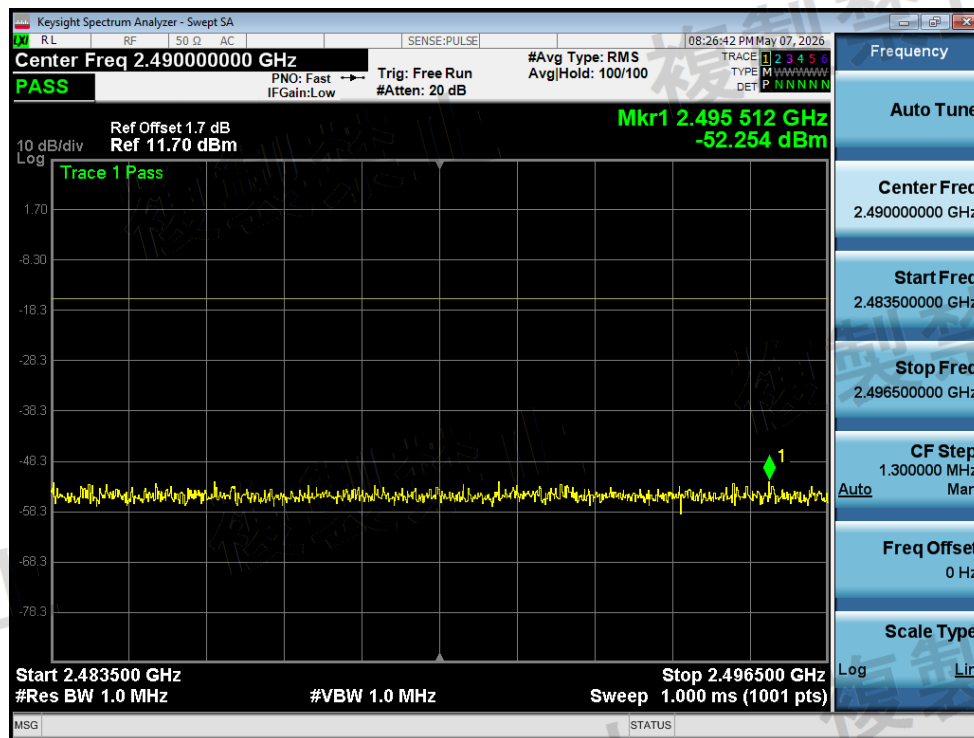


Tx. Spurious NVNT b 2412MHz Ant1 @ 2483.5MHz-2496.5MHz

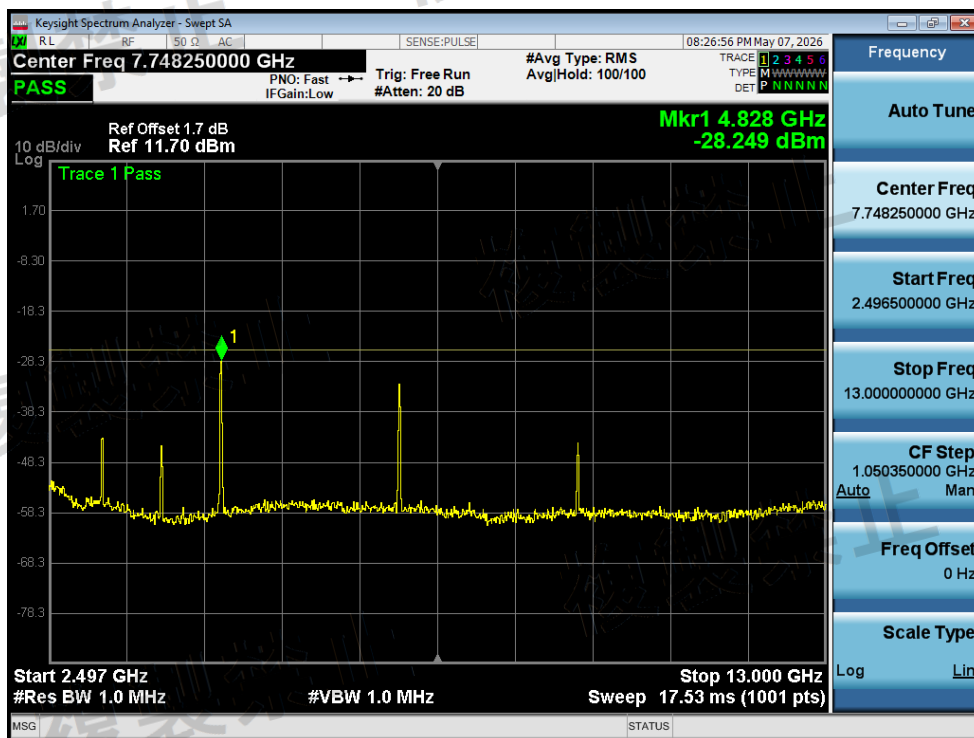


Tx. Spurious NVNT b 2412MHz Ant1 @ 2496.5MHz-13000MHz

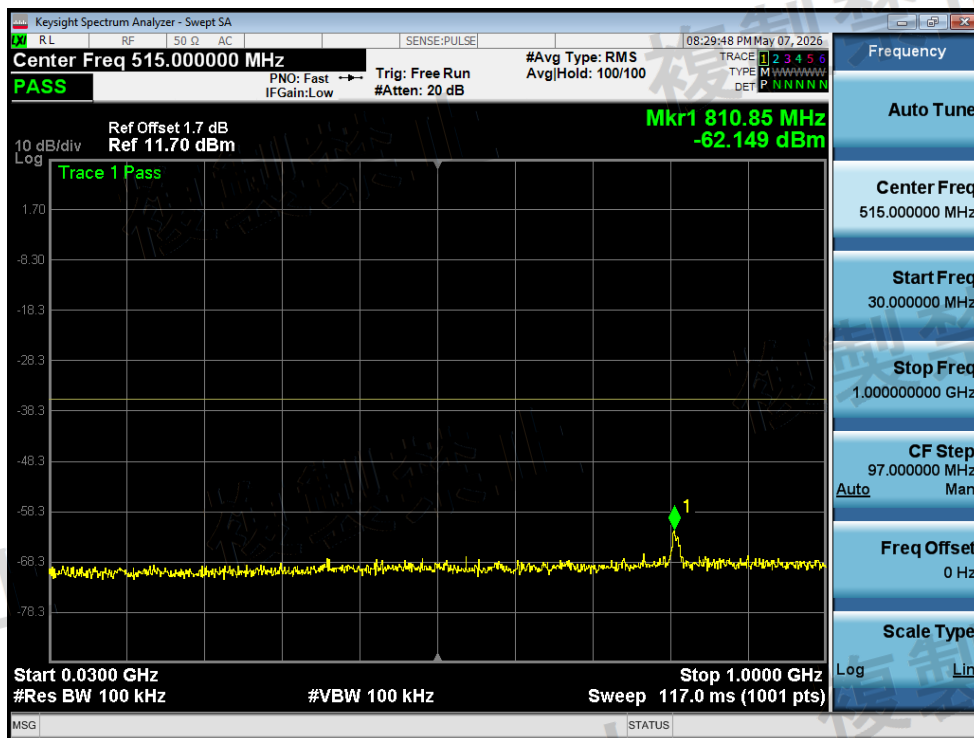


Tx. Spurious NVNT b 2437MHz Ant1 @ 30MHz-1000MHz

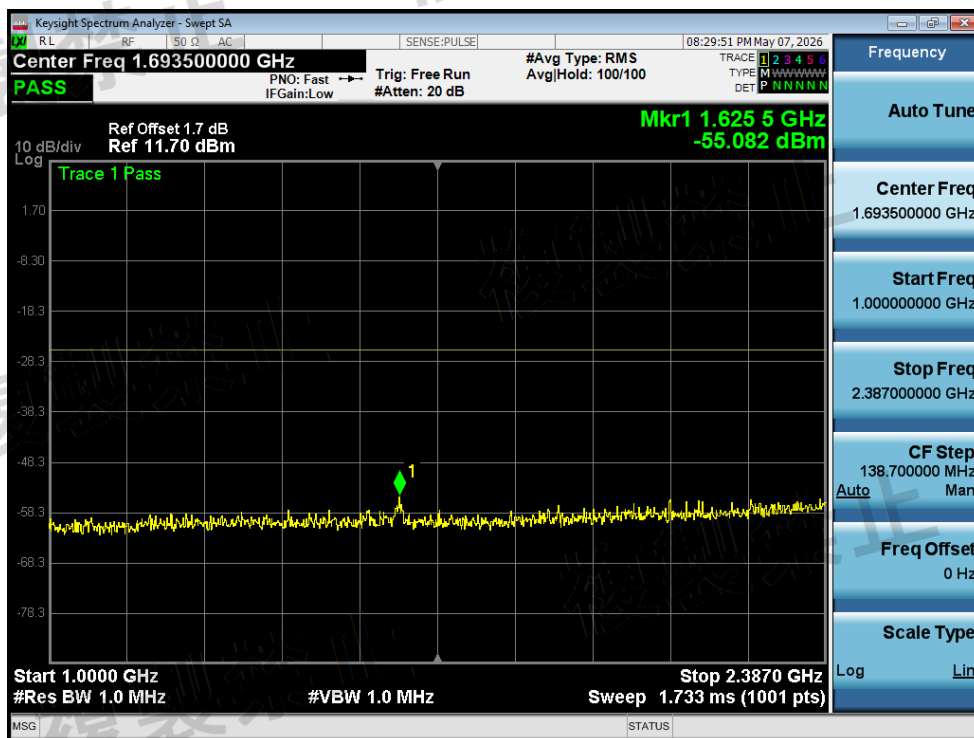


Tx. Spurious NVNT b 2437MHz Ant1 @ 1000MHz-2387MHz

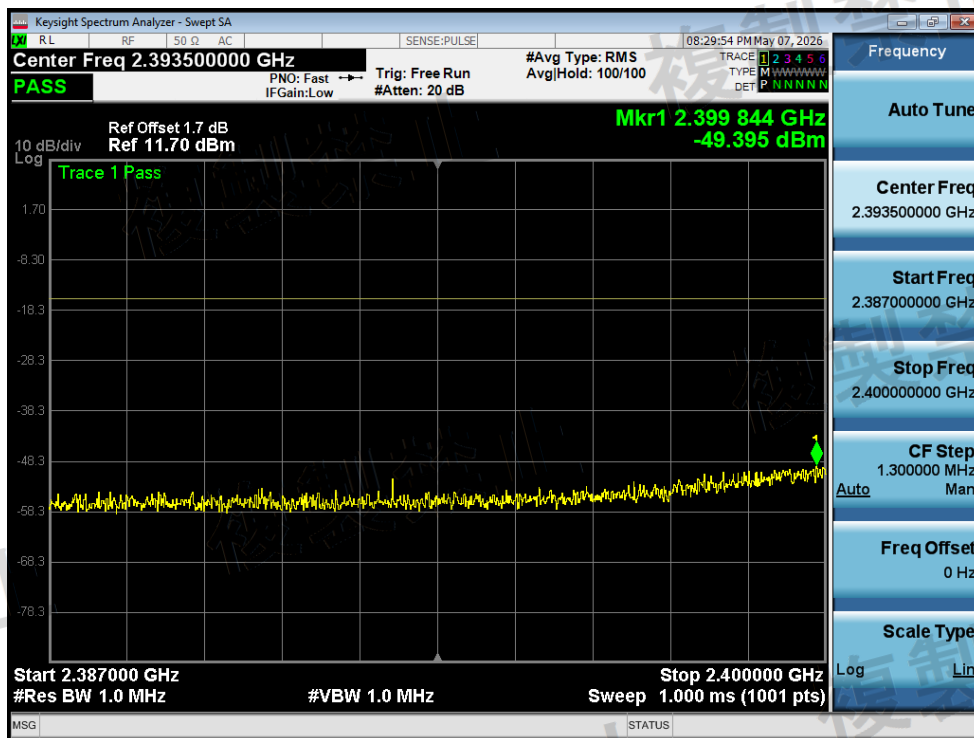


Tx. Spurious NVNT b 2437MHz Ant1 @ 2387MHz-2400MHz

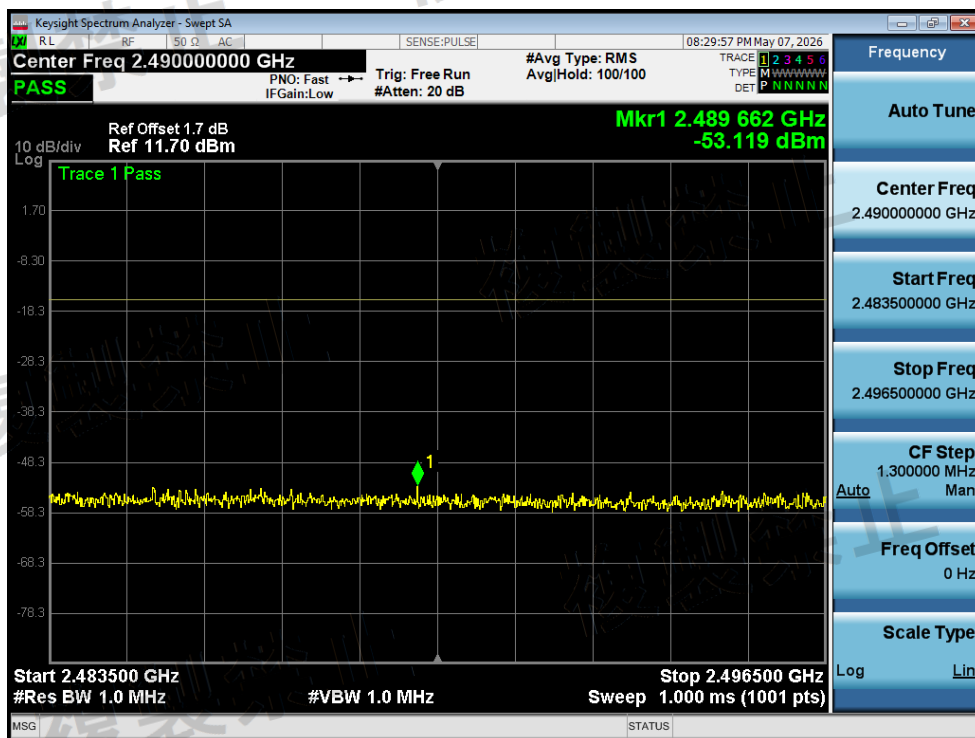


Tx. Spurious NVNT b 2437MHz Ant1 @ 2483.5MHz-2496.5MHz

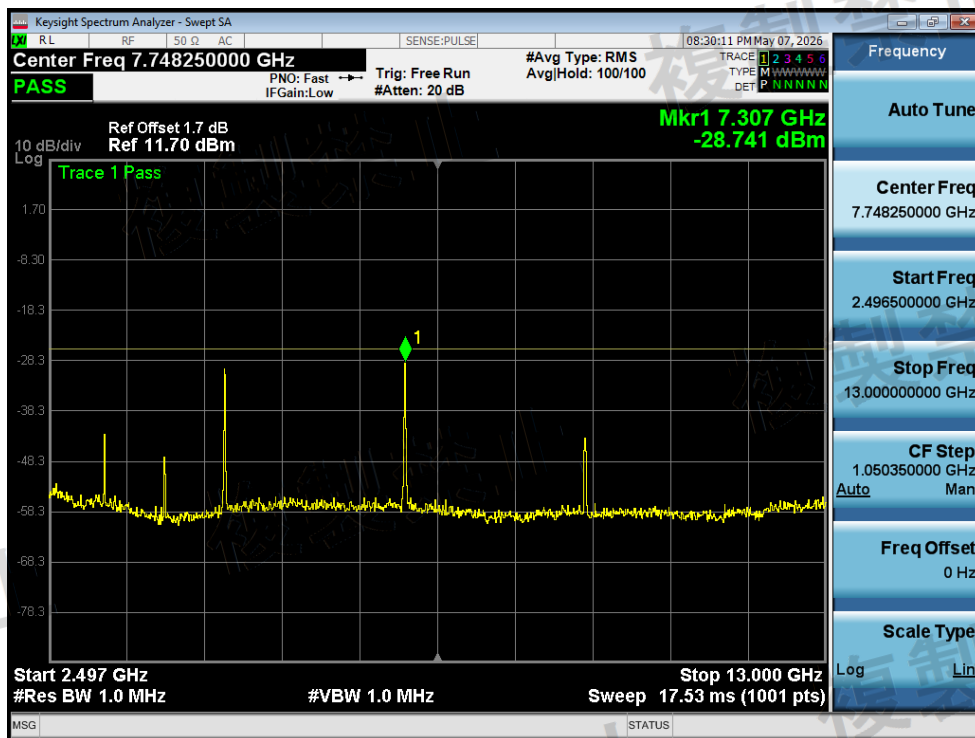


Tx. Spurious NVNT b 2437MHz Ant1 @ 2496.5MHz-13000MHz

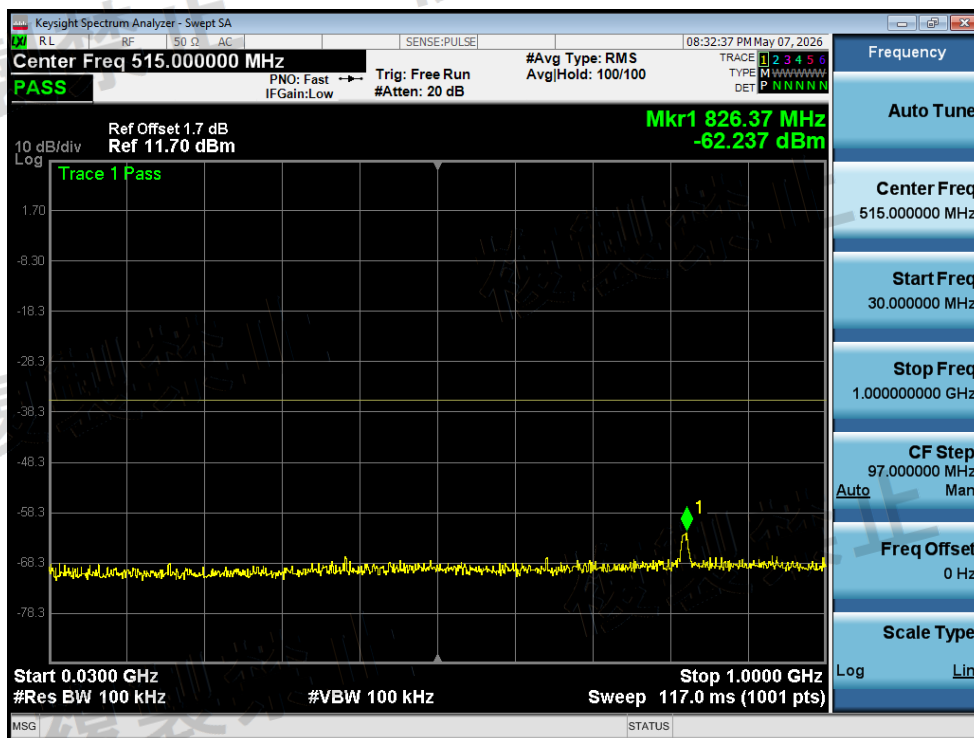


Tx. Spurious NVNT b 2472MHz Ant1 @ 30MHz-1000MHz

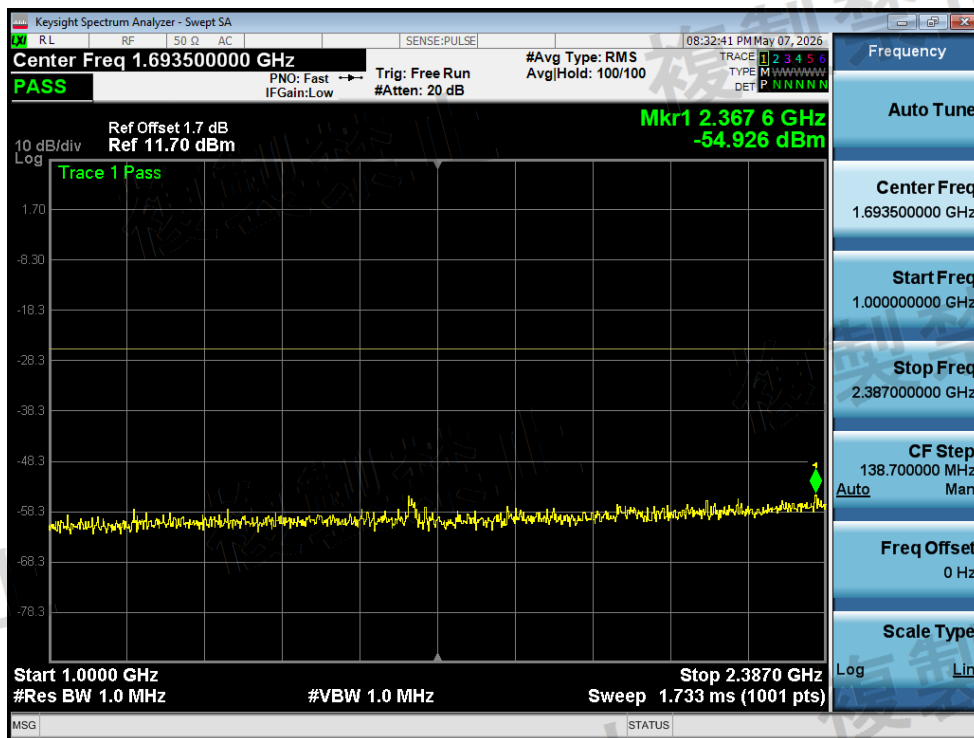


Tx. Spurious NVNT b 2472MHz Ant1 @ 1000MHz-2387MHz

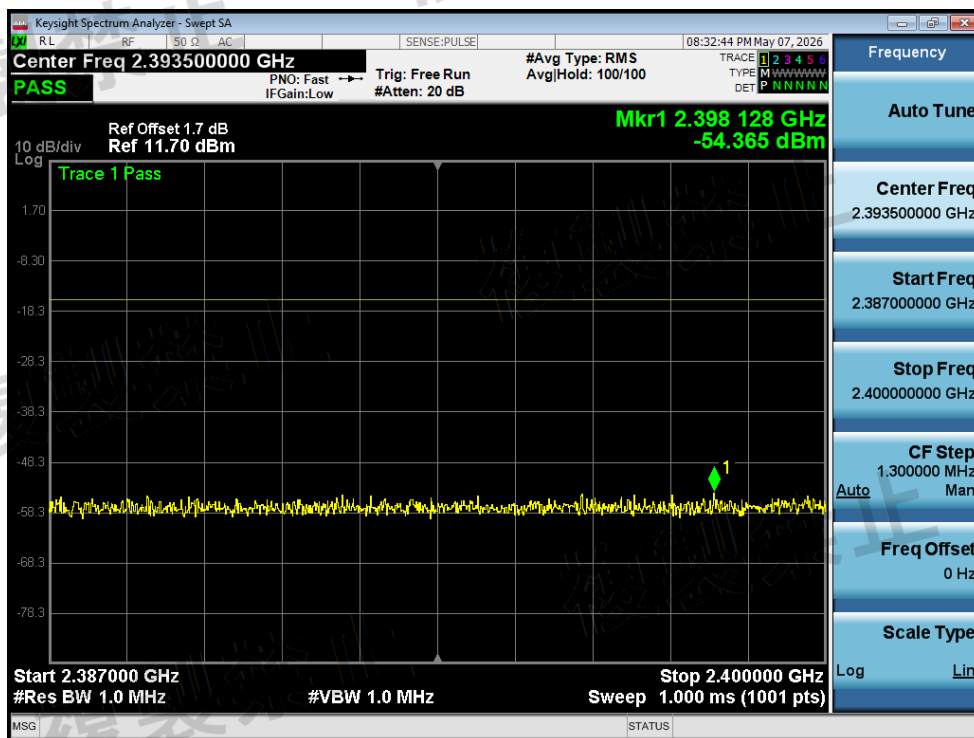


Tx. Spurious NVNT b 2472MHz Ant1 @ 2387MHz-2400MHz

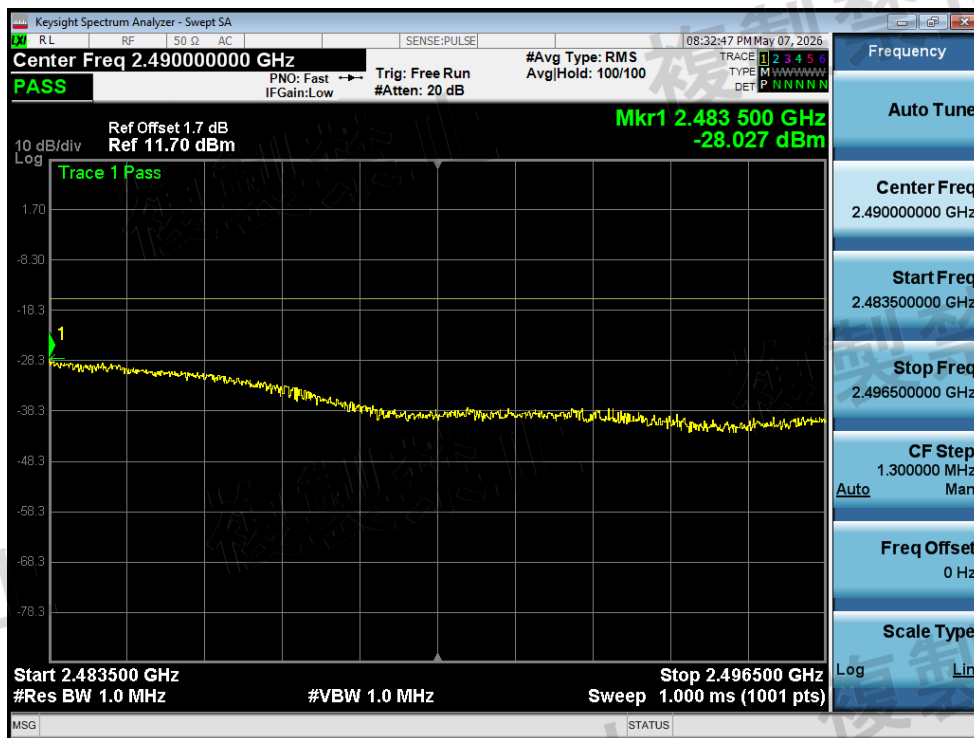


Tx. Spurious NVNT b 2472MHz Ant1 @ 2483.5MHz-2496.5MHz

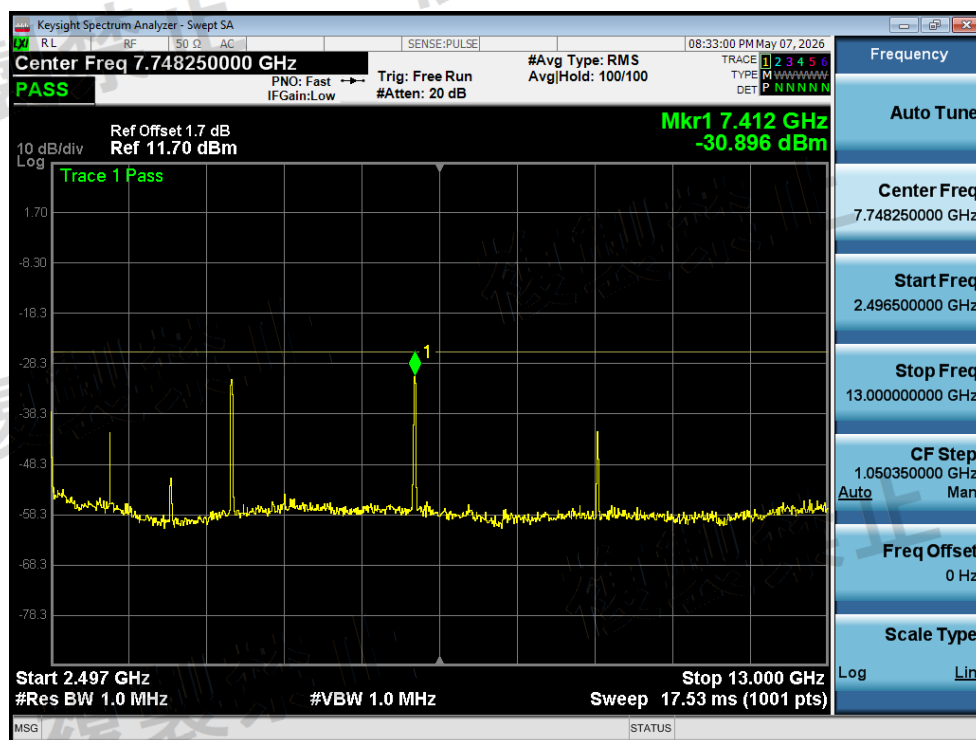


Tx. Spurious NVNT b 2472MHz Ant1 @ 2496.5MHz-13000MHz

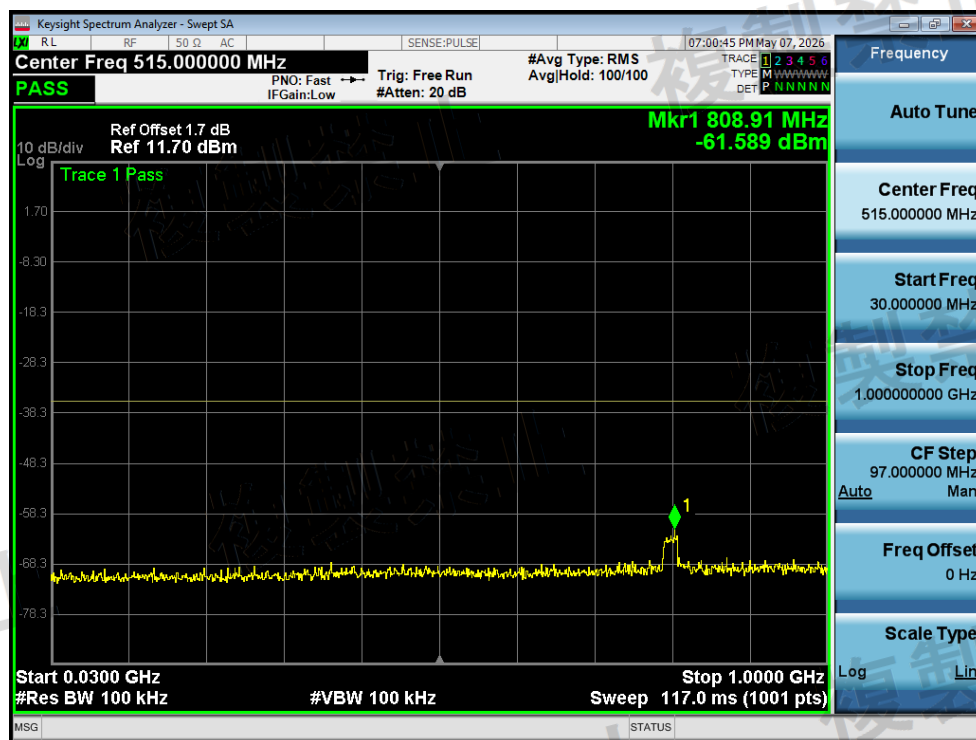


Tx. Spurious NVNT g 2412MHz Ant1 @ 30MHz-1000MHz

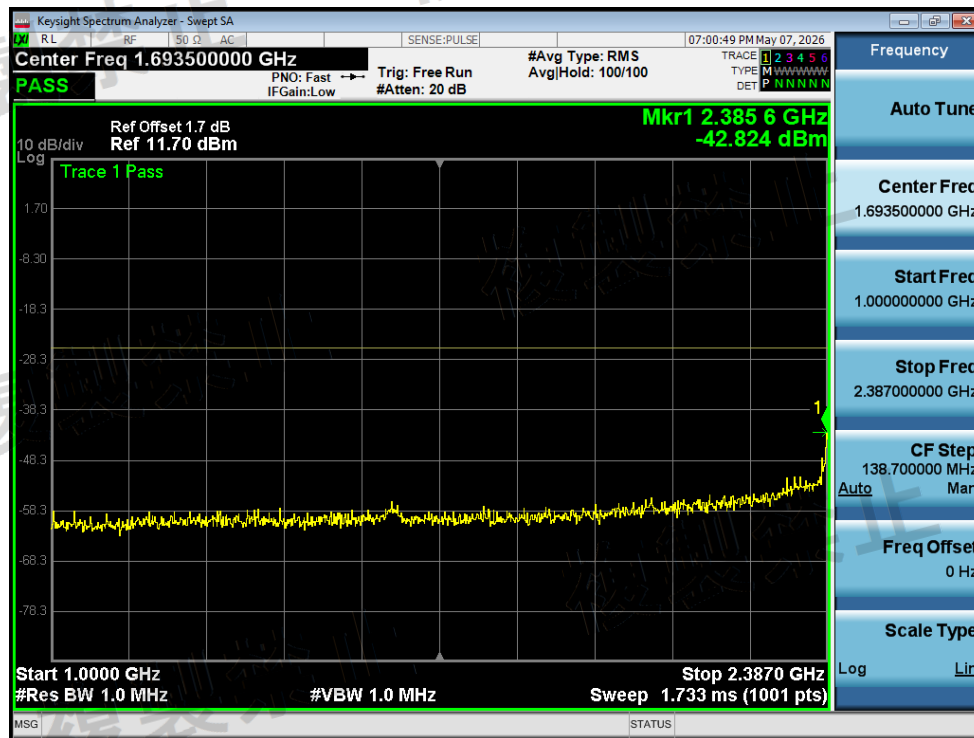


Tx. Spurious NVNT g 2412MHz Ant1 @ 1000MHz-2387MHz

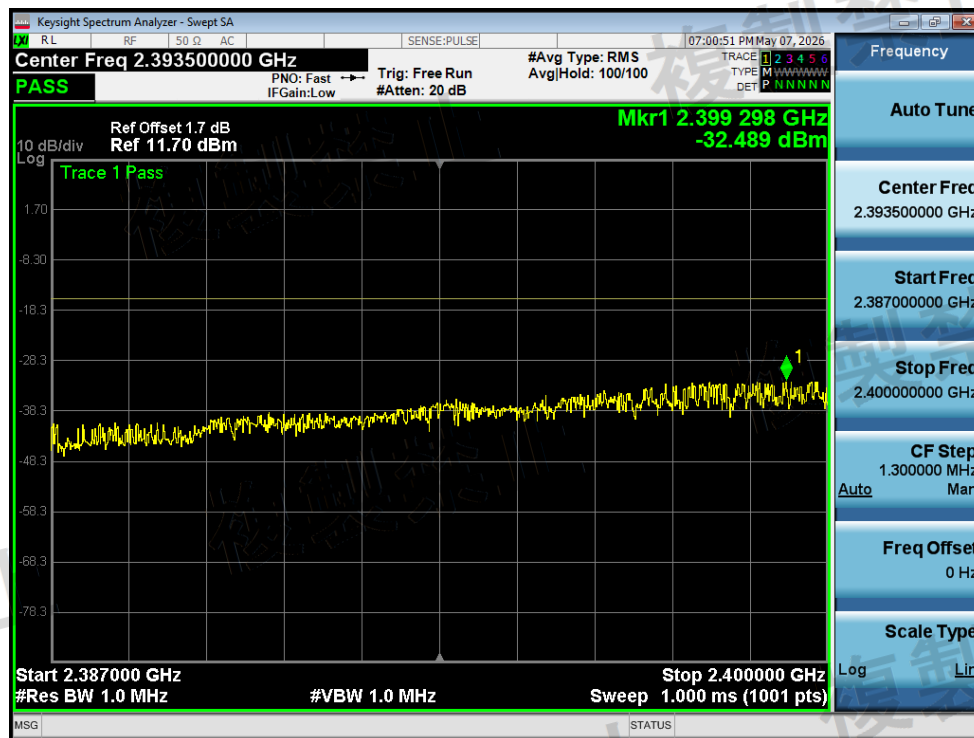


Tx. Spurious NVNT g 2412MHz Ant1 @ 2387MHz-2400MHz

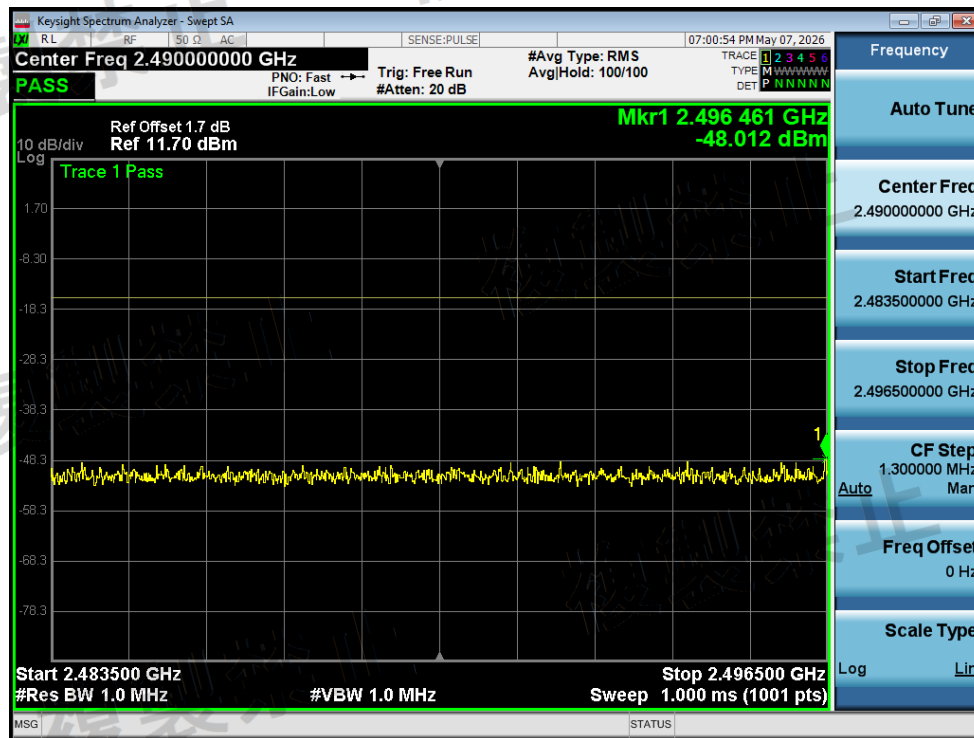


Tx. Spurious NVNT g 2412MHz Ant1 @ 2483.5MHz-2496.5MHz

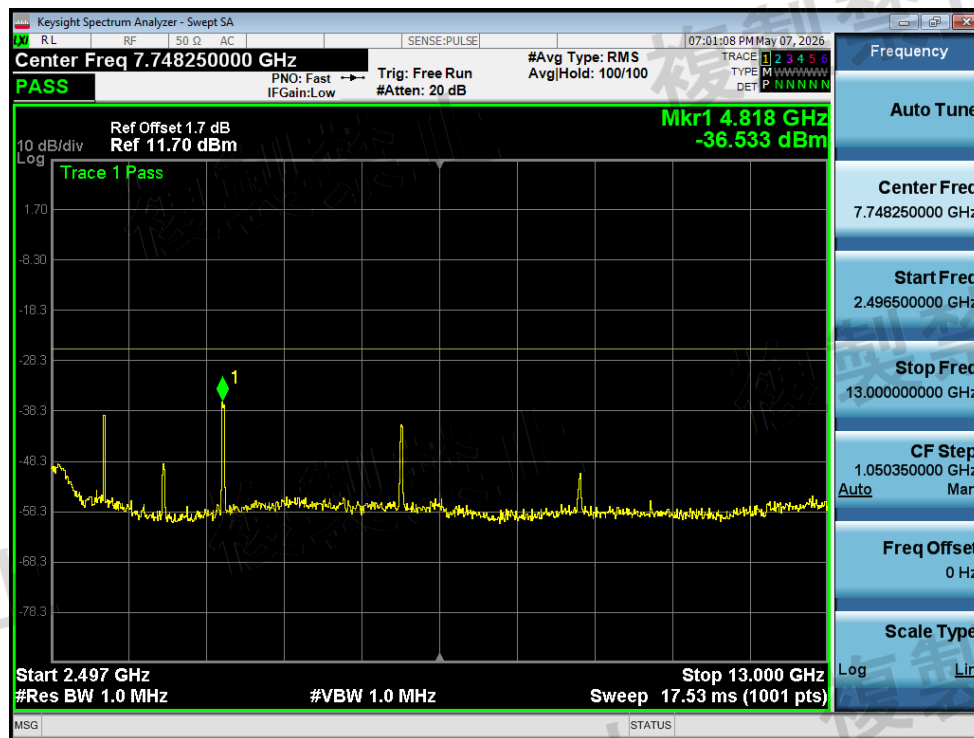


Tx. Spurious NVNT g 2412MHz Ant1 @ 2496.5MHz-13000MHz

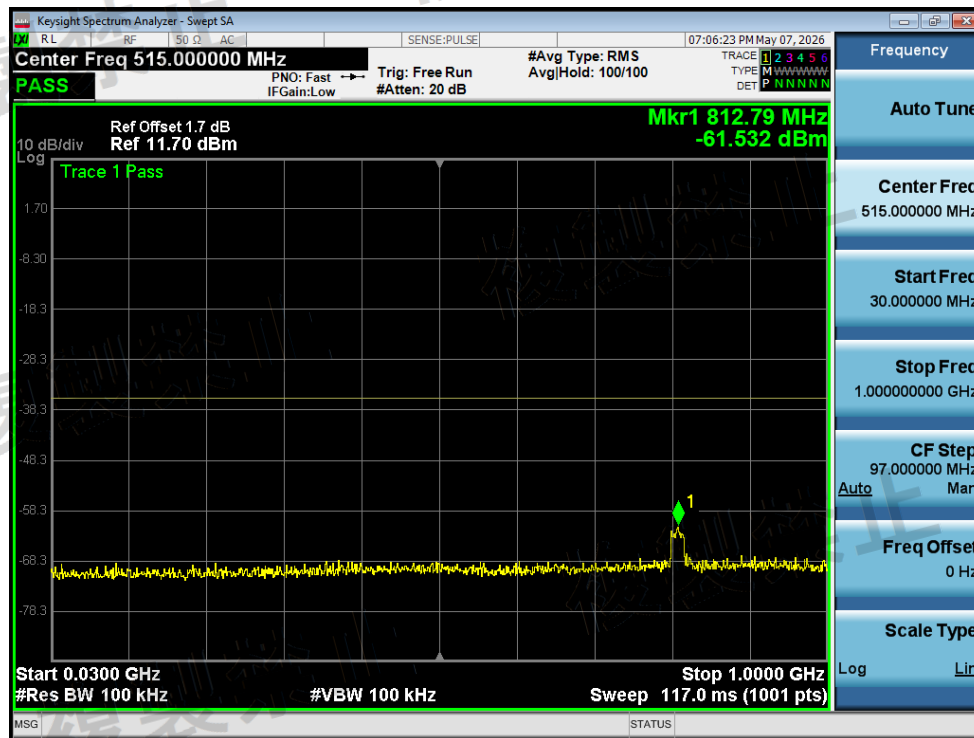


Tx. Spurious NVNT g 2437MHz Ant1 @ 30MHz-1000MHz

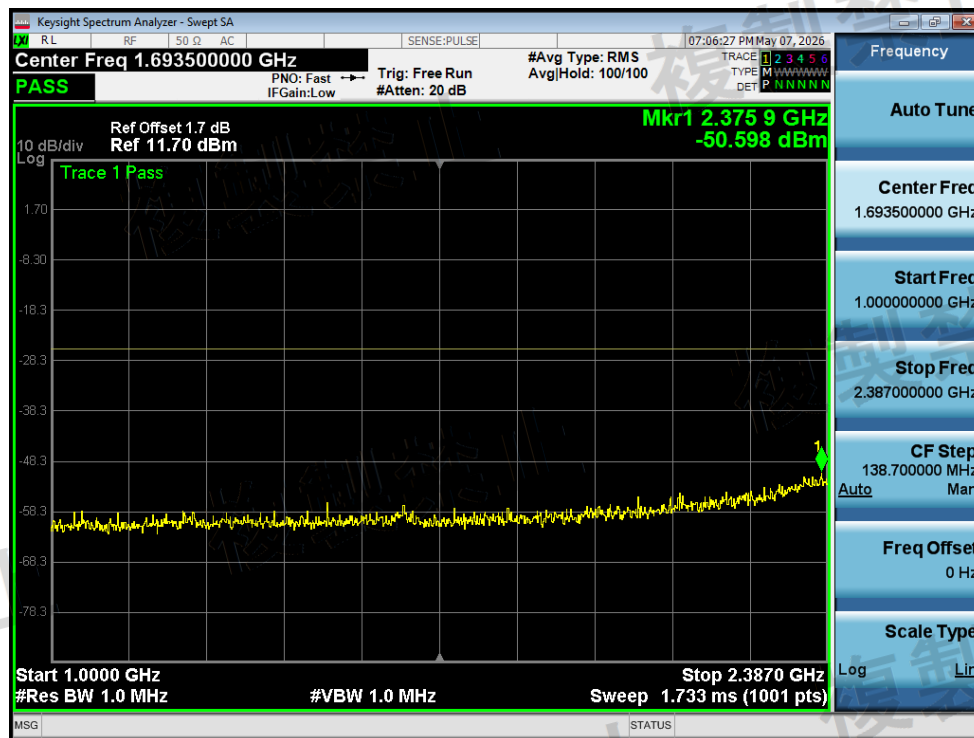


Tx. Spurious NVNT g 2437MHz Ant1 @ 1000MHz-2387MHz

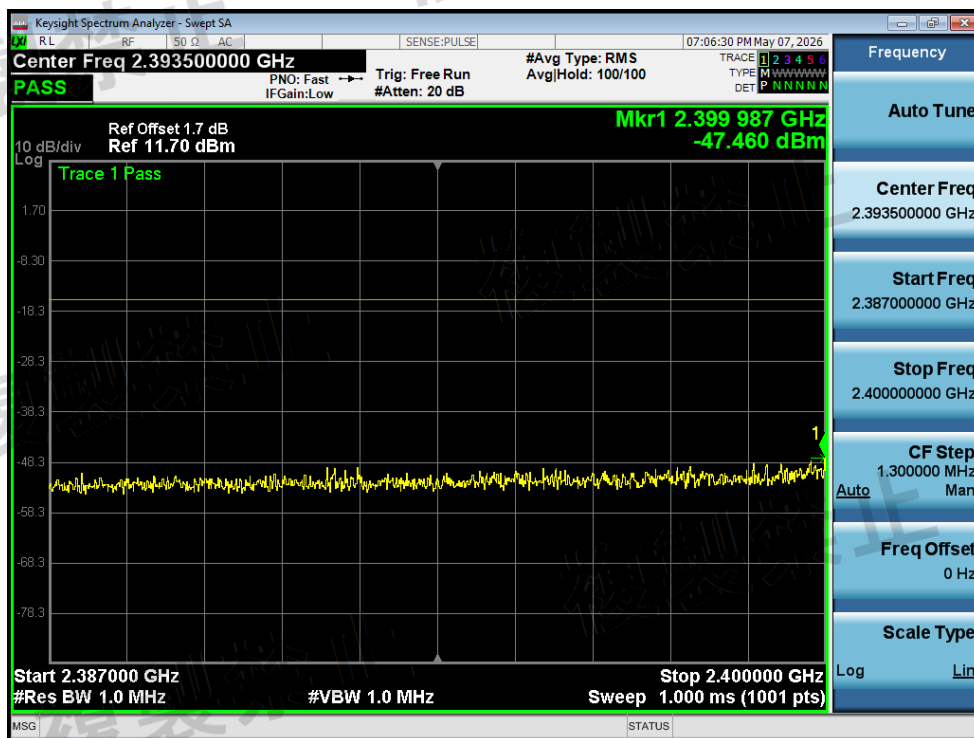


Tx. Spurious NVNT g 2437MHz Ant1 @ 2387MHz-2400MHz

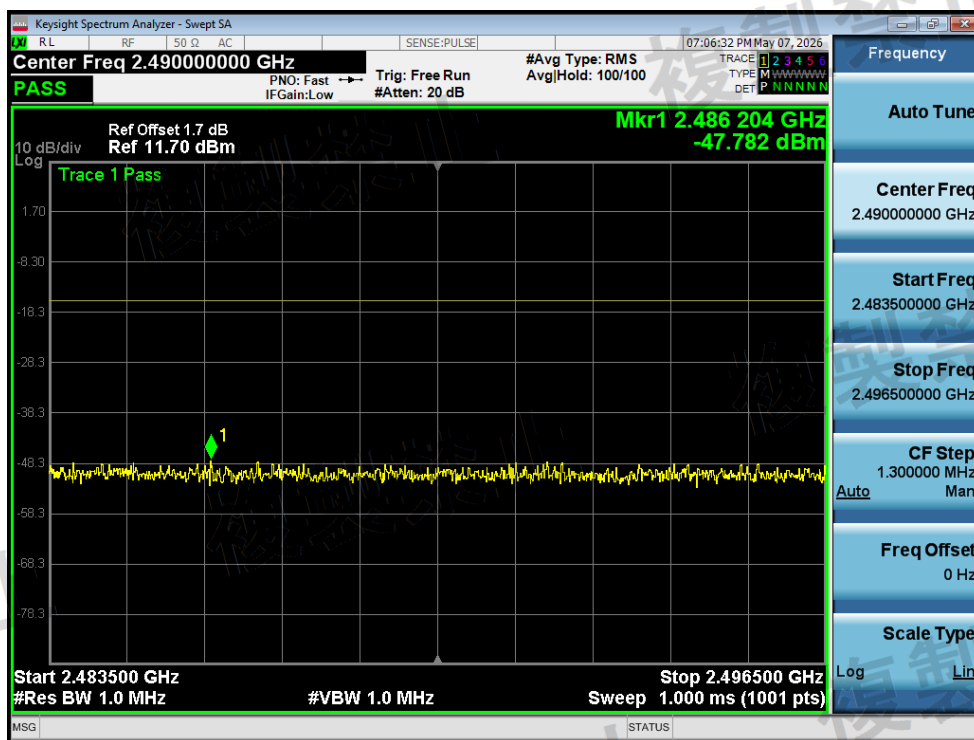


Tx. Spurious NVNT g 2437MHz Ant1 @ 2483.5MHz-2496.5MHz

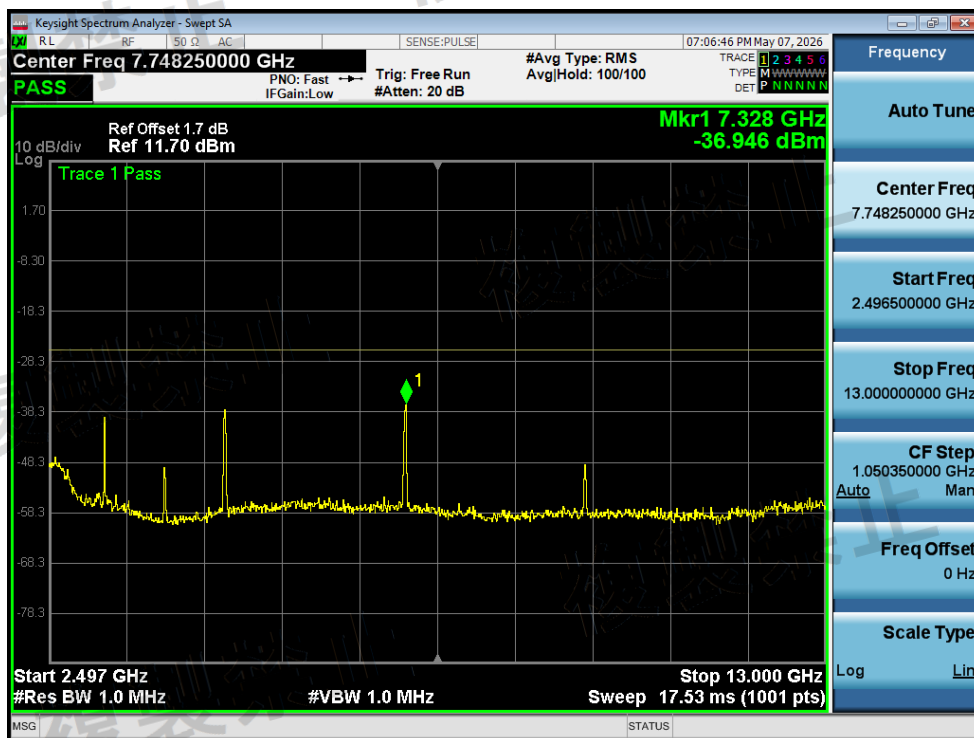


Tx. Spurious NVNT g 2437MHz Ant1 @ 2496.5MHz-13000MHz

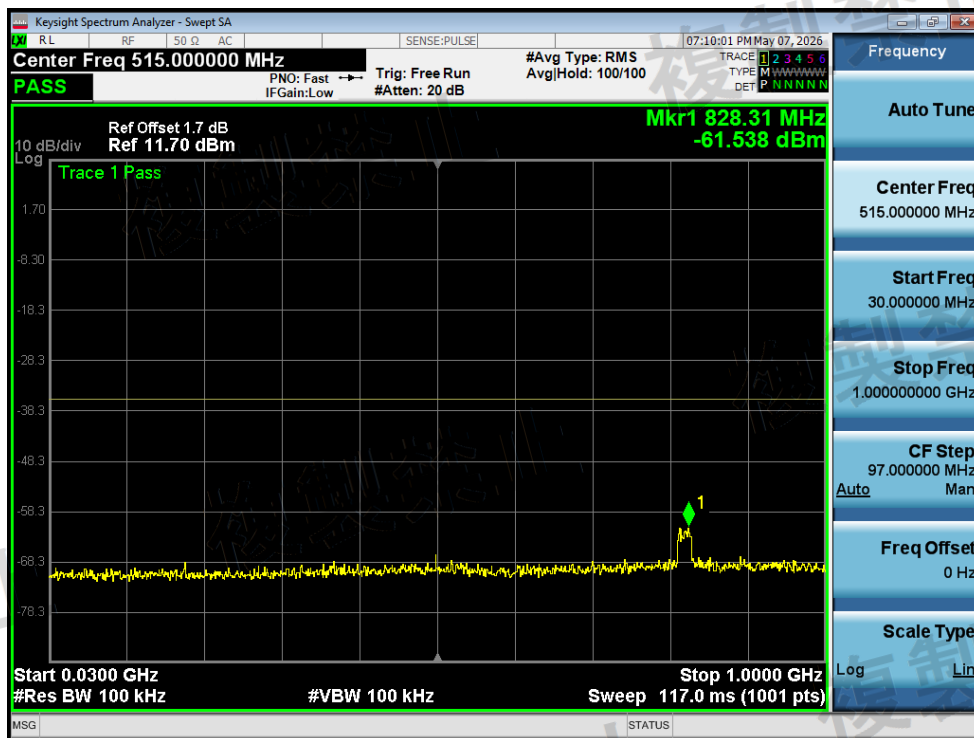


Tx. Spurious NVNT g 2472MHz Ant1 @ 30MHz-1000MHz

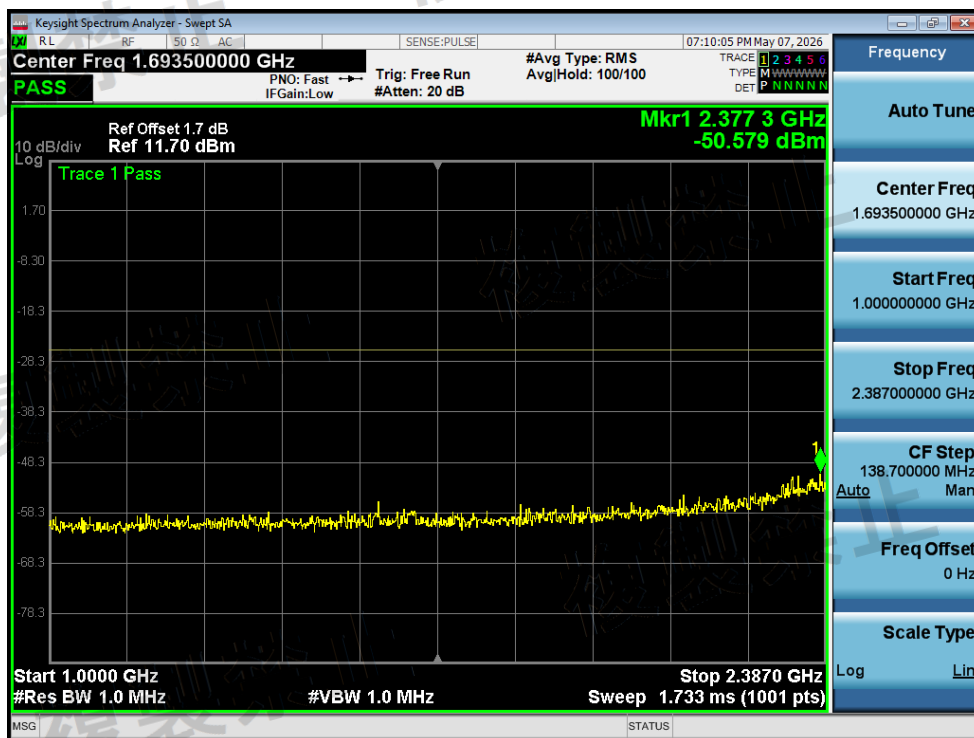


Tx. Spurious NVNT g 2472MHz Ant1 @ 1000MHz-2387MHz

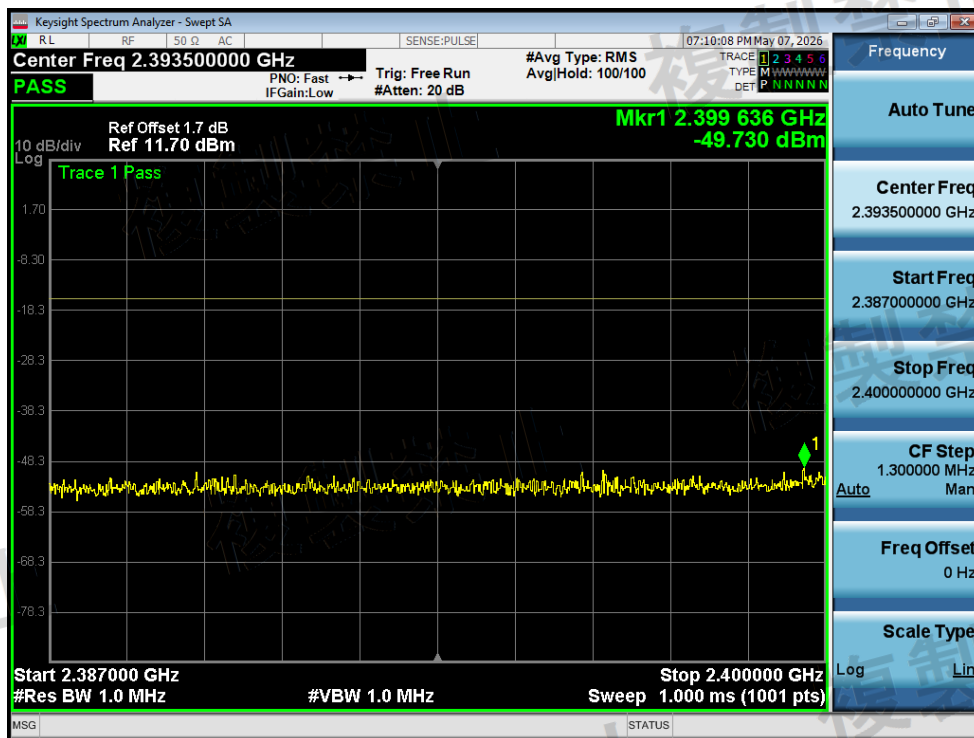


Tx. Spurious NVNT g 2472MHz Ant1 @ 2387MHz-2400MHz

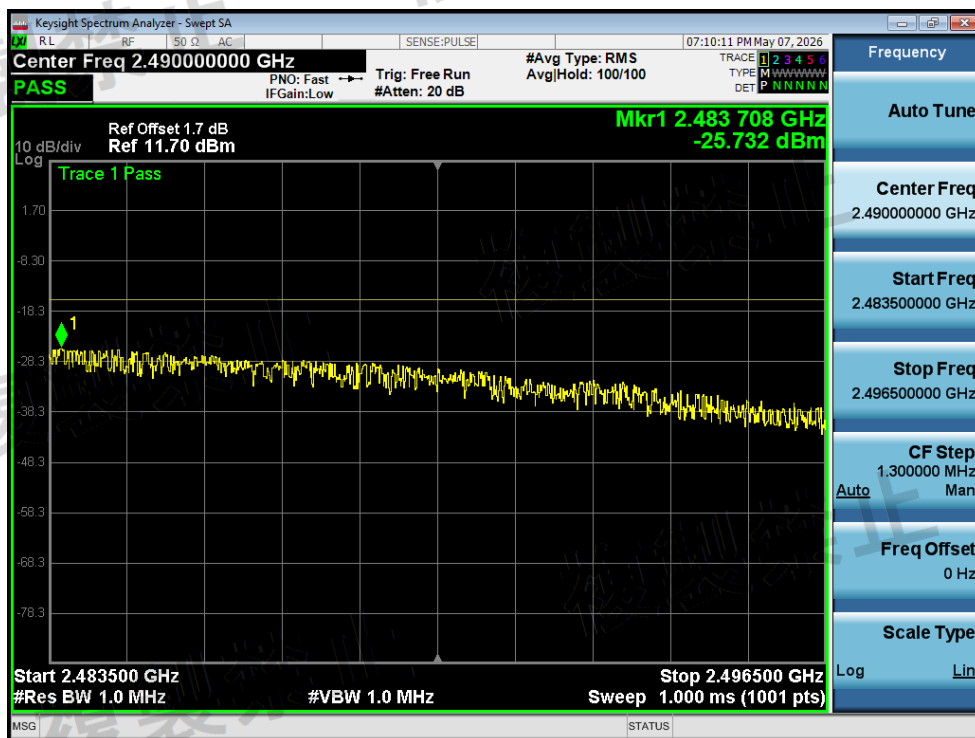

Tx. Spurious NVNT g 2472MHz Ant1 @ 2483.5MHz-2496.5MHz

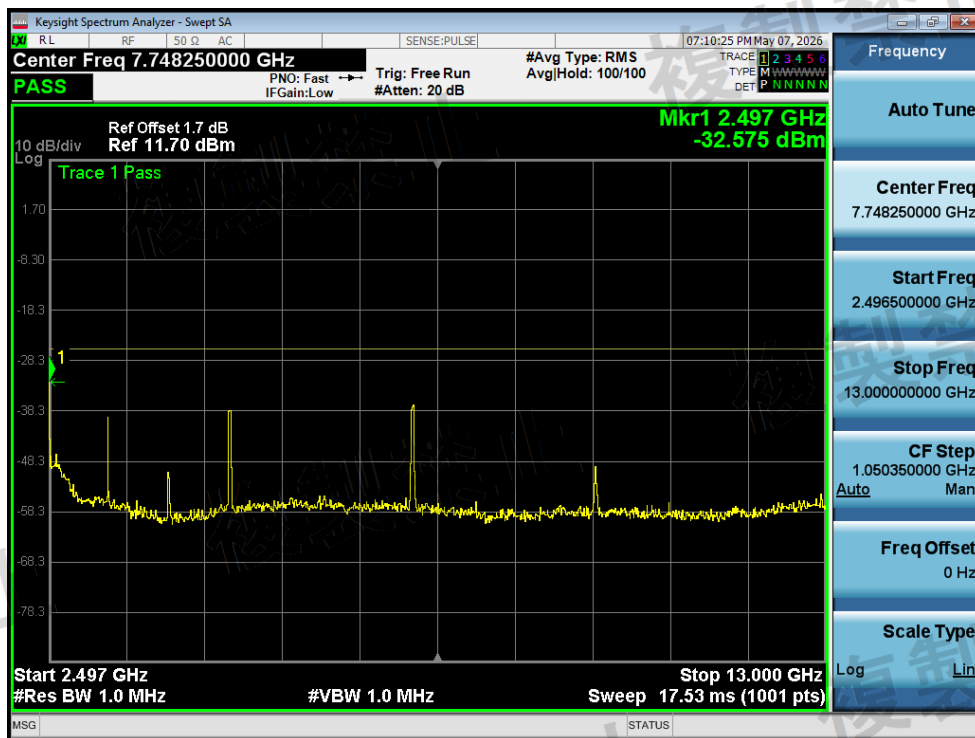


Tx. Spurious NVNT g 2472MHz Ant1 @ 2496.5MHz-13000MHz

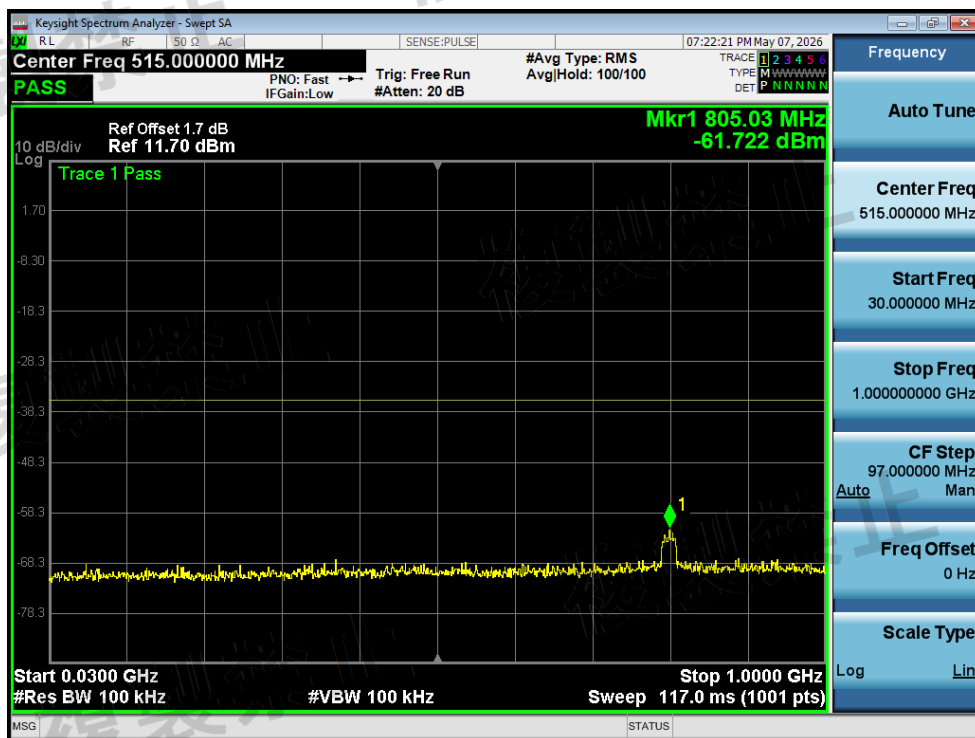


Tx. Spurious NVNT n20 2412MHz Ant1 @ 30MHz-1000MHz




Tx. Spurious NVNT n20 2412MHz Ant1 @ 1000MHz-2387MHz

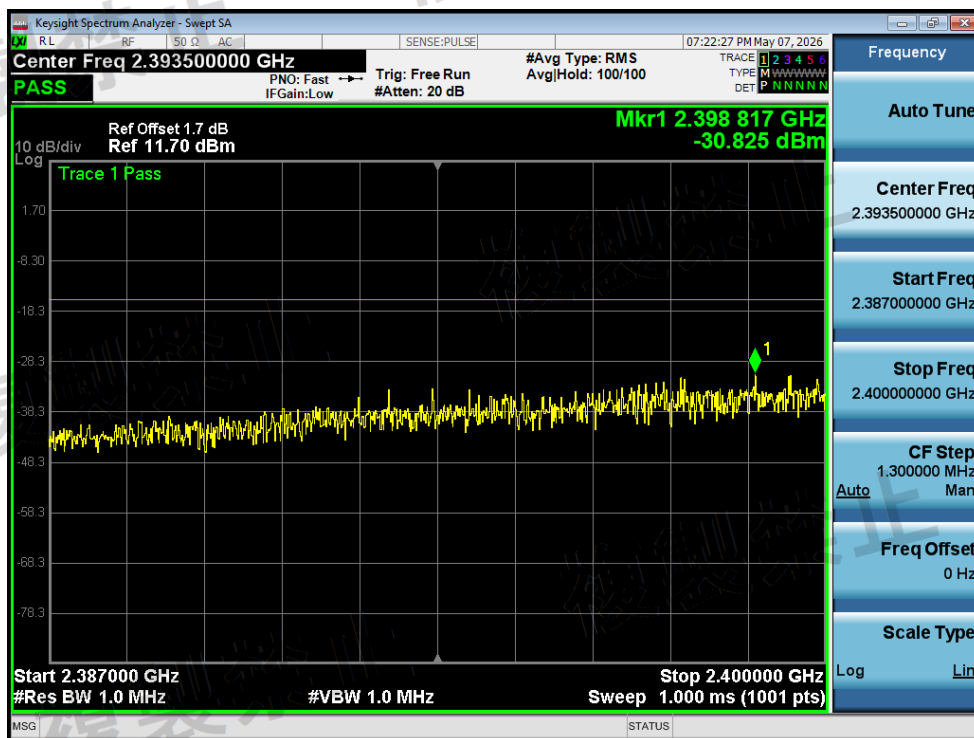


Tx. Spurious NVNT n20 2412MHz Ant1 @ 2387MHz-2400MHz

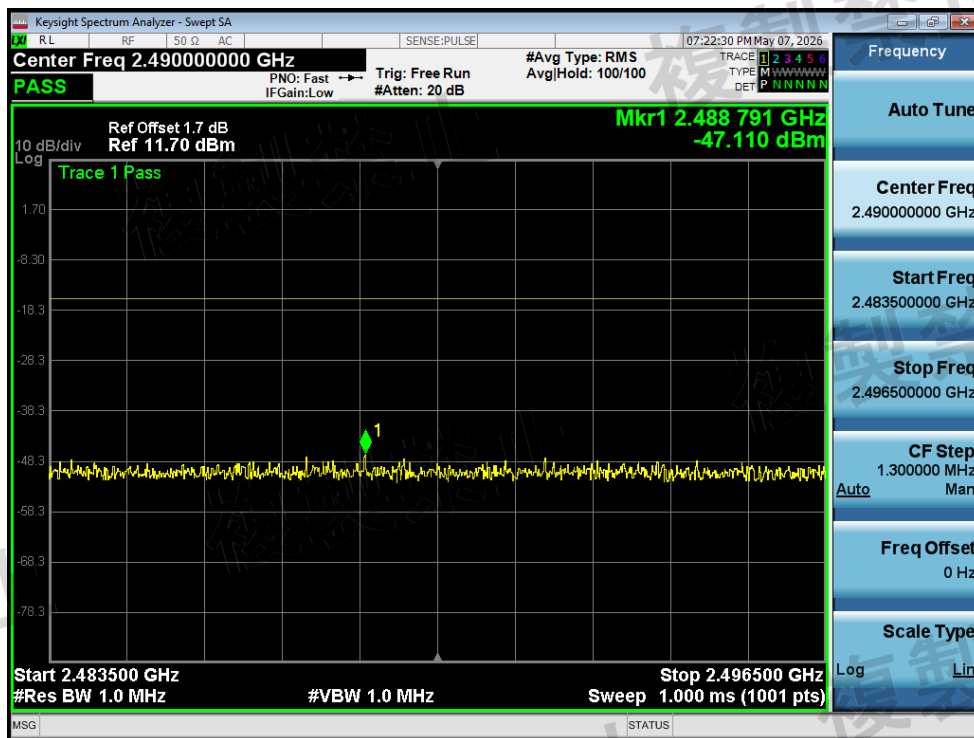


Tx. Spurious NVNT n20 2412MHz Ant1 @ 2483.5MHz-2496.5MHz

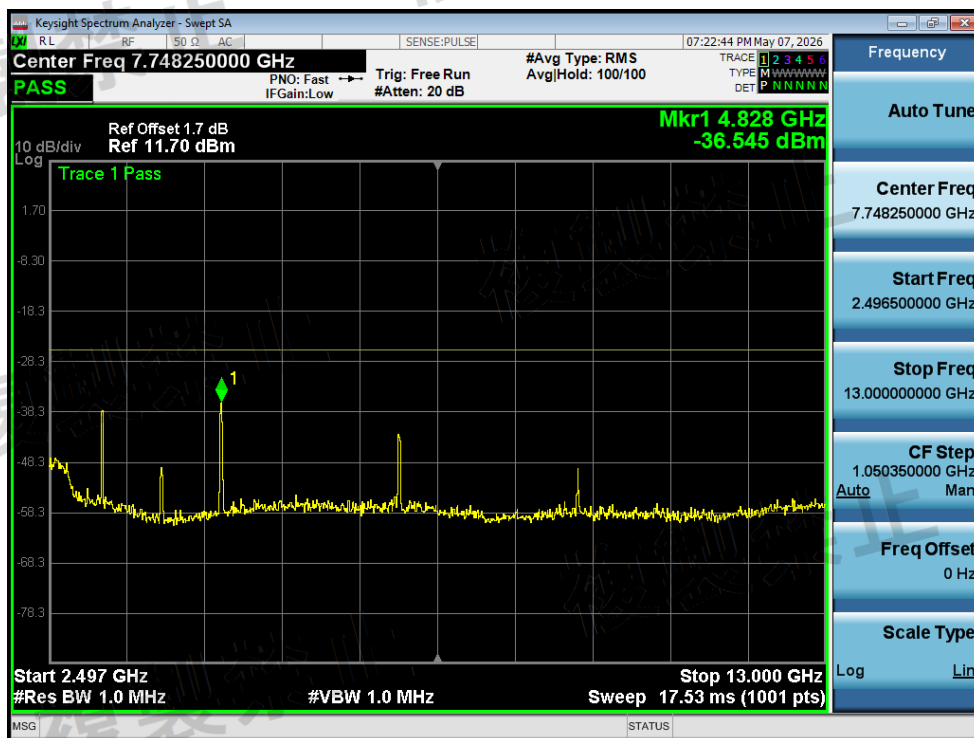


Tx. Spurious NVNT n20 2412MHz Ant1 @ 2496.5MHz-13000MHz

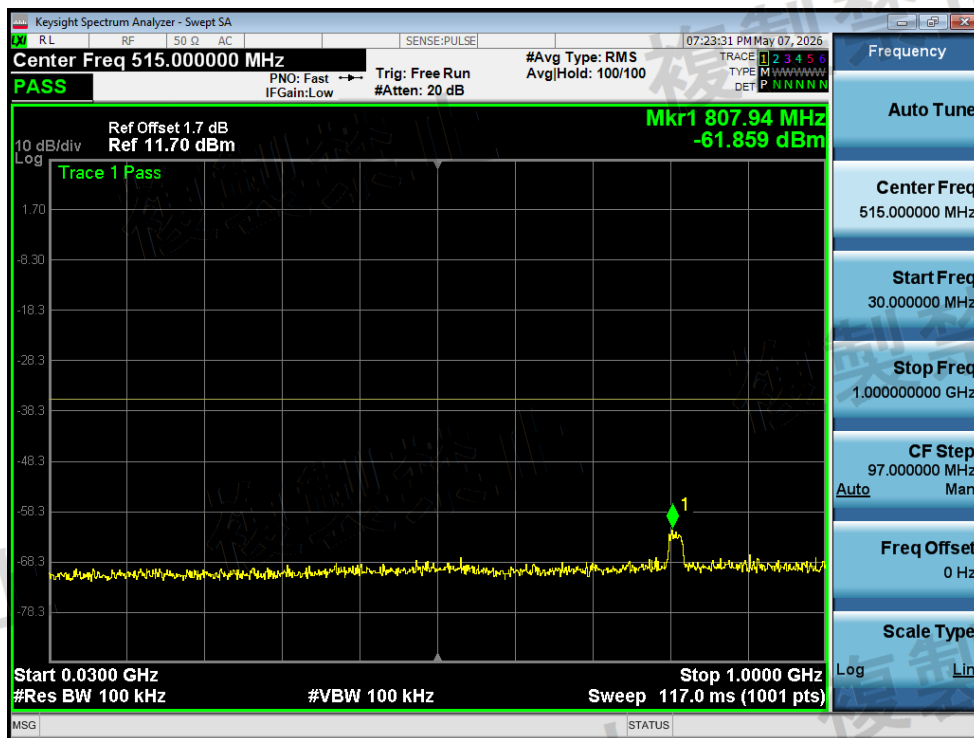


Tx. Spurious NVNT n20 2437MHz Ant1 @ 30MHz-1000MHz

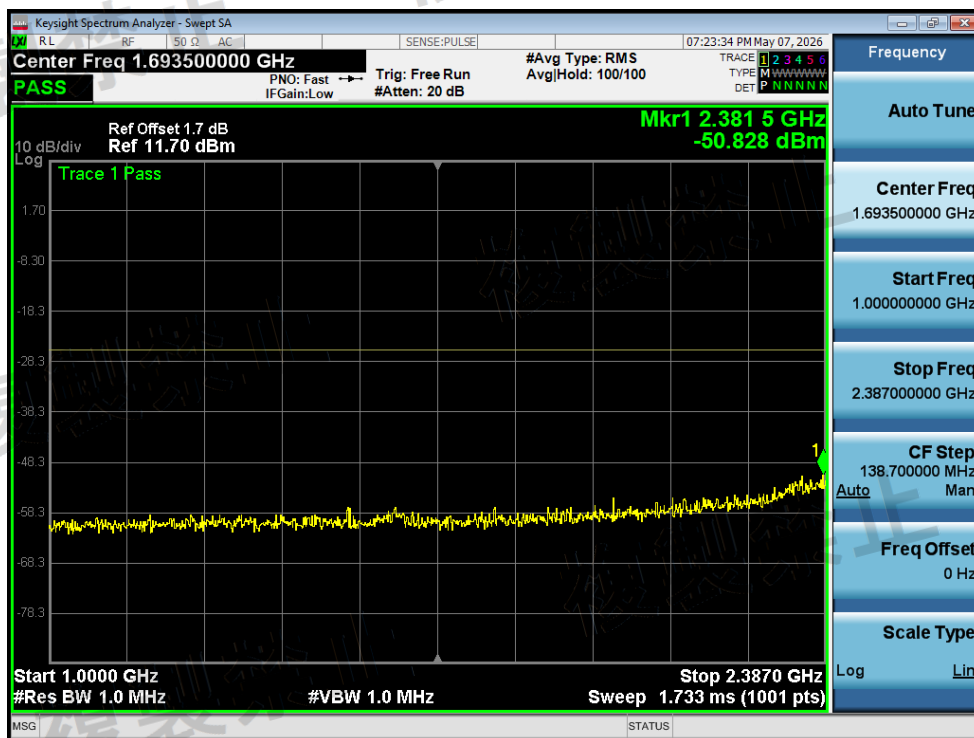


Tx. Spurious NVNT n20 2437MHz Ant1 @ 1000MHz-2387MHz

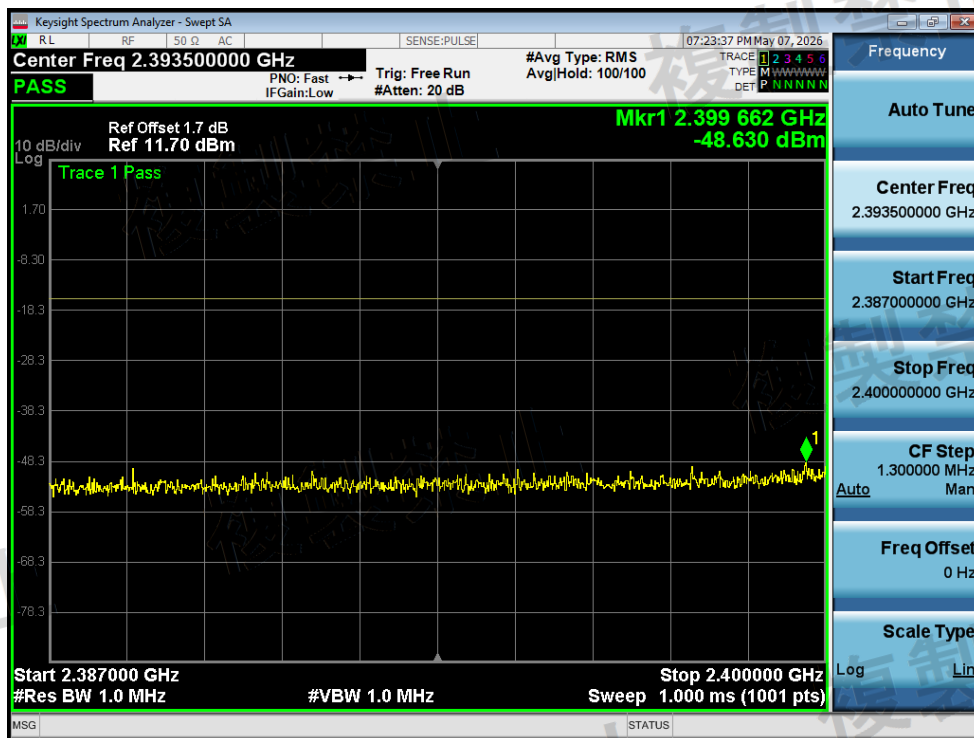


Tx. Spurious NVNT n20 2437MHz Ant1 @ 2387MHz-2400MHz

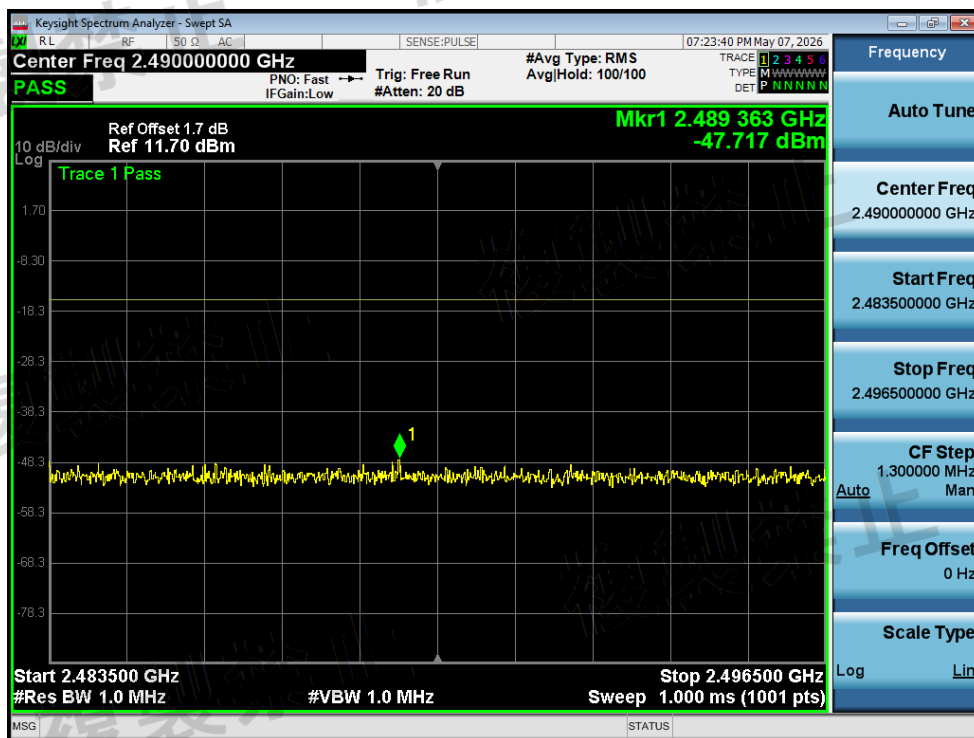


Tx. Spurious NVNT n20 2437MHz Ant1 @ 2483.5MHz-2496.5MHz

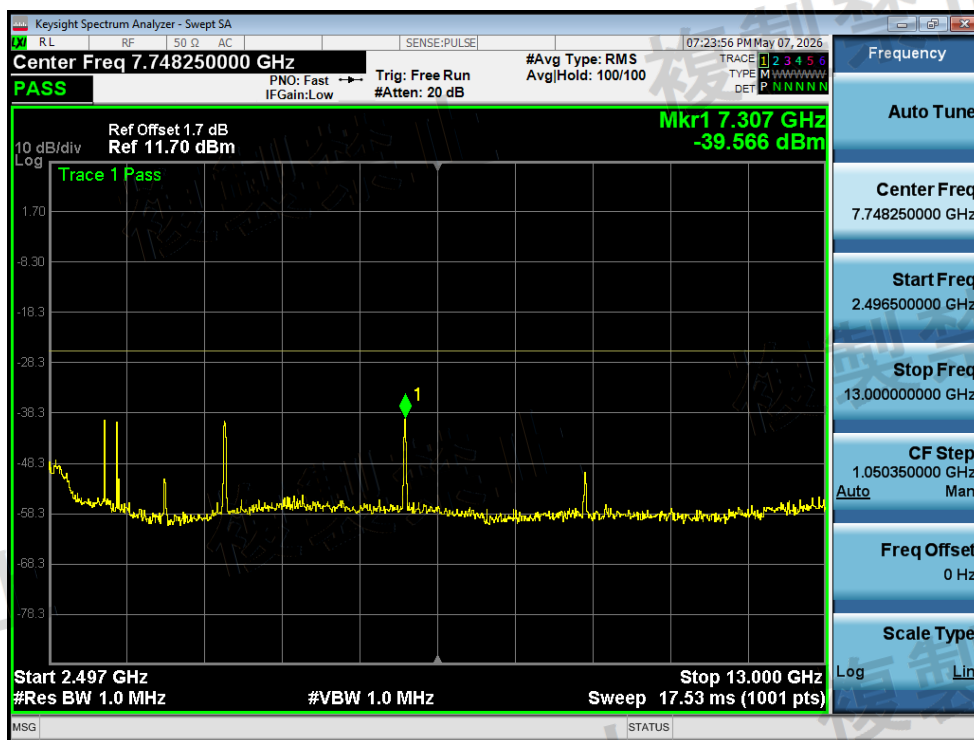


Tx. Spurious NVNT n20 2437MHz Ant1 @ 2496.5MHz-13000MHz

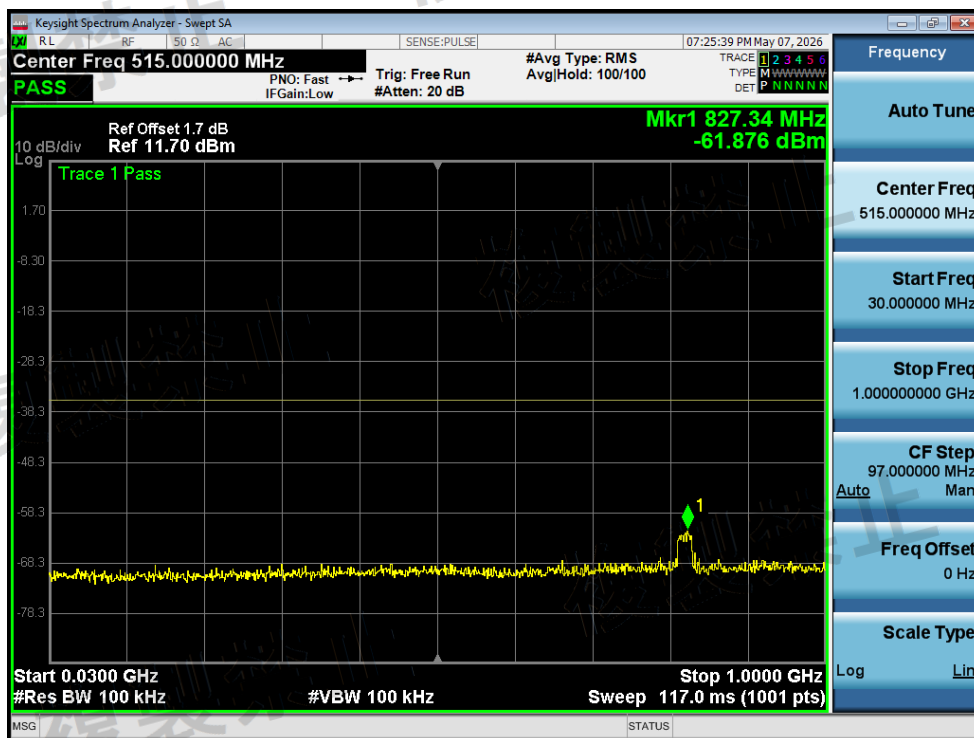


Tx. Spurious NVNT n20 2472MHz Ant1 @ 30MHz-1000MHz

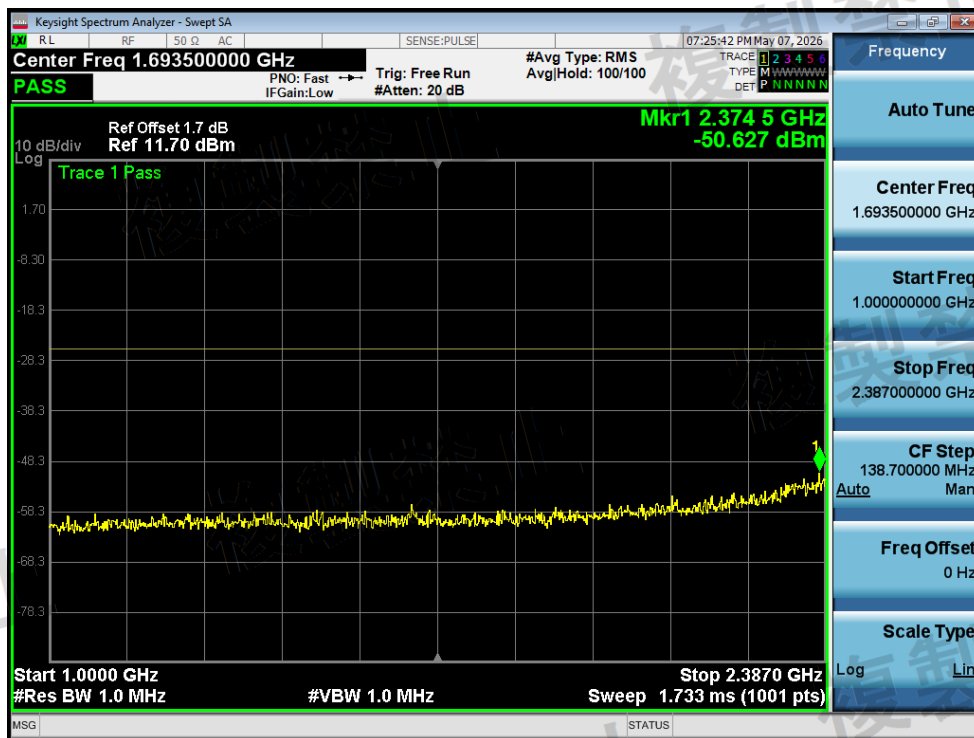


Tx. Spurious NVNT n20 2472MHz Ant1 @ 1000MHz-2387MHz

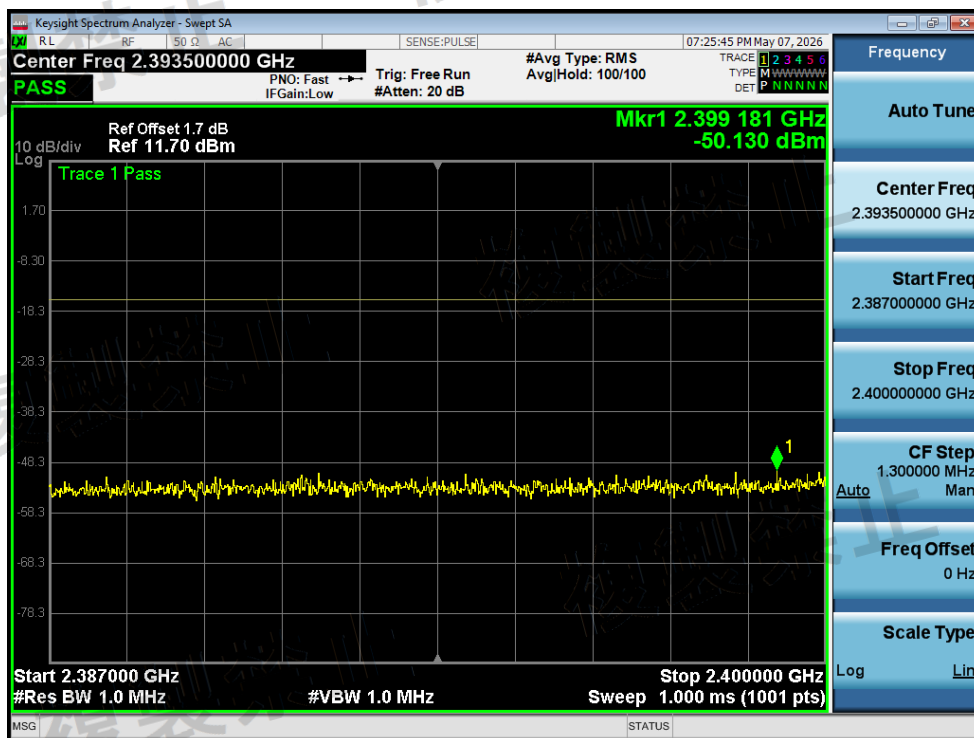


Tx. Spurious NVNT n20 2472MHz Ant1 @ 2387MHz-2400MHz

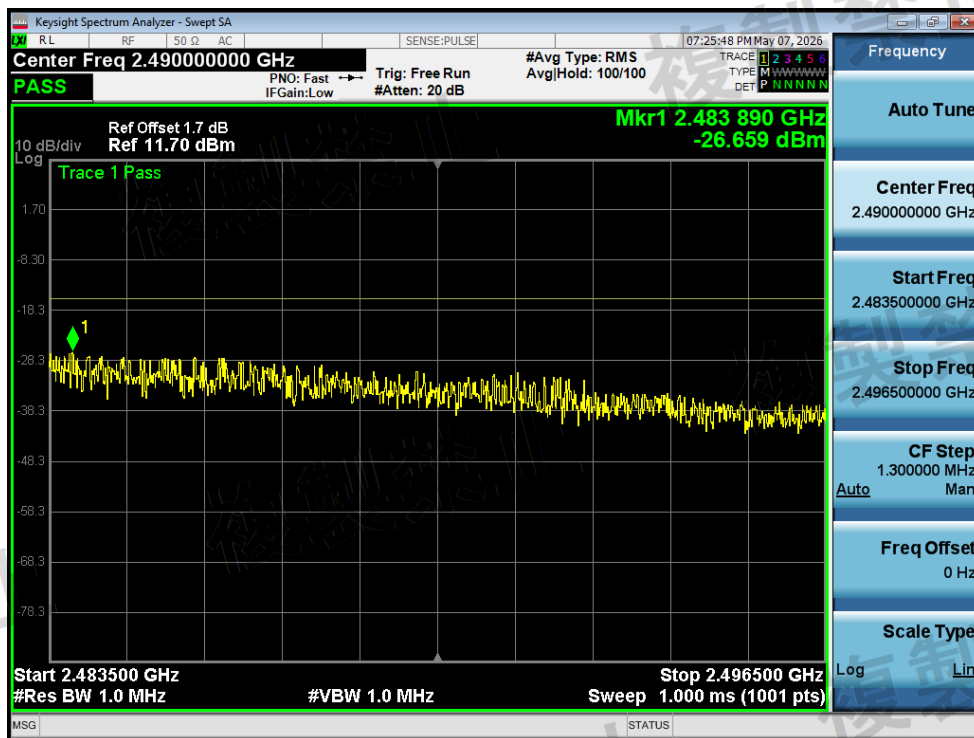


Tx. Spurious NVNT n20 2472MHz Ant1 @ 2483.5MHz-2496.5MHz

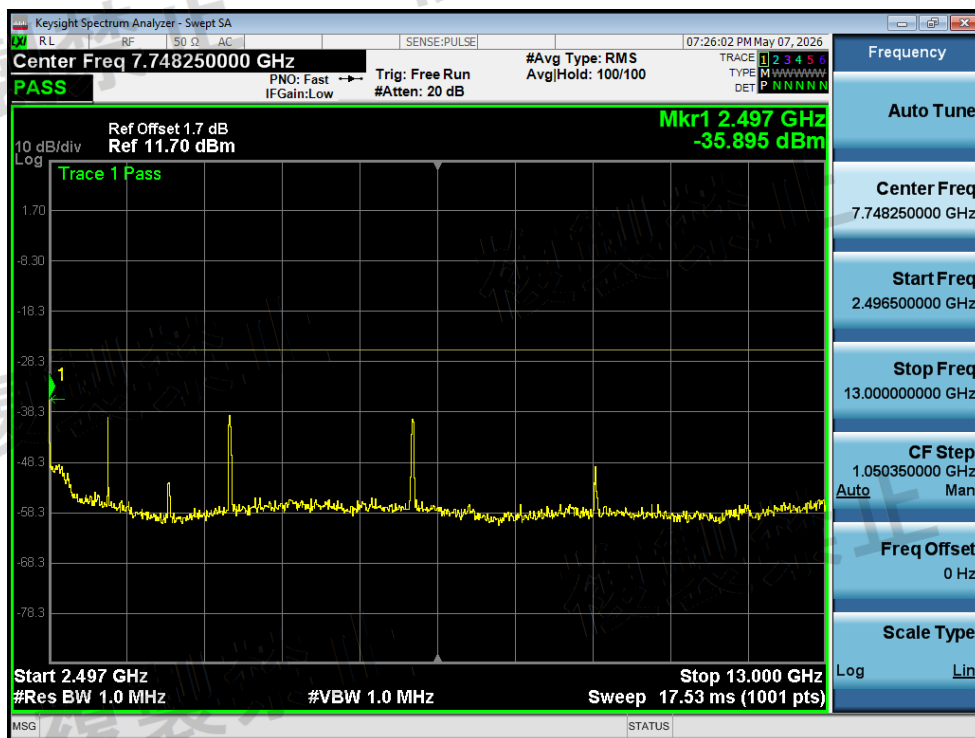


Tx. Spurious NVNT n20 2472MHz Ant1 @ 2496.5MHz-13000MHz

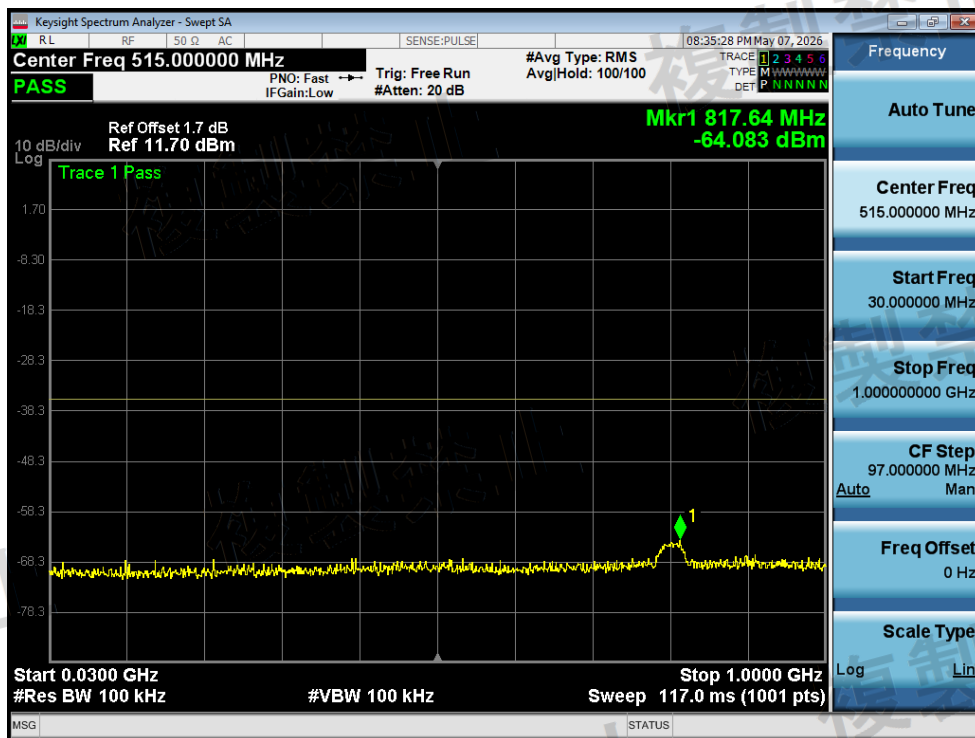


Tx. Spurious NVNT n40 2422MHz Ant1 @ 30MHz-1000MHz

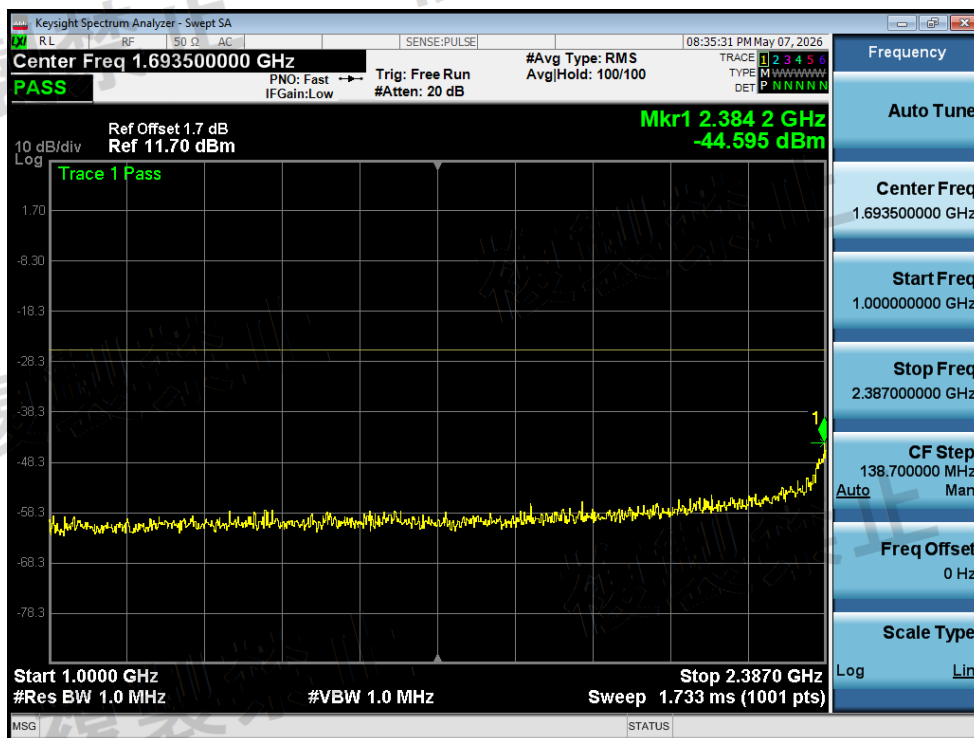


Tx. Spurious NVNT n40 2422MHz Ant1 @ 1000MHz-2387MHz

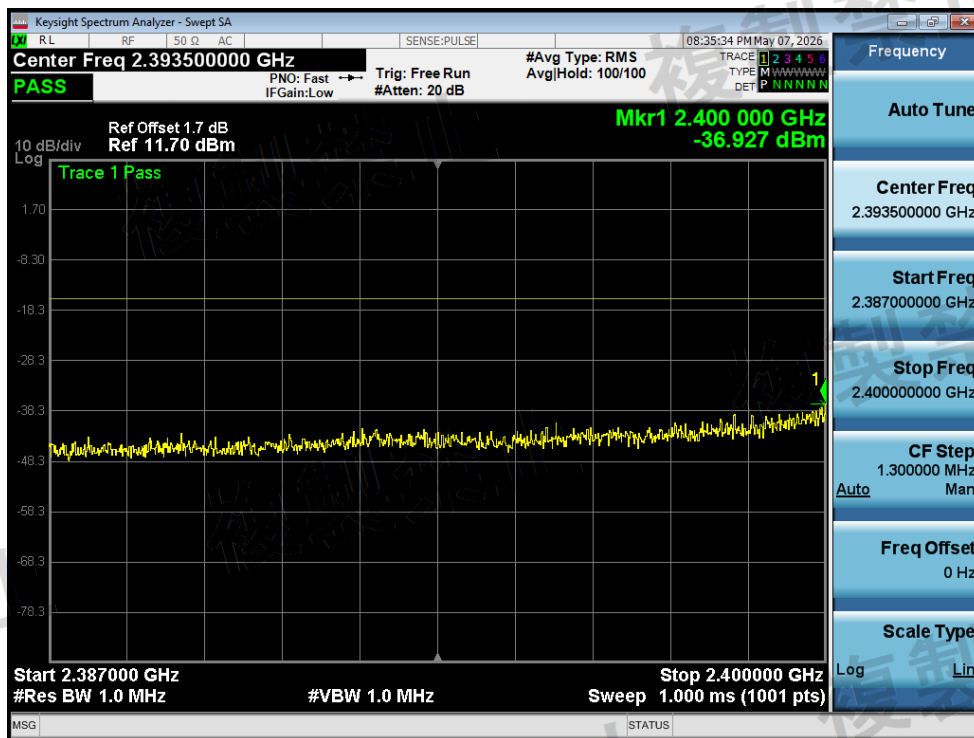

Tx. Spurious NVNT n40 2422MHz Ant1 @ 2387MHz-2400MHz

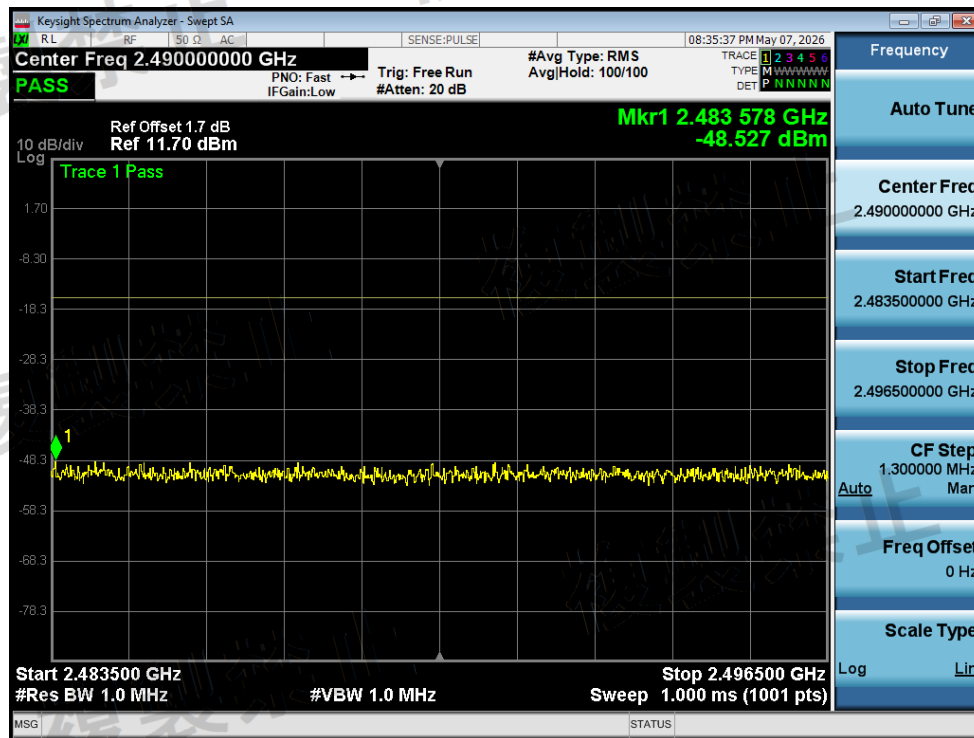


Tx. Spurious NVNT n40 2422MHz Ant1 @ 2483.5MHz-2496.5MHz

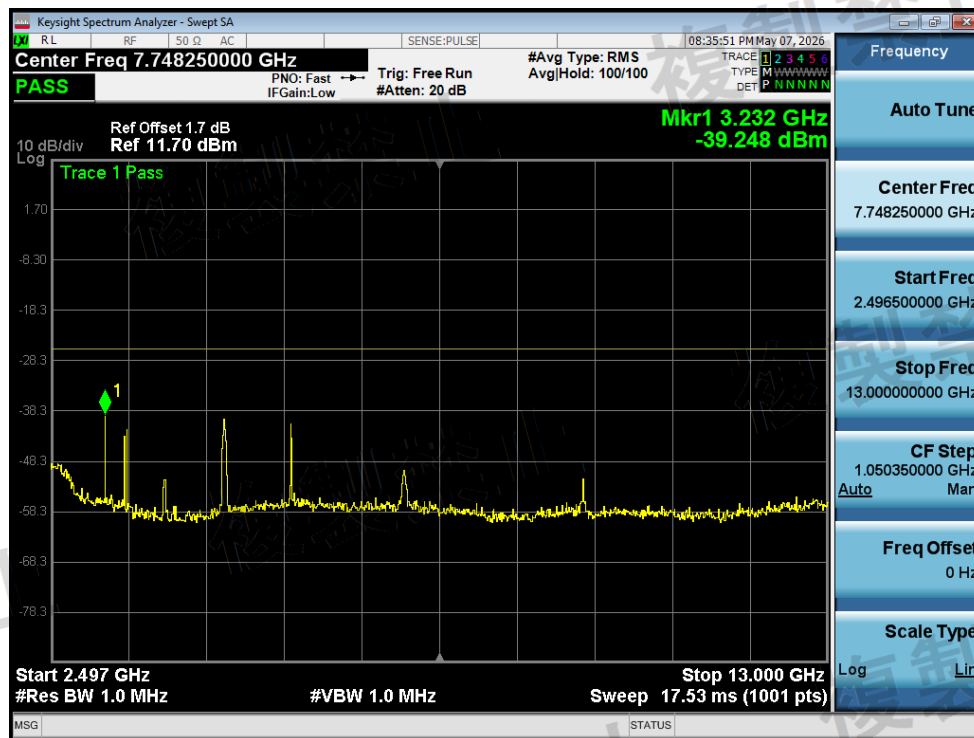


Tx. Spurious NVNT n40 2422MHz Ant1 @ 2496.5MHz-13000MHz




Tx. Spurious NVNT n40 2437MHz Ant1 @ 30MHz-1000MHz

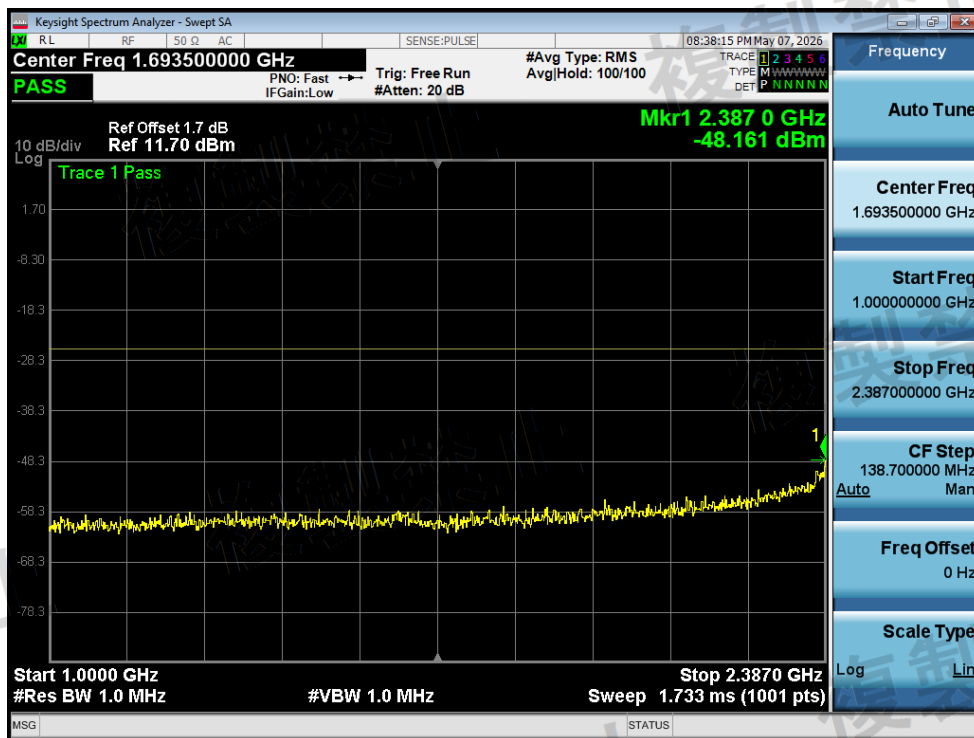


Tx. Spurious NVNT n40 2437MHz Ant1 @ 1000MHz-2387MHz

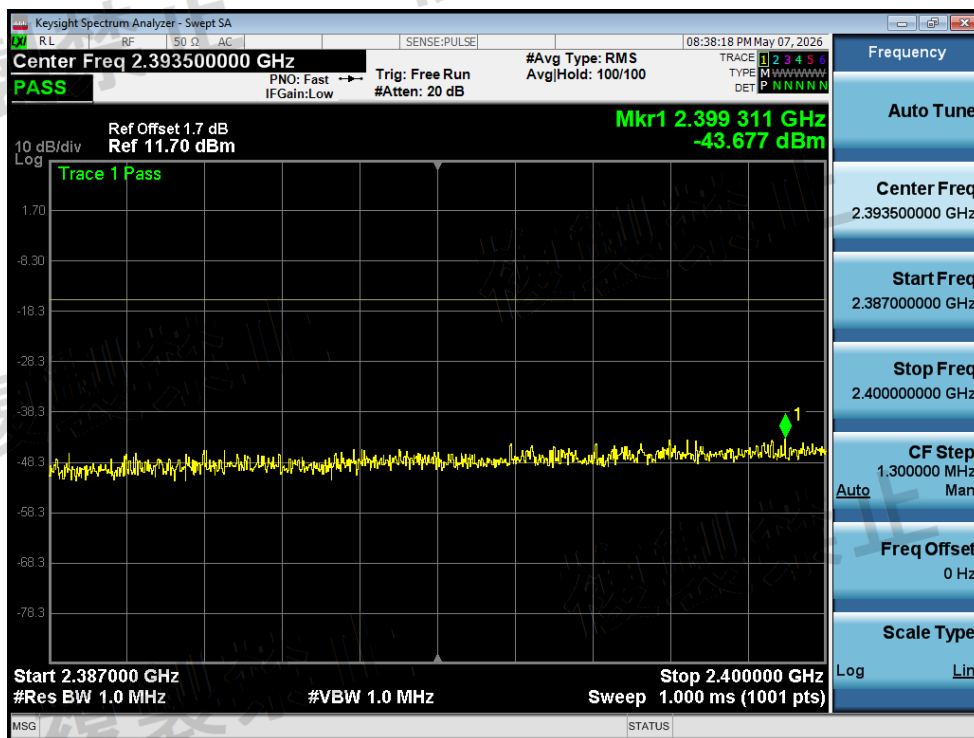


Tx. Spurious NVNT n40 2437MHz Ant1 @ 2387MHz-2400MHz

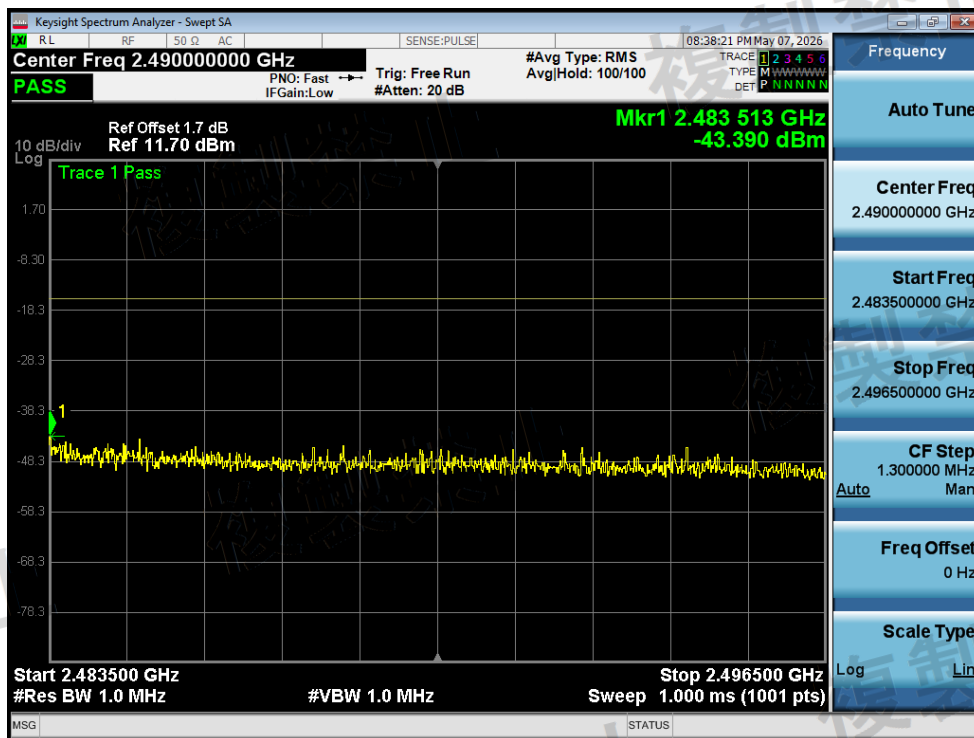


Tx. Spurious NVNT n40 2437MHz Ant1 @ 2483.5MHz-2496.5MHz

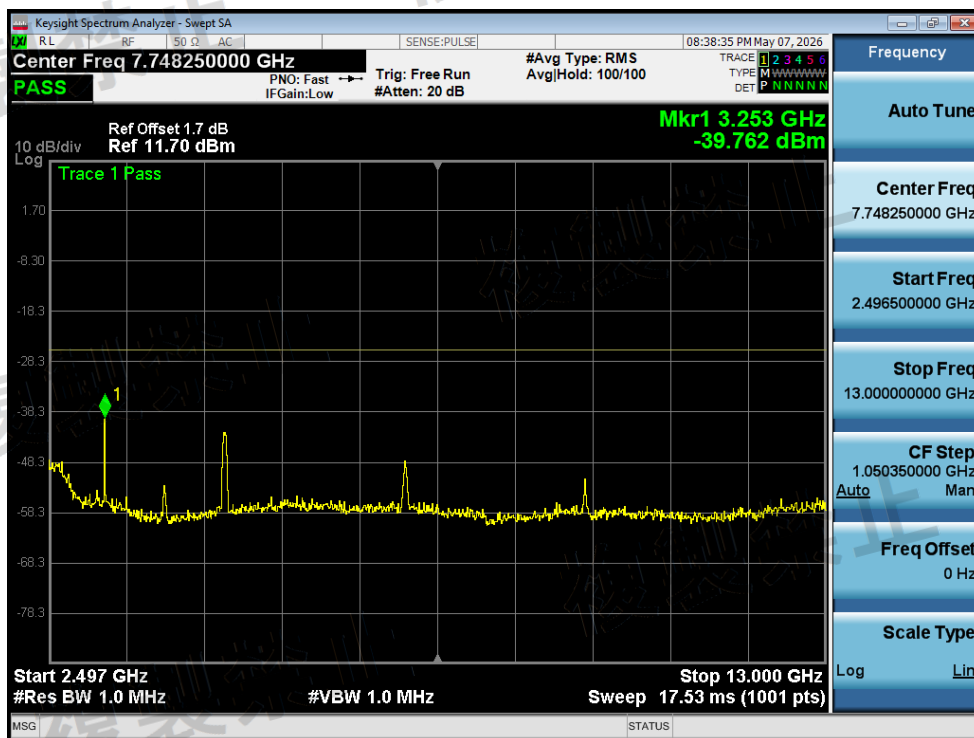


Tx. Spurious NVNT n40 2437MHz Ant1 @ 2496.5MHz-13000MHz

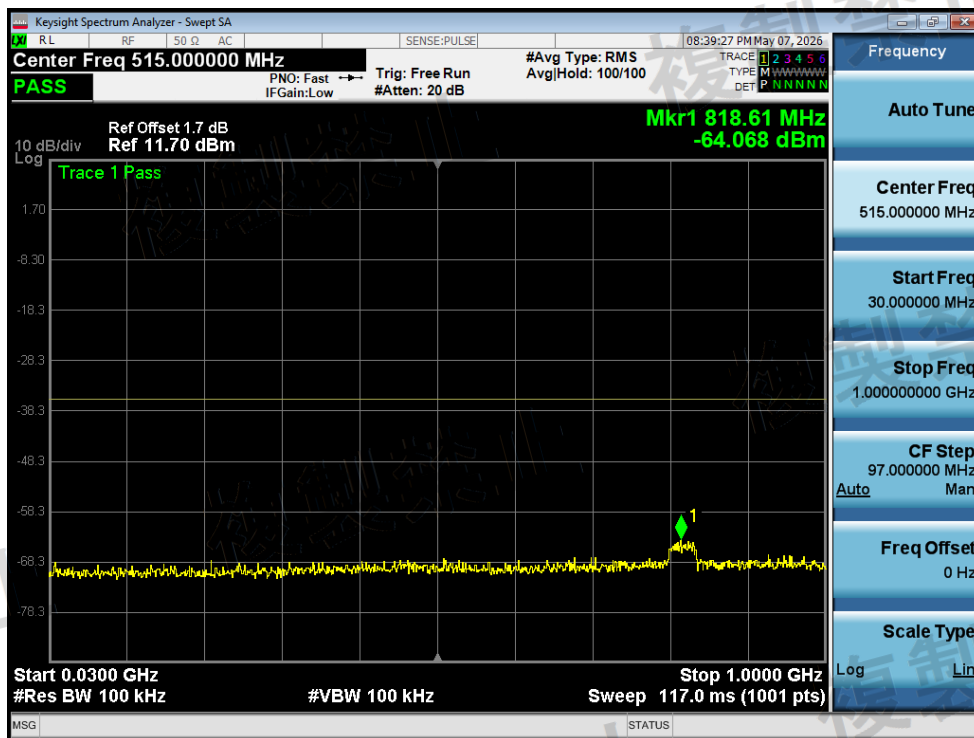


Tx. Spurious NVNT n40 2462MHz Ant1 @ 30MHz-1000MHz

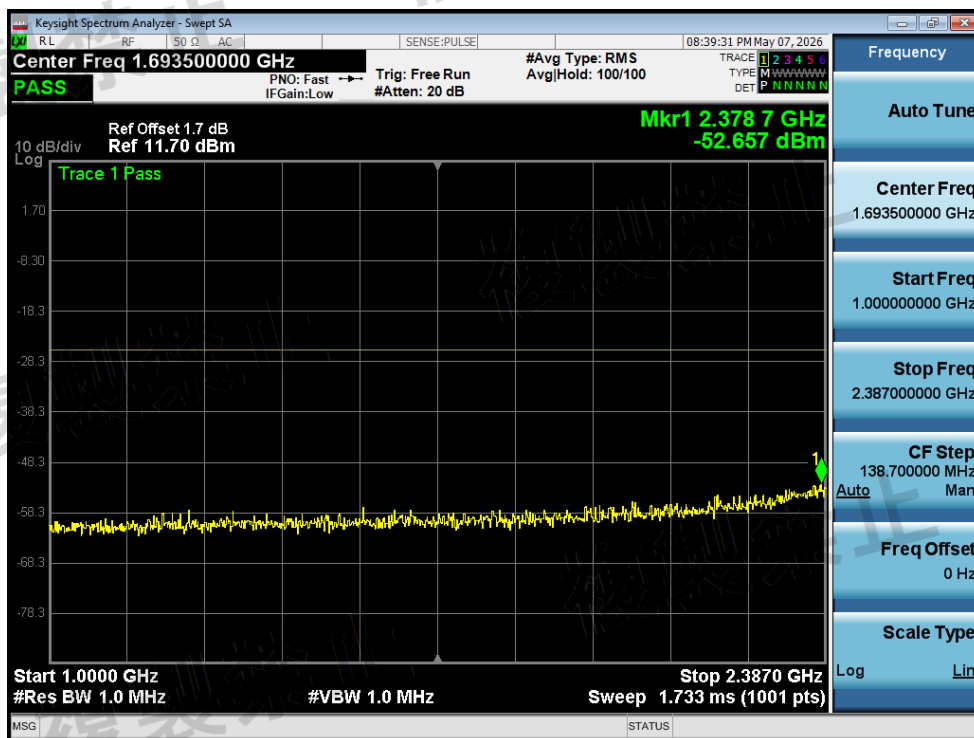


Tx. Spurious NVNT n40 2462MHz Ant1 @ 1000MHz-2387MHz

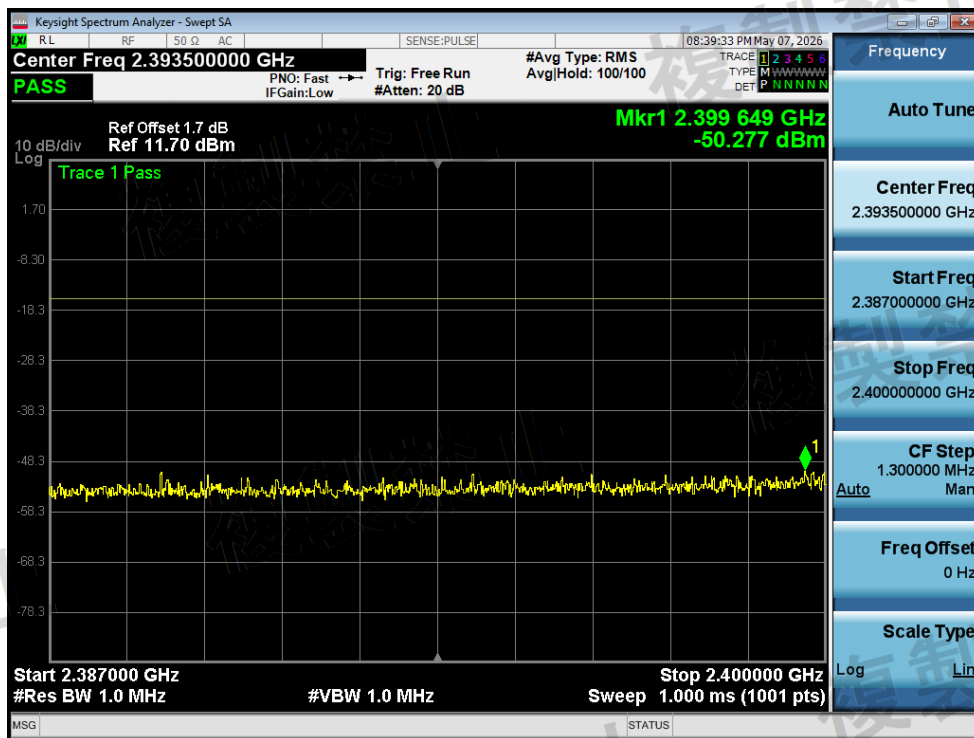

Tx. Spurious NVNT n40 2462MHz Ant1 @ 2387MHz-2400MHz

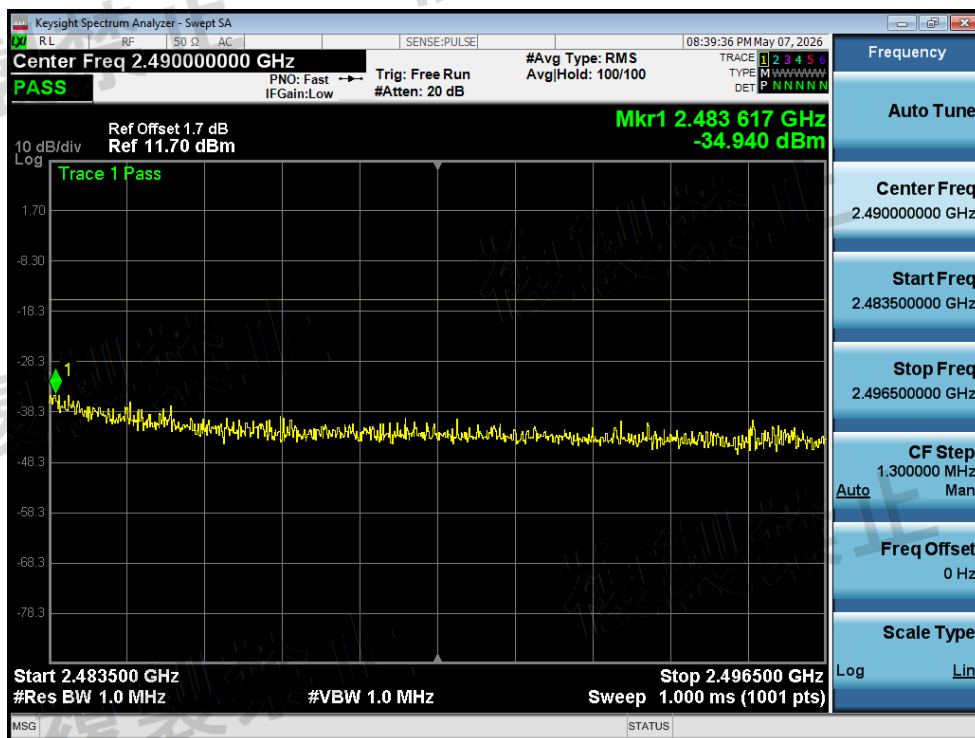


Tx. Spurious NVNT n40 2462MHz Ant1 @ 2483.5MHz-2496.5MHz

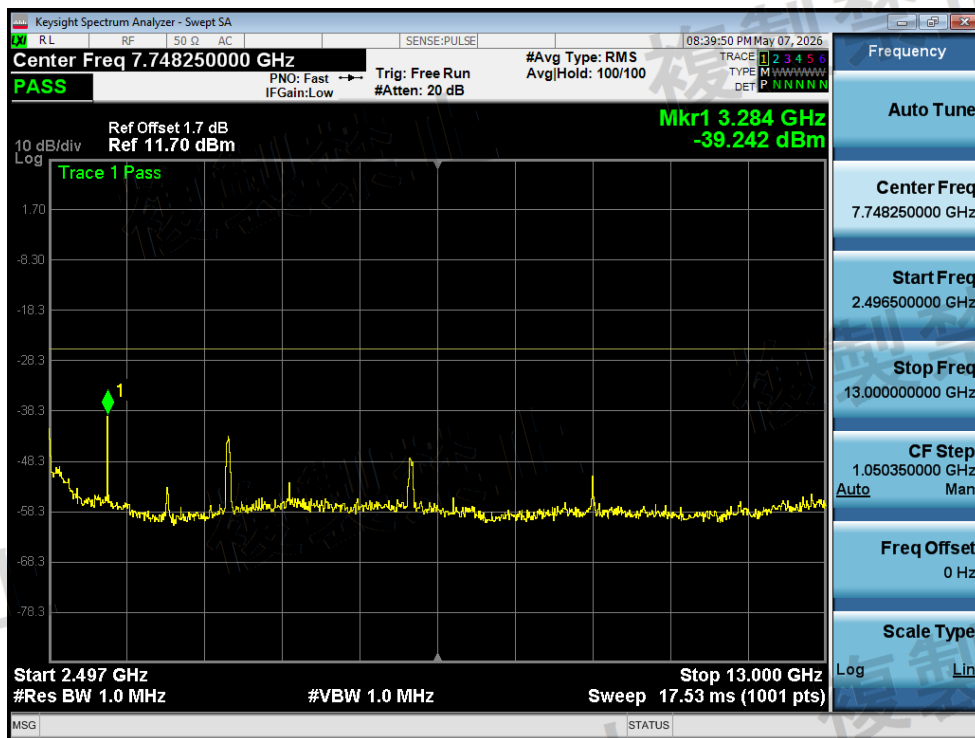


Tx. Spurious NVNT n40 2462MHz Ant1 @ 2496.5MHz-13000MHz

6. Rx Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Range (MHz)	Emission Frequency (MHz)	Max Value (dBm)	Max Value (nW)	Limit (nW)	Verdict
NVNT	b	2412	Ant1	30-1000	159.98	-82.11	0.006	4	Pass
NVNT	b	2412	Ant1	1000-13000	3508	-59.39	1.15	20	Pass
NVNT	b	2437	Ant1	30-1000	159.98	-82.14	0.006	4	Pass
NVNT	b	2437	Ant1	1000-13000	3244	-66.69	0.21	20	Pass
NVNT	b	2472	Ant1	30-1000	159.98	-82.25	0.006	4	Pass
NVNT	b	2472	Ant1	1000-13000	3292	-65.73	0.27	20	Pass
NVNT	g	2412	Ant1	30-1000	159.98	-81.75	0.007	4	Pass
NVNT	g	2412	Ant1	1000-13000	3220	-64.47	0.36	20	Pass
NVNT	g	2437	Ant1	30-1000	159.98	-82.16	0.006	4	Pass
NVNT	g	2437	Ant1	1000-13000	3244	-65.86	0.26	20	Pass
NVNT	g	2472	Ant1	30-1000	159.98	-81.99	0.006	4	Pass
NVNT	g	2472	Ant1	1000-13000	3292	-65.88	0.26	20	Pass
NVNT	n20	2412	Ant1	30-1000	159.98	-82.13	0.006	4	Pass
NVNT	n20	2412	Ant1	1000-13000	3292	-65.77	0.26	20	Pass
NVNT	n20	2437	Ant1	30-1000	159.98	-82.24	0.006	4	Pass
NVNT	n20	2437	Ant1	1000-13000	3292	-65.51	0.28	20	Pass
NVNT	n20	2472	Ant1	30-1000	159.98	-82.31	0.006	4	Pass
NVNT	n20	2472	Ant1	1000-13000	3292	-65.51	0.28	20	Pass
NVNT	n40	2422	Ant1	30-1000	159.98	-82.14	0.006	4	Pass
NVNT	n40	2422	Ant1	1000-13000	3292	-65.68	0.27	20	Pass
NVNT	n40	2437	Ant1	30-1000	159.98	-81.83	0.007	4	Pass
NVNT	n40	2437	Ant1	1000-13000	3292	-65.87	0.26	20	Pass
NVNT	n40	2462	Ant1	30-1000	159.98	-82.3	0.006	4	Pass
NVNT	n40	2462	Ant1	1000-13000	3292	-65.81	0.26	20	Pass

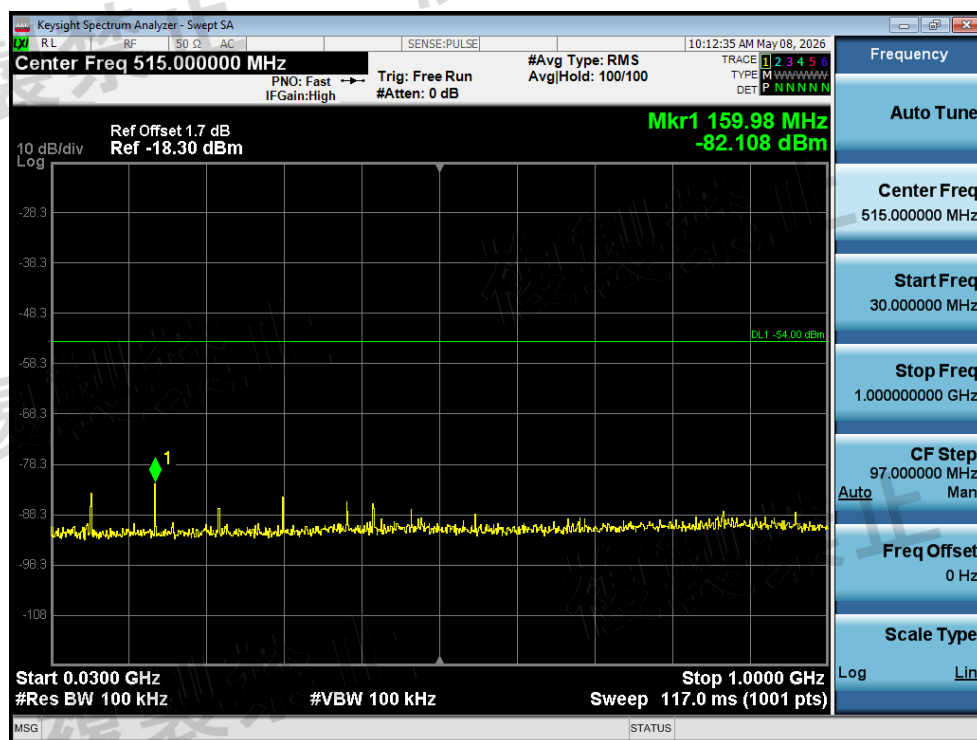


Rx. Spurious NVNT b 2412MHz Ant1 @ 30MHz-1000MHz

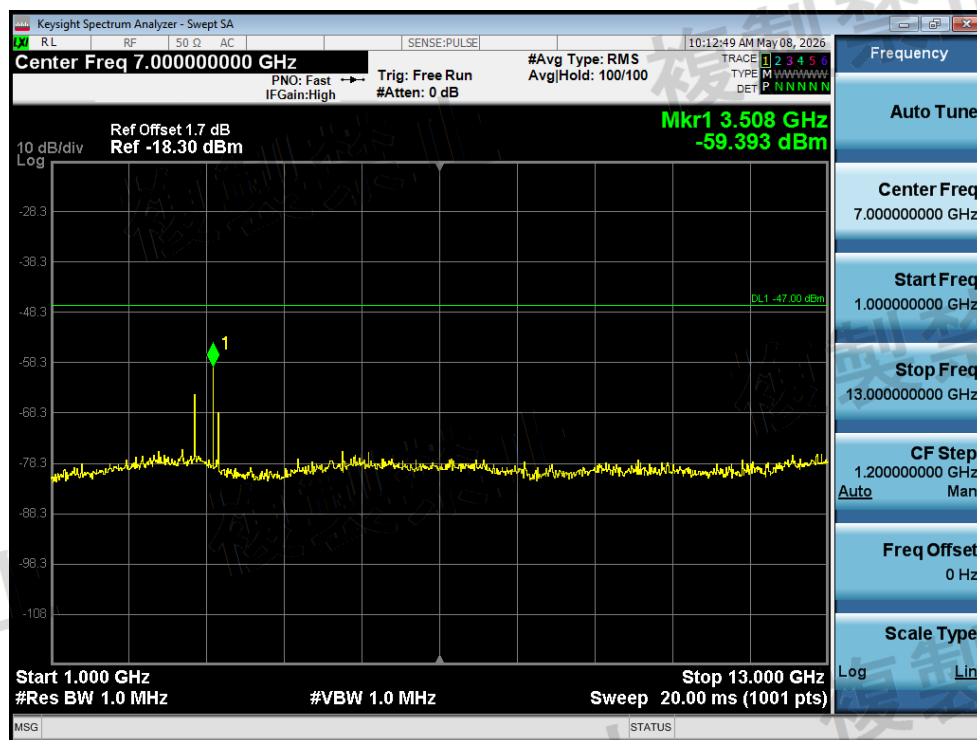


Rx. Spurious NVNT b 2412MHz Ant1 @ 1000MHz-13000MHz

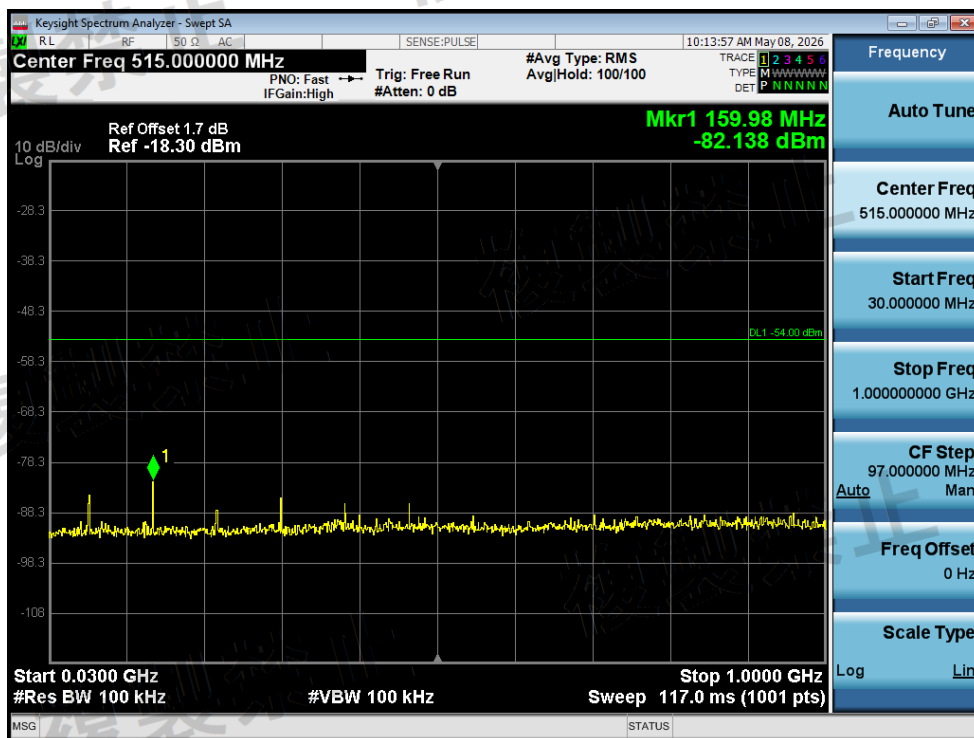


Rx. Spurious NVNT b 2437MHz Ant1 @ 30MHz-1000MHz

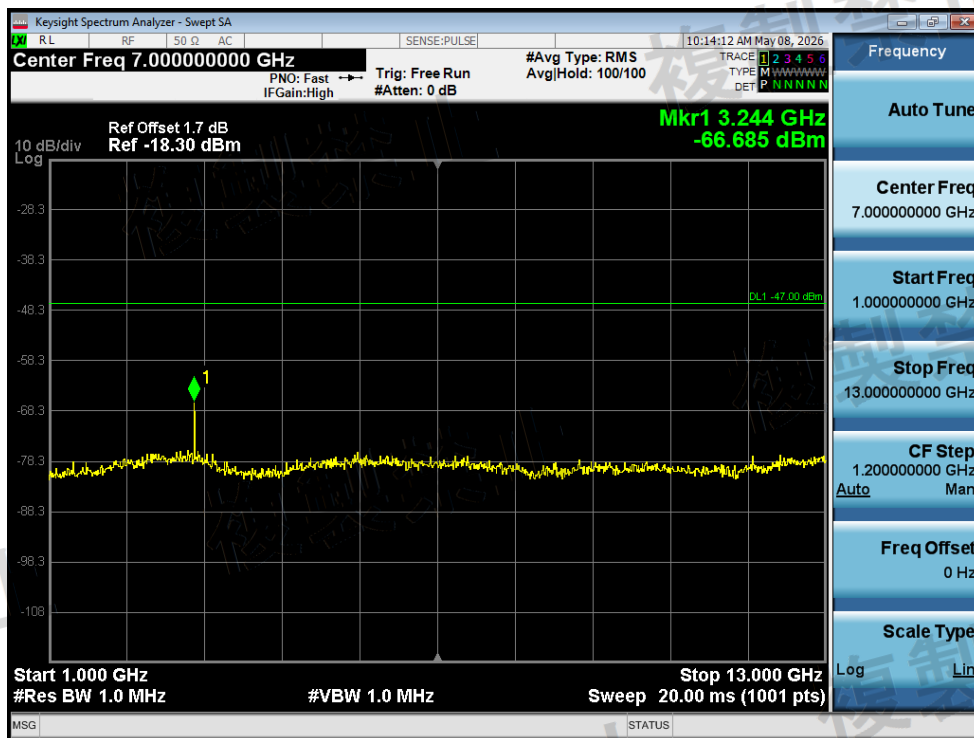


Rx. Spurious NVNT b 2437MHz Ant1 @ 1000MHz-13000MHz

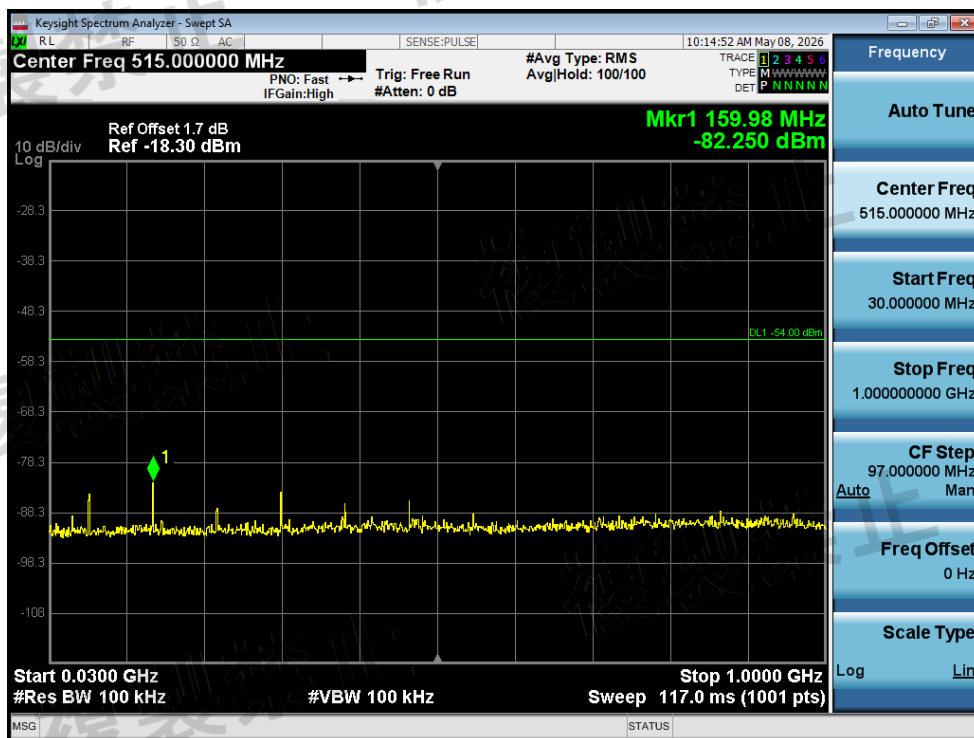


Rx. Spurious NVNT b 2472MHz Ant1 @ 30MHz-1000MHz

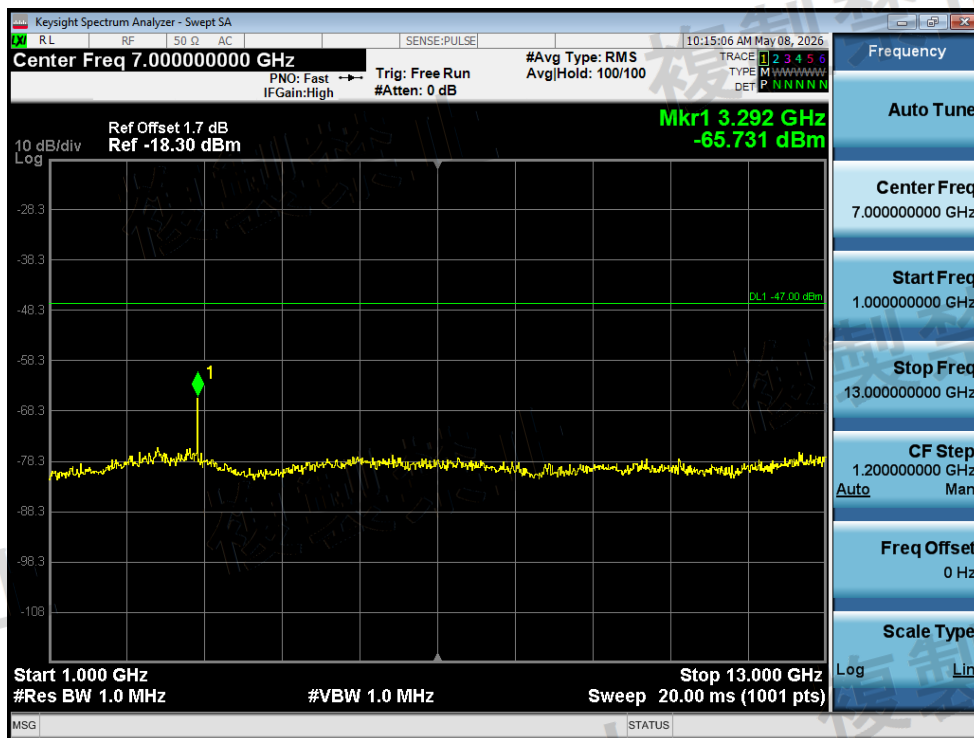


Rx. Spurious NVNT b 2472MHz Ant1 @ 1000MHz-13000MHz

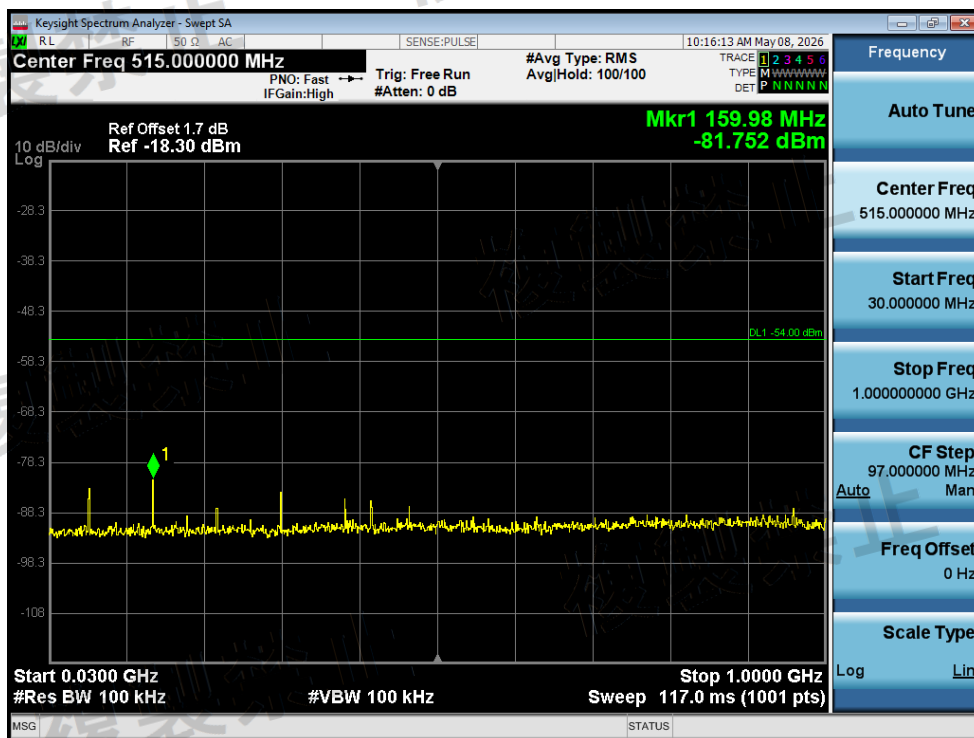


Rx. Spurious NVNT g 2412MHz Ant1 @ 30MHz-1000MHz

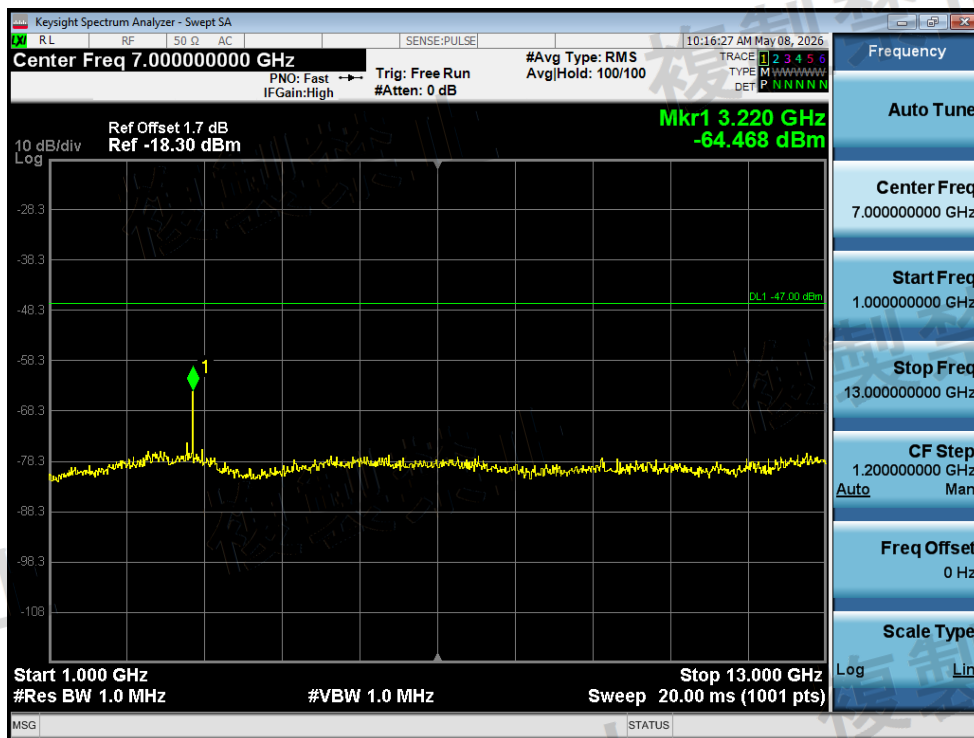


Rx. Spurious NVNT g 2412MHz Ant1 @ 1000MHz-13000MHz

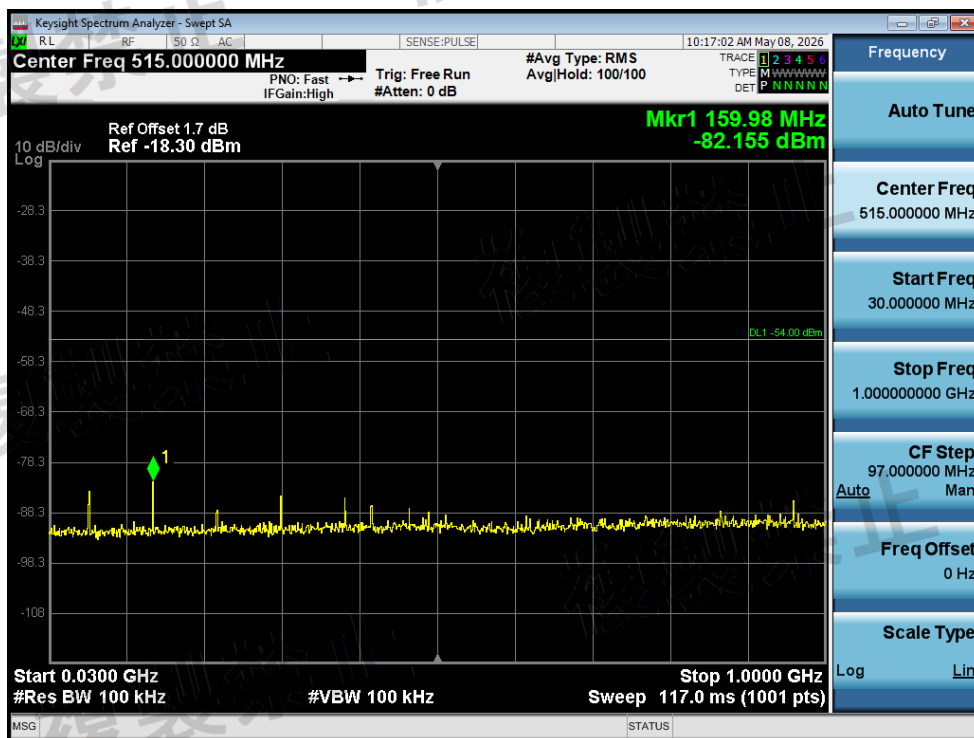


Rx. Spurious NVNT g 2437MHz Ant1 @ 30MHz-1000MHz

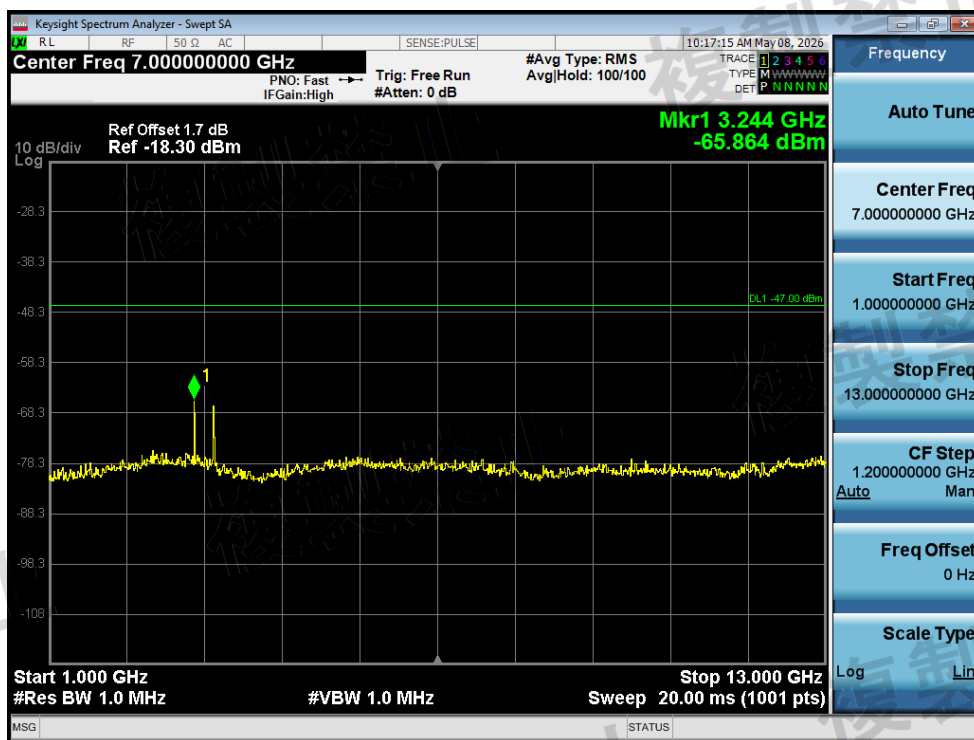


Rx. Spurious NVNT g 2437MHz Ant1 @ 1000MHz-13000MHz

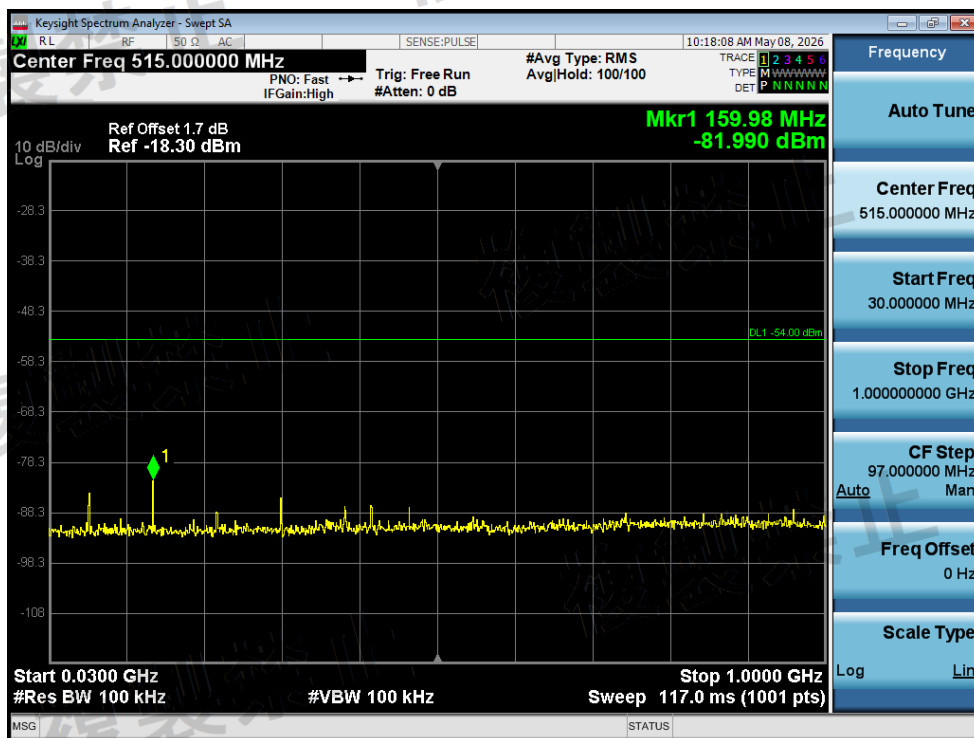


Rx. Spurious NVNT g 2472MHz Ant1 @ 30MHz-1000MHz

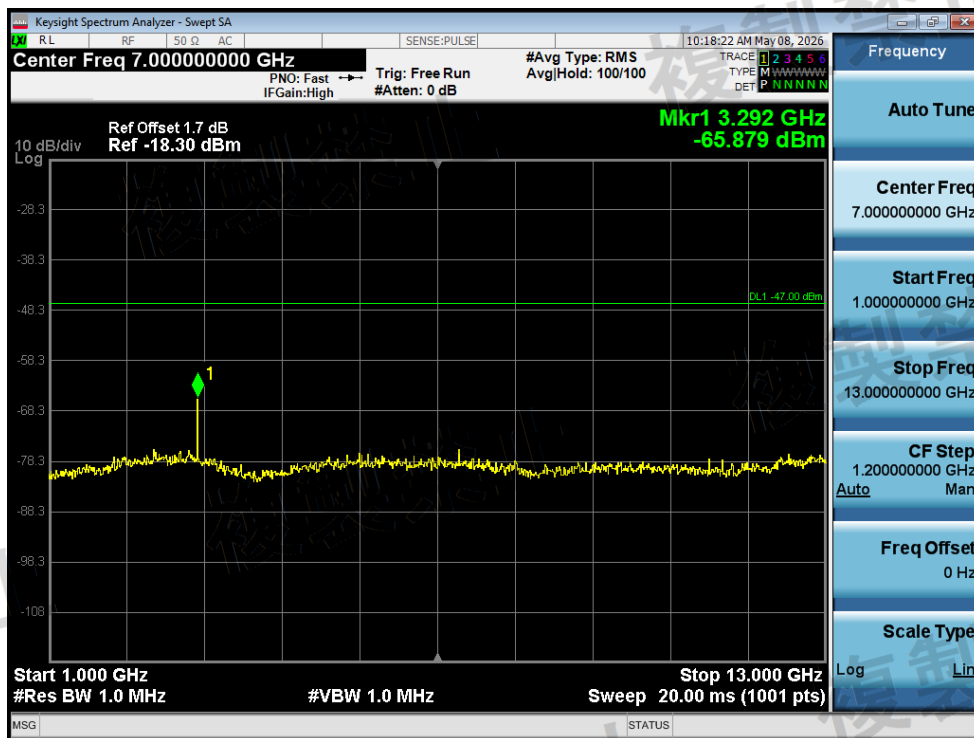


Rx. Spurious NVNT g 2472MHz Ant1 @ 1000MHz-13000MHz

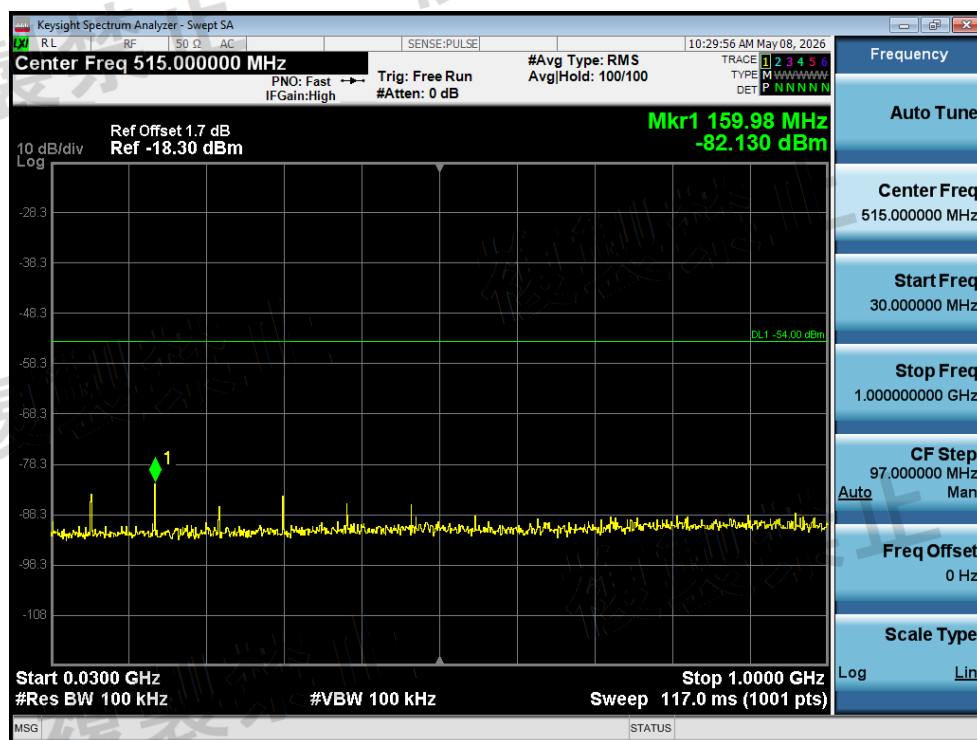


Rx. Spurious NVNT n20 2412MHz Ant1 @ 30MHz-1000MHz

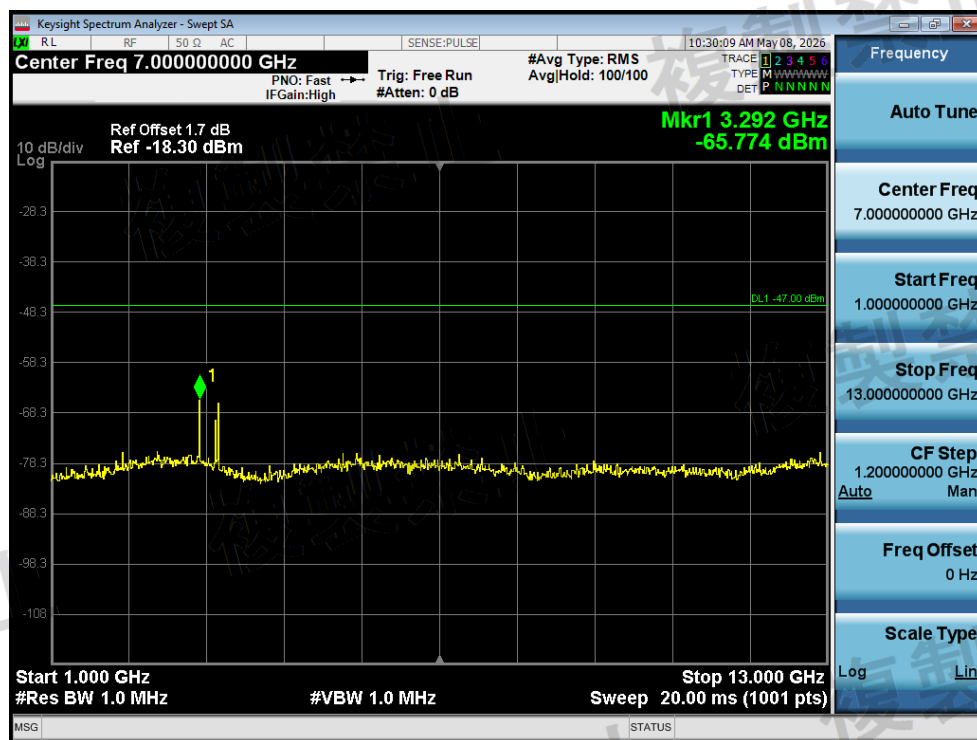


Rx. Spurious NVNT n20 2412MHz Ant1 @ 1000MHz-13000MHz

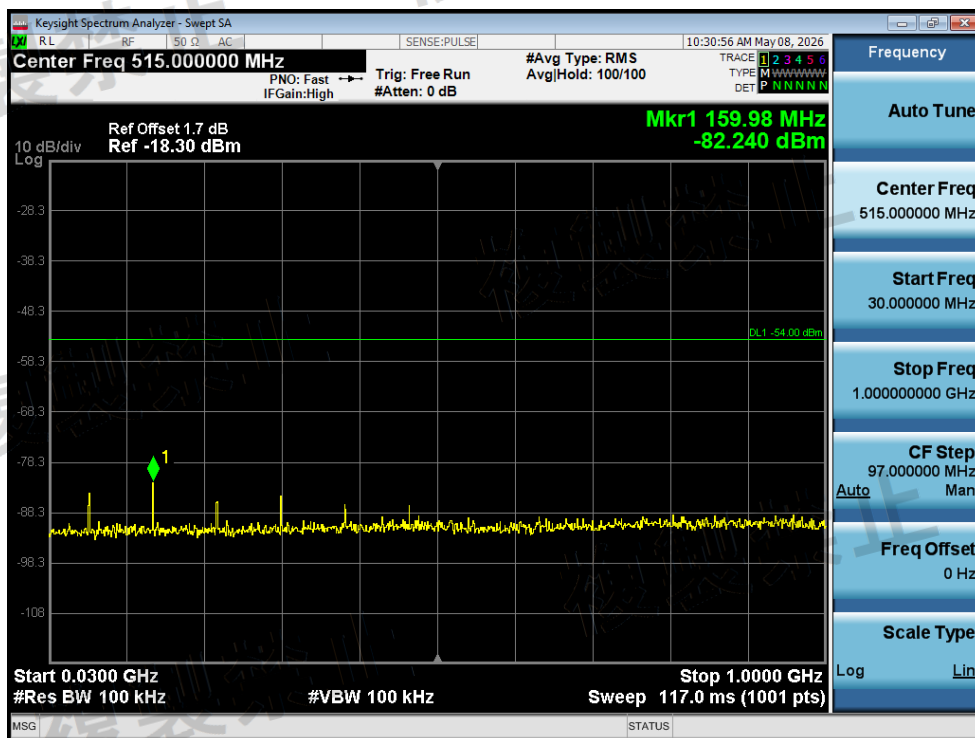


Rx. Spurious NVNT n20 2437MHz Ant1 @ 30MHz-1000MHz

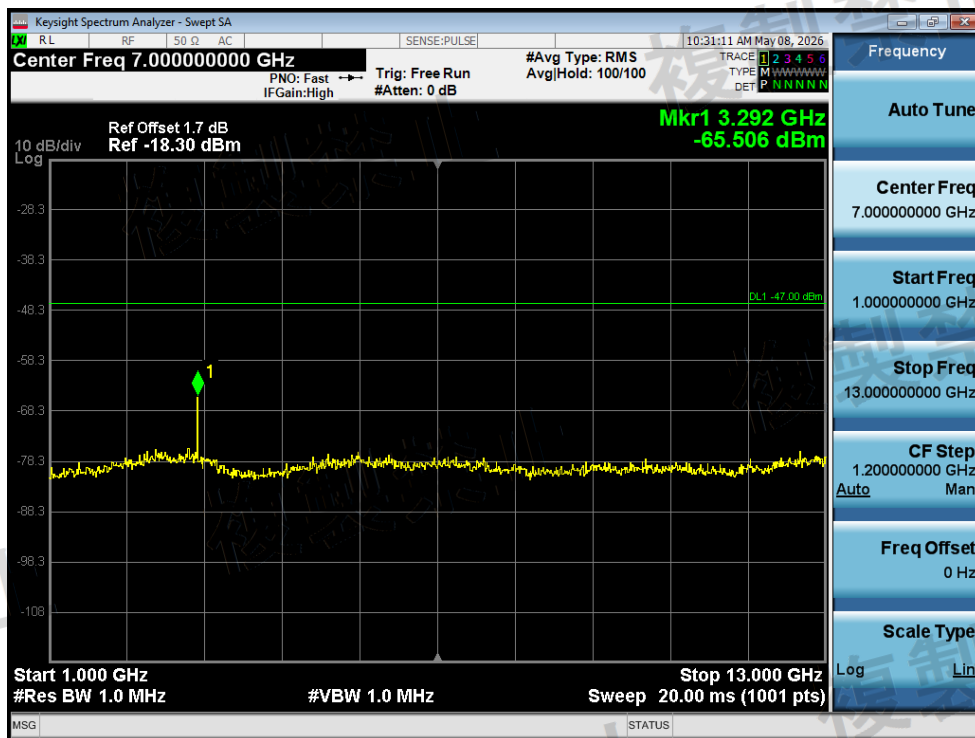


Rx. Spurious NVNT n20 2437MHz Ant1 @ 1000MHz-13000MHz

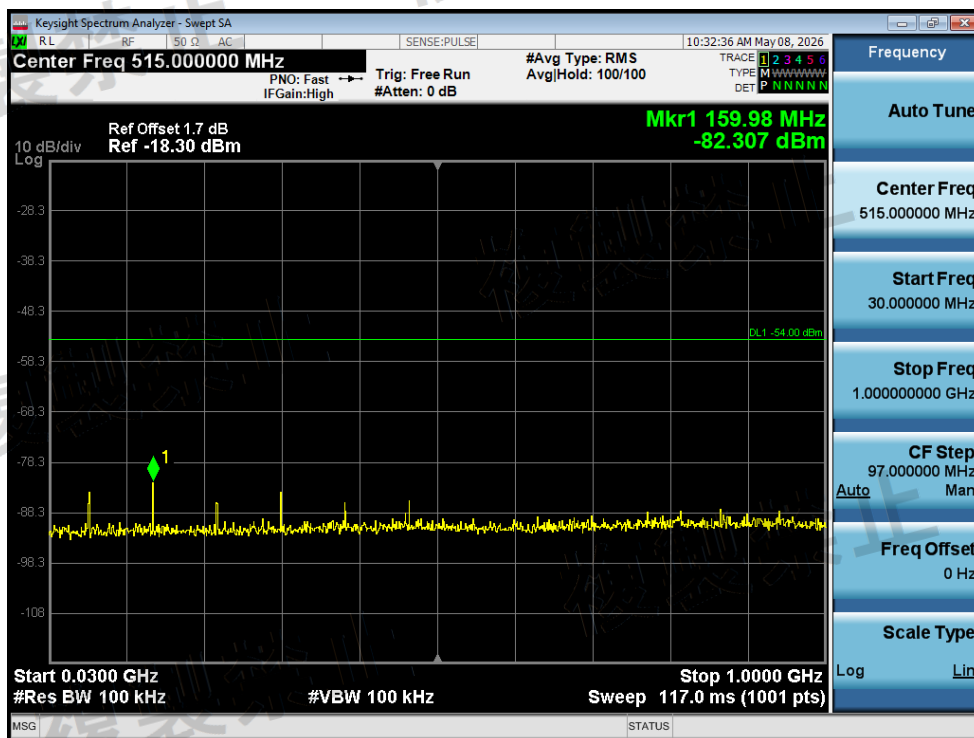


Rx. Spurious NVNT n20 2472MHz Ant1 @ 30MHz-1000MHz

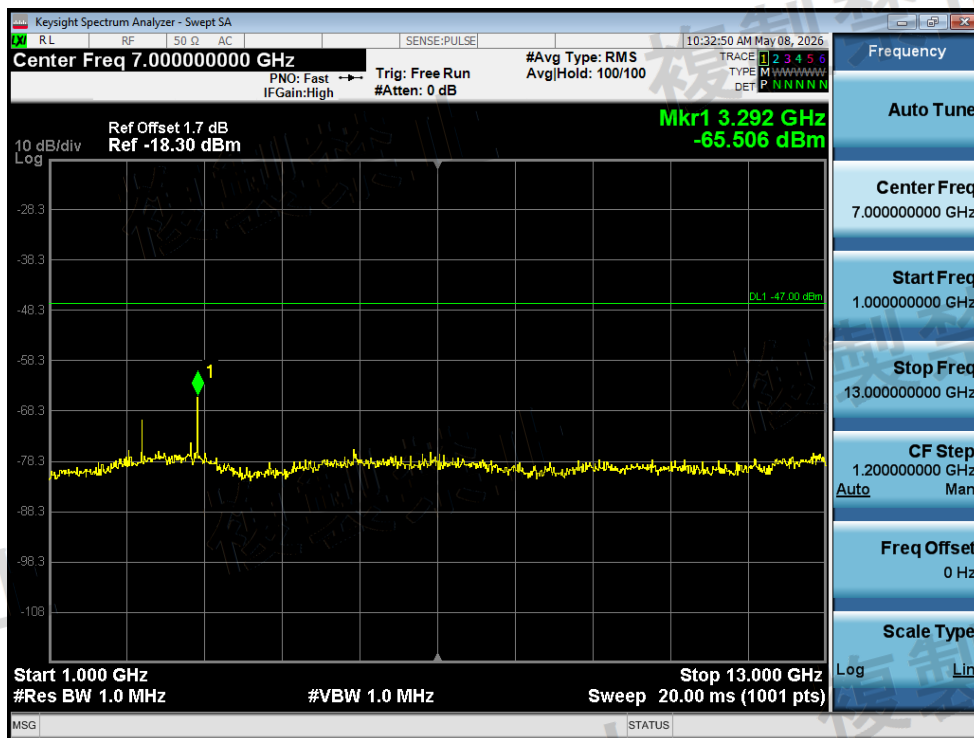


Rx. Spurious NVNT n20 2472MHz Ant1 @ 1000MHz-13000MHz

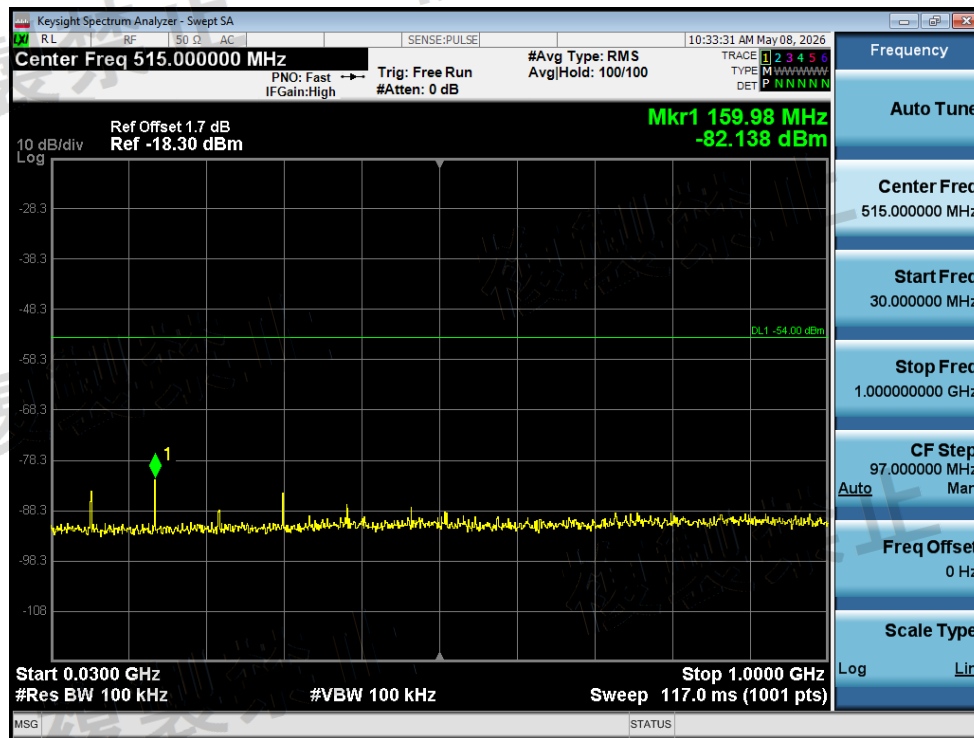


Rx. Spurious NVNT n40 2422MHz Ant1 @ 30MHz-1000MHz

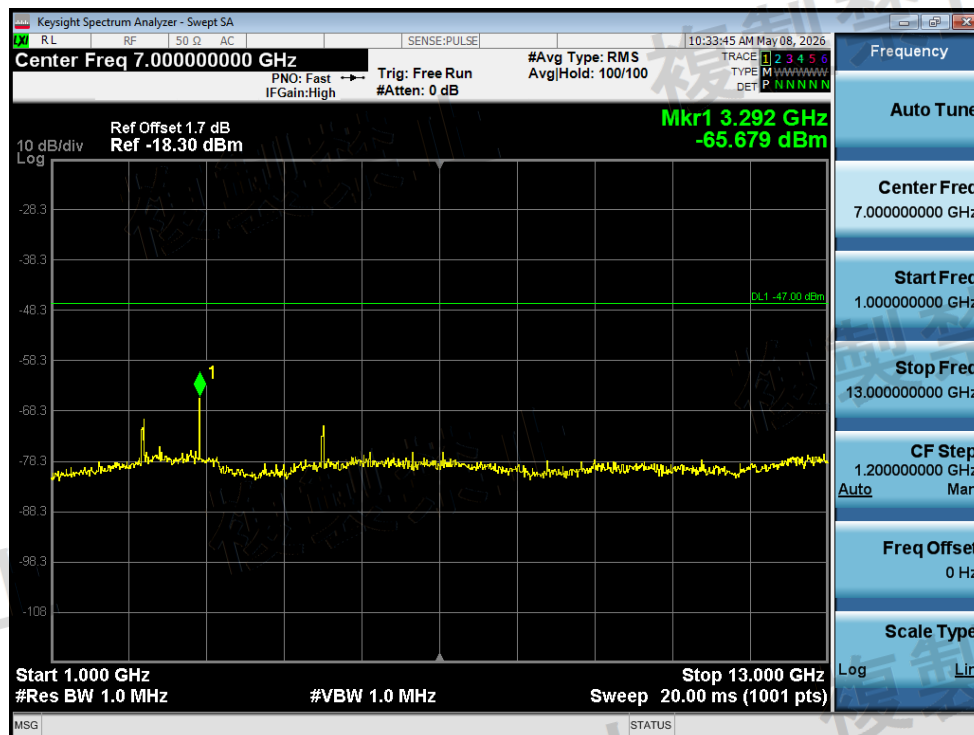


Rx. Spurious NVNT n40 2422MHz Ant1 @ 1000MHz-13000MHz

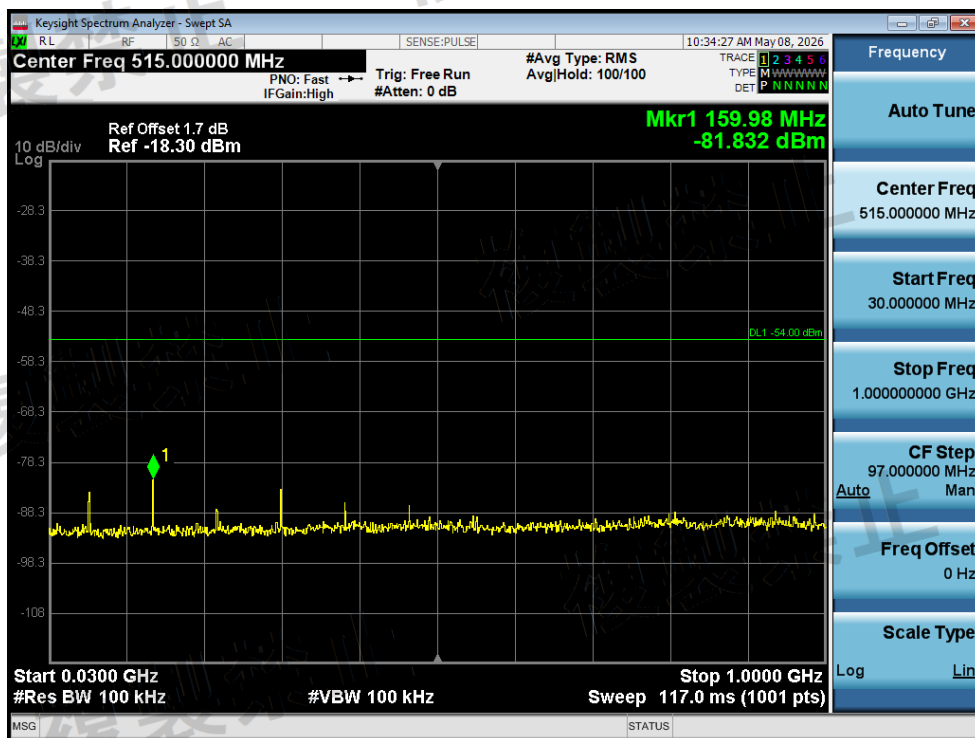


Rx. Spurious NVNT n40 2437MHz Ant1 @ 30MHz-1000MHz

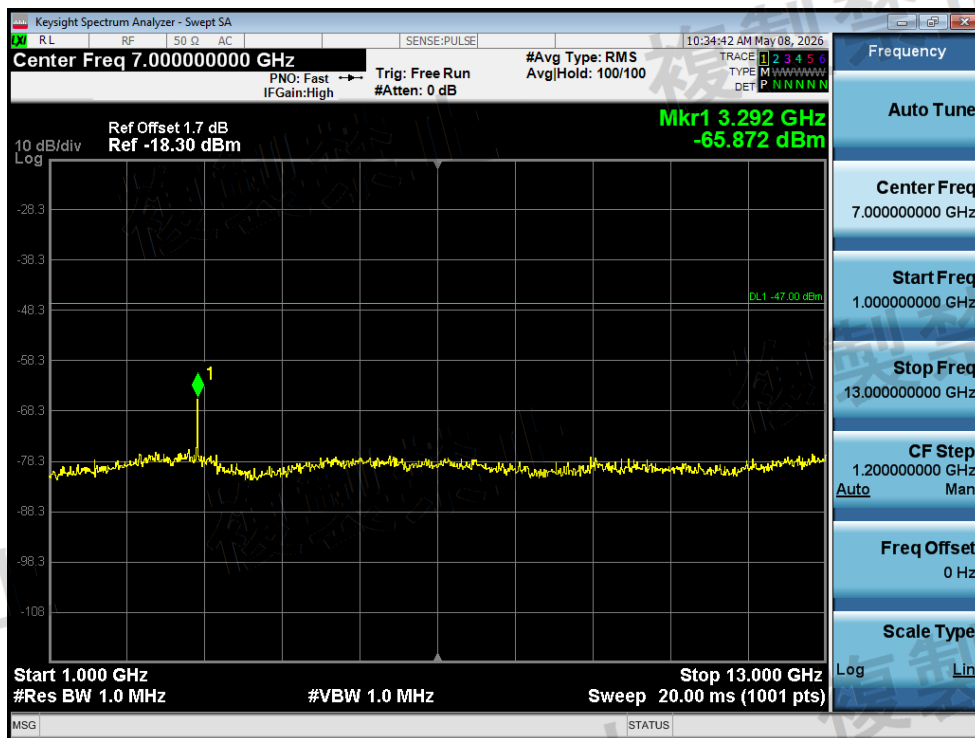

Rx. Spurious NVNT n40 2437MHz Ant1 @ 1000MHz-13000MHz

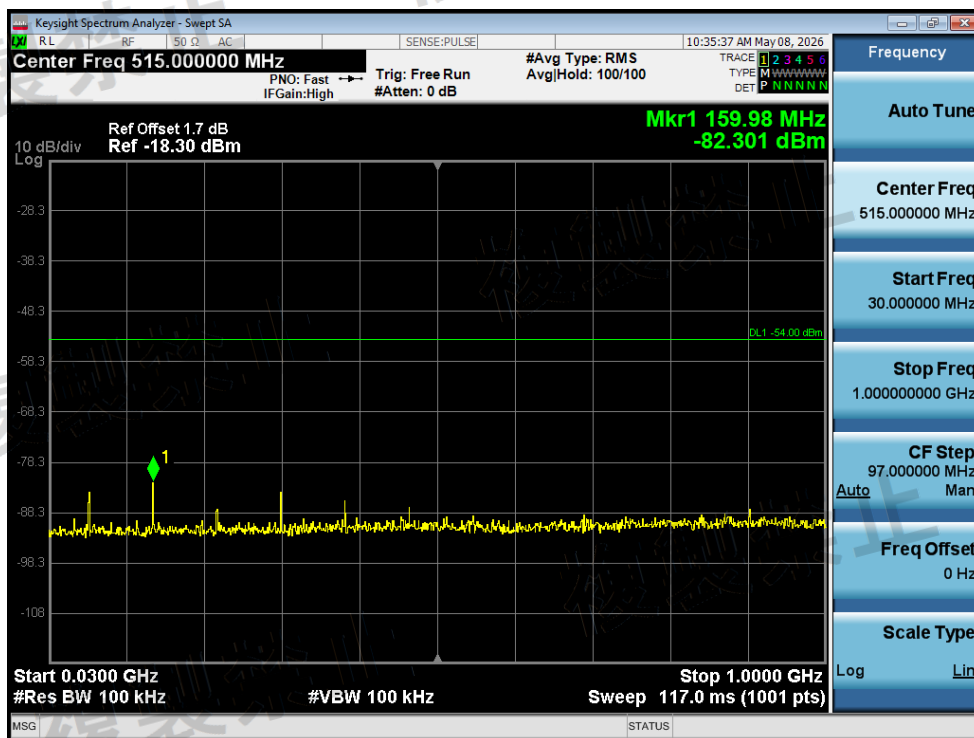

Rx. Spurious NVNT n40 2462MHz Ant1 @ 30MHz-1000MHz

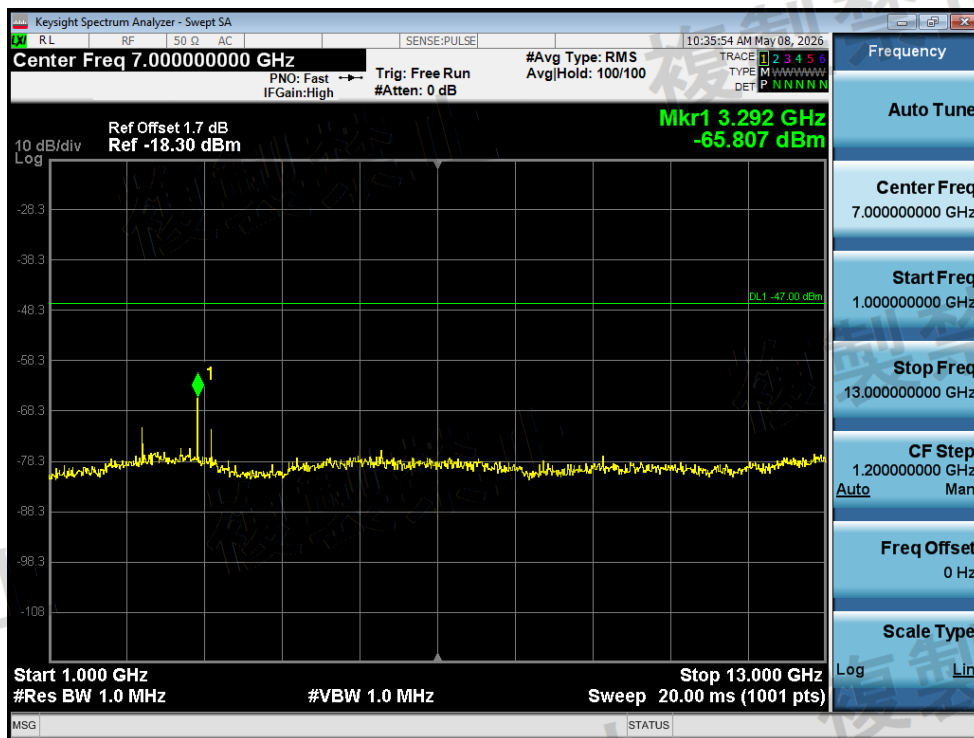

Rx. Spurious NVNT n40 2462MHz Ant1 @ 1000MHz-13000MHz