



Frequency Error


Condition	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	5180	Ant1	5180.017	17000	3.28	20	Pass
NVNT	5180	Ant2	5180.014	14000	2.7	20	Pass
NVNT	5200	Ant1	5200.012	12000	2.31	20	Pass
NVNT	5200	Ant2	5200.013	13000	2.5	20	Pass
NVNT	5240	Ant1	5240.012	12000	2.29	20	Pass
NVNT	5240	Ant2	5240.011	11000	2.1	20	Pass
NVNT	5260	Ant1	5260.011	11000	2.09	20	Pass
NVNT	5260	Ant2	5260.011	11000	2.09	20	Pass
NVNT	5300	Ant1	5300.011	11000	2.08	20	Pass
NVNT	5300	Ant2	5300.011	11000	2.08	20	Pass
NVNT	5320	Ant1	5320.011	11000	2.07	20	Pass
NVNT	5320	Ant2	5320.011	11000	2.07	20	Pass
NVNT	5500	Ant1	5500.011	11000	2	20	Pass
NVNT	5500	Ant2	5500.01	10000	1.82	20	Pass
NVNT	5580	Ant1	5580.01	10000	1.79	20	Pass
NVNT	5580	Ant2	5580.011	11000	1.97	20	Pass
NVNT	5700	Ant1	5700.011	11000	1.93	20	Pass
NVNT	5700	Ant2	5700.01	10000	1.75	20	Pass
NVNT	5190	Ant1	5190.01	10000	1.93	20	Pass
NVNT	5190	Ant2	5190.01	10000	1.93	20	Pass
NVNT	5230	Ant1	5230.01	10000	1.91	20	Pass
NVNT	5230	Ant2	5230.01	10000	1.91	20	Pass
NVNT	5270	Ant1	5270.009	9000	1.71	20	Pass
NVNT	5270	Ant2	5270.009	9000	1.71	20	Pass
NVNT	5310	Ant1	5310.01	10000	1.88	20	Pass
NVNT	5310	Ant2	5310.009	9000	1.69	20	Pass
NVNT	5510	Ant1	5510.009	9000	1.63	20	Pass
NVNT	5510	Ant2	5510.01	10000	1.81	20	Pass
NVNT	5590	Ant1	5590.01	10000	1.79	20	Pass
NVNT	5590	Ant2	5590.01	10000	1.79	20	Pass
NVNT	5670	Ant1	5670.009	9000	1.59	20	Pass
NVNT	5670	Ant2	5670.01	10000	1.76	20	Pass
NVNT	5210	Ant1	5210.018	18000	3.45	20	Pass
NVNT	5210	Ant2	5210.015	15000	2.88	20	Pass
NVNT	5290	Ant1	5290.014	14000	2.65	20	Pass
NVNT	5290	Ant2	5290.013	13000	2.46	20	Pass
NVNT	5530	Ant1	5530.013	13000	2.35	20	Pass
NVNT	5530	Ant2	5530.012	12000	2.17	20	Pass
NVNT	5610	Ant1	5610.012	12000	2.14	20	Pass
NVNT	5610	Ant2	5610.011	11000	1.96	20	Pass

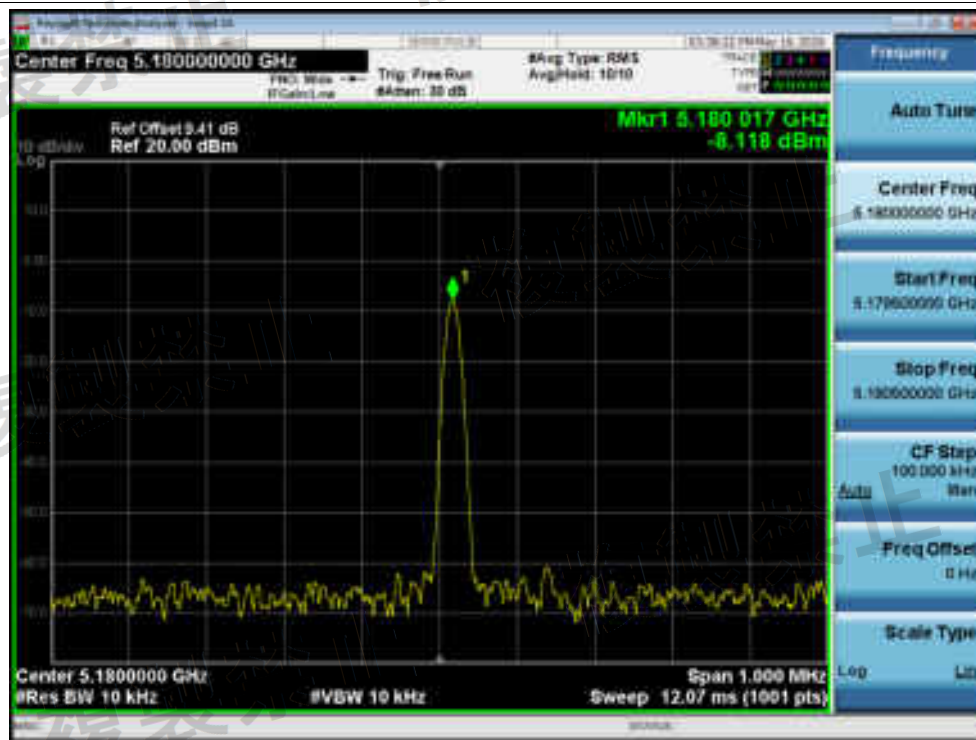


Freq. Error NVNT 5180MHz Ant1

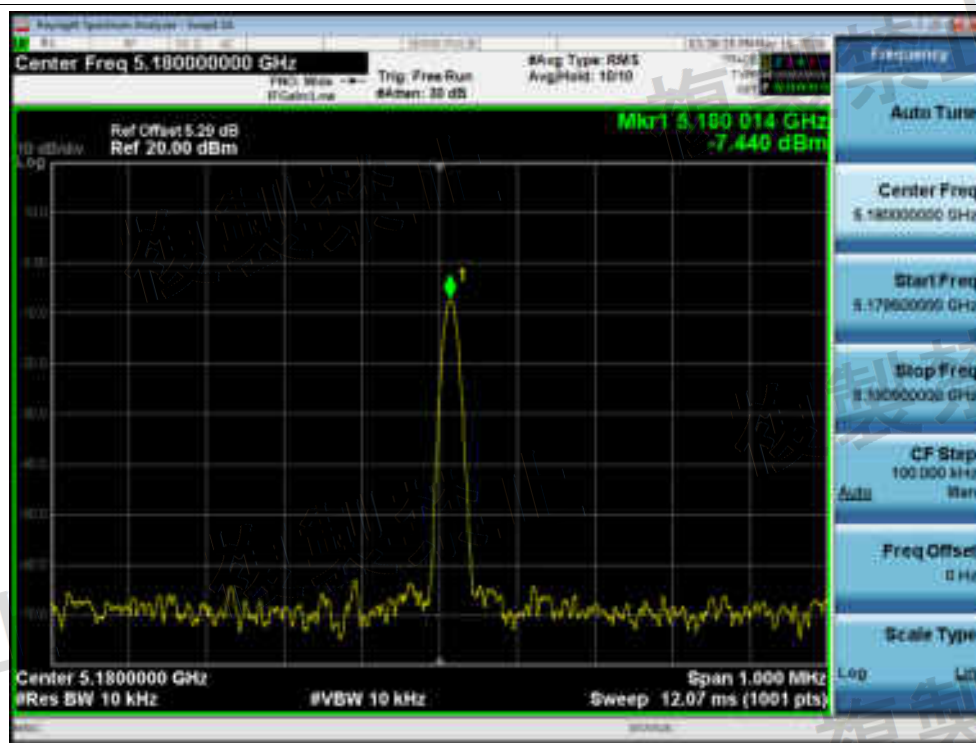


Freq. Error NVNT 5180MHz Ant2

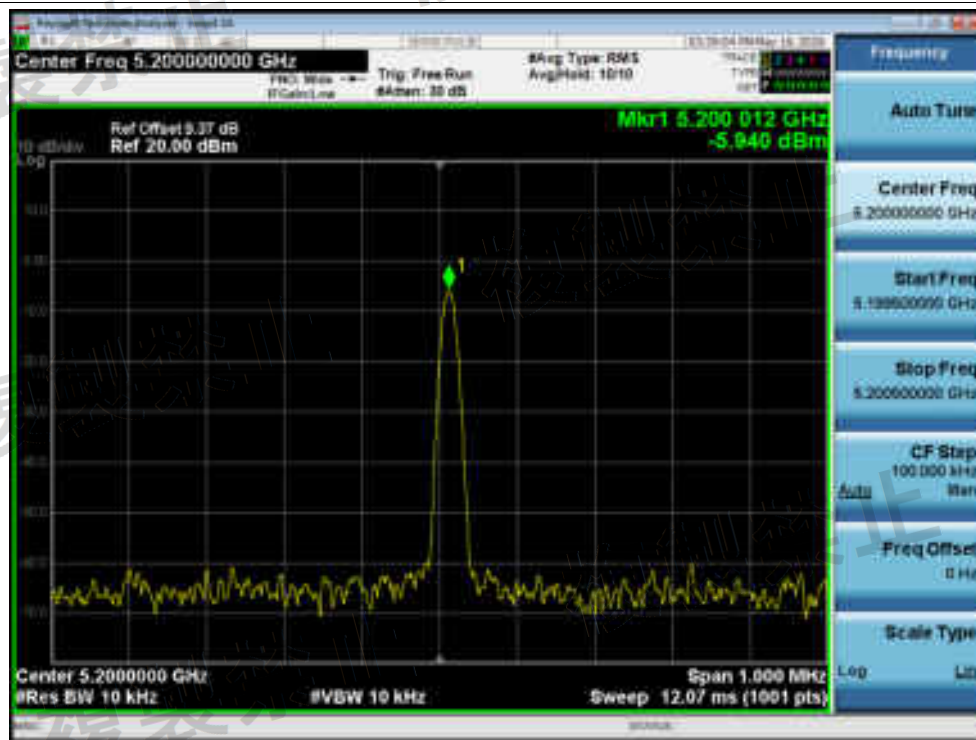


Freq. Error NVNT 5200MHz Ant1

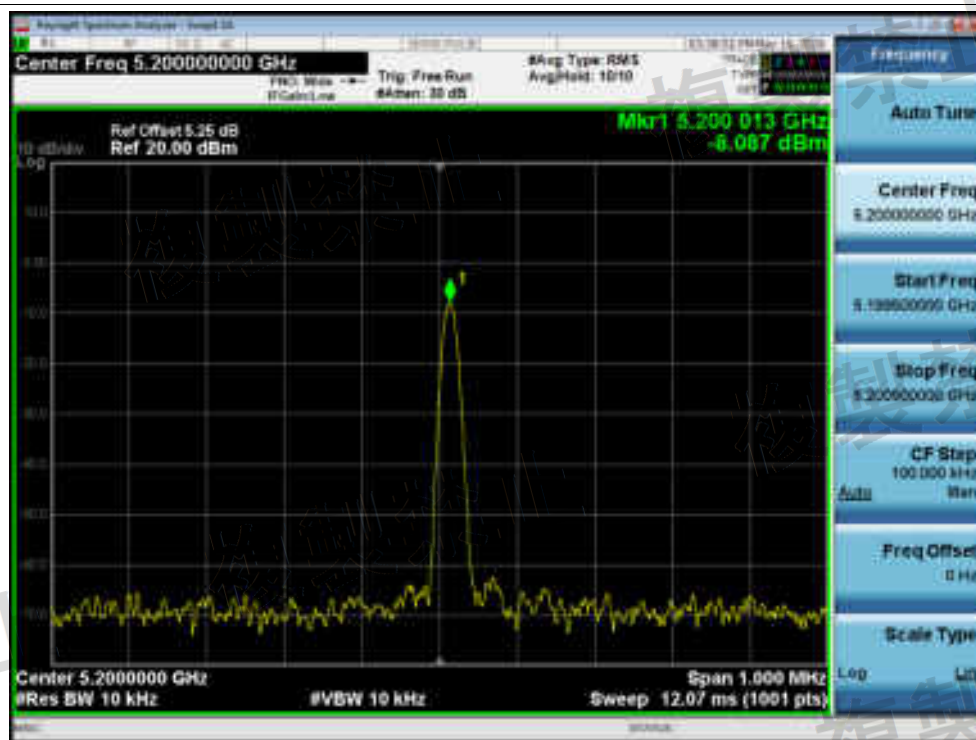


Freq. Error NVNT 5200MHz Ant2

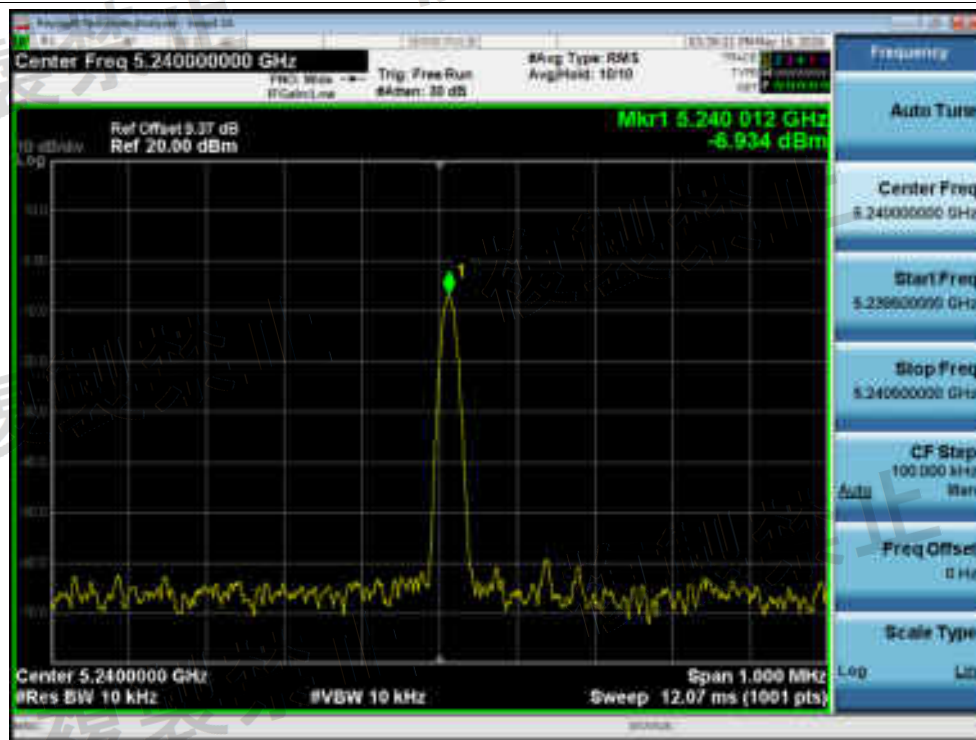


Freq. Error NVNT 5240MHz Ant1

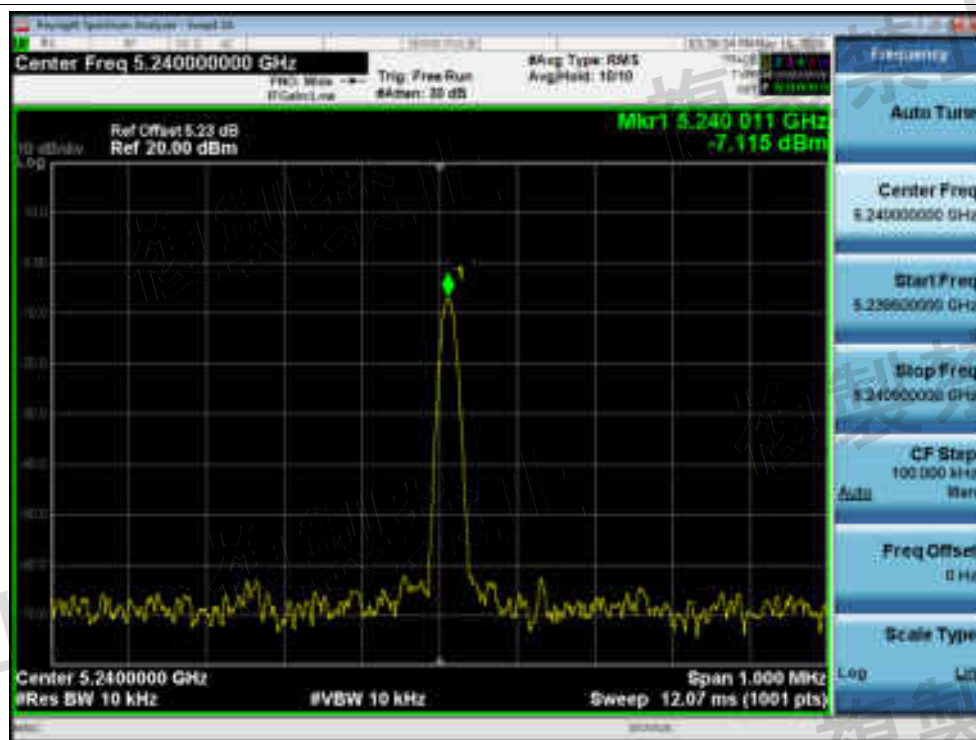


Freq. Error NVNT 5240MHz Ant2

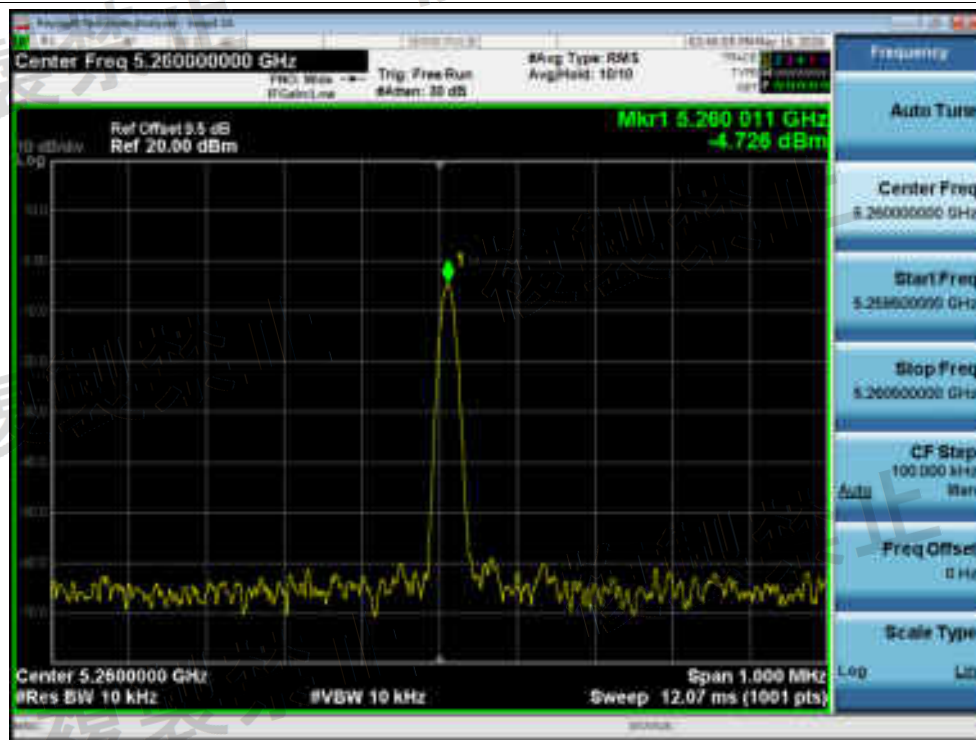


Freq. Error NVNT 5260MHz Ant1

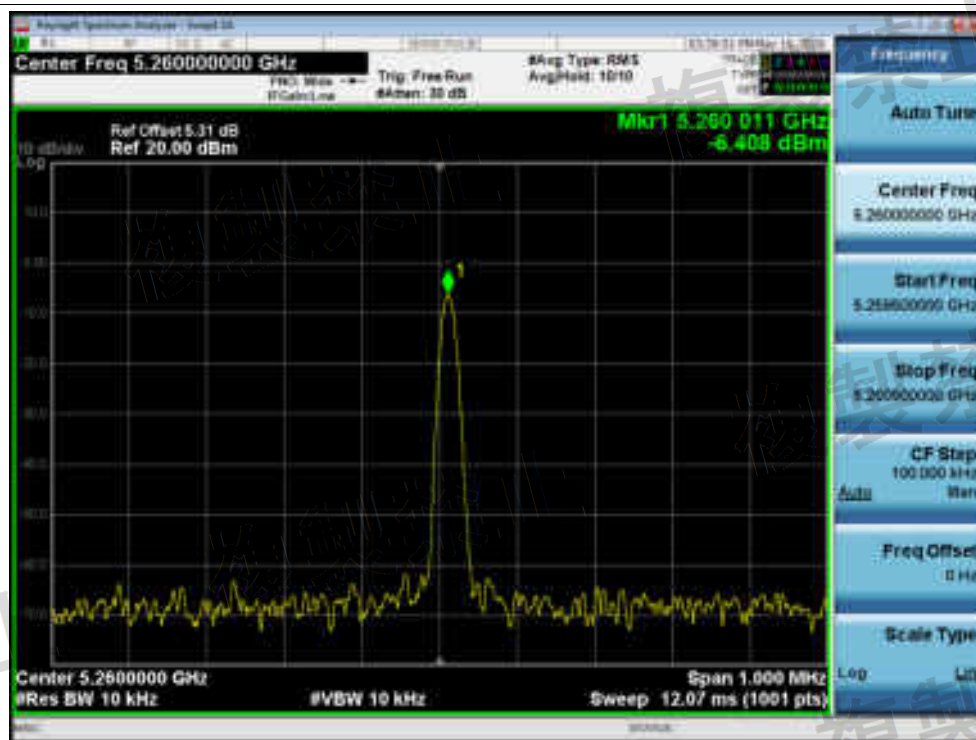


Freq. Error NVNT 5260MHz Ant2

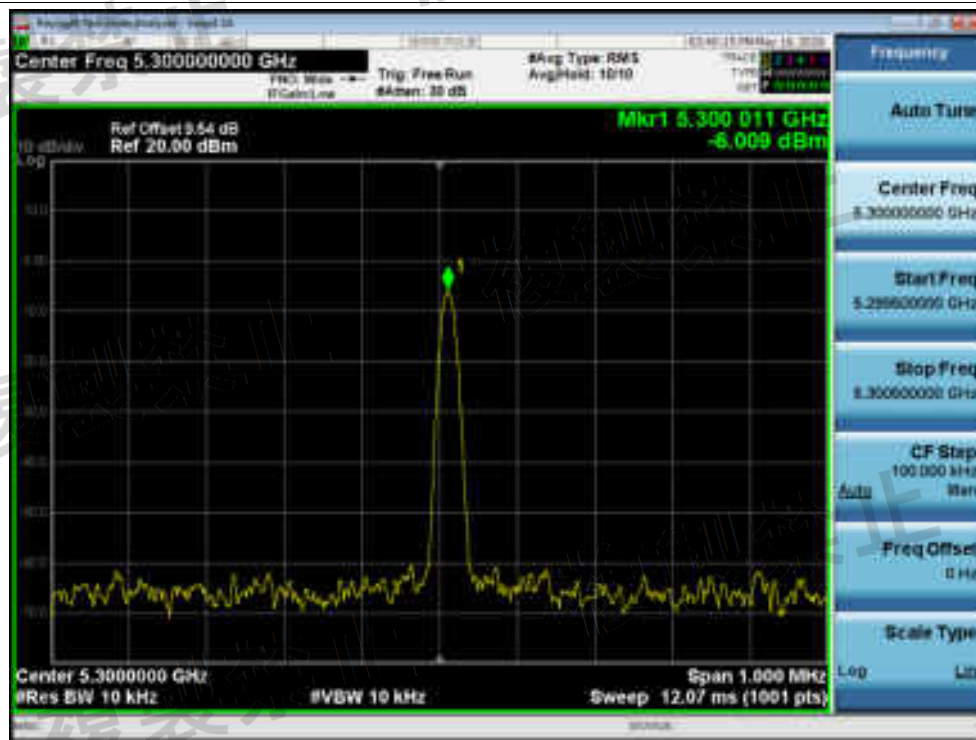


Freq. Error NVNT 5300MHz Ant1

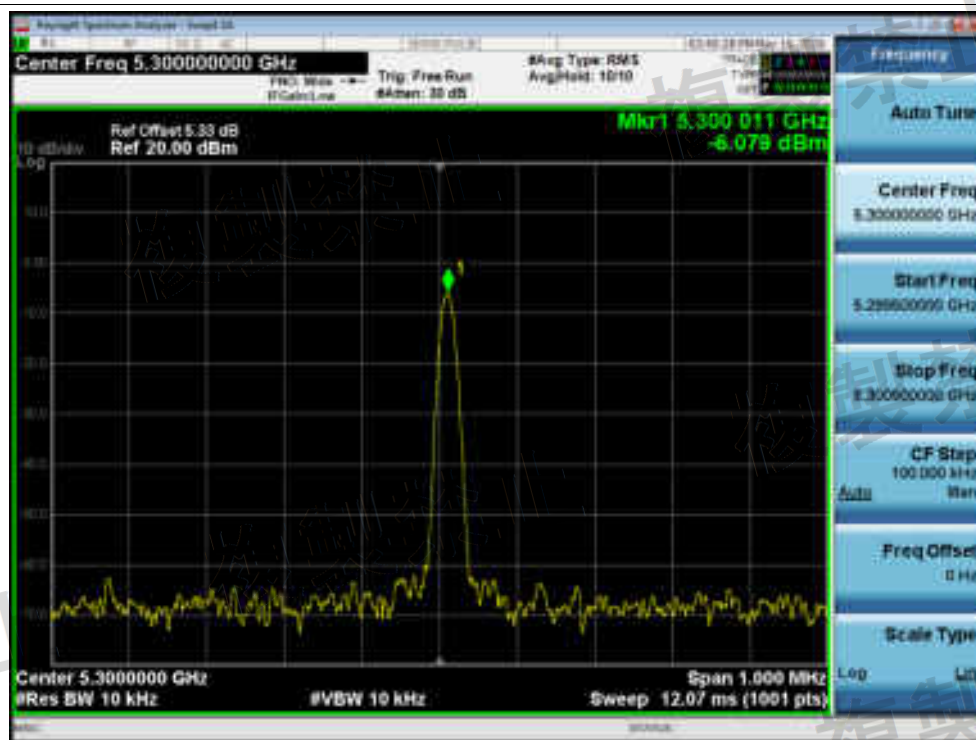


Freq. Error NVNT 5300MHz Ant2

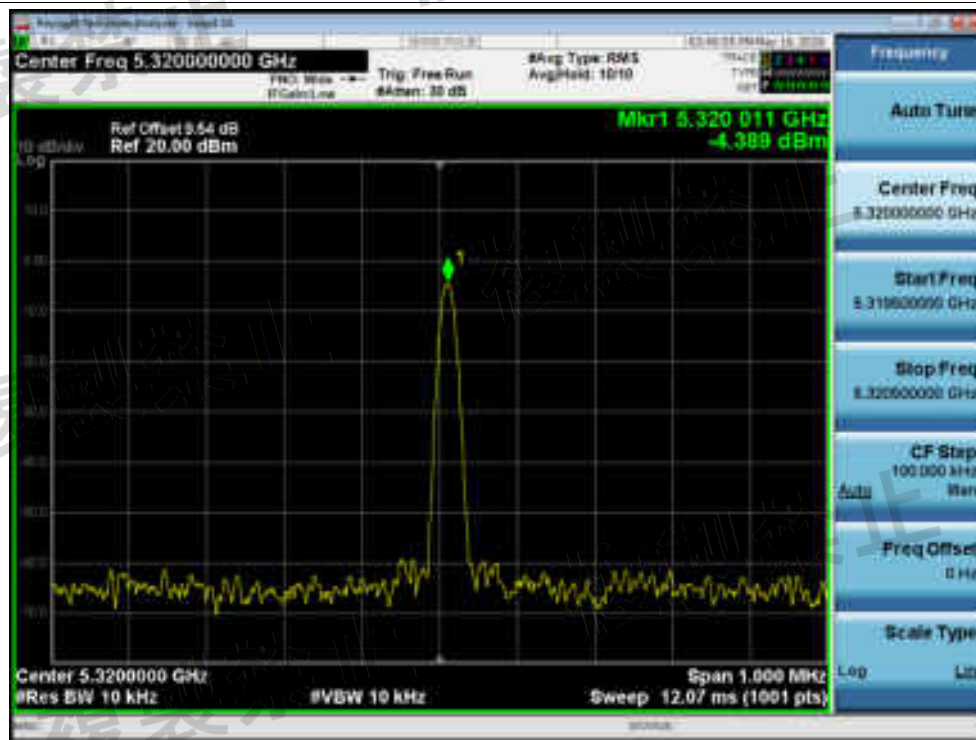


Freq. Error NVNT 5320MHz Ant1

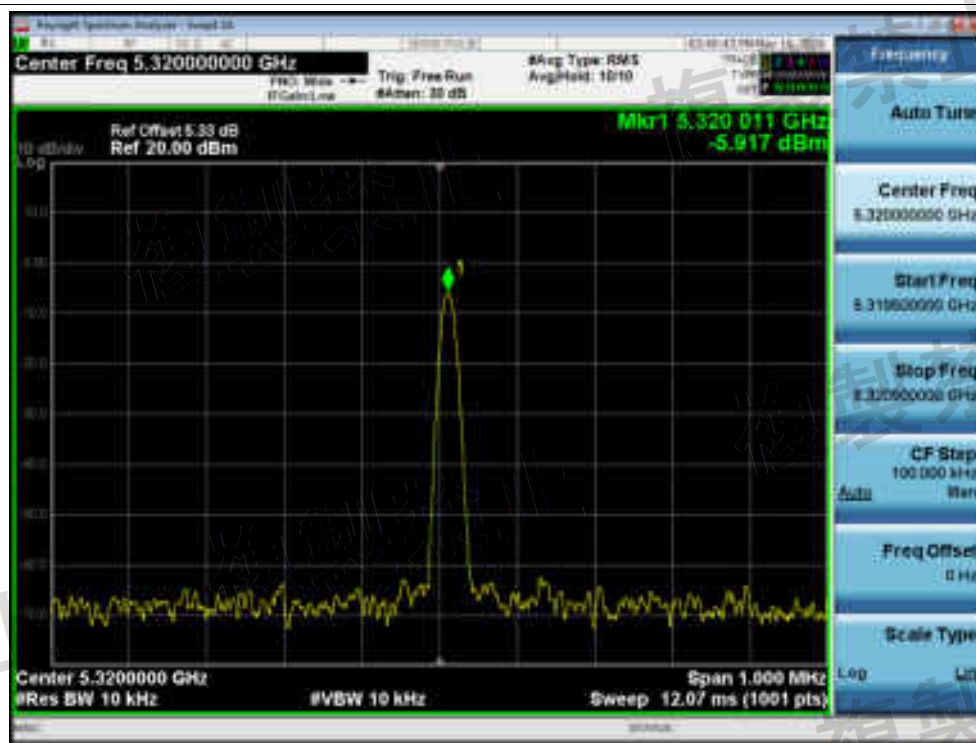


Freq. Error NVNT 5320MHz Ant2

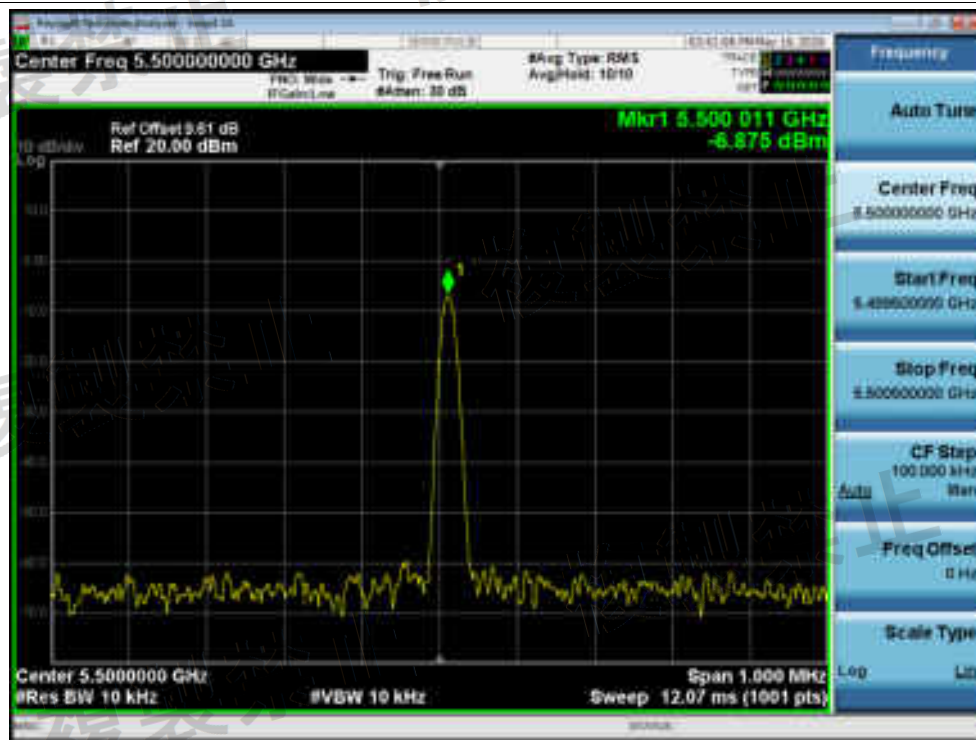


Freq. Error NVNT 5500MHz Ant1

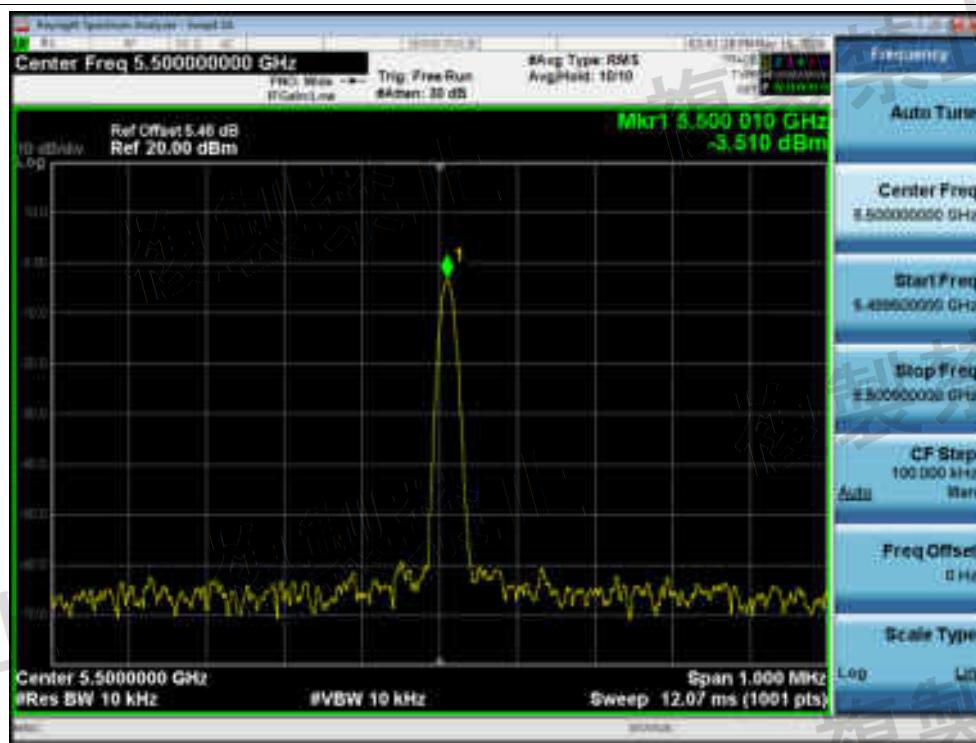


Freq. Error NVNT 5500MHz Ant2

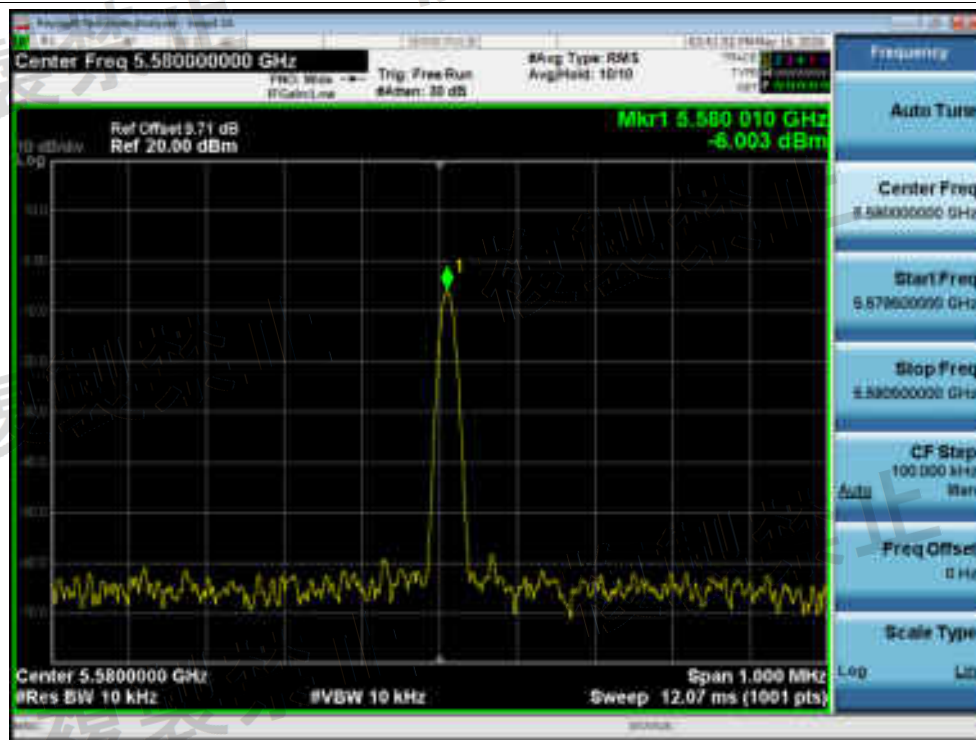


Freq. Error NVNT 5580MHz Ant1

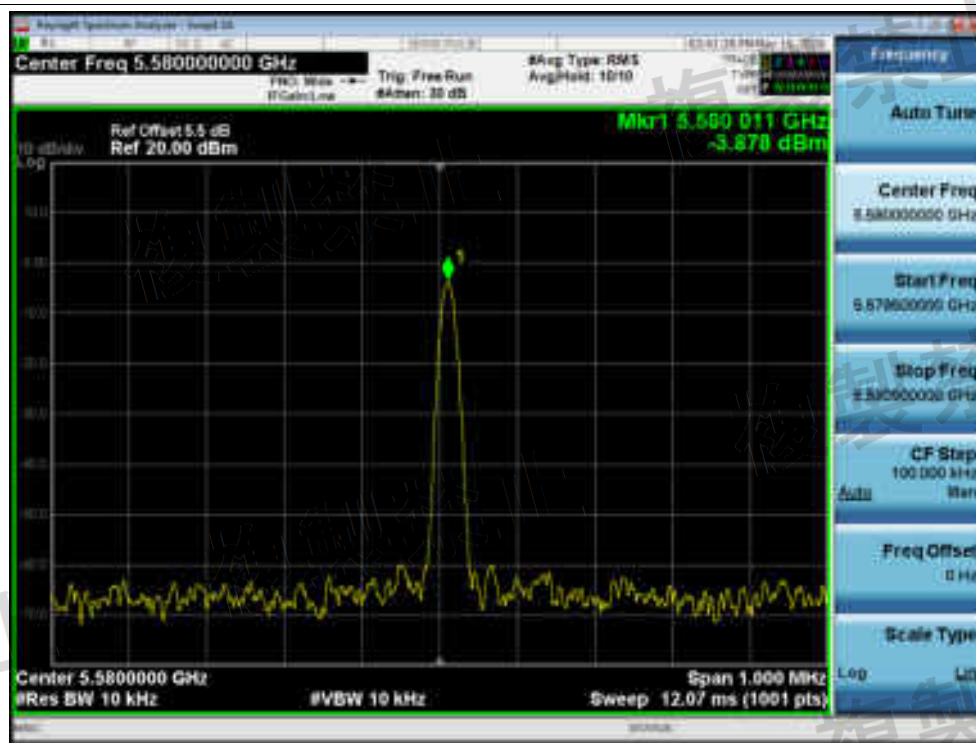


Freq. Error NVNT 5580MHz Ant2

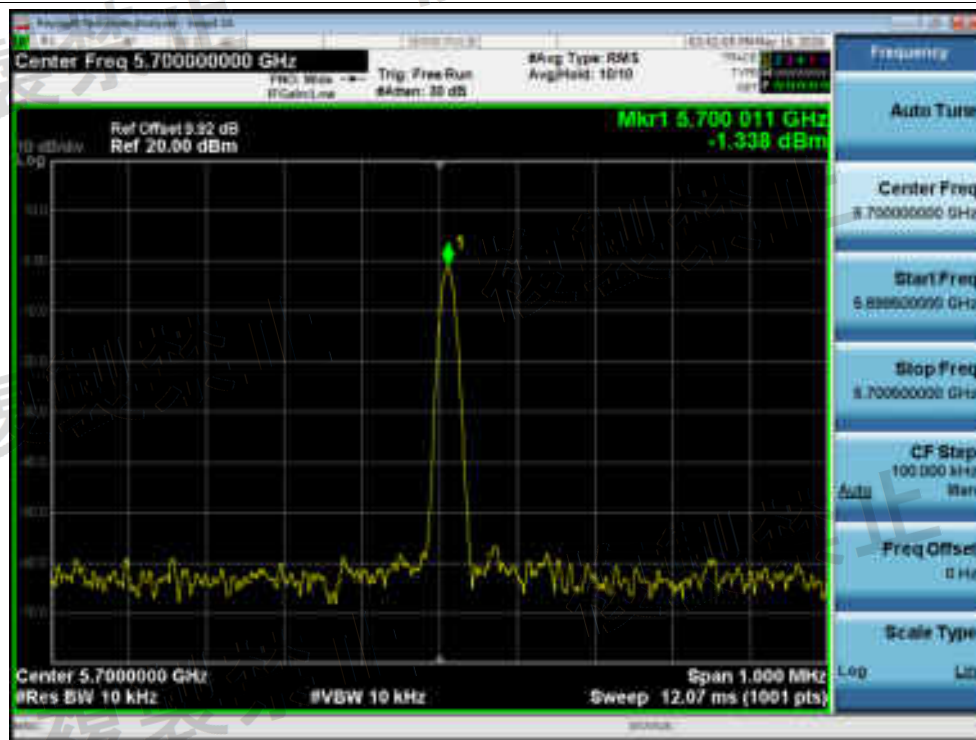


Freq. Error NVNT 5700MHz Ant1

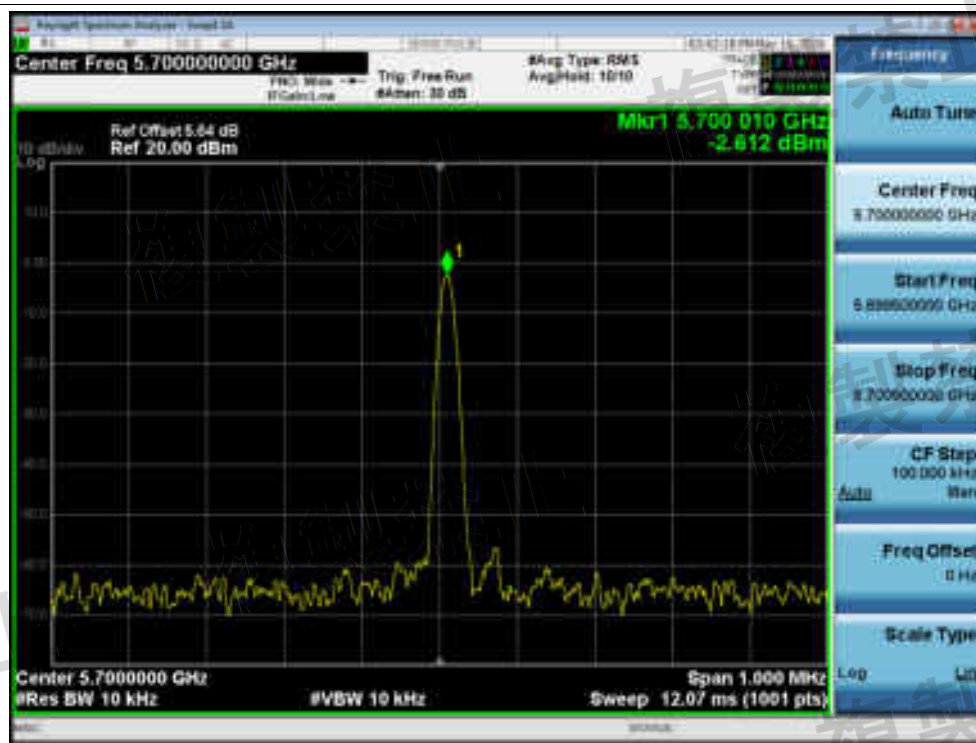


Freq. Error NVNT 5700MHz Ant2

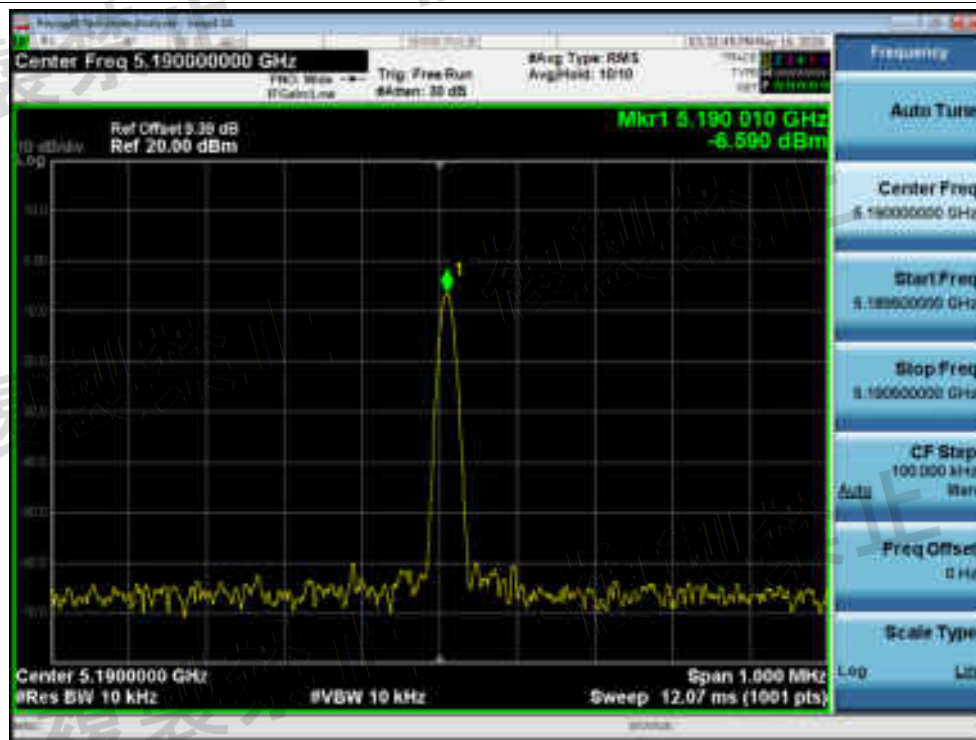


Freq. Error NVNT 5190MHz Ant1

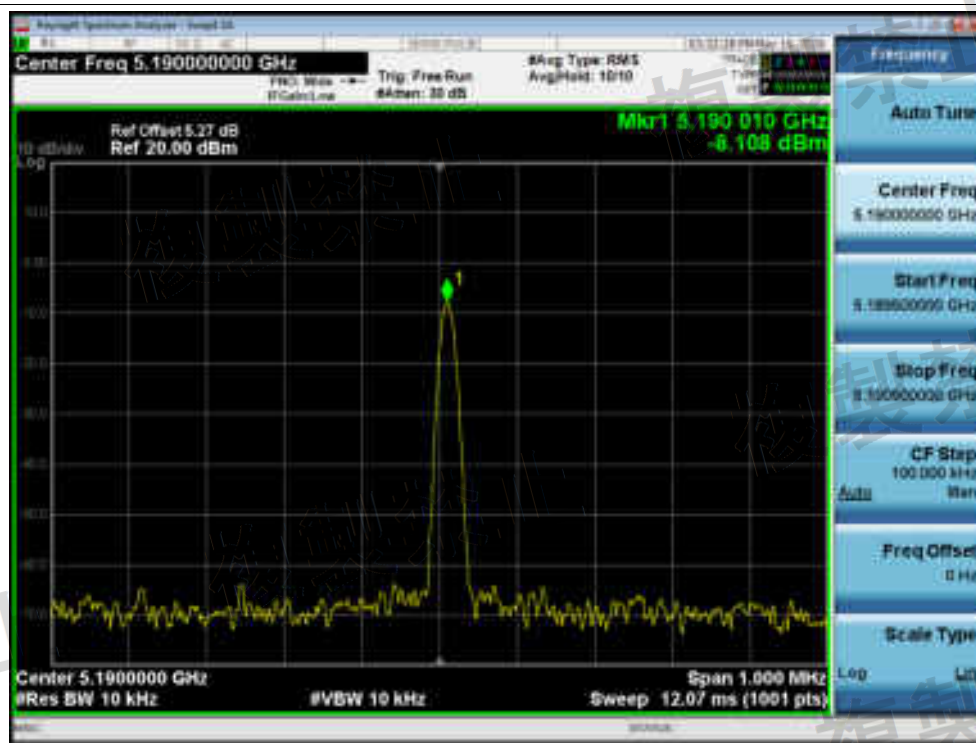


Freq. Error NVNT 5190MHz Ant2

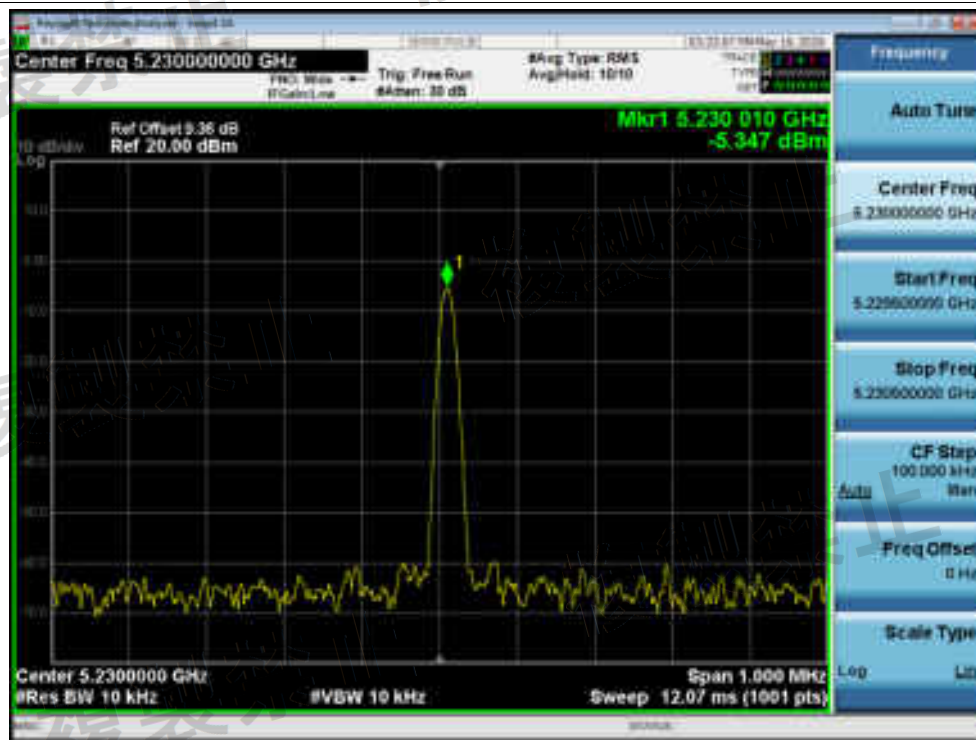


Freq. Error NVNT 5230MHz Ant1

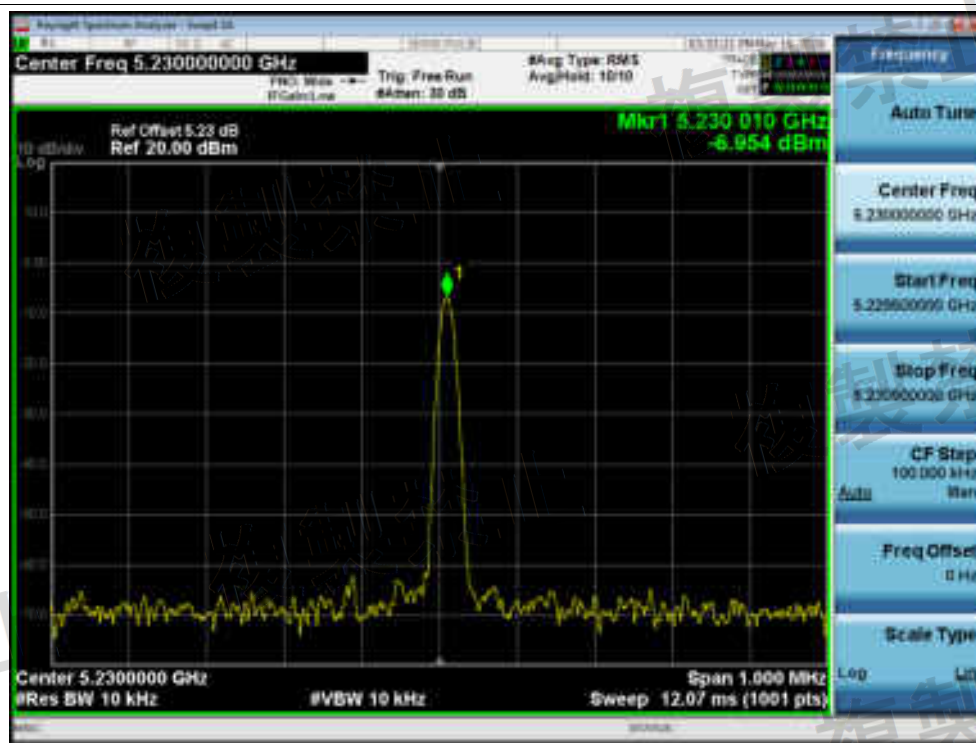


Freq. Error NVNT 5230MHz Ant2

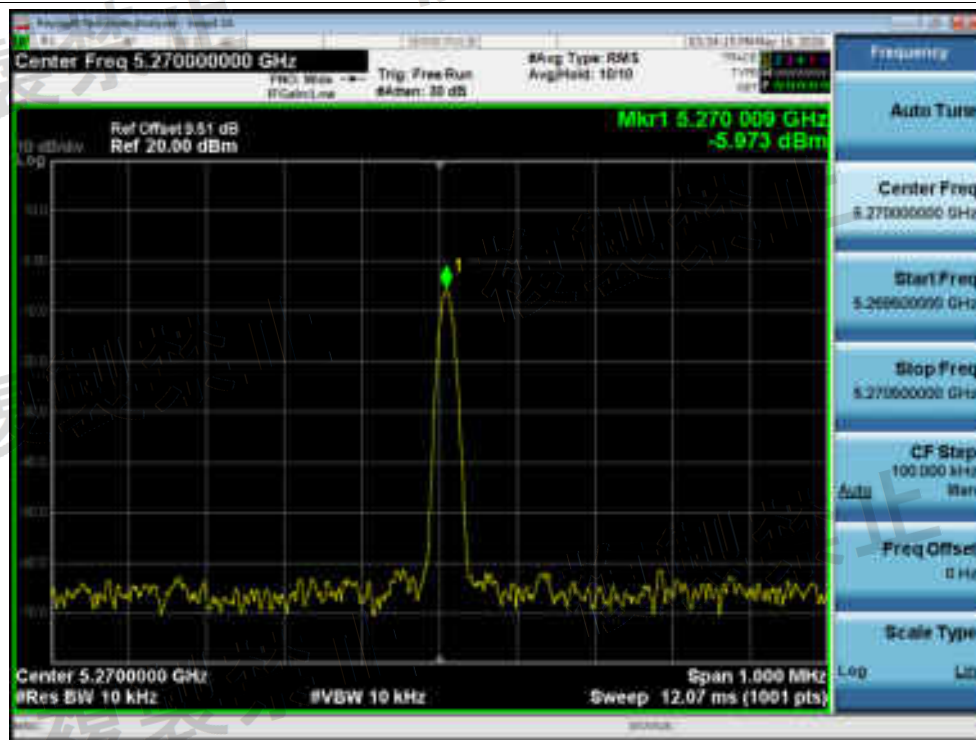


Freq. Error NVNT 5270MHz Ant1

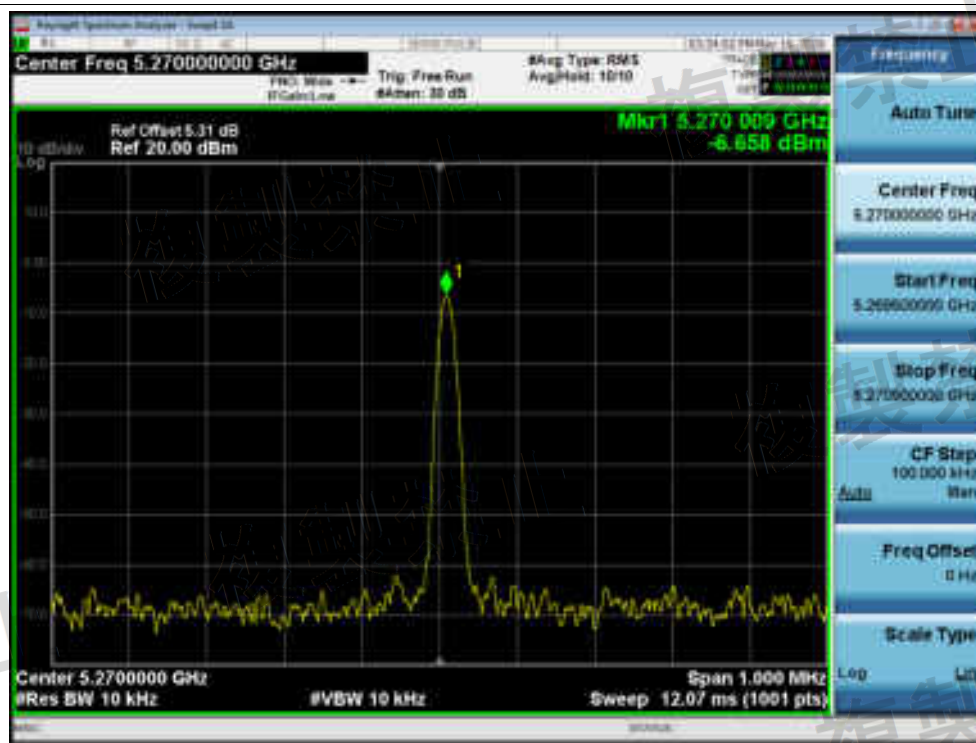


Freq. Error NVNT 5270MHz Ant2

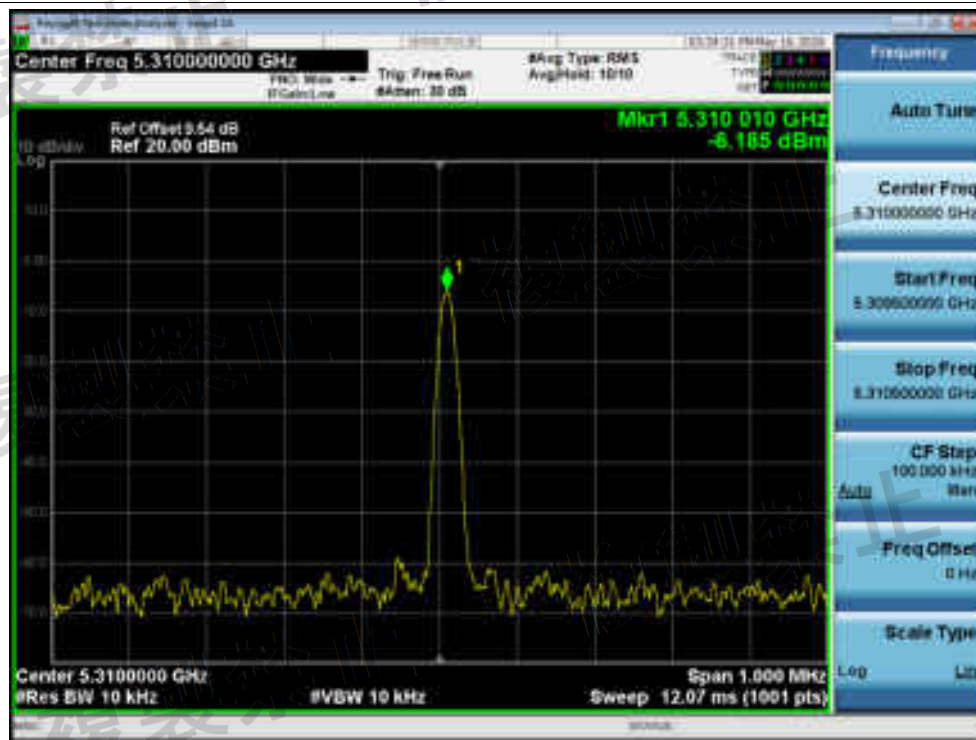


Freq. Error NVNT 5310MHz Ant1

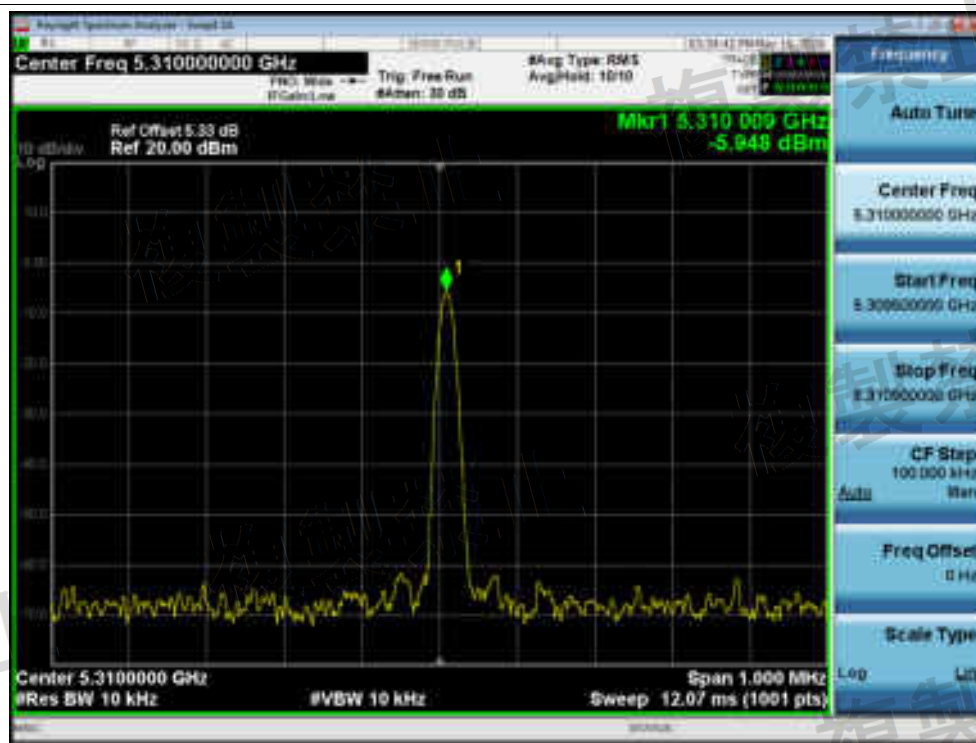


Freq. Error NVNT 5310MHz Ant2

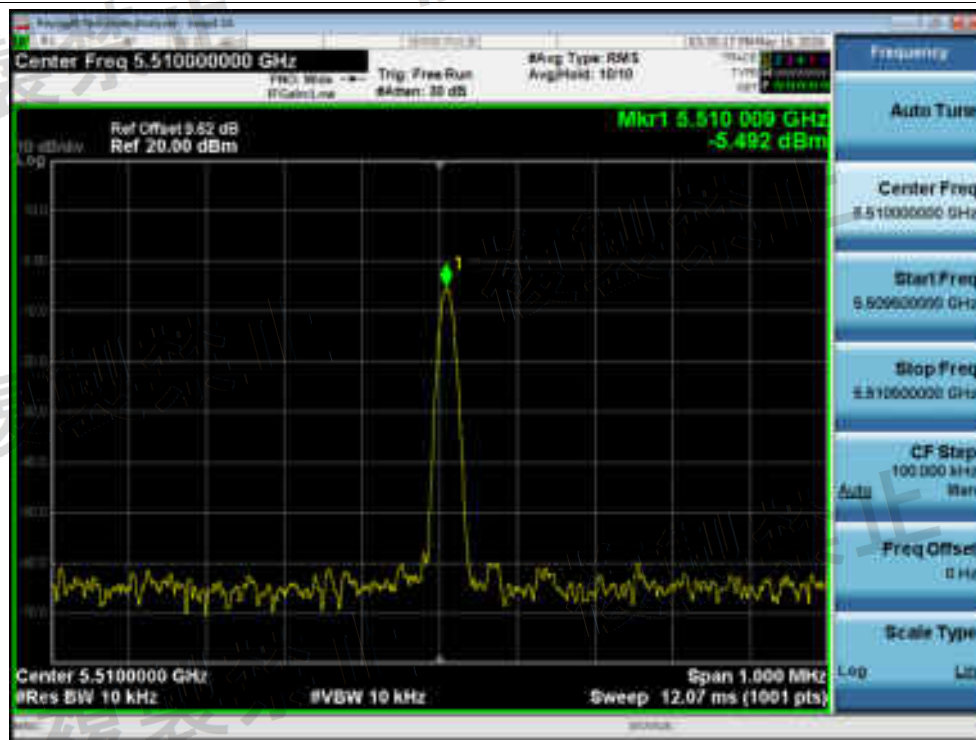


Freq. Error NVNT 5510MHz Ant1

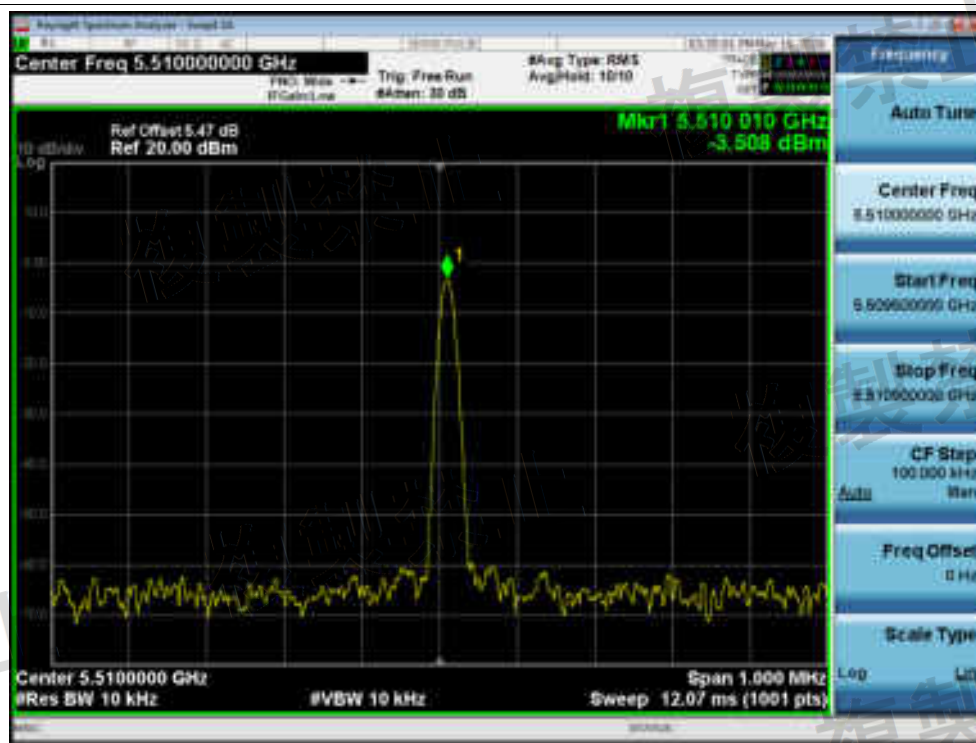


Freq. Error NVNT 5510MHz Ant2

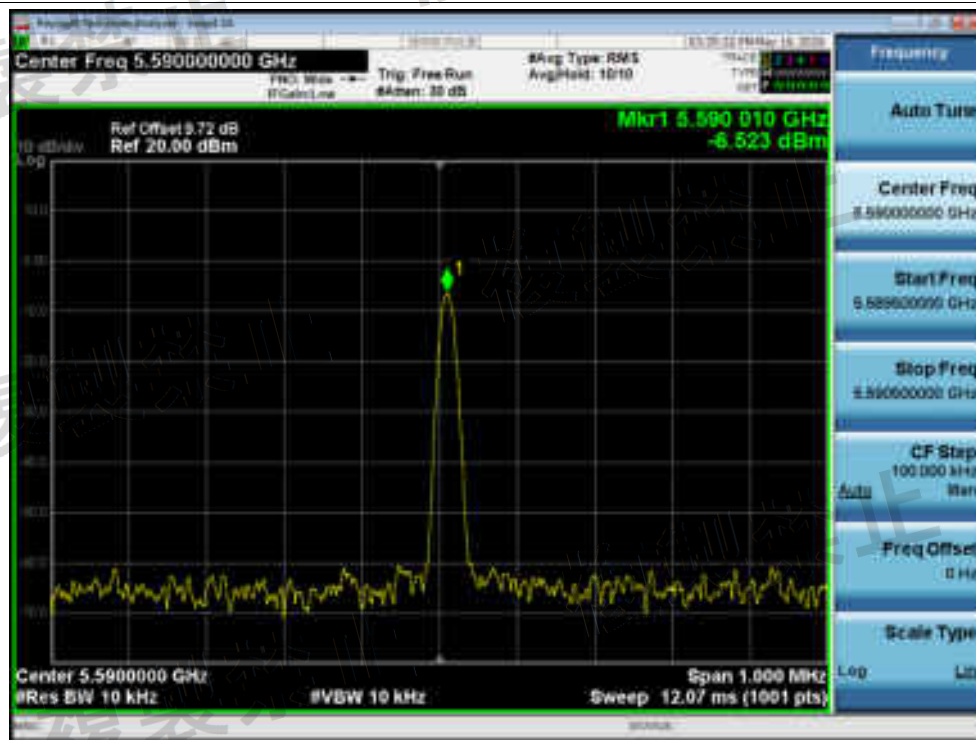


Freq. Error NVNT 5590MHz Ant1

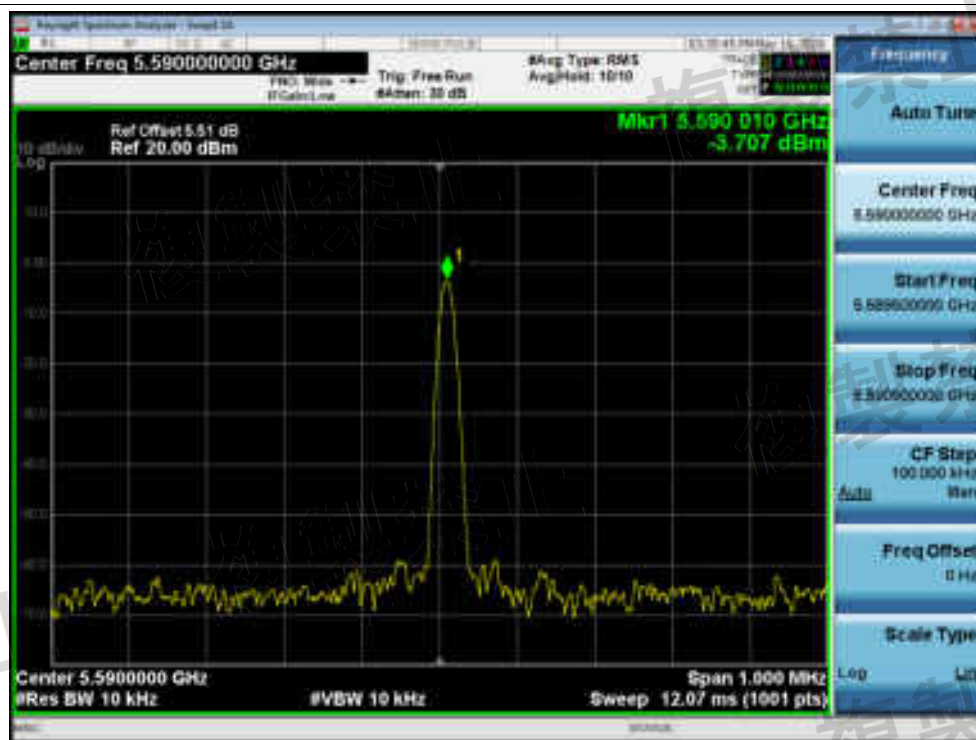


Freq. Error NVNT 5590MHz Ant2

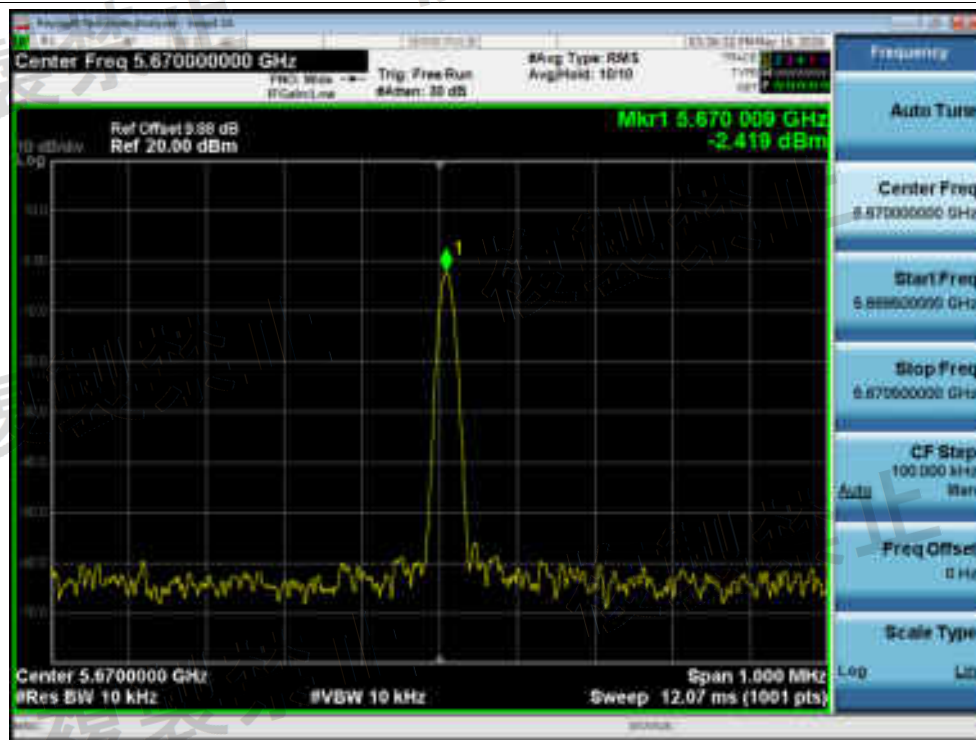


Freq. Error NVNT 5670MHz Ant1

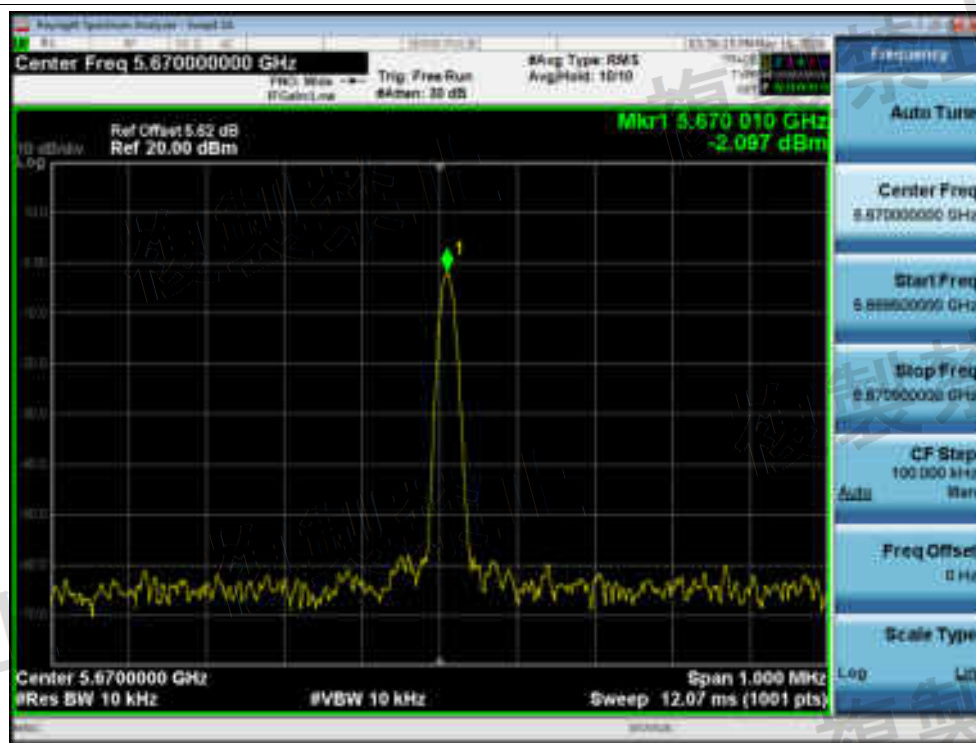


Freq. Error NVNT 5670MHz Ant2

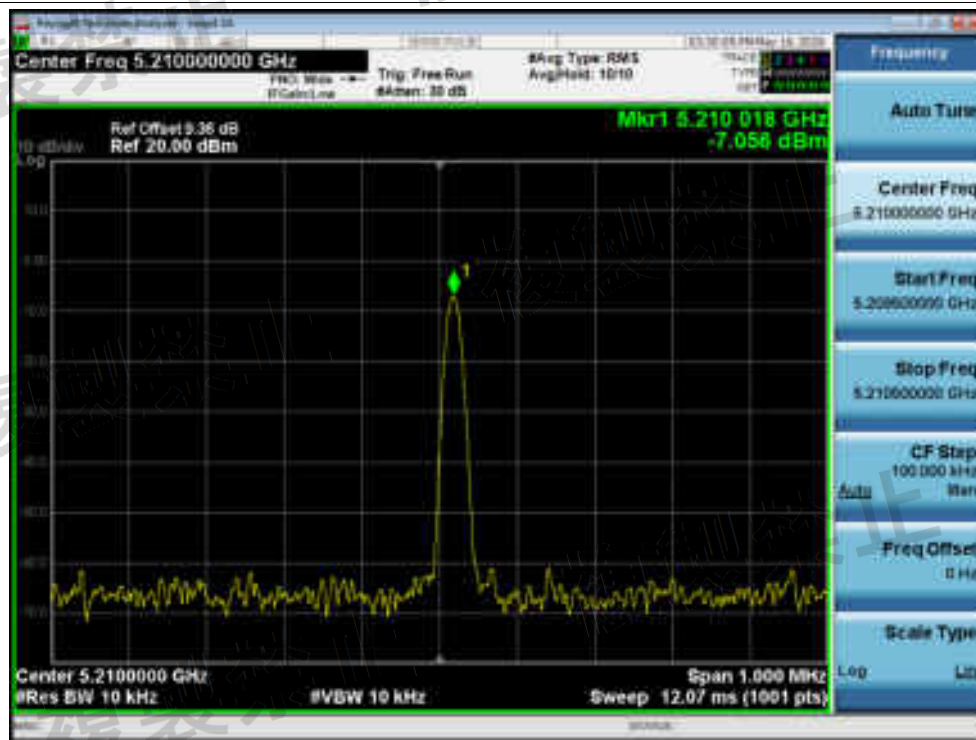


Freq. Error NVNT 5210MHz Ant1

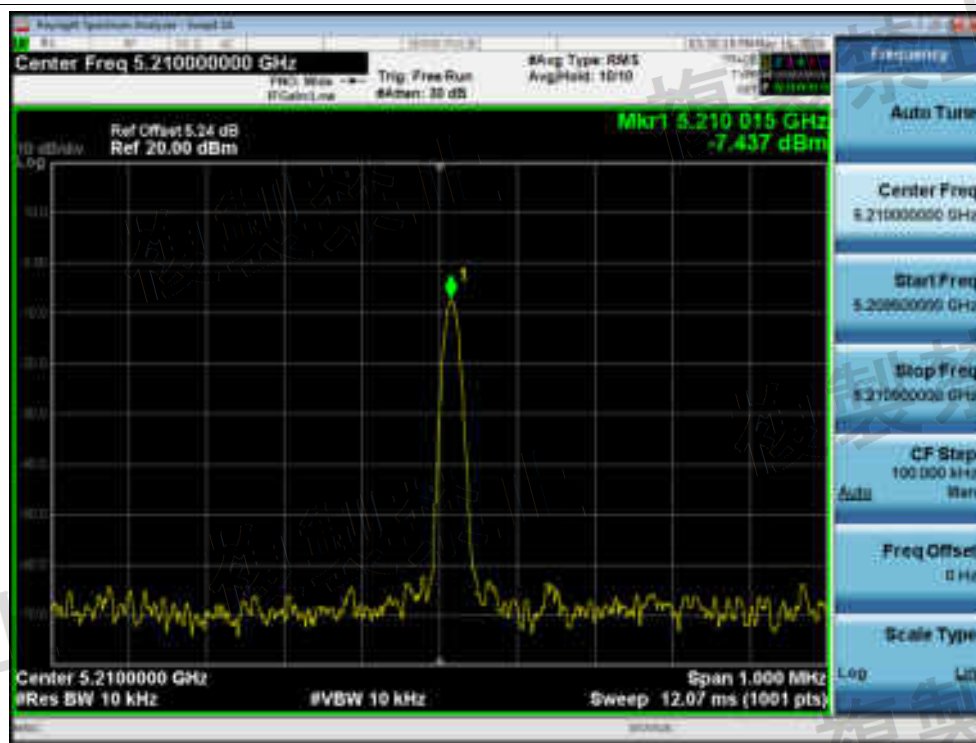


Freq. Error NVNT 5210MHz Ant2

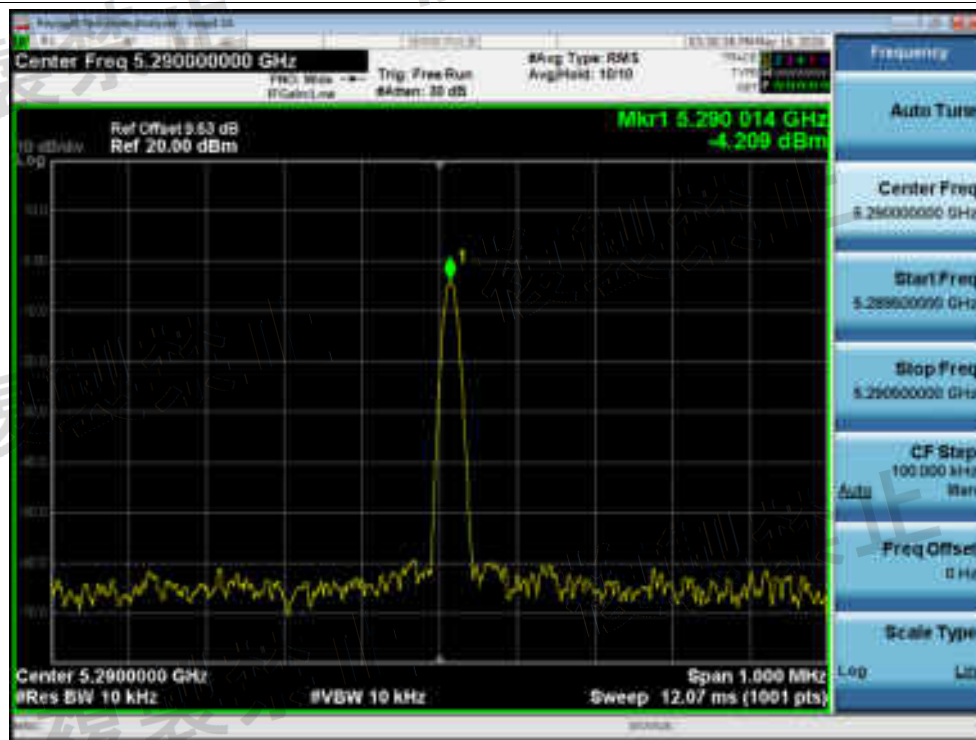


Freq. Error NVNT 5290MHz Ant1

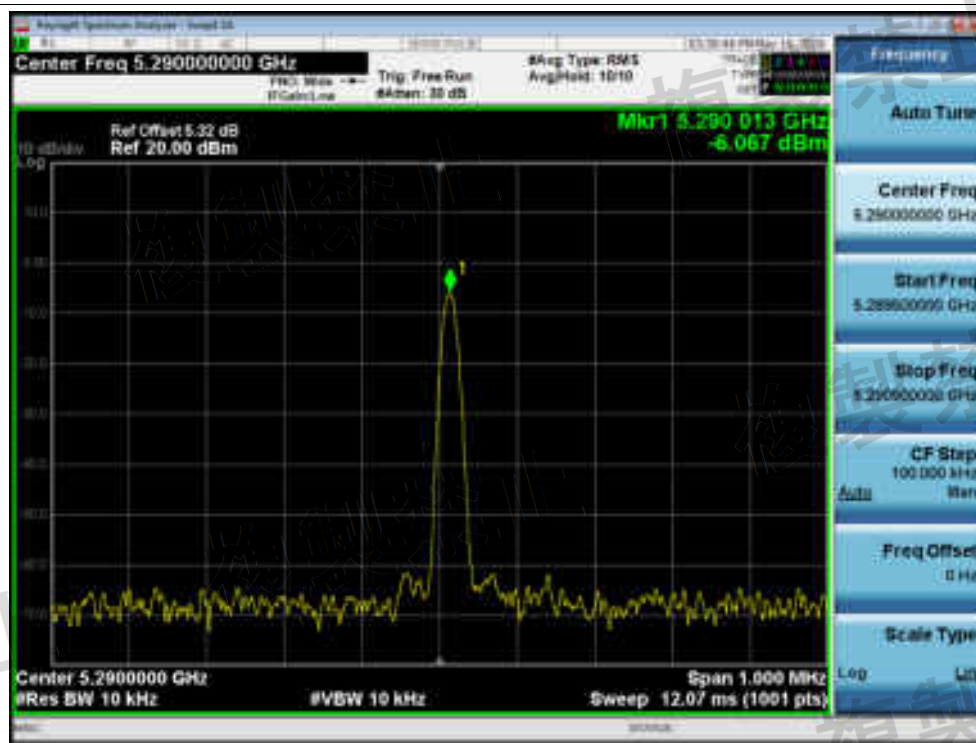


Freq. Error NVNT 5290MHz Ant2

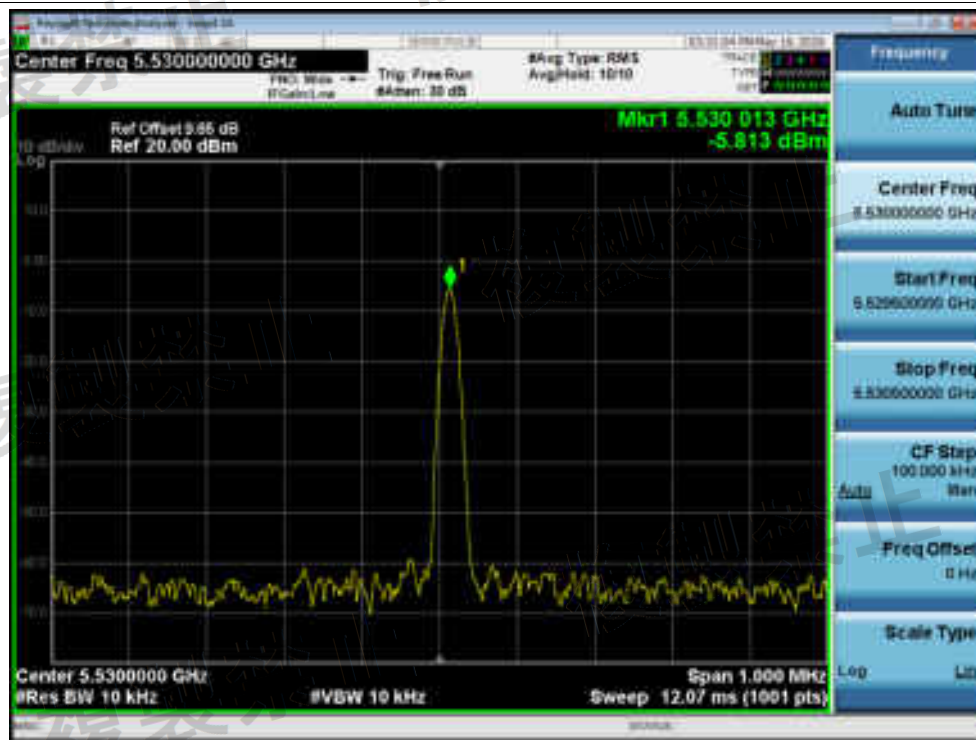


Freq. Error NVNT 5530MHz Ant1

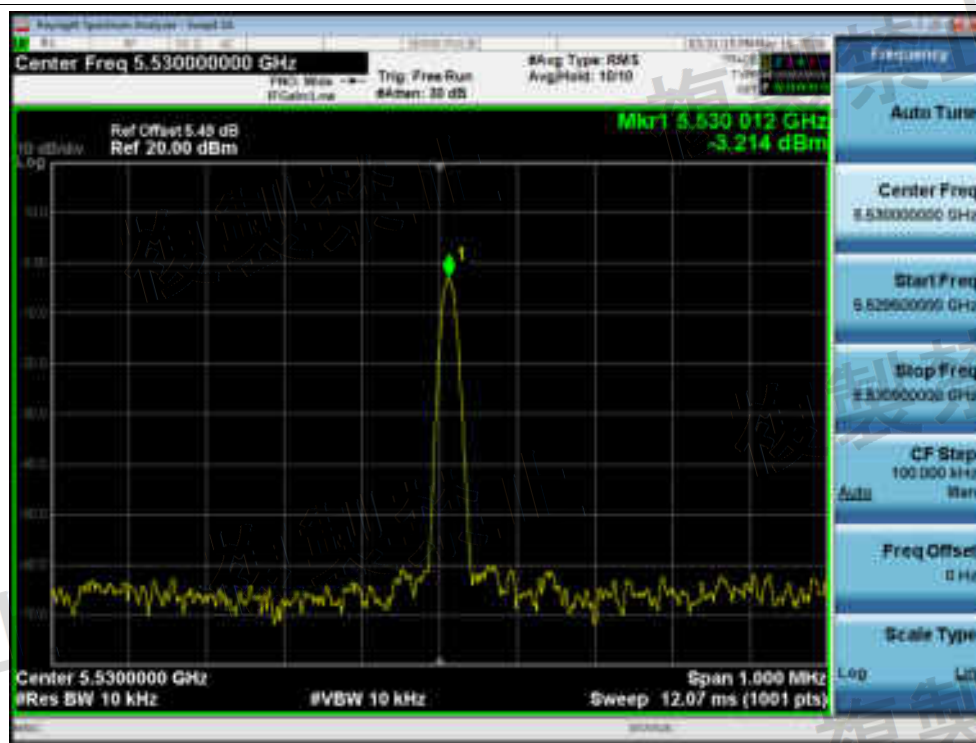

Freq. Error NVNT 5530MHz Ant2

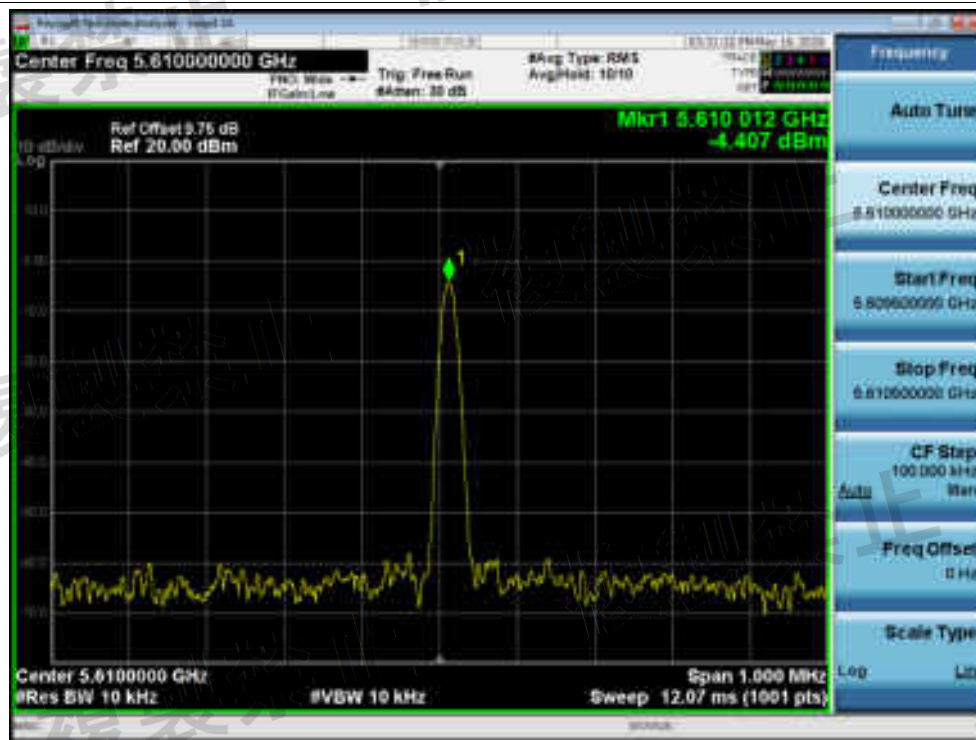

Freq. Error NVNT 5610MHz Ant1

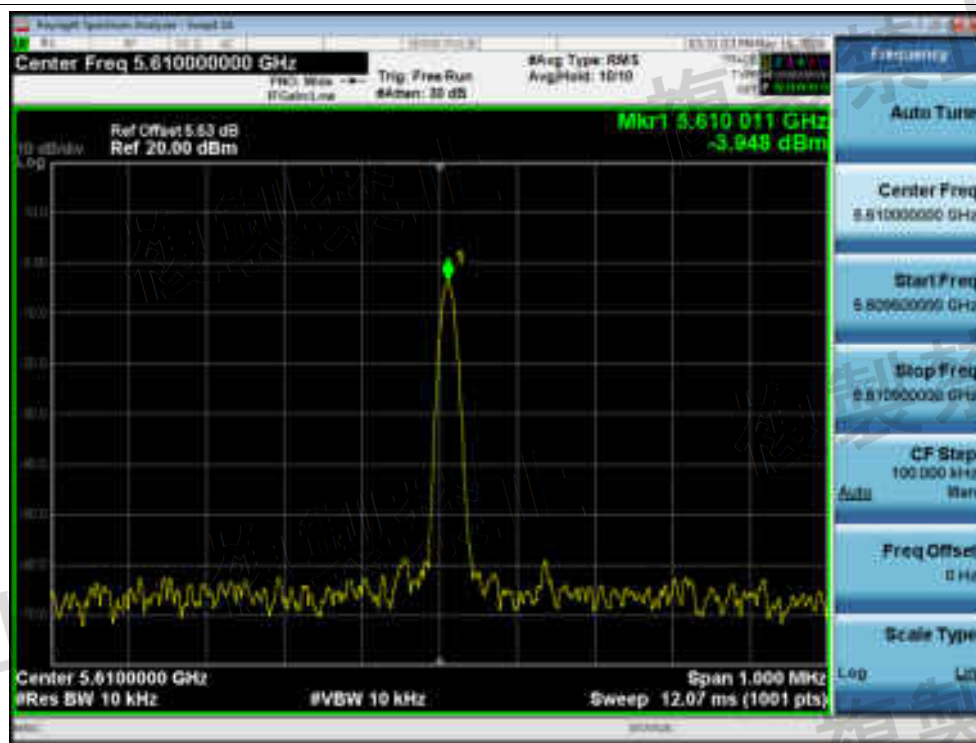

Freq. Error NVNT 5610MHz Ant2

Antenna Power

Condition	Mode	Frequency (MHz)	Antenna	Power (dBm/MHz)	Power (mW/MHz)	Limit (mW/MHz)	Declared Power (mW/MHz)	Tolerance (%)	Lower Limit (%)	Upper Limit (%)	Verdict
NVNT	a	5180	Ant1	3.77	2.382	10	4	-40.44	-80	20	Pass
NVNT	a	5180	Ant2	4.8	3.02	10	5	-39.6	-80	20	Pass
NVNT	a	5200	Ant1	4.6	2.884	10	4	-27.9	-80	20	Pass
NVNT	a	5200	Ant2	4.56	2.858	10	5	-42.85	-80	20	Pass
NVNT	a	5240	Ant1	4.2	2.63	10	4	-34.24	-80	20	Pass
NVNT	a	5240	Ant2	4.71	2.958	10	5	-40.84	-80	20	Pass
NVNT	a	5260	Ant1	1.94	1.563	10	2	-21.84	-80	20	Pass
NVNT	a	5260	Ant2	2.85	1.928	10	3	-35.75	-80	20	Pass
NVNT	a	5300	Ant1	2.03	1.596	10	2	-20.21	-80	20	Pass
NVNT	a	5300	Ant2	3.03	2.009	10	3	-33.03	-80	20	Pass
NVNT	a	5320	Ant1	2.38	1.73	10	2	-13.51	-80	20	Pass
NVNT	a	5320	Ant2	2.93	1.963	10	3	-34.55	-80	20	Pass
NVNT	a	5500	Ant1	4.7	2.951	10	4	-26.22	-50	50	Pass
NVNT	a	5500	Ant2	5.13	3.258	10	5	-34.83	-50	50	Pass
NVNT	a	5580	Ant1	4.91	3.097	10	4	-22.56	-50	50	Pass
NVNT	a	5580	Ant2	5.45	3.508	10	5	-29.85	-50	50	Pass
NVNT	a	5700	Ant1	5.02	3.177	10	4	-20.58	-50	50	Pass
NVNT	a	5700	Ant2	5.01	3.17	10	5	-36.61	-50	50	Pass
NVNT	n20	5180	Ant1	1.83	1.524	-	-	-	-	-	-
NVNT	n20	5180	Ant2	3.65	2.317	-	-	-	-	-	-
NVNT	n20	5180	Sum	5.84	3.841	10	5	-23.18	-80	20	Pass
NVNT	n20	5200	Ant1	2.52	1.786	-	-	-	-	-	-
NVNT	n20	5200	Ant2	3.17	2.075	-	-	-	-	-	-
NVNT	n20	5200	Sum	5.87	3.861	10	5	-22.78	-80	20	Pass
NVNT	n20	5240	Ant1	2.4	1.738	-	-	-	-	-	-
NVNT	n20	5240	Ant2	3.67	2.328	-	-	-	-	-	-
NVNT	n20	5240	Sum	6.09	4.066	10	5	-18.68	-80	20	Pass
NVNT	n20	5260	Ant1	-0.47	0.897	-	-	-	-	-	-
NVNT	n20	5260	Ant2	1.06	1.276	-	-	-	-	-	-
NVNT	n20	5260	Sum	3.37	2.173	10	3	-27.57	-80	20	Pass
NVNT	n20	5300	Ant1	-0.34	0.925	-	-	-	-	-	-
NVNT	n20	5300	Ant2	0.83	1.211	-	-	-	-	-	-
NVNT	n20	5300	Sum	3.29	2.136	10	3	-28.8	-80	20	Pass
NVNT	n20	5320	Ant1	-0.18	0.959	-	-	-	-	-	-
NVNT	n20	5320	Ant2	0.71	1.178	-	-	-	-	-	-
NVNT	n20	5320	Sum	3.3	2.137	10	3	-28.77	-80	20	Pass
NVNT	n20	5500	Ant1	3.39	2.183	-	-	-	-	-	-
NVNT	n20	5500	Ant2	4.09	2.564	-	-	-	-	-	-
NVNT	n20	5500	Sum	6.76	4.747	10	6	-20.88	-50	50	Pass

Report

NVNT	n20	5580	Ant1	3.52	2.249	-	-	-	-	-	-
NVNT	n20	5580	Ant2	3.71	2.35	-	-	-	-	-	-
NVNT	n20	5580	Sum	6.63	4.599	10	6	-23.35	-50	50	Pass
NVNT	n20	5700	Ant1	3.19	2.084	-	-	-	-	-	-
NVNT	n20	5700	Ant2	3.66	2.323	-	-	-	-	-	-
NVNT	n20	5700	Sum	6.44	4.407	10	6	-26.55	-50	50	Pass
NVNT	n40	5190	Ant1	0.18	1.042	-	-	-	-	-	-
NVNT	n40	5190	Ant2	0.62	1.153	-	-	-	-	-	-
NVNT	n40	5190	Sum	3.42	2.195	5	3	-26.83	-80	20	Pass
NVNT	n40	5230	Ant1	-0.23	0.948	-	-	-	-	-	-
NVNT	n40	5230	Ant2	1.01	1.262	-	-	-	-	-	-
NVNT	n40	5230	Sum	3.44	2.21	5	3	-26.33	-80	20	Pass
NVNT	n40	5270	Ant1	-2.78	0.527	-	-	-	-	-	-
NVNT	n40	5270	Ant2	-1.51	0.706	-	-	-	-	-	-
NVNT	n40	5270	Sum	0.91	1.233	5	2	-38.35	-80	20	Pass
NVNT	n40	5310	Ant1	-3.24	0.474	-	-	-	-	-	-
NVNT	n40	5310	Ant2	-2.55	0.556	-	-	-	-	-	-
NVNT	n40	5310	Sum	0.13	1.03	5	2	-48.5	-80	20	Pass
NVNT	n40	5510	Ant1	1.18	1.312	-	-	-	-	-	-
NVNT	n40	5510	Ant2	1.75	1.496	-	-	-	-	-	-
NVNT	n40	5510	Sum	4.48	2.808	5	5	-43.84	-50	50	Pass
NVNT	n40	5590	Ant1	0.93	1.239	-	-	-	-	-	-
NVNT	n40	5590	Ant2	2.05	1.603	-	-	-	-	-	-
NVNT	n40	5590	Sum	4.54	2.842	5	5	-43.16	-50	50	Pass
NVNT	n40	5670	Ant1	1.3	1.349	-	-	-	-	-	-
NVNT	n40	5670	Ant2	1.93	1.56	-	-	-	-	-	-
NVNT	n40	5670	Sum	4.64	2.909	5	5	-41.82	-50	50	Pass
NVNT	ac20	5180	Ant1	1.61	1.449	-	-	-	-	-	-
NVNT	ac20	5180	Ant2	3.91	2.46	-	-	-	-	-	-
NVNT	ac20	5180	Sum	5.92	3.909	10	5	-21.82	-80	20	Pass
NVNT	ac20	5200	Ant1	2.69	1.858	-	-	-	-	-	-
NVNT	ac20	5200	Ant2	3.29	2.133	-	-	-	-	-	-
NVNT	ac20	5200	Sum	6.01	3.991	10	5	-20.18	-80	20	Pass
NVNT	ac20	5240	Ant1	2.42	1.746	-	-	-	-	-	-
NVNT	ac20	5240	Ant2	3.63	2.307	-	-	-	-	-	-
NVNT	ac20	5240	Sum	6.08	4.053	10	5	-18.94	-80	20	Pass
NVNT	ac20	5260	Ant1	-0.51	0.889	-	-	-	-	-	-
NVNT	ac20	5260	Ant2	1.13	1.297	-	-	-	-	-	-
NVNT	ac20	5260	Sum	3.4	2.186	10	3	-27.13	-80	20	Pass
NVNT	ac20	5300	Ant1	-0.27	0.94	-	-	-	-	-	-
NVNT	ac20	5300	Ant2	0.85	1.216	-	-	-	-	-	-
NVNT	ac20	5300	Sum	3.34	2.156	10	3	-28.13	-80	20	Pass
NVNT	ac20	5320	Ant1	-0.06	0.986	-	-	-	-	-	-
NVNT	ac20	5320	Ant2	0.68	1.169	-	-	-	-	-	-


Report

NVNT	ac20	5320	Sum	3.34	2.155	10	3	-28.17	-80	20	Pass
NVNT	ac20	5500	Ant1	3.38	2.178	-	-	-	-	-	-
NVNT	ac20	5500	Ant2	4.19	2.624	-	-	-	-	-	-
NVNT	ac20	5500	Sum	6.81	4.802	10	6	-19.97	-50	50	Pass
NVNT	ac20	5580	Ant1	3.54	2.259	-	-	-	-	-	-
NVNT	ac20	5580	Ant2	4.43	2.773	-	-	-	-	-	-
NVNT	ac20	5580	Sum	7.02	5.032	10	6	-16.13	-50	50	Pass
NVNT	ac20	5700	Ant1	3.2	2.089	-	-	-	-	-	-
NVNT	ac20	5700	Ant2	3.7	2.344	-	-	-	-	-	-
NVNT	ac20	5700	Sum	6.47	4.433	10	6	-26.12	-50	50	Pass
NVNT	ac40	5190	Ant1	0.22	1.052	-	-	-	-	-	-
NVNT	ac40	5190	Ant2	0.61	1.151	-	-	-	-	-	-
NVNT	ac40	5190	Sum	3.43	2.203	5	3	-26.57	-80	20	Pass
NVNT	ac40	5230	Ant1	-0.16	0.964	-	-	-	-	-	-
NVNT	ac40	5230	Ant2	0.63	1.156	-	-	-	-	-	-
NVNT	ac40	5230	Sum	3.26	2.12	5	3	-29.33	-80	20	Pass
NVNT	ac40	5270	Ant1	-3.89	0.408	-	-	-	-	-	-
NVNT	ac40	5270	Ant2	-2.54	0.557	-	-	-	-	-	-
NVNT	ac40	5270	Sum	-0.15	0.965	5	2	-51.75	-80	20	Pass
NVNT	ac40	5310	Ant1	-3.27	0.471	-	-	-	-	-	-
NVNT	ac40	5310	Ant2	-2.22	0.6	-	-	-	-	-	-
NVNT	ac40	5310	Sum	0.3	1.071	5	2	-46.45	-80	20	Pass
NVNT	ac40	5510	Ant1	1.61	1.449	-	-	-	-	-	-
NVNT	ac40	5510	Ant2	1.88	1.542	-	-	-	-	-	-
NVNT	ac40	5510	Sum	4.76	2.991	5	5	-40.18	-50	50	Pass
NVNT	ac40	5590	Ant1	1.09	1.285	-	-	-	-	-	-
NVNT	ac40	5590	Ant2	2.18	1.652	-	-	-	-	-	-
NVNT	ac40	5590	Sum	4.68	2.937	5	5	-41.26	-50	50	Pass
NVNT	ac40	5670	Ant1	1.4	1.38	-	-	-	-	-	-
NVNT	ac40	5670	Ant2	1.91	1.552	-	-	-	-	-	-
NVNT	ac40	5670	Sum	4.67	2.932	5	5	-41.36	-50	50	Pass
NVNT	ac80	5210	Ant1	-2.91	0.512	-	-	-	-	-	-
NVNT	ac80	5210	Ant2	-1.68	0.679	-	-	-	-	-	-
NVNT	ac80	5210	Sum	0.76	1.191	2.5	2	-40.45	-80	20	Pass
NVNT	ac80	5290	Ant1	-7.11	0.195	-	-	-	-	-	-
NVNT	ac80	5290	Ant2	-5.81	0.262	-	-	-	-	-	-
NVNT	ac80	5290	Sum	-3.4	0.457	2.5	1	-54.3	-80	20	Pass
NVNT	ac80	5530	Ant1	-4.87	0.326	-	-	-	-	-	-
NVNT	ac80	5530	Ant2	-6.68	0.215	-	-	-	-	-	-
NVNT	ac80	5530	Sum	-2.67	0.541	2.5	1	-45.9	-50	50	Pass
NVNT	ac80	5610	Ant1	-5.85	0.26	-	-	-	-	-	-
NVNT	ac80	5610	Ant2	-4.9	0.324	-	-	-	-	-	-
NVNT	ac80	5610	Sum	-2.34	0.584	2.5	1	-41.6	-50	50	Pass
NVNT	ax20	5180	Ant1	0.97	1.25	-	-	-	-	-	-

Report

NVNT	ax20	5180	Ant2	3.17	2.075	-	-	-	-	-	-
NVNT	ax20	5180	Sum	5.22	3.325	10	5	-33.5	-80	20	Pass
NVNT	ax20	5200	Ant1	2.39	1.734	-	-	-	-	-	-
NVNT	ax20	5200	Ant2	2.87	1.936	-	-	-	-	-	-
NVNT	ax20	5200	Sum	5.65	3.67	10	5	-26.6	-80	20	Pass
NVNT	ax20	5240	Ant1	1.77	1.503	-	-	-	-	-	-
NVNT	ax20	5240	Ant2	3.08	2.032	-	-	-	-	-	-
NVNT	ax20	5240	Sum	5.48	3.535	10	5	-29.3	-80	20	Pass
NVNT	ax20	5260	Ant1	-0.56	0.879	-	-	-	-	-	-
NVNT	ax20	5260	Ant2	0.62	1.153	-	-	-	-	-	-
NVNT	ax20	5260	Sum	3.08	2.032	10	3	-32.27	-80	20	Pass
NVNT	ax20	5300	Ant1	-0.79	0.834	-	-	-	-	-	-
NVNT	ax20	5300	Ant2	0.08	1.019	-	-	-	-	-	-
NVNT	ax20	5300	Sum	2.68	1.853	10	3	-38.23	-80	20	Pass
NVNT	ax20	5320	Ant1	-0.18	0.959	-	-	-	-	-	-
NVNT	ax20	5320	Ant2	0.4	1.096	-	-	-	-	-	-
NVNT	ax20	5320	Sum	3.13	2.055	10	3	-31.5	-80	20	Pass
NVNT	ax20	5500	Ant1	3.16	2.07	-	-	-	-	-	-
NVNT	ax20	5500	Ant2	3.47	2.223	-	-	-	-	-	-
NVNT	ax20	5500	Sum	6.33	4.293	10	6	-28.45	-50	50	Pass
NVNT	ax20	5580	Ant1	2.92	1.959	-	-	-	-	-	-
NVNT	ax20	5580	Ant2	3.38	2.178	-	-	-	-	-	-
NVNT	ax20	5580	Sum	6.17	4.137	10	6	-31.05	-50	50	Pass
NVNT	ax20	5700	Ant1	2.12	1.629	-	-	-	-	-	-
NVNT	ax20	5700	Ant2	3.4	2.188	-	-	-	-	-	-
NVNT	ax20	5700	Sum	5.82	3.817	10	6	-36.38	-50	50	Pass
NVNT	ax40	5190	Ant1	-0.71	0.849	-	-	-	-	-	-
NVNT	ax40	5190	Ant2	0.38	1.091	-	-	-	-	-	-
NVNT	ax40	5190	Sum	2.88	1.94	5	3	-35.33	-80	20	Pass
NVNT	ax40	5230	Ant1	-0.21	0.953	-	-	-	-	-	-
NVNT	ax40	5230	Ant2	1	1.259	-	-	-	-	-	-
NVNT	ax40	5230	Sum	3.45	2.212	5	3	-26.27	-80	20	Pass
NVNT	ax40	5270	Ant1	-3.86	0.411	-	-	-	-	-	-
NVNT	ax40	5270	Ant2	-2.41	0.574	-	-	-	-	-	-
NVNT	ax40	5270	Sum	-0.06	0.985	5	2	-50.75	-80	20	Pass
NVNT	ax40	5310	Ant1	-3.46	0.451	-	-	-	-	-	-
NVNT	ax40	5310	Ant2	-2.2	0.603	-	-	-	-	-	-
NVNT	ax40	5310	Sum	0.23	1.054	5	2	-47.3	-80	20	Pass
NVNT	ax40	5510	Ant1	-0.33	0.927	-	-	-	-	-	-
NVNT	ax40	5510	Ant2	1.5	1.413	-	-	-	-	-	-
NVNT	ax40	5510	Sum	3.69	2.34	5	5	-53.2	-50	50	Pass
NVNT	ax40	5590	Ant1	1.2	1.318	-	-	-	-	-	-
NVNT	ax40	5590	Ant2	2.02	1.592	-	-	-	-	-	-
NVNT	ax40	5590	Sum	4.64	2.91	5	5	-41.8	-50	50	Pass

NVNT	ax40	5670	Ant1	0.88	1.225	-	-	-	-	-	-
NVNT	ax40	5670	Ant2	1.9	1.549	-	-	-	-	-	-
NVNT	ax40	5670	Sum	4.43	2.774	5	5	-44.52	-50	50	Pass
NVNT	ax80	5210	Ant1	-3.54	0.443	-	-	-	-	-	-
NVNT	ax80	5210	Ant2	-2	0.631	-	-	-	-	-	-
NVNT	ax80	5210	Sum	0.31	1.074	2.5	2	-46.3	-80	20	Pass
NVNT	ax80	5290	Ant1	-6.78	0.21	-	-	-	-	-	-
NVNT	ax80	5290	Ant2	-6.35	0.232	-	-	-	-	-	-
NVNT	ax80	5290	Sum	-3.55	0.442	2.5	1	-55.8	-80	20	Pass
NVNT	ax80	5530	Ant1	-4.98	0.318	-	-	-	-	-	-
NVNT	ax80	5530	Ant2	-5.19	0.303	-	-	-	-	-	-
NVNT	ax80	5530	Sum	-2.07	0.621	2.5	1	-37.9	-50	50	Pass
NVNT	ax80	5610	Ant1	-4.95	0.32	-	-	-	-	-	-
NVNT	ax80	5610	Ant2	-4.35	0.367	-	-	-	-	-	-
NVNT	ax80	5610	Sum	-1.63	0.687	2.5	1	-31.3	-50	50	Pass

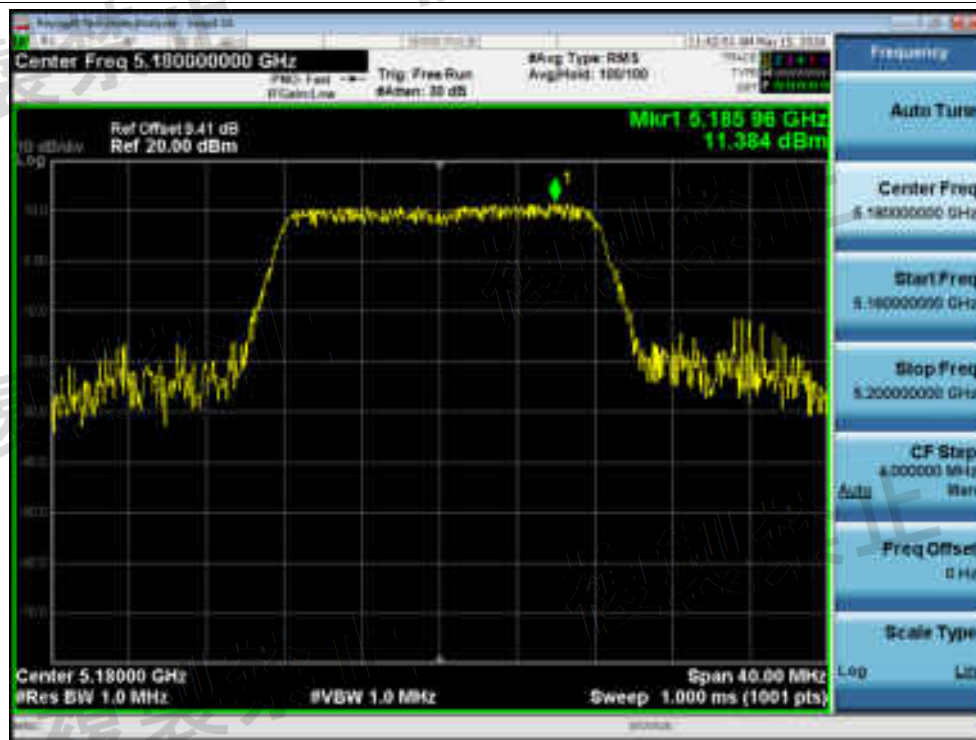


Power NVNT a 5180MHz Ant1 Pre Scan




Power NVNT a 5180MHz Ant1 Zero Span



Power NVNT a 5180MHz Ant2 Pre Scan

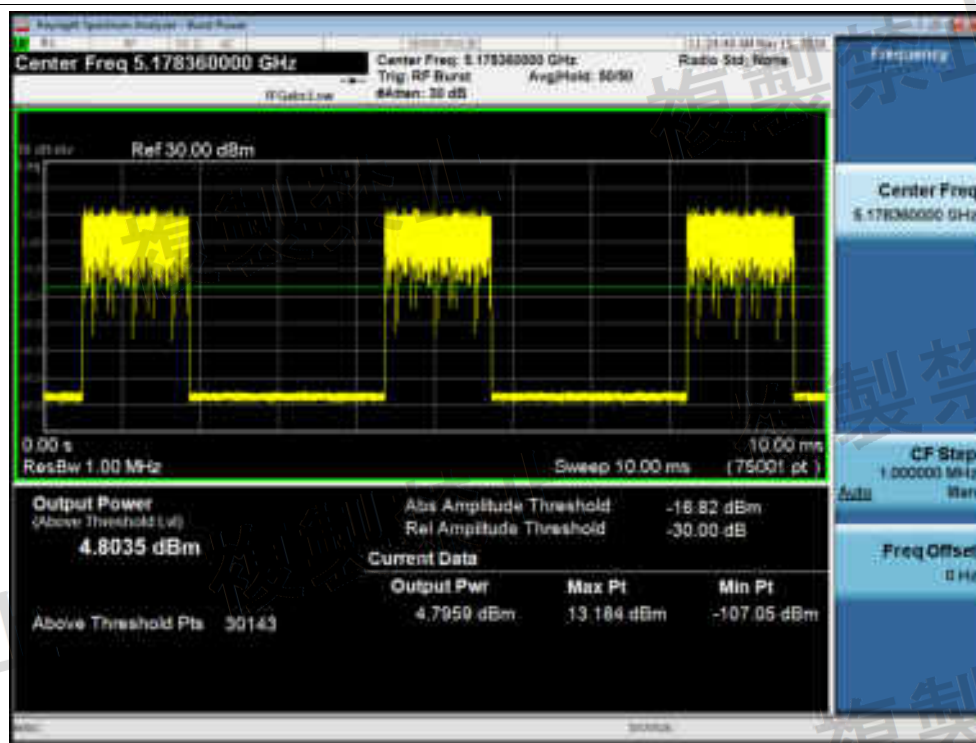

Power NVNT a 5180MHz Ant2 Zero Span

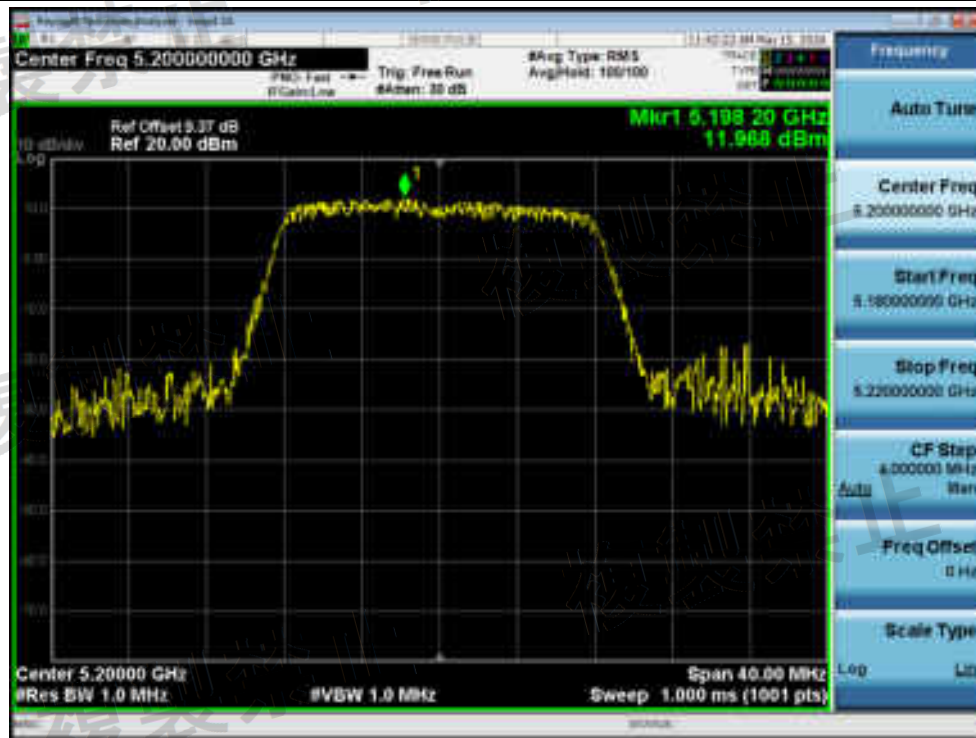

Power NVNT a 5200MHz Ant1 Pre Scan




Power NVNT a 5200MHz Ant1 Zero Span



Power NVNT a 5200MHz Ant2 Pre Scan




Power NVNT a 5200MHz Ant2 Zero Span

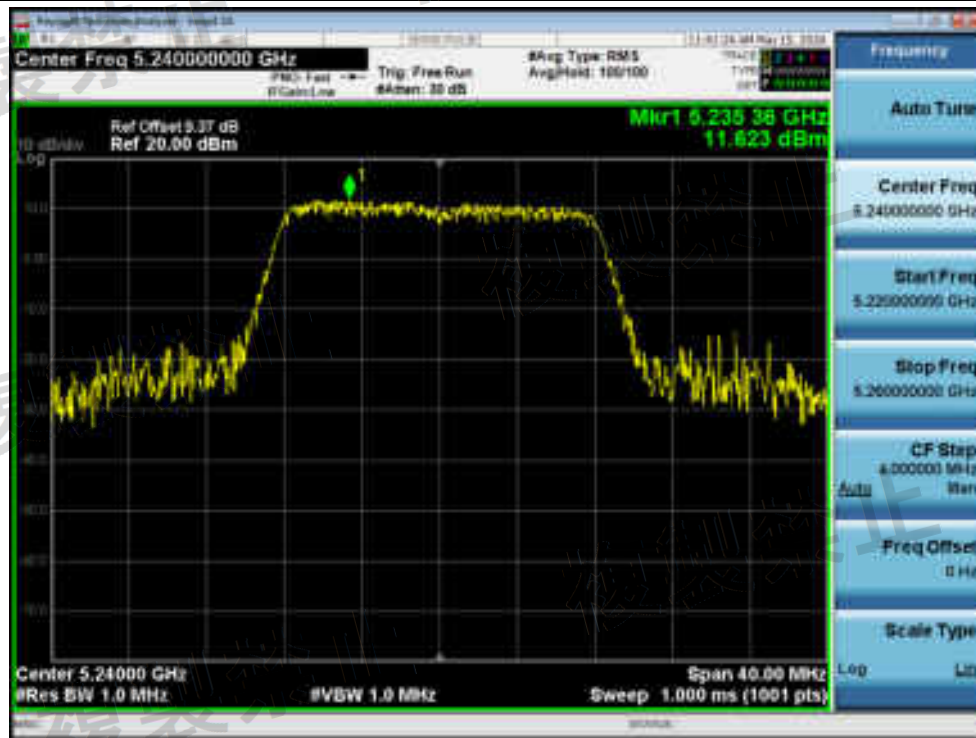


Power NVNT a 5240MHz Ant1 Pre Scan




Power NVNT a 5240MHz Ant1 Zero Span

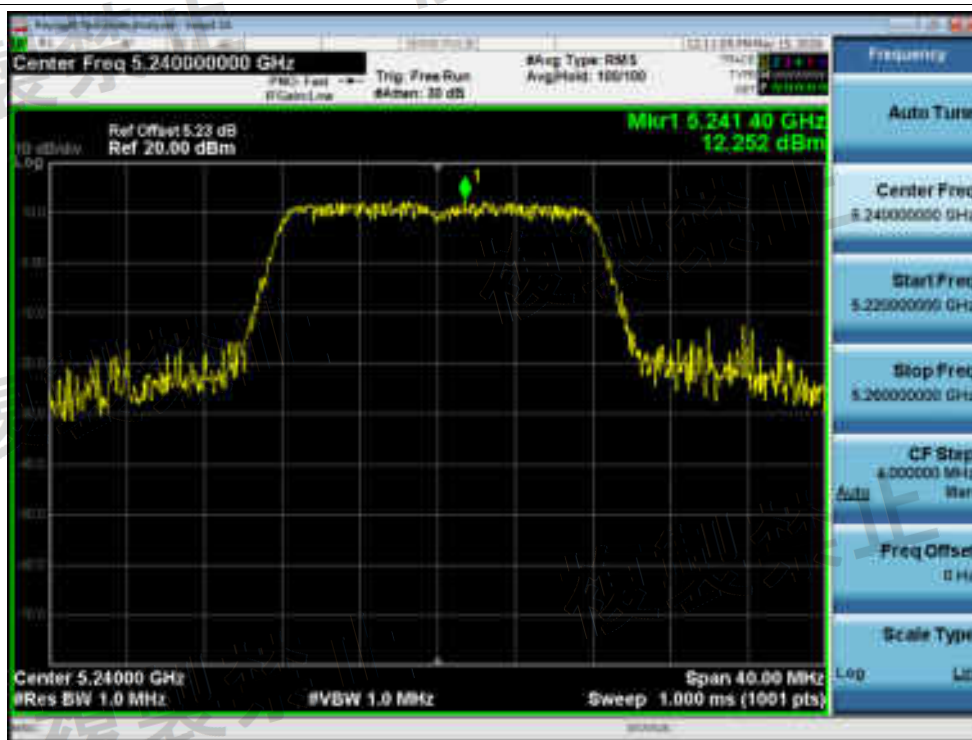

Power NVNT a 5240MHz Ant2 Pre Scan

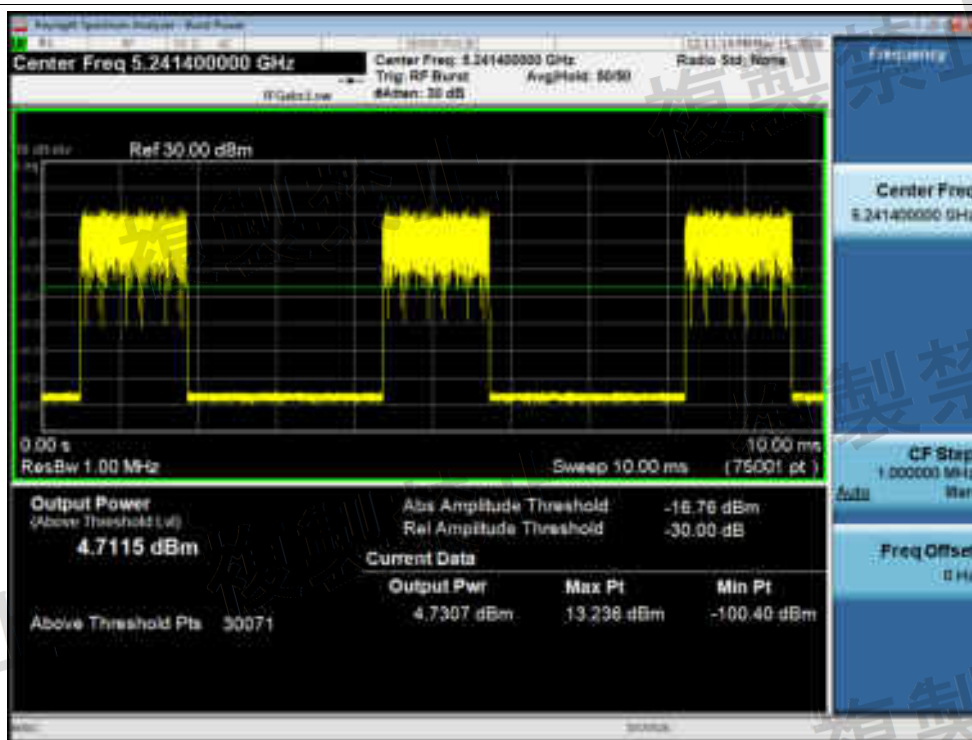


Power NVNT a 5240MHz Ant2 Zero Span

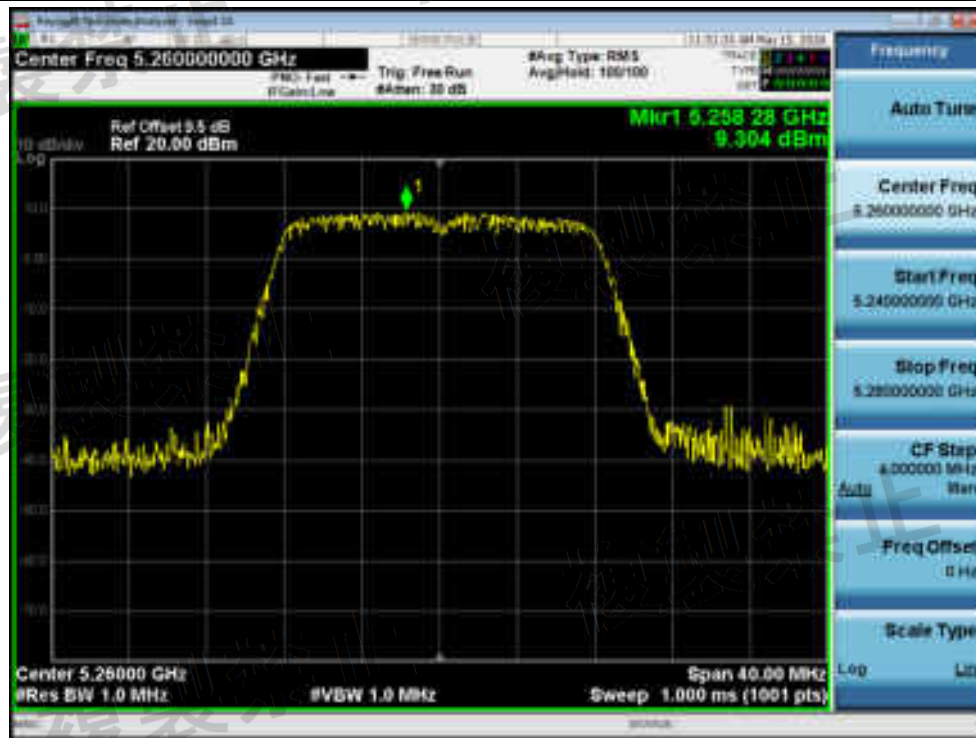


Power NVNT a 5260MHz Ant1 Pre Scan




Power NVNT a 5260MHz Ant1 Zero Span

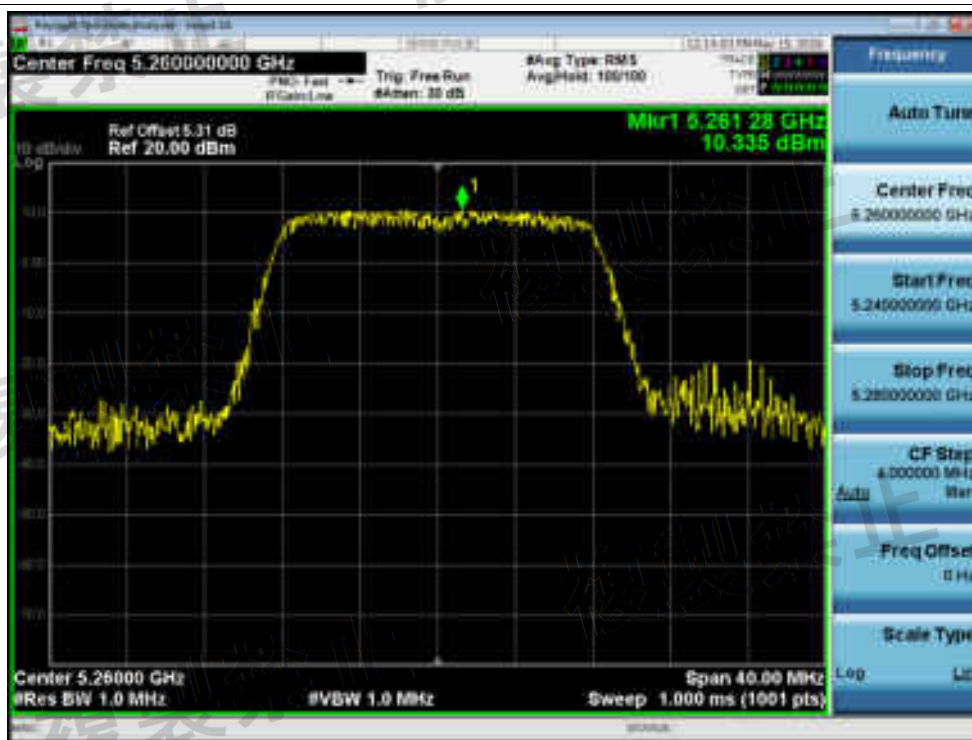


Power NVNT a 5260MHz Ant2 Pre Scan

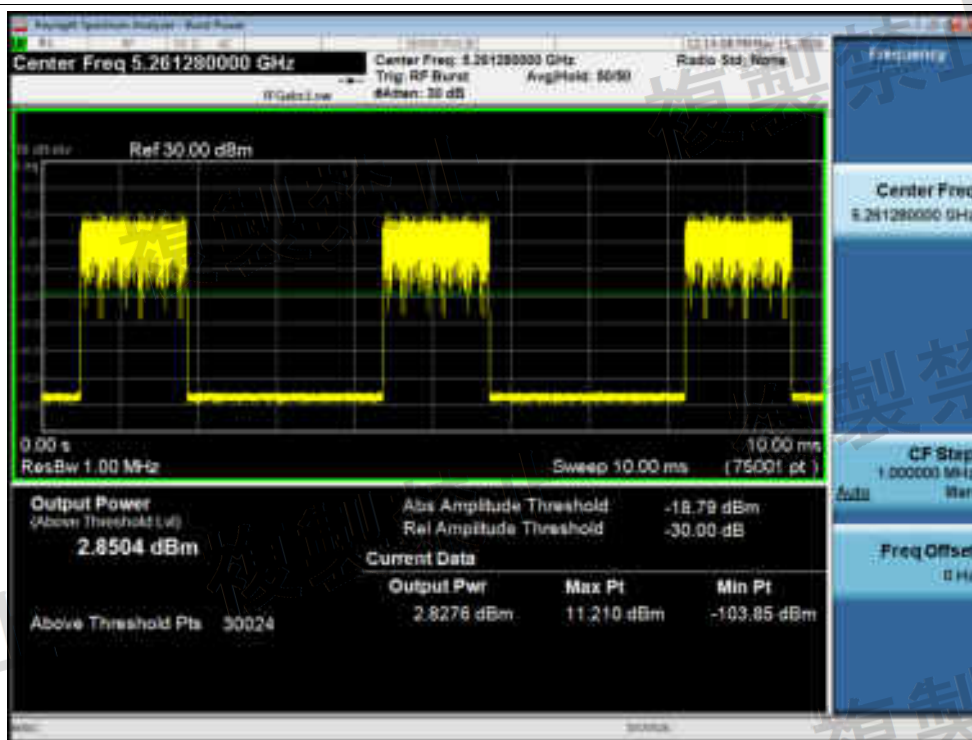


Power NVNT a 5260MHz Ant2 Zero Span

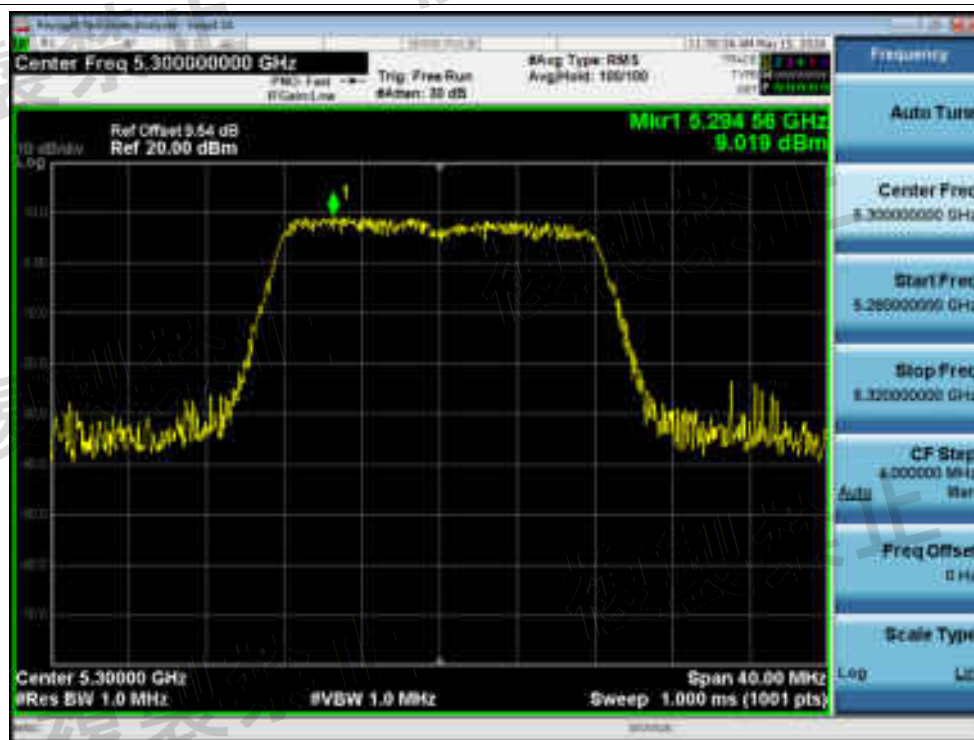

Power NVNT a 5300MHz Ant1 Pre Scan

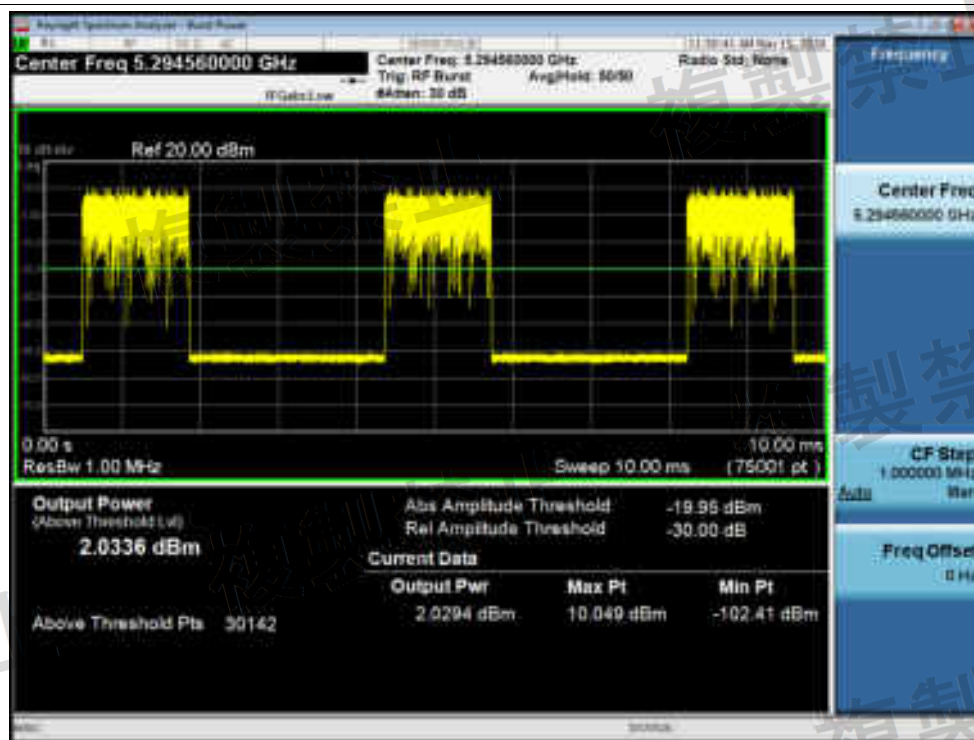


Power NVNT a 5300MHz Ant1 Zero Span

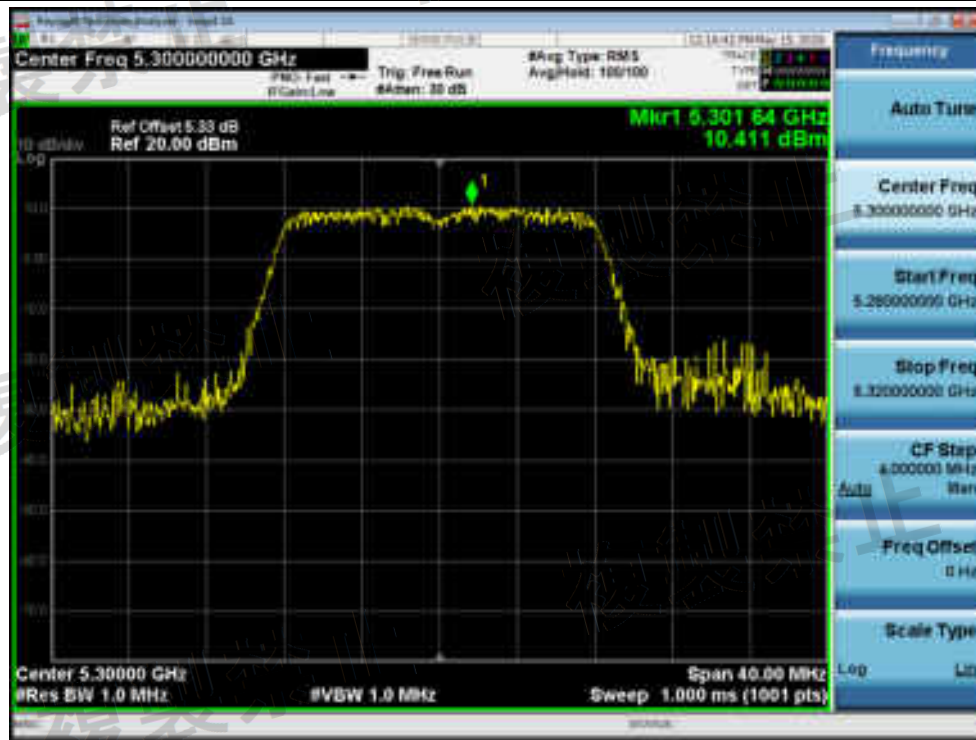

Power NVNT a 5300MHz Ant2 Pre Scan




Power NVNT a 5300MHz Ant2 Zero Span

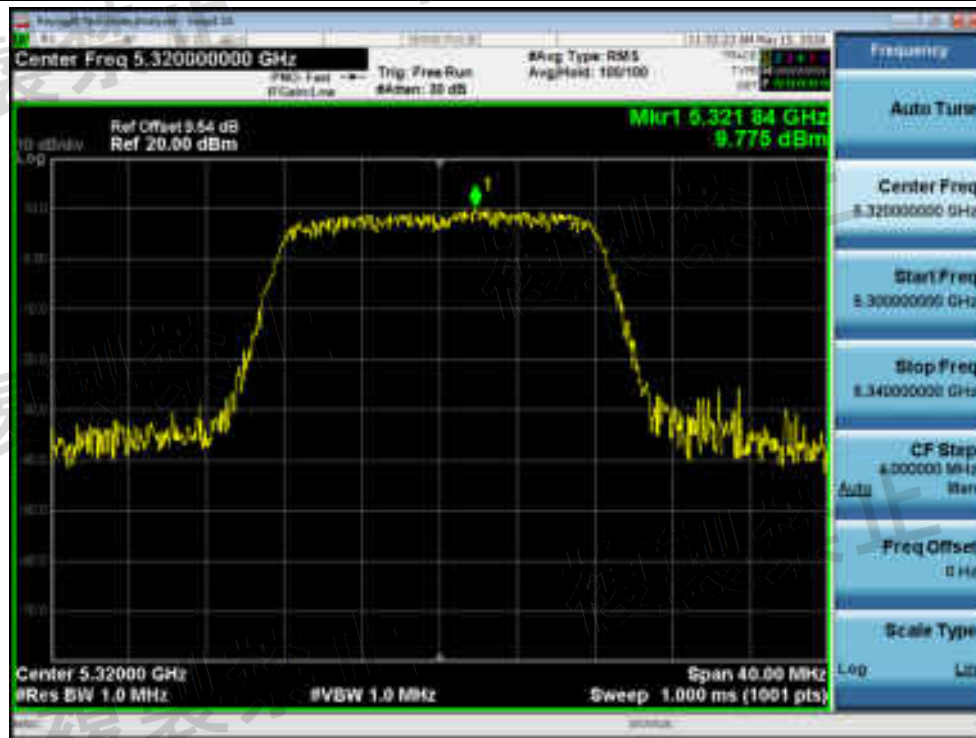

Power NVNT a 5320MHz Ant1 Pre Scan



Power NVNT a 5320MHz Ant1 Zero Span

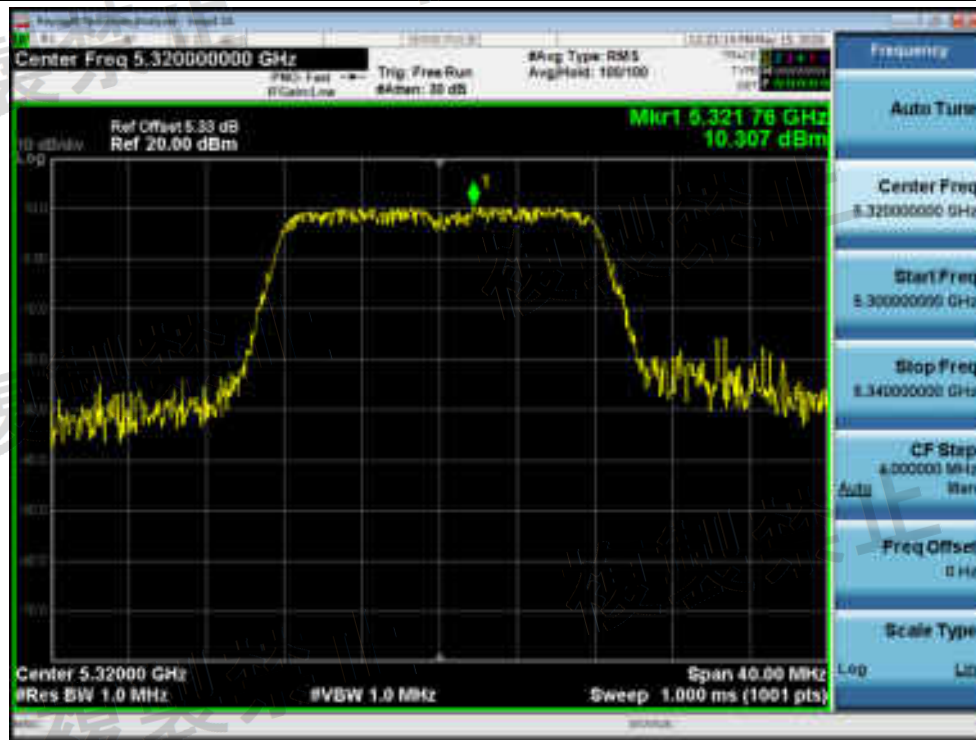

Power NVNT a 5320MHz Ant2 Pre Scan



Power NVNT a 5320MHz Ant2 Zero Span




Power NVNT a 5500MHz Ant1 Pre Scan




Power NVNT a 5500MHz Ant1 Zero Span




Power NVNT a 5500MHz Ant2 Pre Scan

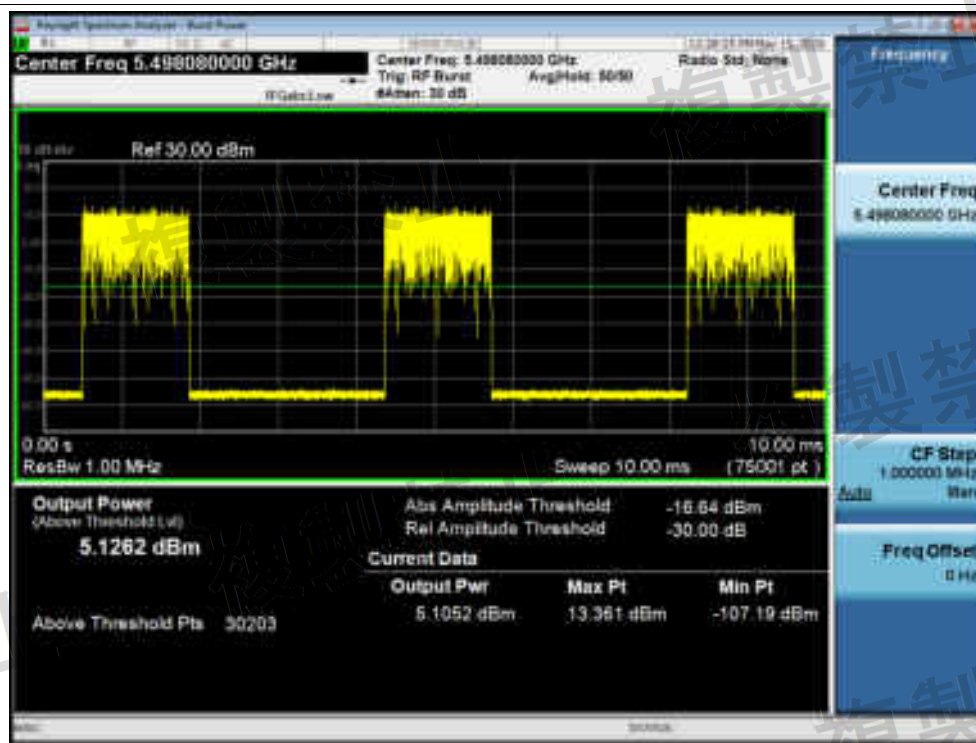


Power NVNT a 5500MHz Ant2 Zero Span

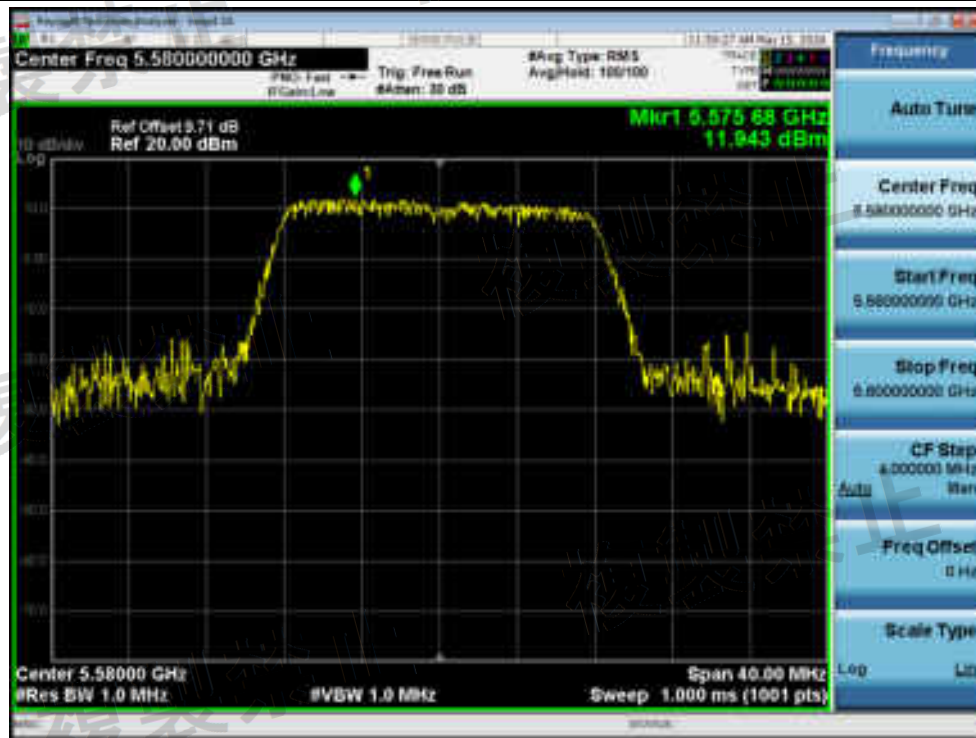


Power NVNT a 5580MHz Ant1 Pre Scan

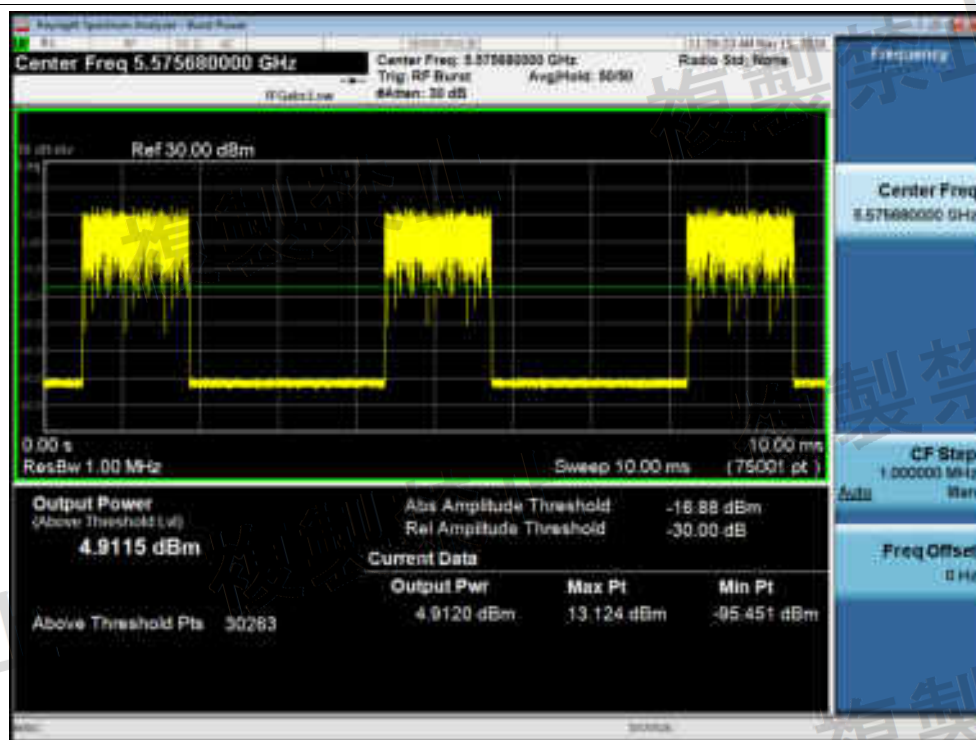


Power NVNT a 5580MHz Ant1 Zero Span

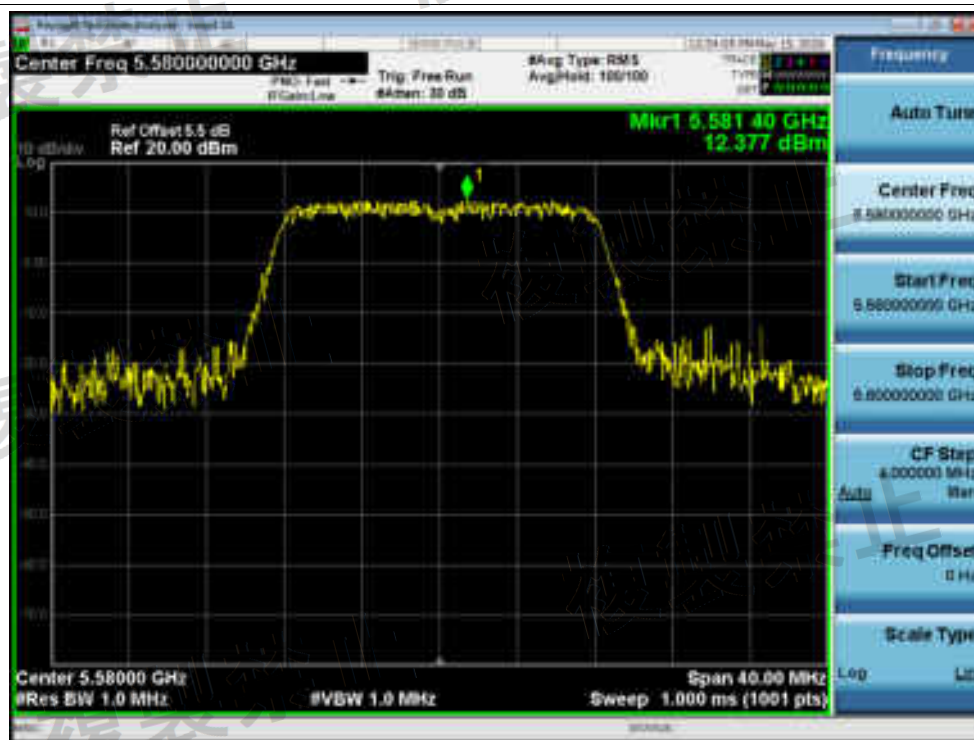

Power NVNT a 5580MHz Ant2 Pre Scan

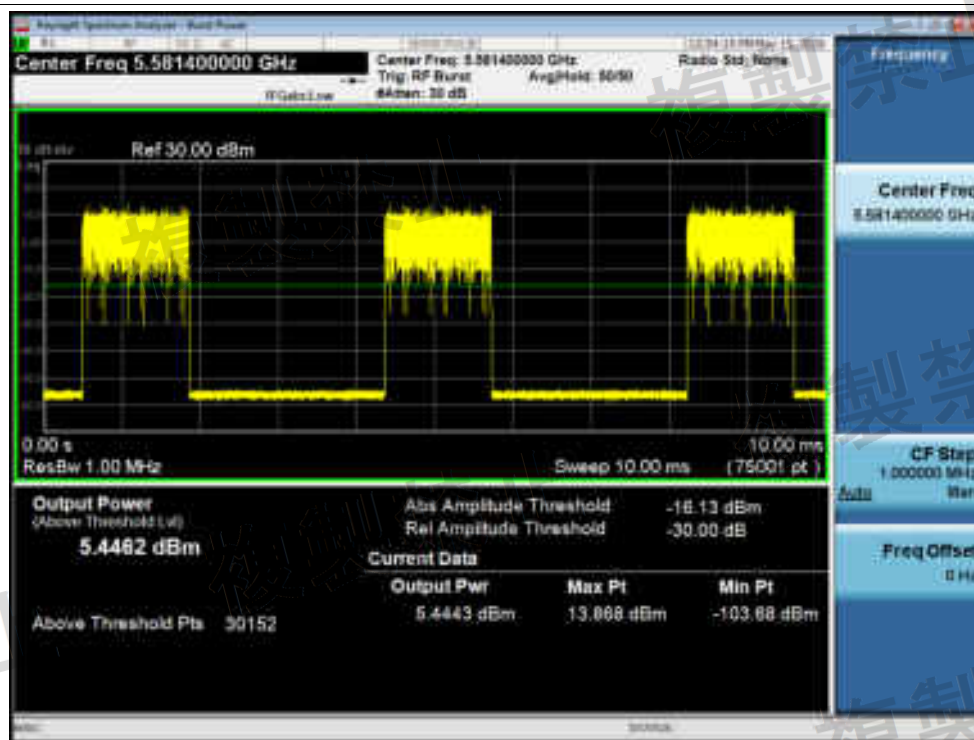

Power NVNT a 5580MHz Ant2 Zero Span

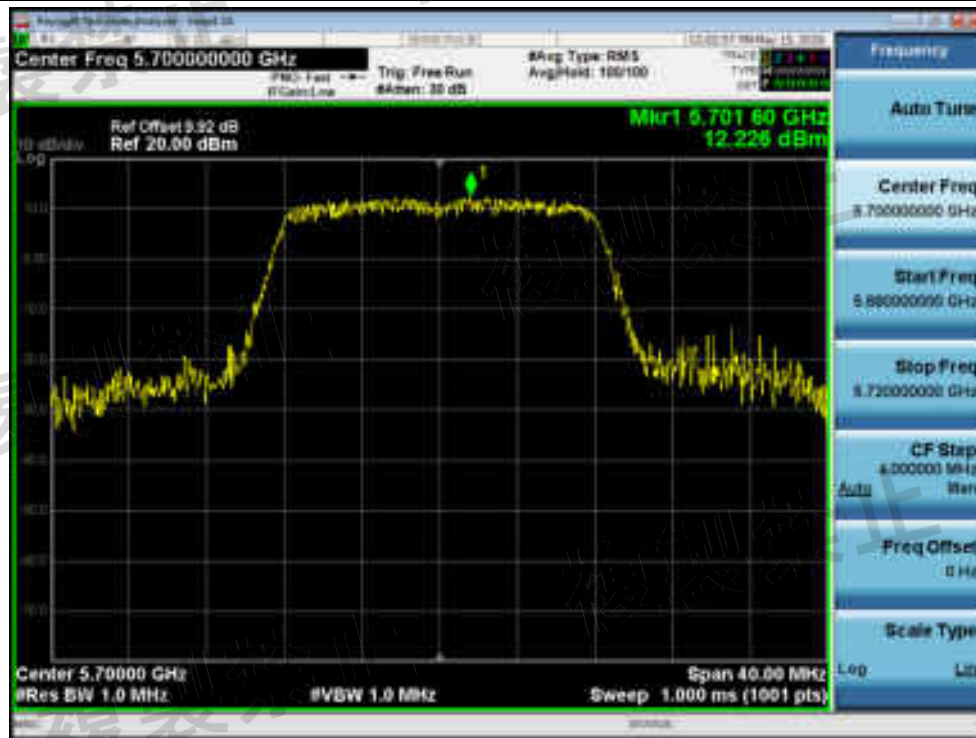


Power NVNT a 5700MHz Ant1 Pre Scan



Power NVNT a 5700MHz Ant1 Zero Span



Power NVNT a 5700MHz Ant2 Pre Scan

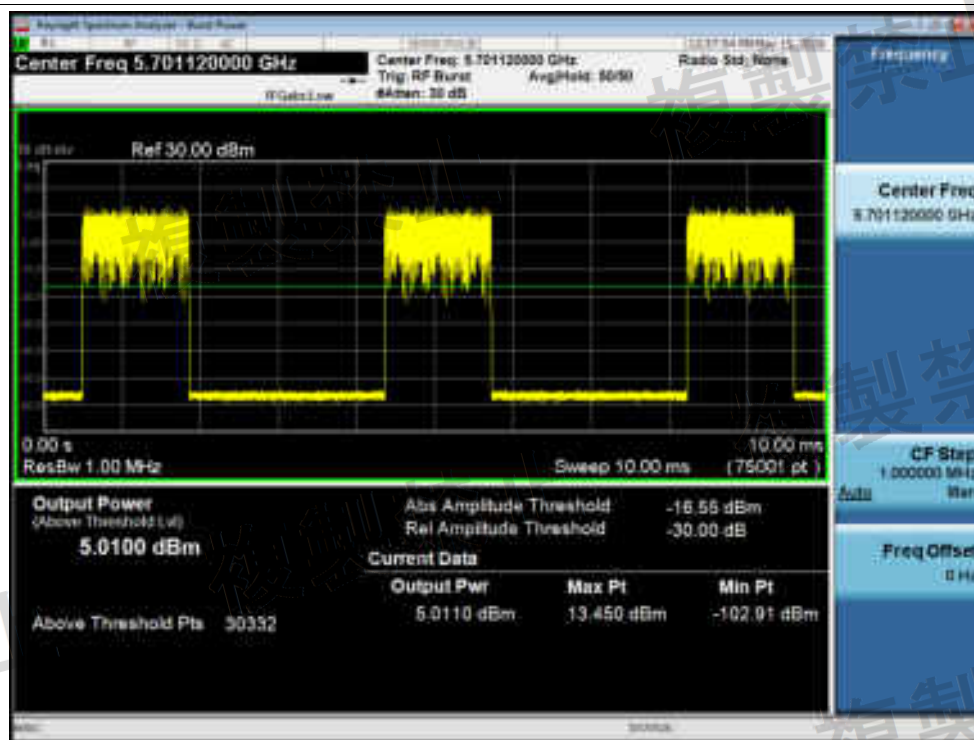

Power NVNT a 5700MHz Ant2 Zero Span




Power NVNT n20 5180MHz Ant1 Pre Scan




Power NVNT n20 5180MHz Ant1 Zero Span




Power NVNT n20 5180MHz Ant2 Pre Scan

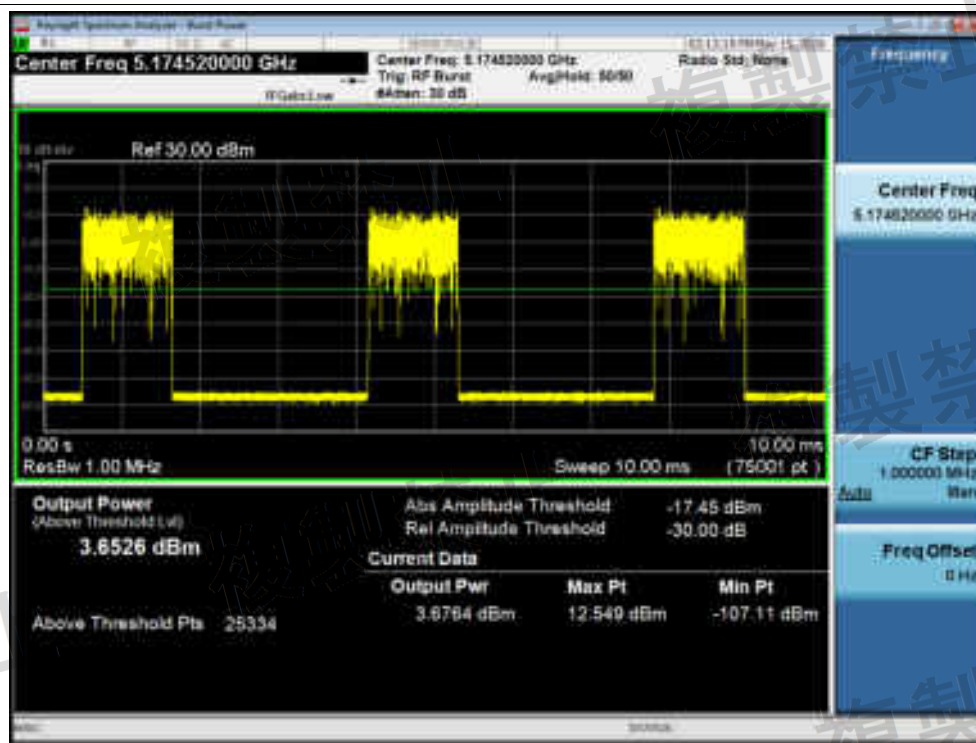


Power NVNT n20 5180MHz Ant2 Zero Span

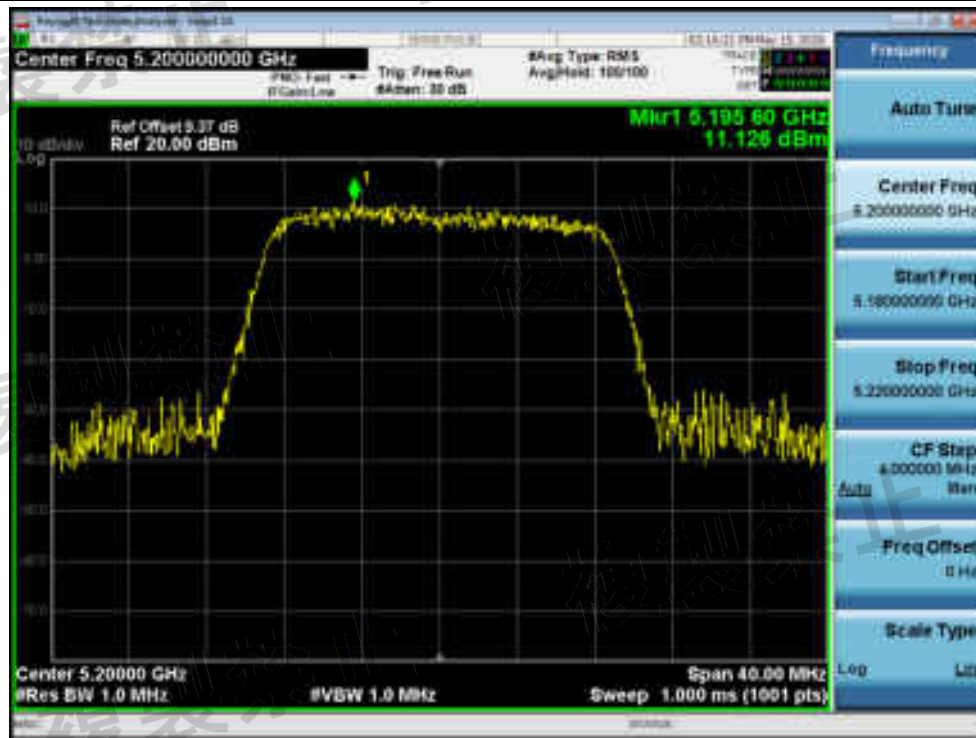

Power NVNT n20 5200MHz Ant1 Pre Scan

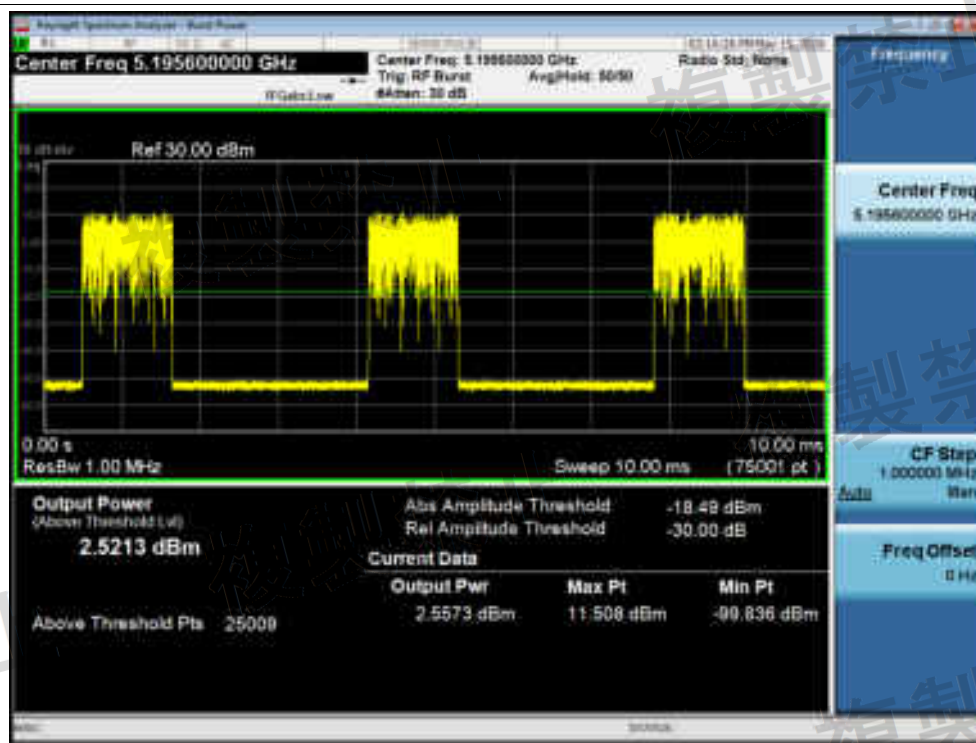


Power NVNT n20 5200MHz Ant1 Zero Span

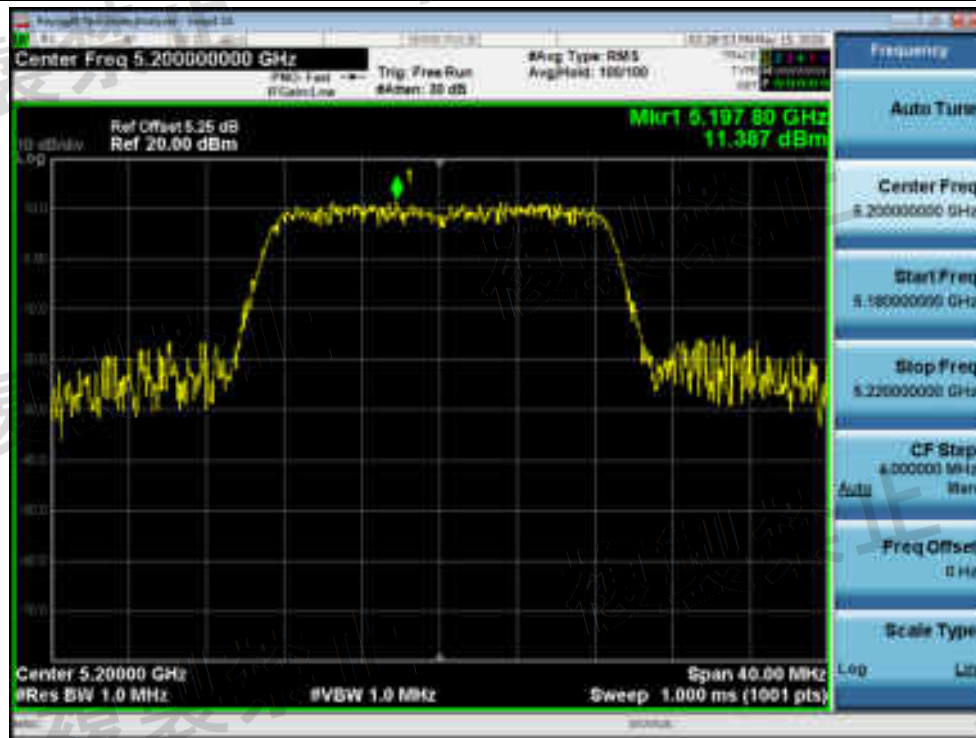


Power NVNT n20 5200MHz Ant2 Pre Scan




Power NVNT n20 5200MHz Ant2 Zero Span

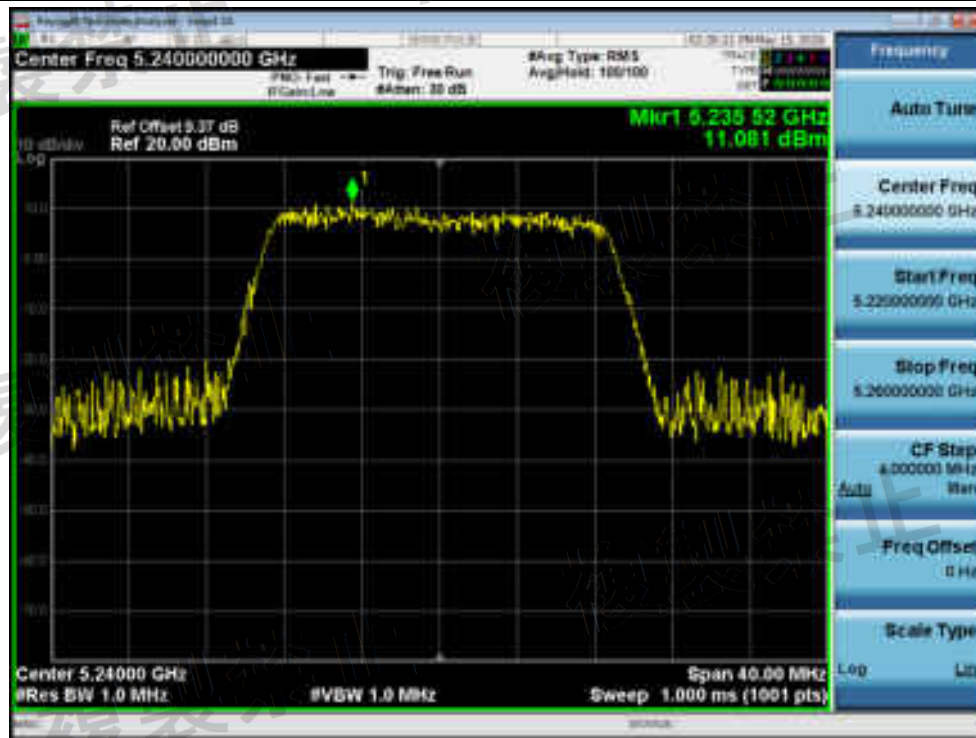


Power NVNT n20 5240MHz Ant1 Pre Scan

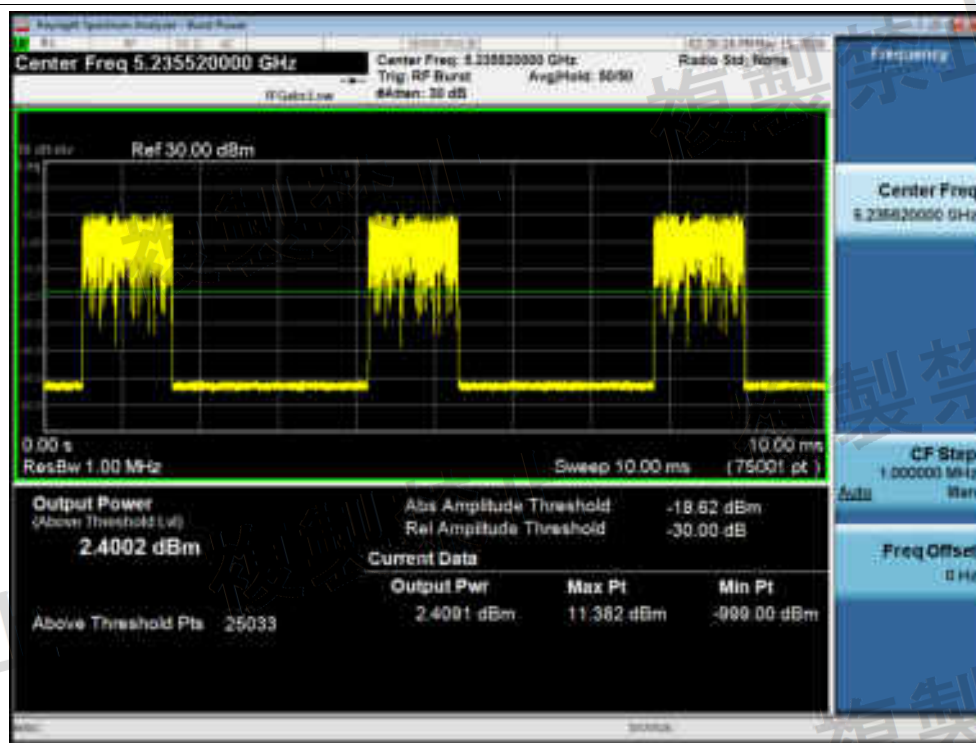


Power NVNT n20 5240MHz Ant1 Zero Span

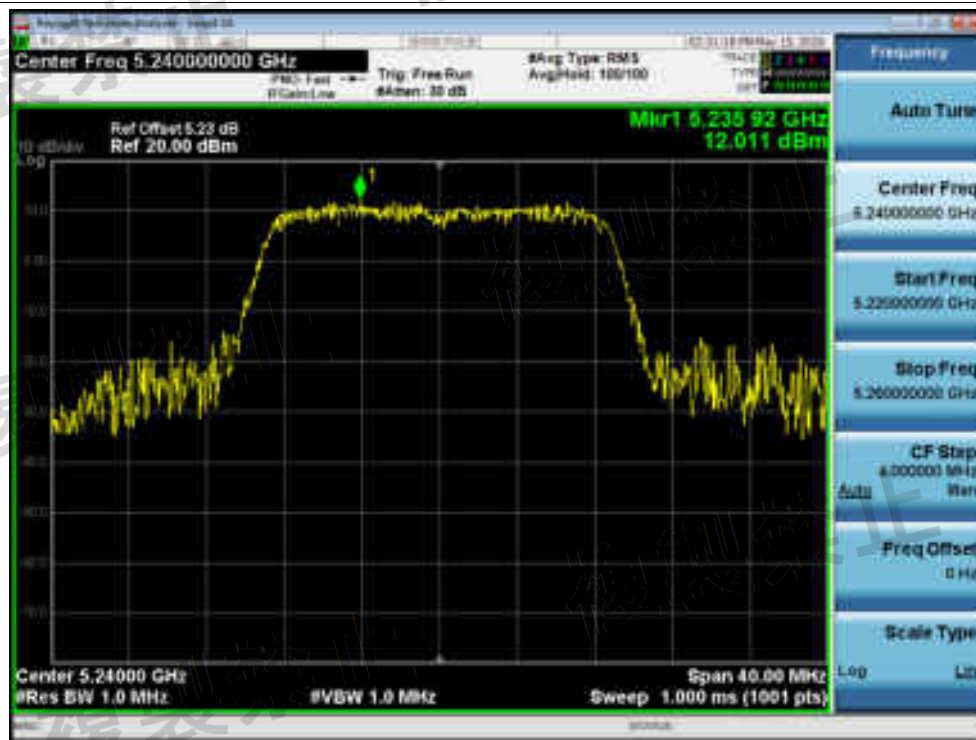


Power NVNT n20 5240MHz Ant2 Pre Scan

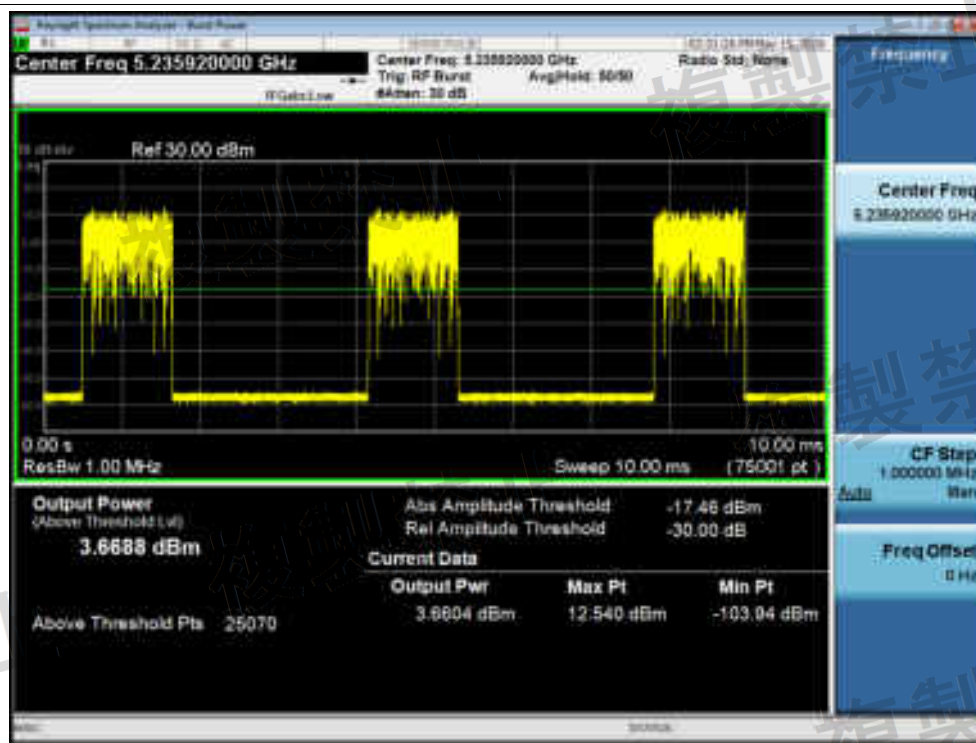


Power NVNT n20 5240MHz Ant2 Zero Span

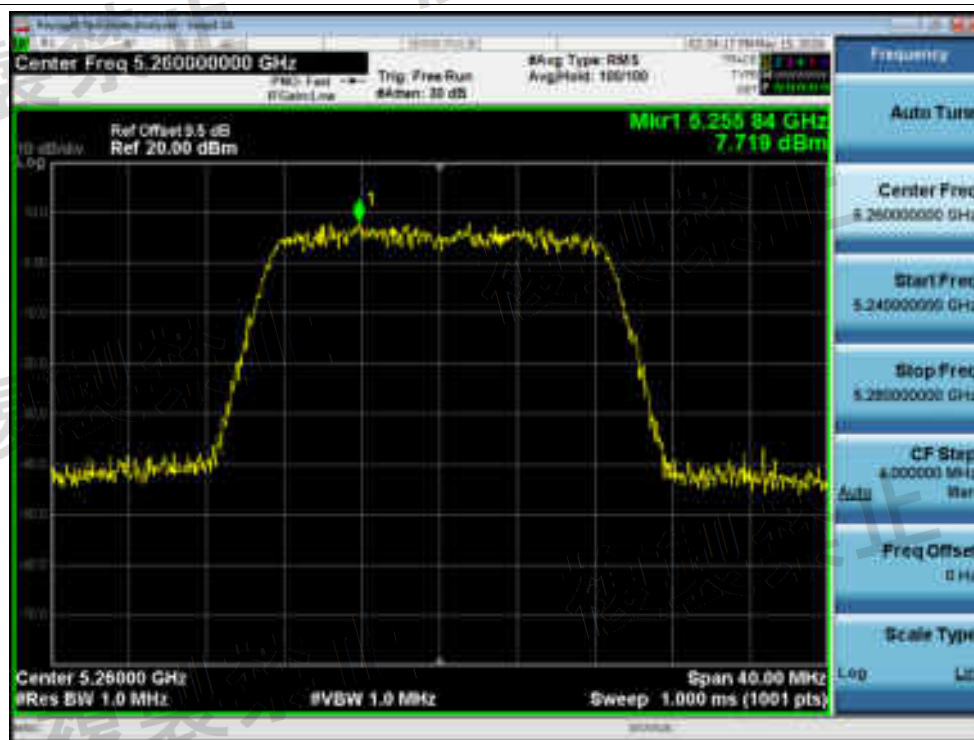


Power NVNT n20 5260MHz Ant1 Pre Scan

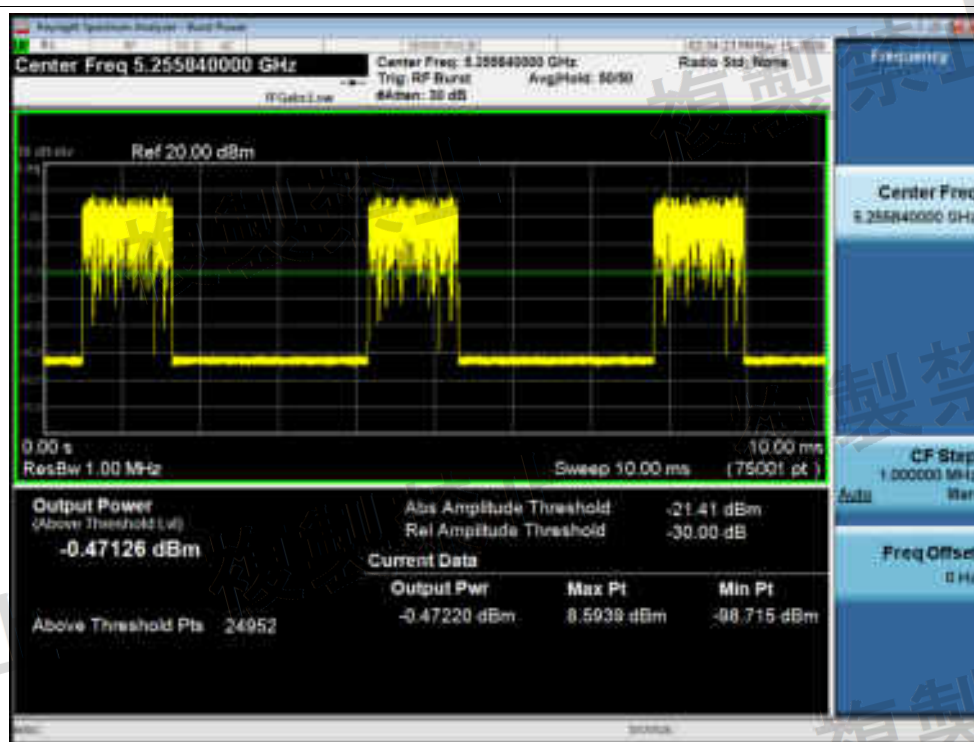

Power NVNT n20 5260MHz Ant1 Zero Span

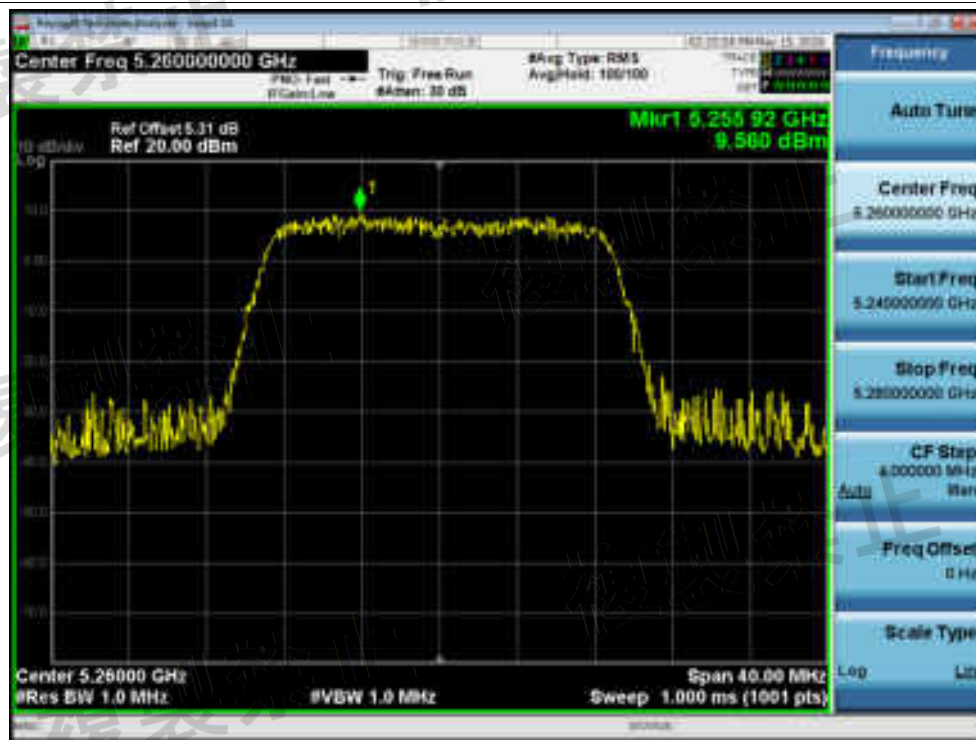


Power NVNT n20 5260MHz Ant2 Pre Scan

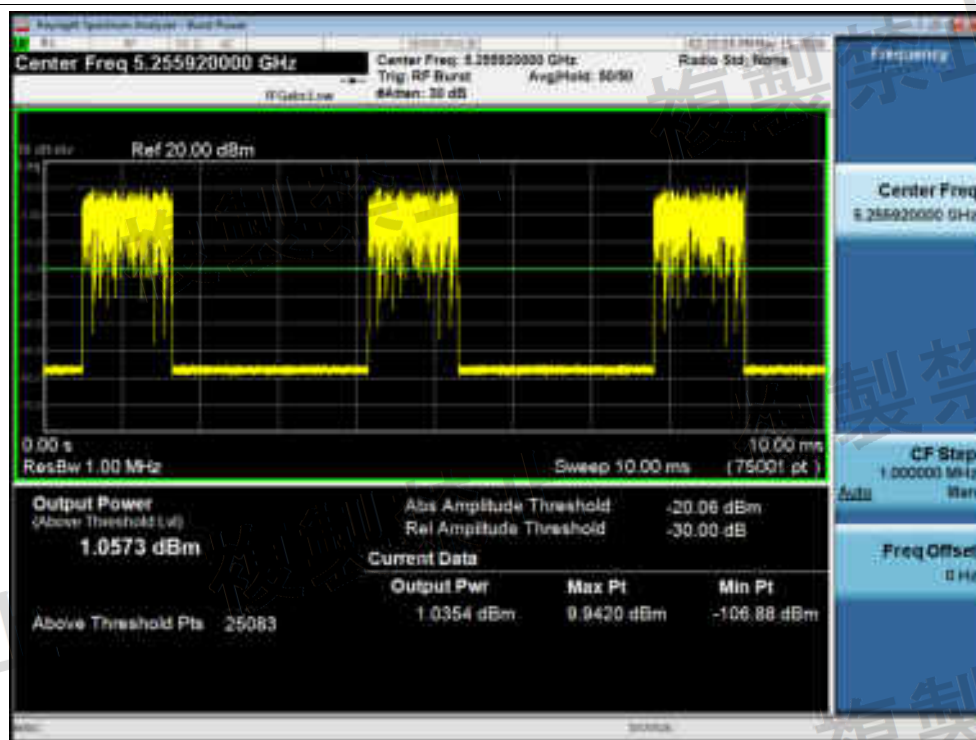

Power NVNT n20 5260MHz Ant2 Zero Span




Power NVNT n20 5300MHz Ant1 Pre Scan

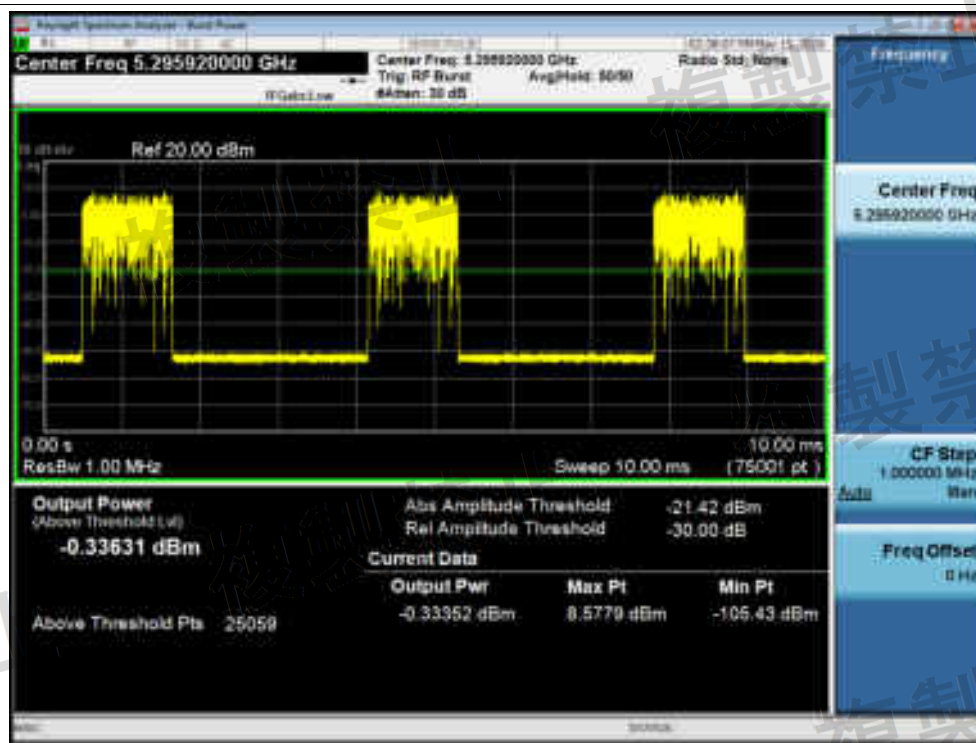


Power NVNT n20 5300MHz Ant1 Zero Span




Power NVNT n20 5300MHz Ant2 Pre Scan

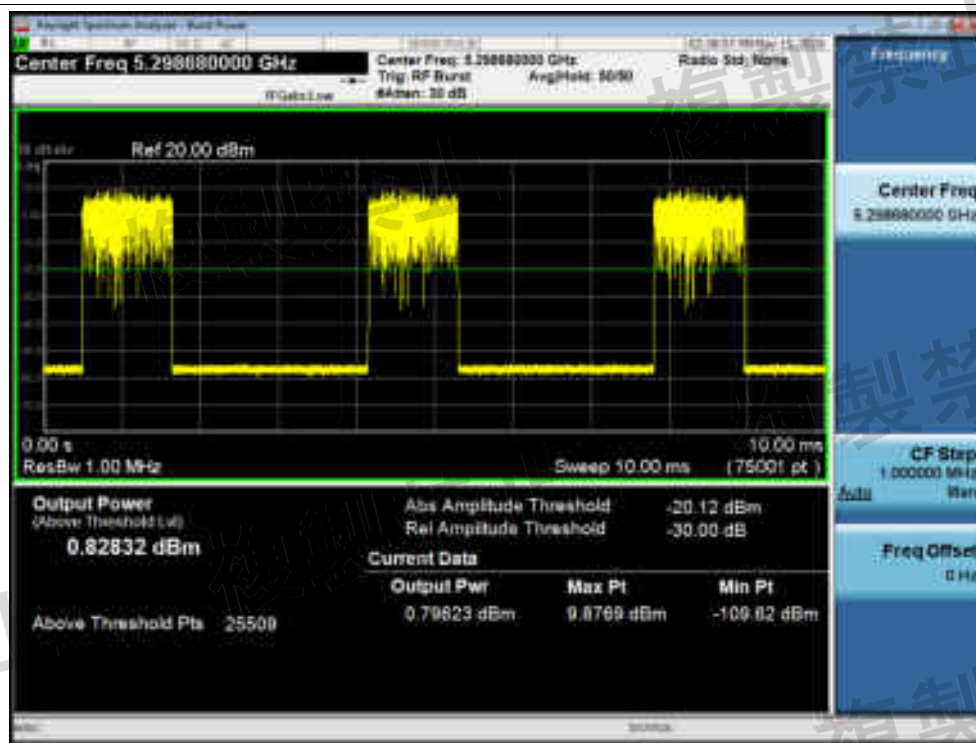


Power NVNT n20 5300MHz Ant2 Zero Span

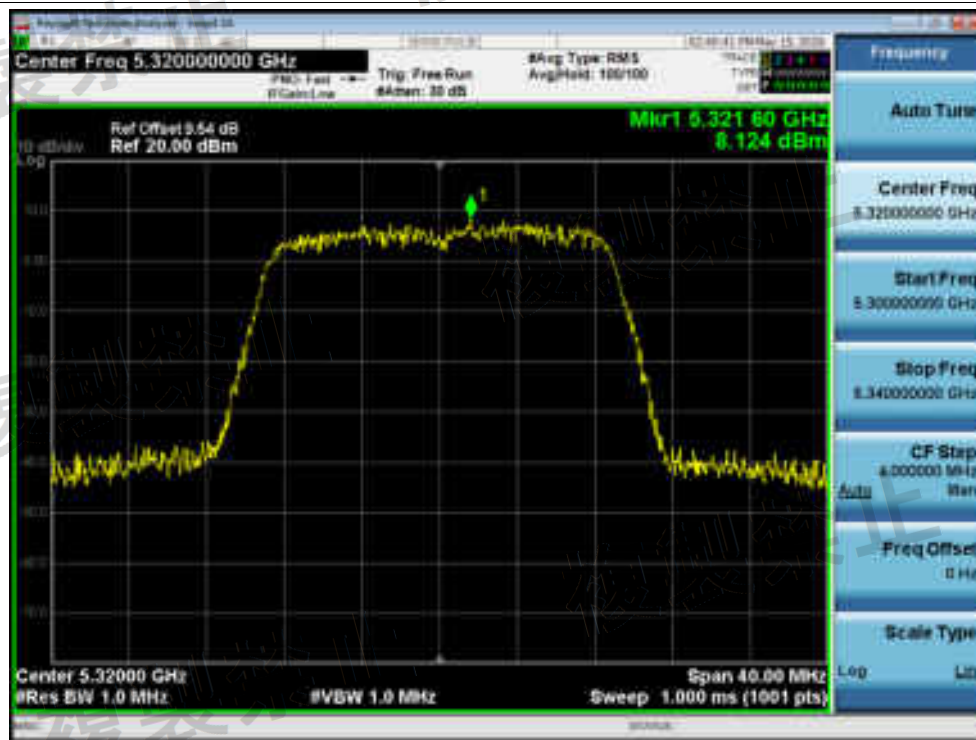


Power NVNT n20 5320MHz Ant1 Pre Scan

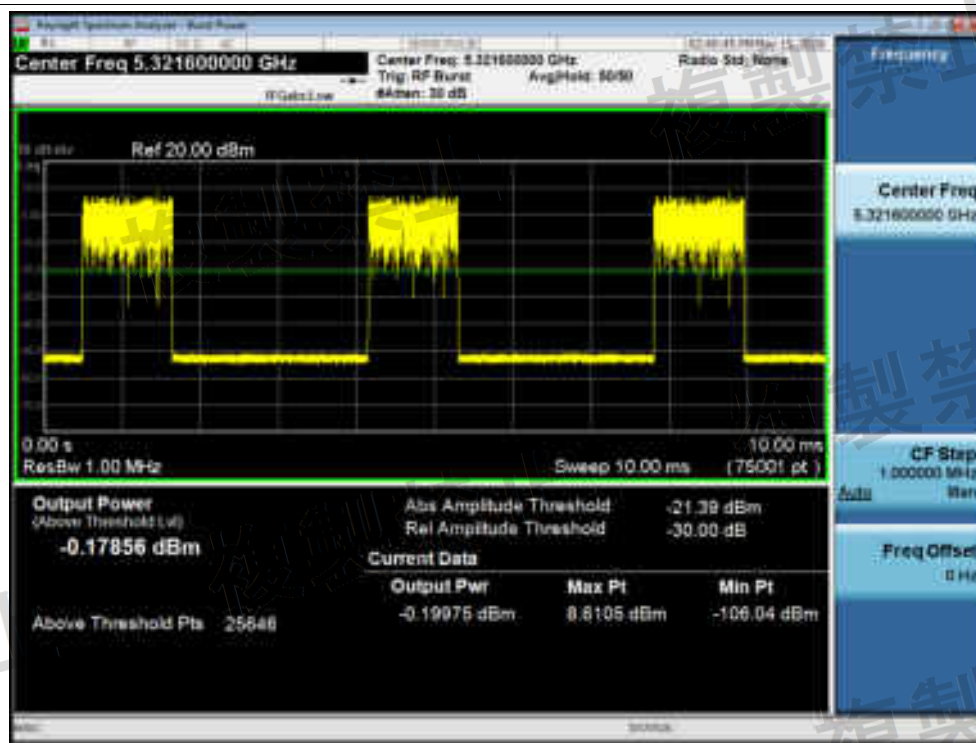


Power NVNT n20 5320MHz Ant1 Zero Span

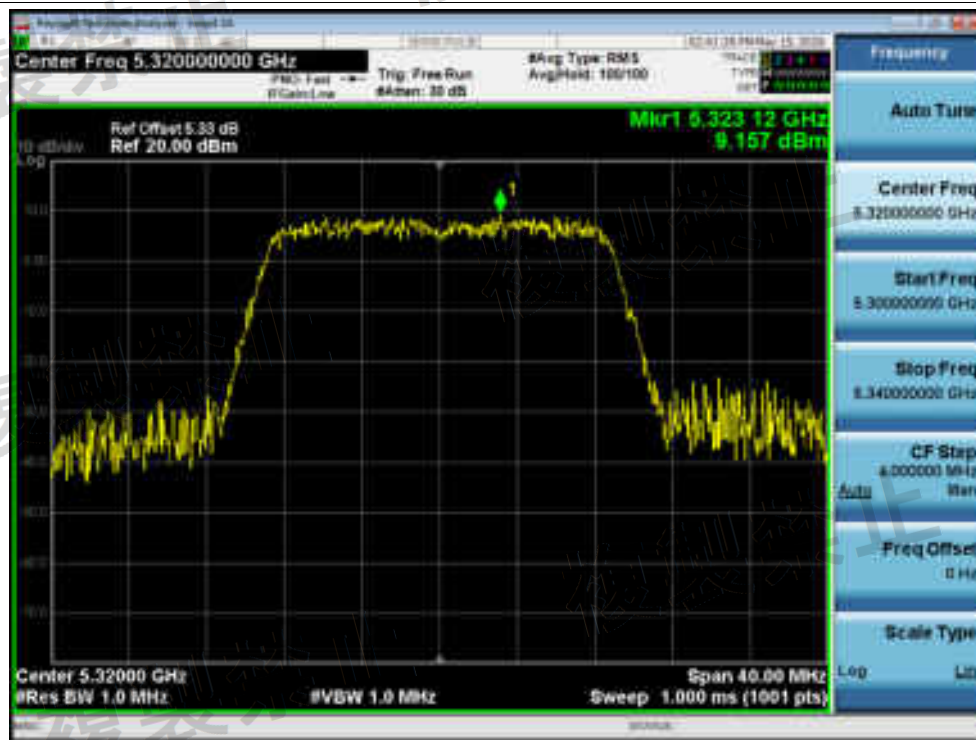


Power NVNT n20 5320MHz Ant2 Pre Scan

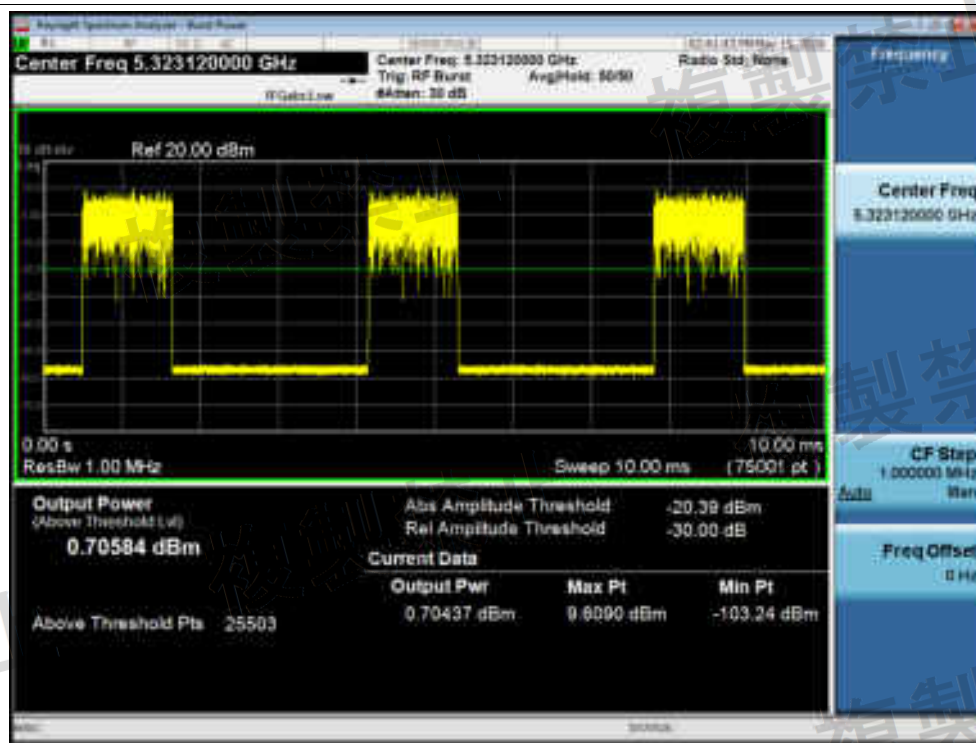


Power NVNT n20 5320MHz Ant2 Zero Span

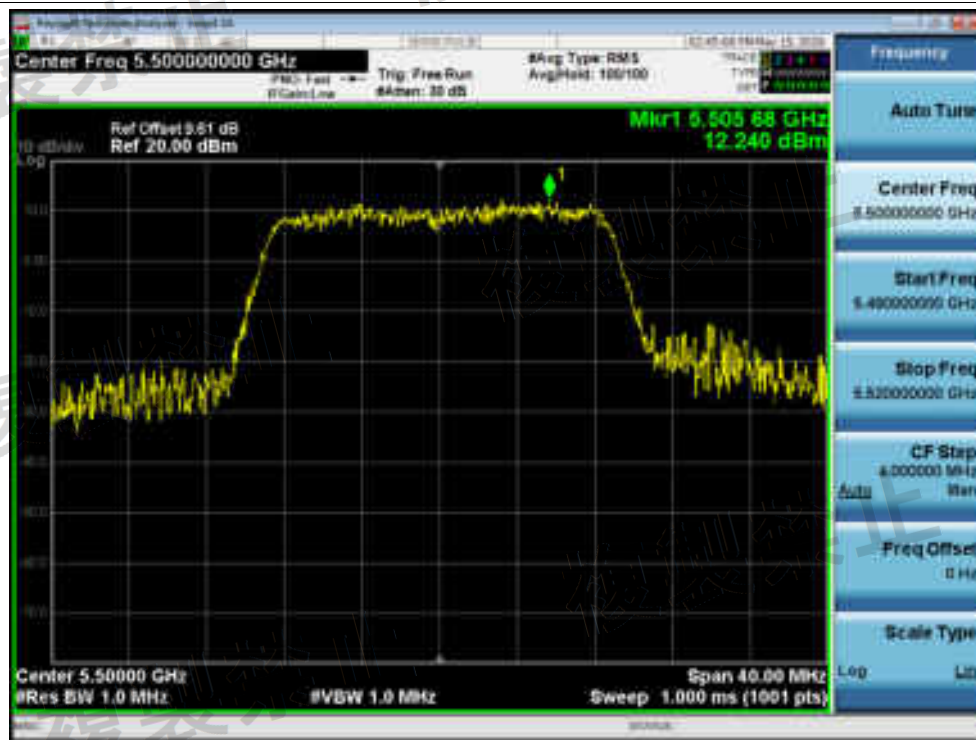


Power NVNT n20 5500MHz Ant1 Pre Scan

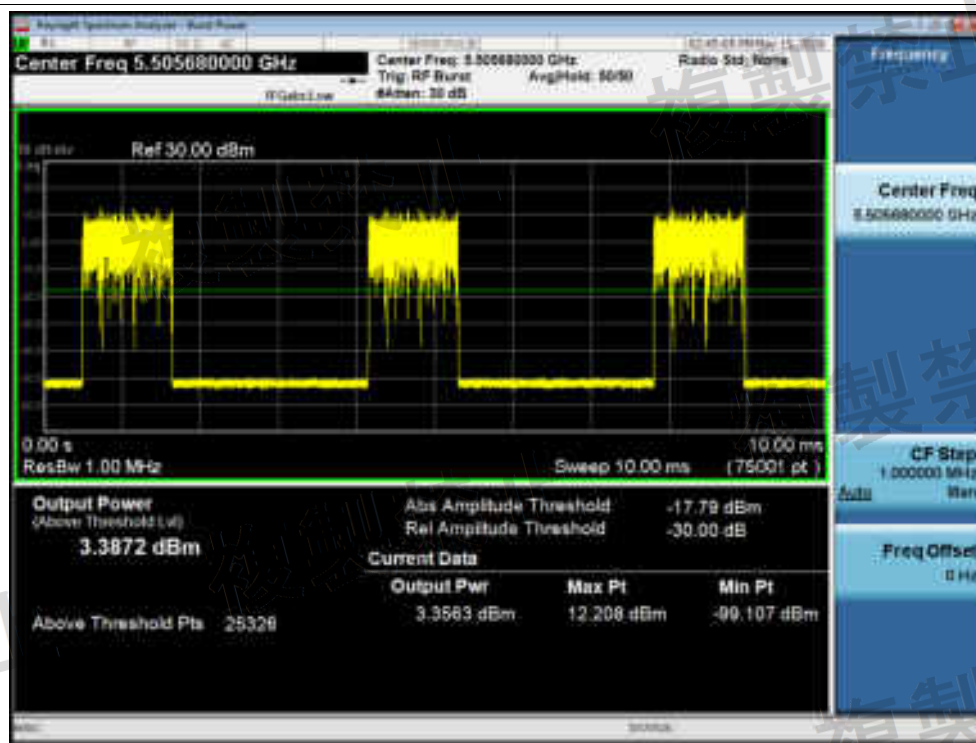

Power NVNT n20 5500MHz Ant1 Zero Span

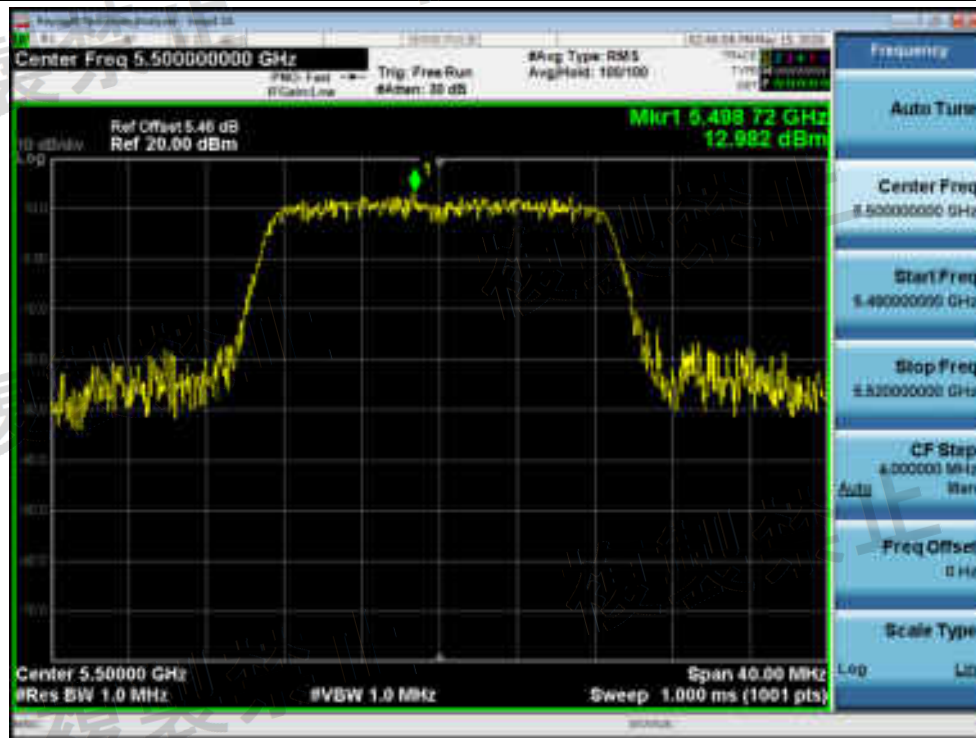


Power NVNT n20 5500MHz Ant2 Pre Scan

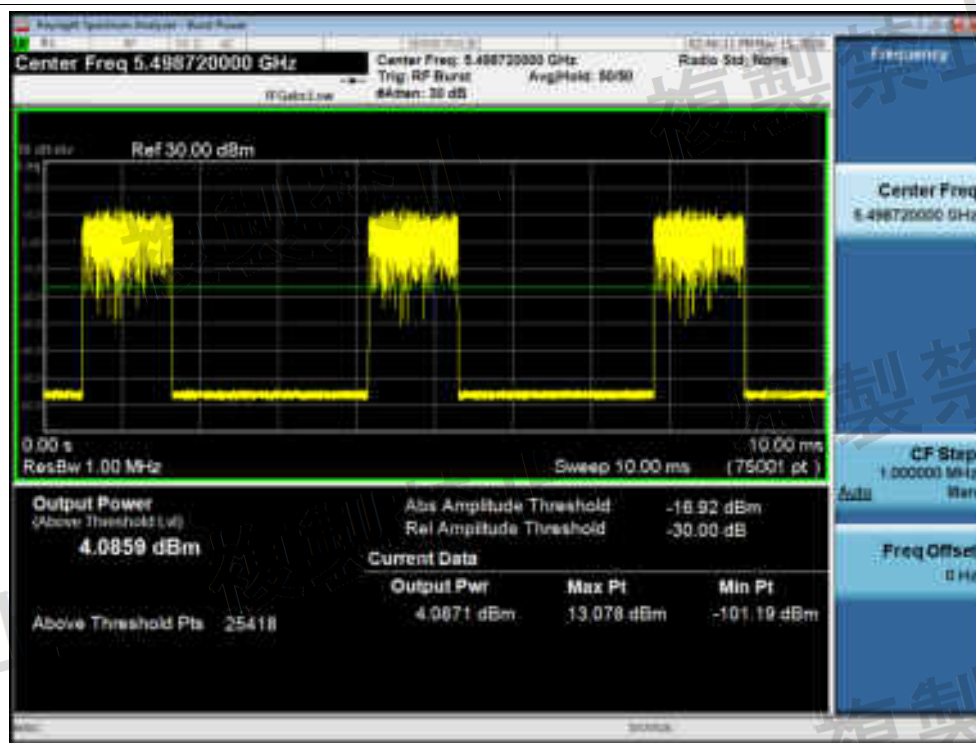


Power NVNT n20 5500MHz Ant2 Zero Span




Power NVNT n20 5580MHz Ant1 Pre Scan

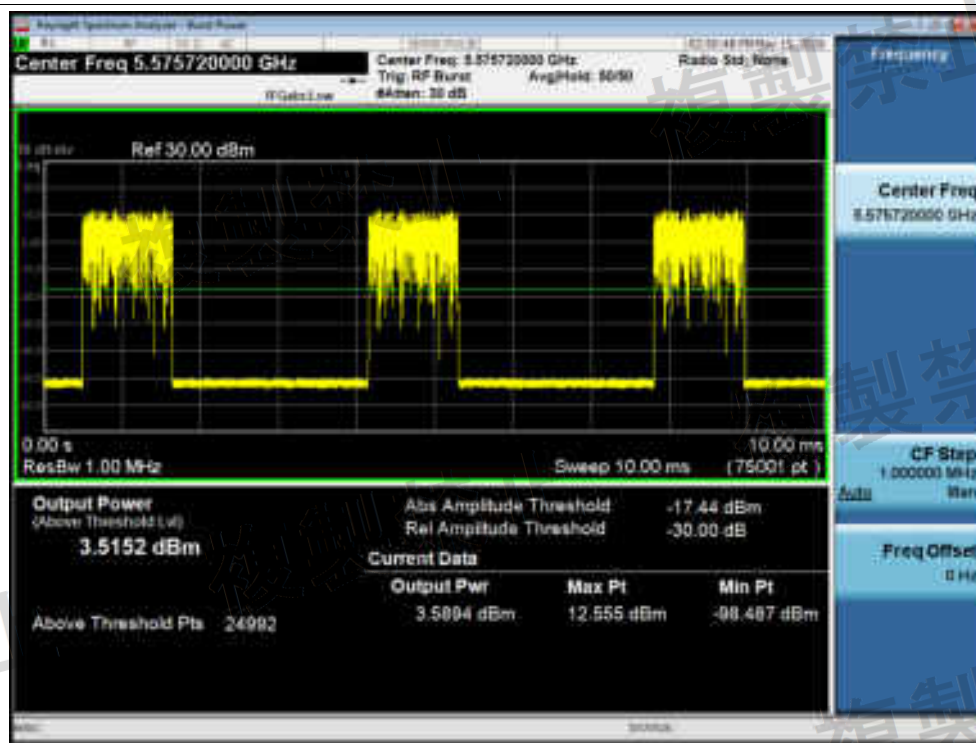

Power NVNT n20 5580MHz Ant1 Zero Span

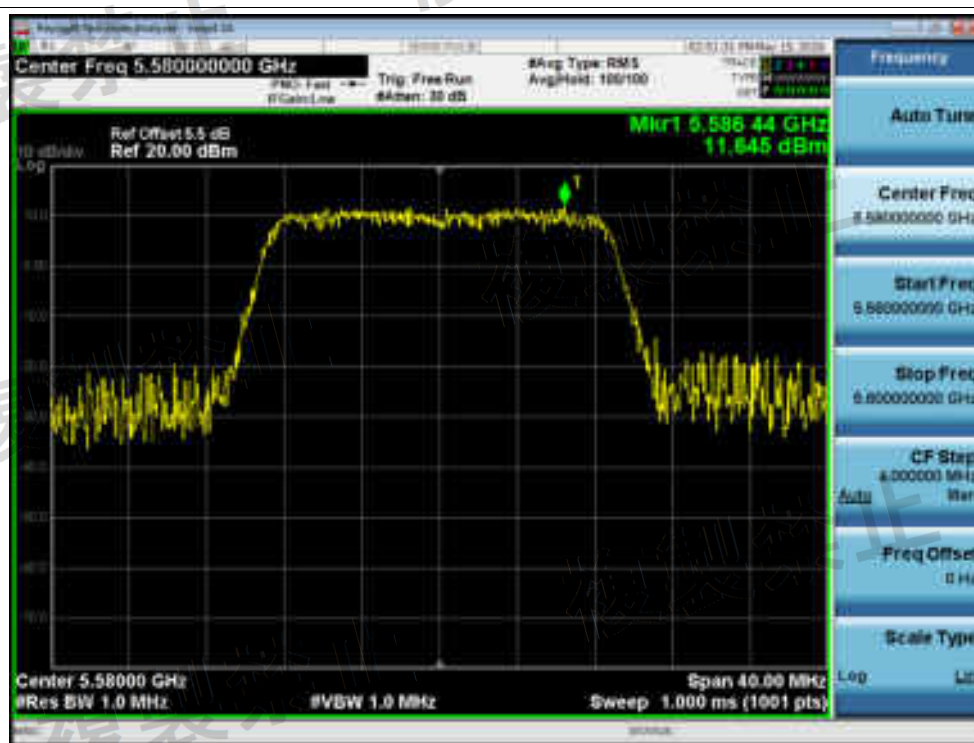


Power NVNT n20 5580MHz Ant2 Pre Scan

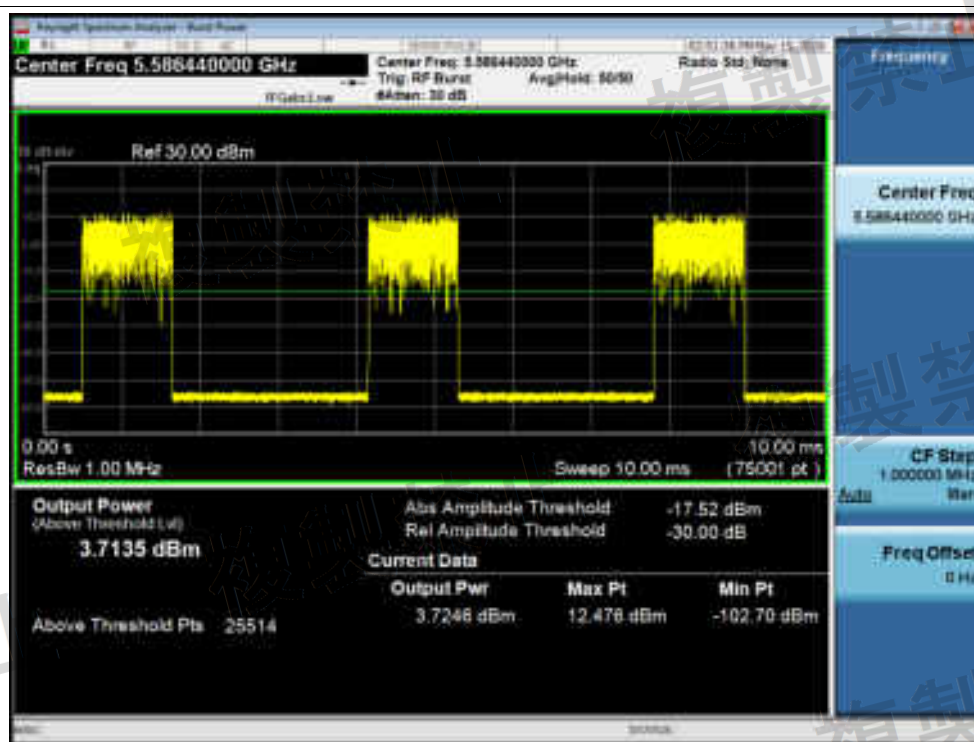


Power NVNT n20 5580MHz Ant2 Zero Span




Power NVNT n20 5700MHz Ant1 Pre Scan

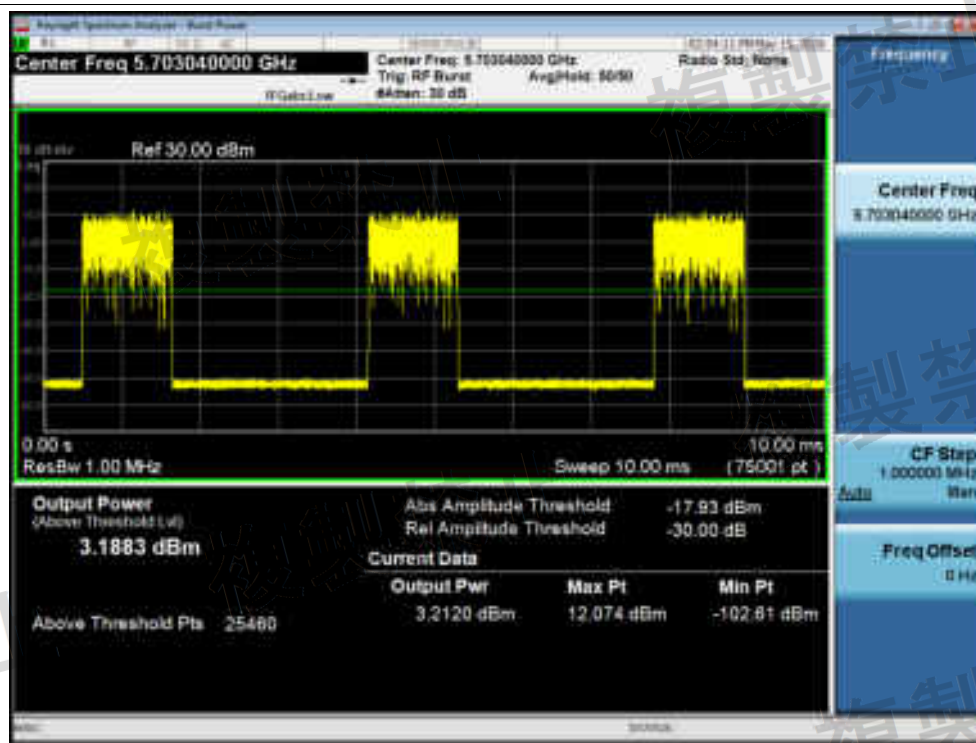

Power NVNT n20 5700MHz Ant1 Zero Span

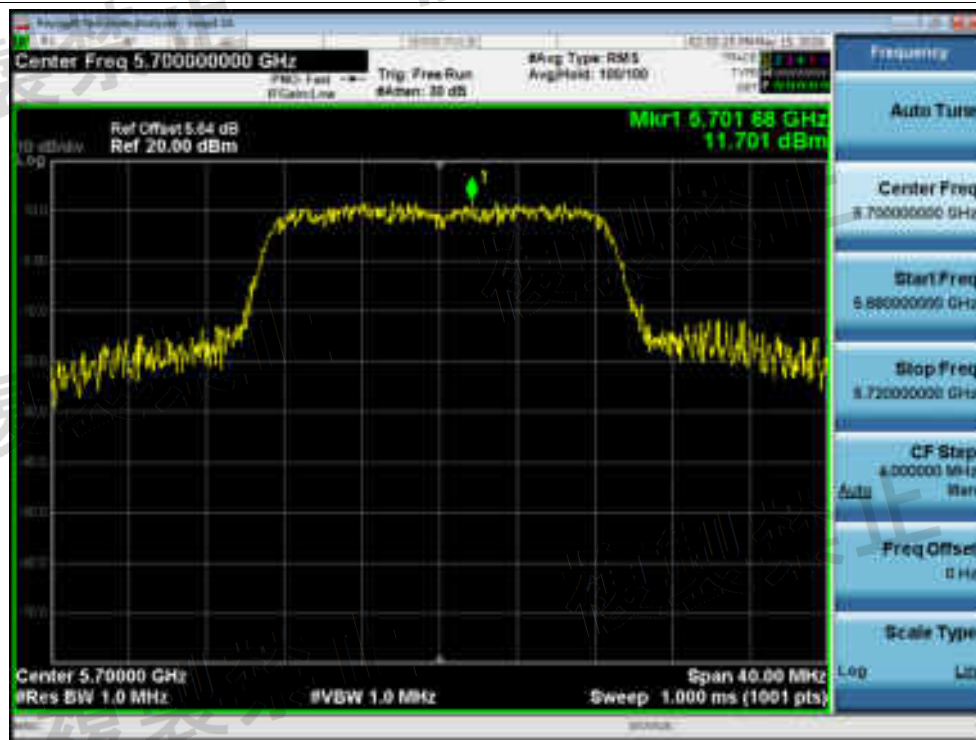


Power NVNT n20 5700MHz Ant2 Pre Scan

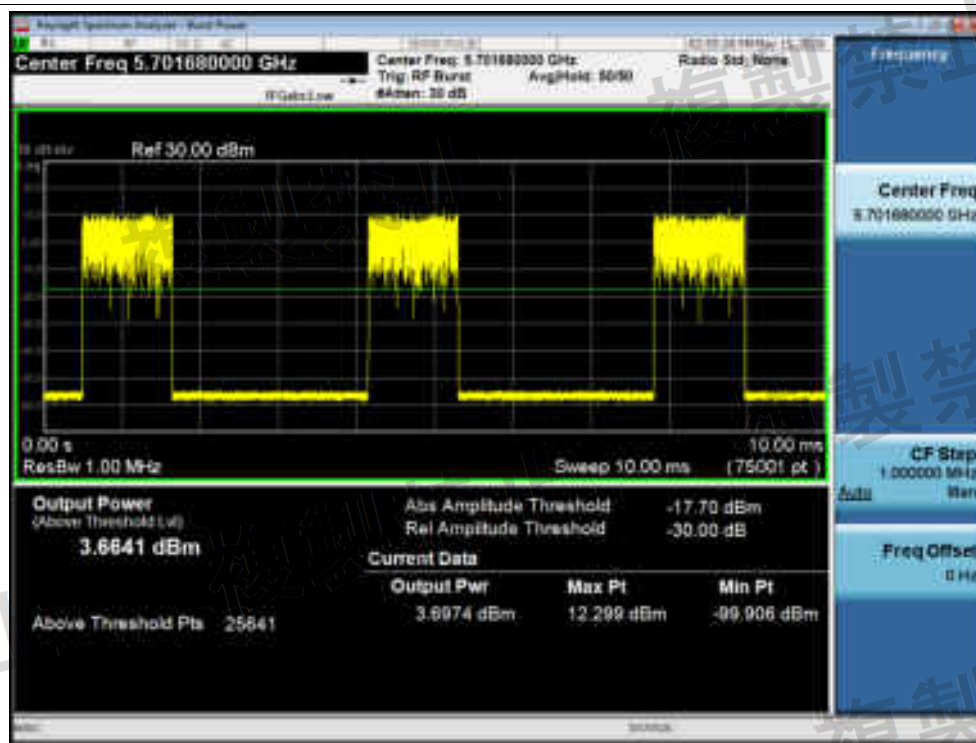


Power NVNT n20 5700MHz Ant2 Zero Span




Power NVNT n40 5190MHz Ant1 Pre Scan

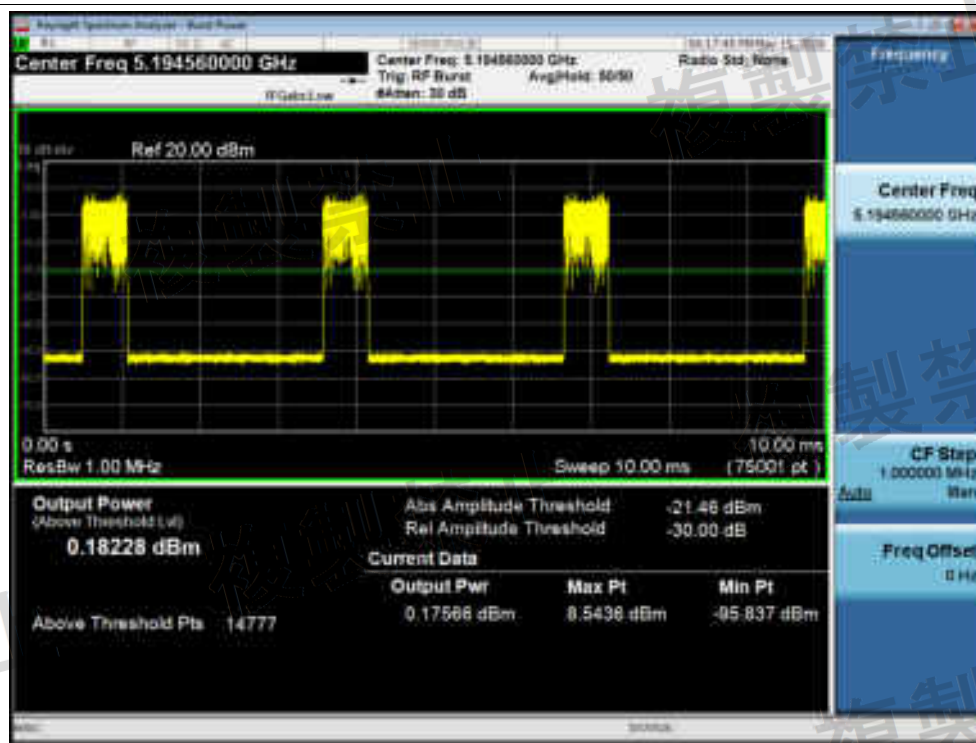

Power NVNT n40 5190MHz Ant1 Zero Span

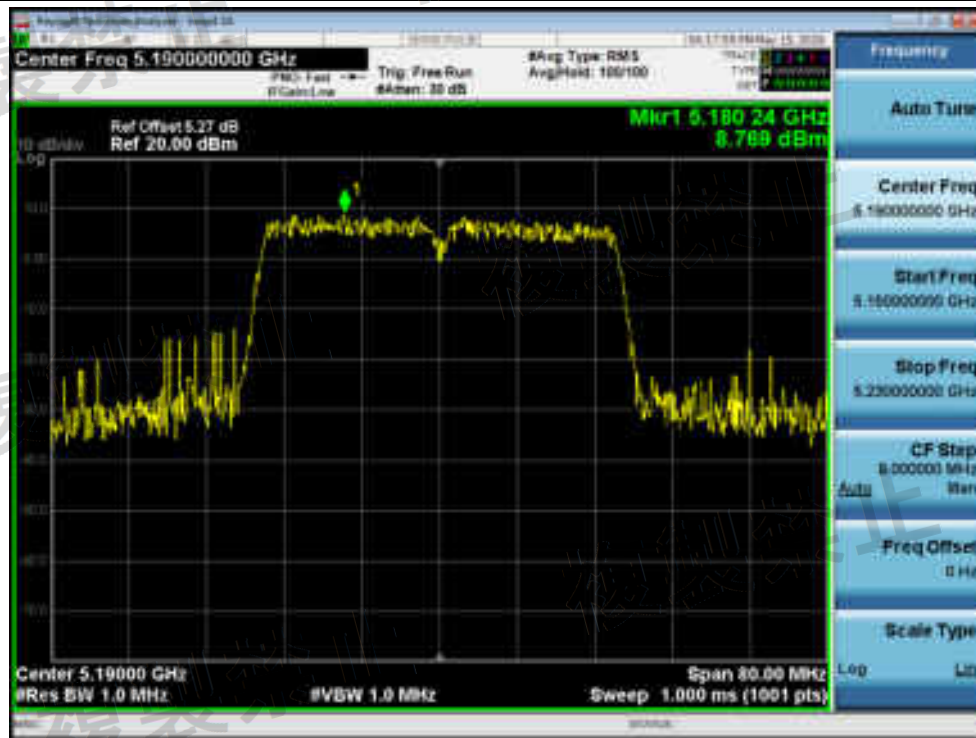


Power NVNT n40 5190MHz Ant2 Pre Scan

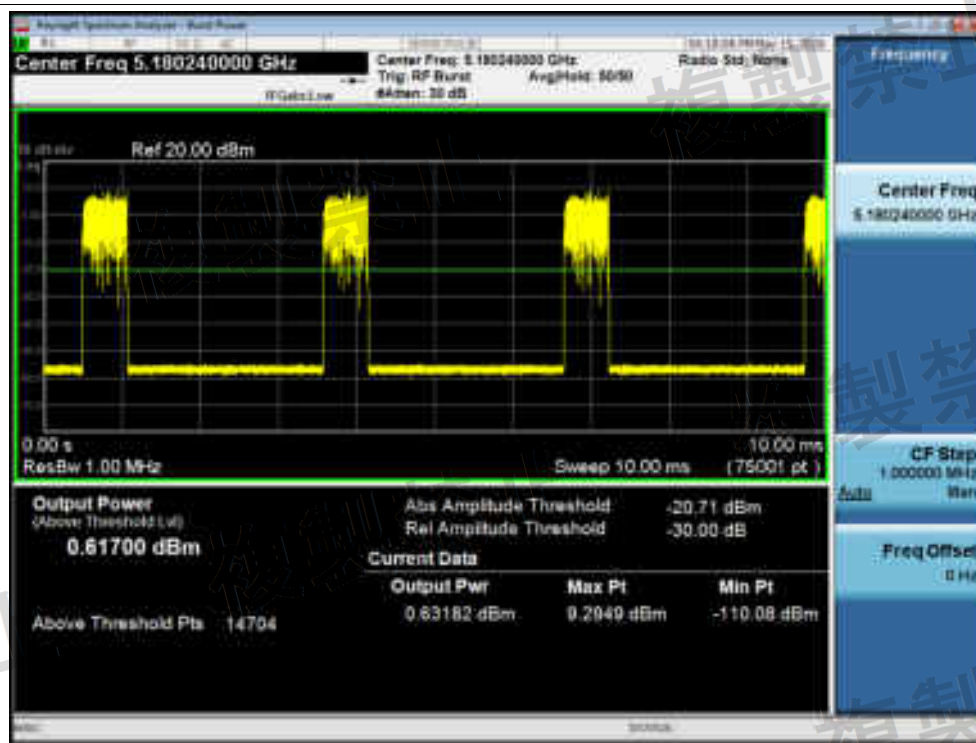

Power NVNT n40 5190MHz Ant2 Zero Span




Power NVNT n40 5230MHz Ant1 Pre Scan

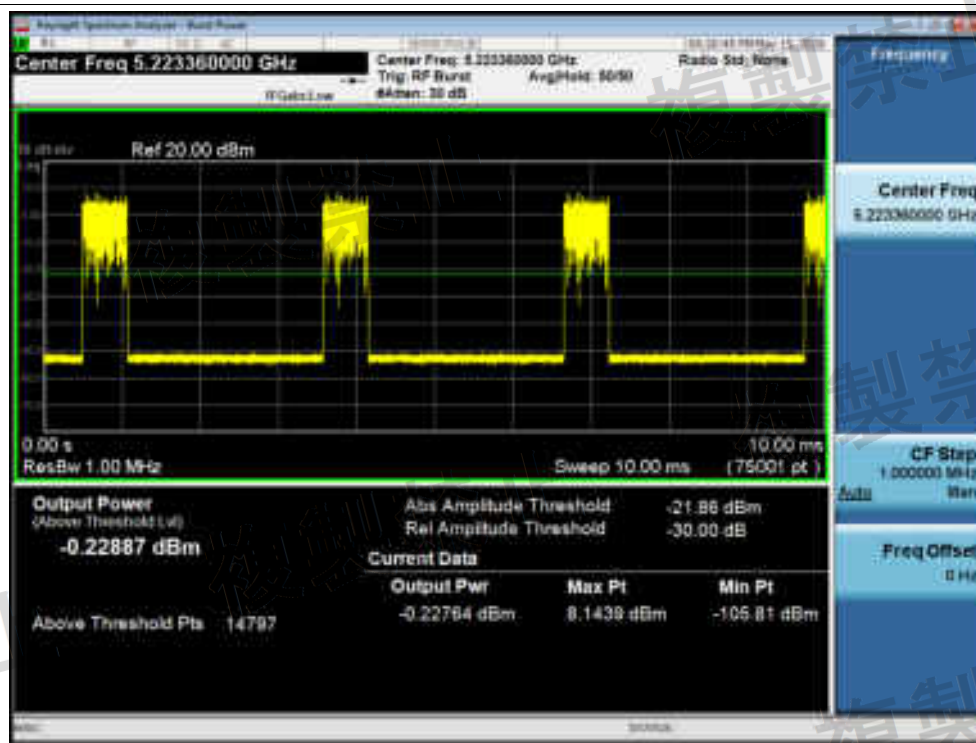


Power NVNT n40 5230MHz Ant1 Zero Span




Power NVNT n40 5230MHz Ant2 Pre Scan

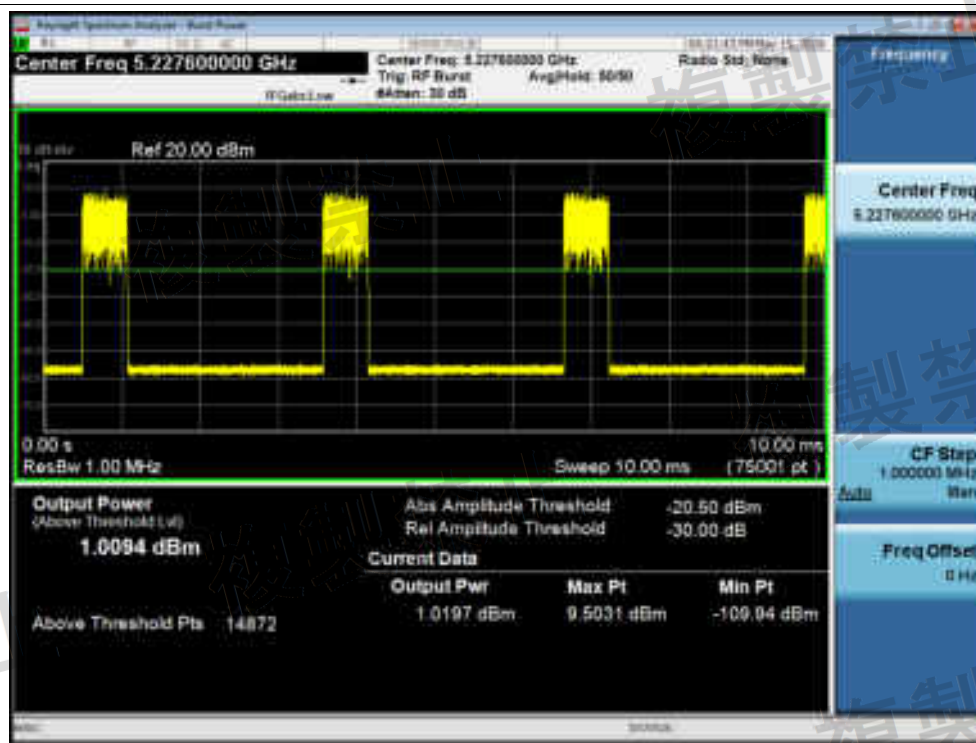


Power NVNT n40 5230MHz Ant2 Zero Span

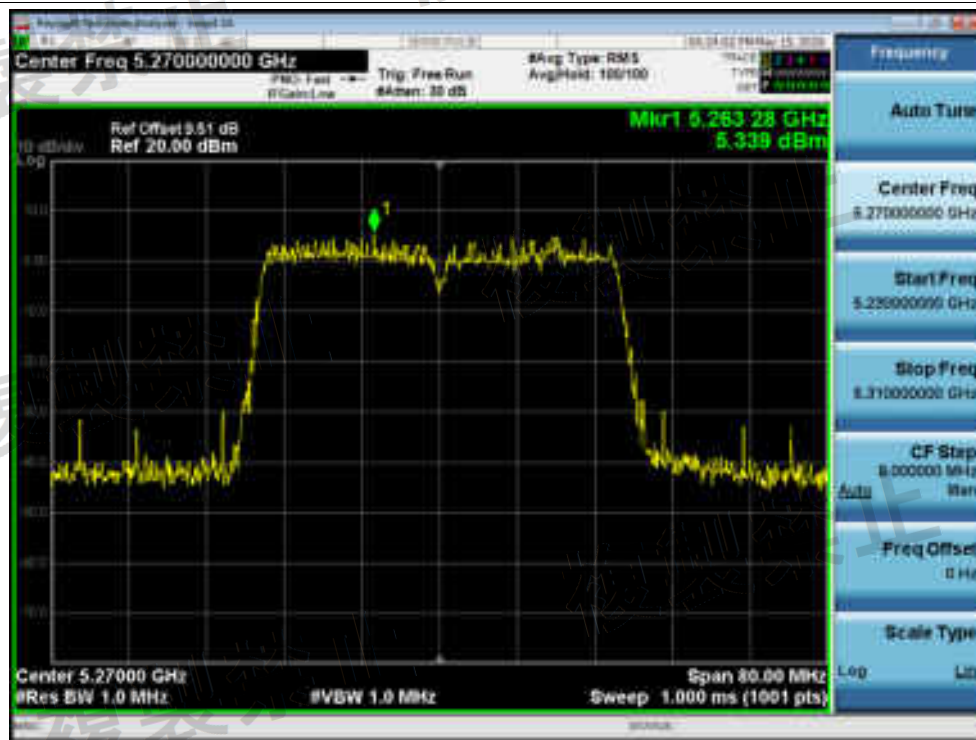


Power NVNT n40 5270MHz Ant1 Pre Scan

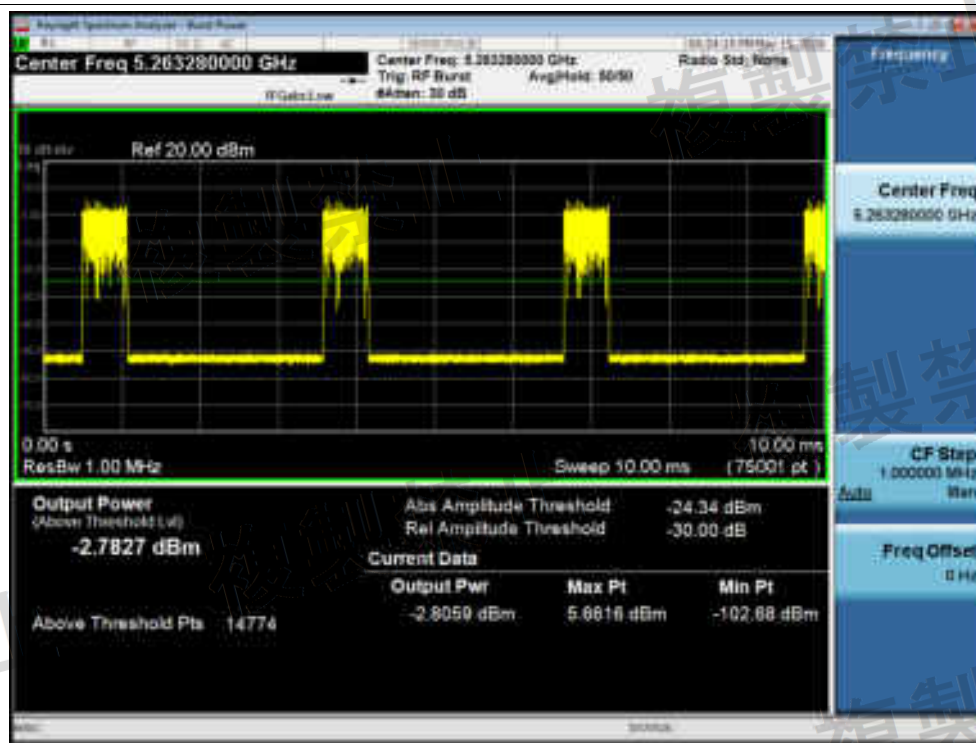


Power NVNT n40 5270MHz Ant1 Zero Span

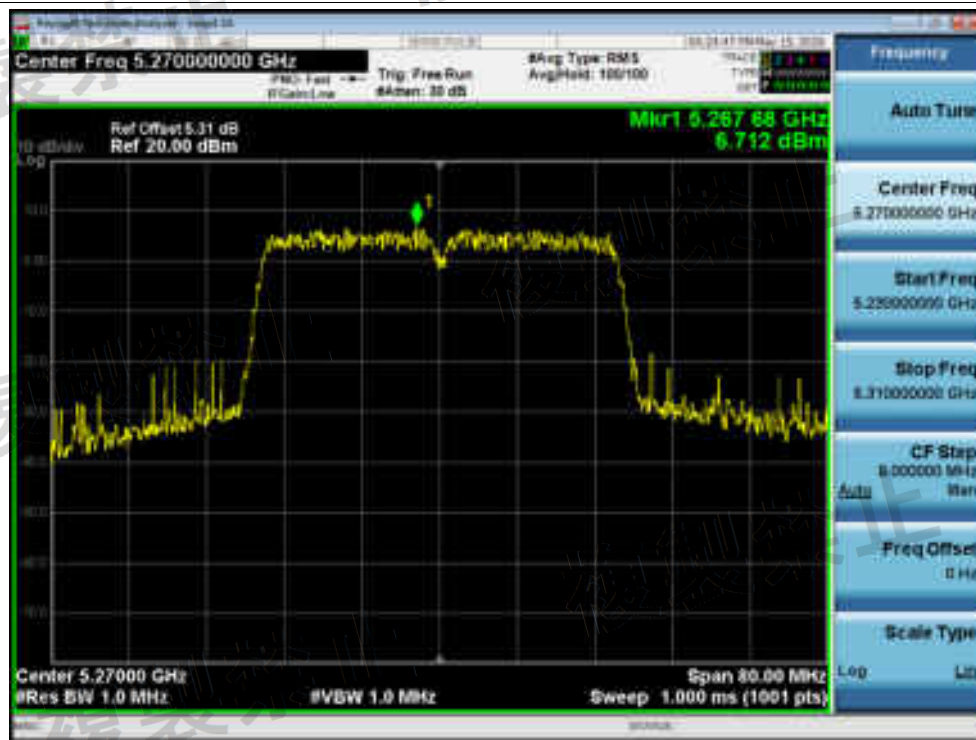

Power NVNT n40 5270MHz Ant2 Pre Scan

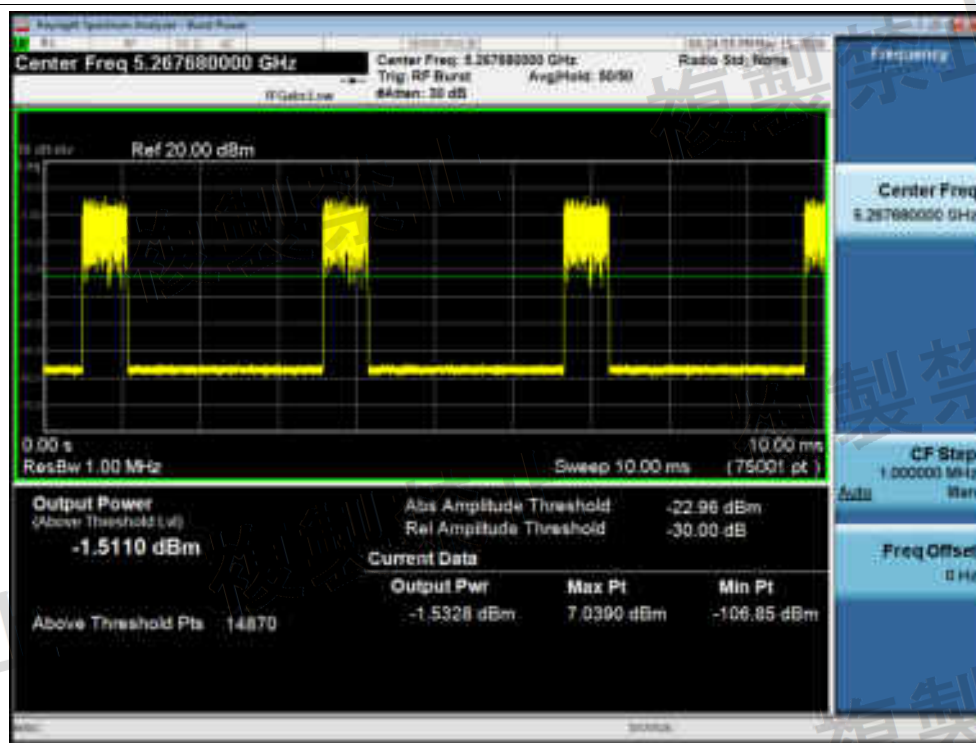


Power NVNT n40 5270MHz Ant2 Zero Span

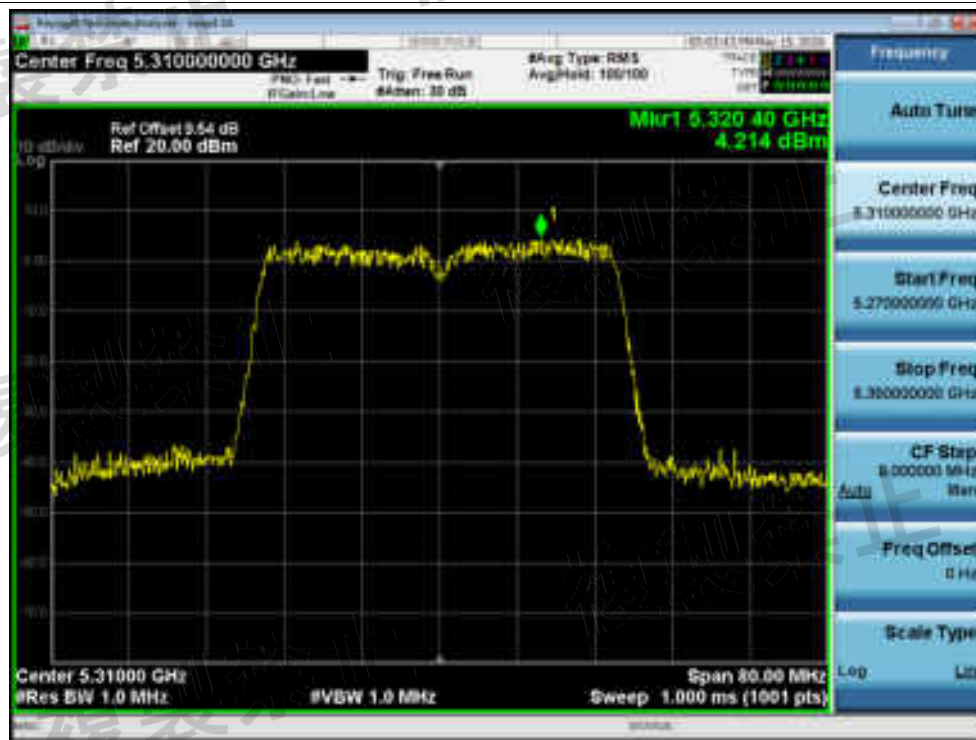


Power NVNT n40 5310MHz Ant1 Pre Scan



Power NVNT n40 5310MHz Ant1 Zero Span

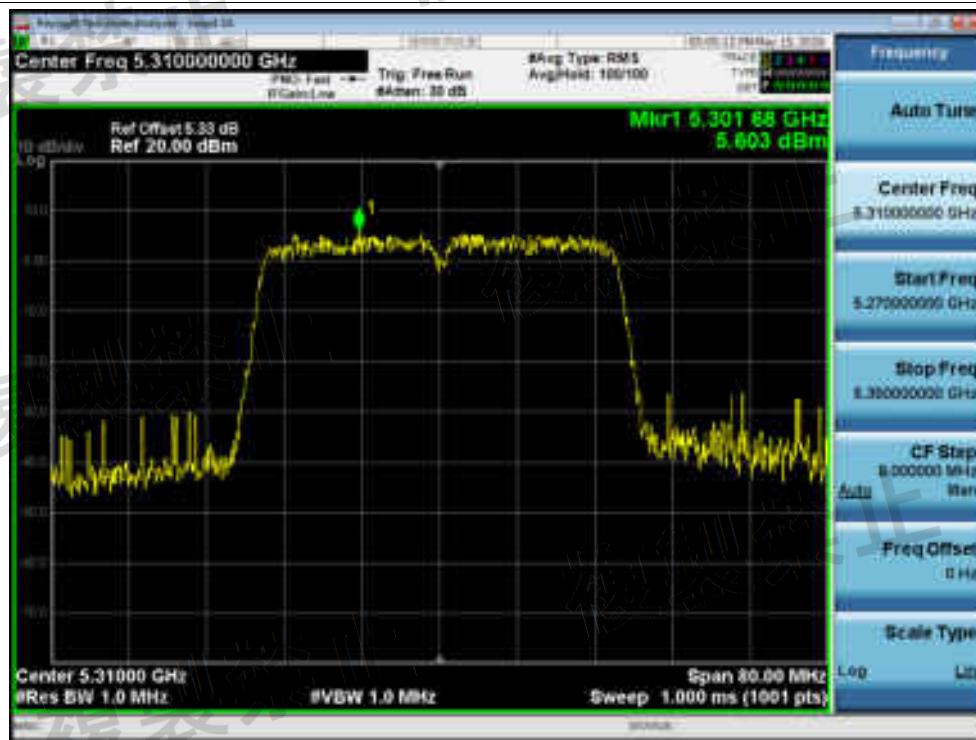


Power NVNT n40 5310MHz Ant2 Pre Scan

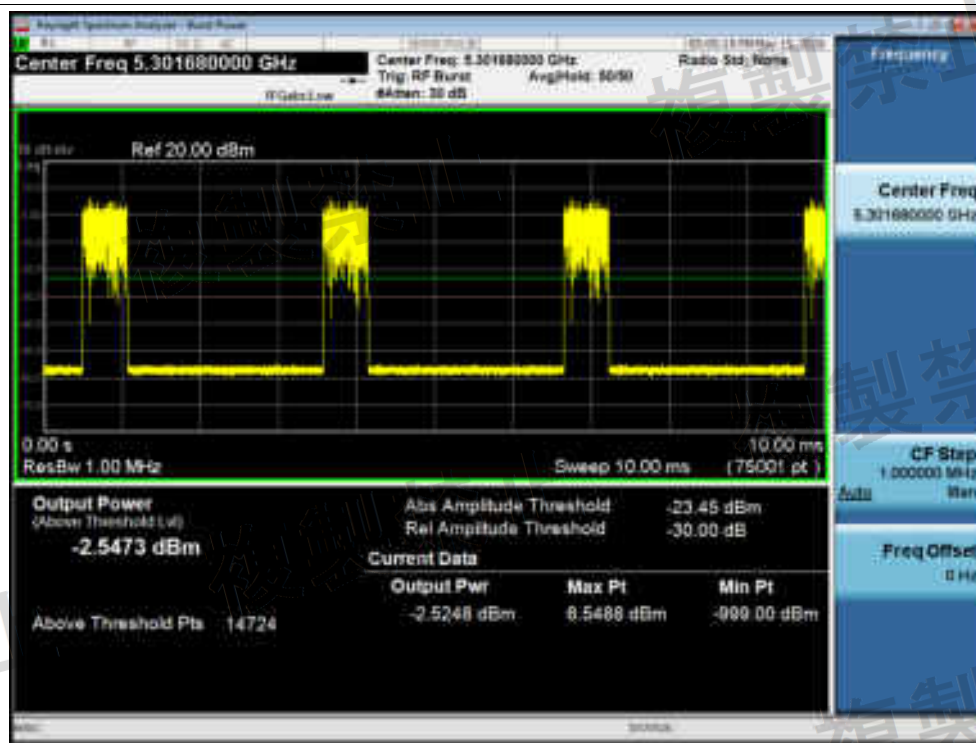

Power NVNT n40 5310MHz Ant2 Zero Span




Power NVNT n40 5510MHz Ant1 Pre Scan

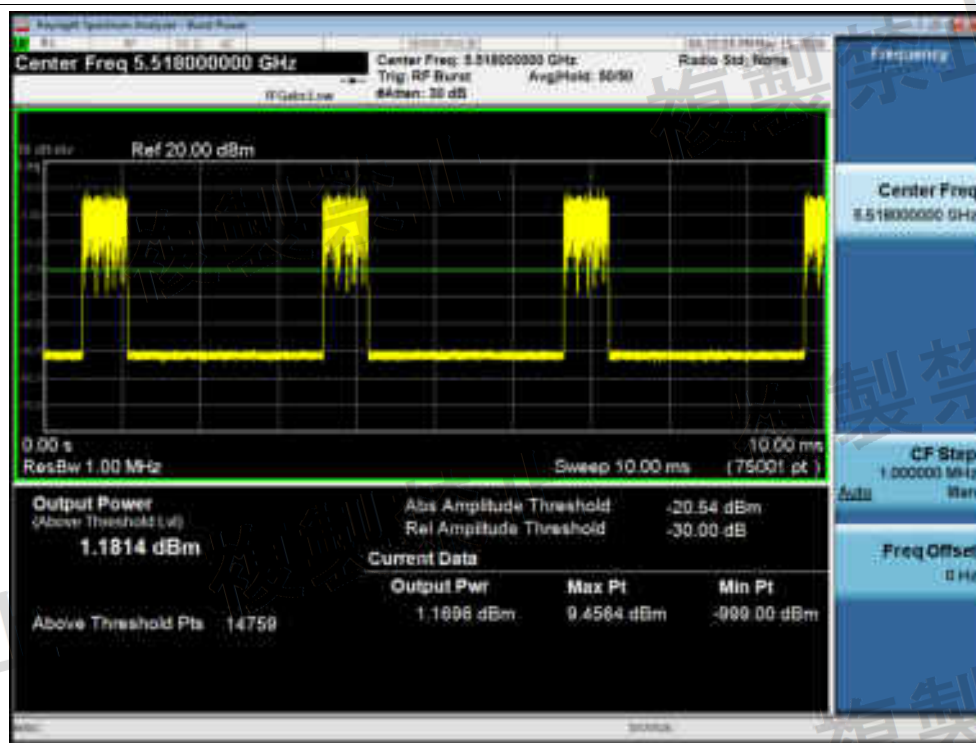


Power NVNT n40 5510MHz Ant1 Zero Span



Power NVNT n40 5510MHz Ant2 Pre Scan

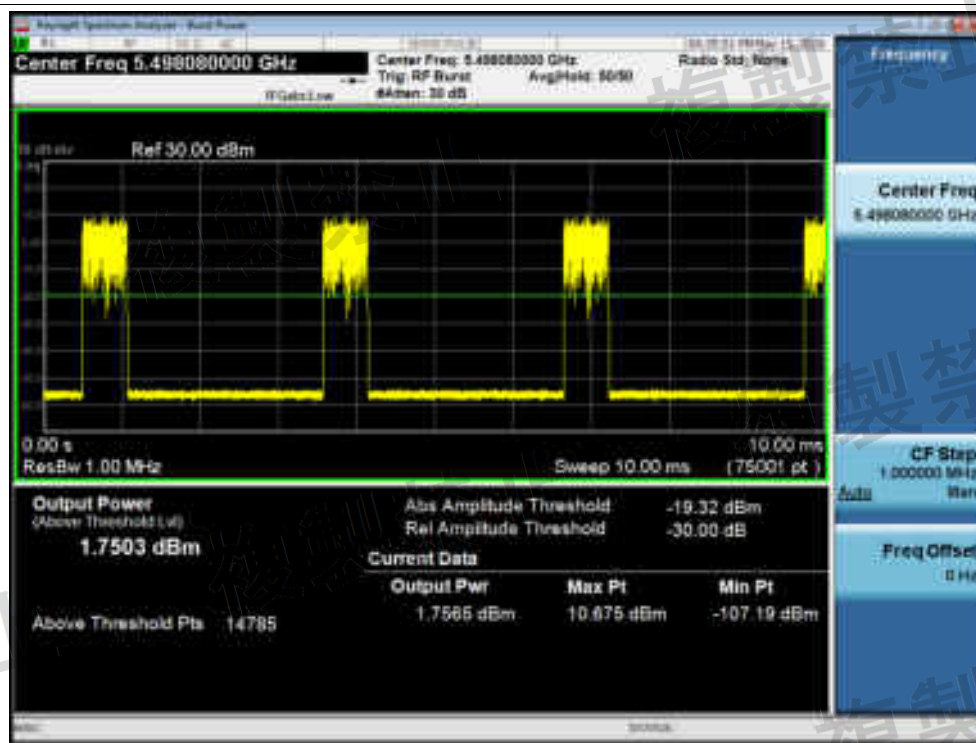

Power NVNT n40 5510MHz Ant2 Zero Span

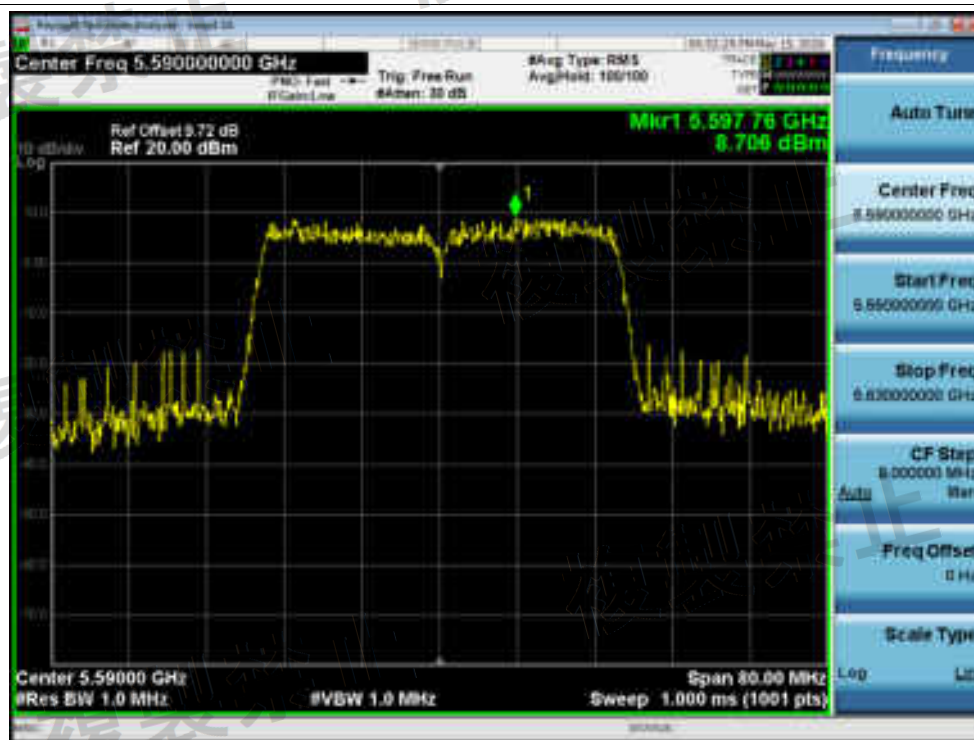


Power NVNT n40 5590MHz Ant1 Pre Scan



Power NVNT n40 5590MHz Ant1 Zero Span



Power NVNT n40 5590MHz Ant2 Pre Scan

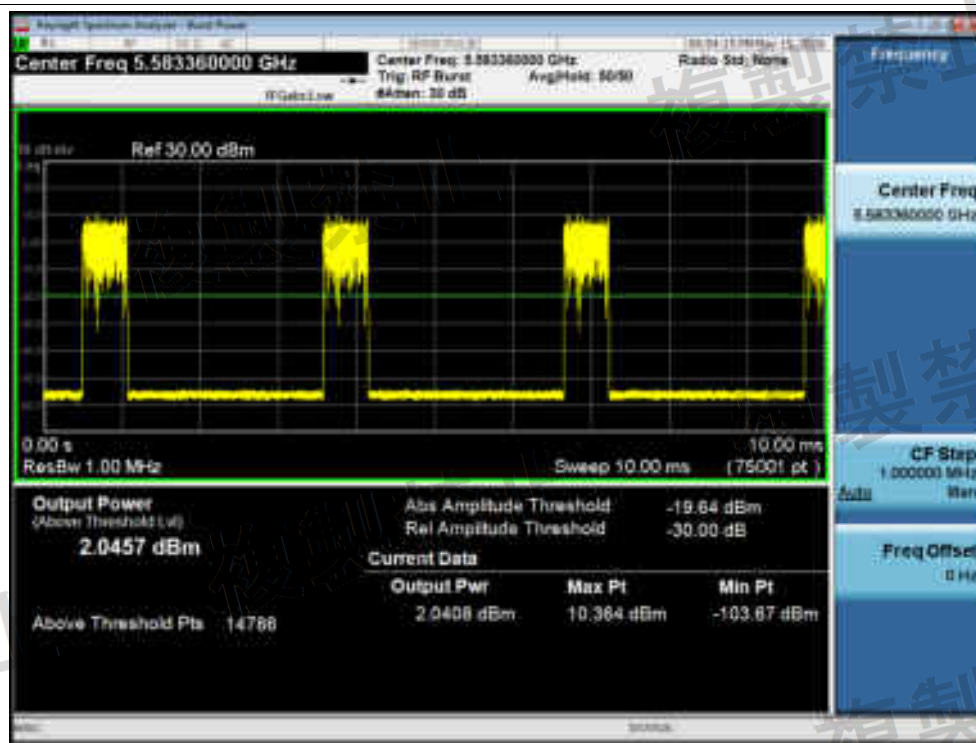

Power NVNT n40 5590MHz Ant2 Zero Span



Power NVNT n40 5670MHz Ant1 Pre Scan




Power NVNT n40 5670MHz Ant1 Zero Span



Power NVNT n40 5670MHz Ant2 Pre Scan



Power NVNT n40 5670MHz Ant2 Zero Span

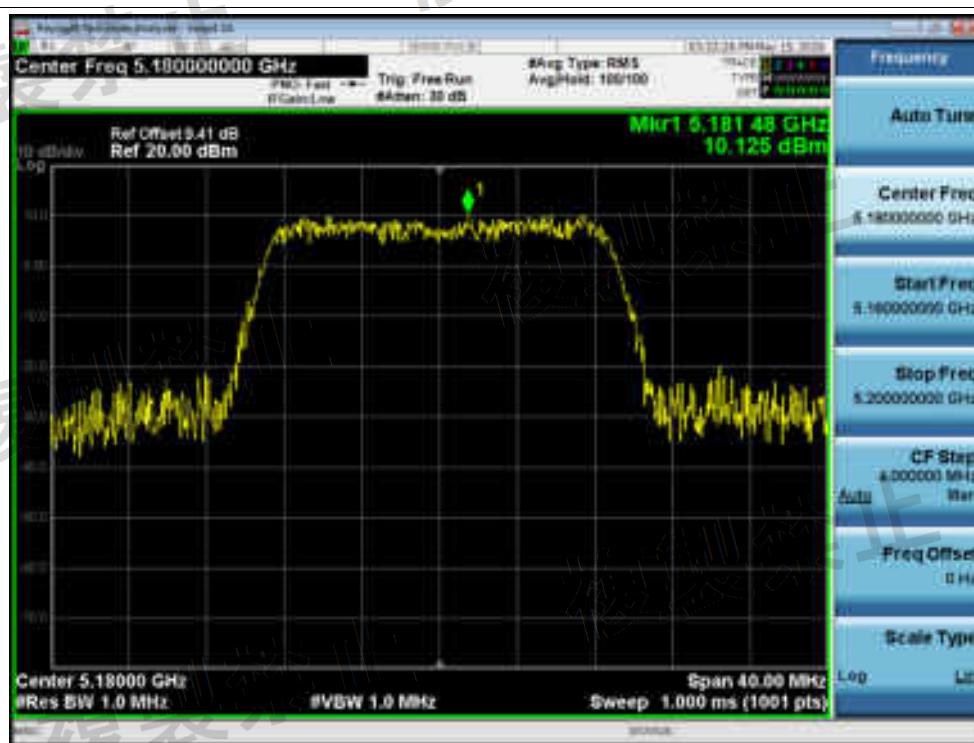


Power NVNT ac20 5180MHz Ant1 Pre Scan




Power NVNT ac20 5180MHz Ant1 Zero Span




Power NVNT ac20 5180MHz Ant2 Pre Scan

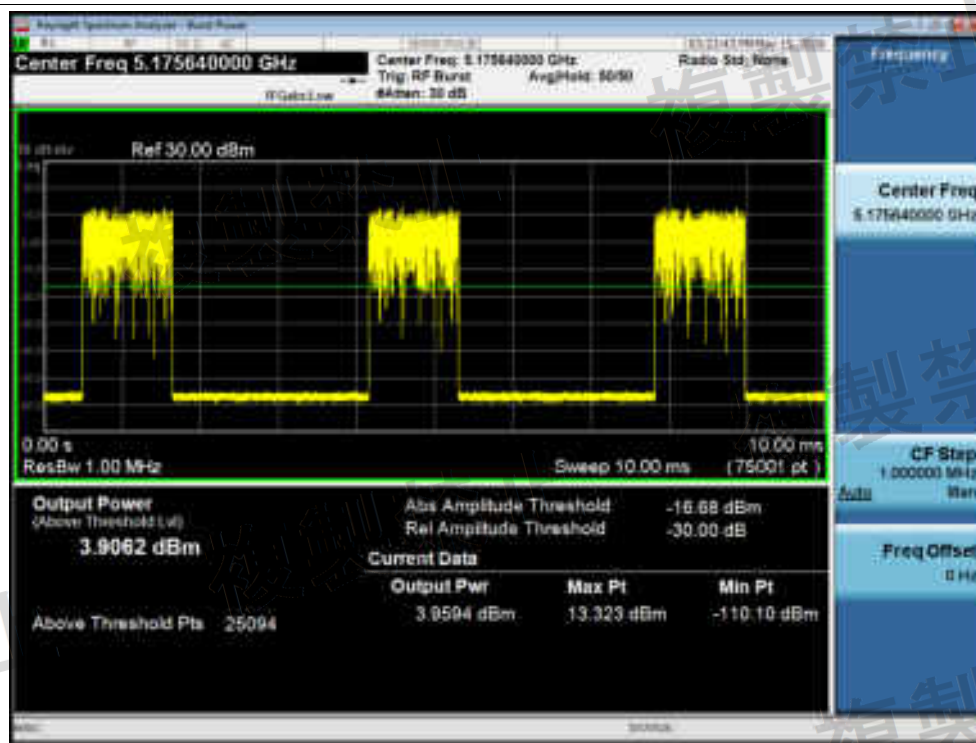

Power NVNT ac20 5180MHz Ant2 Zero Span

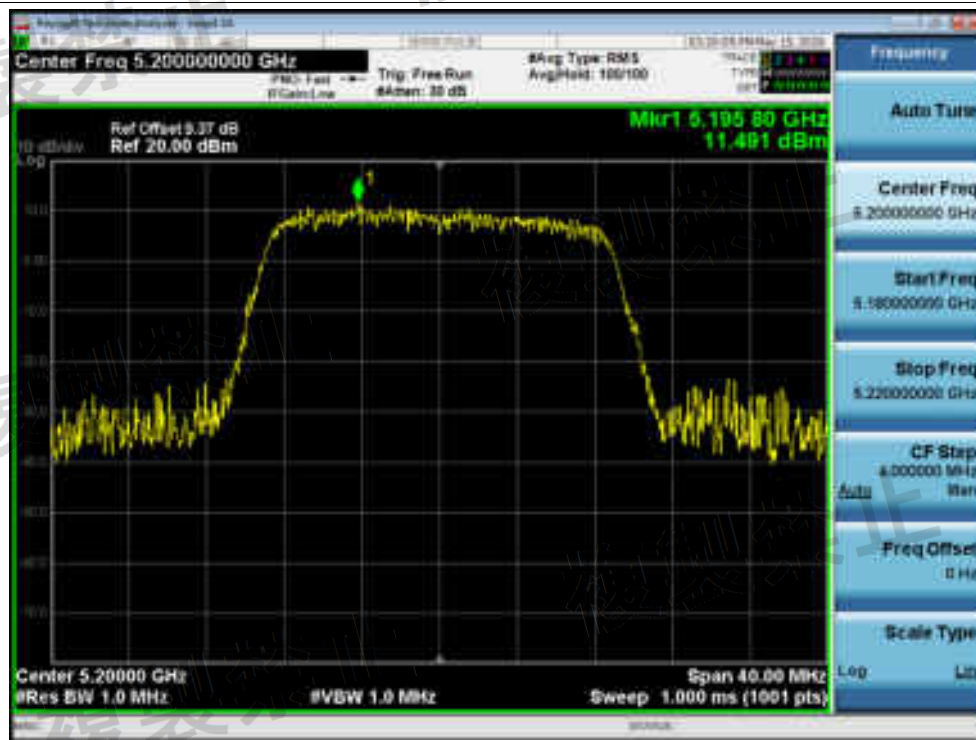


Power NVNT ac20 5200MHz Ant1 Pre Scan

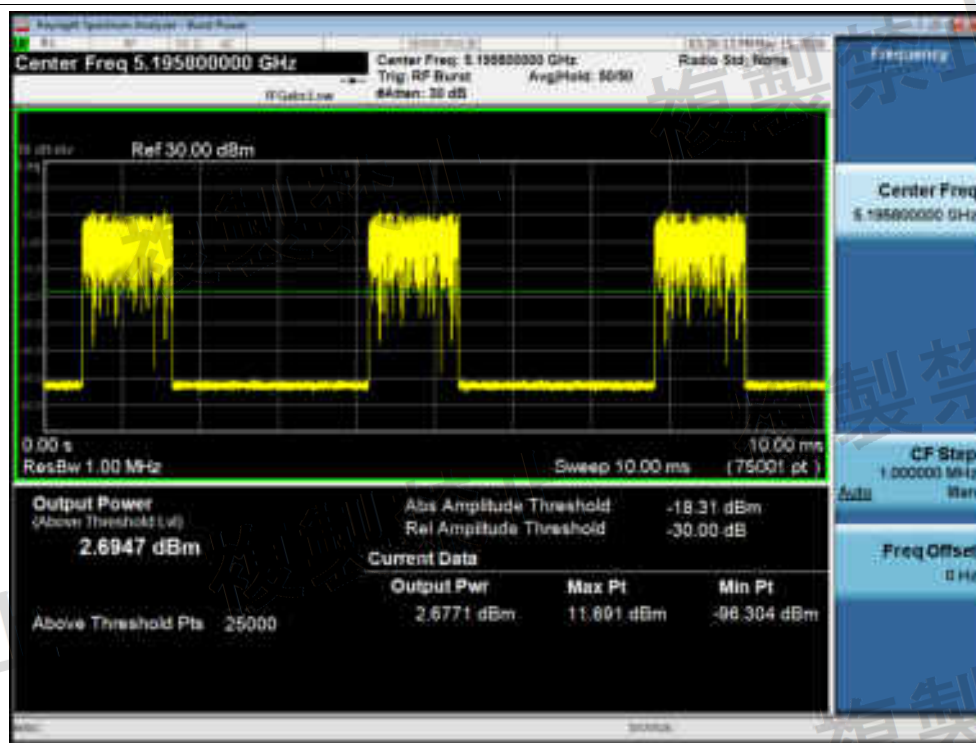


Power NVNT ac20 5200MHz Ant1 Zero Span




Power NVNT ac20 5200MHz Ant2 Pre Scan

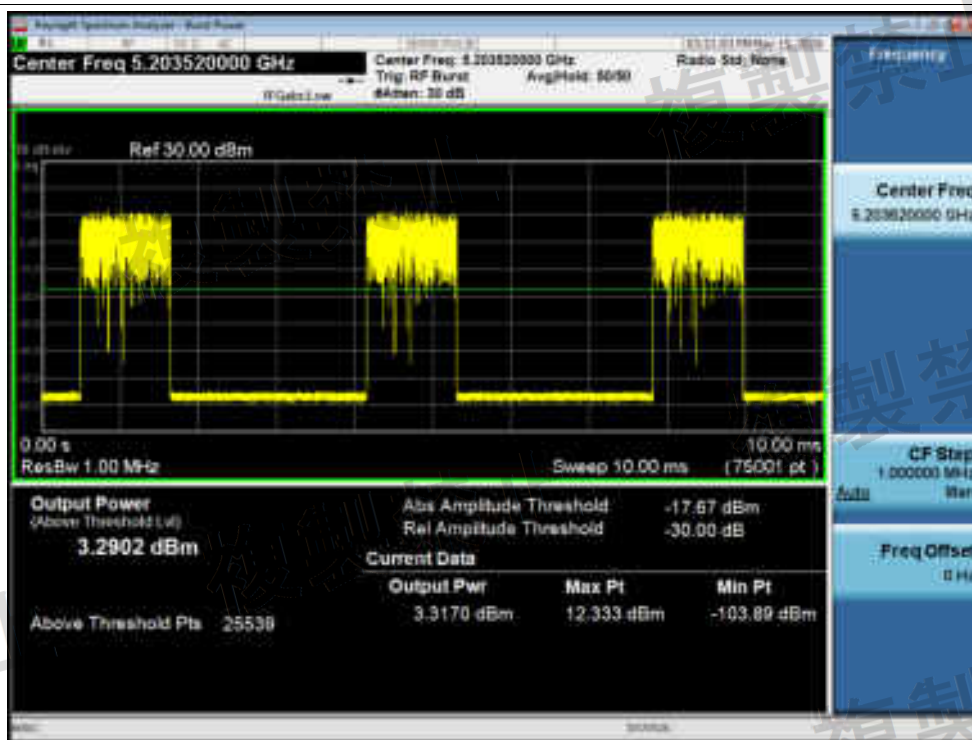


Power NVNT ac20 5200MHz Ant2 Zero Span

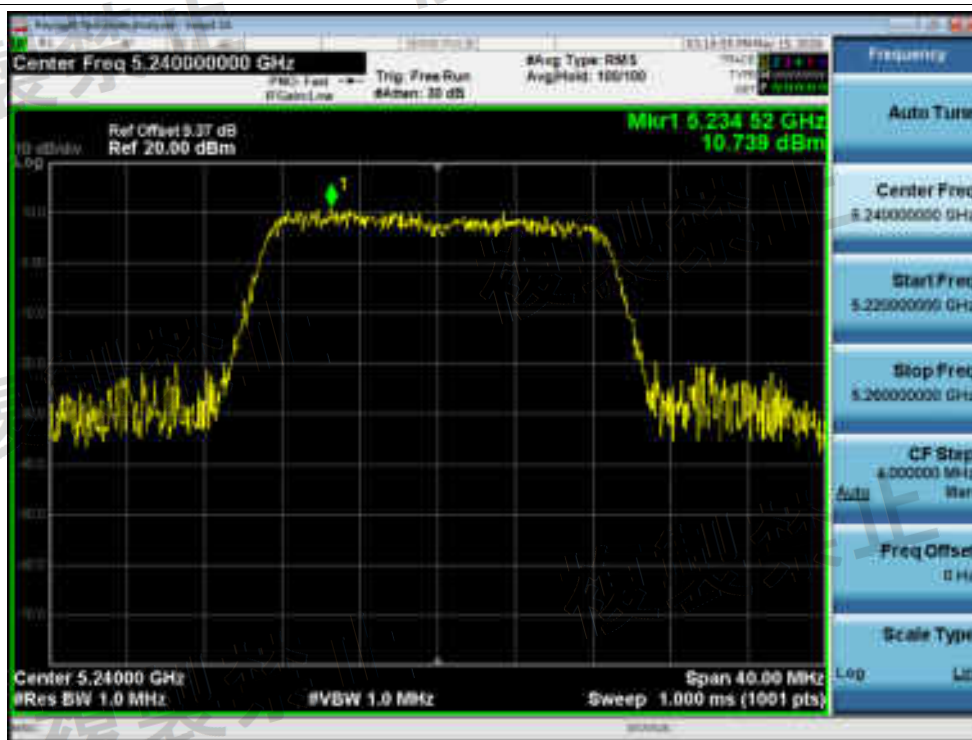


Power NVNT ac20 5240MHz Ant1 Pre Scan

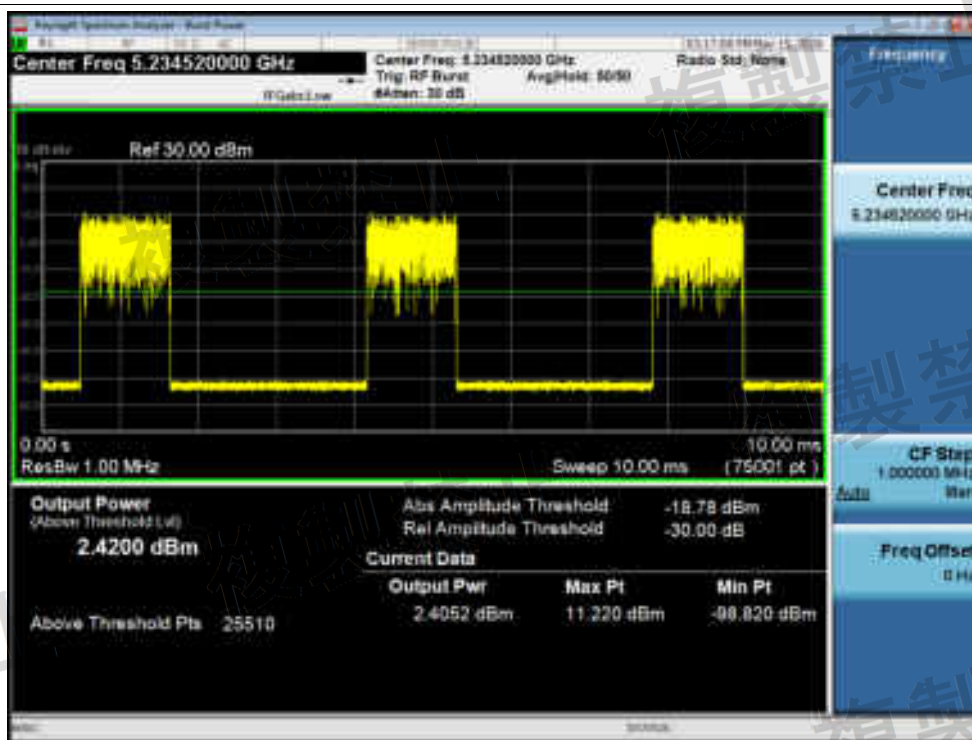


Power NVNT ac20 5240MHz Ant1 Zero Span

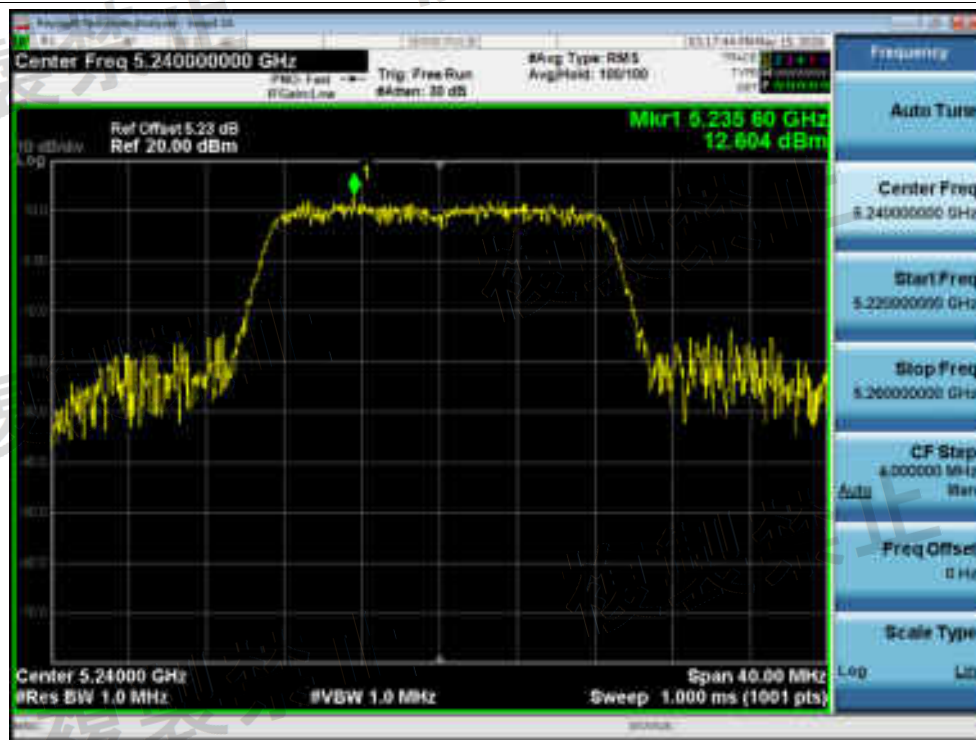


Power NVNT ac20 5240MHz Ant2 Pre Scan

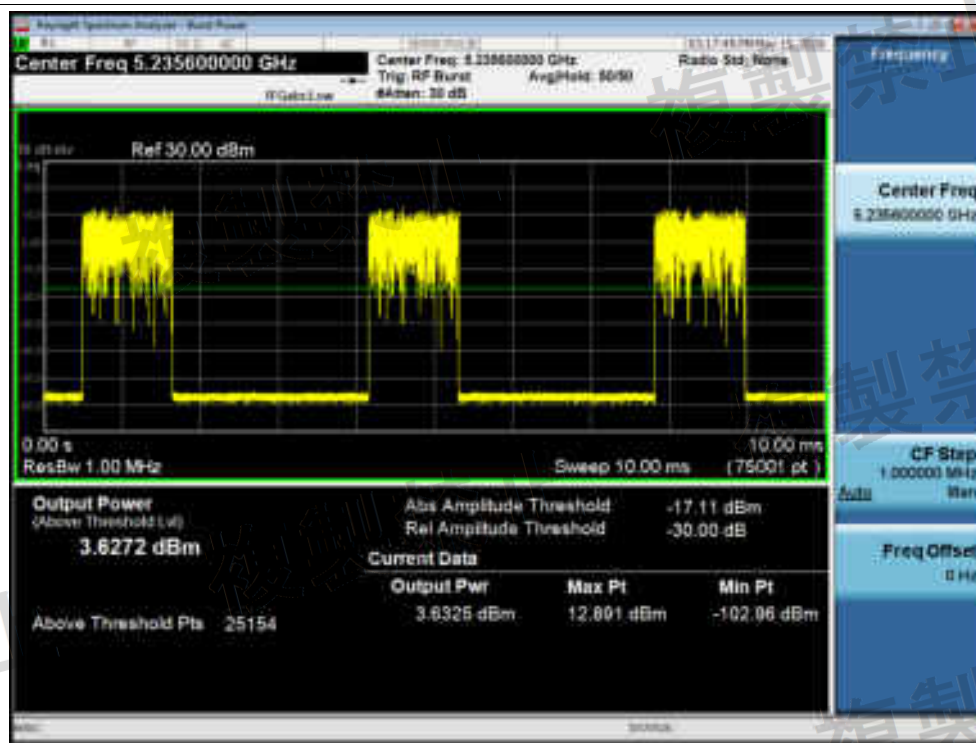

Power NVNT ac20 5240MHz Ant2 Zero Span

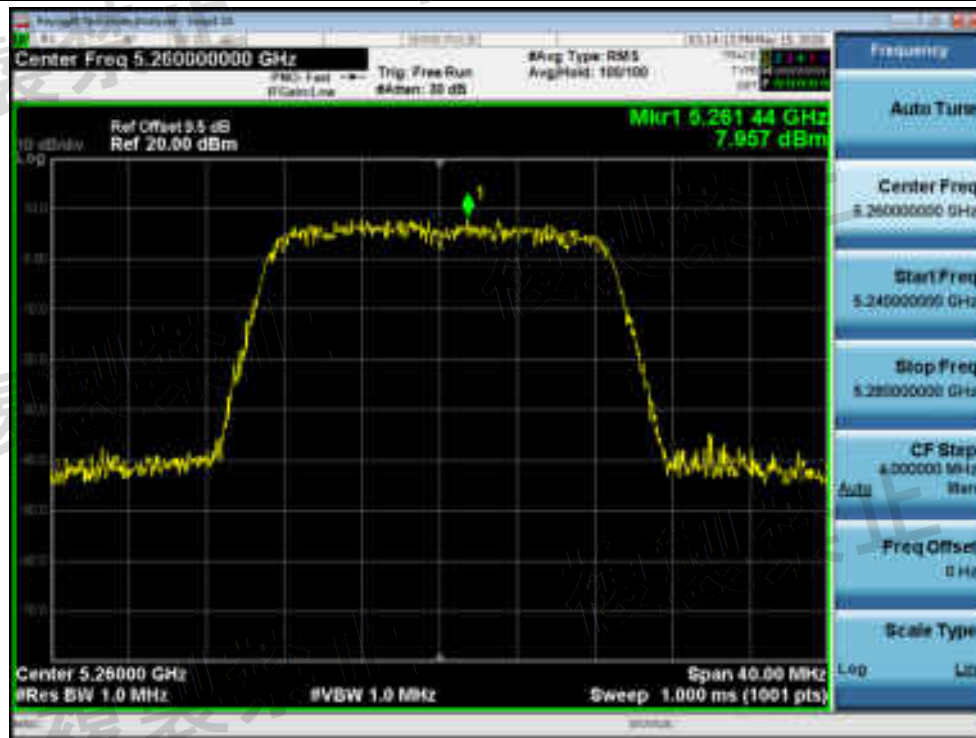


Power NVNT ac20 5260MHz Ant1 Pre Scan

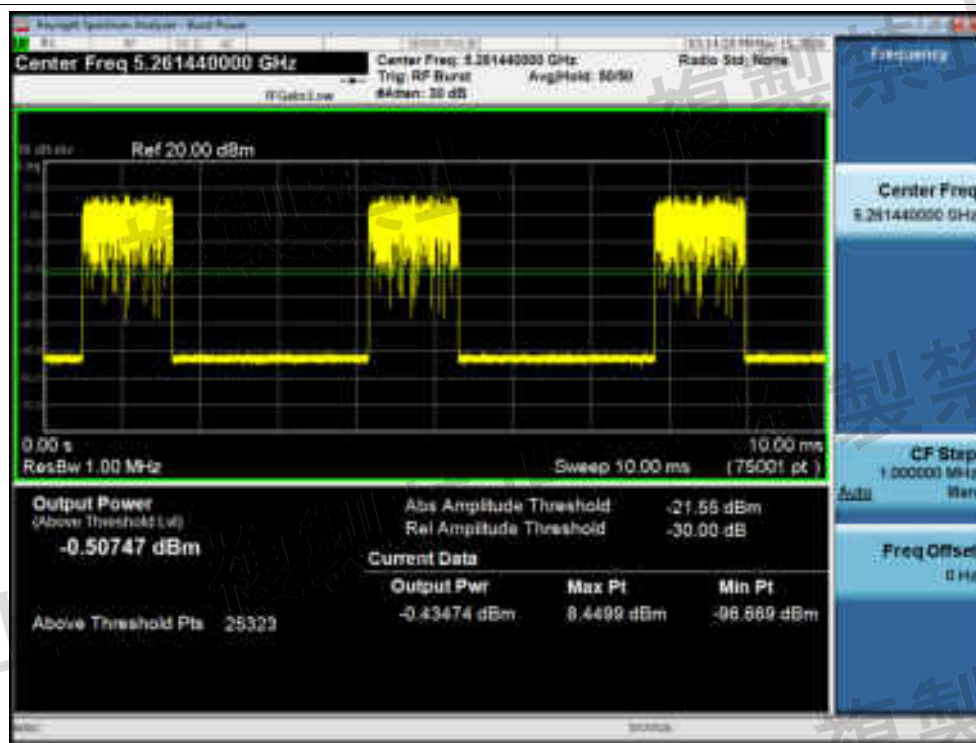

Power NVNT ac20 5260MHz Ant1 Zero Span




Power NVNT ac20 5260MHz Ant2 Pre Scan

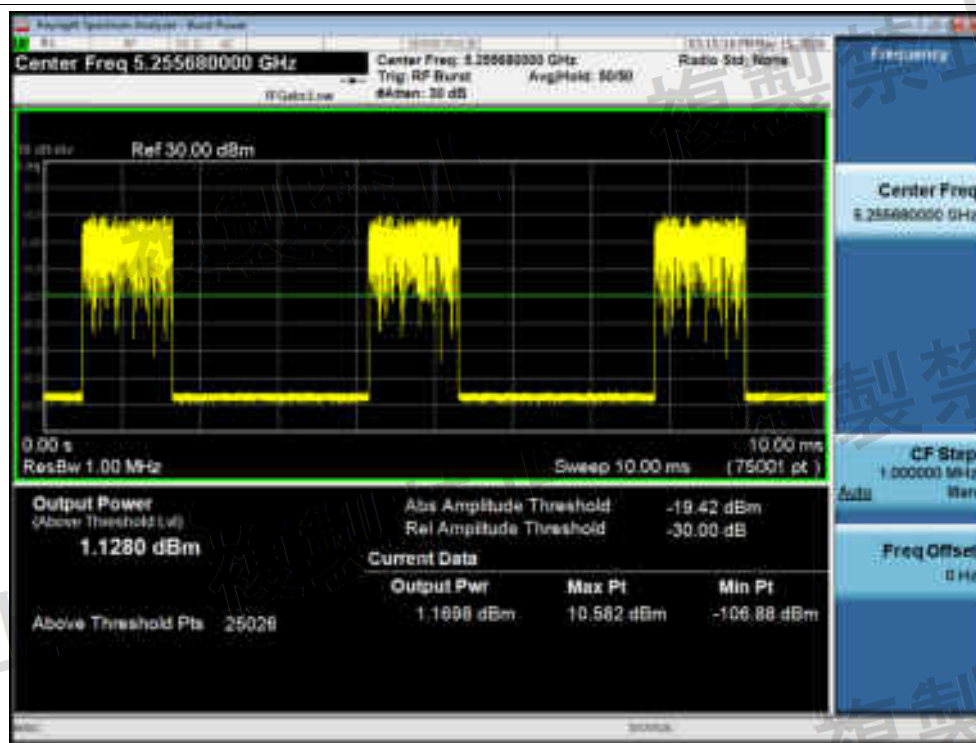

Power NVNT ac20 5260MHz Ant2 Zero Span




Power NVNT ac20 5300MHz Ant1 Pre Scan

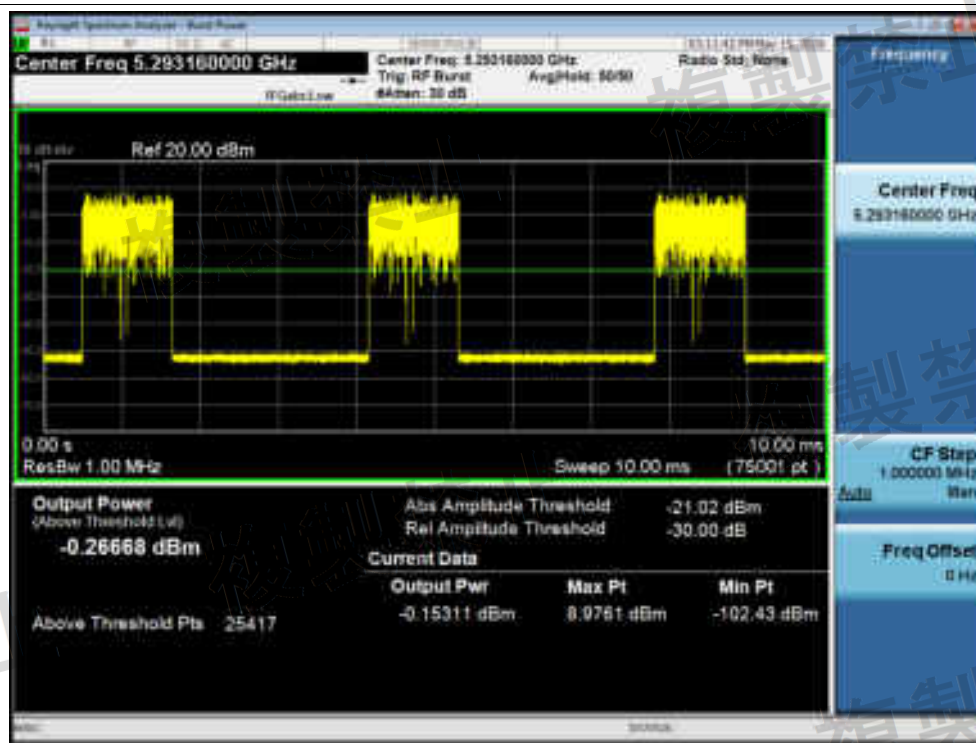


Power NVNT ac20 5300MHz Ant1 Zero Span




Power NVNT ac20 5300MHz Ant2 Pre Scan

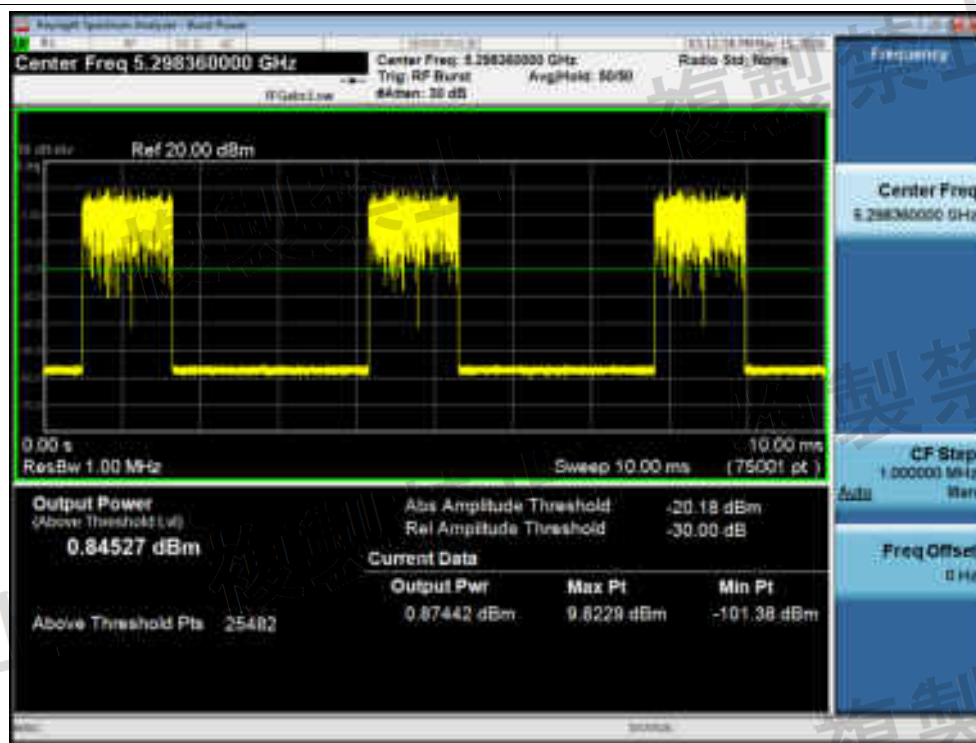

Power NVNT ac20 5300MHz Ant2 Zero Span

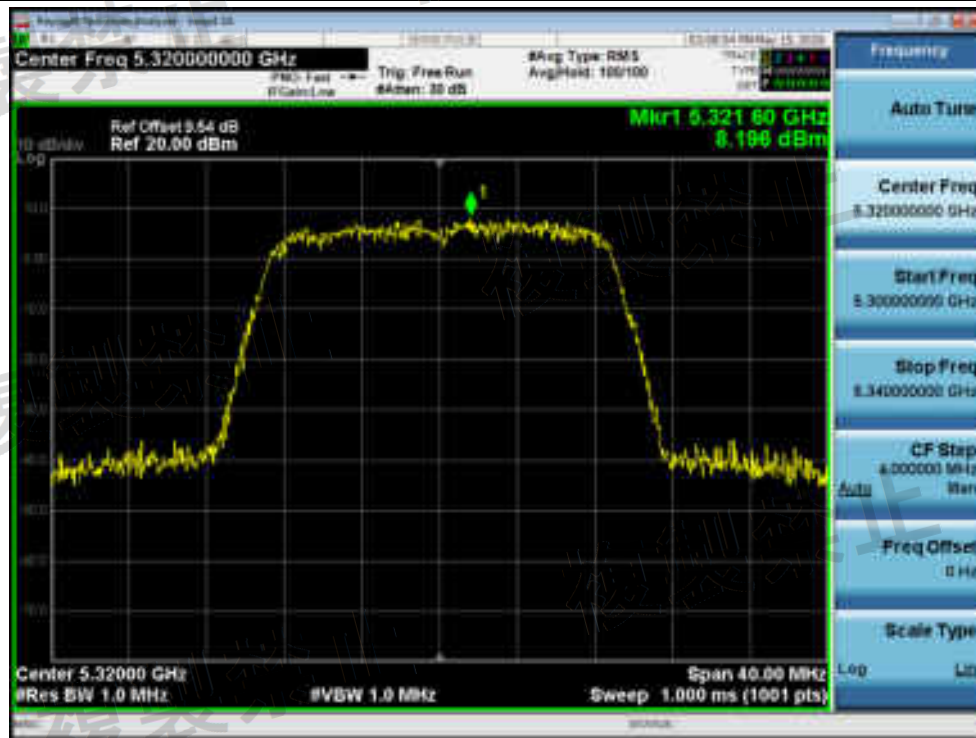


Power NVNT ac20 5320MHz Ant1 Pre Scan

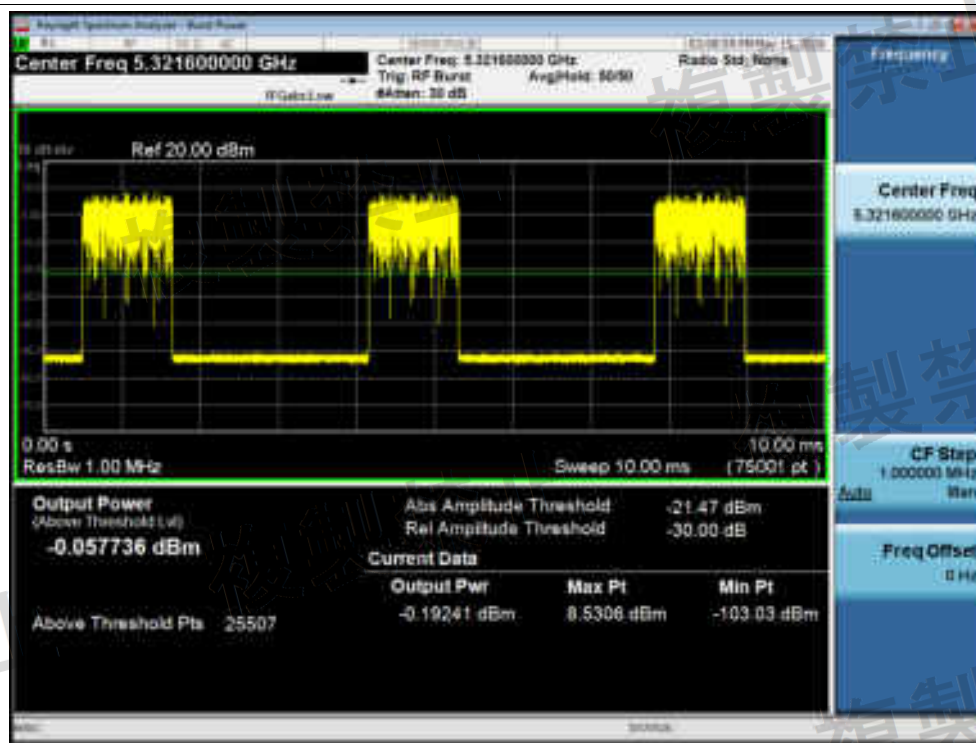

Power NVNT ac20 5320MHz Ant1 Zero Span



Power NVNT ac20 5320MHz Ant2 Pre Scan

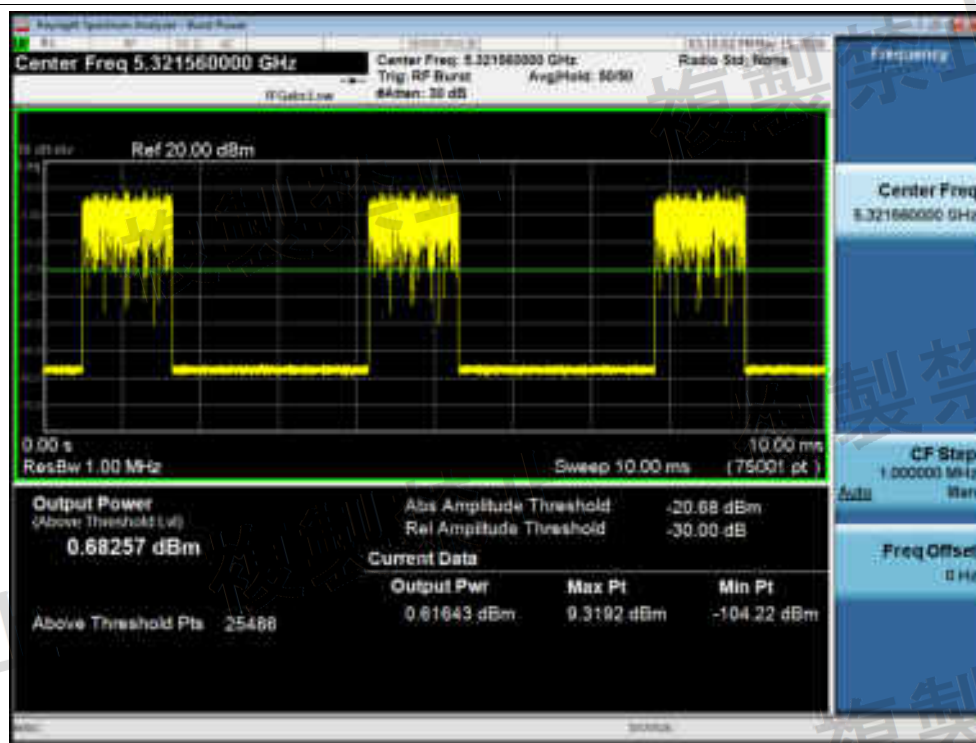


Power NVNT ac20 5320MHz Ant2 Zero Span




Power NVNT ac20 5500MHz Ant1 Pre Scan



Power NVNT ac20 5500MHz Ant1 Zero Span

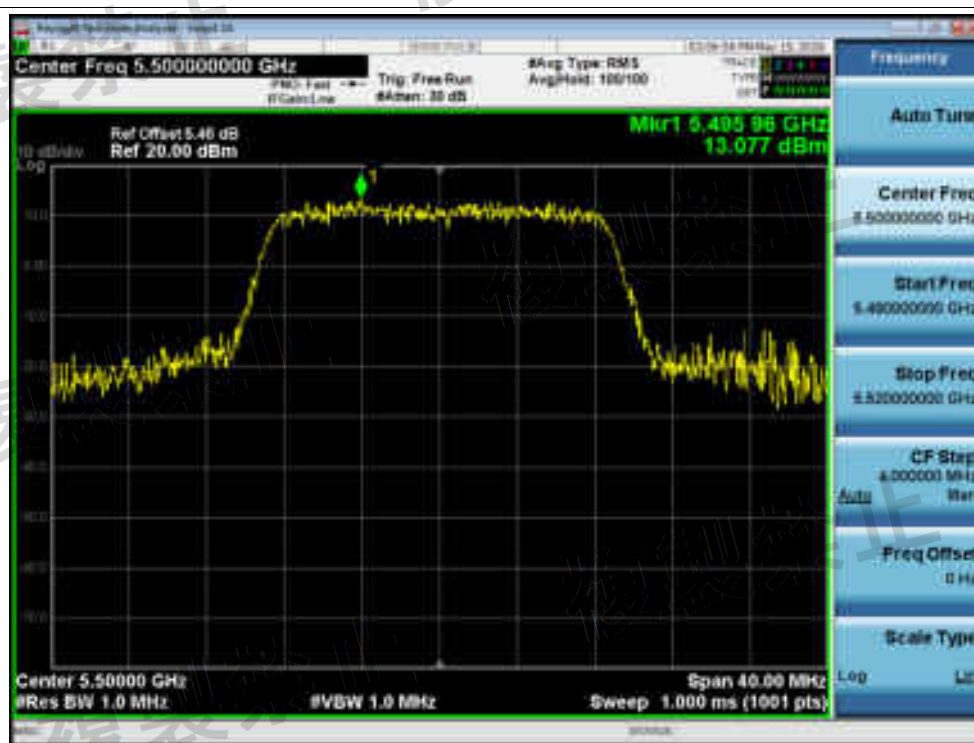


Power NVNT ac20 5500MHz Ant2 Pre Scan

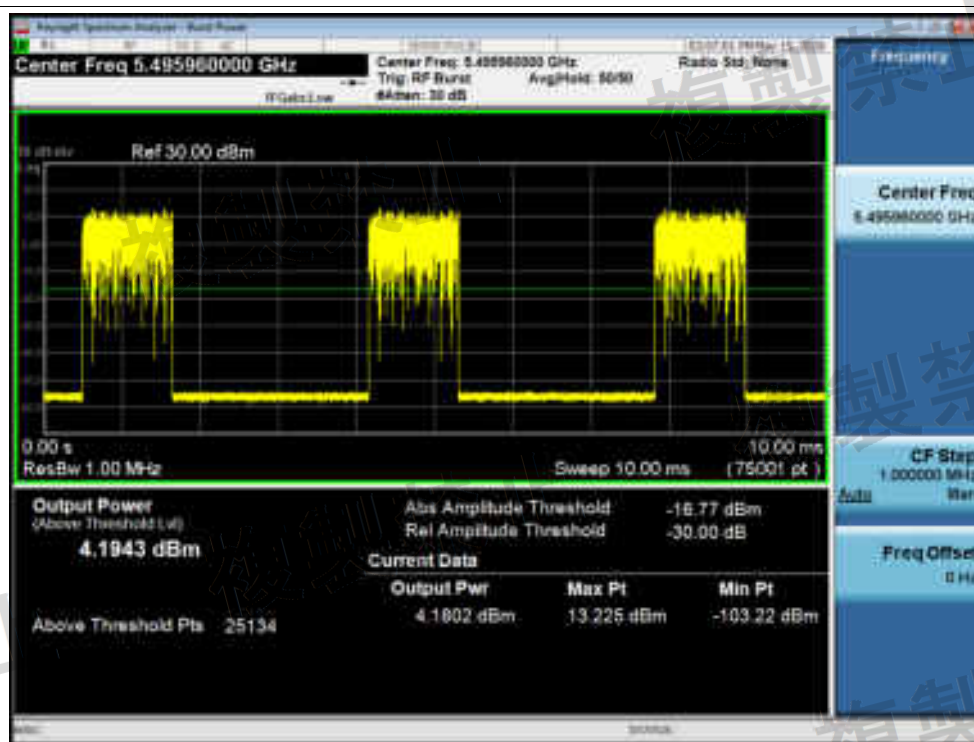


Power NVNT ac20 5500MHz Ant2 Zero Span



Power NVNT ac20 5580MHz Ant1 Pre Scan

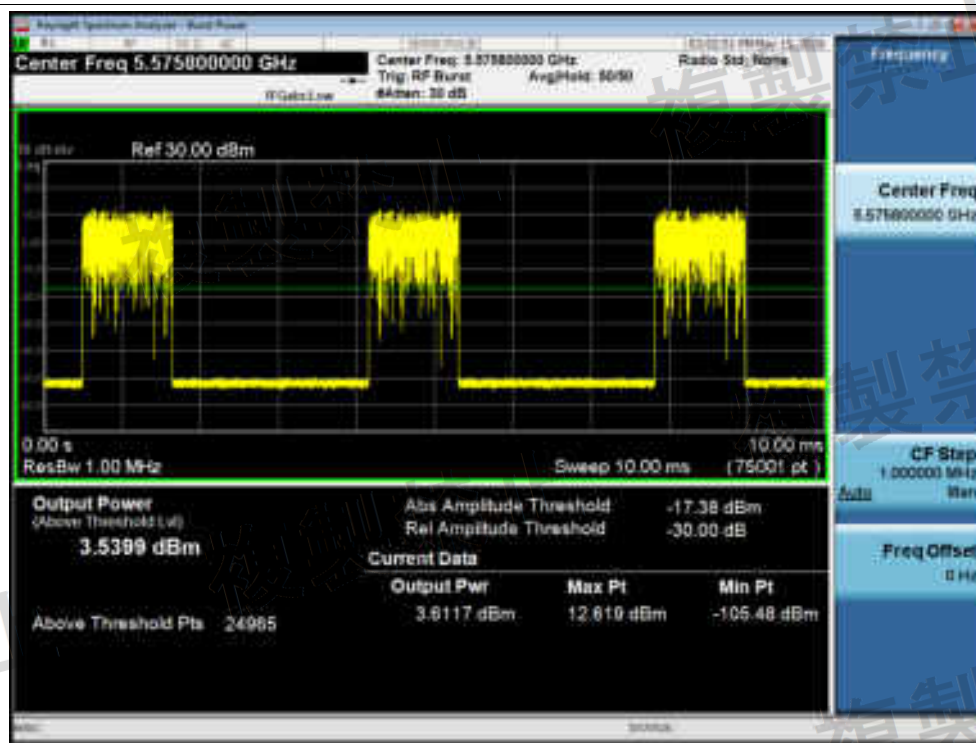


Power NVNT ac20 5580MHz Ant1 Zero Span

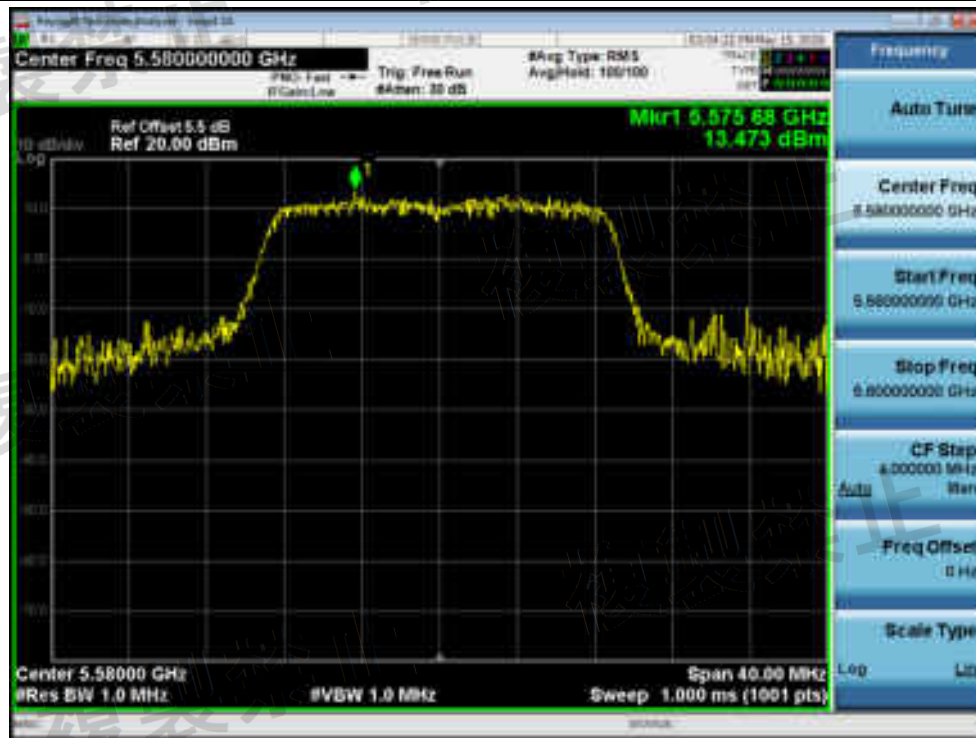


Power NVNT ac20 5580MHz Ant2 Pre Scan



Power NVNT ac20 5580MHz Ant2 Zero Span

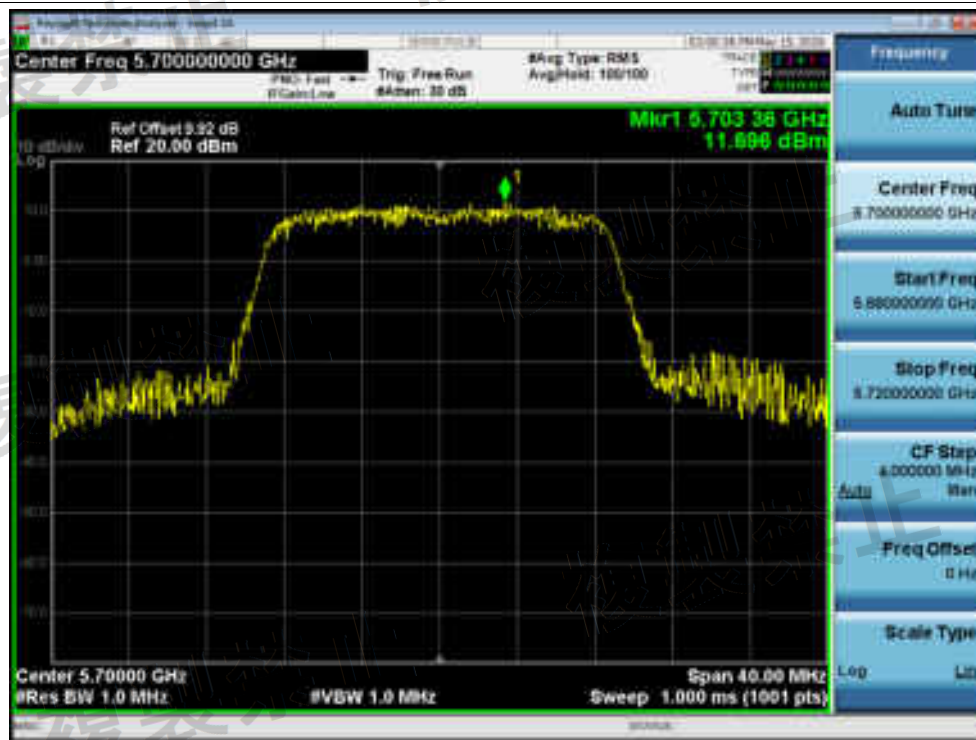


Power NVNT ac20 5700MHz Ant1 Pre Scan

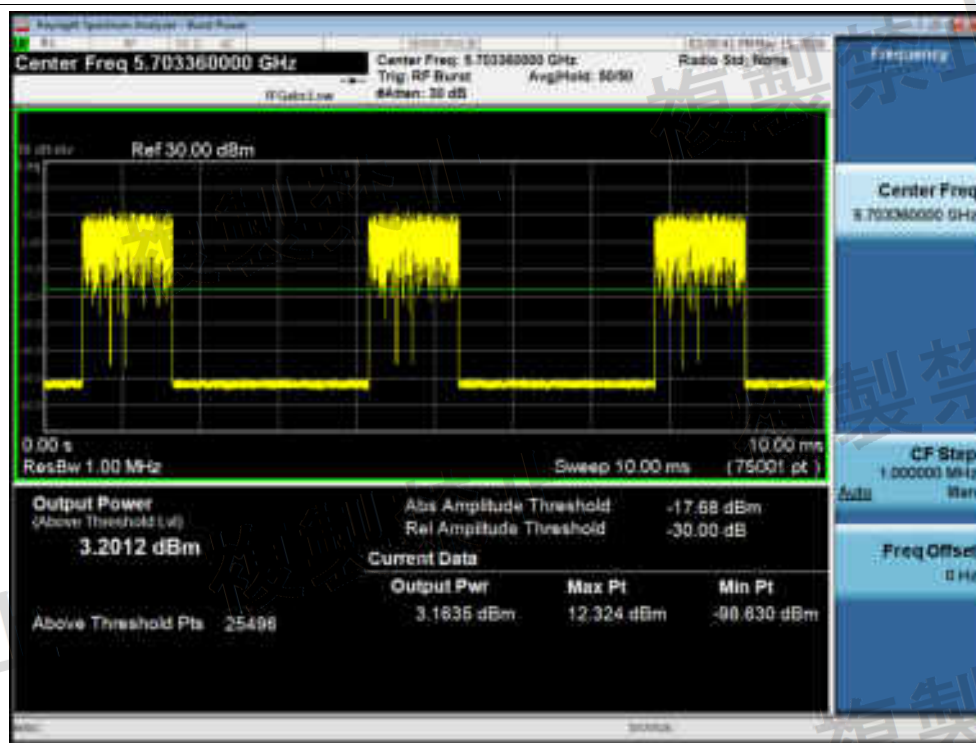

Power NVNT ac20 5700MHz Ant1 Zero Span




Power NVNT ac20 5700MHz Ant2 Pre Scan

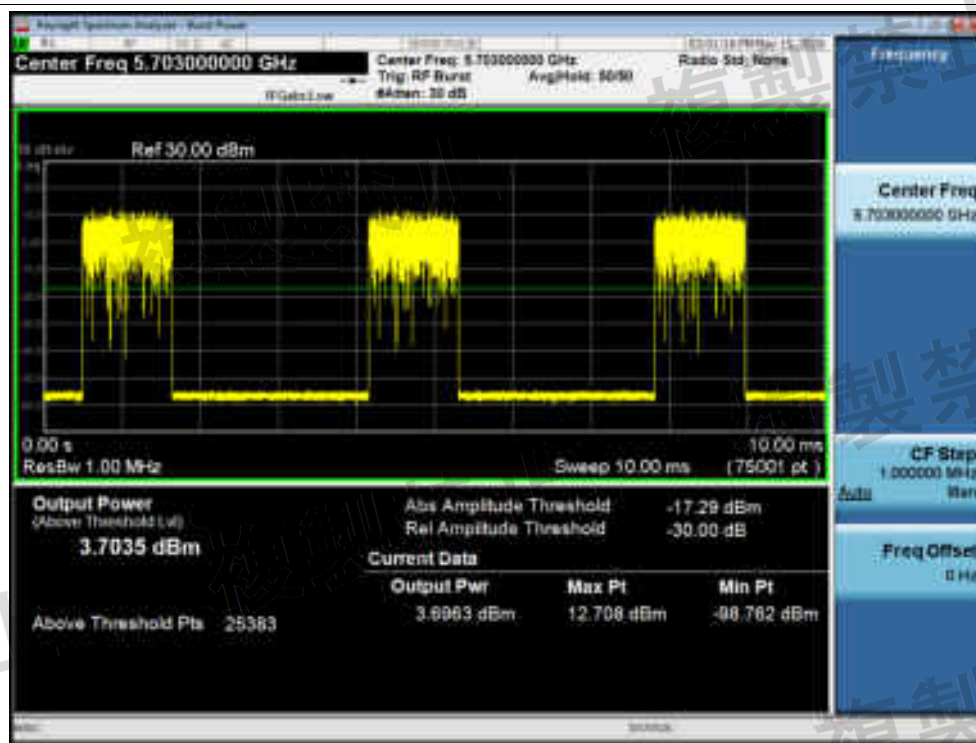


Power NVNT ac20 5700MHz Ant2 Zero Span




Power NVNT ac40 5190MHz Ant1 Pre Scan

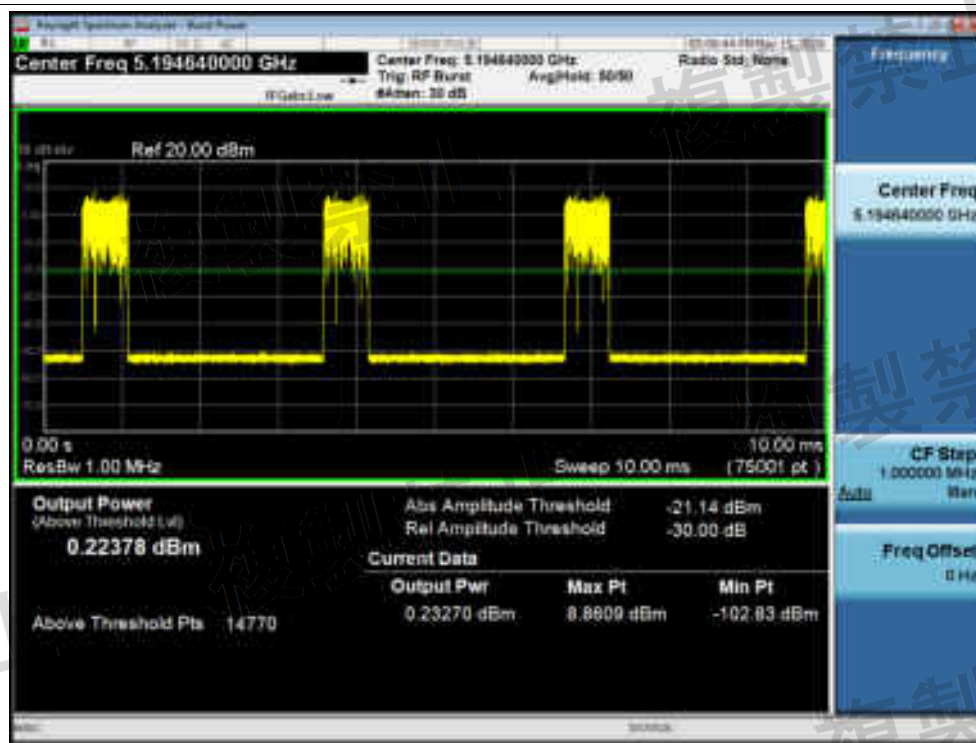

Power NVNT ac40 5190MHz Ant1 Zero Span

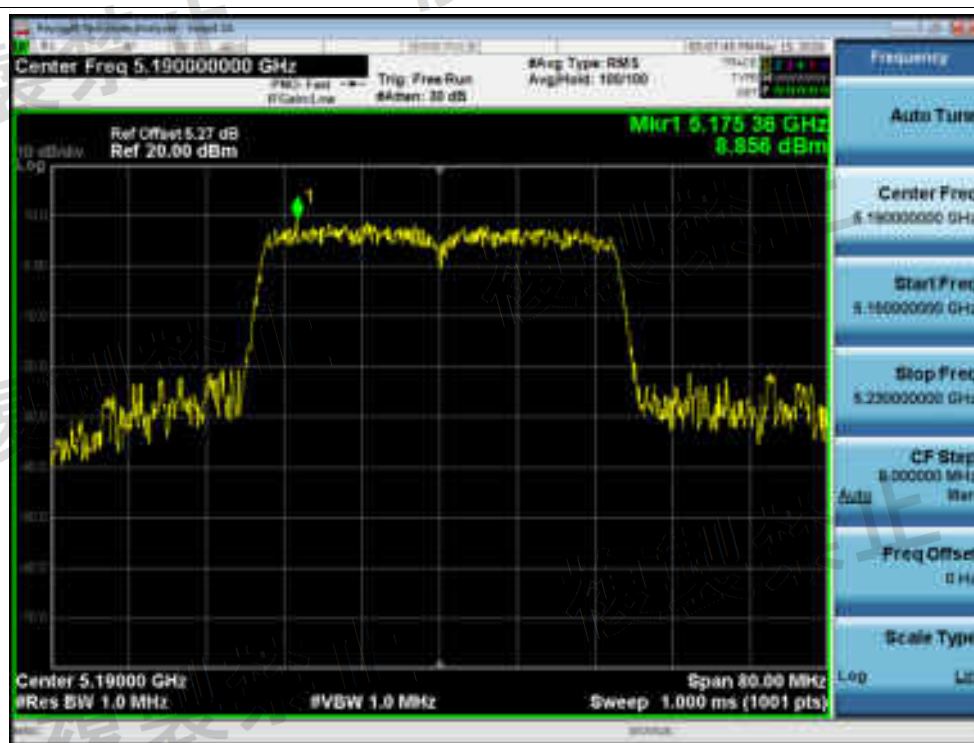


Power NVNT ac40 5190MHz Ant2 Pre Scan

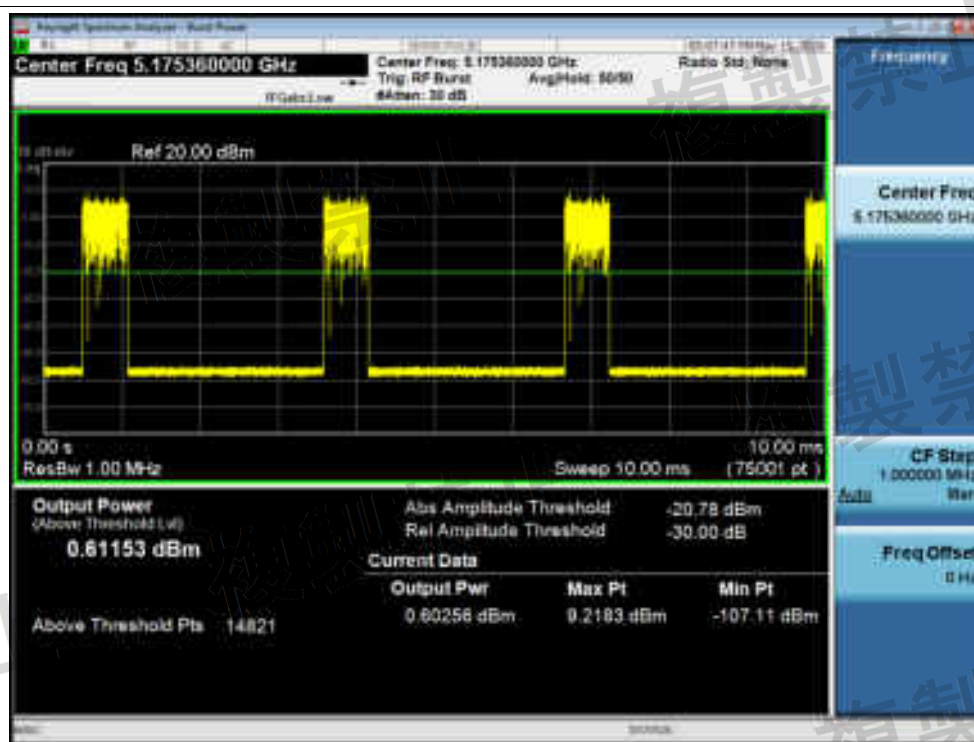

Power NVNT ac40 5190MHz Ant2 Zero Span



Power NVNT ac40 5230MHz Ant1 Pre Scan

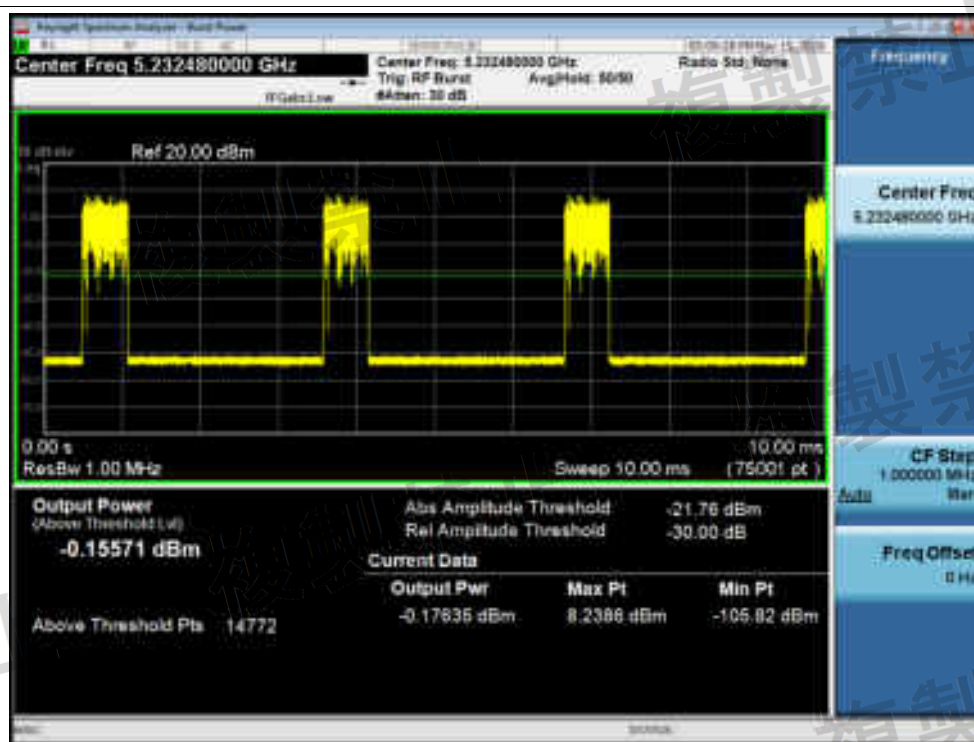


Power NVNT ac40 5230MHz Ant1 Zero Span




Power NVNT ac40 5230MHz Ant2 Pre Scan




Power NVNT ac40 5230MHz Ant2 Zero Span

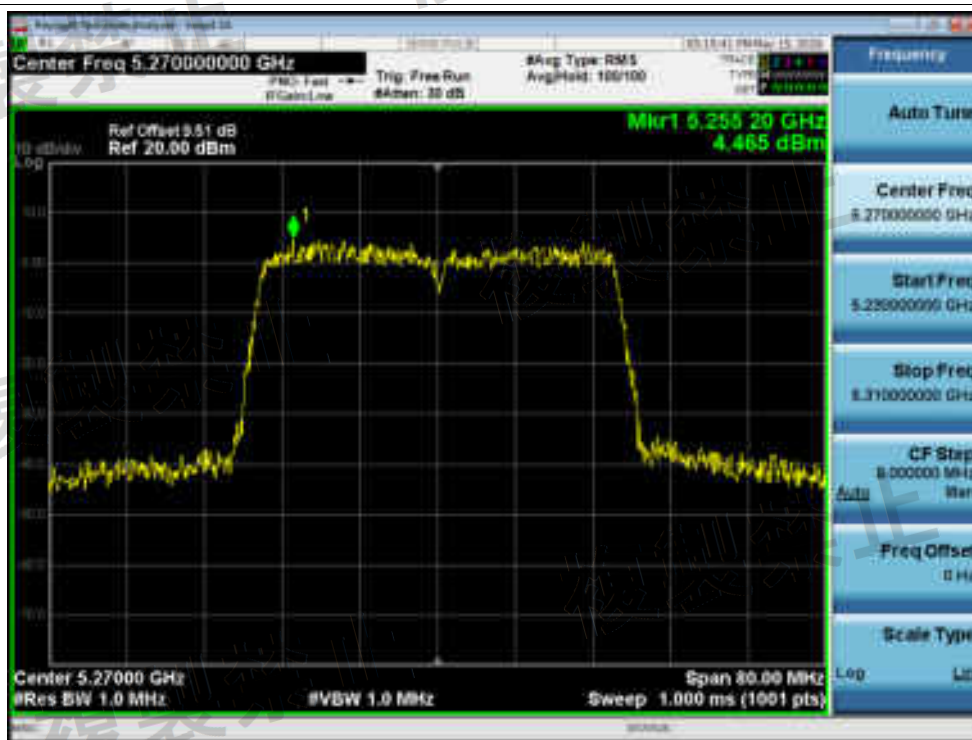


Power NVNT ac40 5270MHz Ant1 Pre Scan

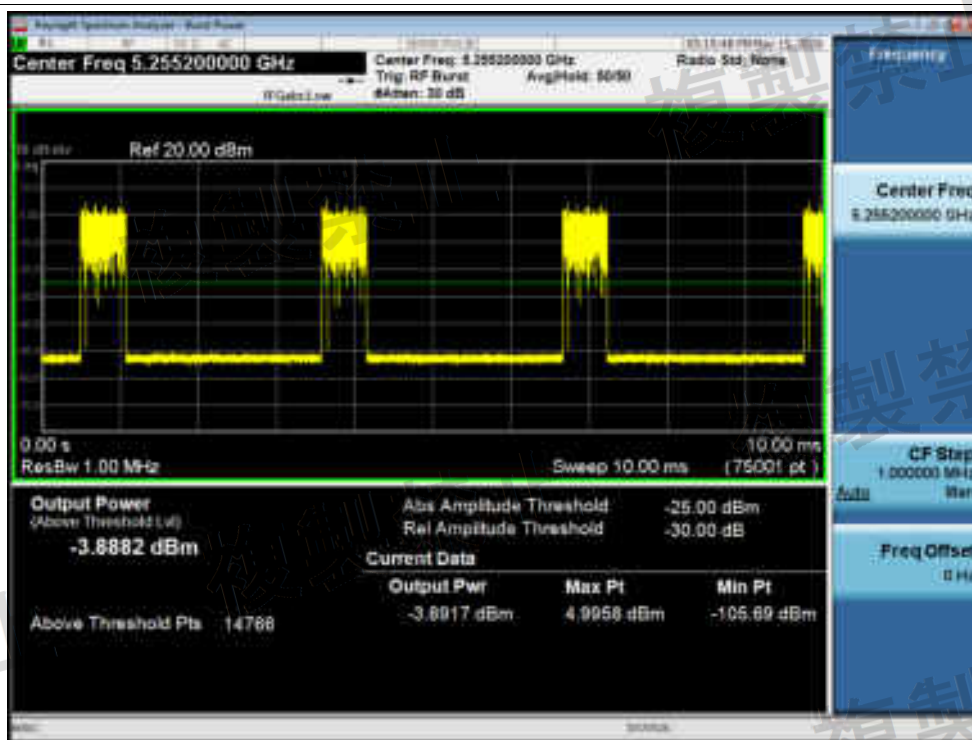


Power NVNT ac40 5270MHz Ant1 Zero Span

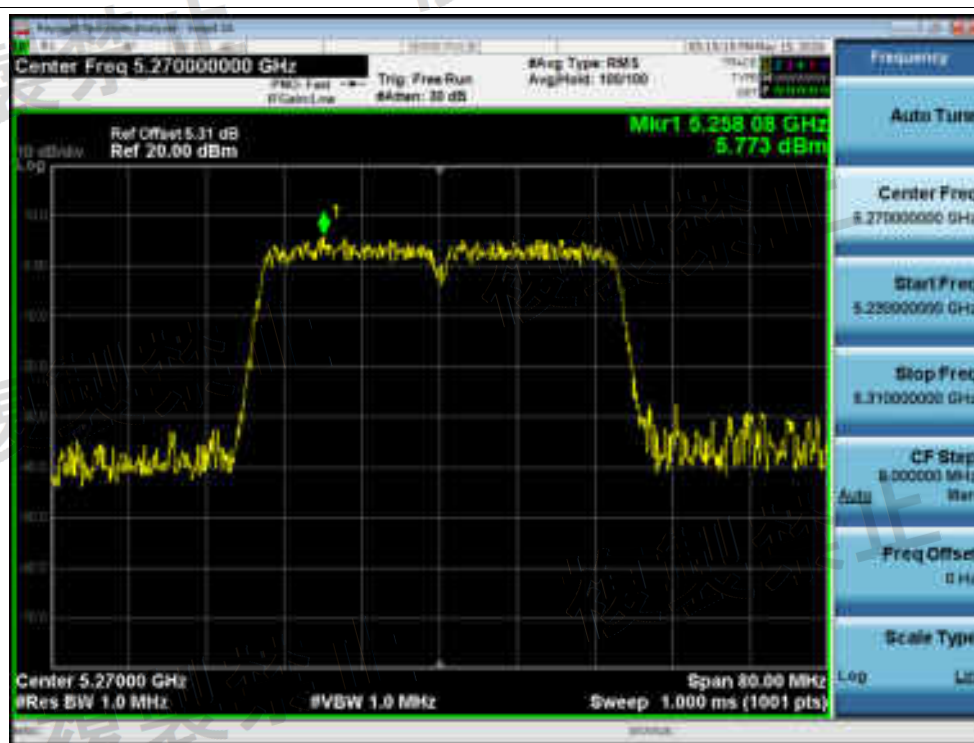

Power NVNT ac40 5270MHz Ant2 Pre Scan

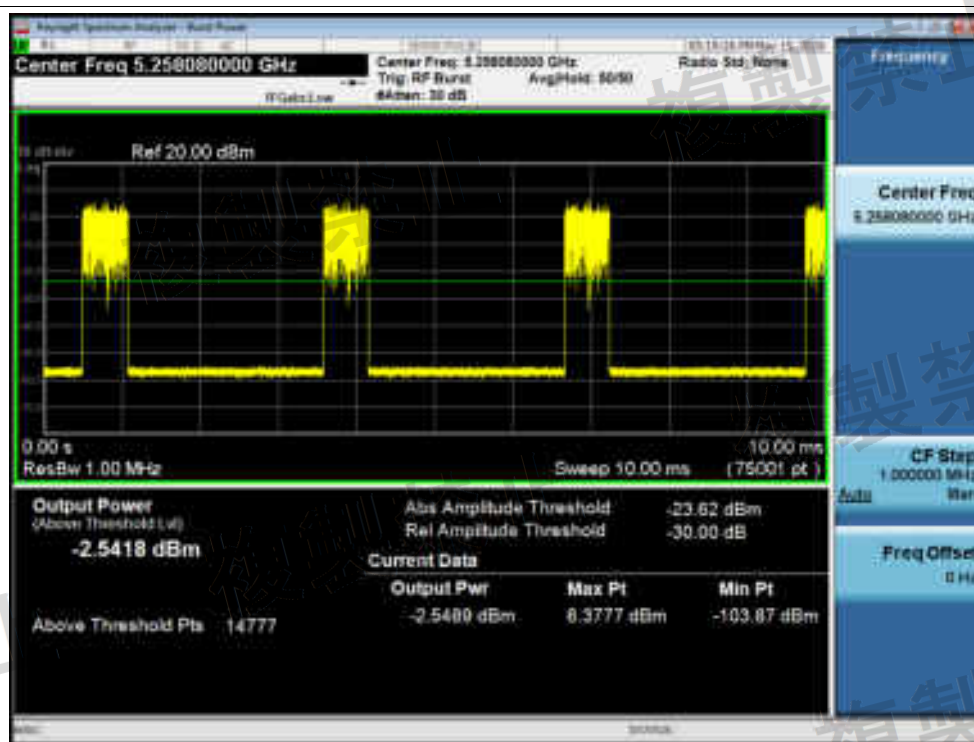


Power NVNT ac40 5270MHz Ant2 Zero Span

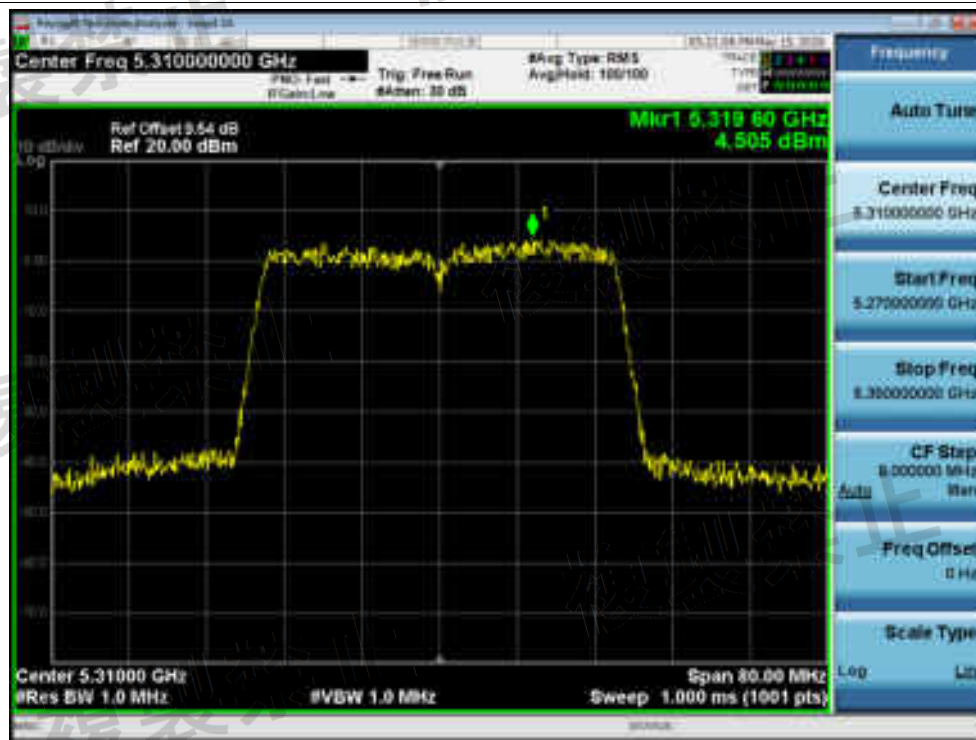


Power NVNT ac40 5310MHz Ant1 Pre Scan



Power NVNT ac40 5310MHz Ant1 Zero Span

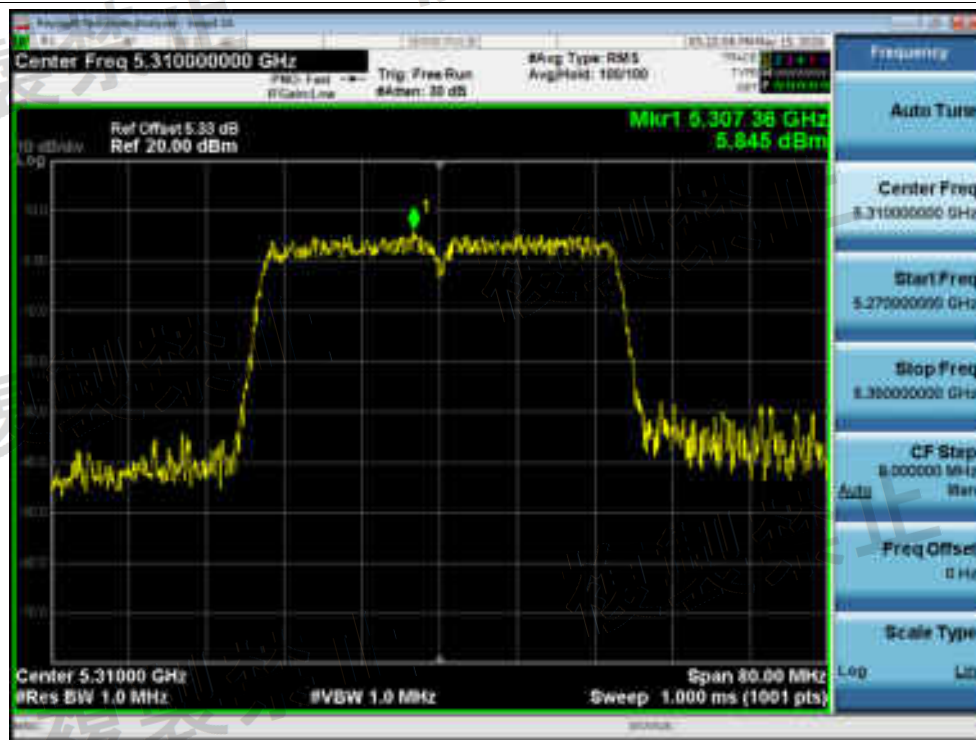


Power NVNT ac40 5310MHz Ant2 Pre Scan

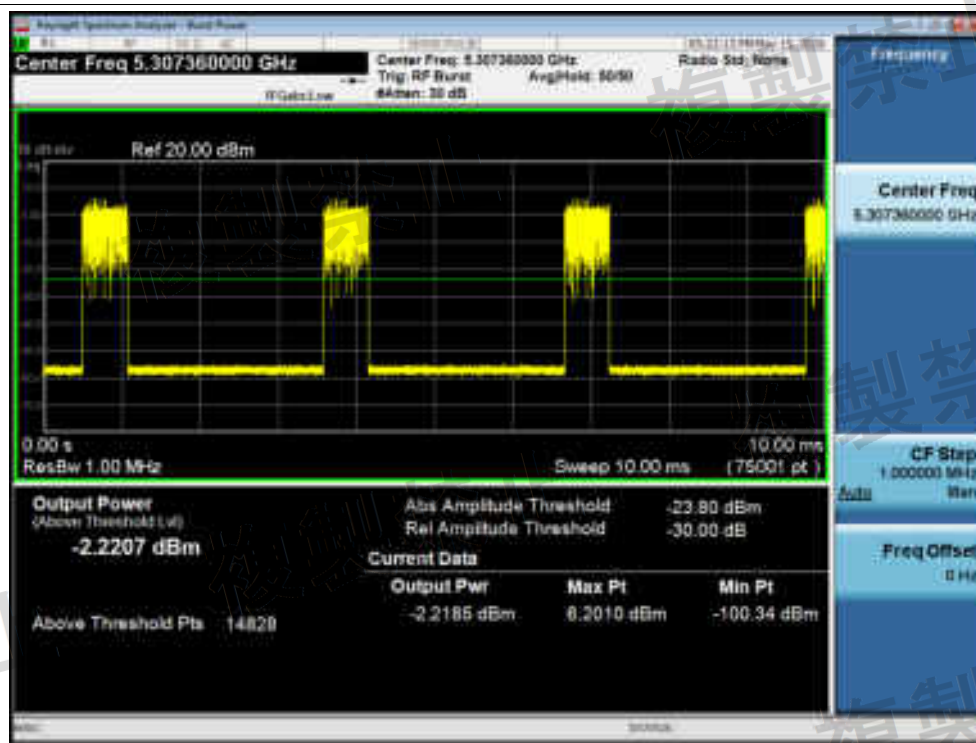

Power NVNT ac40 5310MHz Ant2 Zero Span




Power NVNT ac40 5510MHz Ant1 Pre Scan

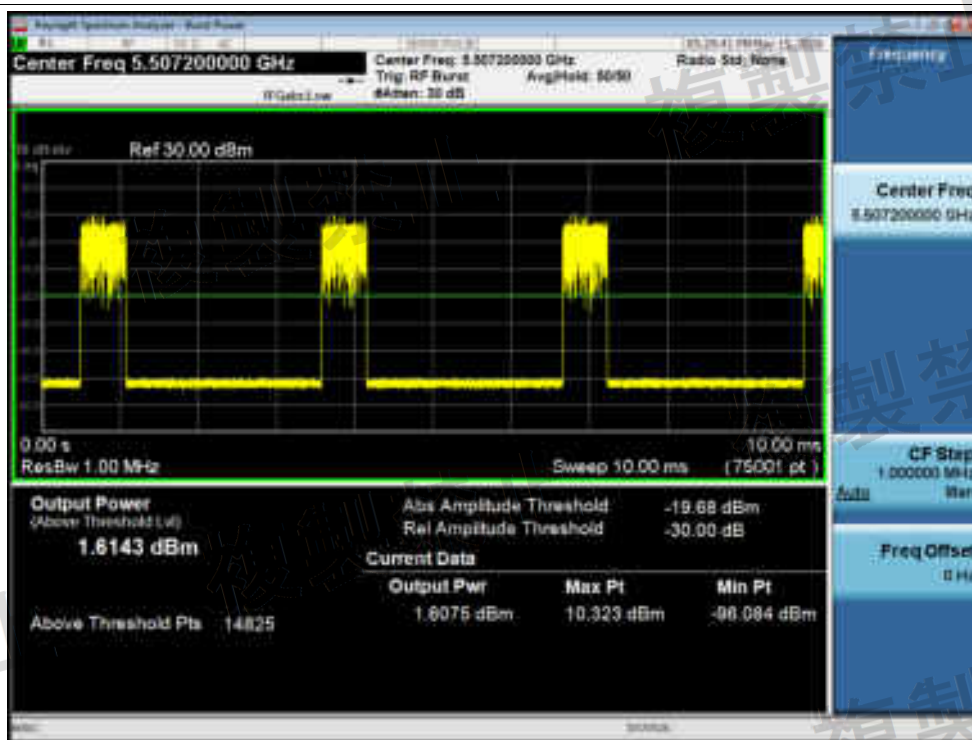


Power NVNT ac40 5510MHz Ant1 Zero Span




Power NVNT ac40 5510MHz Ant2 Pre Scan

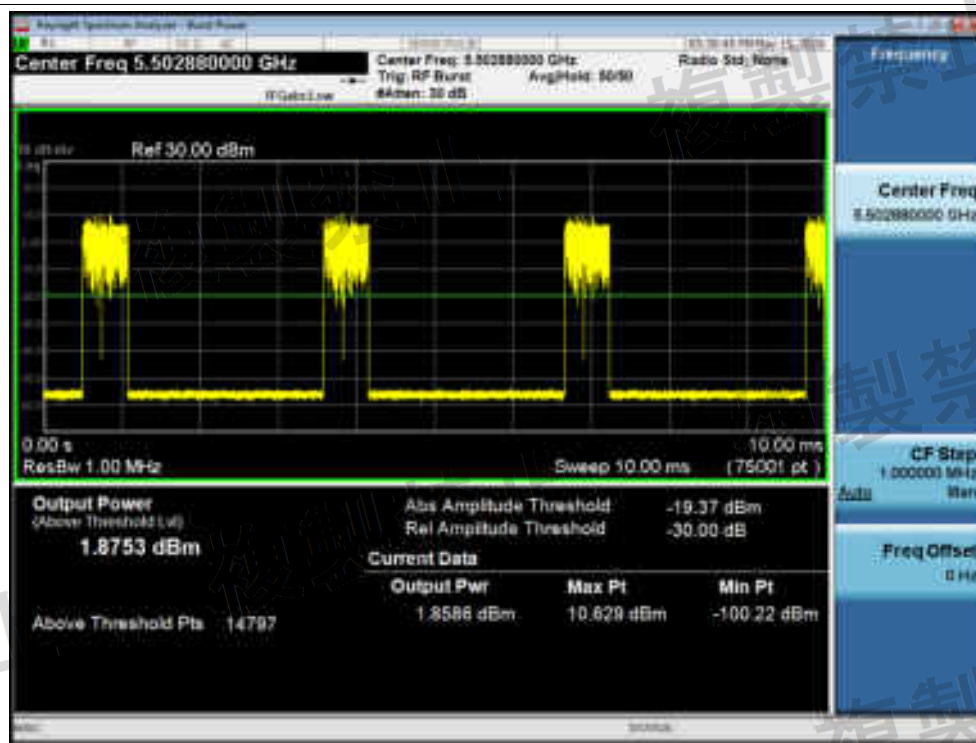

Power NVNT ac40 5510MHz Ant2 Zero Span

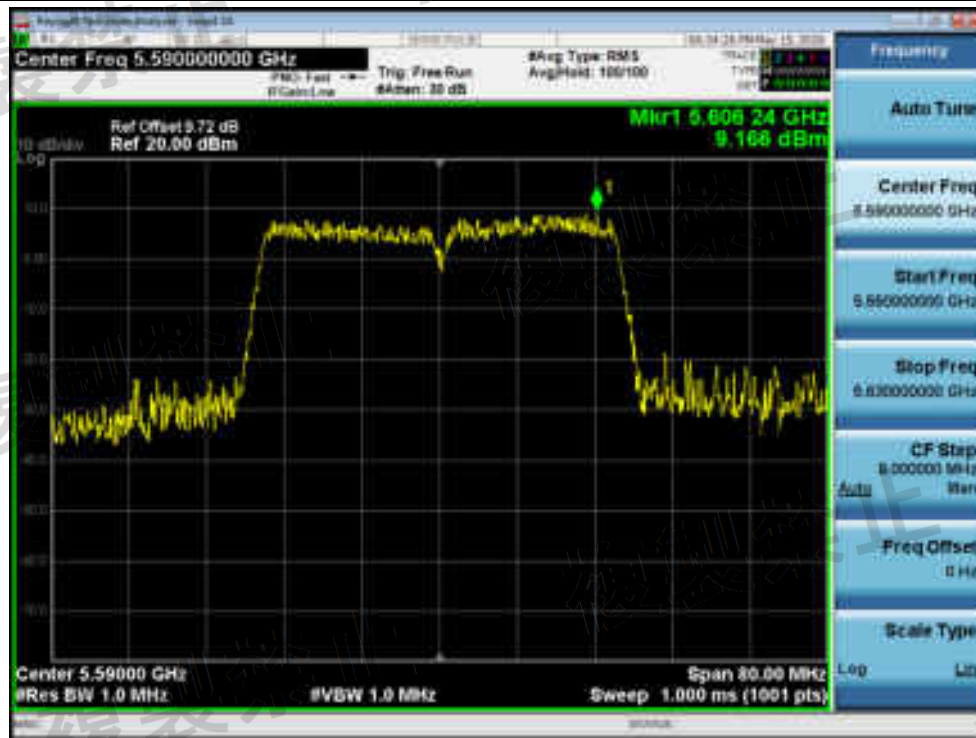


Power NVNT ac40 5590MHz Ant1 Pre Scan

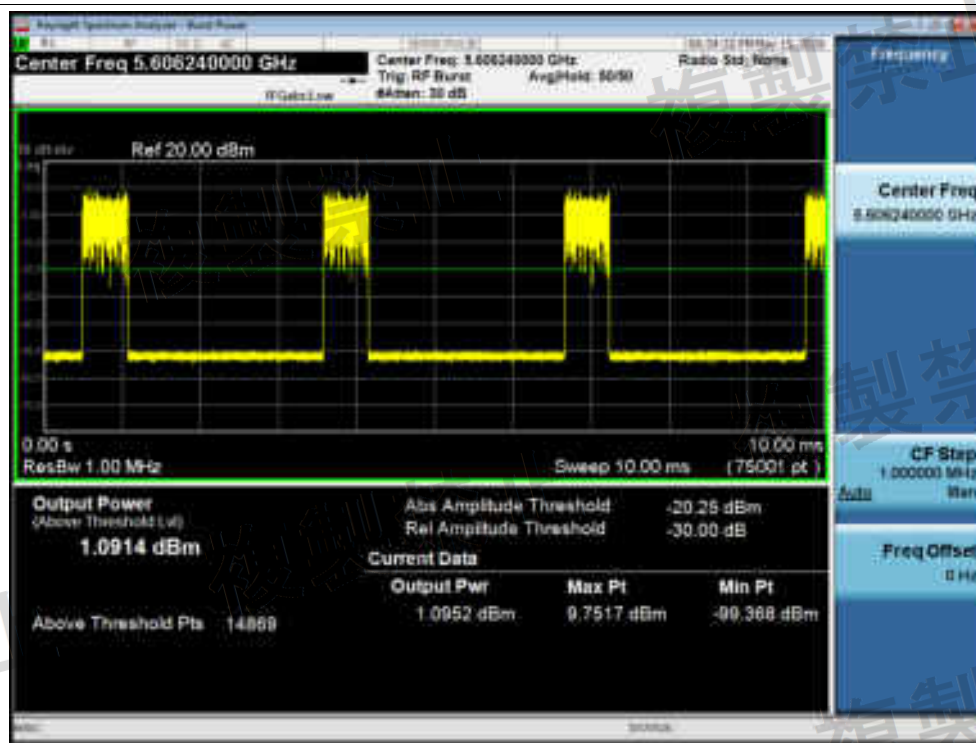

Power NVNT ac40 5590MHz Ant1 Zero Span




Power NVNT ac40 5590MHz Ant2 Pre Scan

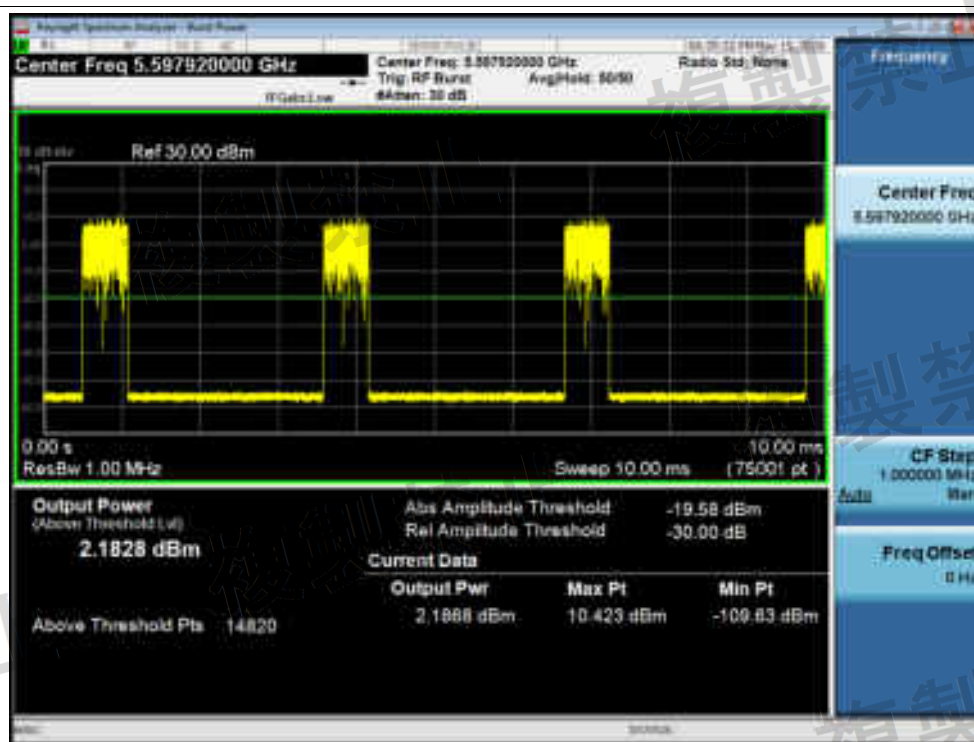

Power NVNT ac40 5590MHz Ant2 Zero Span




Power NVNT ac40 5670MHz Ant1 Pre Scan

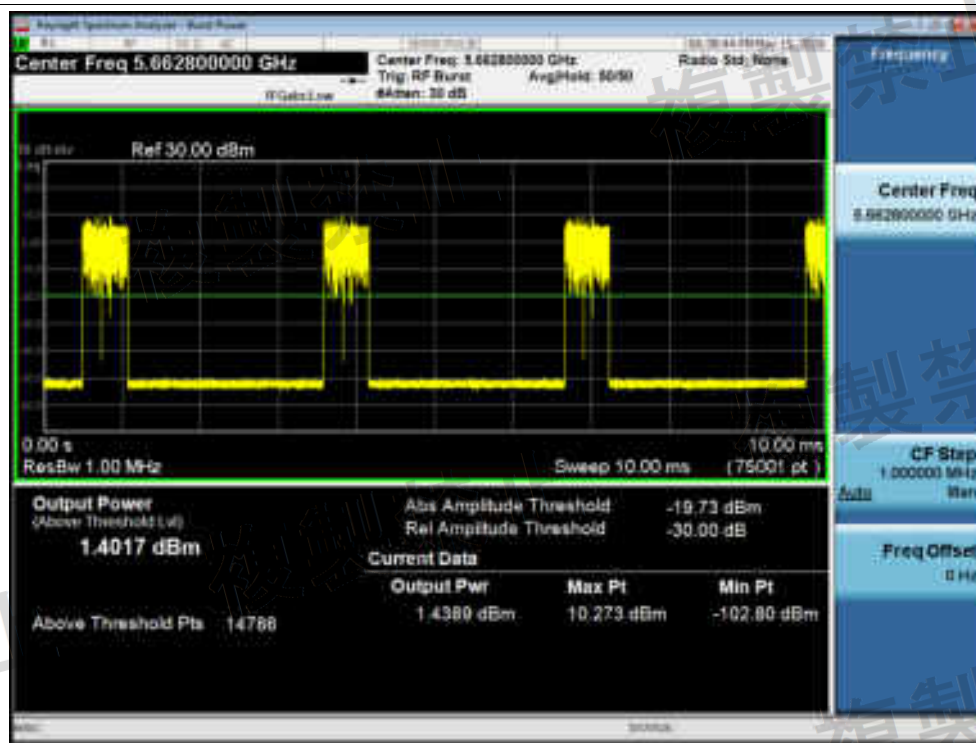

Power NVNT ac40 5670MHz Ant1 Zero Span



Power NVNT ac40 5670MHz Ant2 Pre Scan

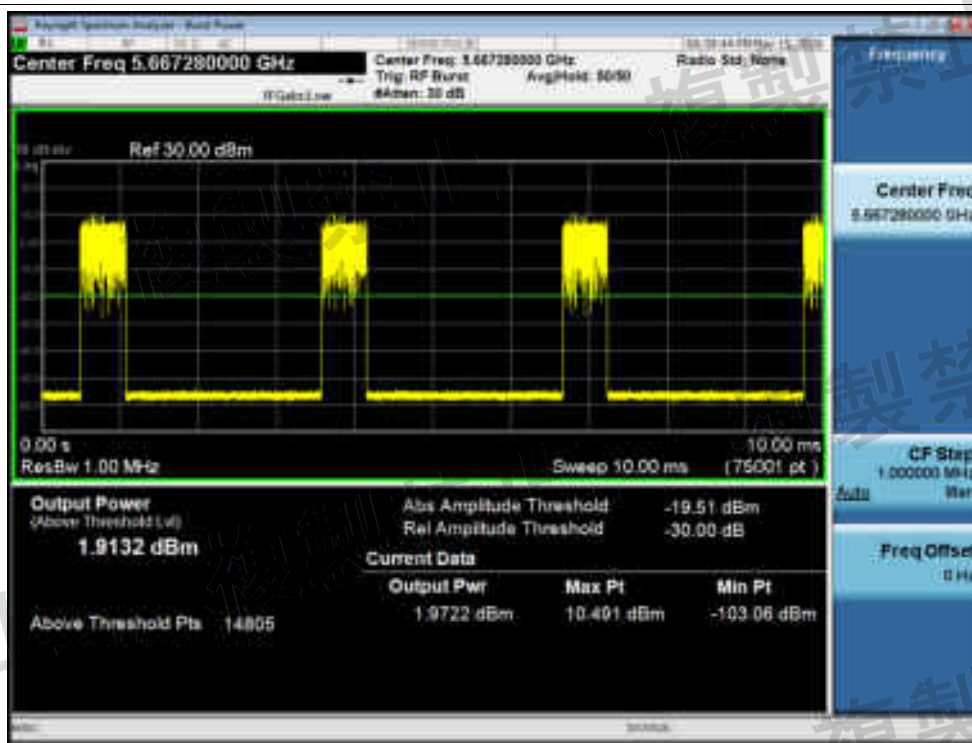


Power NVNT ac40 5670MHz Ant2 Zero Span




Power NVNT ac80 5210MHz Ant1 Pre Scan



Power NVNT ac80 5210MHz Ant1 Zero Span

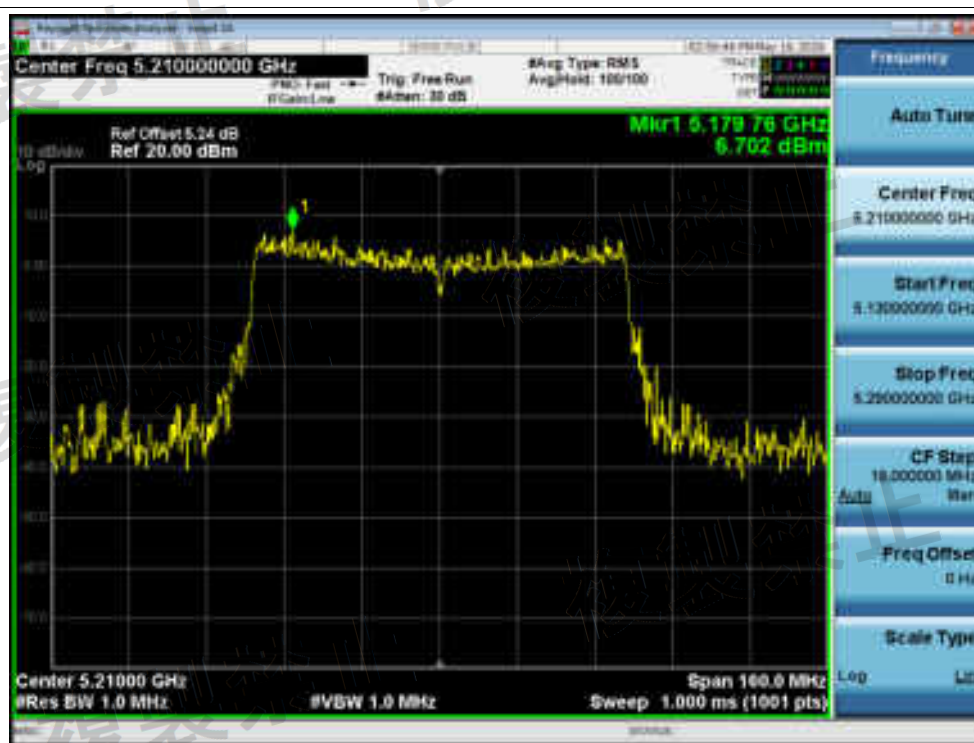

Power NVNT ac80 5210MHz Ant2 Pre Scan

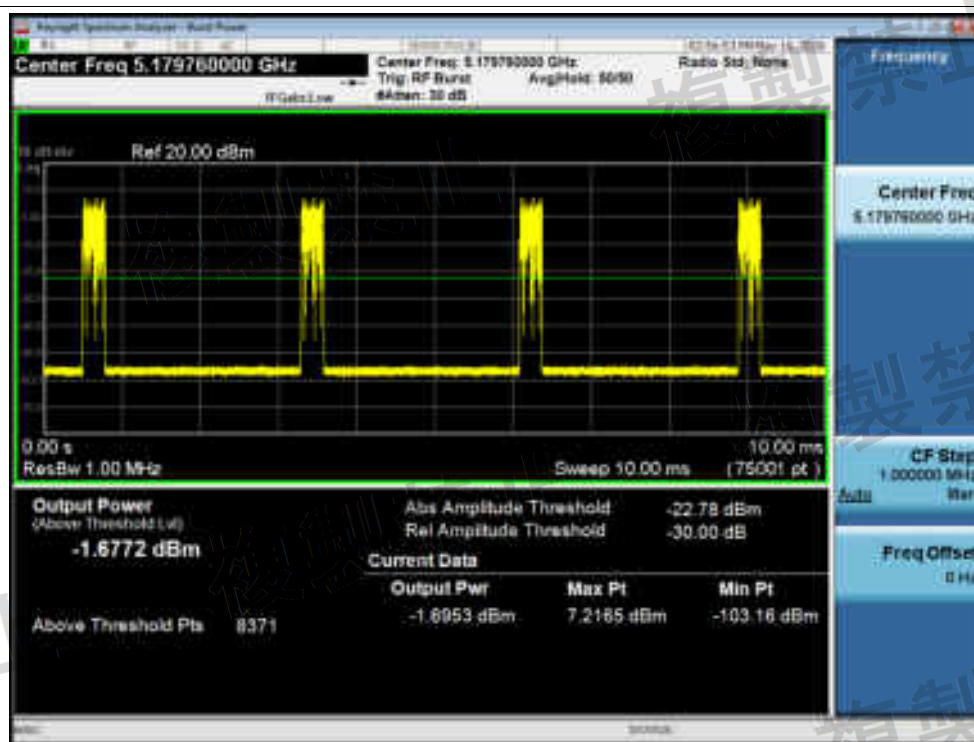

Power NVNT ac80 5210MHz Ant2 Zero Span



Power NVNT ac80 5290MHz Ant1 Pre Scan



Power NVNT ac80 5290MHz Ant1 Zero Span



Power NVNT ac80 5290MHz Ant2 Pre Scan




Power NVNT ac80 5290MHz Ant2 Zero Span



Power NVNT ac80 5530MHz Ant1 Pre Scan



Power NVNT ac80 5530MHz Ant1 Zero Span

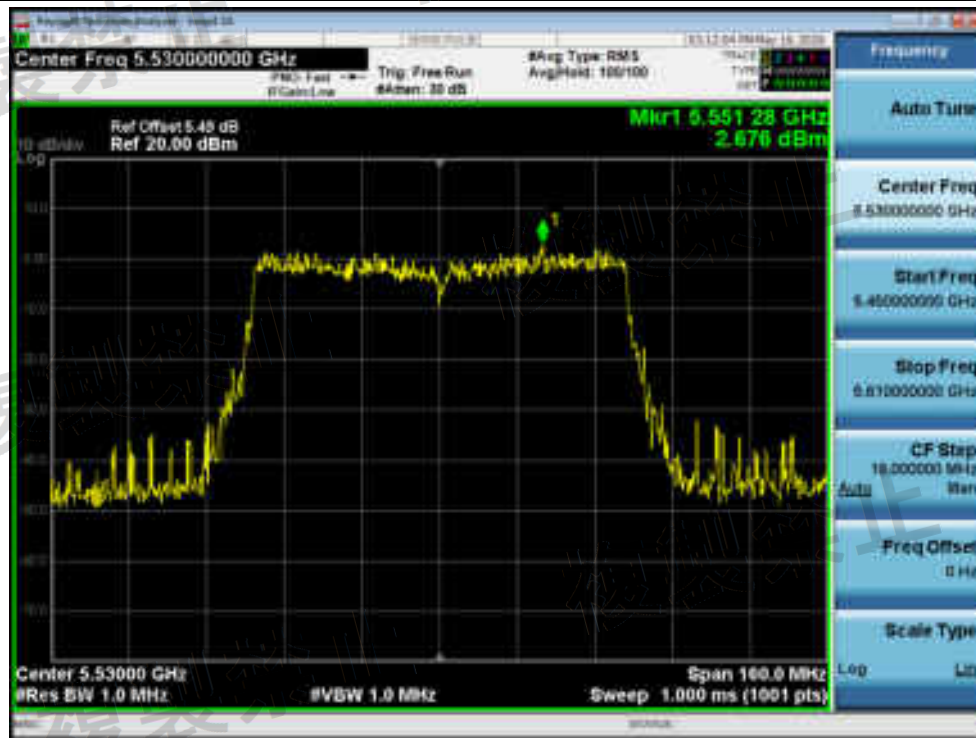

Power NVNT ac80 5530MHz Ant2 Pre Scan




Power NVNT ac80 5530MHz Ant2 Zero Span




Power NVNT ac80 5610MHz Ant1 Pre Scan



Power NVNT ac80 5610MHz Ant1 Zero Span

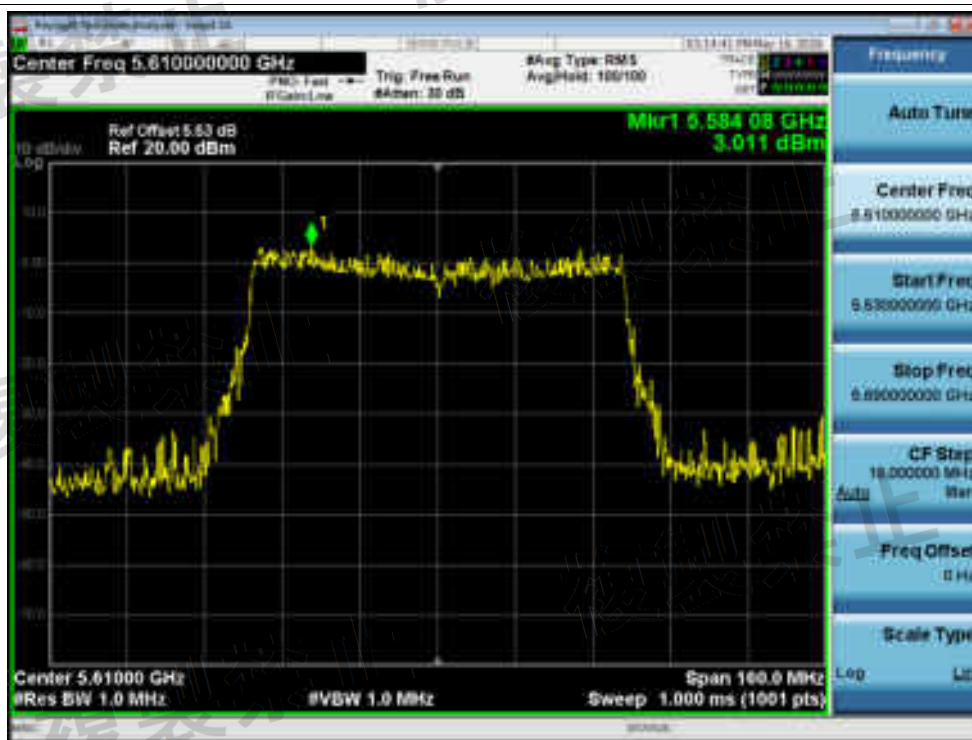


Power NVNT ac80 5610MHz Ant2 Pre Scan

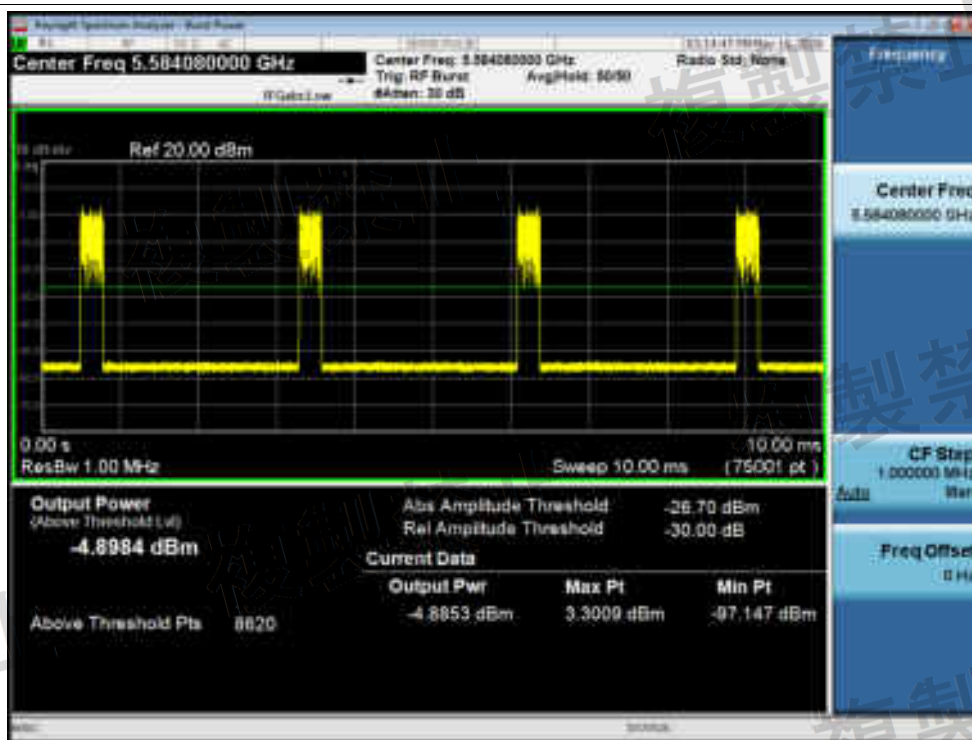


Power NVNT ac80 5610MHz Ant2 Zero Span




Power NVNT ax20 5180MHz Ant1 Pre Scan

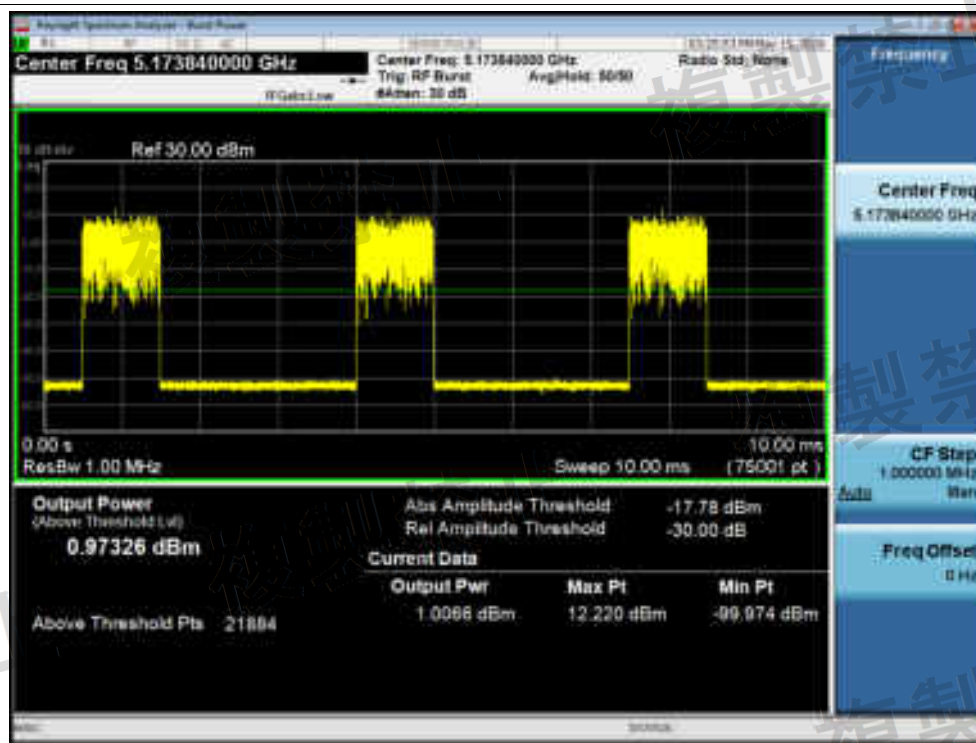

Power NVNT ax20 5180MHz Ant1 Zero Span

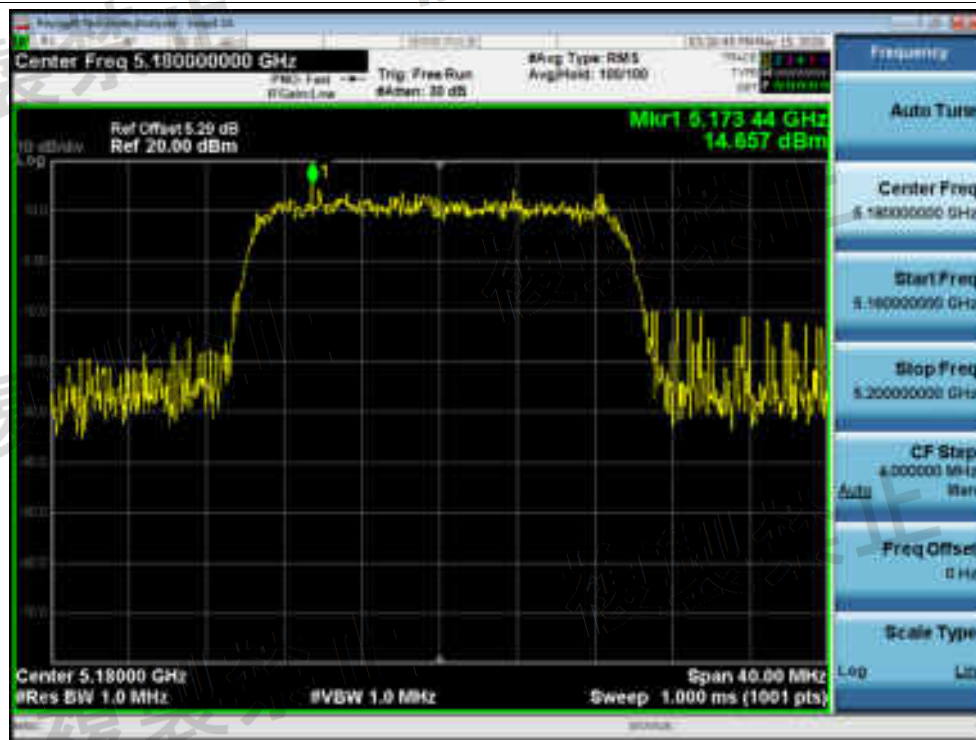


Power NVNT ax20 5180MHz Ant2 Pre Scan

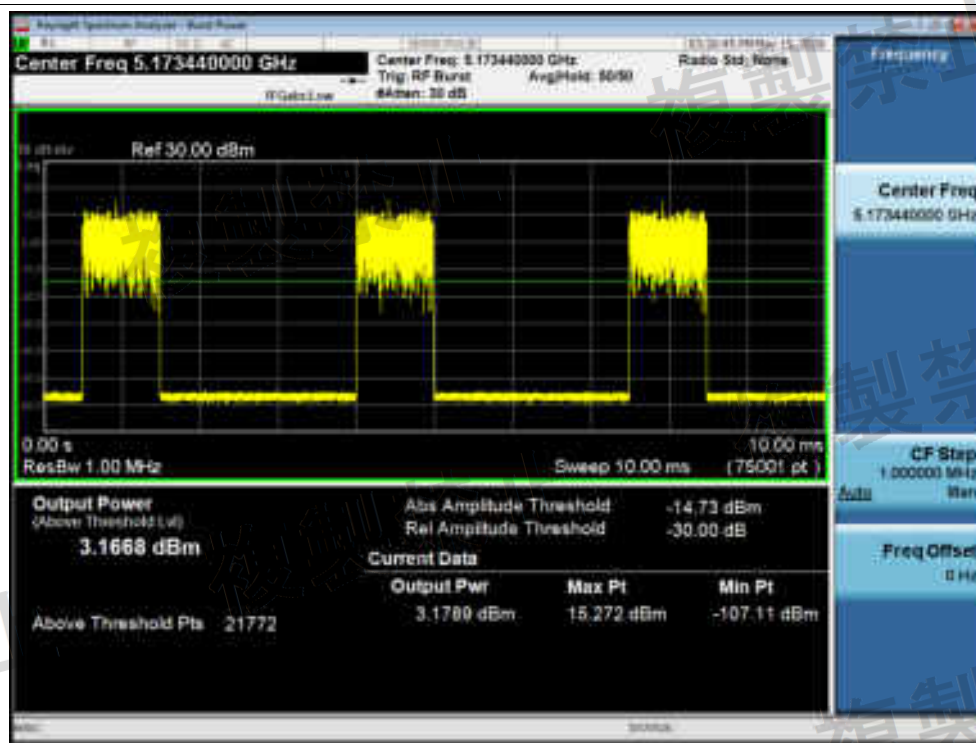

Power NVNT ax20 5180MHz Ant2 Zero Span



Power NVNT ax20 5200MHz Ant1 Pre Scan

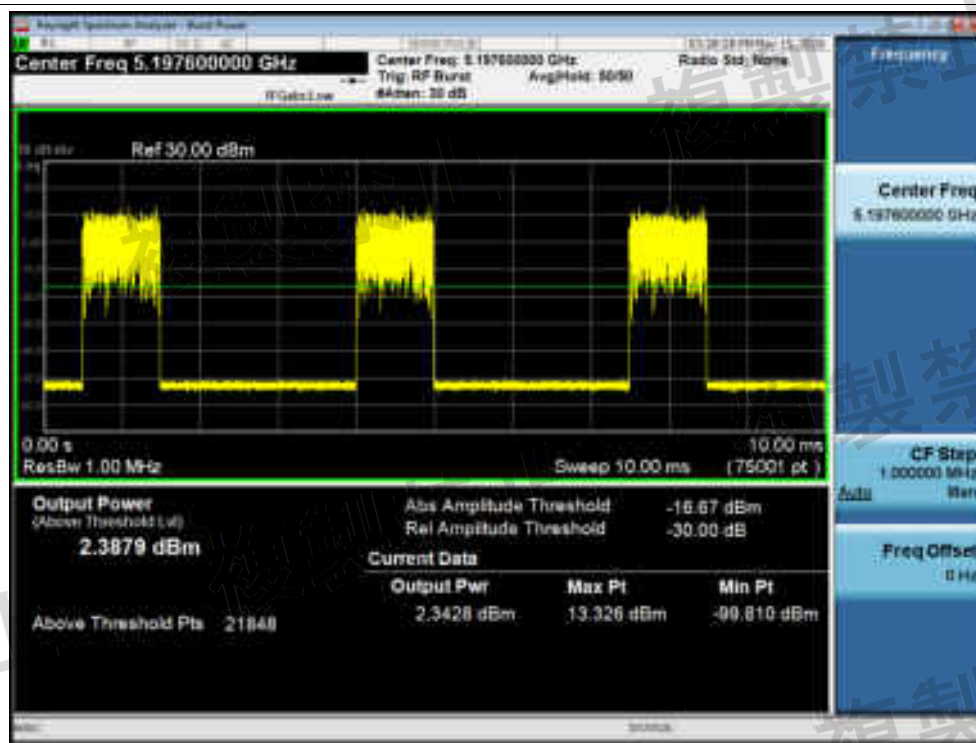

Power NVNT ax20 5200MHz Ant1 Zero Span



Power NVNT ax20 5200MHz Ant2 Pre Scan




Power NVNT ax20 5200MHz Ant2 Zero Span



Power NVNT ax20 5240MHz Ant1 Pre Scan



Power NVNT ax20 5240MHz Ant1 Zero Span

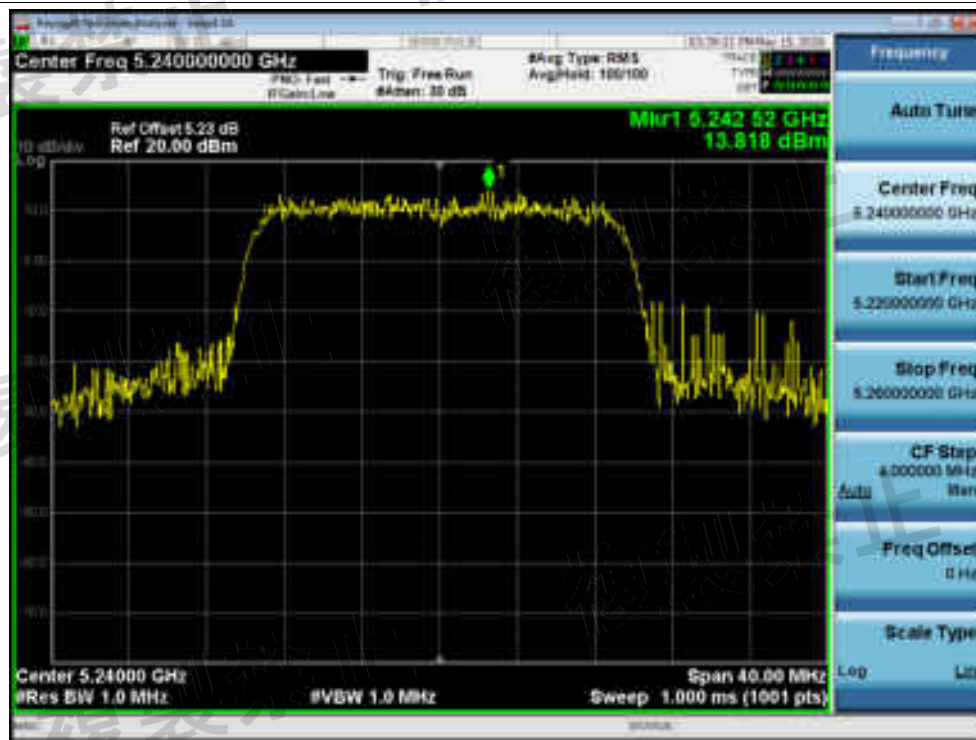

Power NVNT ax20 5240MHz Ant2 Pre Scan




Power NVNT ax20 5240MHz Ant2 Zero Span




Power NVNT ax20 5260MHz Ant1 Pre Scan



Power NVNT ax20 5260MHz Ant1 Zero Span

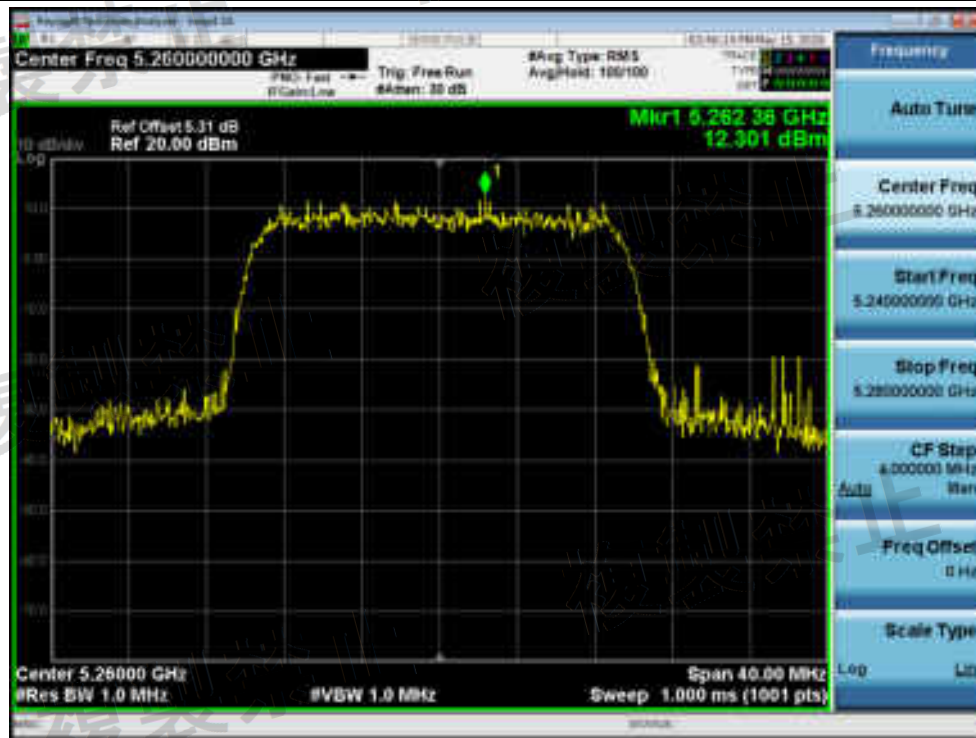

Power NVNT ax20 5260MHz Ant2 Pre Scan

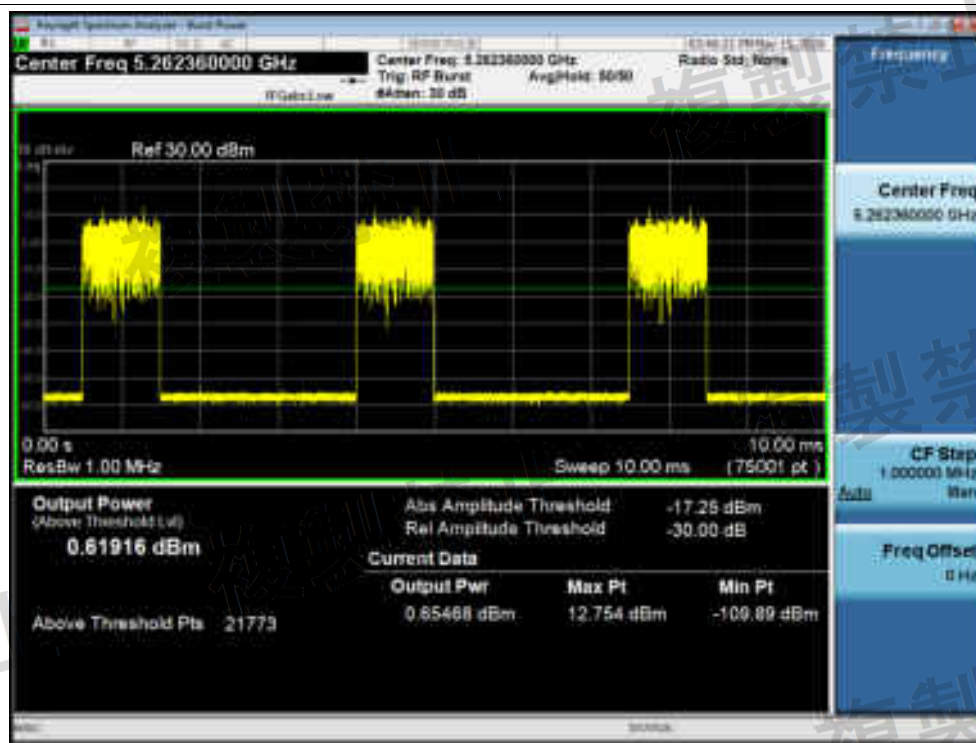

Power NVNT ax20 5260MHz Ant2 Zero Span



Power NVNT ax20 5300MHz Ant1 Pre Scan




Power NVNT ax20 5300MHz Ant1 Zero Span



Power NVNT ax20 5300MHz Ant2 Pre Scan




Power NVNT ax20 5300MHz Ant2 Zero Span

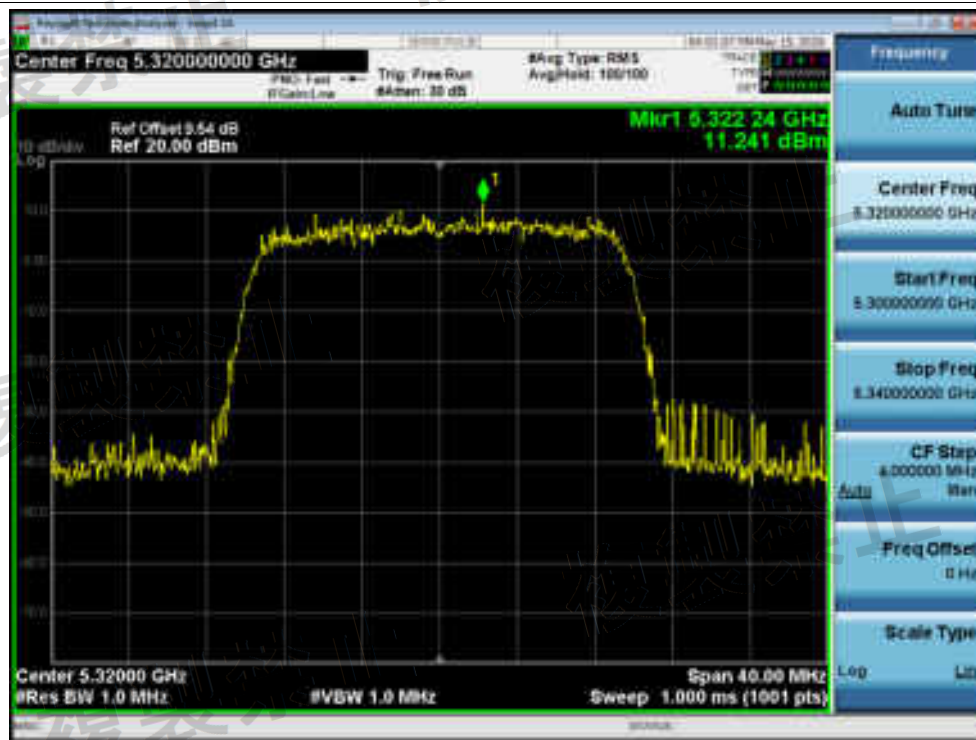


Power NVNT ax20 5320MHz Ant1 Pre Scan



Power NVNT ax20 5320MHz Ant1 Zero Span

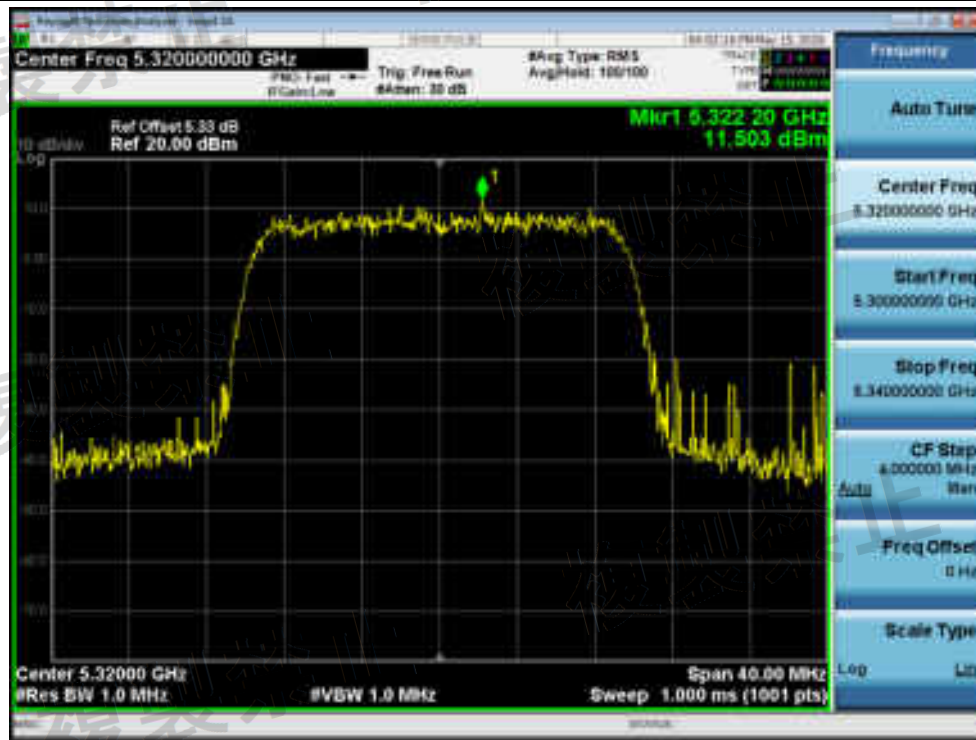

Power NVNT ax20 5320MHz Ant2 Pre Scan

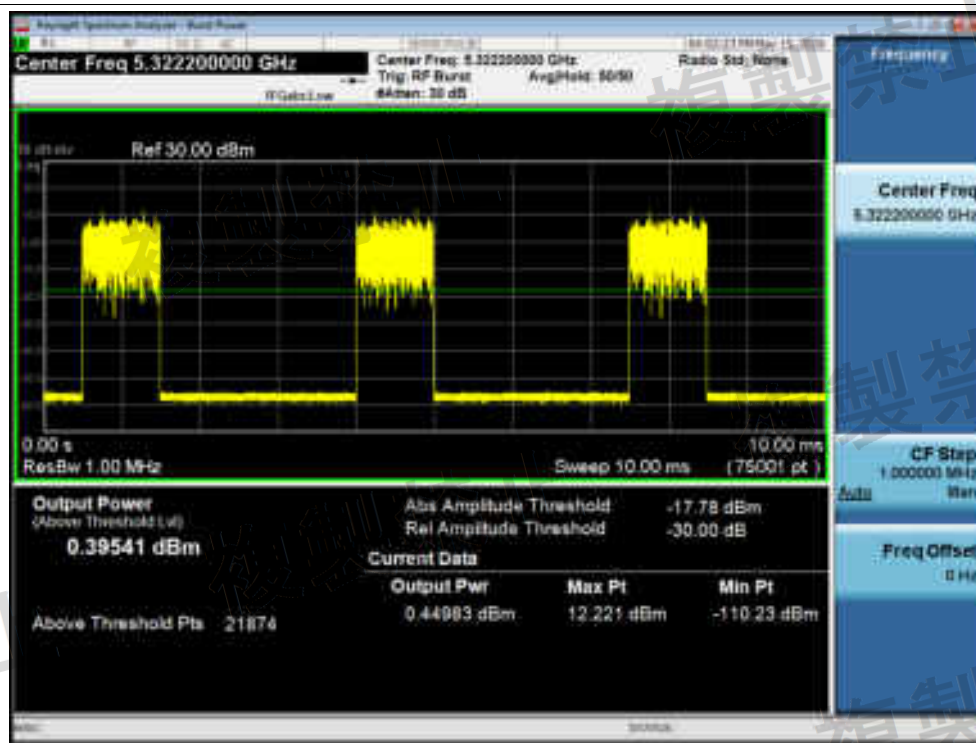

Power NVNT ax20 5320MHz Ant2 Zero Span




Power NVNT ax20 5500MHz Ant1 Pre Scan



Power NVNT ax20 5500MHz Ant1 Zero Span



Power NVNT ax20 5500MHz Ant2 Pre Scan

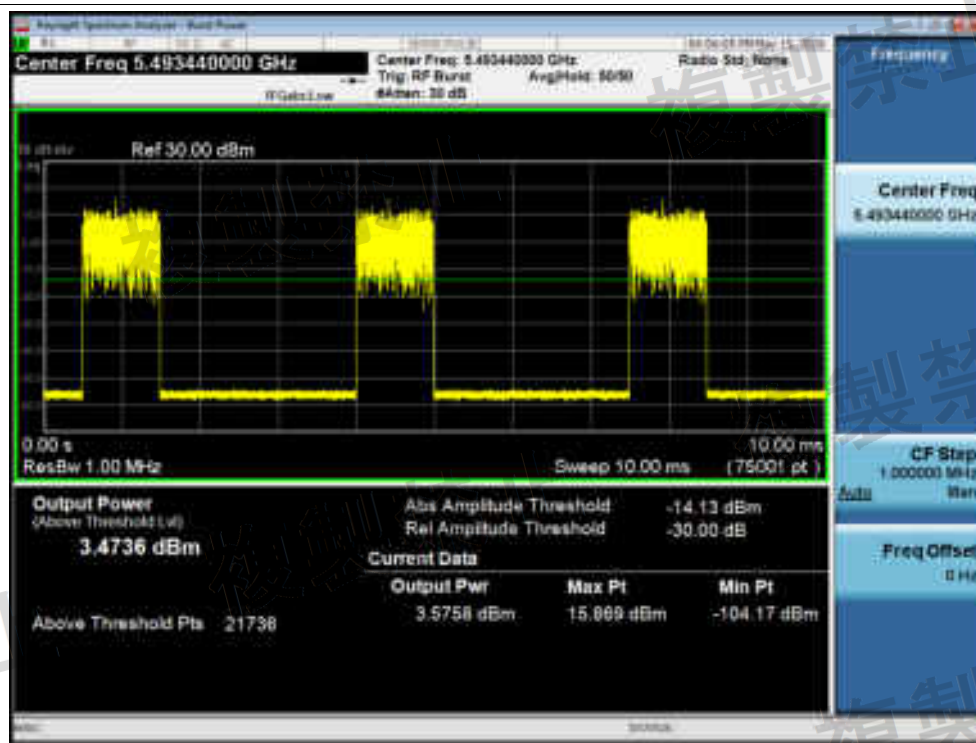

Power NVNT ax20 5500MHz Ant2 Zero Span




Power NVNT ax20 5580MHz Ant1 Pre Scan



Power NVNT ax20 5580MHz Ant1 Zero Span



Power NVNT ax20 5580MHz Ant2 Pre Scan

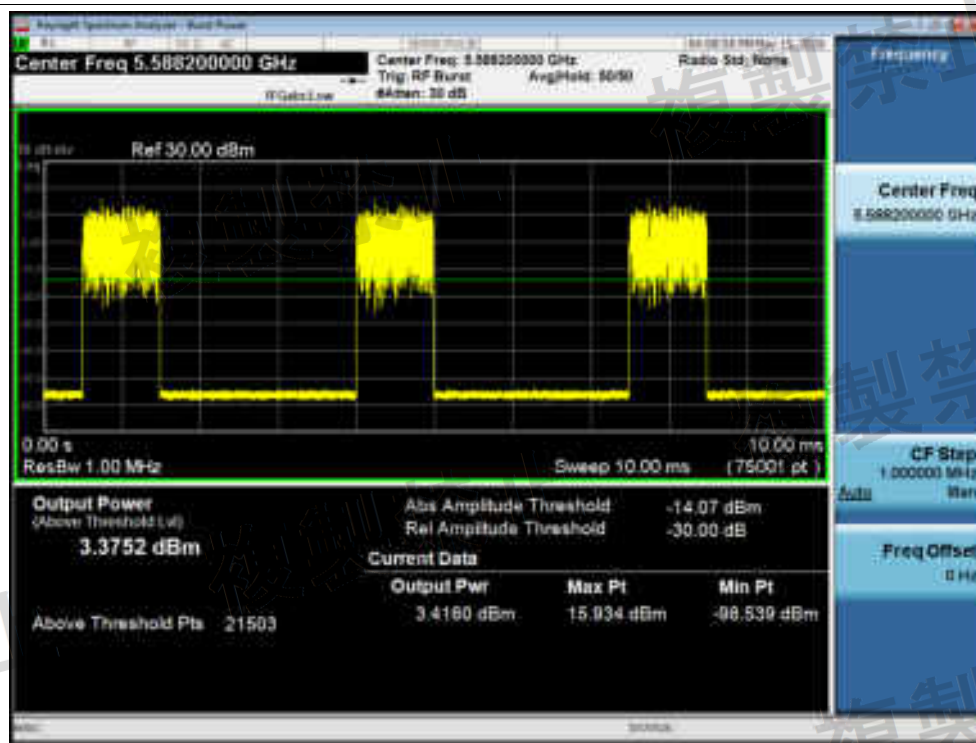

Power NVNT ax20 5580MHz Ant2 Zero Span



Power NVNT ax20 5700MHz Ant1 Pre Scan




Power NVNT ax20 5700MHz Ant1 Zero Span




Power NVNT ax20 5700MHz Ant2 Pre Scan




Power NVNT ax20 5700MHz Ant2 Zero Span

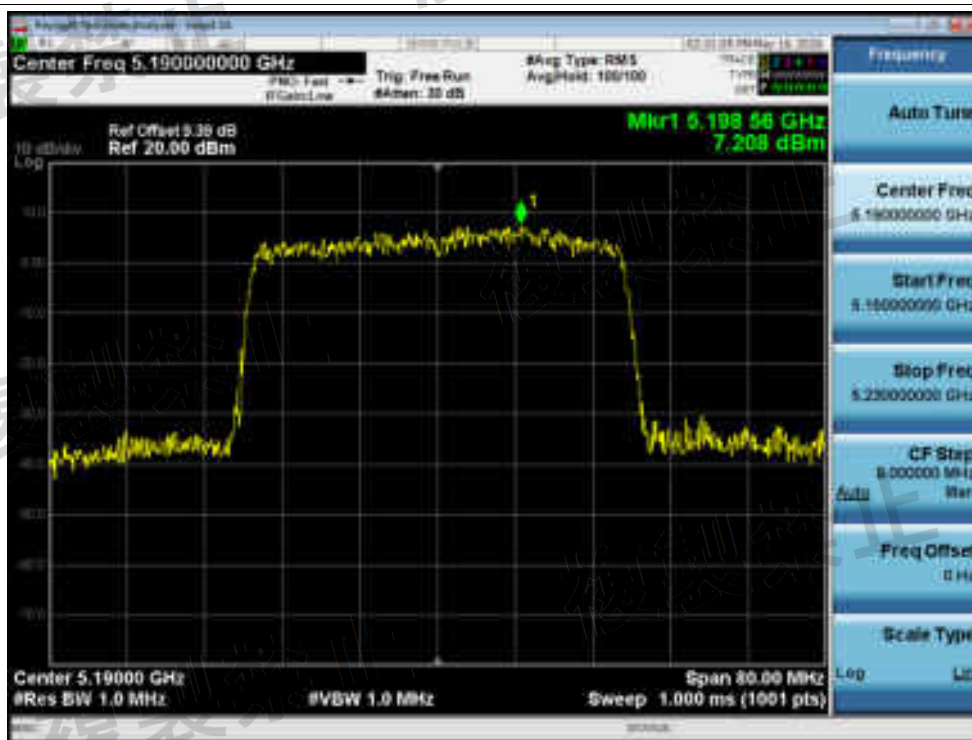


Power NVNT ax40 5190MHz Ant1 Pre Scan

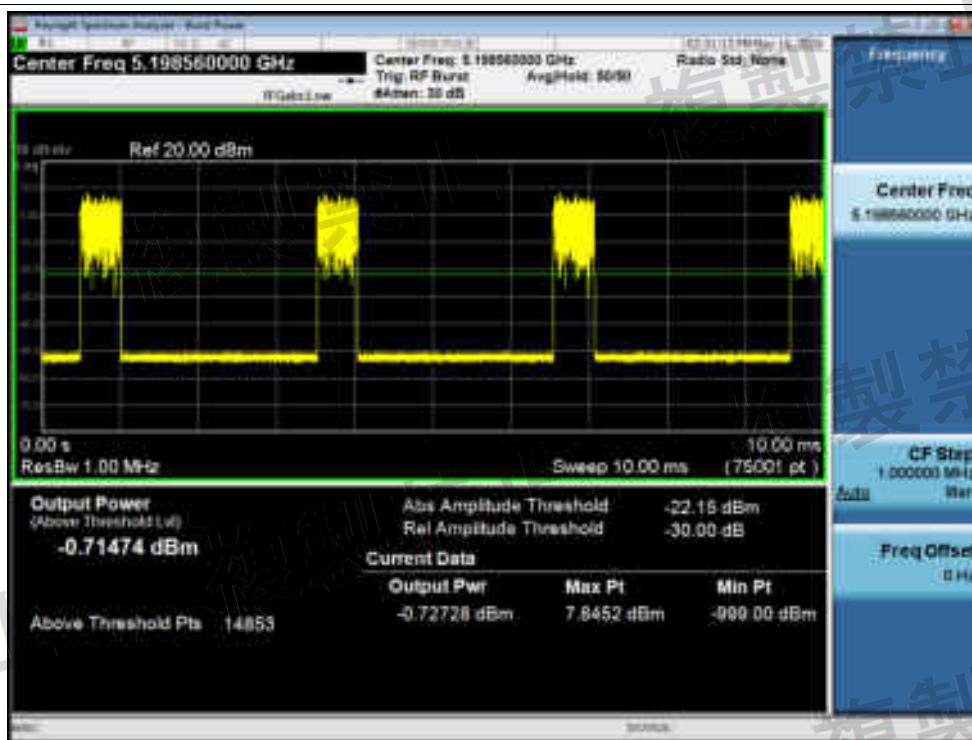


Power NVNT ax40 5190MHz Ant1 Zero Span

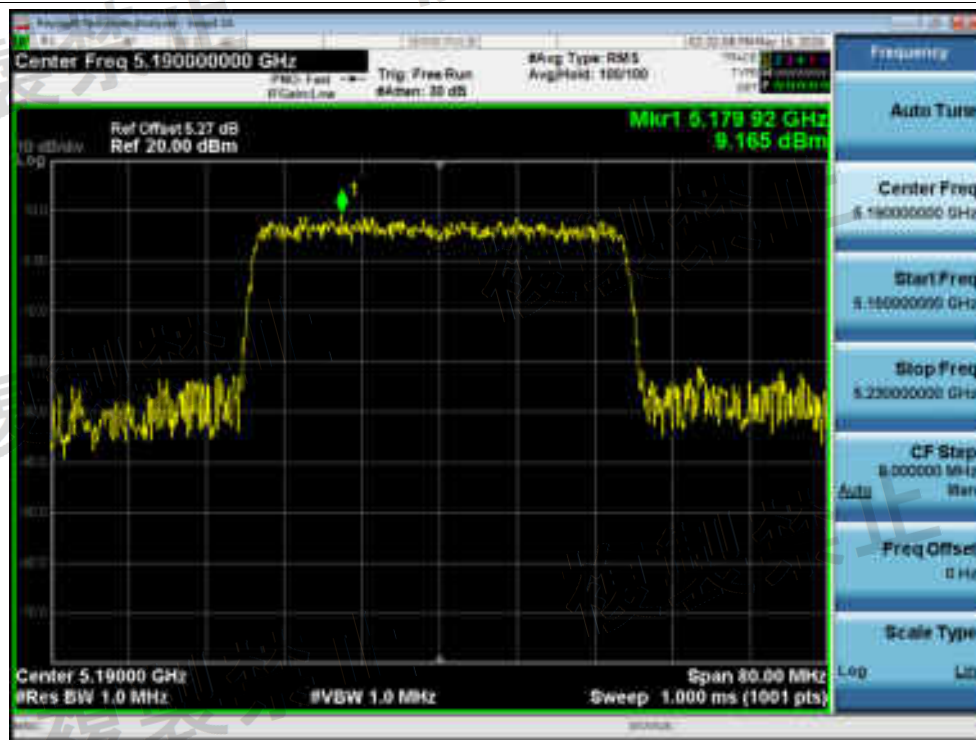


Power NVNT ax40 5190MHz Ant2 Pre Scan

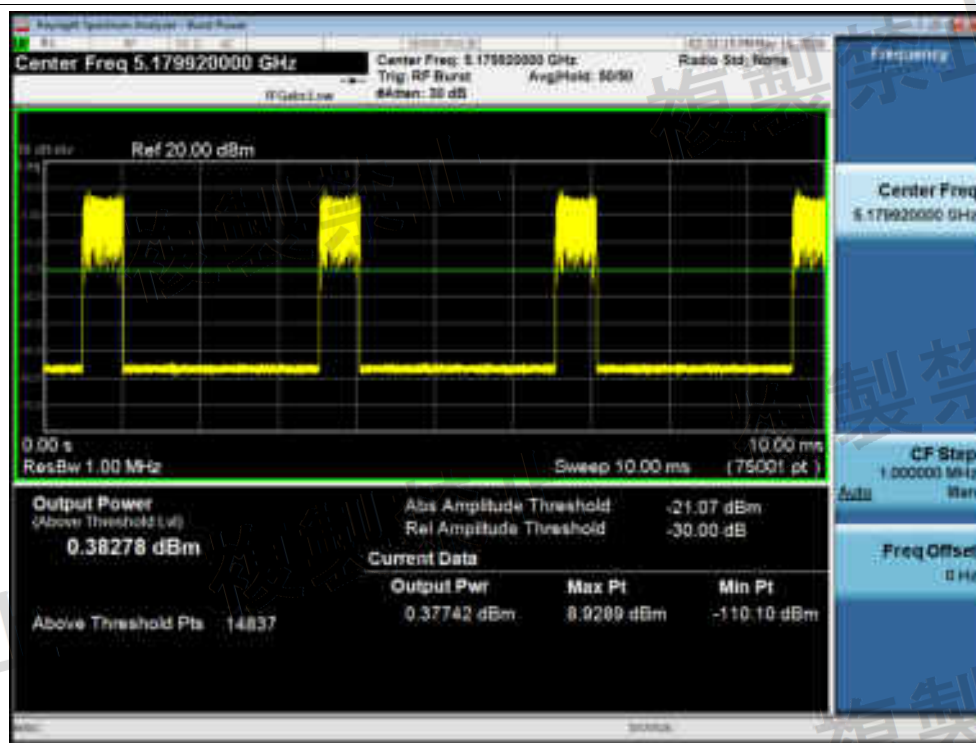


Power NVNT ax40 5190MHz Ant2 Zero Span

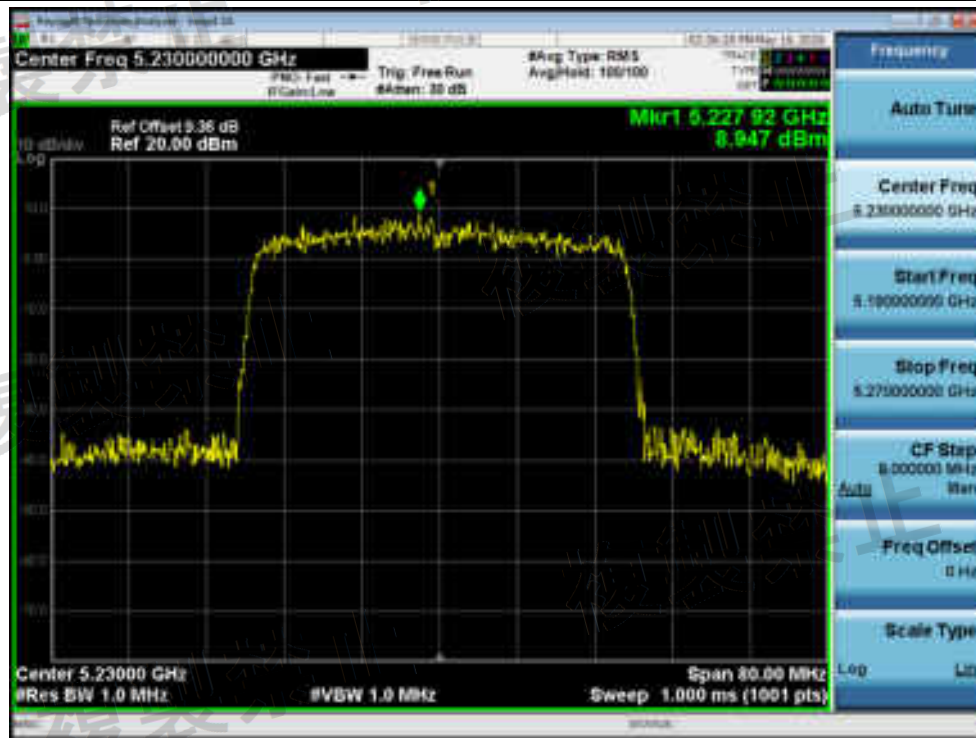


Power NVNT ax40 5230MHz Ant1 Pre Scan

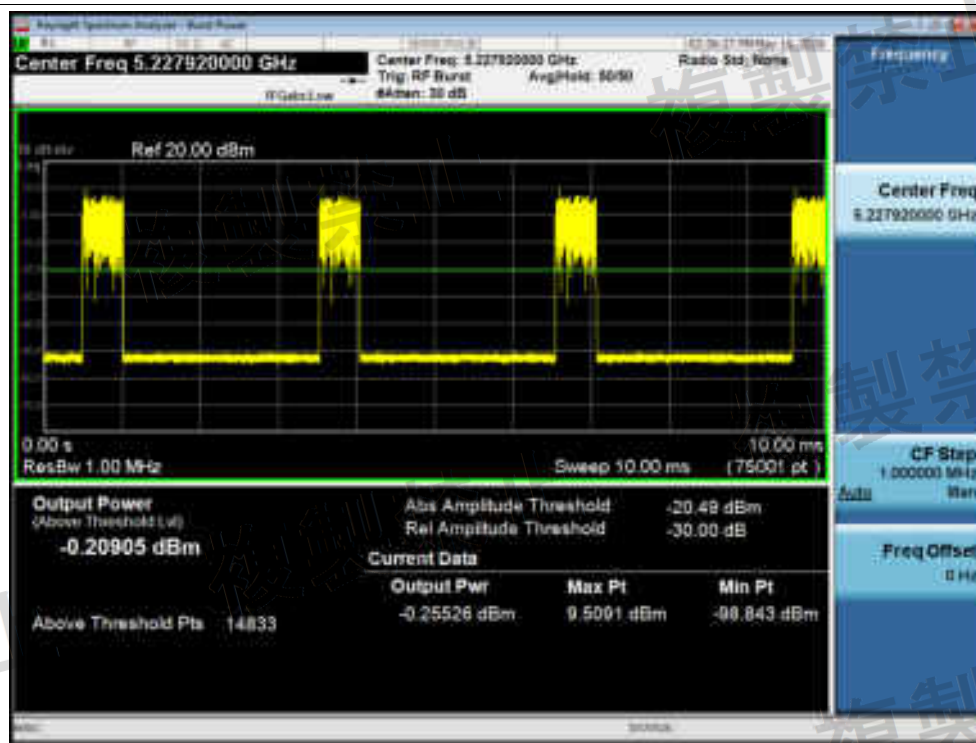


Power NVNT ax40 5230MHz Ant1 Zero Span

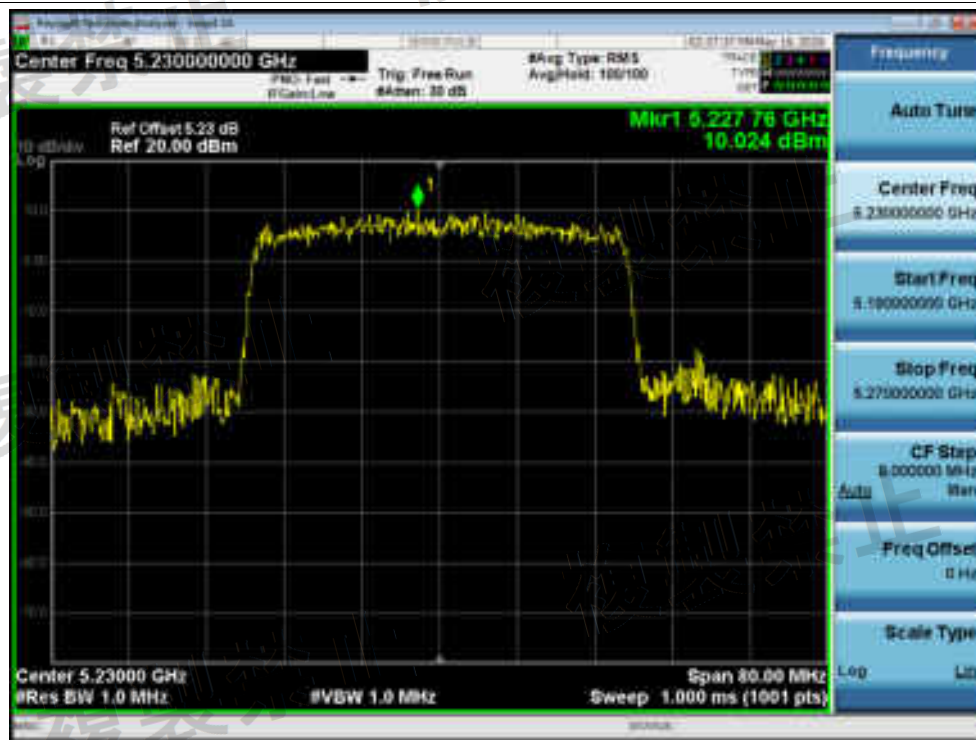

Power NVNT ax40 5230MHz Ant2 Pre Scan

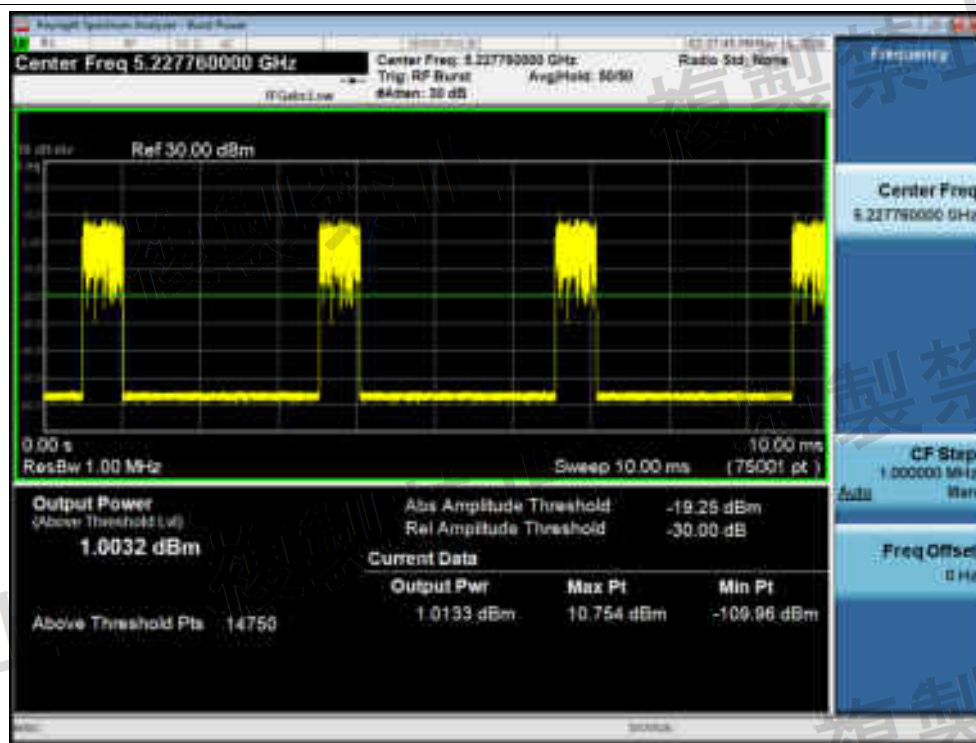

Power NVNT ax40 5230MHz Ant2 Zero Span

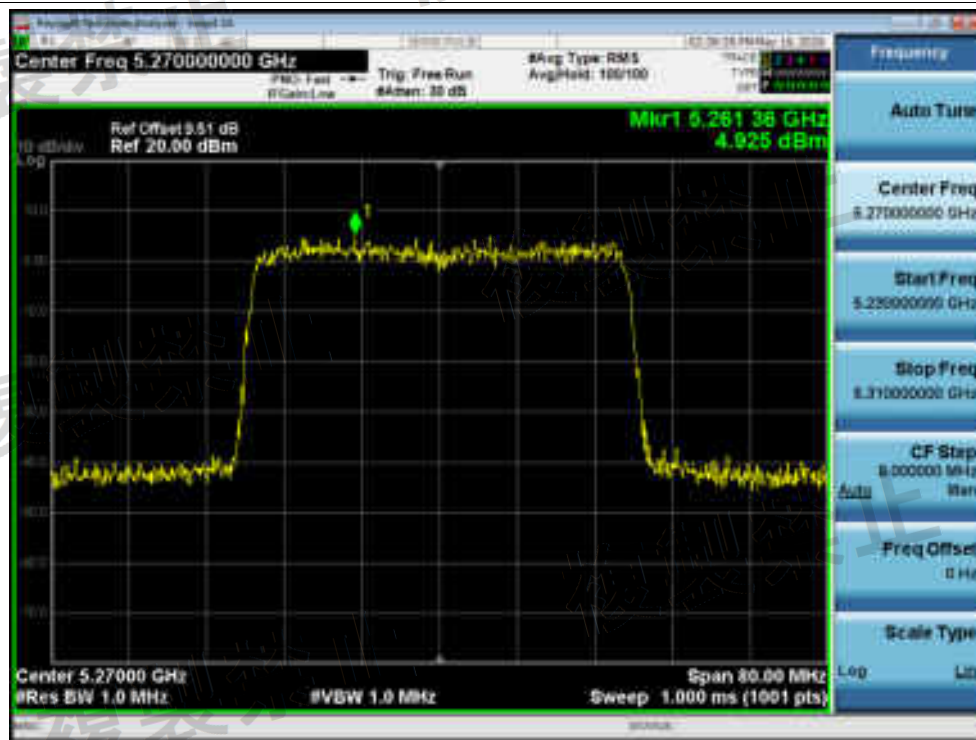


Power NVNT ax40 5270MHz Ant1 Pre Scan




Power NVNT ax40 5270MHz Ant1 Zero Span




Power NVNT ax40 5270MHz Ant2 Pre Scan

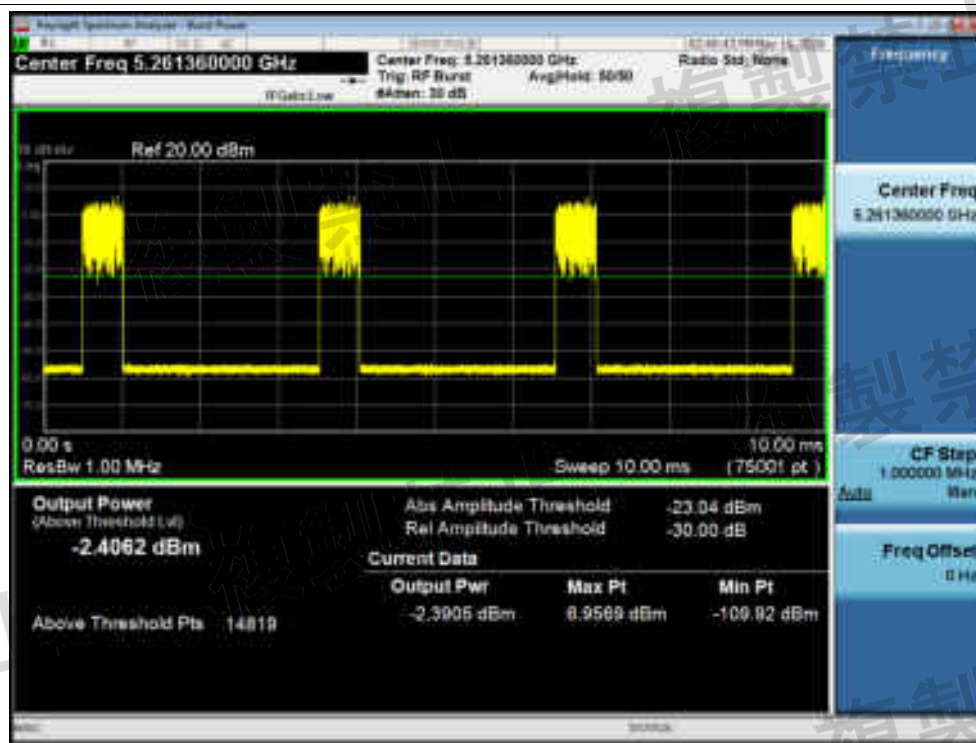


Power NVNT ax40 5270MHz Ant2 Zero Span

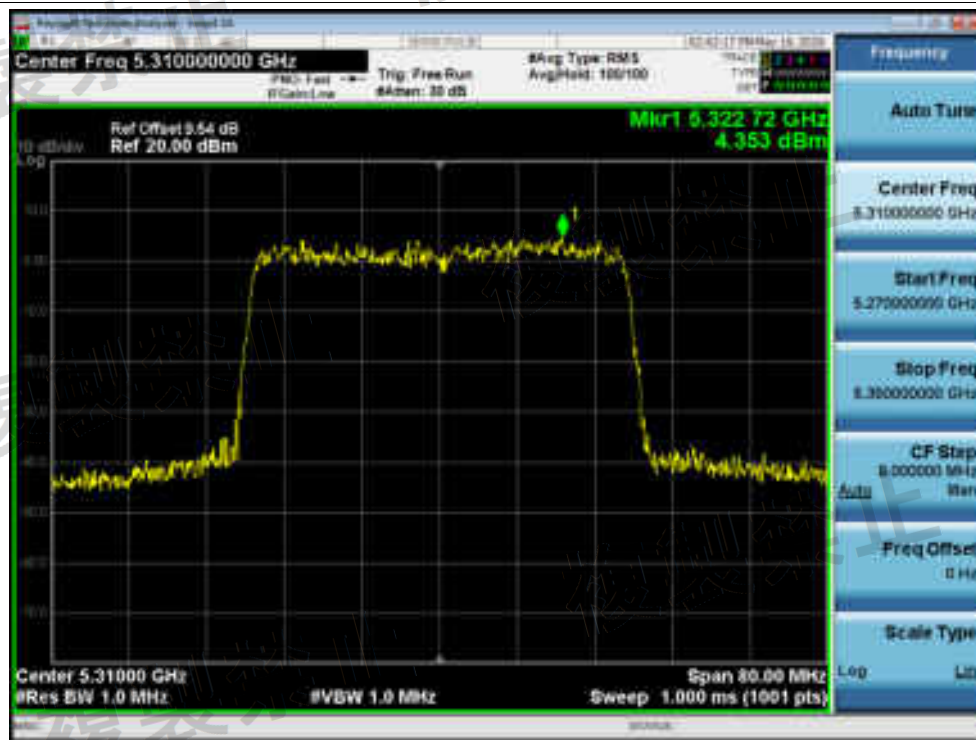

Power NVNT ax40 5310MHz Ant1 Pre Scan

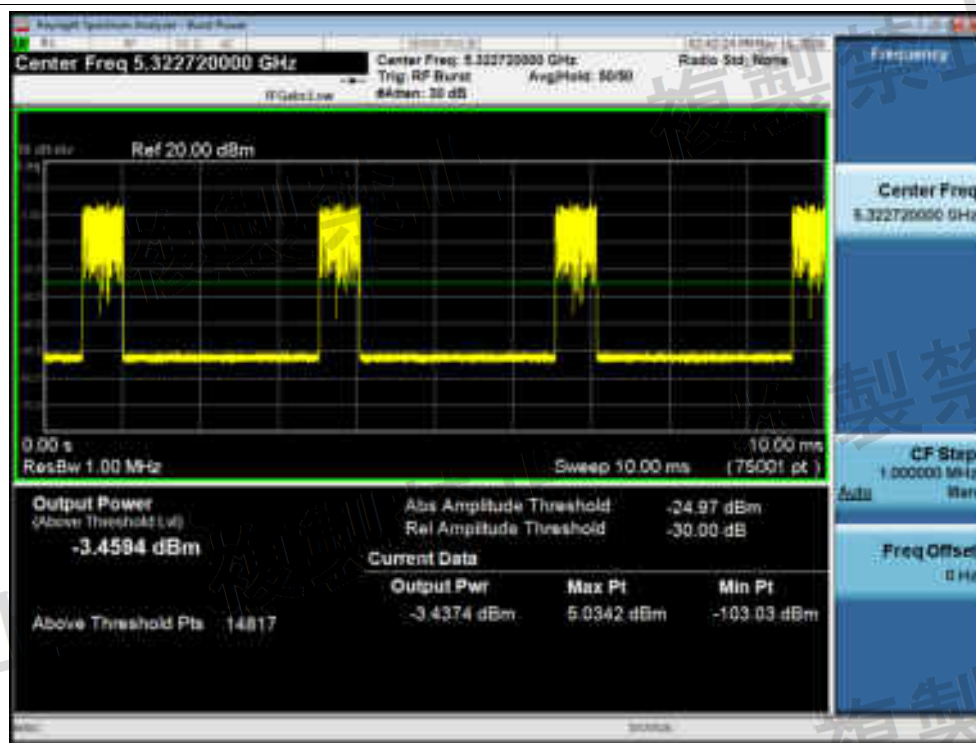


Power NVNT ax40 5310MHz Ant1 Zero Span

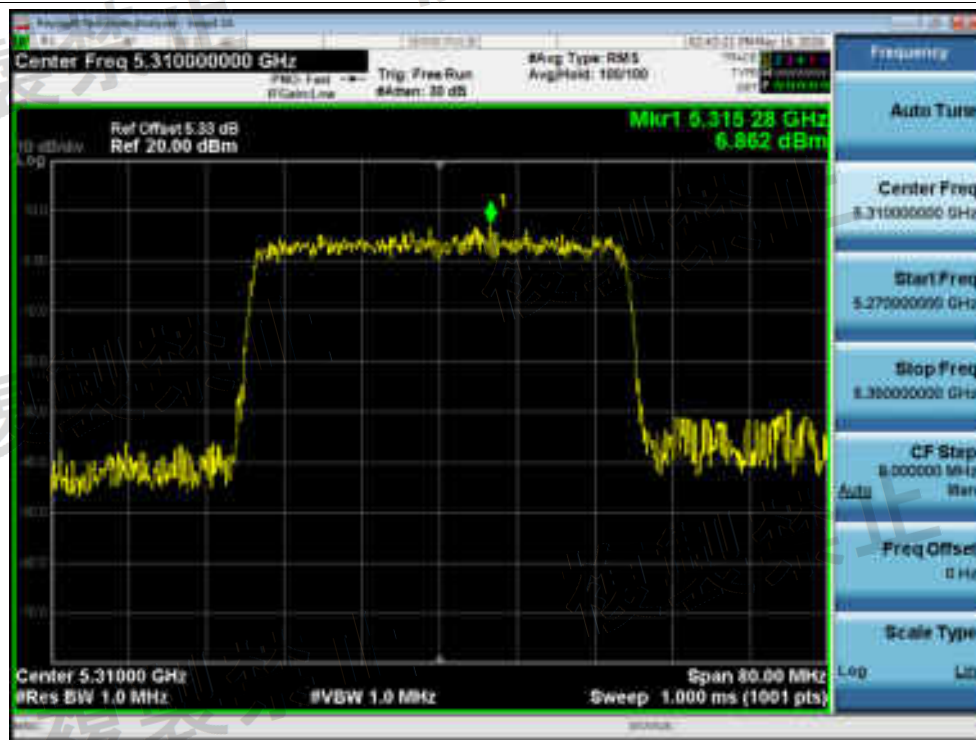

Power NVNT ax40 5310MHz Ant2 Pre Scan



Power NVNT ax40 5310MHz Ant2 Zero Span

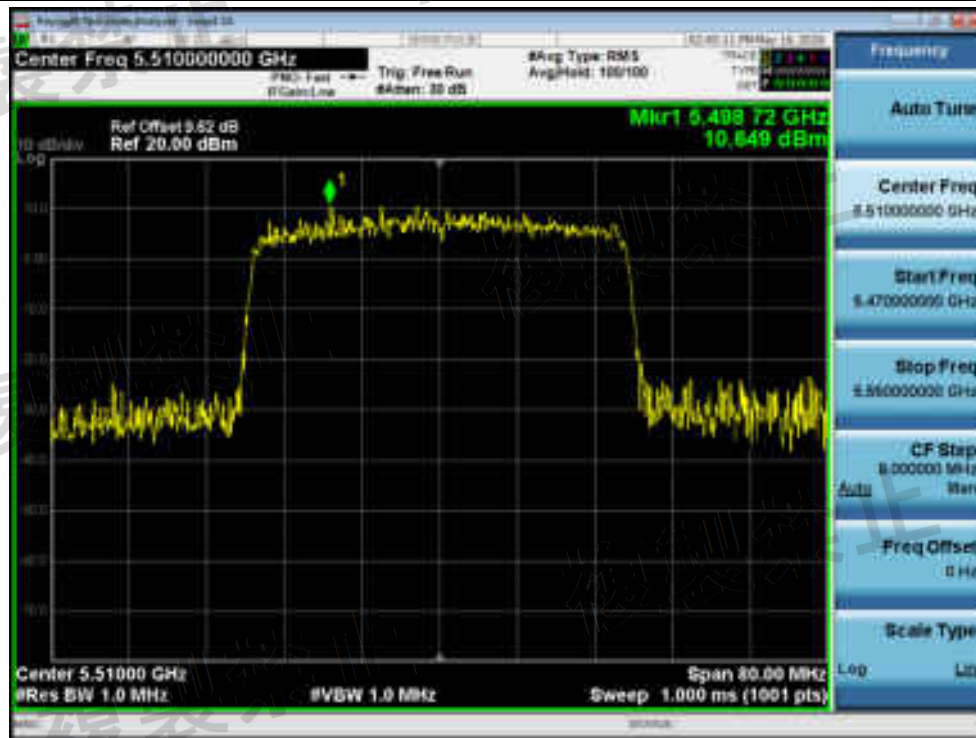


Power NVNT ax40 5510MHz Ant1 Pre Scan



Power NVNT ax40 5510MHz Ant1 Zero Span




Power NVNT ax40 5510MHz Ant2 Pre Scan

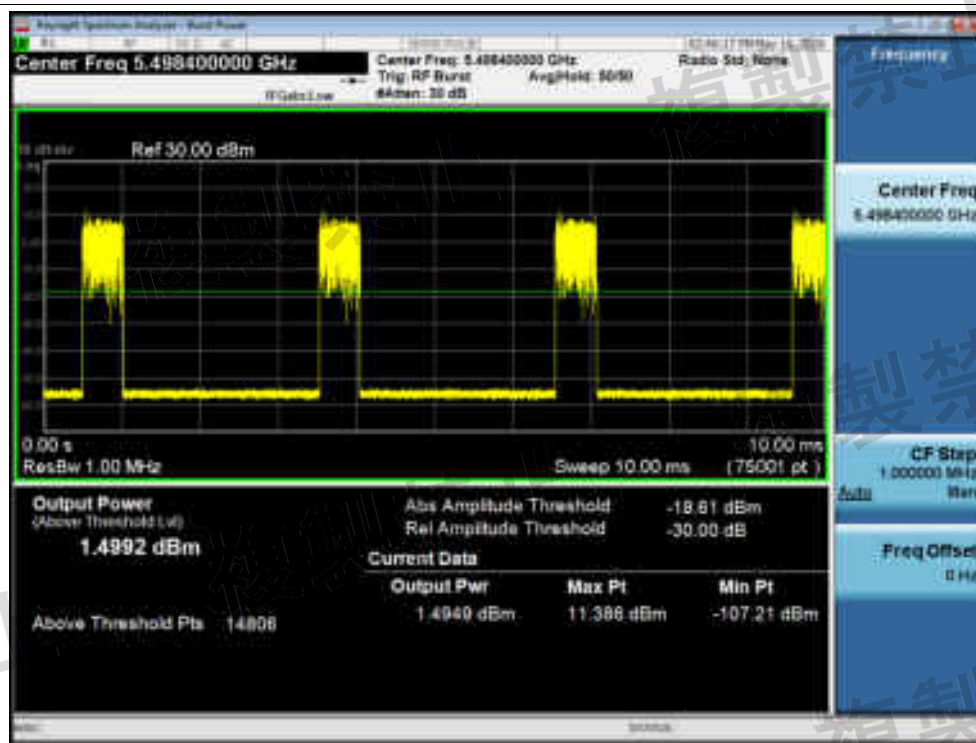

Power NVNT ax40 5510MHz Ant2 Zero Span




Power NVNT ax40 5590MHz Ant1 Pre Scan

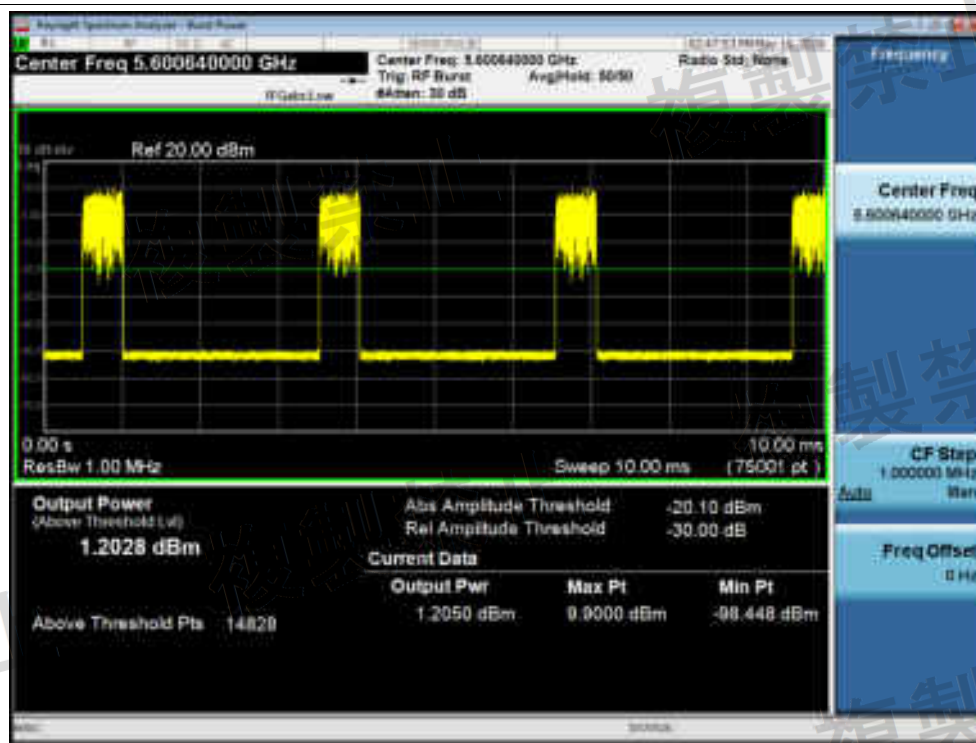


Power NVNT ax40 5590MHz Ant1 Zero Span



Power NVNT ax40 5590MHz Ant2 Pre Scan

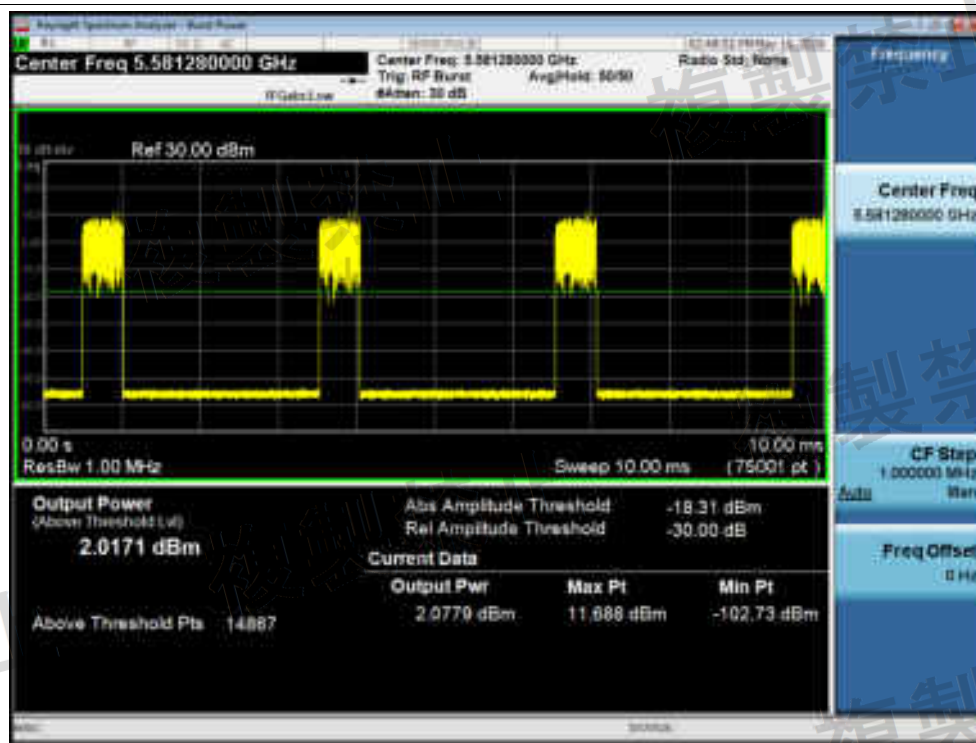


Power NVNT ax40 5590MHz Ant2 Zero Span

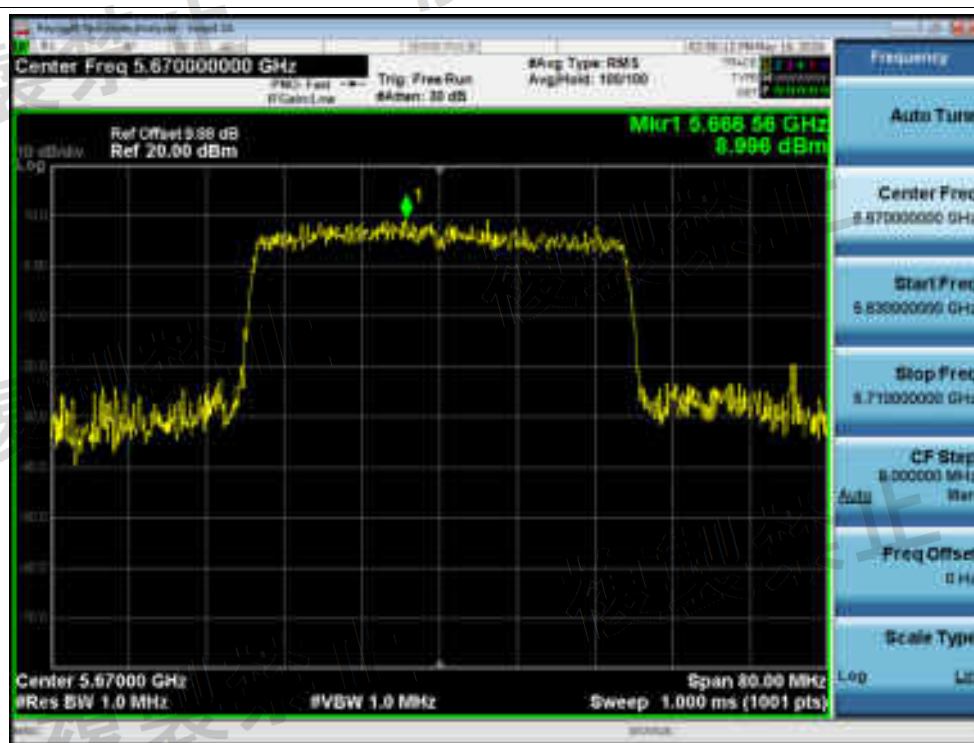

Power NVNT ax40 5670MHz Ant1 Pre Scan



Power NVNT ax40 5670MHz Ant1 Zero Span

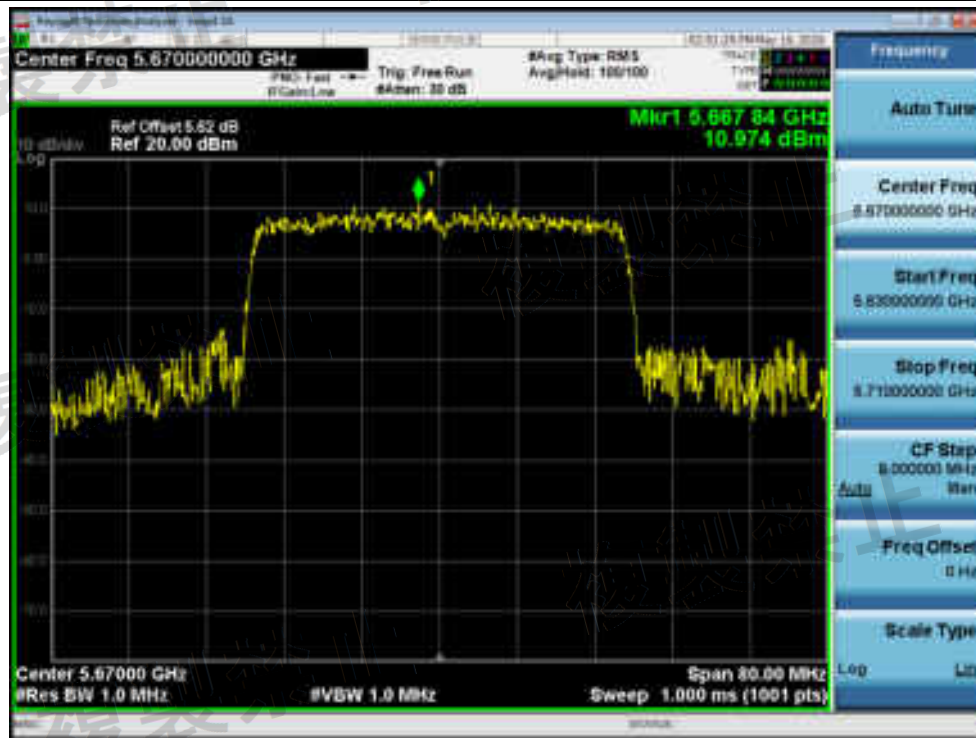

Power NVNT ax40 5670MHz Ant2 Pre Scan



Power NVNT ax40 5670MHz Ant2 Zero Span



Power NVNT ax80 5210MHz Ant1 Pre Scan



Power NVNT ax80 5210MHz Ant1 Zero Span



Power NVNT ax80 5210MHz Ant2 Pre Scan



Power NVNT ax80 5210MHz Ant2 Zero Span




Power NVNT ax80 5290MHz Ant1 Pre Scan




Power NVNT ax80 5290MHz Ant1 Zero Span



Power NVNT ax80 5290MHz Ant2 Pre Scan

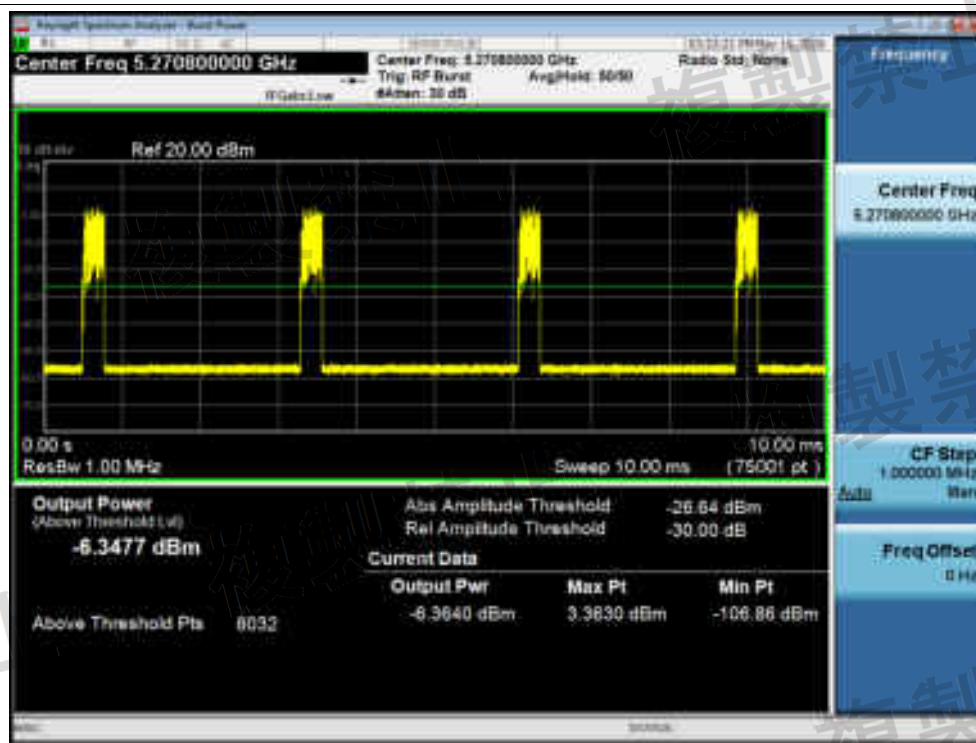

Power NVNT ax80 5290MHz Ant2 Zero Span

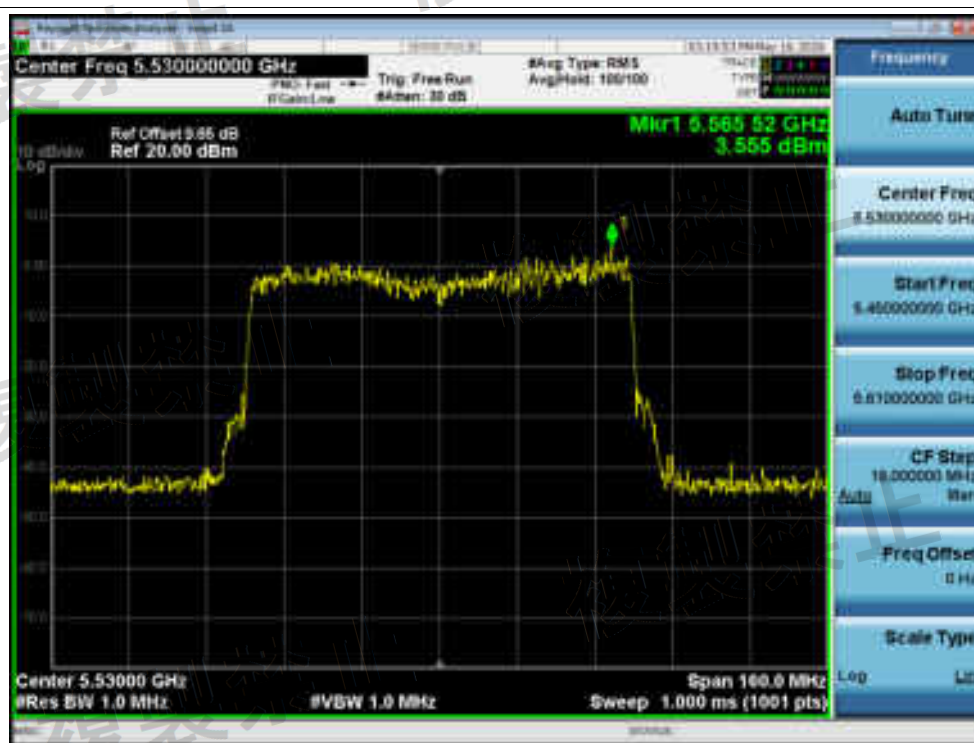

Power NVNT ax80 5530MHz Ant1 Pre Scan



Power NVNT ax80 5530MHz Ant1 Zero Span



Power NVNT ax80 5530MHz Ant2 Pre Scan



Power NVNT ax80 5530MHz Ant2 Zero Span



Power NVNT ax80 5610MHz Ant1 Pre Scan



Power NVNT ax80 5610MHz Ant1 Zero Span



Power NVNT ax80 5610MHz Ant2 Pre Scan



Power NVNT ax80 5610MHz Ant2 Zero Span

EIRP Power

Condition	Mode	Frequency (MHz)	Antenna	Power (dBm/MHz)	Power (mW/MHz)	Gain (dBi)	EIRP (dBm/MHz)	EIRP (mW/MHz)	Limit (mW/MHz)	Verdict
NVNT	a	5180	Ant1	3.77	2.382	3	6.77	4.753	10	Pass
NVNT	a	5180	Ant2	4.8	3.02	3	7.8	6.026	10	Pass
NVNT	a	5200	Ant1	4.6	2.884	3	7.6	5.754	10	Pass
NVNT	a	5200	Ant2	4.56	2.858	3	7.56	5.702	10	Pass
NVNT	a	5240	Ant1	4.2	2.63	3	7.2	5.248	10	Pass
NVNT	a	5240	Ant2	4.71	2.958	3	7.71	5.902	10	Pass
NVNT	a	5260	Ant1	1.94	1.563	3	4.94	3.119	5	Pass
NVNT	a	5260	Ant2	2.85	1.928	3	5.85	3.846	5	Pass
NVNT	a	5300	Ant1	2.03	1.596	3	5.03	3.184	5	Pass
NVNT	a	5300	Ant2	3.03	2.009	3	6.03	4.009	5	Pass
NVNT	a	5320	Ant1	2.38	1.73	3	5.38	3.451	5	Pass
NVNT	a	5320	Ant2	2.93	1.963	3	5.93	3.917	5	Pass
NVNT	a	5500	Ant1	4.7	2.951	3	7.7	5.888	25	Pass
NVNT	a	5500	Ant2	5.13	3.258	3	8.13	6.501	25	Pass
NVNT	a	5580	Ant1	4.91	3.097	3	7.91	6.18	25	Pass
NVNT	a	5580	Ant2	5.45	3.508	3	8.45	6.998	25	Pass
NVNT	a	5700	Ant1	5.02	3.177	3	8.02	6.339	25	Pass
NVNT	a	5700	Ant2	5.01	3.17	3	8.01	6.324	25	Pass
NVNT	n20	5180	Ant1	1.83	1.524	3	4.83	3.041	-	-
NVNT	n20	5180	Ant2	3.65	2.317	3	6.65	4.624	-	-
NVNT	n20	5180	Sum	5.84	3.841	-	8.84	7.665	10	Pass
NVNT	n20	5200	Ant1	2.52	1.786	3	5.52	3.565	-	-
NVNT	n20	5200	Ant2	3.17	2.075	3	6.17	4.14	-	-
NVNT	n20	5200	Sum	5.87	3.861	-	8.87	7.705	10	Pass
NVNT	n20	5240	Ant1	2.4	1.738	3	5.4	3.467	-	-
NVNT	n20	5240	Ant2	3.67	2.328	3	6.67	4.645	-	-
NVNT	n20	5240	Sum	6.09	4.066	-	9.09	8.112	10	Pass
NVNT	n20	5260	Ant1	-0.47	0.897	3	2.53	1.791	-	-
NVNT	n20	5260	Ant2	1.06	1.276	3	4.06	2.547	-	-
NVNT	n20	5260	Sum	3.37	2.173	-	6.37	4.338	5	Pass
NVNT	n20	5300	Ant1	-0.34	0.925	3	2.66	1.845	-	-
NVNT	n20	5300	Ant2	0.83	1.211	3	3.83	2.415	-	-
NVNT	n20	5300	Sum	3.29	2.136	-	6.29	4.26	5	Pass
NVNT	n20	5320	Ant1	-0.18	0.959	3	2.82	1.914	-	-
NVNT	n20	5320	Ant2	0.71	1.178	3	3.71	2.35	-	-
NVNT	n20	5320	Sum	3.3	2.137	-	6.3	4.264	5	Pass
NVNT	n20	5500	Ant1	3.39	2.183	3	6.39	4.355	-	-
NVNT	n20	5500	Ant2	4.09	2.564	3	7.09	5.117	-	-

Report

NVNT	n20	5500	Sum	6.76	4.747	-	9.76	9.472	25	Pass
NVNT	n20	5580	Ant1	3.52	2.249	3	6.52	4.487	-	-
NVNT	n20	5580	Ant2	3.71	2.35	3	6.71	4.688	-	-
NVNT	n20	5580	Sum	6.63	4.599	-	9.63	9.175	25	Pass
NVNT	n20	5700	Ant1	3.19	2.084	3	6.19	4.159	-	-
NVNT	n20	5700	Ant2	3.66	2.323	3	6.66	4.634	-	-
NVNT	n20	5700	Sum	6.44	4.407	-	9.44	8.793	25	Pass
NVNT	n40	5190	Ant1	0.18	1.042	3	3.18	2.08	-	-
NVNT	n40	5190	Ant2	0.62	1.153	3	3.62	2.301	-	-
NVNT	n40	5190	Sum	3.42	2.195	-	6.42	4.381	5	Pass
NVNT	n40	5230	Ant1	-0.23	0.948	3	2.77	1.892	-	-
NVNT	n40	5230	Ant2	1.01	1.262	3	4.01	2.518	-	-
NVNT	n40	5230	Sum	3.44	2.21	-	6.44	4.41	5	Pass
NVNT	n40	5270	Ant1	-2.78	0.527	3	0.22	1.052	-	-
NVNT	n40	5270	Ant2	-1.51	0.706	3	1.49	1.409	-	-
NVNT	n40	5270	Sum	0.91	1.233	-	3.91	2.461	2.5	Pass
NVNT	n40	5310	Ant1	-3.24	0.474	3	-0.24	0.946	-	-
NVNT	n40	5310	Ant2	-2.55	0.556	3	0.45	1.109	-	-
NVNT	n40	5310	Sum	0.13	1.03	-	3.13	2.055	2.5	Pass
NVNT	n40	5510	Ant1	1.18	1.312	3	4.18	2.618	-	-
NVNT	n40	5510	Ant2	1.75	1.496	3	4.75	2.985	-	-
NVNT	n40	5510	Sum	4.48	2.808	-	7.48	5.603	12.5	Pass
NVNT	n40	5590	Ant1	0.93	1.239	3	3.93	2.472	-	-
NVNT	n40	5590	Ant2	2.05	1.603	3	5.05	3.199	-	-
NVNT	n40	5590	Sum	4.54	2.842	-	7.54	5.671	12.5	Pass
NVNT	n40	5670	Ant1	1.3	1.349	3	4.3	2.692	-	-
NVNT	n40	5670	Ant2	1.93	1.56	3	4.93	3.112	-	-
NVNT	n40	5670	Sum	4.64	2.909	-	7.64	5.804	12.5	Pass
NVNT	ac20	5180	Ant1	1.61	1.449	3	4.61	2.891	-	-
NVNT	ac20	5180	Ant2	3.91	2.46	3	6.91	4.909	-	-
NVNT	ac20	5180	Sum	5.92	3.909	-	8.92	7.8	10	Pass
NVNT	ac20	5200	Ant1	2.69	1.858	3	5.69	3.707	-	-
NVNT	ac20	5200	Ant2	3.29	2.133	3	6.29	4.256	-	-
NVNT	ac20	5200	Sum	6.01	3.991	-	9.01	7.963	10	Pass
NVNT	ac20	5240	Ant1	2.42	1.746	3	5.42	3.483	-	-
NVNT	ac20	5240	Ant2	3.63	2.307	3	6.63	4.603	-	-
NVNT	ac20	5240	Sum	6.08	4.053	-	9.08	8.086	10	Pass
NVNT	ac20	5260	Ant1	-0.51	0.889	3	2.49	1.774	-	-
NVNT	ac20	5260	Ant2	1.13	1.297	3	4.13	2.588	-	-
NVNT	ac20	5260	Sum	3.4	2.186	-	6.4	4.362	5	Pass
NVNT	ac20	5300	Ant1	-0.27	0.94	3	2.73	1.875	-	-
NVNT	ac20	5300	Ant2	0.85	1.216	3	3.85	2.427	-	-
NVNT	ac20	5300	Sum	3.34	2.156	-	6.34	4.302	5	Pass
NVNT	ac20	5320	Ant1	-0.06	0.986	3	2.94	1.968	-	-

Report

NVNT	ac20	5320	Ant2	0.68	1.169	3	3.68	2.333	-	-
NVNT	ac20	5320	Sum	3.34	2.155	-	6.34	4.301	5	Pass
NVNT	ac20	5500	Ant1	3.38	2.178	3	6.38	4.345	-	-
NVNT	ac20	5500	Ant2	4.19	2.624	3	7.19	5.236	-	-
NVNT	ac20	5500	Sum	6.81	4.802	-	9.81	9.581	25	Pass
NVNT	ac20	5580	Ant1	3.54	2.259	3	6.54	4.508	-	-
NVNT	ac20	5580	Ant2	4.43	2.773	3	7.43	5.534	-	-
NVNT	ac20	5580	Sum	7.02	5.032	-	10.02	10.042	25	Pass
NVNT	ac20	5700	Ant1	3.2	2.089	3	6.2	4.169	-	-
NVNT	ac20	5700	Ant2	3.7	2.344	3	6.7	4.677	-	-
NVNT	ac20	5700	Sum	6.47	4.433	-	9.47	8.846	25	Pass
NVNT	ac40	5190	Ant1	0.22	1.052	3	3.22	2.099	-	-
NVNT	ac40	5190	Ant2	0.61	1.151	3	3.61	2.296	-	-
NVNT	ac40	5190	Sum	3.43	2.203	-	6.43	4.395	5	Pass
NVNT	ac40	5230	Ant1	-0.16	0.964	3	2.84	1.923	-	-
NVNT	ac40	5230	Ant2	0.63	1.156	3	3.63	2.307	-	-
NVNT	ac40	5230	Sum	3.26	2.12	-	6.26	4.23	5	Pass
NVNT	ac40	5270	Ant1	-3.89	0.408	3	-0.89	0.815	-	-
NVNT	ac40	5270	Ant2	-2.54	0.557	3	0.46	1.112	-	-
NVNT	ac40	5270	Sum	-0.15	0.965	-	2.85	1.927	2.5	Pass
NVNT	ac40	5310	Ant1	-3.27	0.471	3	-0.27	0.94	-	-
NVNT	ac40	5310	Ant2	-2.22	0.6	3	0.78	1.197	-	-
NVNT	ac40	5310	Sum	0.3	1.071	-	3.3	2.137	2.5	Pass
NVNT	ac40	5510	Ant1	1.61	1.449	3	4.61	2.891	-	-
NVNT	ac40	5510	Ant2	1.88	1.542	3	4.88	3.076	-	-
NVNT	ac40	5510	Sum	4.76	2.991	-	7.76	5.967	12.5	Pass
NVNT	ac40	5590	Ant1	1.09	1.285	3	4.09	2.564	-	-
NVNT	ac40	5590	Ant2	2.18	1.652	3	5.18	3.296	-	-
NVNT	ac40	5590	Sum	4.68	2.937	-	7.68	5.86	12.5	Pass
NVNT	ac40	5670	Ant1	1.4	1.38	3	4.4	2.754	-	-
NVNT	ac40	5670	Ant2	1.91	1.552	3	4.91	3.097	-	-
NVNT	ac40	5670	Sum	4.67	2.932	-	7.67	5.851	12.5	Pass
NVNT	ac80	5210	Ant1	-2.91	0.512	3	0.08999999999999999	1.021	-	-
NVNT	ac80	5210	Ant2	-1.68	0.679	3	1.32	1.355	-	-
NVNT	ac80	5210	Sum	0.76	1.191	-	3.76	2.376	2.5	Pass
NVNT	ac80	5290	Ant1	-7.11	0.195	3	-4.11	0.388	-	-
NVNT	ac80	5290	Ant2	-5.81	0.262	3	-2.81	0.524	-	-
NVNT	ac80	5290	Sum	-3.4	0.457	-	-0.4	0.912	1.25	Pass
NVNT	ac80	5530	Ant1	-4.87	0.326	3	-1.87	0.65	-	-
NVNT	ac80	5530	Ant2	-6.68	0.215	3	-3.68	0.429	-	-
NVNT	ac80	5530	Sum	-2.67	0.541	-	0.33	1.079	6.25	Pass
NVNT	ac80	5610	Ant1	-5.85	0.26	3	-2.85	0.519	-	-
NVNT	ac80	5610	Ant2	-4.9	0.324	3	-1.9	0.646	-	-

Report

NVNT	ac80	5610	Sum	-2.34	0.584	-	0.66	1.165	6.25	Pass
NVNT	ax20	5180	Ant1	0.97	1.25	3	3.97	2.495	-	-
NVNT	ax20	5180	Ant2	3.17	2.075	3	6.17	4.14	-	-
NVNT	ax20	5180	Sum	5.22	3.325	-	8.22	6.635	10	Pass
NVNT	ax20	5200	Ant1	2.39	1.734	3	5.39	3.459	-	-
NVNT	ax20	5200	Ant2	2.87	1.936	3	5.87	3.864	-	-
NVNT	ax20	5200	Sum	5.65	3.67	-	8.65	7.323	10	Pass
NVNT	ax20	5240	Ant1	1.77	1.503	3	4.77	2.999	-	-
NVNT	ax20	5240	Ant2	3.08	2.032	3	6.08	4.055	-	-
NVNT	ax20	5240	Sum	5.48	3.535	-	8.48	7.054	10	Pass
NVNT	ax20	5260	Ant1	-0.56	0.879	3	2.44	1.754	-	-
NVNT	ax20	5260	Ant2	0.62	1.153	3	3.62	2.301	-	-
NVNT	ax20	5260	Sum	3.08	2.032	-	6.08	4.055	5	Pass
NVNT	ax20	5300	Ant1	-0.79	0.834	3	2.21	1.663	-	-
NVNT	ax20	5300	Ant2	0.08	1.019	3	3.08	2.032	-	-
NVNT	ax20	5300	Sum	2.68	1.853	-	5.68	3.695	5	Pass
NVNT	ax20	5320	Ant1	-0.18	0.959	3	2.82	1.914	-	-
NVNT	ax20	5320	Ant2	0.4	1.096	3	3.4	2.188	-	-
NVNT	ax20	5320	Sum	3.13	2.055	-	6.13	4.102	5	Pass
NVNT	ax20	5500	Ant1	3.16	2.07	3	6.16	4.13	-	-
NVNT	ax20	5500	Ant2	3.47	2.223	3	6.47	4.436	-	-
NVNT	ax20	5500	Sum	6.33	4.293	-	9.33	8.566	25	Pass
NVNT	ax20	5580	Ant1	2.92	1.959	3	5.92	3.908	-	-
NVNT	ax20	5580	Ant2	3.38	2.178	3	6.38	4.345	-	-
NVNT	ax20	5580	Sum	6.17	4.137	-	9.17	8.253	25	Pass
NVNT	ax20	5700	Ant1	2.12	1.629	3	5.12	3.251	-	-
NVNT	ax20	5700	Ant2	3.4	2.188	3	6.4	4.365	-	-
NVNT	ax20	5700	Sum	5.82	3.817	-	8.82	7.616	25	Pass
NVNT	ax40	5190	Ant1	-0.71	0.849	3	2.29	1.694	-	-
NVNT	ax40	5190	Ant2	0.38	1.091	3	3.38	2.178	-	-
NVNT	ax40	5190	Sum	2.88	1.94	-	5.88	3.872	5	Pass
NVNT	ax40	5230	Ant1	-0.21	0.953	3	2.79	1.901	-	-
NVNT	ax40	5230	Ant2	1	1.259	3	4	2.512	-	-
NVNT	ax40	5230	Sum	3.45	2.212	-	6.45	4.413	5	Pass
NVNT	ax40	5270	Ant1	-3.86	0.411	3	-0.86	0.82	-	-
NVNT	ax40	5270	Ant2	-2.41	0.574	3	0.59	1.146	-	-
NVNT	ax40	5270	Sum	-0.06	0.985	-	2.94	1.966	2.5	Pass
NVNT	ax40	5310	Ant1	-3.46	0.451	3	-0.46	0.899	-	-
NVNT	ax40	5310	Ant2	-2.2	0.603	3	0.8	1.202	-	-
NVNT	ax40	5310	Sum	0.23	1.054	-	3.23	2.101	2.5	Pass
NVNT	ax40	5510	Ant1	-0.33	0.927	3	2.67	1.849	-	-
NVNT	ax40	5510	Ant2	1.5	1.413	3	4.5	2.818	-	-
NVNT	ax40	5510	Sum	3.69	2.34	-	6.69	4.667	12.5	Pass
NVNT	ax40	5590	Ant1	1.2	1.318	3	4.2	2.63	-	-

Report

NVNT	ax40	5590	Ant2	2.02	1.592	3	5.02	3.177	-	-
NVNT	ax40	5590	Sum	4.64	2.91	-	7.64	5.807	12.5	Pass
NVNT	ax40	5670	Ant1	0.88	1.225	3	3.88	2.443	-	-
NVNT	ax40	5670	Ant2	1.9	1.549	3	4.9	3.09	-	-
NVNT	ax40	5670	Sum	4.43	2.774	-	7.43	5.533	12.5	Pass
NVNT	ax80	5210	Ant1	-3.54	0.443	3	-0.54	0.883	-	-
NVNT	ax80	5210	Ant2	-2	0.631	3	1	1.259	-	-
NVNT	ax80	5210	Sum	0.31	1.074	-	3.31	2.142	2.5	Pass
NVNT	ax80	5290	Ant1	-6.78	0.21	3	-3.78	0.419	-	-
NVNT	ax80	5290	Ant2	-6.35	0.232	3	-3.35	0.462	-	-
NVNT	ax80	5290	Sum	-3.55	0.442	-	-0.55	0.881	1.25	Pass
NVNT	ax80	5530	Ant1	-4.98	0.318	3	-1.98	0.634	-	-
NVNT	ax80	5530	Ant2	-5.19	0.303	3	-2.19	0.604	-	-
NVNT	ax80	5530	Sum	-2.07	0.621	-	0.93	1.238	6.25	Pass
NVNT	ax80	5610	Ant1	-4.95	0.32	3	-1.95	0.638	-	-
NVNT	ax80	5610	Ant2	-4.35	0.367	3	-1.35	0.733	-	-
NVNT	ax80	5610	Sum	-1.63	0.687	-	1.37	1.371	6.25	Pass

Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	Lower Limit (MHz)	Upper Limit (MHz)	Verdict
NVNT	a	5180	Ant1	16.437	N/A	20	Pass
NVNT	a	5180	Ant2	16.417	N/A	20	Pass
NVNT	a	5200	Ant1	16.421	N/A	20	Pass
NVNT	a	5200	Ant2	16.437	N/A	20	Pass
NVNT	a	5240	Ant1	16.582	N/A	20	Pass
NVNT	a	5240	Ant2	16.442	N/A	20	Pass
NVNT	a	5260	Ant1	16.353	N/A	20	Pass
NVNT	a	5260	Ant2	16.401	N/A	20	Pass
NVNT	a	5300	Ant1	16.438	N/A	20	Pass
NVNT	a	5300	Ant2	16.421	N/A	20	Pass
NVNT	a	5320	Ant1	16.333	N/A	20	Pass
NVNT	a	5320	Ant2	16.432	N/A	20	Pass
NVNT	a	5500	Ant1	16.593	N/A	20	Pass
NVNT	a	5500	Ant2	16.425	N/A	20	Pass
NVNT	a	5580	Ant1	16.455	N/A	20	Pass
NVNT	a	5580	Ant2	16.458	N/A	20	Pass
NVNT	a	5700	Ant1	16.379	N/A	20	Pass
NVNT	a	5700	Ant2	16.5	N/A	20	Pass
NVNT	n20	5180	Ant1	17.599	N/A	20	Pass
NVNT	n20	5180	Ant2	17.518	N/A	20	Pass
NVNT	n20	5200	Ant1	17.437	N/A	20	Pass
NVNT	n20	5200	Ant2	17.552	N/A	20	Pass
NVNT	n20	5240	Ant1	17.58	N/A	20	Pass
NVNT	n20	5240	Ant2	17.561	N/A	20	Pass
NVNT	n20	5260	Ant1	17.442	N/A	20	Pass
NVNT	n20	5260	Ant2	17.514	N/A	20	Pass
NVNT	n20	5300	Ant1	17.551	N/A	20	Pass
NVNT	n20	5300	Ant2	17.524	N/A	20	Pass
NVNT	n20	5320	Ant1	17.426	N/A	20	Pass
NVNT	n20	5320	Ant2	17.529	N/A	20	Pass
NVNT	n20	5500	Ant1	17.584	N/A	20	Pass
NVNT	n20	5500	Ant2	17.534	N/A	20	Pass
NVNT	n20	5580	Ant1	17.542	N/A	20	Pass
NVNT	n20	5580	Ant2	17.542	N/A	20	Pass
NVNT	n20	5700	Ant1	17.458	N/A	20	Pass
NVNT	n20	5700	Ant2	17.672	N/A	20	Pass
NVNT	n40	5190	Ant1	35.933	N/A	40	Pass
NVNT	n40	5190	Ant2	36.152	N/A	40	Pass
NVNT	n40	5230	Ant1	35.878	N/A	40	Pass
NVNT	n40	5230	Ant2	36.071	N/A	40	Pass
NVNT	n40	5270	Ant1	36.059	N/A	40	Pass


Report

NVNT	n40	5270	Ant2	36.132	N/A	40	Pass
NVNT	n40	5310	Ant1	36.136	N/A	40	Pass
NVNT	n40	5310	Ant2	36.089	N/A	40	Pass
NVNT	n40	5510	Ant1	35.954	N/A	40	Pass
NVNT	n40	5510	Ant2	36.087	N/A	40	Pass
NVNT	n40	5590	Ant1	36.182	N/A	40	Pass
NVNT	n40	5590	Ant2	36.094	N/A	40	Pass
NVNT	n40	5670	Ant1	36.047	N/A	40	Pass
NVNT	n40	5670	Ant2	36.113	N/A	40	Pass
NVNT	ac20	5180	Ant1	17.59	N/A	20	Pass
NVNT	ac20	5180	Ant2	17.512	N/A	20	Pass
NVNT	ac20	5200	Ant1	17.42	N/A	20	Pass
NVNT	ac20	5200	Ant2	17.558	N/A	20	Pass
NVNT	ac20	5240	Ant1	17.571	N/A	20	Pass
NVNT	ac20	5240	Ant2	17.558	N/A	20	Pass
NVNT	ac20	5260	Ant1	17.438	N/A	20	Pass
NVNT	ac20	5260	Ant2	17.511	N/A	20	Pass
NVNT	ac20	5300	Ant1	17.543	N/A	20	Pass
NVNT	ac20	5300	Ant2	17.517	N/A	20	Pass
NVNT	ac20	5320	Ant1	17.418	N/A	20	Pass
NVNT	ac20	5320	Ant2	17.509	N/A	20	Pass
NVNT	ac20	5500	Ant1	17.56	N/A	20	Pass
NVNT	ac20	5500	Ant2	17.59	N/A	20	Pass
NVNT	ac20	5580	Ant1	17.546	N/A	20	Pass
NVNT	ac20	5580	Ant2	17.705	N/A	20	Pass
NVNT	ac20	5700	Ant1	17.462	N/A	20	Pass
NVNT	ac20	5700	Ant2	17.692	N/A	20	Pass
NVNT	ac40	5190	Ant1	35.885	N/A	40	Pass
NVNT	ac40	5190	Ant2	36.033	N/A	40	Pass
NVNT	ac40	5230	Ant1	35.799	N/A	40	Pass
NVNT	ac40	5230	Ant2	35.968	N/A	40	Pass
NVNT	ac40	5270	Ant1	36.043	N/A	40	Pass
NVNT	ac40	5270	Ant2	36.007	N/A	40	Pass
NVNT	ac40	5310	Ant1	36.084	N/A	40	Pass
NVNT	ac40	5310	Ant2	35.972	N/A	40	Pass
NVNT	ac40	5510	Ant1	35.893	N/A	40	Pass
NVNT	ac40	5510	Ant2	35.986	N/A	40	Pass
NVNT	ac40	5590	Ant1	36.159	N/A	40	Pass
NVNT	ac40	5590	Ant2	36.014	N/A	40	Pass
NVNT	ac40	5670	Ant1	35.991	N/A	40	Pass
NVNT	ac40	5670	Ant2	36.038	N/A	40	Pass
NVNT	ac80	5210	Ant1	76.065	N/A	80	Pass
NVNT	ac80	5210	Ant2	76.183	N/A	80	Pass
NVNT	ac80	5290	Ant1	76.074	N/A	80	Pass


Report

NVNT	ac80	5290	Ant2	76.129	N/A	80	Pass
NVNT	ac80	5530	Ant1	76.253	N/A	80	Pass
NVNT	ac80	5530	Ant2	76.072	N/A	80	Pass
NVNT	ac80	5610	Ant1	76.067	N/A	80	Pass
NVNT	ac80	5610	Ant2	76.033	N/A	80	Pass
NVNT	ax20	5180	Ant1	18.963	N/A	20	Pass
NVNT	ax20	5180	Ant2	18.933	N/A	20	Pass
NVNT	ax20	5200	Ant1	18.846	N/A	20	Pass
NVNT	ax20	5200	Ant2	18.957	N/A	20	Pass
NVNT	ax20	5240	Ant1	18.954	N/A	20	Pass
NVNT	ax20	5240	Ant2	18.963	N/A	20	Pass
NVNT	ax20	5260	Ant1	18.841	N/A	20	Pass
NVNT	ax20	5260	Ant2	18.912	N/A	20	Pass
NVNT	ax20	5300	Ant1	18.928	N/A	20	Pass
NVNT	ax20	5300	Ant2	18.916	N/A	20	Pass
NVNT	ax20	5320	Ant1	18.821	N/A	20	Pass
NVNT	ax20	5320	Ant2	18.913	N/A	20	Pass
NVNT	ax20	5500	Ant1	18.946	N/A	20	Pass
NVNT	ax20	5500	Ant2	18.987	N/A	20	Pass
NVNT	ax20	5580	Ant1	18.922	N/A	20	Pass
NVNT	ax20	5580	Ant2	19.088	N/A	20	Pass
NVNT	ax20	5700	Ant1	18.86	N/A	20	Pass
NVNT	ax20	5700	Ant2	19.012	N/A	20	Pass
NVNT	ax40	5190	Ant1	37.516	N/A	40	Pass
NVNT	ax40	5190	Ant2	37.71	N/A	40	Pass
NVNT	ax40	5230	Ant1	37.487	N/A	40	Pass
NVNT	ax40	5230	Ant2	37.592	N/A	40	Pass
NVNT	ax40	5270	Ant1	37.662	N/A	40	Pass
NVNT	ax40	5270	Ant2	37.668	N/A	40	Pass
NVNT	ax40	5310	Ant1	37.706	N/A	40	Pass
NVNT	ax40	5310	Ant2	37.657	N/A	40	Pass
NVNT	ax40	5510	Ant1	37.518	N/A	40	Pass
NVNT	ax40	5510	Ant2	37.651	N/A	40	Pass
NVNT	ax40	5590	Ant1	37.757	N/A	40	Pass
NVNT	ax40	5590	Ant2	37.674	N/A	40	Pass
NVNT	ax40	5670	Ant1	37.658	N/A	40	Pass
NVNT	ax40	5670	Ant2	37.677	N/A	40	Pass
NVNT	ax80	5210	Ant1	77.346	N/A	80	Pass
NVNT	ax80	5210	Ant2	77.028	N/A	80	Pass
NVNT	ax80	5290	Ant1	77.315	N/A	80	Pass
NVNT	ax80	5290	Ant2	76.786	N/A	80	Pass
NVNT	ax80	5530	Ant1	77.276	N/A	80	Pass
NVNT	ax80	5530	Ant2	76.224	N/A	80	Pass
NVNT	ax80	5610	Ant1	77.269	N/A	80	Pass


NVNT	ax80	5610	Ant2	77.295	N/A	80	Pass
------	------	------	------	--------	-----	----	------

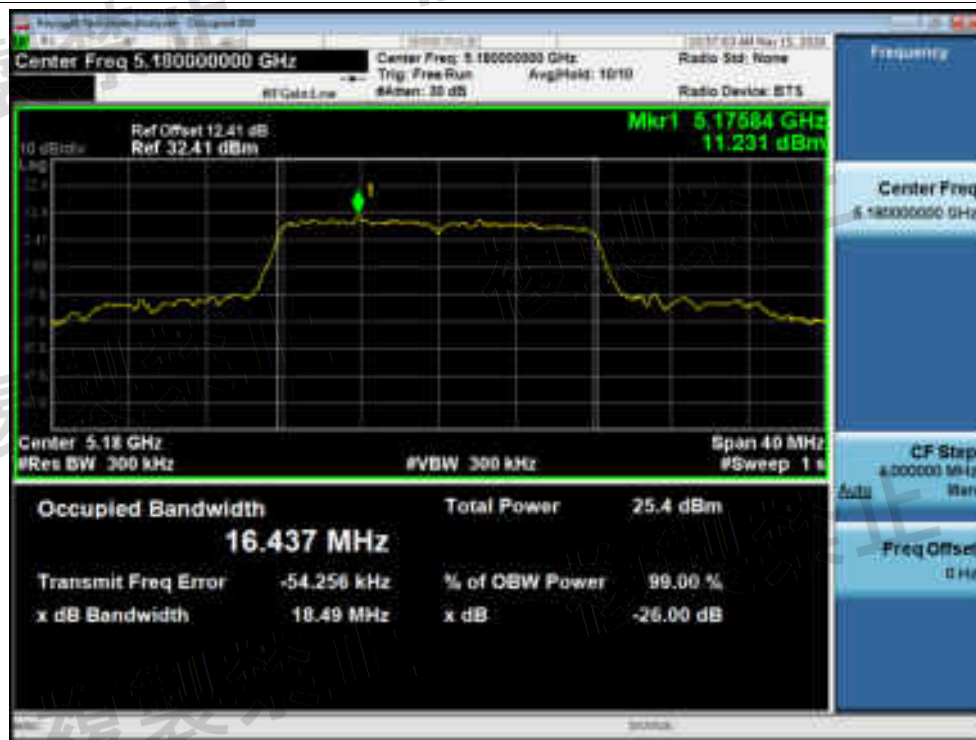


OBW NVNT a 5180MHz Ant1

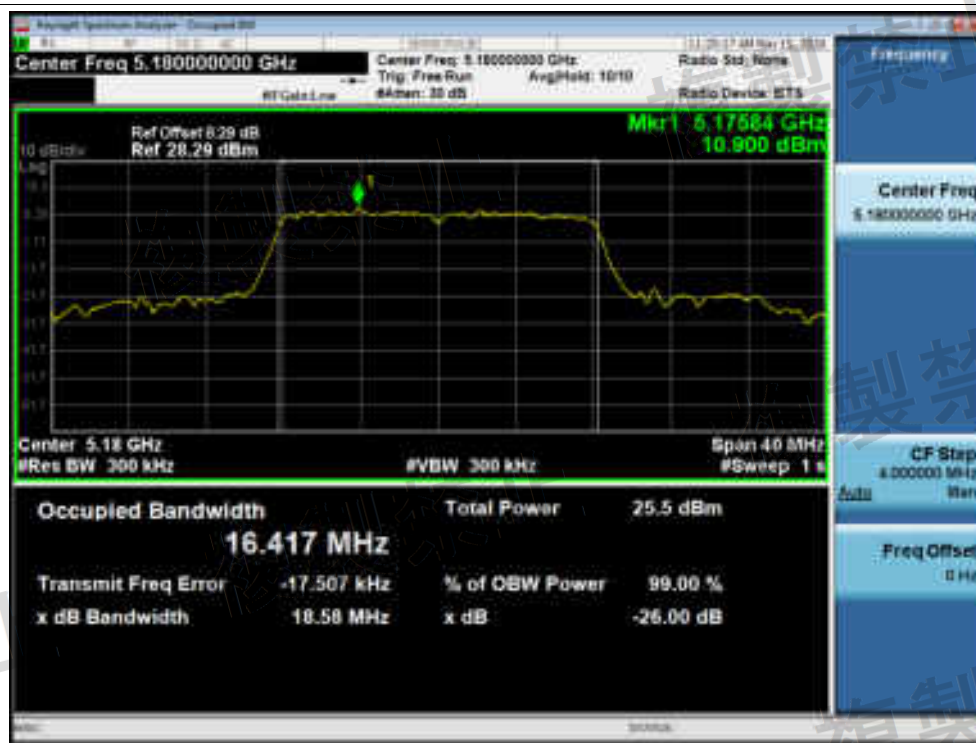


OBW NVNT a 5180MHz Ant2

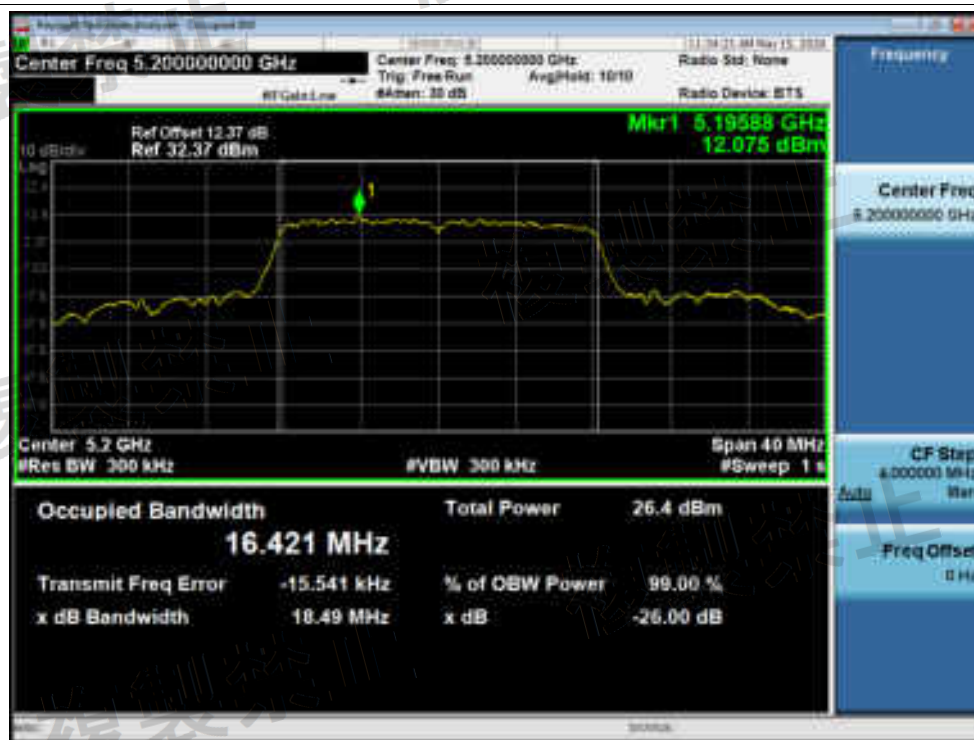


OBW NVNT a 5200MHz Ant1

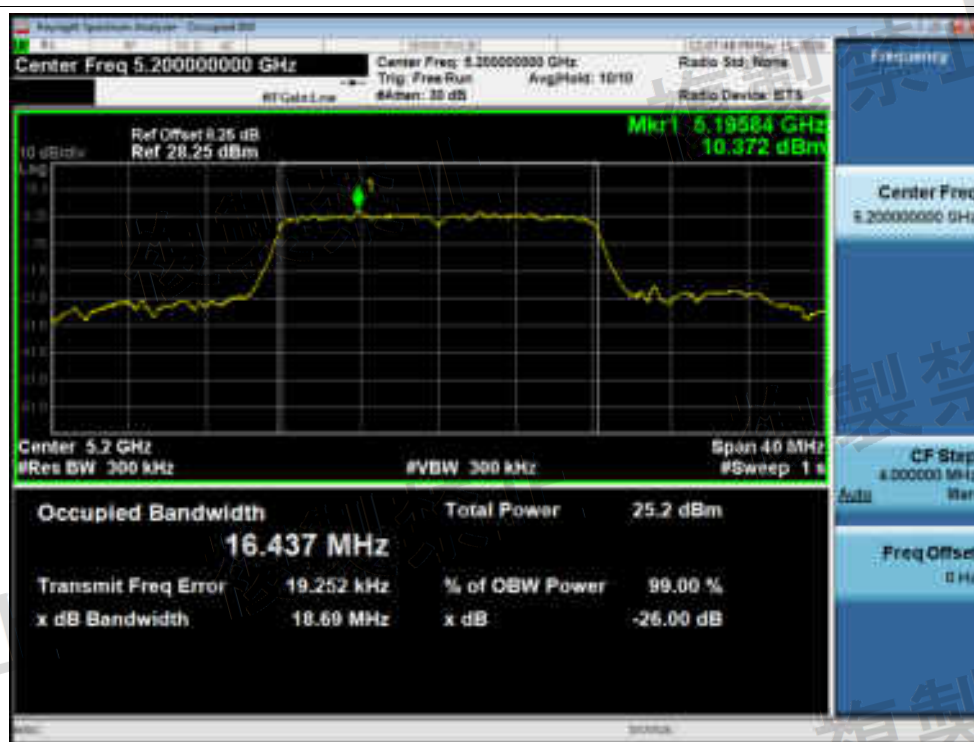


OBW NVNT a 5200MHz Ant2

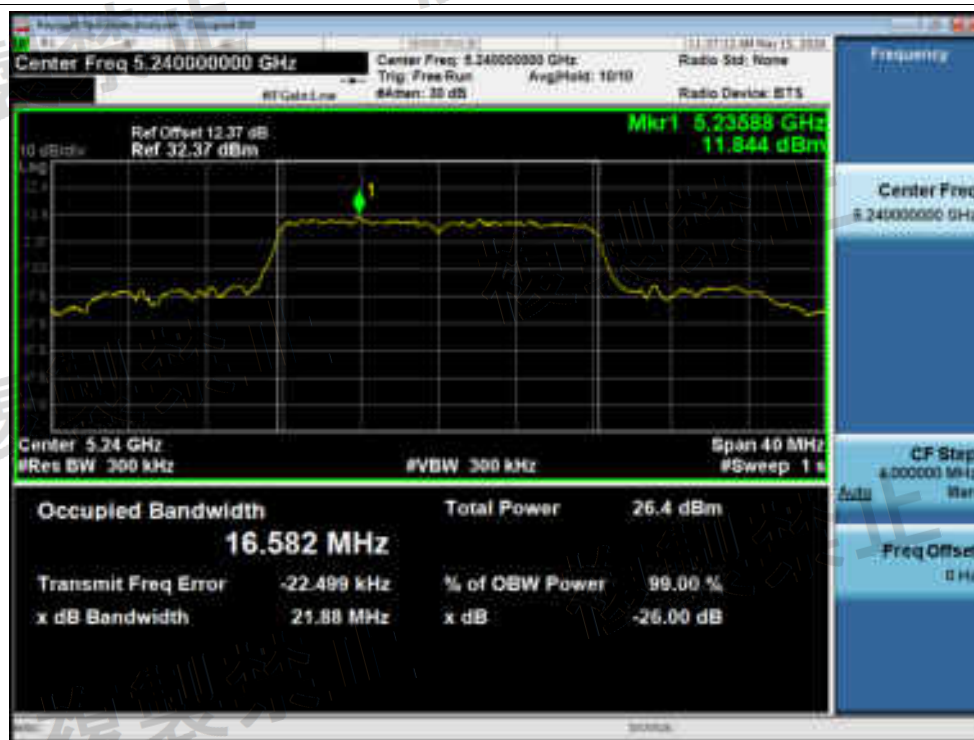

OBW NVNT a 5240MHz Ant1

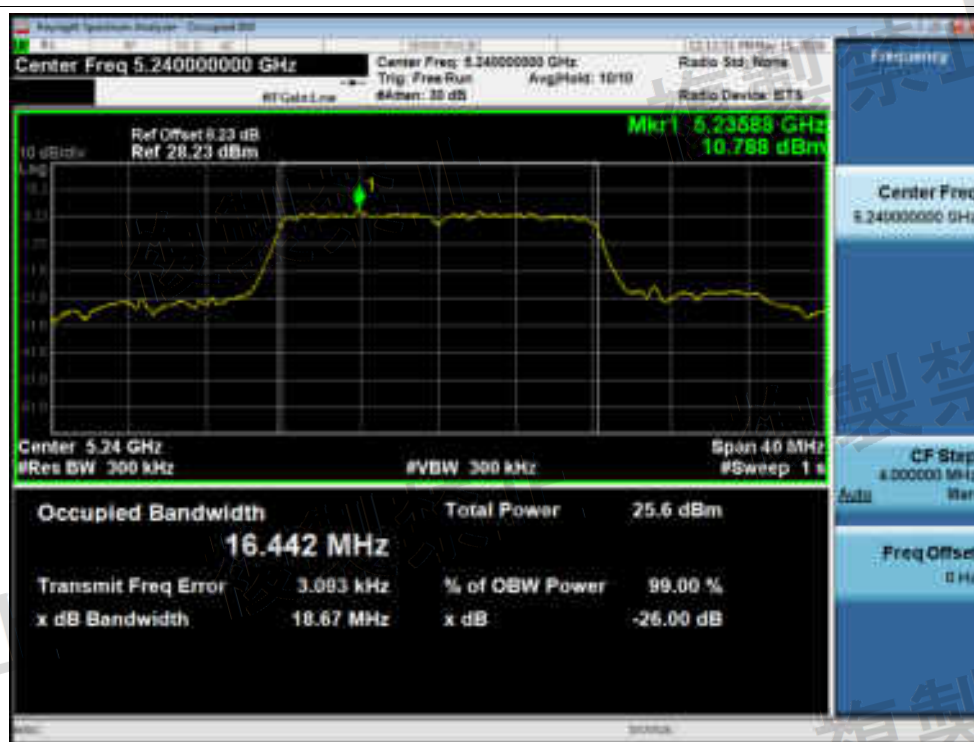


OBW NVNT a 5240MHz Ant2

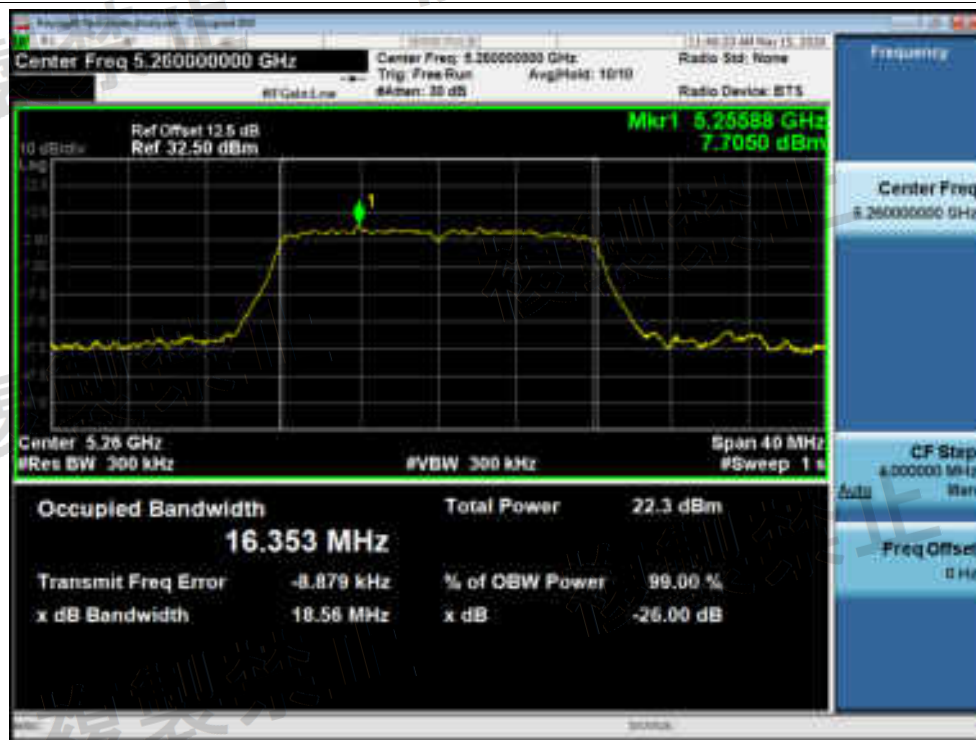

OBW NVNT a 5260MHz Ant1




OBW NVNT a 5260MHz Ant2

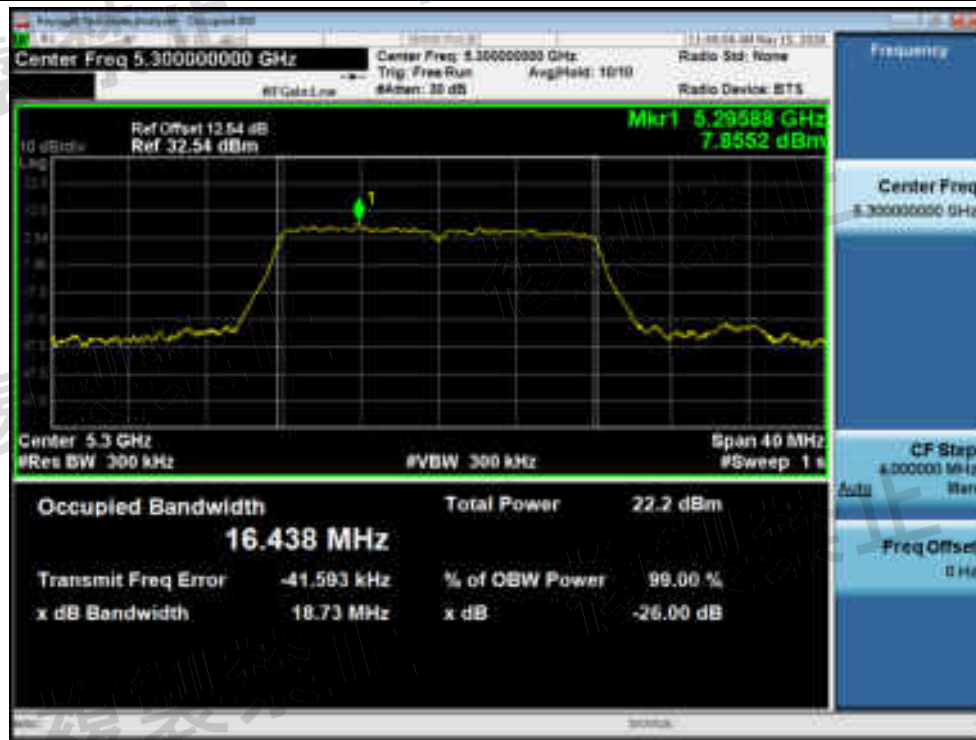

OBW NVNT a 5300MHz Ant1




OBW NVNT a 5300MHz Ant2

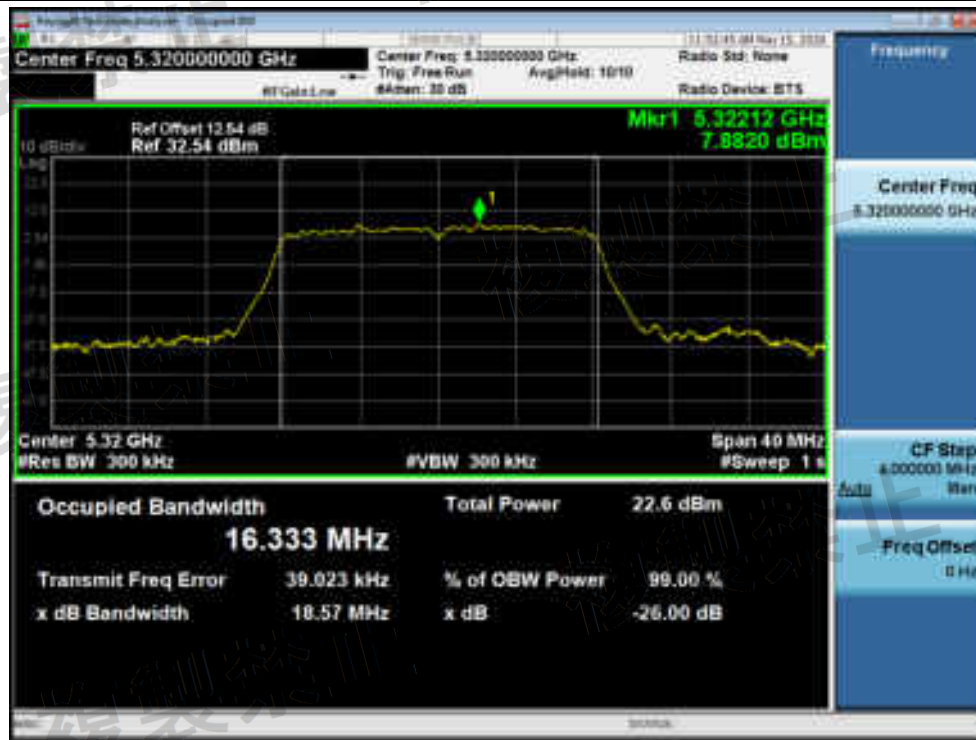


OBW NVNT a 5320MHz Ant1




OBW NVNT a 5320MHz Ant2

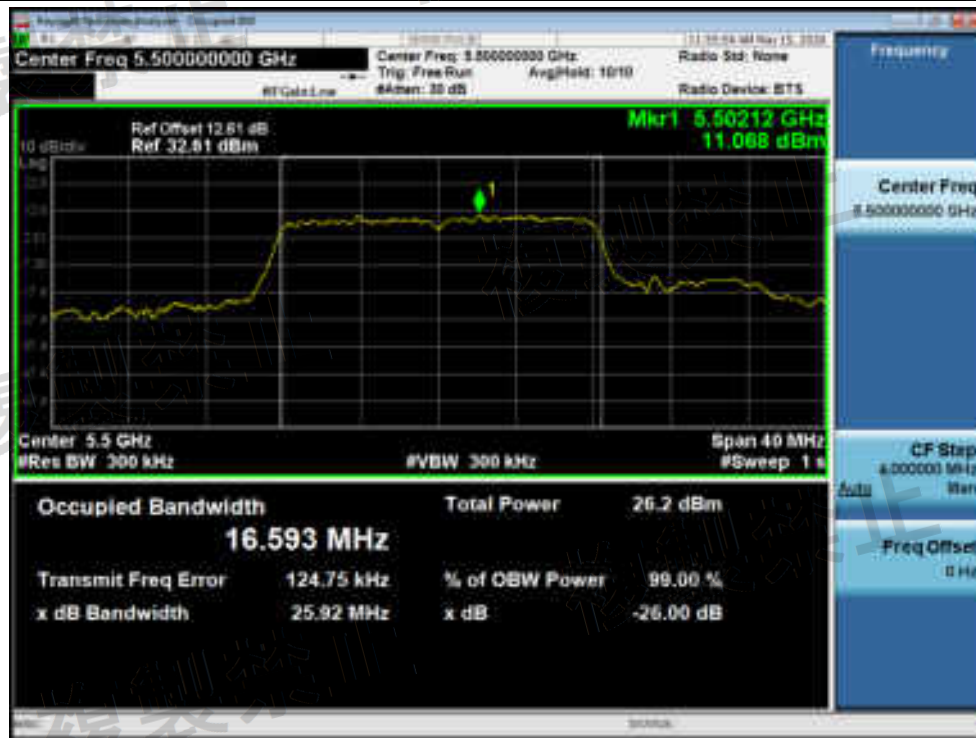


OBW NVNT a 5500MHz Ant1

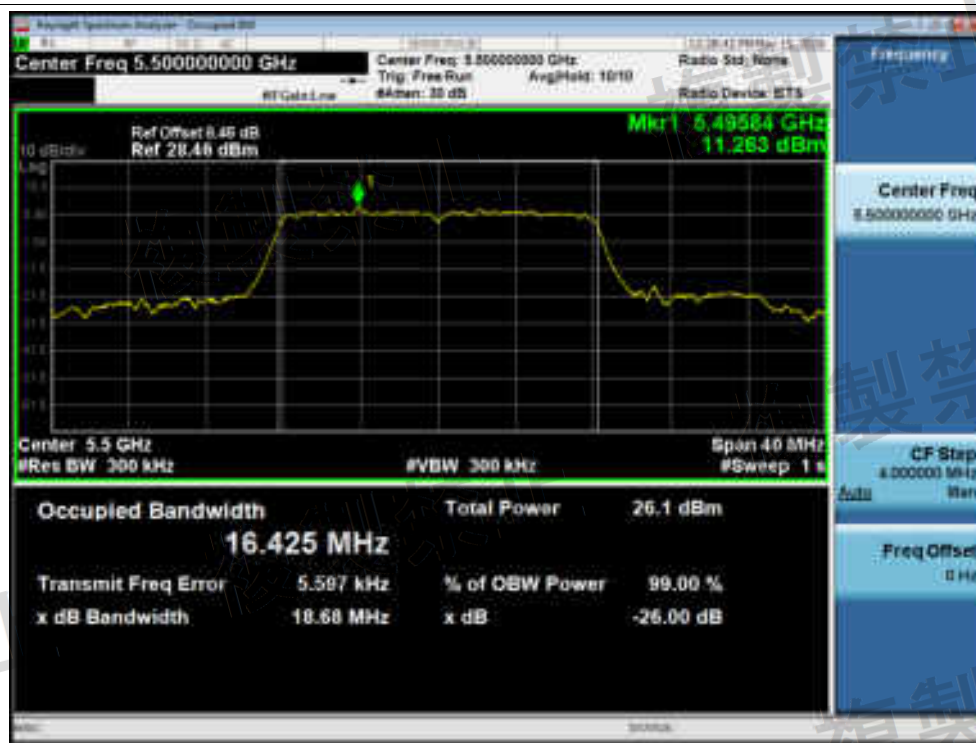


OBW NVNT a 5500MHz Ant2

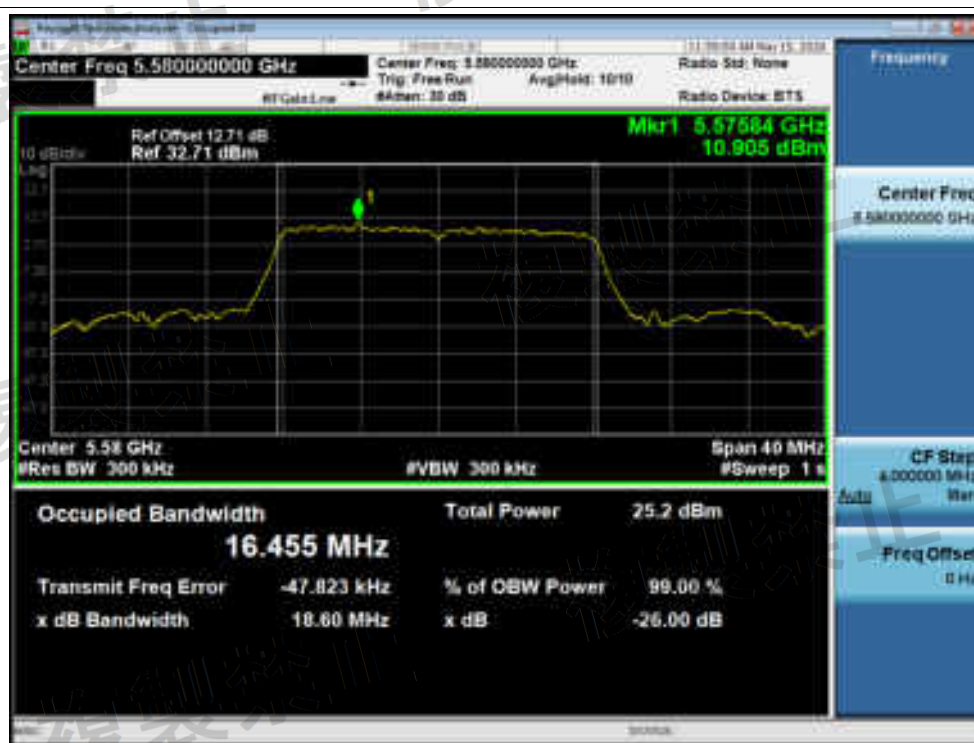

OBW NVNT a 5580MHz Ant1

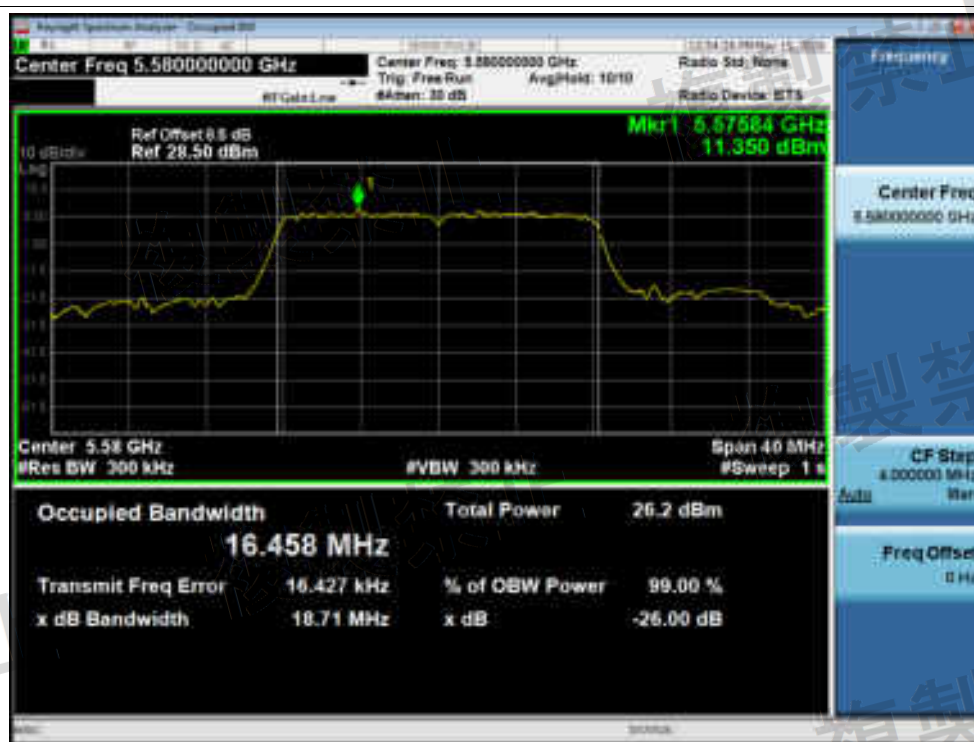

OBW NVNT a 5580MHz Ant2

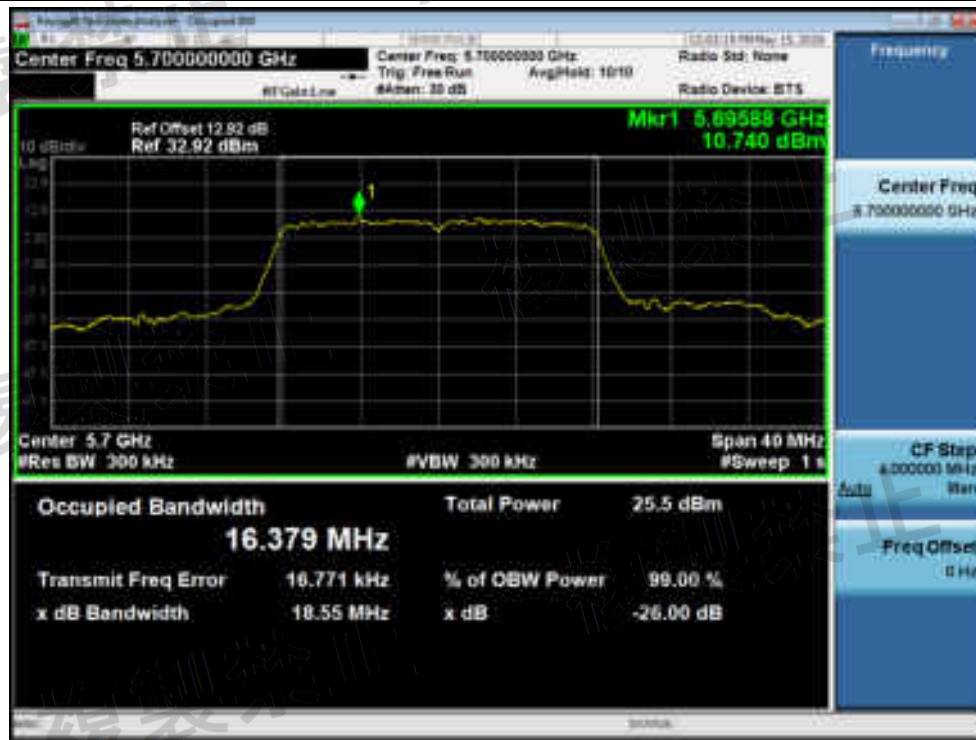


OBW NVNT a 5700MHz Ant1




OBW NVNT a 5700MHz Ant2



OBW NVNT n20 5180MHz Ant1

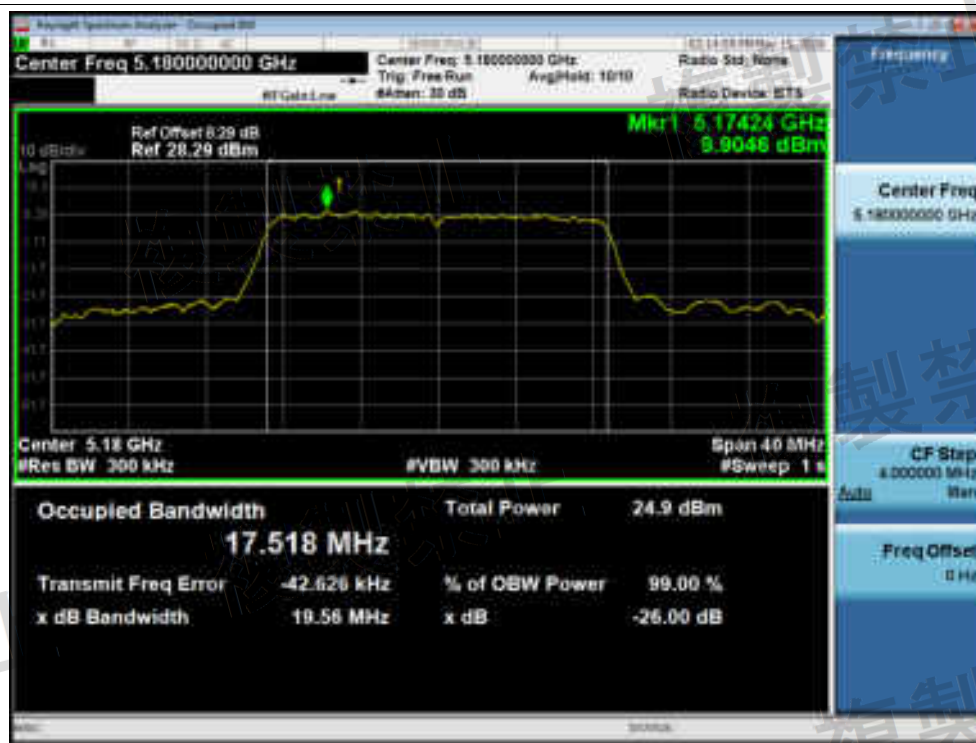


OBW NVNT n20 5180MHz Ant2

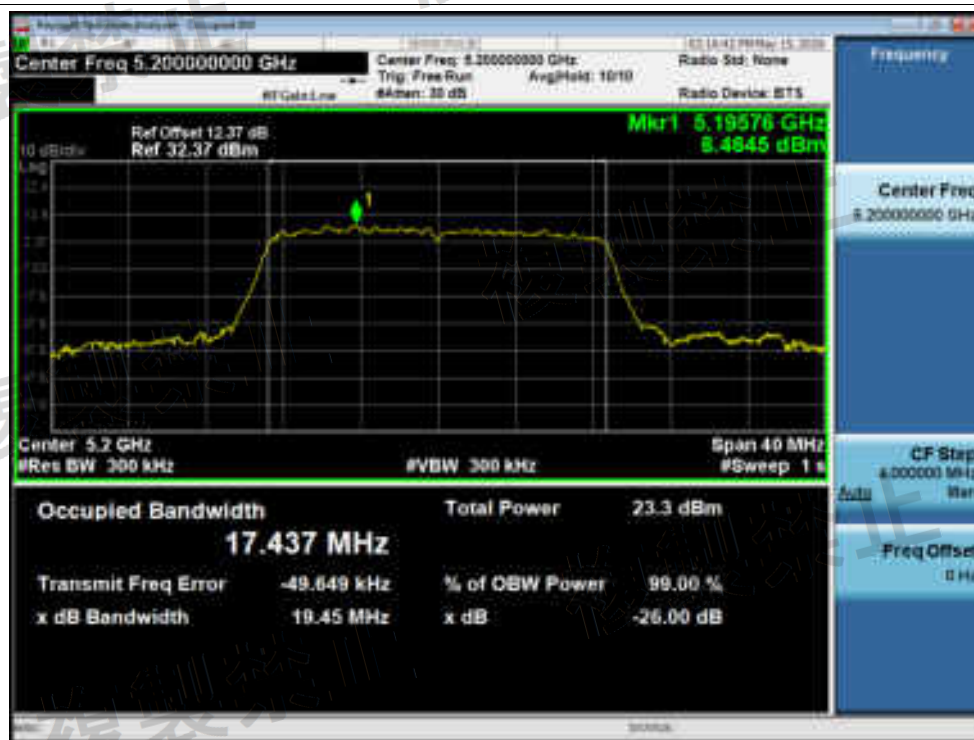

OBW NVNT n20 5200MHz Ant1



OBW NVNT n20 5200MHz Ant2

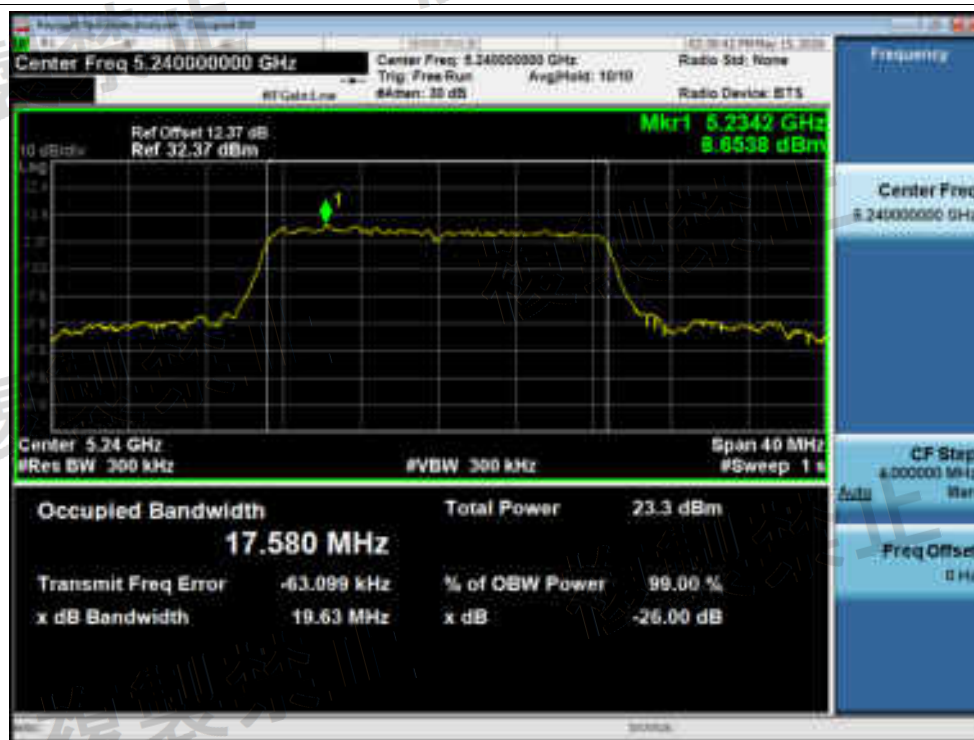

OBW NVNT n20 5240MHz Ant1



OBW NVNT n20 5240MHz Ant2



OBW NVNT n20 5260MHz Ant1




OBW NVNT n20 5260MHz Ant2



OBW NVNT n20 5300MHz Ant1



OBW NVNT n20 5300MHz Ant2

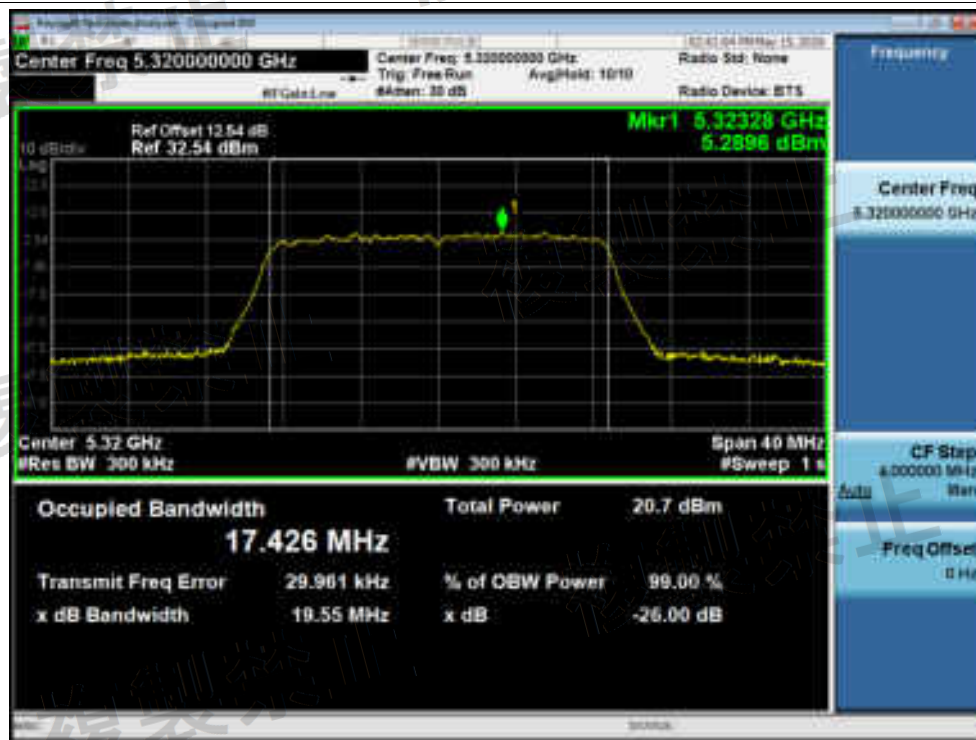


OBW NVNT n20 5320MHz Ant1



OBW NVNT n20 5320MHz Ant2




OBW NVNT n20 5500MHz Ant1

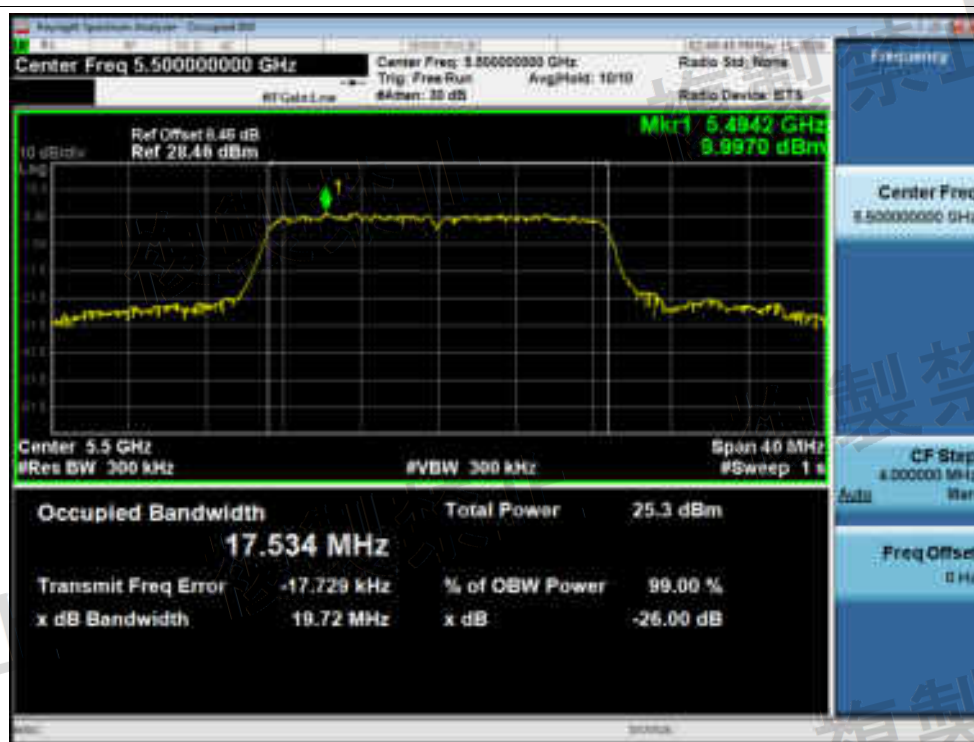

OBW NVNT n20 5500MHz Ant2



OBW NVNT n20 5580MHz Ant1

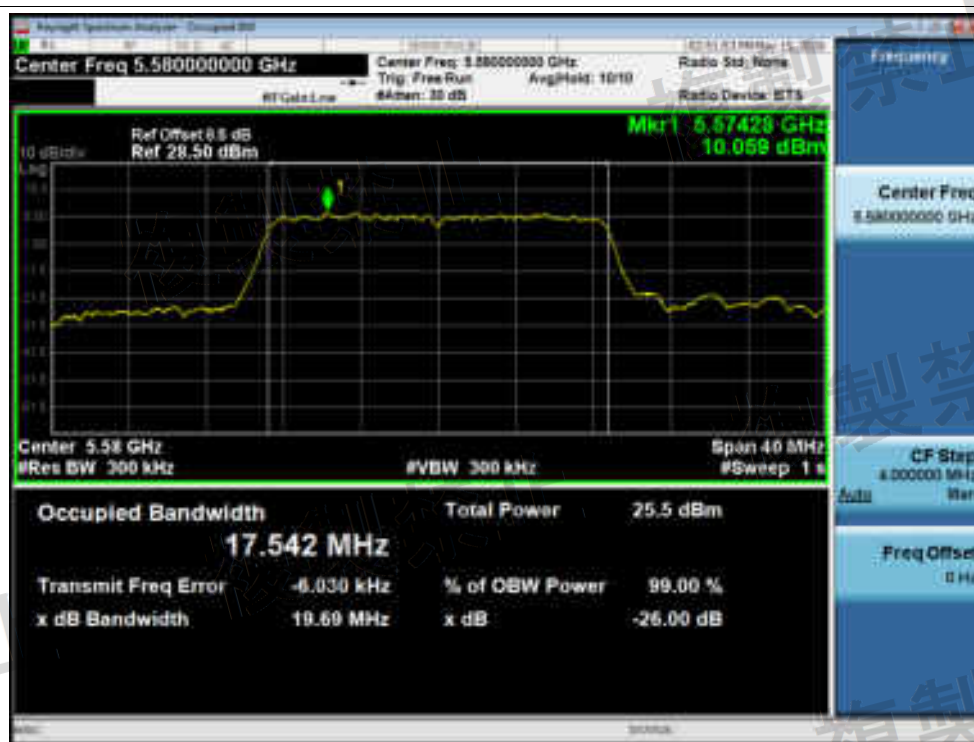


OBW NVNT n20 5580MHz Ant2



OBW NVNT n20 5700MHz Ant1




OBW NVNT n20 5700MHz Ant2

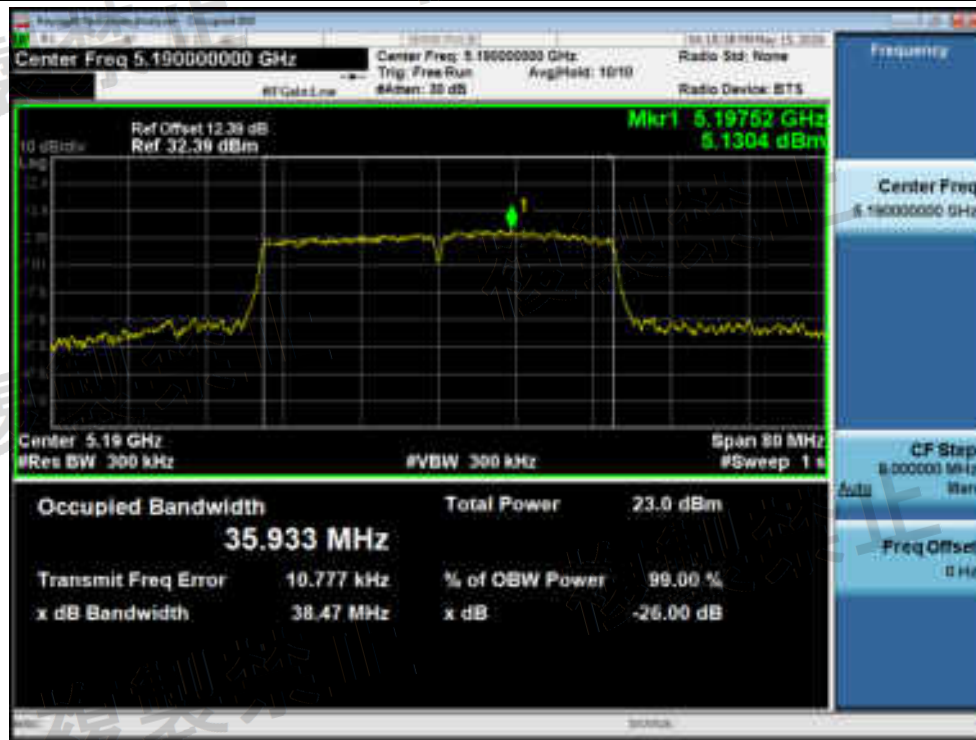


OBW NVNT n40 5190MHz Ant1




OBW NVNT n40 5190MHz Ant2

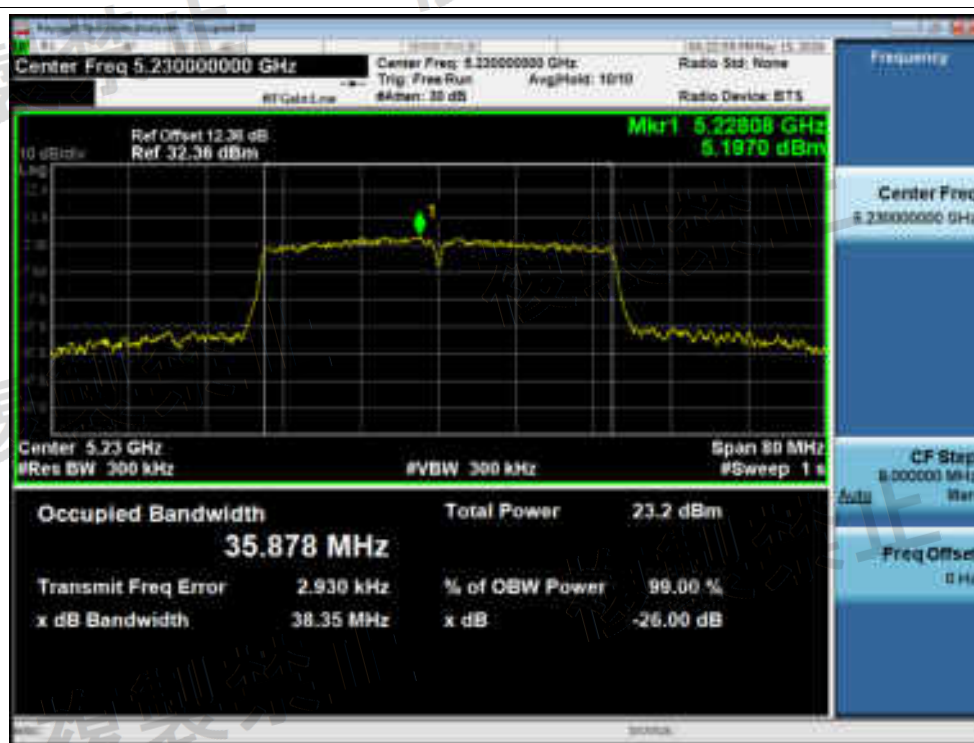

OBW NVNT n40 5230MHz Ant1

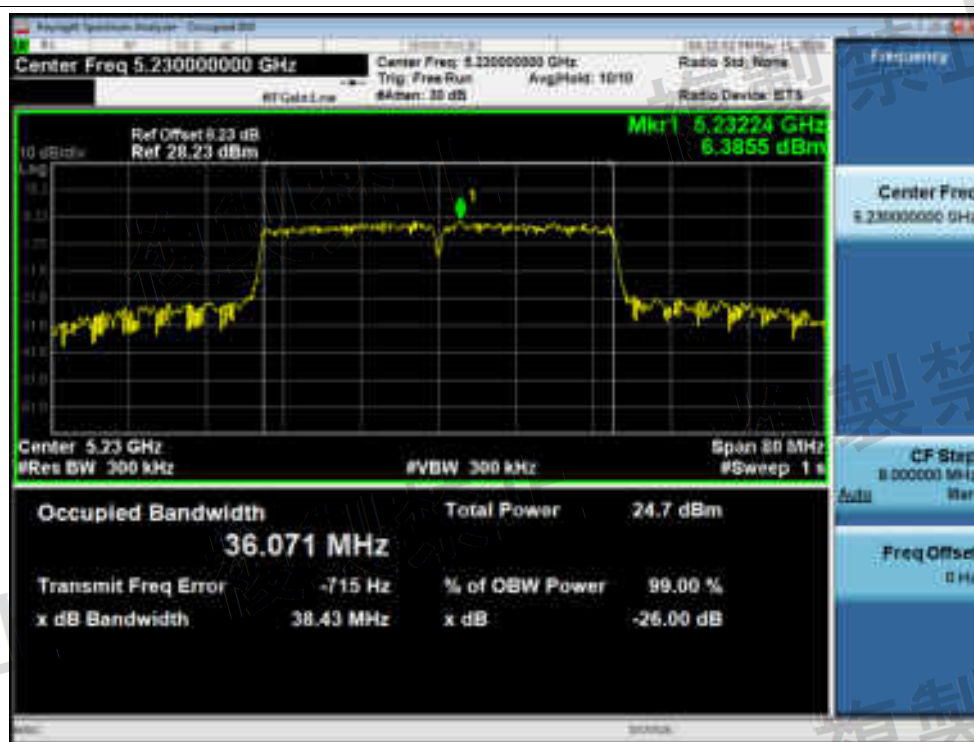


OBW NVNT n40 5230MHz Ant2

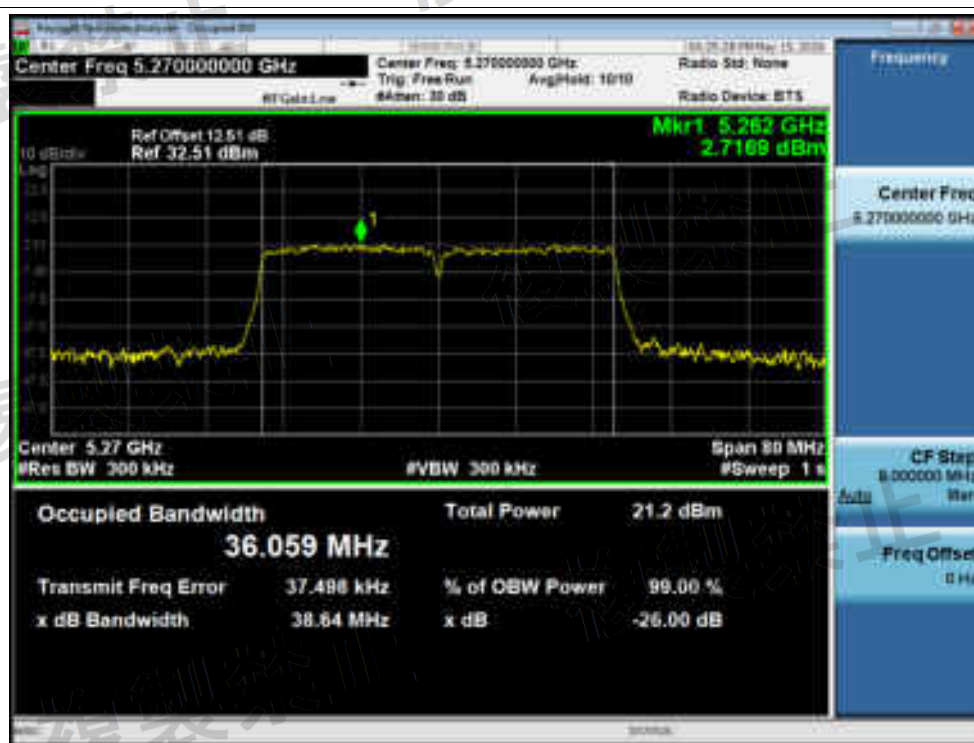

OBW NVNT n40 5270MHz Ant1



OBW NVNT n40 5270MHz Ant2

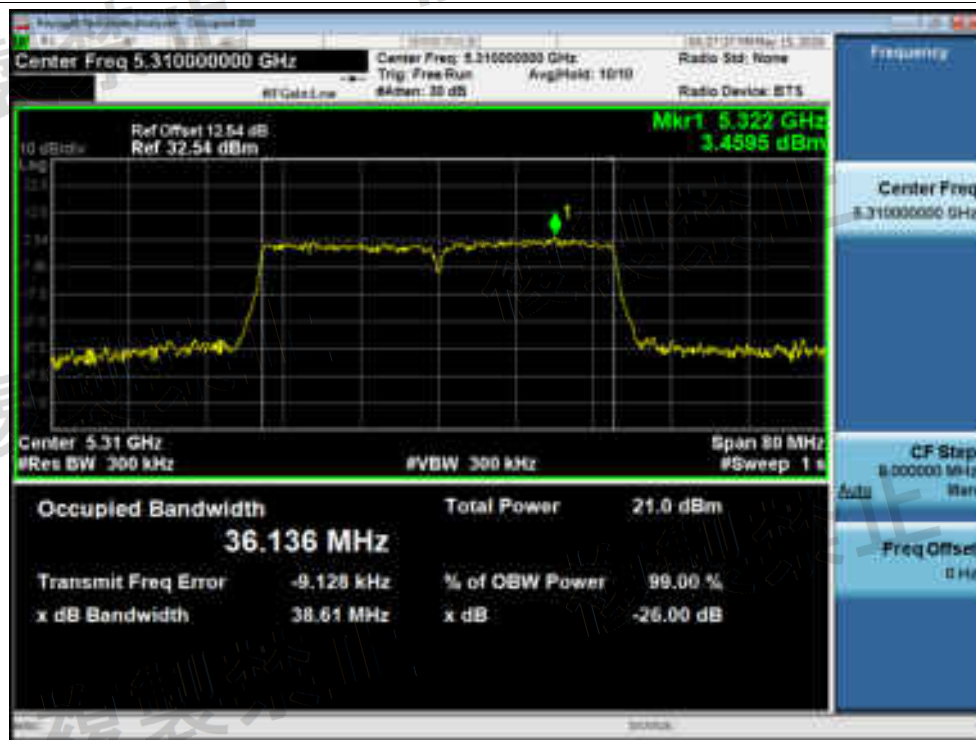


OBW NVNT n40 5310MHz Ant1



OBW NVNT n40 5310MHz Ant2



OBW NVNT n40 5510MHz Ant1

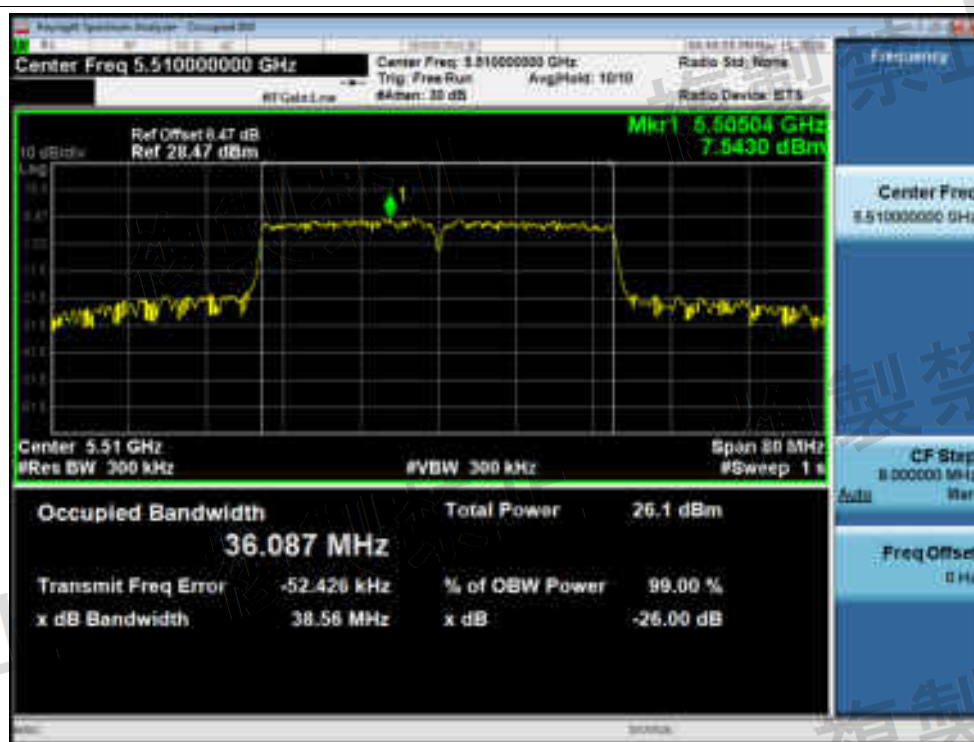


OBW NVNT n40 5510MHz Ant2



OBW NVNT n40 5590MHz Ant1




OBW NVNT n40 5590MHz Ant2

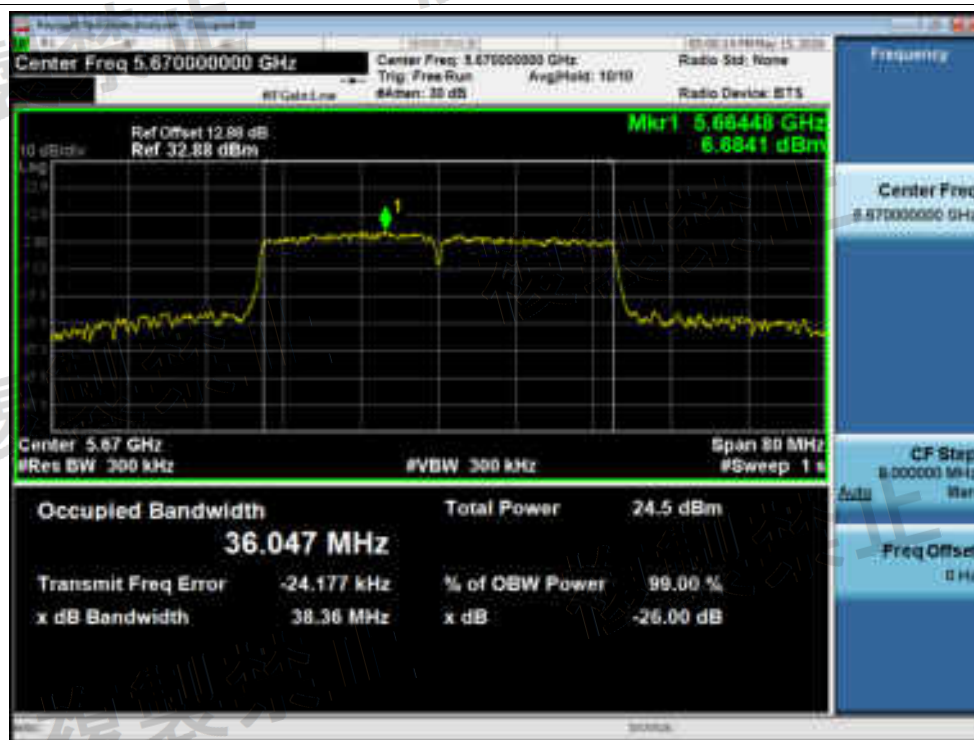


OBW NVNT n40 5670MHz Ant1



OBW NVNT n40 5670MHz Ant2

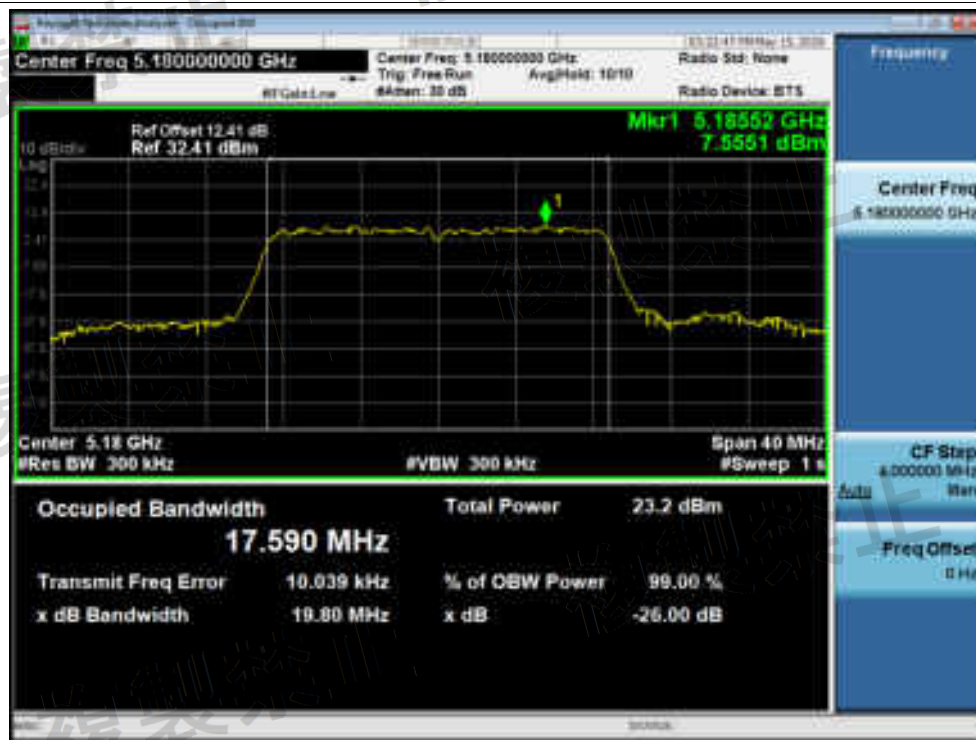

OBW NVNT ac20 5180MHz Ant1

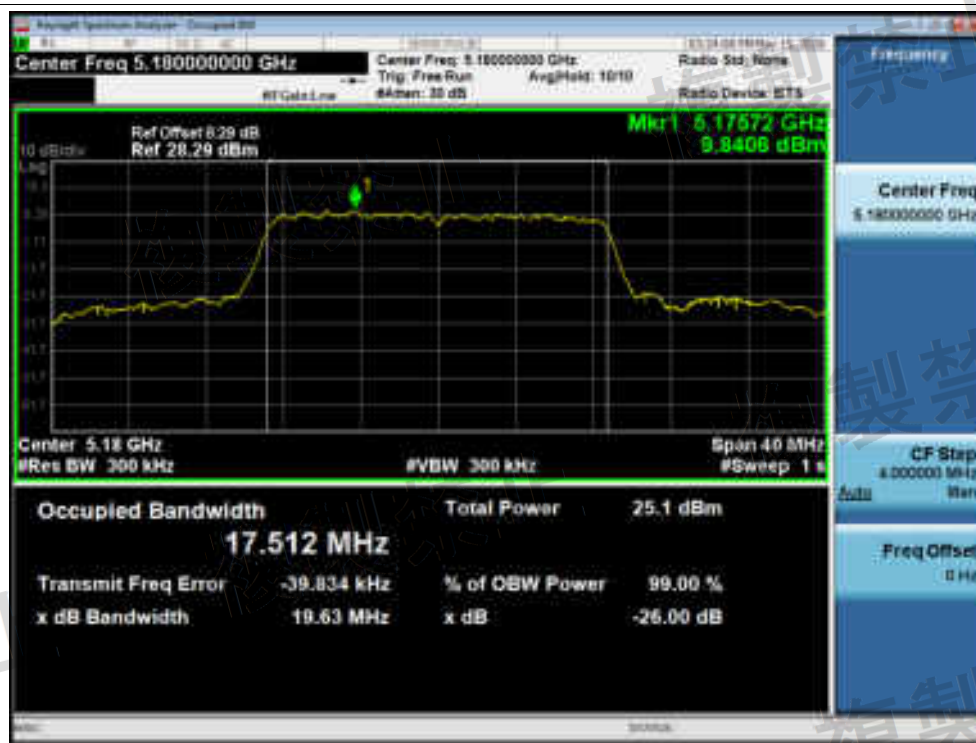


OBW NVNT ac20 5180MHz Ant2



OBW NVNT ac20 5200MHz Ant1



OBW NVNT ac20 5200MHz Ant2

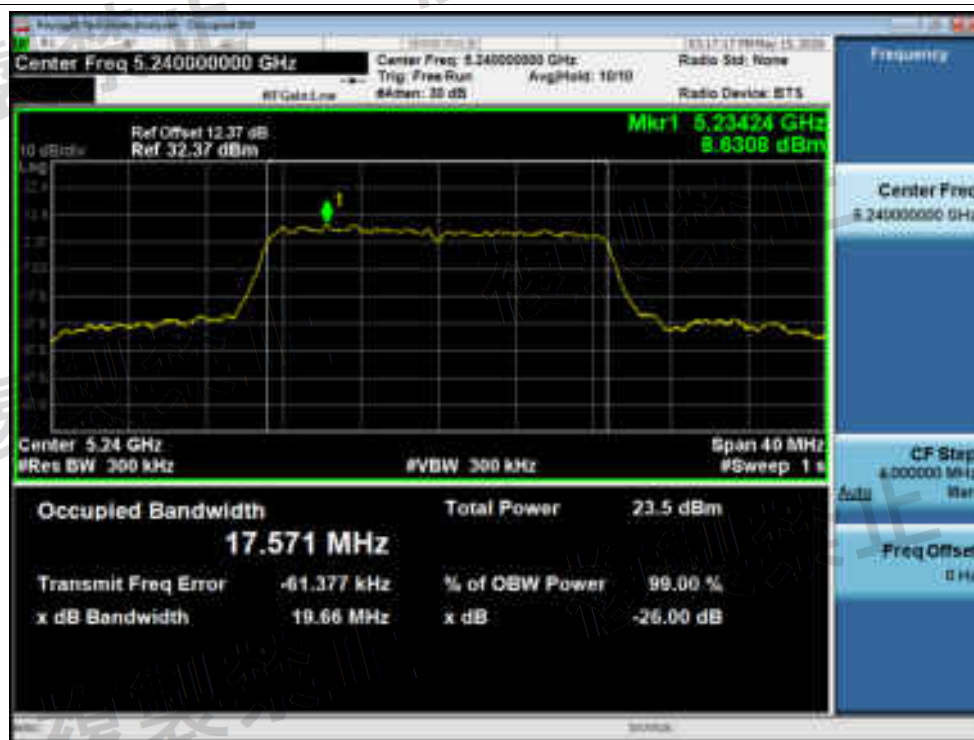

OBW NVNT ac20 5240MHz Ant1



OBW NVNT ac20 5240MHz Ant2



OBW NVNT ac20 5260MHz Ant1



OBW NVNT ac20 5260MHz Ant2



OBW NVNT ac20 5300MHz Ant1



OBW NVNT ac20 5300MHz Ant2



OBW NVNT ac20 5320MHz Ant1



OBW NVNT ac20 5320MHz Ant2




OBW NVNT ac20 5500MHz Ant1



OBW NVNT ac20 5500MHz Ant2



OBW NVNT ac20 5580MHz Ant1

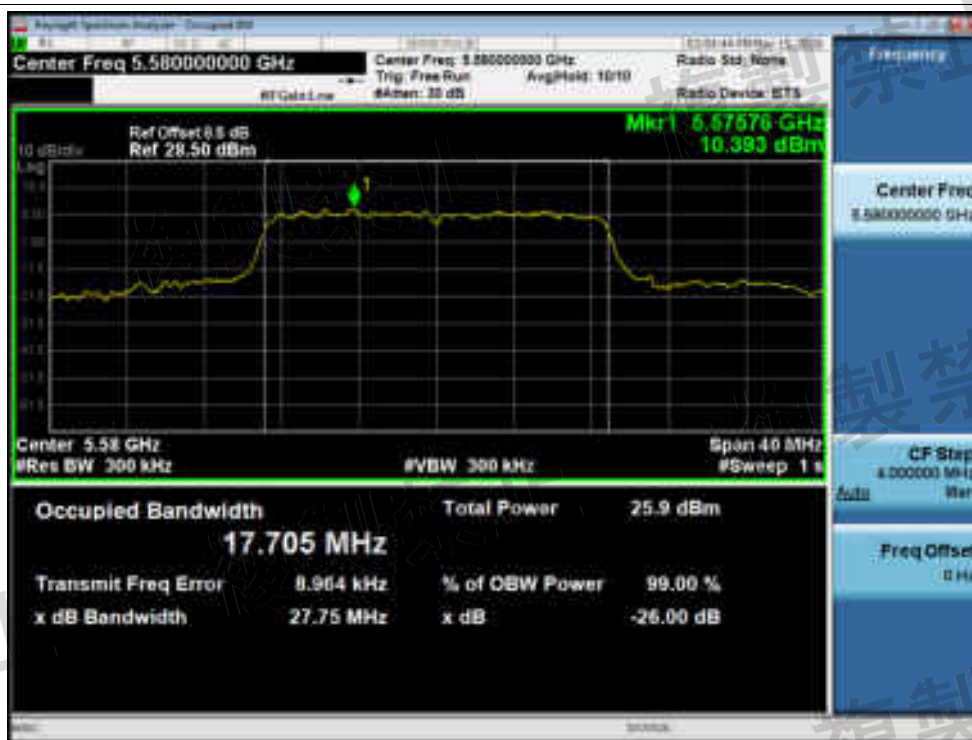

OBW NVNT ac20 5580MHz Ant2



OBW NVNT ac20 5700MHz Ant1




OBW NVNT ac20 5700MHz Ant2



OBW NVNT ac40 5190MHz Ant1




OBW NVNT ac40 5190MHz Ant2

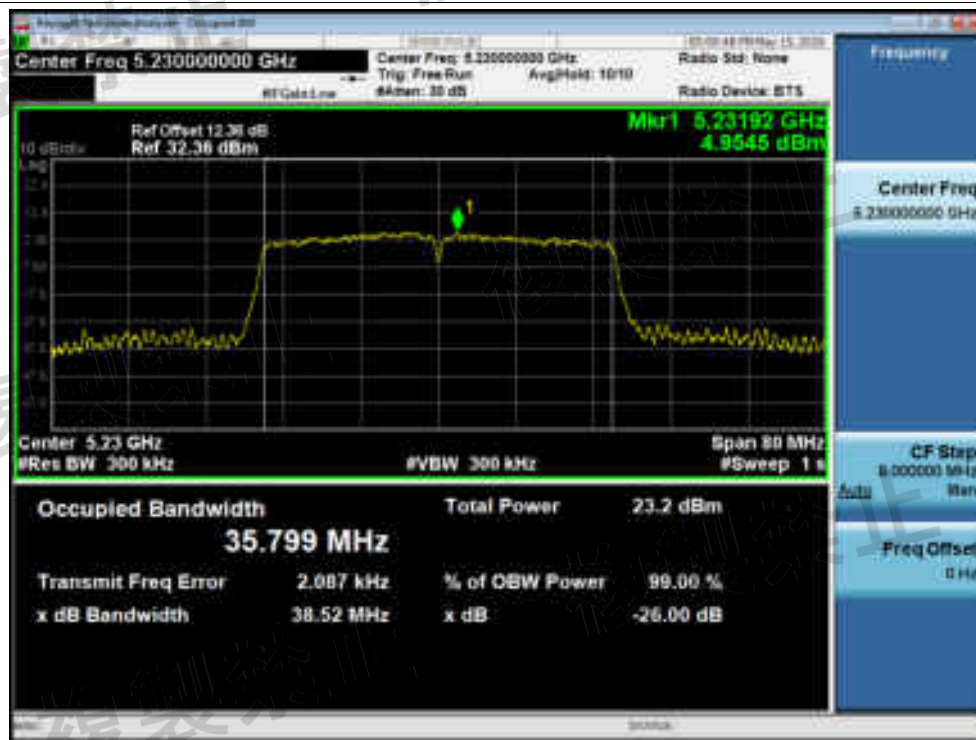


OBW NVNT ac40 5230MHz Ant1



OBW NVNT ac40 5230MHz Ant2

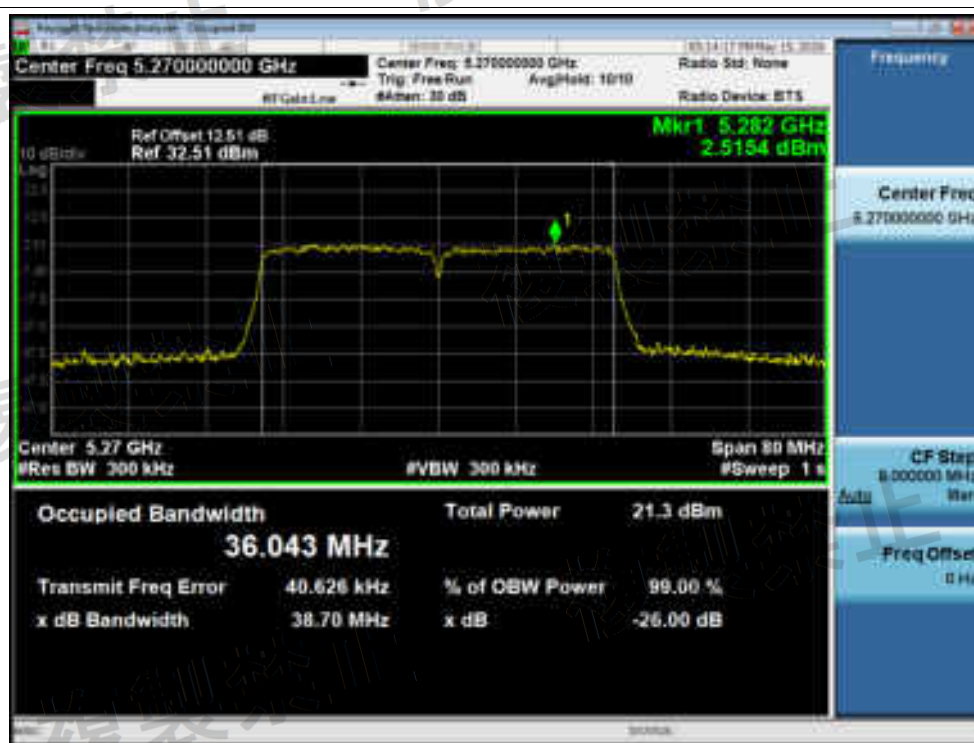


OBW NVNT ac40 5270MHz Ant1

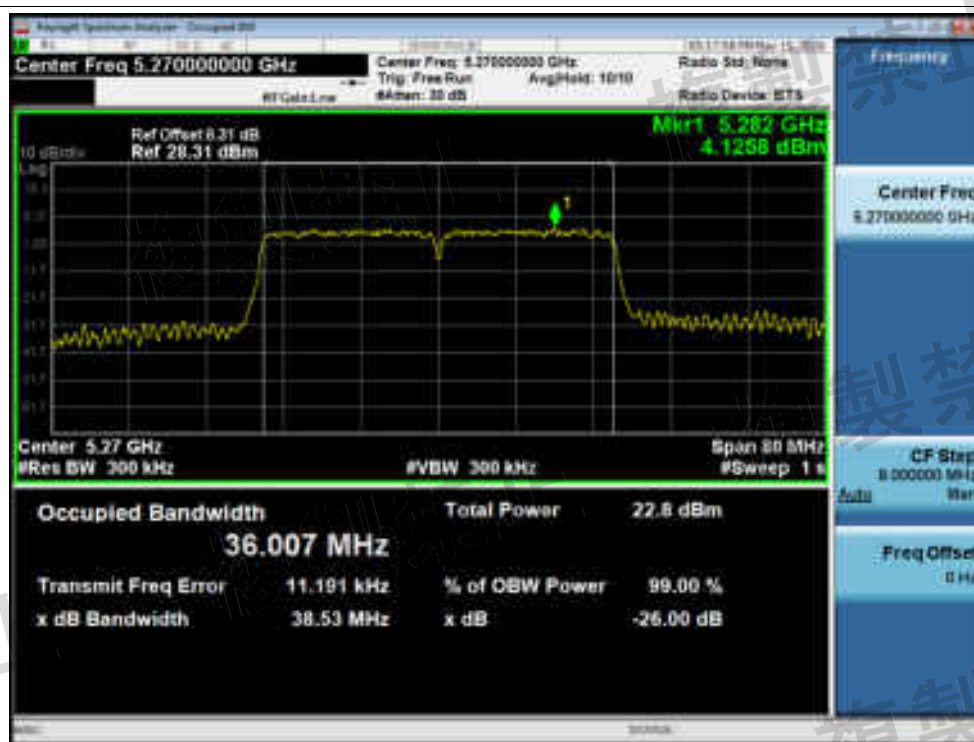


OBW NVNT ac40 5270MHz Ant2




OBW NVNT ac40 5310MHz Ant1

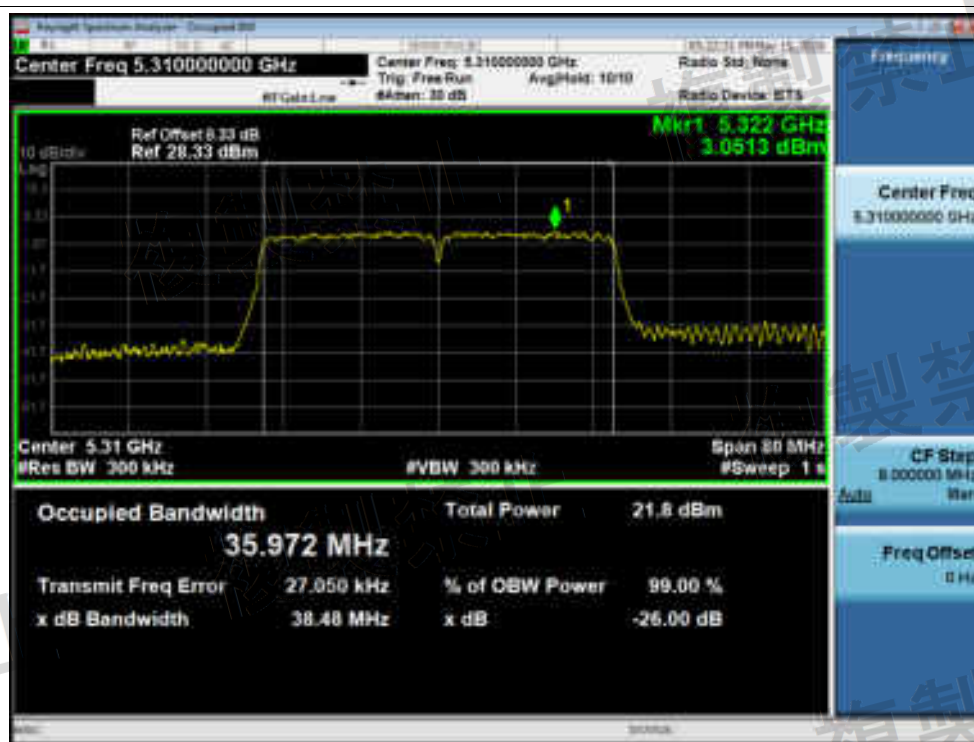

OBW NVNT ac40 5310MHz Ant2

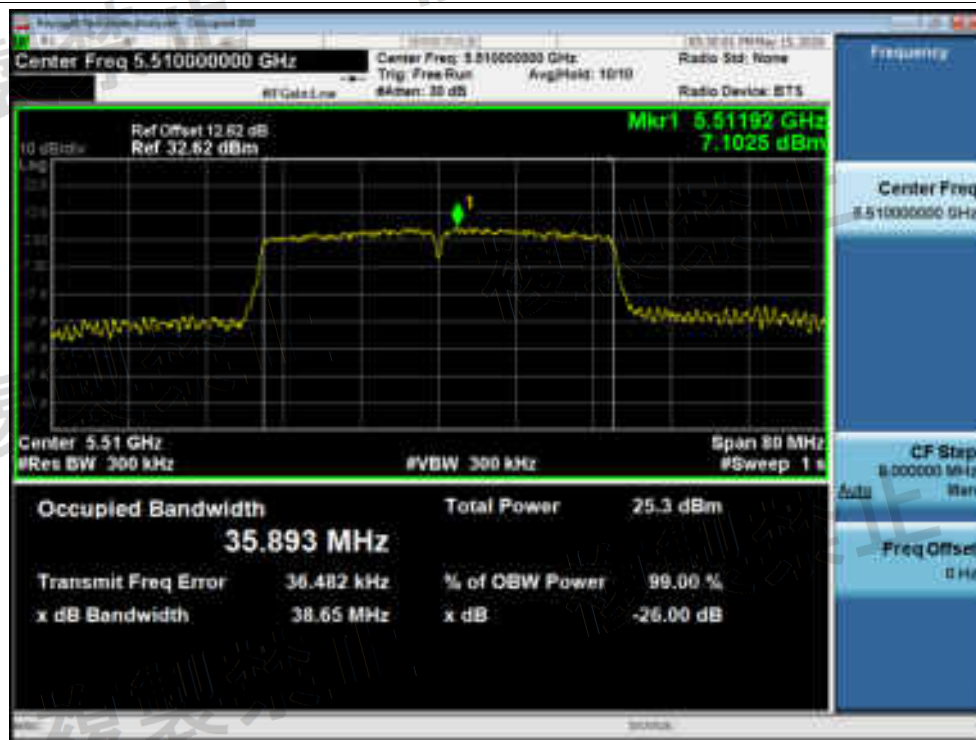


OBW NVNT ac40 5510MHz Ant1

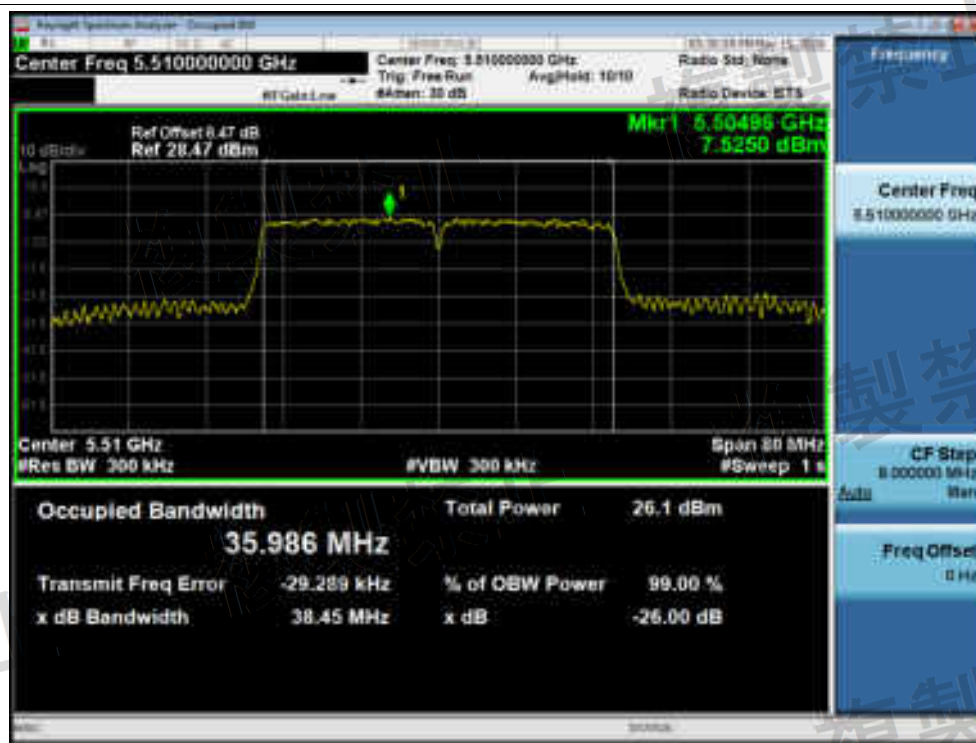


OBW NVNT ac40 5510MHz Ant2



OBW NVNT ac40 5590MHz Ant1

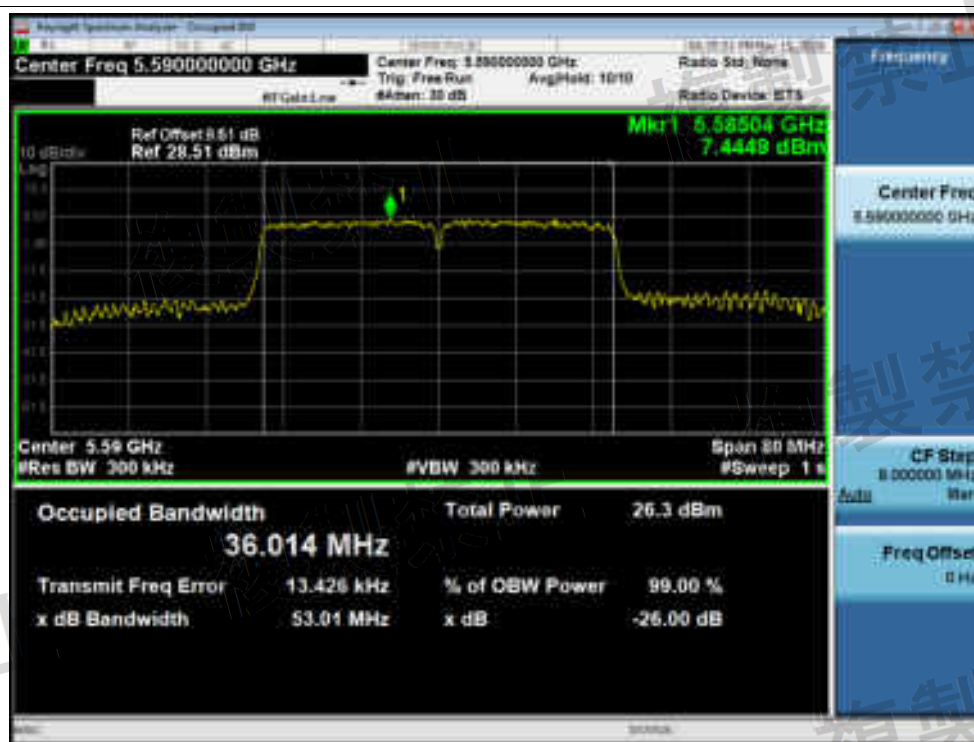


OBW NVNT ac40 5590MHz Ant2

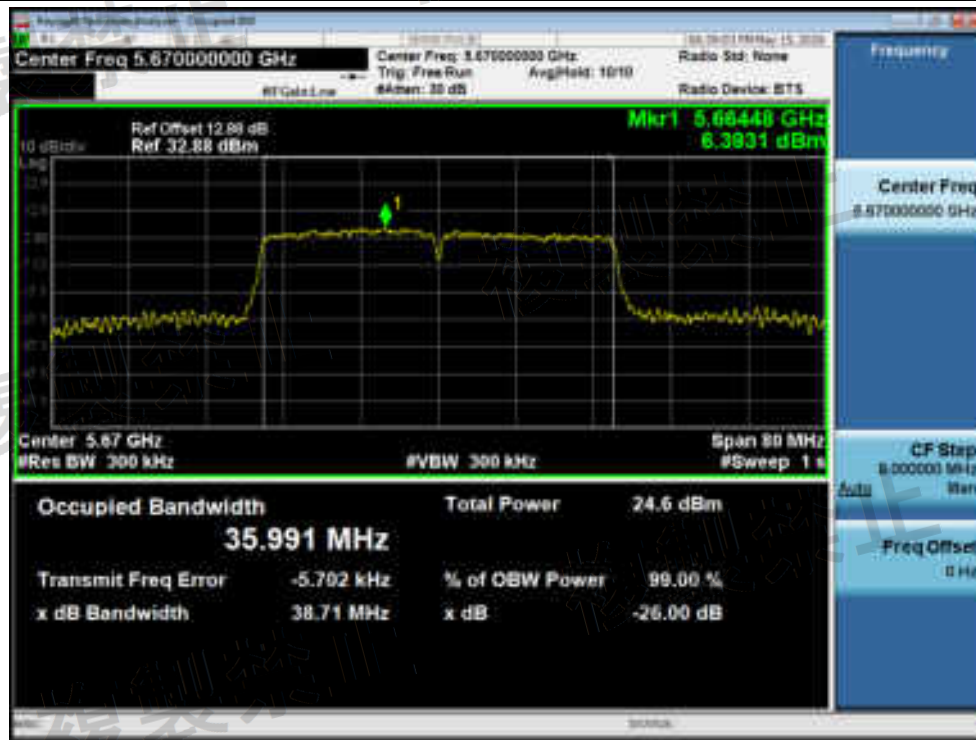

OBW NVNT ac40 5670MHz Ant1



OBW NVNT ac40 5670MHz Ant2

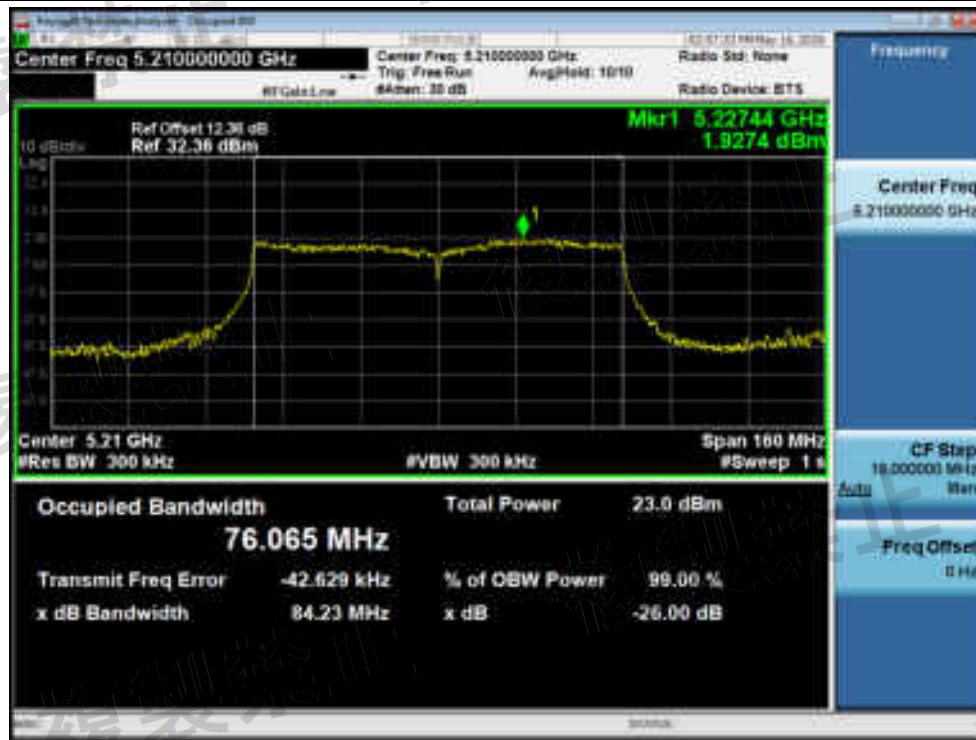

OBW NVNT ac80 5210MHz Ant1




OBW NVNT ac80 5210MHz Ant2



OBW NVNT ac80 5290MHz Ant1




OBW NVNT ac80 5290MHz Ant2

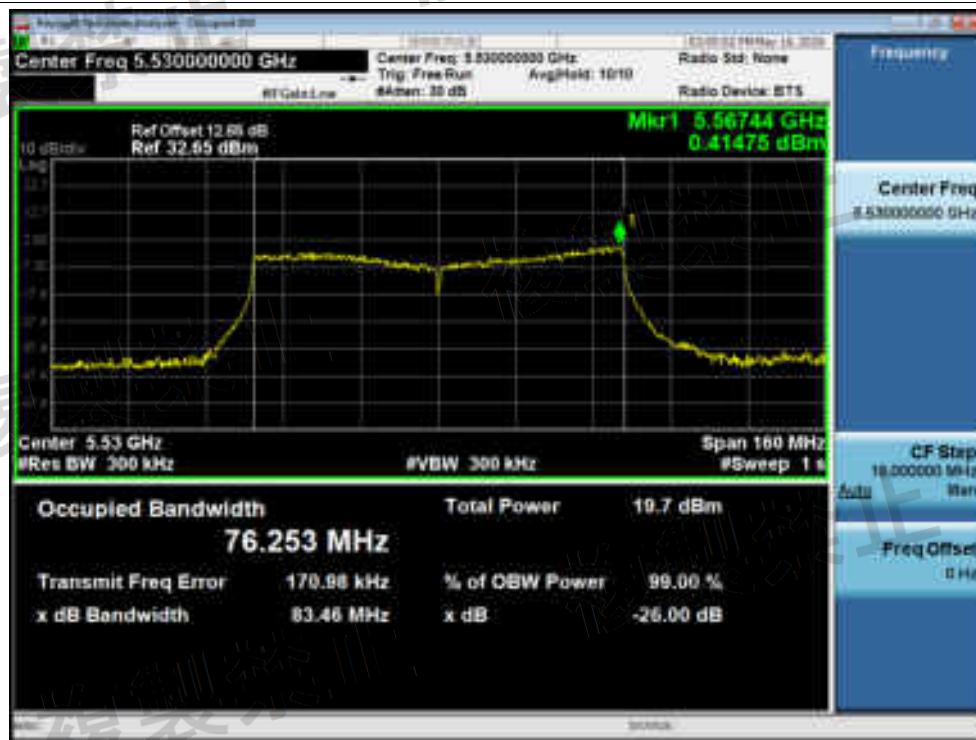


OBW NVNT ac80 5530MHz Ant1




OBW NVNT ac80 5530MHz Ant2

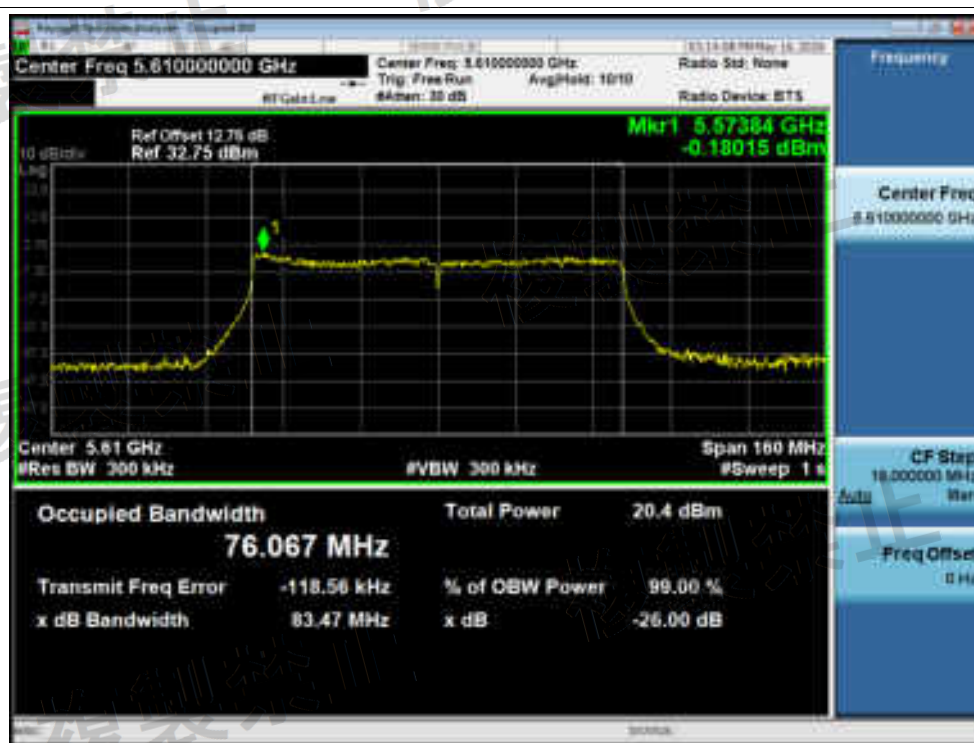

OBW NVNT ac80 5610MHz Ant1

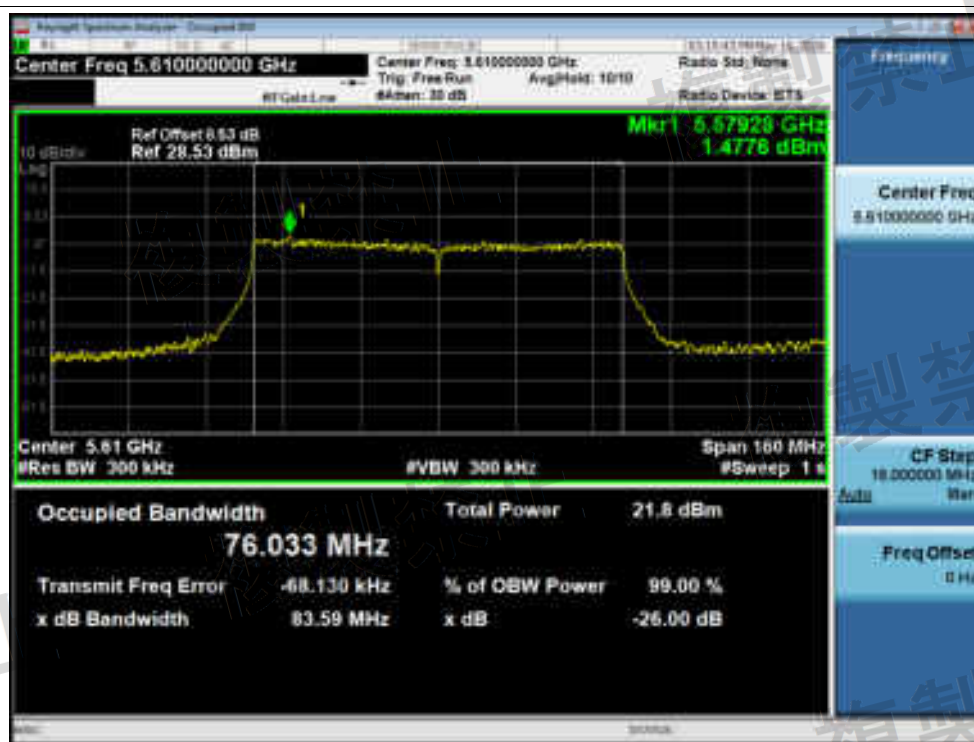


OBW NVNT ac80 5610MHz Ant2

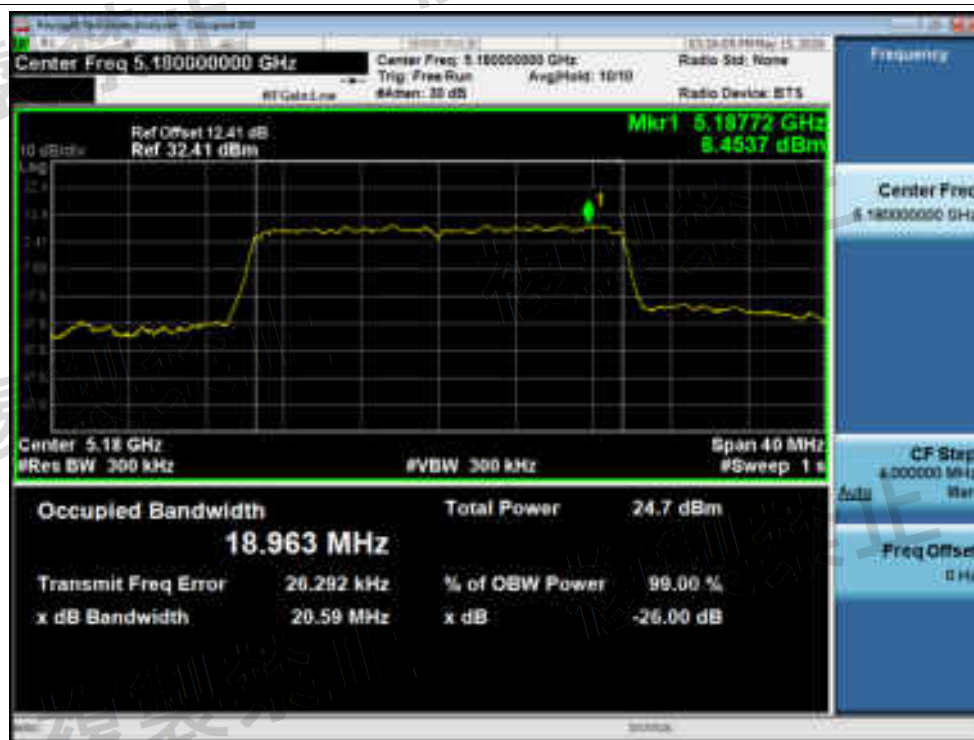


OBW NVNT ax20 5180MHz Ant1




OBW NVNT ax20 5180MHz Ant2

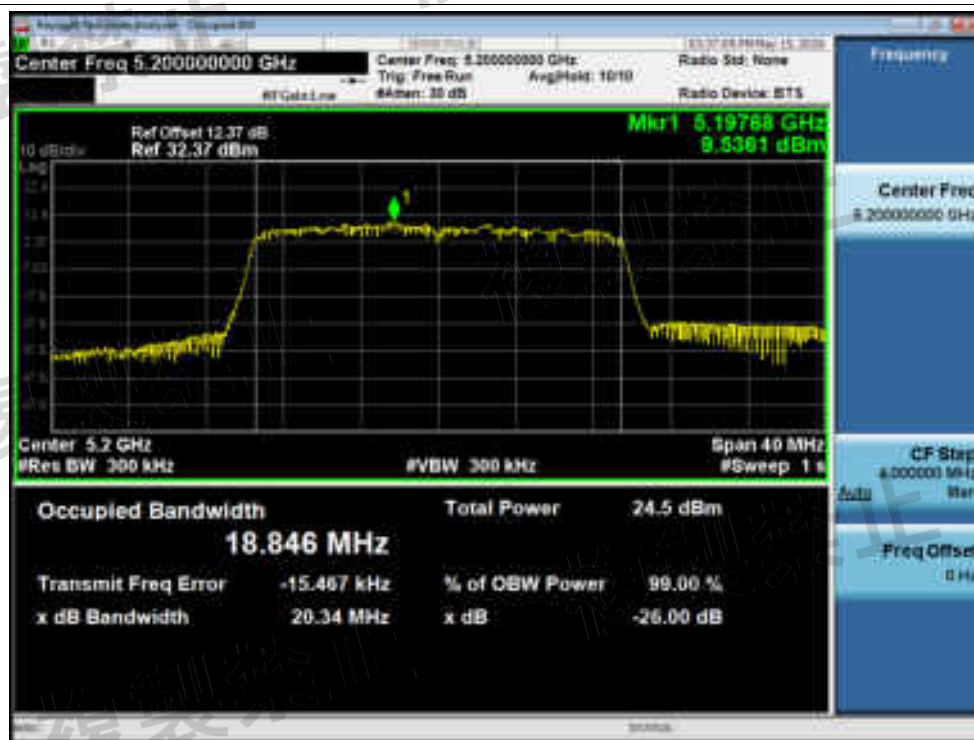


OBW NVNT ax20 5200MHz Ant1

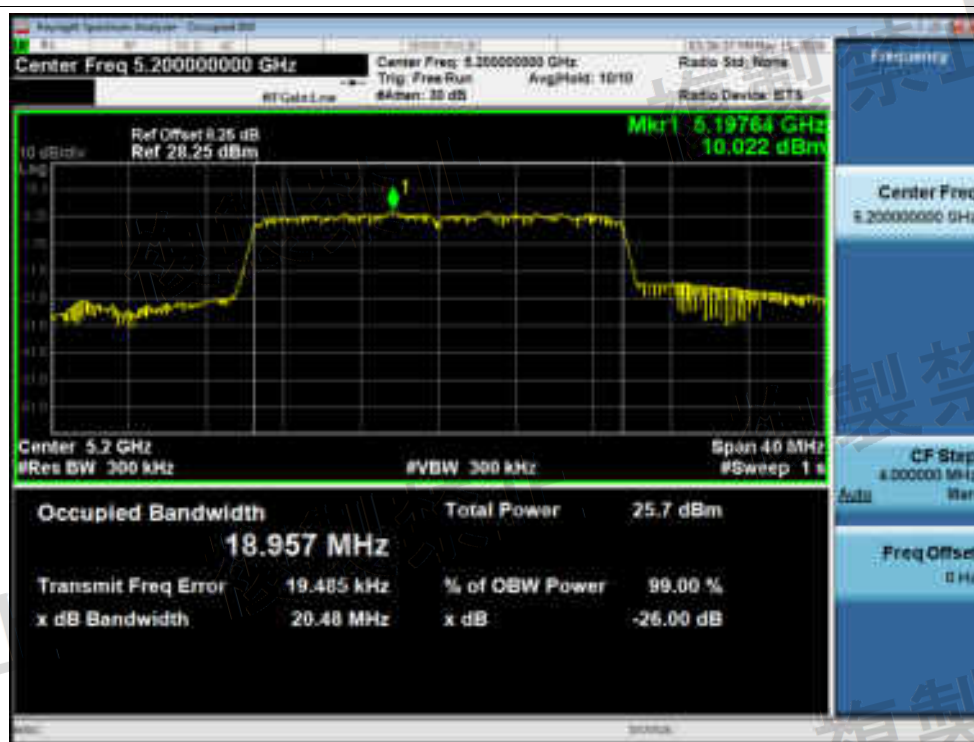

OBW NVNT ax20 5200MHz Ant2

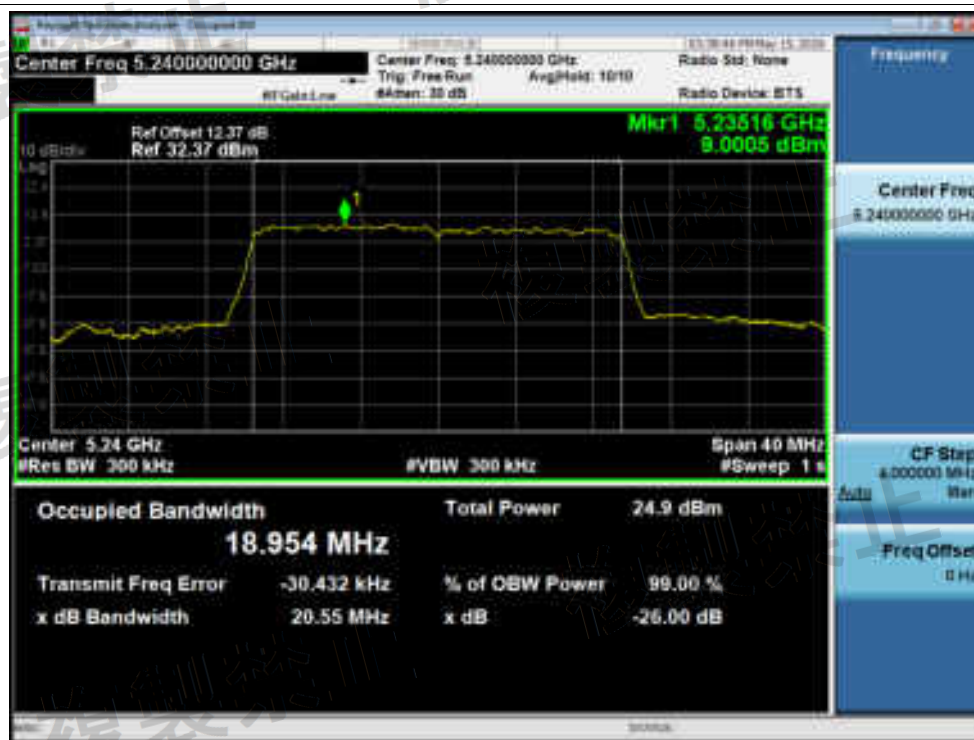

OBW NVNT ax20 5240MHz Ant1

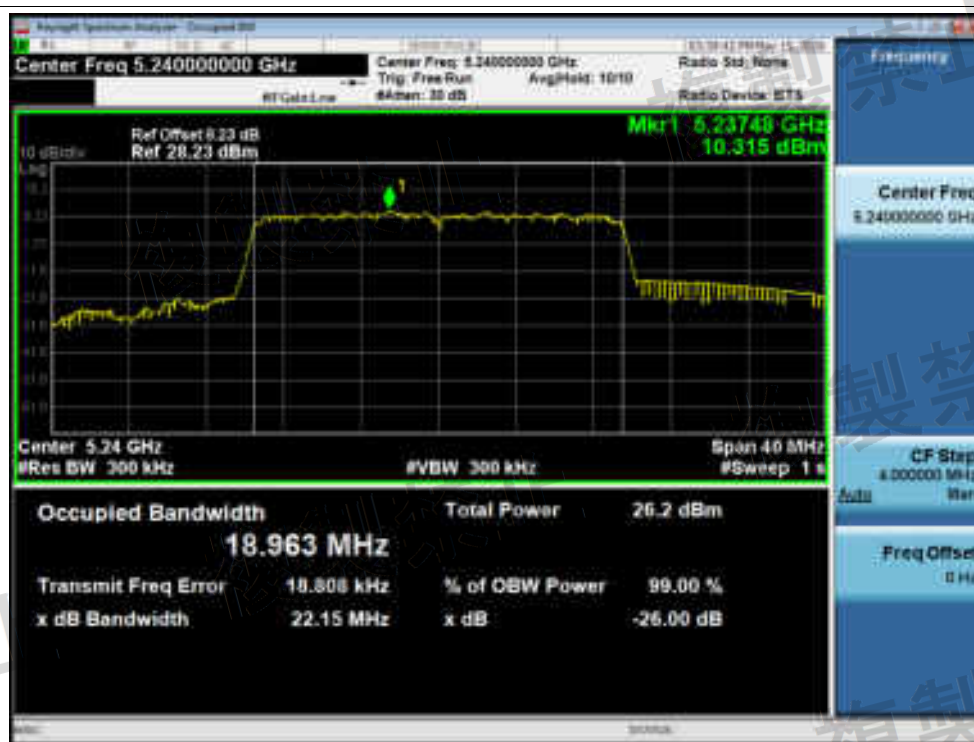

OBW NVNT ax20 5240MHz Ant2