




25. Caution, the brake may become hot in use. Do not touch after use.

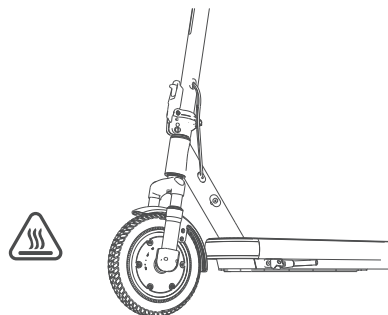


26. Eliminate any sharp edges caused by use. Do not modify or transform the vehicle, including the steering tube and sleeve, stem, folding mechanism and rear brake.

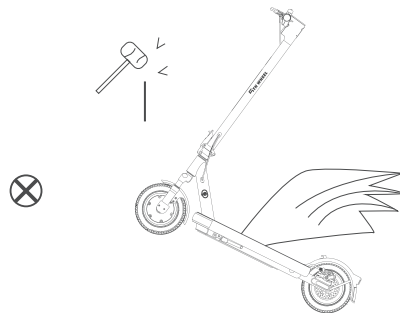

27. The user has the obligation to always wear shoes when riding.

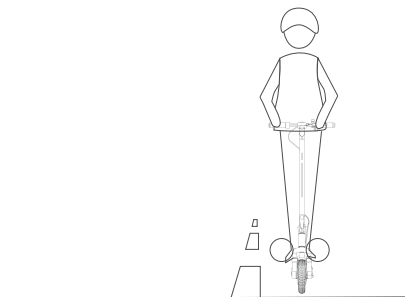


28. In any case, anticipate your trajectory and your speed while respecting the code of the road, the code of the sidewalk and the most vulnerable. If any, local special laws and regulations should be observed during riding of this product.

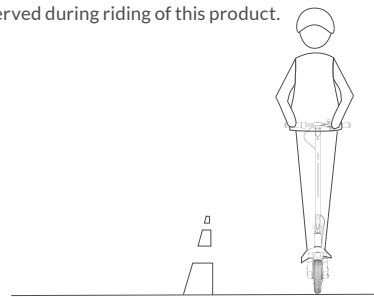

2 Introduction to Functions

1. Product Overview

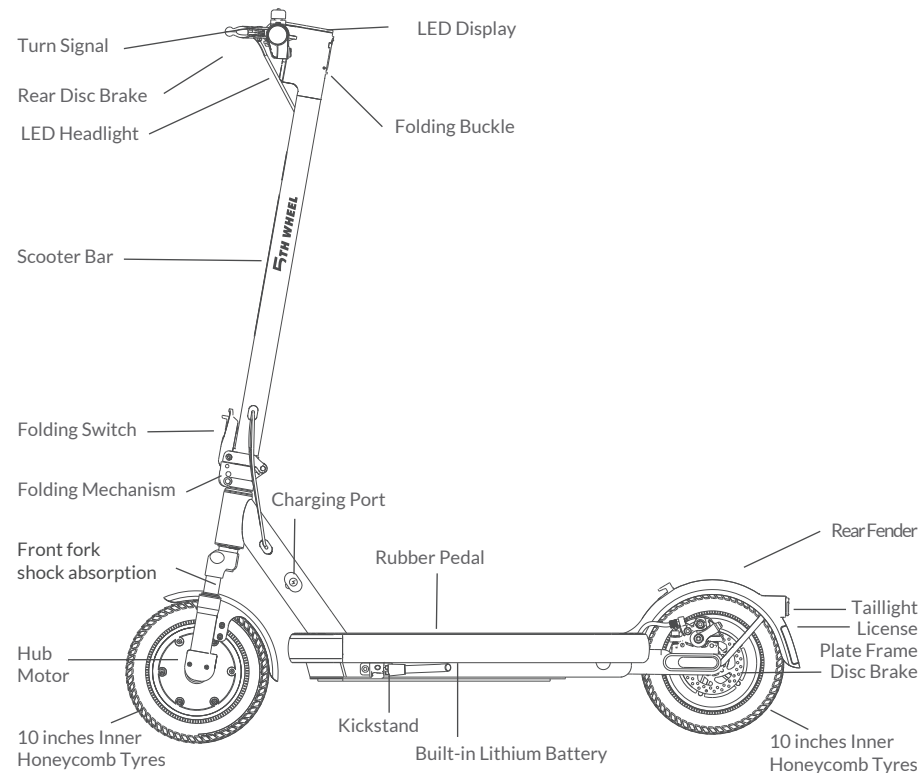


*The accessories and any additional items which are not approved by the manufacturer shall not be used.


Accessories



Manual




M5*12 Screw×4



Screwdriver



Foot brace
silicone cover×2




Power Cable

Note: Please check out all the items in the package carefully. If anything is missing or damaged, please contact email: aftersales@invanti.com


Product Contents	Quantity
User Manual	1
M5*12 Screw	4
Screwdriver	1
Foot brace silicone cover	2
Power Cable	1

3 Product Display

Unfolded status

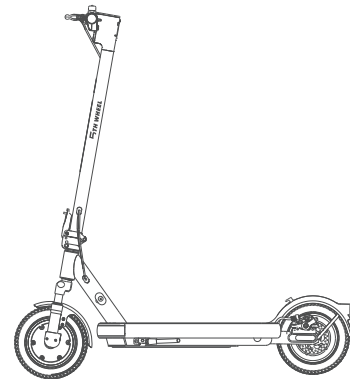

Folded status

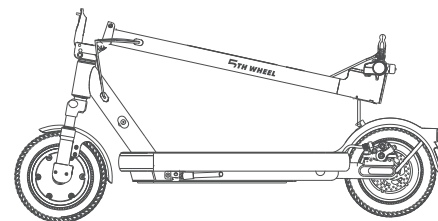



This QR code is a video tutorial for product use. It is recommended to scan this QR code to learn more about how to use the product.




Pay attention !

1. Press the power key to open the scooter.
- ! 2. For safety, the factory setting of scooter ES14 is non-zero start, you need to slide the scooter to 2mph, and the throttle can be used normally.
3. The scooter can be turned on normally and cannot ride in walking mode, but can only be pushed.
- ! 4. Can't start when charging.
5. Do not throw away the manual, please refer to the manual for specific operations.


4 Scooter Assembly

1. Unfold the folding mechanism of ES14 and put down the kickstand.

Unfold ES14 and fix the folding mechanism. (Refer to "Folding and Carrying" for details of unfolding.)




2. Insert the handlebar into the scooter bar.



Connect the line connector in the head and riser.

3. Use the tools included in the package to tighten the screws.



4. After assembly, check whether the power switch can work normally.

