



1. Frequency Error


Condition	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	2412	Ant1	2411.934	-66000	-27.36	±50	Pass
NVNT	2437	Ant1	2436.933	-67000	-27.49	±50	Pass
NVNT	2472	Ant1	2471.933	-67000	-27.1	±50	Pass
NVNT	2422	Ant1	2421.934	-66000	-27.25	±50	Pass
NVNT	2462	Ant1	2461.933	-67000	-27.21	±50	Pass

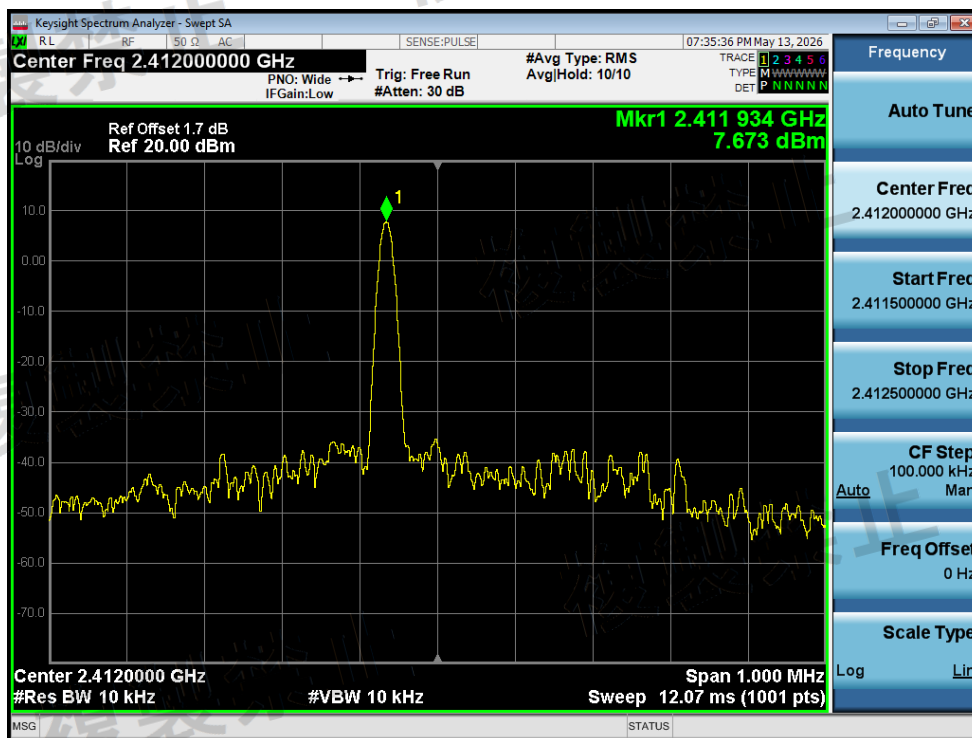


Freq. Error NVNT b 2412MHz Ant1

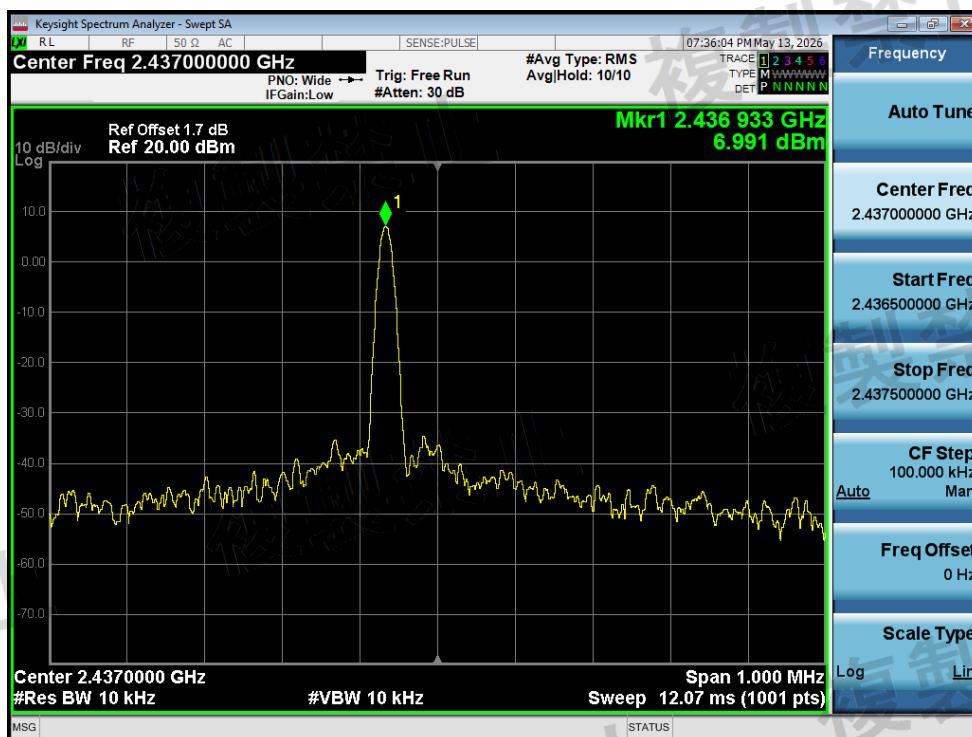


Freq. Error NVNT b 2437MHz Ant1

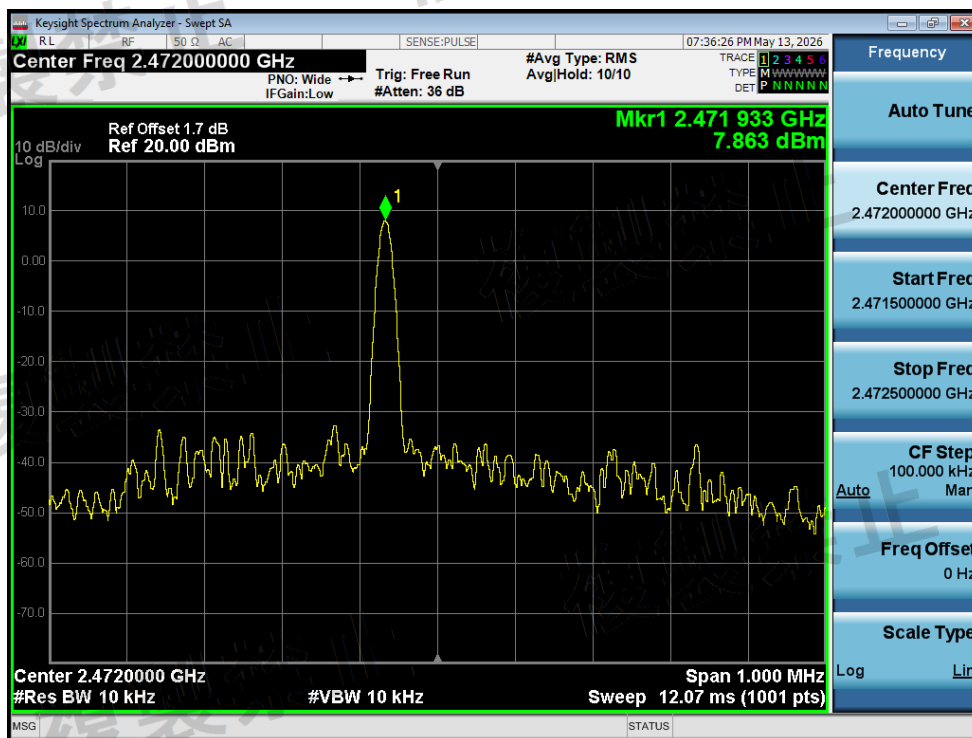

Freq. Error NVNT b 2472MHz Ant1

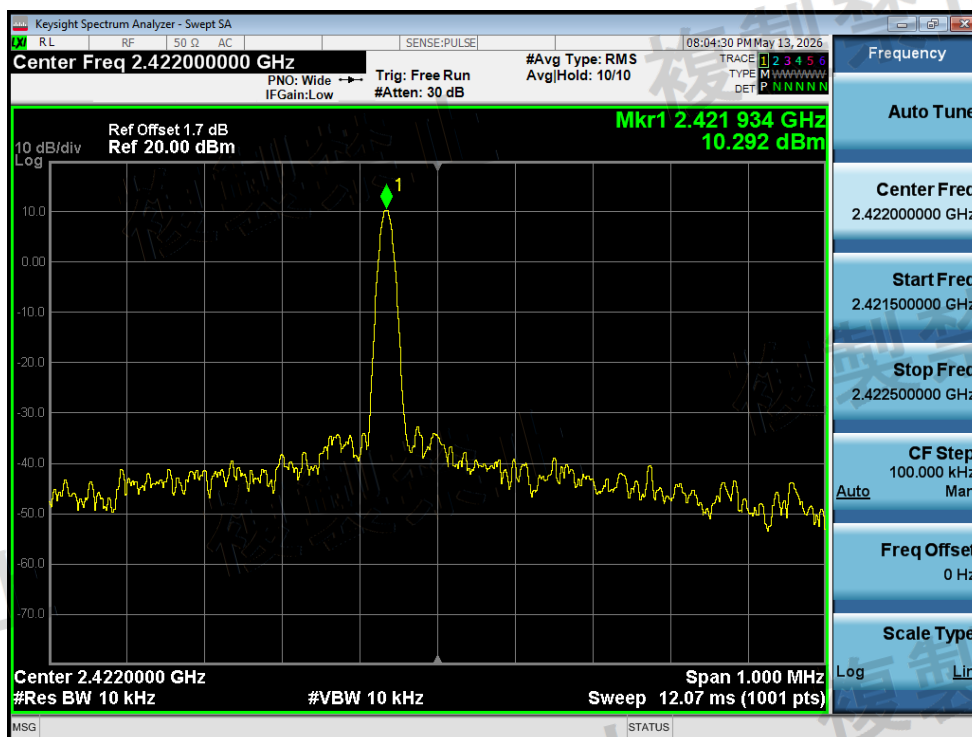


Freq. Error NVNT n40 2422MHz Ant1

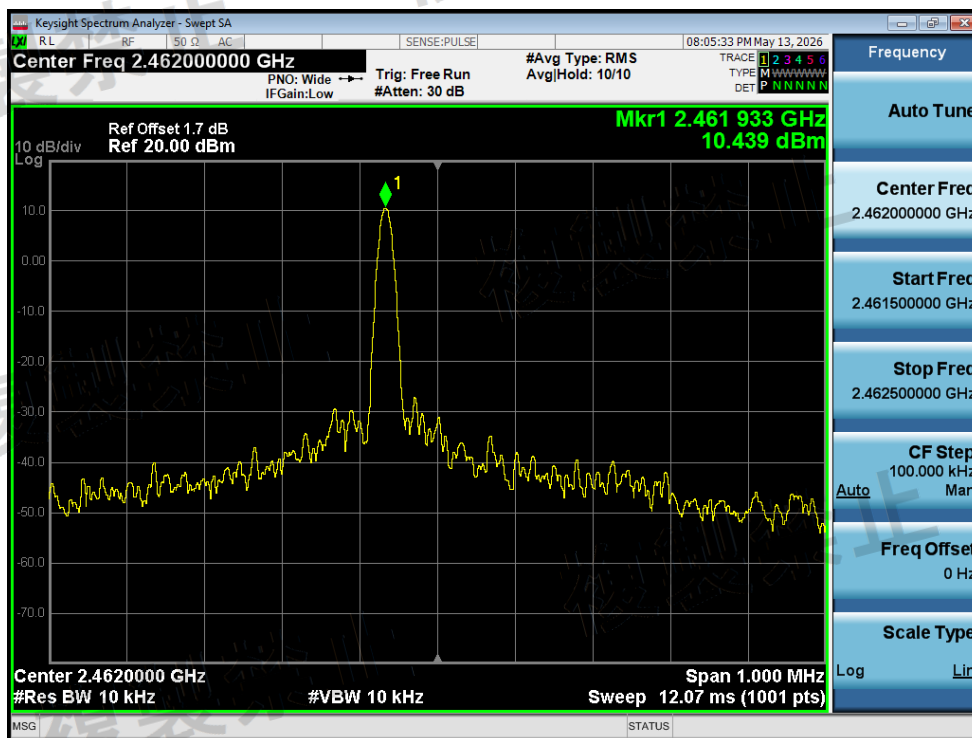


Freq. Error NVNT n40 2462MHz Ant1

2. Antenna and EIRP Power


Condition	Mode	Frequency (MHz)	Antenna	Power (dBm/MHz)	Antenna Power (mW/MHz)	Limit (mW/MHz)	Declared Power (mW/MHz)	Tolerance (%)	Upper Limit (%)	Verdict
NVNT	b	2412	Ant1	7.38	5.46	10	10	-45.4	+20	Pass
NVNT	b	2437	Ant1	7.25	5.3	10	10	-47	+20	Pass
NVNT	b	2472	Ant1	7.36	5.45	10	10	-45.5	+20	Pass
NVNT	g	2412	Ant1	3.35	2.16	10	10	-78.4	+20	Pass
NVNT	g	2437	Ant1	3.14	2.06	10	10	-79.4	+20	Pass
NVNT	g	2472	Ant1	3.82	2.41	10	10	-75.9	+20	Pass
NVNT	n20	2412	Ant1	2.4	1.74	10	10	-82.6	+20	Pass
NVNT	n20	2437	Ant1	1.82	1.52	10	10	-84.8	+20	Pass
NVNT	n20	2472	Ant1	2.63	1.83	10	10	-81.7	+20	Pass
NVNT	n40	2422	Ant1	-1.75	0.67	5	5	-86.6	+20	Pass
NVNT	n40	2437	Ant1	-1.49	0.71	5	5	-85.8	+20	Pass
NVNT	n40	2462	Ant1	-1.14	0.77	5	5	-84.6	+20	Pass

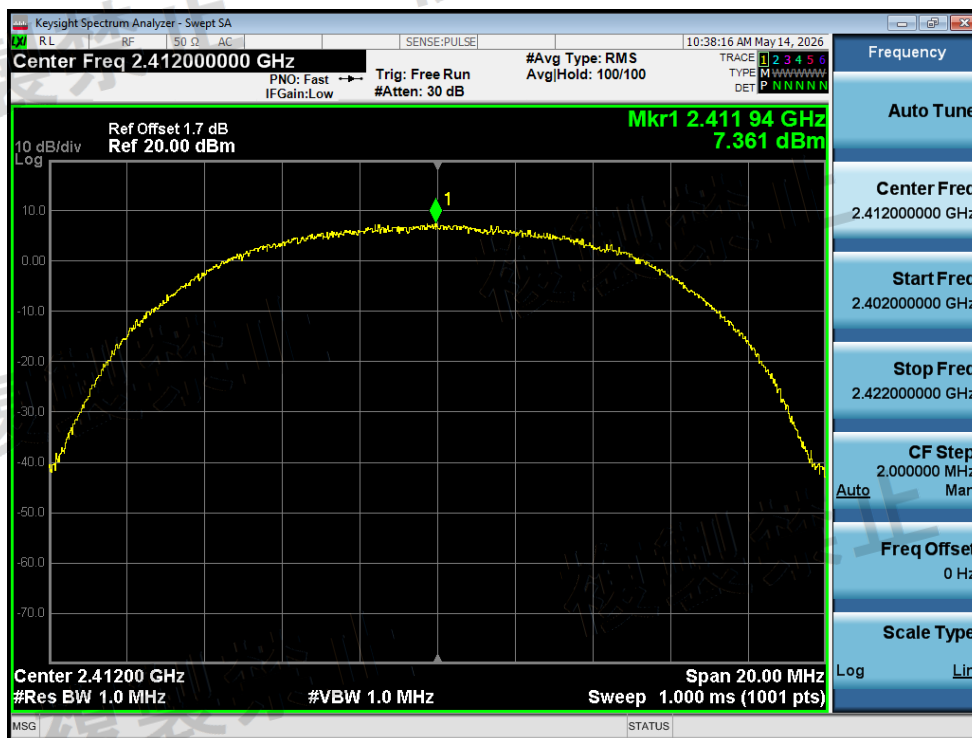


Power NVNT b 2412MHz Ant1 Pre Scan

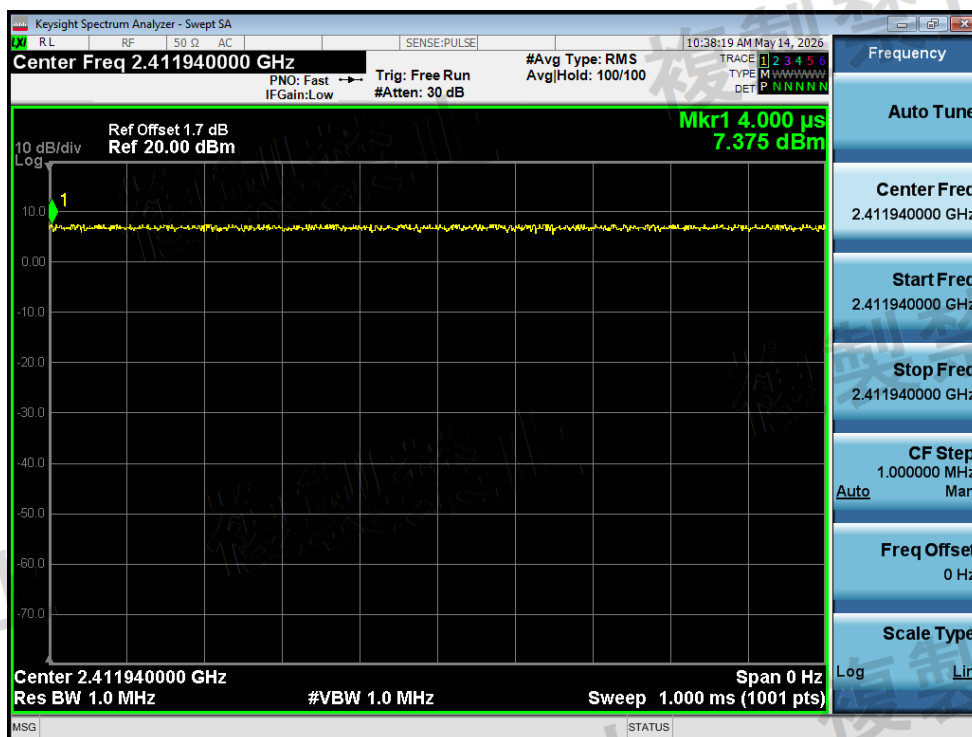


Power NVNT b 2412MHz Ant1 Zero Span

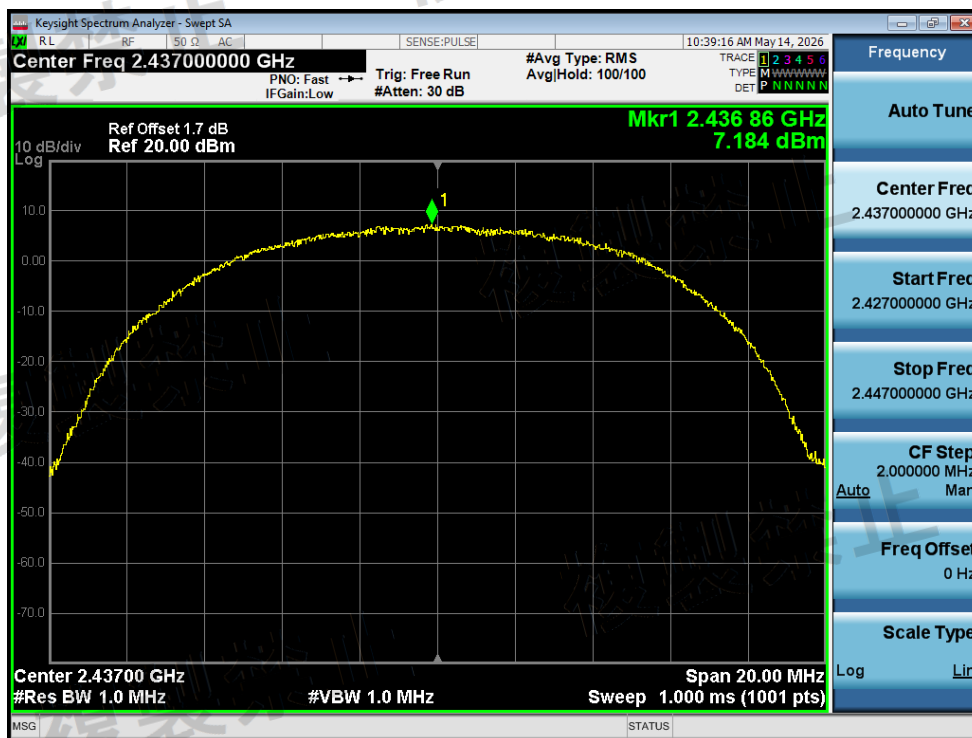


Power NVNT b 2437MHz Ant1 Pre Scan

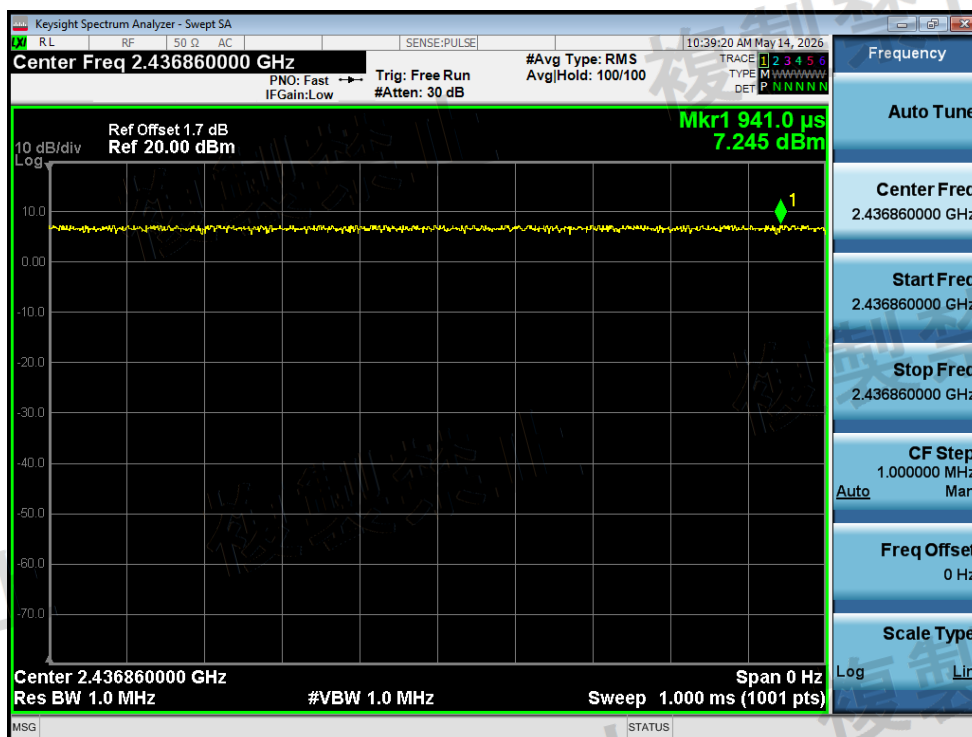


Power NVNT b 2437MHz Ant1 Zero Span

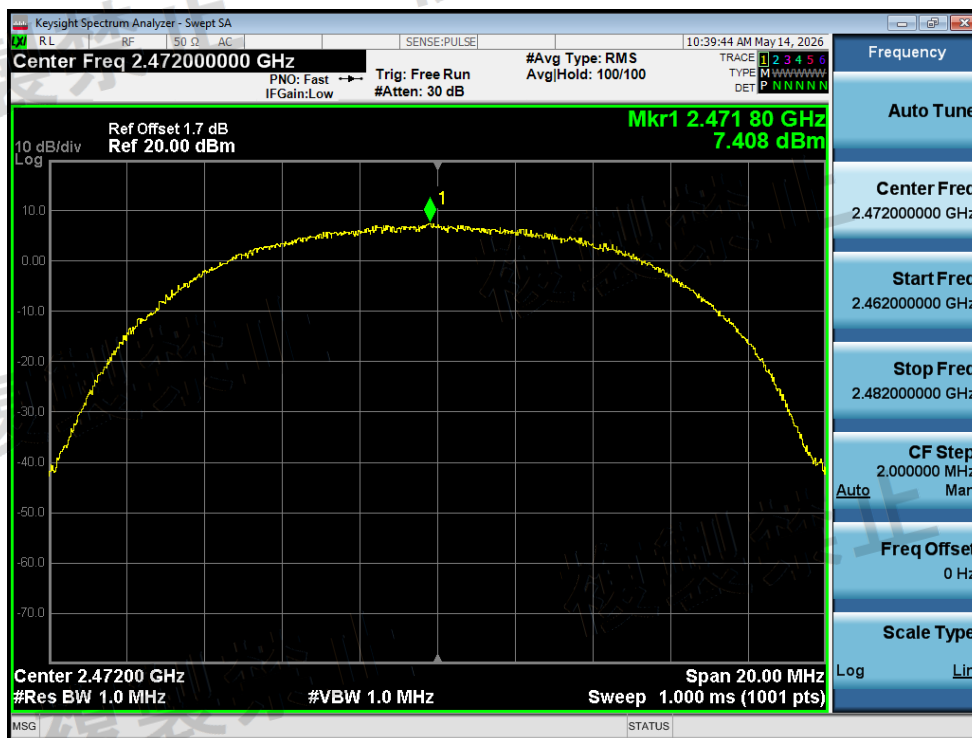


Power NVNT b 2472MHz Ant1 Pre Scan

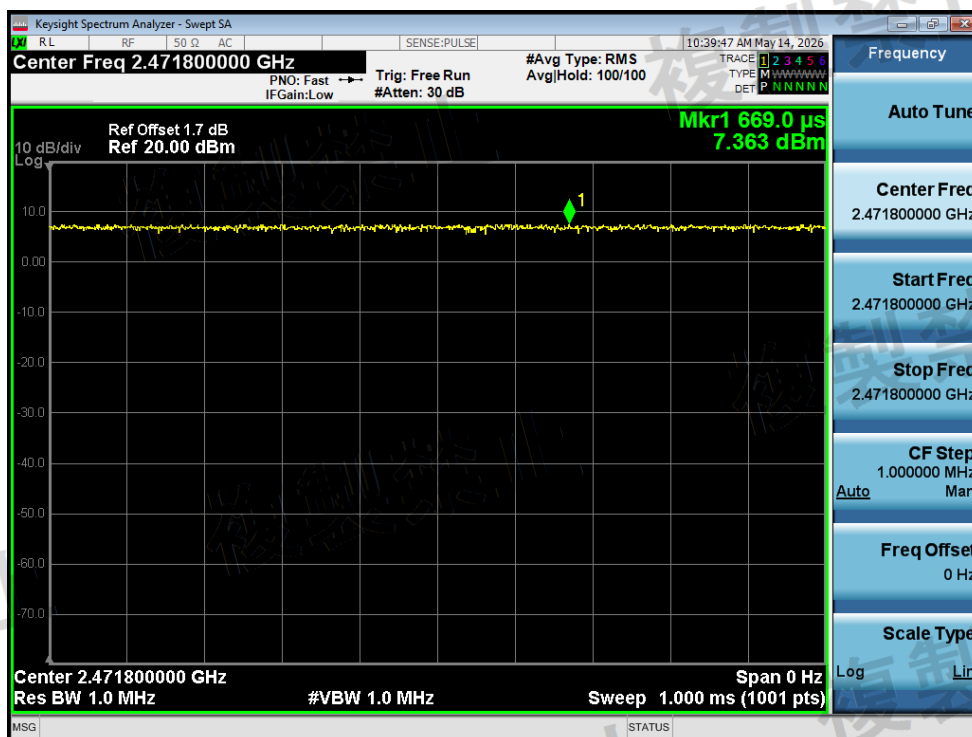


Power NVNT b 2472MHz Ant1 Zero Span

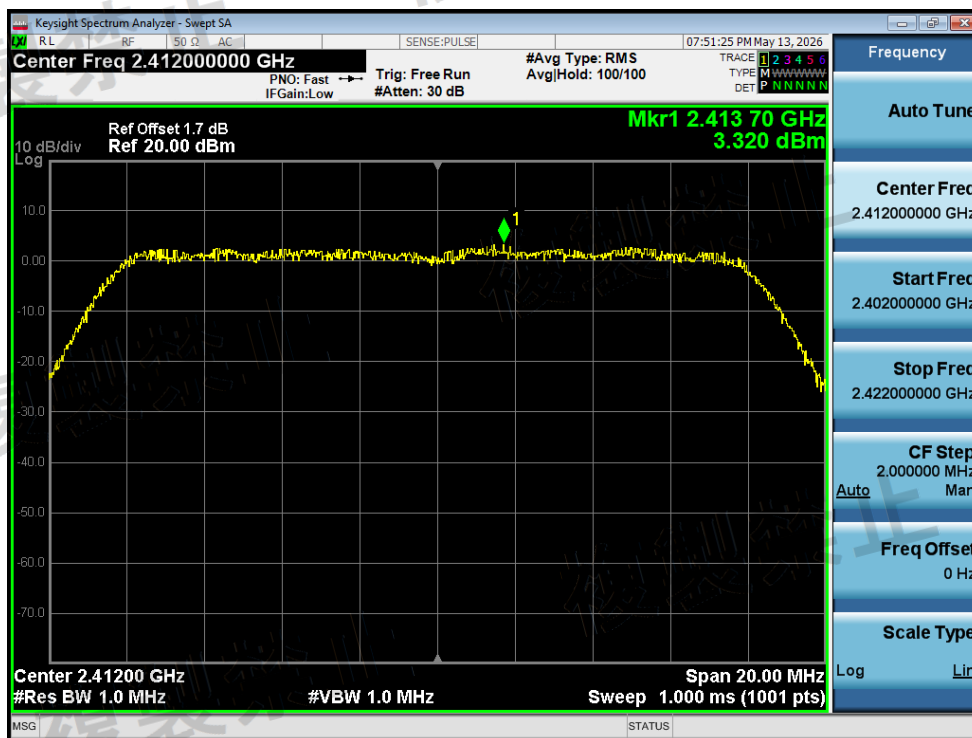


Power NVNT g 2412MHz Ant1 Pre Scan

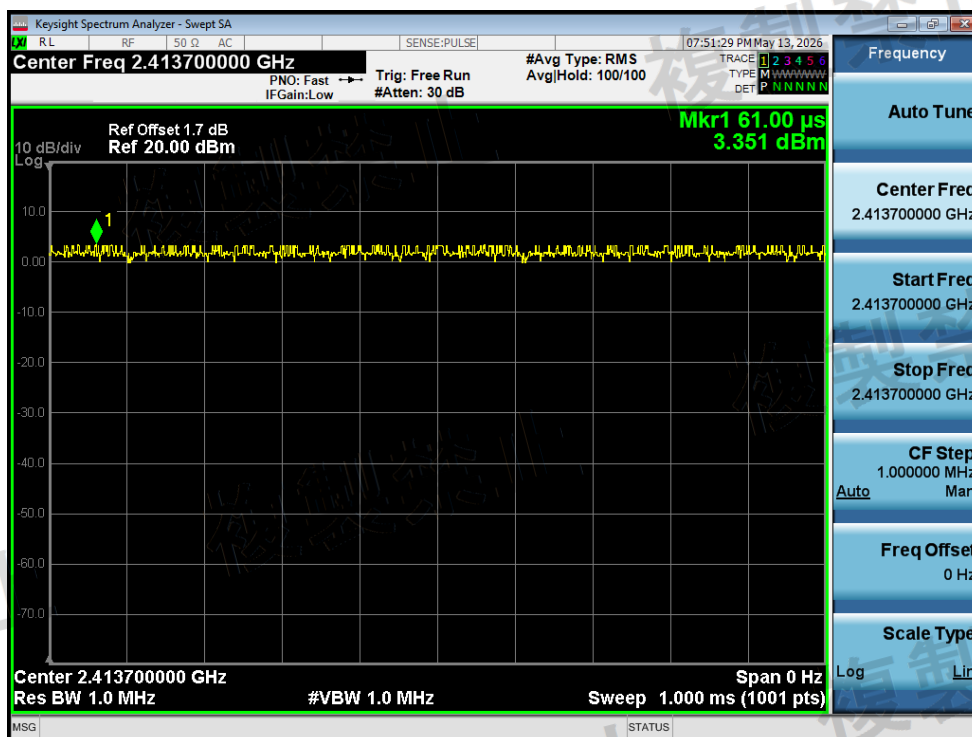


Power NVNT g 2412MHz Ant1 Zero Span

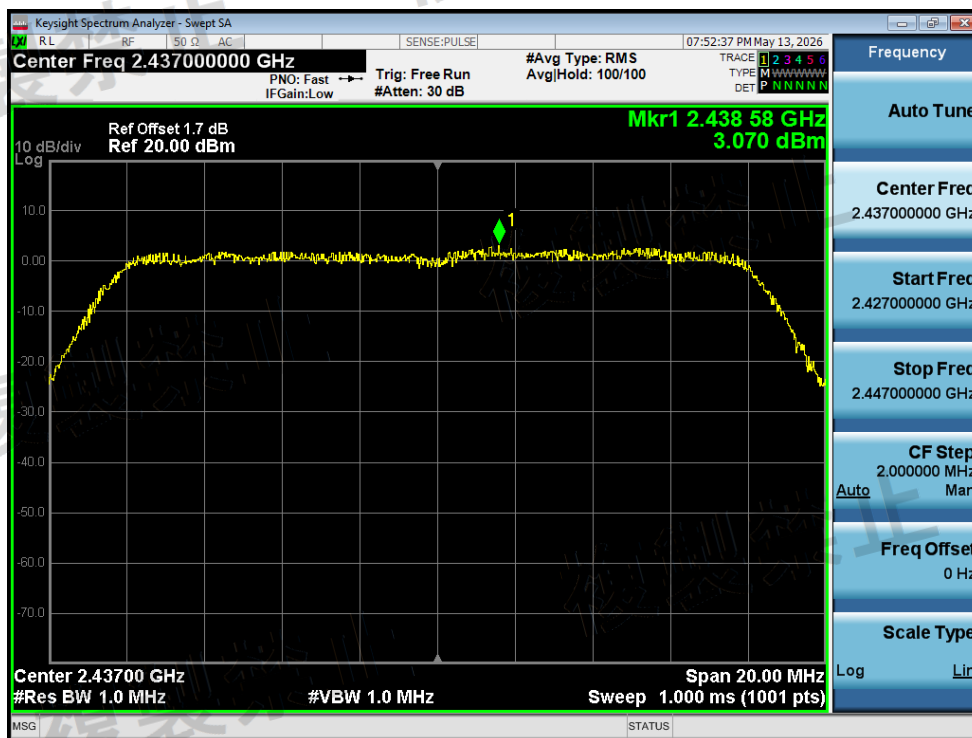


Power NVNT g 2437MHz Ant1 Pre Scan

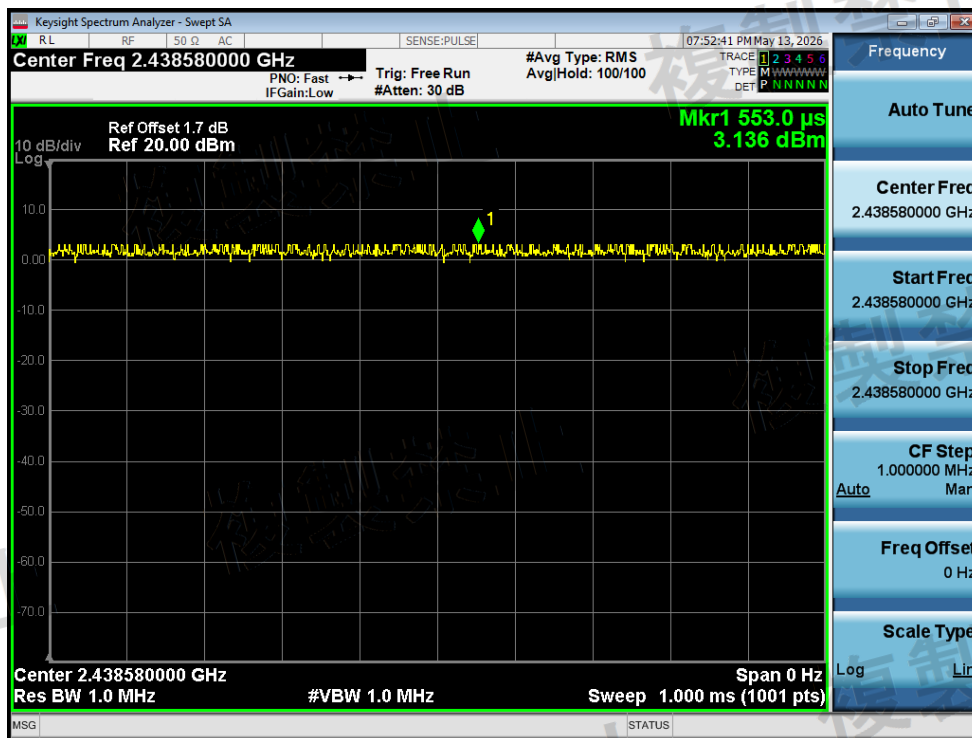


Power NVNT g 2437MHz Ant1 Zero Span

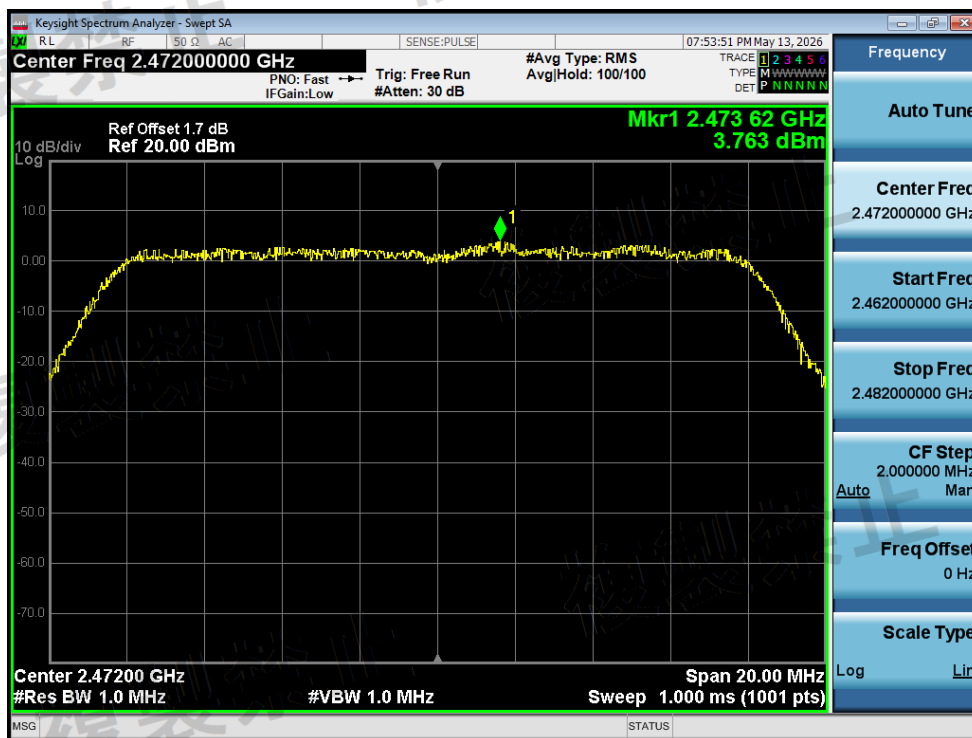


Power NVNT g 2472MHz Ant1 Pre Scan

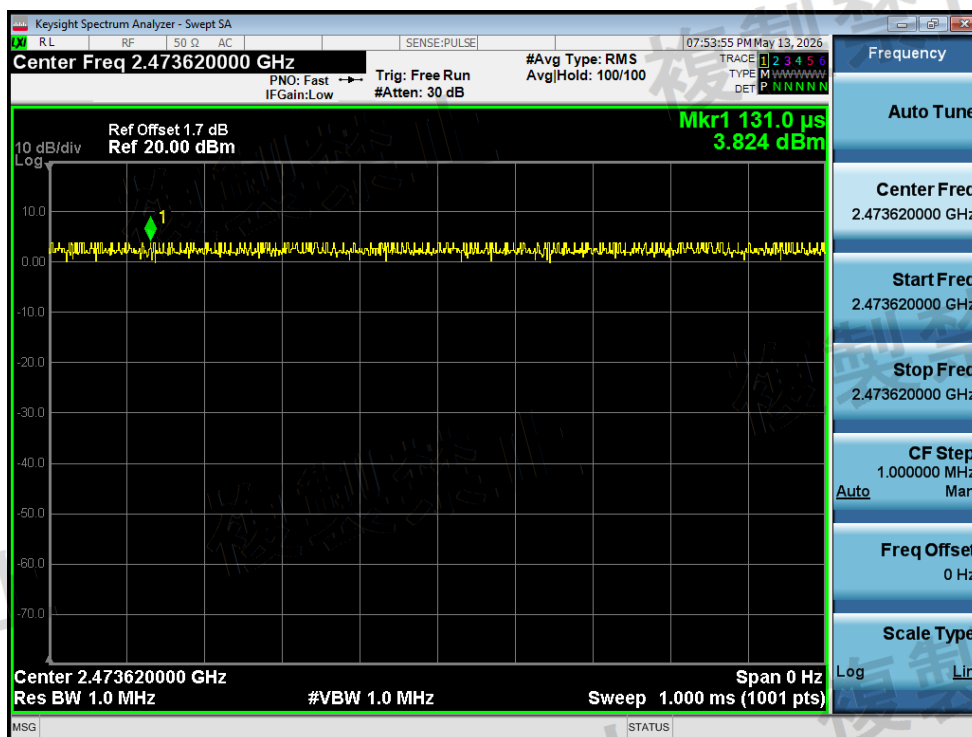


Power NVNT g 2472MHz Ant1 Zero Span

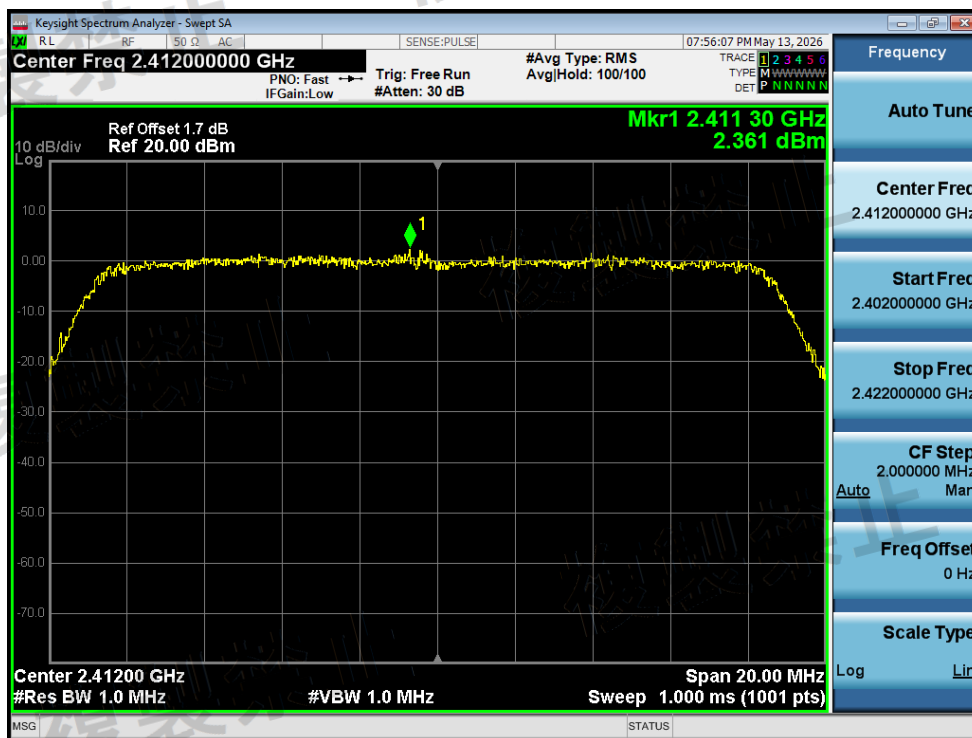


Power NVNT n20 2412MHz Ant1 Pre Scan

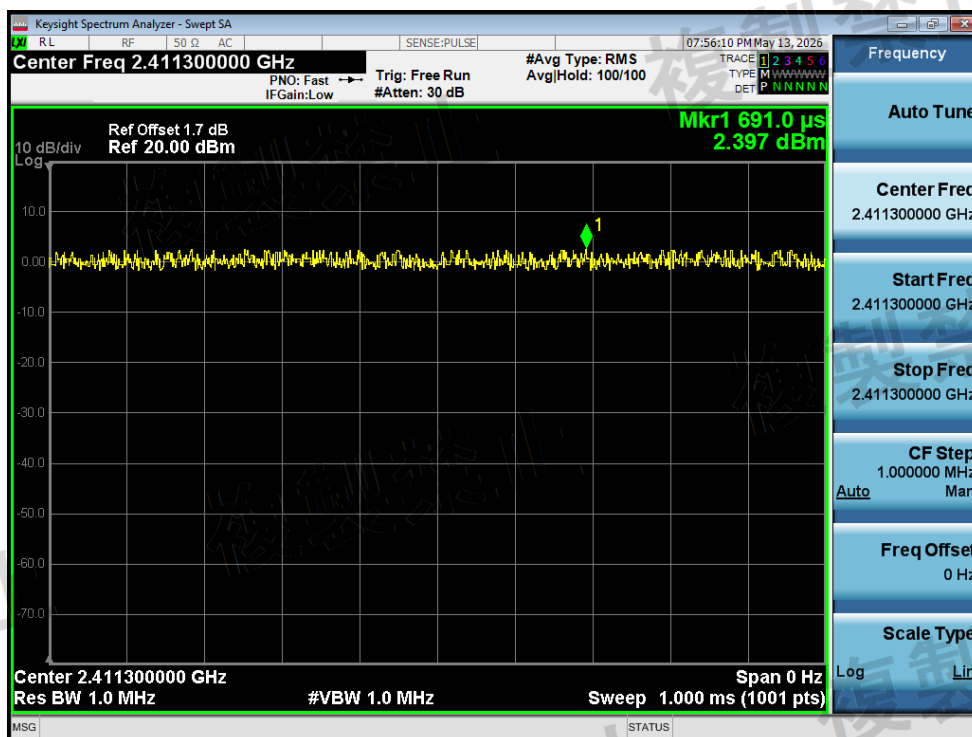


Power NVNT n20 2412MHz Ant1 Zero Span

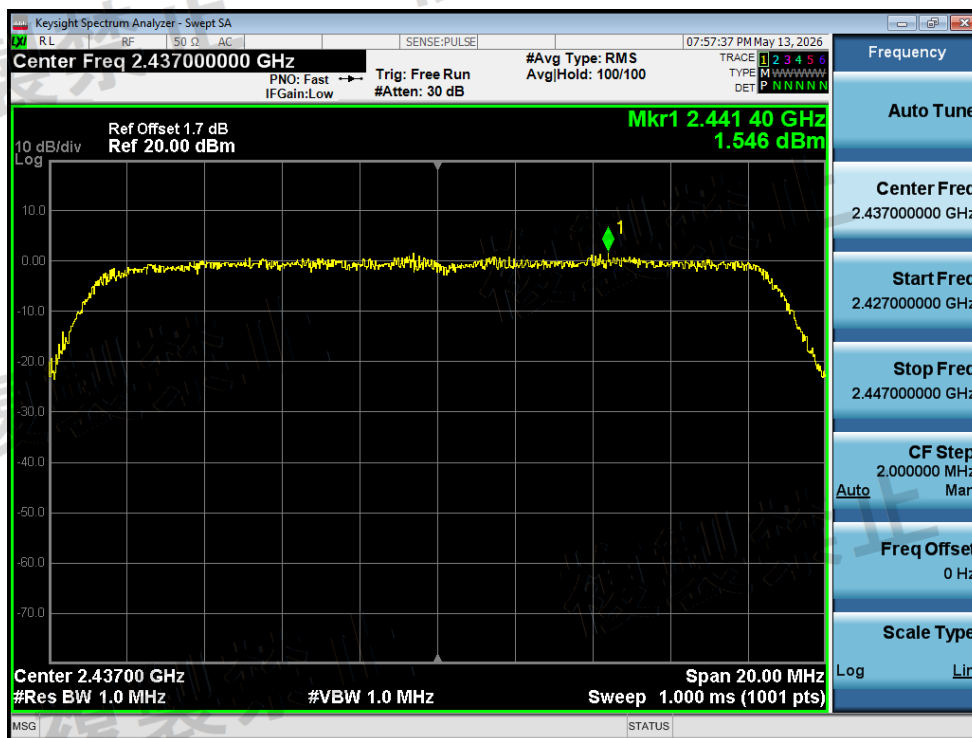


Power NVNT n20 2437MHz Ant1 Pre Scan

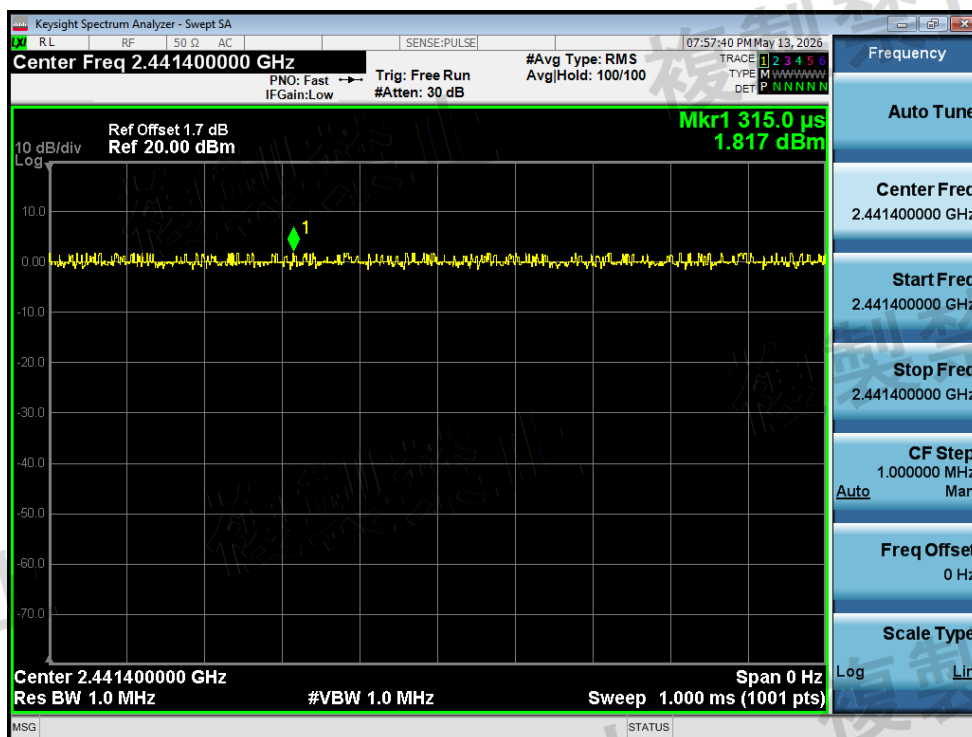


Power NVNT n20 2437MHz Ant1 Zero Span

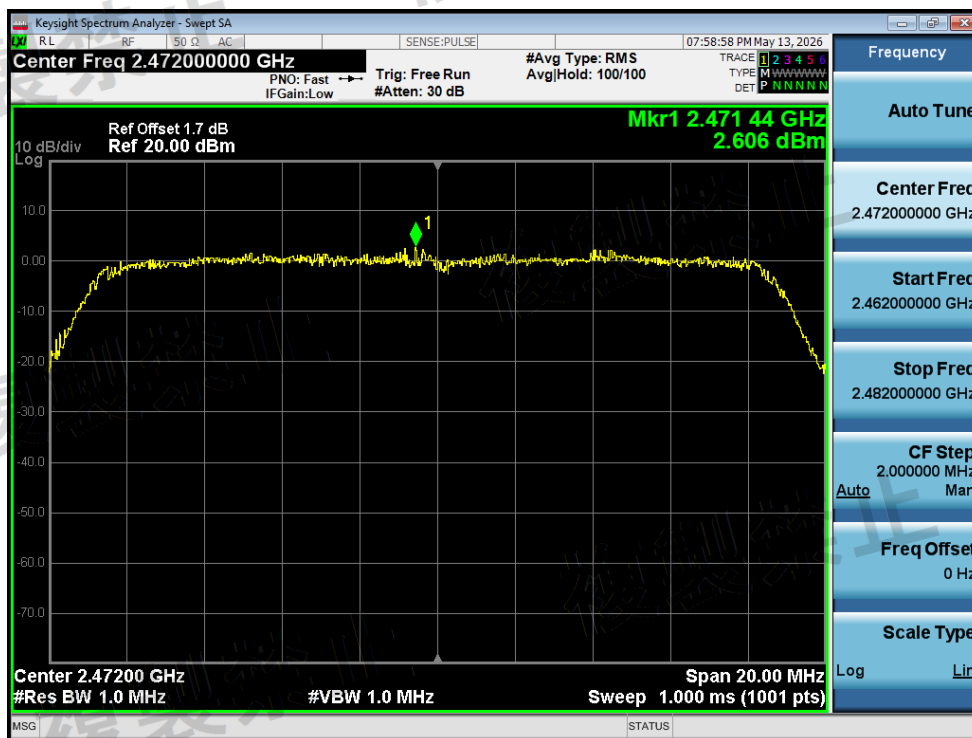


Power NVNT n20 2472MHz Ant1 Pre Scan

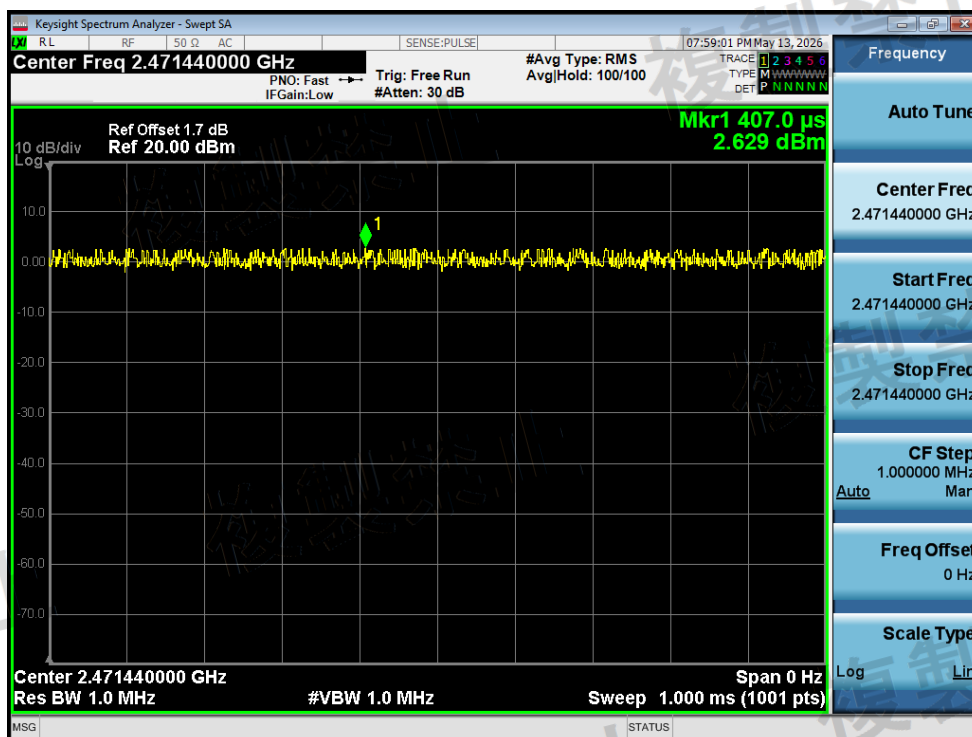

Power NVNT n20 2472MHz Ant1 Zero Span

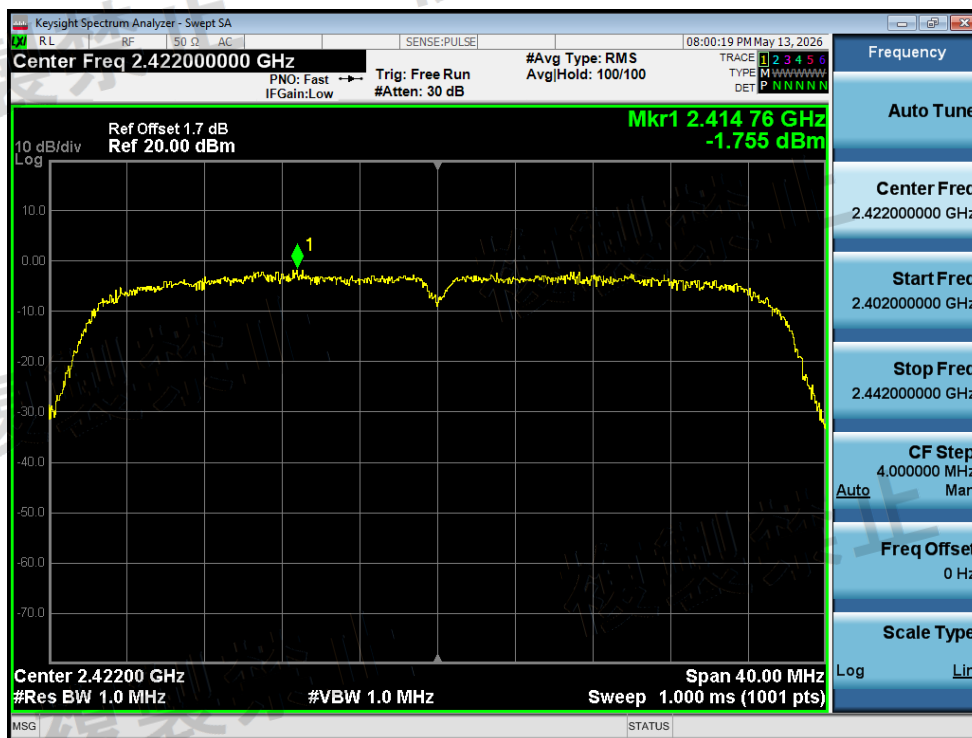


Power NVNT n40 2422MHz Ant1 Pre Scan

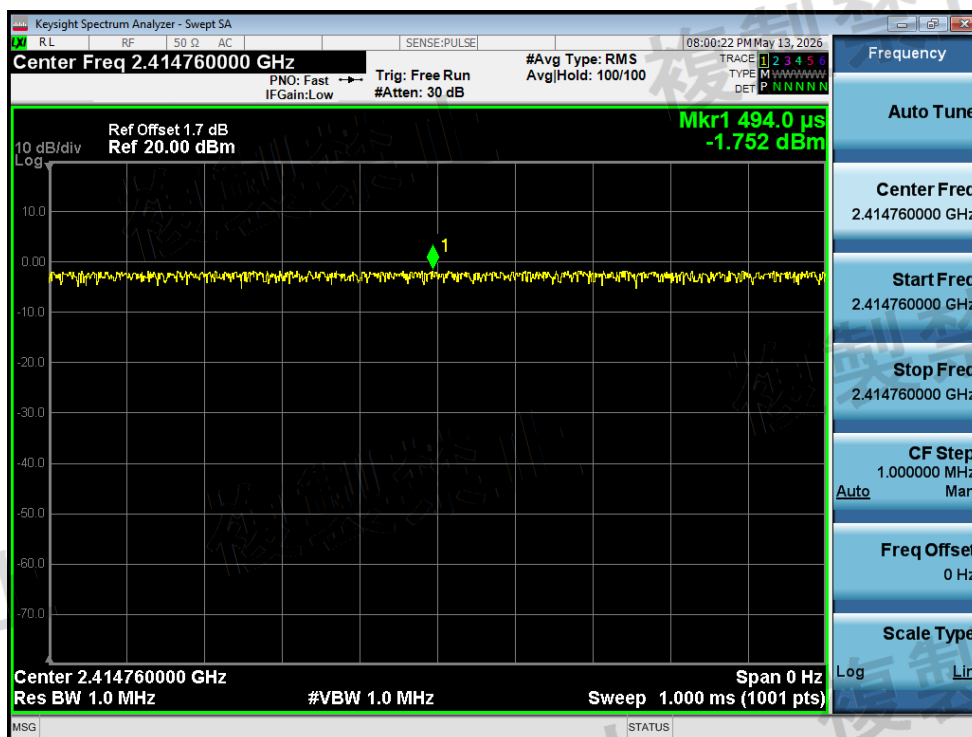

Power NVNT n40 2422MHz Ant1 Zero Span




Power NVNT n40 2437MHz Ant1 Pre Scan

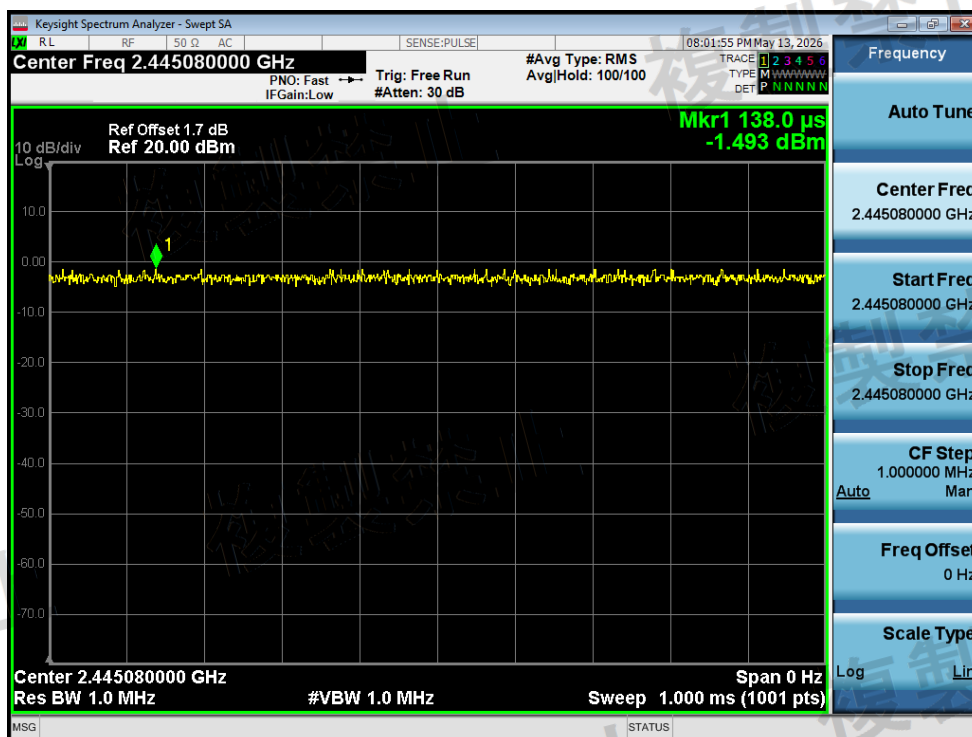

Power NVNT n40 2437MHz Ant1 Zero Span



Power NVNT n40 2462MHz Ant1 Pre Scan

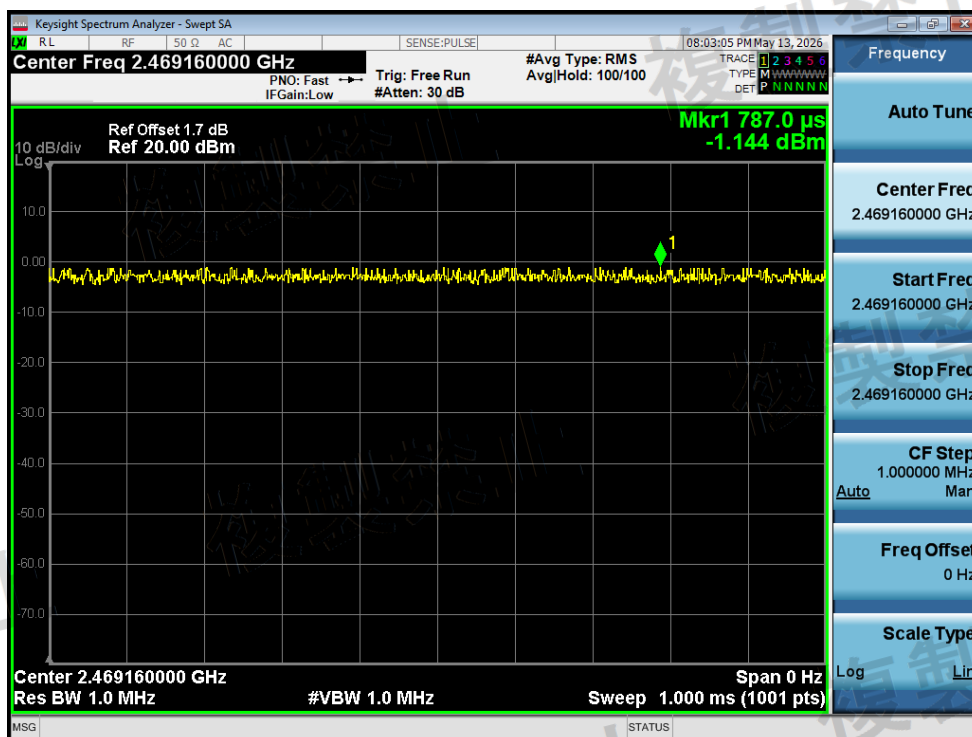


Power NVNT n40 2462MHz Ant1 Zero Span

3. EIRP Power


Condition	Mode	Frequency (MHz)	Antenna	Antenna Power (dBm/MHz)	Gain (dBi)	EIRP Power (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	b	2412	Ant1	7.37	4.1	11.47	12.14	Pass
NVNT	b	2437	Ant1	7.24	4.1	11.34	12.14	Pass
NVNT	b	2472	Ant1	7.36	4.1	11.46	12.14	Pass
NVNT	g	2412	Ant1	3.34	4.1	7.44	12.14	Pass
NVNT	g	2437	Ant1	3.14	4.1	7.24	12.14	Pass
NVNT	g	2472	Ant1	3.82	4.1	7.92	12.14	Pass
NVNT	n20	2412	Ant1	2.41	4.1	6.51	12.14	Pass
NVNT	n20	2437	Ant1	1.82	4.1	5.92	12.14	Pass
NVNT	n20	2472	Ant1	2.62	4.1	6.72	12.14	Pass
NVNT	n40	2422	Ant1	-1.74	4.1	2.36	9.13	Pass
NVNT	n40	2437	Ant1	-1.49	4.1	2.61	9.13	Pass
NVNT	n40	2462	Ant1	-1.14	4.1	2.96	9.13	Pass

4. Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	12.978
NVNT	b	2437	Ant1	13.071
NVNT	b	2472	Ant1	12.941
NVNT	g	2412	Ant1	16.47
NVNT	g	2437	Ant1	16.492
NVNT	g	2472	Ant1	16.472
NVNT	n20	2412	Ant1	17.352
NVNT	n20	2437	Ant1	17.37
NVNT	n20	2472	Ant1	17.35
NVNT	n40	2422	Ant1	34.771
NVNT	n40	2437	Ant1	34.654
NVNT	n40	2462	Ant1	34.77

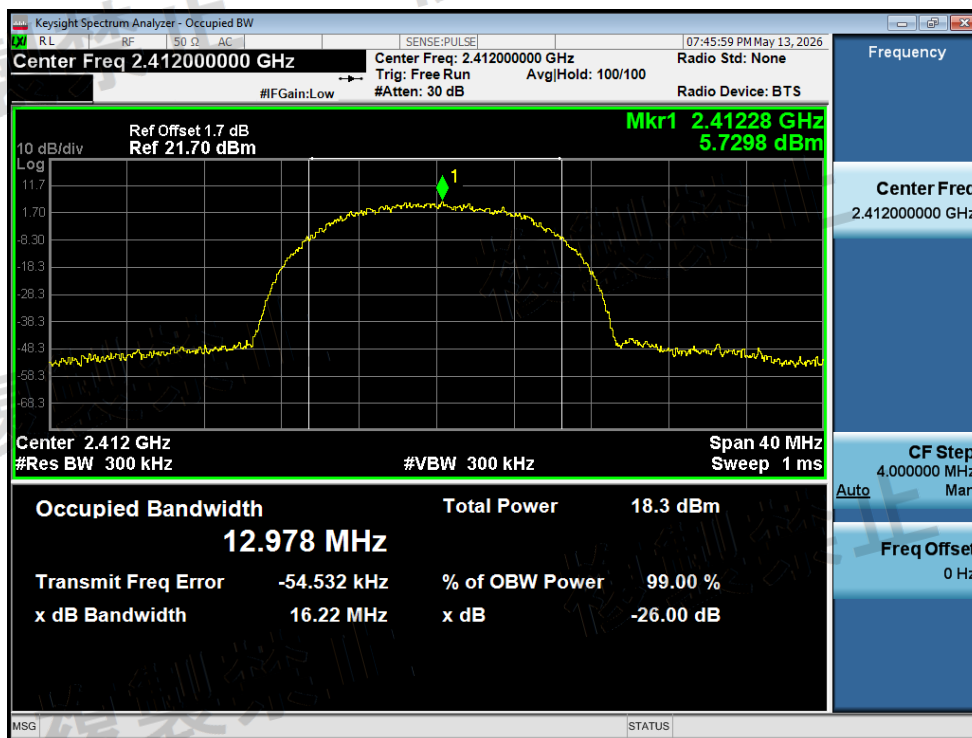


OBW NVNT b 2412MHz Ant1

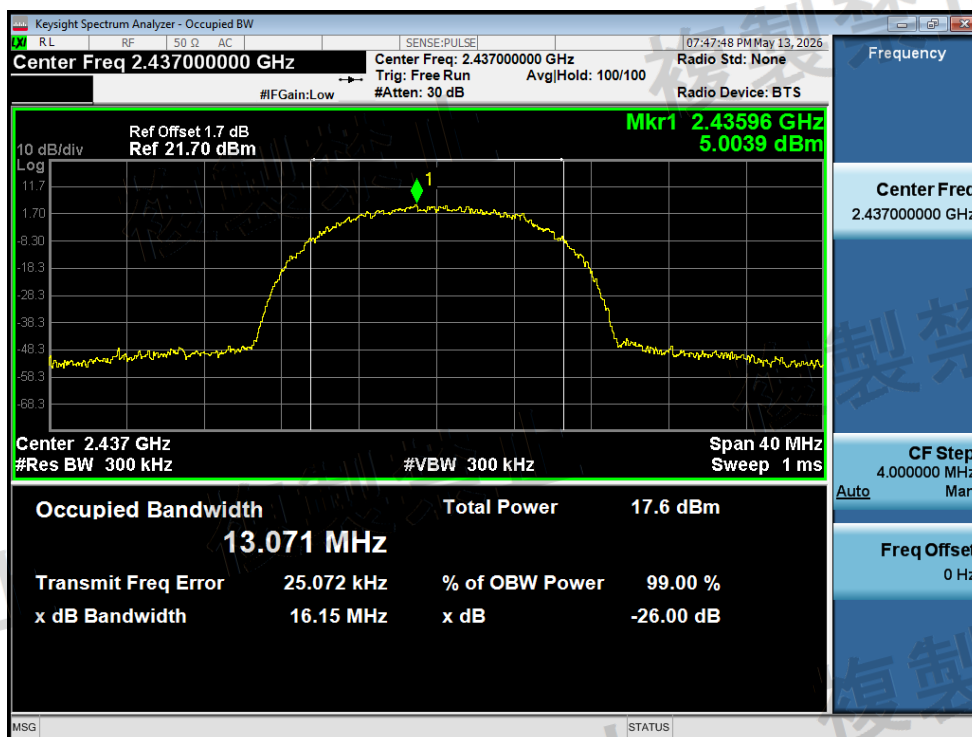


OBW NVNT b 2437MHz Ant1

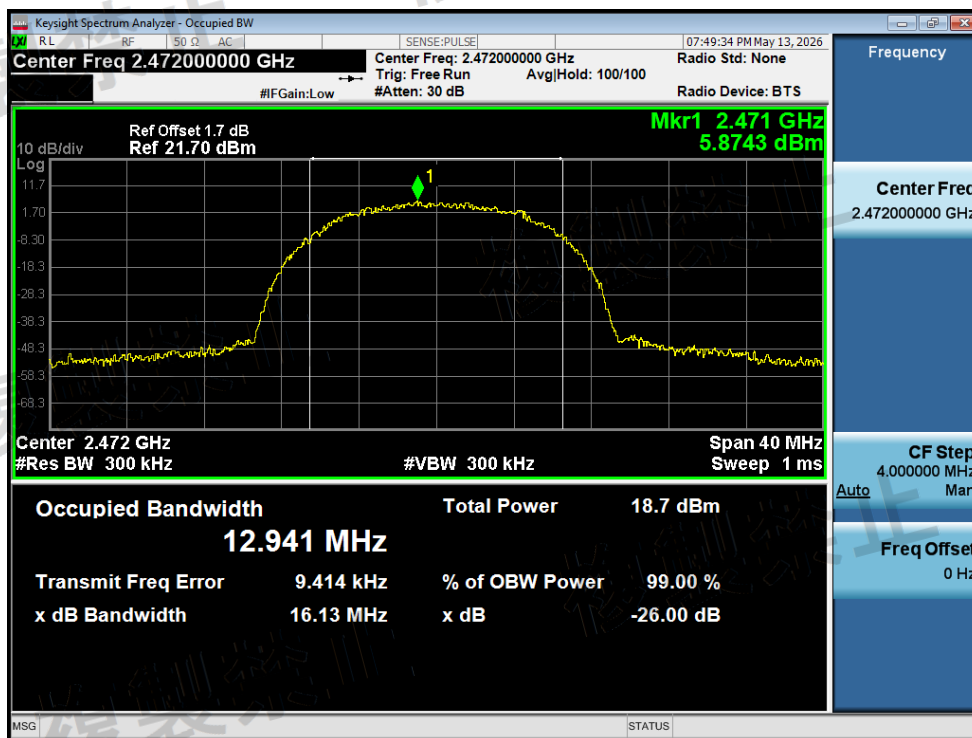


OBW NVNT b 2472MHz Ant1

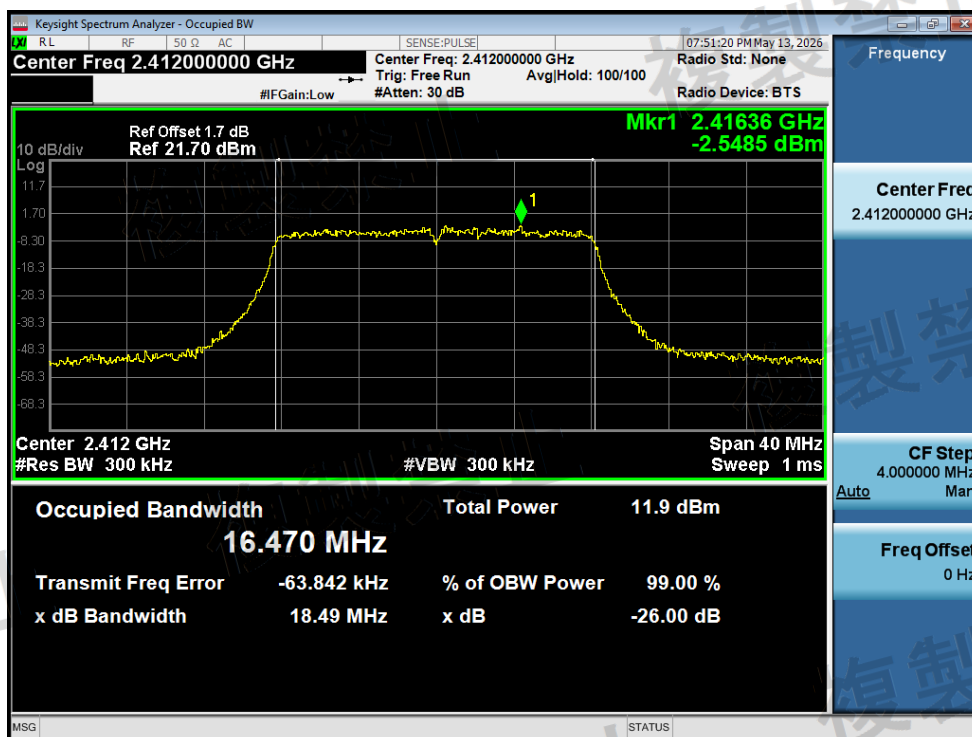


OBW NVNT g 2412MHz Ant1

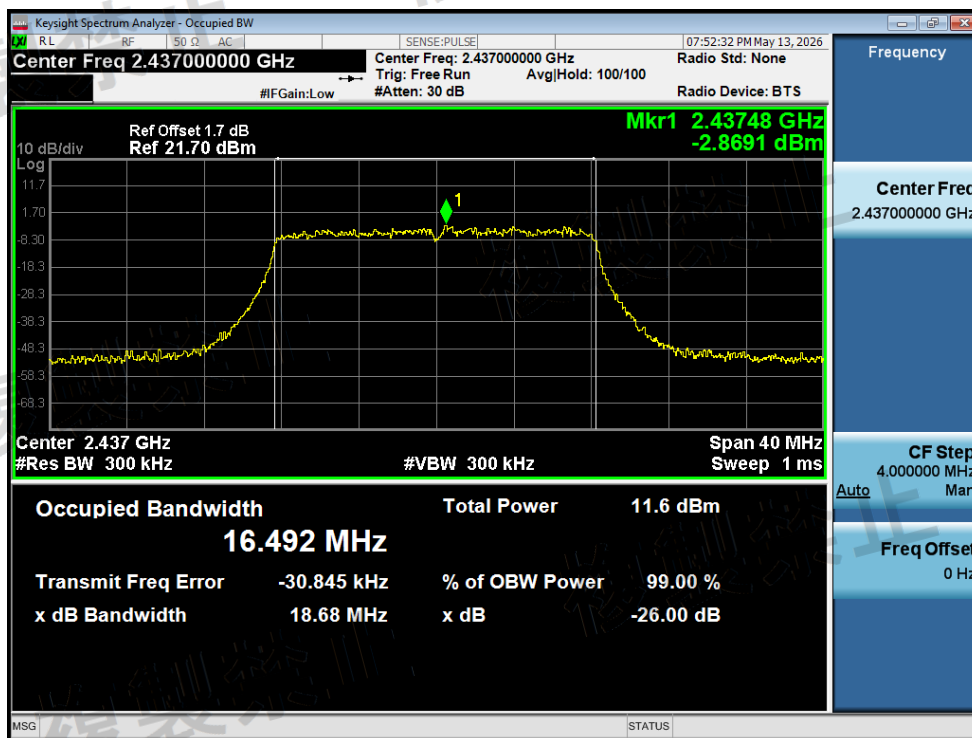


OBW NVNT g 2437MHz Ant1

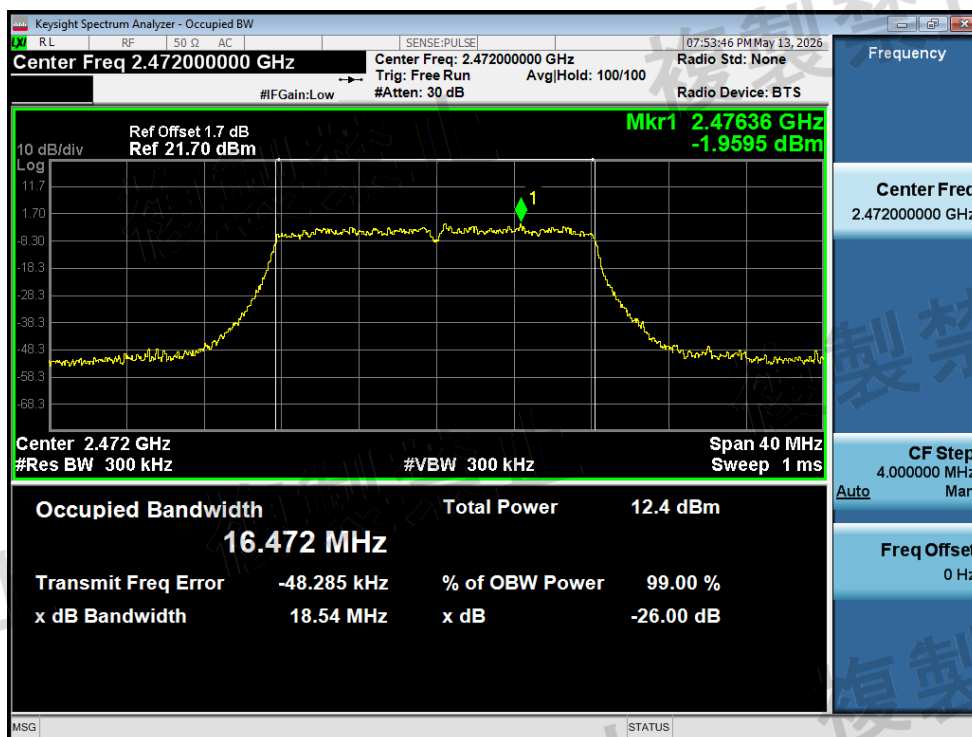


OBW NVNT g 2472MHz Ant1

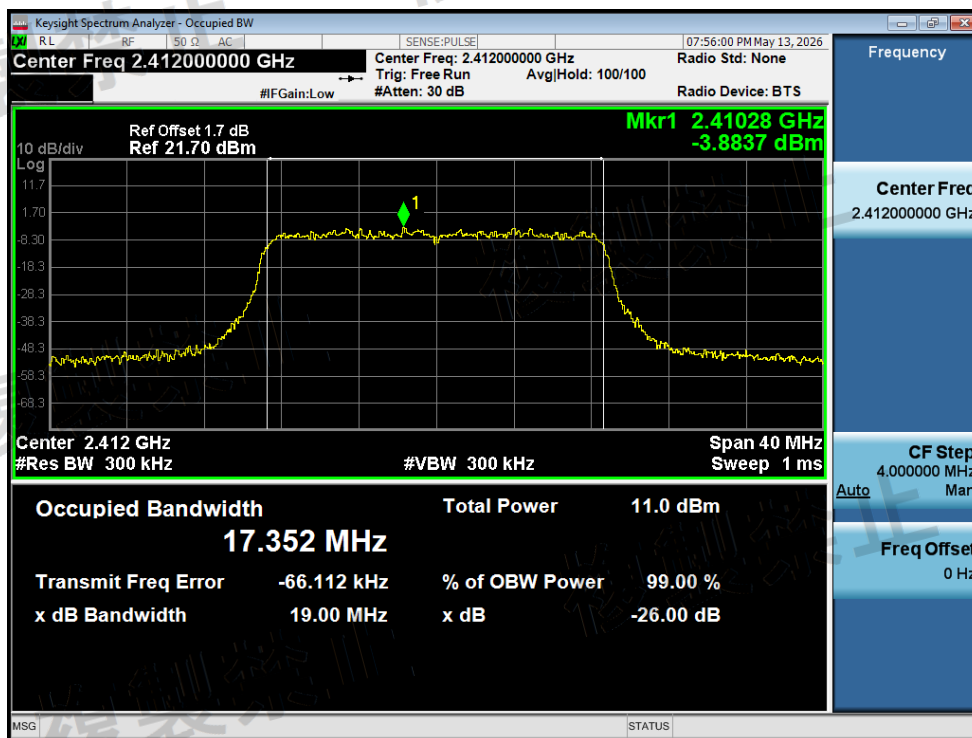


OBW NVNT n20 2412MHz Ant1

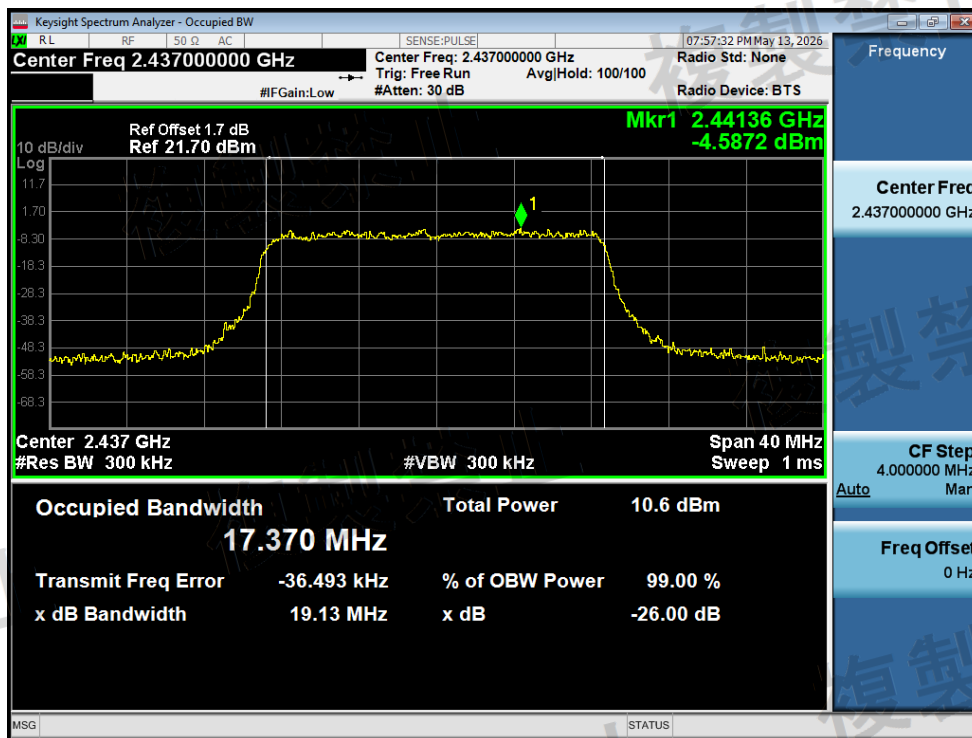


OBW NVNT n20 2437MHz Ant1

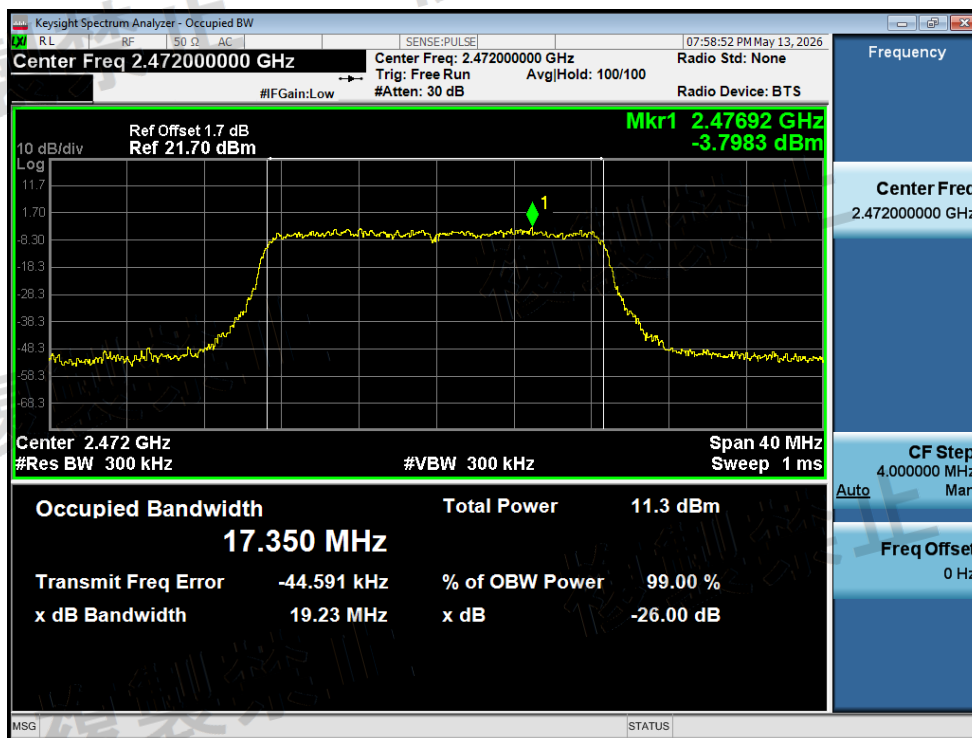


OBW NVNT n20 2472MHz Ant1

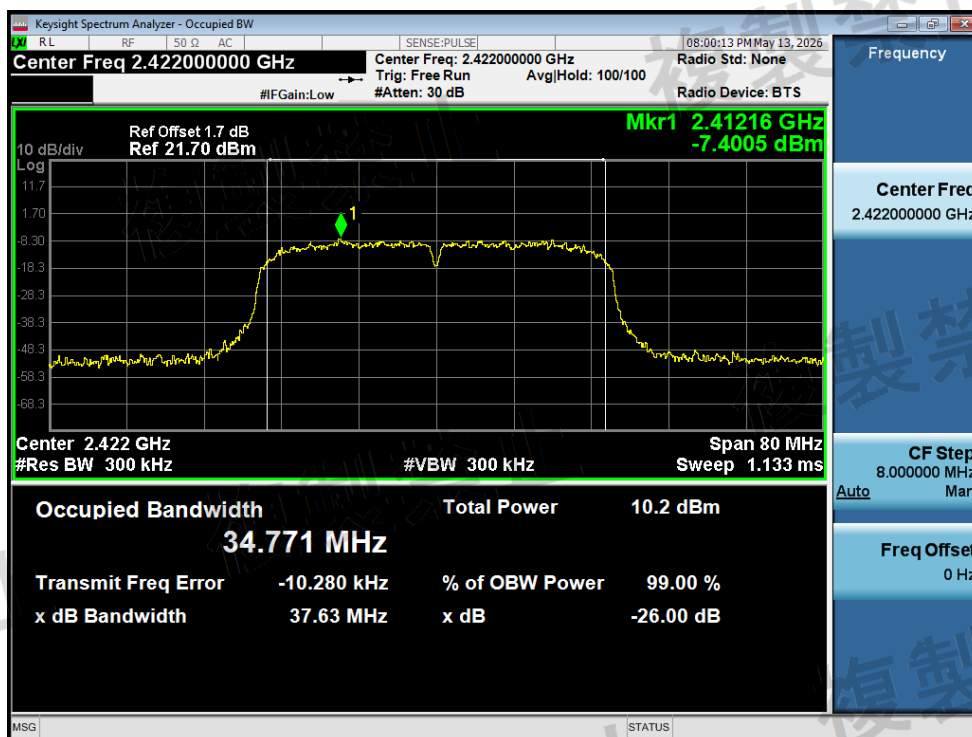

OBW NVNT n40 2422MHz Ant1

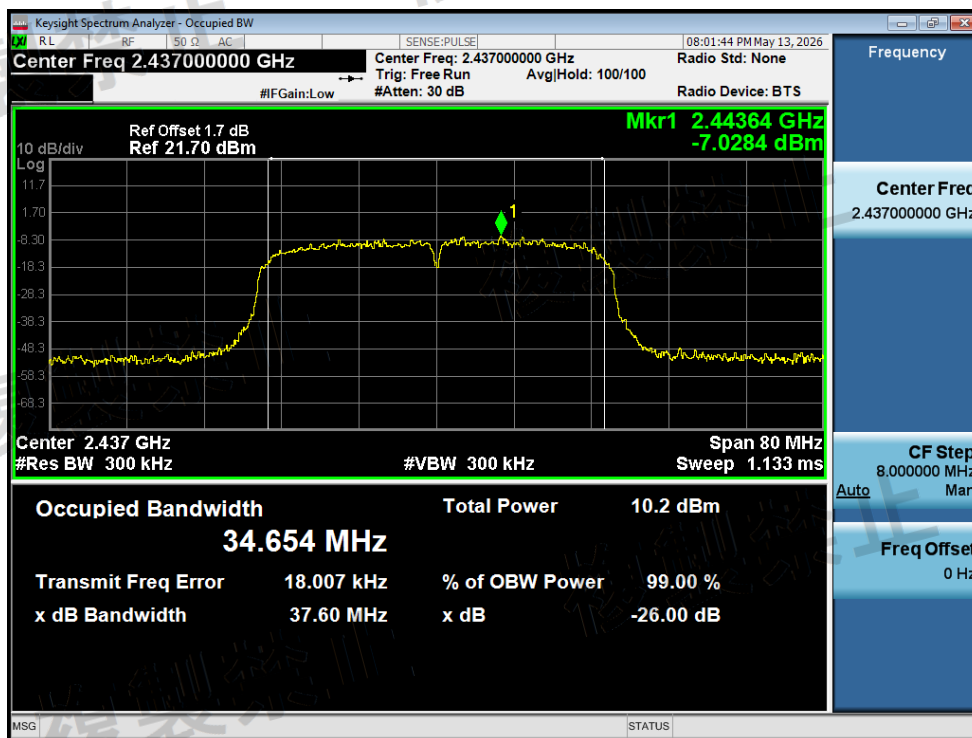

OBW NVNT n40 2437MHz Ant1

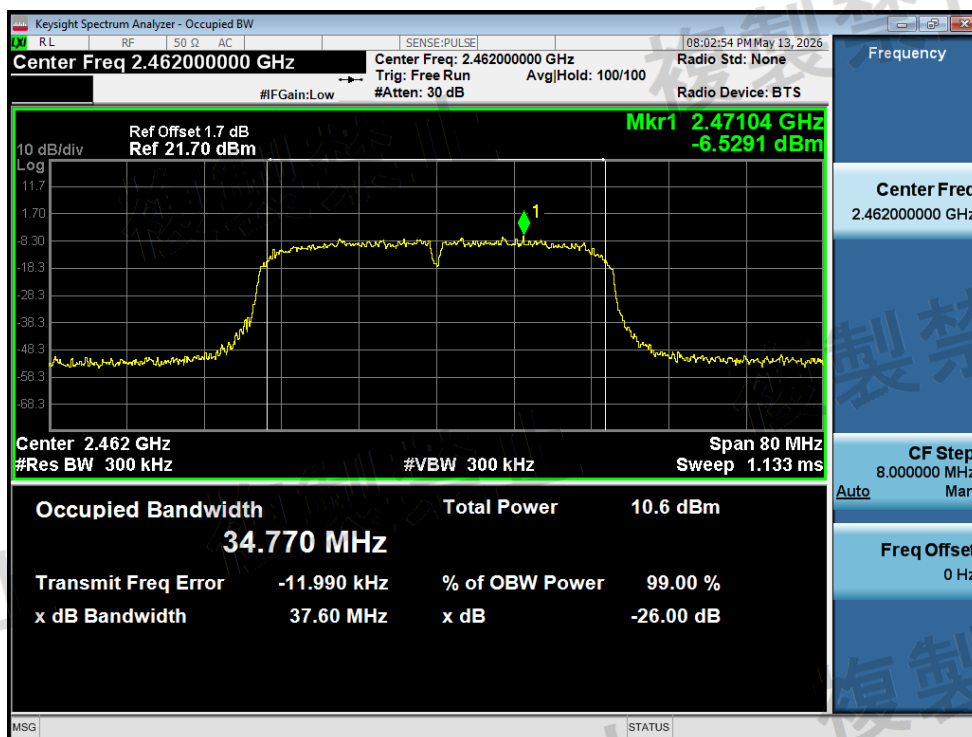


OBW NVNT n40 2462MHz Ant1

5. Tx Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Range (MHz)	Emission Frequency (MHz)	Max Value (dBm)	Max Value (μ W/ MHz)	Limit (μ W/ MHz)	Verdict
NVNT	b	2412	Ant1	30-1000	806	-51.56	0.007	2.5	Pass
NVNT	b	2412	Ant1	1000-2387	2371.74	-46.33	0.023	2.5	Pass
NVNT	b	2412	Ant1	2387-2400	2399.39	-43	0.050	25	Pass
NVNT	b	2412	Ant1	2483.5-2496.5	2492.65	-47.79	0.017	25	Pass
NVNT	b	2412	Ant1	2496.5-13000	4828.28	-38.94	0.128	2.5	Pass
NVNT	b	2437	Ant1	30-1000	812.79	-51.93	0.006	2.5	Pass
NVNT	b	2437	Ant1	1000-2387	2357.87	-50.05	0.010	2.5	Pass
NVNT	b	2437	Ant1	2387-2400	2396.39	-45.3	0.030	25	Pass
NVNT	b	2437	Ant1	2483.5-2496.5	2487.19	-49.12	0.012	25	Pass
NVNT	b	2437	Ant1	2496.5-13000	4870.29	-41	0.079	2.5	Pass
NVNT	b	2472	Ant1	30-1000	822.49	-52.07	0.006	2.5	Pass
NVNT	b	2472	Ant1	1000-2387	2378.68	-52.23	0.006	2.5	Pass
NVNT	b	2472	Ant1	2387-2400	2393.96	-48.09	0.016	25	Pass
NVNT	b	2472	Ant1	2483.5-2496.5	2483.71	-42.27	0.059	25	Pass
NVNT	b	2472	Ant1	2496.5-13000	4943.82	-38.63	0.137	2.5	Pass
NVNT	g	2412	Ant1	30-1000	804.06	-54.73	0.003	2.5	Pass
NVNT	g	2412	Ant1	1000-2387	2368.97	-48.25	0.015	2.5	Pass
NVNT	g	2412	Ant1	2387-2400	2400	-38.01	0.158	25	Pass
NVNT	g	2412	Ant1	2483.5-2496.5	2491.3	-48.55	0.014	25	Pass
NVNT	g	2412	Ant1	2496.5-13000	3221.24	-46.22	0.024	2.5	Pass
NVNT	g	2437	Ant1	30-1000	812.79	-54.89	0.003	2.5	Pass
NVNT	g	2437	Ant1	1000-2387	2381.45	-51.32	0.007	2.5	Pass
NVNT	g	2437	Ant1	2387-2400	2398.17	-47.98	0.016	25	Pass
NVNT	g	2437	Ant1	2483.5-2496.5	2485.06	-48.04	0.016	25	Pass
NVNT	g	2437	Ant1	2496.5-13000	7454.15	-46.4	0.023	2.5	Pass
NVNT	g	2472	Ant1	30-1000	824.43	-54.43	0.004	2.5	Pass
NVNT	g	2472	Ant1	1000-2387	2375.9	-50.35	0.009	2.5	Pass
NVNT	g	2472	Ant1	2387-2400	2399.75	-49.28	0.012	25	Pass
NVNT	g	2472	Ant1	2483.5-2496.5	2483.5	-35.83	0.261	25	Pass
NVNT	g	2472	Ant1	2496.5-13000	4954.32	-46.58	0.022	2.5	Pass
NVNT	n20	2412	Ant1	30-1000	811.82	-55.36	0.003	2.5	Pass
NVNT	n20	2412	Ant1	1000-2387	2371.74	-49.43	0.011	2.5	Pass
NVNT	n20	2412	Ant1	2387-2400	2399.9	-38.96	0.127	25	Pass
NVNT	n20	2412	Ant1	2483.5-2496.5	2489.27	-49.12	0.012	25	Pass
NVNT	n20	2412	Ant1	2496.5-13000	3210.74	-45.86	0.026	2.5	Pass
NVNT	n20	2437	Ant1	30-1000	816.67	-55.2	0.003	2.5	Pass
NVNT	n20	2437	Ant1	1000-2387	2374.52	-50.62	0.009	2.5	Pass
NVNT	n20	2437	Ant1	2387-2400	2399.84	-48.52	0.014	25	Pass
NVNT	n20	2437	Ant1	2483.5-2496.5	2484.02	-48.29	0.015	25	Pass

NVNT	n20	2437	Ant1	2496.5-13000	3252.75	-46.78	0.021	2.5	Pass
NVNT	n20	2472	Ant1	30-1000	824.43	-54.78	0.003	2.5	Pass
NVNT	n20	2472	Ant1	1000-2387	2384.23	-51.41	0.007	2.5	Pass
NVNT	n20	2472	Ant1	2387-2400	2392.36	-49.42	0.011	25	Pass
NVNT	n20	2472	Ant1	2483.5-2496.5	2483.5	-35.65	0.272	25	Pass
NVNT	n20	2472	Ant1	2496.5-13000	3294.77	-47.86	0.016	2.5	Pass
NVNT	n40	2422	Ant1	30-1000	799.21	-54.88	0.003	2.5	Pass
NVNT	n40	2422	Ant1	1000-2387	2385.61	-49.12	0.012	2.5	Pass
NVNT	n40	2422	Ant1	2387-2400	2399.71	-39.06	0.124	25	Pass
NVNT	n40	2422	Ant1	2483.5-2496.5	2486.58	-48.48	0.014	25	Pass
NVNT	n40	2422	Ant1	2496.5-13000	3231.75	-45.41	0.029	2.5	Pass
NVNT	n40	2437	Ant1	30-1000	816.67	-54.91	0.003	2.5	Pass
NVNT	n40	2437	Ant1	1000-2387	2364.81	-51.28	0.007	2.5	Pass
NVNT	n40	2437	Ant1	2387-2400	2399.87	-47.21	0.019	25	Pass
NVNT	n40	2437	Ant1	2483.5-2496.5	2483.75	-47.44	0.018	25	Pass
NVNT	n40	2437	Ant1	2496.5-13000	3252.75	-46.72	0.021	2.5	Pass
NVNT	n40	2462	Ant1	30-1000	819.58	-55.83	0.003	2.5	Pass
NVNT	n40	2462	Ant1	1000-2387	2377.29	-50.87	0.008	2.5	Pass
NVNT	n40	2462	Ant1	2387-2400	2399.94	-49.77	0.011	25	Pass
NVNT	n40	2462	Ant1	2483.5-2496.5	2483.51	-38.08	0.156	25	Pass
NVNT	n40	2462	Ant1	2496.5-13000	3284.26	-47.45	0.018	2.5	Pass


Note: For 30-1000MHz test data, the RBW of the spectrum analyzer is 100kHz, the data measured with RBW=100kHz needs to add 10db to get the calculated data of RBW=1Mhz.

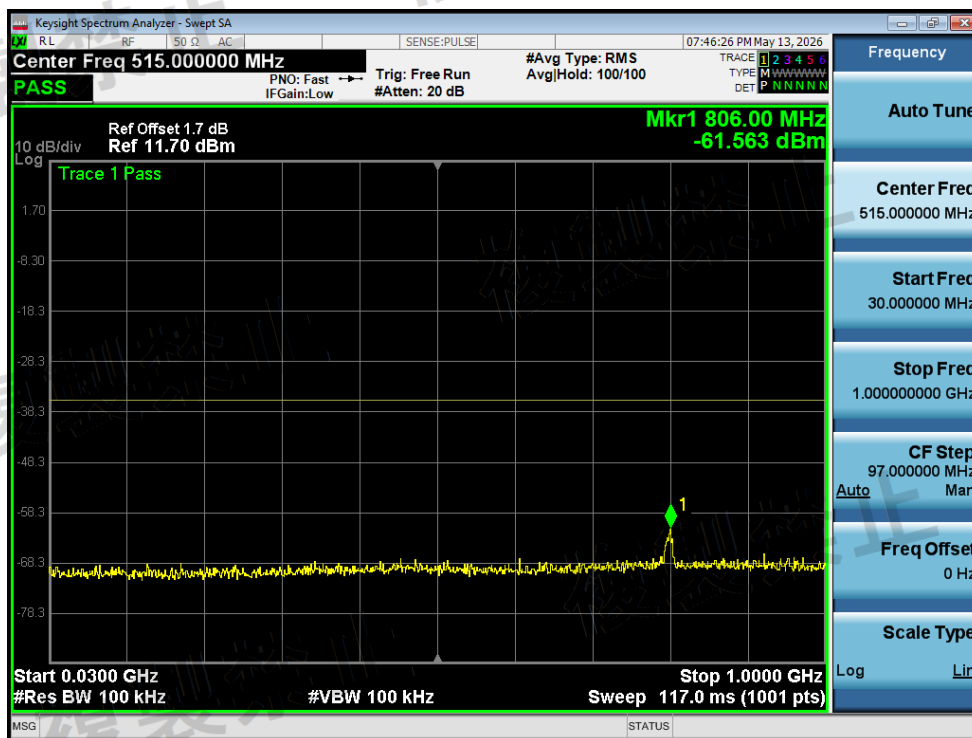


Tx. Spurious NVNT b 2412MHz Ant1 @ 30MHz-1000MHz

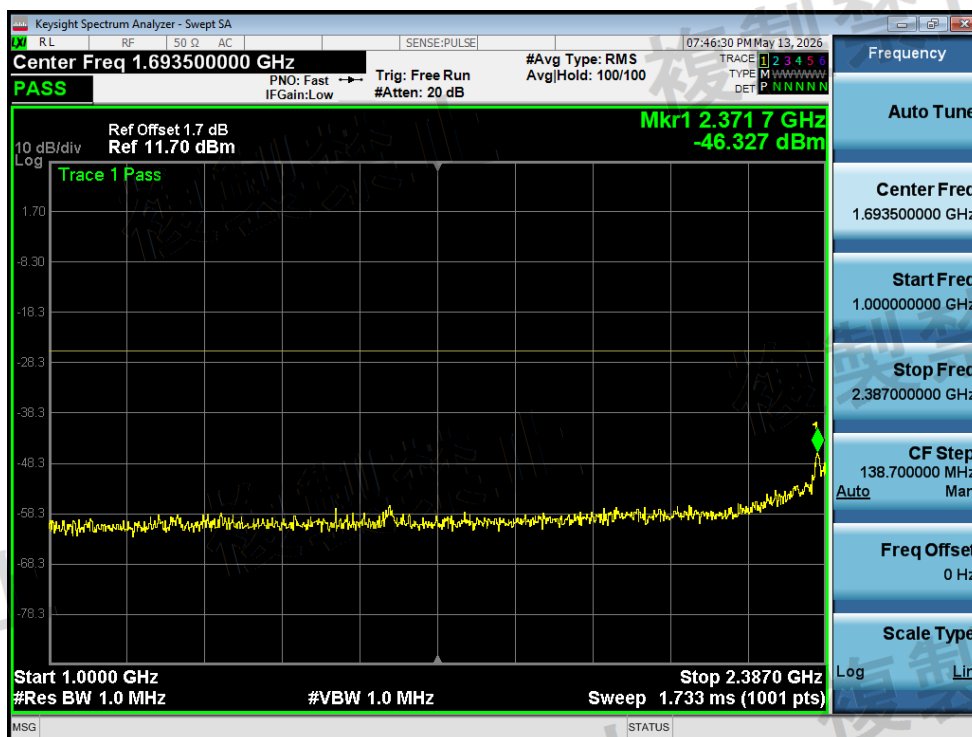


Tx. Spurious NVNT b 2412MHz Ant1 @ 1000MHz-2387MHz

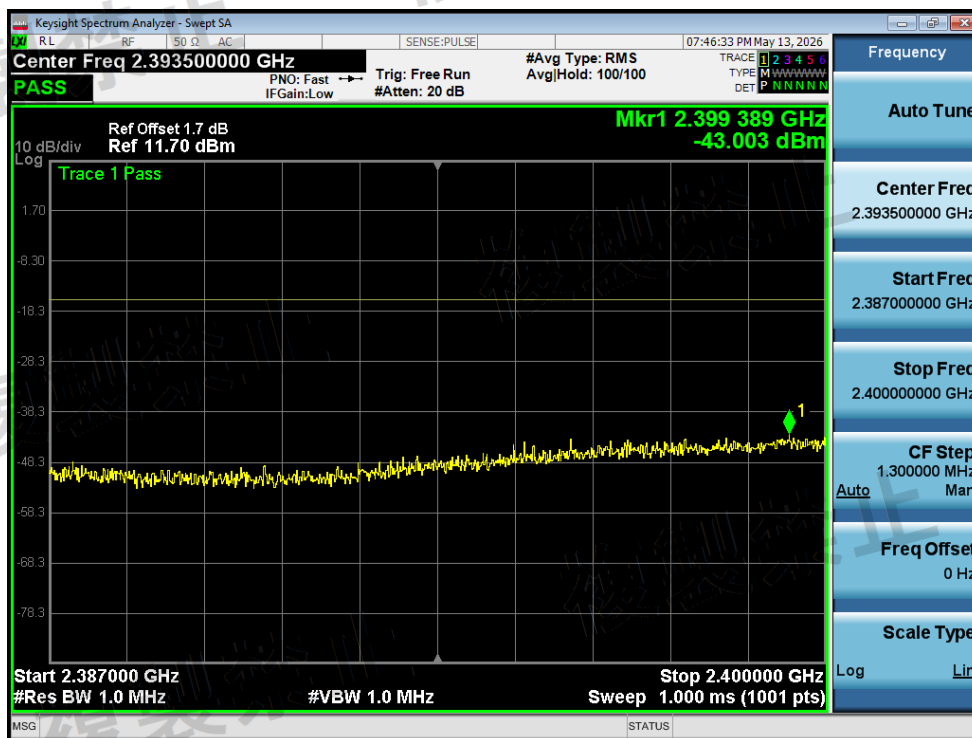


Tx. Spurious NVNT b 2412MHz Ant1 @ 2387MHz-2400MHz

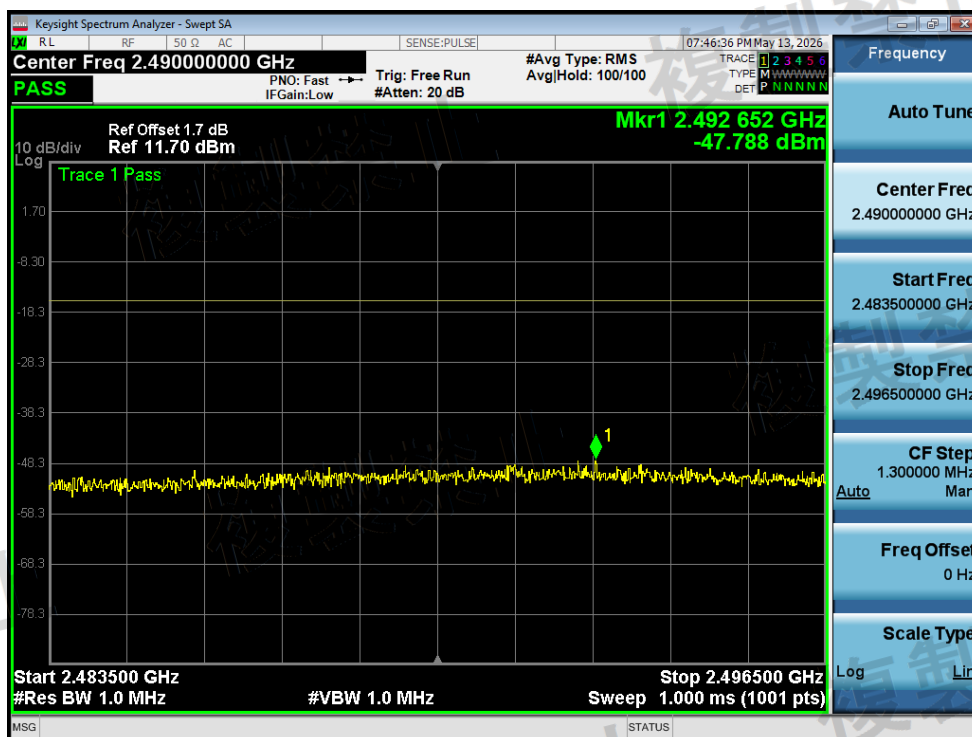


Tx. Spurious NVNT b 2412MHz Ant1 @ 2483.5MHz-2496.5MHz

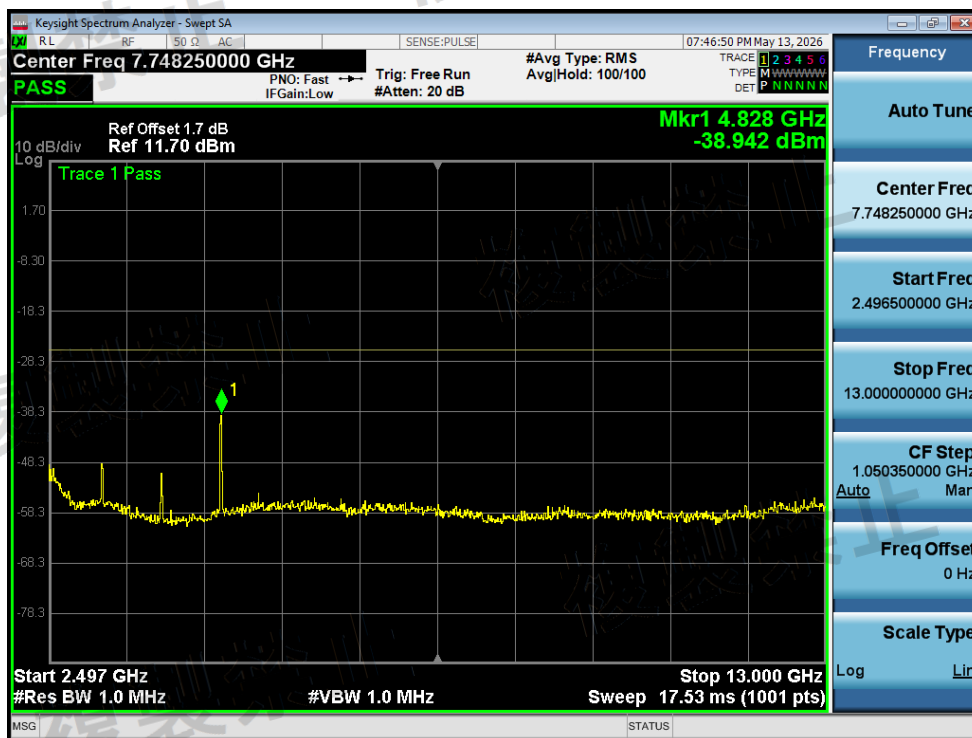


Tx. Spurious NVNT b 2412MHz Ant1 @ 2496.5MHz-13000MHz

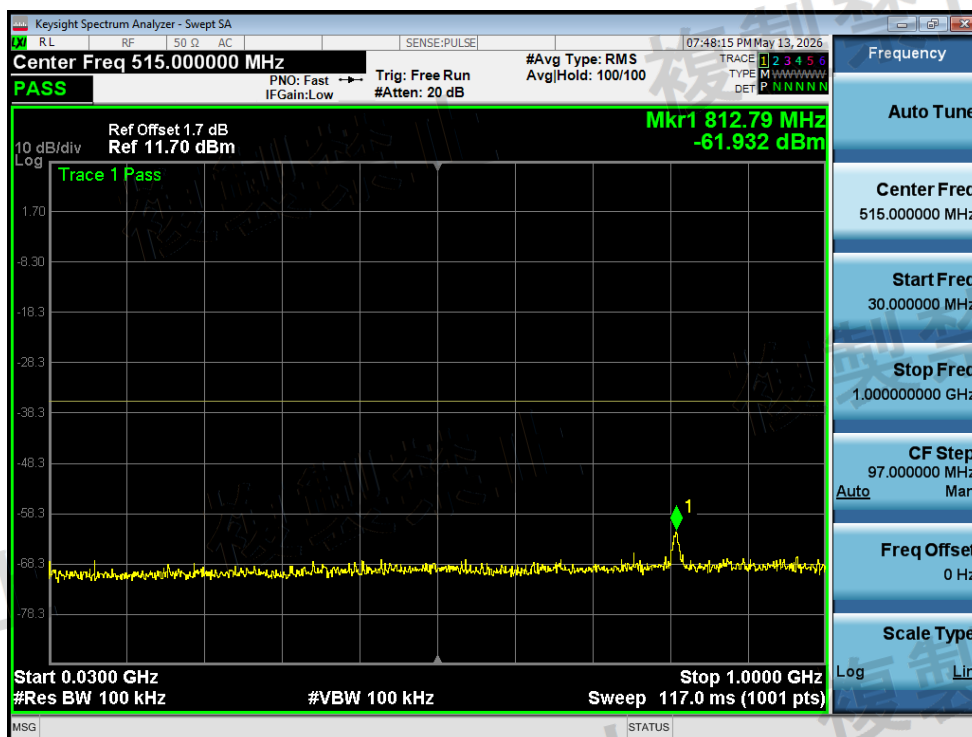


Tx. Spurious NVNT b 2437MHz Ant1 @ 30MHz-1000MHz

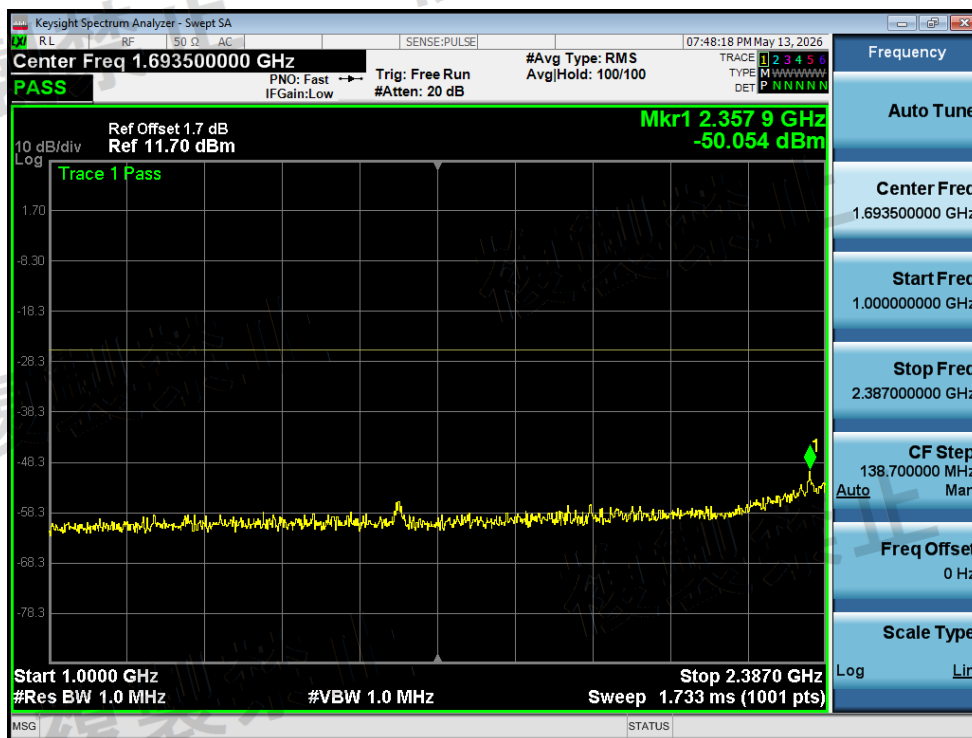


Tx. Spurious NVNT b 2437MHz Ant1 @ 1000MHz-2387MHz

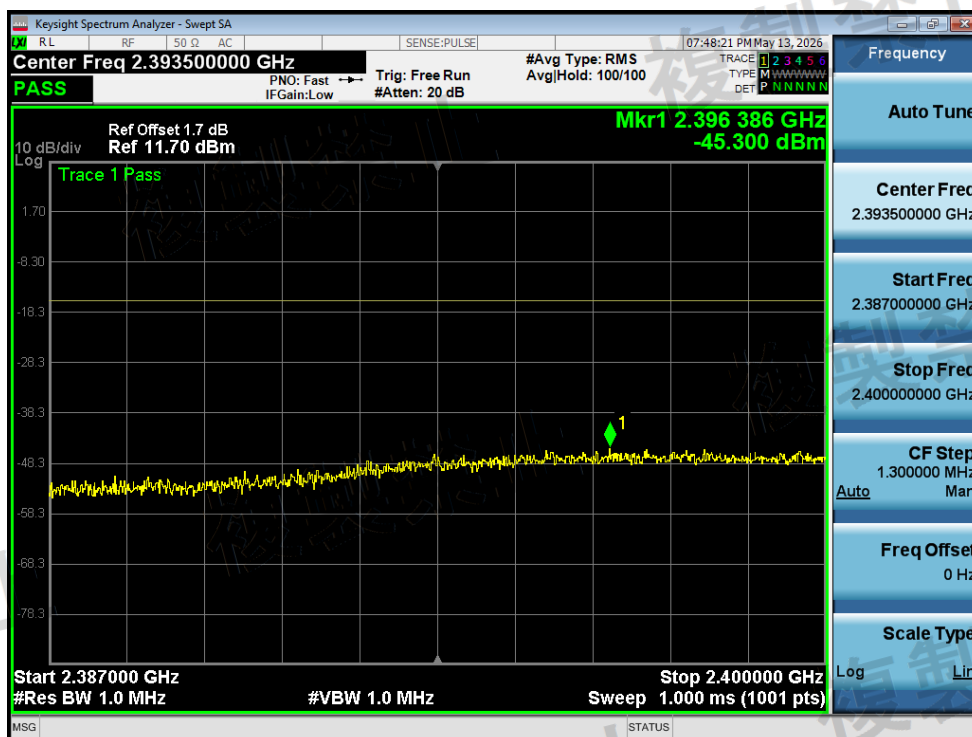


Tx. Spurious NVNT b 2437MHz Ant1 @ 2387MHz-2400MHz

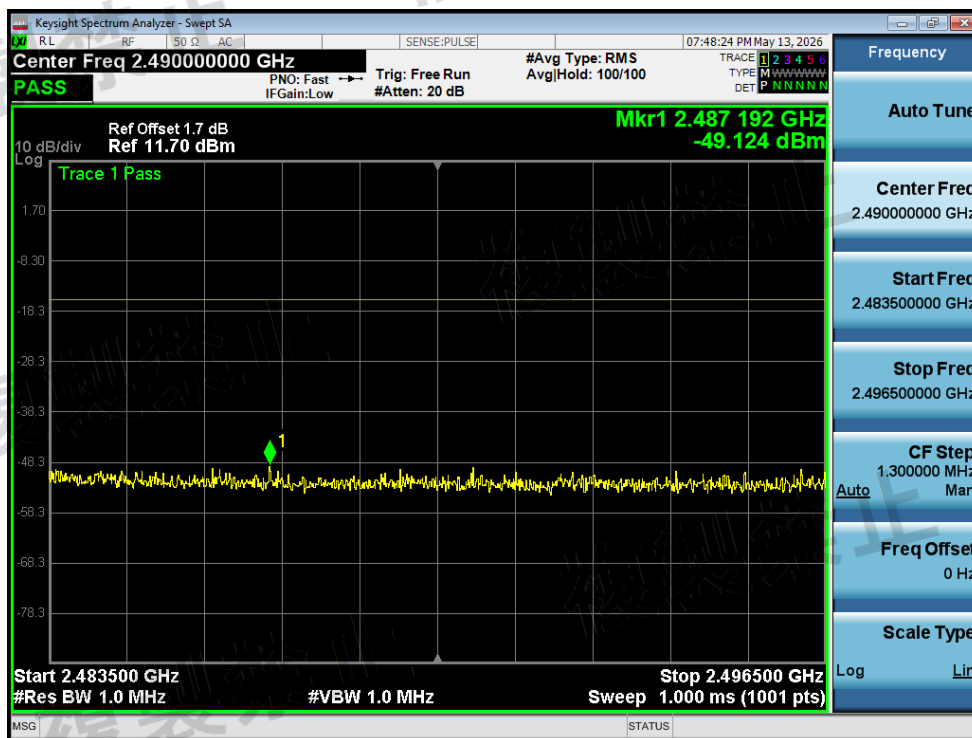


Tx. Spurious NVNT b 2437MHz Ant1 @ 2483.5MHz-2496.5MHz

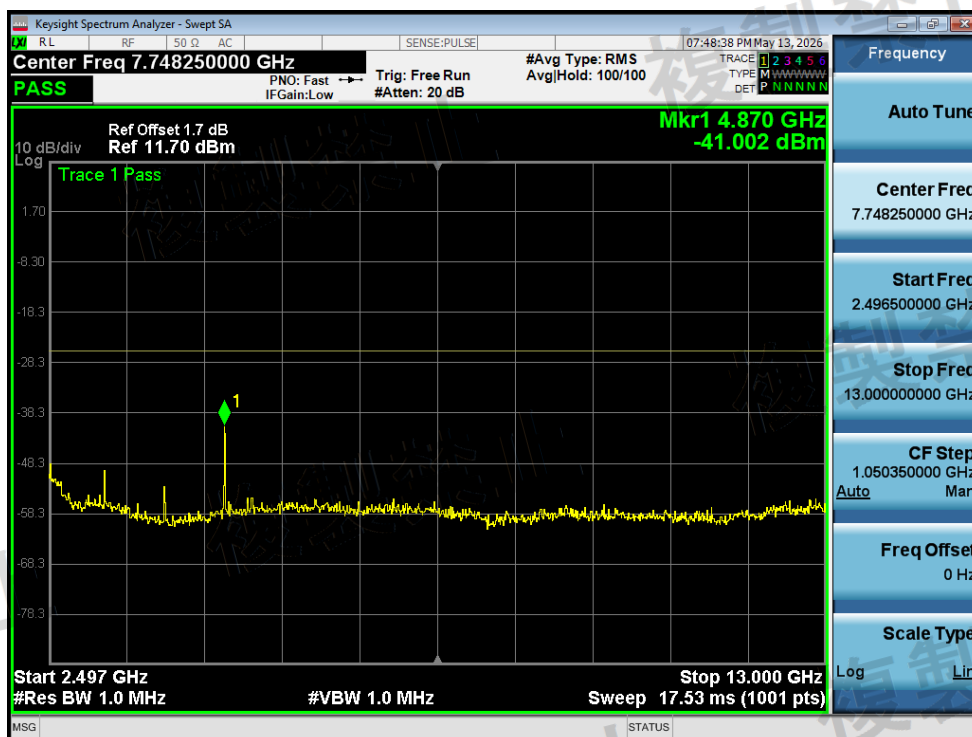


Tx. Spurious NVNT b 2437MHz Ant1 @ 2496.5MHz-13000MHz

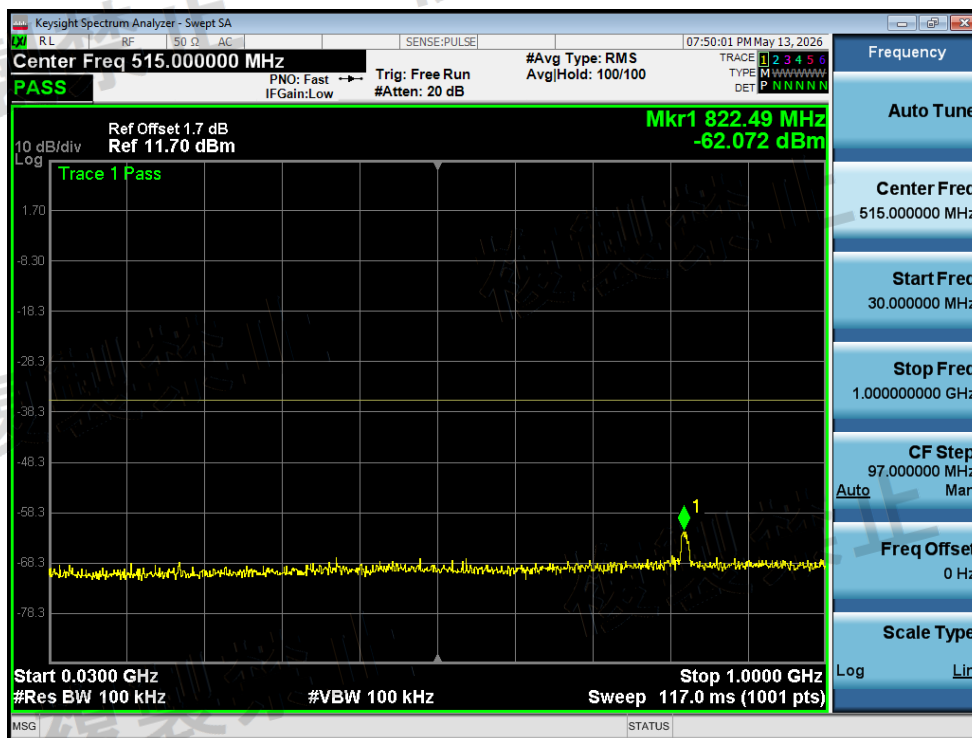


Tx. Spurious NVNT b 2472MHz Ant1 @ 30MHz-1000MHz

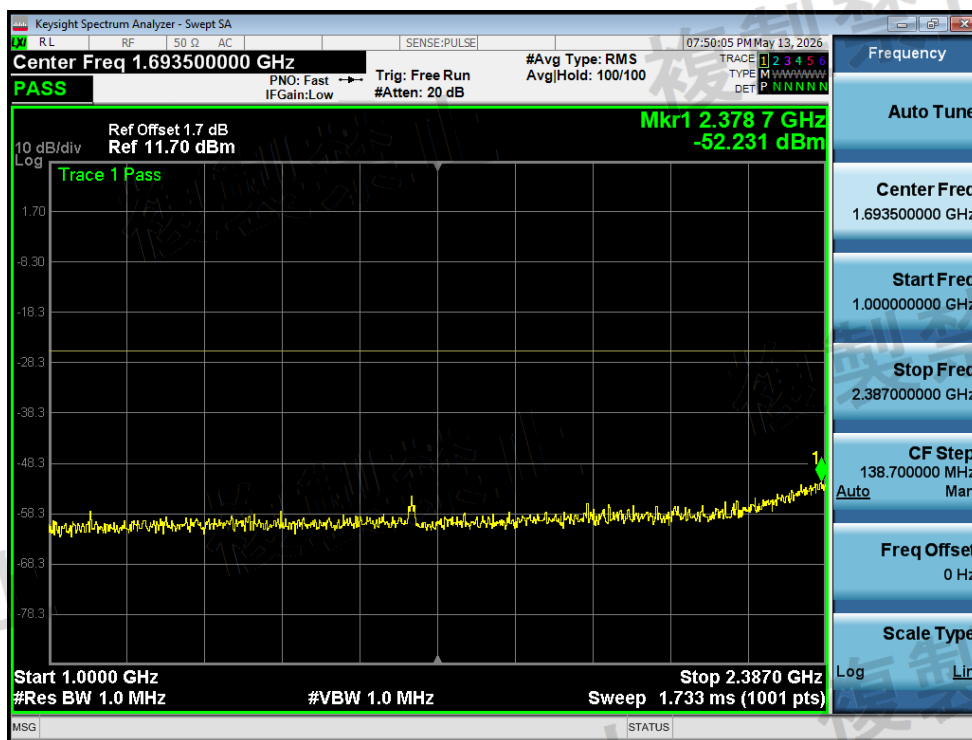


Tx. Spurious NVNT b 2472MHz Ant1 @ 1000MHz-2387MHz

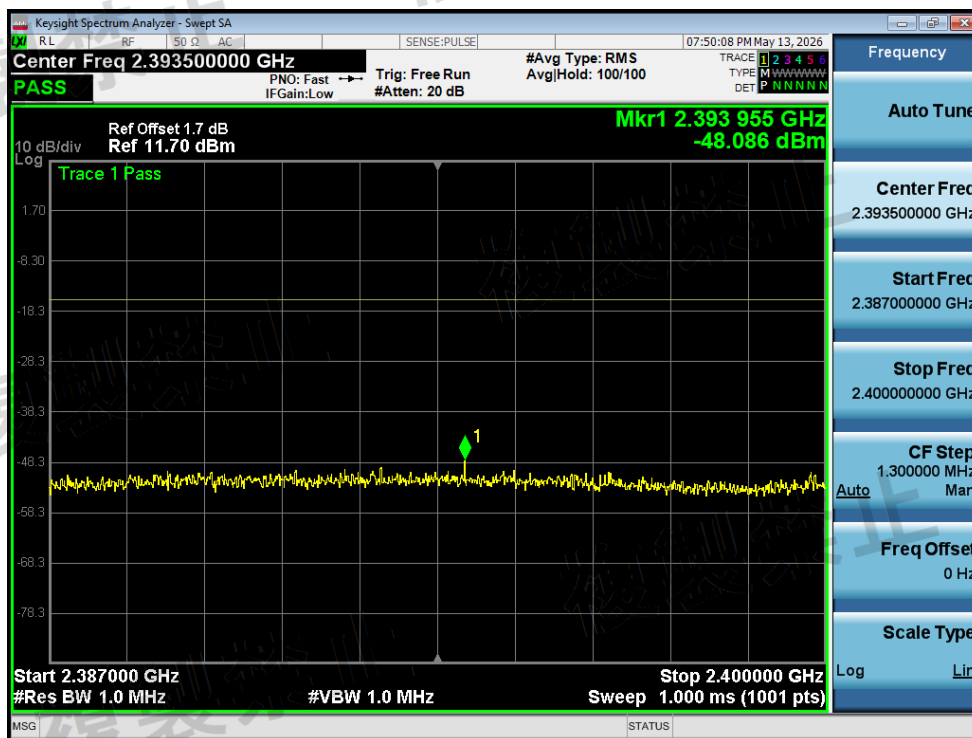


Tx. Spurious NVNT b 2472MHz Ant1 @ 2387MHz-2400MHz

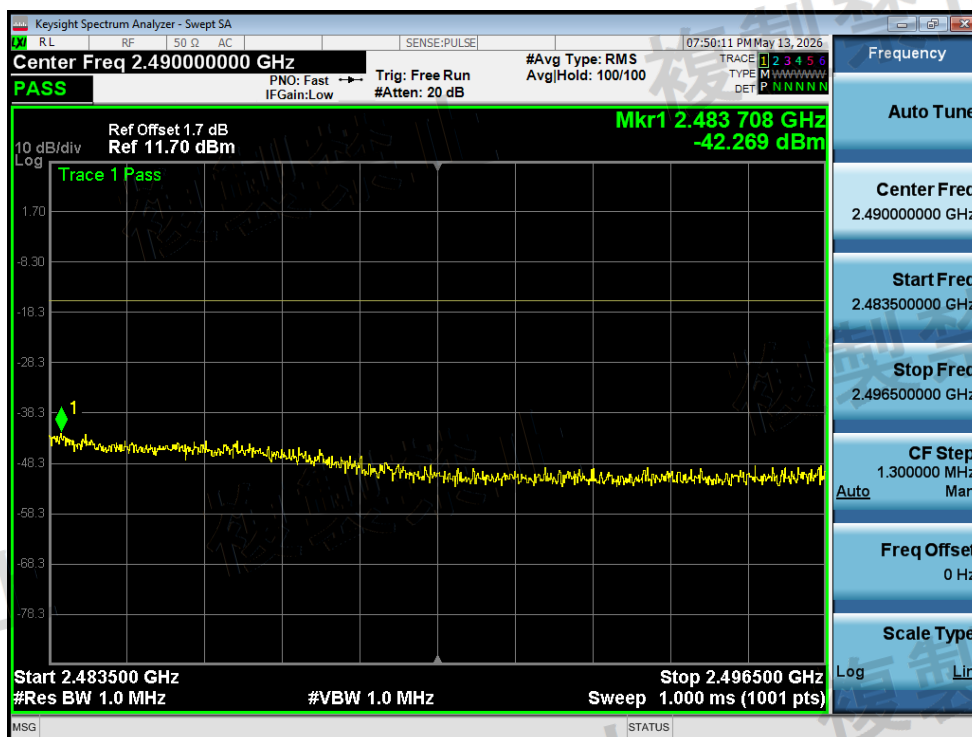


Tx. Spurious NVNT b 2472MHz Ant1 @ 2483.5MHz-2496.5MHz

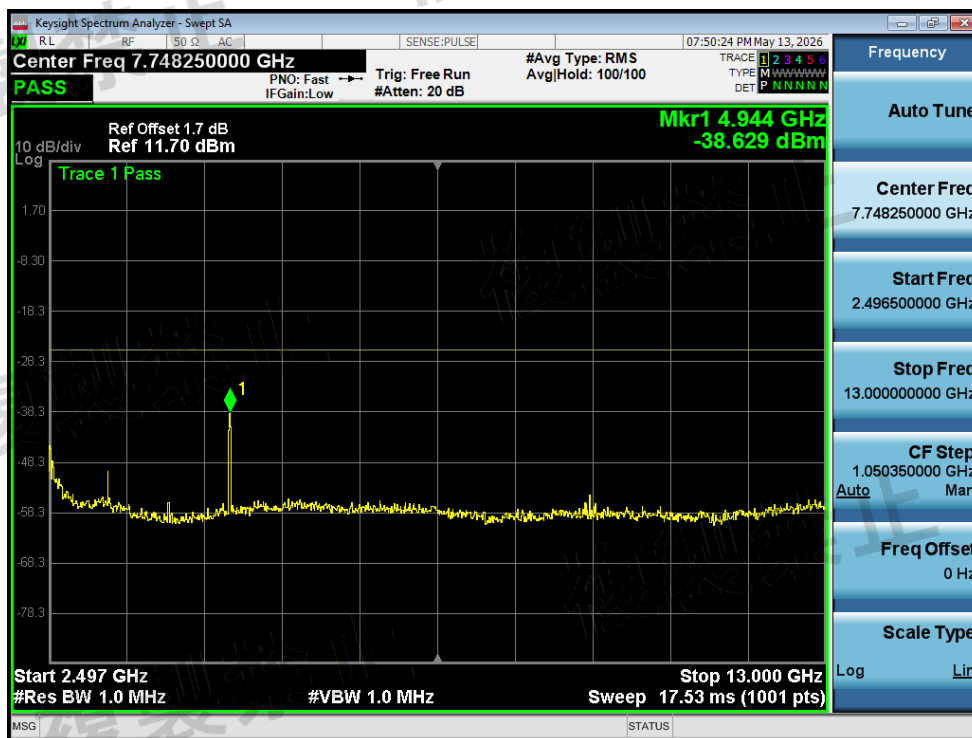


Tx. Spurious NVNT b 2472MHz Ant1 @ 2496.5MHz-13000MHz

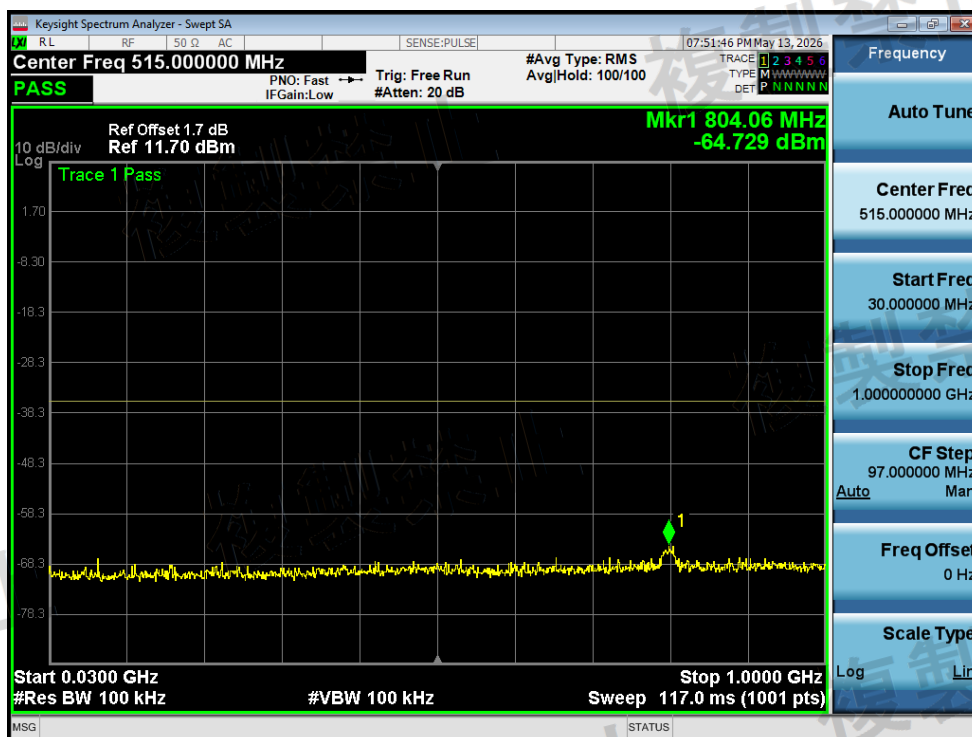


Tx. Spurious NVNT g 2412MHz Ant1 @ 30MHz-1000MHz

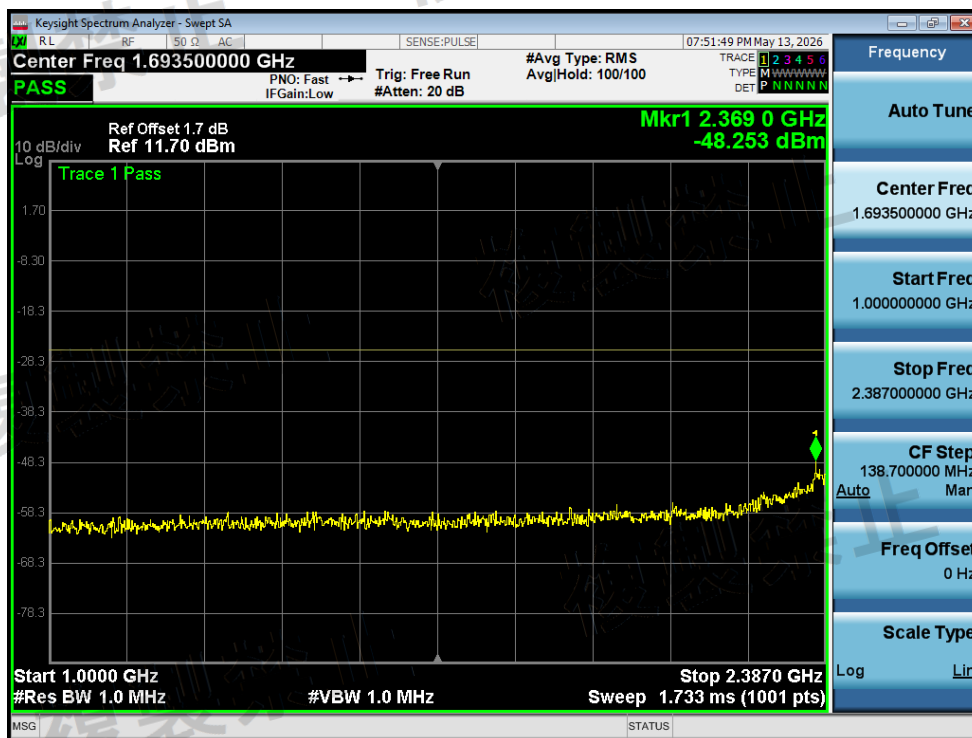


Tx. Spurious NVNT g 2412MHz Ant1 @ 1000MHz-2387MHz

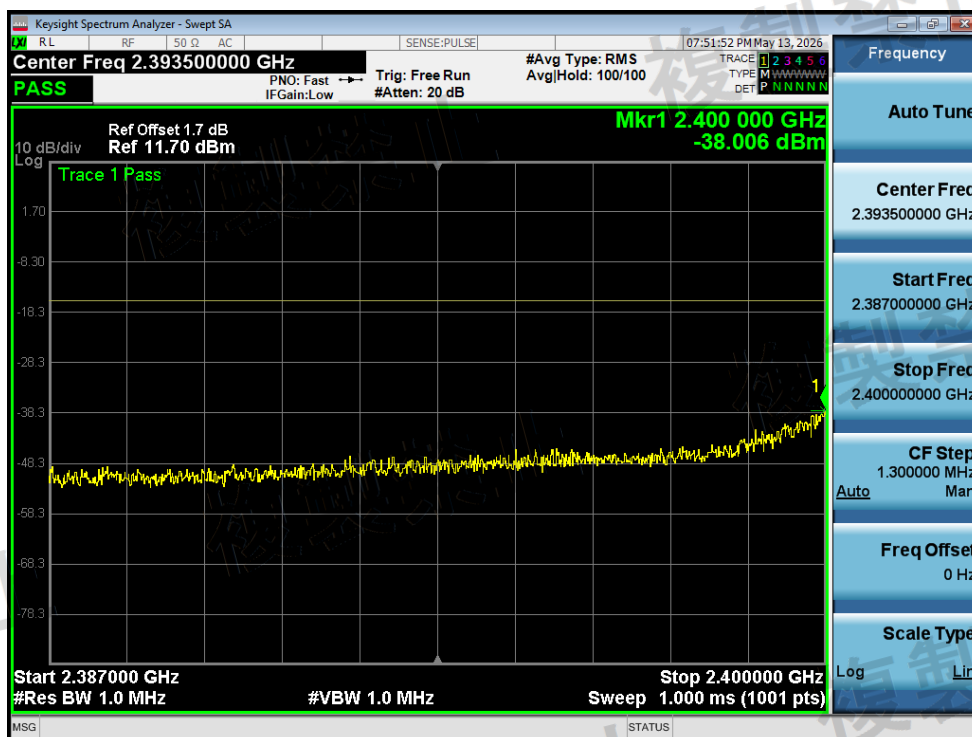


Tx. Spurious NVNT g 2412MHz Ant1 @ 2387MHz-2400MHz

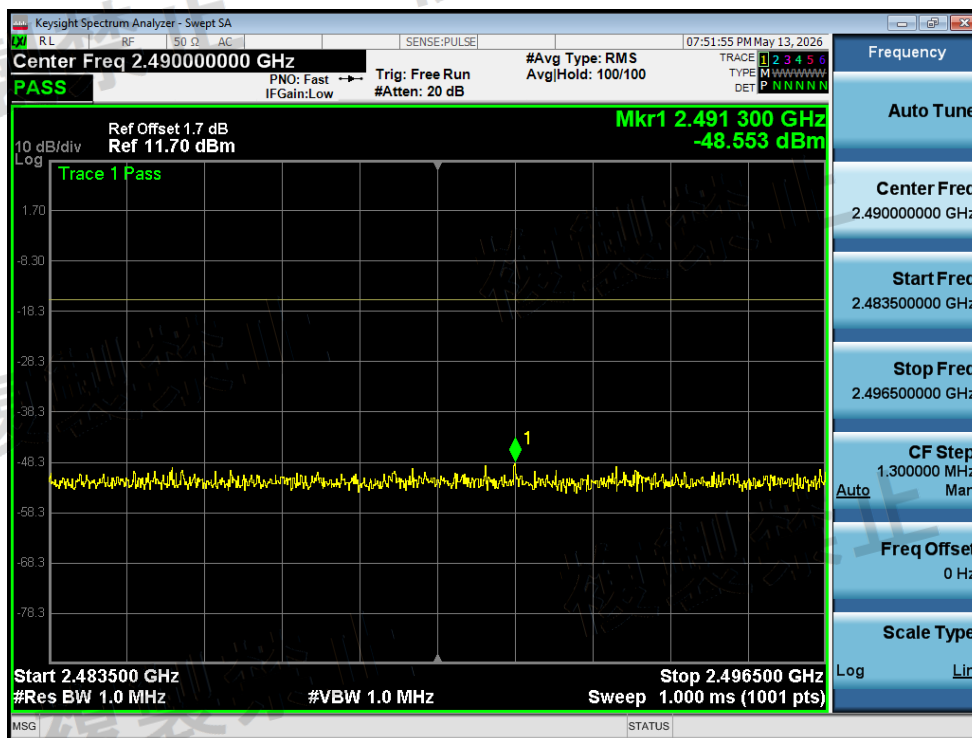


Tx. Spurious NVNT g 2412MHz Ant1 @ 2483.5MHz-2496.5MHz

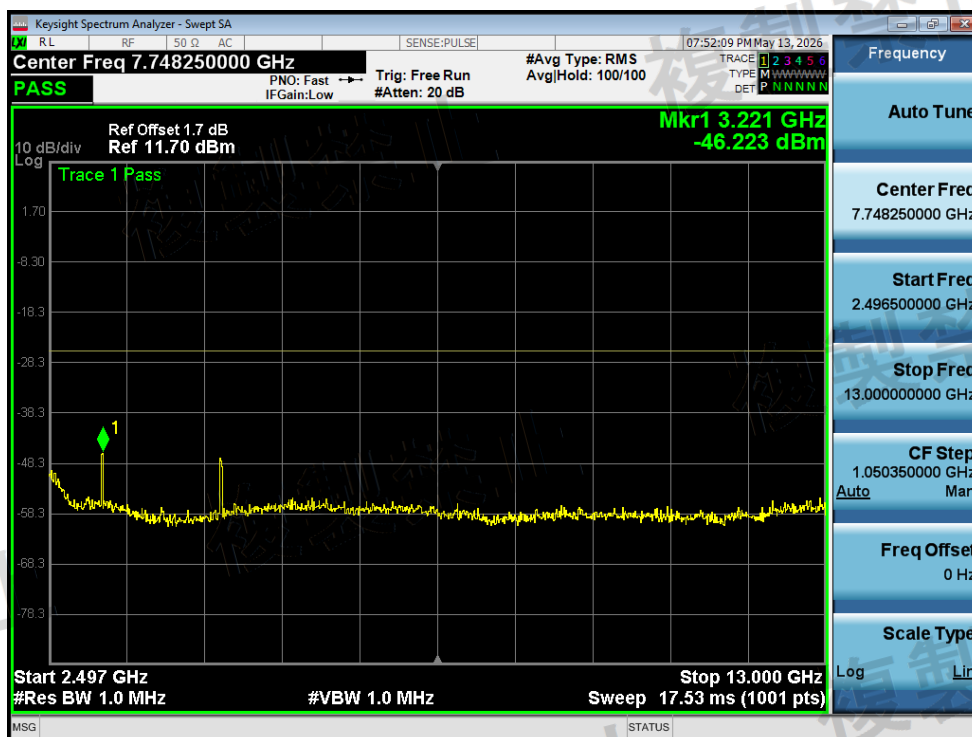


Tx. Spurious NVNT g 2412MHz Ant1 @ 2496.5MHz-13000MHz

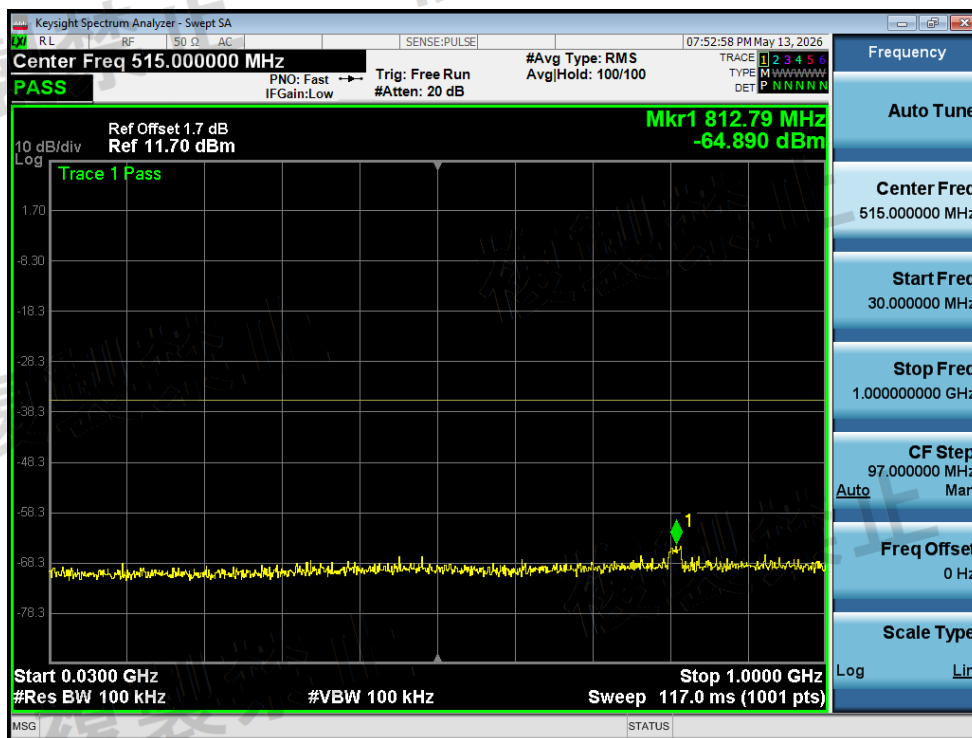


Tx. Spurious NVNT g 2437MHz Ant1 @ 30MHz-1000MHz

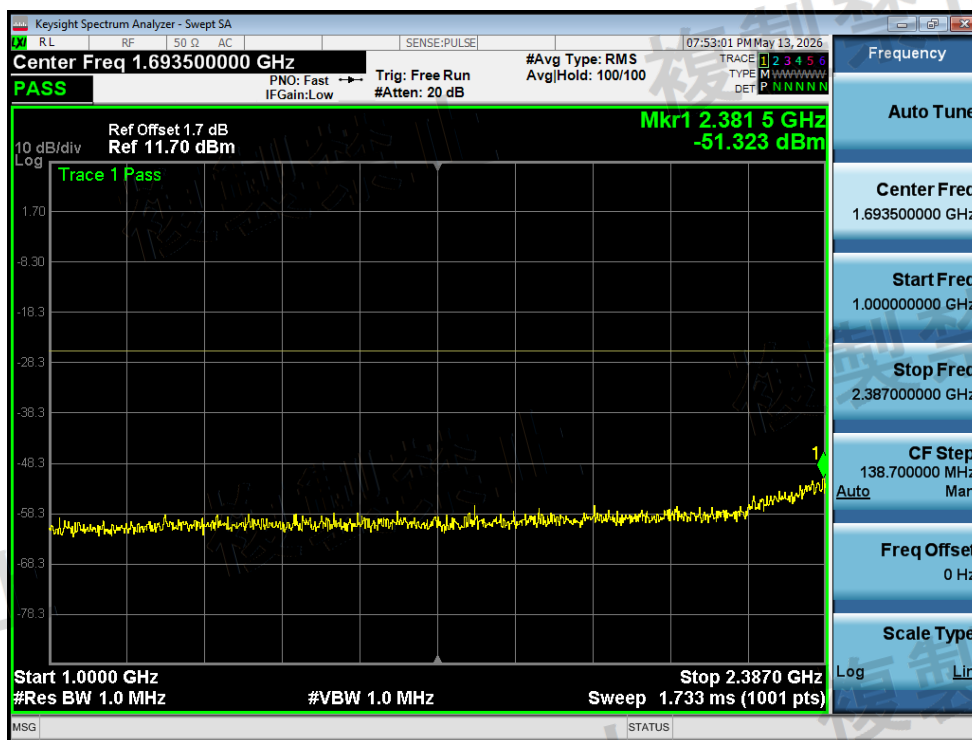


Tx. Spurious NVNT g 2437MHz Ant1 @ 1000MHz-2387MHz

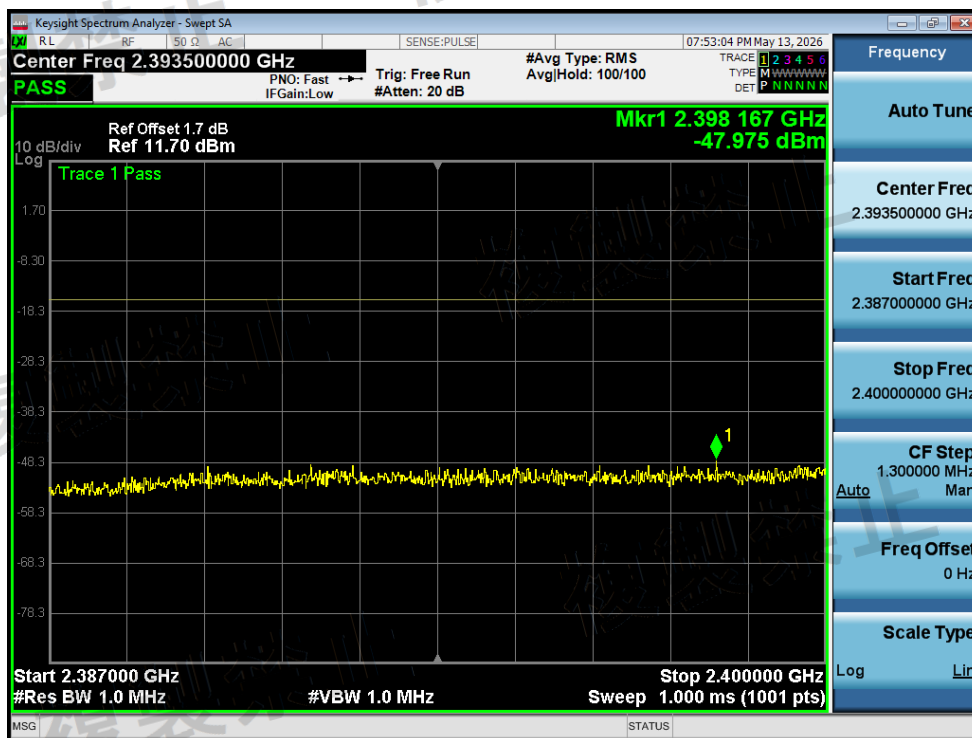


Tx. Spurious NVNT g 2437MHz Ant1 @ 2387MHz-2400MHz

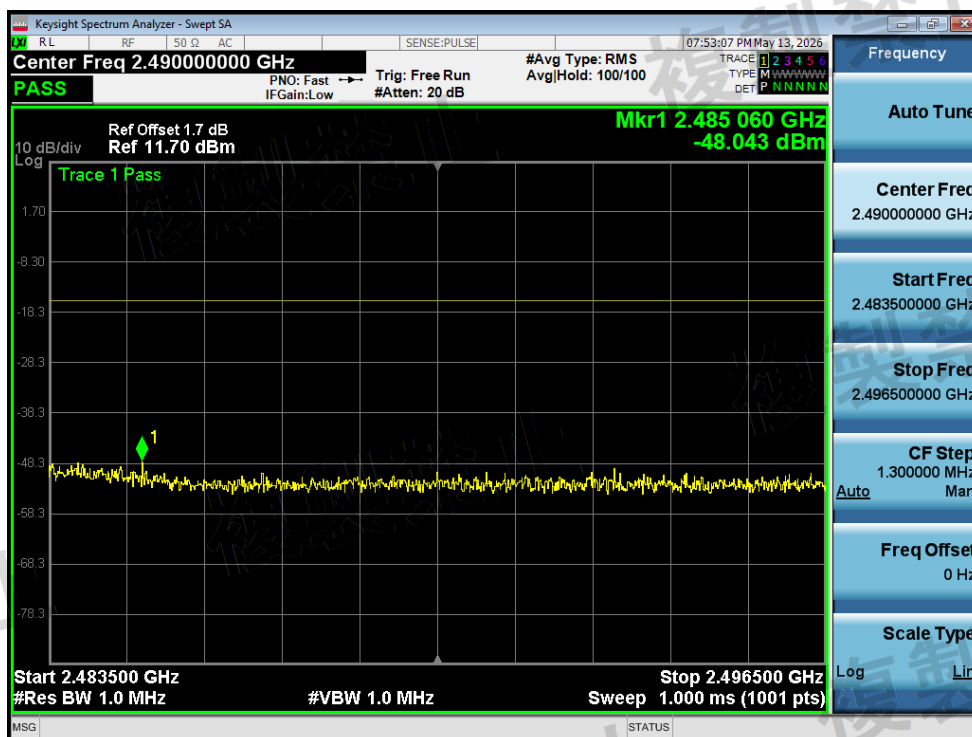


Tx. Spurious NVNT g 2437MHz Ant1 @ 2483.5MHz-2496.5MHz

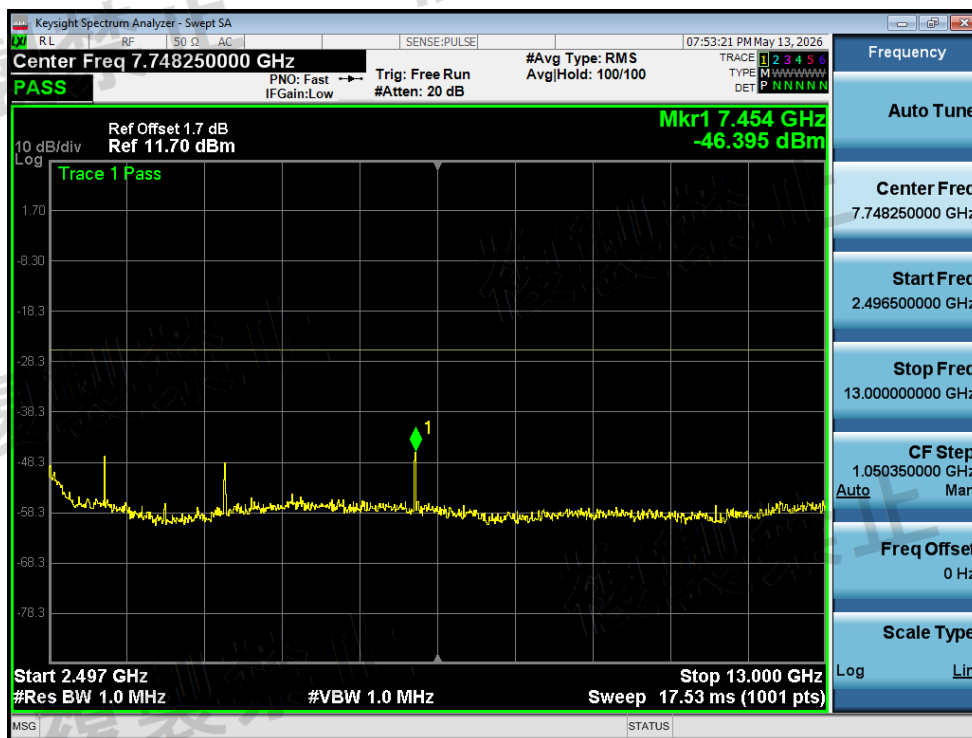


Tx. Spurious NVNT g 2437MHz Ant1 @ 2496.5MHz-13000MHz

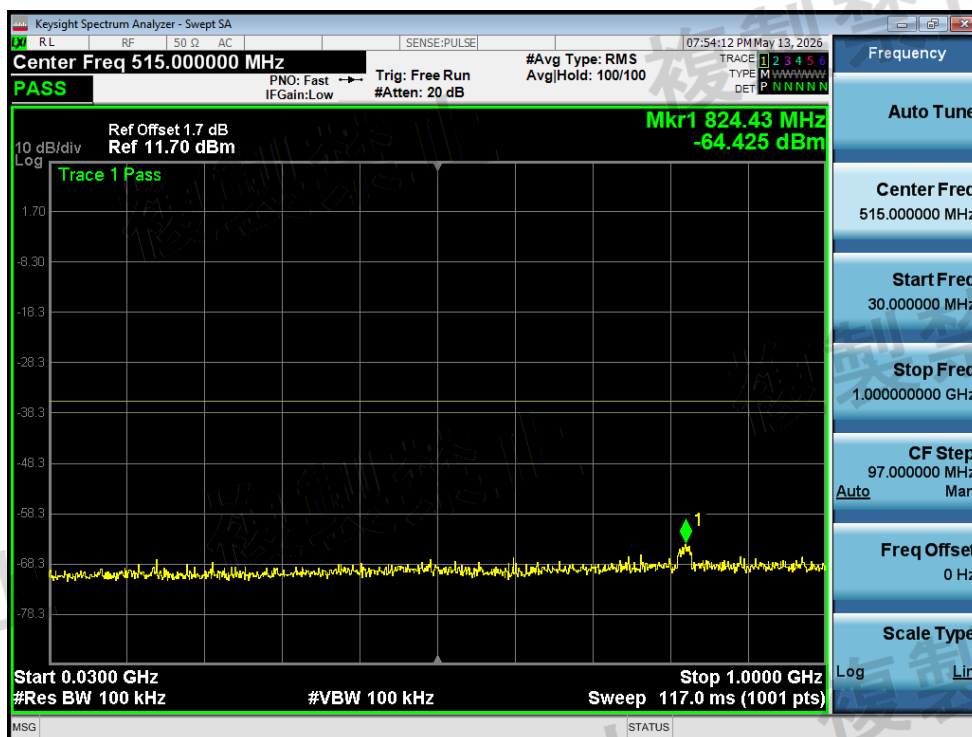


Tx. Spurious NVNT g 2472MHz Ant1 @ 30MHz-1000MHz

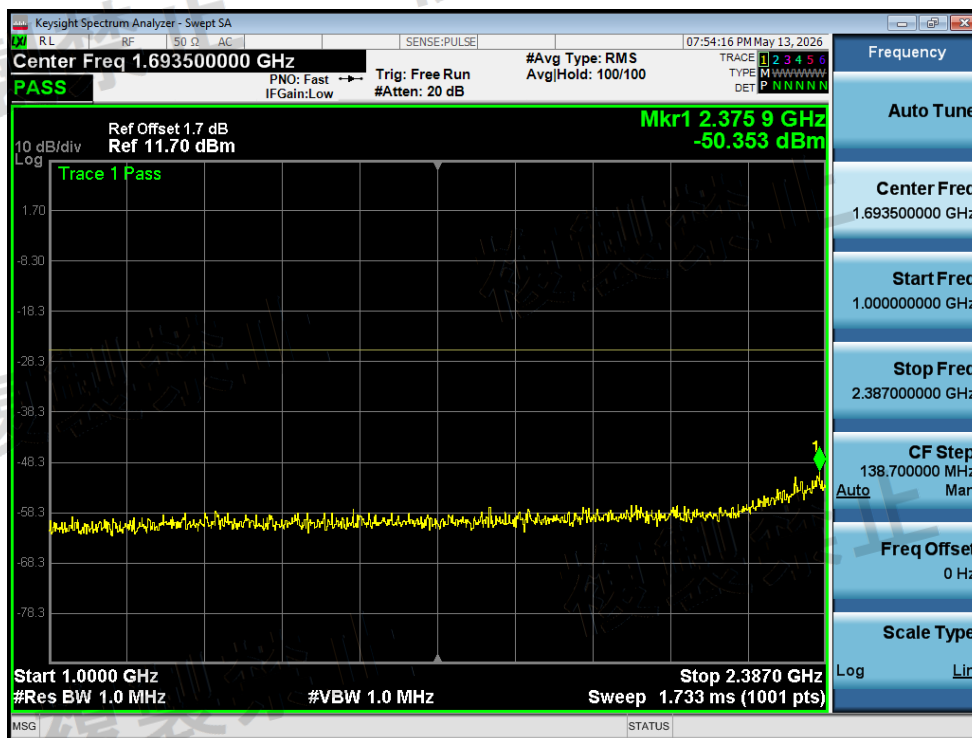


Tx. Spurious NVNT g 2472MHz Ant1 @ 1000MHz-2387MHz

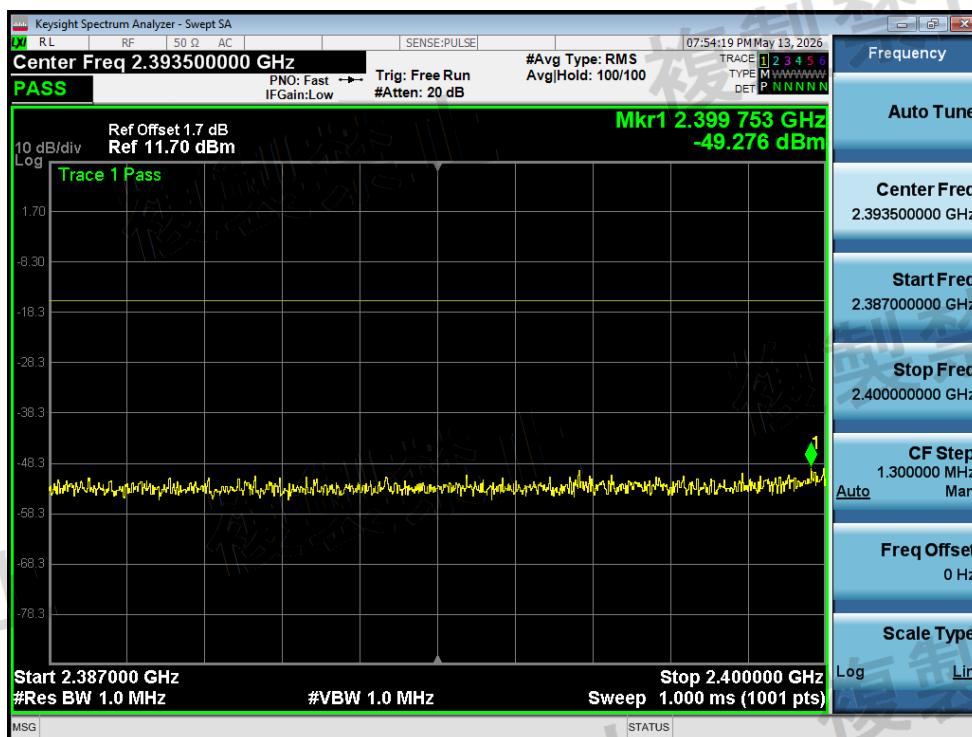


Tx. Spurious NVNT g 2472MHz Ant1 @ 2387MHz-2400MHz

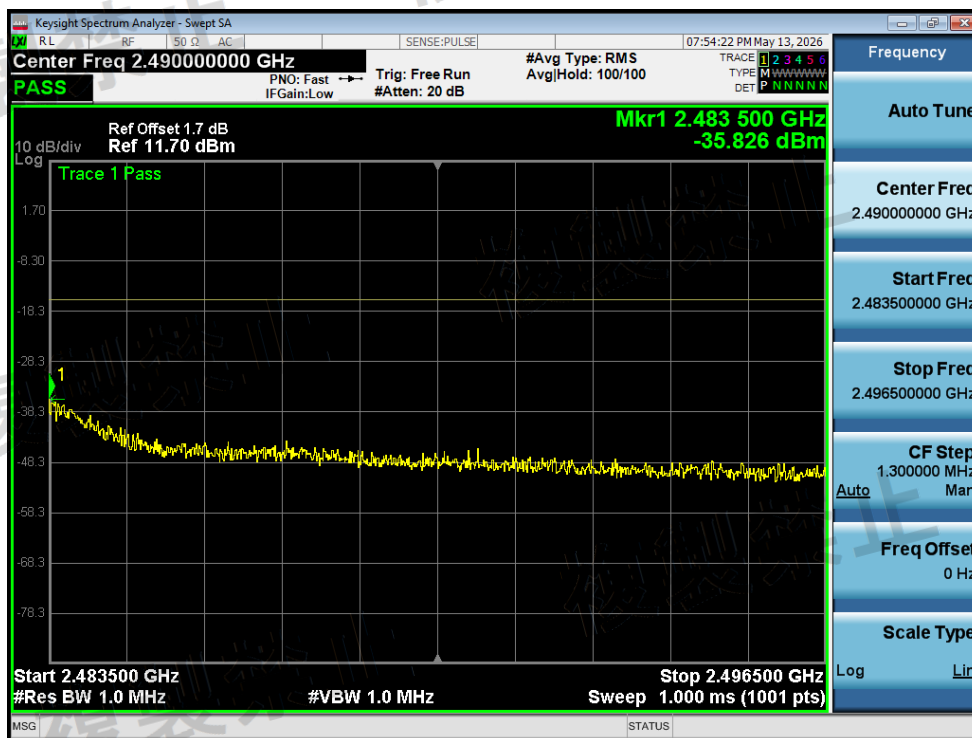


Tx. Spurious NVNT g 2472MHz Ant1 @ 2483.5MHz-2496.5MHz

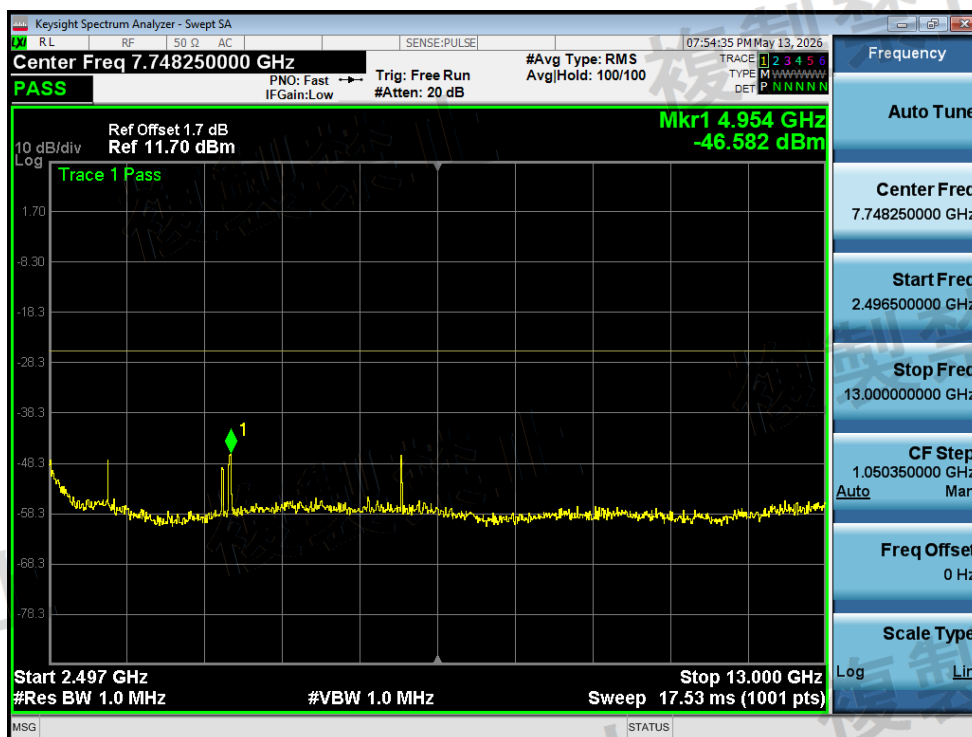


Tx. Spurious NVNT g 2472MHz Ant1 @ 2496.5MHz-13000MHz

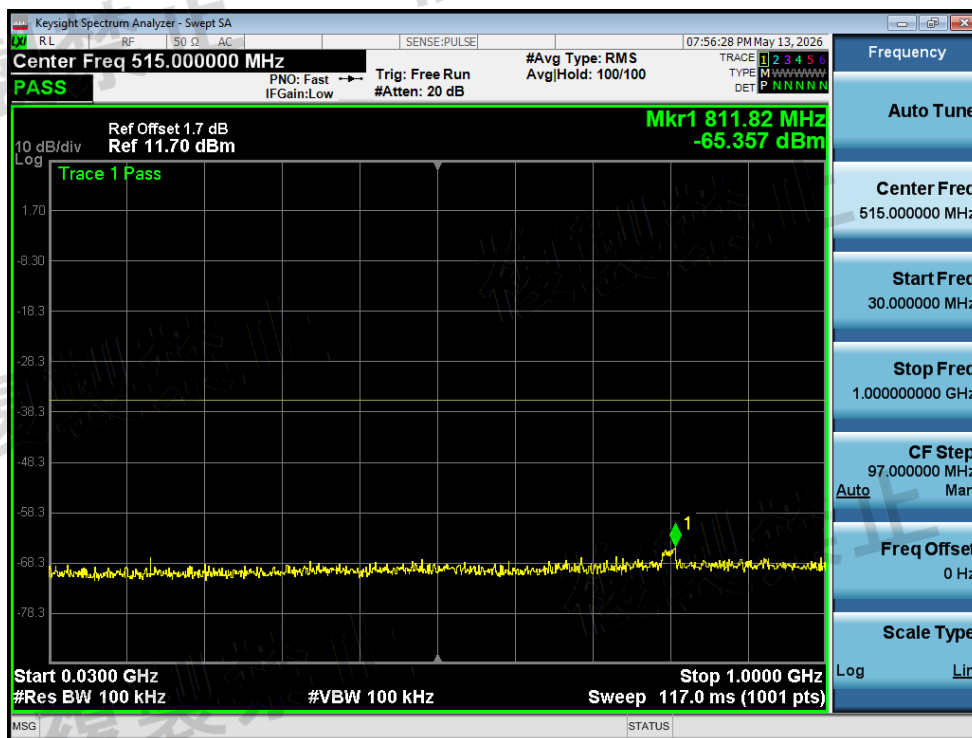


Tx. Spurious NVNT n20 2412MHz Ant1 @ 30MHz-1000MHz

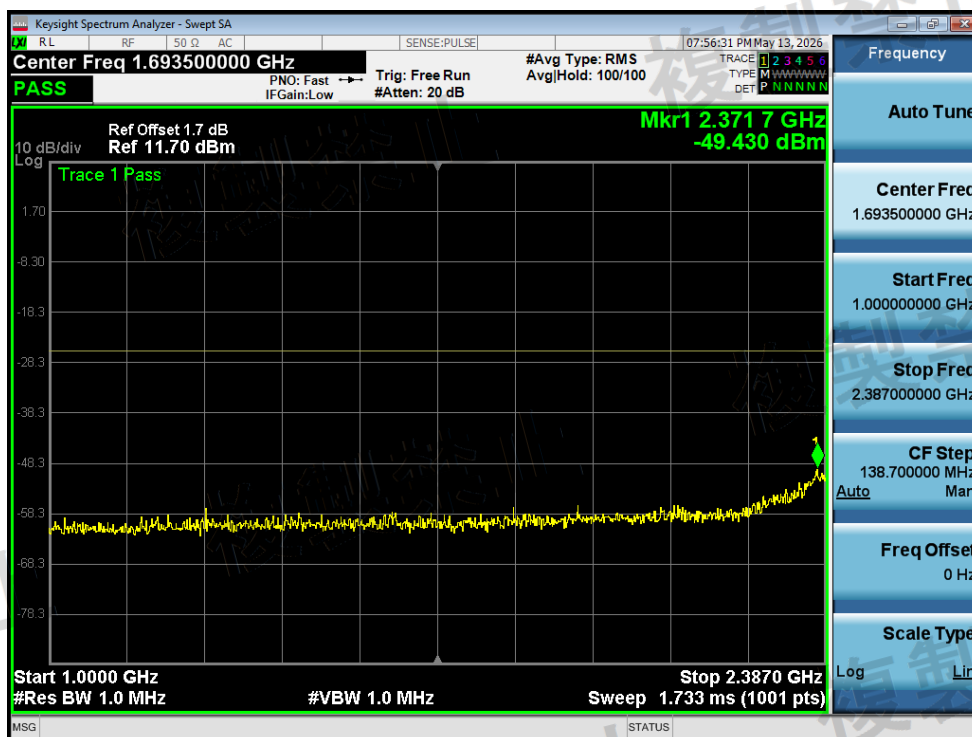


Tx. Spurious NVNT n20 2412MHz Ant1 @ 1000MHz-2387MHz

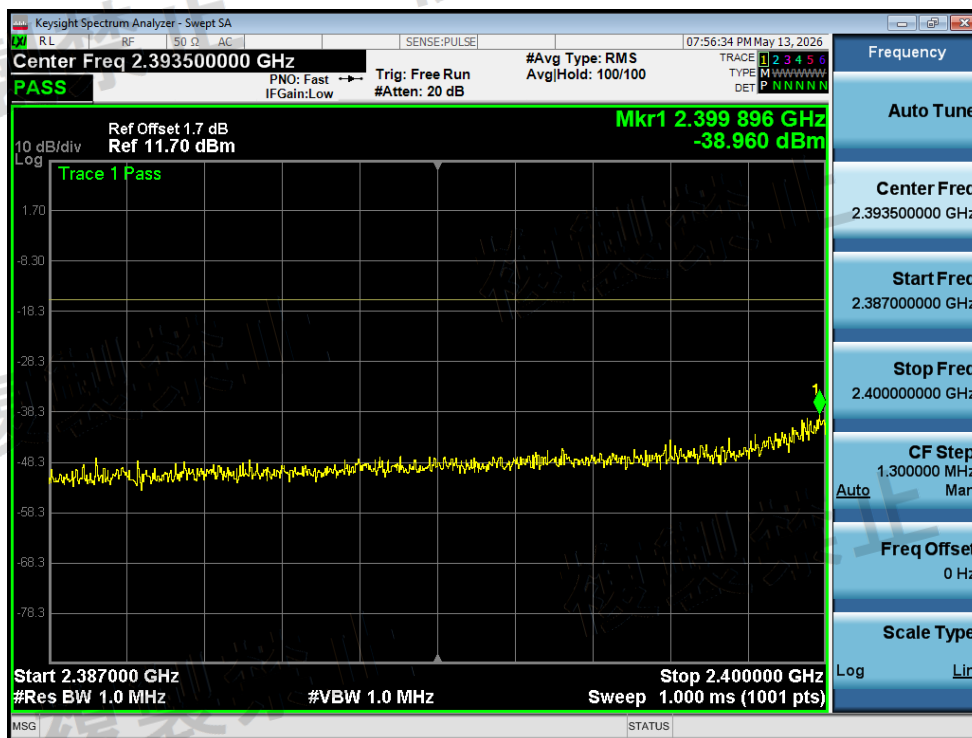


Tx. Spurious NVNT n20 2412MHz Ant1 @ 2387MHz-2400MHz

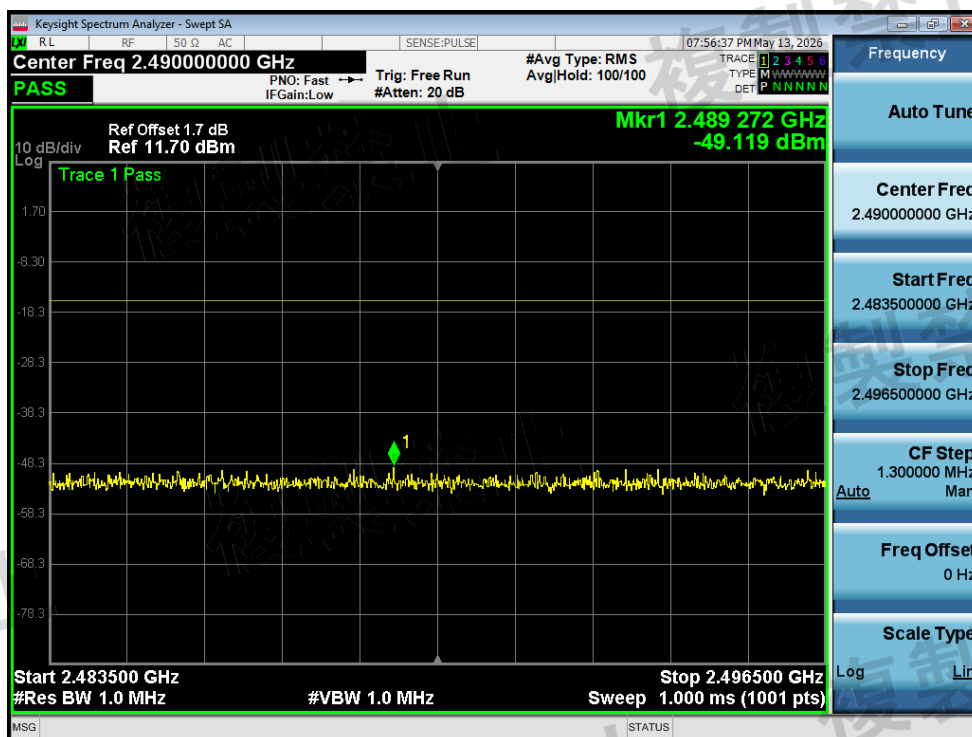


Tx. Spurious NVNT n20 2412MHz Ant1 @ 2483.5MHz-2496.5MHz

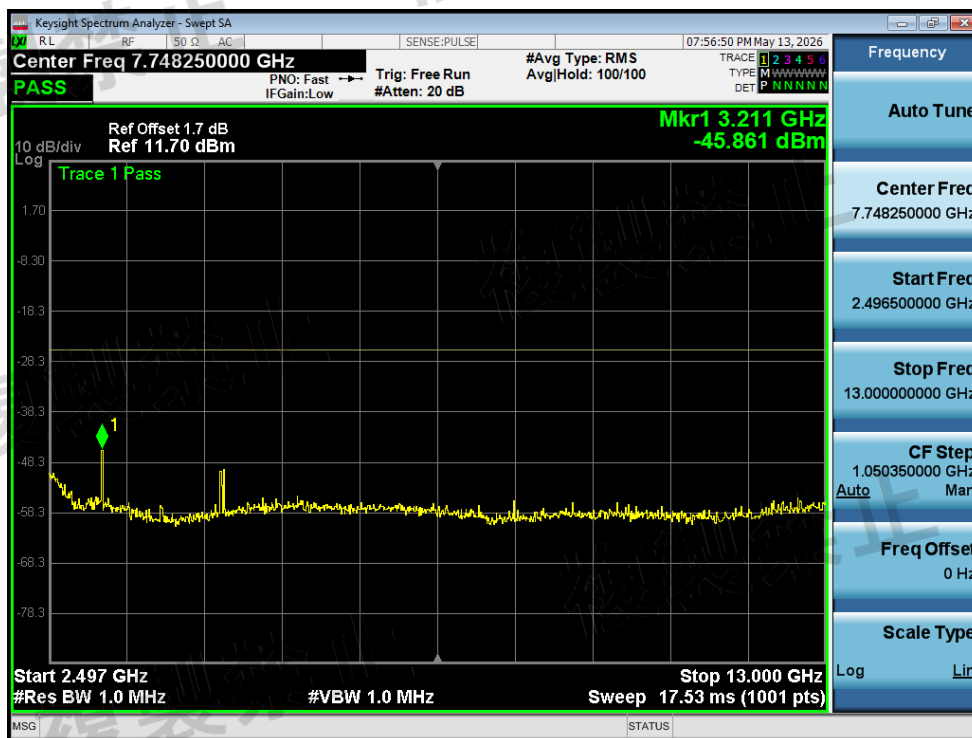


Tx. Spurious NVNT n20 2412MHz Ant1 @ 2496.5MHz-13000MHz

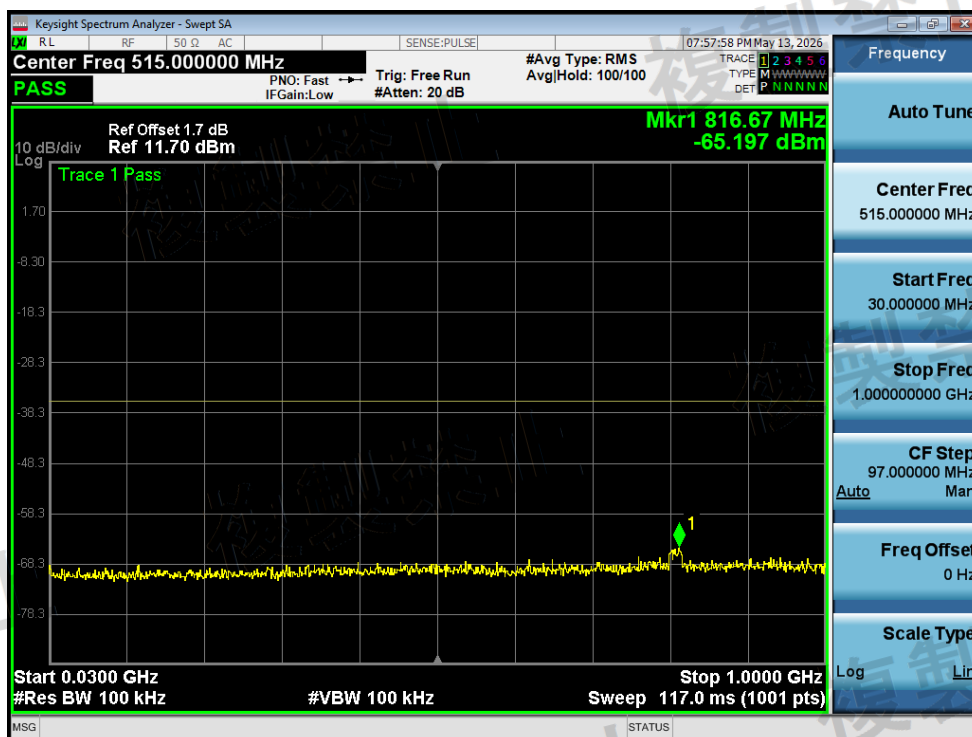


Tx. Spurious NVNT n20 2437MHz Ant1 @ 30MHz-1000MHz

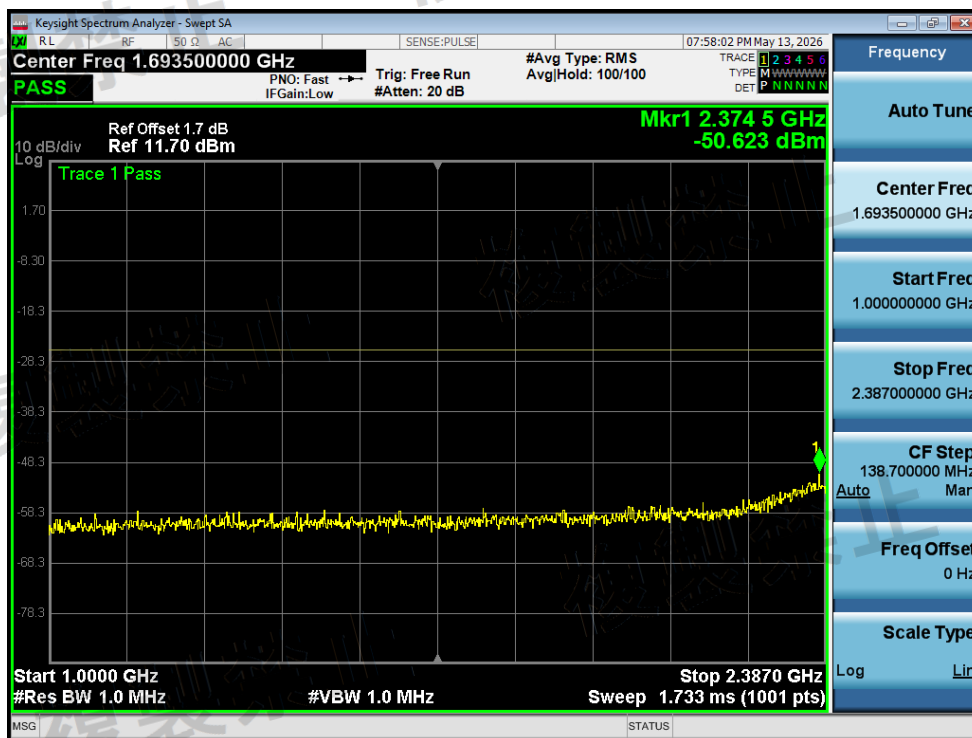


Tx. Spurious NVNT n20 2437MHz Ant1 @ 1000MHz-2387MHz

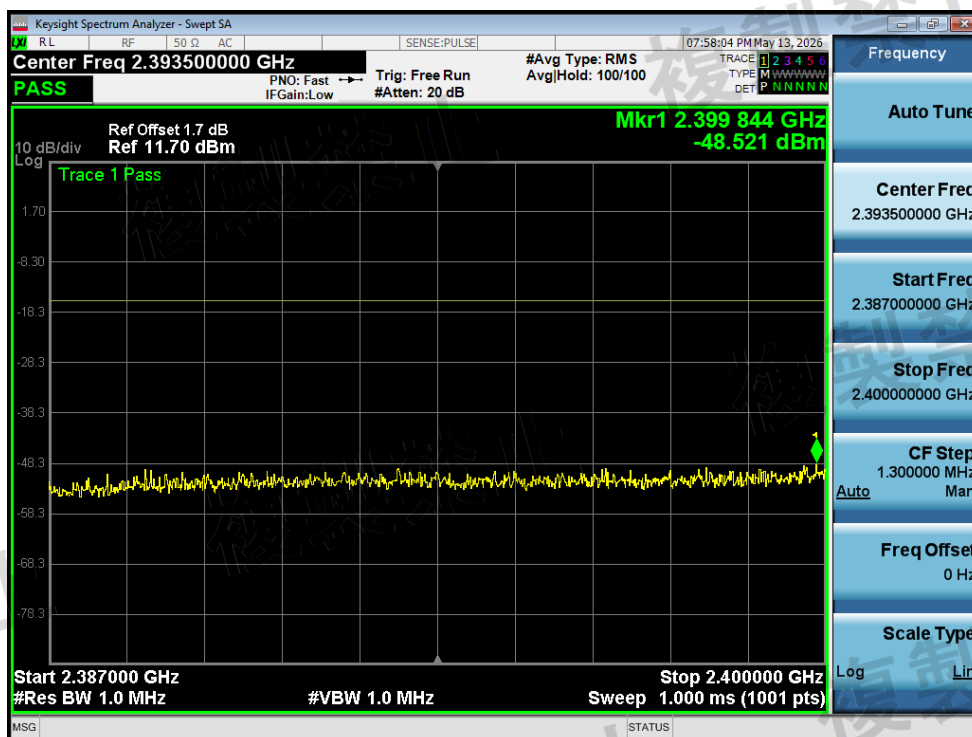


Tx. Spurious NVNT n20 2437MHz Ant1 @ 2387MHz-2400MHz

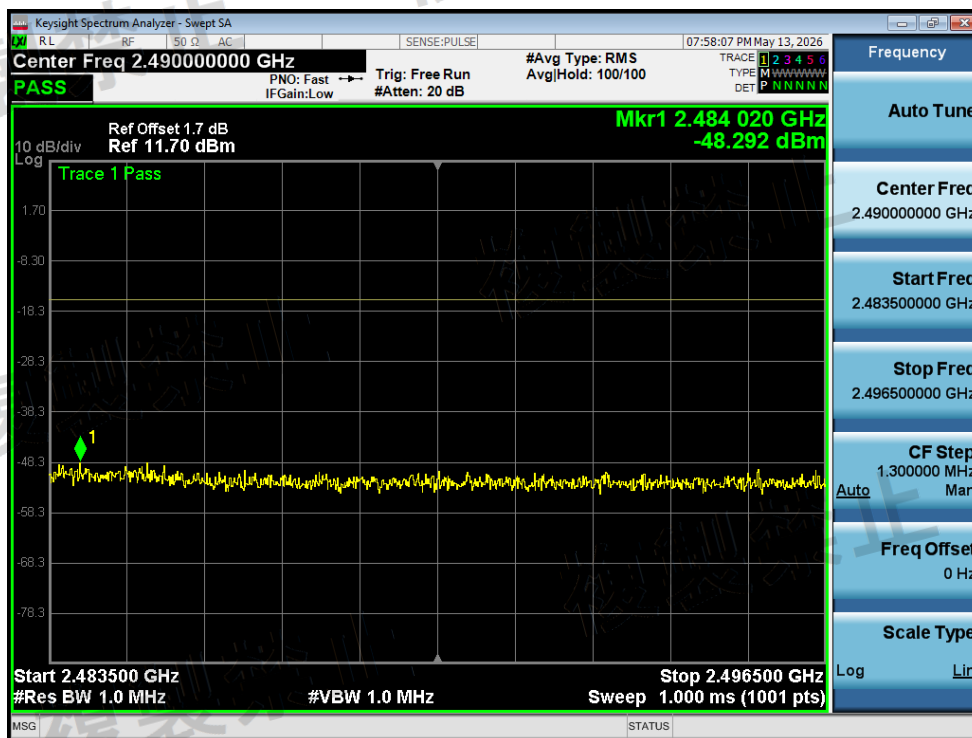


Tx. Spurious NVNT n20 2437MHz Ant1 @ 2483.5MHz-2496.5MHz

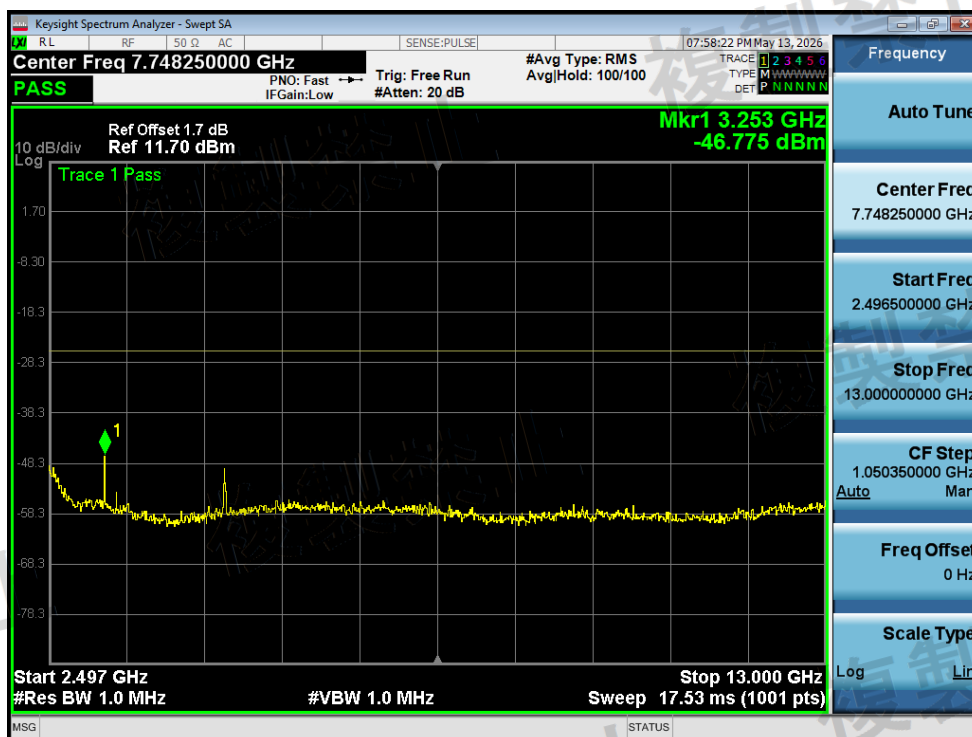


Tx. Spurious NVNT n20 2437MHz Ant1 @ 2496.5MHz-13000MHz

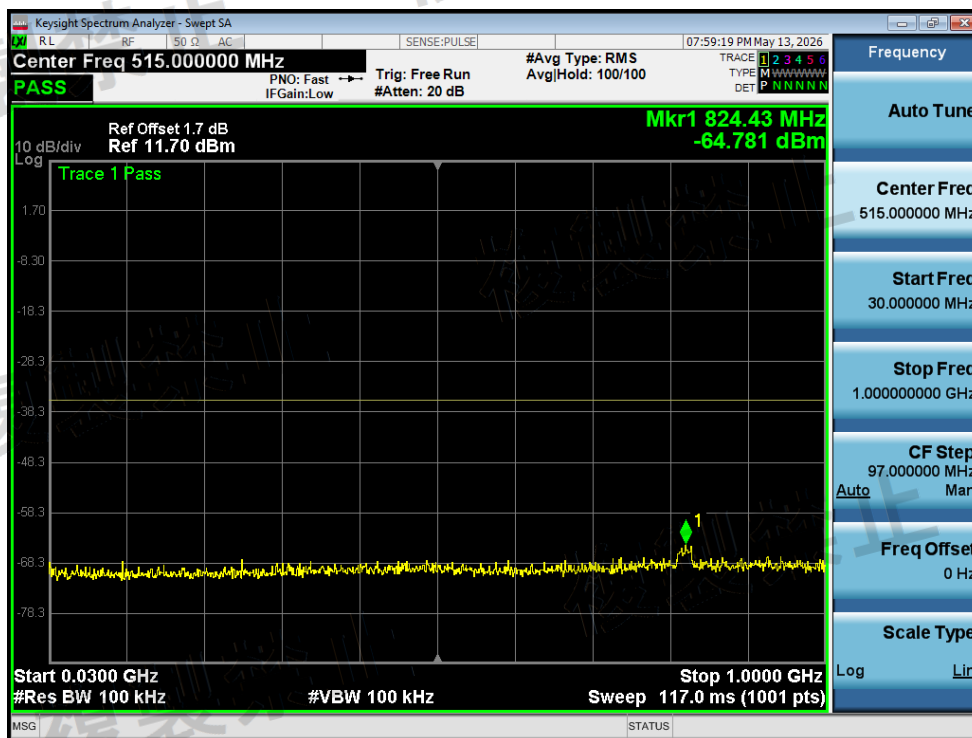


Tx. Spurious NVNT n20 2472MHz Ant1 @ 30MHz-1000MHz

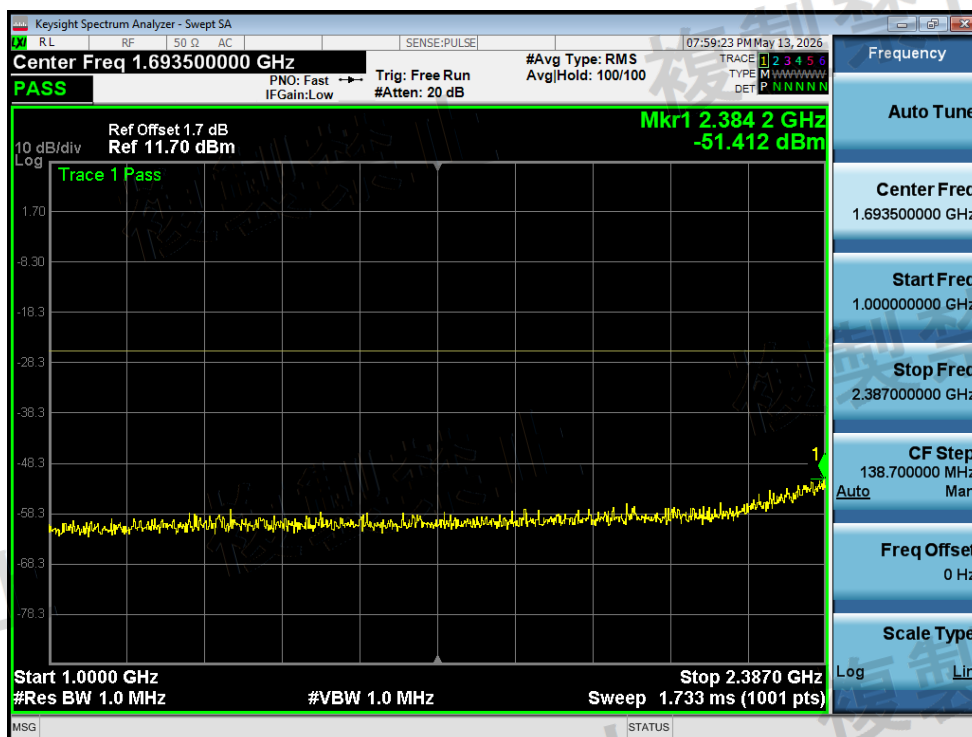


Tx. Spurious NVNT n20 2472MHz Ant1 @ 1000MHz-2387MHz

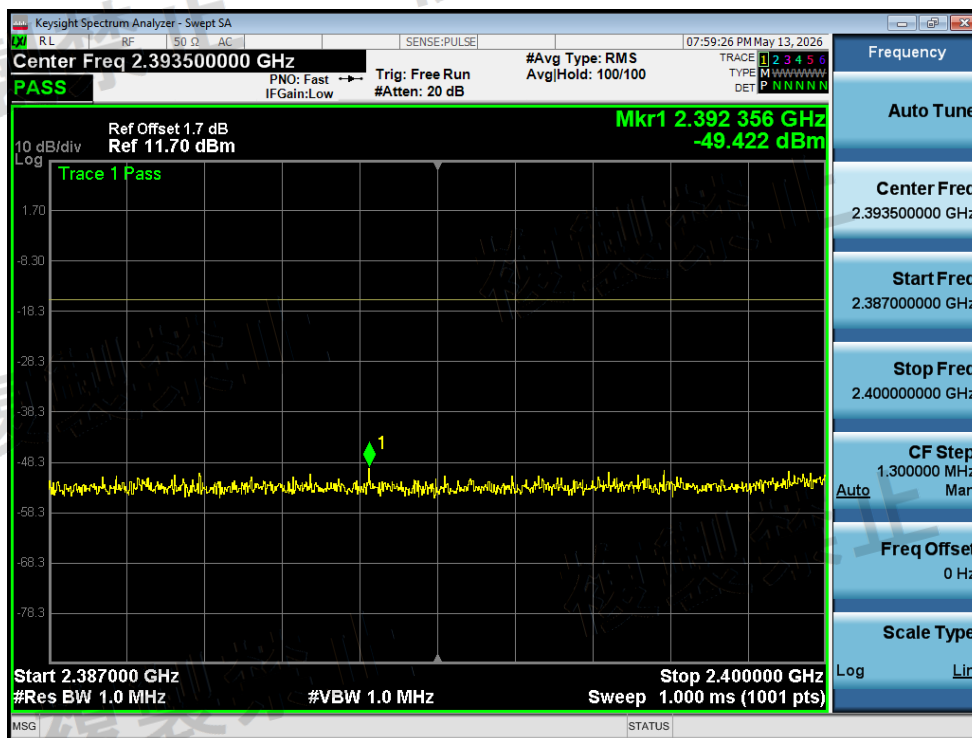


Tx. Spurious NVNT n20 2472MHz Ant1 @ 2387MHz-2400MHz

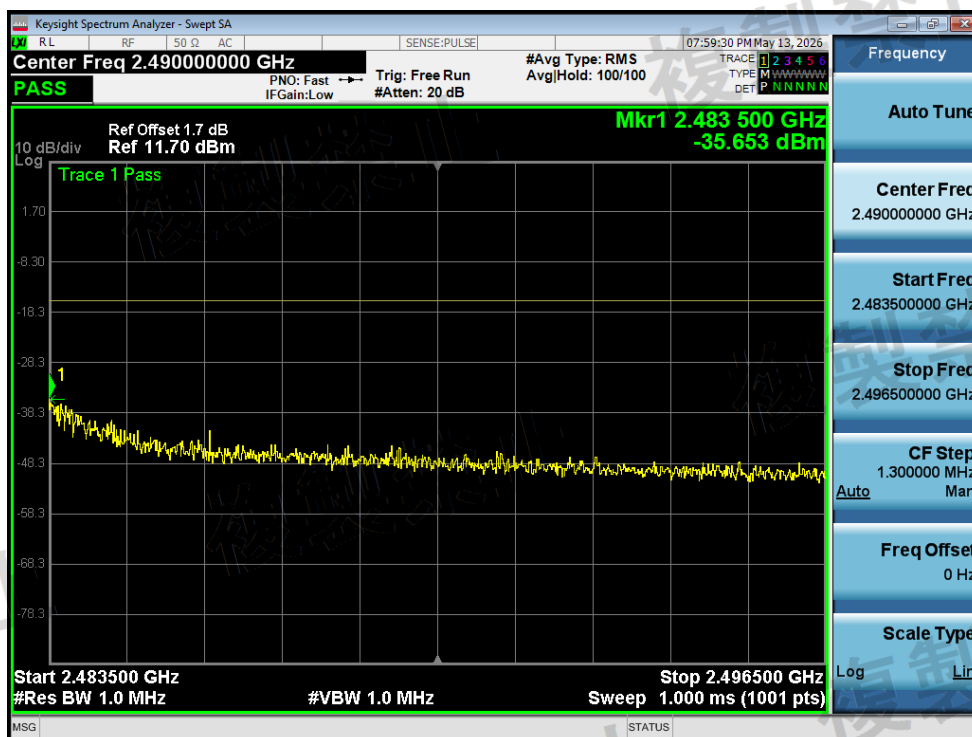


Tx. Spurious NVNT n20 2472MHz Ant1 @ 2483.5MHz-2496.5MHz

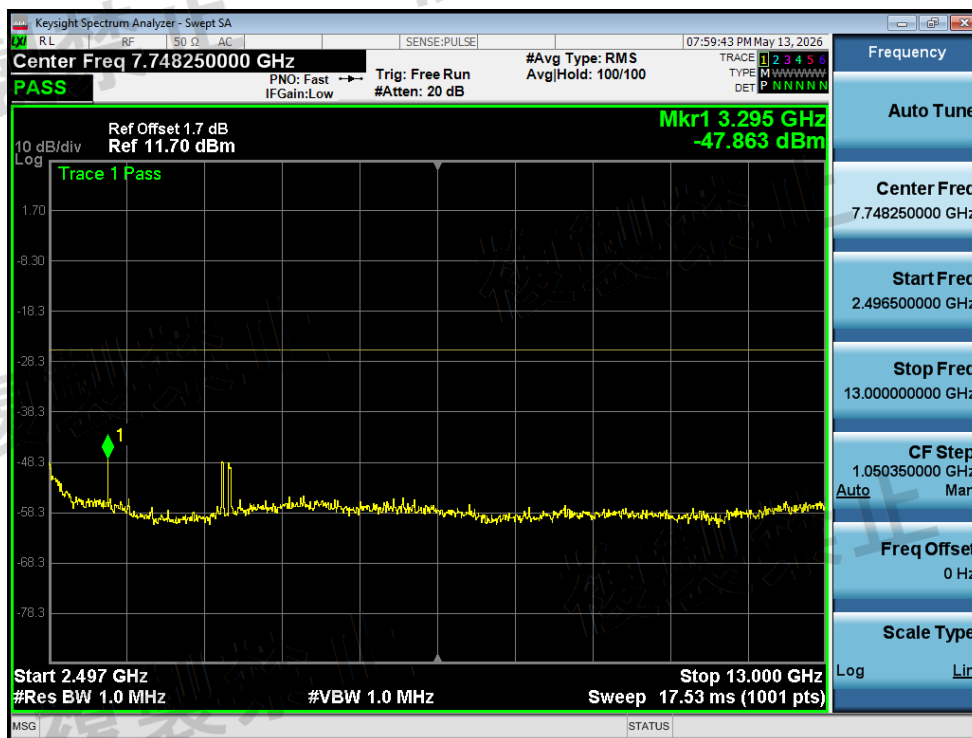


Tx. Spurious NVNT n20 2472MHz Ant1 @ 2496.5MHz-13000MHz

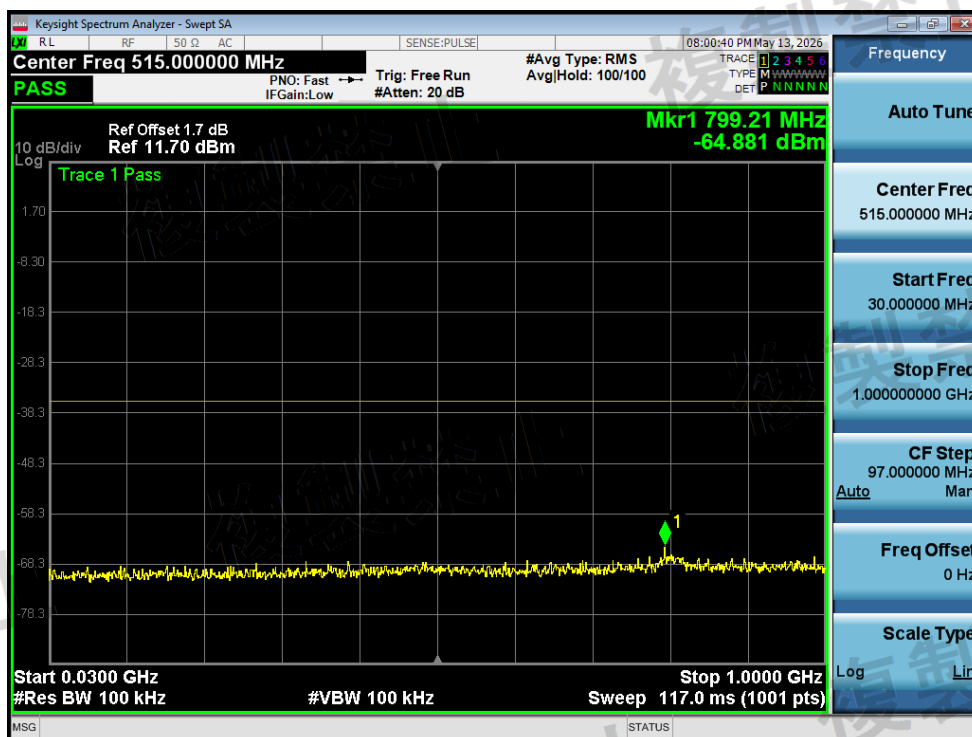


Tx. Spurious NVNT n40 2422MHz Ant1 @ 30MHz-1000MHz

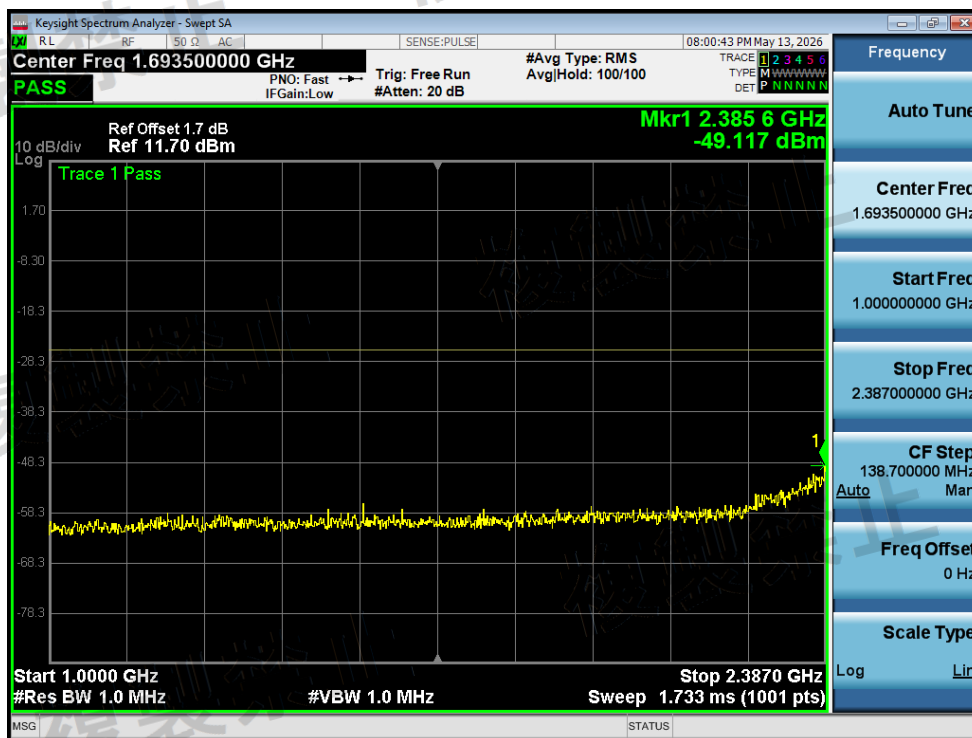


Tx. Spurious NVNT n40 2422MHz Ant1 @ 1000MHz-2387MHz

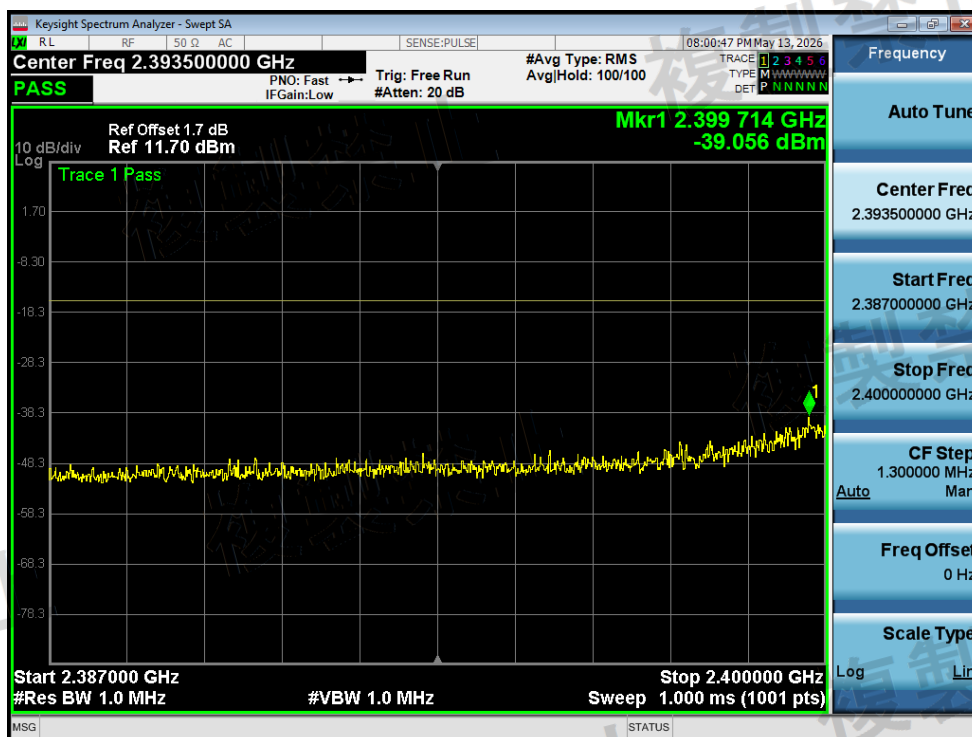

Tx. Spurious NVNT n40 2422MHz Ant1 @ 2387MHz-2400MHz

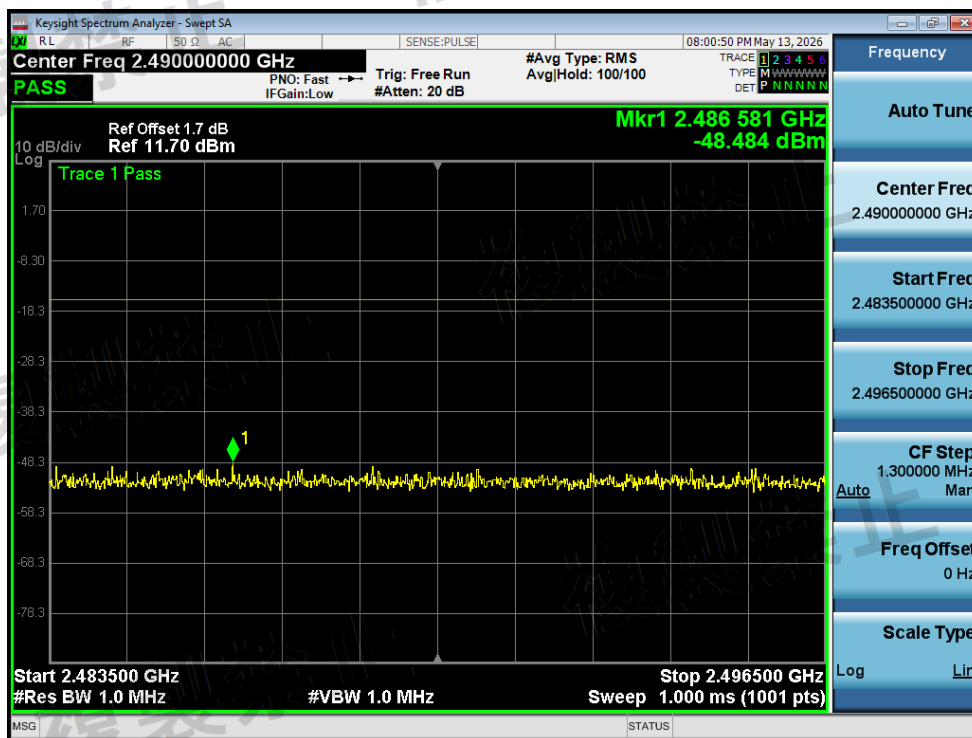

Tx. Spurious NVNT n40 2422MHz Ant1 @ 2483.5MHz-2496.5MHz

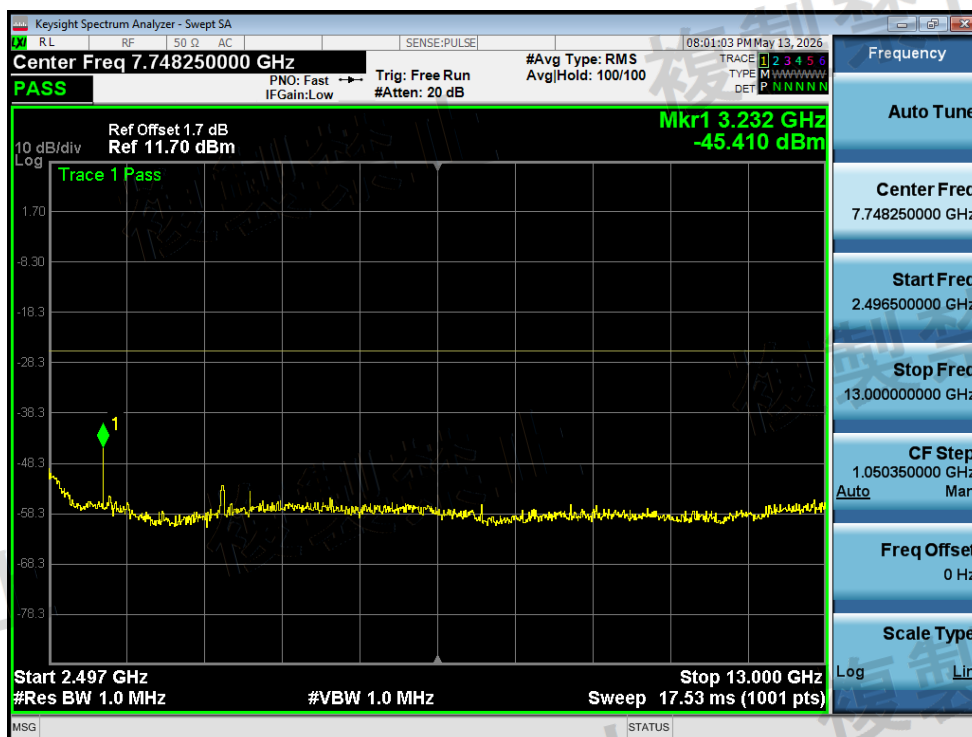


Tx. Spurious NVNT n40 2422MHz Ant1 @ 2496.5MHz-13000MHz




Tx. Spurious NVNT n40 2437MHz Ant1 @ 30MHz-1000MHz




Tx. Spurious NVNT n40 2437MHz Ant1 @ 1000MHz-2387MHz

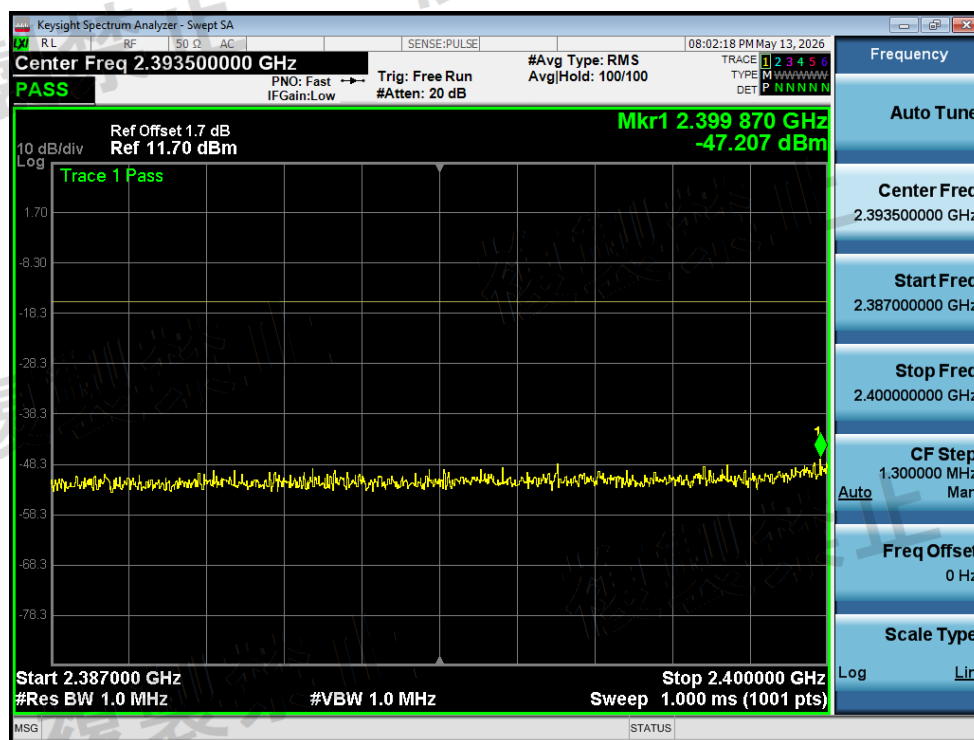


Tx. Spurious NVNT n40 2437MHz Ant1 @ 2387MHz-2400MHz

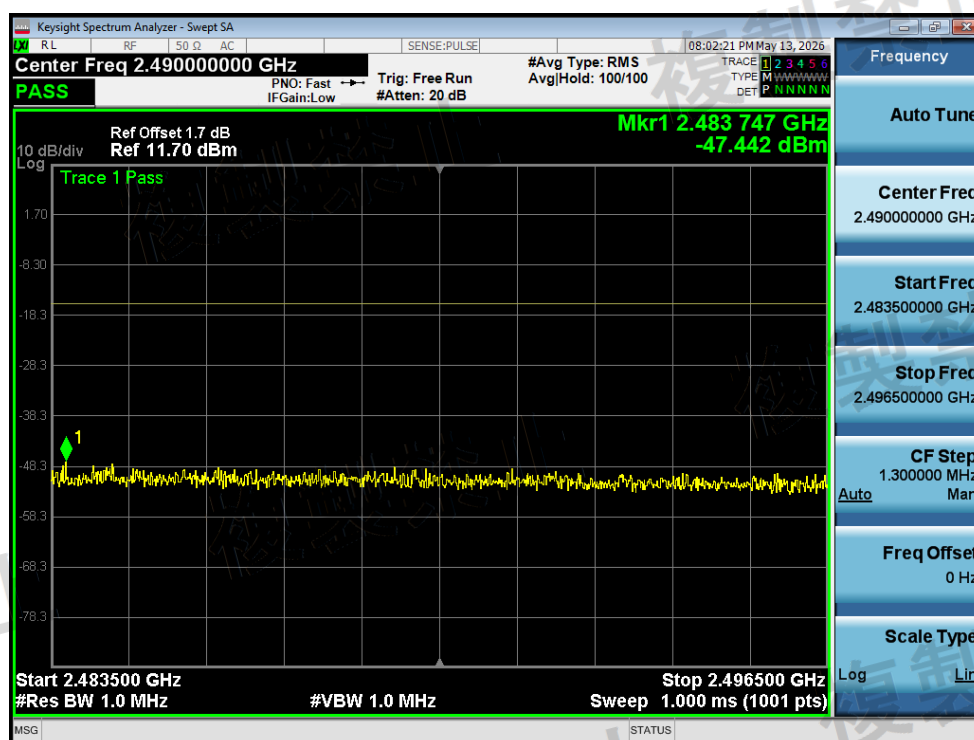


Tx. Spurious NVNT n40 2437MHz Ant1 @ 2483.5MHz-2496.5MHz

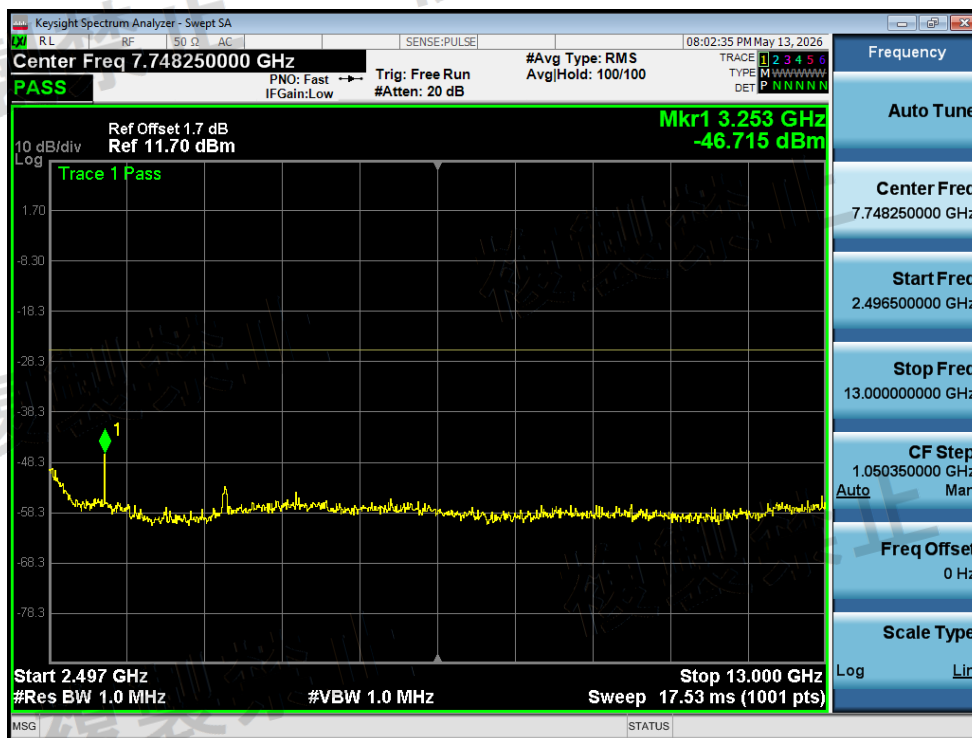


Tx. Spurious NVNT n40 2437MHz Ant1 @ 2496.5MHz-13000MHz

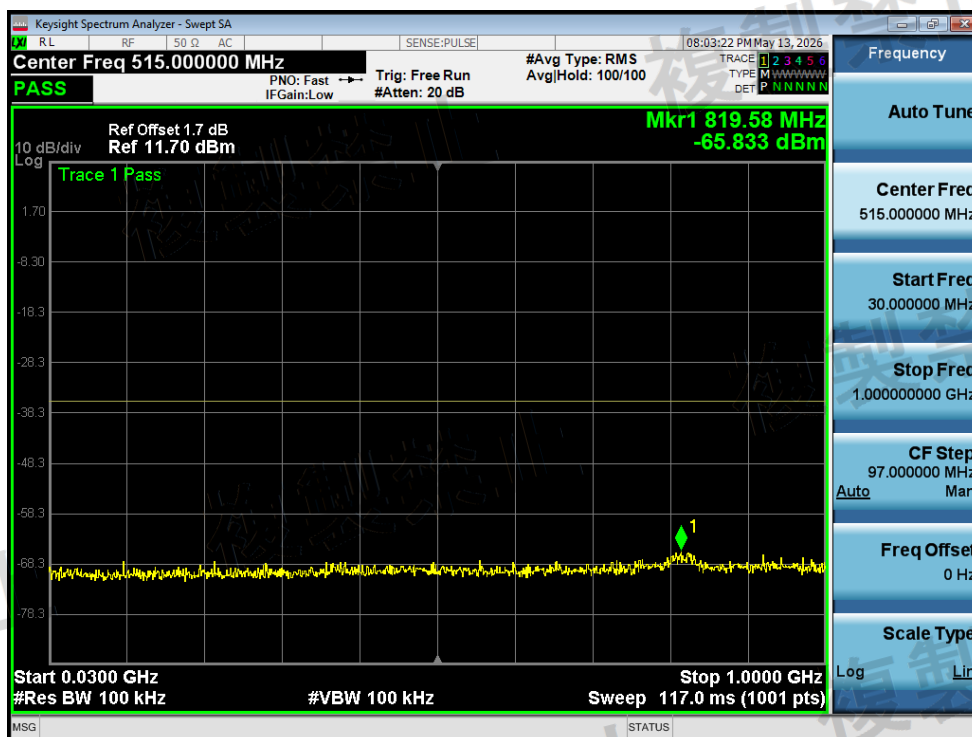


Tx. Spurious NVNT n40 2462MHz Ant1 @ 30MHz-1000MHz

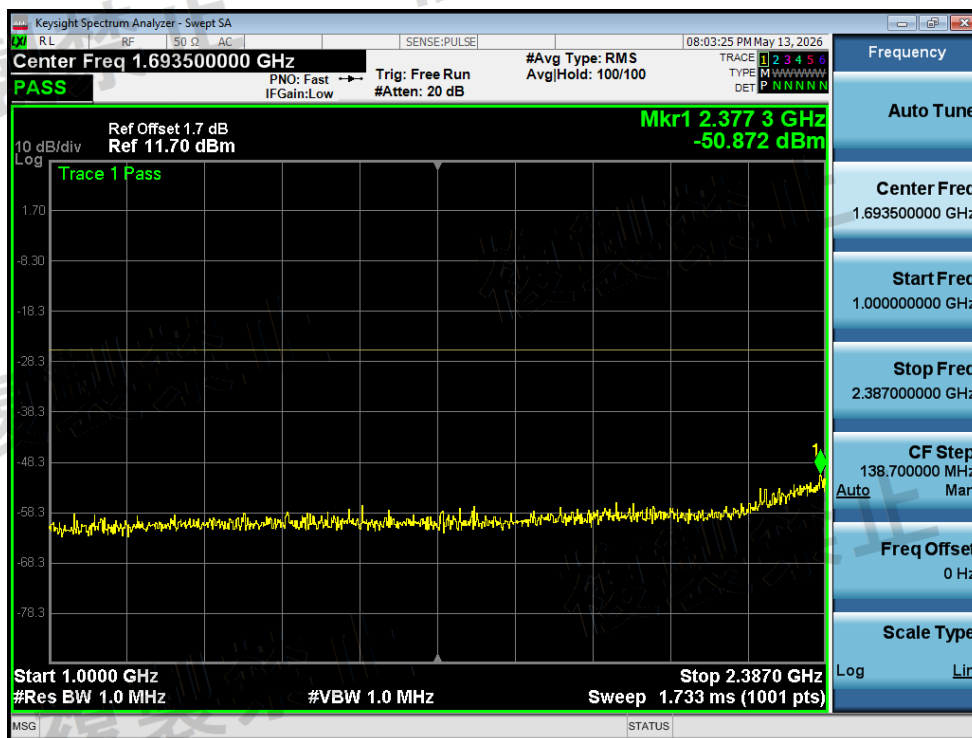


Tx. Spurious NVNT n40 2462MHz Ant1 @ 1000MHz-2387MHz

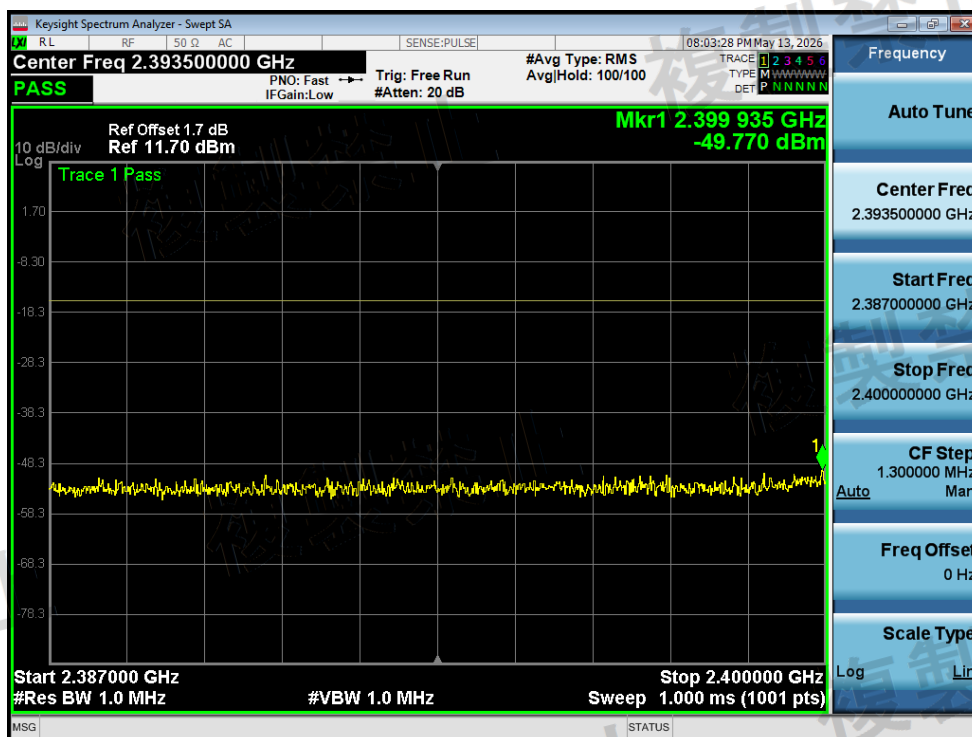

Tx. Spurious NVNT n40 2462MHz Ant1 @ 2387MHz-2400MHz

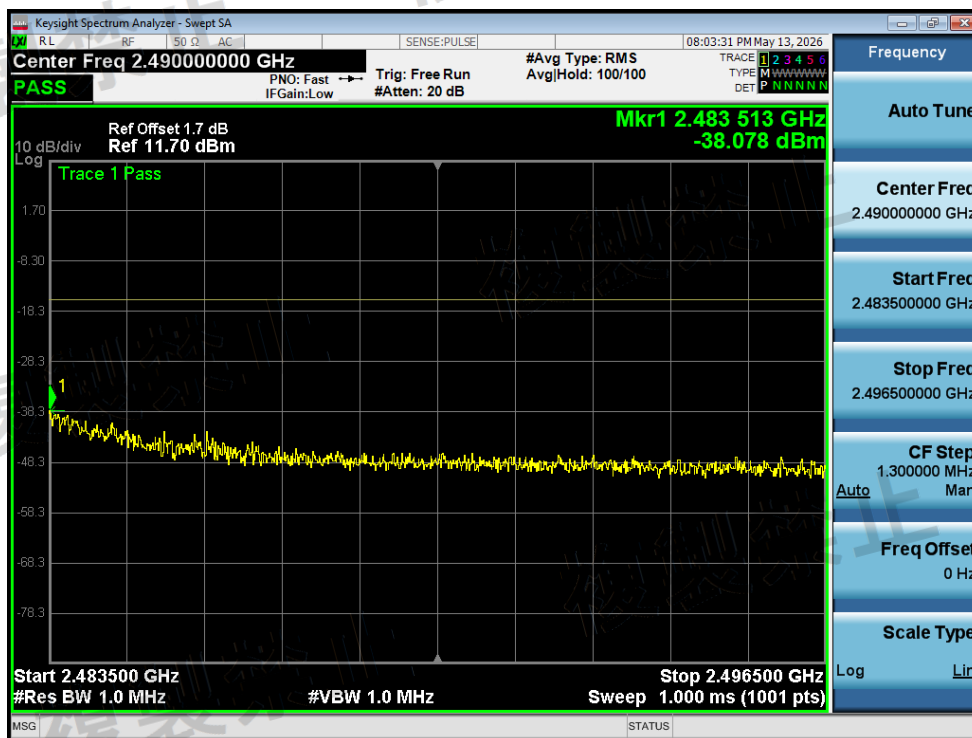


Tx. Spurious NVNT n40 2462MHz Ant1 @ 2483.5MHz-2496.5MHz

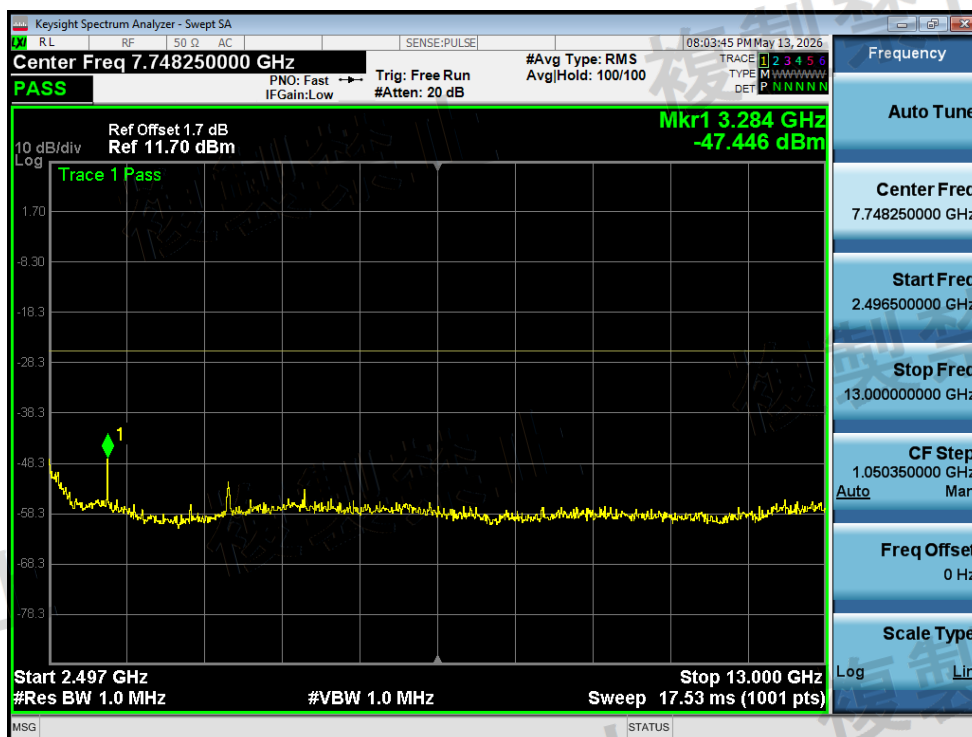


Tx. Spurious NVNT n40 2462MHz Ant1 @ 2496.5MHz-13000MHz

6. Rx Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Range (MHz)	Emission Frequency (MHz)	Max Value (dBm)	Max Value (nW)	Limit (nW)	Verdict
NVNT	b	2412	Ant1	30-1000	432.55	-87.8	0.002	4	Pass
NVNT	b	2412	Ant1	1000-13000	2464	-59.92	1.02	20	Pass
NVNT	b	2437	Ant1	30-1000	432.55	-88.15	0.002	4	Pass
NVNT	b	2437	Ant1	1000-13000	2464	-64.55	0.35	20	Pass
NVNT	b	2472	Ant1	30-1000	432.55	-87.54	0.002	4	Pass
NVNT	b	2472	Ant1	1000-13000	2464	-70.72	0.08	20	Pass
NVNT	g	2412	Ant1	30-1000	877.78	-88.24	0.001	4	Pass
NVNT	g	2412	Ant1	1000-13000	2464	-59.76	1.06	20	Pass
NVNT	g	2437	Ant1	30-1000	861.29	-88.76	0.001	4	Pass
NVNT	g	2437	Ant1	1000-13000	2464	-62.28	0.59	20	Pass
NVNT	g	2472	Ant1	30-1000	432.55	-88.07	0.002	4	Pass
NVNT	g	2472	Ant1	1000-13000	2464	-63.42	0.45	20	Pass
NVNT	n20	2412	Ant1	30-1000	432.55	-87.03	0.002	4	Pass
NVNT	n20	2412	Ant1	1000-13000	2464	-64.03	0.40	20	Pass
NVNT	n20	2437	Ant1	30-1000	432.55	-87.37	0.002	4	Pass
NVNT	n20	2437	Ant1	1000-13000	2404	-73.26	0.05	20	Pass
NVNT	n20	2472	Ant1	30-1000	432.55	-87.18	0.002	4	Pass
NVNT	n20	2472	Ant1	1000-13000	2464	-66.93	0.20	20	Pass
NVNT	n40	2422	Ant1	30-1000	847.71	-88.43	0.001	4	Pass
NVNT	n40	2422	Ant1	1000-13000	5308	-75.92	0.03	20	Pass
NVNT	n40	2437	Ant1	30-1000	573.2	-88.45	0.001	4	Pass
NVNT	n40	2437	Ant1	1000-13000	2464	-66.61	0.22	20	Pass
NVNT	n40	2462	Ant1	30-1000	954.41	-88.58	0.001	4	Pass
NVNT	n40	2462	Ant1	1000-13000	2464	-62.12	0.61	20	Pass

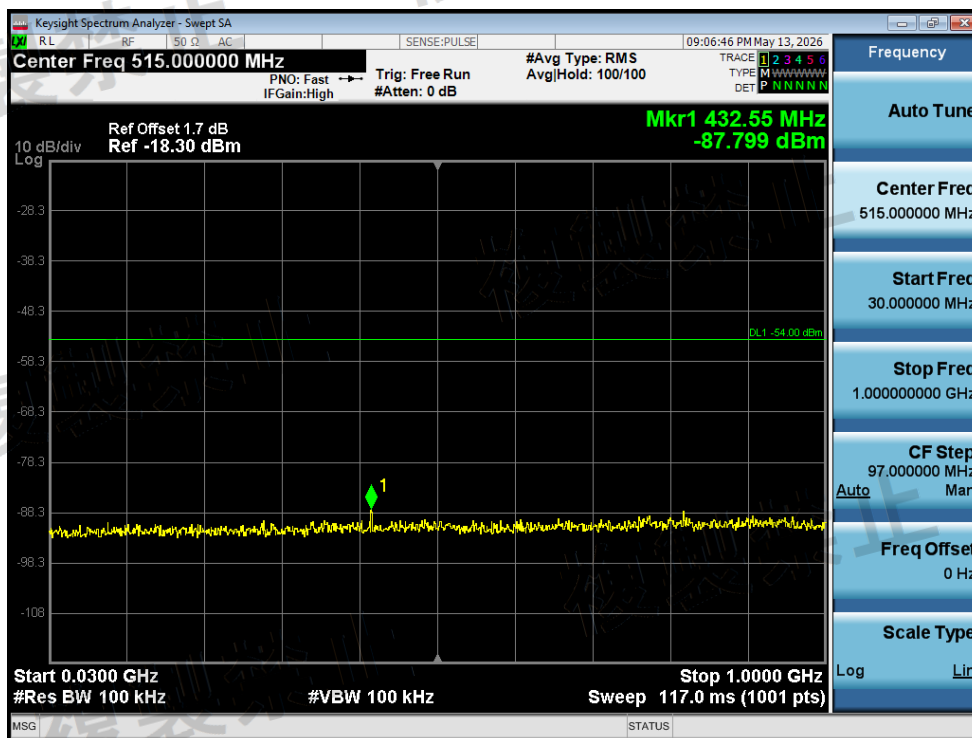


Rx. Spurious NVNT b 2412MHz Ant1 @ 30MHz-1000MHz

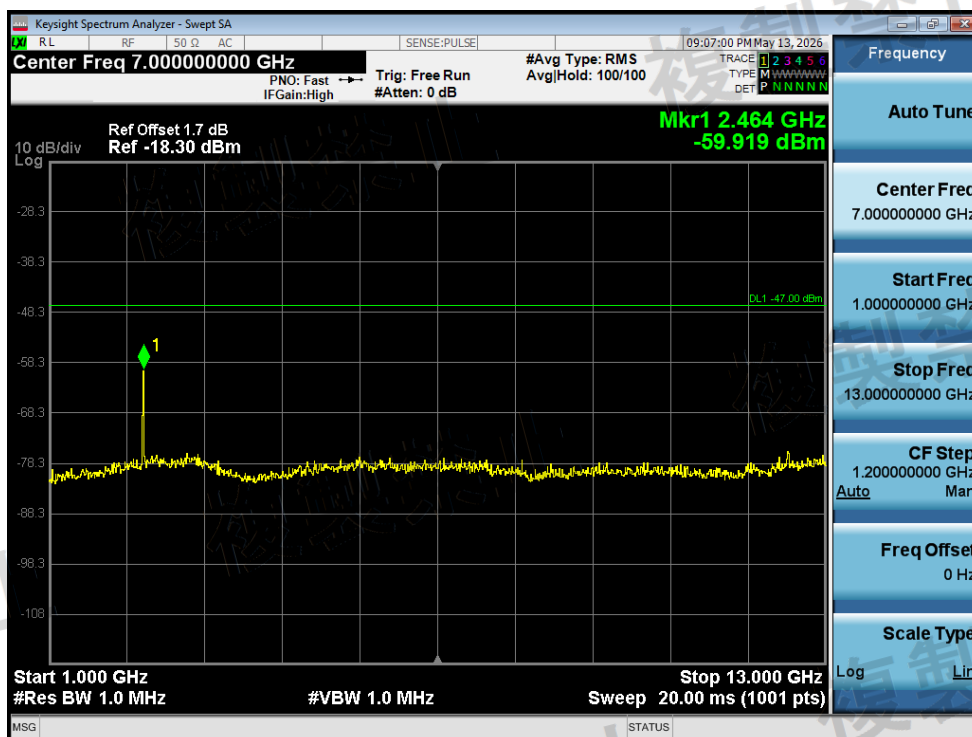


Rx. Spurious NVNT b 2412MHz Ant1 @ 1000MHz-13000MHz

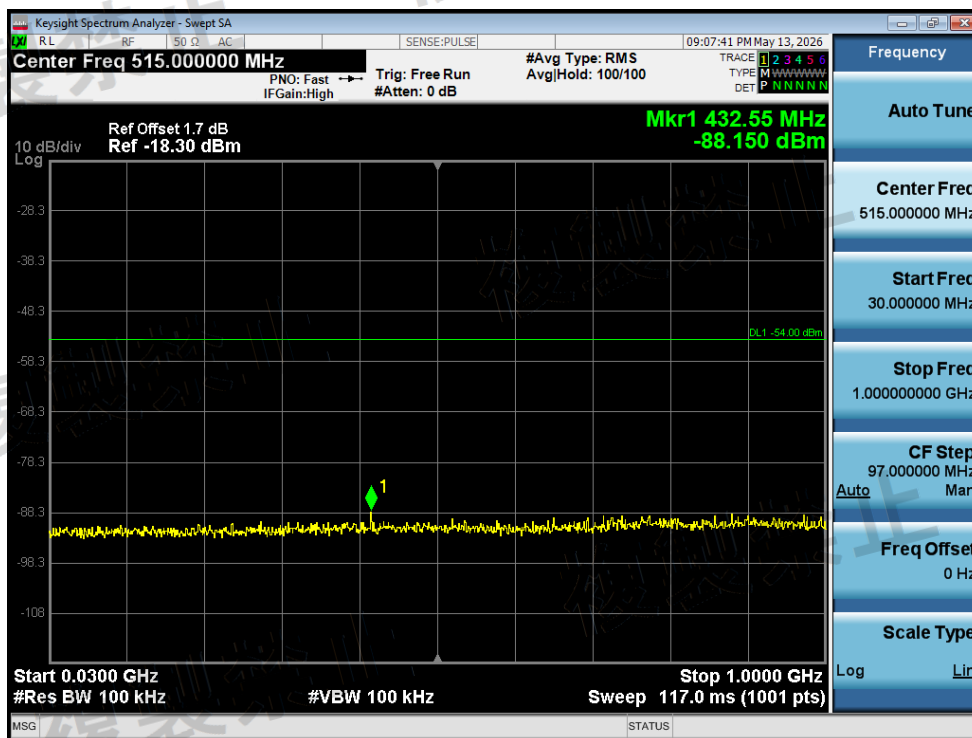


Rx. Spurious NVNT b 2437MHz Ant1 @ 30MHz-1000MHz

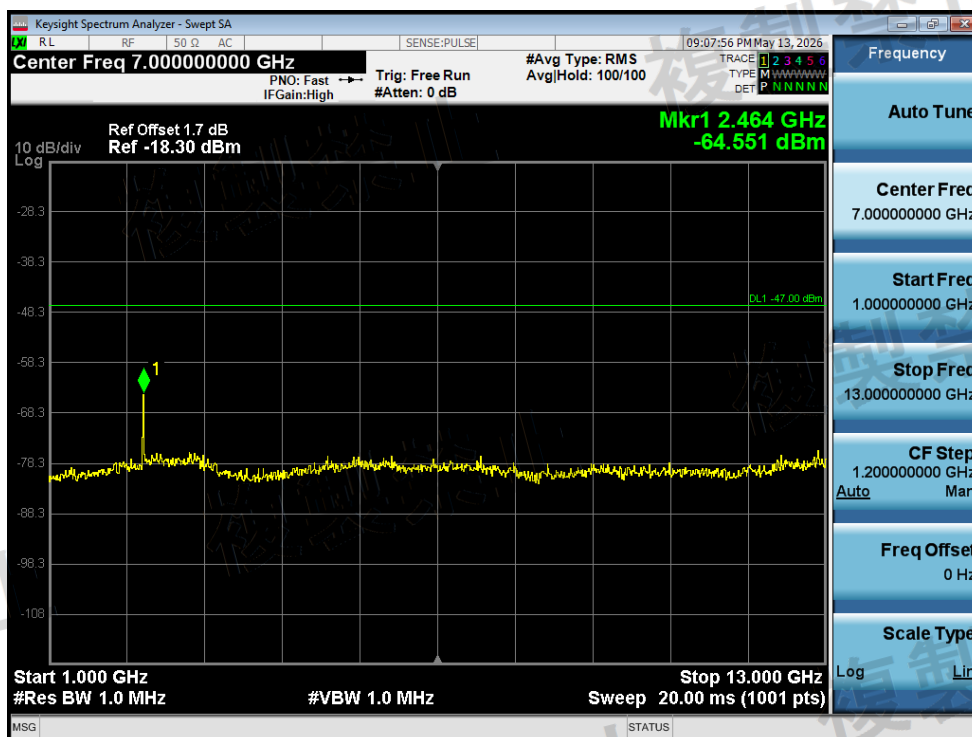


Rx. Spurious NVNT b 2437MHz Ant1 @ 1000MHz-13000MHz

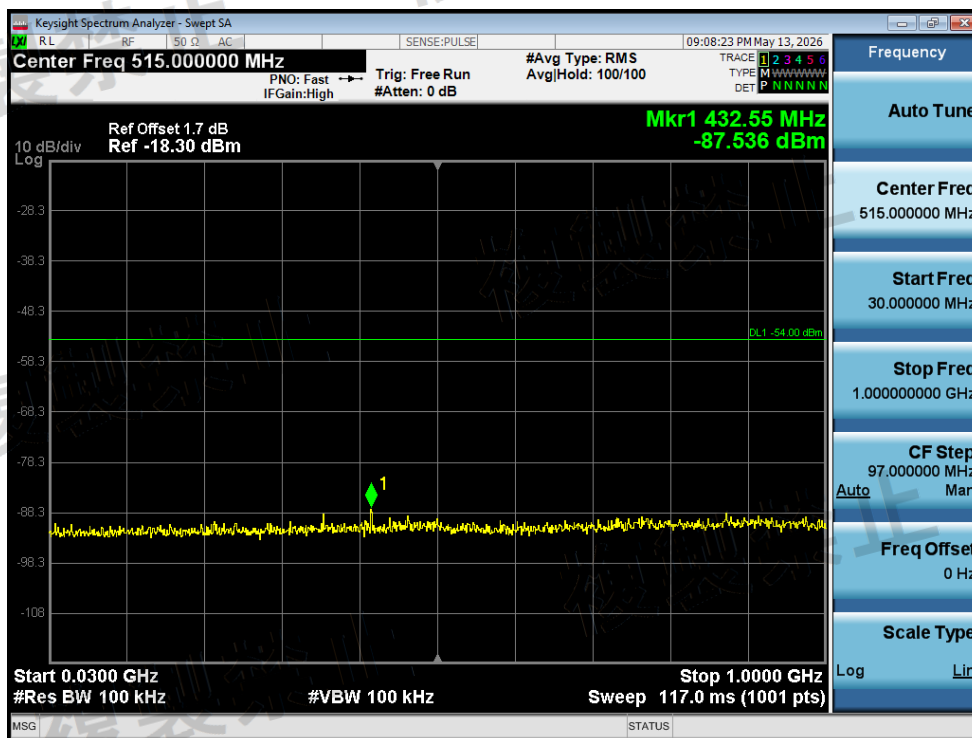


Rx. Spurious NVNT b 2472MHz Ant1 @ 30MHz-1000MHz

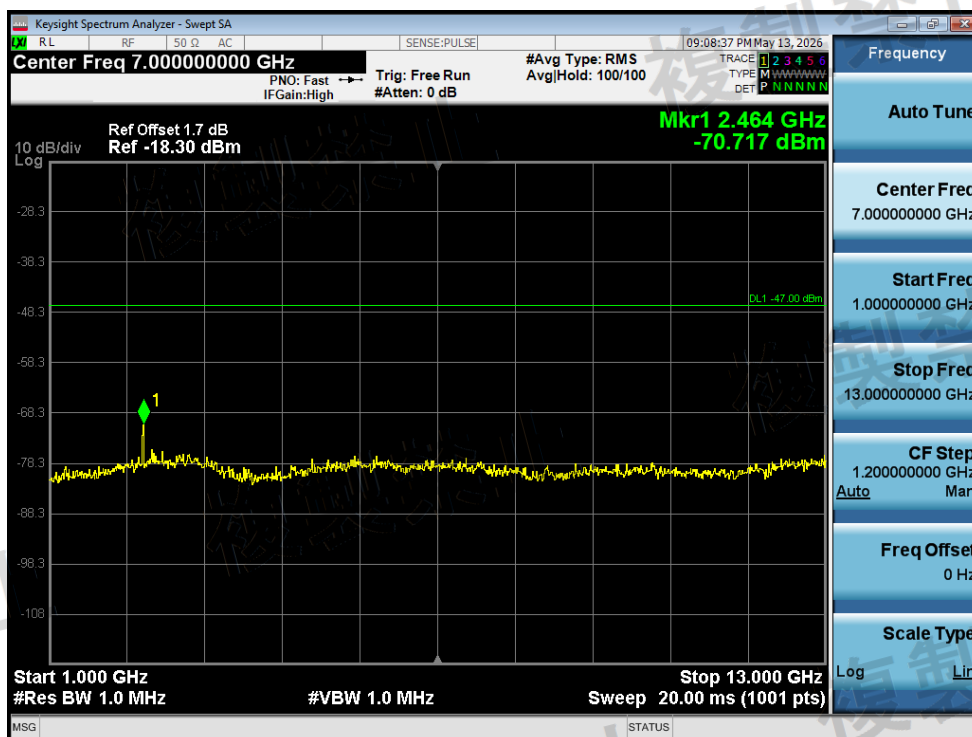


Rx. Spurious NVNT b 2472MHz Ant1 @ 1000MHz-13000MHz

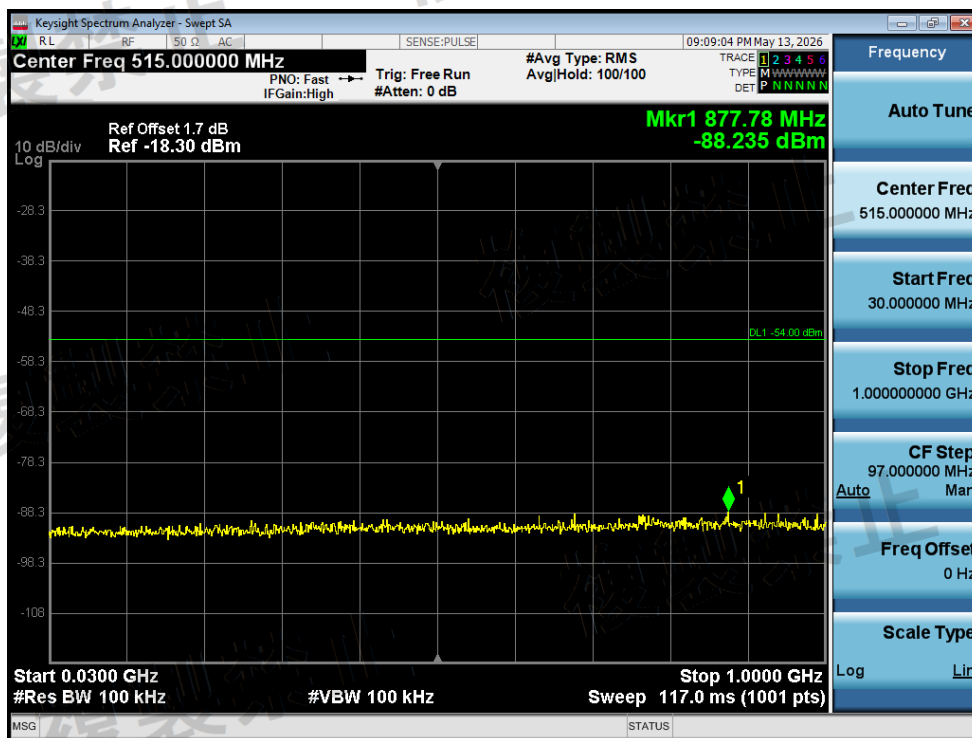


Rx. Spurious NVNT g 2412MHz Ant1 @ 30MHz-1000MHz

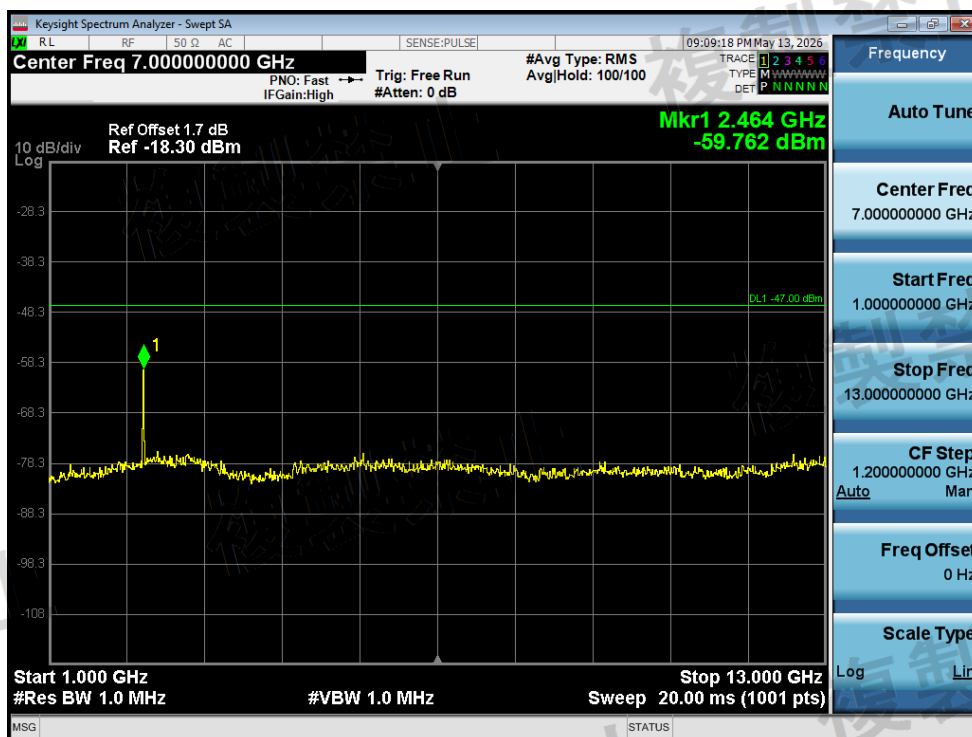


Rx. Spurious NVNT g 2412MHz Ant1 @ 1000MHz-13000MHz

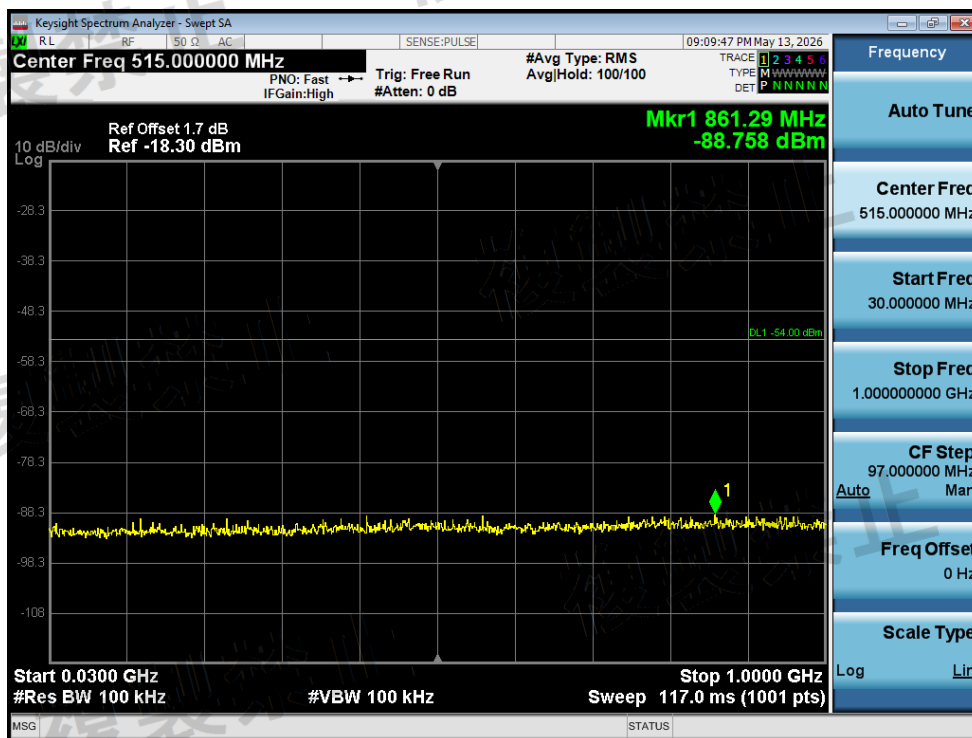


Rx. Spurious NVNT g 2437MHz Ant1 @ 30MHz-1000MHz

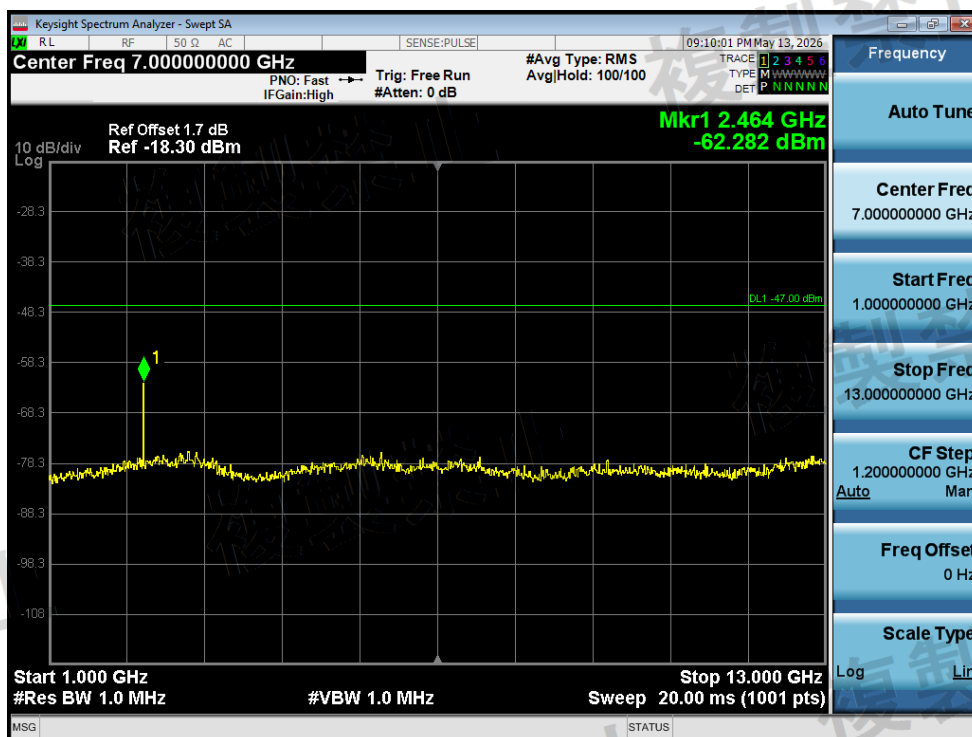


Rx. Spurious NVNT g 2437MHz Ant1 @ 1000MHz-13000MHz

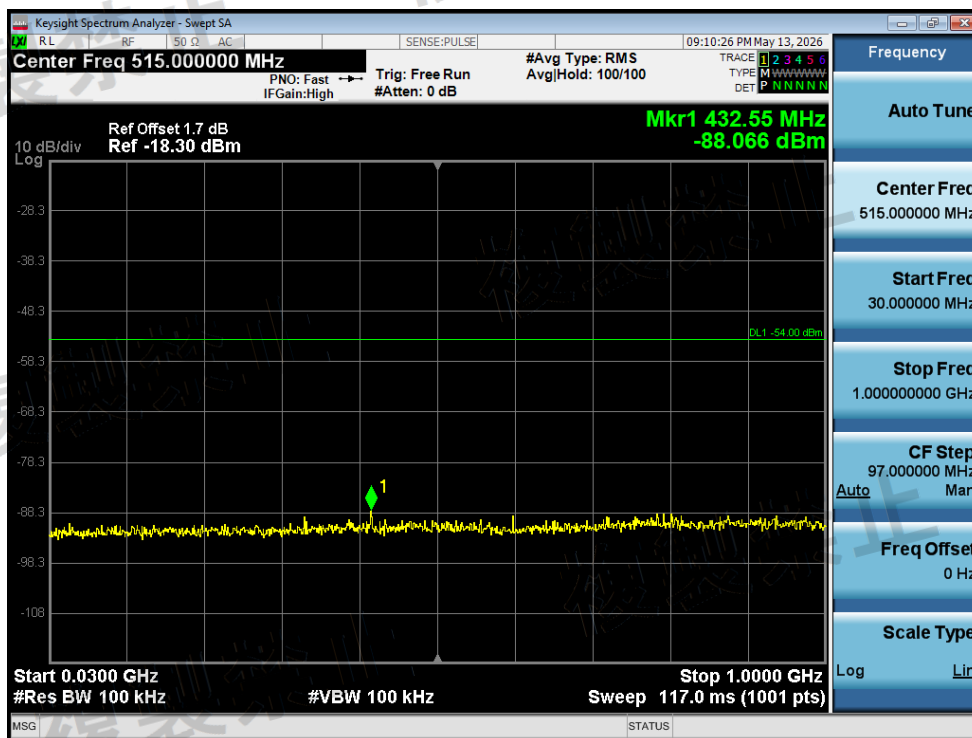


Rx. Spurious NVNT g 2472MHz Ant1 @ 30MHz-1000MHz

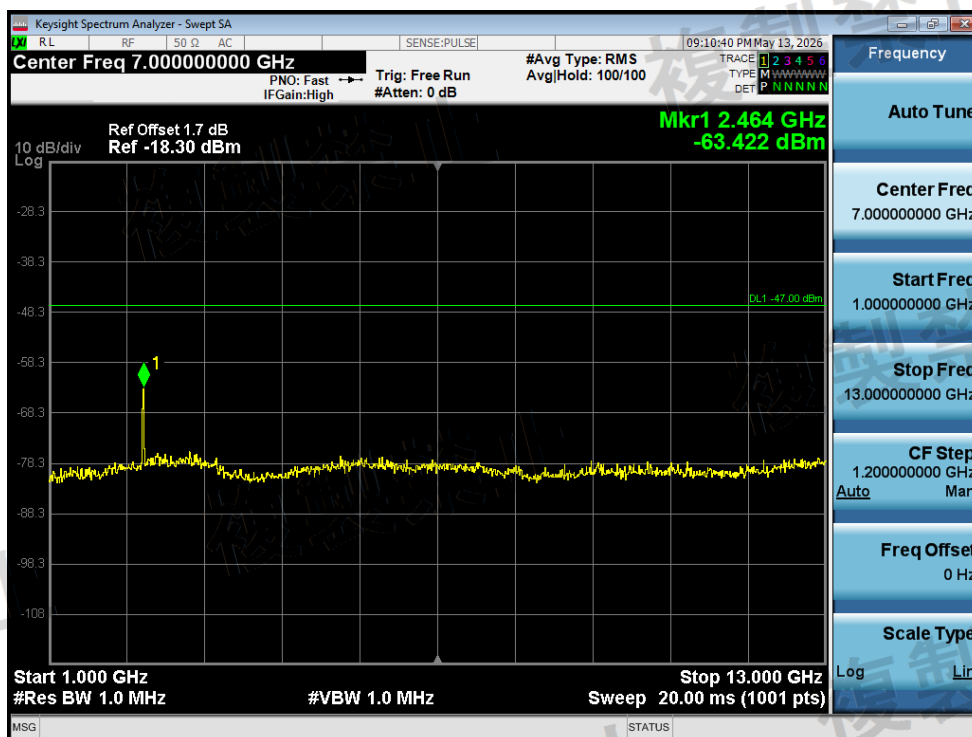


Rx. Spurious NVNT g 2472MHz Ant1 @ 1000MHz-13000MHz

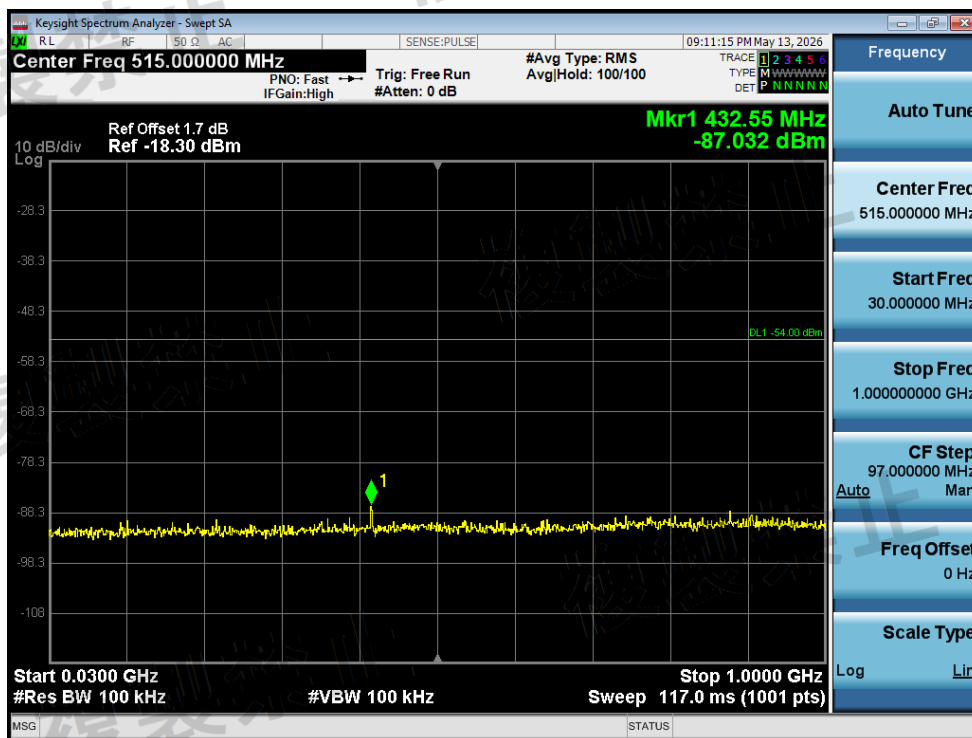


Rx. Spurious NVNT n20 2412MHz Ant1 @ 30MHz-1000MHz

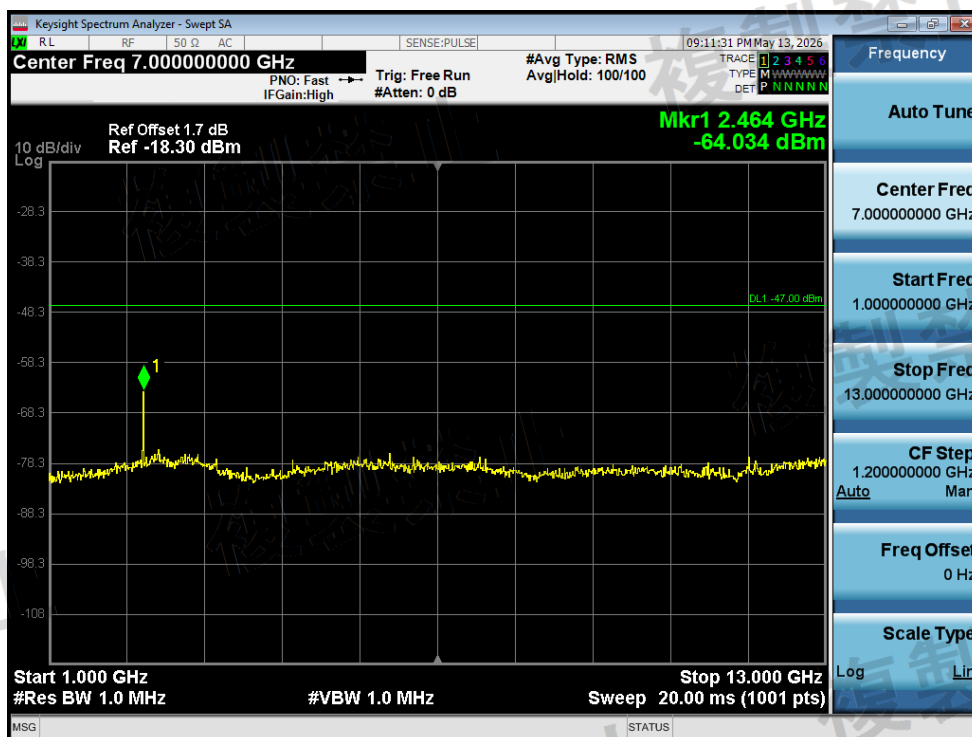


Rx. Spurious NVNT n20 2412MHz Ant1 @ 1000MHz-13000MHz

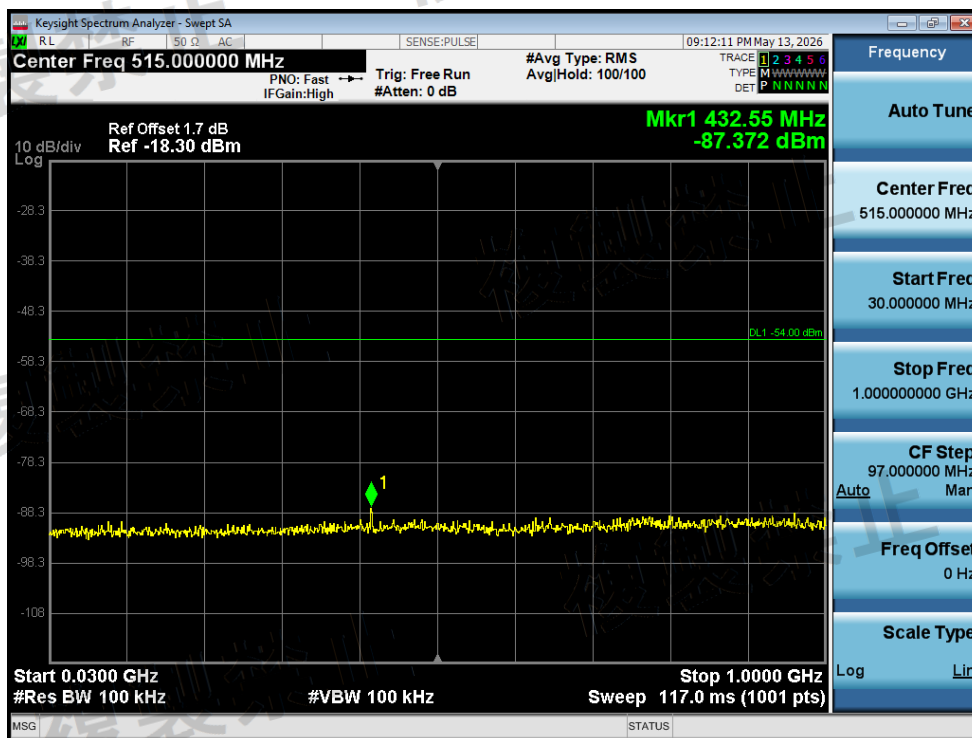


Rx. Spurious NVNT n20 2437MHz Ant1 @ 30MHz-1000MHz

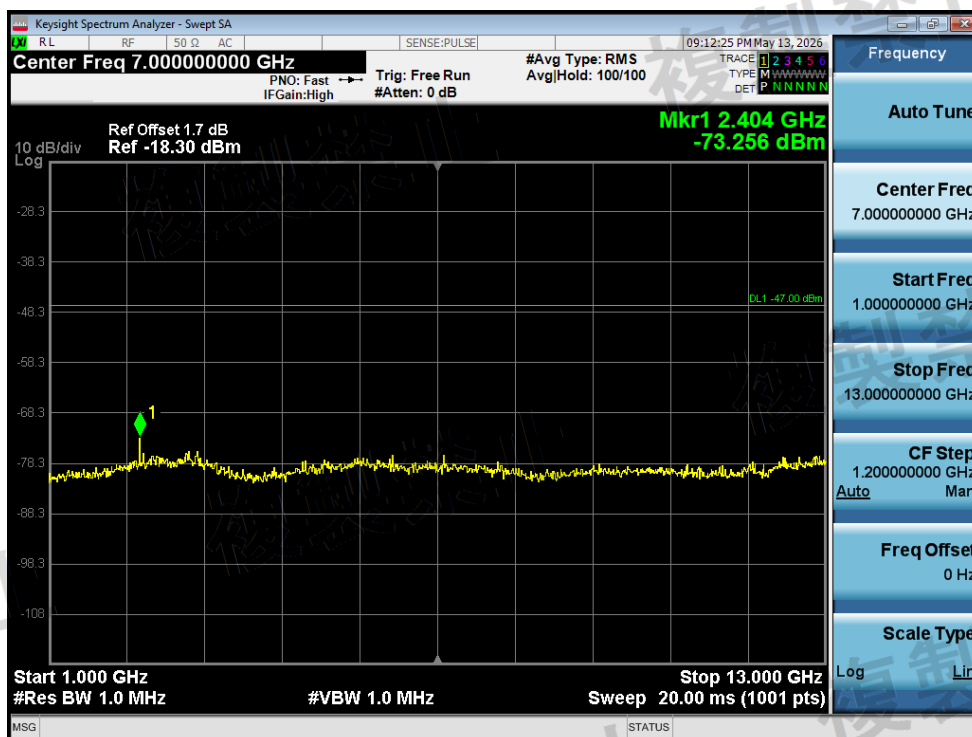


Rx. Spurious NVNT n20 2437MHz Ant1 @ 1000MHz-13000MHz

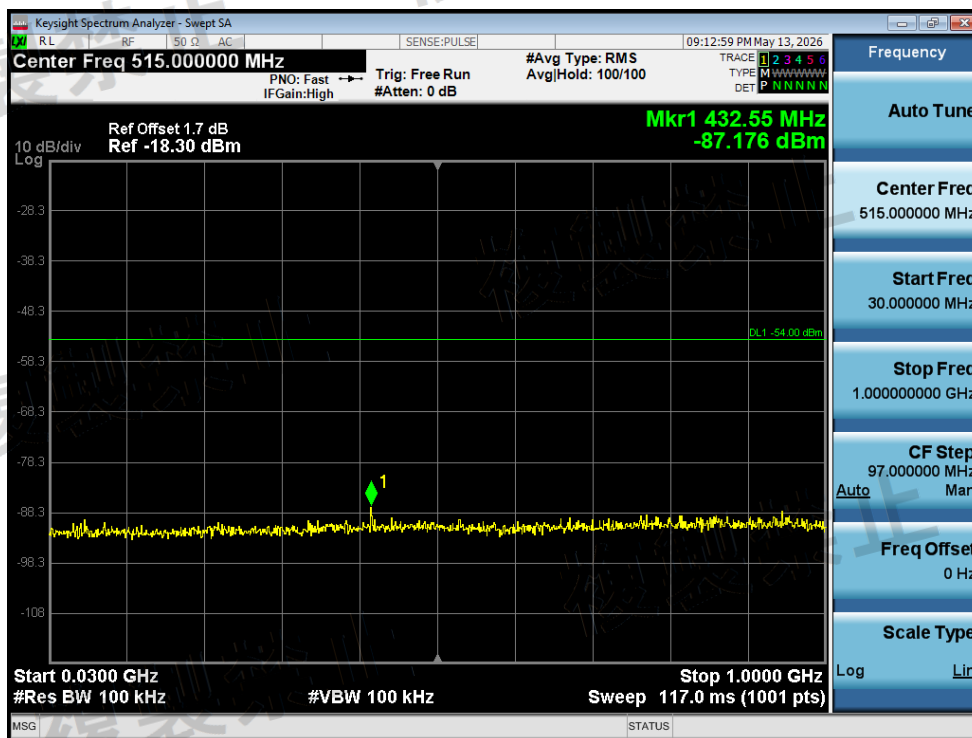


Rx. Spurious NVNT n20 2472MHz Ant1 @ 30MHz-1000MHz

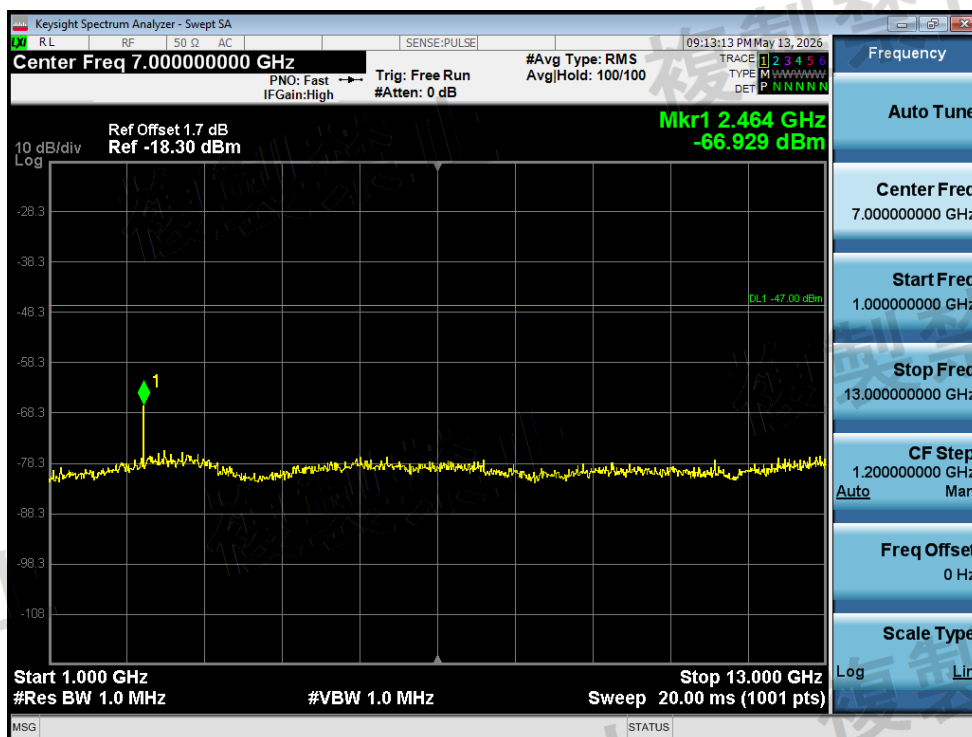


Rx. Spurious NVNT n20 2472MHz Ant1 @ 1000MHz-13000MHz

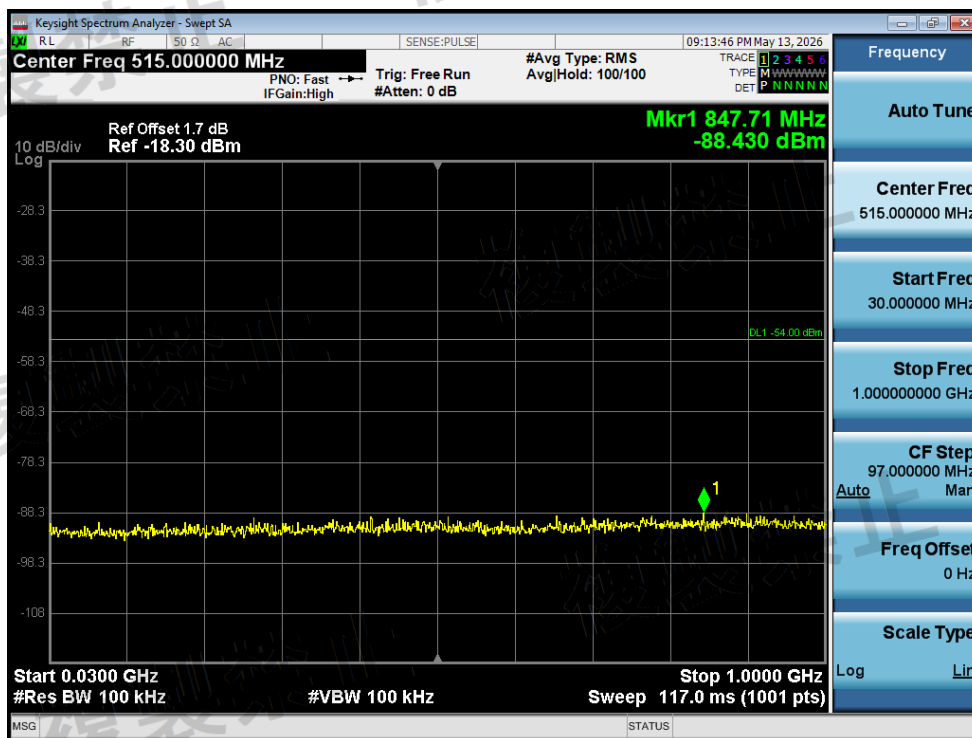


Rx. Spurious NVNT n40 2422MHz Ant1 @ 30MHz-1000MHz

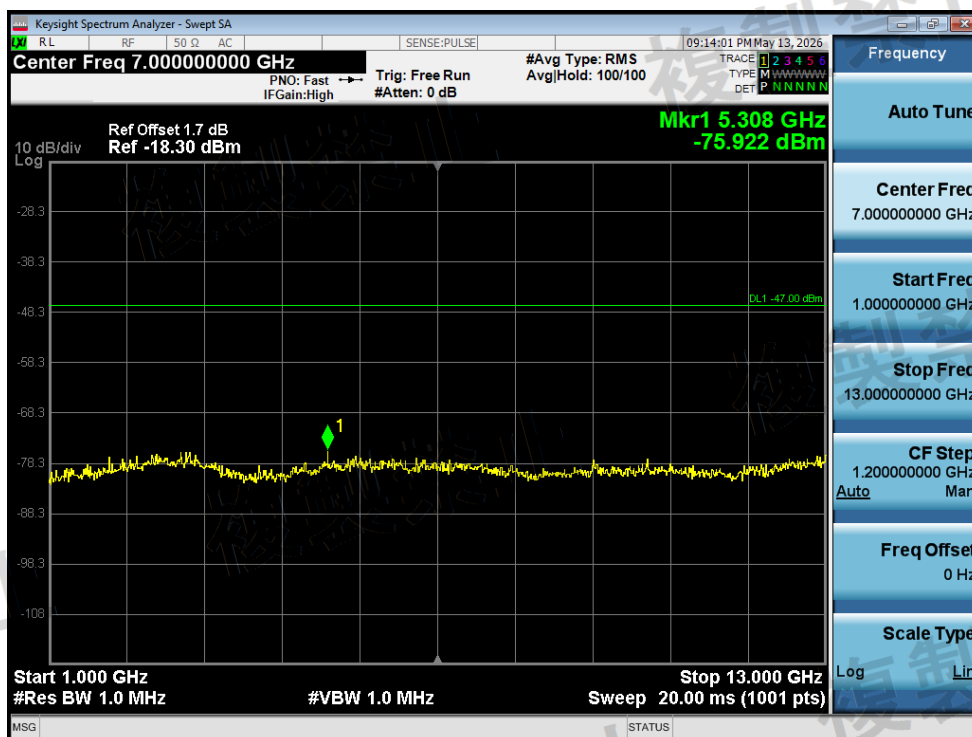


Rx. Spurious NVNT n40 2422MHz Ant1 @ 1000MHz-13000MHz

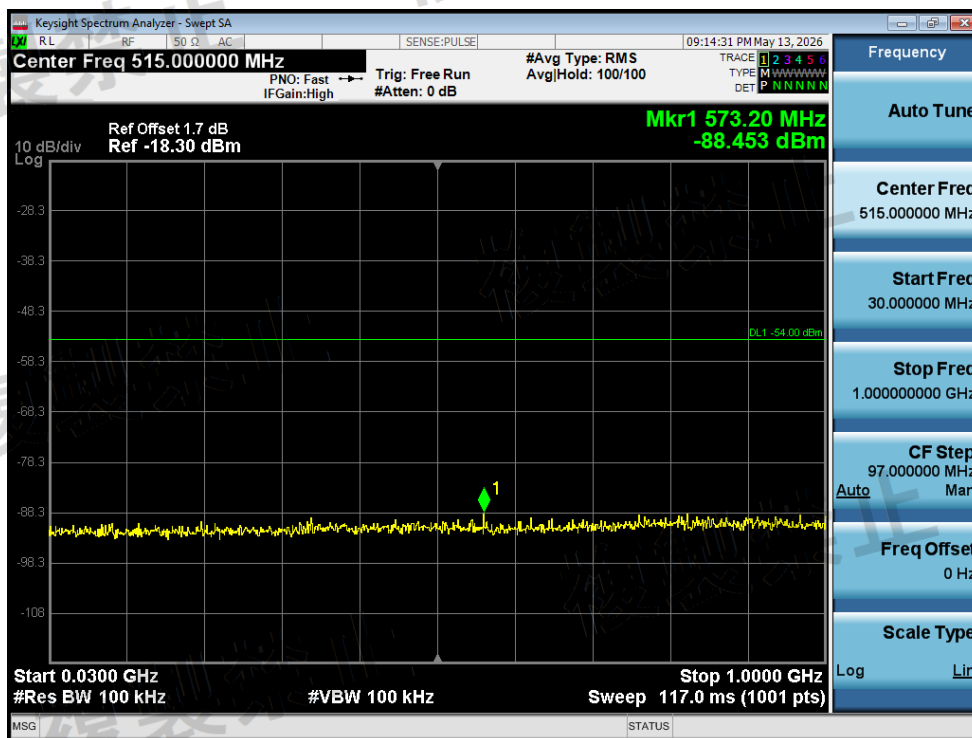


Rx. Spurious NVNT n40 2437MHz Ant1 @ 30MHz-1000MHz

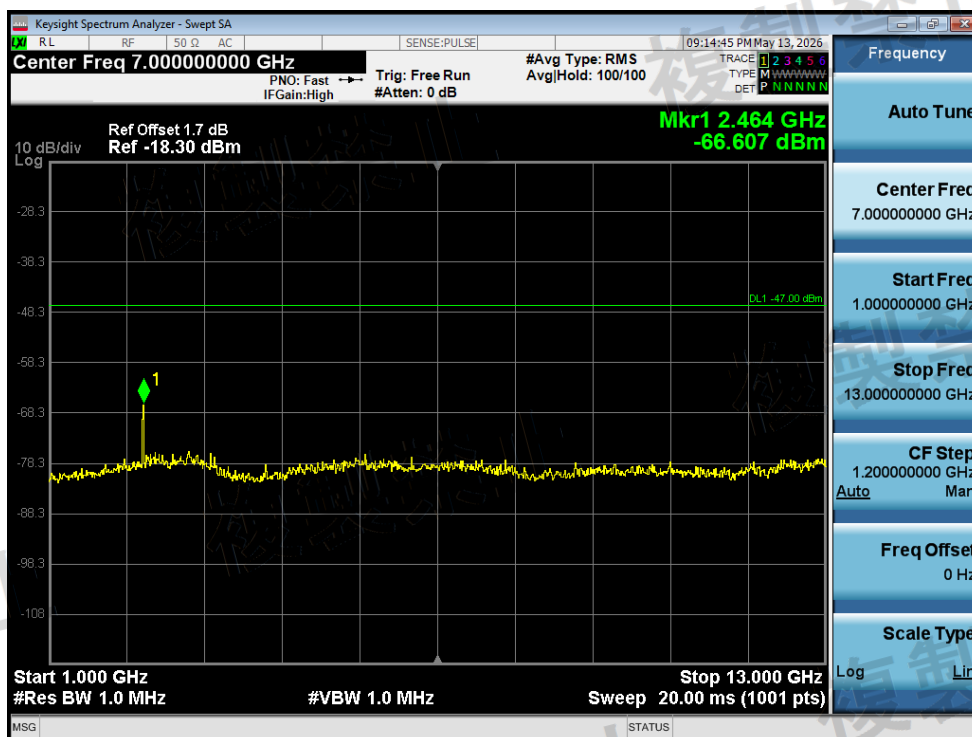

Rx. Spurious NVNT n40 2437MHz Ant1 @ 1000MHz-13000MHz

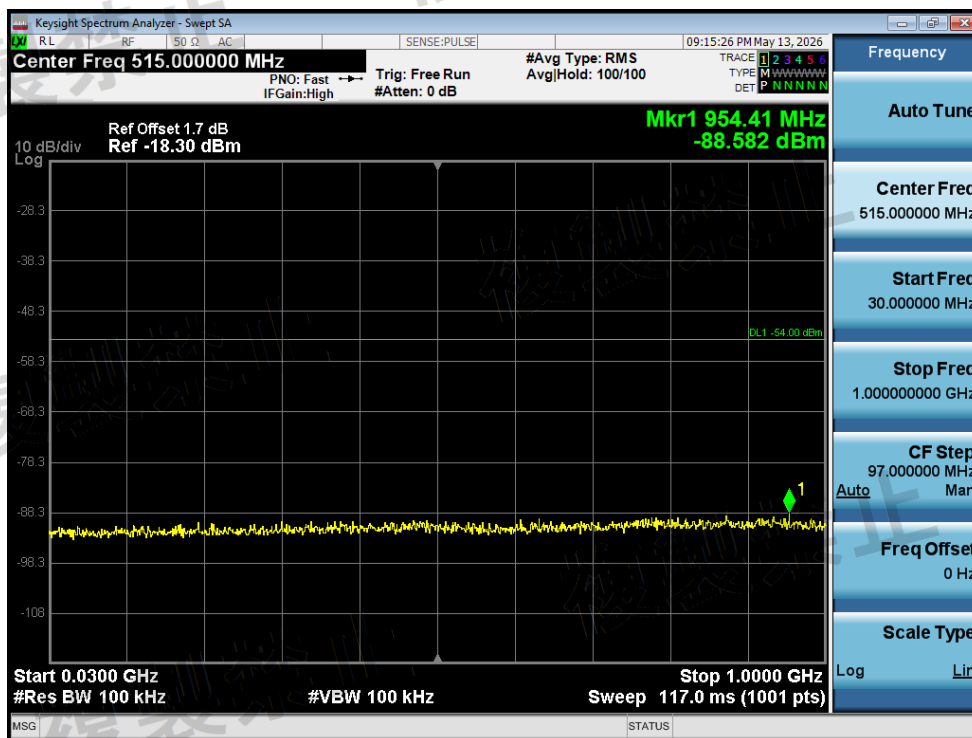

Rx. Spurious NVNT n40 2462MHz Ant1 @ 30MHz-1000MHz

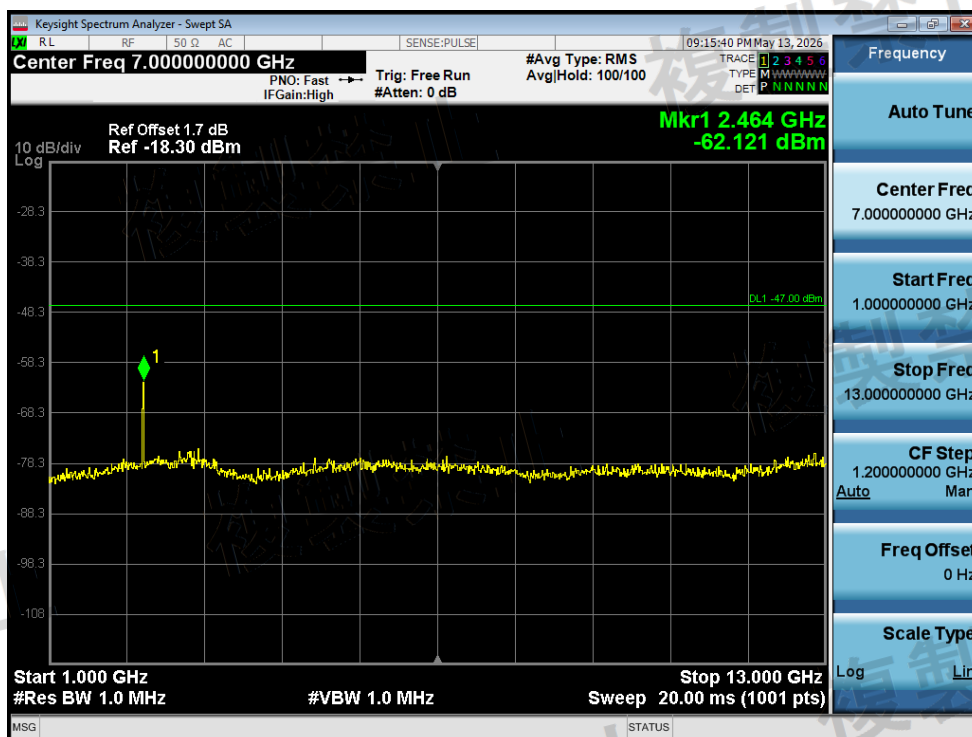

Rx. Spurious NVNT n40 2462MHz Ant1 @ 1000MHz-13000MHz