



Cisco Connected Grid 3G Module Installation and Configuration Guide

First Published: January, 2012
Part Number: OL-25991-02

Tell Us What You Think



Send your feedback about this document directly to the Connected Energy Documentation Team.

[Connected Energy Documentation Feedback Form](#)

This document provides an overview of hardware and configuration information for the following single-wide grid router WAN interface card modules:

- Cisco Connected Grid Module—3G EVDO Rev A/0/1xRTT (CDMA version)
- Cisco Connected Grid Module—3G HSPA+/UMTS/GSM/GPRS/EDGE (GSM version)

These 3rd Generation (3G) technology modules are supported on Cisco 1240 Connected Grid Router. This document contains the following topics:

- [Kit Contents, page 2](#)
- [Features, page 4](#)
- [Hardware Overview, page 5](#)
- [Installing and Removing the SIM Card \(GSM Module\), page 16](#)
- [Installing and Removing the 3G Module, page 18](#)
- [Regulatory and Compliance Information, page 20](#)
- [Software Overview, page 20](#)
- [Configuring the Module, page 21](#)
- [Configuration Example, page 31](#)
- [Additional References, page 37](#)



Americas Headquarters:
Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134-1706 USA

- [Troubleshooting and Diagnostics](#), page 38
- [Technical Assistance](#), page 49
- [Tell Us What You Think](#), page 49



Warning


Only trained and qualified personnel should be allowed to install, replace, or service this equipment.
Statement 1030



Note

The Cisco Connected Grid 3G Module is a field-replaceable unit.

Figure 1 *Cisco Connected Grid 2G/3G Wireless Connected Grid Module*

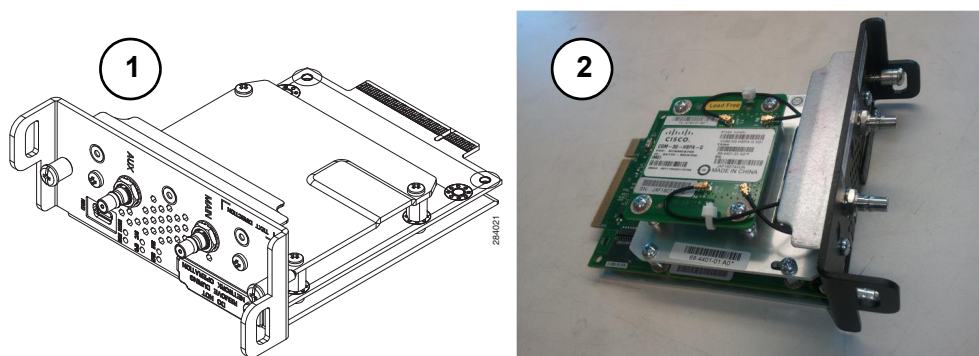

1	CGM-3G-HSPA-A and CGM-3G-HSPA-G	2	CGM-3G-HSPA-AB-G (all band)
----------	------------------------------------	----------	-----------------------------

Kit Contents

Your 3G module kit contains the GSM or CDMA module. Parts can be ordered by referencing the following information shown in [Table 1](#).

Table 1 *Kit Contents for the 3G Module*

Cisco Part Number	Mode	Description	Region	Frequency Band
CGM-3G-HSPA-A	GSM/HSPA+	AT&T (MC8705), Connected Grid Module - 3G AT&T HSPA+/UMTS/ GSM/GPRS/EDGE	North America	• GSM/GPRS/EDGE: 850/1800/1900 MHz • UMTS(WCDMA)/HSPA+: 850/900/1900/2100 MHz

Table 1 **Kit Contents for the 3G Module**

Cisco Part Number	Mode	Description	Region	Frequency Band
CGM-3G-HSPA-G	GSM/HSPA+	ROW (Rest of World) (MC8705), Connected Grid Module - 3G (Global) HSPA+/UMTS/GSM/GPRS/EDGE	Canada, Europe, Australia, South America, other	- GSM/GPRS/EDGE: 850/1800/1900 MHz - UMTS(WCDMA)/HSPA+: 850/900/1900/2100 MHz
CGM-3G-HSPA-AB-G (all band)	GSM/HSPA+	All bands (MC8705), Connected Grid Module - 3G (All band) HSPA+/UMTS/GSM/EDGE	Canada, Europe, Australia, South America, other	- GSM/GPRS/EDGE: 850/900/1800/1900 MHz - UMTS(WCDMA)/HSPA+: 850/900/1900/2100 MHz

For system requirements, important notes, limitations, open and resolved bugs, and last-minute documentation updates, see the Release Notes on Cisco.com. For translations of the warnings that appear in this document, see the *Regulatory Compliance and Safety Information* document for your router on Cisco.com.

When using the online publications, see the documents that match the Cisco system software version running on the 2G/3G wireless module.

Features

Cisco Connected Grid 3G GSM Modules offer the following features:

Table 2 *Feature Information for 3G module*

3G GSM Module	3G CDMA Module
- MC8705 PCI Express Mini Card wireless data modem: - GSM data connectivity - GSM SIM-card interface - Supports 850 MHz, 1800 MHz, and 1900 MHz frequencies - PCI Express chip-set interface - Input/output hub component for embedded applications	- MC5728V PCI Express Mini Card wireless data modem: - CDMA data connectivity 1xEVDO data connectivity (full-mini and half-mini) - Supports 800 MHz, 850 MHz, 900 MHz, 1900 MHz, and 2100 MHz frequencies - PCI Express chip-set interface - Input/output hub component for embedded applications
- Support for the following technologies: - High Speed Packet Access (HSPA and HSPA+) - High-speed Downlink Packet Access (HSDPA) - High-speed Uplink Packet Access (HSUPA) - Universal Mobile Telecommunication System (UMTS) - Enhanced Data-Rates for GSM Evolution (EDGE) - General Packet Radio Service (GPRS)	- Support for the following technologies: - EVDO Rev. A - EVDO Rel. 0 1xRTT

The Cisco Connected Grid 3G GSM and CDMA modules share the following key features:

- Supported by Cisco CG-OS system software
- Supported on the Cisco 1240 Connected Grid Router and the Cisco 1120 Connected Grid Router
- Supports Cisco system software
- Provides the primary cellular WAN connection for critical data applications in supporting the Connected-Grid Router
- WAN connectivity as a backup data link for critical data applications
- SIM plug-in SIM card—ISO 7816 compliant, (U)SAT commands, USIM, 3G phone book, flash memory 8/6/128-1024 MB

3G module provides the following functionality:

- Broadband WAN connectivity using high-speed cellular data technology
- Automatic best-network selection
- Always-on capability
- Multiple antenna and cable options:
 - Diversity antenna
 - Indoor and outdoor external antennas
 - Radio Frequency Low loss coaxial cable
- Dynamic IP addressing
- Cellular modem upgrade over wireless link—Enables you to upgrade the firmware on the modem by using Cisco commands
- Modem management—Enables you to access modem software and hardware information, radio and network status, and data profile information by using Cisco commands
- Auto-detect—3G WAN for fixed and modular routers automatically detects and uses the best available service
- Profile Configuration—Enables you to configure the Access-Point Name (APN) profile.
- 3G wireless WAN for fixed and modular routers support on Cisco Connected Grid Router 1000 Series platforms

Hardware Overview

The 3G modules are wireless modules with a mini-card cellular modem (PCI-e mini-card form factor). The 3G module comes in two types of technologies: GSM and CDMA. This document describes the CDMA module and the GSM model.

The module connects to the host router board of the CGR 1120 or CGR1240.

This section covers the following topics:

- [Front Panel, page 6](#)
- [Ports and LEDs, page 7](#)
- [Supported Cisco Antennas, page 10](#)
- [Supported Cisco Cables, page 11](#)
- [3G Module Models, page 12](#)
- [Interfaces, page 11](#)
- [Radio Frequency Interface, page 12](#)
- [Environmental Specifications, page 12](#)
- [Power Specifications, page 12](#)
- [Modem, page 13](#)
- [GSM Module SIM Interface, page 14](#)
- [Voltage Monitoring State Machine, page 15](#)
- [Temperature Monitoring State Machine, page 15](#)
- [Data Rates, page 15](#)

- [USB Interface, page 15](#)
- [Memory Specifications, page 15](#)
- [Module Power States, page 16](#)


Front Panel

The front panel of the 3G module has the following components:

- Auxiliary port—QMA connector for antenna for RX diversity antenna. (Connector is not used for GPS since the GPS of host router is used.)
- QMA connector for antenna—transmits and receives RF.
- Mini-USB port—Can be used as a diagnostic port.
- LEDs:
 - Wireless WAN (WWAN)
 - Received Signal Strength Indication (RSSI)
 - SAN Volume Controller 1 (SVC1) and SVC2
 - SIM0 and SIM1

Figure 2 shows the front panel components of the 3G module.

Figure 2 **Front Panel of the 3G module**

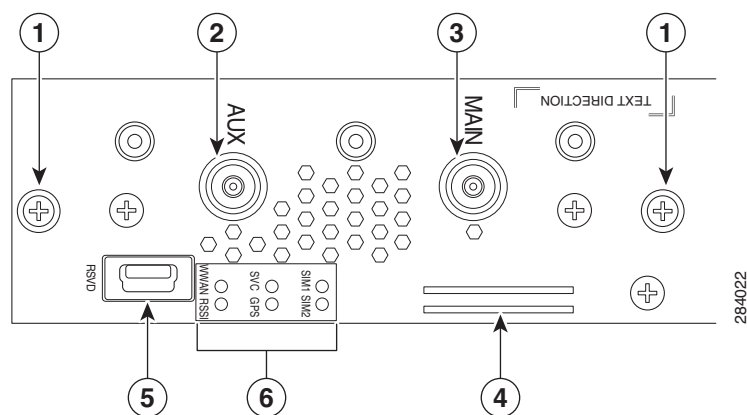


1	Captive screws (2)	2	Auxiliary port—QMA connector for antenna for RX diversity antenna. (Connector is not used for GPS since the GPS of host router is used).
3	Main port—QMA connector for antenna—transmits and receives RF.	4	SIM card slots—Only SIM card slot x is currently supported by software.
5	RSVD—Mini-USB port (can be diagnostic port).	6	LEDs—WWAN, RSSI, SVC1, SVC2, SIM0, and SIM1.

Ports and LEDs

Figure 3 shows the LEDs of the Cisco Connected Grid 3G Module.

Figure 3 2G/3G Connected Grid Module LEDs

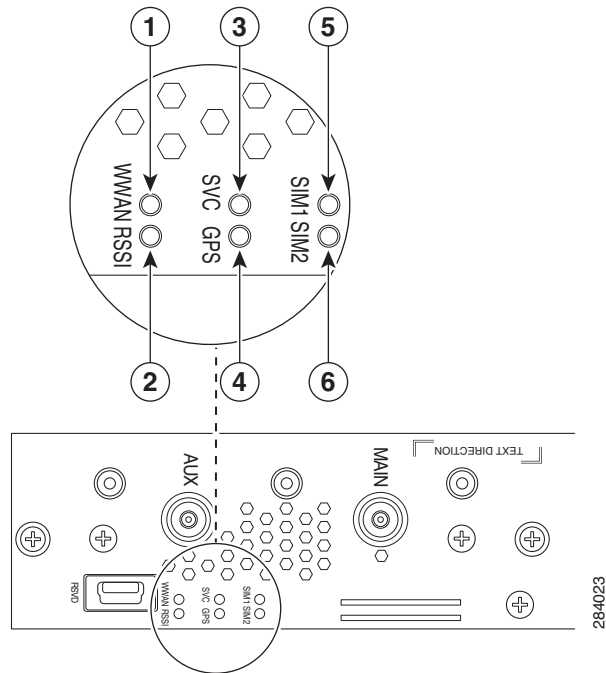

1	WWAN LED	2	RSSI LED
3	SVC LED	4	GPS LED (not used)
5	SIM0 LED (for GSM version)	6	SIM1 LED (for GSM version)

[Table 3](#) lists the ports and the LED indicators and describes their behavior. The LEDs provide a visual indication of the available services.

Table 3 *LED Definitions*

Port or LED Name	Color	Description
WWAN	Green	Indicates the modem status. Driven by the modem, not under software control except for diagnostic purposes. Functionality may be changed by configuring modem. • Off: Module not powered • On: Module is powered on and connected but not transmitting or receiving • Slow blink: Module is powered on and searching for connection • Fast blink: Module is transmitting or receiving. For information on modem settings, see Modem, page 13.
RSSI	Bi-color, green/amber	Indicates the level of signal strength received by the software. LEDs can be lit as follows: • Off: RSSI ≤ -110 • Solid amber: $-110 < \text{RSSI} \leq -90$ • Fast green blink: $-90 < \text{RSSI} \leq -75$ • Slow green blink: $-75 < \text{RSSI} \leq -60$ • Solid green: RSSI > -60
SVC	Bi-color, green/amber	Service LED indicates the following: GSM Module: • Off: No service • Solid amber: GPRS/EDGE mode is in use • Green slow blink: UMTS mode is in use • Solid green: HSDPA/HSUPA/HSPA+ mode is in use CDMA module: • Off: No service • Solid amber: 1xRTT • Green slow blink: EVDO Rev 0 • Solid green: EVDO Rev A
SIMx (GSM module)	Bi-color, green/amber	SIM0 and SIM1 LEDs are controlled by hardware under normal operation. SIM insertion/removal and software setting of the SIM Socket Select bit are decoded by the CPLD to control the LEDs. • Off: No SIM • Amber: SIM installed but not active • Green: SIM installed and active

Table 4 Release Caveats and Caveats Corrected Reference

Port or LED Name	Color	Description
WWAN	Green	Indicates the modem status. Driven by the modem, not under software control except for diagnostic purposes. Functionality may be changed by configuring modem. • Off: Module not powered • On: Module is powered on and connected but not transmitting or receiving • Slow blink: Module is powered on and searching for connection • Fast blink: Module is transmitting or receiving. For information on modem settings, see Modem, page 13.
RSSI	Bi-color, green/amber	Indicates the level of signal strength received by the software. LEDs can be lit as follows: • Off: RSSI ≤ -110 • Solid amber: $-100 < \text{RSSI} \leq -90$ • Fast green blink: $-90 < \text{RSSI} \leq -75$ • Slow green blink: $-75 < \text{RSSI} \leq -60$ • Solid green: RSSI > -60
SVC	Bi-color, green/amber	Service LED indicates the following: GSM Module: • Off: No service • Solid amber: GPRS/EDGE mode is in use • Green slow blink: UMTS mode is in use • Solid green: HSDPA/HSUPA/HSPA+ mode is in use CDMA Module: • Off: No service • Solid amber: 1xRTT • Green slow blink: EVDO Rev 0 • Solid green: EVDO Rev A
SIMx	Bi-color, green/yellow	SIM0 and SIM1 LEDs are controlled by hardware under normal operation. SIM insertion/removal and software setting of the SIM Socket Select bit are decoded by the CPLD to control the LEDs. For diagnostic purposes there is register control of these LEDs in WLANLEDR. • Off: No SIM • Yellow: SIM installed but not active • Green: SIM installed and active

Supported Cisco Antennas

The antenna is connected to the QMA, panel-mount, 50-ohm connector located on the faceplate of the module. The modem mini-card antenna connector is a U.FL, 50-ohm, with a short 50-ohm coaxial cable to the QMA connector.


Note

The antennas have either N or TNC connectors (not QMA connectors). This means that either an adapter is required (ANT-4G-SR-OUT-TNC) or lightning arrestor (omni or panel).

For more information about antennas, including installation procedures, see *Cisco 1240 and 1120 Connected Grid Router Hardware Installation Guide*.

Table 4 lists the Cisco antennas that are supported for use with the module and the Cisco 1120 Connected Grid Router.

Table 4 *CGR 1120—Supported Antennas and Cables for Use With the 3G module*

Cisco 1120 Connected Grid Router				
Case Description	Indoor Cable	Lightning Arrestor	Outdoor Cable	Antenna
Case 1: 2G/3G Connected Grid Module, 10', 15' or 20' cable through conduit or building entry panel passthrough, Stick Omni or Directional Flat Panel antenna, 2 QMA(f) on faceplate	RA-QMA(m) to N(m), LMR-240-DB, 10', qty 2 • CAB-L240-10-QMA-N	None	Same cable as indoor cable, i.e. single cable runs from inside to outside, through conduit.	4G omni stick, N(f), qty 2 • ANT-4G-OMNI-OUT-N
	RA-QMA(m) to N(m), LMR-240-DB, 15', qty 2 • CAB-L240-15-QMA-N			3G, 806-960 MHz, 1710-2170 MHz, flat panel antenna, 10/11 dBi, qty 1 • ANT-4G-PNL-OUT-N
	RA-QMA(m) to N(m), LMR-240-DB, 20', qty 2 • CAB-L240-20-QMA-N			
Case 2: 2G/3G Connected Grid Module, Indoor Cable, Lightning Arrestor, Outdoor Cable, Stick Omni or Directional Flat Panel antenna, 2 QMA(f) on faceplate	RA-QMA(m) to N(m), LMR-240-DB, 10', qty 2 • CAB-L240-10-QMA-N	Lightning Arrestor, N(f)-N(f), qty 2 • CGR-LA-N-N	RA-N(m) to N(m), LMR-400-DB, 20', qty 2 • CAB-L400-20-N-N	4G omni stick, N(f), qty 2 • ANT-4G-OMNI-OUT-N
			RA-N(m)-N(m), LMR-600-DB, 30' • CAB-L600-30-N-N	3G, 806-960 MHz, 1710-2170 MHz, flat panel antenna, 10/11 dBi, qty 2 • ANT-4G-PNL-OUT-N
Case 3. 2G/3G Connected Grid Module, Low Profile Antenna with Integrated 15" coax cable, Mounted to top of Utility Cabinet Roof, 2 QMA(f) on faceplate	None	Connector Adaptor, QMA(m)-TNC(f), qty 2 • ANT-ADPTR-Q-TNC	None	4G Low Profile, Integrated, 15' LMR-195 cable with TNC(m), qty 2 • ANT-4G-SR-OUT-TNC

(f) denotes female connector.

(m) denotes male connector

Table 5 lists the Cisco antennas that are supported for use with the module and the Cisco 1240 Connected Grid Router.

Table 5 *CGR 1240—Supported Antennas and Cables for Use With the 3G Module*

Cisco 1240 Connected Grid Router				
Case Description	Internal Cable	Adapter or Lightning Arrestor	Outdoor Cable	Antenna
Case 1: Integrated Antenna, 2G/3G Connected Grid Module, 2 QMA(f) on faceplate	RA-QMA(m) to RA-MCX(m), LMR-100, 10.5", qty 2 • CAB-L100-10-Q-M	None	None	900 MHz, 3G, 806-960 MHz, 1710-2700 MHz, Monopole Antenna, Chassis Mounted, Omni-directional, qty 2 • ANT-MP-INT-OUT-M
Case 2: External Antenna, 2G/3G Connected Grid Module, 2 QMA(f) on faceplate	RA-QMA(m) to RA-MCX(m), LMR-100, 10.5", qty 2 • CAB-L100-10-Q-M	Bulkhead Adapter, MCX(f) receptacle – N(f), qty 2 • CGR-N-CONN	RA-N(m)-N(m), LMR-400-DB, 20', qty 2 • CAB-L400-20-N-N	4G omni stick, N(f), qty 2 • ANT-4G-OMNI-OUT-N
		and Lightning Arrestor, DC Pass, N(m)-N(f), qty 2 • CGR-LA-NM-NF	RA-N(m)-N(m), LMR-600-DB, 30', qty 2 • CAB-L600-30-N-N	3G, 806-960 MHz, 1710-2170 MHz, flat panel antenna, qty 2 • ANT-4G-PNL-OUT-N

Supported Cisco Cables

Table 6 lists insertion loss information and operating frequency levels for the Ultra-Low-Loss (ULL) LMR cables, and LMR 400 cables available from Cisco for use with the 2G/3G Connected Grid module.

You can use the RG-174/U type cables to adapt the modem external antenna connection to any of the modules cables and antennas.

Table 6 *Cisco Extension Cable Assemblies for 3G Module*

Cisco Product Number	Cable Length	Maximum Insertion Loss	Frequency (MHz)
CAB-L240-10-Q-N	10 ft (3.1 m)	1.3 dB max. at 2000 MHz	700 to 2700 MHz
CAB-L240-15-Q-N	15 ft (4.6 m)	1.9 dB max. at 2000 MHz	700 to 2700 MHz
CAB-L240-20-Q-N	20 ft (6.1 m)	2.5 dB max. at 2000 MHz	700 to 2700 MHz
CAB-L400-20-Q-N	20 ft (6.1 m)	1.4 dB max. at 2000 MHz	700 to 2700 MHz
CAB-L400-30-Q-N	30 ft (9.1 m)	1.4 dB max. at 2000 MHz	700 to 2700 MHz

Interfaces

The module includes the following physical interfaces to the host:

- **Power**—Supplied to the module by the host
- **Wireless disable**—As described in the PCI-Express Mini Card specification
- **LED output**—As described in the PCI-Express Mini Card specification.

- **Antenna**—QMA (f) RF connector for the Rx/Tx path. For more details
- **USIM**—Supported through the interface connector. The USIM cavity/connector needs to be placed on the host device for this feature
- **USB**—Only communication interface to the host for data, control, and status information

Radio Frequency Interface

The Radio Frequency (RF) interface consists of two QMA connectors on the faceplate labeled *MAIN* and *AUX*. The main antenna is mandatory; it both transmits and receives RF. The second *AUX* QMA connector is for the RX Diversity.

Environmental Specifications

The following are operating temperature ranges for the module:

Table 7 *Module Environmental Specifications*

Router	Specifications
CGR1120	-40 to 140-degrees F (-40 to 60-degrees C)
CGR1240	-40 to 158-degrees F (-40 to 70-degrees C)

[Table 8](#) lists the environmental specifics of the 3G module.

Table 8 *Module Environmental Specifications*

Environmental—Operational	Specifications
Temperature—standard range	-5°C to 55°C (-41°F to 131°F)
Temperature—long term	-40°C to 60°C (-40°F to 140°F)
Temperature—short term (up to 16 hours)	-40°C and 85°C (-40°F to 185°F)
Altitude	Up to 1500 meters
Humidity	RH95% non condensed
Vibration	1.0 g from 1.0 to 150 Hz
Shock	30 G half sine 6 ms and 11 ms
Seismic	GR63-Core, Zone 4

Power Specifications

There are two switching DC-DC power supplies on the Cisco Connected Grid 2G/3G Wireless Connected Grid Module. The module 12V-to-3.3V DC-DC switcher and modem 12V-to-3.3V DC-DC switcher can both be power margined through CLI commands.



Note

Power cables are self-shielded—there is no additional shielding required.

The 2G/3G Connected Grid module has 12V power rail and 3.3V stan-by power provided by the host system. It has two 3.3V DC-DC converters on the 12V power rail: one for the module and the other for the modem.

Table 9 **Power Specifications**

Power Source	Description
12V power rail	Max 1A (based on current draw from 2 DC-DC converters below)
3.3V modem	Peak current 3.75A, average power: 3W (based on average current of ~0.8A)
3.3V module	Peak current 500mA typical: 200mA (for LEDs and integrated circuitry)
3.3V standby	Peak current 500mA (for quack2/temp sensor)

Modem

GSM

The MC8705 PCI Express mini-card modem provides EDGE, GPRS, GSM, WCDMA, HSDPA, HSUPA, and HSPA+ wireless radio connectivity technologies over the following frequency bands:

Table 10 **Frequency Bands**

Power Source	Description
GSM, GPRS, EDGE	850 MHz, 1800 MHz, 1900 MHz
UMTS/WCDMA/HSDPA/HSUPA/HSPA+	800 MHz, 850 MHz, 900 MHz, 1900 MHz, 2100 MHz
Receive diversity	Optimized for diversity on 800, 850, 900, 1900 and 2100 MHz

MC8705 includes a RF connector jack for use with host antennas (it does not have integrated antennas) which is used for the main Rx/Tx path.

The MC8705 modem supports the following GSM features:

- Cellular packet data profile
- Traditional modem COM port support for CSD and AT commands (concurrent with NDIS)
- Suspend/resume
- SIM application tool kit with proactive SIM commands
- Static and Dynamic IP address. The network may assign fixed IP address or dynamically assign one using DHCP (Dynamic Host Configuration Protocol).

CDMA

The MC5728V PCI Express Mini Card modem provides voice, features, and CDMA and 1xEVDO wireless radio connectivity technologies with dual-band diversity radio supporting the following frequency bands:

- 800 MHz cellular
- 1900 MHz PCS

MC5728V includes two RF connector jacks for use with host antennas. (It does not have integrated antennas.) One connector is used for the main Rx/Tx path.

MC5728V supports the following RF features:

- Dual-band for 800 MHz cellular and 1.9 GHz PCS bands
- Diversity support for the 800 MHz cellular and 1.9 GHz PCS bands
- CDMA authentication as specified in CDMA 1X
- IS-95A/B and CDMA 1X Release 0/A
- IS-856 1xEVDO Revision A

The MC5728V Mini Card supports communication with the host through the USB . The USB interface can be dynamically configured to operate in one of two modes:

- Non-MUX mode
- MUX mode

The MC5728V Mini Card supports three logical interfaces:

- Data channel—Supports AT command and Point-to-Point (PPP) packet exchange during data calls
- Control channel—Supports modem control and status, call processing, and event notification
- Diagnostic channel—Supports the QUALCOMM Diagnostic Monitoring protocol used by support tools

GSM Module SIM Interface

The GSM module has two GSM (Global System for Mobile Communications) SIM card sockets for storing critical subscriber authentication information. The SIM card can be installed in either of the two available sockets accessible on the front panel of the 3G module. Only one slot is active at any given time—if both slots SIM0 and SIM1 are occupied by a card, then the system activates SIM0. This behavior cannot be reconfigured.

- The SIM card stores critical GSM subscriber authentication information.
- The two SIM cards are powered by the modem and operates at 5 MHz.
- The SIM card is a 3.3 V device, and has 2.8 V power applied to its power pin.

Through the software you can control which SIM is connected to the modem. Only one SIM can be connected to the modem at any time. The SIM switching circuit also provides the option of disconnecting both SIMs from the modem. The 3G Debug and SIM Control register controls the SIM connections.

By setting the SIM Socket Enable and the SIM Socket Select bit, you can control the signal and power connections from the modem to the SIM card.

Table 11 shows the options used to connect to SIM0 and SIM1 cards:

Table 11 *Specifications to Connect to the SIM Sockets*

SIM Socket Enable	SIM Socket Select	State
0	—	No SIM connected
1	0	SIM0 connected
1	1	SIM1 connected

For information on installing and removing the SIM card, see [Installing and Removing the SIM Card \(GSM Module\)](#), page 16.

Voltage Monitoring State Machine

A state machine in the 3G module monitors the VCC supply and the voltage conditions that trigger state changes.

Temperature Monitoring State Machine

The state machine in the Cisco Connected Grid 2G/3G Wireless Connected Grid Module monitors the embedded module temperature.

Data Rates

The actual throughput rates depend on many different factors, but the theoretical rates for the technologies follows:

Table 12 *GSM and CDMA Data Rates*

GSM	CDMA
HSPA+: 21.1 Mbps Down; 5.76 Mbps Up	EVDO Rev A: 3.1 Mbps Down; 1.8 Mbps Up

Memory Specifications

The memory specifications of the module are listed in [Table 13](#).

Table 13 *Specifications to Connect to the SIM Sockets*

Memory Type	Minimum	Maximum
DDR2 SDRAM	1Gb (128 Mb)	NA (1Gb is sufficient for the Linux SDK design and modem firmware upgrade)
DDR2 SDRAM for fixed platforms	512 Mb (384 Mb for IOS and 128 Mb for the Linux)	—

Module Power States

The module has the following power states:

- **Normal mode** (default mode)—Module is active. Receive and Transmit modes are possible. In this state:
 - The module is fully powered
 - The module is capable of placing/receiving calls or establishing data connections on the wireless network
 - The USB interface is fully active



Note The module unit defaults to the Normal state when VCC is first applied.

- **Low power mode** (*airplane mode*)—The module is active, but RF is disabled. In this state, RF (both Rx and Tx) is disabled on the module, but the USB interface is still active. This state is controlled through the host interface by the following software commands:
 - **+CFUN=0** command (AT Command Set for User Equipment (UE) (Release 6))
 - **CDMA module:** CNS_RADIO_POWER [0x1075] (CDMA CnS Reference (Document 2130754))
 - **GSM module:** CNS_RADIO_POWER [0x1075] (MC87XX Modem CnS Reference (Document 2130602))
 - **Disable Modem** command (MC87XX Modem CnS Reference (Document 2130602))



Note The module goes from normal mode into low-power mode to suspend RF activity. This occurs when the module's supply voltage exceeds either the high or low limits. The module returns to normal mode to resume RF activity. It occurs when the module's supply voltage returns from critical to normal limits.

- **Disconnected mode**—No power to the module. The host power source is disconnected from the module and all voltages associated with the module are at 0 V.

CGR 1120 and CGR 1240 controls the power to the module, therefore the host can stay powered on and cut the power in order to put the module into the disconnected state.

The module begins a shutdown sequence and powers off if it has been in a powered-on state for more than 10.5 seconds and the host device drives the W_Disable# signal low for:

- MC8775/MC8775V: >= 50 ms
- Other devices: >= 500 ms

Installing and Removing the SIM Card (GSM Module)

For more information on the SIM interface, see [GSM Module SIM Interface, page 14](#).



Note You must reload the system after installing or changing the SIM card.

Preventing Electrostatic Discharge Damage

Electrostatic Discharge (ESD) damage can occur when electronic cards or components are handled improperly, and can result in complete or intermittent failures.

To prevent ESD damage:

- Always use an ESD wrist or ankle strap and ensure that it makes good skin contact
- Connect the equipment end of the strap to an unfinished chassis surface
- Place a removed compact SIM card on an antistatic surface or in a static shielding bag. If the card will be returned to the factory, immediately place it in a static shielding bag
- Avoid contact between the card and clothing. The wrist strap protects the card from ESD voltages on the body only; ESD voltages on clothing can still cause damage
- Do not remove the wrist strap until the installation is complete



Warning

Only trained and qualified personnel should be allowed to install, replace, or service this equipment.
Statement 1030



Caution


For safety, periodically check the resistance value of the antistatic strap. The measurement should be between 1 and 10 megohms (Mohms).

Installing the SIM Card (GSM Module)

To install the SIM card:

- Step 1** Using a Phillips-head screwdriver, loosen the screw that secures the SIM slot cover in place. Rotate the cover downward so it exposes the SIM slot.
- Step 2** Insert the SIM card with the key (notch) positioned on the right-hand side. The SIM card will come in contact with the metal contacts in the socket.

Figure 5 *Installing the SIM Socket*

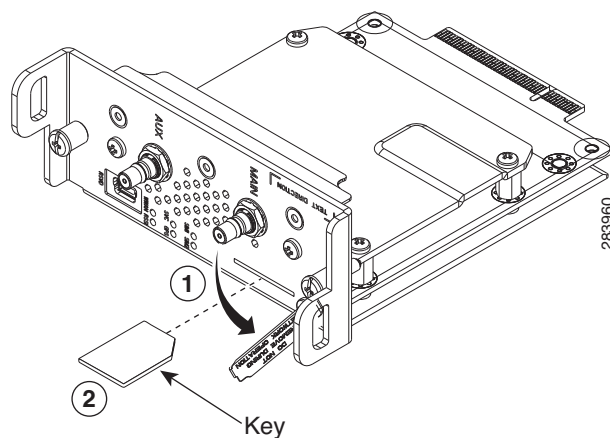

- Step 3** Firmly insert the card until it clicks into place.

- Step 4** Rotate the cover back in place and secure by tightening the screw.
-

Removing the SIM Card (GSM Module)

To remove the SIM card, open the cover press the card and it will eject. Remove the card and replace the cover.

Installing and Removing the 3G Module

Some Cisco Connected Grid 2G/3G Wireless Connected Grid Modules are installed into the host router at the factory.

Before You Begin Installation

Before installing the module, verify that the following guidelines have been met:

- Clearance to the I/O-side view is such that the LEDs can be easily read.
- Cabling is away from sources of electrical noise, such as radios, power lines, and fluorescent lighting fixtures. Make sure that the cabling is away from other devices that might damage the cables.
- Airflow around the switch module and through the vents is unrestricted.
- Temperature around the unit does not exceed 140°F (60° C). If the switch module is installed in a closed or multi-rack assembly, the temperature around it might be higher than normal room temperature.
- Relative humidity around the switch module does not exceed 95 percent (non-condensing).
- Altitude at the installation site is not higher than (4921 feet) 1500 meters.
- For 10/100 and 10/100/1000 fixed ports, cable lengths from the switch module to connected devices are not longer than 328 feet (100 meters).

Installation Warning Statements

This section includes the basic installation warning statements. Translations of these warning statements appear in the *Regulatory Compliance and Safety Information for Cisco Connected Grid Router 1000 Series Routers* documents.



Warning

This unit is intended for installation in restricted access areas. A restricted access area can be accessed only through the use of a special tool, lock and key, or other means of security.
Statement 1017



Warning

Only trained and qualified personnel should be allowed to install, replace, or service this equipment.
Statement 1030

**Warning**

To prevent the system from overheating, do not operate it in an area that exceeds the maximum recommended ambient temperature of:
140°F (60°C) Statement 1047

**Warning**

This equipment is intended to be grounded to comply with emission and immunity requirements. Ensure that the switch functional ground lug is connected to earth ground during normal use.
 Statement 1064

**Warning**

To prevent airflow restriction, allow clearance around the ventilation openings to be at least: 1.75 in. (4.4 cm) Statement 1076

Installing the 3G Module


The 3G module can be installed into any slot of the CGR 1120 and CGR 1240.


To install the module into the router:

**Caution**

The module can NOT be hot swapped—to install the module, you must first power down the host router.

- Step 1** Before you install the Cisco Connected Grid 3G Module into the host CGR 1240 router, you must power down the router as described in the *Hardware Installation Guide* of your router.
- Step 2** Insert the module into the slot. (CGR 1120 and CGR 1240 shown.)

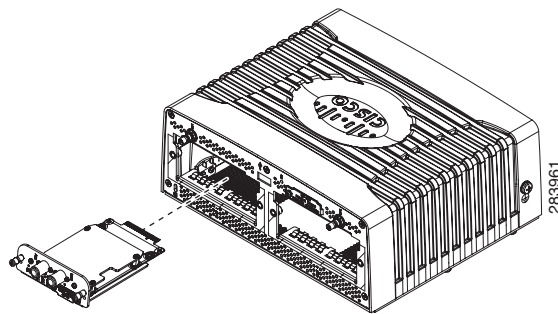

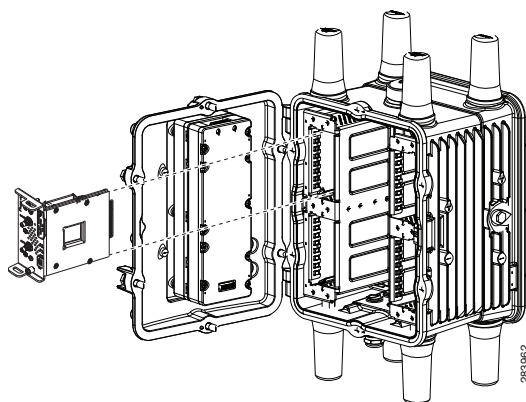

- Step 3** Using a screwdriver, secure the two captive screws into place. Tighten to 5 to 8 pound-force inches (lbf-in.).

Removing the Module

To remove the module from a router:



Caution

The module can NOT be hot swapped—to install the module, you must first power down the host router.

- Step 1** Before you remove the Cisco Connected Grid 3G Module from the host CGR 1240 router, you must power down the router as described in the *Hardware Installation Guide* of your router.
- Step 2** Using a screwdriver, loosen the two captive screws on the Cisco Connected Grid 3G Module.
- Step 3** Gently pull the module out of the slot.

Regulatory and Compliance Information

For regulatory compliance and safety information for the module, refer to the *Connected Grid Router 2000 Series Regulatory Compliance and Safety Information* document.

<http://www.cisco.com/en/US/docs/routers/access/2000/CGR2010/hardware/rcsi/rcsiCGR2000series.html>

Software Overview

This section covers the following topics:

- [3G Overview, page 21](#)
- [Note On the Cisco Connected Grid Module—3G HSPA+/UMTS/GSM/GPRS/EDGE module \(CGM-3G-HSPA-A\), the ping packet size limit is 1472 bytes., page 21](#)
- [CDMA Data Network Overview, page 21](#)

3G Overview

3G is defined by the ITU (International Telecommunications Union-2000 (IMT-2000)) as mobile radio systems capable of supporting peak data rates of:

- 144 Kb/s or more in a large cell (where the users may be miles from the Base Stations) with high speed vehicular users
- 384 Kb/s or more for urban small cells (where the user may be only a few city blocks from a Base Station) with pedestrian users
- 2 Mb/s or more for indoor (or very small cells, where the user may be only a few hundred feet from a Base Station) with primarily stationary users



Note

On the Cisco Connected Grid Module—3G HSPA+/UMTS/GSM/GPRS/EDGE module (CGM-3G-HSPA-A), the ping packet size limit is 1472 bytes.

Configuring the Module

The module is configured using the system software. This section covers the following topics:

- [Prerequisites, page 21](#)
- [Configuration Restrictions, page 22](#)
- [Configuring the GSM Module, page 22](#)
- [Configuring the CDMA Module, page 23](#)
- [show Commands, page 25](#)
- [Data Account Provisioning, page 27](#)
- [GSM Cellular Interface Configuration, page 29](#)
- [CDMA Cellular Interface Configuration, page 30](#)
- [Configuring WAN Backhaul Redundancy, page 31](#)



Note

The 3G module can be plugged into slots 3 to 6 of Cisco 1240 Connected Grid Router, therefore the interface names used to configure the module can be 3/1, 4/1, 5/1, or 6/1. Interface 3/1 is used in the configuration examples in this section.



Note

The 3G module can be plugged into slots 3 or 4 of Cisco 1120 Connected Grid Router, therefore the interface names used to configure the module can be 3/1 or 4/1. Interface 3/1 is used in the configuration examples in this section.

Prerequisites

To configure the 3G module, you must meet the following requirements:

- Have 2G/3G network coverage where your router will be physically located. For a complete list of supported carriers, see the product data sheet.
- Subscribe to a service plan with a wireless service provider and obtain a SIM card.
- Install the SIM card before configuring the 3G module. For instructions on how to install the SIM card, see the section, [Installing the SIM Card \(GSM Module\)](#), page 17.

Configuration Restrictions

The following restrictions apply to configuring the Cisco Connected Grid 3G Module:

- Data connection can be originated only by the module.
- Throughput: Due to the shared nature of wireless communications, the experienced throughput varies depending on the number of active users or congestion in a given network.
- Cellular networks have higher latency compared to wired networks. Latency rates depend on the technology and carrier. Latency may be higher because of network congestion.
- Any restrictions that are a part of the terms of service from your carrier.

Configuring the GSM Module

Before beginning the steps below, contact your ISP and get your access point name.



Note

In the following examples, the interface name, including slot number, are used as an example. Your configuration will vary depending on the slot you have installed your 3G module.

Step 1: Creating a GSM Profile

Use the **cellular 3/1 gsm profile** command to configure a GSM profile:

```
Router# cellular 3/1 gsm profile create 1 access_point_name [authentication_type username password ]
```

- Use *authentication_type* if username and password is configured.
- Use *username* if required by your carrier.
- Use *password* if required by your carrier.

See also [GSM Cellular Interface Configuration](#), page 29.

Step 2: Configuring a Chat Script

Use the **chat-script** command to configure a GSM chat script:

```
Router(config)# chat-script chat-script_name PROFILE1
```

Step 3: Configuring Dialer Parameters

Use the **dialer** commands to configure dialer parameters:

```
Router(config)# interface dialer 1
Router(config-if)# dialer pool 1
Router(config-if)# dialer string chat-script_name
Router(config-if)# dialer persistent
Router(config-if)# no shutdown
```



Note

To unconfigure dialer persistent, you must delete the profile by using the command, **cellular 3/1 gsm profile delete 1**.

Step 4: Configuring Cellular Parameters

Use the **dialer pool-member** command to configure cellular parameters:

```
Router(config)# interface cellular 3/1
Router(config-if)# dialer pool-member 1
```

Step 5: Saving Configuration

Use the **no shutdown** commands to activate the interface:

```
Router(config)# interface cellular 3/1
Router(config-if)# no shutdown
```

GSM Unconfiguration

All commands can be unconfigured with the **no** option. The dialer persistent profile must be deleted with the command, **cellular 3/1 gsm profile delete 1**.

See also [Step 3: Configuring Dialer Parameters, page 23](#).

Configuring the CDMA Module

Configuration of the CDMA Hostname and Password

CDMA module supports PPP Challenge Handshake Authentication Protocol (CHAP) type 6 and type 7 password support for Simple IP (SIP) to provide strength-check configuration on passwords. The SIP CLI command enables you to configure your hostname and password on a cellular interface to be used for PPP negotiation.

Currently, the password is not subject to password strength-check configuration because the CGR acts as the PPP client rather than a server. Typically, the hostname and password are managed and set by the cellular network-side server with strength-check functionality.

Use the **ppp chap hostname** command in interface configuration mode. To disable this function, use the **no** form of this command.

```
Router(config-if)# ppp chap hostname xyz
```

Use the **ppp chap password** command in interface configuration mode. To disable the PPP CHAP password, use the **no** form of this command.

```
Router(config-if)# ppp chap password ?
  6 Type-6 encrypted
  7 Type-7 encrypted
WORD PPP CHAP clear text password (Max Size 63)
```

For more information, see the following:

- **ppp chap hostname:**
http://www.cisco.com/en/US/docs/ios/security/command/reference/sec_p2.html#wp1032912
- **ppp chap password:**
http://www.cisco.com/en/US/docs/ios/security/command/reference/sec_p2.html#wp1036302

Step 1: Configuring a Chat Script

Use the **chat-script** command to configure a GSM chat script:

```
Router(config)# chat-script chat-script_name ATDT#777
```

Step 2: Configuring Dialer Parameters

Use the **dialer** commands to configure dialer parameters:

```
Router(config)# interface dialer 1
Router(config-if)# dialer pool 1
Router(config-if)# dialer string chat-script_name
Router(config-if)# dialer persistent
Router(config-if)# no shutdown
```

Step 3: Configuring PPP Encapsulation

Use the **feature ppp** command to configure PPP encapsulation:

```
Router(config)# feature ppp
```

Step 4: Configuring Cellular Parameters

Use the **dialer pool** and **encapsulation ppp** commands to configure cellular parameters:

```
Router(config)# interface cellular 3/1
Router(config-if)# dialer pool-member 1
Router(config-if)# encapsulation ppp
```

Step 5: Saving Configuration

Use the **no shutdown** commands to activate the interface:

```
Router(config)# interface cellular 3/1
Router(config-if)# no shutdown
```

show Commands

To view your configurations, use the following **show** commands:

- **show ip interface brief**
- **show interface cellular 3/1**
- **show cellular 3/1 ?**
 - **all**—Display cellular information
 - **connection**—Display cellular connection status
 - **hardware**—Display cellular hardware information
 - **leds**—Display LED information
 - **network**—Display cellular network information
 - **profile**—Display cellular interface profile
 - **radio**—Display cellular radio information
 - **band**—Display radio band information

show cellular 3/1 all (GSM Module)

Shows consolidated information about the modem, profiles created, radio signal strength, network security, and so on.



Note

The RSSI should be better than -90 dBm for steady and reliable connection.

```
Router# show cellular 3/1 all
```

```
Hardware Information
=====
```

```
Modem Firmware Version = T1_0_3_2AP R361 CNSZXD00000061 2011/04/15 17:40:48
Modem Firmware Built = 04/15/11
Modem Hardware Version = 1.0
International Mobile Subscriber Identity (IMSI) = 0123456063
International Mobile Equipment Identity (IMEI) = 353567040032469 <-- Unique identifier for module
Factory Serial Number (FSN) = CC3291006141001
Modem status = Online
Current Modem Temperature = 33 deg C
Current Temperature State = Normal
```

```
Profile Information
=====
```

```
--- Profile 1 details ---
Status = Activated
Default: Yes
PDP Type: IPv4
Profile IP: 192.0.2.0 <-- Profile details stored on the modem
Profile APN: isp.cingular
Authentication: CHAP
Profile UserName:
Profile Password:
```

```

Data Connection Information
=====

Data Transmitted = 208880986 bytes
Data Received = 208880986 bytes
Profile 1, Packet Session Status = ACTIVATED <-- State of the connection

Network Information
=====

Modem status = Online
Service status = Normal
Service type = Combined
Country Initials = 1
Network name =
MCC = 1, MNC = 1 <-- Mobile country code, mobile network code
Location Area Code (LAC) = 128
Routing Area Code (RAC) = 0
Cell ID = 1
Primary Scrambling Code = 100
PLMN Selection = Automatic

Radio Information
=====

Current band = WCDMA_I_IMT2000 <-- Current band/channel/RSSI
Radio power mode = On
Channel number = 10563
Band selected = Auto
Current RSSI = -56 dBm

Band Information
=====

Number of bands: 5 <-- Bands supported by the modem are listed below
Band 1: GSM EGSM DCS
Band 2: Unknown Band Group
Band 3: GSM ALL
Band 4: Unknown Band Group
Band 5: AUTO BAND

```

show cellular 3/1 all (CDMA Module)

Shows consolidated information about the modem, profiles created, radio signal strength, network security, and so on.



Note

The RSSI should be better than -90 dBm for steady and reliable connection.

```

Router# show cellular 3/1 all

Hardware Information
=====

Modem Firmware Version = p2813301
Modem Firmware Built = 06-24-10

```

```

Modem Hardware Version = MC5728V Rev 1.0
International Mobile Subscriber Identity (IMSI) = 5555550032
Electronic Serial Number (ESN) = 60D22706 <-- Unique identifier for module
Modem status = Online
Current Modem Temperature = 31 deg C
Current Temperature State = Normal

```

Profile Information

=====

```

Electronic Serial Number (ESN) = 60D22706 <-- Unique identifier for module
Activation Status = active
Activation Date = 20110925
Phone Number (MDN) = 5555550213
Number of data profiles configured: 1
Current Active Data Profile: 1
NAI (Network Access Identifier) = 5555550213@vzw3g.com
MN-HA SS = enabled
MN-HA SPI = 300
MN-AAA SS = enabled
MN-AAA SPI = 2
Reverse Tunneling Preference = enabled
Home Address = 0.0.0.0
Primary Home Agent Address = 255.255.255.255
Secondary Home Agent Address = 255.255.255.255

```

Data Connection Information

=====

```

Phone Number of outgoing call = 5555550213
Data Transmitted = 14041 bytes
Data Received = 14041 bytes

```

Network Information

=====

```

Current Roaming Status = Not Roaming
Current Idle Digital Mode = No Service
Current System Identifier (SID) = 40
Current System Identifier (NID) = 0
Serving Base Station Longitude = 0 deg 0 min 0 sec
Serving Base Station Latitude = 0 deg 0 min 0 sec

```

Radio Information

=====

```

Current band = CDMA_CLASS1,CDMA_CLASS1 <-- Current band/channel/RSSI
Radio power mode = On
Channel number = 548
Current RSSI = -82 dBm

```

Data Account Provisioning



Note

For the Cisco Connected Grid 3G Module, the numbering is **3/1** for all commands.

**Note**

To provision your modem, you must have an active wireless account with a service provider for both GSM and CDMA modules. The GSM module requires a SIM card installed.

To provision your data account, see the following topics:

- [Verifying Signal Strength and Service Availability, page 28](#)
- [Activating the Module Using OTASP \(CDMA Module\), page 28](#)

Verifying Signal Strength and Service Availability

The RSSI rating of less than -100 dBm will not connect to the base station.

To verify the signal strength and service availability on your modem, use the following commands in privileged EXEC mode. See also [show Commands, page 25](#).

- `show cellular 3/1 network`
- `show cellular 3/1 radio`
- `show cellular 3/1 profile`
- `show cellular 3/1 led`
- `show cellular 3/1 all`

DETAILED STEPS

Step	Command	Purpose
Step 1	<code>show cellular 3/1 network</code>	Displays information about the carrier network, cell site, and available service.
Step 2	<code>show cellular 3/1 radio</code>	Shows the radio signal strength. Note The RSSI should be better than -90 dBm for steady and reliable connection.
Step 3	<code>show cellular 3/1 profile</code>	Shows information about the modem data profiles created.
Step 4	<code>show cellular 3/1 led</code>	Shows WWAN link state, RSSI strength, SIM card, and service status.
Step 5	<code>show cellular 3/1 all</code>	Shows consolidated information about the modem, profiles created, radio signal strength, network security, and so on.

Activating the Module Using OTASP (CDMA Module)

To activate the module using Over-The-Air Service Provisioning (OTASP), use the `cellular 3/1 cdma activate otasp *22899` command.

**Note**

Do not hit a Enter (carriage return) until provisioning is complete—you will see “Over the air provisioning complete; Result = Success.” See below.

```
Router# cellular 3/1 cdma activate otasp *22899
Beginning OTASP activation
OTASP number is *22899
```

```
Router# <-- Do not hit Enter key-- provisioning is in process.
OTA State = SPL unlock, Result = Successprovising
OTA State = Profile downloaded, Result = Success
OTA State = MDN downloaded, Result = Success
OTA State = Parameters committed to NVRAM, Result = Success
Over the air provisioning complete; Result = Success <-- Activation successful. Hit Enter to return to prompt
```

To verify that the account has been provisioned and the modem has been activated, use the **show cellular 3/1 profile** command in EXEC mode:

```
Router# show cellular 3/1 profile
Electronic Serial Number (ESN) = 60D22720
Activation Status = activated <-- Activation verified.
Activation Date = 20111129
Phone Number (MDN) = 4086875313
Number of data profiles configured: 1
Current Active Data Profile: 1
NAI (Network Access Identifier) = 4086875313@vzw3g.com
MN-HA SS = enabled
MN-HA SPI = 300
MN-AAA SS = enabled
MN-AAA SPI = 2
Reverse Tunneling Preference = enabled
Home Address = 0.0.0.0
Primary Home Agent Address = 255.255.255.255
Secondary Home Agent Address = 255.255.255.255
```

GSM Cellular Interface Configuration

To configure the cellular interface:

-
- Step 1** Create a profile on the interface 3/1 using the **cellular** command:
- ```
Router# cellular 3/1 gsm profile create 1 access_point_name [username password]
```
- Step 2** Configure terminal:
- ```
Router# configure terminal
```
- Step 3** Create a chat script using the **chat-script** command and assign it to your profile:
- ```
Router(config)# chat-script chat-script_name PROFILE1 #
```
- Step 4** Configure dialer parameters on the interface by using the **interface** command to enter interface configuration mode, and the **dialer** command to configure **persistent** dialer mode.
- ```
Router(config)# interface dialer 1
Router(config-if)# dialer pool 1
Router(config-if)# dialer string chat-script_name #
Router(config-if)# dialer persistent
Router(config-if)# no shutdown
```
- Step 5** Configure cellular parameters on the interface by using the **interface** and **dialer** commands:
- ```
Router(config)# interface cellular 3/1
Router(config-if)# dialer pool-member 1
```
- Step 6** Shutdown and no shut the interface using the **shutdown** and **no shutdown** commands:
- ```
Router(config)# interface cellular 3/1
Router(config-if)# shutdown
```

```
Router(config-if)# no shutdown
```

GSM Dialer Persistent Unconfiguration

The interface configuration command, **dialer persistent**, allows a dial-on-demand routing (DDR) dialer profile connection to be brought up without being triggered by *interesting* traffic. When configured, the dialer persistent command starts a timer when the dialer interface starts up and starts the connection when the timer expires. If interesting traffic arrives before the timer expires, the connection is still brought up and set as persistent. The command provides a default timer interval, or you can set a custom timer interval.

The connection is brought down with the **shutdown** interface command is entered on the dialer interface. If the persistent connection is torn down for some other reason, such as the ISDN line goes down, the system immediately tries to bring the connection back up, and will use any other settings configured for dialing on the dialer interface. The Dialer Persistent feature allows the connection settings in the dialer profile to be configured as persistent, that is, the connection is not torn down until the shutdown interface command is entered on the dialer interface.

The dialer persistent feature can be unconfigured with the **no dialer persistent** command.

CDMA Cellular Interface Configuration

The following example shows how to configure the cellular interface:

Step 1 Configure a chat script using the **chat-script** command:

```
Router(config)# chat-script chat-script_name ATDT#777 <-- ATDT777# is the chat-script name.
```

Step 2 Configure dialer parameters by using the **dialer** command:

```
Router(config)# interface dialer 1
Router(config-if)# dialer pool 1
Router(config-if)# dialer string ATDT777#
Router(config-if)# dialer persistent
Router(config-if)# no shutdown
```

Step 3 Configure PPP encapsulation by using the **feature** command:

```
Router(config)# feature ppp
```

Step 4 Configure the cellular parameters by using the **encapsulation** command:

```
Router(config)# interface cellular 3/1
Router(config-if)# dialer pool-member 1
Router(config-if)# encapsulation ppp
```

Step 5 Save changes by issuing **shutdown** and **no shutdown** on the interface:

```
Router(config)# interface cellular 3/1
Router(config-if)# no shutdown
```

Configuring WAN Backhaul Redundancy

For information on configuring WAN backhaul redundancy, see *Cisco 1000 Series Connected Grid Routers Unicast Routing Software Configuration Guide*.

Configuration Example

The following example shows a configuration that includes information on TACACS+ security, OSPF (Open Shortest Path First), OSPF v3, DHCP (Dynamic Host Configuration Protocol), DHCP v6, a tunnel, virtual tunnel, QoS, Internet Protocol Security (IPSec), a static IP address when a tunnel interface (3/1) is configured, the interfaces (Ethernet, serial, cellular, WPAN, and WiFi), dialer, and chat script. The cellular-related configurations are highlighted.

Router# **show running-configuration**

```
!Command: show running-config
!Time: Sun Aug 14 00:36:25 2011

version 5.2(1)
hostname Router
vdc Router id 1
    limit-resource vlan minimum 16 maximum 4094
    limit-resource vrf minimum 2 maximum 4096
    limit-resource port-channel minimum 0 maximum 768
    limit-resource u4route-mem minimum 9 maximum 9
    limit-resource u6route-mem minimum 24 maximum 24
    limit-resource m4route-mem minimum 58 maximum 58
    limit-resource m6route-mem minimum 8 maximum 8

feature privilege
feature tacacs+
feature crypto ike
crypto ike domain ipsec
    policy 10
        group 1
            lifetime seconds 660
            identity hostname
feature ospf
feature ospfv3
feature dhcp
feature tunnel
feature crypto ipsec virtual-tunnel
feature dhcpv6
feature ppp

username adminbackup password 5 ! role network-operator
username admin password 5 $1$fMmnWu6t$Aawk/sH5wmErCjCwnxeyb. role network-admin
enable secret 5 $1$454cdd6$a08d10dc3fdb2f6f
no password strength-check
ip domain-lookup
tacacs-server host 4.4.4.5 key 7 "fewhg"
aaa group server tacacs+ tactical
    server 4.4.4.5
crypto key param rsa label IPSEC_IDENTITY_BLUE modulus 2048 exportable
crypto ca trustpoint IPSEC_IDENTITY_BLUE
    rsakeypair IPSEC_IDENTITY_BLUE 2048
    revocation-check none
class-map type qos match-all ignore
    match precedence 0
```

```

class-map type qos match-all packet
  match packet length 1500
class-map type qos match-all critical
  match dscp 46
class-map type qos match-all matchall
  match precedence 1
  match dscp 10
class-map type qos match-any matchany
  match dscp 10,26
class-map type qos match-all priority
  match precedence 3
policy-map type qos ignore
  class ignore
    set dscp 1
policy-map type qos packet
  class packet
    set precedence 5
policy-map type qos critical
  class critical
    set dscp 10
policy-map type qos matchall
  class matchall
    set precedence 5
policy-map type qos matchany
  class matchany
    set dscp 46
policy-map type qos priority
  class priority
    set dscp 46
priority level 3
copp profile strict
snmp-server user admin auth md5 0x5f66c5f7cde8de86eecb2008de9126f8 priv 0x5f66c5
f7cde8de86eecb2008de9126f8 localizedkey engineID 128:0:0:9:3:0:34:189:224:46:129
rmon event 1 log trap public description FATAL(1) owner PMON@FATAL
rmon event 2 log trap public description CRITICAL(2) owner PMON@CRITICAL
rmon event 3 log trap public description ERROR(3) owner PMON@ERROR
rmon event 4 log trap public description WARNING(4) owner PMON@WARNING
rmon event 5 log trap public description INFORMATION(5) owner PMON@INFO

vrf context test
vrf context management
crypto ipsec profile MyProfile
  set transform-set MyTransformSet
  set pfs group1
  set security-association lifetime seconds 120
  set security-association lifetime kilobytes 2560
crypto ipsec transform-set MyTransformSet esp-gcm 256
vlan 1

no ip dhcp relay

interface Tunnel0
  ip address 4.0.0.1/24
  tunnel mode ipsec ipv4
  tunnel source cellular3/1
  tunnel destination 192.168.168.2
  tunnel protection ipsec profile MyProfile
  no shutdown

interface Tunnel1
  ipv6 address 2001:b:b:bc::1/64
  ipv6 mld join-group ff38:40:2011:dead:beef:cafe:0:1
  ipv6 router ospfv3 1 area 0.0.0.0
  tunnel source Tunnel0

```

```

tunnel destination 4.0.0.2
no shutdown
ipv6 dhcp relay destination 2001:a:b:c::100

interface Tunnel5
no shutdown

interface Ethernet2/1
mac-address 0022.bde0.3201
ip address 2.12.54.10/16
no shutdown

interface Ethernet2/2
mtu 1496
mac-address 0022.bde0.3202
ip address 172.27.161.54/25
ipv6 address 2001:dead:beef:cafe::2/64
no shutdown

interface Ethernet2/3
mtu 1496
mac-address 0022.bde0.3203

interface Ethernet2/4
mtu 1496
mac-address 0022.bde0.3204

interface Ethernet2/5
mtu 1496
mac-address 0022.bde0.3205

interface Ethernet2/6
mtu 1496
mac-address 0022.bde0.3206

interface Ethernet2/7
mtu 1496
mac-address 0022.bde0.3207

interface Ethernet2/8
mtu 1496
mac-address 0022.bde0.3208
no shutdown

interface serial1/1
physical-layer async

interface serial1/2
physical-layer async

interface cellular3/1
no shutdown
encapsulation ppp
dialer pool-member 1

interface wimax5/1
shutdown
no description
pkm version none
pkm crypto algorithm none

interface wpan4/1
no shutdown
ipv6 address 2011:dead:beef:cafe::0/64

```

```

rpl prefix 2011:dead:beef:cafe::0/64
ipv6 dhcp relay client-interface

interface wifi2/1
clock timezone PST -8 0
line console
line vty
boot kickstart bootflash:/cgr1000-uk9-kickstart.5.2.0.CG1.0.194.SSA.gbin sup-1
boot system bootflash:/cgr1000-uk9.5.2.0.CG1.0.194.SSA.gbin sup-1
router ospfv3 1
  address-family ipv6 unicast
ip route 0.0.0.0/0 cellular3/1
ip route 223.255.0.0/16 2.12.0.1
ipv6 route 2001:420:7bf:5f::/64 Tunnel1
ipv6 route 2001:a:b:c::/64 Tunnel1
line tty 1
  device-role dce
line tty 2
  device-role dce

interface Dialer1
  dialer persistent
  dialer pool 1
  dialer string gsm

chat-script gsm PROFILE1

cgdm
  registration start trustpoint ://2001:420:7bf:5f::800:9121
no logging console

```

Upgrading to a New Software Release and Firmware

You can upgrade the NX-OS software on the Cisco router by using the **install all** command in one of the two possible approaches:

- Download the images (kickstart, system image, **or firmware**) from a remote server into the volatile memory of the Cisco CG-OS router by employing the **install all** command to specify the path to the remote server and the protocol. After the download, the software installation begins *automatically*.
- Download the images (kickstart, system image, **or firmware**) from a local server directly into the bootflash of the Cisco CG-OS router, and then *manually* enter the **install all** command to initiate the software upgrade.

The following table provides detailed command syntax for the **install all** command.

```

install all [kickstart {bootflash: | ftp:[/server]/[path] | scp:[/[username@]server]/[path] |
sftp:[/[username@]server]/[path] | tftp:[/server[:port]]/[path] | volatile:} kickstart-filename]
[system {bootflash: | ftp:[/server]/[path] | scp:[/[username@]server]/[path] |
sftp:[/[username@]server]/[path] | tftp:[/server[:port]]/[path] | volatile:} system-filename]
[non-interactive]

```

The **install all** command specifies the software images being downloaded (kickstart, system, **or firmware** images), the method used to download the images such as FTP, SCP, TFTP (remote server downloads only), and the destination of the images (bootflash or volatile) on the Cisco CG-OS router.

- Define **bootflash:** as the destination in the **install all** command when the download is from a local server.

- Define **volatile:** as the destination in the **install all** command when you are downloading the software from a remote server (such as Cisco.com or a remote server in your own network).

kickstart bootflash: *kickstart-file-name*—Identifies the file as a kickstart image and the file name of that image. Format of the kickstart filename is as follows: cg-os_kick.bin. File name is case sensitive.

system bootflash: *system-filename*—Specifies internal flash memory as the destination of the software images. Format of the bootflash filename is as follows: cg-os_sys.bin. File name is case sensitive.

ftp: Specifies File Transfer Protocol (FTP) as the transfer method for the software images (kickstart and system).

scp:—Specifies Secure Copy Protocol (SCP) as the transfer method for the software images (kickstart and system).

sftp:—Specifies Secure Shell FTP (SFTP) as the transfer method for the software images (kickstart and system).

tftp:—Specifies Trivial FTP (TFTP) as the transfer method for the software images (kickstart and system).

username@—Specifies the username on the server. Username is case-sensitive.

//path—Defines the path to the server on which the software images reside.

//server—Defines the IPv4 address or name of the server on which the software images reside.

[non-interactive]—Eliminates the need for interaction or responses from an administrator during the process. Process proceeds to completion without requesting approval by the user.

EXAMPLES

This example shows how to download the software images from a remote FTP server onto the Cisco CG-OS router bootflash. After download, the software installation starts automatically on the Cisco CG-OS router.

```
cgr1000# install all kickstart ftp://10.10.1.1/cg-os_kick.bin
system ftp://10.10.1.1/cg-os_sys.bin
```

This example shows how to download the software images from a remote SCP server onto the Cisco CG-OS router bootflash. After download, the software installation starts automatically on the Cisco CG-OS router.

```
cgr1000# install all kickstart scp://adminuser@10.10.1.1/cg-os_kick.bin
system scp://adminuser@10.10.1.1/cg-os_sys.bin
```

This example shows how to copy the image from a remote SCP server onto the Cisco CG-OS router bootflash and then *manually* upgrade the software by using the **install all** command.

```
cgr1000# copy scp://adminuser@10.10.1.1/cg-os_kick.bin bootflash:
cgr1000# install all kickstart bootflash:cg-os_kick.bin system bootflash:cg-os_sys.bin
```

This example shows how to copy the image from a remote SCP server onto the Cisco CG-OS router bootflash without requiring any action or entry by the administrator. All actions proceed automatically.

```
cgr1000# copy scp://adminuser@10.10.1.1/cg-os_kick.bin bootflash:
cgr1000# install all kickstart bootflash:cg-os_kick.bin system bootflash:cg-os_sys.bin
non-interactive
```



Note

An output similar to the one below displays during the install. The same output displays for local and remote installations.

```
Verifying image bootflash:///cgr1000-uk9-kickstart.5.2.1.CG1.0.277.SPA.bin for boot
variable "kickstart".
[#####] 100% -- SUCCESS

Verifying image bootflash:///cgr1000-uk9.5.2.1.CG1.0.277.SPA.bin for boot variable
"system".
[#####] 100% -- SUCCESS

Verifying image type.
[#####] 100% -- SUCCESS

Extracting "system" version from image bootflash:///cgr1000-uk9.5.2.1.CG1.0.277.SPA.bin.
[#####] 100% -- SUCCESS

Extracting "kickstart" version from image
bootflash:///cgr1000-uk9-kickstart.5.2.1.CG1.0.277.SPA.bin.
[#####] 100% -- SUCCESS

Extracting "bios" version from image bootflash:///cgr1000-uk9.5.2.1.CG1.0.277.SPA.bin.
[#####] 100% -- SUCCESS

Extracting "loader" version from image
bootflash:///cgr1000-uk9-kickstart.5.2.1.CG1.0.277.SPA.bin.
[#####] 100% -- SUCCESS

Performing module support checks.
2012 Jan 3 00:12:23 Router %$ VDC-1 %$
[#####] 100% -- SUCCESS
```

```

Notifying services about system upgrade.
[#####] 100% -- SUCCESS

Compatibility check is done:
Module  bootable          Impact  Install-type  Reason
-----  -
      1      yes  non-disruptive          none
Images will be upgraded according to following table:
Module  Image          Running-Version(pri:alt)  New-Version  Upg-Required
-----  -
      1    system          5.2(1)          5.2(1)        no
      1  kickstart          5.2(1)          5.2(1)        no
      1    bios              :              :              no
      1   loader          1.2(2)          1.2(2)        no
      1    fpga            2_0_0          2_4_0         yes

Do you want to continue with the installation (y/n)?  [n] y

Install is in progress, please wait.

Performing runtime checks.
[#####] 100% -- SUCCESS

Setting boot variables.
[#####] 100% -- SUCCESS

Performing configuration copy.
[#####] 100% -- SUCCESS

Module 1: Refreshing compact flash and upgrading bios/loader/bootrom/fpga/modem firmware.
Warning: please do not remove or power off the module at this time.
[#####] 100% -- SUCCESS

Install has been successful.

cgr1000#

```

**Note**

The Cisco CG-OS router reboots after a successful installation.

Additional References

Consult the following resources for related information about the 3G module or for technical assistance.

Hardware Overview and Installation Documents

- *Cisco Connected Grid Modules*
http://www.cisco.com/en/US/products/ps10984/prod_module_series_home.html
- *Cisco CGR 1240 Hardware Installation Guide*
- *Cisco CGR 1120 Hardware Installation Guide*
- *Cisco CGS1240 Getting Started Guide*

Supported Cisco Antennas and Accessories Documents

- *Cisco CGR 1000 and 2000 Series Connected Grid Antennas Guide*
http://www.cisco.com/en/US/docs/routers/connectedgrid/antennas/installing/cg_antenna_install_guide.html

Cisco System Software Commands Documents

- *Cisco Connected Grid Device Manager User Guide*
- *Cisco System Software*
http://www.cisco.com/en/US/products/ps9372/tsd_products_support_series_home.html
- *Configuring Cisco EHWIC-3G-EDVO-x*
http://www.cisco.com/en/US/docs/routers/access/1800/1861/software/feature/guide/mrwls_evdo.html
- *Cisco 1000 Series Connected Grid Routers Unicast Routing Software Configuration Guide*

Regulatory, Compliance, and Safety Information

- Cisco Network Modules and Interface Cards Regulatory Compliance and Safety Information
<http://www.cisco.com/en/US/docs/routers/access/interfaces/rcsi/IOHrcsi.html>

Troubleshooting and Diagnostics

This section provides the necessary background information and resources available for troubleshooting the 2G/3G Connected Grid module.

For LED descriptions, see *Ports and LEDs*, page 7.

- *Debug Commands*, page 39
- *The following are the debug commands and keywords:*, page 39
- *Checking Signal Strength*, page 39
- *Verifying Service Availability (GSM Module)*, page 39
- *Verifying Service Availability (CDMA Module)*, page 41
- *Successful Call Setup (GSM Module)*, page 42
- *Successful Call Setup (CDMA Module)*, page 43
- *Debug Output (GSM Module)*, page 44
- *Debug Output (CDMA Module)*, page 46
- *Retrieving the Electronic Serial Number*, page 47
- *Converting Hexadecimal ESN to Decimal Notation*, page 48

Debug Commands

The following are the **debug** commands and keywords:

Command Syntax	Description
debug cellular	<0-10>—Debug level
debug cellpm	all—All debugging error—Error cellpm debug trace—Trace cellpm debug
debug chat	error—Error chat debug trace—Trace chat debug
debug dialer	all—All debugging error—Error chat debug trace—Trace chat debug

Checking Signal Strength

If the Received Signal Strength Indication (RSSI) level is very low (for example, if it is less than -110 dBm), follow these steps:

-
- Step 1** Check the antenna connection. Make sure the QMA connector is correctly threaded and tightened.
- Step 2** If you are using a remote antenna, move the antenna cradle and check if the RSSI has improved.
- Step 3** Contact your wireless service provider to verify that there is service availability in your area.
-

Verifying Service Availability (GSM Module)

The following are the GSM module service availability issues and their corresponding troubleshooting tasks:

Issues	Troubleshooting
No profile configured	Verify profile. See Step 1: Creating a GSM Profile, page 22 .
- Not connected to the network - Antenna not present - Antenna bad - Out of network	- Check antenna hardware for faulty connections. - Verify RSSI. See Verifying Signal Strength and Service Availability, page 28. - SIM card not installed. Use show cellular 3/1 led command to verify presence of SIM card in a slot and indicated as “green.” See Verifying Signal Strength and Service Availability, page 28 - Contact your base station for more information..

The following is sample **show cellular 3/1 all** command output for a scenario where the antenna is disconnected and a modem data profile has not been created.

The error in this case has been highlighted below:

Router# **show cellular 3/1 all**

Hardware Information

=====

Modem Firmware Version = T1_0_3_2AP R361 CNSZXD00000061 2011/04/15 17:40:48

Modem Firmware Built = 04/15/11

Modem Hardware Version = 1.0

International Mobile Subscriber Identity (IMSI) = 345678901

International Mobile Equipment Identity (IMEI) = 357115040054053

Factory Serial Number (FSN) = CC3200115221007

Modem status = Online

Current Modem Temperature = 0 deg C

Current Temperature State = Normal

Profile Information

=====

* - Default profile <-- Indicates that no profile is present. See [GSM Module Troubleshooting Service Availability, page 37](#).

Data Connection Information

=====

Data Transmitted = 5616 bytes

Data Received = 9424 bytes

Profile 1, Packet Session Status = ACTIVATED

IP Address = 192.0.2.0

Network Information

=====

Current Service Status = No service, Service Error = None <-- Indicates not connected to network. See [GSM Module Troubleshooting Service Availability, page 37](#).

Current Service = Combined

Packet Service = None

Packet Session Status = Inactive

Current Roaming Status = Home

Network Selection Mode = Automatic

Country = USA, Network = Cinglr

Mobile Country Code (MCC) = 310

Mobile Network Code (MNC) = 380

Location Area Code (LAC) = 6042

Routing Area Code (RAC) = 255

Cell ID = 0

Primary Scrambling Code = 0

PLMN Selection = Automatic

Radio Information

=====

Current Band = None, Channel Number = 0

Current RSSI = -110 dBm <-- Indicates either no antenna or bad antenna, or out of network. See [GSM Module Troubleshooting Service Availability, page 37](#)

Band Information

=====

Number of bands: 5

Band 1: GSM EGSM DCS
 Band 2: Unknown Band Group
 Band 3: GSM ALL
 Band 4: Unknown Band Group
 Band 5: AUTO BAND

Verifying Service Availability (CDMA Module)

The following are the CDMA module service availability issues and their corresponding troubleshooting tasks:

Issue	Troubleshooting
No profile configured	Verify profile: - Contact your wireless carrier to ensure your account is activated. - See Data Account Provisioning, page 27.
- Not connected to the network - Antenna not present - Antenna bad - Out of network	- Check antenna hardware for faulty connections. - Verify RSSI. See Verifying Signal Strength and Service Availability, page 28. - Check that OTASP is active. See Activating the Module Using OTASP (CDMA Module), page 28 - Contact your base station for more information..

The following is output for the **show cellular 3/1 all** command:

Hardware Information
 =====

```
Modem Firmware Version = p2813301
Modem Firmware Built = 06-24-10
Modem Hardware Version = MC5728V Rev 1.0
International Mobile Subscriber Identity (IMSI) = 0000008126
Electronic Serial Number (ESN) = 60E62F4E
Modem status = Online
Current Modem Temperature = 33 deg C
Current Temperature State = Normal
```

Profile Information
 =====

```
Electronic Serial Number (ESN) = 60E62F4E
Activation Status = not activated <- account is not provisioned yet
Activation Date =
Phone Number (MDN) = 0000008126
Number of data profiles configured: 1
Current Active Data Profile: 0 <- not active data profile, account is not provisioned yet
NAI (Network Access Identifier) = 0000008126@vzw3g.com
MN-HA SS = enabled
MN-HA SPI = 300
MN-AAA SS = enabled
MN-AAA SPI = 2
Reverse Tunneling Preference = enabled
Home Address = 0.0.0.0
Primary Home Agent Address = 255.255.255.255
Secondary Home Agent Address = 255.255.255.255
```

```
Data Connection Information
=====
Phone Number of outgoing call = 0000008126
Data Transmitted = 0 bytes
Data Received = 0 bytes

Network Information
=====
Current Roaming Status = Not Roaming
Current Idle Digital Mode = No Service <- Indicates no service - not connected to network
Current System Identifier (SID) = 0
Current System Identifier (NID) = 0
Serving Base Station Longitude = 0 deg 0 min 0 sec
Serving Base Station Latitude = 0 deg 0 min 0 sec

Radio Information
=====

Current band = CDMA_CLASS1,CDMA_CLASS0
Radio power mode = On
Channel number = 375
Current RSSI = -150 dBm <- Indicates either no antenna or bad antenna, or out of network
```

Successful Call Setup (GSM Module)

The following are the single-line debug output for key steps while establishing a successful connection.

Modem is Enabled

The **debug cellular trace** command output provides the following output:

```
...
2009 Jan 1 07:53:37.232260 cellpm: Receive modem enabled notification
...
```

Chat Script Invoked

The **debug chat trace** command output provides the following output:

```
...
2009 Jan 1 07:53:37.265470 dialer: CHAT SCRIPT gsm1_x profile 1
...
```

Dialer Dial Out Successfully

The debug dialer trace command output provides the following output:

```
...
2009 Jan 1 07:53:38.724766 dialer: Dialer1 dial out cellular3/1 successfully
...
```

Packet Session Activated Successfully

The **debug cellular trace** command output provides the following output:

```
...
2009 Jan 1 07:53:39.724489 cellpm: Send MTS - PKT SESS ACTIVATED to dialer
...
```

Stop Dialer Since Connection is Established

The **debug dialer trace** command output provides the following output:

```
...
2009 Jan 1 07:53:39.557800 dialer: Session activated. Dialer1 stop dialing
...
2009 Jan 1 07:53:39.267768 cellpm: interface cellular 3/1 IP address 166.129.59.20
...
```

Successful Call Setup (CDMA Module)

The following are the single-line debug output for key steps while establishing a successful connection.

Modem is Enabled

The **debug cellular trace** command output provides the following output:

```
...
2008 Mar 12 03:10:46.519698 cellpm: Receive modem enabled notification
...
```

Chat Script Invoked

The **debug chat trace** command output provides the following output:

```
...
2008 Mar 12 03:10:46.520486 dialer: CHAT SCRIPT cdma ATDT string ATDT#777
...
```

Dialer Dial Out Successfully

The **debug cellular trace** command output provides the following output:

```
...
2008 Mar 12 03:10:52.600975 dialer: Dialer1 dial out cellular3/1 successfully
...
```

Call Connect Successfully

The **debug cellular trace** command output provides the following output:

```
...
2008 Mar 12 03:10:52.610970 cellpm: Call Connecting rec'd
2008 Mar 12 03:10:53.519849 cellpm: Call Connected rec'd
...
```

Stop Dialer Since Connection is Established

The **debug dialer trace** command output provides the following output:

```
...
2008 Mar 12 03:10:53.522327 dialer: Session activated. Dialer1 stop dialing
...
```

Start PPP Session

The **debug cellpm trace** command output provides the following output:

```
...
2008 Mar 12 03:10:56.533277 cellpm: Send PPP Start MTS for if_index 29100000
...
```

PPP Connection Established Successfully

The **debug cellpm trace** command output provides the following output:

```
...
2008 Mar 12 03:10:59.620989 cellpm: PPP notify IP address 107.38.152.162
2008 Mar 12 03:10:59.621037 cellpm: interface name ppp0
```

Cellular Driver Started

The **debug cellular trace** command output provides the following output:

```
...
2008 Mar 12 03:11:00.305943 cellpm: Cellular start driver: ifindex 29100000
...
```

Debug Output (GSM Module)

The following is a sample output for a call that is set up using CHAT script. It shows a received IP address from the network and indicates that the call setup is successful and the data path is open:

```
Debugs enabled:
deb chat error
deb chat trace
deb dialer error
deb dialer trace
deb cellular error
deb cellular trace

2012 Mar 9 13:59:12.952936 cellpm: Modem Disabled Status: Enabled
2012 Mar 9 13:59:12.953231 cellpm: Receive modem enabled notification
2012 Mar 9 13:59:12.955038 dialer: Modem Enable on interface 29100000
2012 Mar 9 13:59:12.955160 dialer: Rec'd cellular3/1 modem ENABLE notification
2012 Mar 9 13:59:12.955205 dialer: current modem state is DISABLE
2012 Mar 9 13:59:12.955250 dialer: modem changes from DISABLE to ENABLE
2012 Mar 9 13:59:12.955300 dialer: CHAT SCRIPT gsm profile 1
2012 Mar 9 13:59:12.955346 dialer: Dialer1 is in READY state
2012 Mar 9 13:59:12.955395 dialer: Dial out interface service is not ready yet
2012 Mar 9 13:59:12.960748 cellpm: Plmn Ready: 0
2012 Mar 9 13:59:12.960860 cellpm: SIM Status: SIM Okay
2012 Mar 9 13:59:12.960945 cellpm: Rec'd Modem Radio Power Enable
2012 Mar 9 13:59:12.961311 cellpm: Receive modem enabled notification
2012 Mar 9 13:59:12.964637 dialer: Modem Enable on interface 29100000
2012 Mar 9 13:59:12.964752 dialer: Rec'd cellular3/1 modem ENABLE notification
2012 Mar 9 13:59:12.964802 dialer: current modem state is ENABLE
sg-salta-12(config-if)# 2012 Mar 9 13:59:14.304917 cellpm: Network Service Status:
Emergency
2012 Mar 9 13:59:14.305279 cellpm: Service Type: 0
2012 Mar 9 13:59:14.305633 cellpm: Registration Indication:
2012 Mar 9 13:59:14.305678 cellpm:
2012 Mar 9 13:59:58.156348 cellpm: Network Service Status: Emergency
2012 Mar 9 13:59:58.156840 cellpm: Service Type: 0
2012 Mar 9 13:59:58.157253 cellpm: Network Service Status: Normal
2012 Mar 9 13:59:58.157295 cellpm: Modem Status Normal notify dialer
2012 Mar 9 13:59:58.157502 cellpm: Send MTS opcode 183299 to sap 776 if_index 29100000
2012 Mar 9 13:59:58.157692 dialer: Modem Enable on interface 29100000
2012 Mar 9 13:59:58.157769 dialer: Rec'd cellular3/1 modem ENABLE notification
2012 Mar 9 13:59:58.157802 dialer: current modem state is ENABLE
2012 Mar 9 13:59:58.160722 cellpm: Send MTS opcode 183317 to sap 776 if_index 29100000
2012 Mar 9 13:59:58.160915 dialer: Modem service is ready for interface 29100000
2012 Mar 9 13:59:58.160965 dialer: timer start #1 if_index 29100000
2012 Mar 9 13:59:58.161004 dialer: Create time for msg 0
2012 Mar 9 13:59:58.161035 dialer: dialer_timer_start start timer
2012 Mar 9 13:59:58.163338 cellpm: Service Type: 6
2012 Mar 9 13:59:58.163777 cellpm: Registration Indication:
```

```

2012 Mar 9 13:59:58.163819 cellpm: Network Name; Limited Service
2012 Mar 9 13:59:58.163852 cellpm: Network Name; Ltd Srv
2012 Mar 9 13:59:58.163883 cellpm:
2012 Mar 9 13:59:58.164301 cellpm: Network Service Status: Normal
2012 Mar 9 13:59:58.164343 cellpm: Modem Status Normal notify dialer
2012 Mar 9 13:59:58.164536 cellpm: Send MTS opcode 183299 to sap 776 if_index 29100000
2012 Mar 9 13:59:58.164716 dialer: Modem Enable on interface 29100000
2012 Mar 9 13:59:58.164788 dialer: Rec'd cellular3/1 modem ENABLE notification
2012 Mar 9 13:59:58.164822 dialer: current modem state is ENABLE
2012 Mar 9 13:59:58.167941 cellpm: Send MTS opcode 183317 to sap 776 if_index 2
9100000
2012 Mar 9 13:59:58.168192 dialer: Modem service is ready for interface 29100000
2012 Mar 9 13:59:58.168250 dialer: Dial out timer started already
2012 Mar 9 13:59:58.171015 cellpm: Service Type: 6
2012 Mar 9 13:59:59.329671 cellpm: Network Service Status: Normal
2012 Mar 9 13:59:59.329741 cellpm: Modem Status Normal notify dialer
2012 Mar 9 13:59:59.330002 cellpm: Send MTS opcode 183299 to sap 776 if_index 29100000
2012 Mar 9 13:59:59.330234 dialer: Modem Enable on interface 29100000
2012 Mar 9 13:59:59.330337 dialer: Rec'd cellular3/1 modem ENABLE notification
2012 Mar 9 13:59:59.330388 dialer: current modem state is ENABLE
2012 Mar 9 13:59:59.333237 cellpm: Send MTS opcode 183317 to sap 776 if_index 29100000
2012 Mar 9 13:59:59.333496 dialer: Modem service is ready for interface 29100000
2012 Mar 9 13:59:59.333554 dialer: Dial out timer started already
2012 Mar 9 13:59:59.336185 cellpm: Service Type: 6
2012 Mar 9 13:59:59.336339 cellpm: Registration Indication:
2012 Mar 9 13:59:59.336389 cellpm: Network Name; AT&T
2012 Mar 9 13:59:59.336436 cellpm:
2012 Mar 9 13:59:59.825867 cellpm: Network Service Status: Normal
2012 Mar 9 13:59:59.825922 cellpm: Modem Status Normal notify dialer
2012 Mar 9 13:59:59.826132 cellpm: Send MTS opcode 183299 to sap 776 if_index 29100000
2012 Mar 9 13:59:59.826323 dialer: Modem Enable on interface 29100000
2012 Mar 9 13:59:59.826422 dialer: Rec'd cellular3/1 modem ENABLE notification
2012 Mar 9 13:59:59.826467 dialer: current modem state is ENABLE
2012 Mar 9 13:59:59.829155 cellpm: Send MTS opcode 183317 to sap 776 if_index 29100000
2012 Mar 9 13:59:59.829361 dialer: Modem service is ready for interface 29100000
2012 Mar 9 13:59:59.829405 dialer: Dial out timer started already
2012 Mar 9 13:59:59.831511 cellpm: Service Type: 6
2012 Mar 9 13:59:59.831613 cellpm: Registration Indication:
2012 Mar 9 13:59:59.831648 cellpm: Network Name; AT&T
2012 Mar 9 13:59:59.831681 cellpm:
2012 Mar 9 14:00:03.168981 dialer: timer expired if_index 29100000
2012 Mar 9 14:00:03.169048 dialer: CHAT SCRIPT gsm profile 1
2012 Mar 9 14:00:03.169087 dialer: Dialer1 is in READY state
2012 Mar 9 14:00:03.204955 dialer: timer start #2 if_index 29100000
2012 Mar 9 14:00:03.205014 dialer: Create time for msg 0
2012 Mar 9 14:00:03.205050 dialer: dialer_timer_start start timer
2012 Mar 9 14:00:03.205086 dialer: Dialer1 dial out cellular3/1 successfully
2012 Mar 9 14:00:03.215063 cellpm: Plmn Ready: 0
2012 Mar 9 14:00:04.985692 cellpm: Network Service Status: Normal
2012 Mar 9 14:00:04.985747 cellpm: Modem Status Normal notify dialer
2012 Mar 9 14:00:04.985952 cellpm: Send MTS opcode 183299 to sap 776 if_index 29100000
2012 Mar 9 14:00:04.986139 dialer: Modem Enable on interface 29100000
2012 Mar 9 14:00:04.986212 dialer: Rec'd cellular3/1 modem ENABLE notification
2012 Mar 9 14:00:04.986245 dialer: current modem state is ENABLE
2012 Mar 9 14:00:04.989199 cellpm: Send MTS opcode 183317 to sap 776 if_index 29100000
2012 Mar 9 14:00:04.989399 dialer: Modem service is ready for interface 29100000
2012 Mar 9 14:00:04.989442 dialer: Dial out timer started already
2012 Mar 9 14:00:04.991674 cellpm: Service Type: 7
2012 Mar 9 14:00:05.557275 cellpm: GSM profile 1 is activated
2012 Mar 9 14:00:05.557559 cellpm: Send MTS - PKT SESS ACTIVATED to dialer
2012 Mar 9 14:00:05.557800 dialer: Session activated. Dialer1 stop dialing
2012 Mar 9 14:00:05.558321 cellpm: Rec'd session active notification
2012 Mar 9 14:00:06.267768 cellpm: interface cellular 3/1 IP address 166.129.59.20

```

```
2012 Mar 9 14:00:06.268517 cellpm: Cellpm:Going to send port bringup message to qosmgr for
ifindex 29100000
```

Debug Output (CDMA Module)

The following is debug output for key steps while establishing a successful connection.

```
2008 Mar 12 03:10:46.519360 cellpm: Rec'd Modem Radio Power Enable
2008 Mar 12 03:10:46.519698 cellpm: Receive modem enabled notification
2008 Mar 12 03:10:46.519370 cellpm: Cellpm:Going to send port bringup message to qosmgr
2008 Mar 12 03:10:46.520230 dialer: Modem Enable on interface 29100000
2008 Mar 12 03:10:46.520335 dialer: Rec'd cellular3/1 modem ENABLE notification
2008 Mar 12 03:10:46.520388 dialer: current modem state is DISABLE
2008 Mar 12 03:10:46.520435 dialer: modem changes from DISABLE to ENABLE
2008 Mar 12 03:10:46.520486 dialer: CHAT SCRIPT cdma ATDT string ATDT#777
2008 Mar 12 03:10:46.520533 dialer: Dialer1 is in READY state
2008 Mar 12 03:10:46.520570 cellpm: Report modem available
2008 Mar 12 03:10:46.644498 cellpm: RSSI_hdr_srv_state: No Service
2008 Mar 12 03:10:46.775658 cellpm: Channel State: 5
2008 Mar 12 03:10:46.775716 cellpm: Scan
2008 Mar 12 03:10:47.467059 cellpm: Channel State: 1
2008 Mar 12 03:10:47.467117 cellpm: Aquired
2008 Mar 12 03:10:47.528183 dialer: No EVDO Service
2008 Mar 12 03:10:47.538327 dialer: CDMA Digital Service
2008 Mar 12 03:10:47.538374 dialer: num_service_check 0
2008 Mar 12 03:10:47.538408 dialer: EVDO is not ready, CDMA is ready
2008 Mar 12 03:10:47.538468 dialer: timer start #1 if_index 29100000
2008 Mar 12 03:10:47.538508 dialer: Create time for msg 0
2008 Mar 12 03:10:47.538542 dialer: dialer_timer_start start timer
2008 Mar 12 03:10:47.538578 dialer: Dial out interface service is not ready yet
2008 Mar 12 03:10:47.538860 dialer: air service available - if_index 29100000
2008 Mar 12 03:10:47.538904 dialer: CHAT SCRIPT cdma ATDT string ATDT#777
2008 Mar 12 03:10:47.538939 dialer: Dialer1 is in PENDING state
2008 Mar 12 03:10:48.325223 cellpm: Service Indication State: 2
2008 Mar 12 03:10:48.325469 cellpm: Send MTS opcode 183317 to sap 776 if_index 29100000
2008 Mar 12 03:10:48.327789 cellpm: Digital Service
2008 Mar 12 03:10:48.327909 cellpm: EVDO/HDR Service State: 0
2008 Mar 12 03:10:48.327960 cellpm: Hdr_srv: No Service
2008 Mar 12 03:10:48.328043 cellpm: Protocol Revision: 6
2008 Mar 12 03:10:48.328095 cellpm: CDMA 2000 Rev 0
2008 Mar 12 03:10:48.328176 cellpm: Radio Band: 1
2008 Mar 12 03:10:48.328228 cellpm: PCS
2008 Mar 12 03:10:48.328461 dialer: Modem service is ready for interface 29100000
2008 Mar 12 03:10:48.328522 dialer: Dial out timer started already
2008 Mar 12 03:10:49.318960 cellpm: Protocol Revision: 6
2008 Mar 12 03:10:49.319020 cellpm: CDMA 2000 Rev 0
2008 Mar 12 03:10:49.319399 cellpm: Radio Band: 1
2008 Mar 12 03:10:49.319445 cellpm: PCS
2008 Mar 12 03:10:49.570086 cellpm: EVDO/HDR Service State: 4
2008 Mar 12 03:10:49.570333 cellpm: Send MTS opcode 183317 to sap 776 if_index 29100000
2008 Mar 12 03:10:49.572369 cellpm: EVDO RevA Service
2008 Mar 12 03:10:49.572461 cellpm: Protocol Revision: 6
2008 Mar 12 03:10:49.572517 cellpm: CDMA 2000 Rev 0
2008 Mar 12 03:10:49.572596 cellpm: Radio Band: 1
2008 Mar 12 03:10:49.572642 cellpm: PCS
2008 Mar 12 03:10:49.572855 dialer: Modem service is ready for interface 29100000
2008 Mar 12 03:10:49.572905 dialer: Dial out timer started already
2008 Mar 12 03:10:50.322934 cellpm: Protocol Revision: 6
2008 Mar 12 03:10:50.322994 cellpm: CDMA 2000 Rev 0
2008 Mar 12 03:10:50.323334 cellpm: Radio Band: 1
2008 Mar 12 03:10:50.323380 cellpm: PCS
2008 Mar 12 03:10:52.539100 dialer: timer expired if_index 29100000
```

```

2008 Mar 12 03:10:52.539166 dialer: CHAT SCRIPT cdma ATDT string ATDT#777
2008 Mar 12 03:10:52.539202 dialer: Dialer1 is in READY state
2008 Mar 12 03:10:52.560359 dialer: EVDO RevA Service
2008 Mar 12 03:10:52.580554 dialer: CDMA Digital Service
2008 Mar 12 03:10:52.580601 dialer: num_service_check 1
2008 Mar 12 03:10:52.580637 dialer: Both EVDO and CDMA are ready
2008 Mar 12 03:10:52.580667 dialer: Dial out interface service is ready
2008 Mar 12 03:10:52.600846 dialer: timer start #2 if_index 29100000
2008 Mar 12 03:10:52.600903 dialer: Create time for msg 0
2008 Mar 12 03:10:52.600939 dialer: dialer_timer_start start timer
2008 Mar 12 03:10:52.600975 dialer: Dialer1 dial out cellular3/1 successfully
2008 Mar 12 03:10:52.610970 cellpm: Call Connecting rec'd
2008 Mar 12 03:10:53.519849 cellpm: Call Connected rec'd
2008 Mar 12 03:10:53.520138 cellpm: Send MTS opcode 183297 to sap 776 if_index 29100000
2008 Mar 12 03:10:53.522327 dialer: Session activated. Dialer1 stop dialing
2008 Mar 12 03:10:56.533277 cellpm: Send PPP Start MTS for if_index 29100000
2008 Mar 12 03:10:59.579924 cellpm: Channel State: 5
2008 Mar 12 03:10:59.579991 cellpm: Scan
2008 Mar 12 03:10:59.580050 cellpm: Channel State: 1
2008 Mar 12 03:10:59.580086 cellpm: Aquired
2008 Mar 12 03:10:59.587827 cellpm: Protocol Revision: 6
2008 Mar 12 03:10:59.587880 cellpm: CDMA 2000 Rev 0
2008 Mar 12 03:10:59.587940 cellpm: Radio Band: 1
2008 Mar 12 03:10:59.587976 cellpm: PCS
2008 Mar 12 03:10:59.620989 cellpm: PPP notify IP address 107.38.152.162
2008 Mar 12 03:10:59.621037 cellpm: interface name ppp0
2008 Mar 12 03:10:59.621436 cellpm: ifindex 29100000
2008 Mar 12 03:11:00.300889 cellpm: interface cellular 3/1 IP address 107.38.152.162
2008 Mar 12 03:11:00.301243 cellpm: Cellpm:Going to send port bringup message to qosmgr
for ifindex 29100000
2008 Mar 12 03:11:00.305705 cellpm: Error setting status LED to OK (22 - Invalid argument)
2008 Mar 12 03:11:00.305943 cellpm: Cellular start driver: ifindex 29100000

```

Retrieving the Electronic Serial Number

If your network provider requests the 11-digit decimal equivalent of your Electronic Serial Number (ESN), you must retrieve your ESN, then convert it to decimal notation. See also, [Converting Hexadecimal ESN to Decimal Notation, page 48](#).

The ESN number is located directly on the modem label in hexadecimal notation. It can also be retrieved using the Cisco IOS CLI using the **show cellular 3/1 all** command.

GSM Module Sample Output

The sample output below shows the IMEI number:

```
Router# show cellular 3/1 all
```

```

Hardware Information
=====
Modem Firmware Version = T1_0_3_2AP R361 CNSZXD00000061 2011/04/15 17:40:48
Modem Firmware Built = 04/15/11
Modem Hardware Version = 1.0
International Mobile Subscriber Identity (IMSI) = 0123456063
International Mobile Equipment Identity (IMEI) = 353567040032469 <-- Unique identifier for module
Factory Serial Number (FSN) = CC3291006141001
Modem status = Online
Current Modem Temperature = 33 deg C
Current Temperature State = Normal

```

CDMA Module Sample Output

The sample output below shows the ESN number:

```
Router# show cellular 3/1 all

Hardware Information
=====
Modem Firmware Version = p2813301
Modem Firmware Built = 06-24-10
Modem Hardware Version = MC5728V Rev 1.0
International Mobile Subscriber Identity (IMSI) = 4082280032
Electronic Serial Number (ESN) = 60D22706 <-- Unique identifier for module
Modem status = Online
Current Modem Temperature = 31 deg C
Current Temperature State = Normal
```

Converting Hexadecimal ESN to Decimal Notation

If your network provider requests the 11-digit decimal equivalent of your Electronic Serial Number (ESN), you must retrieve your ESN, then convert it to decimal notation. See also, [Retrieving the Electronic Serial Number, page 47](#).

To convert the ESN number from hexadecimal notation to decimal notation:

-
- Step 1** Start with the 8-digit HEX ESN # obtained from the label or using CLI, for example 0x603C9854. This number consists of two parts:
- 0x60—Serial number
 - 3C9854—Manufacturer's code
- Step 2** Convert manufacturer's code to decimal as shown:
- Hexadecimal 0x60 equals decimal 96.
- If the decimal value is two digits only, prepend it with a zero to expand it to three digits.
- Manufacturer's code is thus 096.
- Step 3** Convert the serial number to decimal, as shown in the example below:
- Hexadecimal 0x3C9854 equals decimal 3971156.
- If decimal value is less than 8 digits, add enough zeros to make it into an 8 digit number.
- Serial number is thus 03971156.
- Step 4** To obtain complete 11-digit decimal ESN notation, combine manufacturer code and serial number:
- Manufacturer code: 096
- Serial #: 03971156
- Decimal ESN: 09603971156
-

Technical Assistance

The Cisco Support and Documentation website provides online resources to download documentation, software, and tools. Use these resources to install and configure the software and to troubleshoot and resolve technical issues with Cisco products and technologies. Access to most tools on the Cisco Support and Documentation website requires a Cisco.com user ID and password.

<http://www.cisco.com/cisco/web/support/index.html>

Tell Us What You Think



Send your feedback about this document directly to the Connected Energy Documentation Team.

[Connected Grid Documentation Feedback Form](#)

Cisco and the Cisco Logo are trademarks of Cisco Systems, Inc. and/or its affiliates in the U.S. and other countries. A listing of Cisco's trademarks can be found at www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1005R)

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

No combinations are authorized or intended under this document.

© 2012 Cisco Systems, Inc. All rights reserved.

