
Frequency Error

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	a	5180	Ant1	5180.033	33000	6.37	+-20	Pass
NVNT	a	5200	Ant1	5200.015	15000	2.88	+-20	Pass
NVNT	a	5240	Ant1	5240.011	11000	2.1	+-20	Pass
NVNT	n40	5190	MIMO	5190.0075	7500	1.45	+-20	Pass
NVNT	n40	5230	MIMO	5230.008	8000	1.53	+-20	Pass
NVNT	ac80	5210	MIMO	5210.008	8000	1.54	+-20	Pass


複製禁止

Test Graphs


Freq. Error NVNT a 5180MHz Ant1

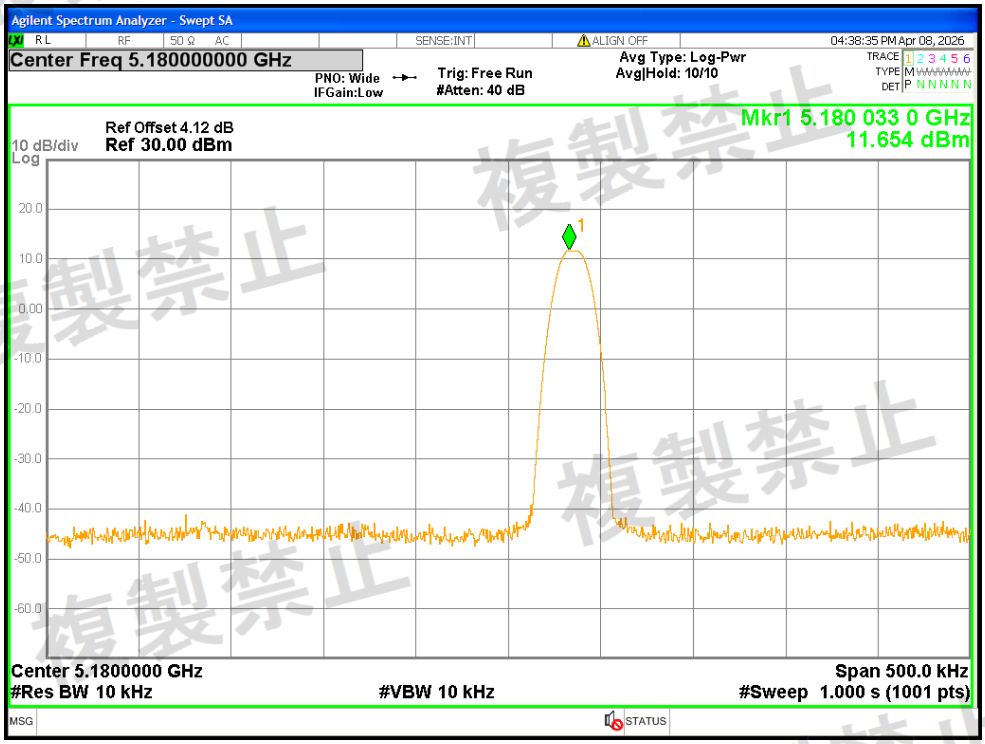


Freq. Error NVNT a 5200MHz Ant1

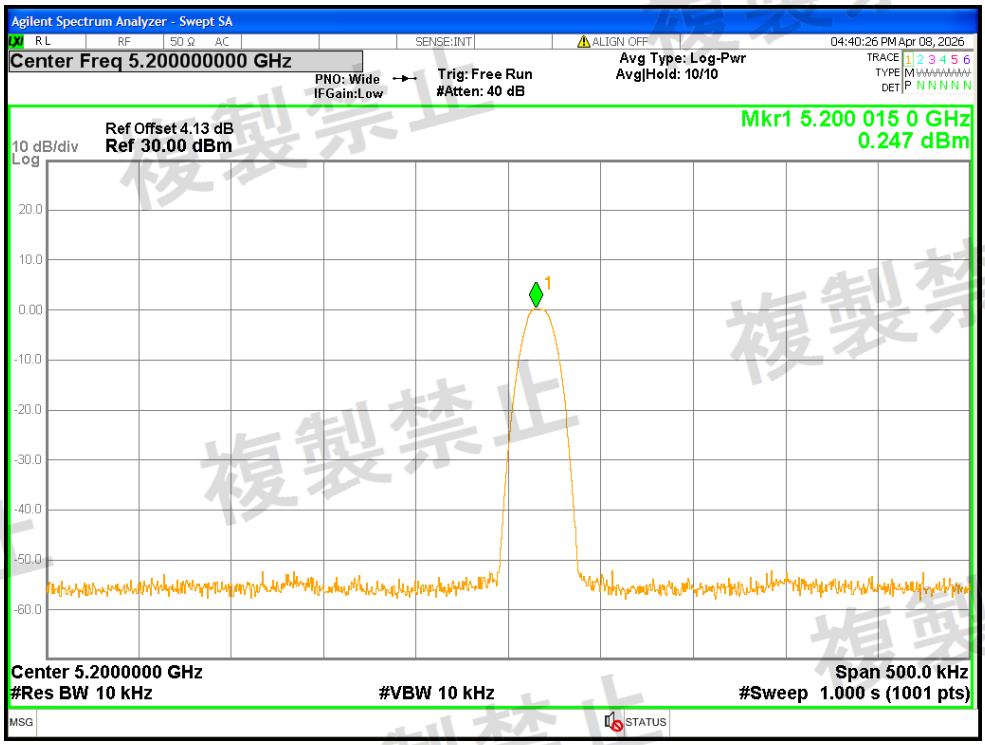


Freq. Error NVNT a 5240MHz Ant1

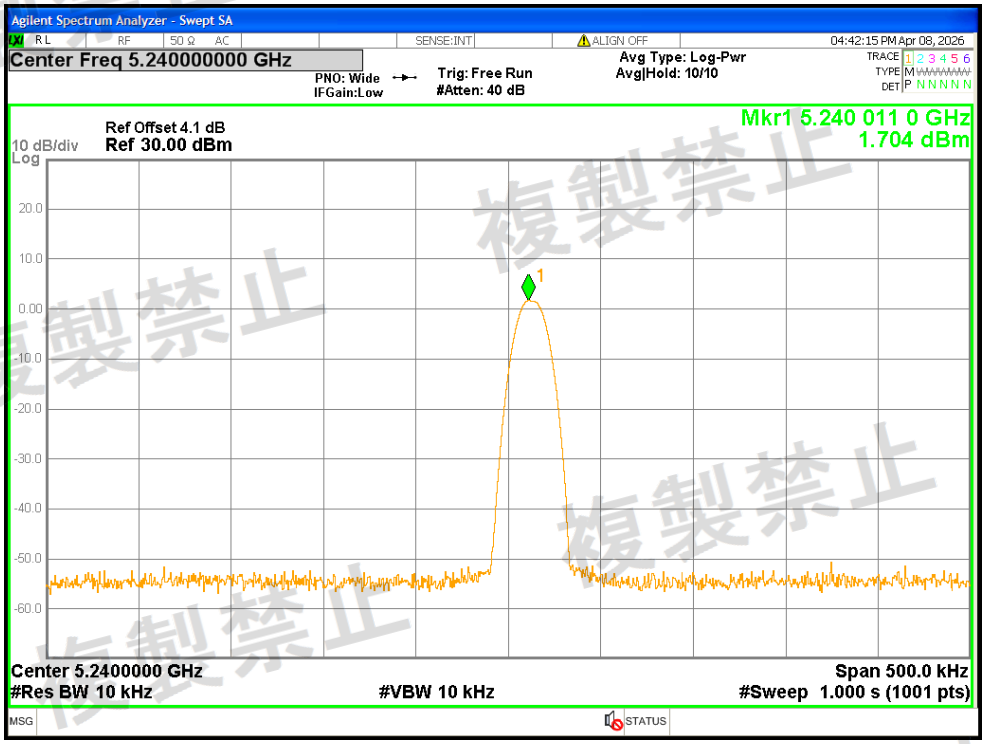


Freq. Error NVNT n40 5190MHz MIMO

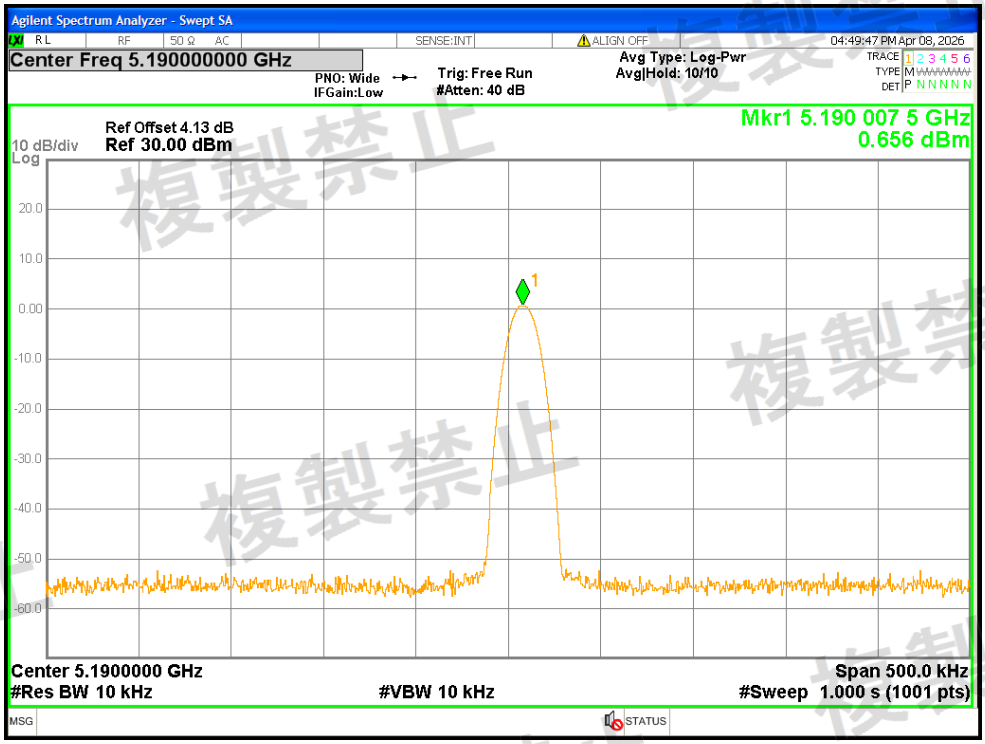

Freq. Error NVNT n40 5230MHz MIMO

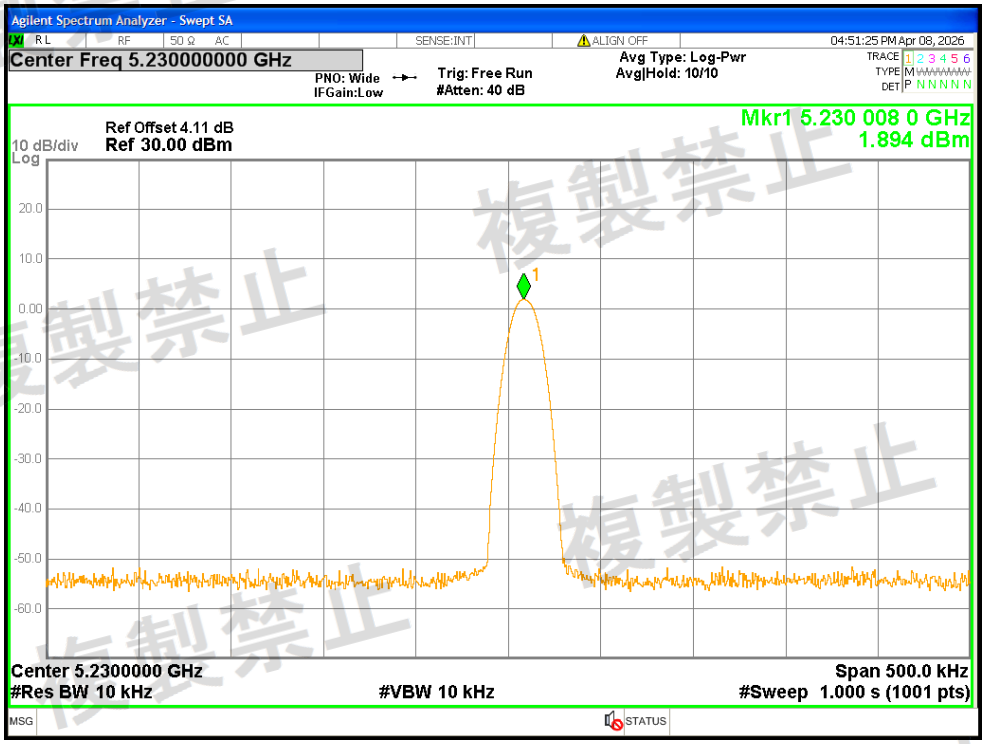

Freq. Error NVNT ac80 5210MHz MIMO

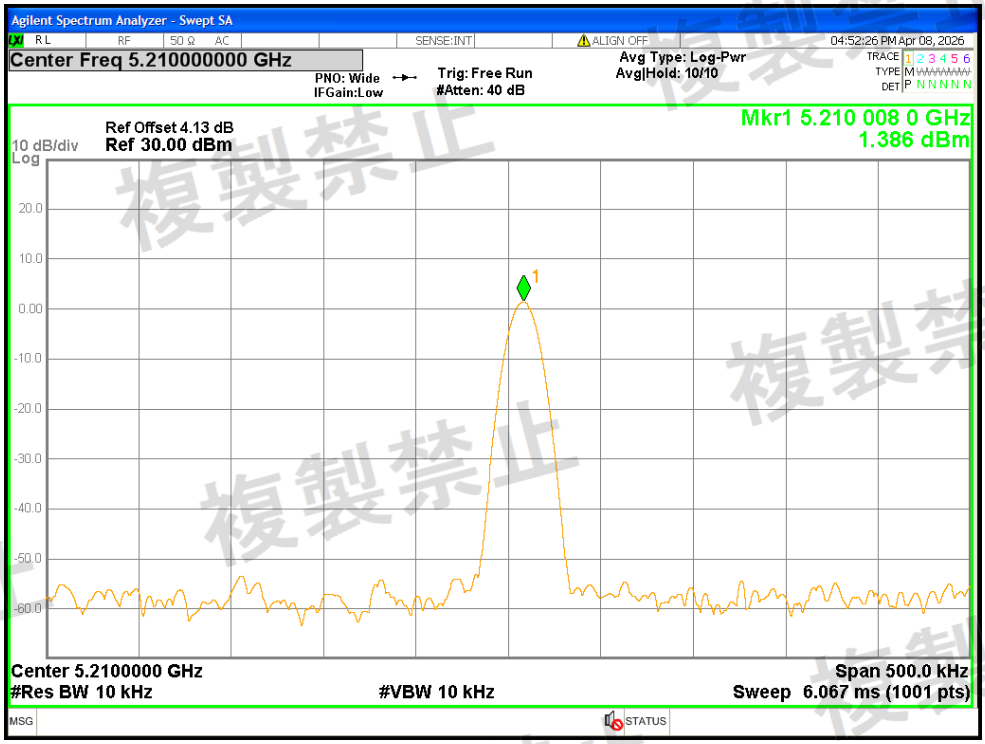

Antenna Power

Condition	Mode	Frequency (MHz)	Antenna	Power (dBm/MHz)	Antenna Power (mW/MHz)	Limit (mW/MHz)	Declared Power (mW/MHz)	Tolerance (%)	Upper Limit (%)	Lower Limit (%)	Verdict
NVNT	a	5180	Ant1	1.61	1.449	10	2.5	-42.04	20	-80	Pass
NVNT	a	5200	Ant1	1.56	1.432	10	2.5	-42.72	20	-80	Pass
NVNT	a	5240	Ant1	3.61	2.296	10	2.5	-8.16	20	-80	Pass
NVNT	a	5180	Ant2	2.23	1.671	10	2.5	-33.16	20	-80	Pass
NVNT	a	5200	Ant2	3.11	2.046	10	2.5	-18.16	20	-80	Pass
NVNT	a	5240	Ant2	3.77	2.382	10	2.5	-4.72	20	-80	Pass
NVNT	n20	5180	Ant1	-1.89	0.647	10	2.4	-73.04	20	-80	Pass
NVNT	n20	5180	Ant2	-0.67	0.857	10	2.4	-64.29	20	-80	Pass
NVNT	n20	5180	MIMO	1.77	1.504	10	2.4	-37.33	20	-80	Pass
NVNT	n20	5200	Ant1	-1.28	0.745	10	2.4	-68.96	20	-80	Pass
NVNT	n20	5200	Ant2	0.36	1.086	10	2.4	-54.75	20	-80	Pass
NVNT	n20	5200	MIMO	2.63	1.831	10	2.4	-23.71	20	-80	Pass
NVNT	n20	5240	Ant1	0.94	1.242	10	2.4	-48.25	20	-80	Pass
NVNT	n20	5240	Ant2	0.48	1.117	10	2.4	-53.46	20	-80	Pass
NVNT	n20	5240	MIMO	3.73	2.359	10	2.4	-1.71	20	-80	Pass
NVNT	n40	5190	Ant1	-5.07	0.311	5	1.2	-74.08	20	-80	Pass
NVNT	n40	5190	Ant2	-2.97	0.505	5	1.2	-57.92	20	-80	Pass
NVNT	n40	5190	MIMO	-0.88	0.816	5	1.2	-32.00	20	-80	Pass
NVNT	n40	5230	Ant1	-1.81	0.659	5	1.2	-45.08	20	-80	Pass
NVNT	n40	5230	Ant2	-2.98	0.504	5	1.2	-58.00	20	-80	Pass
NVNT	n40	5230	MIMO	0.66	1.163	5	1.2	-3.08	20	-80	Pass
NVNT	ac20	5180	Ant1	-2.18	0.605	10	2.3	-73.70	20	-80	Pass
NVNT	ac20	5180	Ant2	-1.37	0.729	10	2.3	-68.30	20	-80	Pass
NVNT	ac20	5180	MIMO	1.25	1.334	10	2.3	-42.00	20	-80	Pass
NVNT	ac20	5200	Ant1	-0.93	0.807	10	2.3	-64.91	20	-80	Pass
NVNT	ac20	5200	Ant2	0.50	1.122	10	2.3	-51.22	20	-80	Pass
NVNT	ac20	5200	MIMO	2.85	1.929	10	2.3	-16.13	20	-80	Pass
NVNT	ac20	5240	Ant1	0.38	1.091	10	2.3	-52.57	20	-80	Pass
NVNT	ac20	5240	Ant2	0.58	1.143	10	2.3	-50.30	20	-80	Pass
NVNT	ac20	5240	MIMO	3.49	2.234	10	2.3	-2.87	20	-80	Pass
NVNT	ac40	5190	Ant1	-4.50	0.355	5	1.1	-67.73	20	-80	Pass
NVNT	ac40	5190	Ant2	-3.30	0.468	5	1.1	-57.45	20	-80	Pass
NVNT	ac40	5190	MIMO	-0.85	0.823	5	1.1	-25.18	20	-80	Pass
NVNT	ac40	5230	Ant1	-2.82	0.522	5	1.1	-52.55	20	-80	Pass
NVNT	ac40	5230	Ant2	-2.74	0.532	5	1.1	-51.64	20	-80	Pass
NVNT	ac40	5230	MIMO	0.23	1.054	5	1.1	-4.18	20	-80	Pass
NVNT	ac80	5210	Ant1	-4.11	0.388	2.5	0.8	-51.50	20	-80	Pass
NVNT	ac80	5210	Ant2	-3.95	0.403	2.5	0.8	-49.63	20	-80	Pass

NVNT	ac80	5210	MIMO	-1.02	0.791	2.5	0.8	-1.13	20	-80	Pass
NVNT	ax20	5180	Ant1	-0.86	0.82	10	2.8	-70.71	20	-80	Pass
NVNT	ax20	5180	Ant2	-0.24	0.946	10	2.8	-66.21	20	-80	Pass
NVNT	ax20	5180	MIMO	2.47	1.766	10	2.8	-36.93	20	-80	Pass
NVNT	ax20	5200	Ant1	-0.53	0.885	10	2.8	-68.39	20	-80	Pass
NVNT	ax20	5200	Ant2	0.23	1.054	10	2.8	-62.36	20	-80	Pass
NVNT	ax20	5200	MIMO	2.88	1.939	10	2.8	-30.75	20	-80	Pass
NVNT	ax20	5240	Ant1	1.65	1.462	10	2.8	-47.79	20	-80	Pass
NVNT	ax20	5240	Ant2	1.21	1.321	10	2.8	-52.82	20	-80	Pass
NVNT	ax20	5240	MIMO	4.45	2.783	10	2.8	-0.61	20	-80	Pass
NVNT	ax40	5190	Ant1	-4.55	0.351	5	1.2	-70.75	20	-80	Pass
NVNT	ax40	5190	Ant2	-3.32	0.466	5	1.2	-61.17	20	-80	Pass
NVNT	ax40	5190	MIMO	-0.88	0.817	5	1.2	-31.92	20	-80	Pass
NVNT	ax40	5230	Ant1	-2.08	0.619	5	1.2	-48.42	20	-80	Pass
NVNT	ax40	5230	Ant2	-2.72	0.535	5	1.2	-55.42	20	-80	Pass
NVNT	ax40	5230	MIMO	0.62	1.154	5	1.2	-3.83	20	-80	Pass
NVNT	ax80	5210	Ant1	-6.31	0.234	2.5	0.7	-66.57	20	-80	Pass
NVNT	ax80	5210	Ant2	-5.38	0.29	2.5	0.7	-58.57	20	-80	Pass
NVNT	ax80	5210	MIMO	-2.81	0.524	2.5	0.7	-25.14	20	-80	Pass

EIRP Power

Condition	Mode	Frequency (MHz)	Antenna	Antenna Power (mW/MHz)	Gain (dBi)	EIRP Power (mW/MHz)	Limit (mW/MHz)	Verdict
NVNT	a	5180	Ant1	1.449	3.19	3.020	10	Pass
NVNT	a	5200	Ant1	1.432	3.19	2.985	10	Pass
NVNT	a	5240	Ant1	2.296	3.19	4.786	10	Pass
NVNT	a	5180	Ant2	1.671	2.76	3.155	10	Pass
NVNT	a	5200	Ant2	2.046	2.76	3.863	10	Pass
NVNT	a	5240	Ant2	2.382	2.76	4.497	10	Pass
NVNT	n20	5180	Ant1	0.647	3.19	1.349	10	Pass
NVNT	n20	5180	Ant2	0.857	2.76	1.618	10	Pass
NVNT	n20	5180	MIMO	1.504	3.19	3.135	10	Pass
NVNT	n20	5200	Ant1	0.745	3.19	1.553	10	Pass
NVNT	n20	5200	Ant2	1.086	2.76	2.050	10	Pass
NVNT	n20	5200	MIMO	1.831	3.19	3.817	10	Pass
NVNT	n20	5240	Ant1	1.242	3.19	2.589	10	Pass
NVNT	n20	5240	Ant2	1.117	2.76	2.109	10	Pass
NVNT	n20	5240	MIMO	2.359	3.19	4.917	10	Pass
NVNT	n40	5190	Ant1	0.311	3.19	0.648	5	Pass
NVNT	n40	5190	Ant2	0.505	2.76	0.953	5	Pass
NVNT	n40	5190	MIMO	0.816	3.19	1.701	5	Pass
NVNT	n40	5230	Ant1	0.659	3.19	1.374	5	Pass
NVNT	n40	5230	Ant2	0.504	2.76	0.952	5	Pass
NVNT	n40	5230	MIMO	1.163	3.19	2.424	5	Pass
NVNT	ac20	5180	Ant1	0.605	3.19	1.261	10	Pass
NVNT	ac20	5180	Ant2	0.729	2.76	1.376	10	Pass
NVNT	ac20	5180	MIMO	1.334	3.19	2.781	10	Pass
NVNT	ac20	5200	Ant1	0.807	3.19	1.682	10	Pass
NVNT	ac20	5200	Ant2	1.122	2.76	2.118	10	Pass
NVNT	ac20	5200	MIMO	1.929	3.19	4.021	10	Pass
NVNT	ac20	5240	Ant1	1.091	3.19	2.274	10	Pass
NVNT	ac20	5240	Ant2	1.143	2.76	2.158	10	Pass
NVNT	ac20	5240	MIMO	2.234	3.19	4.657	10	Pass
NVNT	ac40	5190	Ant1	0.355	3.19	0.740	5	Pass
NVNT	ac40	5190	Ant2	0.468	2.76	0.884	5	Pass
NVNT	ac40	5190	MIMO	0.823	3.19	1.716	5	Pass
NVNT	ac40	5230	Ant1	0.522	3.19	1.088	5	Pass
NVNT	ac40	5230	Ant2	0.532	2.76	1.004	5	Pass
NVNT	ac40	5230	MIMO	1.054	3.19	2.197	5	Pass
NVNT	ac80	5210	Ant1	0.388	3.19	0.809	2.5	Pass
NVNT	ac80	5210	Ant2	0.403	2.76	0.761	2.5	Pass
NVNT	ac80	5210	MIMO	0.791	3.19	1.649	2.5	Pass
NVNT	ax20	5180	Ant1	0.82	3.19	1.709	10	Pass


NVNT	ax20	5180	Ant2	0.946	2.76	1.786	10	Pass
NVNT	ax20	5180	MIMO	1.766	3.19	3.681	10	Pass
NVNT	ax20	5200	Ant1	0.885	3.19	1.845	10	Pass
NVNT	ax20	5200	Ant2	1.054	2.76	1.990	10	Pass
NVNT	ax20	5200	MIMO	1.939	3.19	4.042	10	Pass
NVNT	ax20	5240	Ant1	1.462	3.19	3.048	10	Pass
NVNT	ax20	5240	Ant2	1.321	2.76	2.494	10	Pass
NVNT	ax20	5240	MIMO	2.783	3.19	5.801	10	Pass
NVNT	ax40	5190	Ant1	0.351	3.19	0.732	5	Pass
NVNT	ax40	5190	Ant2	0.466	2.76	0.880	5	Pass
NVNT	ax40	5190	MIMO	0.817	3.19	1.703	5	Pass
NVNT	ax40	5230	Ant1	0.619	3.19	1.290	5	Pass
NVNT	ax40	5230	Ant2	0.535	2.76	1.010	5	Pass
NVNT	ax40	5230	MIMO	1.154	3.19	2.406	5	Pass
NVNT	ax80	5210	Ant1	0.234	3.19	0.488	2.5	Pass
NVNT	ax80	5210	Ant2	0.29	2.76	0.548	2.5	Pass
NVNT	ax80	5210	MIMO	0.524	3.19	1.092	2.5	Pass

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	Lower Limit (MHz)	Upper Limit (MHz)	Verdict
NVNT	a	5180	Ant1	16.986	N/A	20	Pass
NVNT	a	5200	Ant1	17.044	N/A	20	Pass
NVNT	a	5240	Ant1	16.957	N/A	20	Pass
NVNT	a	5180	Ant2	17.101	N/A	20	Pass
NVNT	a	5200	Ant2	17.074	N/A	20	Pass
NVNT	a	5240	Ant2	17.126	N/A	20	Pass
NVNT	n20	5180	Ant1	18.085	N/A	20	Pass
NVNT	n20	5180	Ant2	17.826	N/A	20	Pass
NVNT	n20	5200	Ant1	18.115	N/A	20	Pass
NVNT	n20	5200	Ant2	17.851	N/A	20	Pass
NVNT	n20	5240	Ant1	18.064	N/A	20	Pass
NVNT	n20	5240	Ant2	17.845	N/A	20	Pass
NVNT	n40	5190	Ant1	36.302	N/A	40	Pass
NVNT	n40	5190	Ant2	36.216	N/A	40	Pass
NVNT	n40	5230	Ant1	36.21	N/A	40	Pass
NVNT	n40	5230	Ant2	36.232	N/A	40	Pass
NVNT	ac20	5180	Ant1	18.032	N/A	20	Pass
NVNT	ac20	5180	Ant2	17.838	N/A	20	Pass
NVNT	ac20	5200	Ant1	18.092	N/A	20	Pass
NVNT	ac20	5200	Ant2	17.849	N/A	20	Pass
NVNT	ac20	5240	Ant1	18.043	N/A	20	Pass
NVNT	ac20	5240	Ant2	17.852	N/A	20	Pass
NVNT	ac40	5190	Ant1	36.275	N/A	40	Pass
NVNT	ac40	5190	Ant2	36.229	N/A	40	Pass
NVNT	ac40	5230	Ant1	36.193	N/A	40	Pass
NVNT	ac40	5230	Ant2	36.229	N/A	40	Pass
NVNT	ac80	5210	Ant1	75.764	N/A	80	Pass
NVNT	ac80	5210	Ant2	75.589	N/A	80	Pass
NVNT	ax20	5180	Ant1	18.871	N/A	20	Pass
NVNT	ax20	5180	Ant2	18.856	N/A	20	Pass
NVNT	ax20	5200	Ant1	18.869	N/A	20	Pass
NVNT	ax20	5200	Ant2	18.845	N/A	20	Pass
NVNT	ax20	5240	Ant1	18.852	N/A	20	Pass
NVNT	ax20	5240	Ant2	18.849	N/A	20	Pass
NVNT	ax40	5190	Ant1	37.582	N/A	40	Pass
NVNT	ax40	5190	Ant2	37.468	N/A	40	Pass
NVNT	ax40	5230	Ant1	37.472	N/A	40	Pass
NVNT	ax40	5230	Ant2	37.474	N/A	40	Pass
NVNT	ax80	5210	Ant1	76.792	N/A	80	Pass
NVNT	ax80	5210	Ant2	76.619	N/A	80	Pass

Test Graphs


OBW NVNT a 5180MHz Ant1

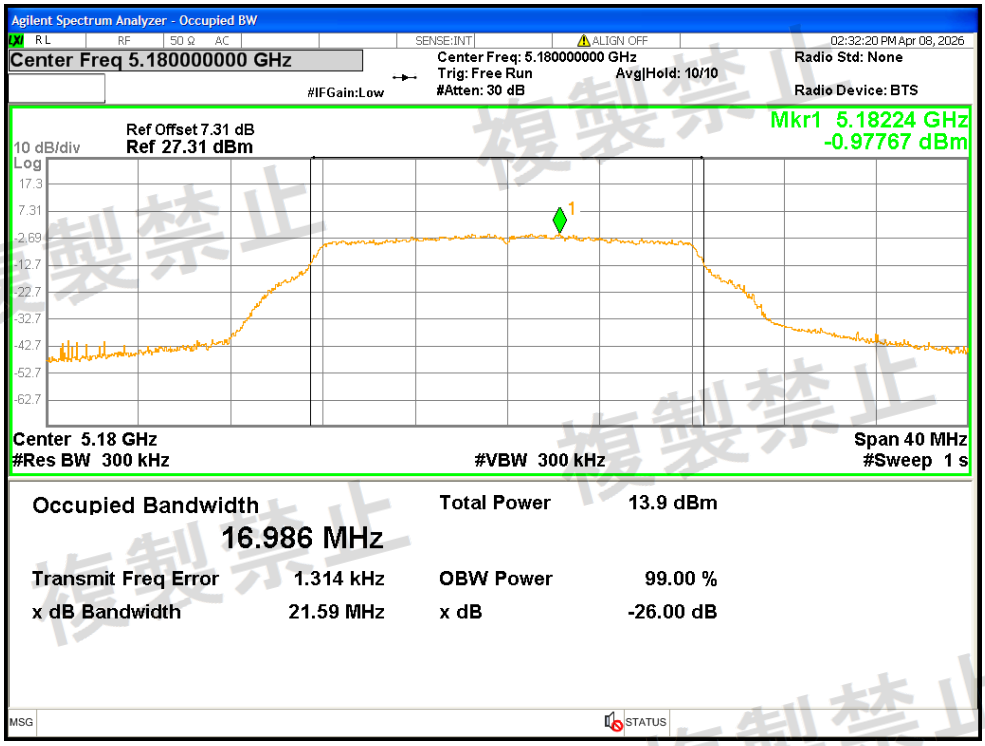


OBW NVNT a 5200MHz Ant1

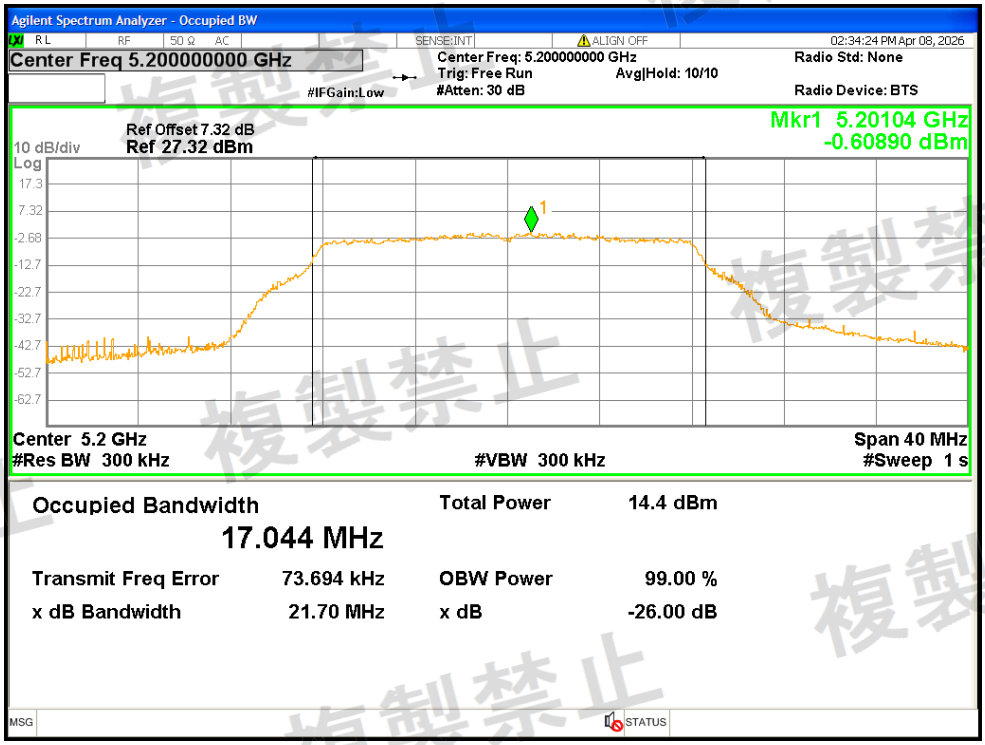


OBW NVNT a 5240MHz Ant1

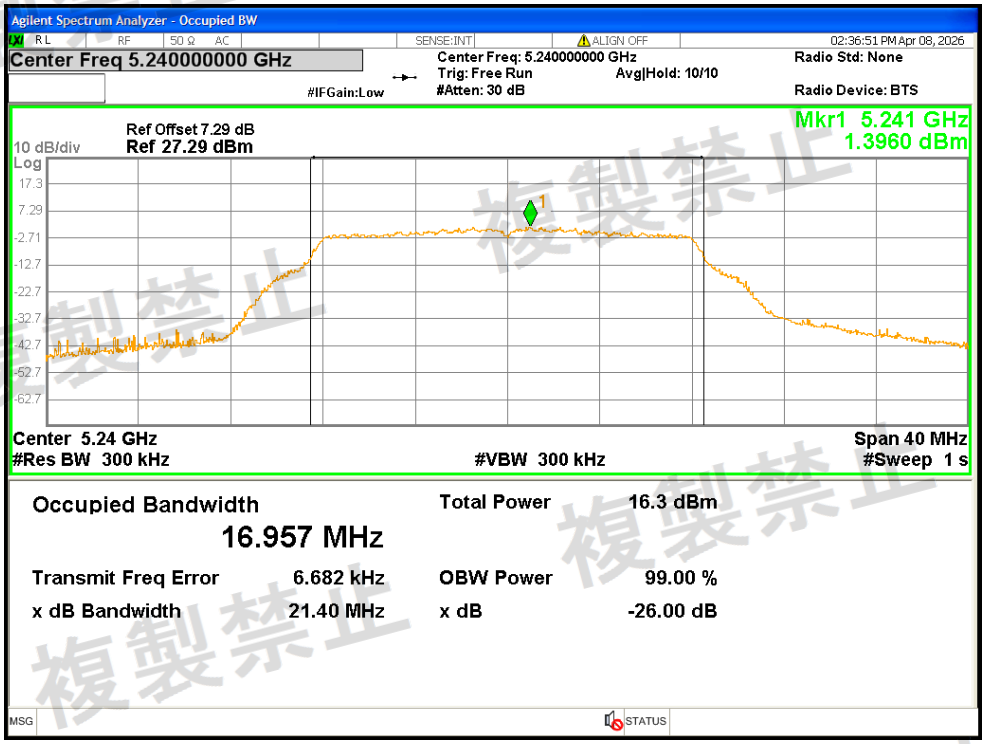


OBW NVNT a 5180MHz Ant2

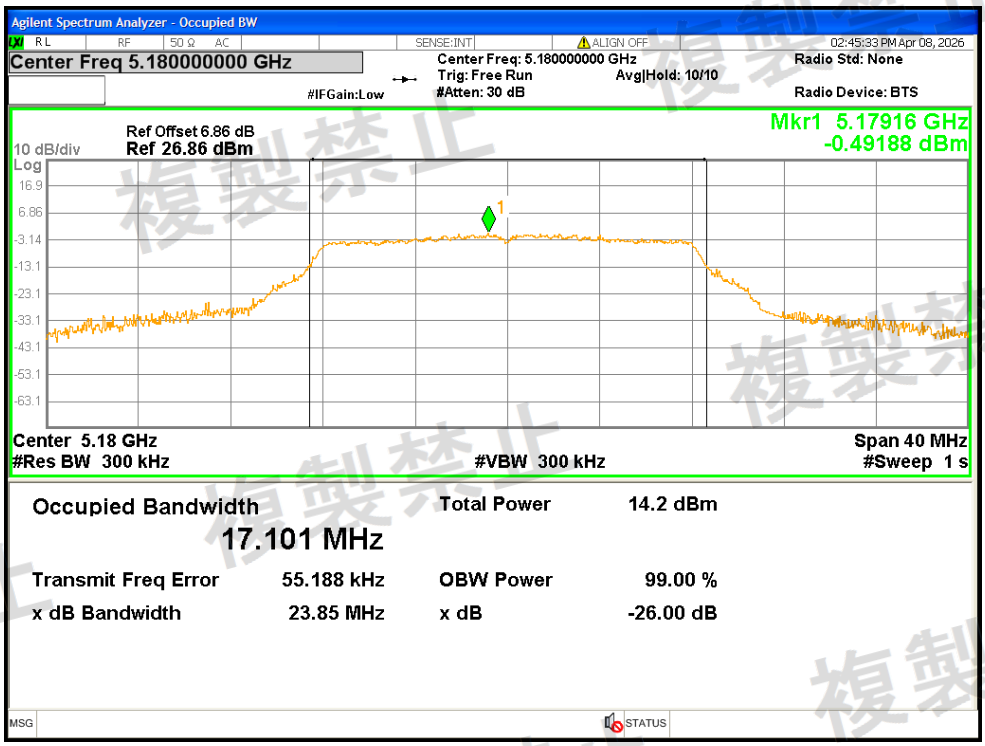


OBW NVNT a 5200MHz Ant2

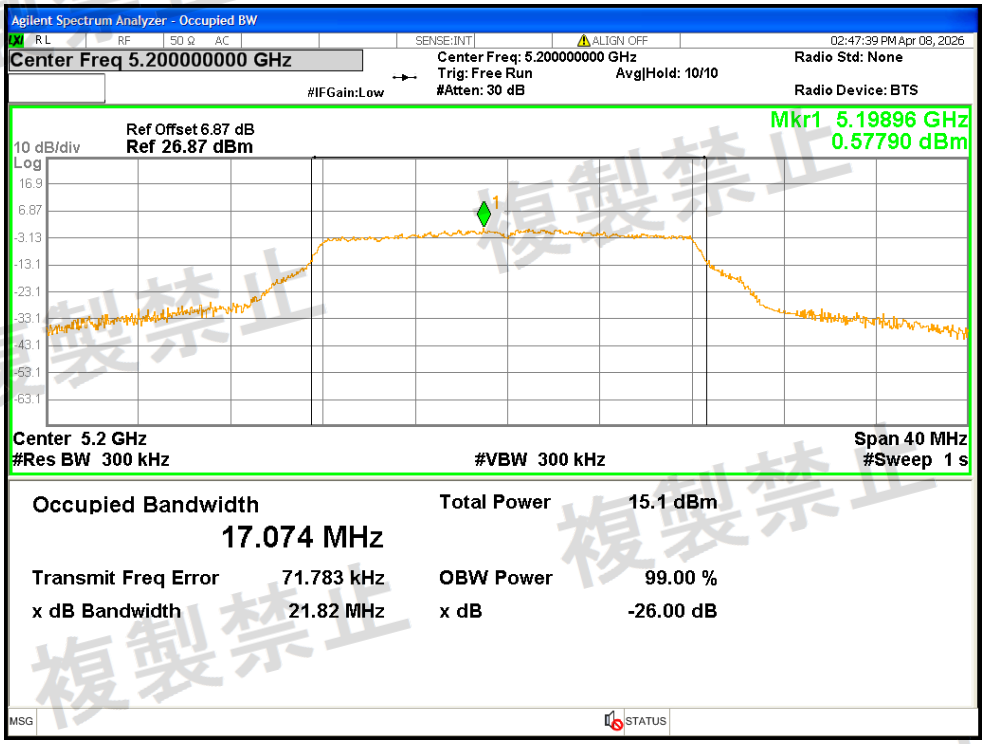


OBW NVNT a 5240MHz Ant2

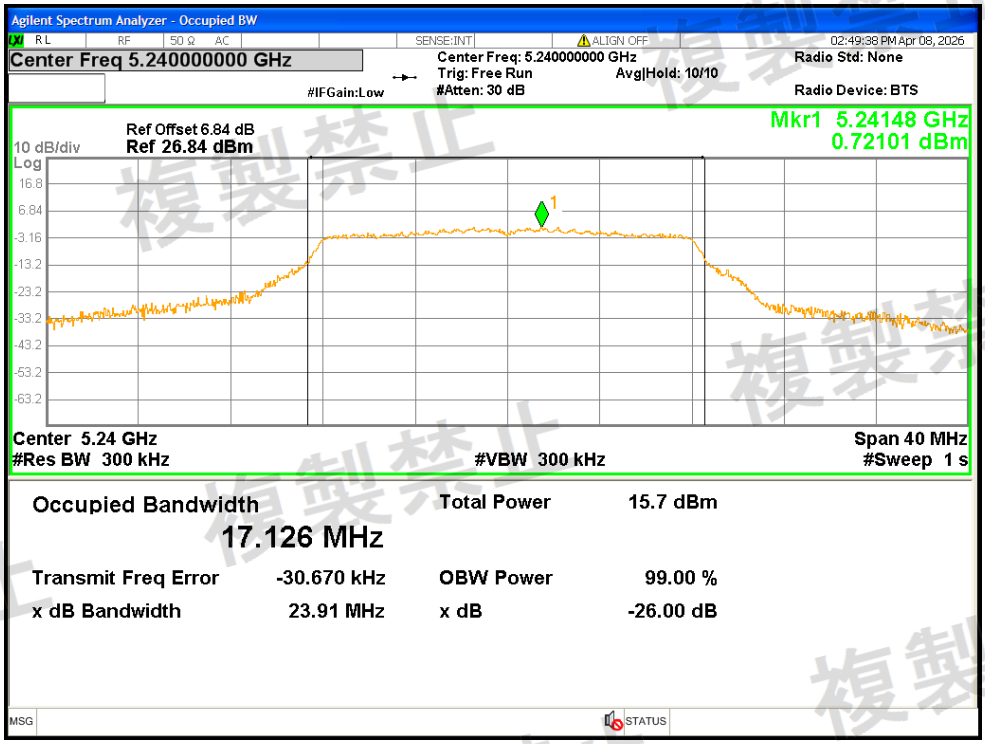


OBW NVNT n20 5180MHz Ant1

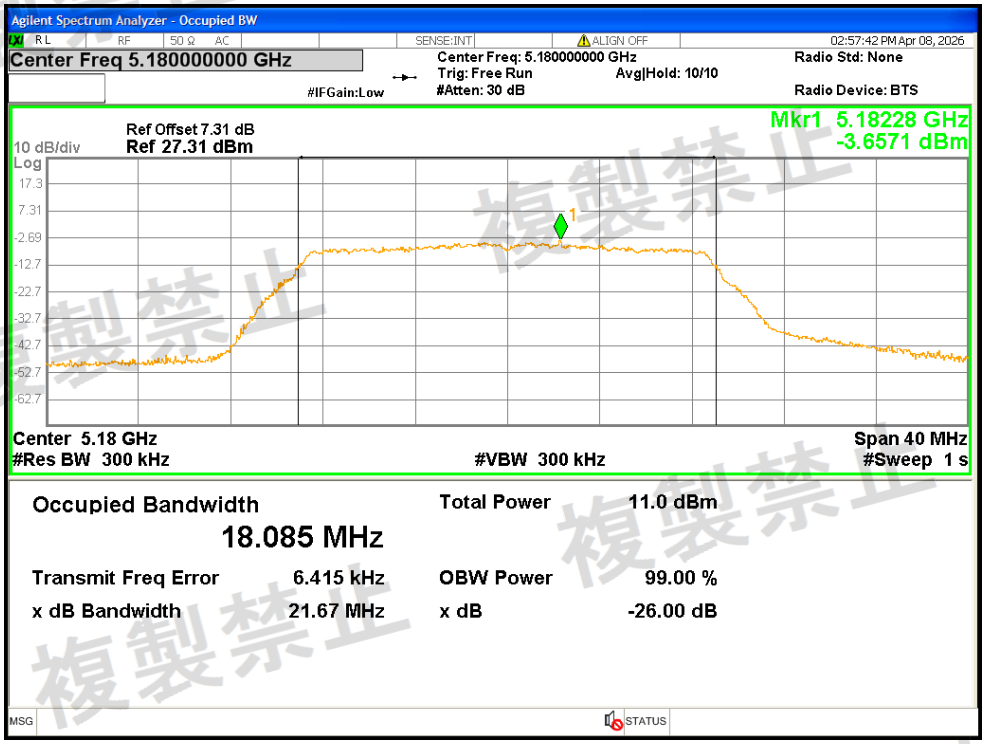


OBW NVNT n20 5180MHz Ant2

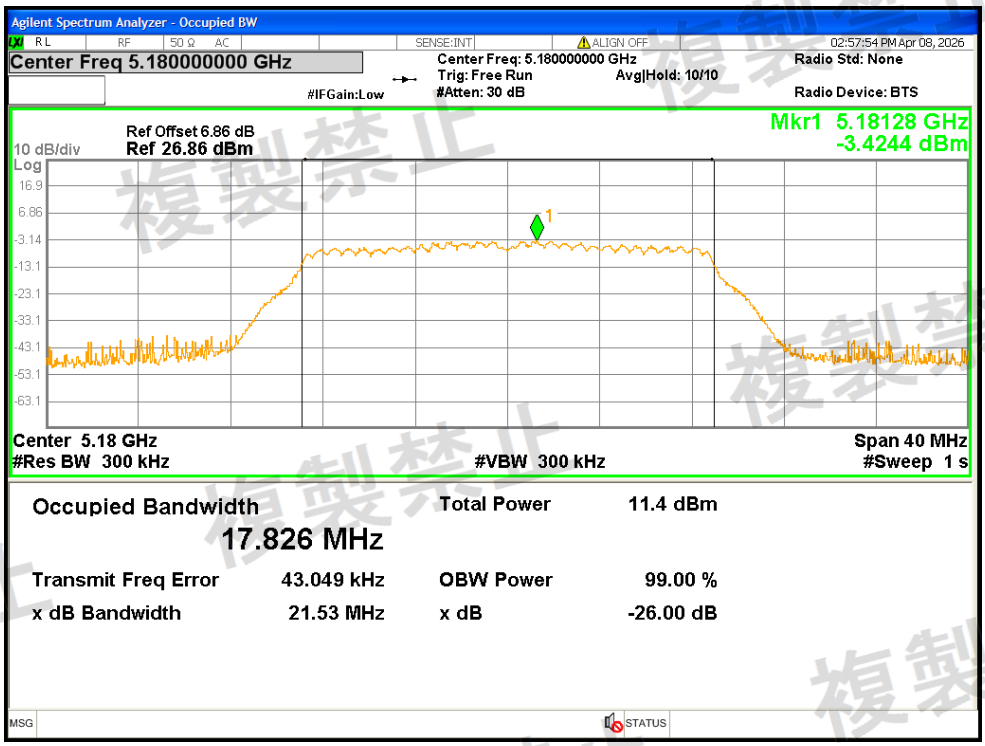


OBW NVNT n20 5200MHz Ant1

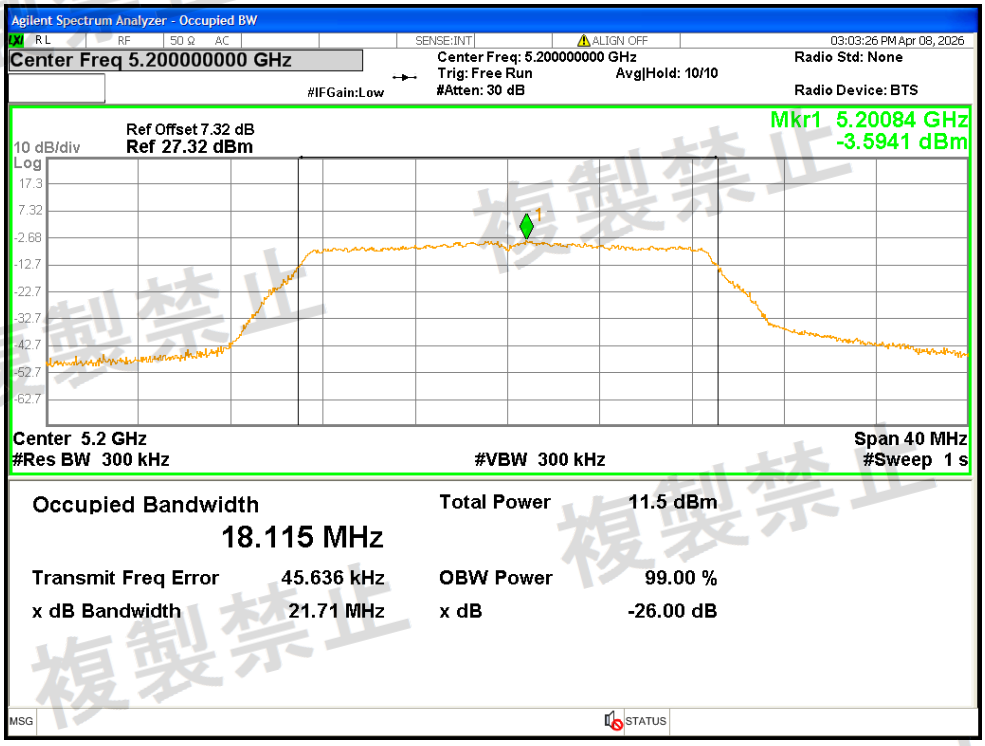


OBW NVNT n20 5200MHz Ant2

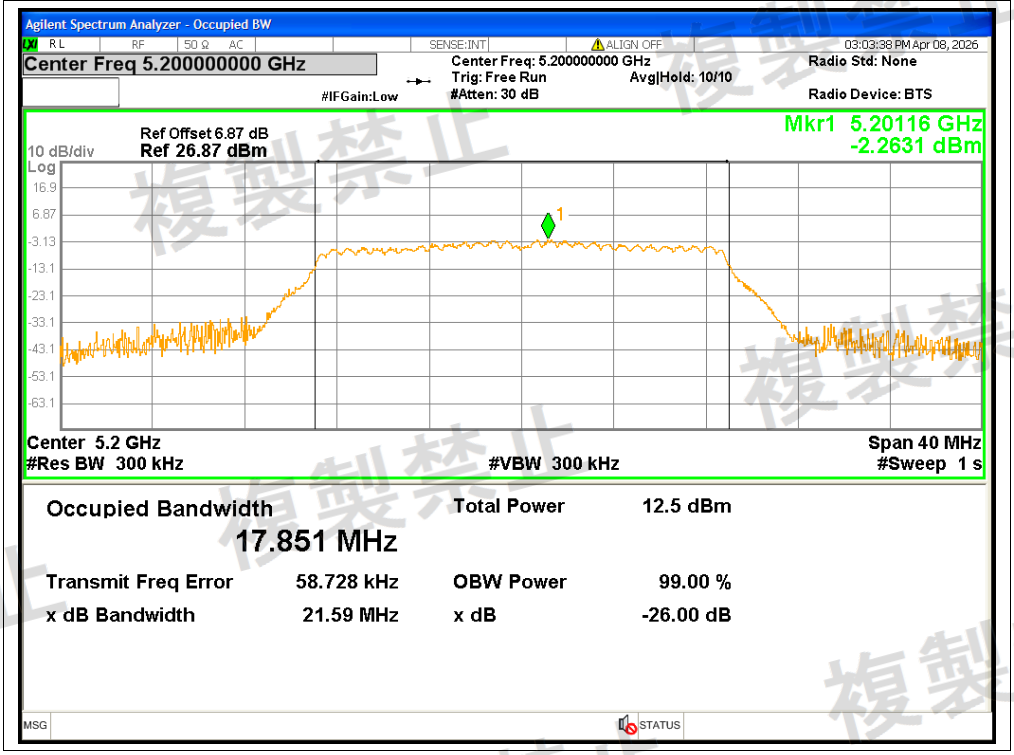


OBW NVNT n20 5240MHz Ant1

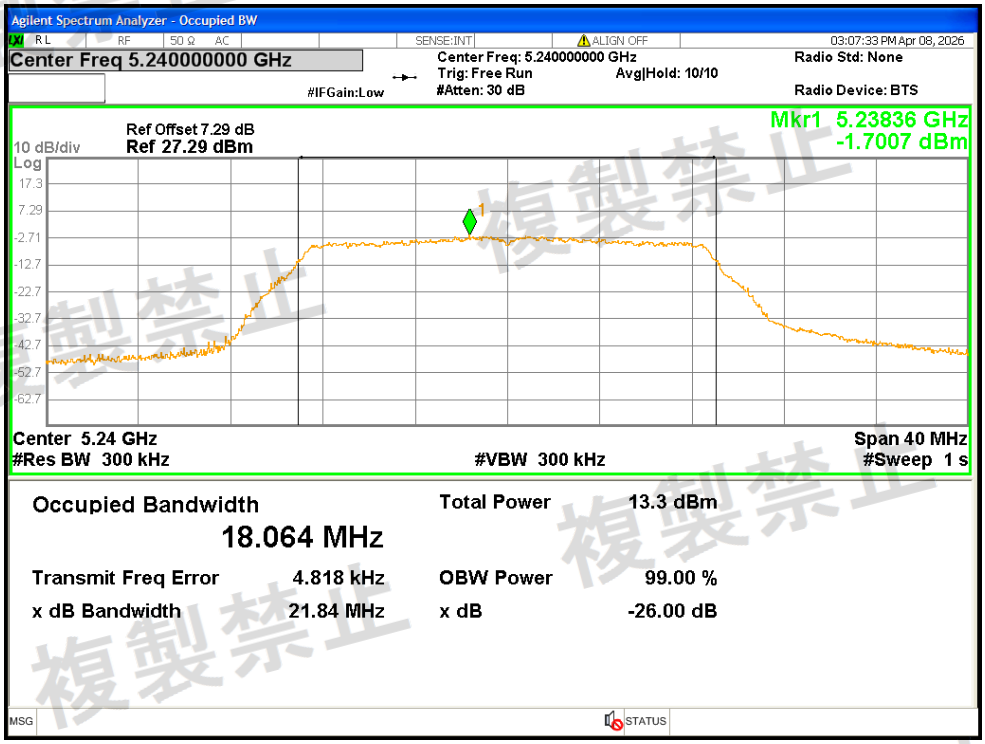


OBW NVNT n20 5240MHz Ant2

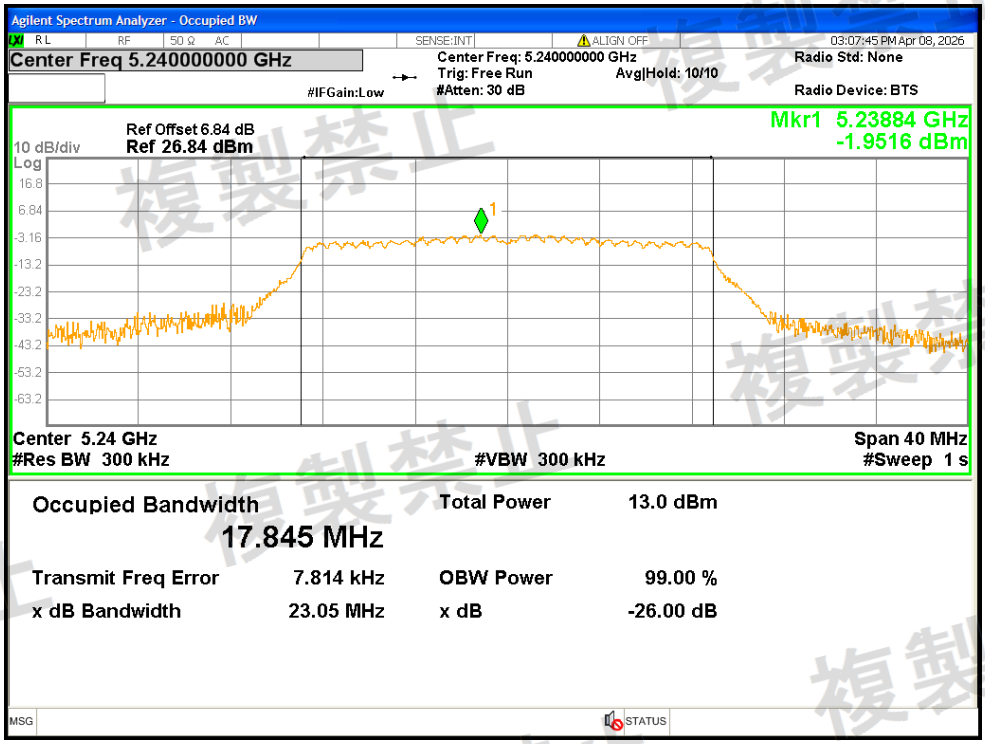


OBW NVNT n40 5190MHz Ant1

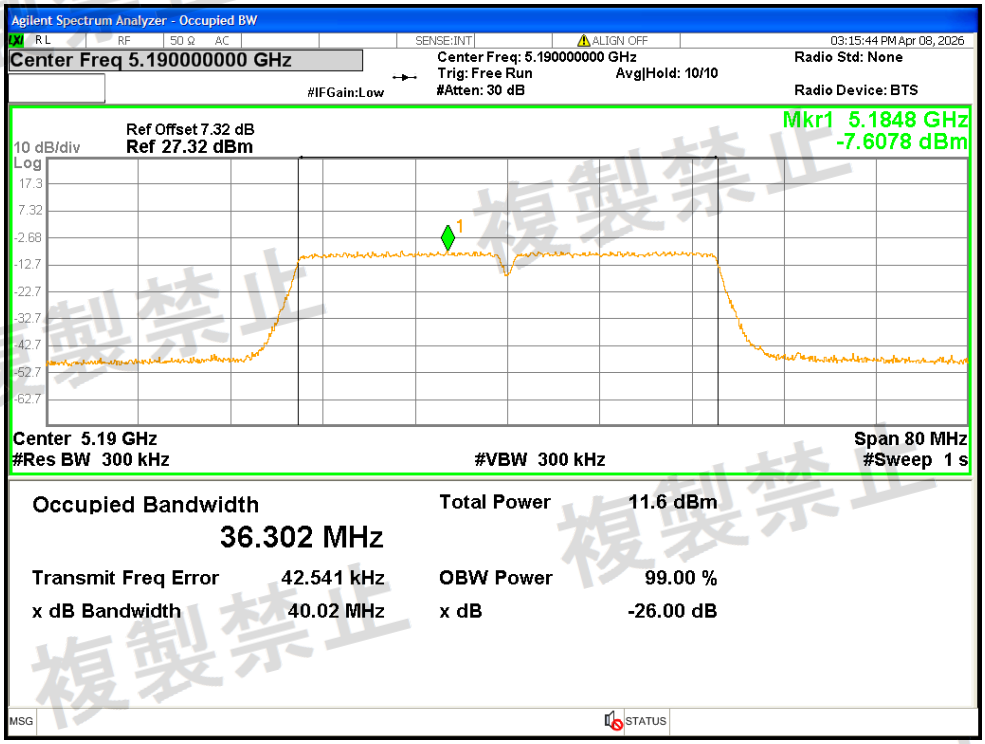


OBW NVNT n40 5190MHz Ant2

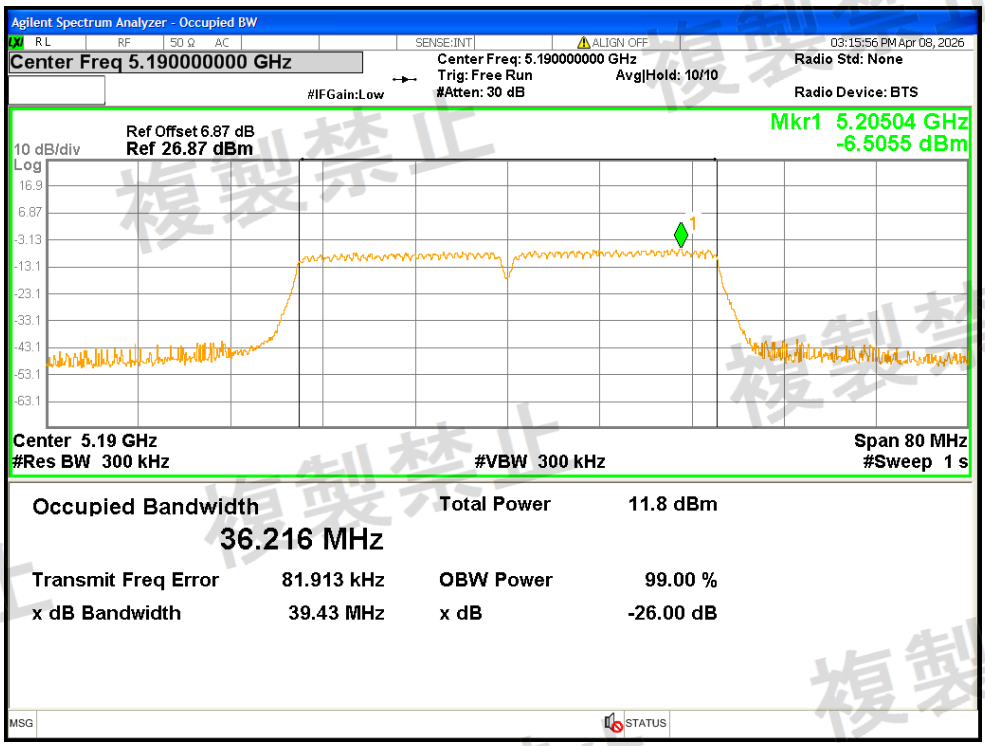


OBW NVNT n40 5230MHz Ant1

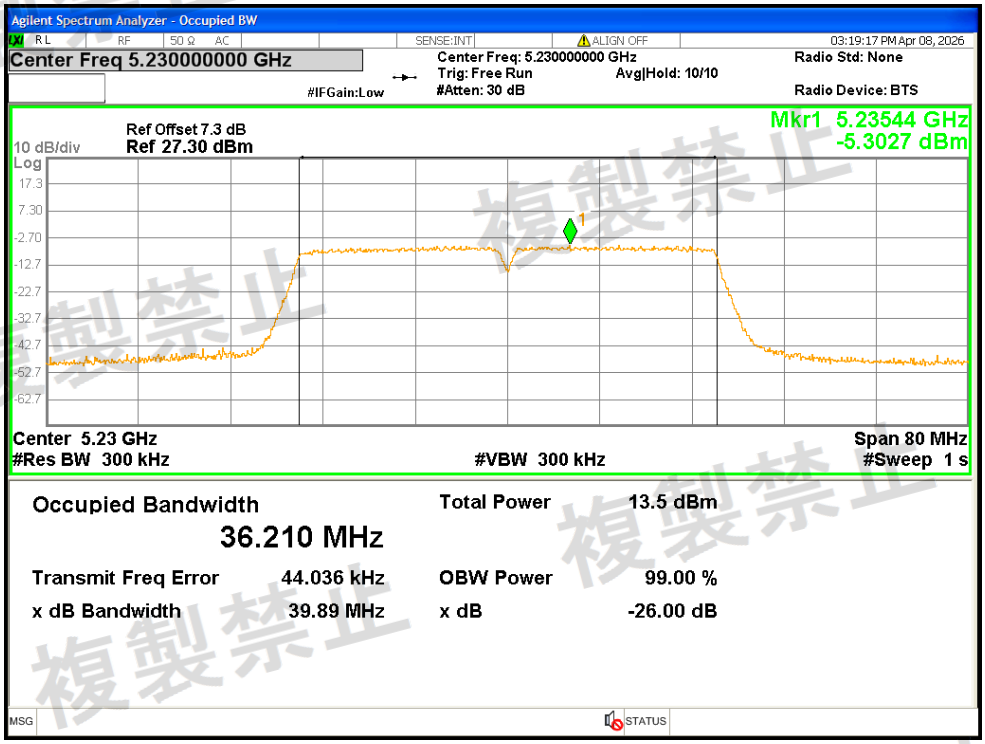


OBW NVNT n40 5230MHz Ant2

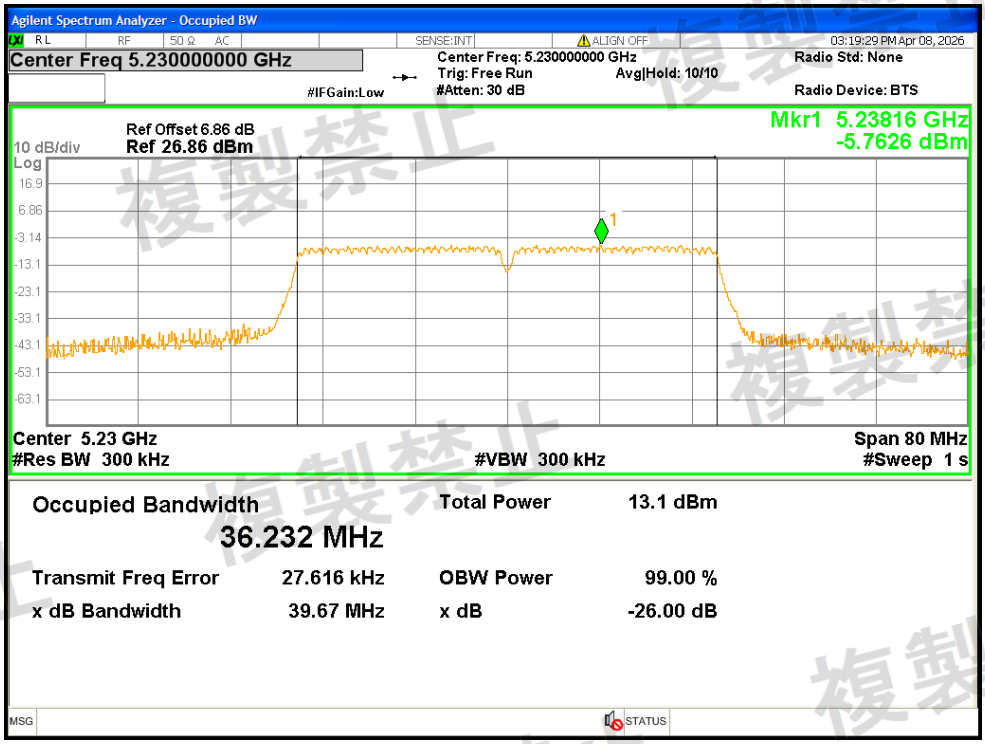


OBW NVNT ac20 5180MHz Ant1

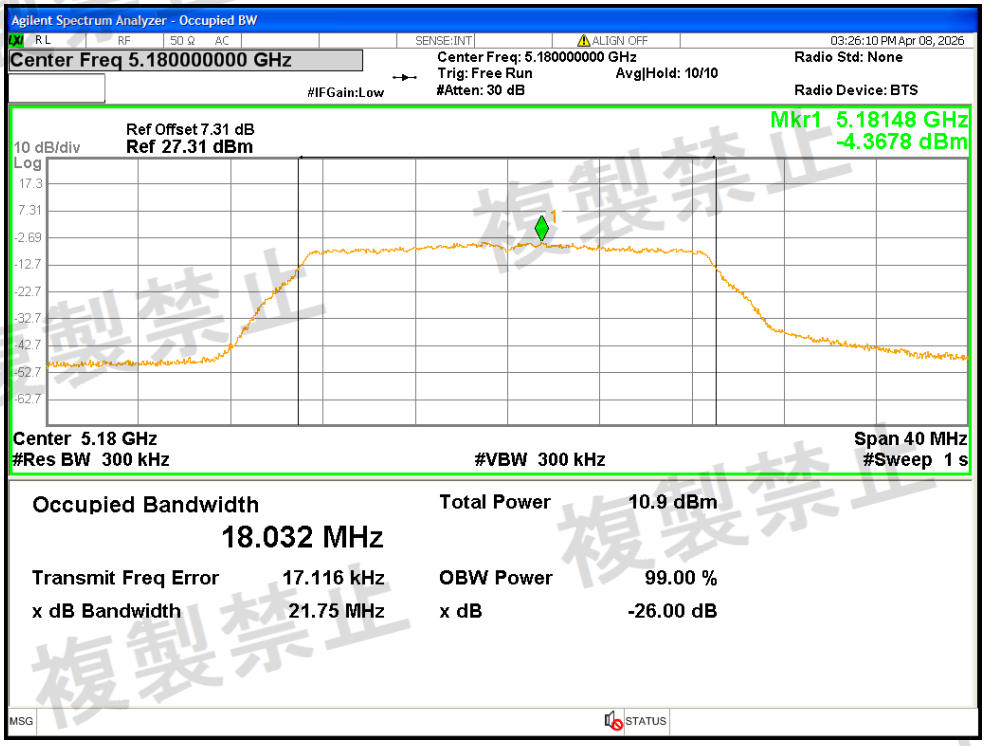


OBW NVNT ac20 5180MHz Ant2

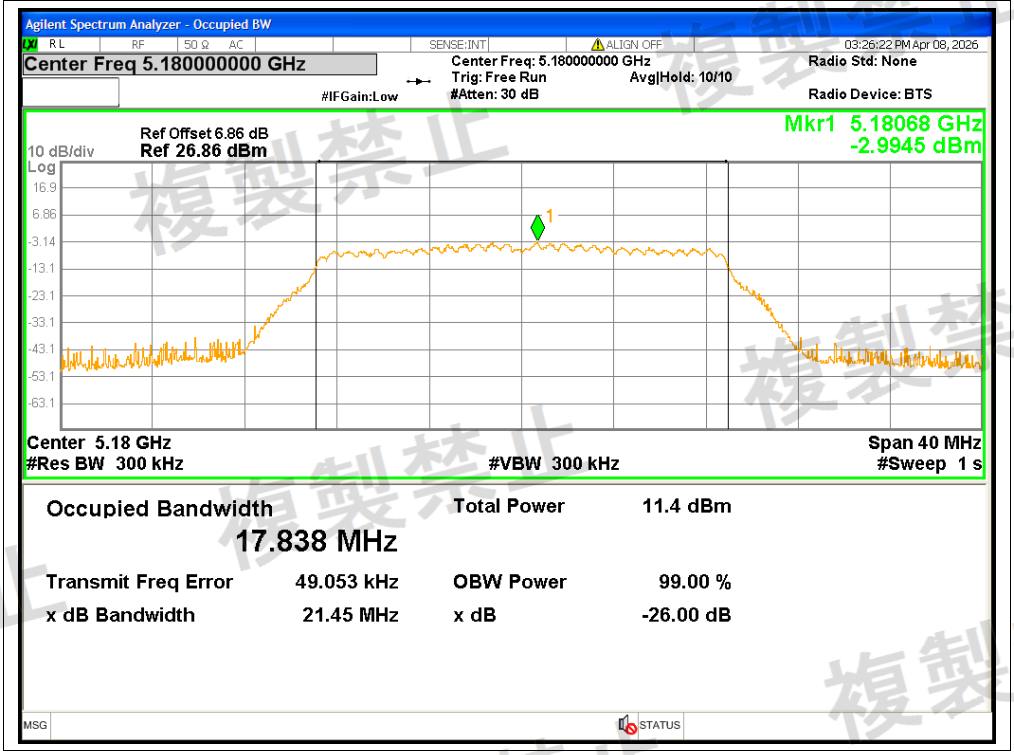


OBW NVNT ac20 5200MHz Ant1

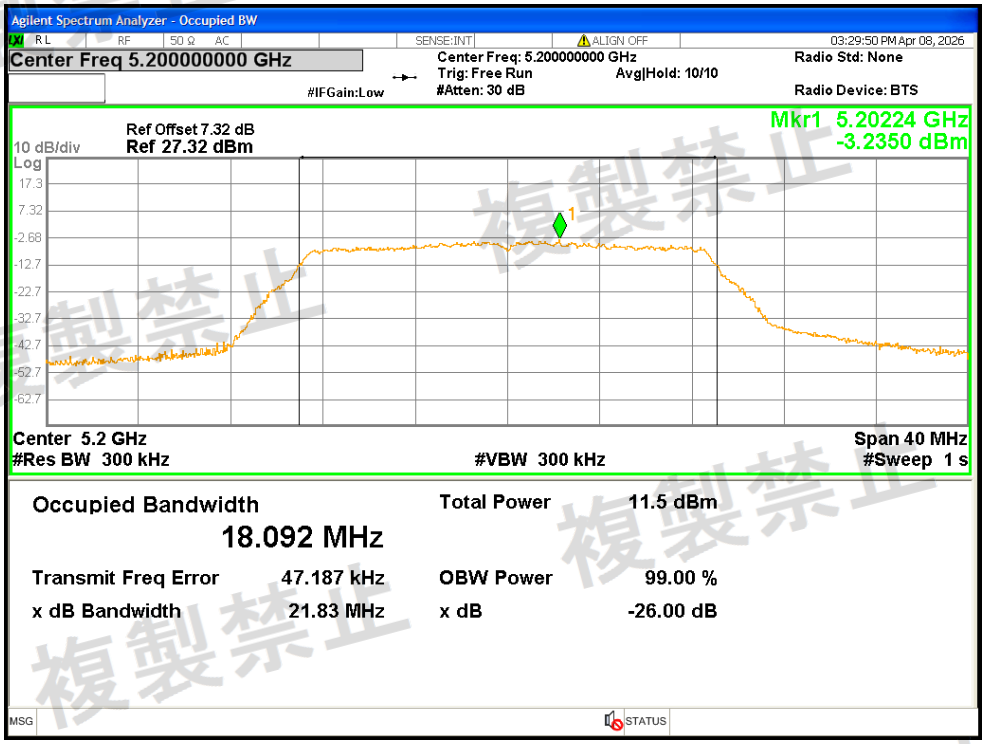


OBW NVNT ac20 5200MHz Ant2

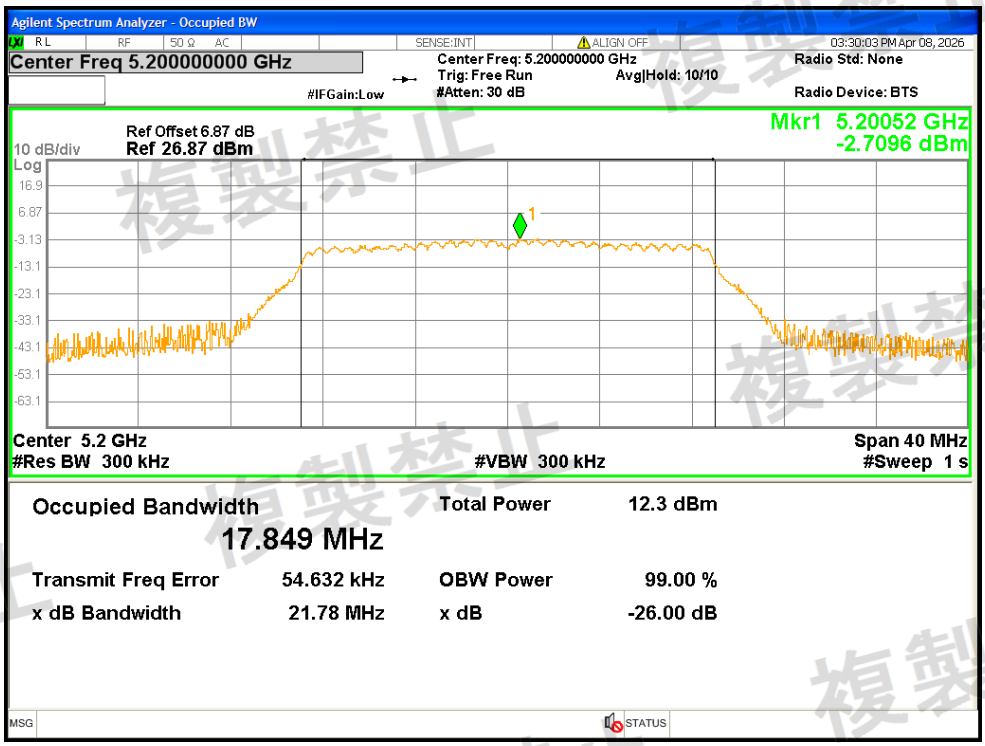


OBW NVNT ac20 5240MHz Ant1

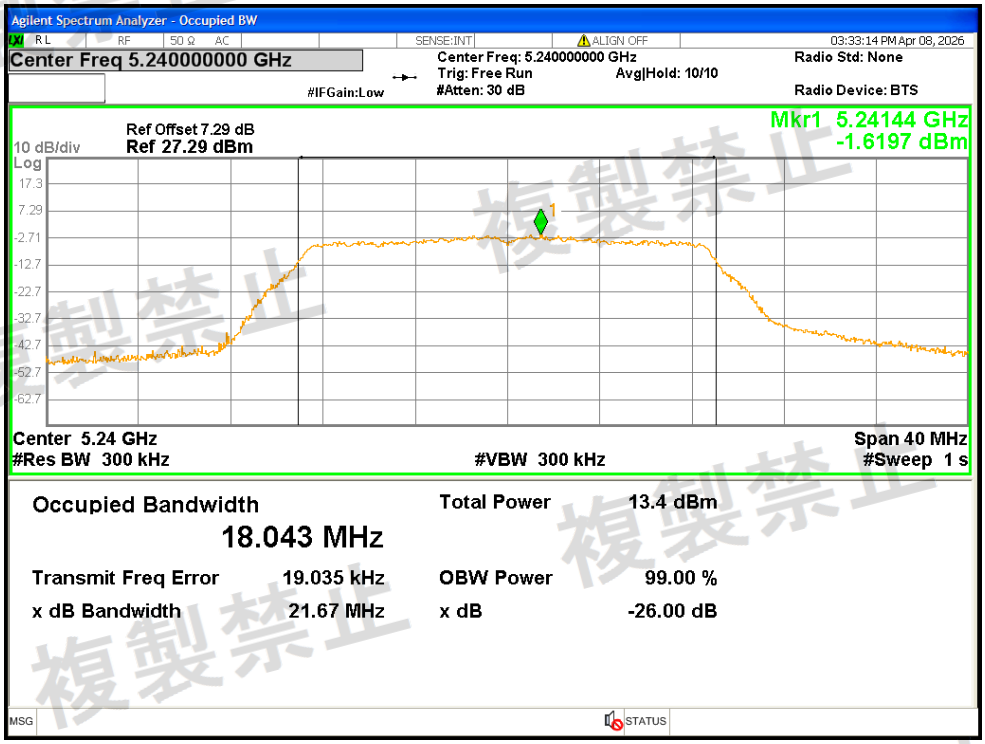


OBW NVNT ac20 5240MHz Ant2

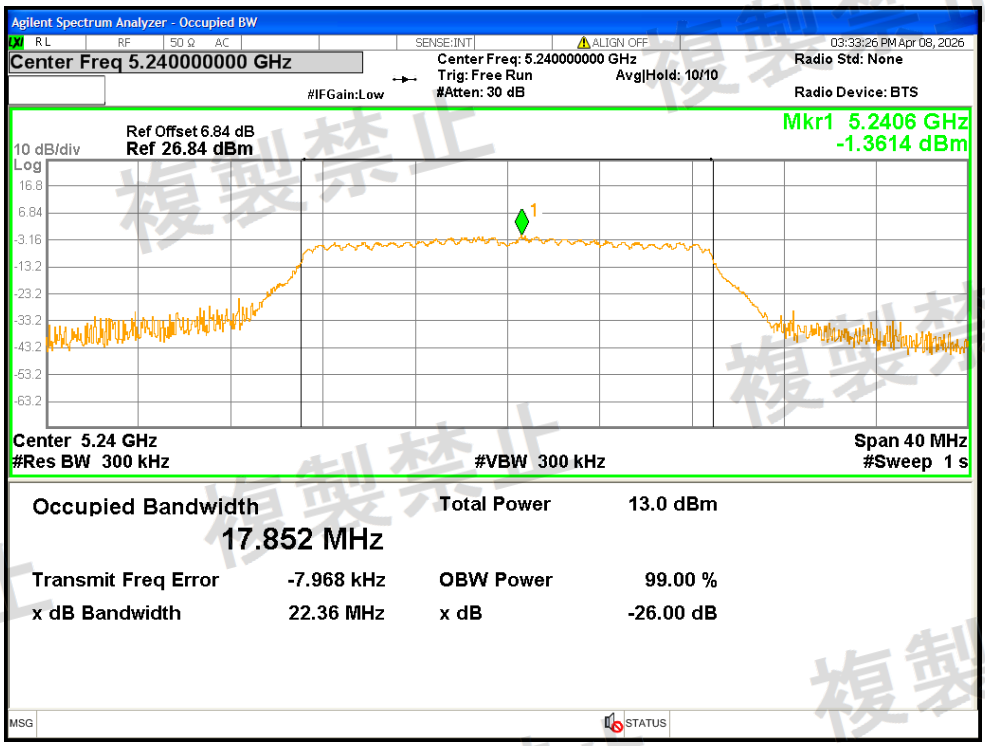


OBW NVNT ac40 5190MHz Ant1

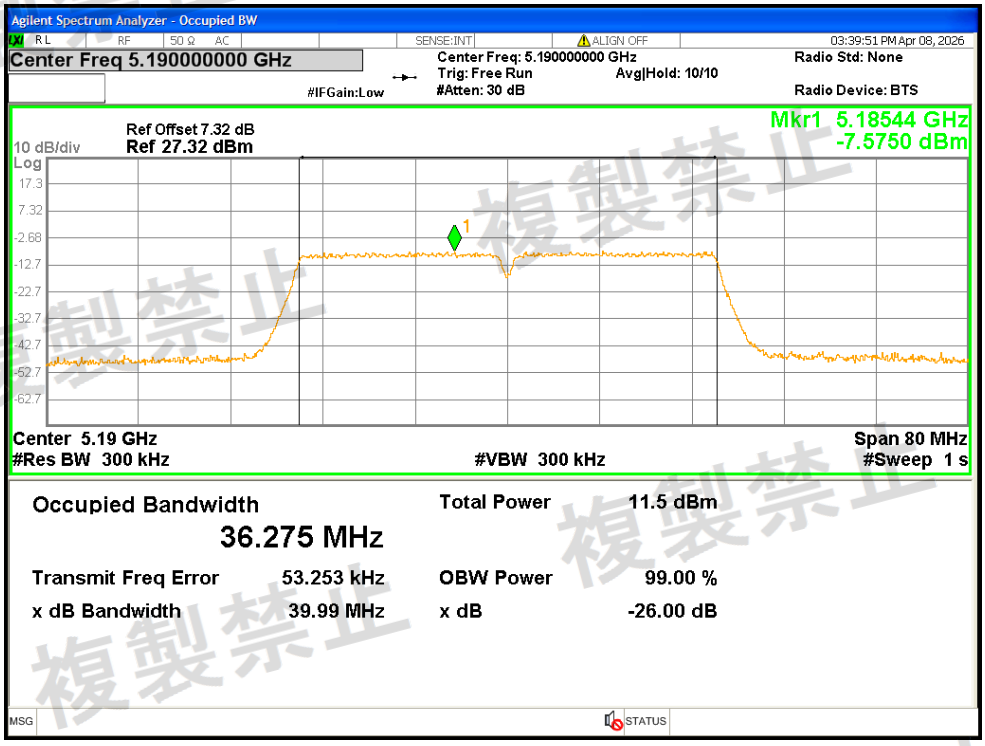


OBW NVNT ac40 5190MHz Ant2

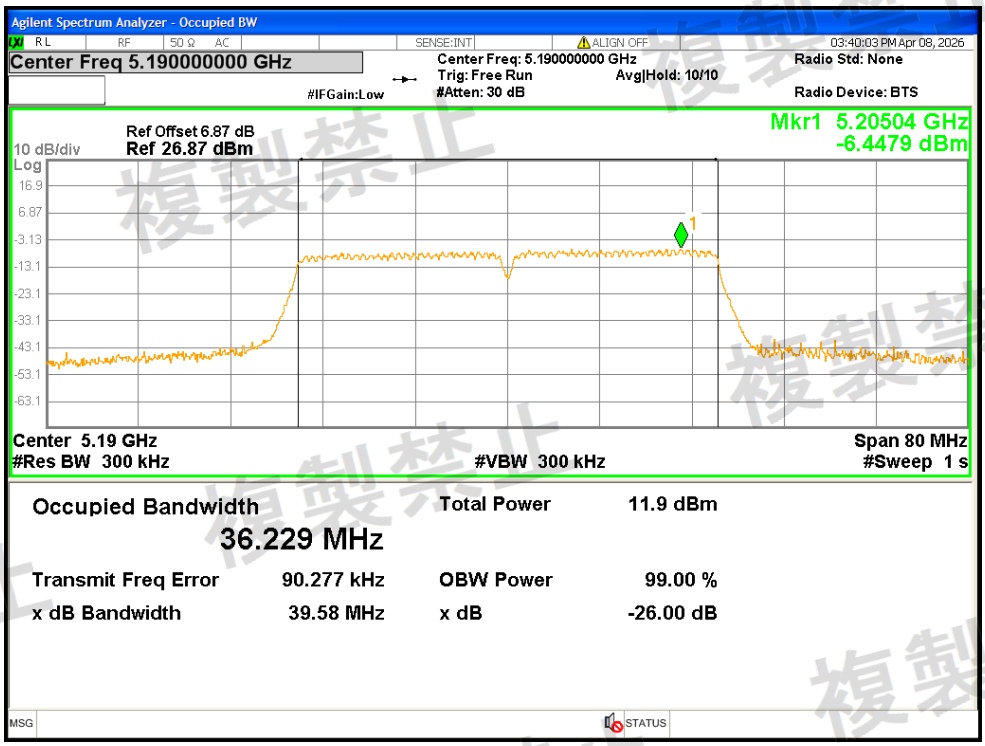


OBW NVNT ac40 5230MHz Ant1

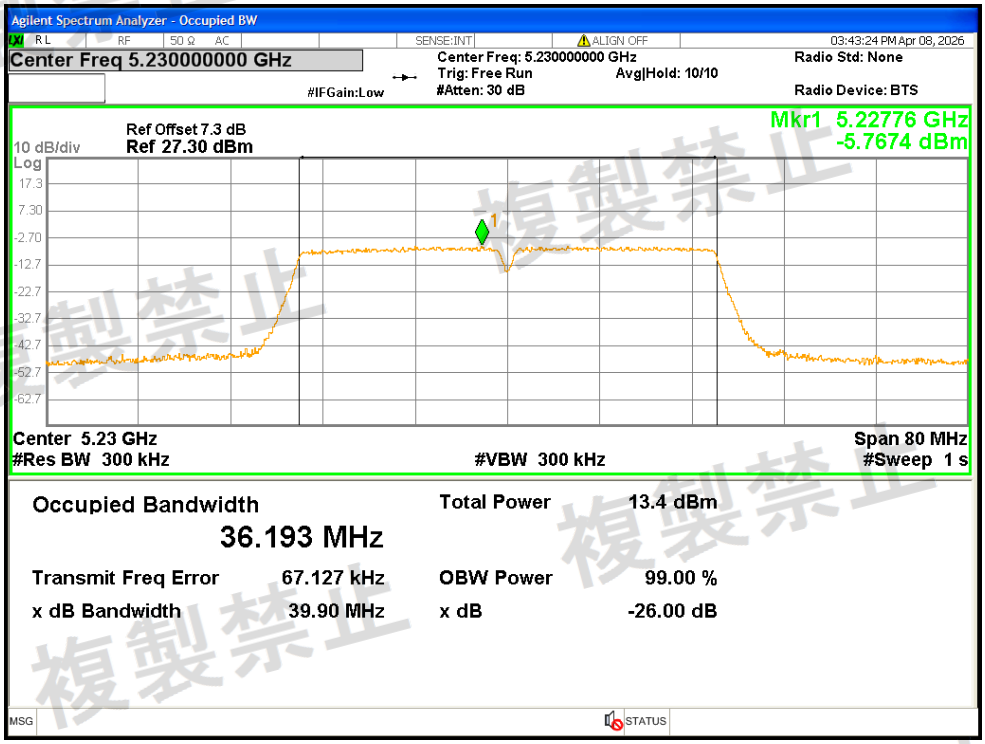


OBW NVNT ac40 5230MHz Ant2

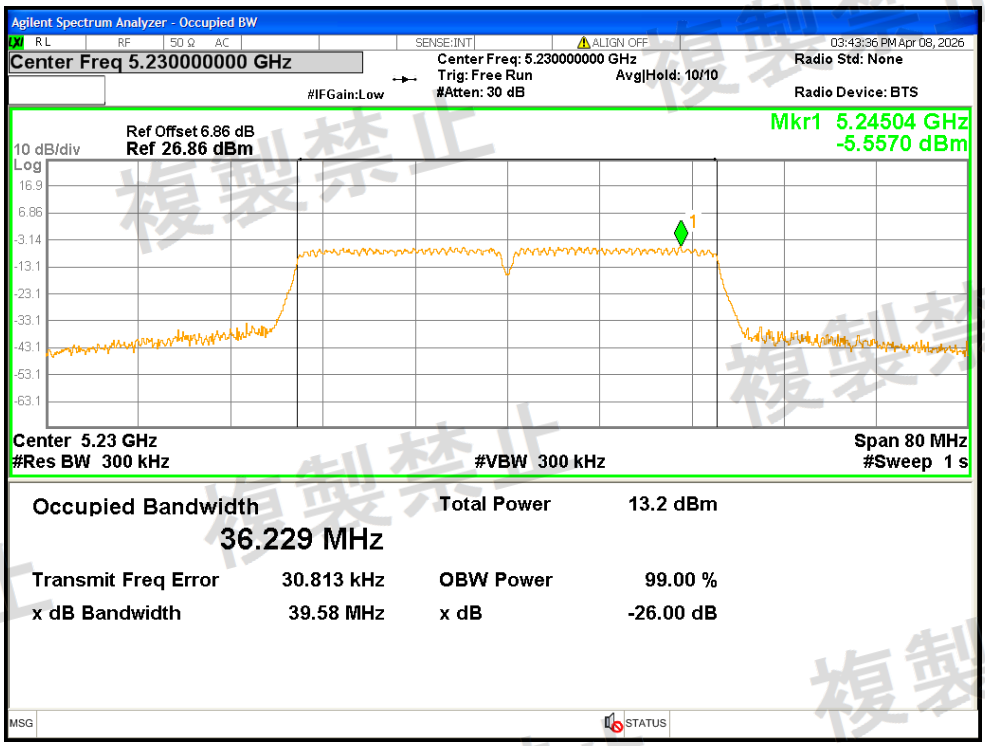


OBW NVNT ac80 5210MHz Ant1

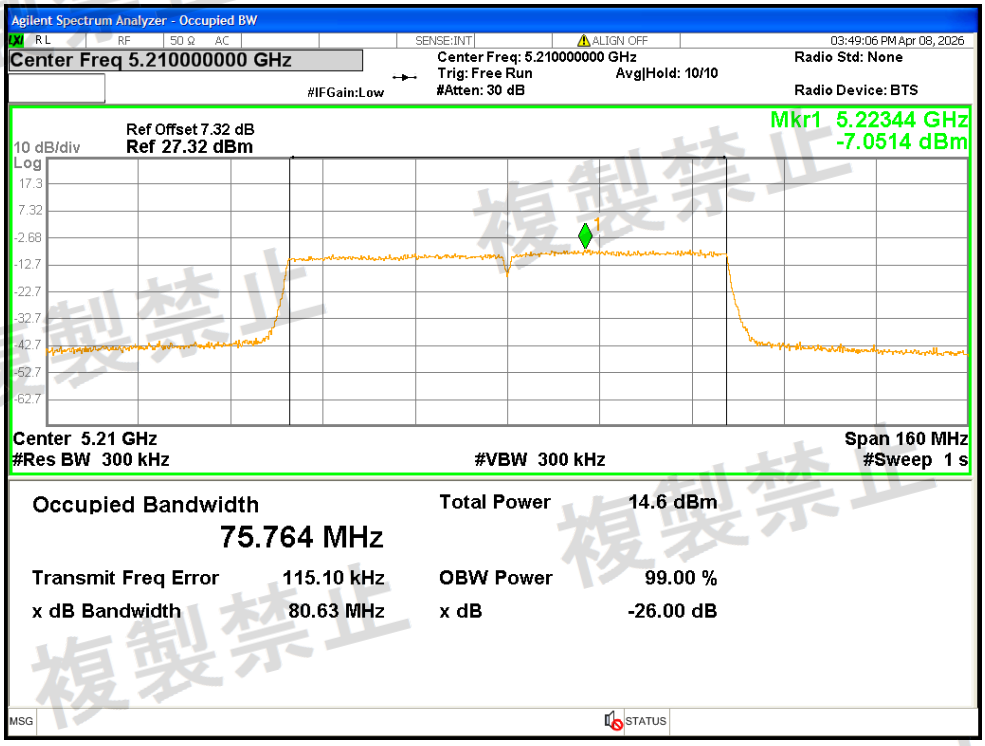


OBW NVNT ac80 5210MHz Ant2

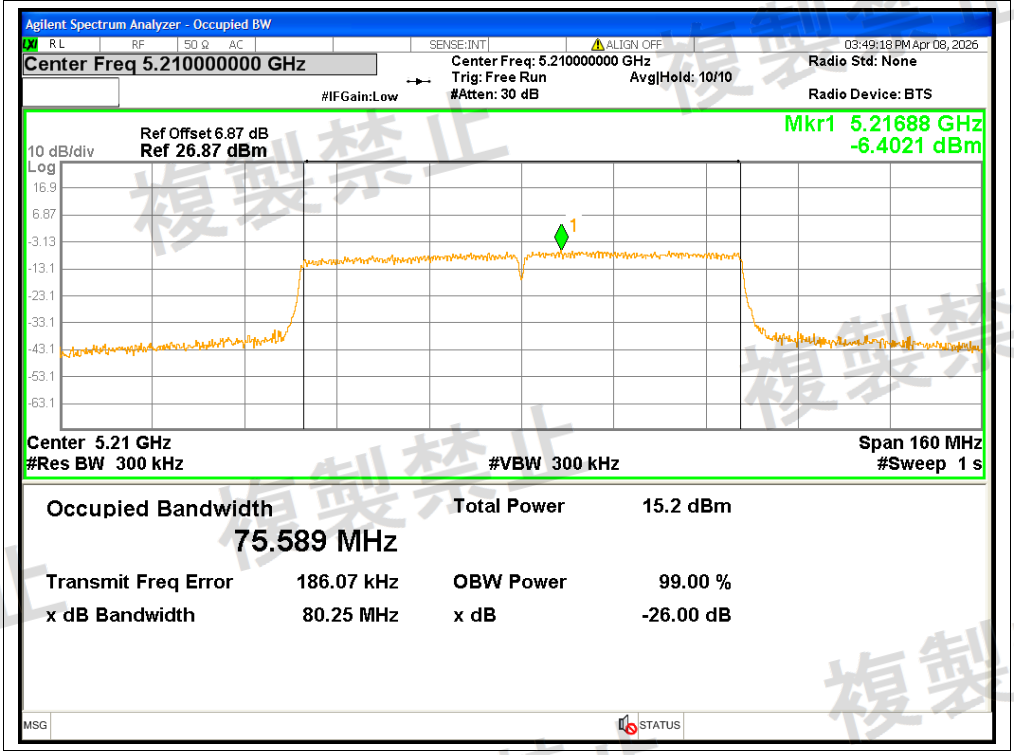


OBW NVNT ax20 5180MHz Ant1

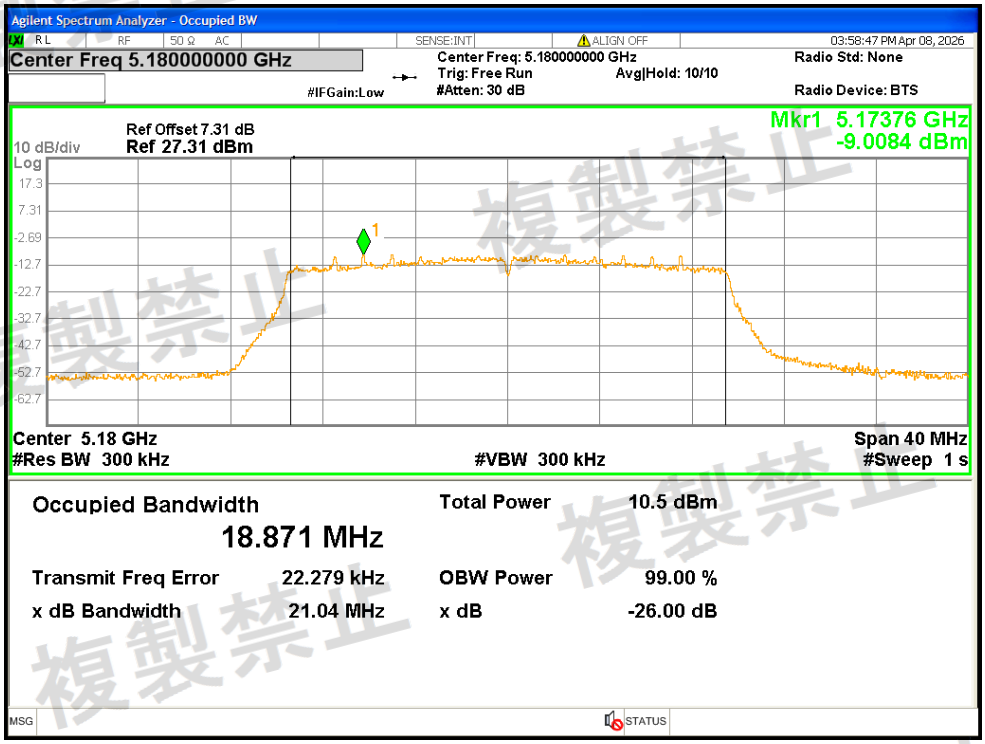


OBW NVNT ax20 5180MHz Ant2

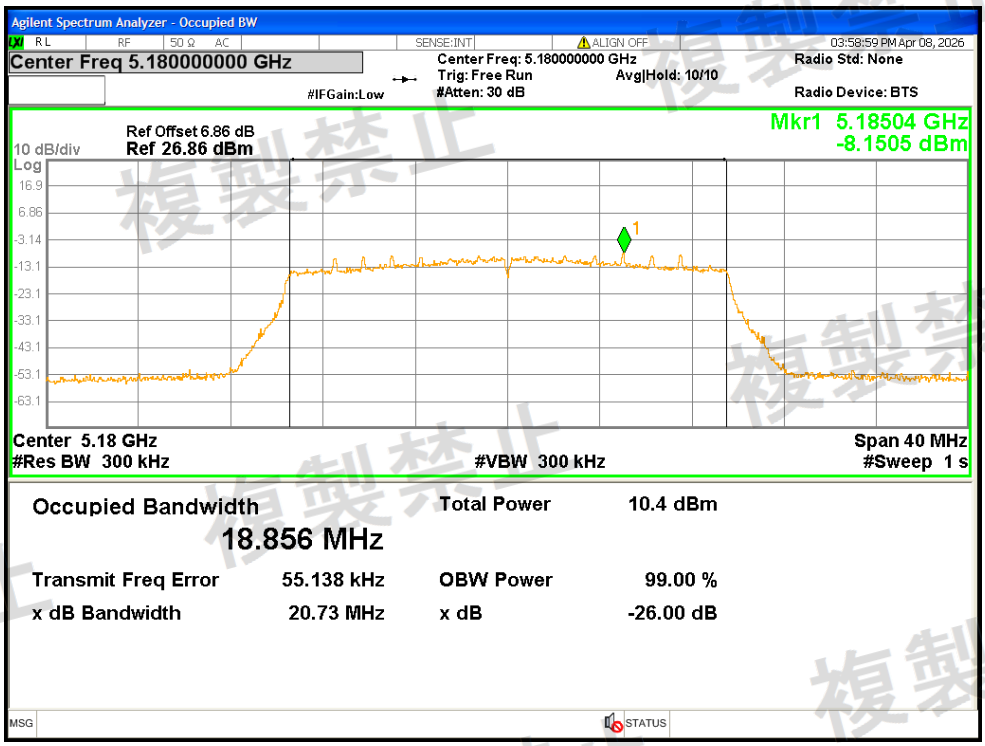


OBW NVNT ax20 5200MHz Ant1

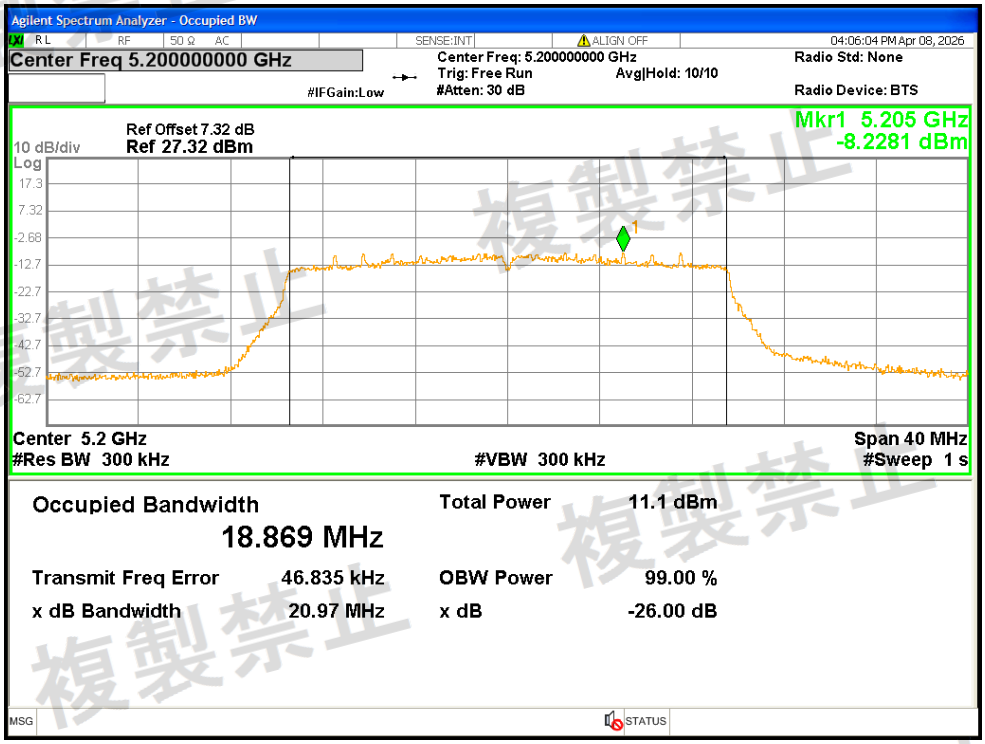


OBW NVNT ax20 5200MHz Ant2

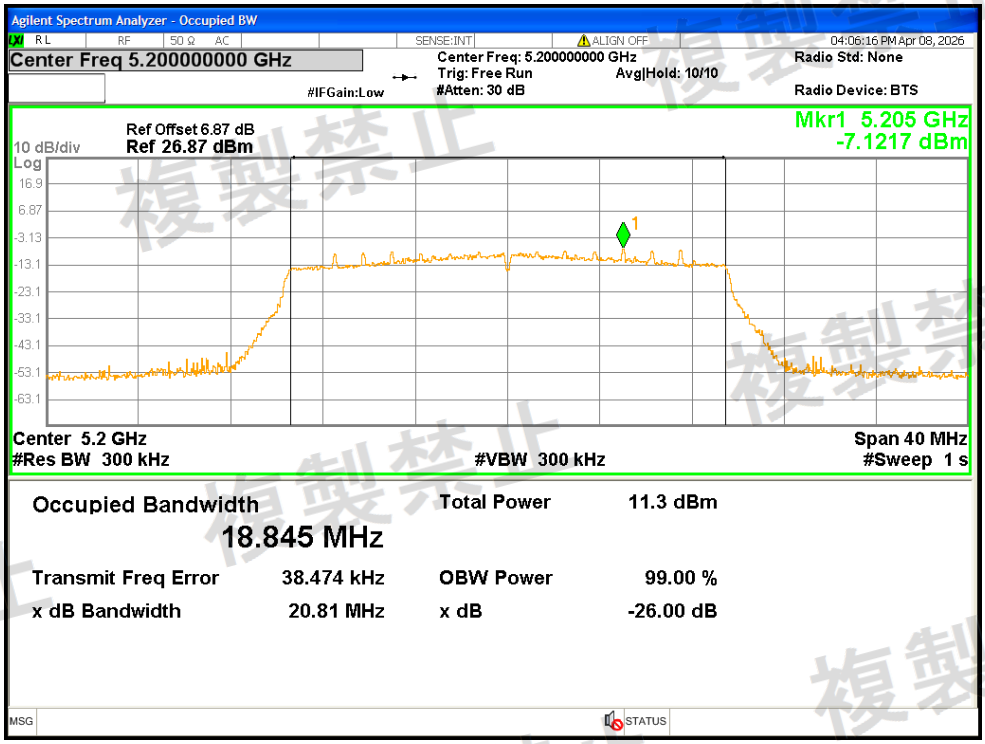


OBW NVNT ax20 5240MHz Ant1

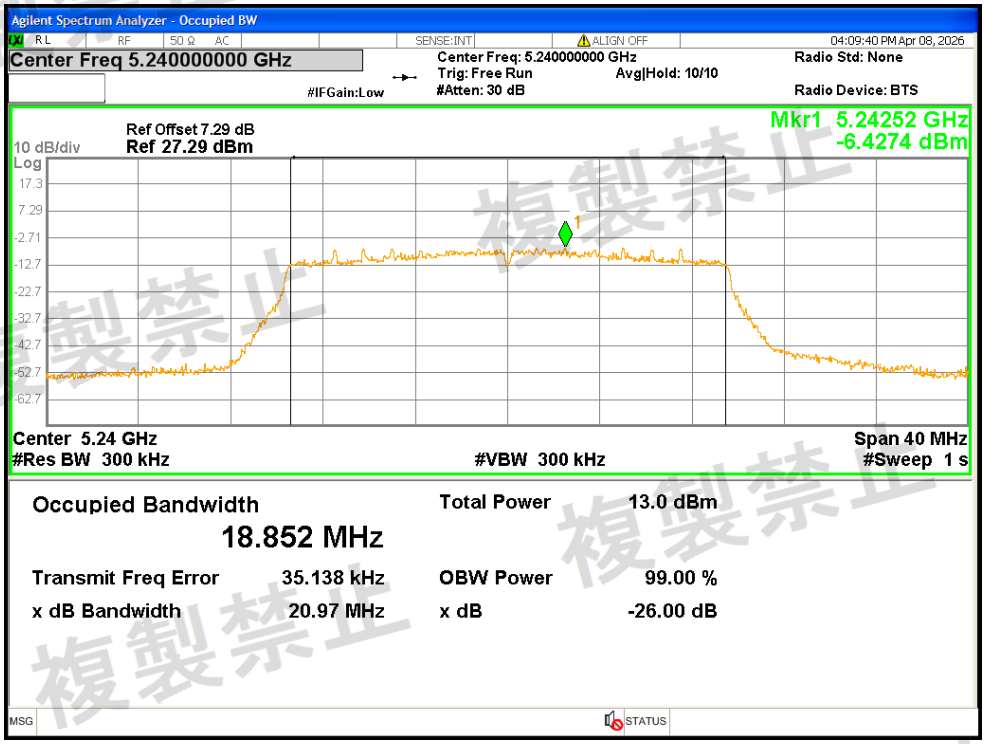


OBW NVNT ax20 5240MHz Ant2

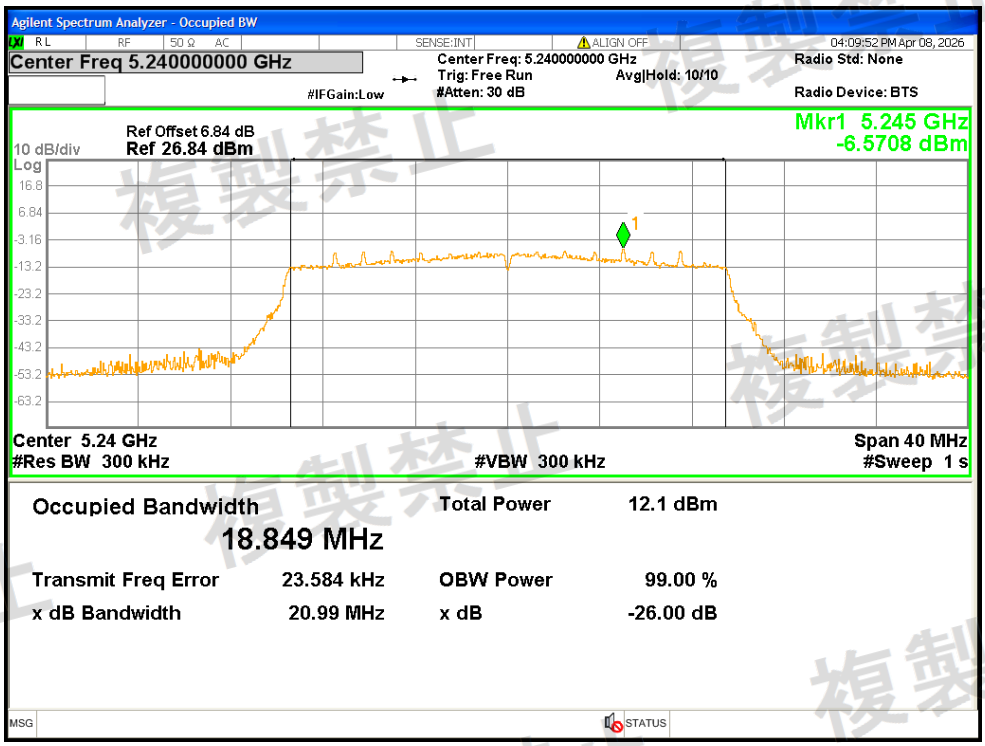


OBW NVNT ax40 5190MHz Ant1

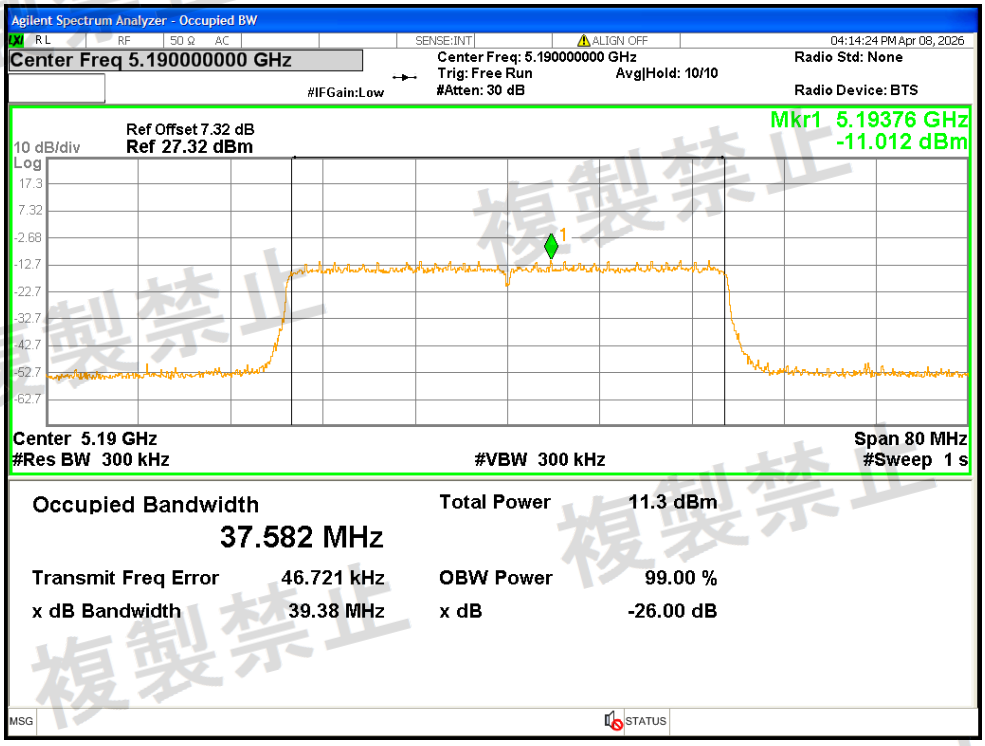


OBW NVNT ax40 5190MHz Ant2

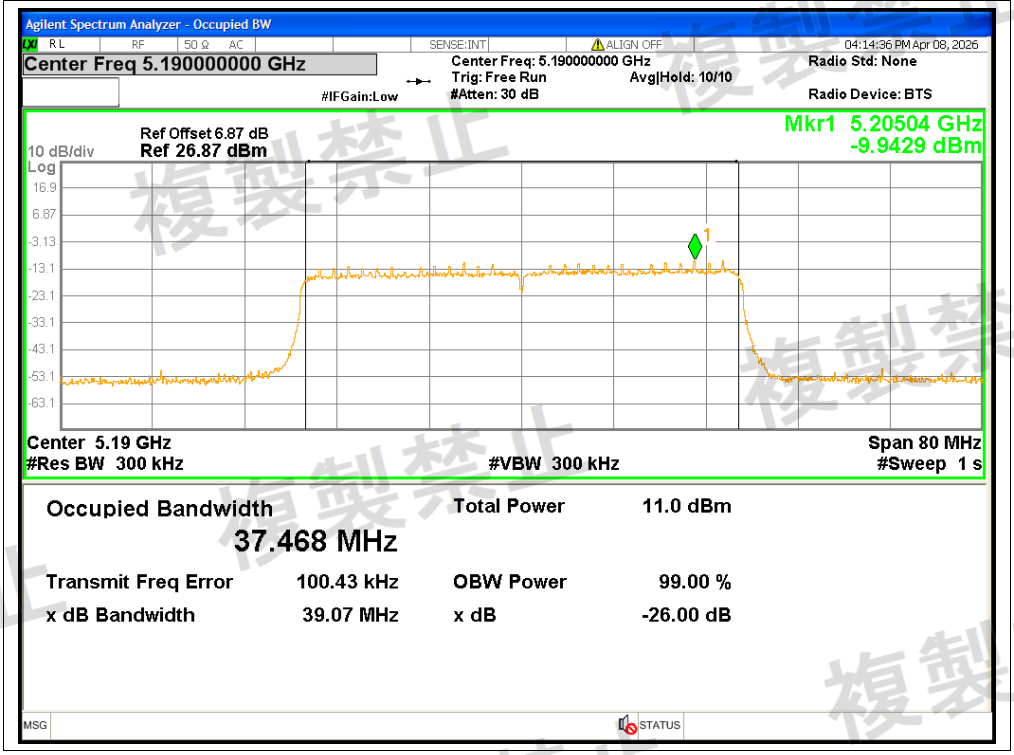


OBW NVNT ax40 5230MHz Ant1

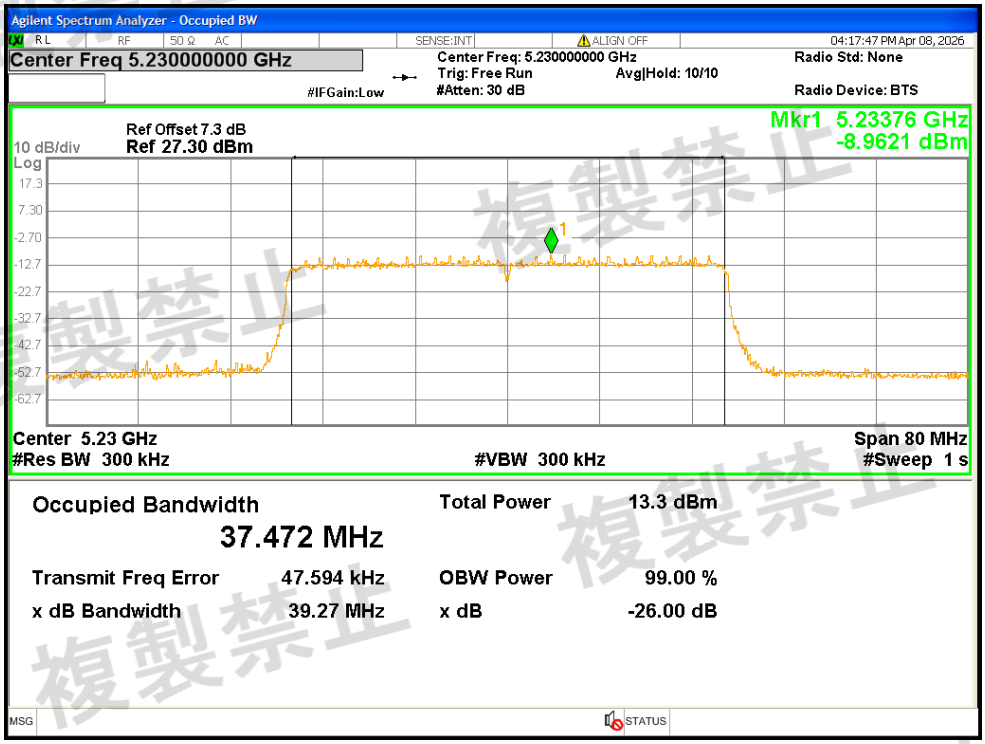


OBW NVNT ax40 5230MHz Ant2

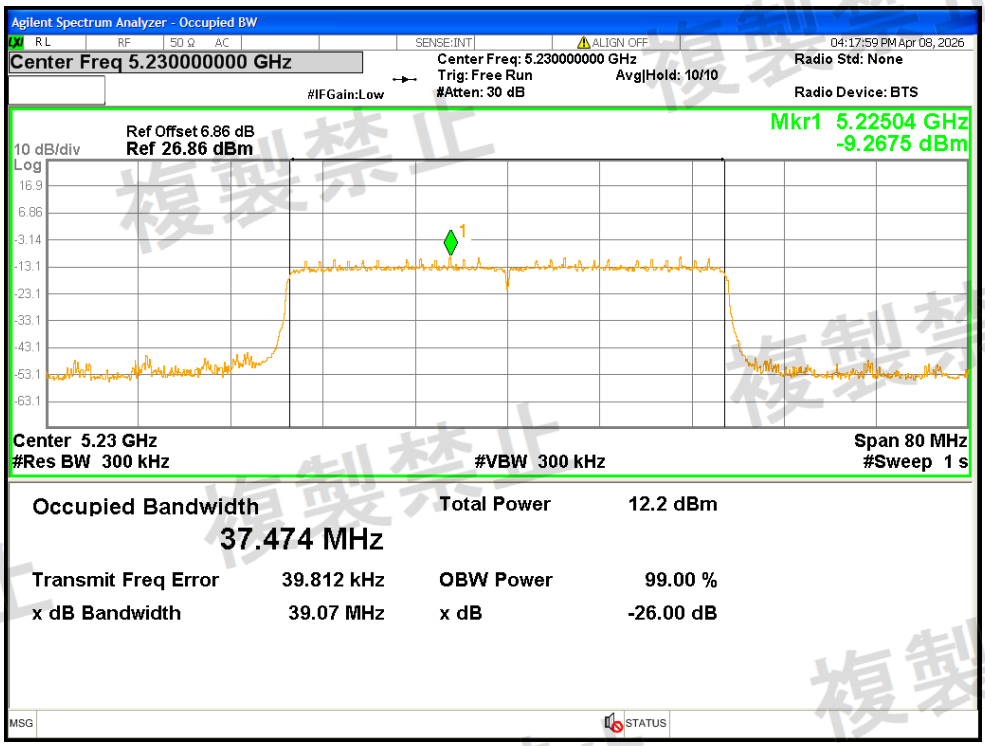

OBW NVNT ax80 5210MHz Ant1

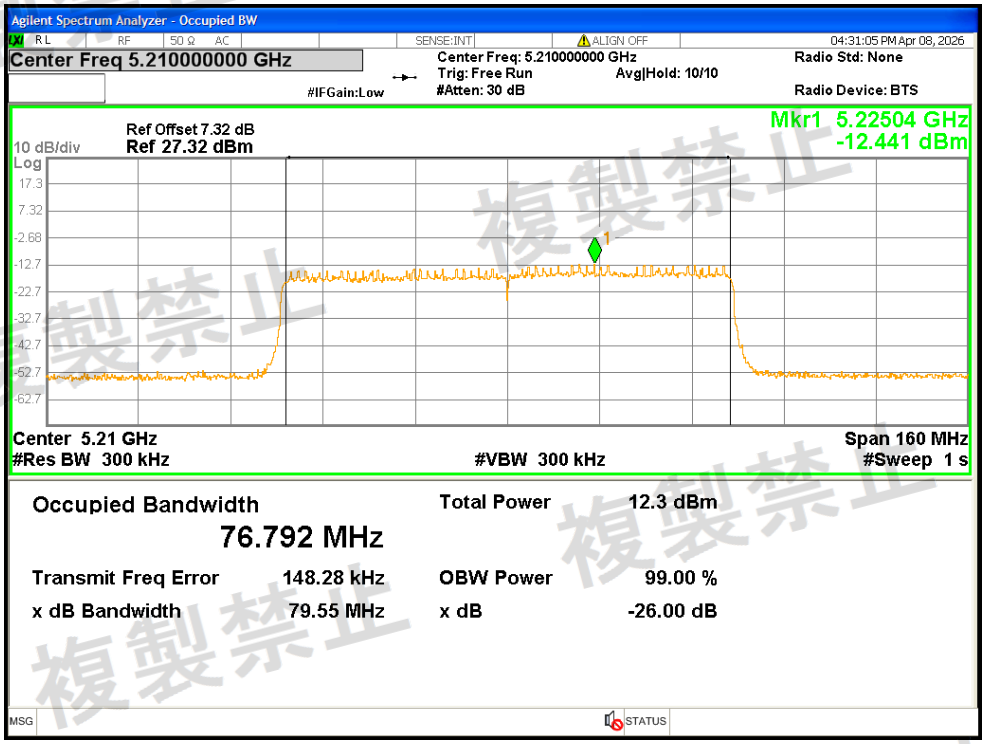

OBW NVNT ax80 5210MHz Ant2

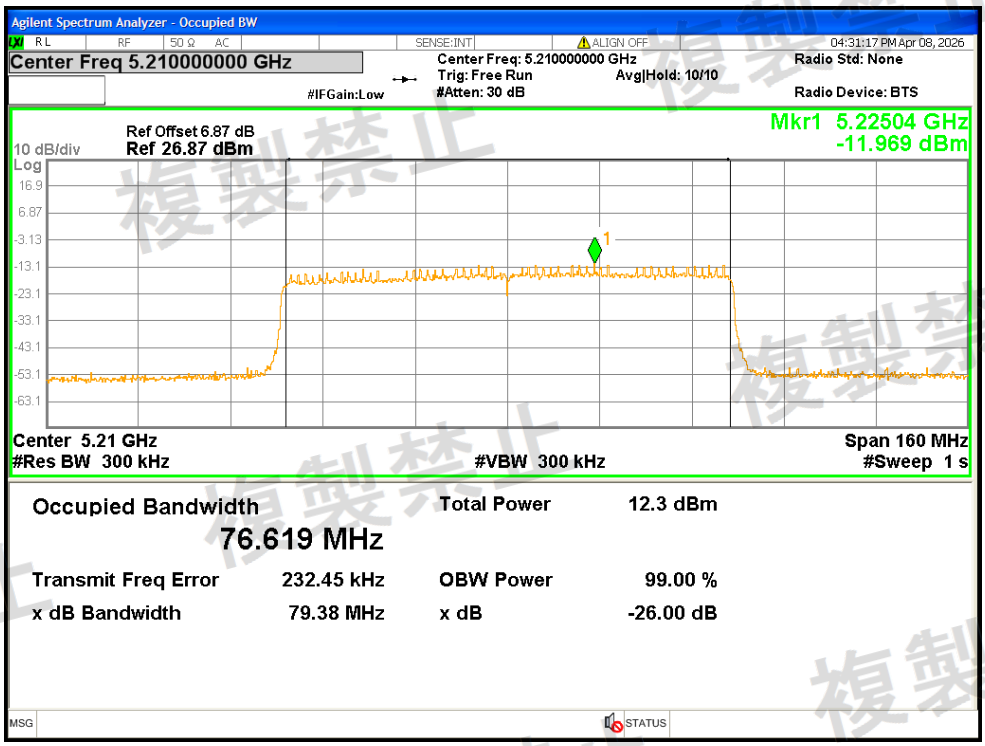


Spreading Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	90% OBW (MHz)
NVNT	a	5180	Ant1	14.484
NVNT	a	5200	Ant1	14.528
NVNT	a	5240	Ant1	14.552
NVNT	a	5180	Ant2	14.435
NVNT	a	5200	Ant2	14.374
NVNT	a	5240	Ant2	14.458
NVNT	n20	5180	Ant1	15.43
NVNT	n20	5180	Ant2	15.291
NVNT	n20	5200	Ant1	15.483
NVNT	n20	5200	Ant2	15.512
NVNT	n20	5240	Ant1	15.546
NVNT	n20	5240	Ant2	15.347
NVNT	n40	5190	Ant1	32.831
NVNT	n40	5190	Ant2	32.526
NVNT	n40	5230	Ant1	32.207
NVNT	n40	5230	Ant2	32.608
NVNT	ac20	5180	Ant1	15.462
NVNT	ac20	5180	Ant2	15.431
NVNT	ac20	5200	Ant1	15.559
NVNT	ac20	5200	Ant2	15.383
NVNT	ac20	5240	Ant1	15.361
NVNT	ac20	5240	Ant2	15.441
NVNT	ac40	5190	Ant1	32.97
NVNT	ac40	5190	Ant2	32.665
NVNT	ac40	5230	Ant1	32.457
NVNT	ac40	5230	Ant2	32.721
NVNT	ac80	5210	Ant1	67.954
NVNT	ac80	5210	Ant2	67.022
NVNT	ax20	5180	Ant1	16.109
NVNT	ax20	5180	Ant2	16.058
NVNT	ax20	5200	Ant1	16.198
NVNT	ax20	5200	Ant2	16.026
NVNT	ax20	5240	Ant1	16.247
NVNT	ax20	5240	Ant2	16.129
NVNT	ax40	5190	Ant1	33.557
NVNT	ax40	5190	Ant2	33.569
NVNT	ax40	5230	Ant1	33.453
NVNT	ax40	5230	Ant2	33.778
NVNT	ax80	5210	Ant1	69.236
NVNT	ax80	5210	Ant2	67.963

Test Graphs


Spreading Bandwidth NVNT a 5180MHz Ant1

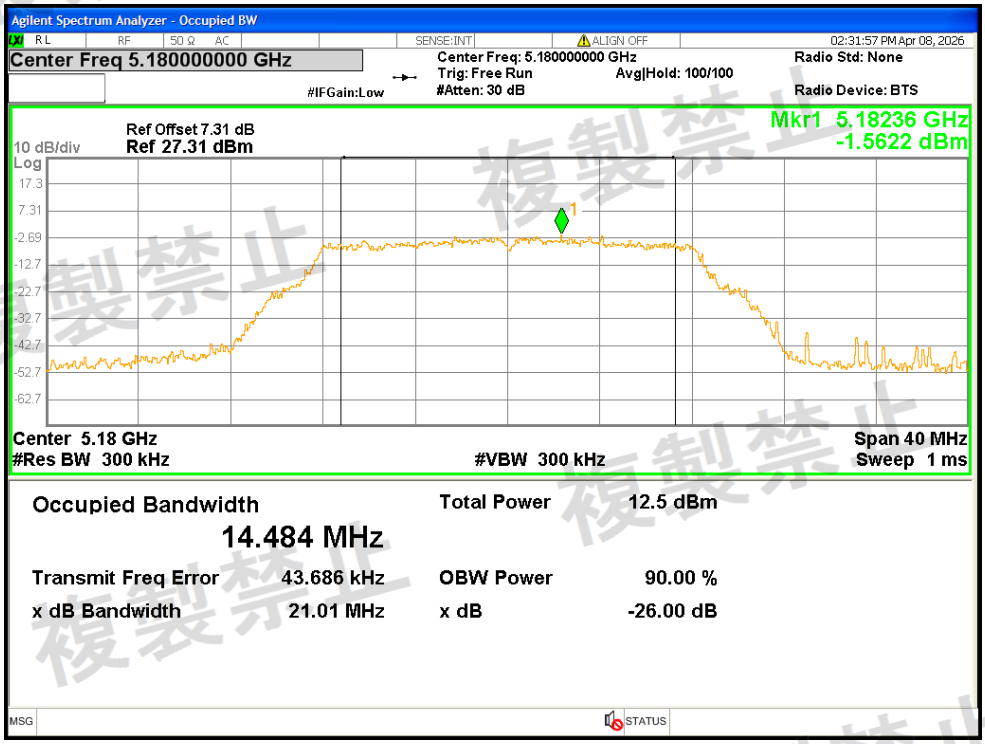


Spreading Bandwidth NVNT a 5200MHz Ant1

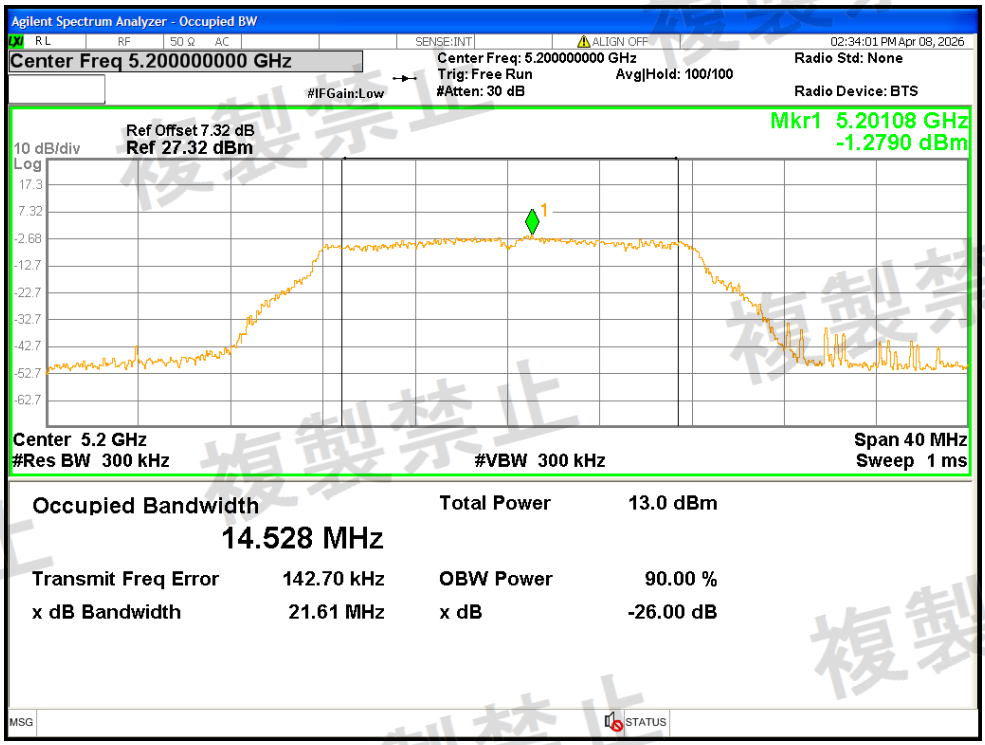


Spreading Bandwidth NVNT a 5240MHz Ant1

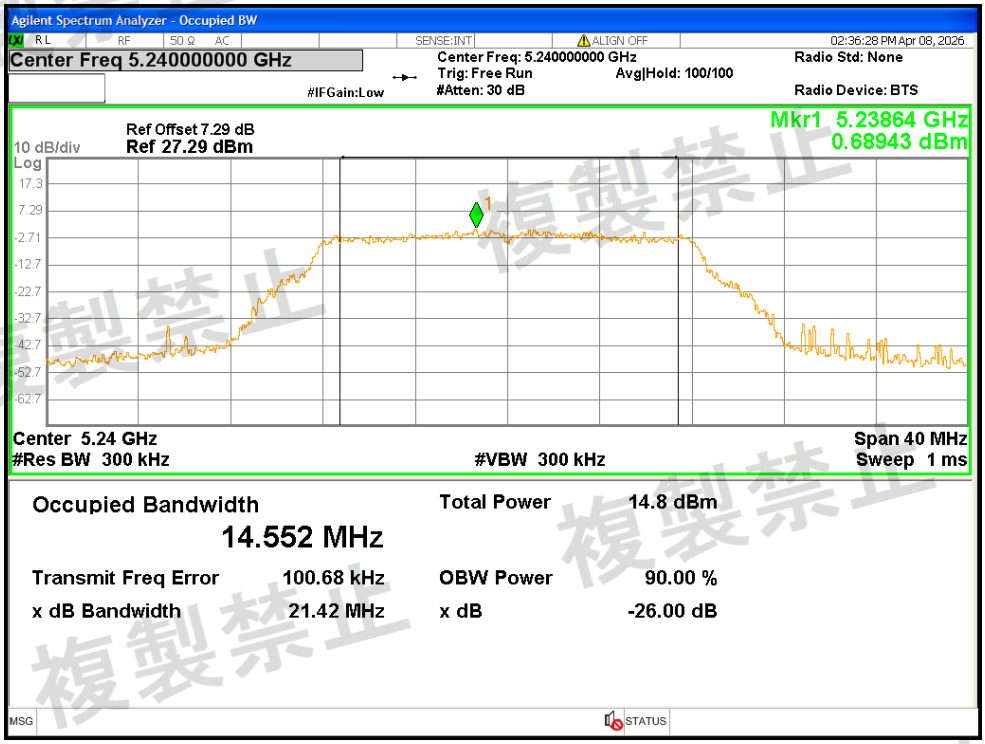


Spreading Bandwidth NVNT a 5180MHz Ant2

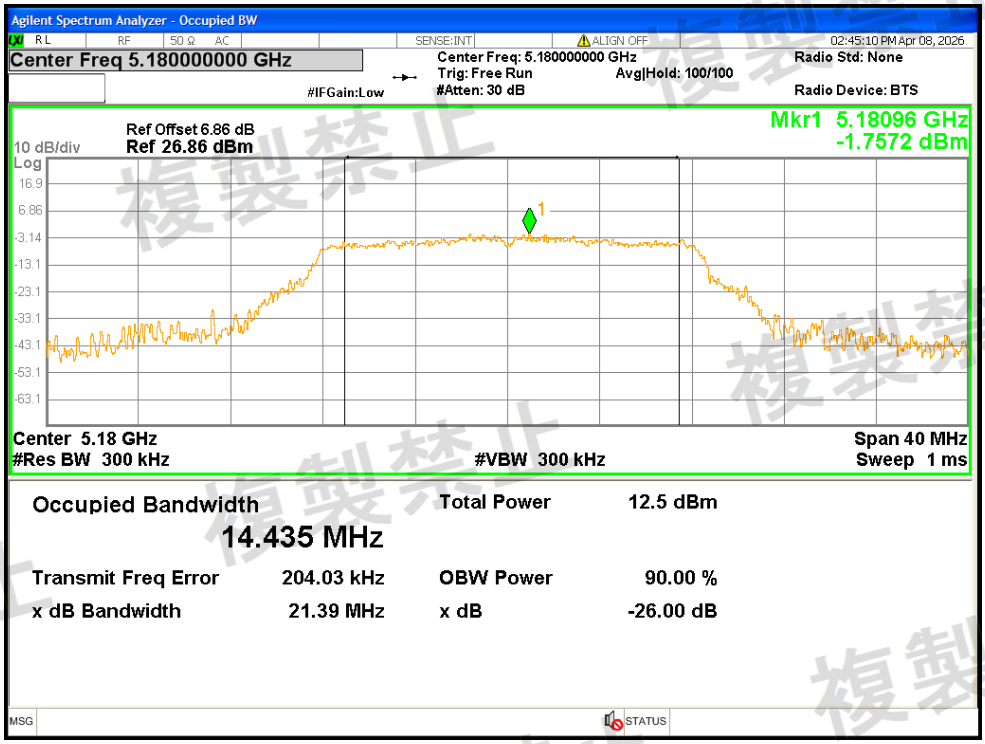


Spreading Bandwidth NVNT a 5200MHz Ant2

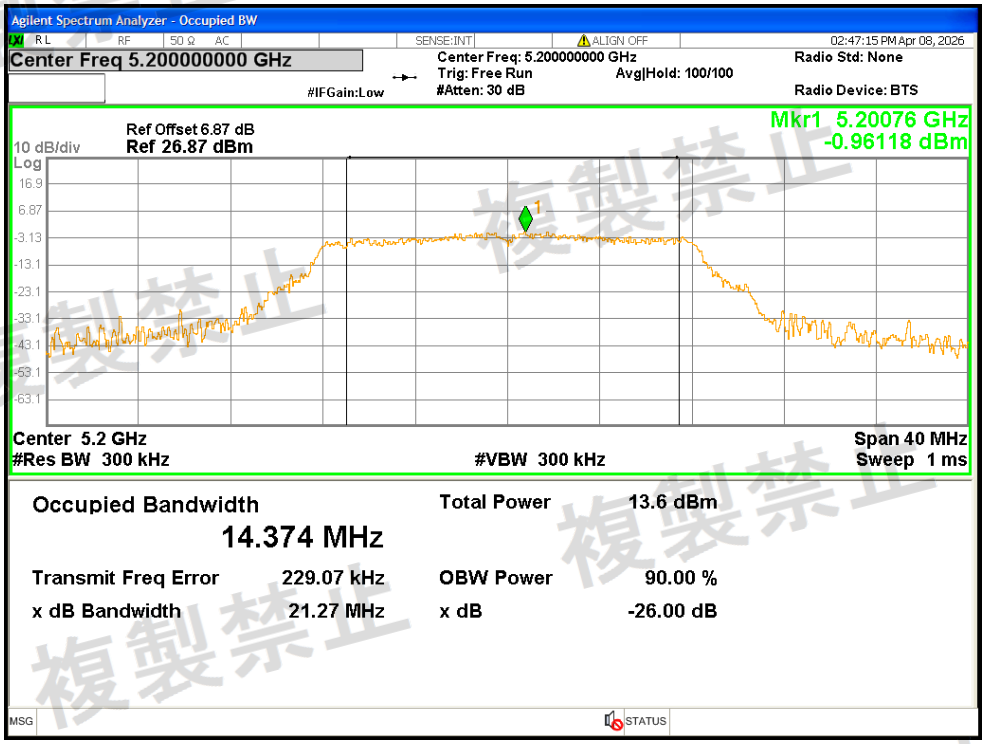


Spreading Bandwidth NVNT a 5240MHz Ant2

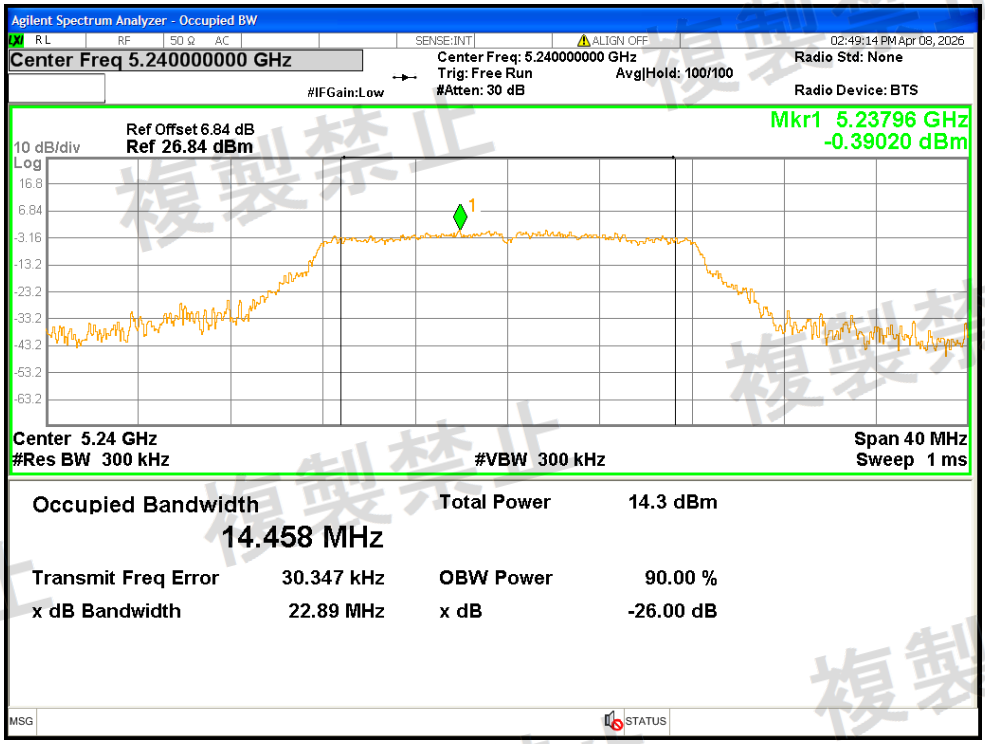


Spreading Bandwidth NVNT n20 5180MHz Ant1

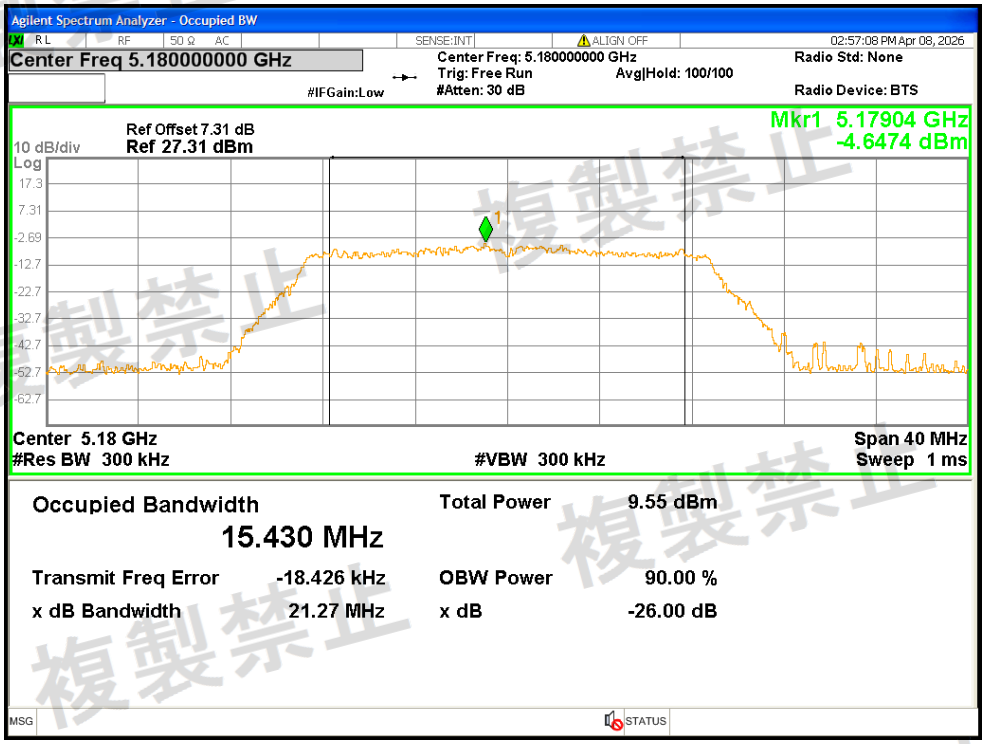


Spreading Bandwidth NVNT n20 5180MHz Ant2

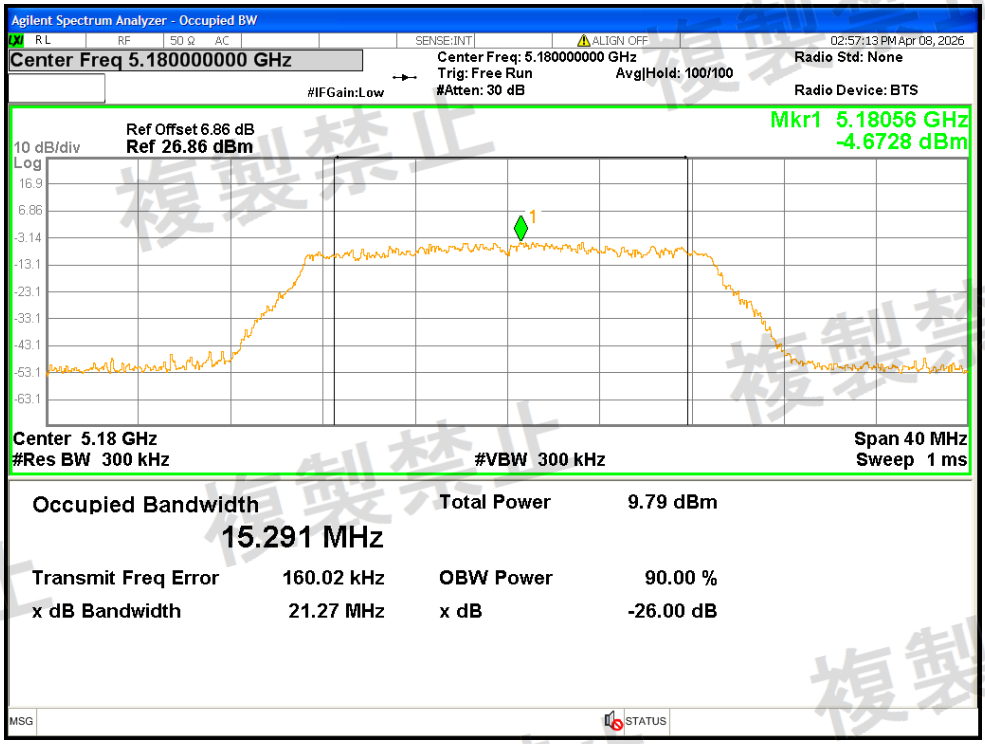


Spreading Bandwidth NVNT n20 5200MHz Ant1

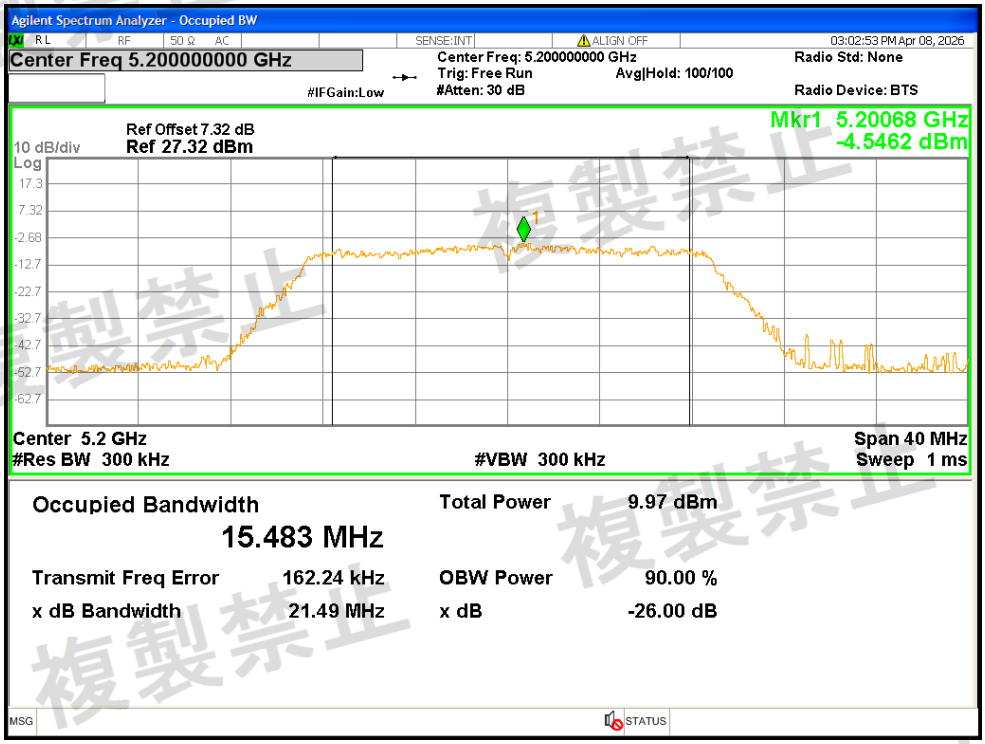


Spreading Bandwidth NVNT n20 5200MHz Ant2

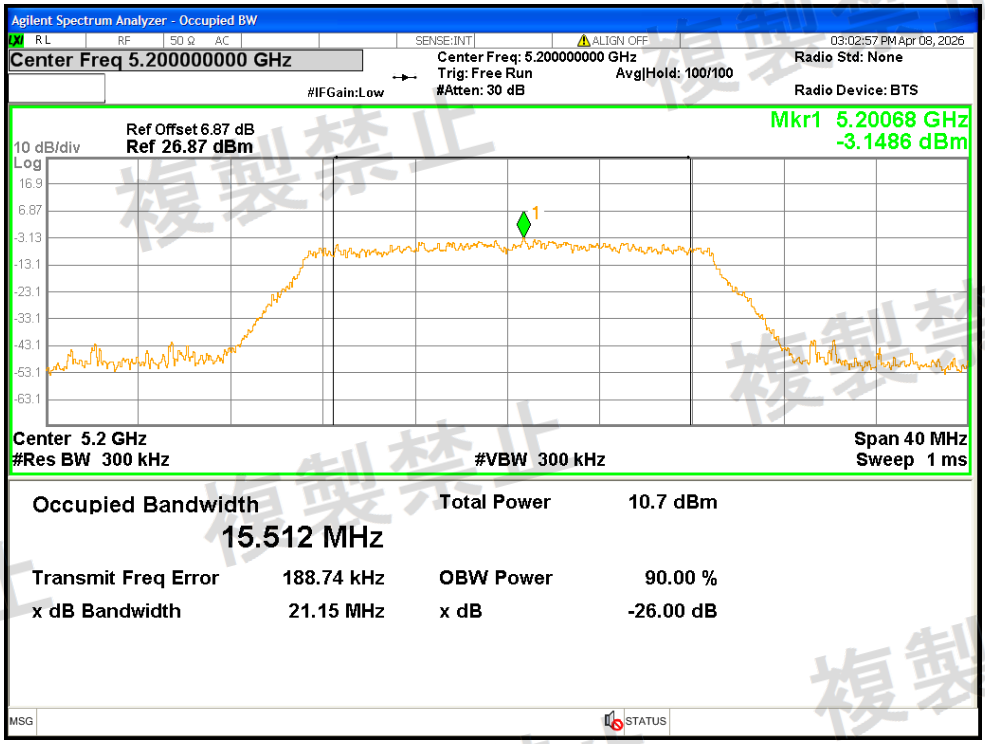


Spreading Bandwidth NVNT n20 5240MHz Ant1

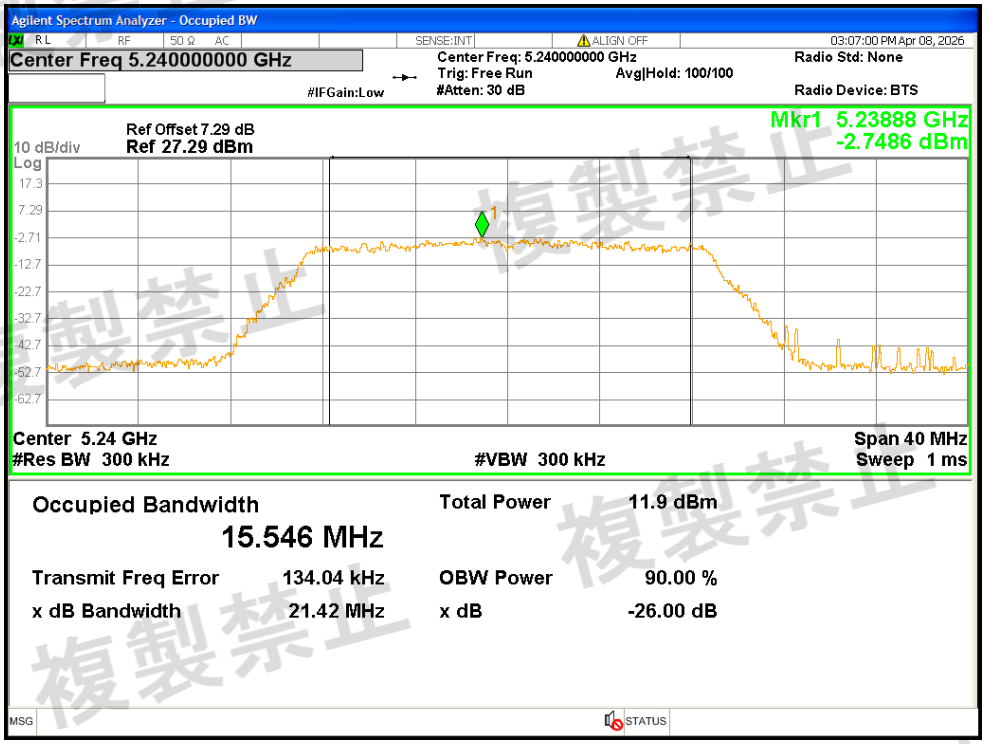


Spreading Bandwidth NVNT n20 5240MHz Ant2

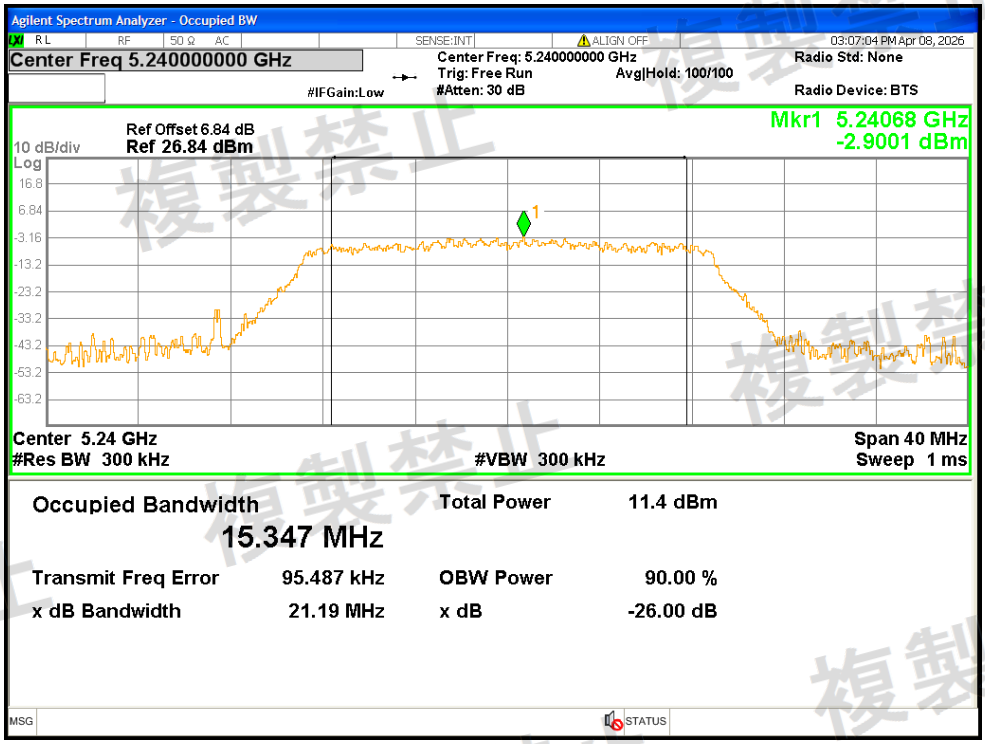


Spreading Bandwidth NVNT n40 5190MHz Ant1

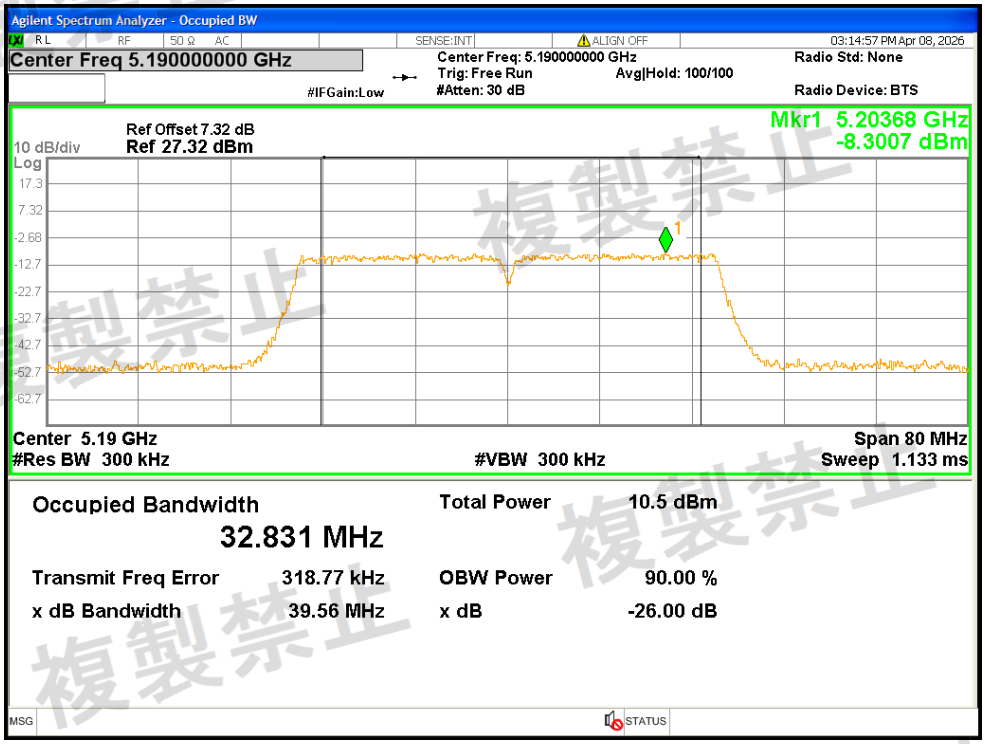


Spreading Bandwidth NVNT n40 5190MHz Ant2

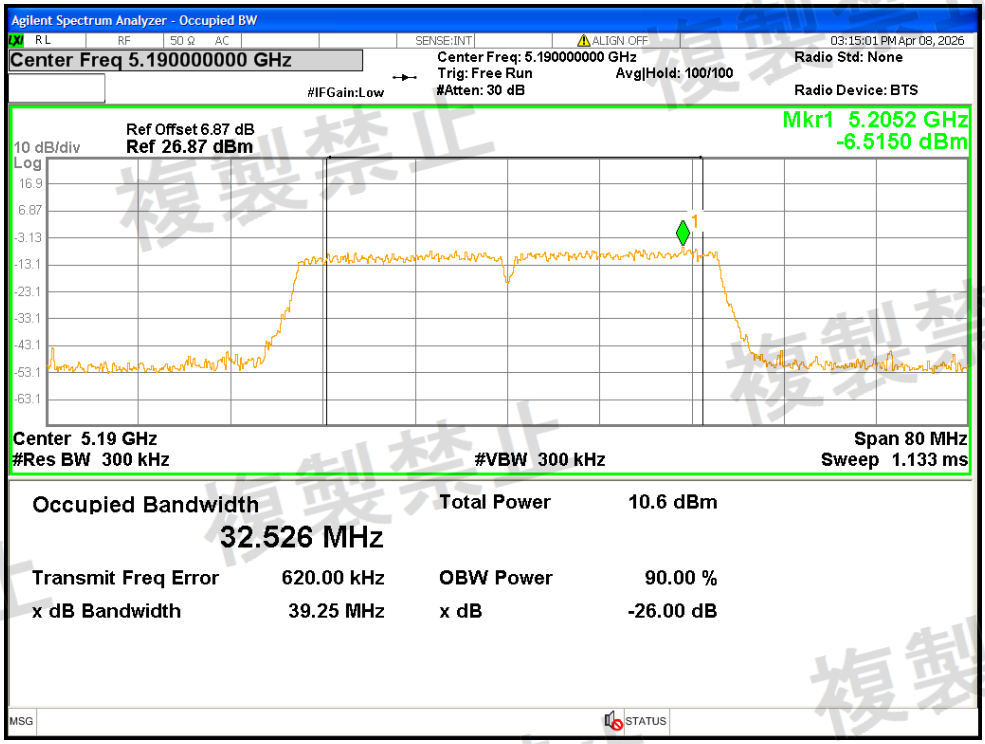


Spreading Bandwidth NVNT n40 5230MHz Ant1

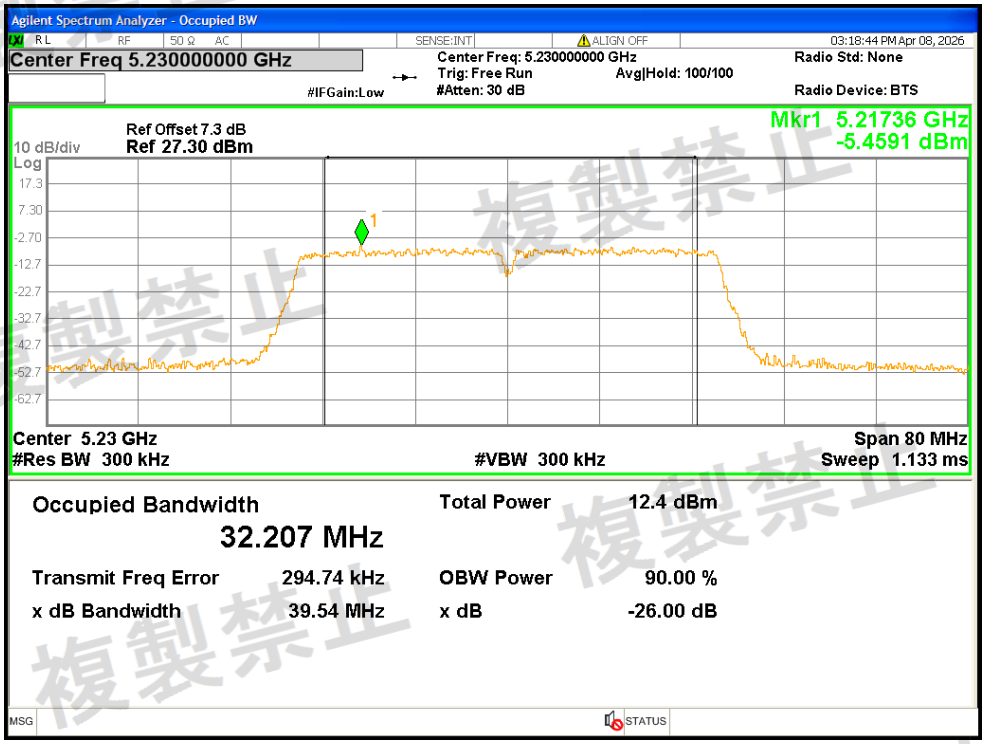


Spreading Bandwidth NVNT n40 5230MHz Ant2

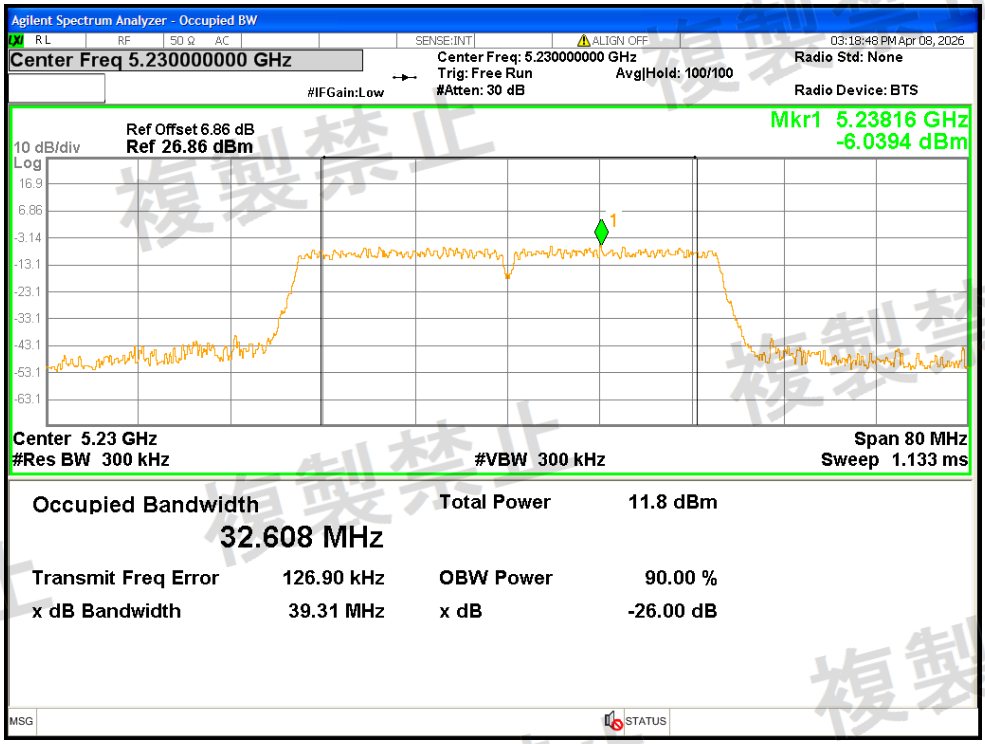


Spreading Bandwidth NVNT ac20 5180MHz Ant1

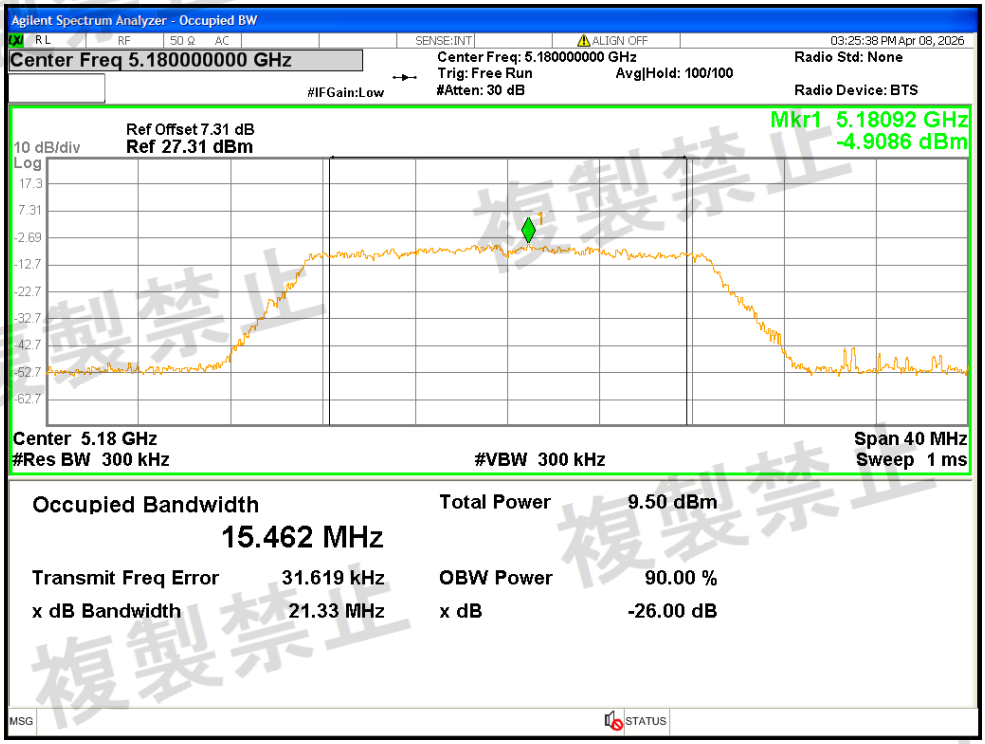


Spreading Bandwidth NVNT ac20 5180MHz Ant2

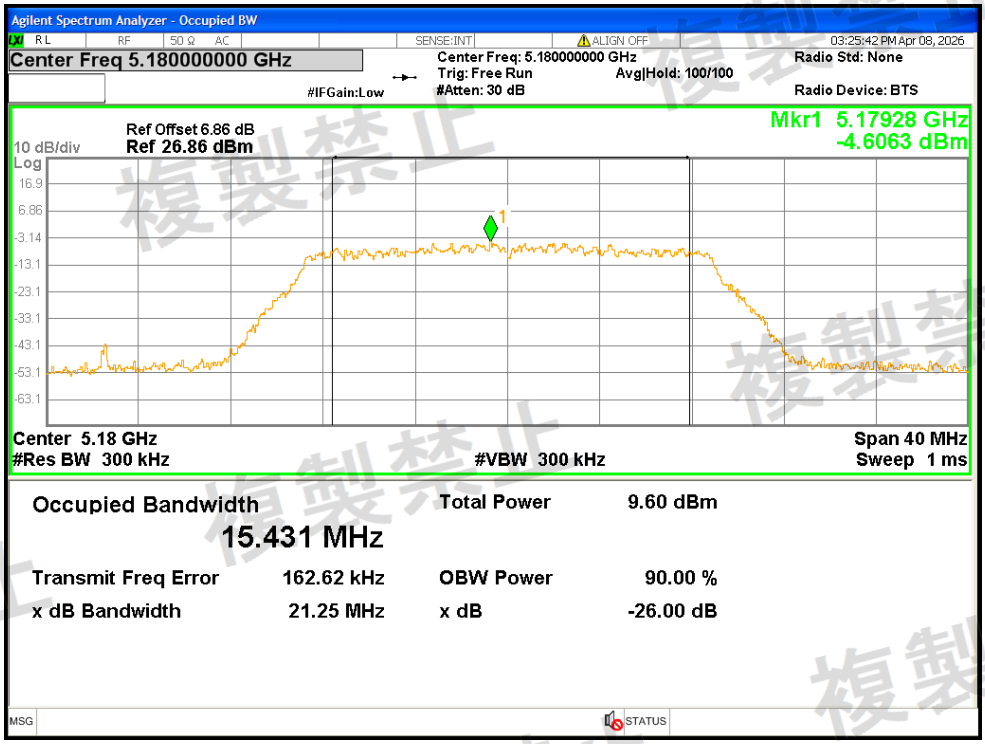


Spreading Bandwidth NVNT ac20 5200MHz Ant1

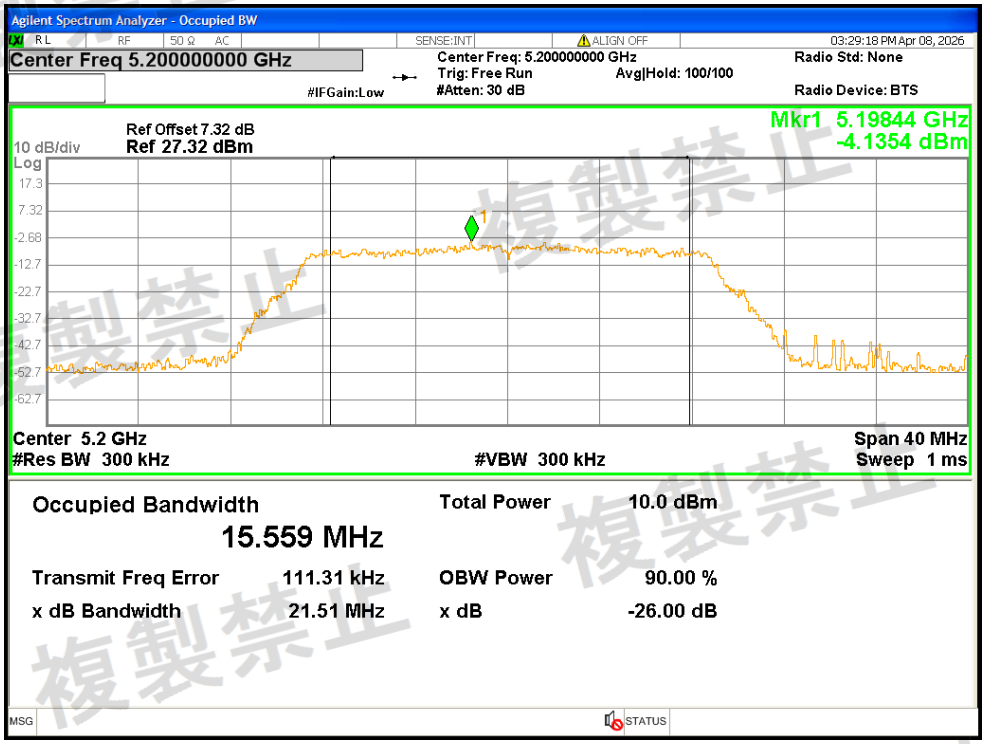


Spreading Bandwidth NVNT ac20 5200MHz Ant2

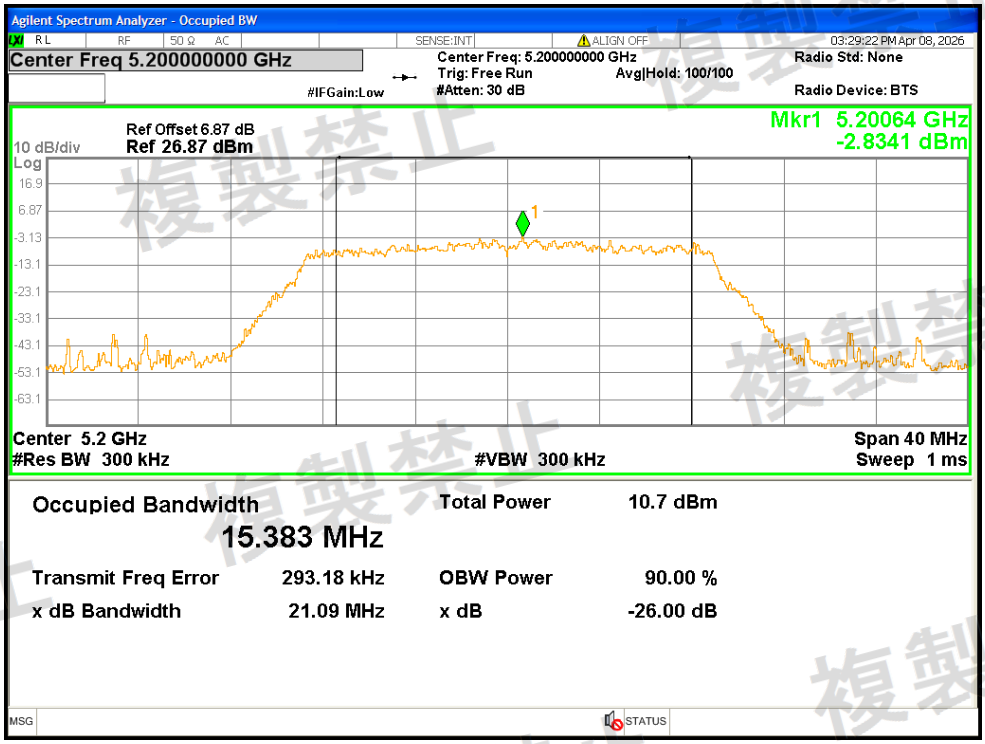


Spreading Bandwidth NVNT ac20 5240MHz Ant1

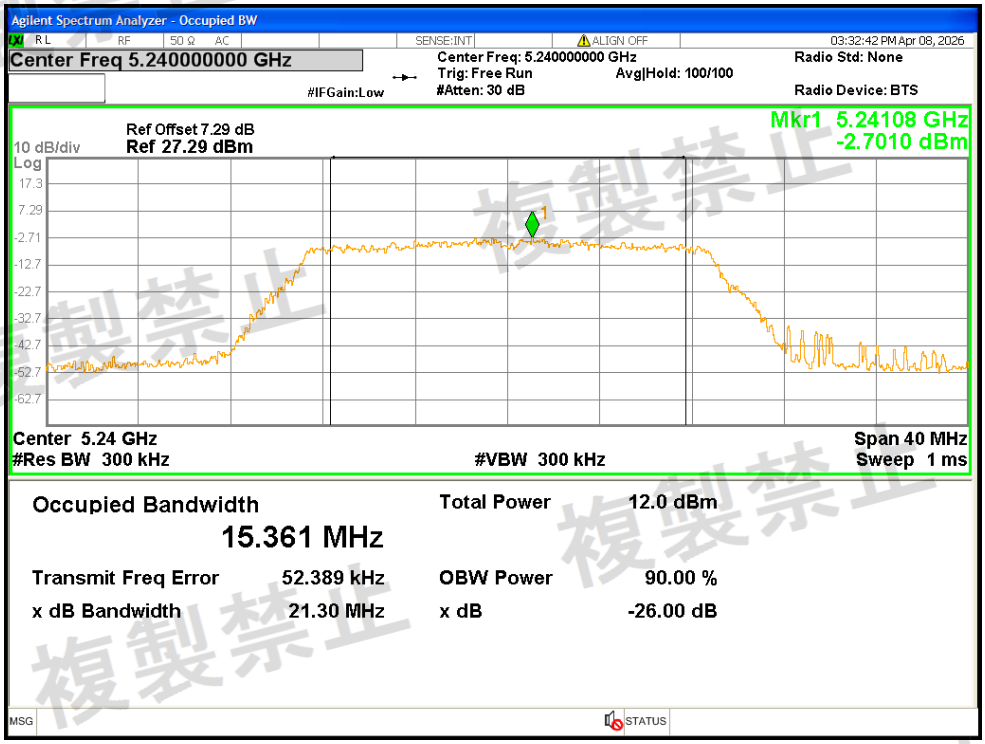


Spreading Bandwidth NVNT ac20 5240MHz Ant2

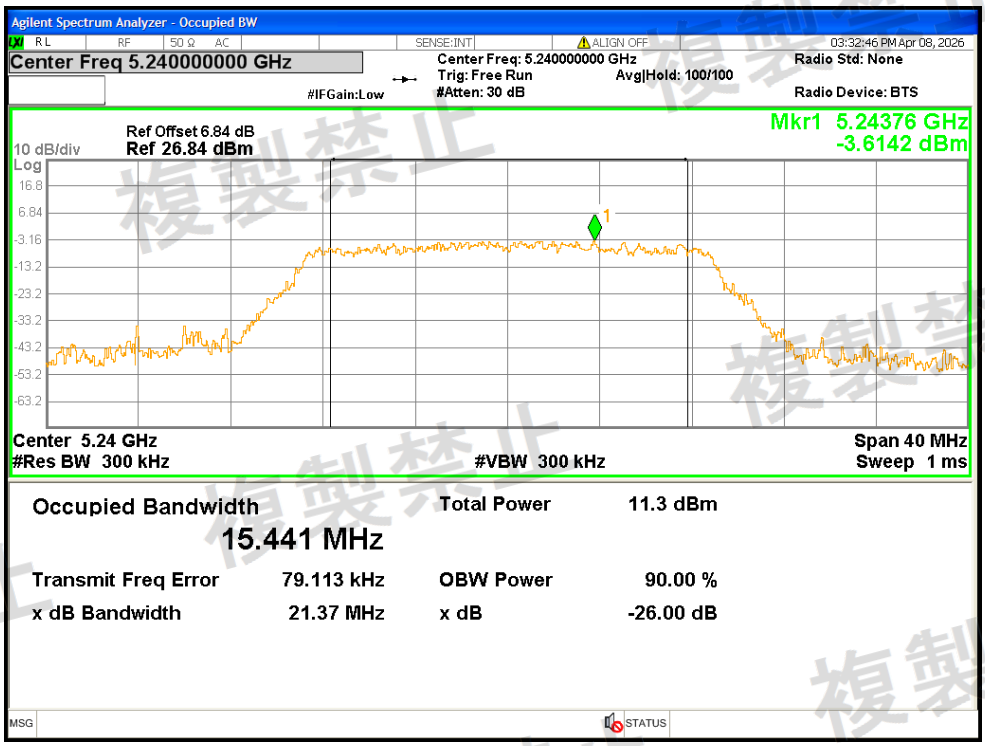


Spreading Bandwidth NVNT ac40 5190MHz Ant1

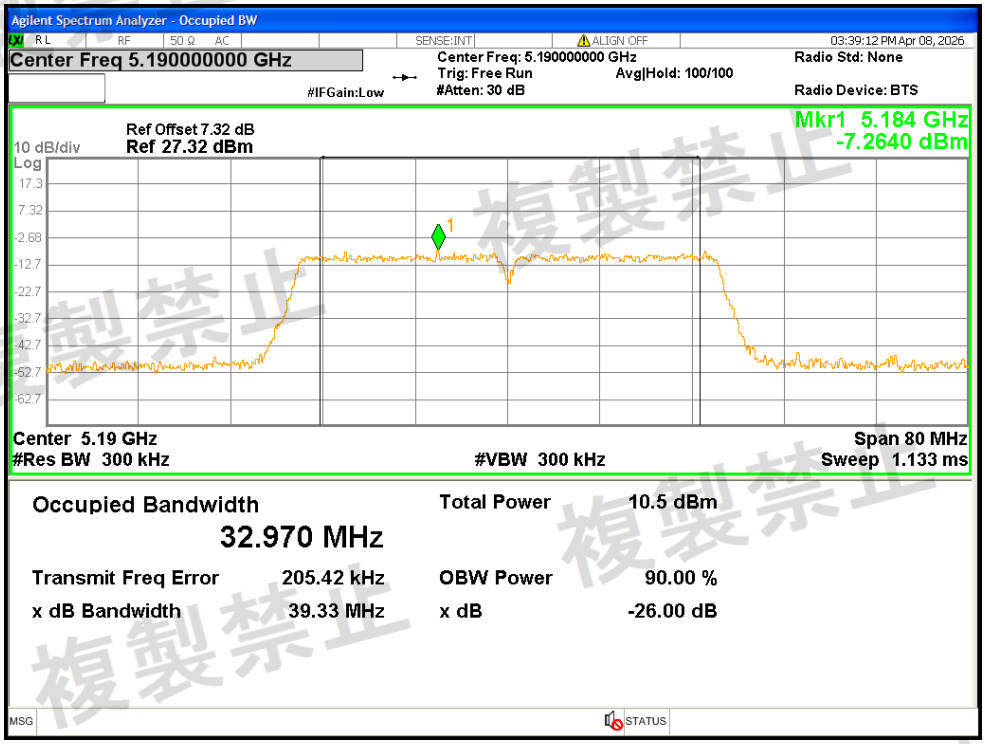


Spreading Bandwidth NVNT ac40 5190MHz Ant2

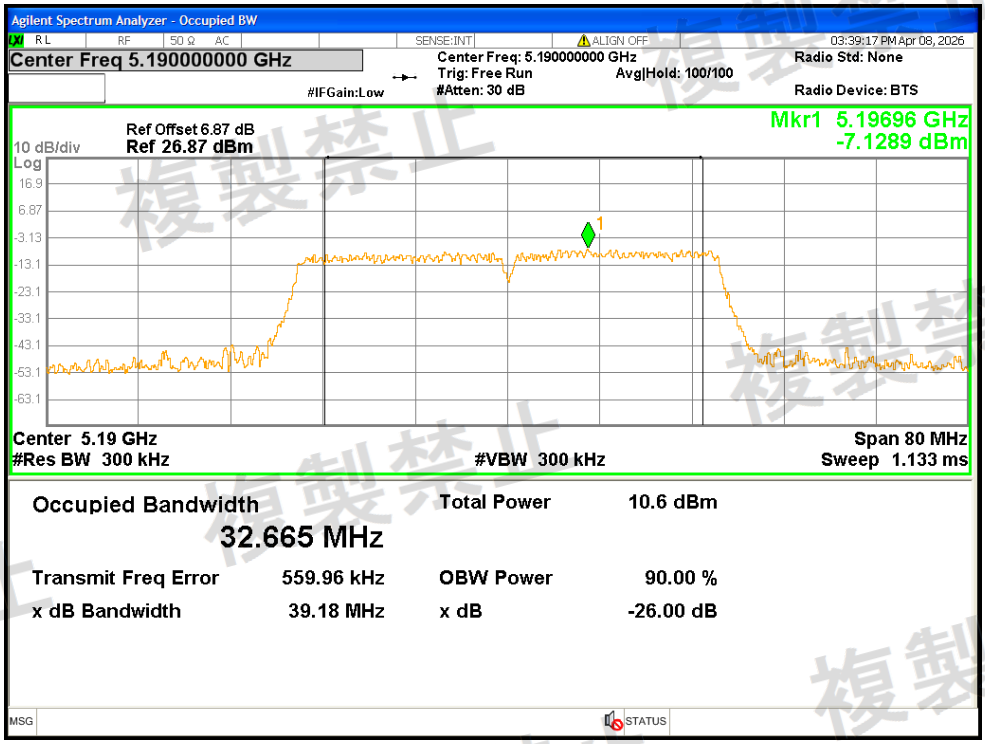


Spreading Bandwidth NVNT ac40 5230MHz Ant1

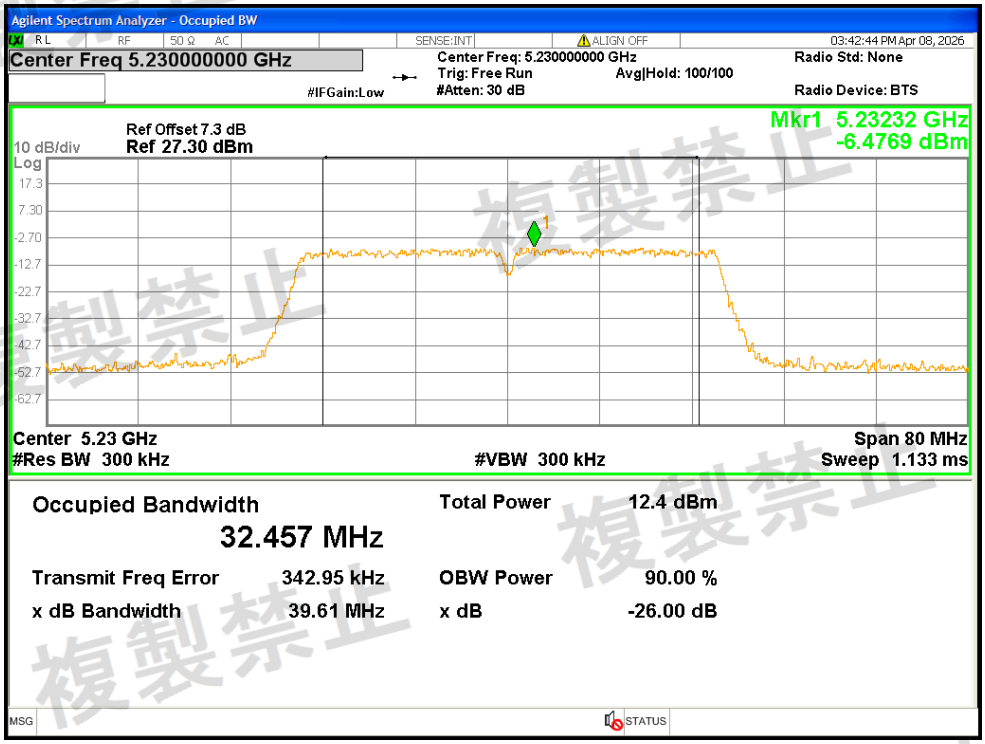


Spreading Bandwidth NVNT ac40 5230MHz Ant2

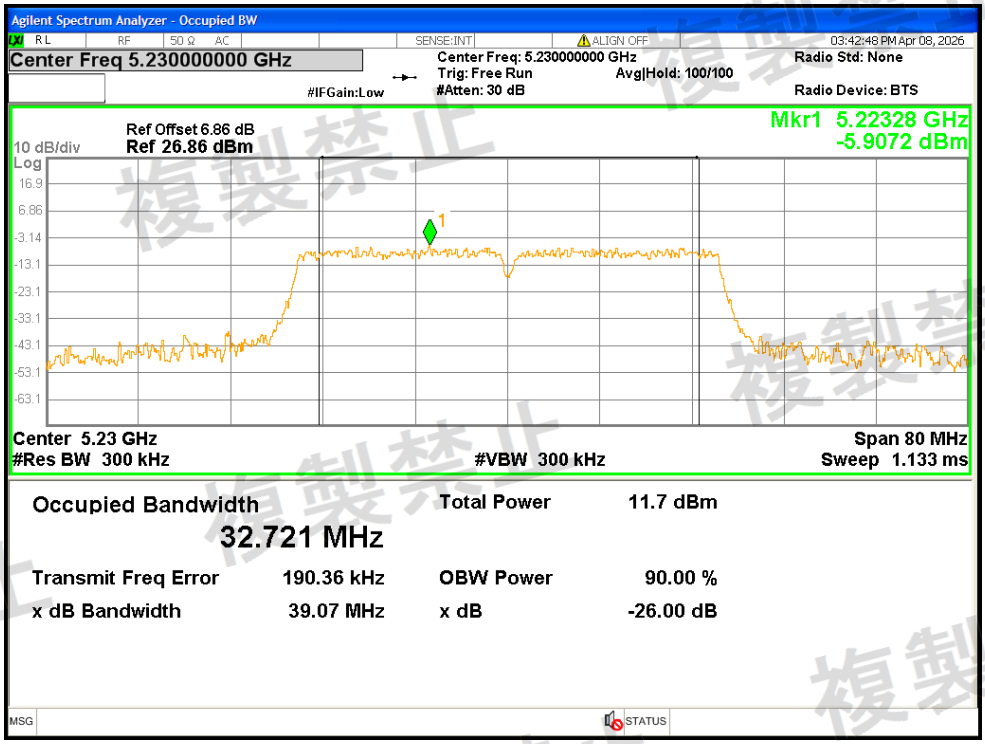


Spreading Bandwidth NVNT ac80 5210MHz Ant1

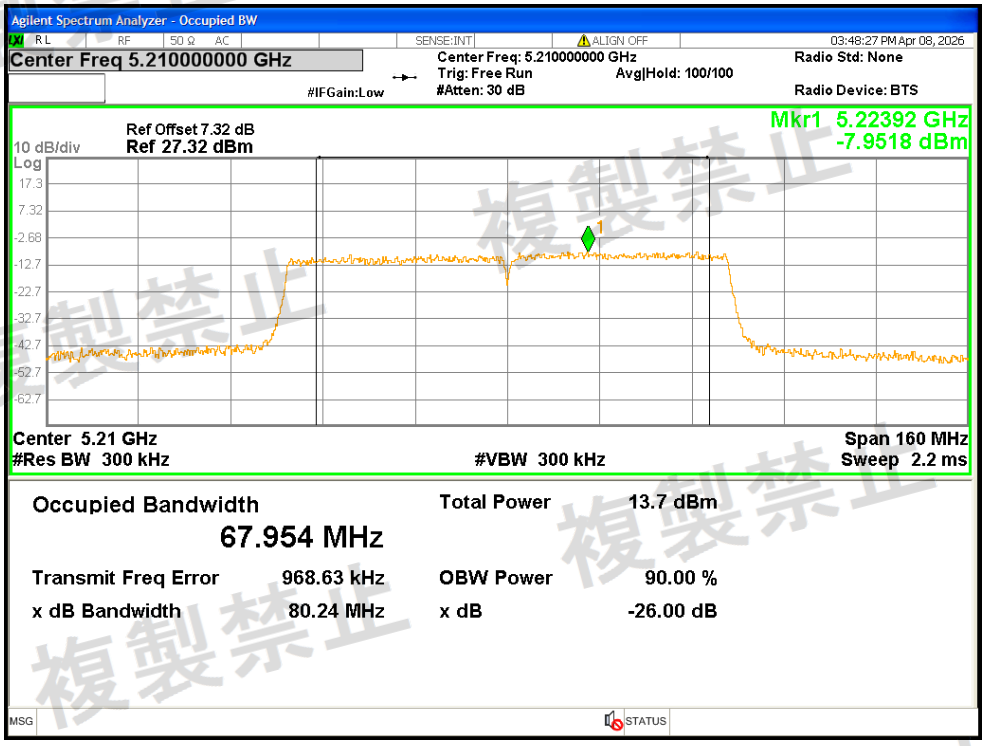


Spreading Bandwidth NVNT ac80 5210MHz Ant2

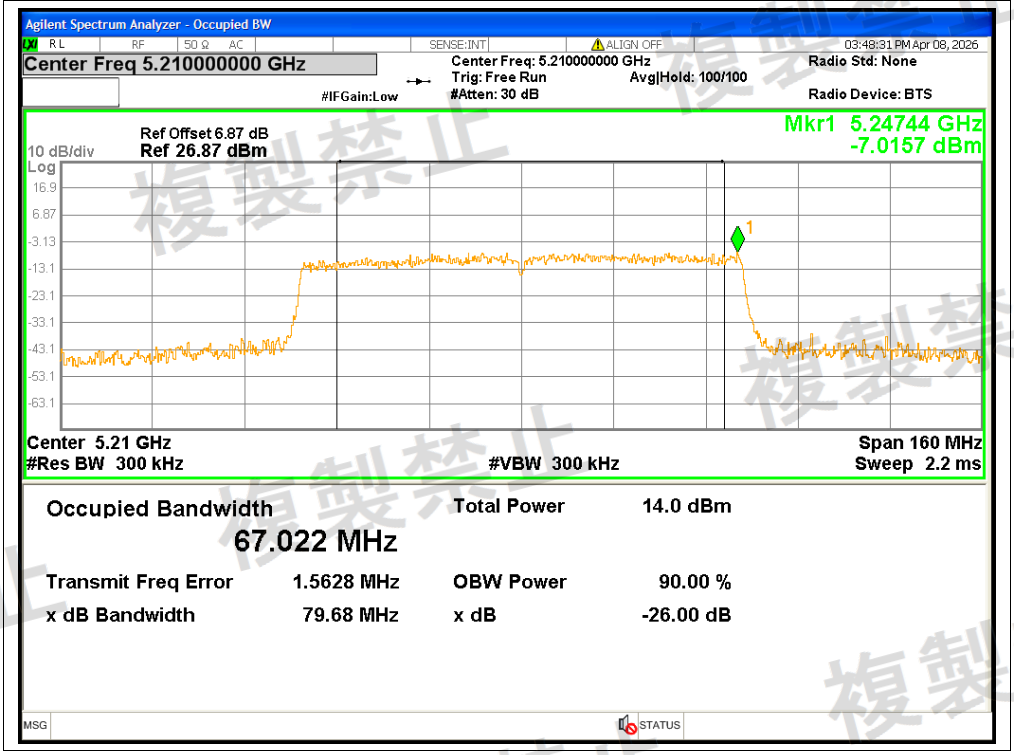


Spreading Bandwidth NVNT ax20 5180MHz Ant1

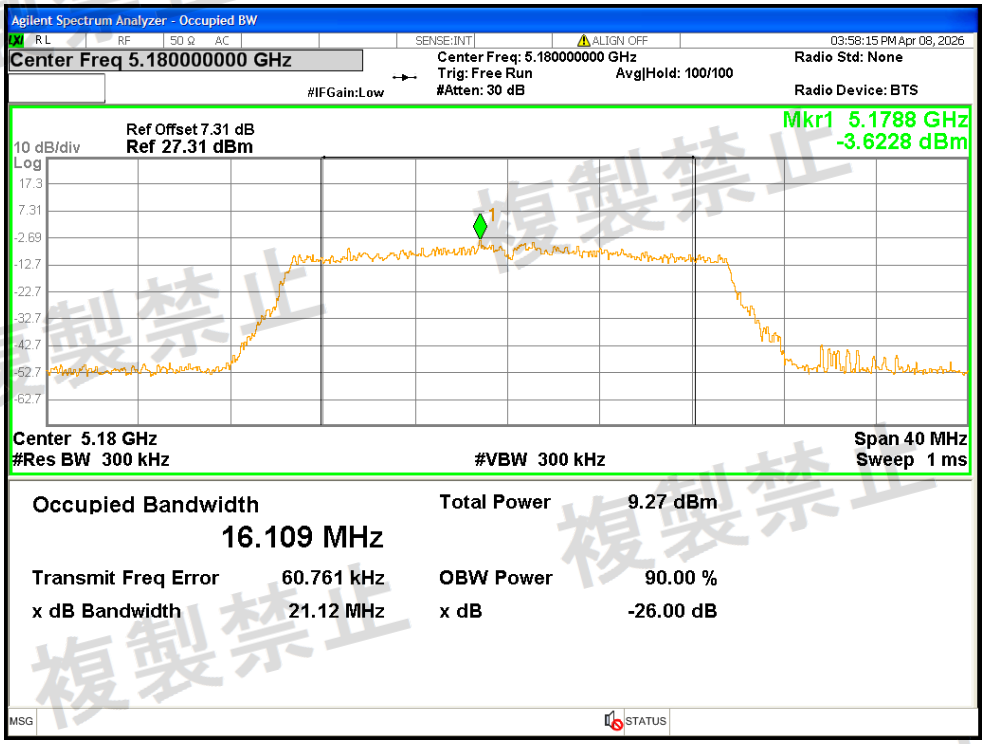


Spreading Bandwidth NVNT ax20 5180MHz Ant2

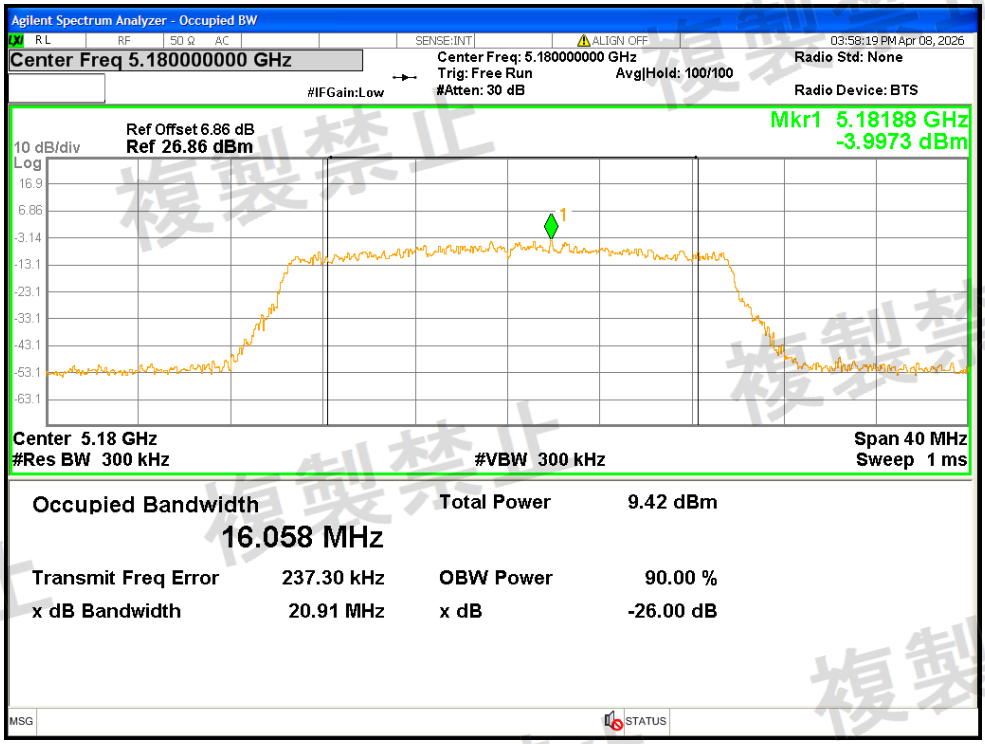


Spreading Bandwidth NVNT ax20 5200MHz Ant1

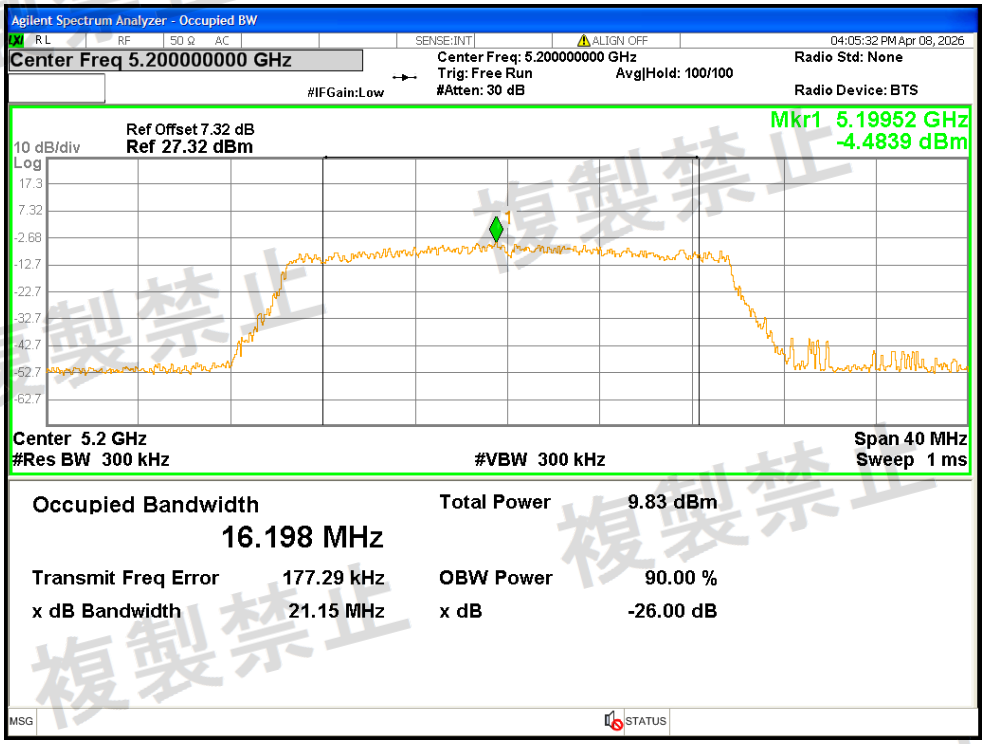


Spreading Bandwidth NVNT ax20 5200MHz Ant2

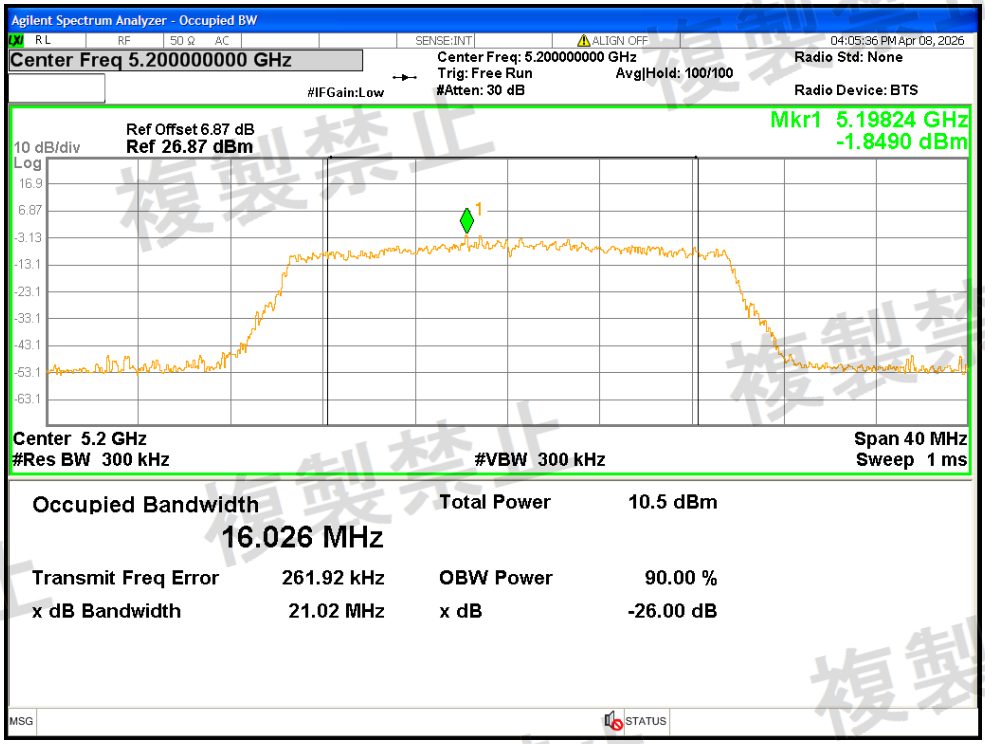


Spreading Bandwidth NVNT ax20 5240MHz Ant1

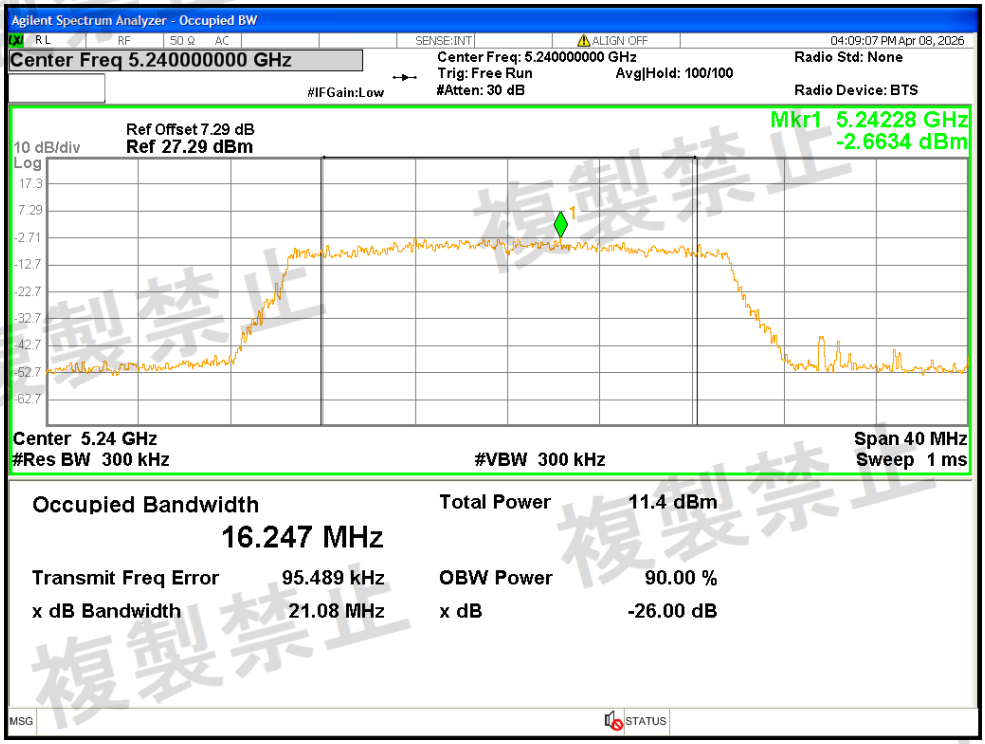


Spreading Bandwidth NVNT ax20 5240MHz Ant2

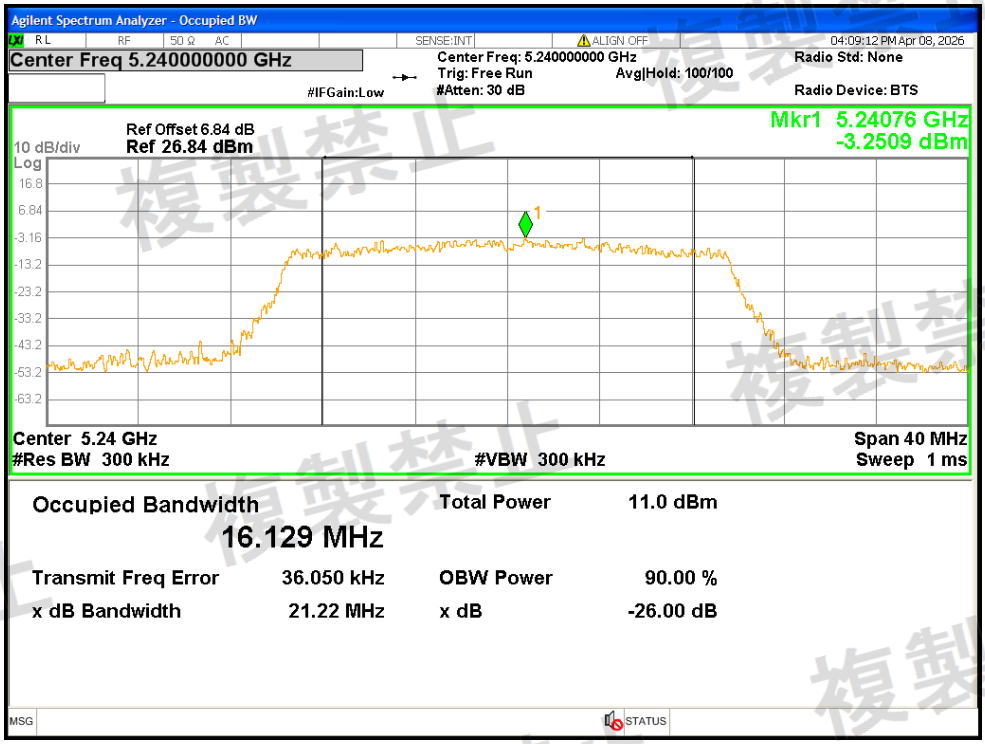


Spreading Bandwidth NVNT ax40 5190MHz Ant1

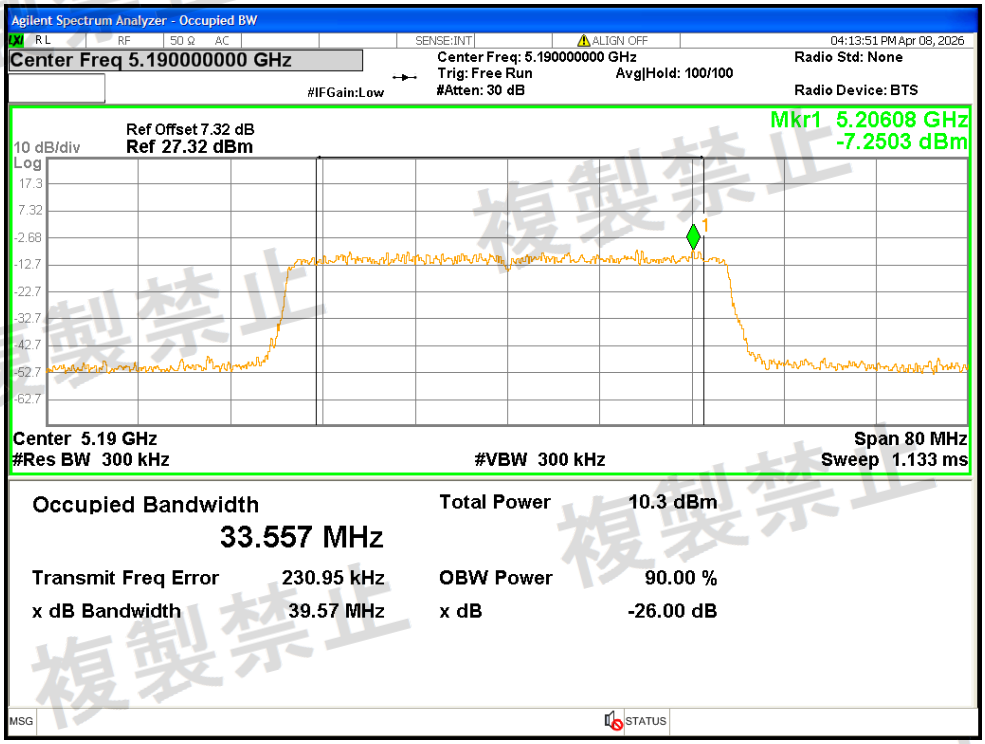


Spreading Bandwidth NVNT ax40 5190MHz Ant2

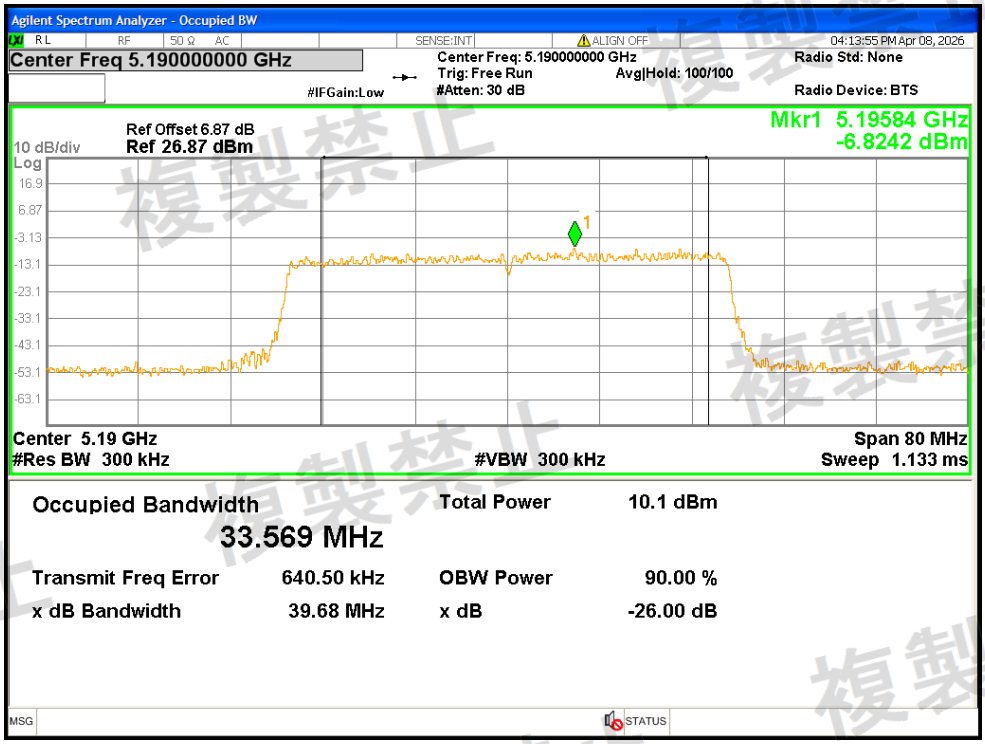


Spreading Bandwidth NVNT ax40 5230MHz Ant1

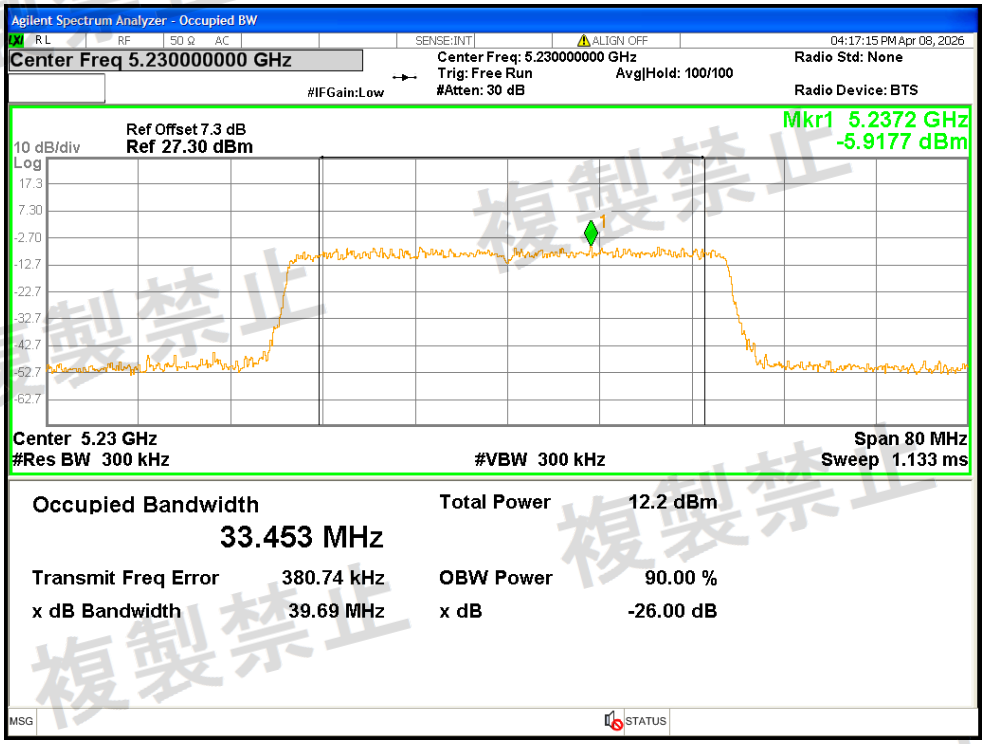


Spreading Bandwidth NVNT ax40 5230MHz Ant2

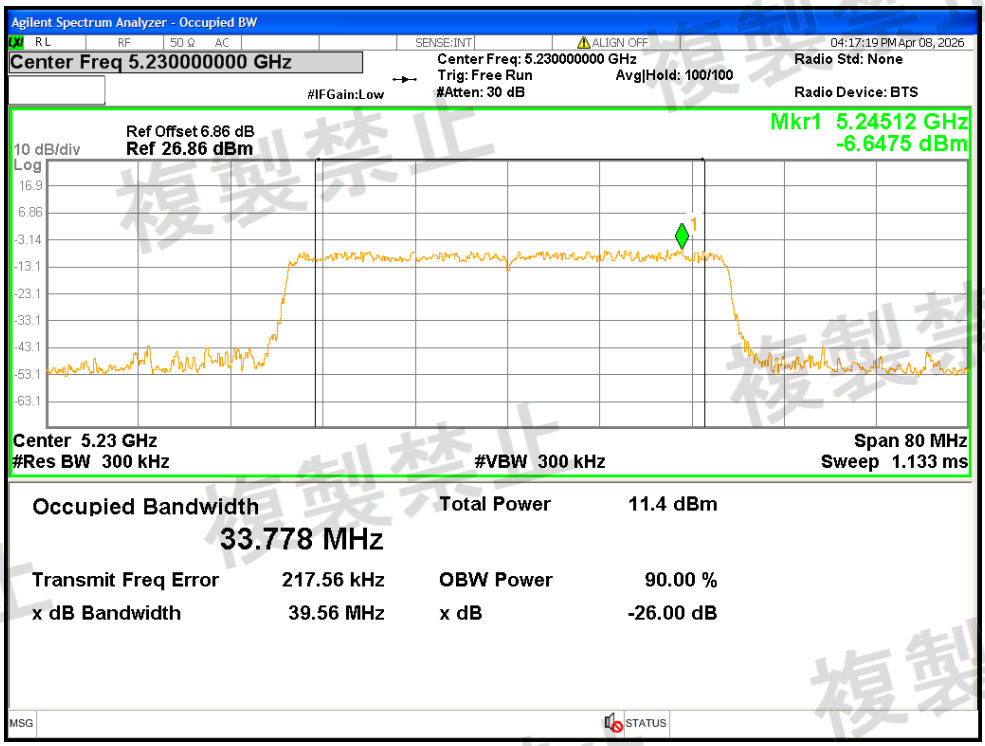

Spreading Bandwidth NVNT ax80 5210MHz Ant1

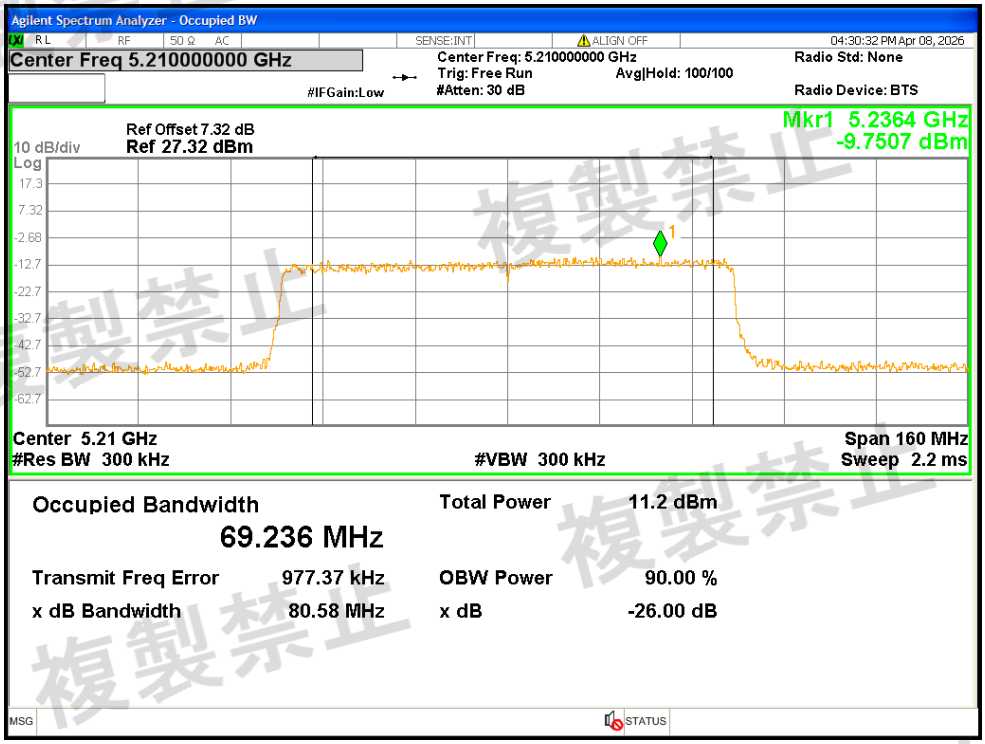

Spreading Bandwidth NVNT ax80 5210MHz Ant2

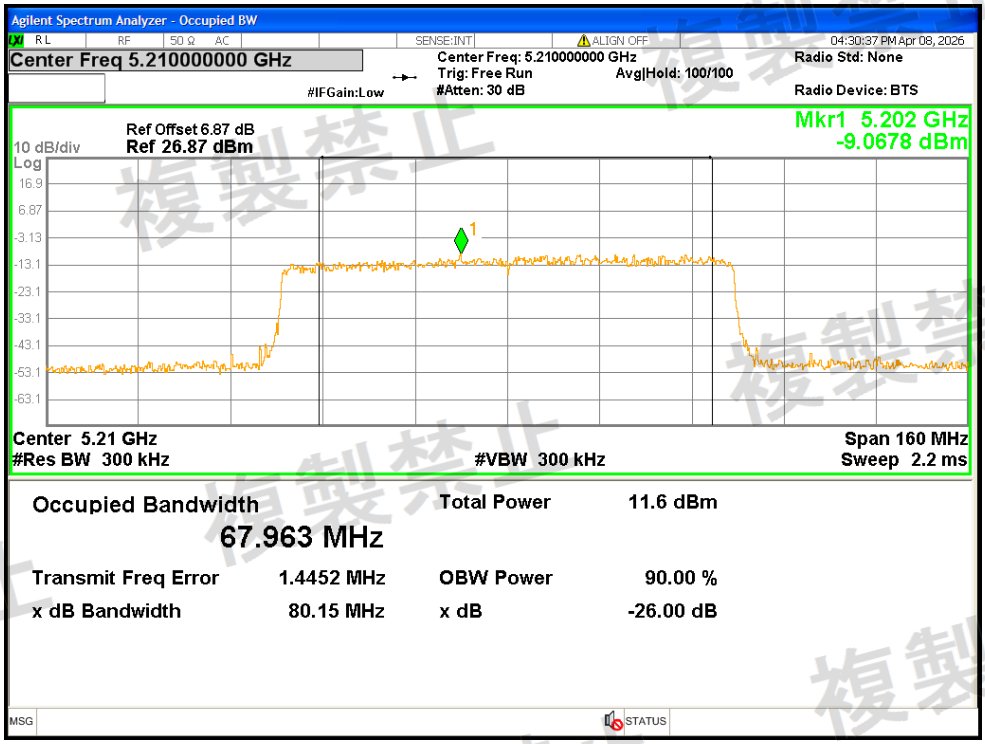

Tx Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Range (MHz)	Emission Frequency (MHz)	Max Value (dBm/MHz)	Max Value (uW/MHz)	Limit Start(uW/MHz)	Limit Stop (uW/MHz)	Verdict
NVNT	a	5180	Ant1	30-5142	3310.37	-49.8	0.0105	2.5	2.5	Pass
NVNT	a	5180	Ant1	5142-5150	5149.49	-44.88	0.0325	15	15	Pass
NVNT	a	5180	Ant1	5250-5251	5250.74	-48.7	0.0135	1000	100	Pass
NVNT	a	5180	Ant1	5251-5260	5255.83	-49.04	0.0125	100	15.85	Pass
NVNT	a	5180	Ant1	5260-5266.7	5260.51	-49.43	0.0114	15.85	2.49	Pass
NVNT	a	5180	Ant1	5266.7-26000	25908.77	-36.55	0.2213	2.5	2.5	Pass
NVNT	a	5200	Ant1	30-5142	5134.33	-50.53	0.0089	2.5	2.5	Pass
NVNT	a	5200	Ant1	5142-5150	5145.41	-48.87	0.013	15	15	Pass
NVNT	a	5200	Ant1	5250-5251	5250.77	-48.16	0.0153	1000	100	Pass
NVNT	a	5200	Ant1	5251-5260	5256.97	-48.63	0.0137	100	15.85	Pass
NVNT	a	5200	Ant1	5260-5266.7	5260.87	-48.98	0.0126	15.85	2.49	Pass
NVNT	a	5200	Ant1	5266.7-26000	25921.21	-36.92	0.2032	2.5	2.5	Pass
NVNT	a	5240	Ant1	30-5142	5128.71	-50.21	0.0095	2.5	2.5	Pass
NVNT	a	5240	Ant1	5142-5150	5147.03	-52.03	0.0063	15	15	Pass
NVNT	a	5240	Ant1	5250-5251	5250.21	-8.94	127.6439	1000	100	Pass
NVNT	a	5240	Ant1	5251-5260	5251.01	-17.09	19.5434	100	15.85	Pass
NVNT	a	5240	Ant1	5260-5266.7	5260.33	-34.1	0.389	15.85	2.49	Pass
NVNT	a	5240	Ant1	5266.7-26000	25693.15	-34.77	0.3334	2.5	2.5	Pass
NVNT	a	5180	Ant2	30-5142	5126.15	-48.25	0.015	2.5	2.5	Pass
NVNT	a	5180	Ant2	5142-5150	5148.89	-33.98	0.3999	15	15	Pass
NVNT	a	5180	Ant2	5250-5251	5250.08	-47.53	0.0177	1000	100	Pass
NVNT	a	5180	Ant2	5251-5260	5252.77	-46.25	0.0237	100	15.85	Pass
NVNT	a	5180	Ant2	5260-5266.7	5260.68	-47.18	0.0191	15.85	2.49	Pass
NVNT	a	5180	Ant2	5266.7-26000	25512.77	-37.71	0.1694	2.5	2.5	Pass
NVNT	a	5200	Ant2	30-5142	5121.55	-50.95	0.008	2.5	2.5	Pass
NVNT	a	5200	Ant2	5142-5150	5149.54	-45.46	0.0284	15	15	Pass
NVNT	a	5200	Ant2	5250-5251	5250.13	-39.67	0.1079	1000	100	Pass

NVNT	a	5200	Ant2	5251-5260	5252.57	-44.82	0.033	100	15.85	Pass
NVNT	a	5200	Ant2	5260-5266.7	5263.07	-46.42	0.0228	15.85	2.49	Pass
NVNT	a	5200	Ant2	5266.7-26000	25962.68	-37.78	0.1667	2.5	2.5	Pass
NVNT	a	5240	Ant2	30-5142	3305.26	-51.62	0.0069	2.5	2.5	Pass
NVNT	a	5240	Ant2	5142-5150	5147.33	-52.73	0.0053	15	15	Pass
NVNT	a	5240	Ant2	5250-5251	5250.04	-9.27	118.3042	1000	100	Pass
NVNT	a	5240	Ant2	5251-5260	5251.06	-19.18	12.0781	100	15.85	Pass
NVNT	a	5240	Ant2	5260-5266.7	5260.21	-28.08	1.556	15.85	2.49	Pass
NVNT	a	5240	Ant2	5266.7-26000	25954.39	-37.53	0.1766	2.5	2.5	Pass
NVNT	n20	5180	Ant1	30-5142	2440.31	-50.61	0.0087	2.5	2.5	Pass
NVNT	n20	5180	Ant1	5142-5150	5146.87	-50.29	0.0094	15	15	Pass
NVNT	n20	5180	Ant1	5250-5251	5250.53	-50.31	0.0093	1000	100	Pass
NVNT	n20	5180	Ant1	5251-5260	5252.74	-50.73	0.0085	100	15.85	Pass
NVNT	n20	5180	Ant1	5260-5266.7	5260.42	-51.35	0.0073	15.85	2.49	Pass
NVNT	n20	5180	Ant1	5266.7-26000	25734.61	-36.61	0.2183	2.5	2.5	Pass
NVNT	n20	5180	Ant2	30-5142	5112.35	-51	0.0079	2.5	2.5	Pass
NVNT	n20	5180	Ant2	5142-5150	5149.87	-48.74	0.0134	15	15	Pass
NVNT	n20	5180	Ant2	5250-5251	5250.41	-48.56	0.0139	1000	100	Pass
NVNT	n20	5180	Ant2	5251-5260	5251.3	-49.88	0.0103	100	15.85	Pass
NVNT	n20	5180	Ant2	5260-5266.7	5264.45	-50.3	0.0093	15.85	2.49	Pass
NVNT	n20	5180	Ant2	5266.7-26000	25674.49	-37.55	0.1758	2.5	2.5	Pass
NVNT	n20	5200	Ant1	30-5142	3274.08	-50.36	0.0092	2.5	2.5	Pass
NVNT	n20	5200	Ant1	5142-5150	5149.99	-51.25	0.0075	15	15	Pass
NVNT	n20	5200	Ant1	5250-5251	5250.6	-49.56	0.0111	1000	100	Pass
NVNT	n20	5200	Ant1	5251-5260	5251.5	-49.12	0.0122	100	15.85	Pass
NVNT	n20	5200	Ant1	5260-5266.7	5265.4	-50.89	0.0081	15.85	2.49	Pass
NVNT	n20	5200	Ant1	5266.7-26000	25703.51	-35.89	0.2576	2.5	2.5	Pass
NVNT	n20	5200	Ant2	30-5142	3299.64	-51.44	0.0072	2.5	2.5	Pass
NVNT	n20	5200	Ant2	5142-5150	5148.09	-52.32	0.0059	15	15	Pass
NVNT	n20	5200	Ant2	5250-5251	5250.26	-49.64	0.0109	1000	100	Pass
NVNT	n20	5200	Ant2	5251-5260	5254.05	-49.67	0.0108	100	15.85	Pass
NVNT	n20	5200	Ant2	5260-5266	5261.86	-47.77	0.0167	15.85	2.49	Pass

				.7						
NVNT	n20	5200	Ant2	5266.7-26000	25838.28	-37.22	0.1897	2.5	2.5	Pass
NVNT	n20	5240	Ant1	30-5142	3282.25	-51.08	0.0078	2.5	2.5	Pass
NVNT	n20	5240	Ant1	5142-5150	5147	-51.59	0.0069	15	15	Pass
NVNT	n20	5240	Ant1	5250-5251	5250.01	-8.31	147.5707	1000	100	Pass
NVNT	n20	5240	Ant1	5251-5260	5251.06	-19.29	11.7761	100	15.85	Pass
NVNT	n20	5240	Ant1	5260-5266.7	5260.8	-37.54	0.1762	15.85	2.49	Pass
NVNT	n20	5240	Ant1	5266.7-26000	25693.15	-36.43	0.2275	2.5	2.5	Pass
NVNT	n20	5240	Ant2	30-5142	3193.31	-51.33	0.0074	2.5	2.5	Pass
NVNT	n20	5240	Ant2	5142-5150	5147.47	-53.4	0.0046	15	15	Pass
NVNT	n20	5240	Ant2	5250-5251	5250.02	-10.43	90.5733	1000	100	Pass
NVNT	n20	5240	Ant2	5251-5260	5251.05	-19.86	10.3276	100	15.85	Pass
NVNT	n20	5240	Ant2	5260-5266.7	5260.47	-31.53	0.7031	15.85	2.49	Pass
NVNT	n20	5240	Ant2	5266.7-26000	25709.73	-37.36	0.1837	2.5	2.5	Pass
NVNT	n40	5190	Ant1	30-5141.6	4980.58	-50.82	0.0083	2.5	2.5	Pass
NVNT	n40	5190	Ant1	5141.6-5150	5149.58	-44.88	0.0325	15	15	Pass
NVNT	n40	5190	Ant1	5250-5251	5250.28	-49.07	0.0124	500	50	Pass
NVNT	n40	5190	Ant1	5251-5270	5254.44	-49.25	0.0119	50	7.92	Pass
NVNT	n40	5190	Ant1	5270-5278.4	5271.95	-49.17	0.0121	7.92	2.48	Pass
NVNT	n40	5190	Ant1	5278.4-26000	25670.53	-37.2	0.1905	2.5	2.5	Pass
NVNT	n40	5190	Ant2	30-5141.6	2408.43	-50.51	0.0089	2.5	2.5	Pass
NVNT	n40	5190	Ant2	5141.6-5150	5148.36	-41.68	0.0679	15	15	Pass
NVNT	n40	5190	Ant2	5250-5251	5250.42	-45.87	0.0259	500	50	Pass
NVNT	n40	5190	Ant2	5251-5270	5261.71	-48.14	0.0153	50	7.92	Pass
NVNT	n40	5190	Ant2	5270-5278.4	5276.03	-48.65	0.0136	7.92	2.48	Pass
NVNT	n40	5190	Ant2	5278.4-26000	25506.83	-37.65	0.1718	2.5	2.5	Pass
NVNT	n40	5230	Ant1	30-5141.6	3555.47	-50.73	0.0085	2.5	2.5	Pass
NVNT	n40	5230	Ant1	5141.6-5150	5142.98	-50.88	0.0082	15	15	Pass
NVNT	n40	5230	Ant1	5250-5251	5250.03	-20.18	9.594	500	50	Pass

NVNT	n40	5230	Ant1	5251-5270	5251.08	-31.86	0.6516	50	7.92	Pass
NVNT	n40	5230	Ant1	5270-5278.4	5270.54	-44.24	0.0377	7.92	2.48	Pass
NVNT	n40	5230	Ant1	5278.4-26000	25693.32	-36.36	0.2312	2.5	2.5	Pass
NVNT	n40	5230	Ant2	30-5141.6	5139.04	-51.43	0.0072	2.5	2.5	Pass
NVNT	n40	5230	Ant2	5141.6-5150	5146.07	-51.78	0.0066	15	15	Pass
NVNT	n40	5230	Ant2	5250-5251	5250.09	-22.51	5.6105	500	50	Pass
NVNT	n40	5230	Ant2	5251-5270	5251.09	-32.14	0.6109	50	7.92	Pass
NVNT	n40	5230	Ant2	5270-5278.4	5270.61	-33.8	0.4169	7.92	2.48	Pass
NVNT	n40	5230	Ant2	5278.4-26000	25504.75	-37.75	0.1679	2.5	2.5	Pass
NVNT	ac20	5180	Ant1	30-5142	3187.68	-50.07	0.0098	2.5	2.5	Pass
NVNT	ac20	5180	Ant1	5142-5150	5142.46	-49.86	0.0103	15	15	Pass
NVNT	ac20	5180	Ant1	5250-5251	5250.46	-51.1	0.0078	1000	100	Pass
NVNT	ac20	5180	Ant1	5251-5260	5257.73	-49.67	0.0108	100	15.85	Pass
NVNT	ac20	5180	Ant1	5260-5266.7	5260.12	-50.6	0.0087	15.85	2.49	Pass
NVNT	ac20	5180	Ant1	5266.7-26000	25657.9	-37.01	0.1991	2.5	2.5	Pass
NVNT	ac20	5180	Ant2	30-5142	2403.5	-49.43	0.0114	2.5	2.5	Pass
NVNT	ac20	5180	Ant2	5142-5150	5142.36	-50.76	0.0084	15	15	Pass
NVNT	ac20	5180	Ant2	5250-5251	5250.89	-50.37	0.0092	1000	100	Pass
NVNT	ac20	5180	Ant2	5251-5260	5255.71	-49.55	0.0111	100	15.85	Pass
NVNT	ac20	5180	Ant2	5260-5266.7	5262.75	-50.43	0.0091	15.85	2.49	Pass
NVNT	ac20	5180	Ant2	5266.7-26000	25626.8	-38.08	0.1556	2.5	2.5	Pass
NVNT	ac20	5200	Ant1	30-5142	4952.86	-50.8	0.0083	2.5	2.5	Pass
NVNT	ac20	5200	Ant1	5142-5150	5144.7	-50.96	0.008	15	15	Pass
NVNT	ac20	5200	Ant1	5250-5251	5250.74	-49.62	0.0109	1000	100	Pass

NVNT	ac20	5200	Ant1	5251-5260	5254.46	-49.85	0.0104	100	15.85	Pass
NVNT	ac20	5200	Ant1	5260-5266.7	5260.76	-50.89	0.0081	15.85	2.49	Pass
NVNT	ac20	5200	Ant1	5266.7-26000	25481.67	-36.95	0.2018	2.5	2.5	Pass
NVNT	ac20	5200	Ant2	30-5142	2404.52	-50.89	0.0081	2.5	2.5	Pass
NVNT	ac20	5200	Ant2	5142-5150	5145.88	-51.26	0.0075	15	15	Pass
NVNT	ac20	5200	Ant2	5250-5251	5250.79	-49.65	0.0108	1000	100	Pass
NVNT	ac20	5200	Ant2	5251-5260	5258.17	-49.34	0.0116	100	15.85	Pass
NVNT	ac20	5200	Ant2	5260-5266.7	5263.18	-49.16	0.0121	15.85	2.49	Pass
NVNT	ac20	5200	Ant2	5266.7-26000	25691.07	-37.09	0.1954	2.5	2.5	Pass
NVNT	ac20	5240	Ant1	30-5142	2545.62	-50.78	0.0084	2.5	2.5	Pass
NVNT	ac20	5240	Ant1	5142-5150	5148.35	-52.58	0.0055	15	15	Pass
NVNT	ac20	5240	Ant1	5250-5251	5250.05	-9.21	119.9499	1000	100	Pass
NVNT	ac20	5240	Ant1	5251-5260	5251	-20.55	8.8105	100	15.85	Pass
NVNT	ac20	5240	Ant1	5260-5266.7	5260.03	-37.46	0.1795	15.85	2.49	Pass
NVNT	ac20	5240	Ant1	5266.7-26000	25709.73	-37.37	0.1832	2.5	2.5	Pass
NVNT	ac20	5240	Ant2	30-5142	3136.05	-51.43	0.0072	2.5	2.5	Pass
NVNT	ac20	5240	Ant2	5142-5150	5143.62	-53.23	0.0048	15	15	Pass
NVNT	ac20	5240	Ant2	5250-5251	5250.01	-11.13	77.0903	1000	100	Pass
NVNT	ac20	5240	Ant2	5251-5260	5251.07	-22.68	5.3951	100	15.85	Pass
NVNT	ac20	5240	Ant2	5260-5266.7	5260.52	-31.47	0.7129	15.85	2.49	Pass
NVNT	ac20	5240	Ant2	5266.7-26000	25510.69	-37.51	0.1774	2.5	2.5	Pass
NVNT	ac40	5190	Ant1	30-5141.6	5135.47	-50.14	0.0097	2.5	2.5	Pass

NVNT	ac40	5190	Ant1	5141.6-5150	5148.44	-45.39	0.0289	15	15	Pass
NVNT	ac40	5190	Ant1	5250-5251	5250.21	-47.42	0.0181	500	50	Pass
NVNT	ac40	5190	Ant1	5251-5270	5252.45	-49.2	0.012	50	7.92	Pass
NVNT	ac40	5190	Ant1	5270-5278.4	5275.95	-49.78	0.0105	7.92	2.48	Pass
NVNT	ac40	5190	Ant1	5278.4-26000	25699.54	-37.02	0.1986	2.5	2.5	Pass
NVNT	ac40	5190	Ant2	30-5141.6	5140.58	-49.06	0.0124	2.5	2.5	Pass
NVNT	ac40	5190	Ant2	5141.6-5150	5145.81	-42.59	0.0551	15	15	Pass
NVNT	ac40	5190	Ant2	5250-5251	5250.01	-45.87	0.0259	500	50	Pass
NVNT	ac40	5190	Ant2	5251-5270	5251.68	-46.74	0.0212	50	7.92	Pass
NVNT	ac40	5190	Ant2	5270-5278.4	5278.14	-48.74	0.0134	7.92	2.48	Pass
NVNT	ac40	5190	Ant2	5278.4-26000	25728.55	-37.65	0.1718	2.5	2.5	Pass
NVNT	ac40	5230	Ant1	30-5141.6	3288.65	-50.56	0.0088	2.5	2.5	Pass
NVNT	ac40	5230	Ant1	5141.6-5150	5145.36	-50.62	0.0087	15	15	Pass
NVNT	ac40	5230	Ant1	5250-5251	5250.1	-21.38	7.2778	500	50	Pass
NVNT	ac40	5230	Ant1	5251-5270	5251.12	-31.81	0.6592	50	7.92	Pass
NVNT	ac40	5230	Ant1	5270-5278.4	5272.09	-44.74	0.0336	7.92	2.48	Pass
NVNT	ac40	5230	Ant1	5278.4-26000	25695.39	-36.73	0.2123	2.5	2.5	Pass
NVNT	ac40	5230	Ant2	30-5141.6	3188.97	-50.98	0.008	2.5	2.5	Pass
NVNT	ac40	5230	Ant2	5141.6-5150	5149.58	-51.79	0.0066	15	15	Pass
NVNT	ac40	5230	Ant2	5250-5251	5250.09	-22.67	5.4075	500	50	Pass
NVNT	ac40	5230	Ant2	5251-5270	5254.43	-27.95	1.6032	50	7.92	Pass
NVNT	ac40	5230	Ant2	5270-5278.4	5270.92	-33.96	0.4018	7.92	2.48	Pass

NVNT	ac40	5230	Ant2	5278.4-26000	25510.97	-37.38	0.1828	2.5	2.5	Pass
NVNT	ac80	5210	Ant1	30-5123.2	5115.56	-43.08	0.0492	2.5	2.5	Pass
NVNT	ac80	5210	Ant1	5123.2-5150	5146.89	-36.24	0.2377	15	15	Pass
NVNT	ac80	5210	Ant1	5250-5251	5250.08	-19.33	11.6681	250	25	Pass
NVNT	ac80	5210	Ant1	5251-5290	5251.08	-26.57	2.2029	25	3.96	Pass
NVNT	ac80	5210	Ant1	5290-5296.7	5291.53	-38.42	0.1439	3.96	2.49	Pass
NVNT	ac80	5210	Ant1	5296.7-26000	25658.4	-36.59	0.2193	2.5	2.5	Pass
NVNT	ac80	5210	Ant2	30-5123.2	5121.16	-43.24	0.0474	2.5	2.5	Pass
NVNT	ac80	5210	Ant2	5123.2-5150	5135.76	-33.09	0.4909	15	15	Pass
NVNT	ac80	5210	Ant2	5250-5251	5250.01	-20.51	8.892	250	25	Pass
NVNT	ac80	5210	Ant2	5251-5290	5251.16	-27.73	1.6866	25	3.96	Pass
NVNT	ac80	5210	Ant2	5290-5296.7	5293.51	-35.01	0.3155	3.96	2.49	Pass
NVNT	ac80	5210	Ant2	5296.7-26000	5300.84	-35.55	0.2786	2.5	2.5	Pass
NVNT	ax20	5180	Ant1	30-5142	3292.48	-51.29	0.0074	2.5	2.5	Pass
NVNT	ax20	5180	Ant1	5142-5150	5144.77	-50.94	0.0081	15	15	Pass
NVNT	ax20	5180	Ant1	5250-5250.2	5250.05	-50.73	0.0085	2154.43	630.96	Pass
NVNT	ax20	5180	Ant1	5250.2-5251	5250.82	-50.75	0.0084	630.96	100	Pass
NVNT	ax20	5180	Ant1	5251-5260	5252.13	-51.16	0.0077	100	15.85	Pass
NVNT	ax20	5180	Ant1	5260-5266.7	5260.77	-51.26	0.0075	15.85	2.49	Pass
NVNT	ax20	5180	Ant1	5266.7-26000	25939.87	-36.81	0.2084	2.5	2.5	Pass
NVNT	ax20	5180	Ant2	30-5142	3435.1	-51.46	0.0071	2.5	2.5	Pass
NVNT	ax20	5180	Ant2	5142-5150	5148.78	-51.91	0.0064	15	15	Pass

NVNT	ax20	5180	Ant2	5250-5250.2	5250	-50.93	0.0081	2154.43	630.96	Pass
NVNT	ax20	5180	Ant2	5250.2-5251	5250.77	-50.69	0.0085	630.96	100	Pass
NVNT	ax20	5180	Ant2	5251-5260	5254.73	-51.3	0.0074	100	15.85	Pass
NVNT	ax20	5180	Ant2	5260-5266.7	5263.38	-50.77	0.0084	15.85	2.49	Pass
NVNT	ax20	5180	Ant2	5266.7-26000	25954.39	-37.39	0.1824	2.5	2.5	Pass
NVNT	ax20	5200	Ant1	30-5142	3282.77	-51.11	0.0077	2.5	2.5	Pass
NVNT	ax20	5200	Ant1	5142-5150	5146.79	-51.7	0.0068	15	15	Pass
NVNT	ax20	5200	Ant1	5250-5250.2	5250.17	-50.46	0.009	2154.43	630.96	Pass
NVNT	ax20	5200	Ant1	5250.2-5251	5250.43	-50.42	0.0091	630.96	100	Pass
NVNT	ax20	5200	Ant1	5251-5260	5254.36	-50.74	0.0084	100	15.85	Pass
NVNT	ax20	5200	Ant1	5260-5266.7	5264.21	-50.68	0.0086	15.85	2.49	Pass
NVNT	ax20	5200	Ant1	5266.7-26000	25510.69	-37.26	0.1879	2.5	2.5	Pass
NVNT	ax20	5200	Ant2	30-5142	3512.29	-41.88	0.0649	2.5	2.5	Pass
NVNT	ax20	5200	Ant2	5142-5150	5143.05	-51.97	0.0064	15	15	Pass
NVNT	ax20	5200	Ant2	5250-5250.2	5250.02	-49.67	0.0108	2154.43	630.96	Pass
NVNT	ax20	5200	Ant2	5250.2-5251	5250.54	-50.73	0.0085	630.96	100	Pass
NVNT	ax20	5200	Ant2	5251-5260	5255.97	-51.1	0.0078	100	15.85	Pass
NVNT	ax20	5200	Ant2	5260-5266.7	5265.2	-50.5	0.0089	15.85	2.49	Pass
NVNT	ax20	5200	Ant2	5266.7-26000	25500.33	-37.85	0.1641	2.5	2.5	Pass
NVNT	ax20	5240	Ant1	30-5142	3284.3	-50.91	0.0081	2.5	2.5	Pass
NVNT	ax20	5240	Ant1	5142-5150	5143.62	-52.59	0.0055	15	15	Pass
NVNT	ax20	5240	Ant1	5250-5250.2	5250.06	-5.29	295.8012	2154.43	630.96	Pass

NVNT	ax20	5240	Ant1	5250.2-5251	5250.23	-8.48	141.9058	630.96	100	Pass
NVNT	ax20	5240	Ant1	5251-5260	5251.07	-20.01	9.977	100	15.85	Pass
NVNT	ax20	5240	Ant1	5260-5266.7	5260.08	-38.91	0.1285	15.85	2.49	Pass
NVNT	ax20	5240	Ant1	5266.7-26000	25697.29	-36.8	0.2089	2.5	2.5	Pass
NVNT	ax20	5240	Ant2	30-5142	3159.57	-51.38	0.0073	2.5	2.5	Pass
NVNT	ax20	5240	Ant2	5142-5150	5143.85	-52.45	0.0057	15	15	Pass
NVNT	ax20	5240	Ant2	5250-5250.2	5250	-6.26	236.592	2154.43	630.96	Pass
NVNT	ax20	5240	Ant2	5250.2-5251	5250.24	-10.9	81.2831	630.96	100	Pass
NVNT	ax20	5240	Ant2	5251-5260	5251.01	-20.24	9.4624	100	15.85	Pass
NVNT	ax20	5240	Ant2	5260-5266.7	5260.67	-35.65	0.2723	15.85	2.49	Pass
NVNT	ax20	5240	Ant2	5266.7-26000	25720.1	-37.6	0.1738	2.5	2.5	Pass
NVNT	ax40	5190	Ant1	30-5141.6	909.71	-44.66	0.0342	2.5	2.5	Pass
NVNT	ax40	5190	Ant1	5141.6-5150	5149.27	-47.28	0.0187	15	15	Pass
NVNT	ax40	5190	Ant1	5250-5251	5250.84	-50.01	0.01	500	50	Pass
NVNT	ax40	5190	Ant1	5251-5270	5254.94	-50.61	0.0087	50	7.92	Pass
NVNT	ax40	5190	Ant1	5270-5278.4	5271.01	-50.59	0.0087	7.92	2.48	Pass
NVNT	ax40	5190	Ant1	5278.4-26000	25904.68	-36.46	0.2259	2.5	2.5	Pass
NVNT	ax40	5190	Ant2	30-5141.6	2464.66	-50.81	0.0083	2.5	2.5	Pass
NVNT	ax40	5190	Ant2	5141.6-5150	5149.4	-46.96	0.0201	15	15	Pass
NVNT	ax40	5190	Ant2	5250-5251	5250.52	-49.61	0.0109	500	50	Pass
NVNT	ax40	5190	Ant2	5251-5270	5251.25	-49.05	0.0124	50	7.92	Pass
NVNT	ax40	5190	Ant2	5270-5278.4	5273.13	-49.86	0.0103	7.92	2.48	Pass


NVNT	ax40	5190	Ant2	5278.4-26000	25751.34	-37.39	0.1824	2.5	2.5	Pass
NVNT	ax40	5230	Ant1	30-5141.6	4984.16	-50.5	0.0089	2.5	2.5	Pass
NVNT	ax40	5230	Ant1	5141.6-5150	5148.45	-50.88	0.0082	15	15	Pass
NVNT	ax40	5230	Ant1	5250-5251	5250.1	-16.62	21.7771	500	50	Pass
NVNT	ax40	5230	Ant1	5251-5270	5251.04	-30.51	0.8892	50	7.92	Pass
NVNT	ax40	5230	Ant1	5270-5278.4	5272.54	-47.25	0.0188	7.92	2.48	Pass
NVNT	ax40	5230	Ant1	5278.4-26000	25724.4	-36.48	0.2249	2.5	2.5	Pass
NVNT	ax40	5230	Ant2	30-5141.6	1784.3	-45.7	0.0269	2.5	2.5	Pass
NVNT	ax40	5230	Ant2	5141.6-5150	5142.13	-52.52	0.0056	15	15	Pass
NVNT	ax40	5230	Ant2	5250-5251	5250.02	-18.98	12.6474	500	50	Pass
NVNT	ax40	5230	Ant2	5251-5270	5251.04	-33.23	0.4753	50	7.92	Pass
NVNT	ax40	5230	Ant2	5270-5278.4	5276.9	-40.9	0.0813	7.92	2.48	Pass
NVNT	ax40	5230	Ant2	5278.4-26000	25968.92	-37.38	0.1828	2.5	2.5	Pass
NVNT	ax80	5210	Ant1	30-5123.2	5021.85	-48.4	0.0145	2.5	2.5	Pass
NVNT	ax80	5210	Ant1	5123.2-5150	5139.53	-48	0.0158	15	15	Pass
NVNT	ax80	5210	Ant1	5250-5251	5250.03	-20.39	9.1411	250	25	Pass
NVNT	ax80	5210	Ant1	5251-5290	5251.4	-31.16	0.7656	25	3.96	Pass
NVNT	ax80	5210	Ant1	5290-5296.7	5290.57	-48.96	0.0127	3.96	2.49	Pass
NVNT	ax80	5210	Ant1	5296.7-26000	25706.01	-36.53	0.2223	2.5	2.5	Pass
NVNT	ax80	5210	Ant2	30-5123.2	5122.69	-50.22	0.0095	2.5	2.5	Pass
NVNT	ax80	5210	Ant2	5123.2-5150	5143.45	-40.94	0.0805	15	15	Pass
NVNT	ax80	5210	Ant2	5250-5251	5250.12	-17.71	16.9434	250	25	Pass

NVNT	ax80	5210	Ant2	5251-5290	5251.02	-30.47	0.8974	25	3.96	Pass
NVNT	ax80	5210	Ant2	5290-5296.7	5292.97	-42.66	0.0542	3.96	2.49	Pass
NVNT	ax80	5210	Ant2	5296.7-26000	25563.16	-36.81	0.2084	2.5	2.5	Pass


複製禁止

Test Graphs


Tx. Spurious NVNT a 5180MHz Ant1 @ 30MHz-5142MHz

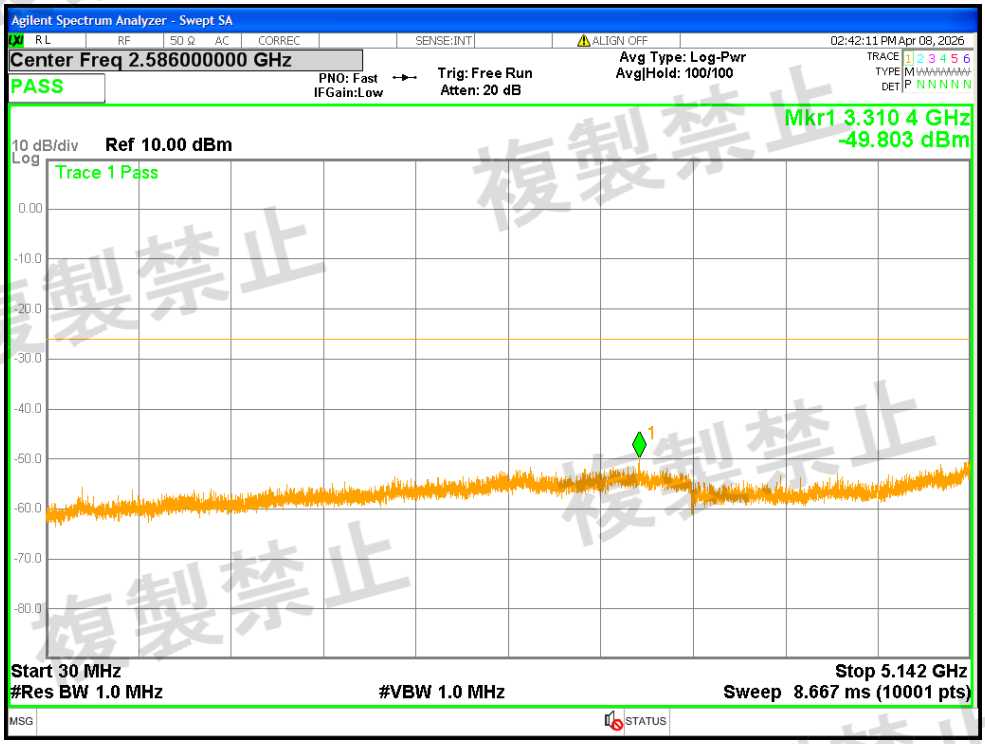


Tx. Spurious NVNT a 5180MHz Ant1 @ 5142MHz-5150MHz

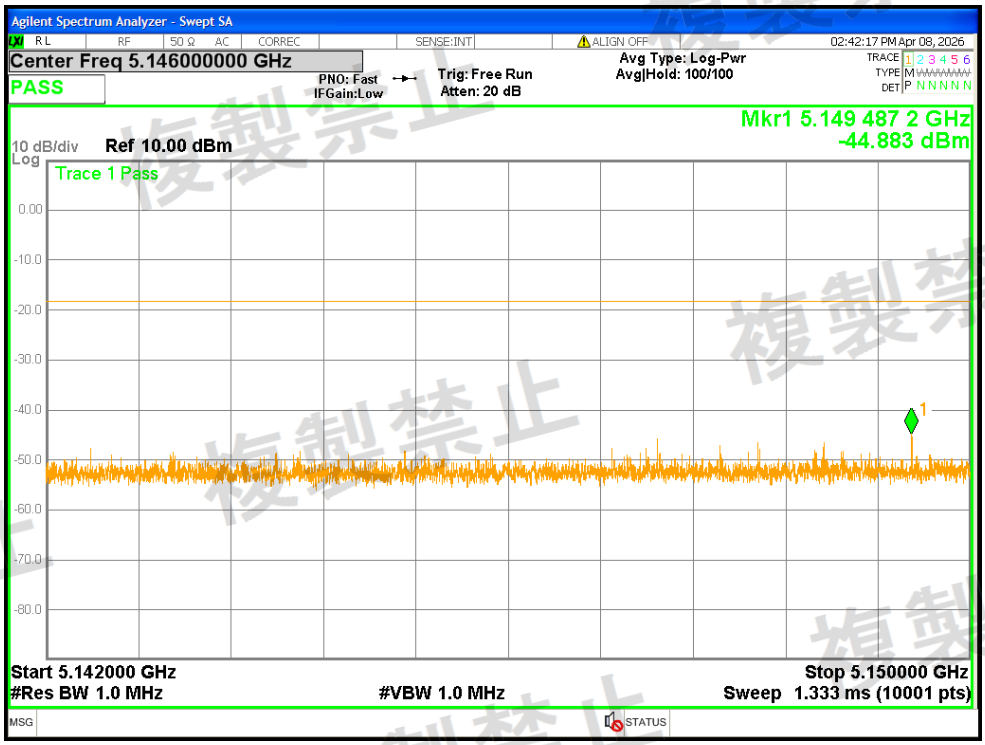


Tx. Spurious NVNT a 5180MHz Ant1 @ 5250MHz-5251MHz

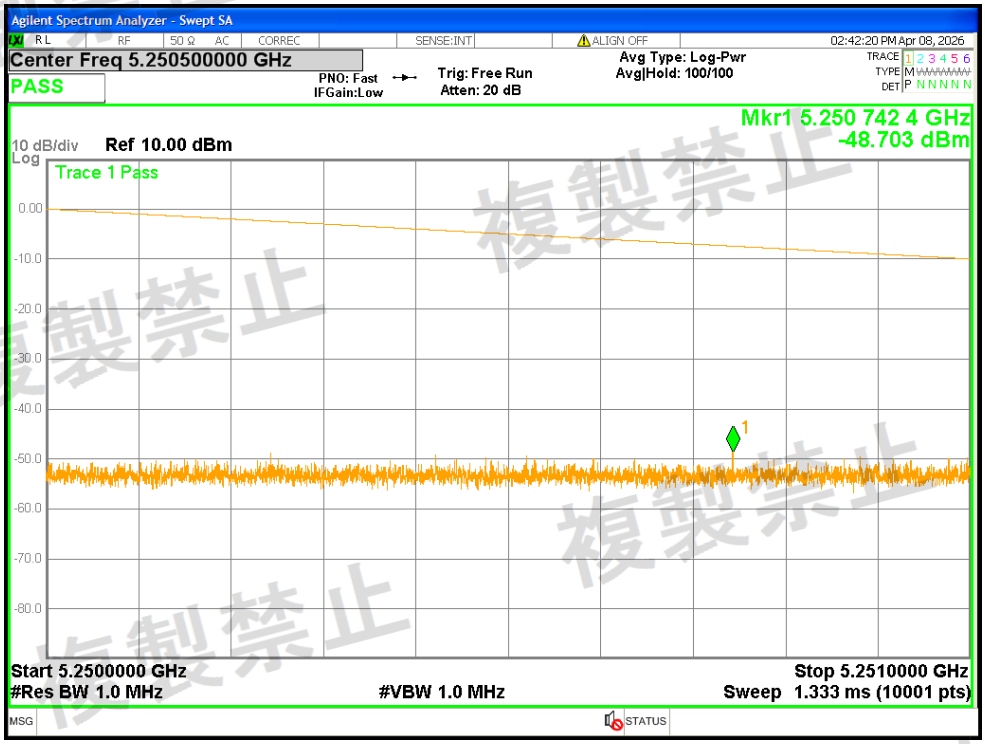


Tx. Spurious NVNT a 5180MHz Ant1 @ 5251MHz-5260MHz

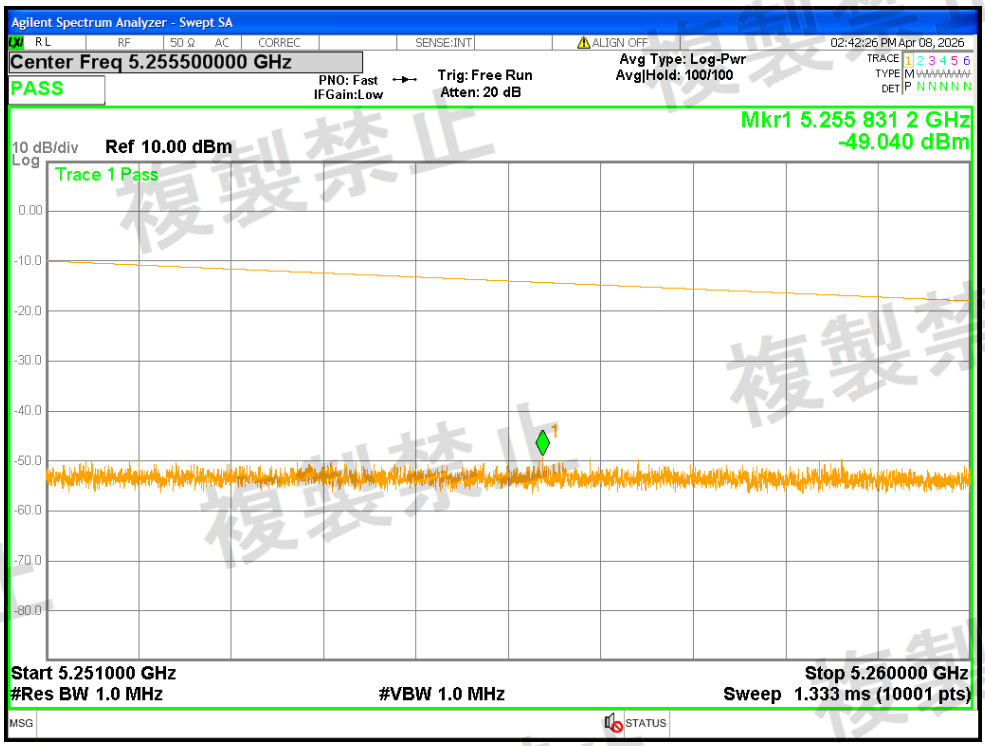


Tx. Spurious NVNT a 5180MHz Ant1 @ 5260MHz-5266.7MHz

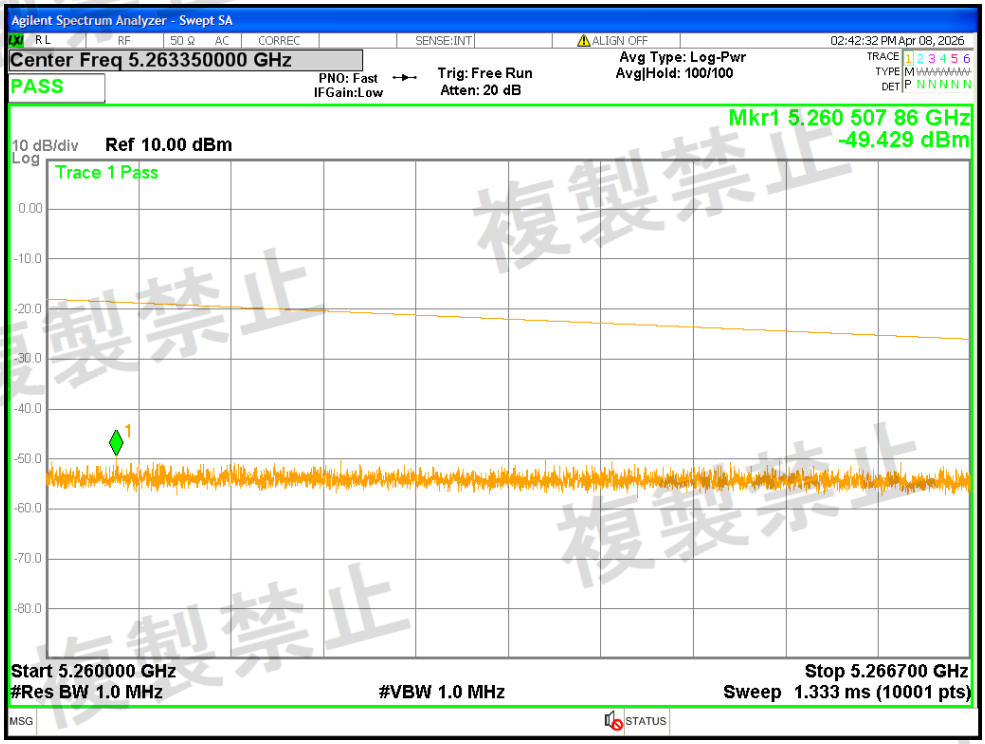


Tx. Spurious NVNT a 5180MHz Ant1 @ 5266.7MHz-26000MHz

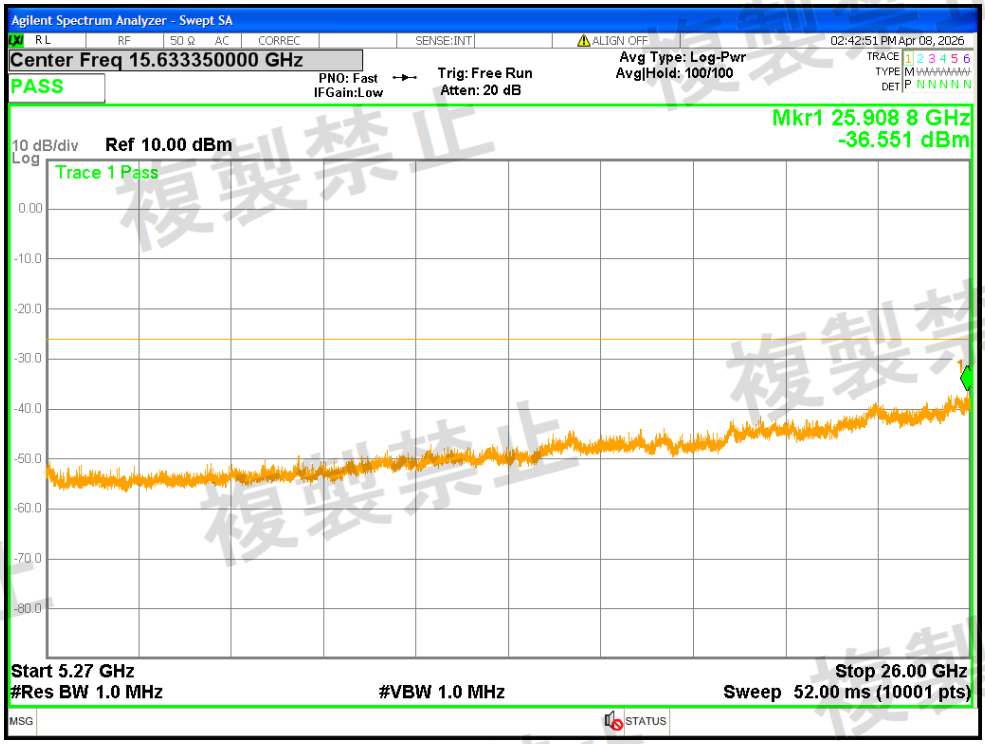


Tx. Spurious NVNT a 5200MHz Ant1 @ 30MHz-5142MHz

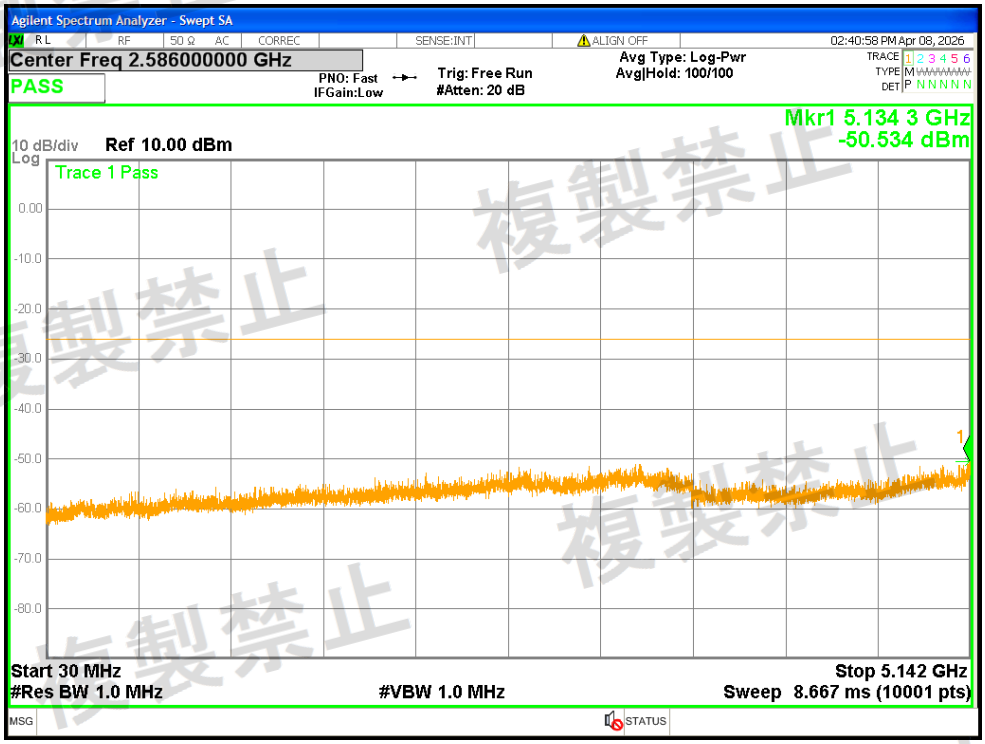


Tx. Spurious NVNT a 5200MHz Ant1 @ 5142MHz-5150MHz

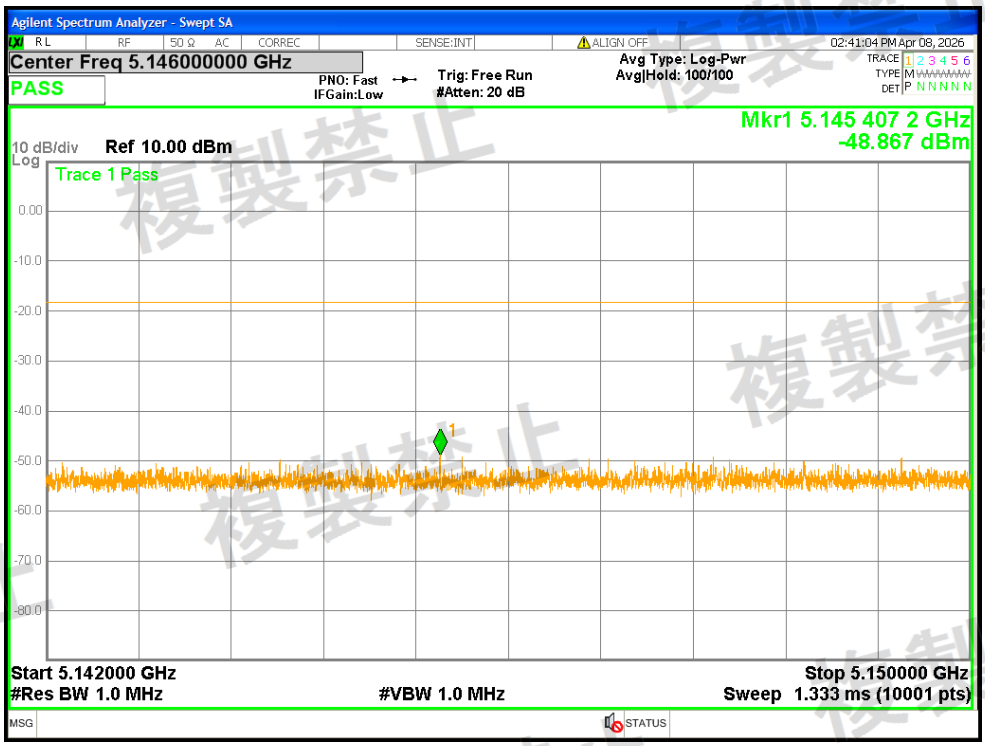


Tx. Spurious NVNT a 5200MHz Ant1 @ 5250MHz-5251MHz

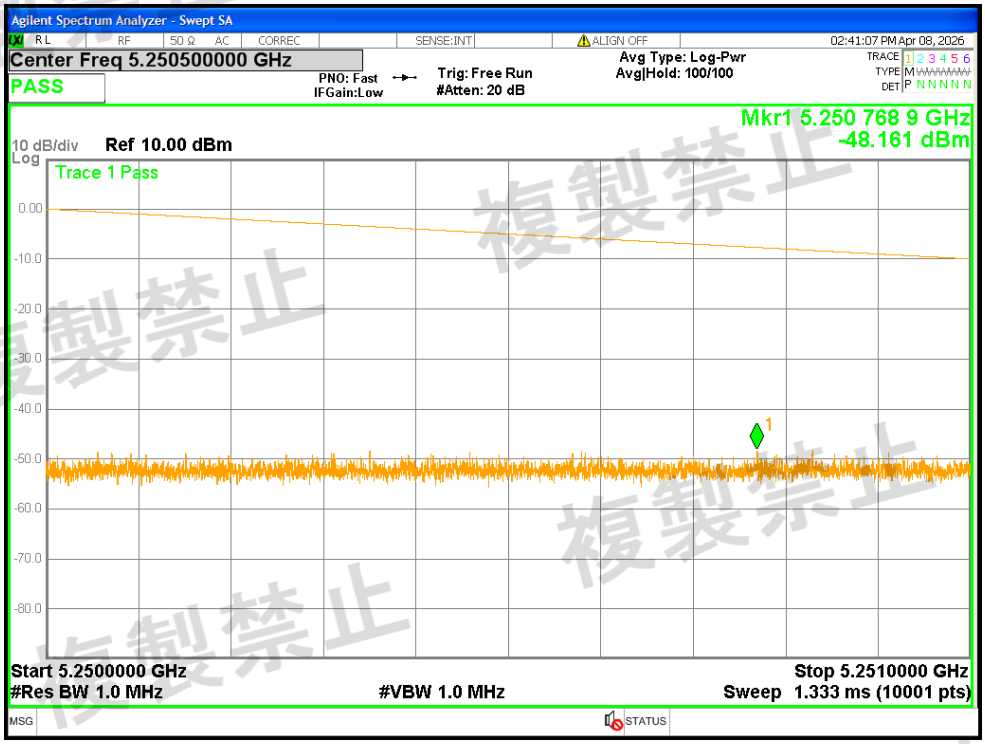


Tx. Spurious NVNT a 5200MHz Ant1 @ 5251MHz-5260MHz

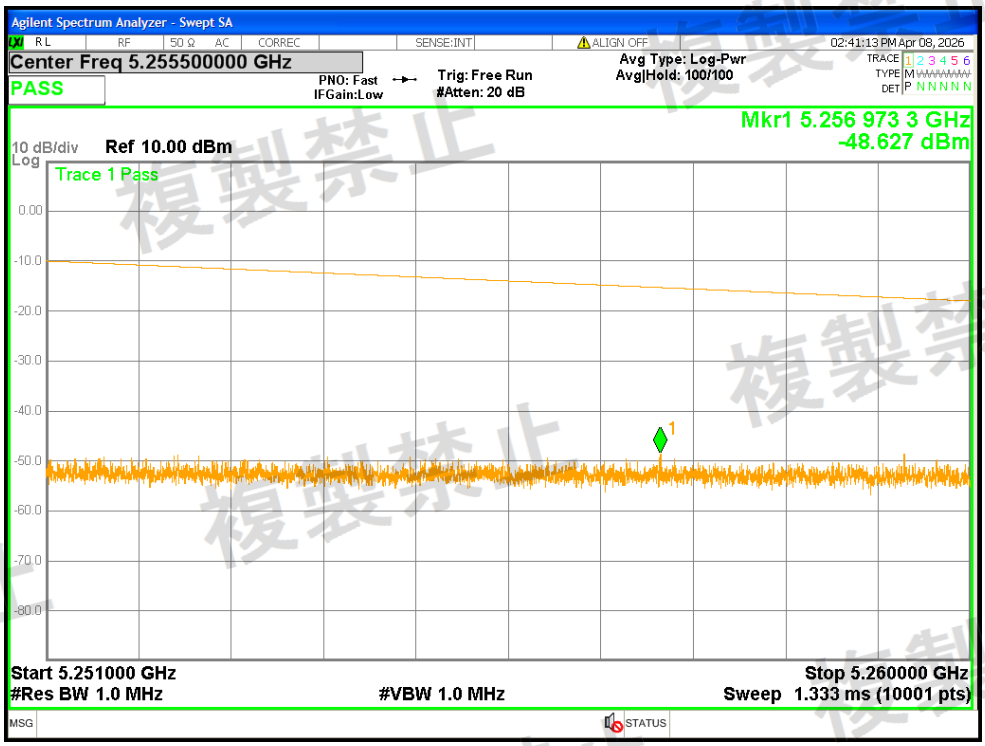


Tx. Spurious NVNT a 5200MHz Ant1 @ 5260MHz-5266.7MHz

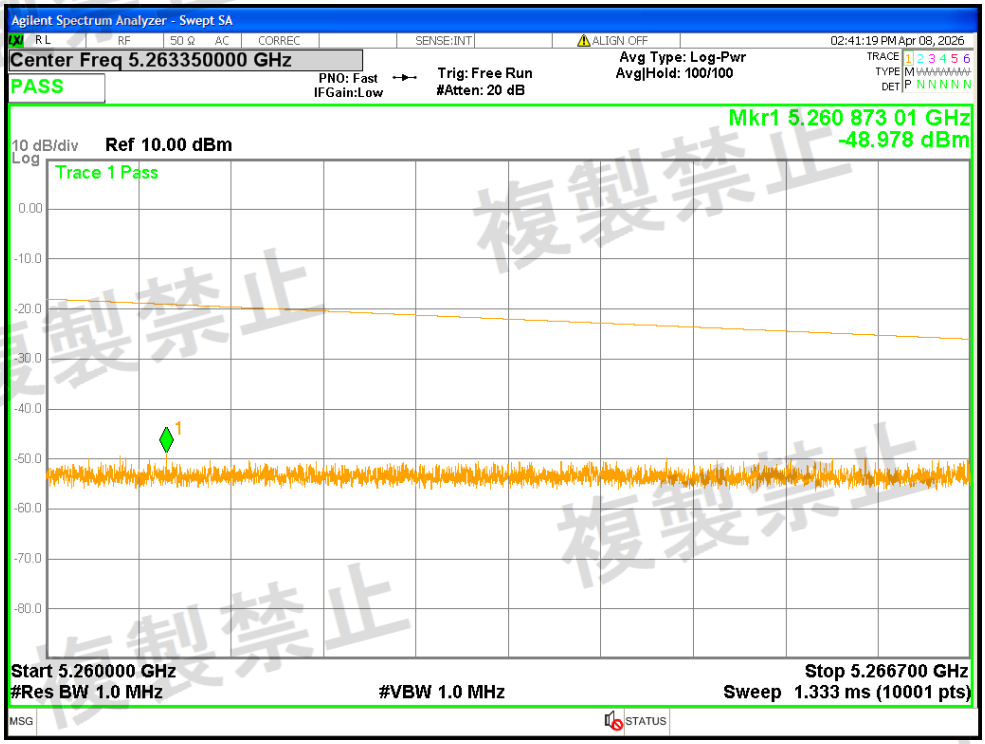


Tx. Spurious NVNT a 5200MHz Ant1 @ 5266.7MHz-26000MHz

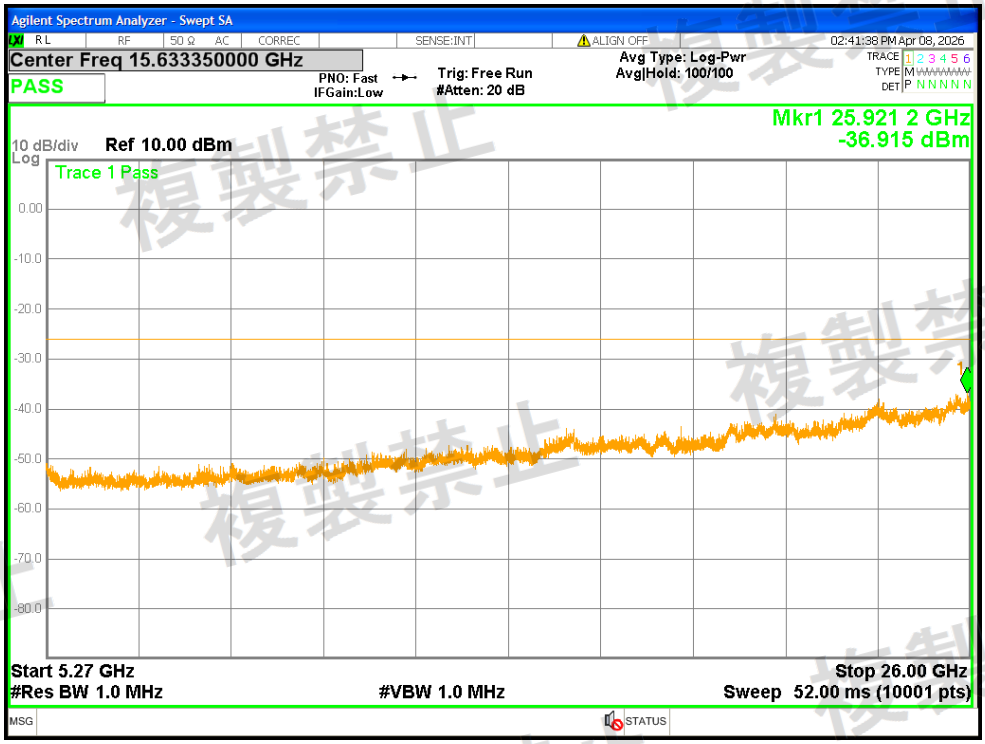


Tx. Spurious NVNT a 5240MHz Ant1 @ 30MHz-5142MHz

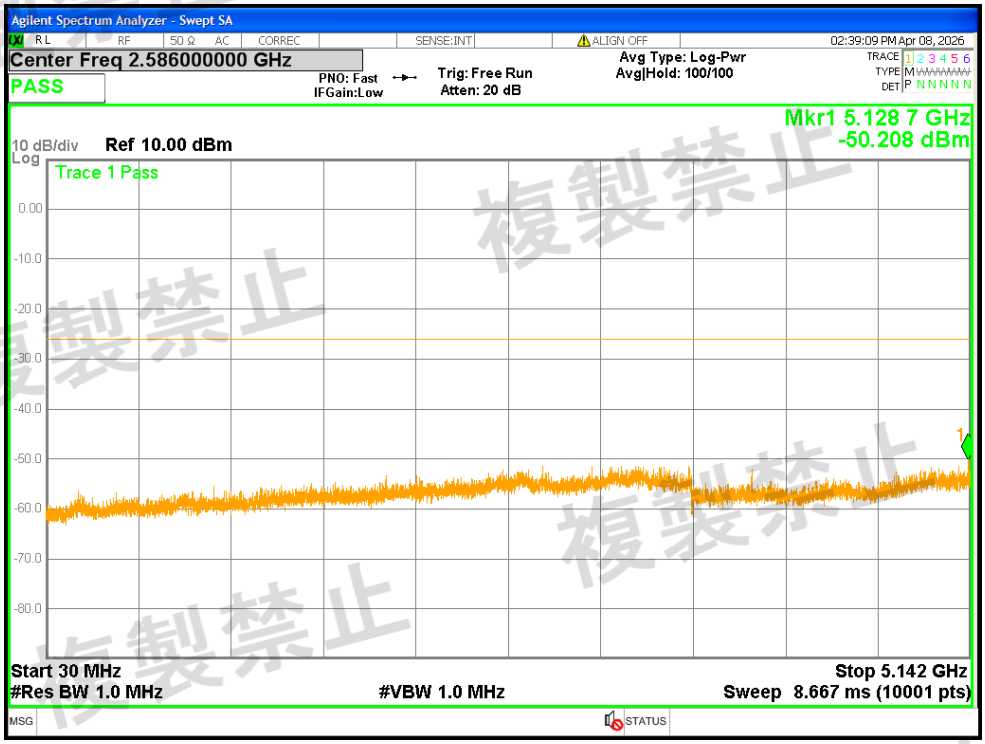


Tx. Spurious NVNT a 5240MHz Ant1 @ 5142MHz-5150MHz

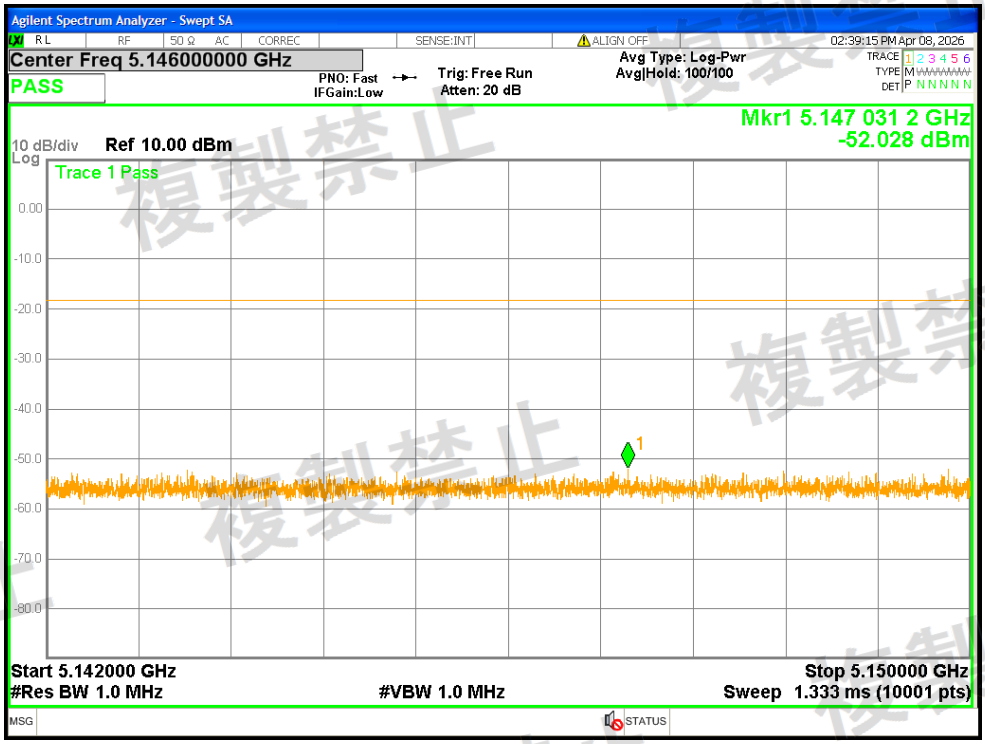


Tx. Spurious NVNT a 5240MHz Ant1 @ 5250MHz-5251MHz

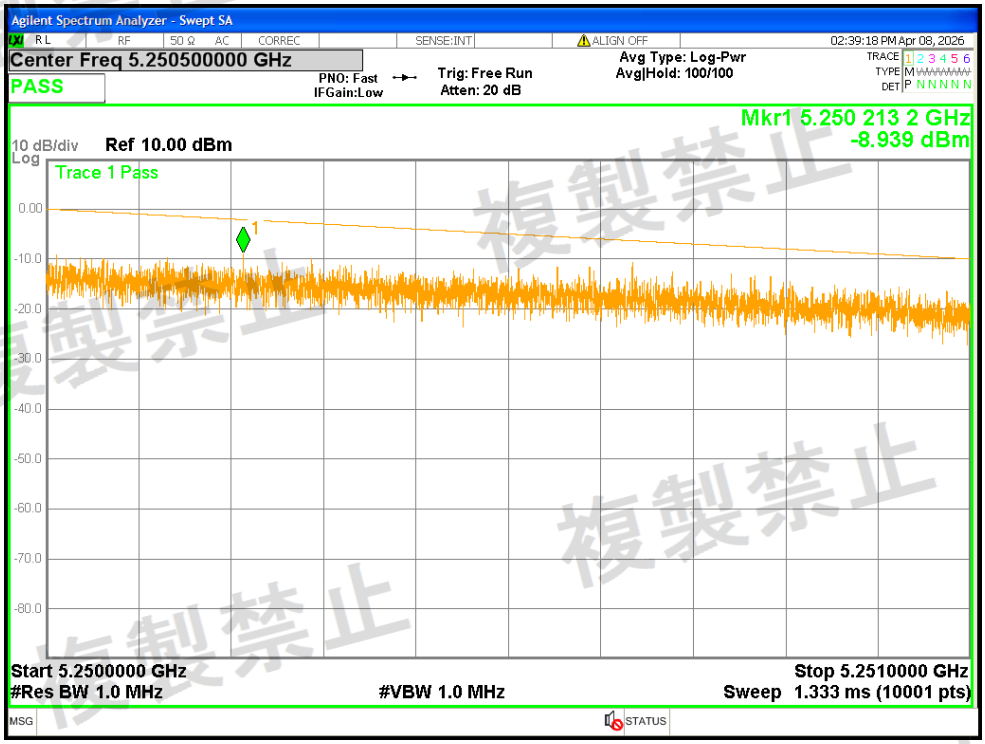


Tx. Spurious NVNT a 5240MHz Ant1 @ 5251MHz-5260MHz

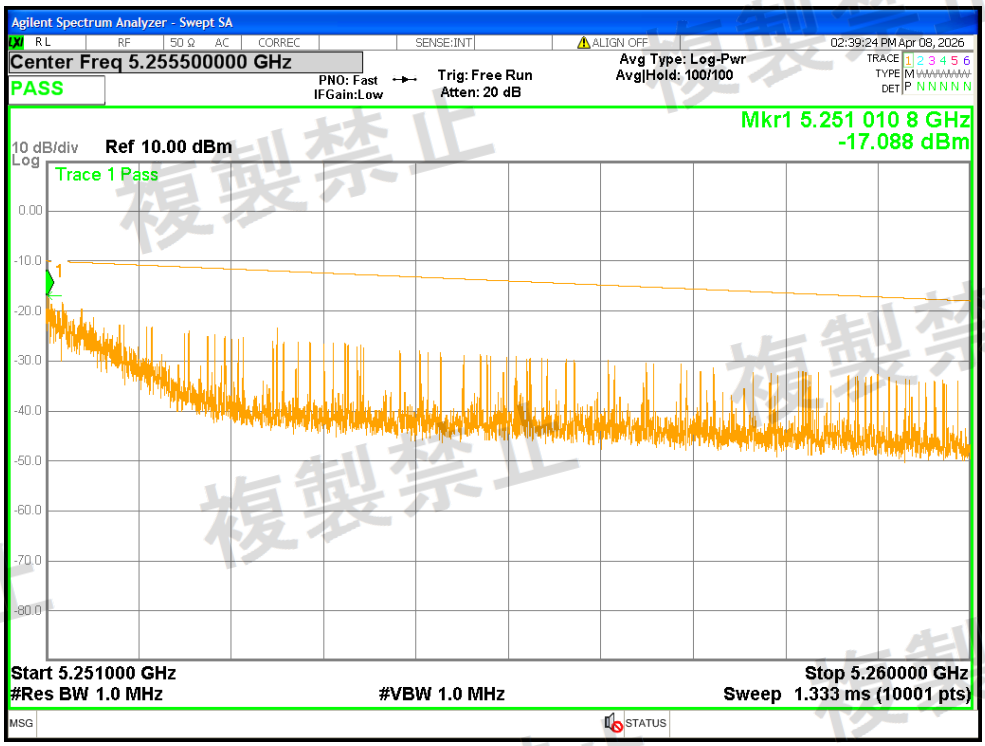


Tx. Spurious NVNT a 5240MHz Ant1 @ 5260MHz-5266.7MHz

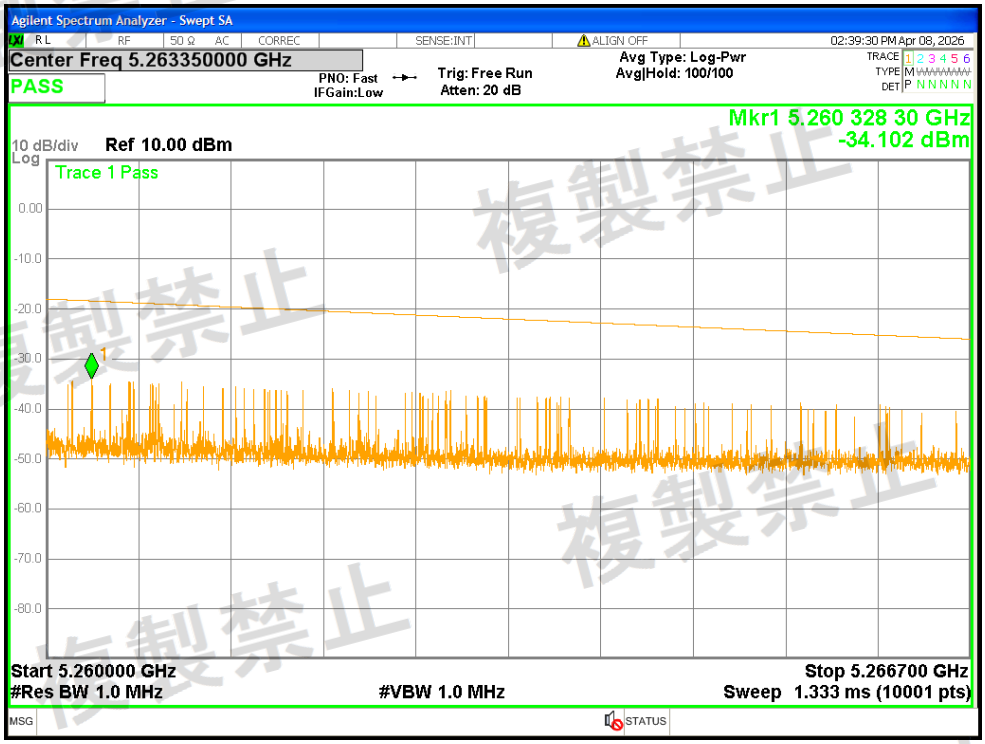


Tx. Spurious NVNT a 5240MHz Ant1 @ 5266.7MHz-26000MHz

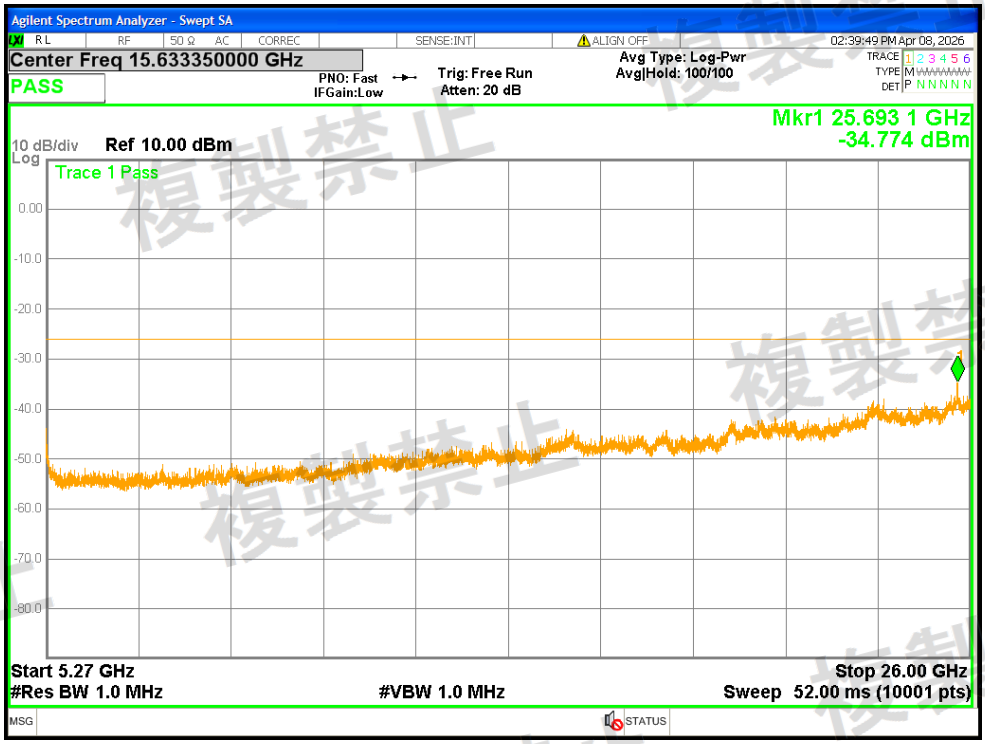


Tx. Spurious NVNT a 5180MHz Ant2 @ 30MHz-5142MHz

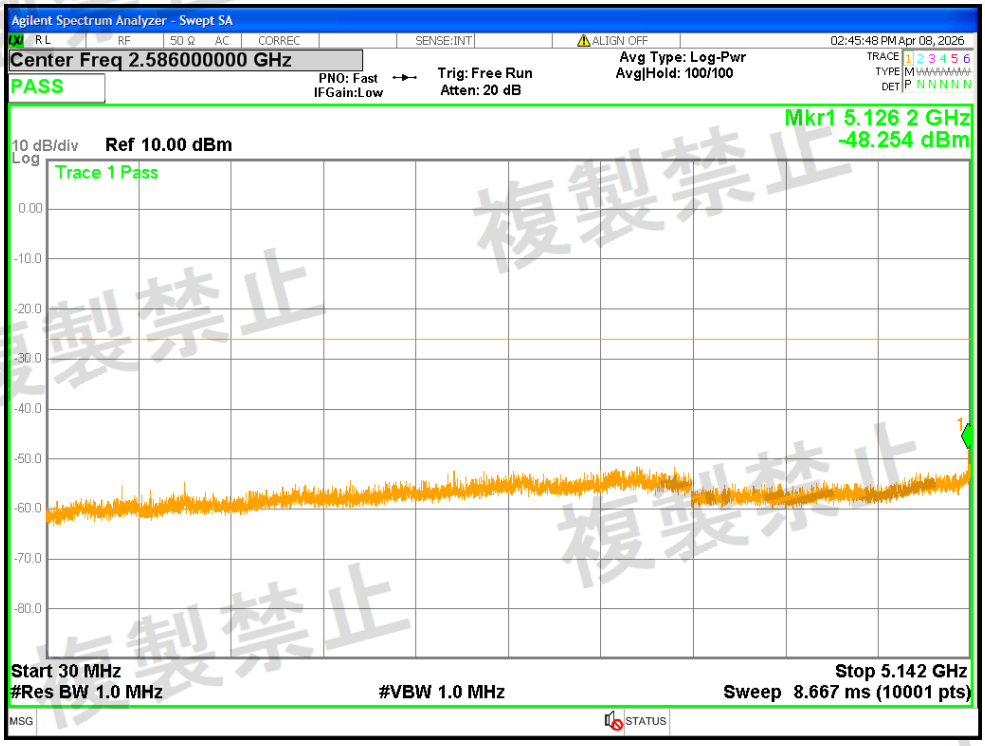


Tx. Spurious NVNT a 5180MHz Ant2 @ 5142MHz-5150MHz

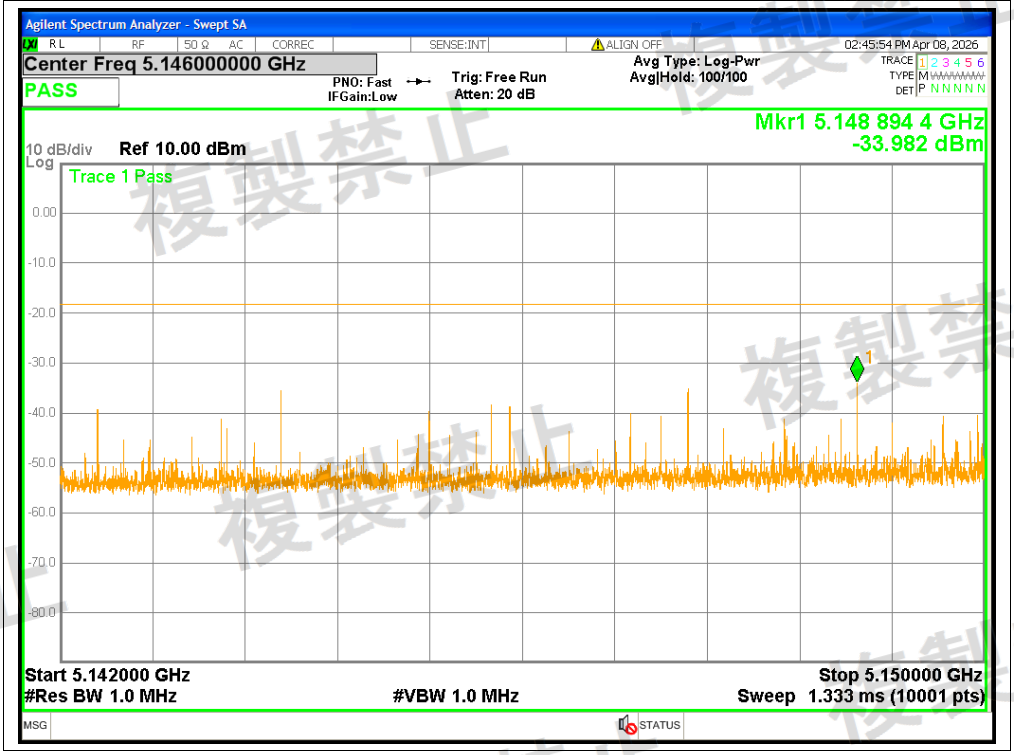


Tx. Spurious NVNT a 5180MHz Ant2 @ 5250MHz-5251MHz

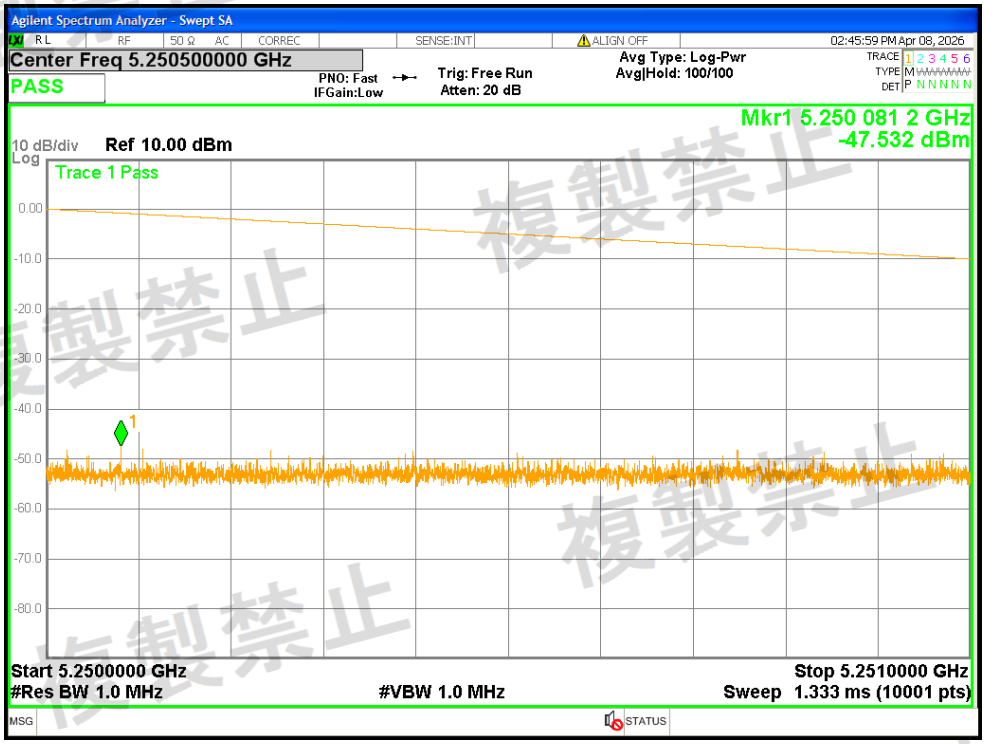


Tx. Spurious NVNT a 5180MHz Ant2 @ 5251MHz-5260MHz

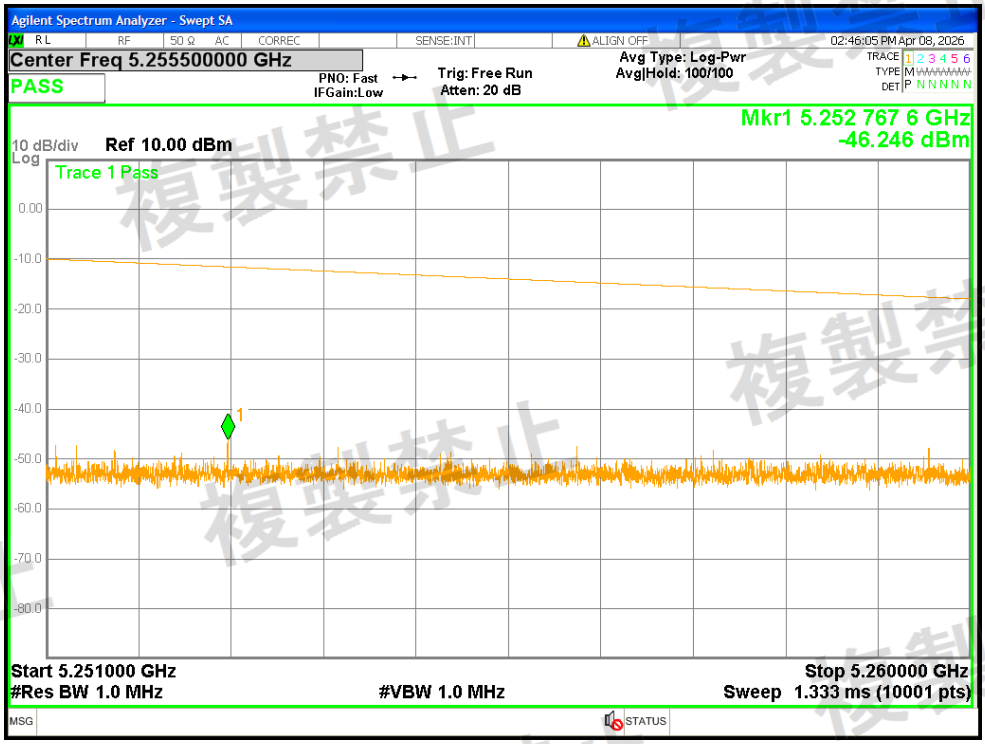


Tx. Spurious NVNT a 5180MHz Ant2 @ 5260MHz-5266.7MHz

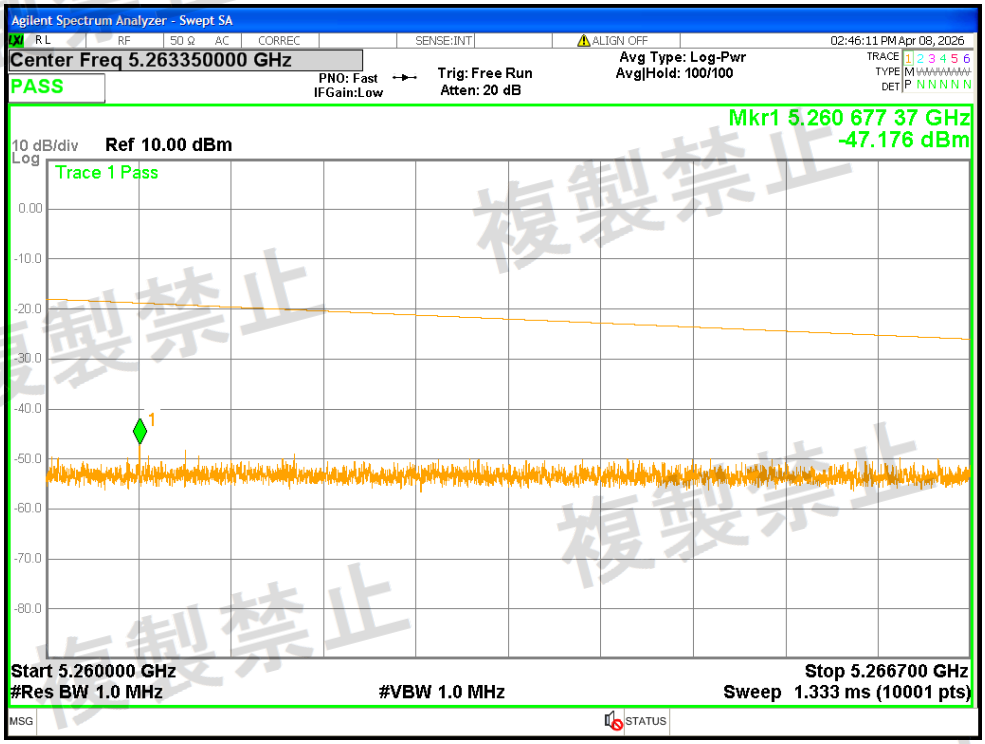


Tx. Spurious NVNT a 5180MHz Ant2 @ 5266.7MHz-26000MHz

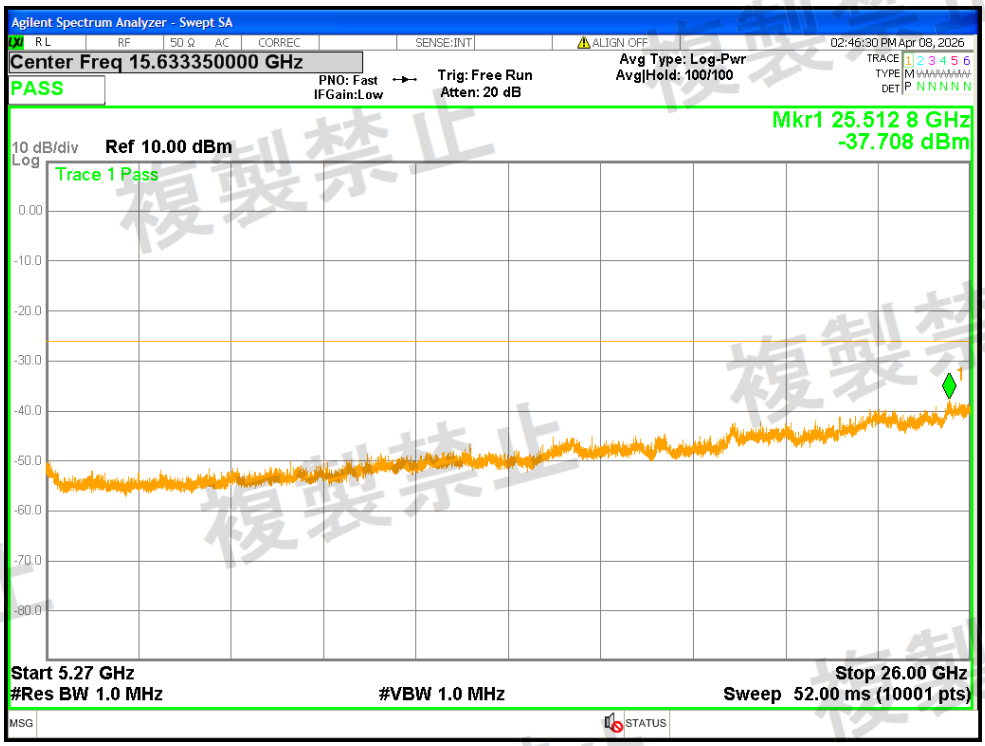


Tx. Spurious NVNT a 5200MHz Ant2 @ 30MHz-5142MHz

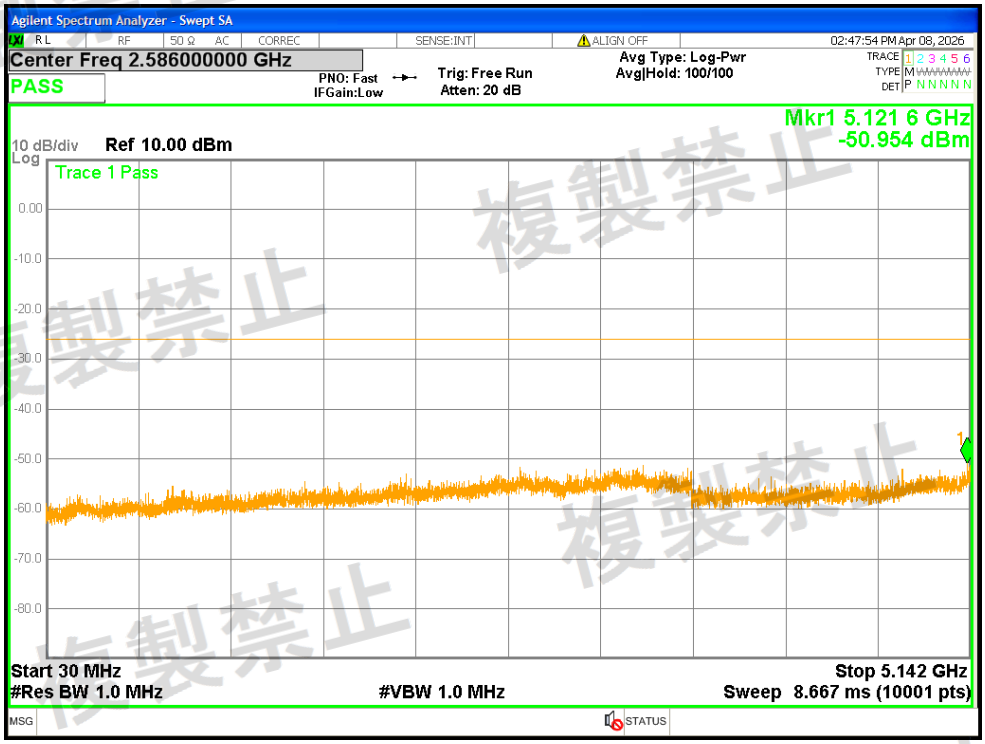


Tx. Spurious NVNT a 5200MHz Ant2 @ 5142MHz-5150MHz

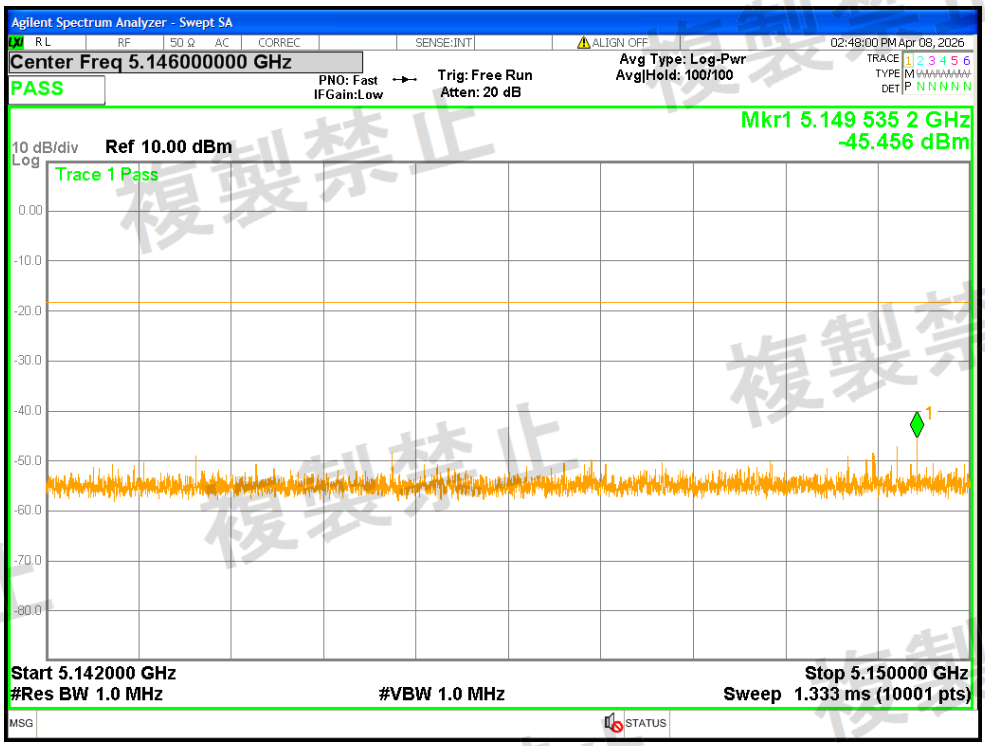


Tx. Spurious NVNT a 5200MHz Ant2 @ 5250MHz-5251MHz

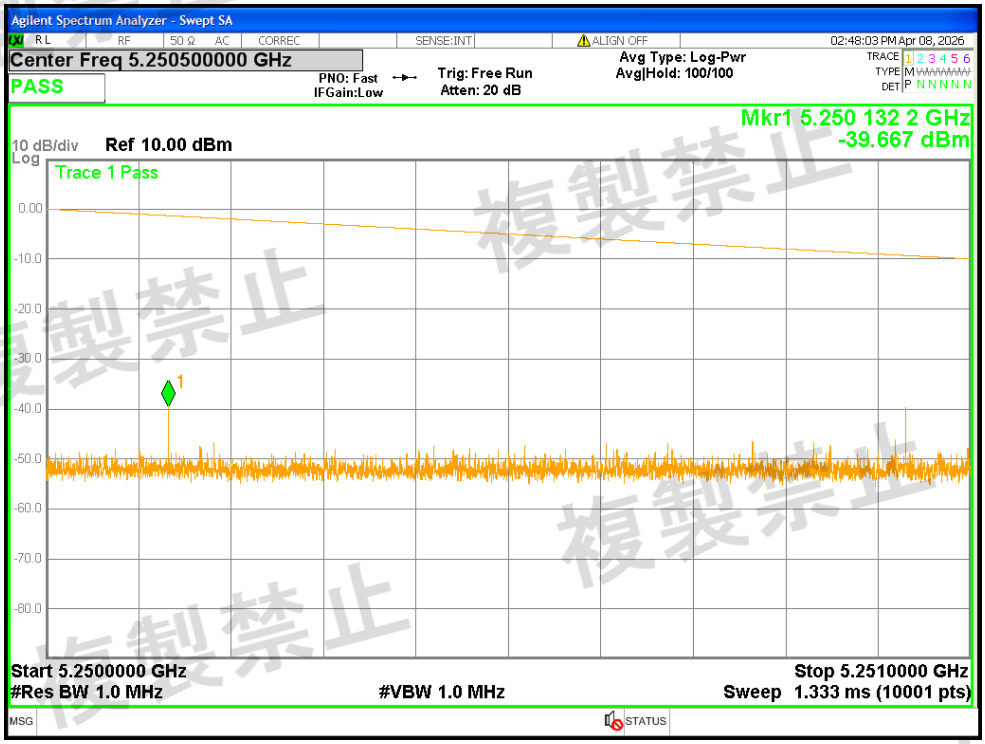


Tx. Spurious NVNT a 5200MHz Ant2 @ 5251MHz-5260MHz

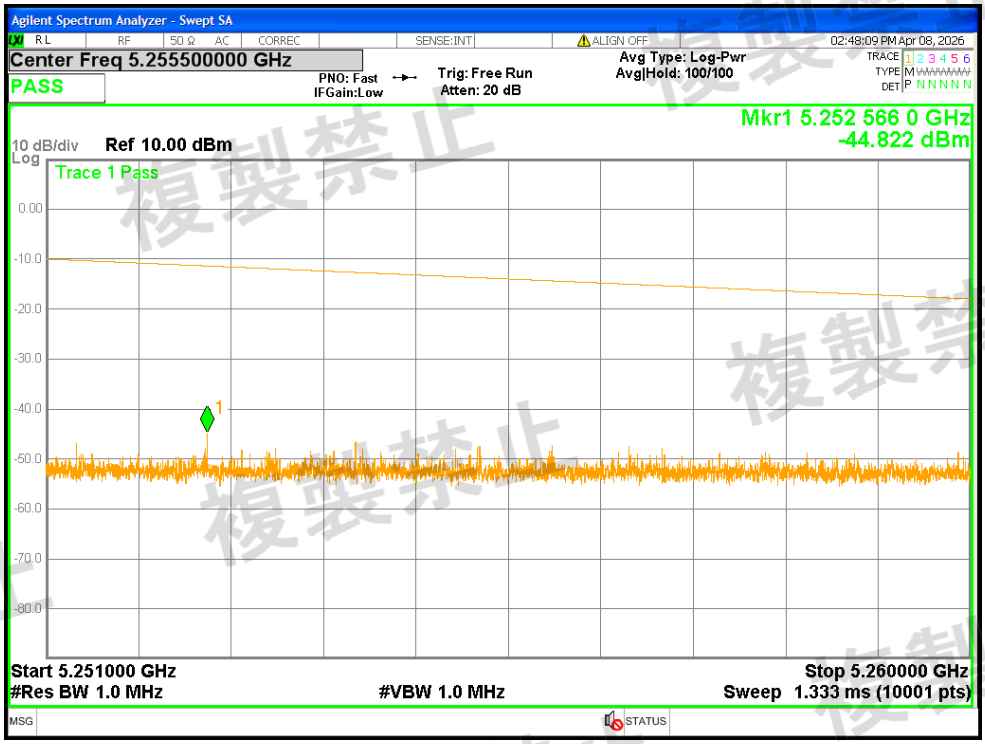


Tx. Spurious NVNT a 5200MHz Ant2 @ 5260MHz-5266.7MHz

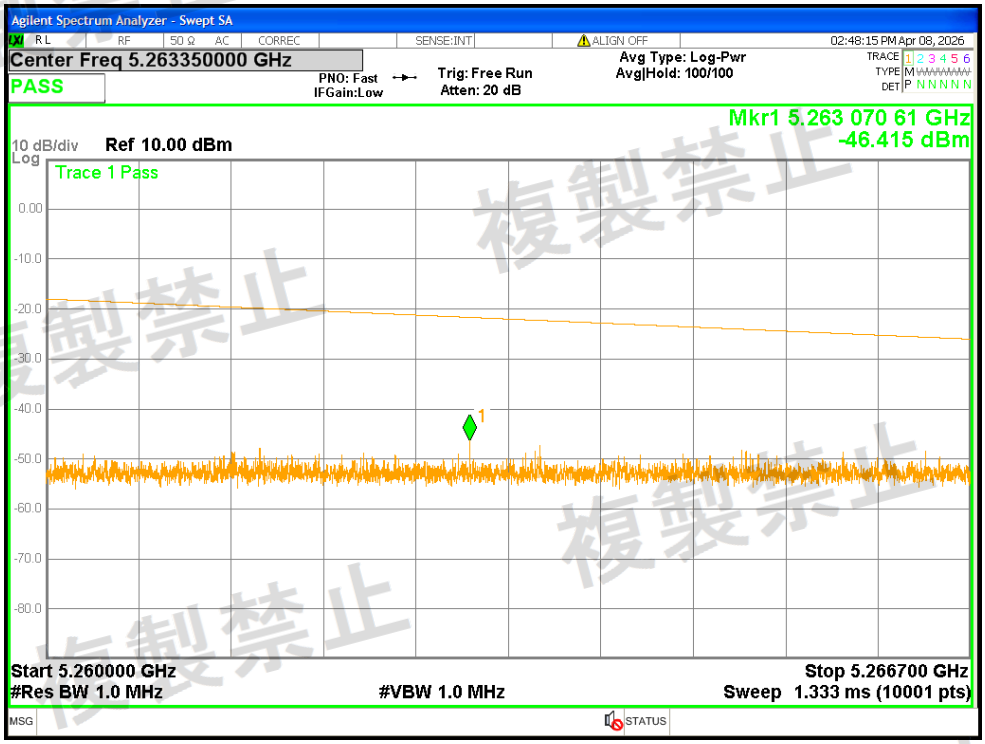


Tx. Spurious NVNT a 5200MHz Ant2 @ 5266.7MHz-26000MHz

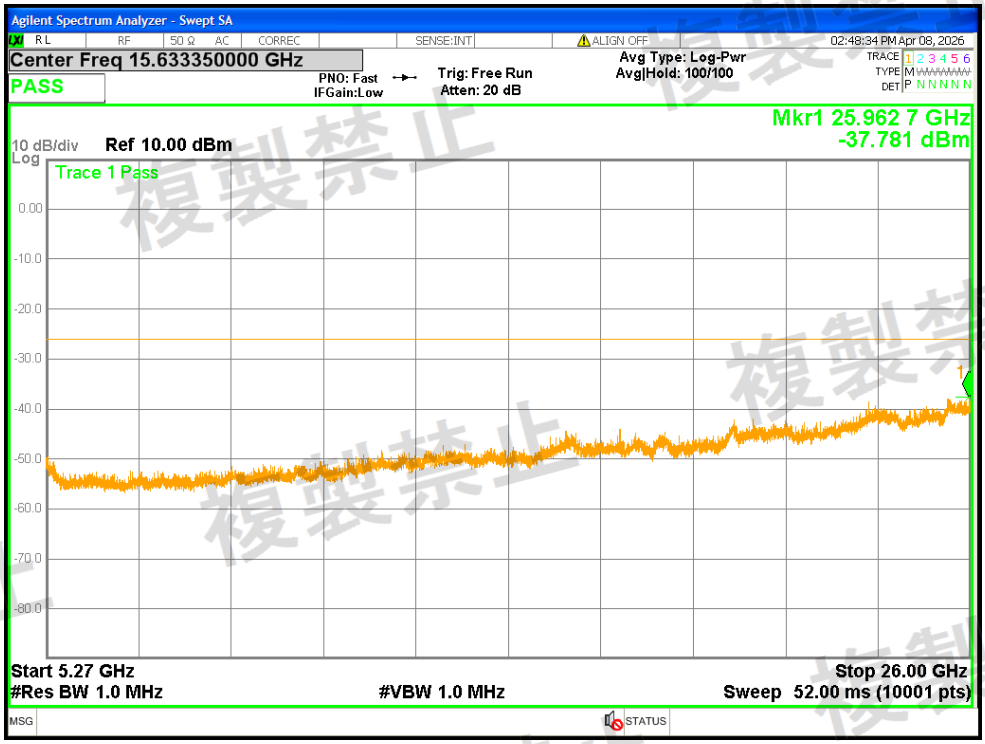


Tx. Spurious NVNT a 5240MHz Ant2 @ 30MHz-5142MHz

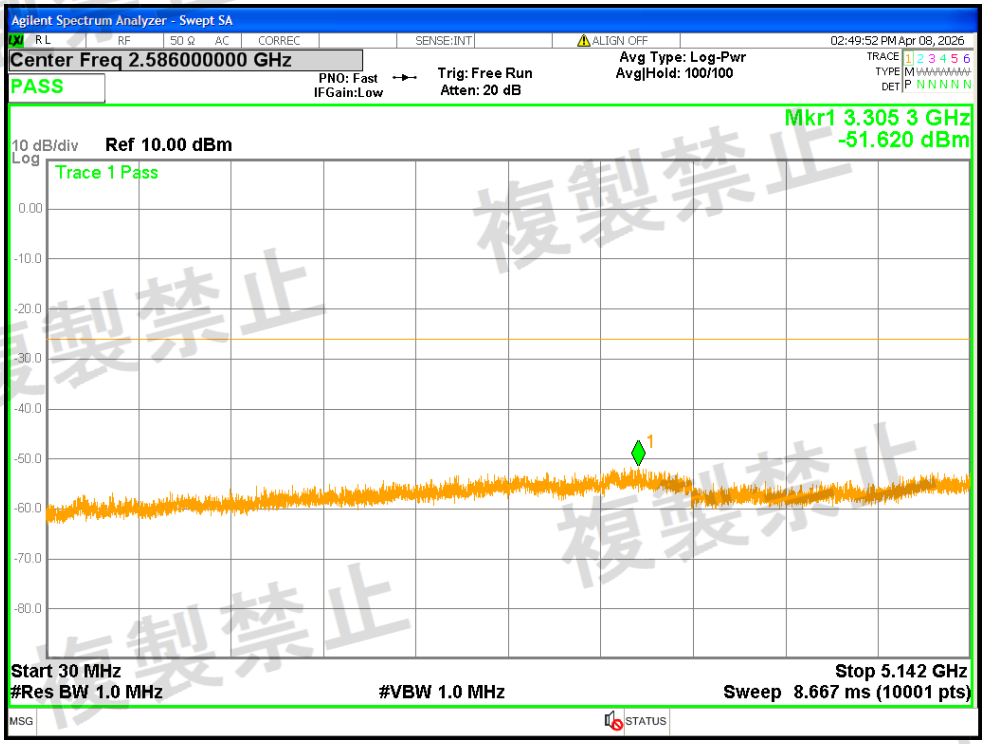


Tx. Spurious NVNT a 5240MHz Ant2 @ 5142MHz-5150MHz

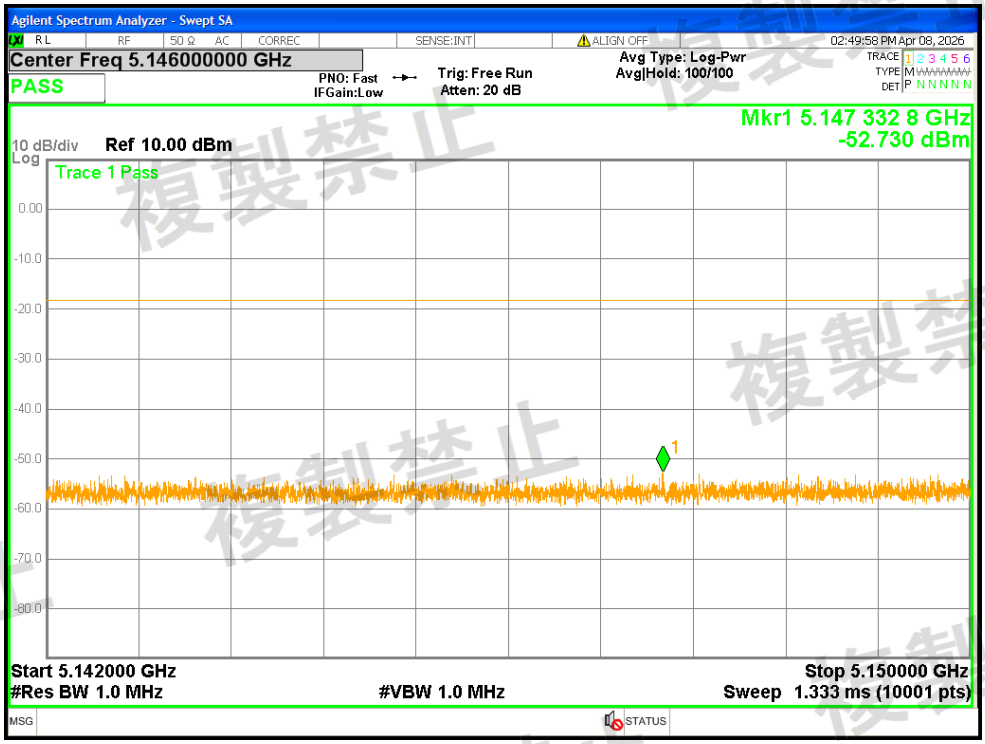


Tx. Spurious NVNT a 5240MHz Ant2 @ 5250MHz-5251MHz

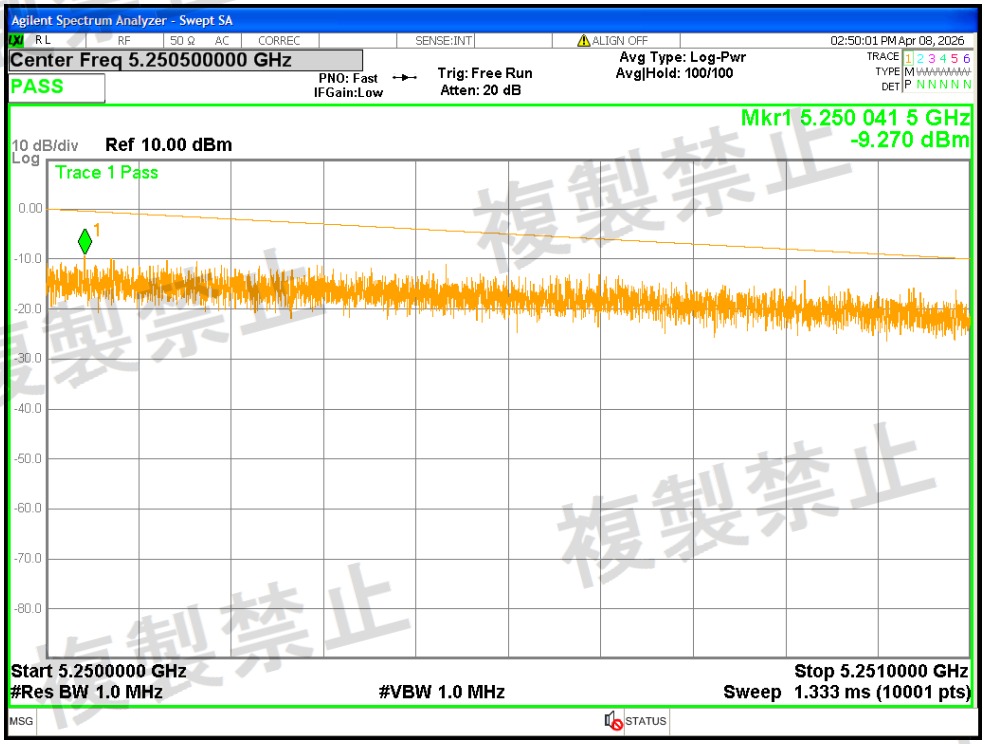


Tx. Spurious NVNT a 5240MHz Ant2 @ 5251MHz-5260MHz

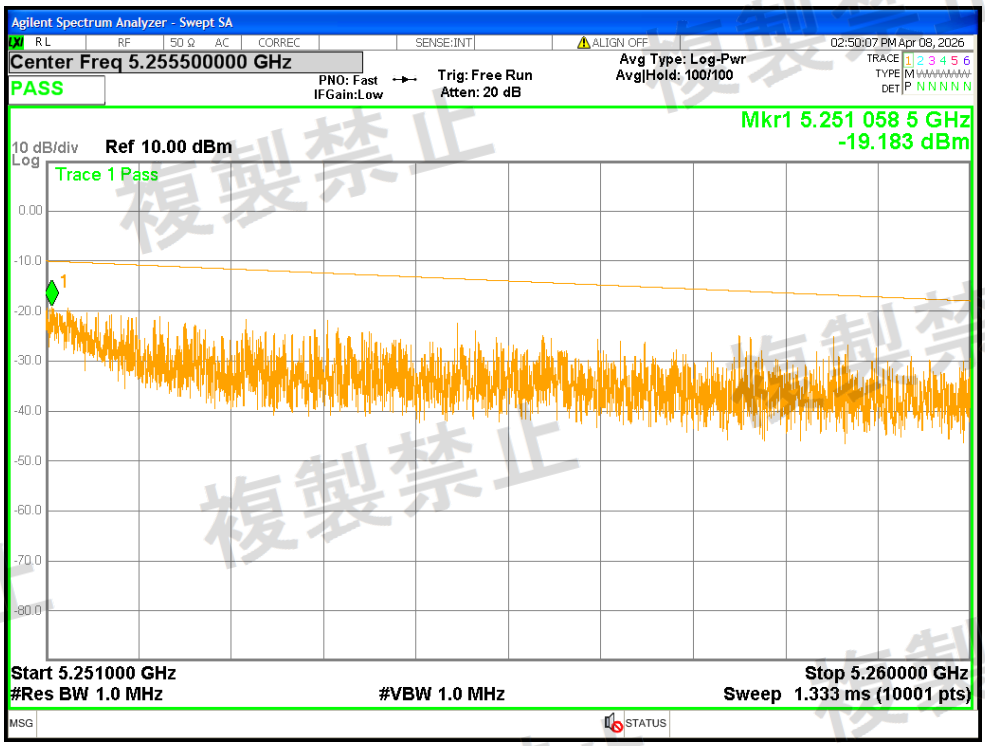


Tx. Spurious NVNT a 5240MHz Ant2 @ 5260MHz-5266.7MHz

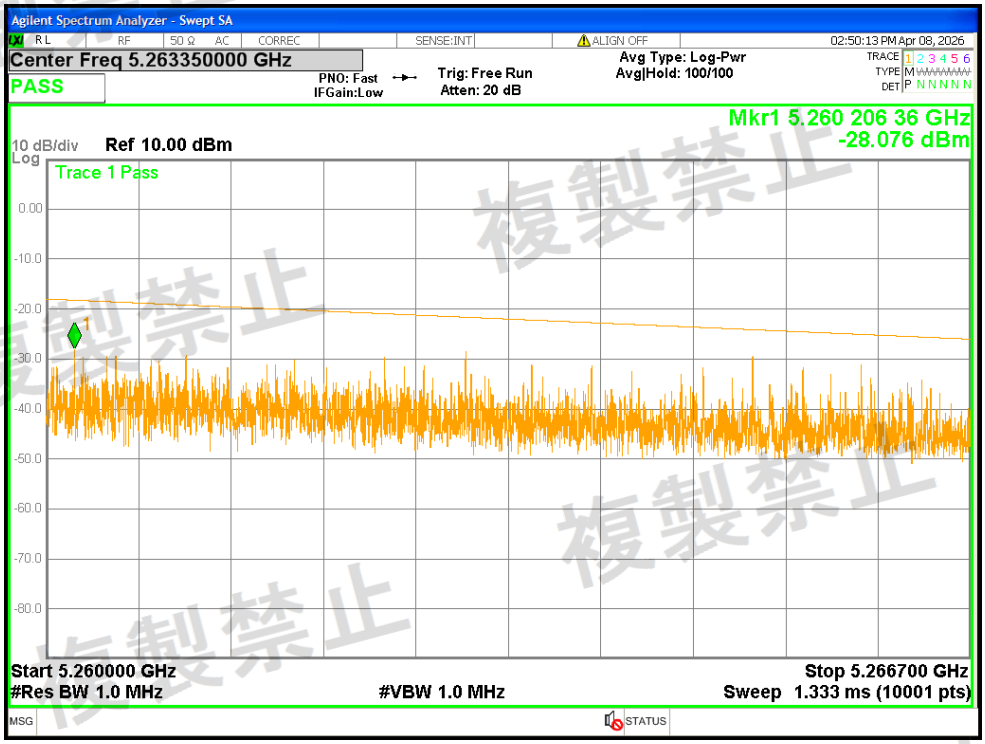


Tx. Spurious NVNT a 5240MHz Ant2 @ 5266.7MHz-26000MHz

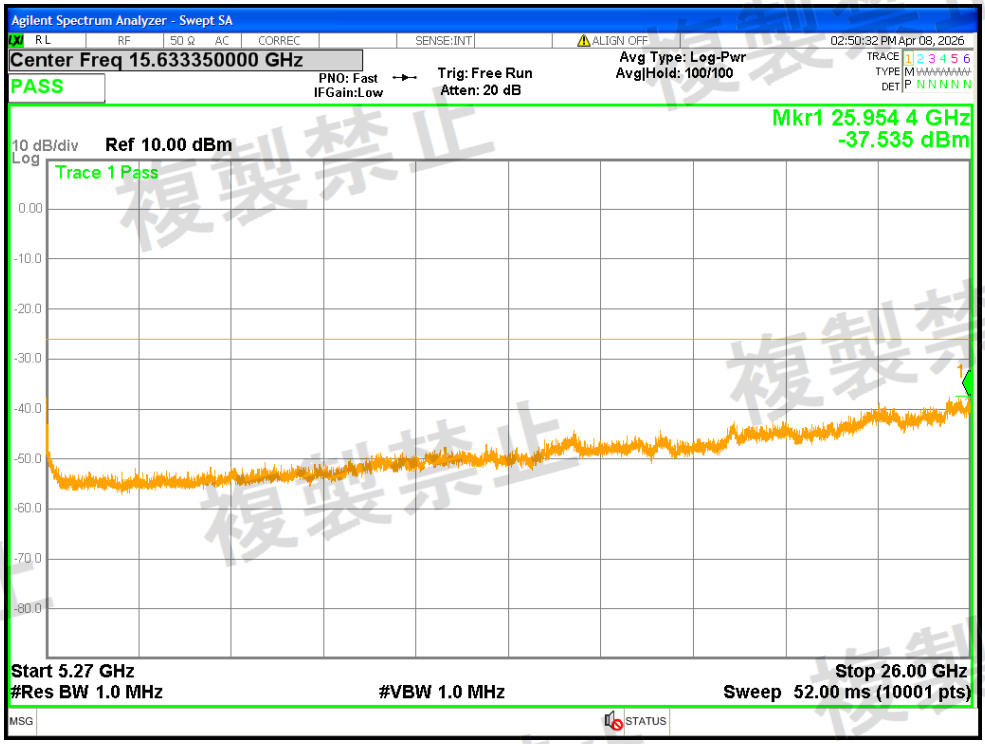


Tx. Spurious NVNT n20 5180MHz Ant1 @ 30MHz-5142MHz

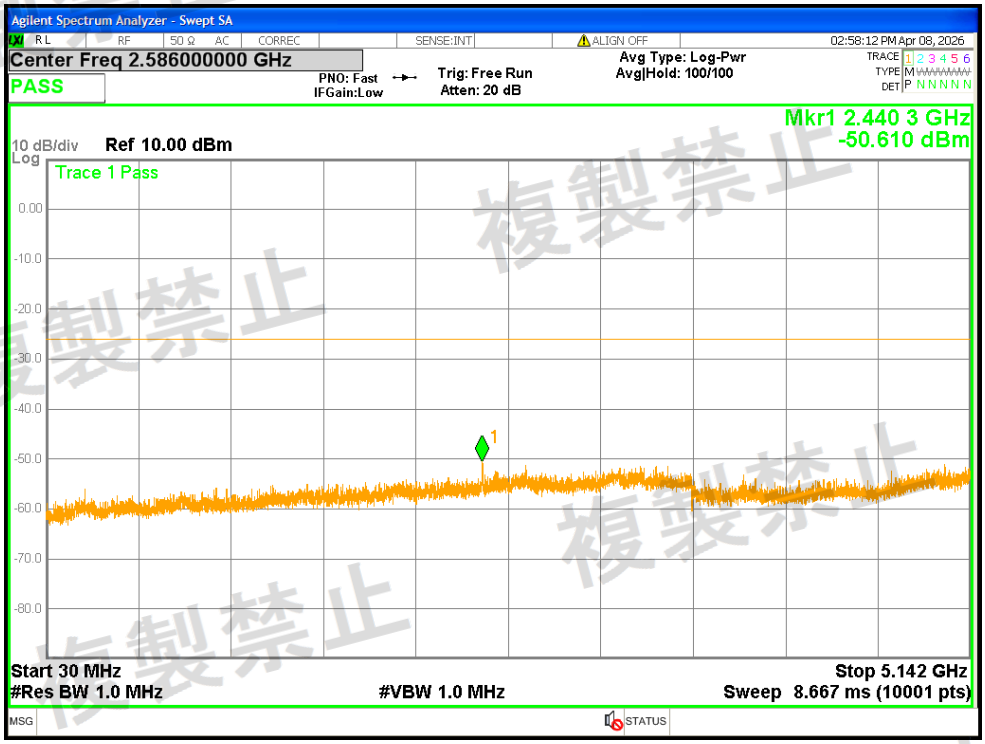


Tx. Spurious NVNT n20 5180MHz Ant1 @ 5142MHz-5150MHz

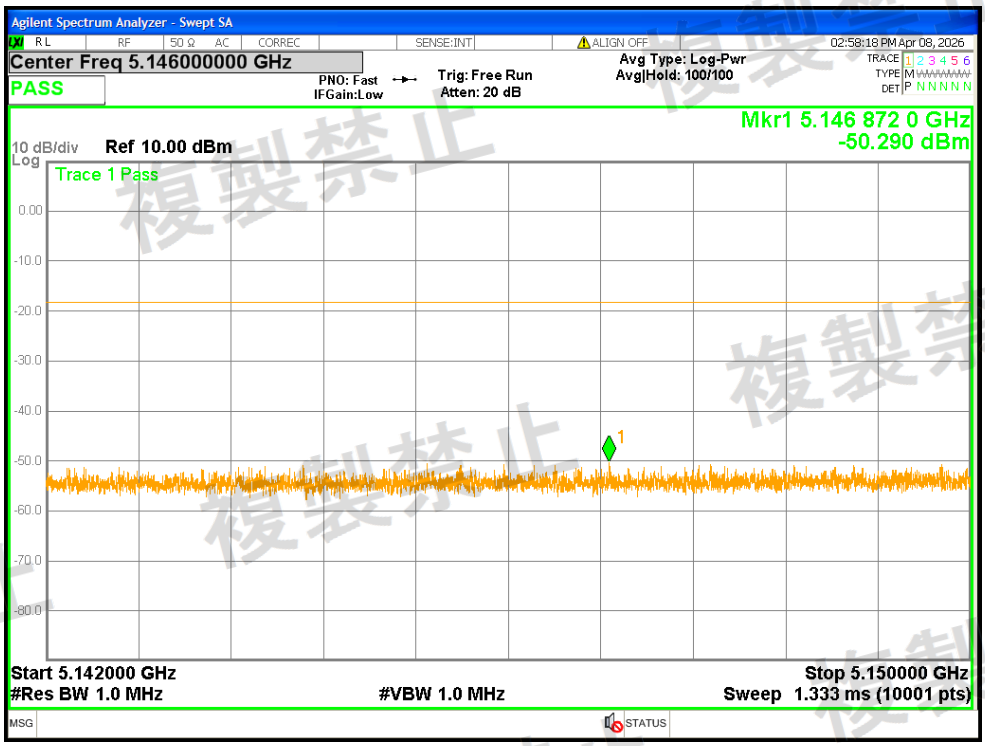


Tx. Spurious NVNT n20 5180MHz Ant1 @ 5250MHz-5251MHz

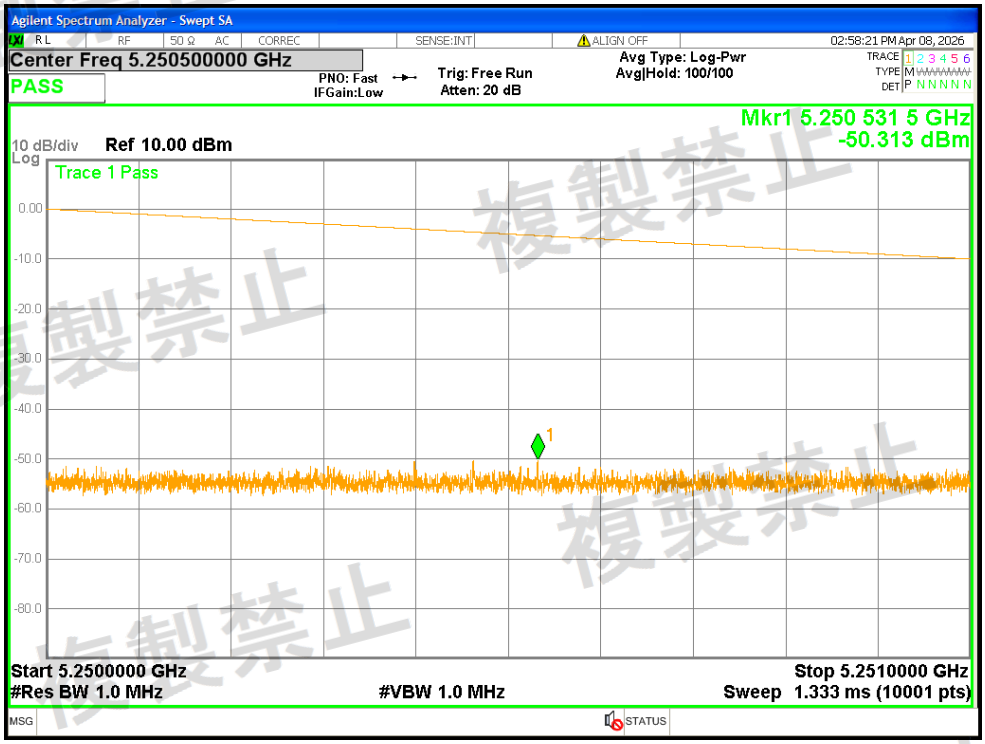


Tx. Spurious NVNT n20 5180MHz Ant1 @ 5251MHz-5260MHz

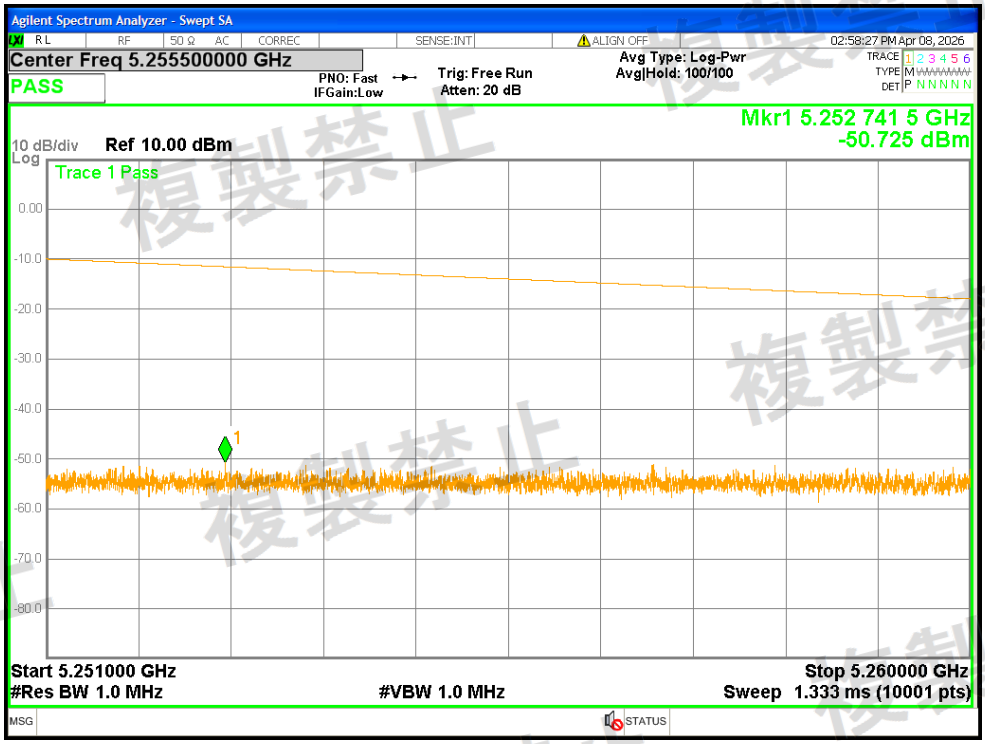


Tx. Spurious NVNT n20 5180MHz Ant1 @ 5260MHz-5266.7MHz

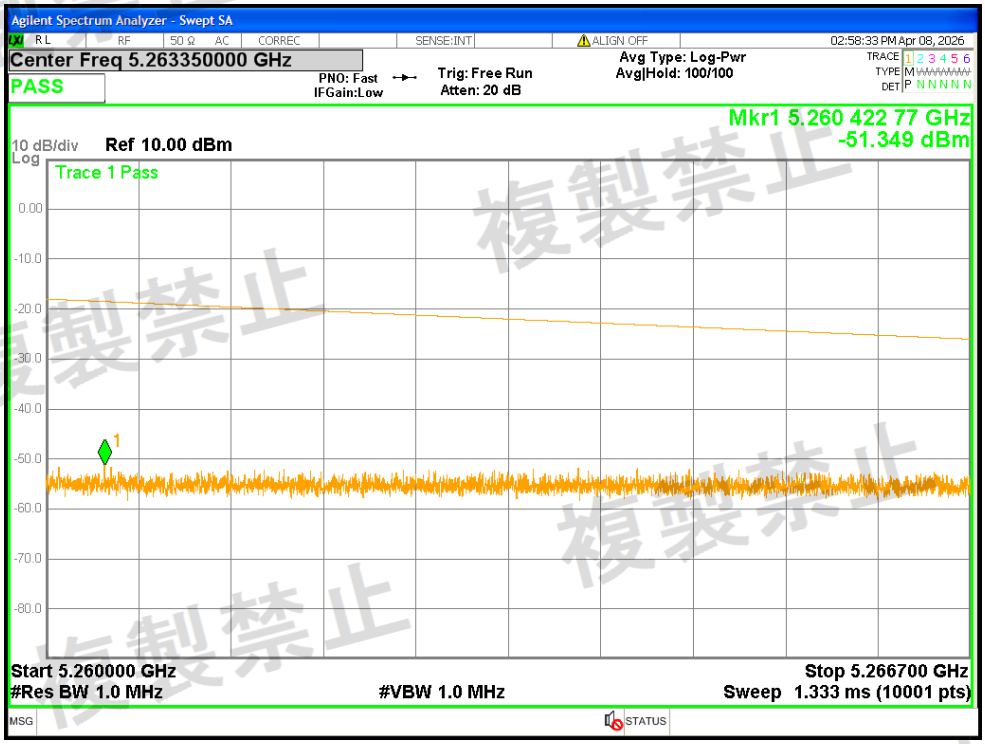


Tx. Spurious NVNT n20 5180MHz Ant1 @ 5266.7MHz-26000MHz

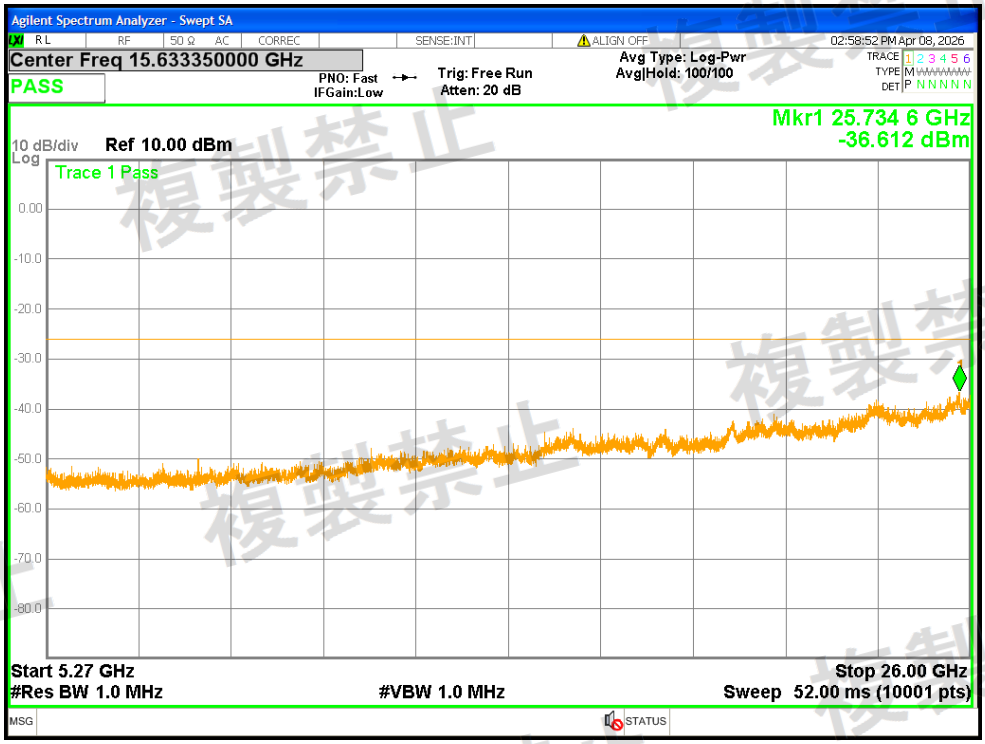


Tx. Spurious NVNT n20 5180MHz Ant2 @ 30MHz-5142MHz

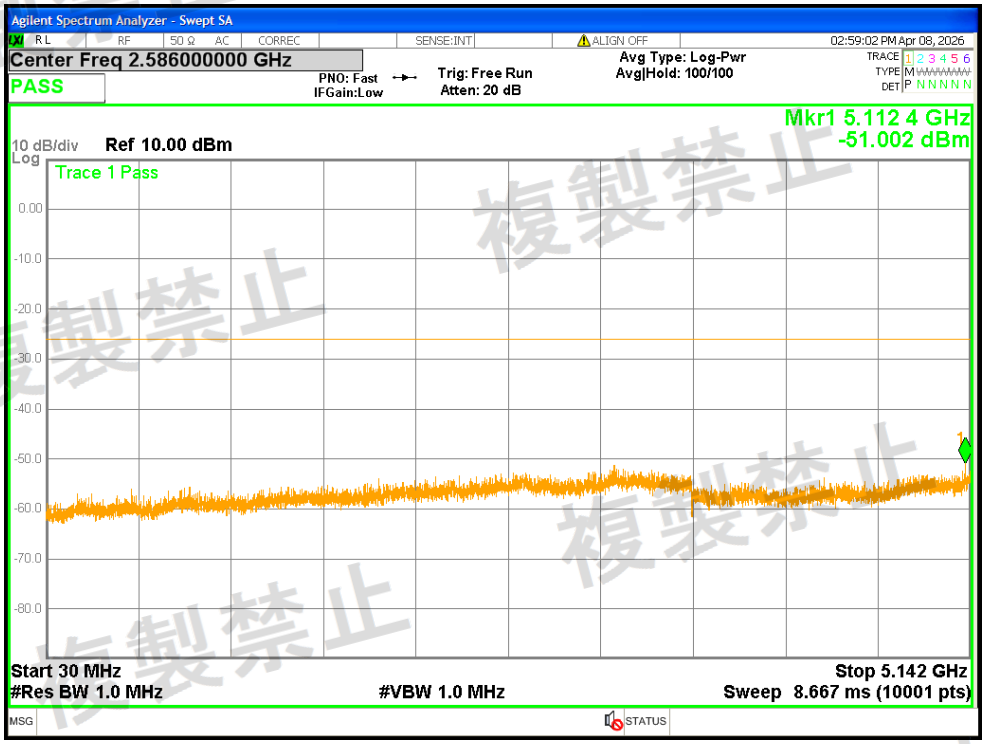


Tx. Spurious NVNT n20 5180MHz Ant2 @ 5142MHz-5150MHz

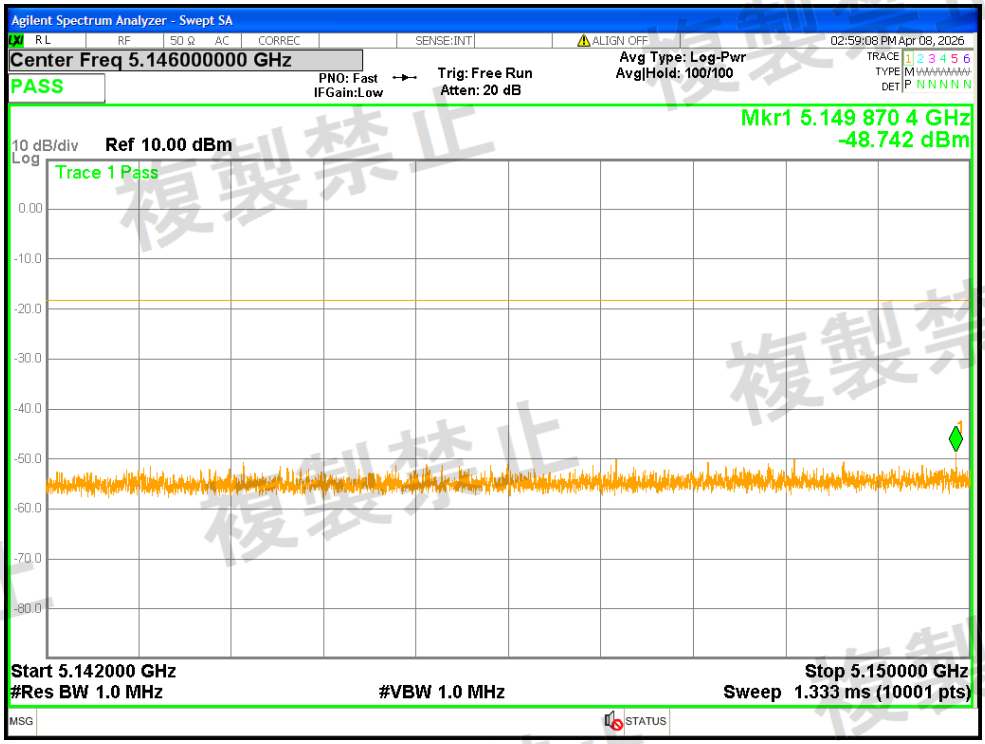


Tx. Spurious NVNT n20 5180MHz Ant2 @ 5250MHz-5251MHz

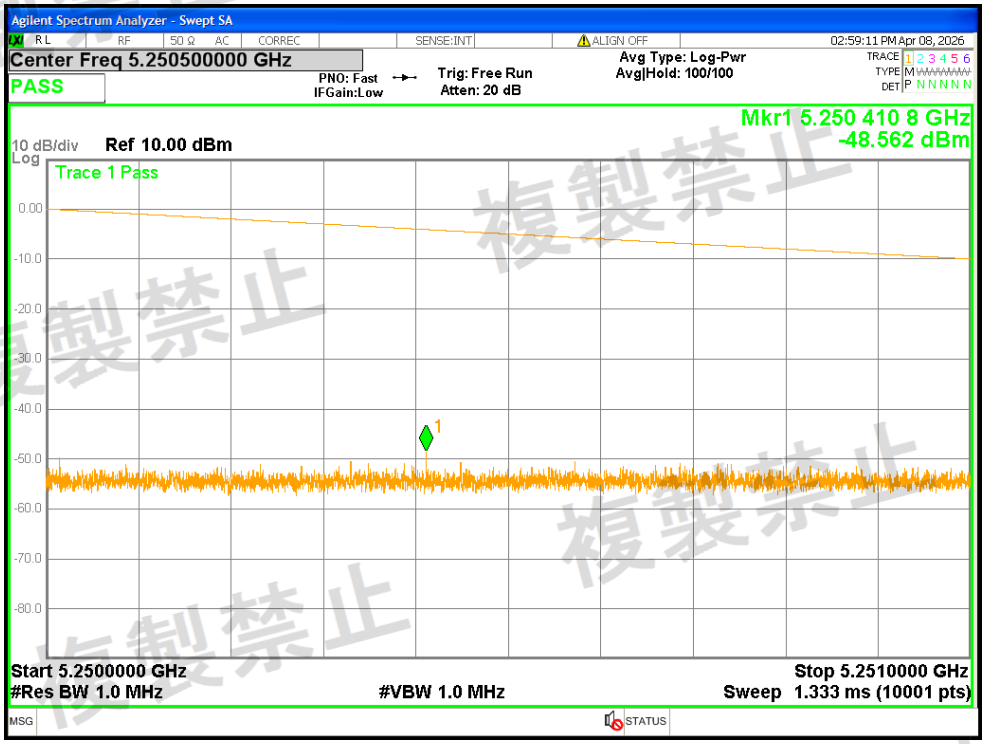


Tx. Spurious NVNT n20 5180MHz Ant2 @ 5251MHz-5260MHz

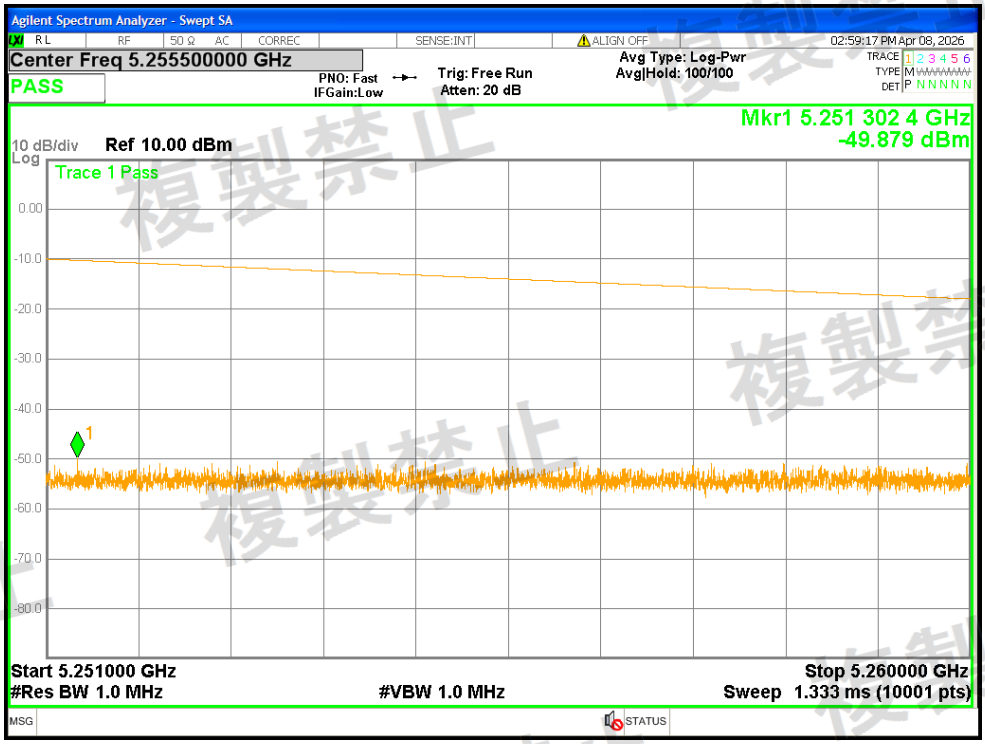


Tx. Spurious NVNT n20 5180MHz Ant2 @ 5260MHz-5266.7MHz

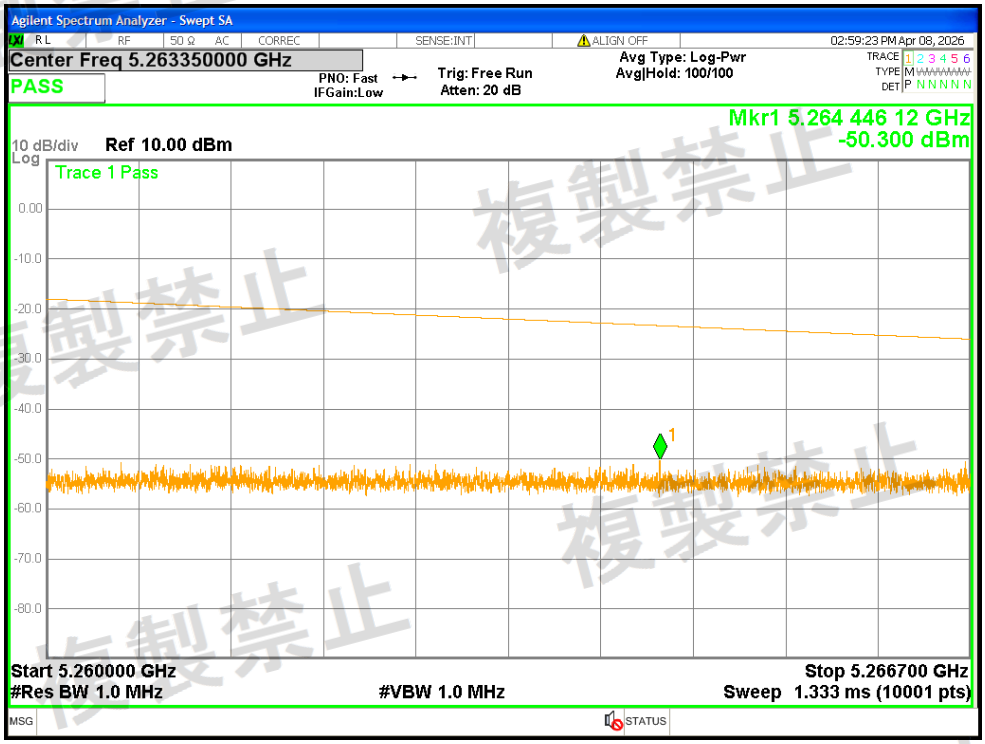


Tx. Spurious NVNT n20 5180MHz Ant2 @ 5266.7MHz-26000MHz

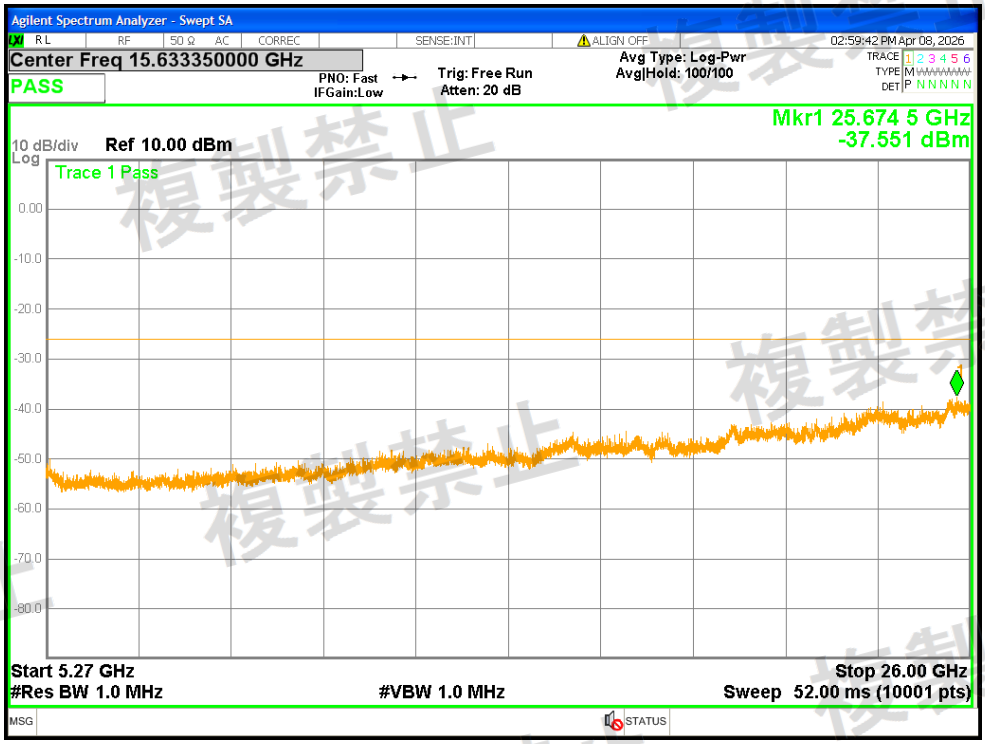


Tx. Spurious NVNT n20 5200MHz Ant1 @ 30MHz-5142MHz

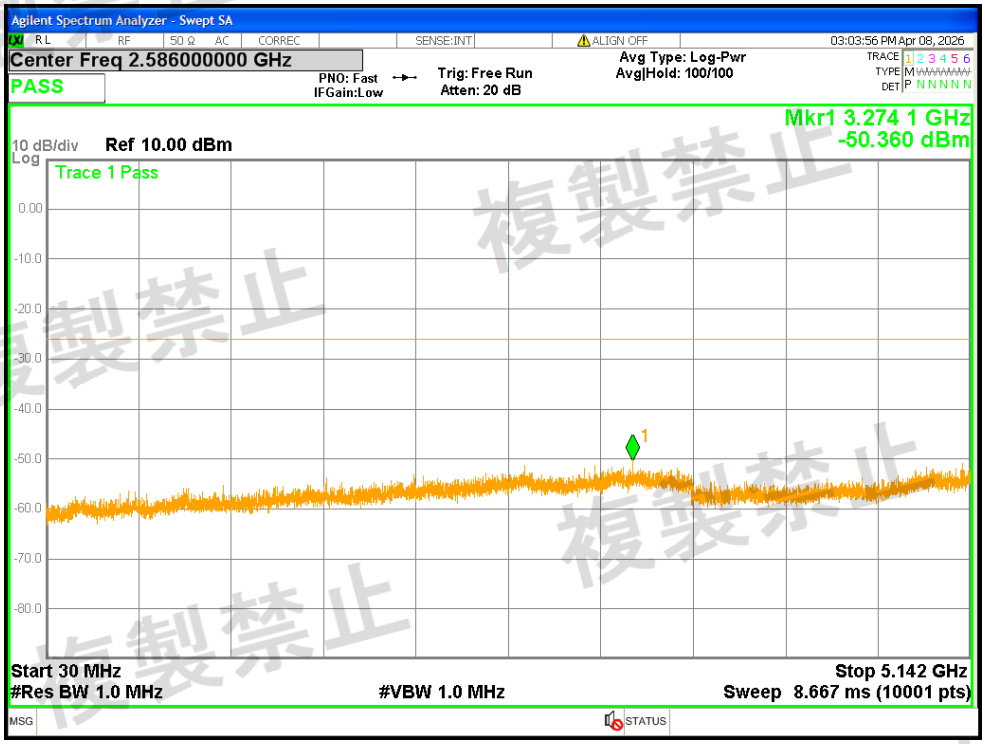


Tx. Spurious NVNT n20 5200MHz Ant1 @ 5142MHz-5150MHz

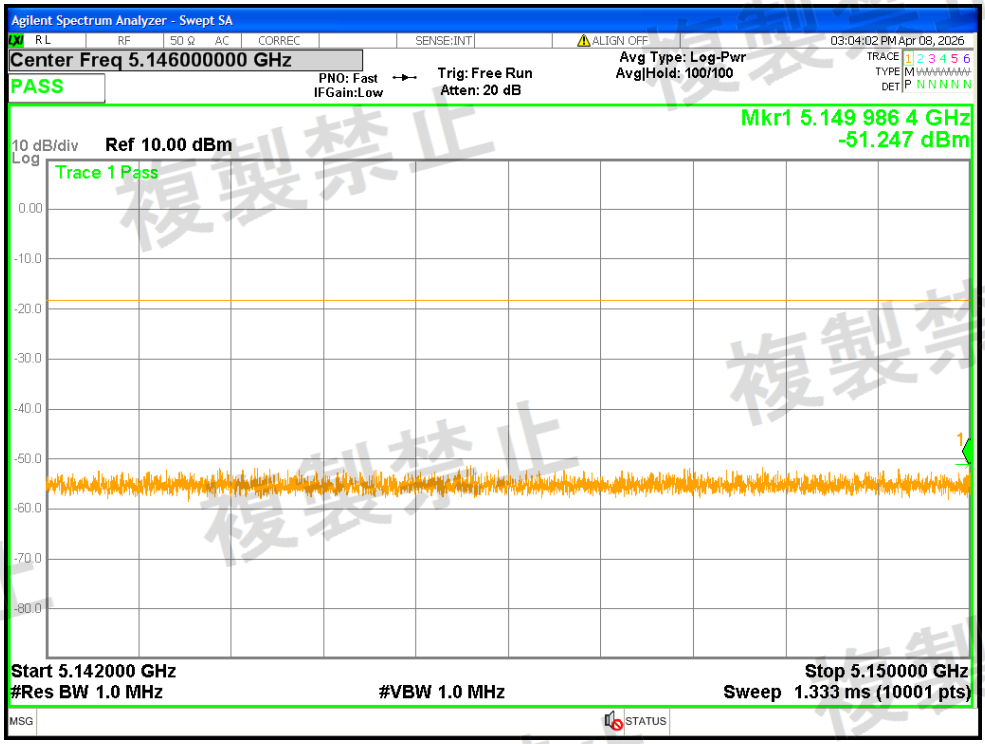


Tx. Spurious NVNT n20 5200MHz Ant1 @ 5250MHz-5251MHz

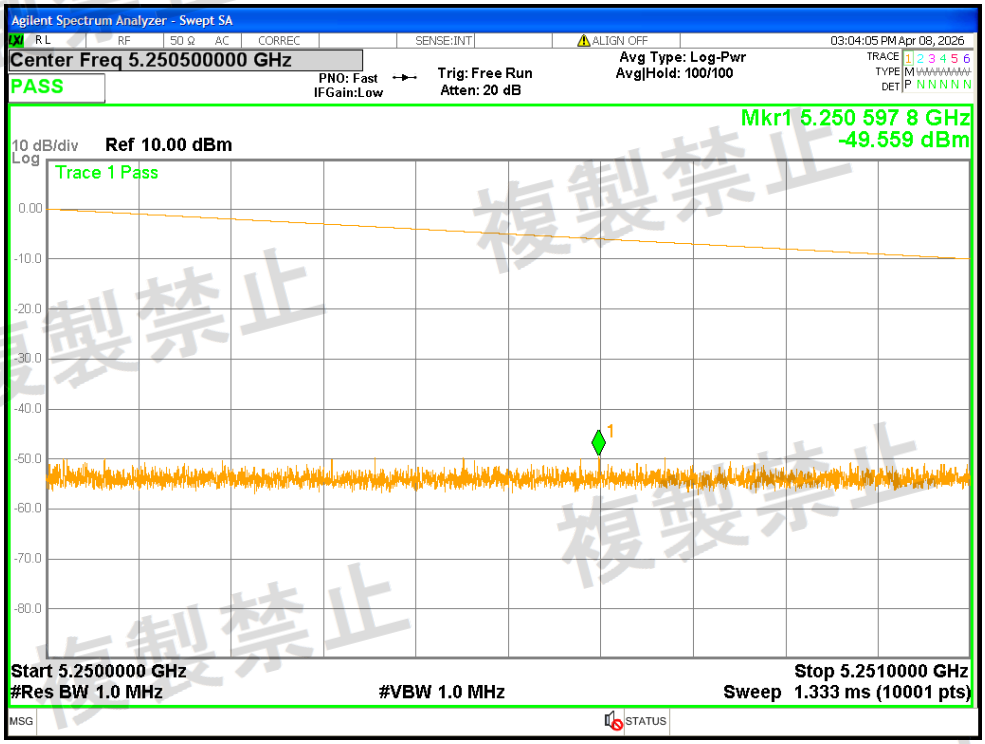


Tx. Spurious NVNT n20 5200MHz Ant1 @ 5251MHz-5260MHz

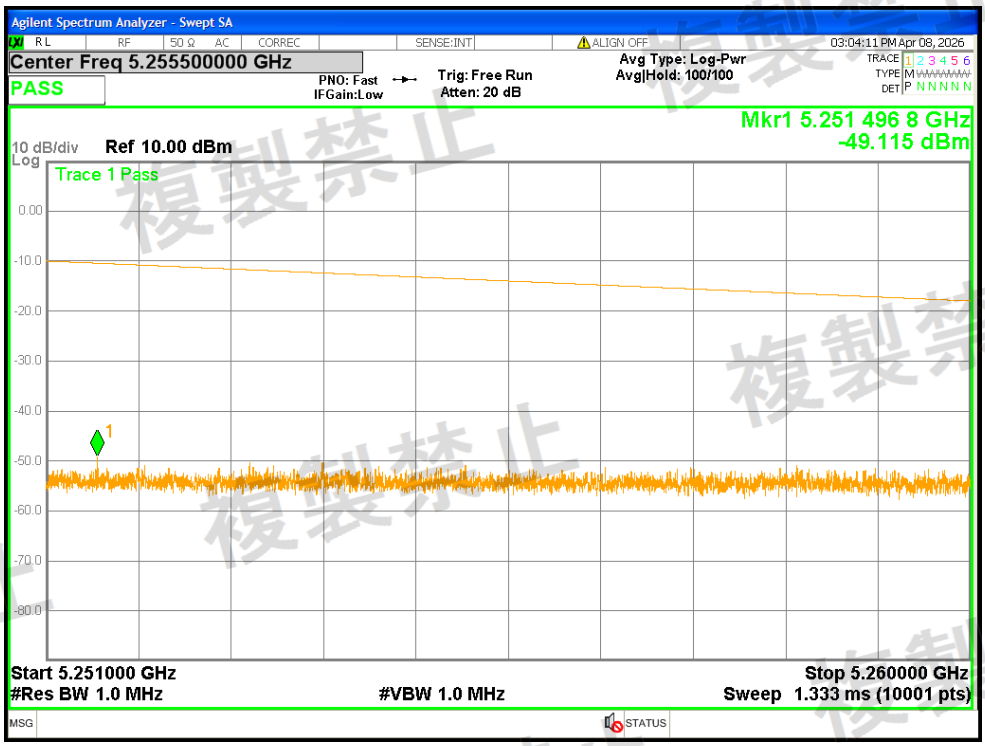


Tx. Spurious NVNT n20 5200MHz Ant1 @ 5260MHz-5266.7MHz

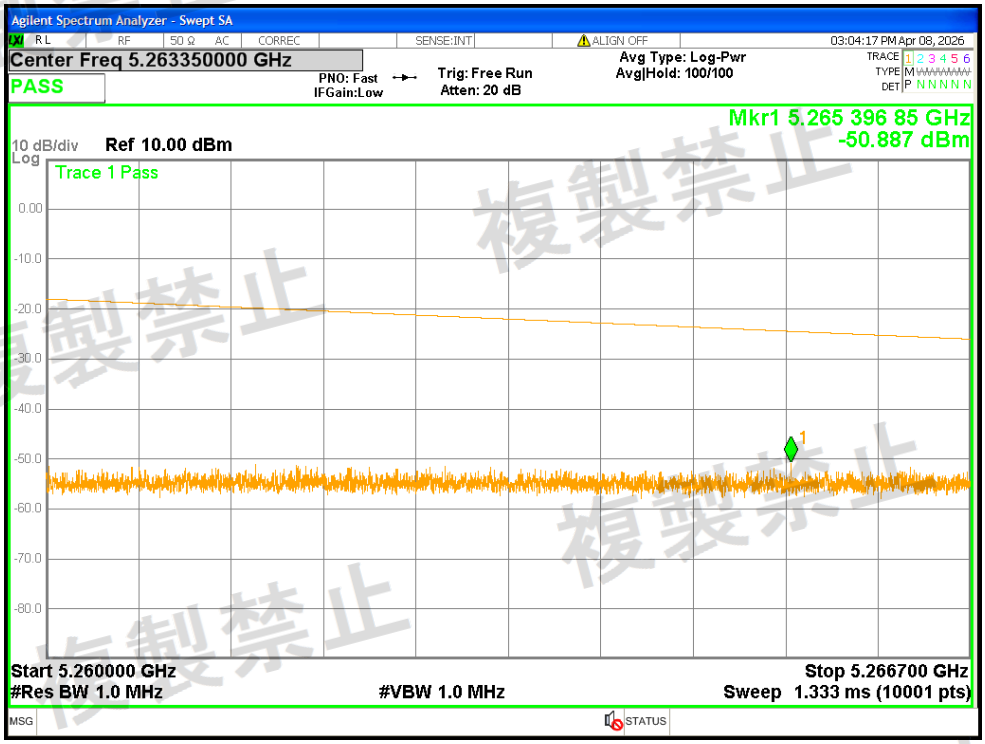


Tx. Spurious NVNT n20 5200MHz Ant1 @ 5266.7MHz-26000MHz

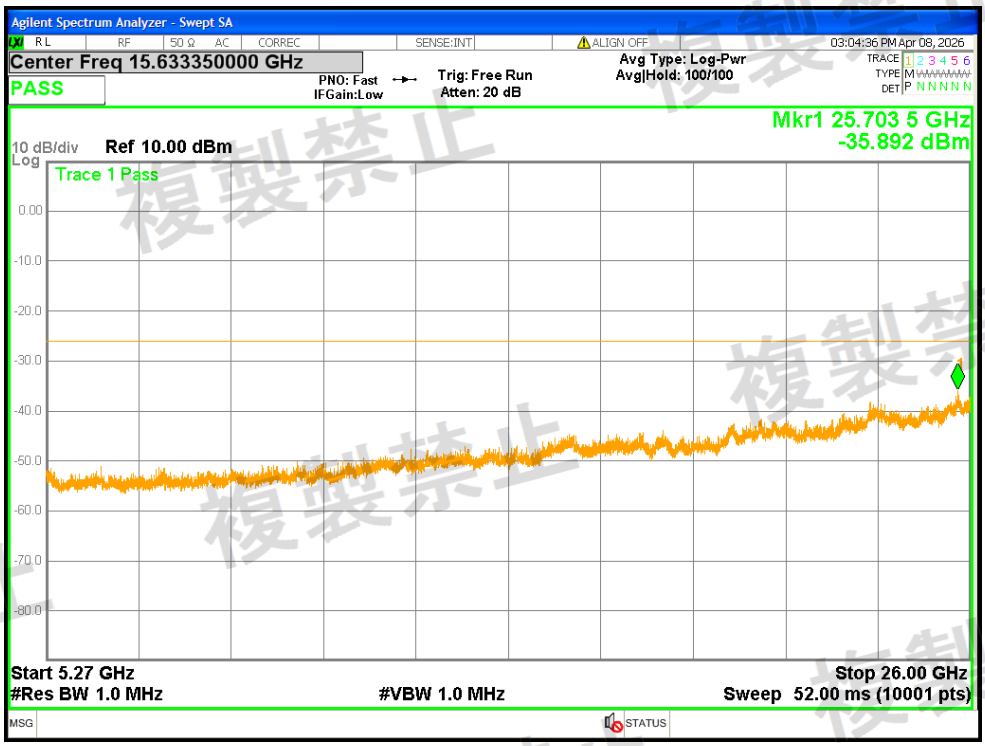


Tx. Spurious NVNT n20 5200MHz Ant2 @ 30MHz-5142MHz

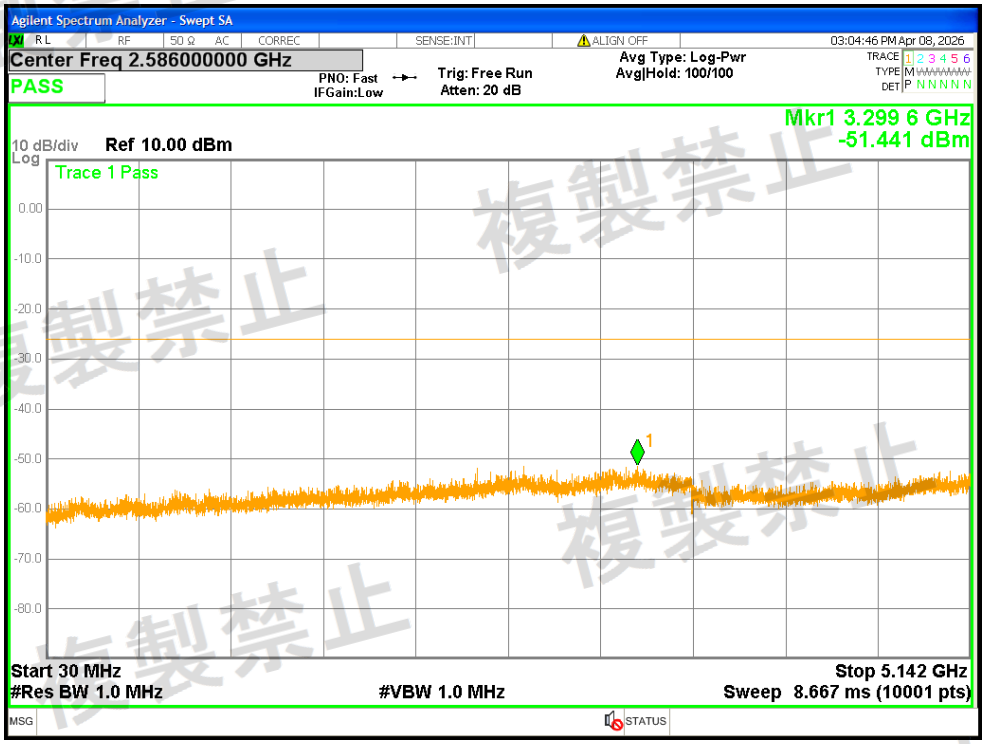


Tx. Spurious NVNT n20 5200MHz Ant2 @ 5142MHz-5150MHz

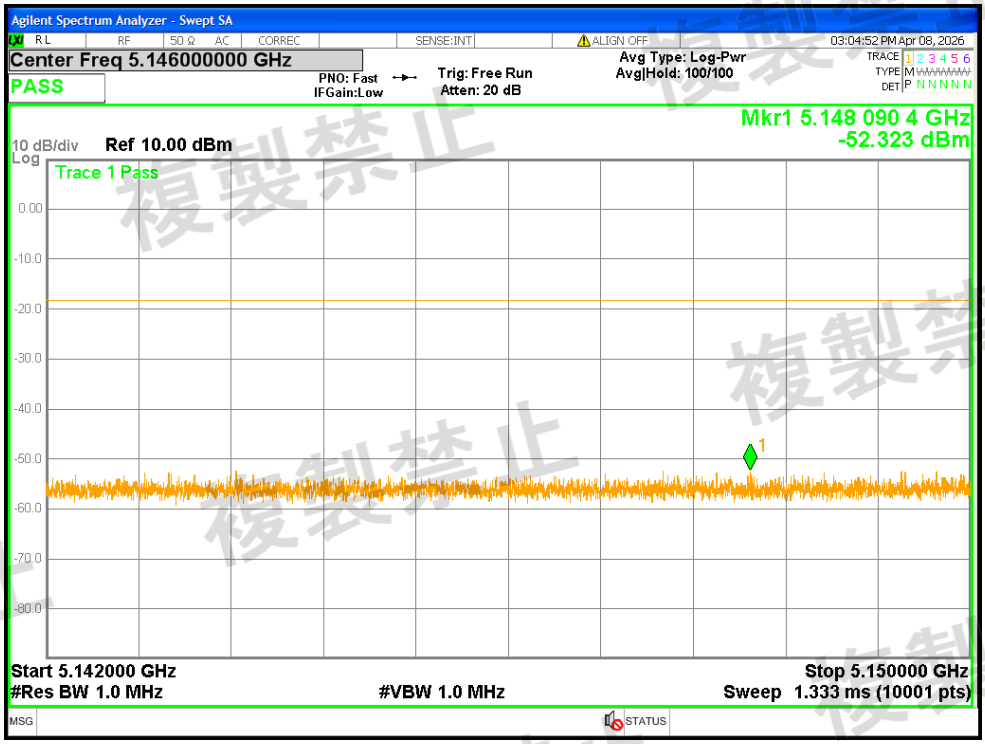


Tx. Spurious NVNT n20 5200MHz Ant2 @ 5250MHz-5251MHz

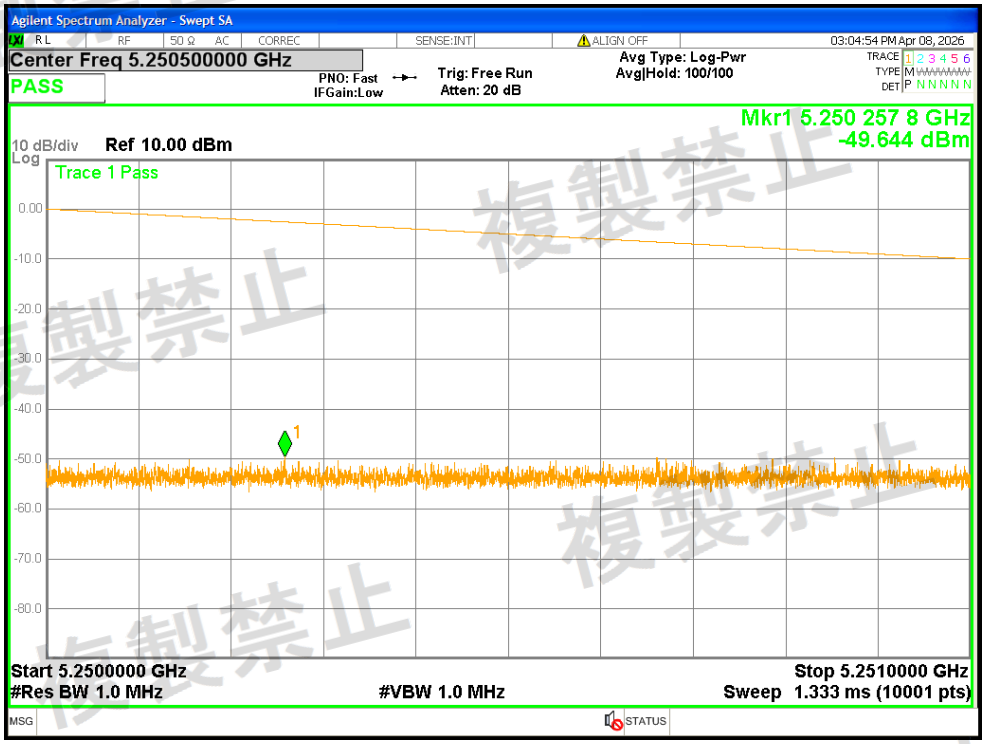


Tx. Spurious NVNT n20 5200MHz Ant2 @ 5251MHz-5260MHz

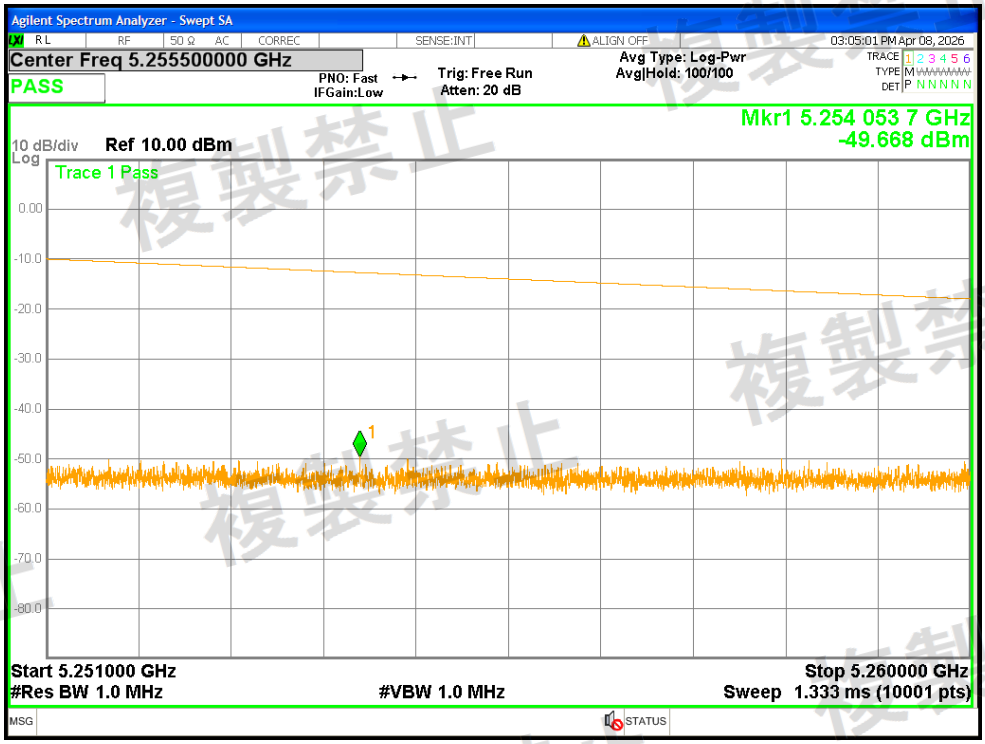


Tx. Spurious NVNT n20 5200MHz Ant2 @ 5260MHz-5266.7MHz

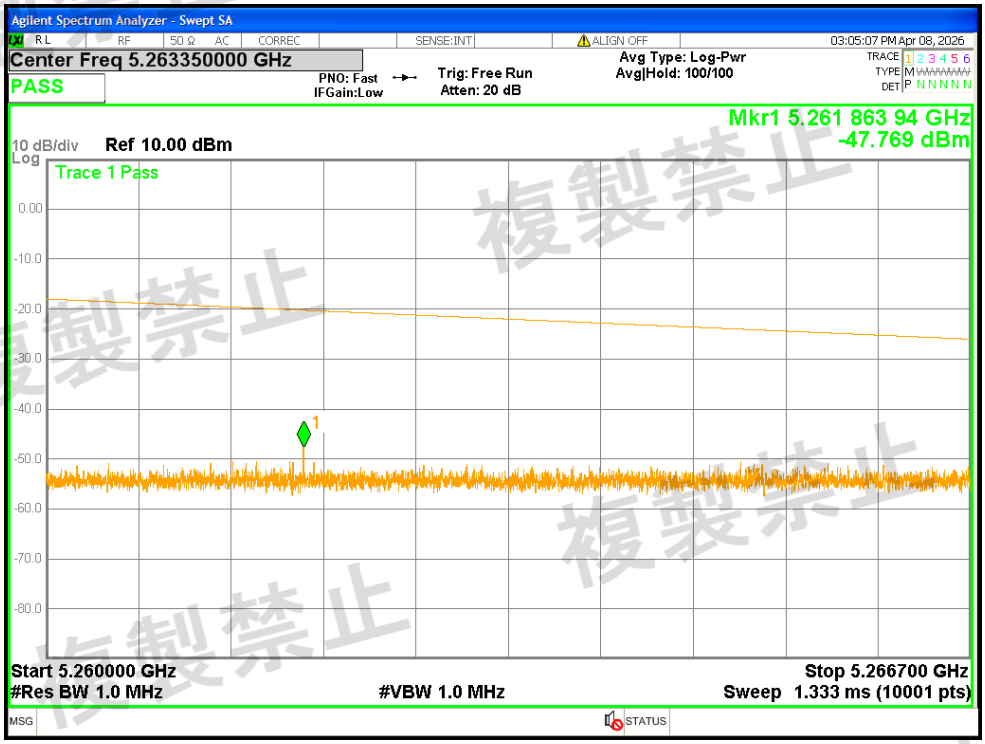


Tx. Spurious NVNT n20 5200MHz Ant2 @ 5266.7MHz-26000MHz

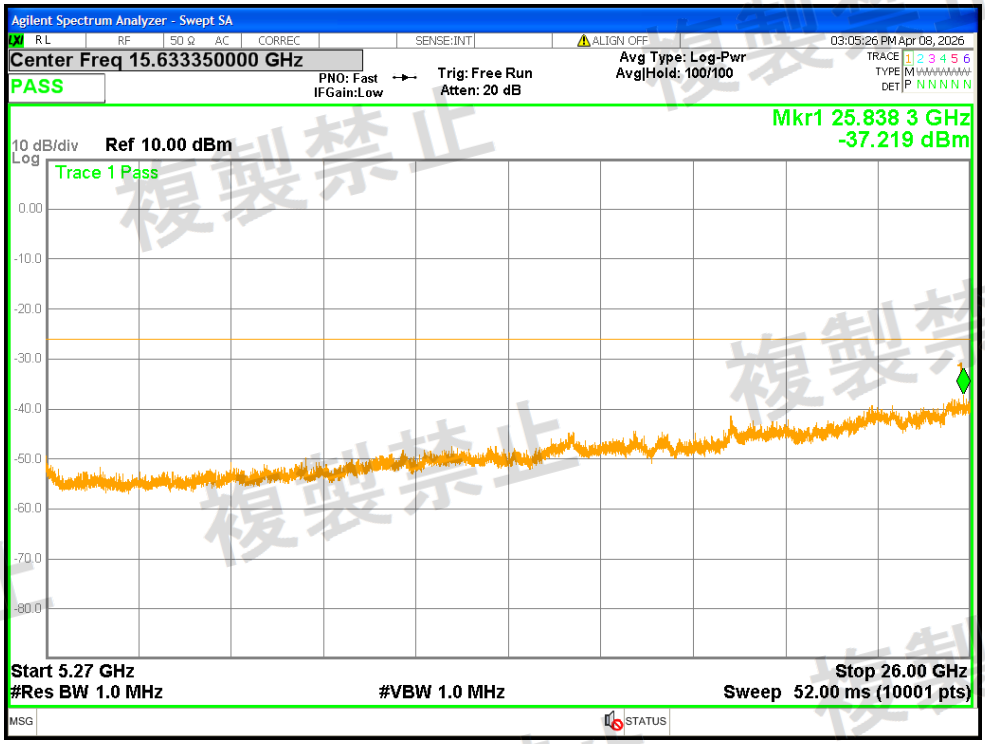


Tx. Spurious NVNT n20 5240MHz Ant1 @ 30MHz-5142MHz

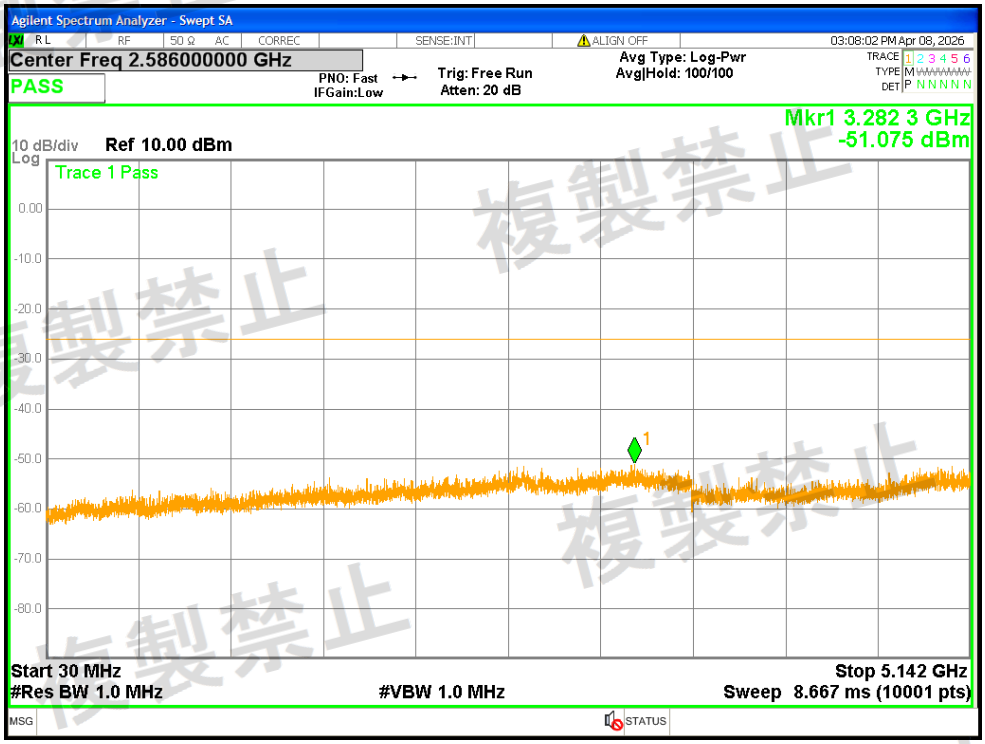


Tx. Spurious NVNT n20 5240MHz Ant1 @ 5142MHz-5150MHz

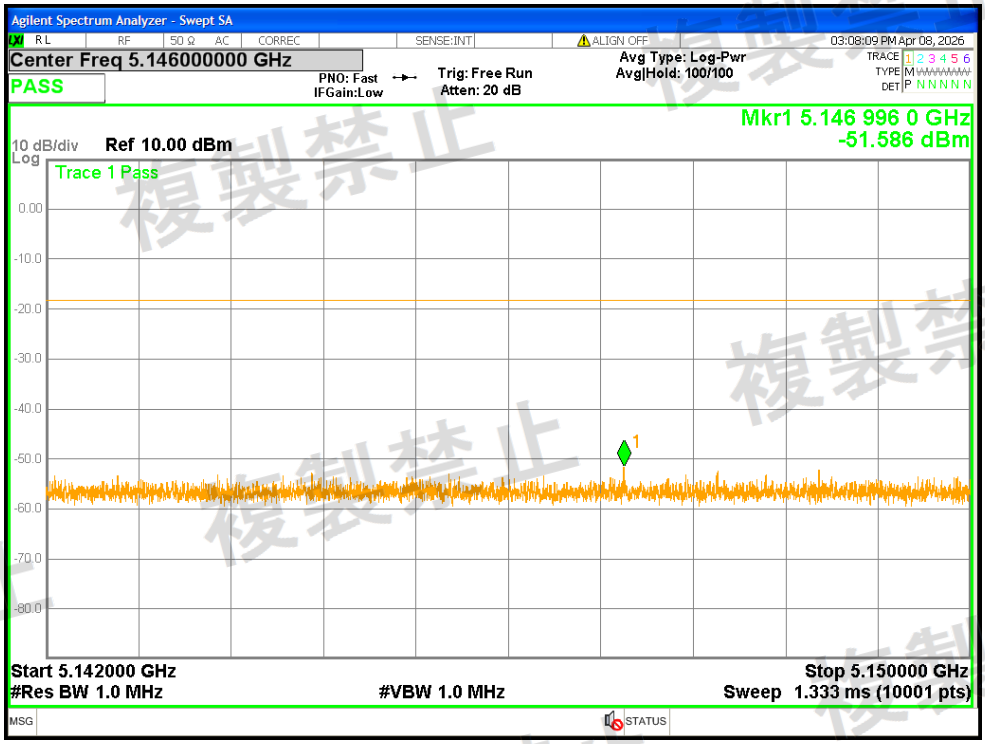


Tx. Spurious NVNT n20 5240MHz Ant1 @ 5250MHz-5251MHz

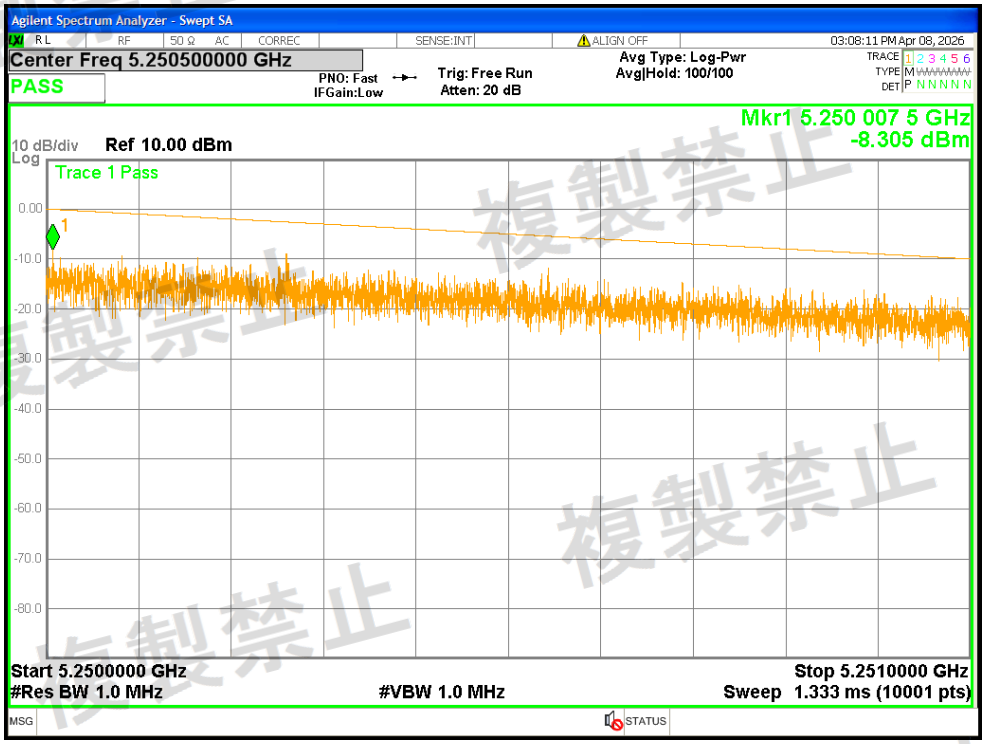


Tx. Spurious NVNT n20 5240MHz Ant1 @ 5251MHz-5260MHz

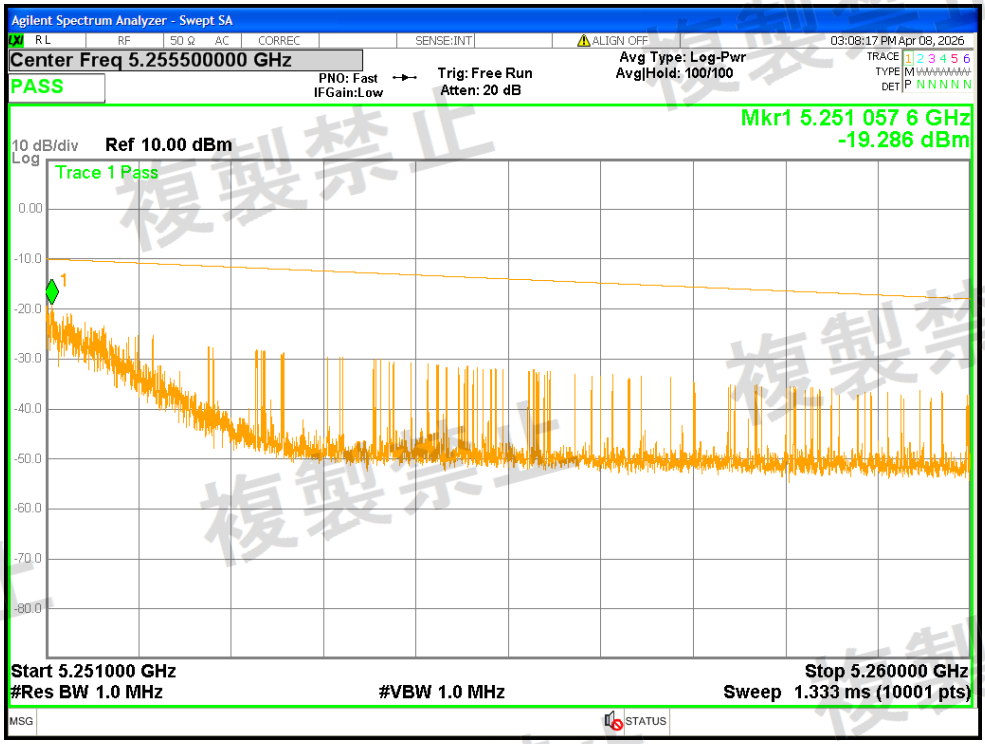


Tx. Spurious NVNT n20 5240MHz Ant1 @ 5260MHz-5266.7MHz

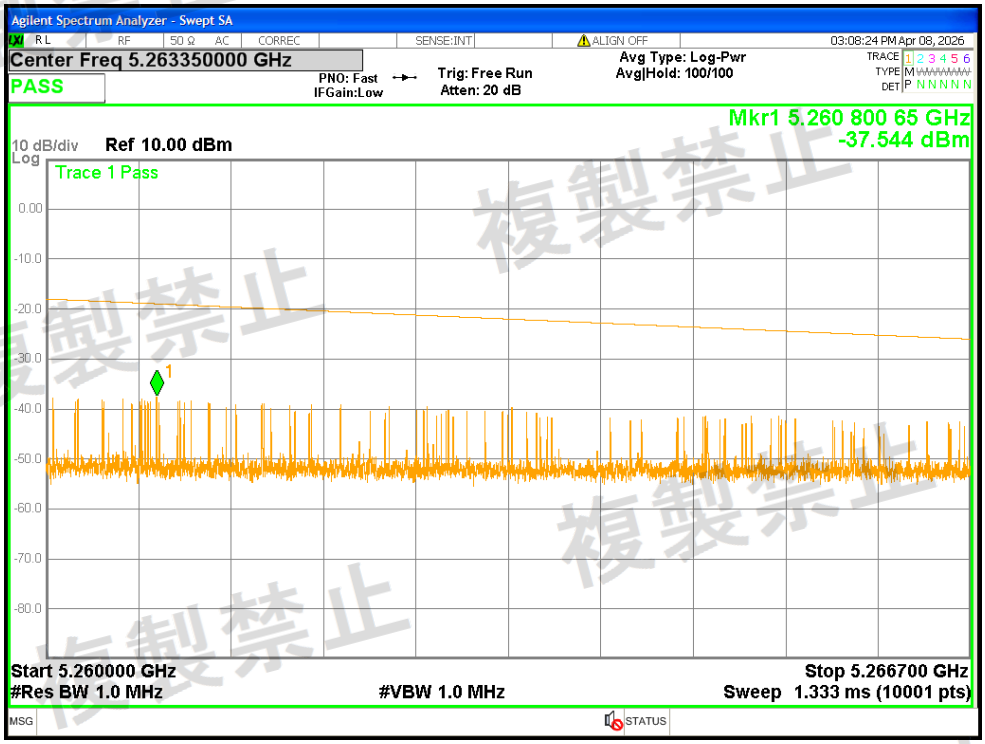


Tx. Spurious NVNT n20 5240MHz Ant1 @ 5266.7MHz-26000MHz

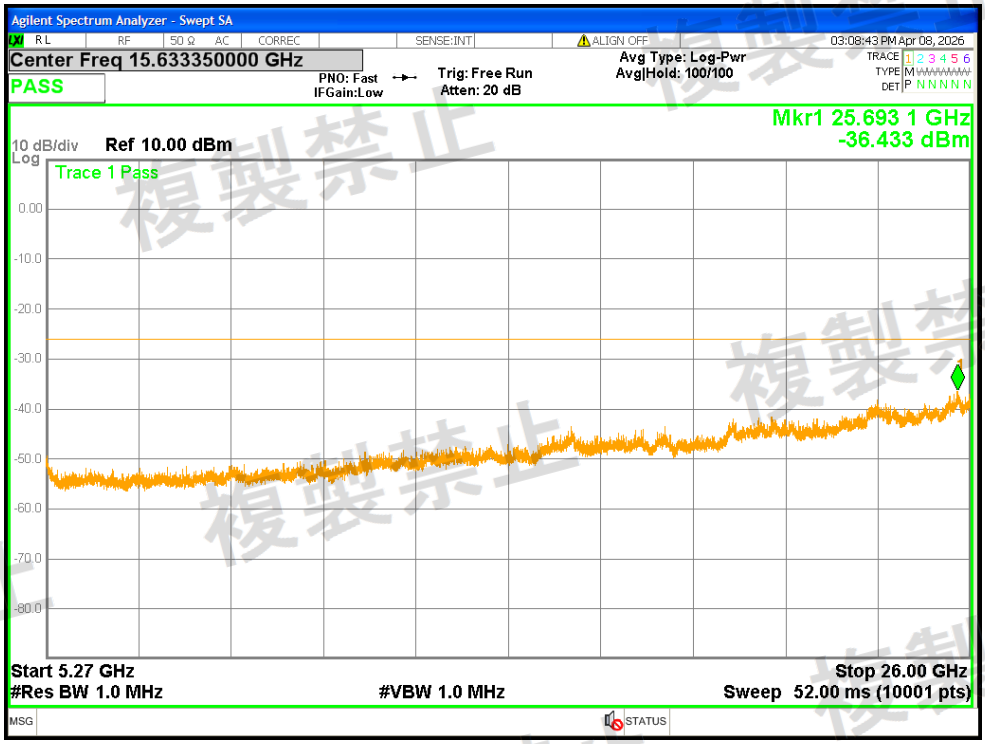


Tx. Spurious NVNT n20 5240MHz Ant2 @ 30MHz-5142MHz

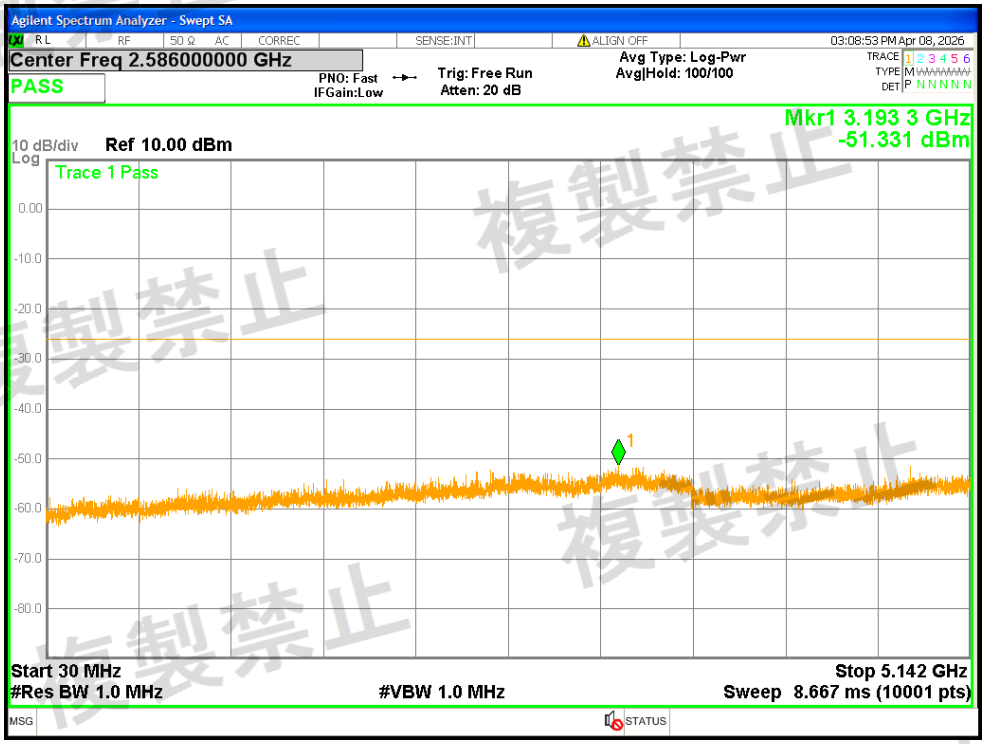


Tx. Spurious NVNT n20 5240MHz Ant2 @ 5142MHz-5150MHz

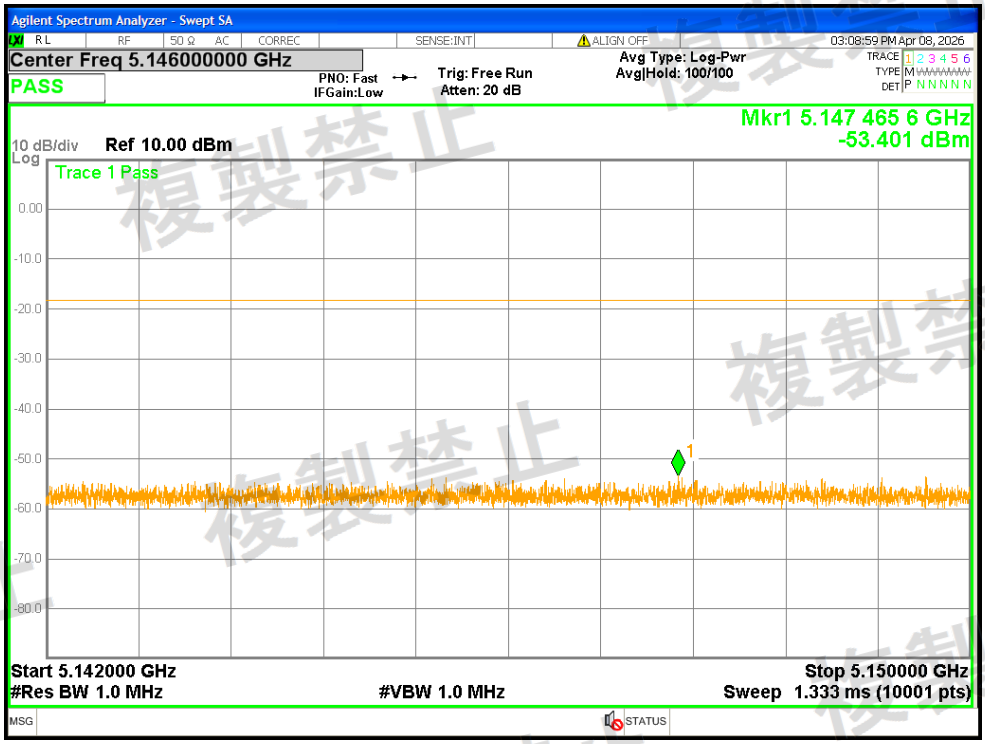


Tx. Spurious NVNT n20 5240MHz Ant2 @ 5250MHz-5251MHz

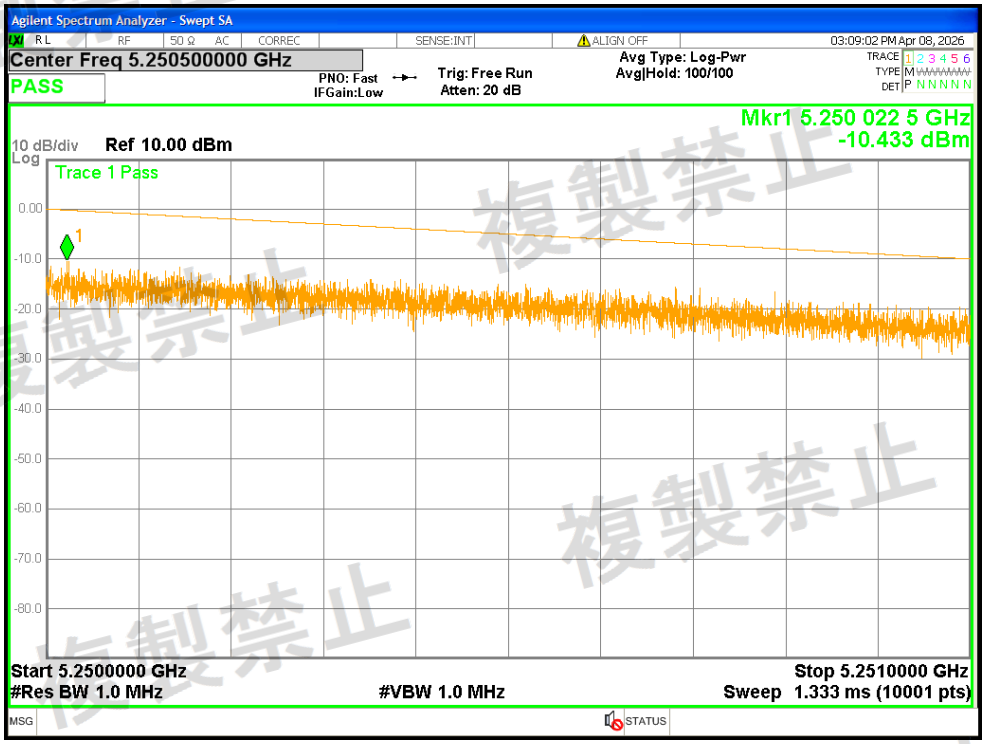


Tx. Spurious NVNT n20 5240MHz Ant2 @ 5251MHz-5260MHz

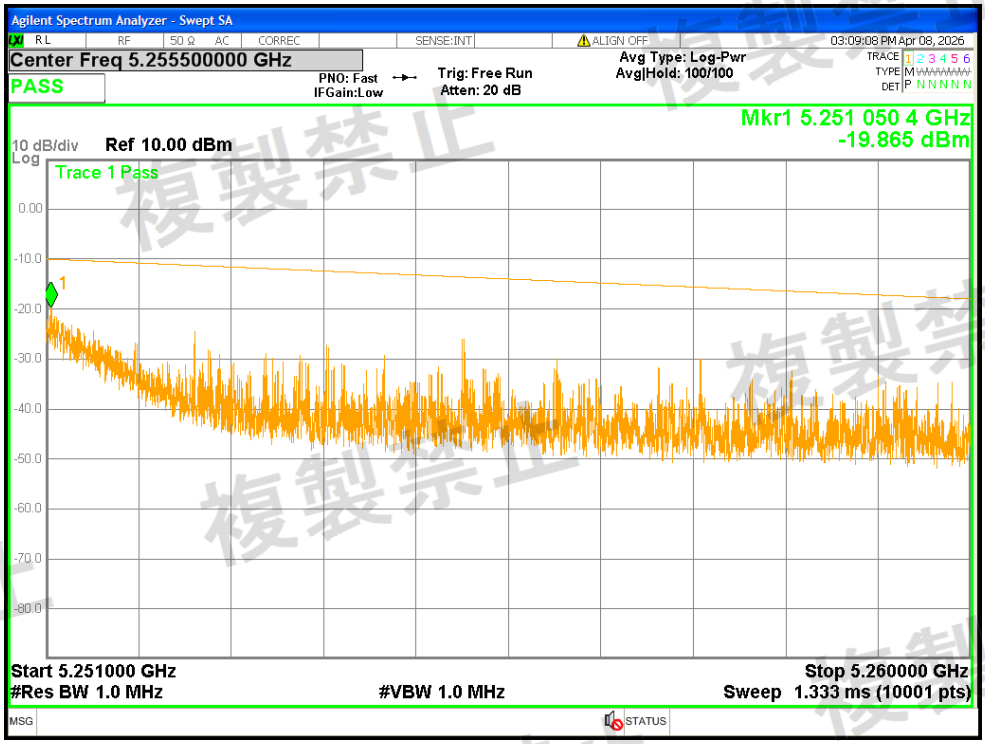


Tx. Spurious NVNT n20 5240MHz Ant2 @ 5260MHz-5266.7MHz

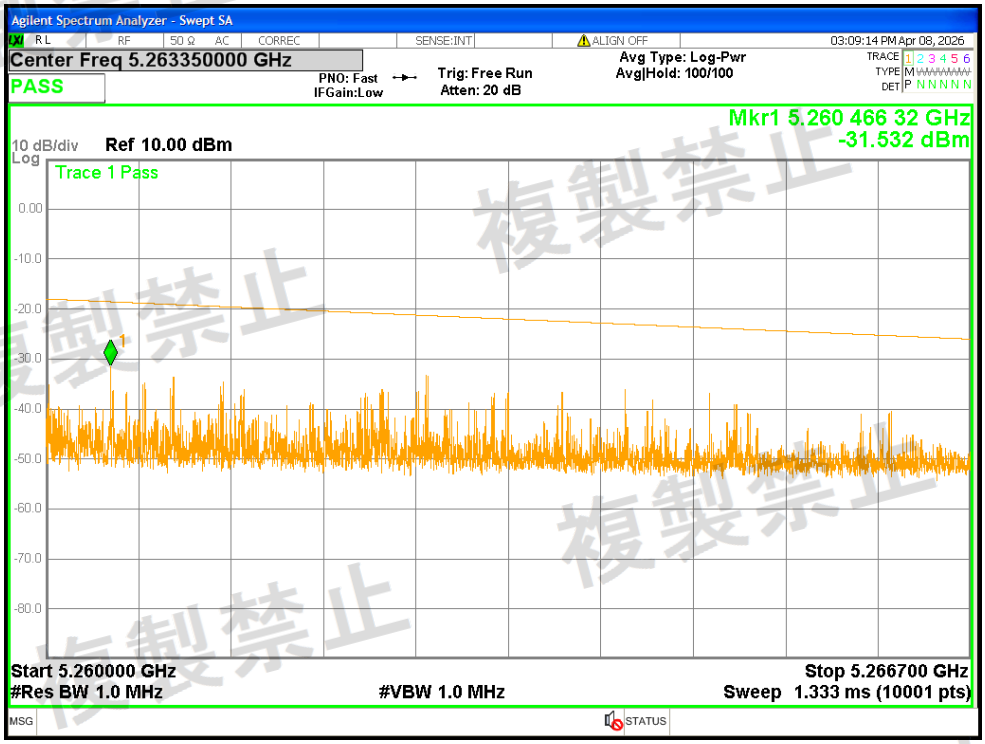


Tx. Spurious NVNT n20 5240MHz Ant2 @ 5266.7MHz-26000MHz

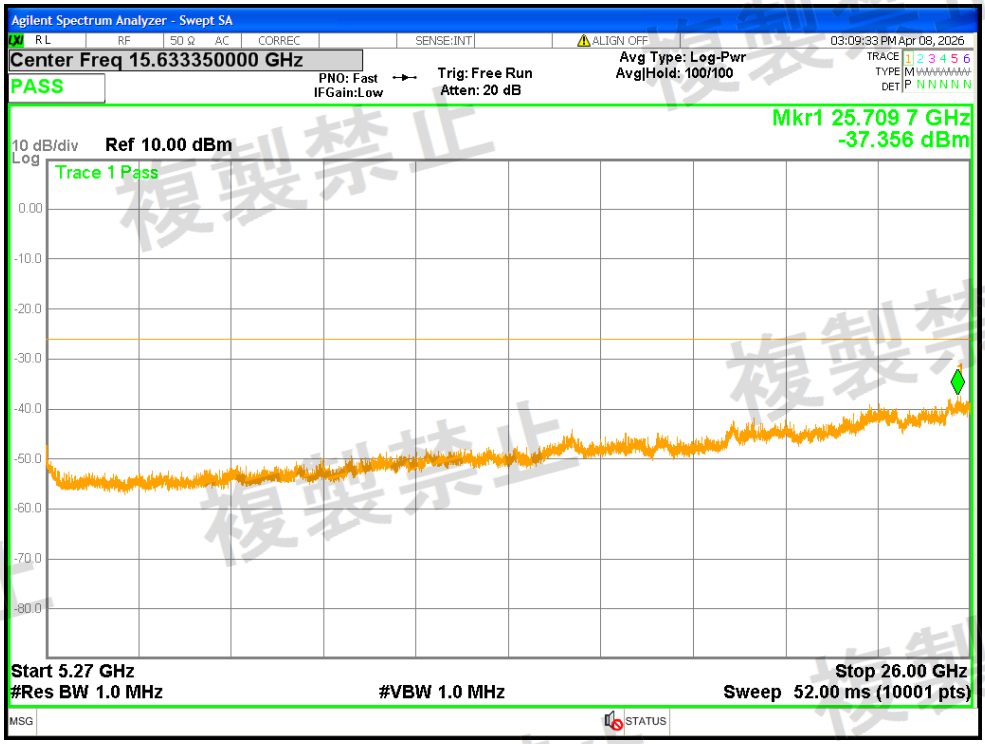


Tx. Spurious NVNT n40 5190MHz Ant1 @ 30MHz-5141.6MHz

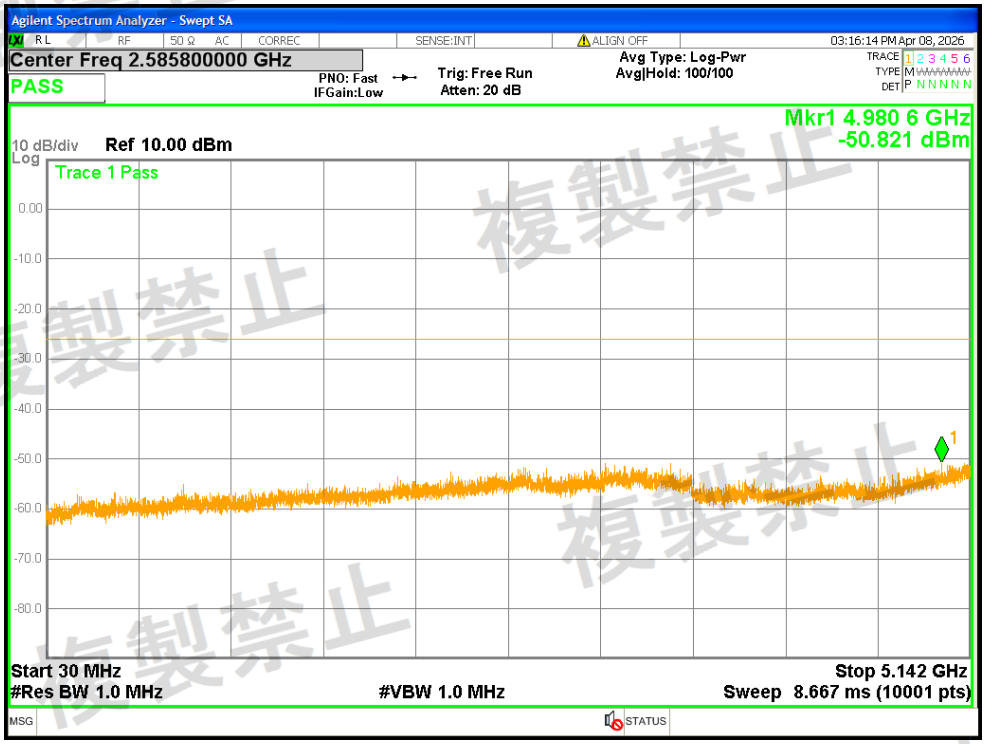


Tx. Spurious NVNT n40 5190MHz Ant1 @ 5141.6MHz-5150MHz

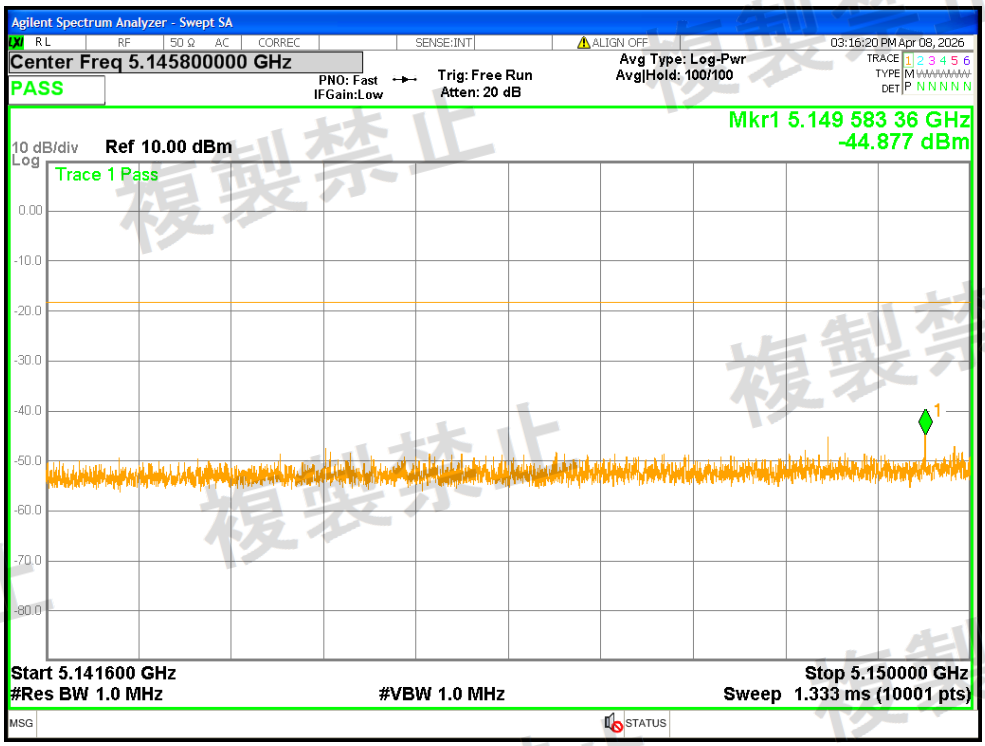


Tx. Spurious NVNT n40 5190MHz Ant1 @ 5250MHz-5251MHz

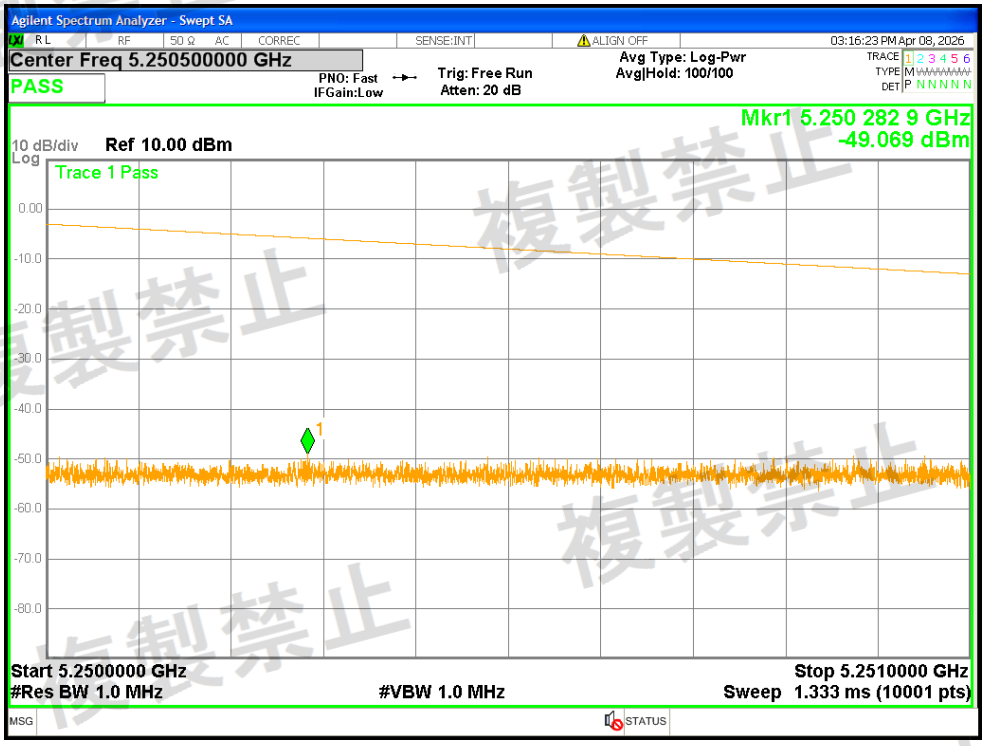


Tx. Spurious NVNT n40 5190MHz Ant1 @ 5251MHz-5270MHz

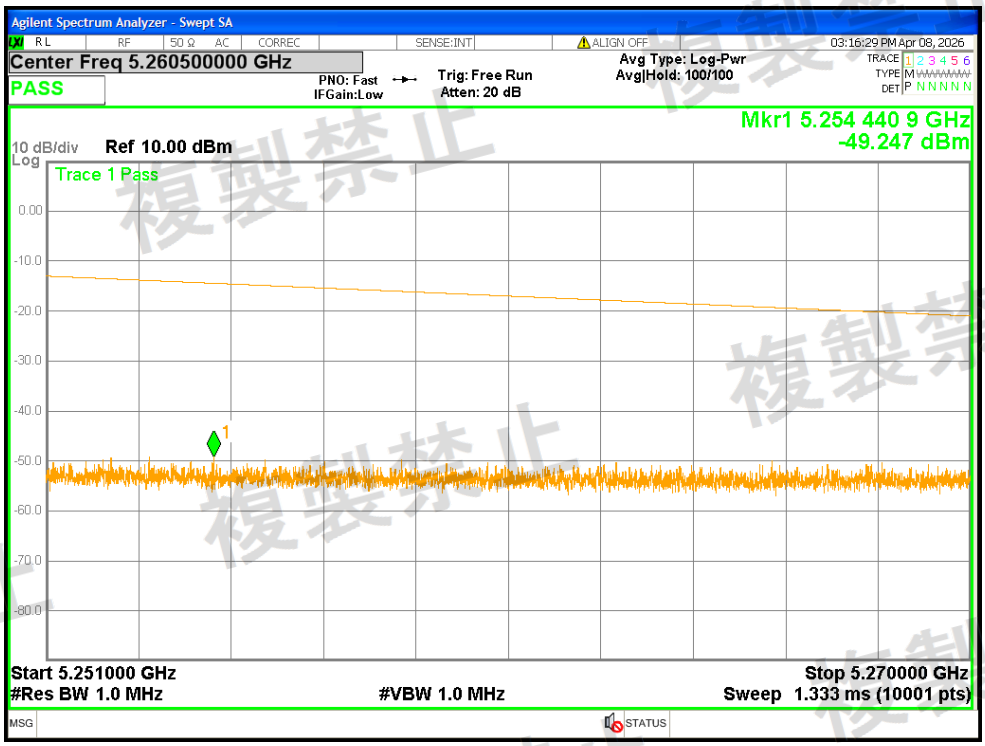


Tx. Spurious NVNT n40 5190MHz Ant1 @ 5270MHz-5278.4MHz

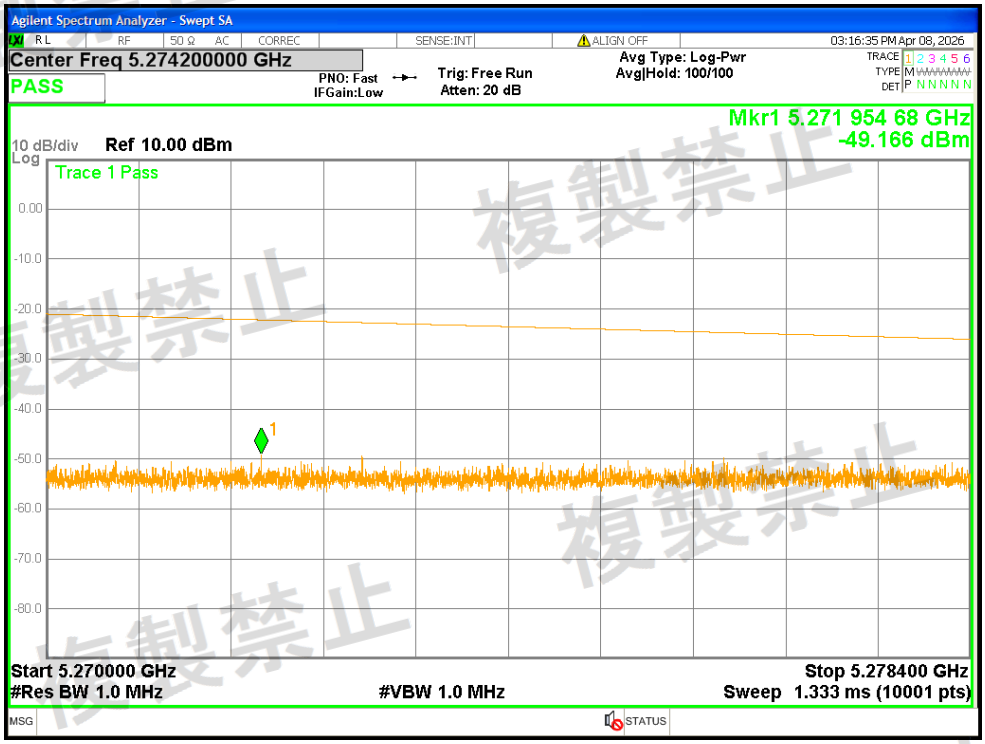


Tx. Spurious NVNT n40 5190MHz Ant1 @ 5278.4MHz-26000MHz

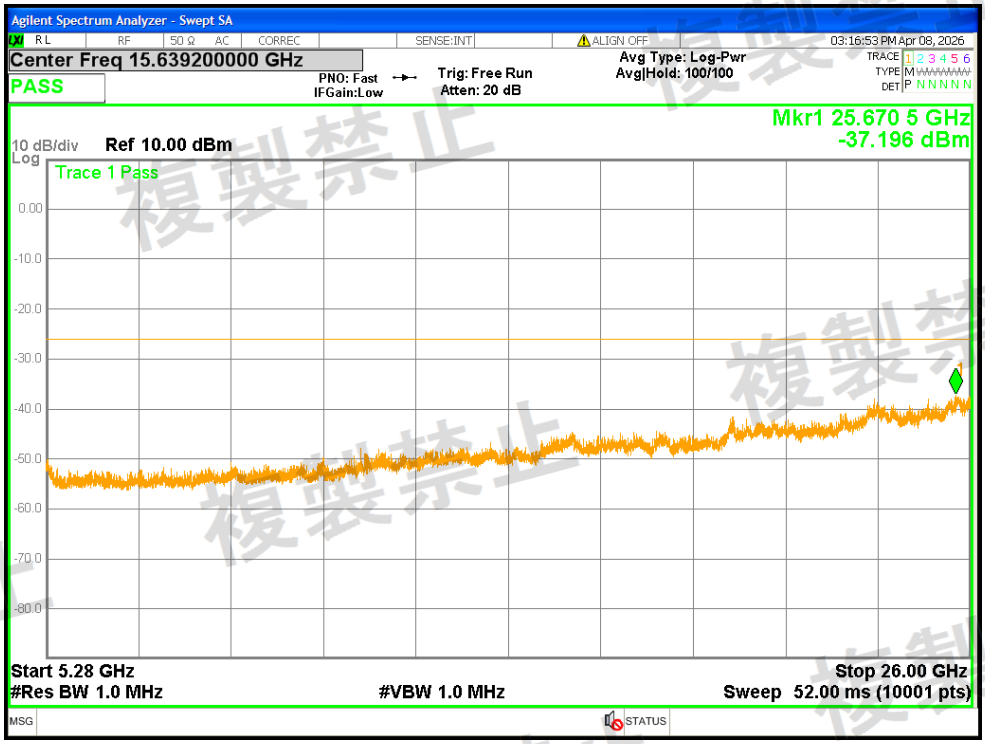


Tx. Spurious NVNT n40 5190MHz Ant2 @ 30MHz-5141.6MHz

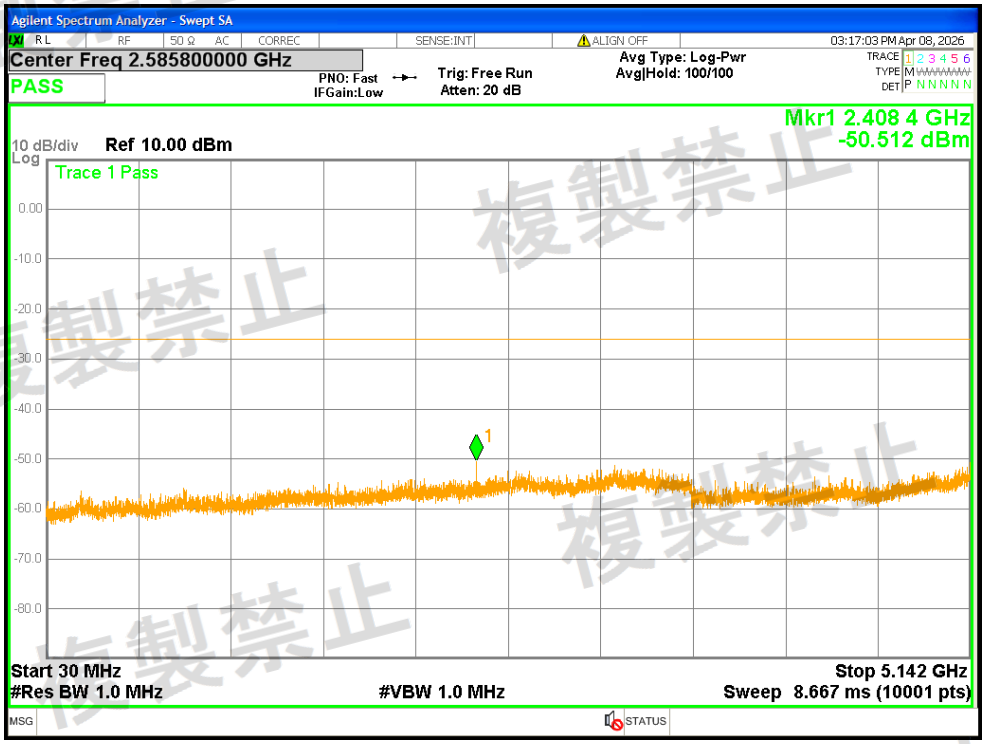


Tx. Spurious NVNT n40 5190MHz Ant2 @ 5141.6MHz-5150MHz

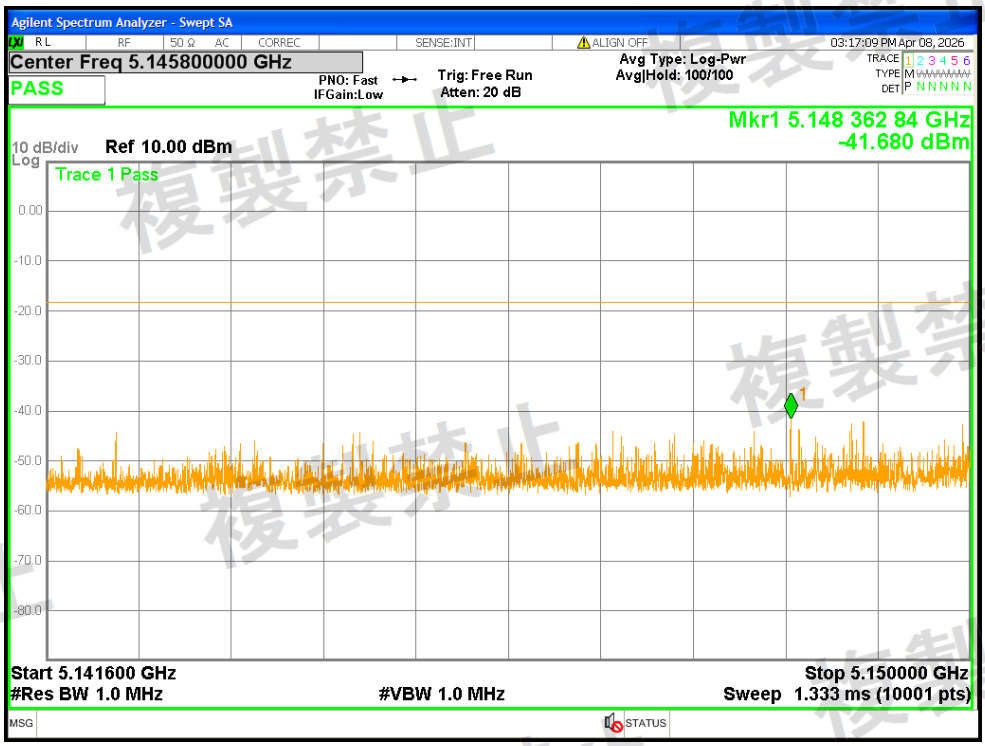


Tx. Spurious NVNT n40 5190MHz Ant2 @ 5250MHz-5251MHz

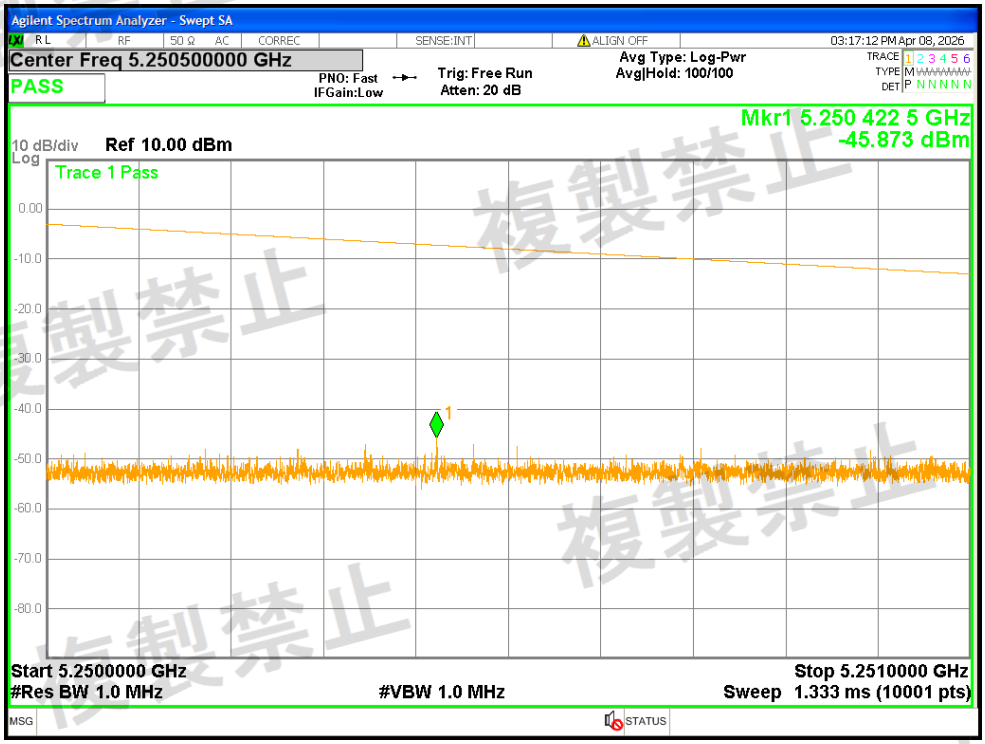


Tx. Spurious NVNT n40 5190MHz Ant2 @ 5251MHz-5270MHz

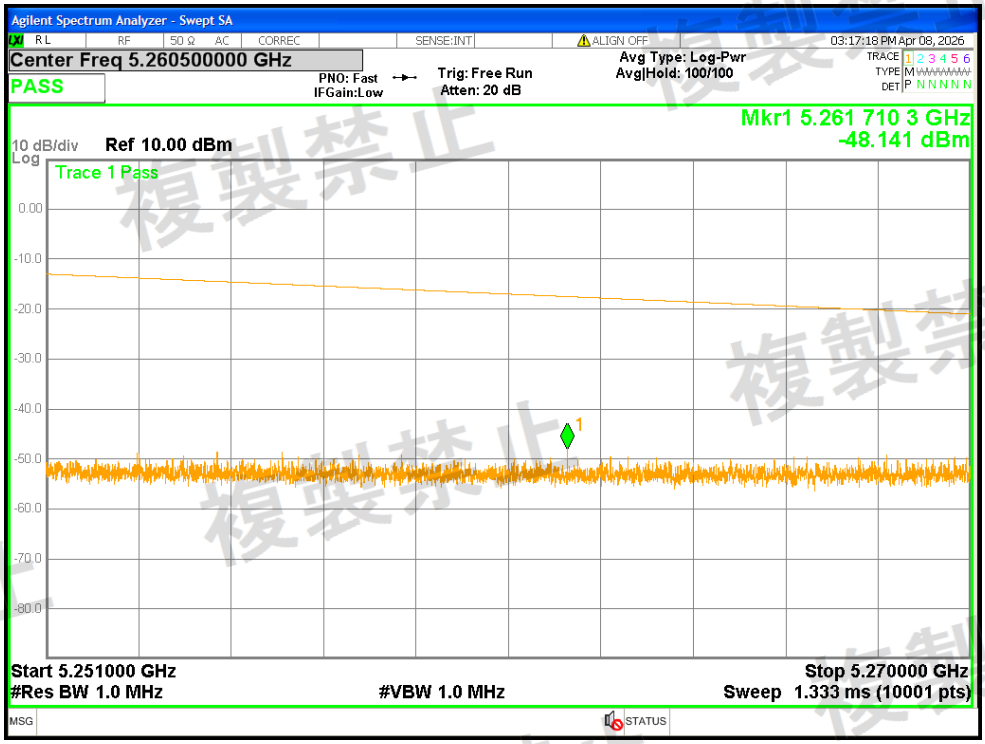


Tx. Spurious NVNT n40 5190MHz Ant2 @ 5270MHz-5278.4MHz

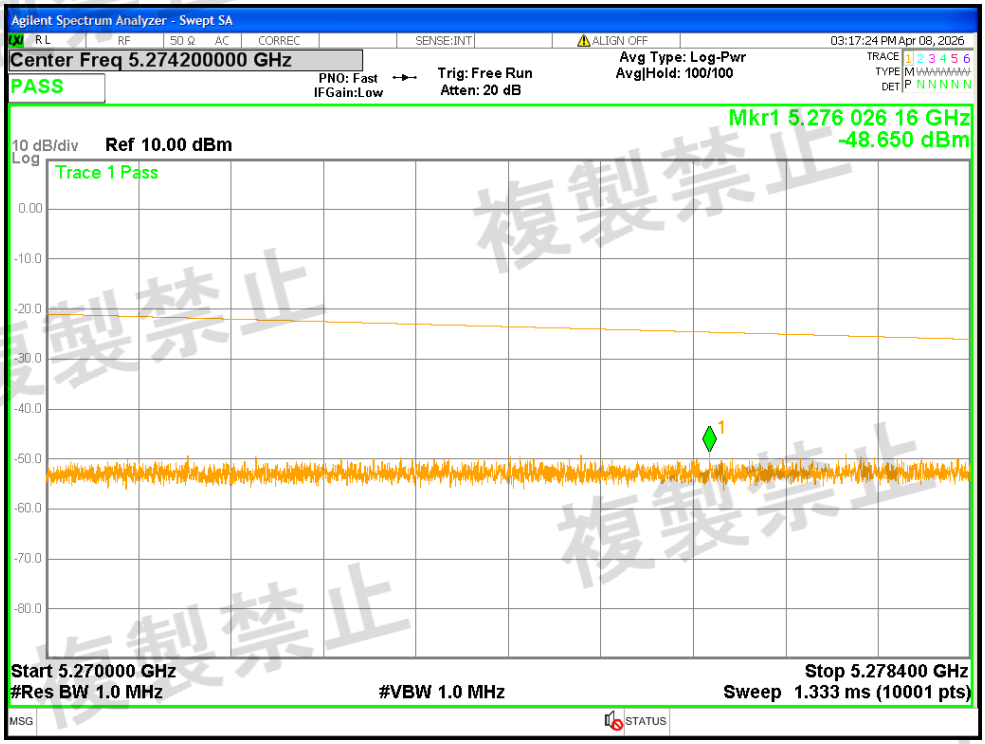


Tx. Spurious NVNT n40 5190MHz Ant2 @ 5278.4MHz-26000MHz

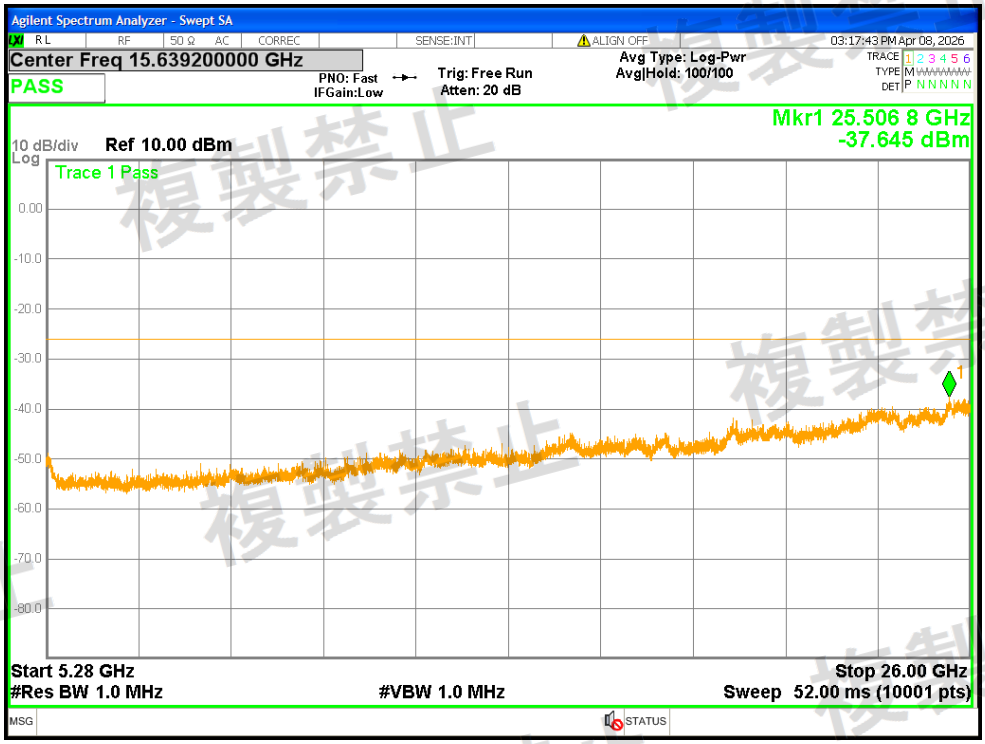


Tx. Spurious NVNT n40 5230MHz Ant1 @ 30MHz-5141.6MHz

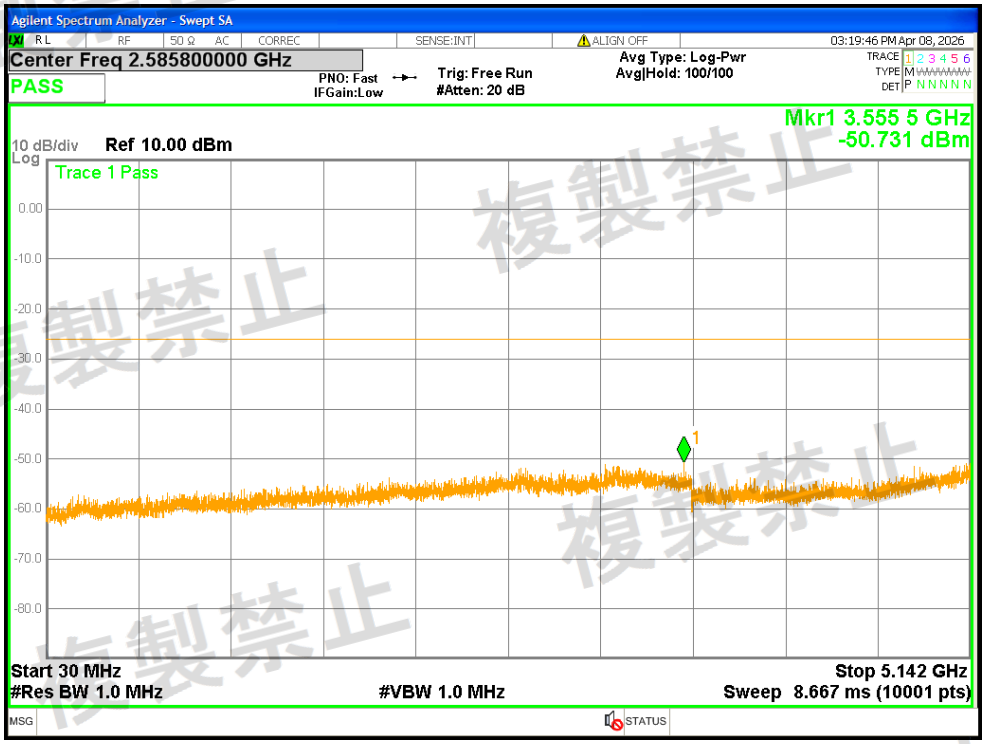


Tx. Spurious NVNT n40 5230MHz Ant1 @ 5141.6MHz-5150MHz

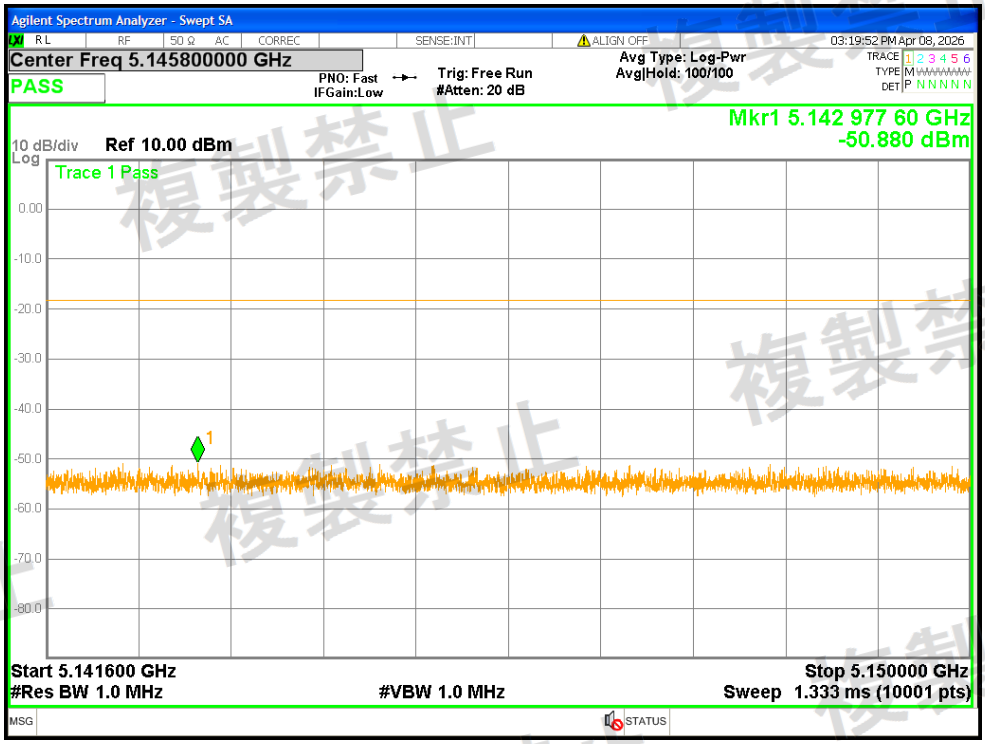


Tx. Spurious NVNT n40 5230MHz Ant1 @ 5250MHz-5251MHz

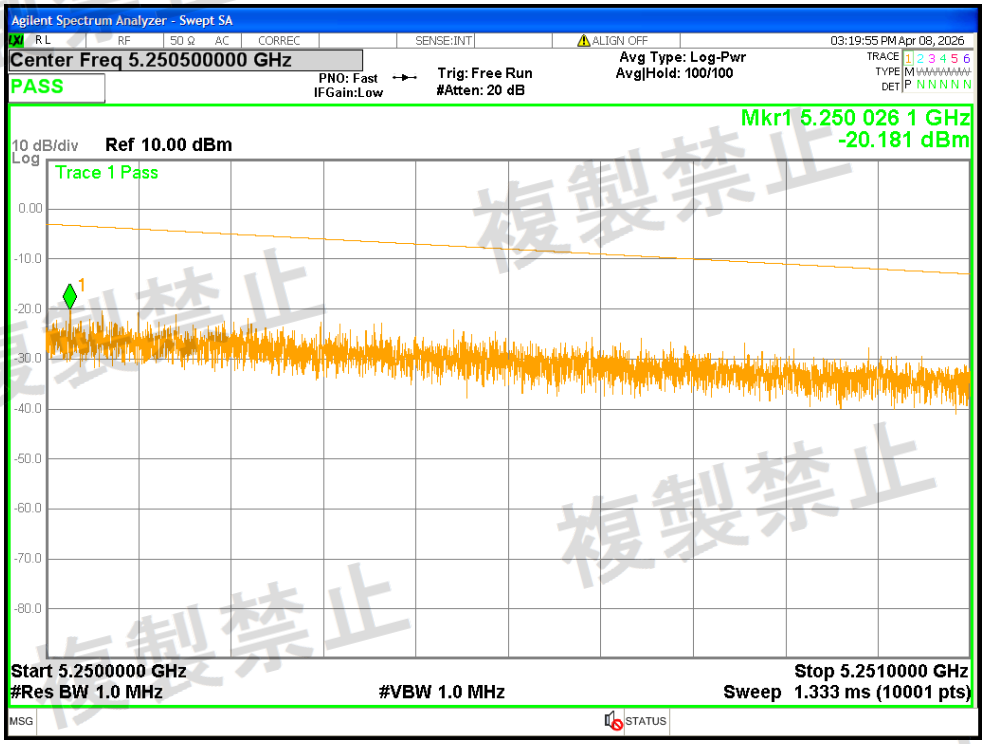


Tx. Spurious NVNT n40 5230MHz Ant1 @ 5251MHz-5270MHz

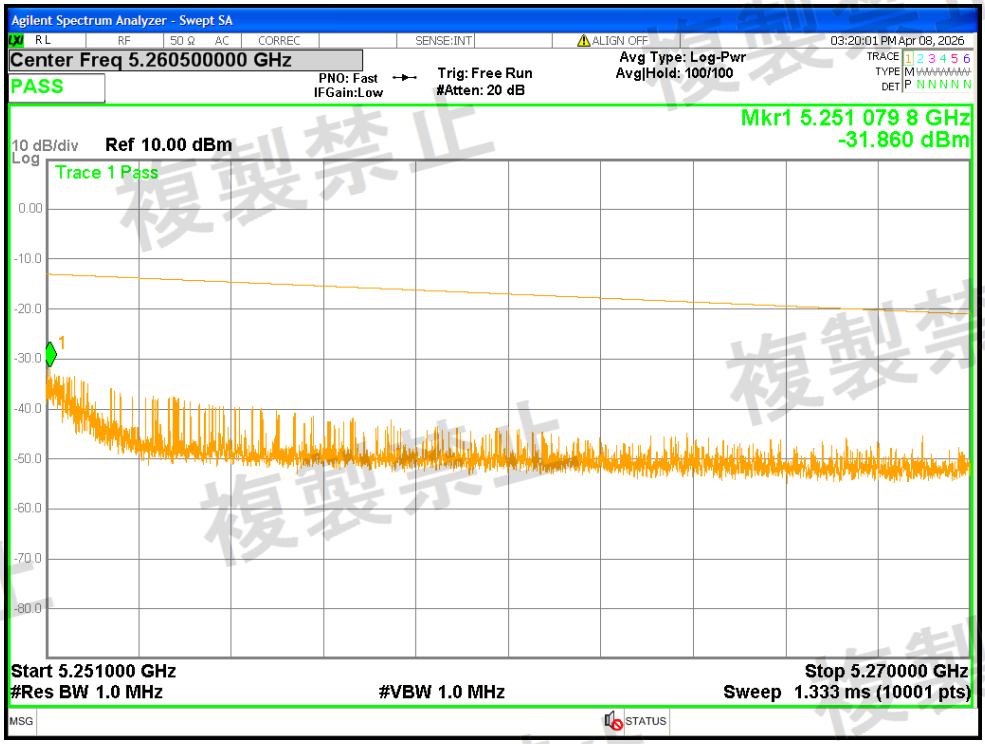


Tx. Spurious NVNT n40 5230MHz Ant1 @ 5270MHz-5278.4MHz

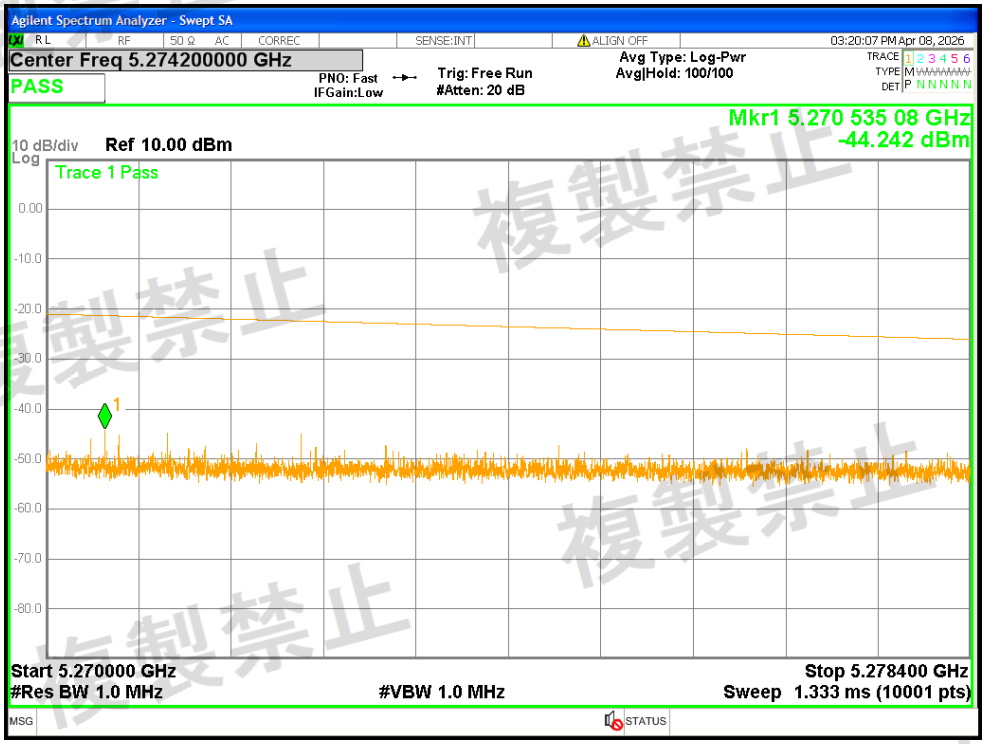


Tx. Spurious NVNT n40 5230MHz Ant1 @ 5278.4MHz-26000MHz

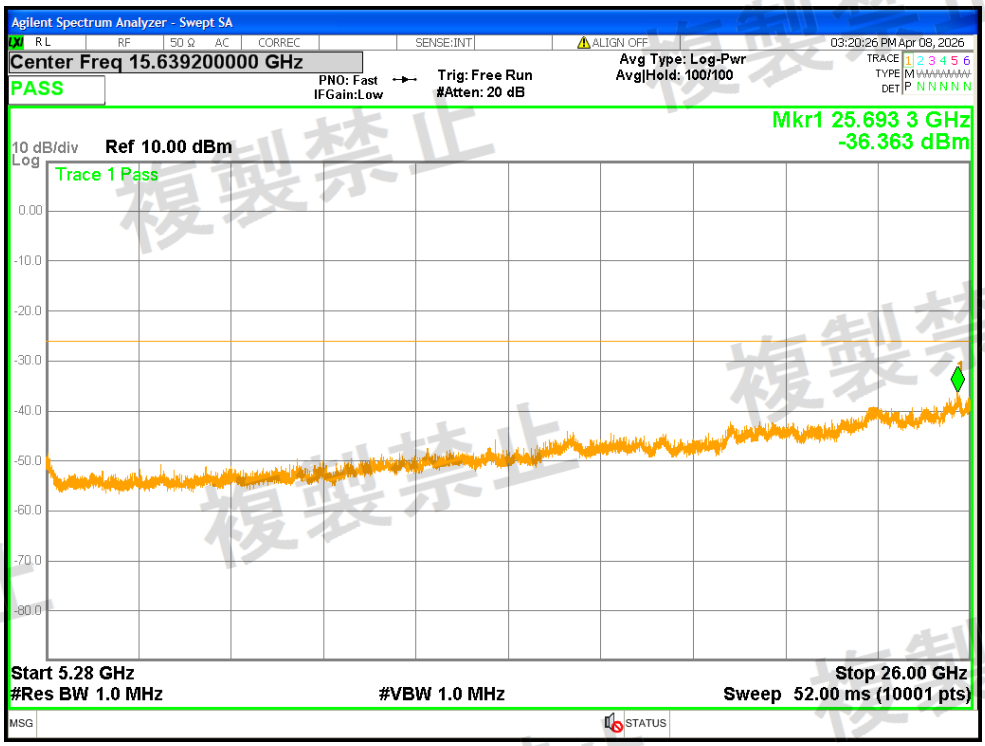


Tx. Spurious NVNT n40 5230MHz Ant2 @ 30MHz-5141.6MHz

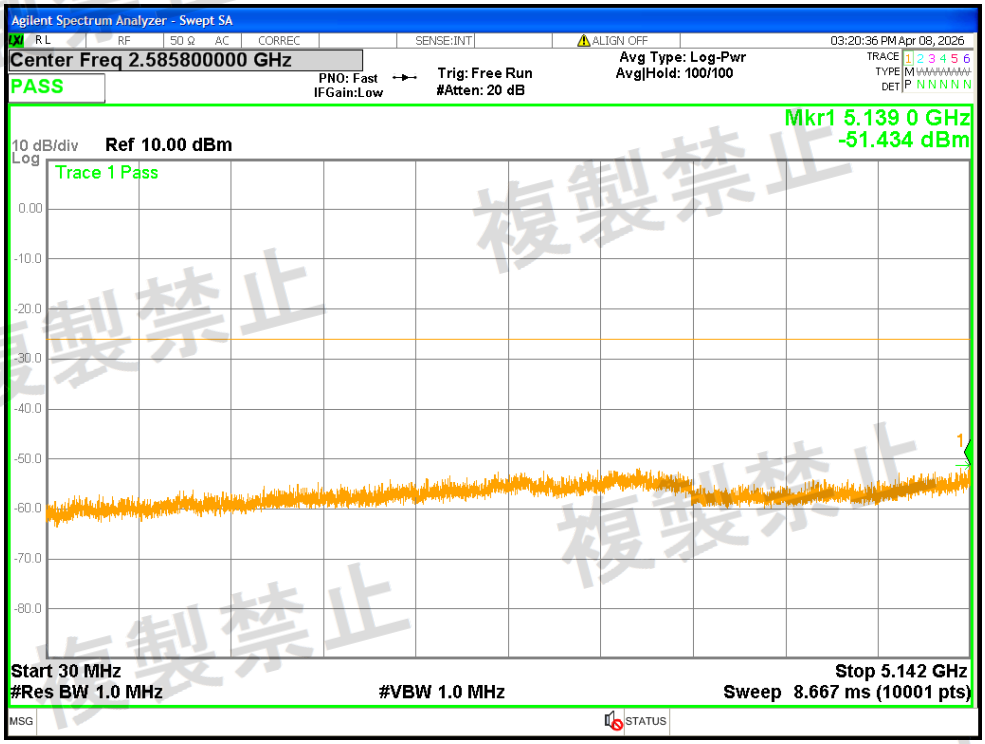


Tx. Spurious NVNT n40 5230MHz Ant2 @ 5141.6MHz-5150MHz

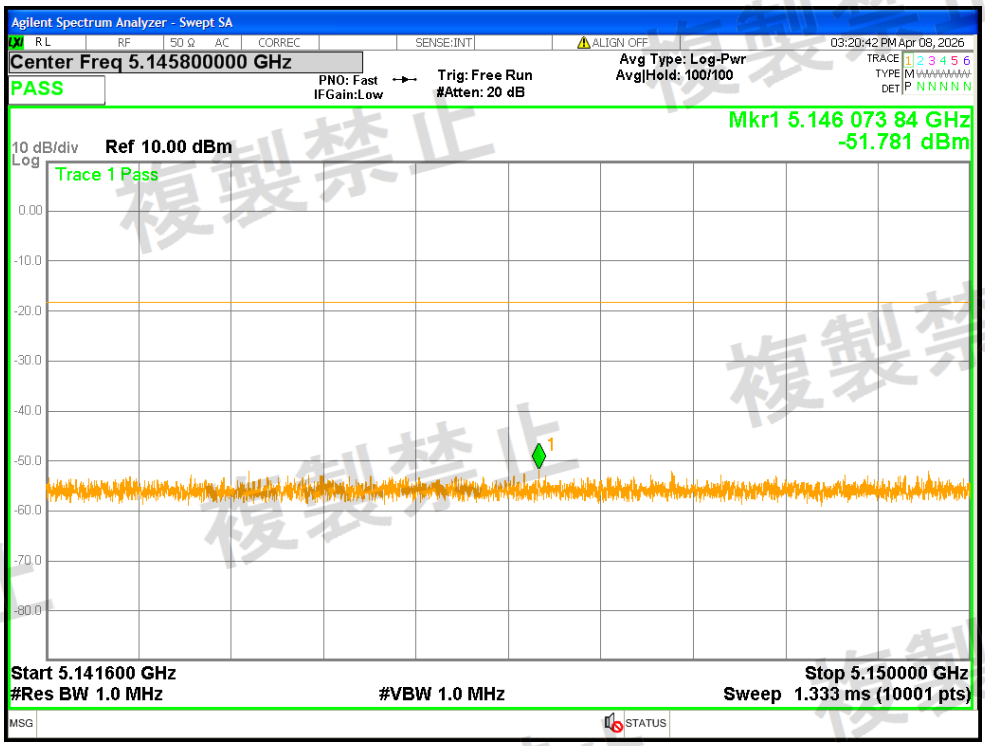


Tx. Spurious NVNT n40 5230MHz Ant2 @ 5250MHz-5251MHz

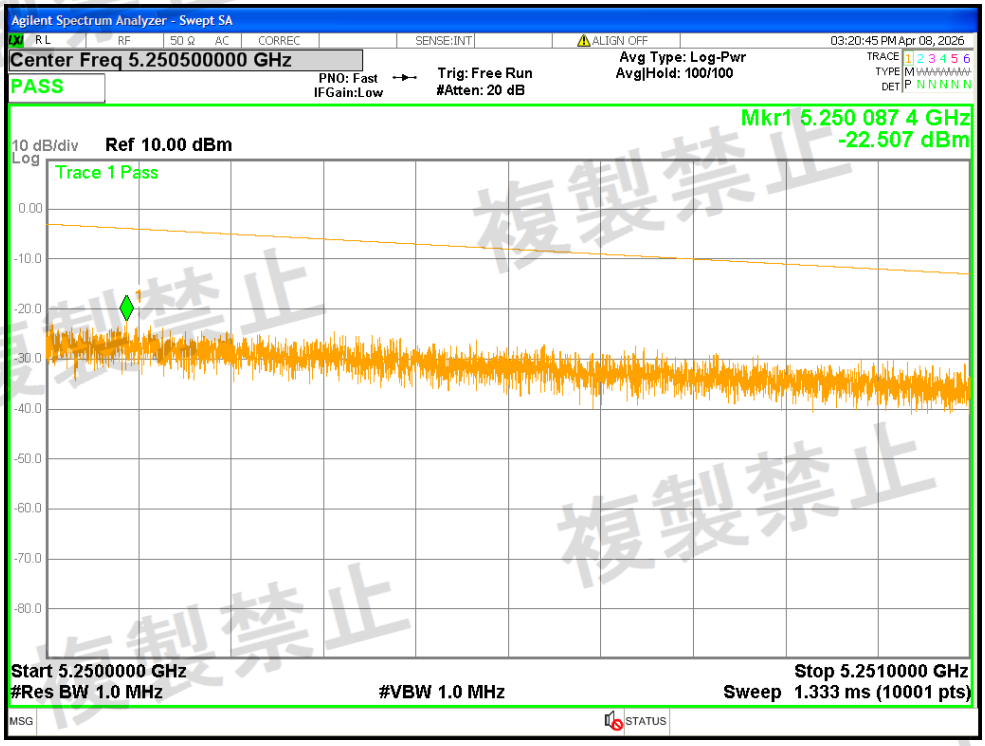


Tx. Spurious NVNT n40 5230MHz Ant2 @ 5251MHz-5270MHz

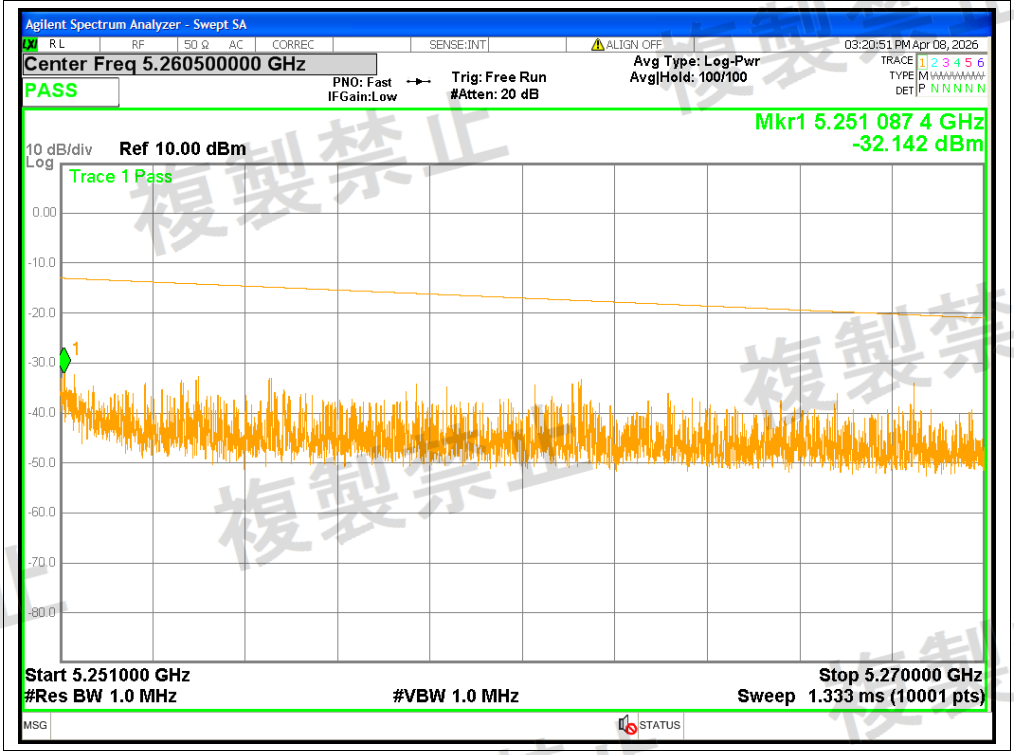


Tx. Spurious NVNT n40 5230MHz Ant2 @ 5270MHz-5278.4MHz

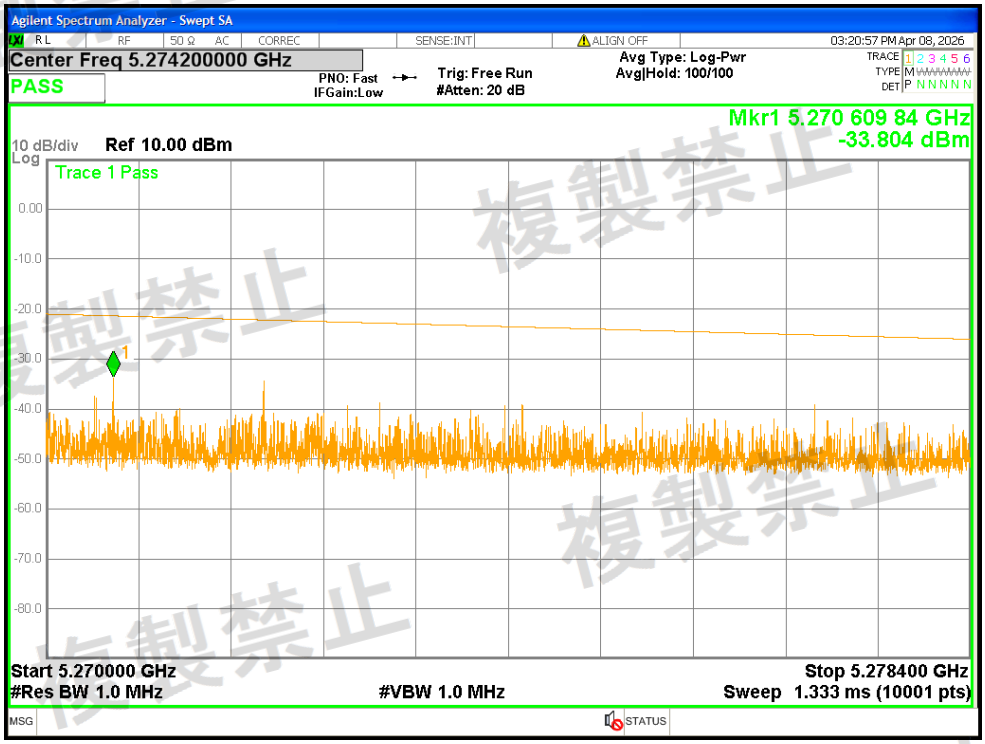


Tx. Spurious NVNT n40 5230MHz Ant2 @ 5278.4MHz-26000MHz

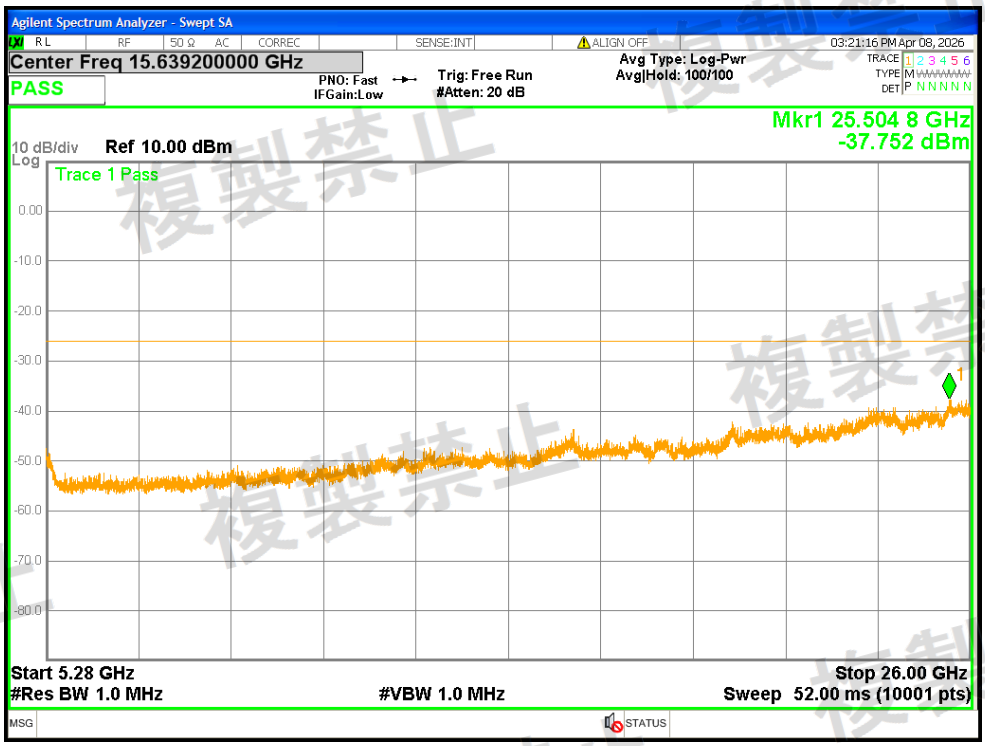


Tx. Spurious NVNT ac20 5180MHz Ant1 @ 30MHz-5142MHz

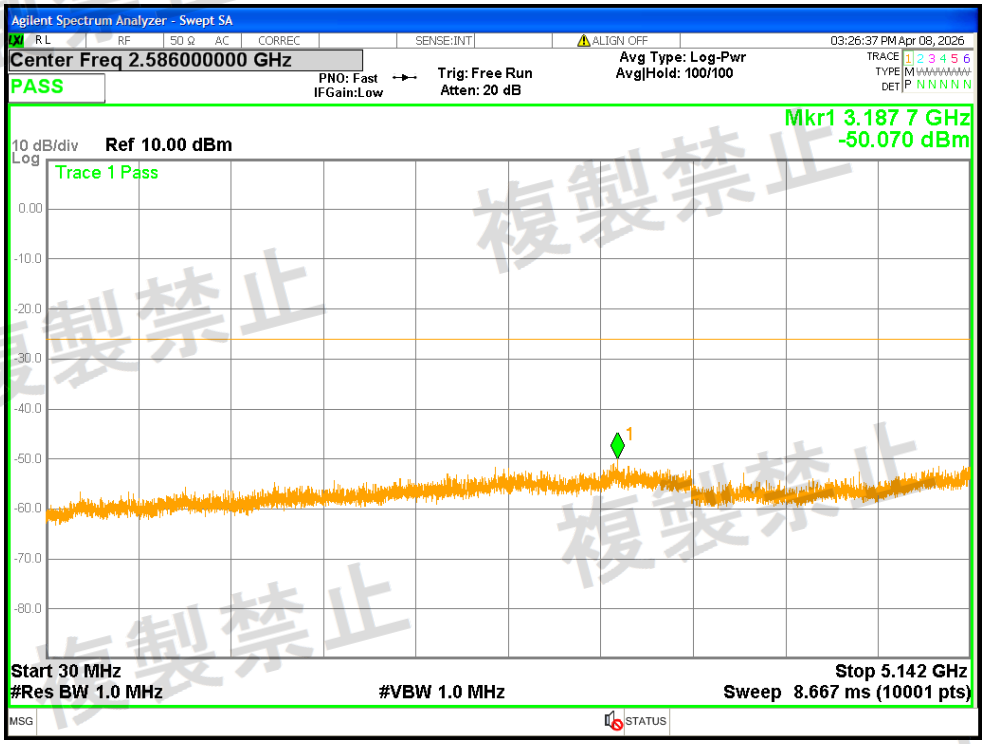


Tx. Spurious NVNT ac20 5180MHz Ant1 @ 5142MHz-5150MHz

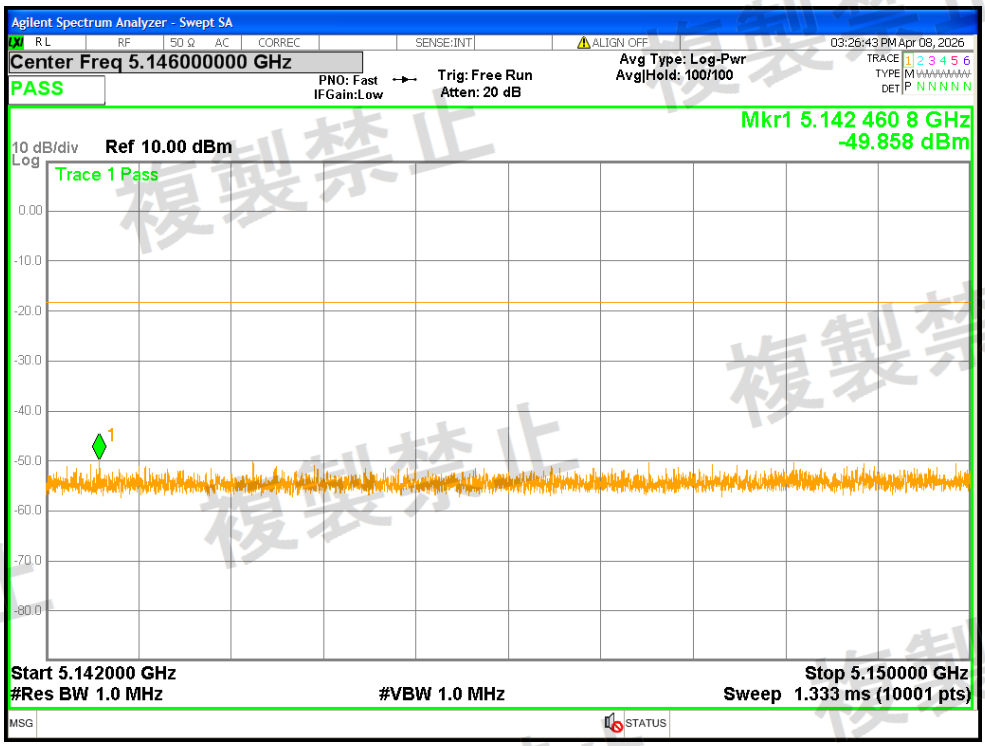


Tx. Spurious NVNT ac20 5180MHz Ant1 @ 5250MHz-5251MHz

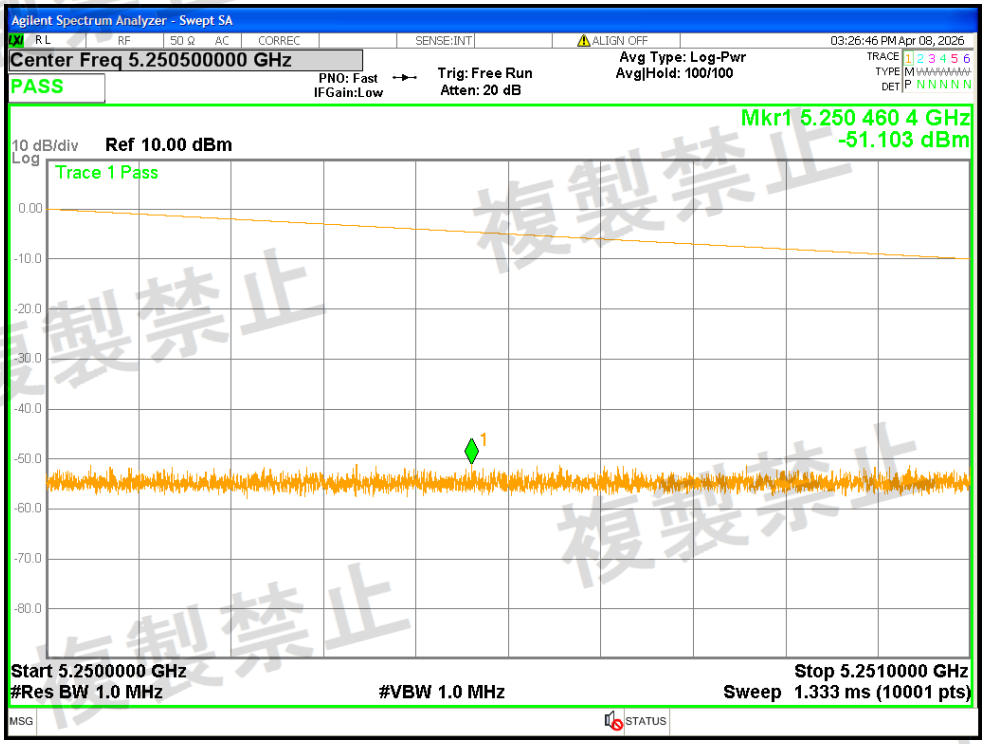


Tx. Spurious NVNT ac20 5180MHz Ant1 @ 5251MHz-5260MHz

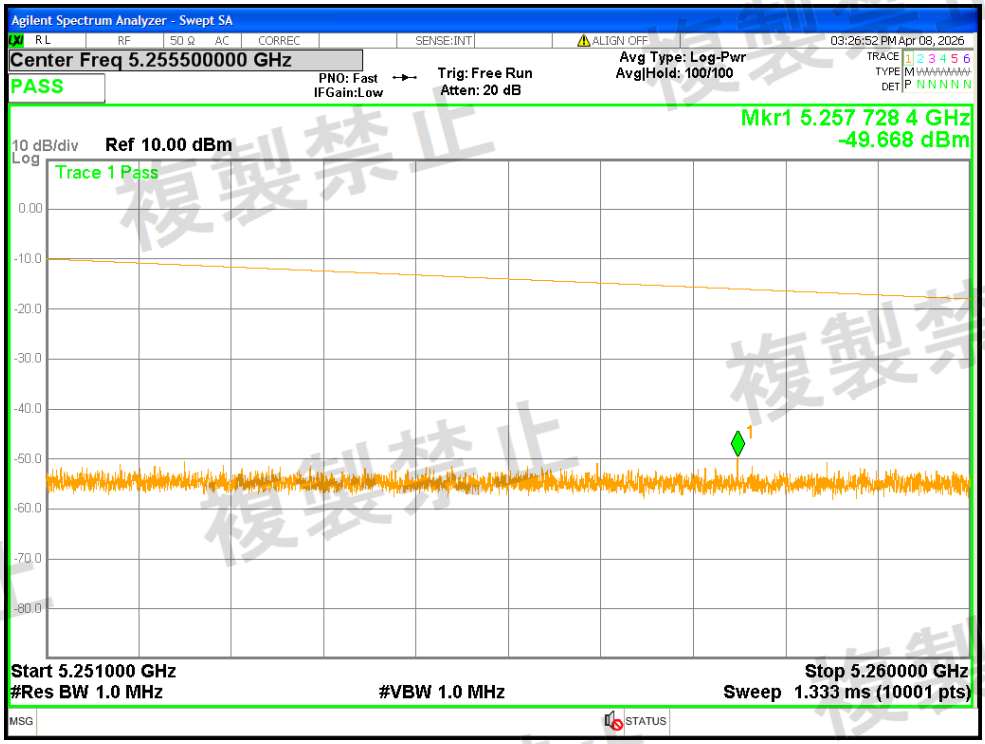


Tx. Spurious NVNT ac20 5180MHz Ant1 @ 5260MHz-5266.7MHz

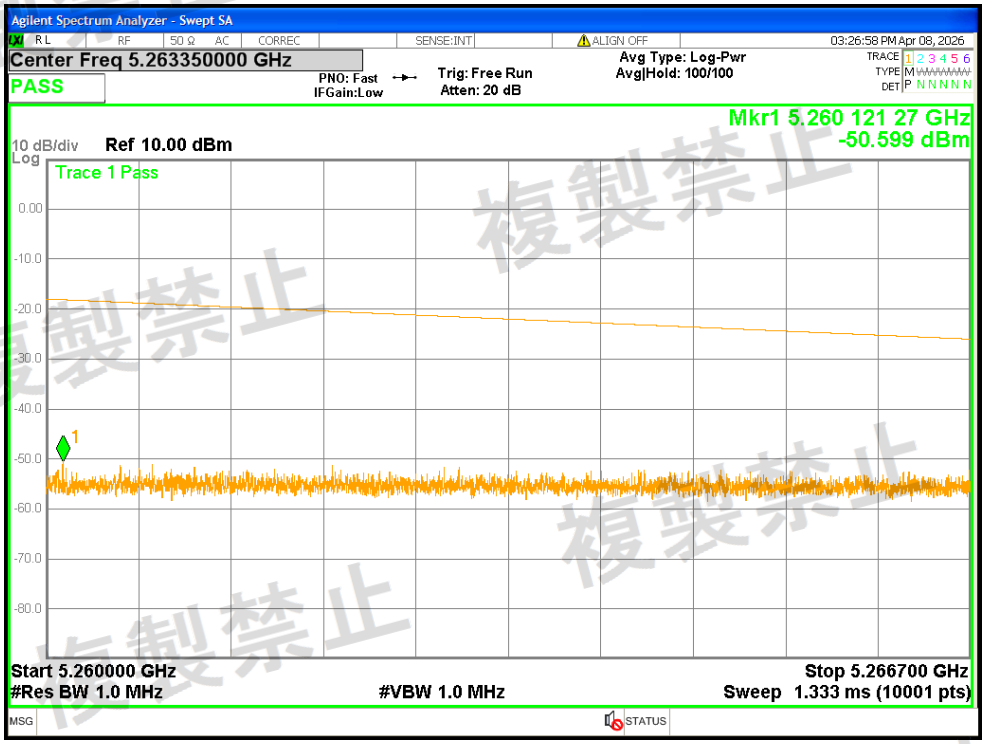


Tx. Spurious NVNT ac20 5180MHz Ant1 @ 5266.7MHz-26000MHz

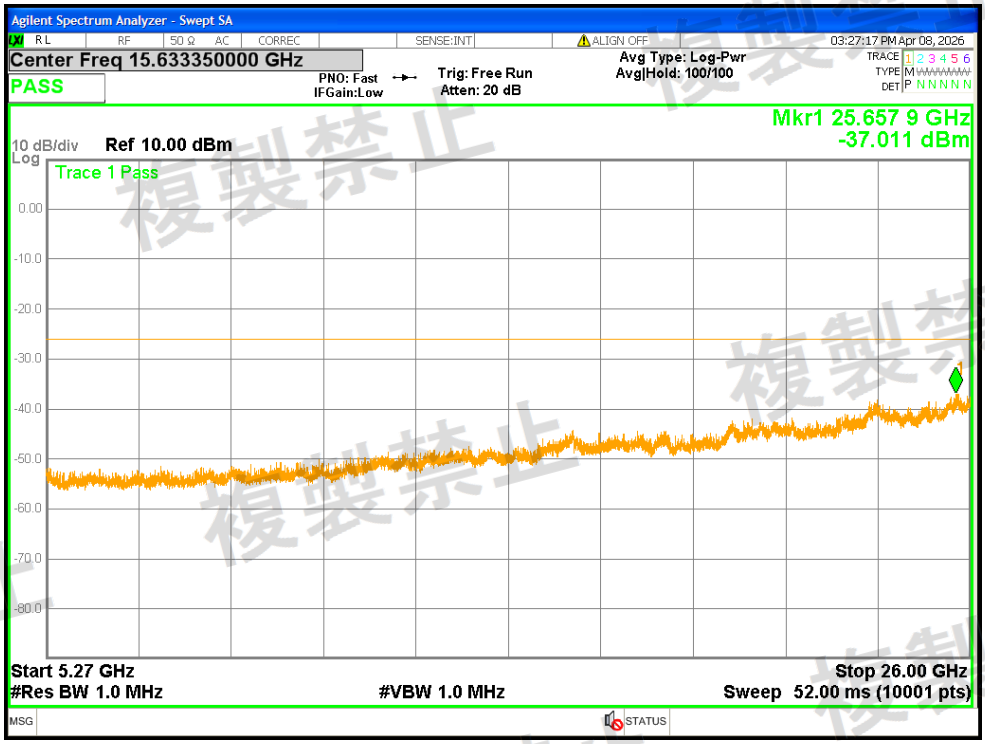


Tx. Spurious NVNT ac20 5180MHz Ant2 @ 30MHz-5142MHz

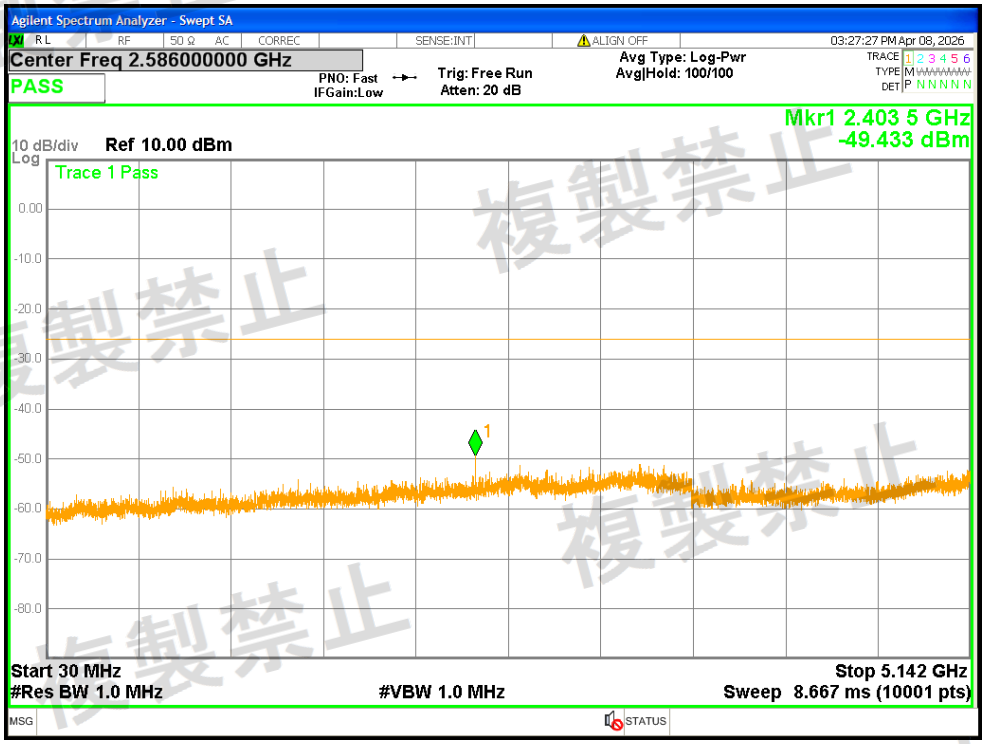


Tx. Spurious NVNT ac20 5180MHz Ant2 @ 5142MHz-5150MHz

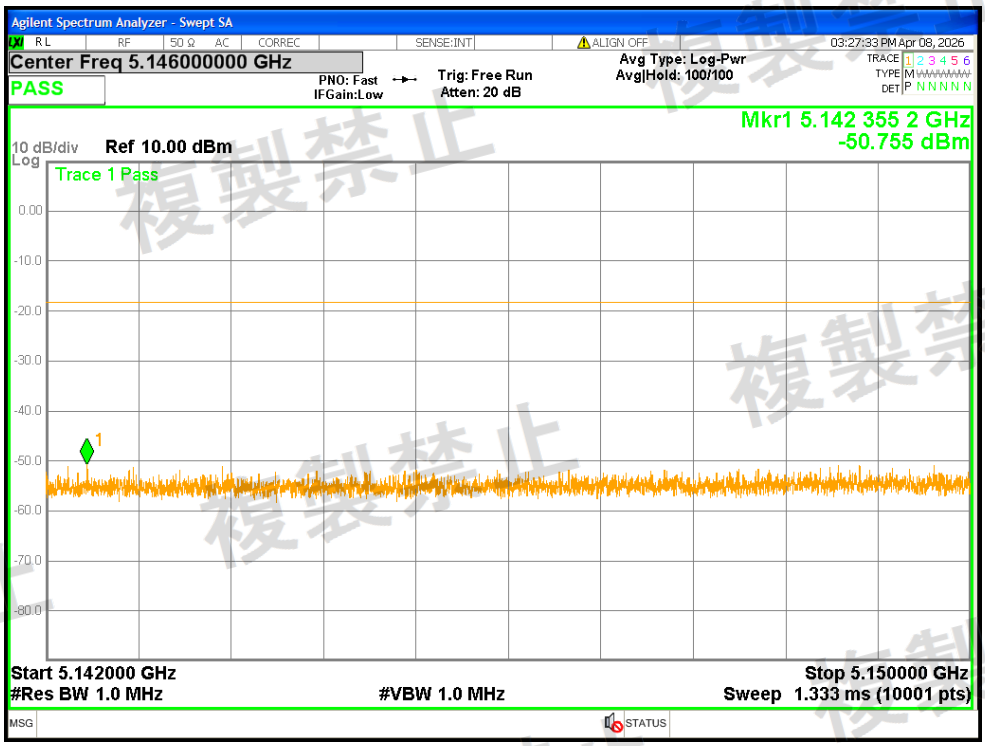


Tx. Spurious NVNT ac20 5180MHz Ant2 @ 5250MHz-5251MHz

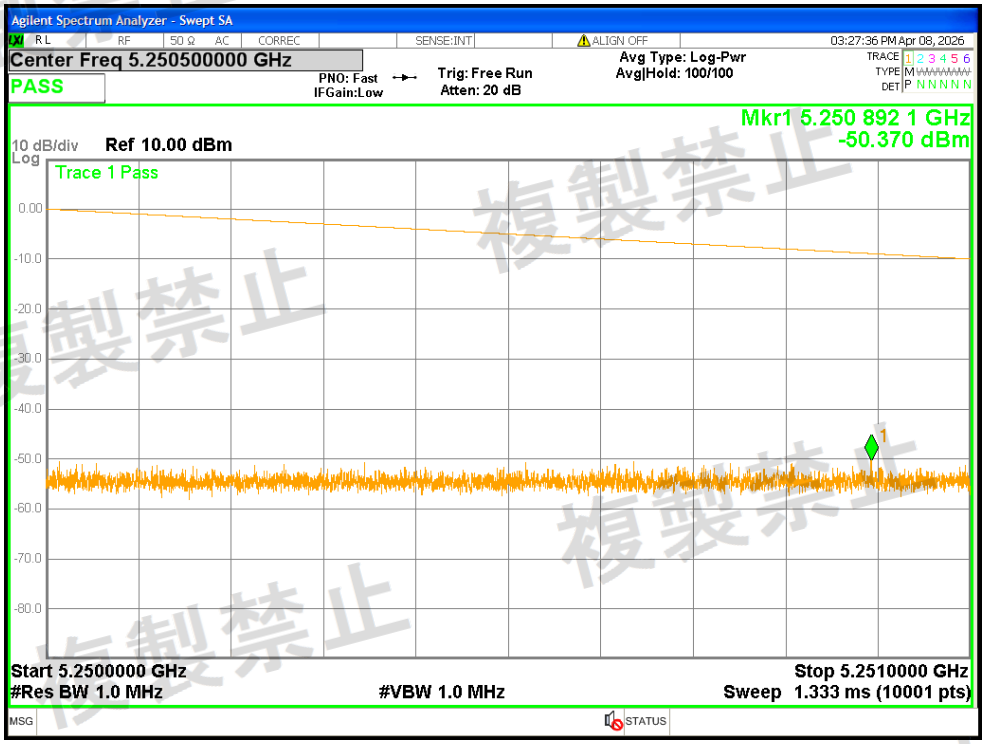


Tx. Spurious NVNT ac20 5180MHz Ant2 @ 5251MHz-5260MHz

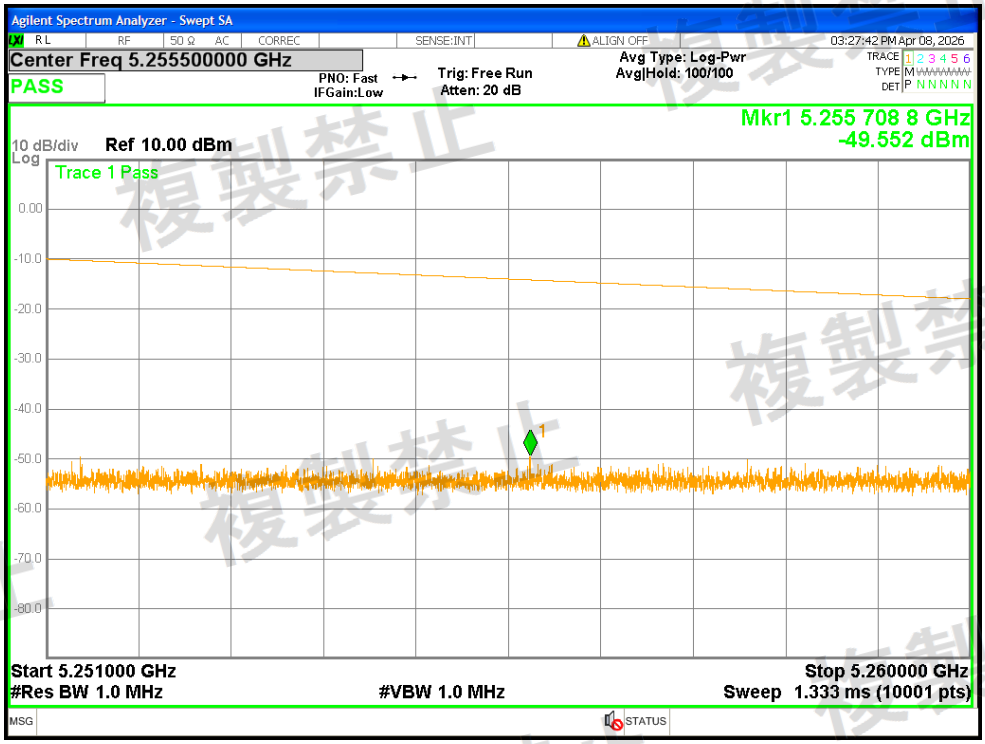


Tx. Spurious NVNT ac20 5180MHz Ant2 @ 5260MHz-5266.7MHz

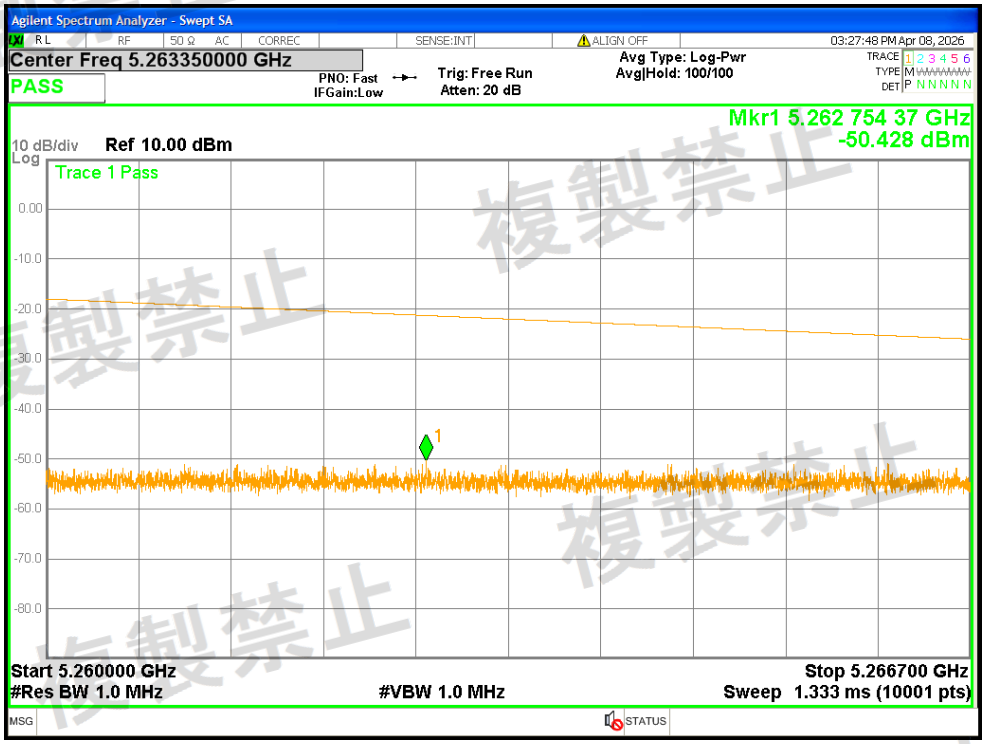


Tx. Spurious NVNT ac20 5180MHz Ant2 @ 5266.7MHz-26000MHz

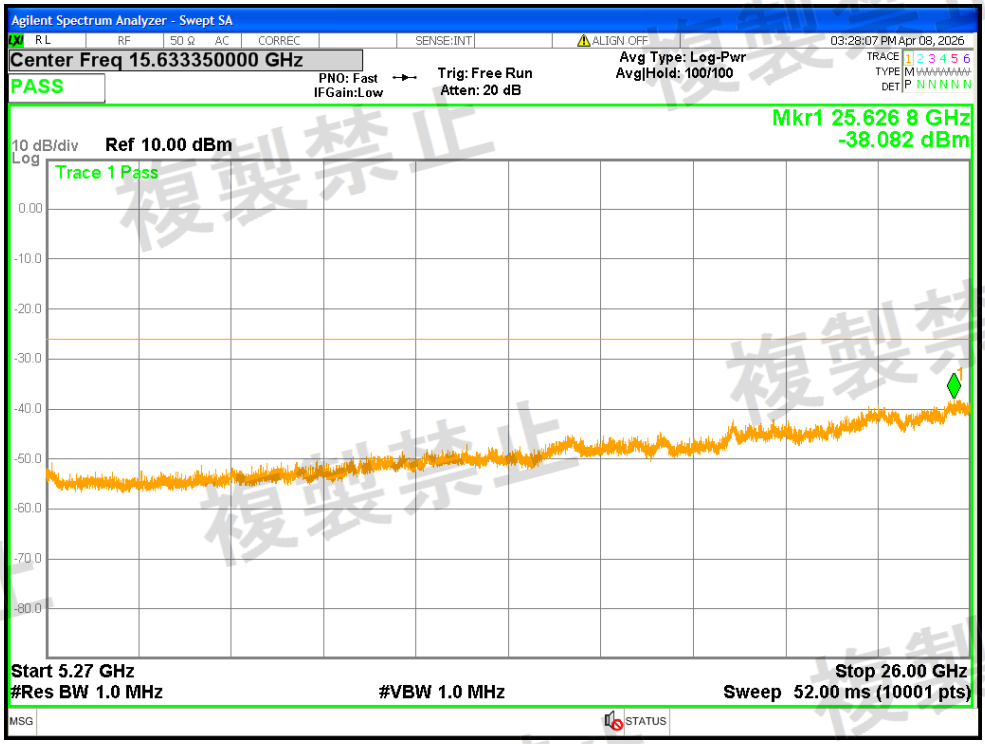


Tx. Spurious NVNT ac20 5200MHz Ant1 @ 30MHz-5142MHz

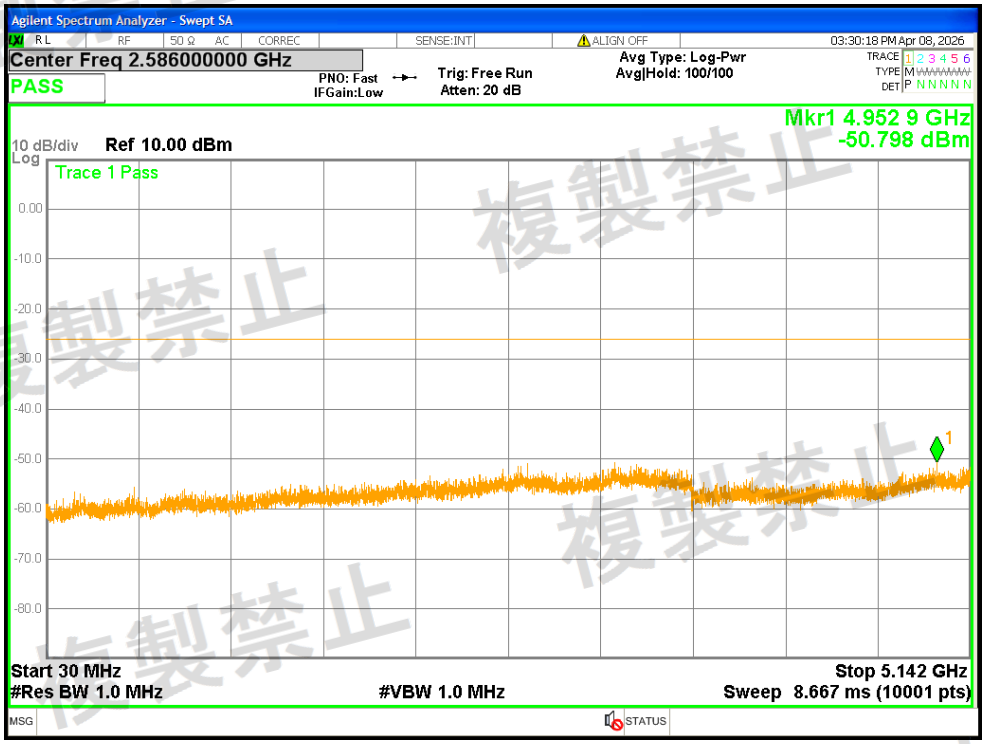


Tx. Spurious NVNT ac20 5200MHz Ant1 @ 5142MHz-5150MHz

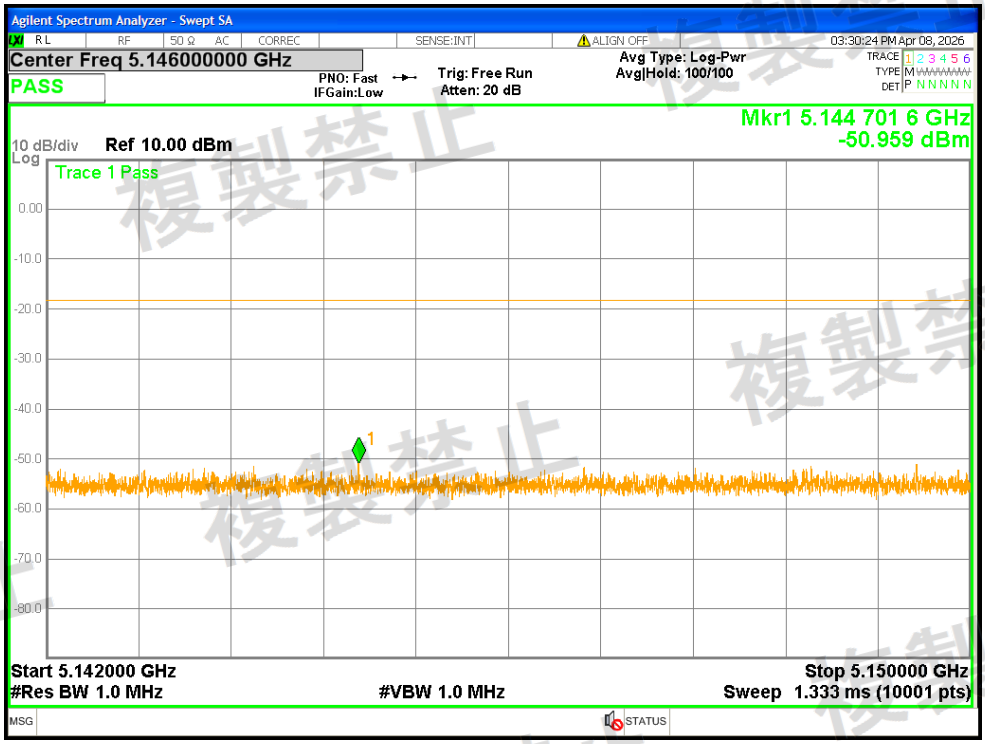


Tx. Spurious NVNT ac20 5200MHz Ant1 @ 5250MHz-5251MHz

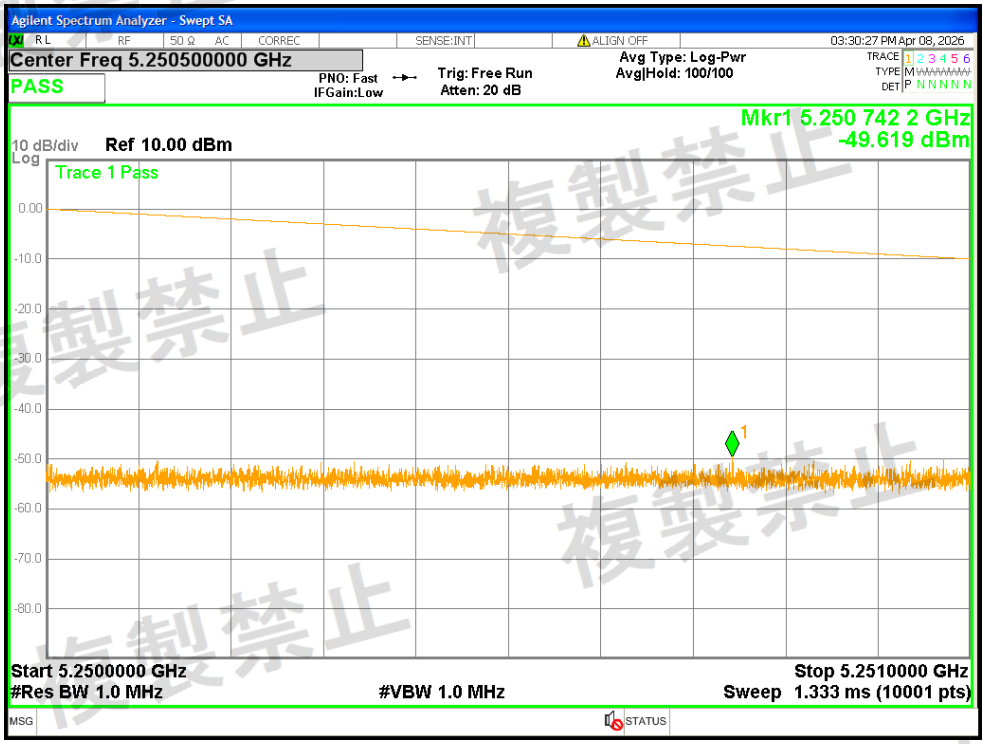


Tx. Spurious NVNT ac20 5200MHz Ant1 @ 5251MHz-5260MHz

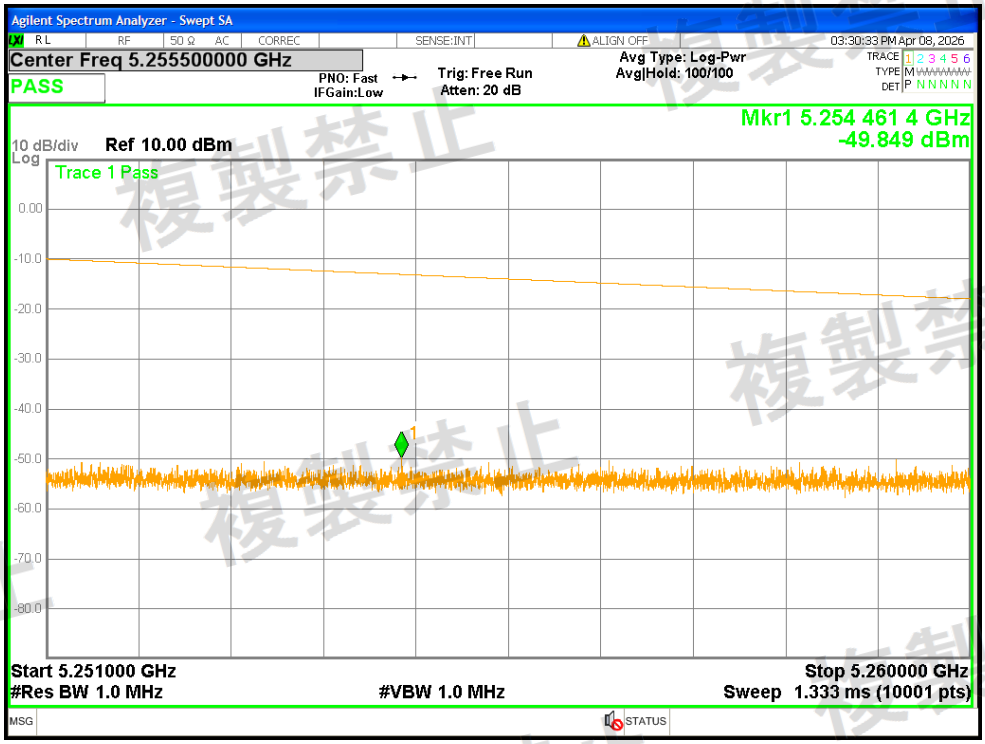


Tx. Spurious NVNT ac20 5200MHz Ant1 @ 5260MHz-5266.7MHz

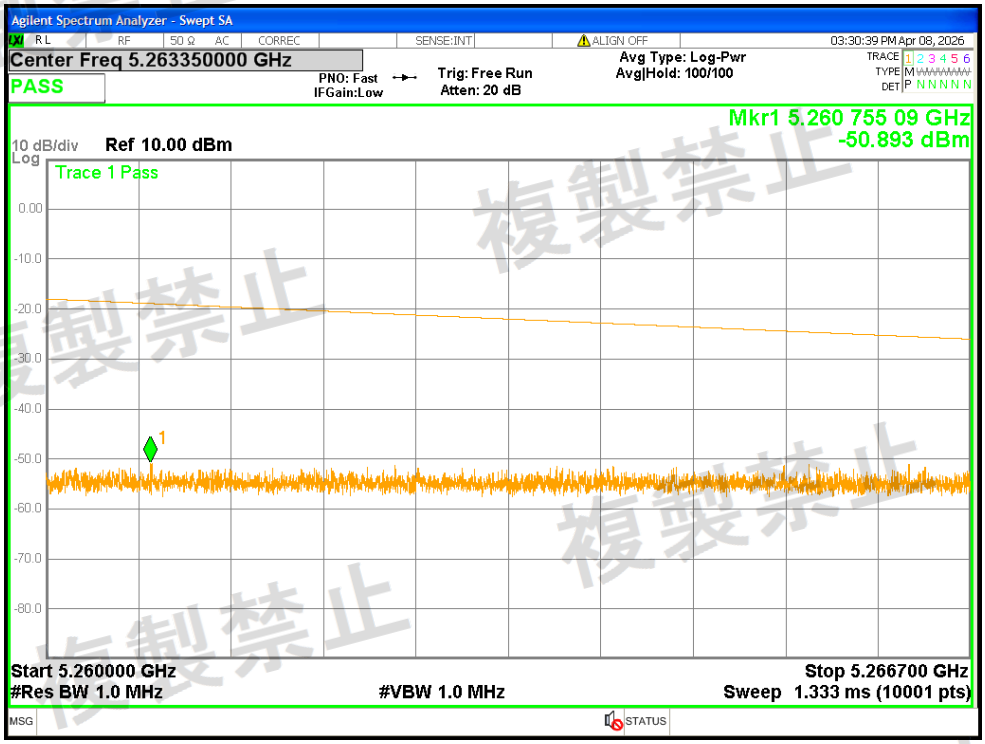


Tx. Spurious NVNT ac20 5200MHz Ant1 @ 5266.7MHz-26000MHz

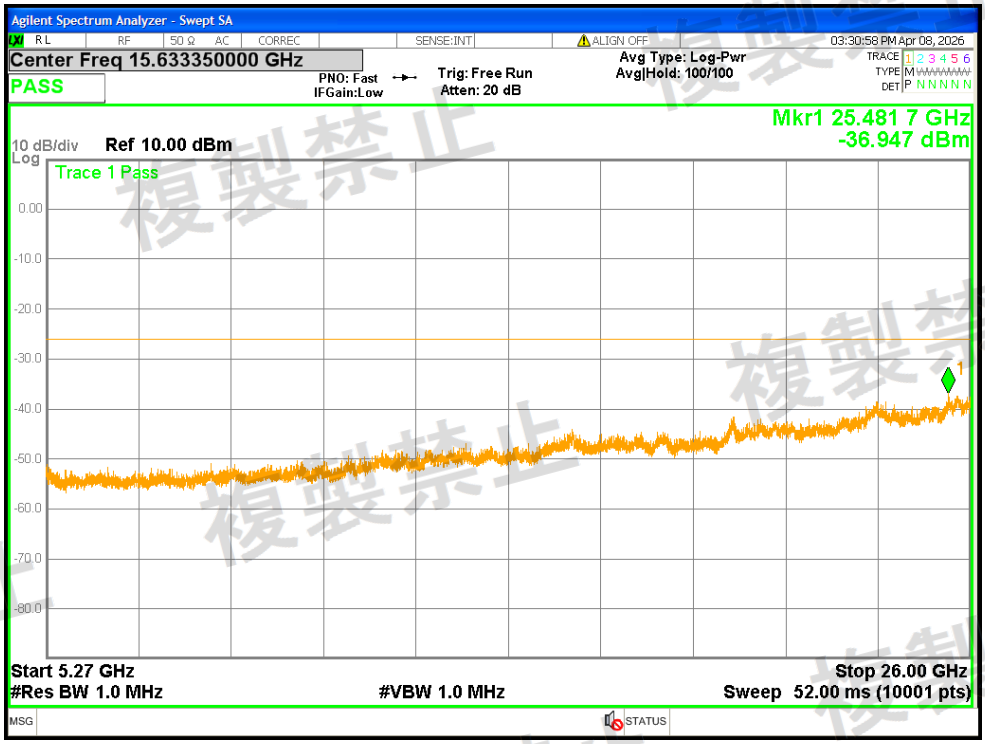


Tx. Spurious NVNT ac20 5200MHz Ant2 @ 30MHz-5142MHz

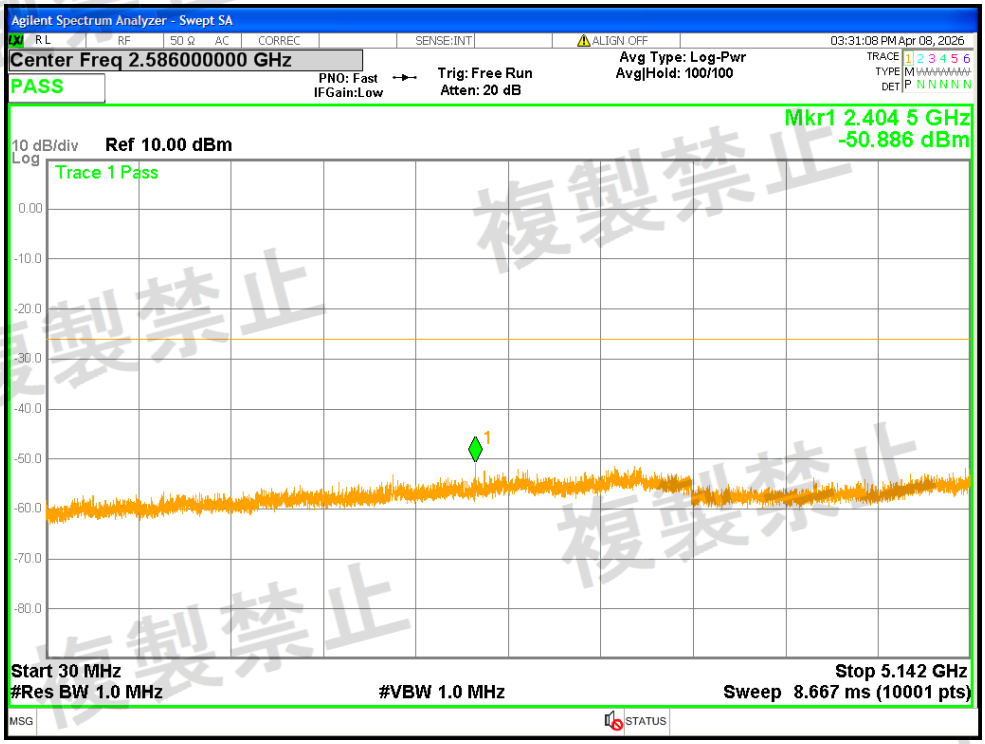


Tx. Spurious NVNT ac20 5200MHz Ant2 @ 5142MHz-5150MHz

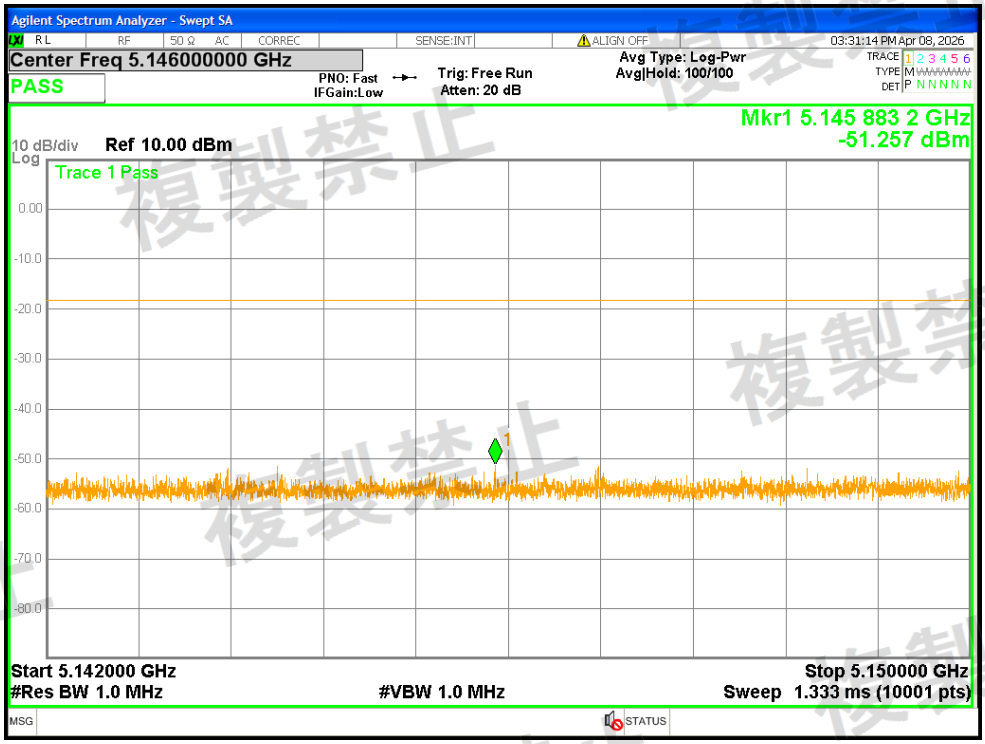


Tx. Spurious NVNT ac20 5200MHz Ant2 @ 5250MHz-5251MHz

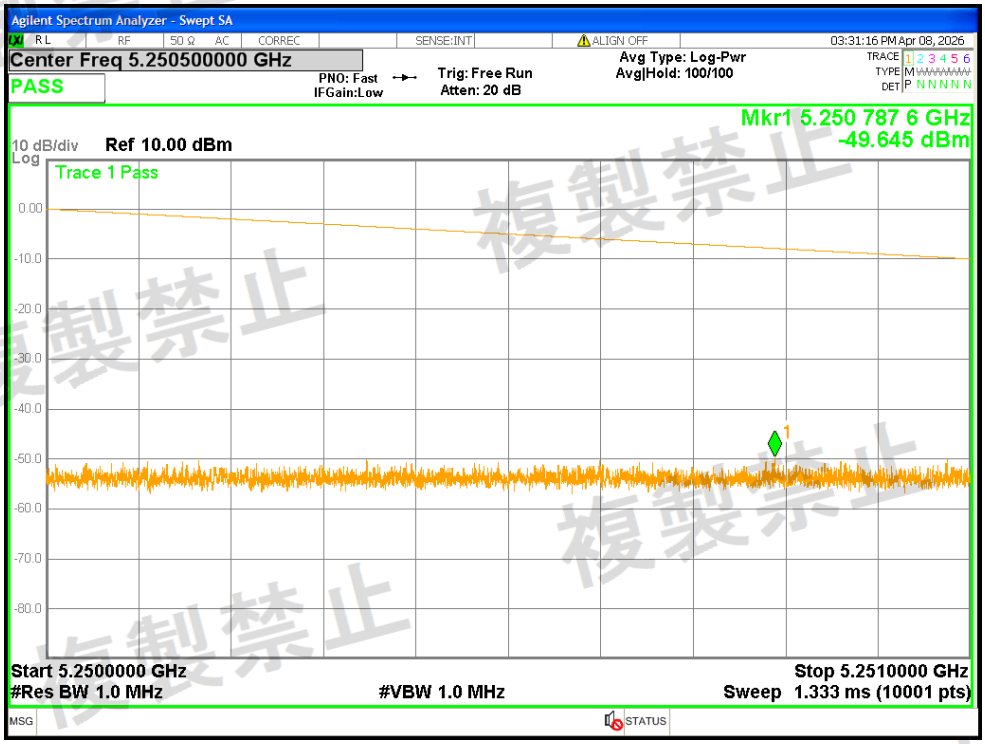


Tx. Spurious NVNT ac20 5200MHz Ant2 @ 5251MHz-5260MHz

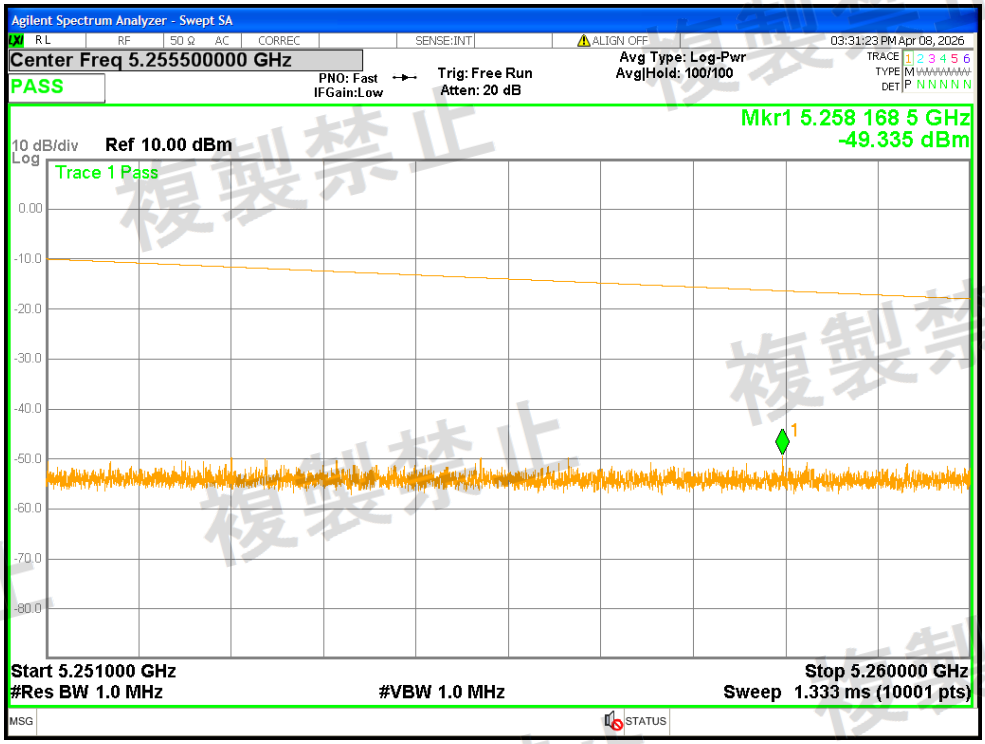


Tx. Spurious NVNT ac20 5200MHz Ant2 @ 5260MHz-5266.7MHz

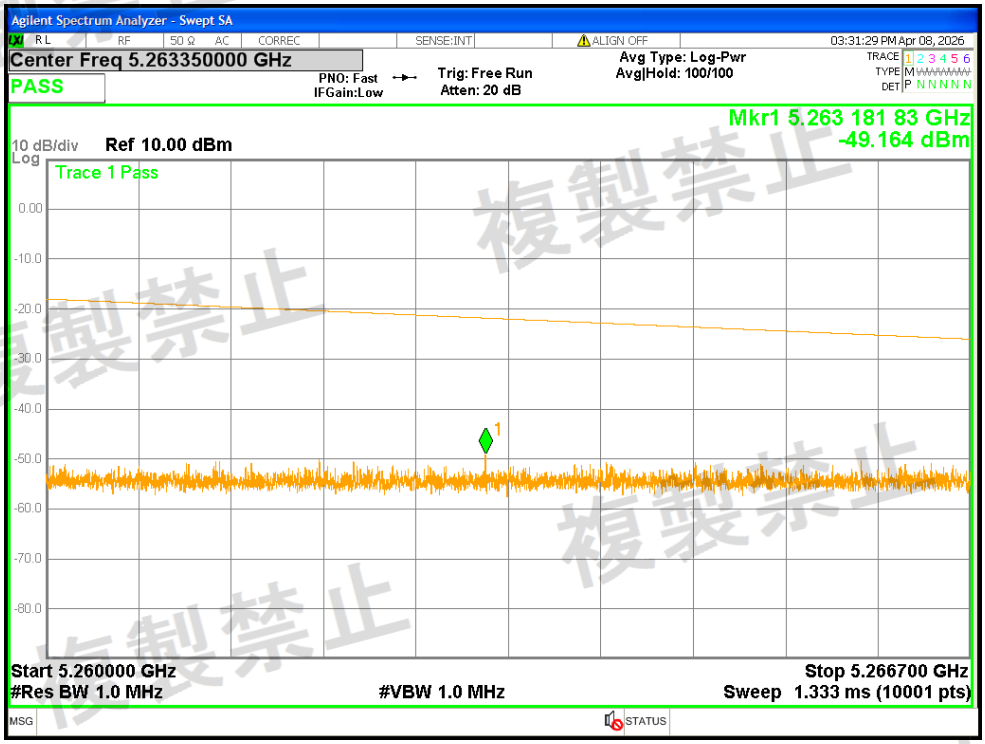


Tx. Spurious NVNT ac20 5200MHz Ant2 @ 5266.7MHz-26000MHz

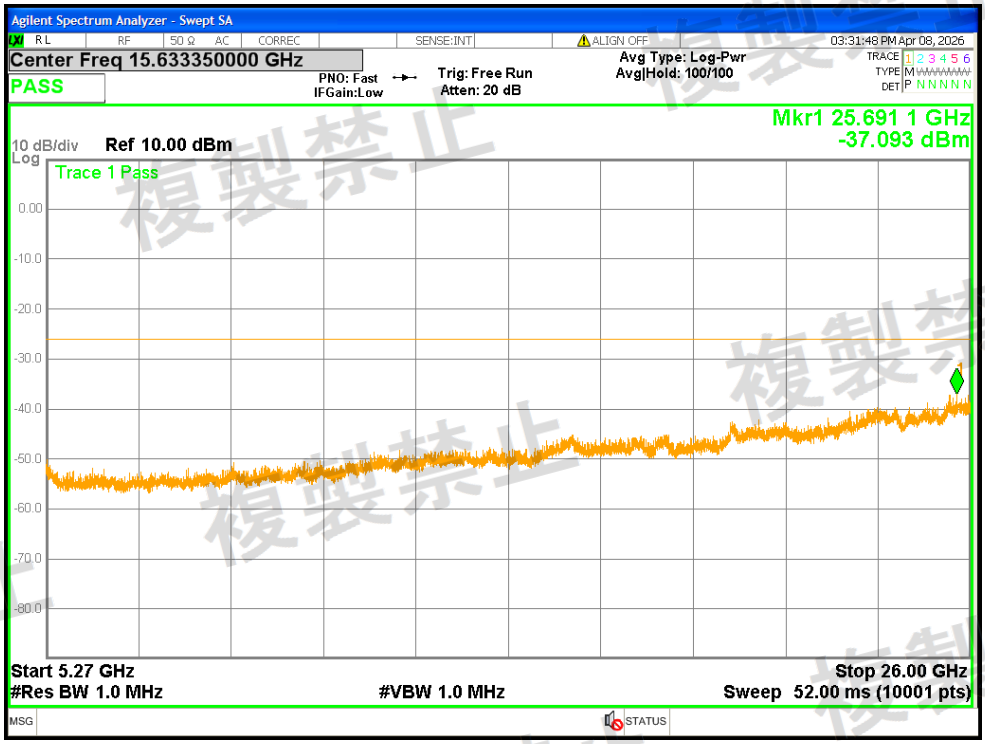


Tx. Spurious NVNT ac20 5240MHz Ant1 @ 30MHz-5142MHz

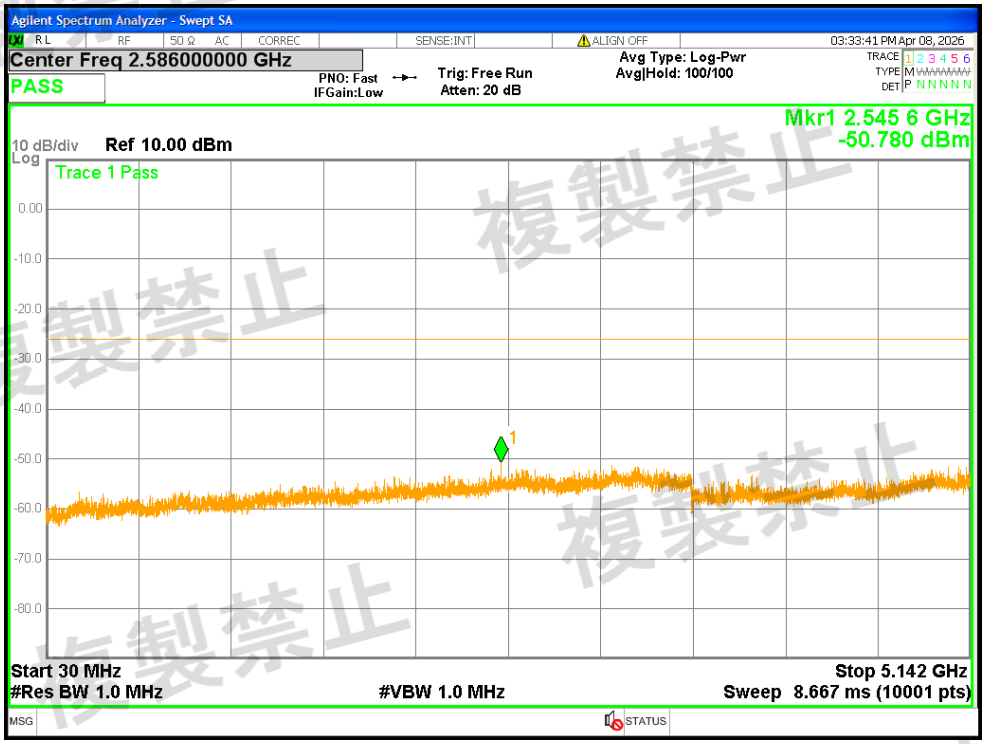


Tx. Spurious NVNT ac20 5240MHz Ant1 @ 5142MHz-5150MHz

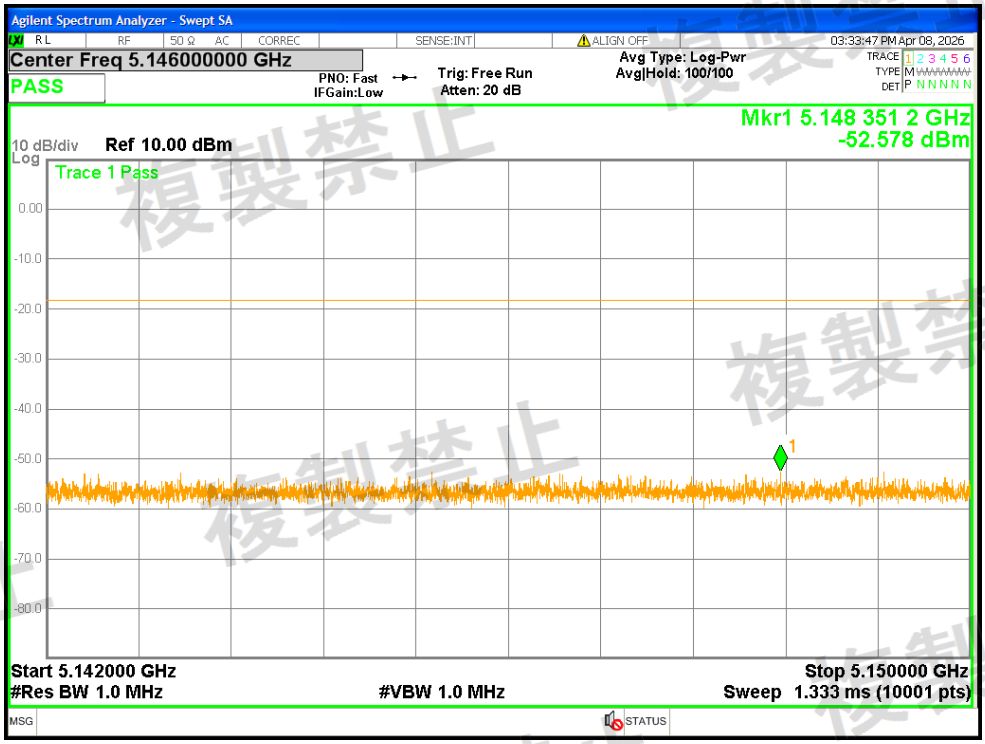


Tx. Spurious NVNT ac20 5240MHz Ant1 @ 5250MHz-5251MHz

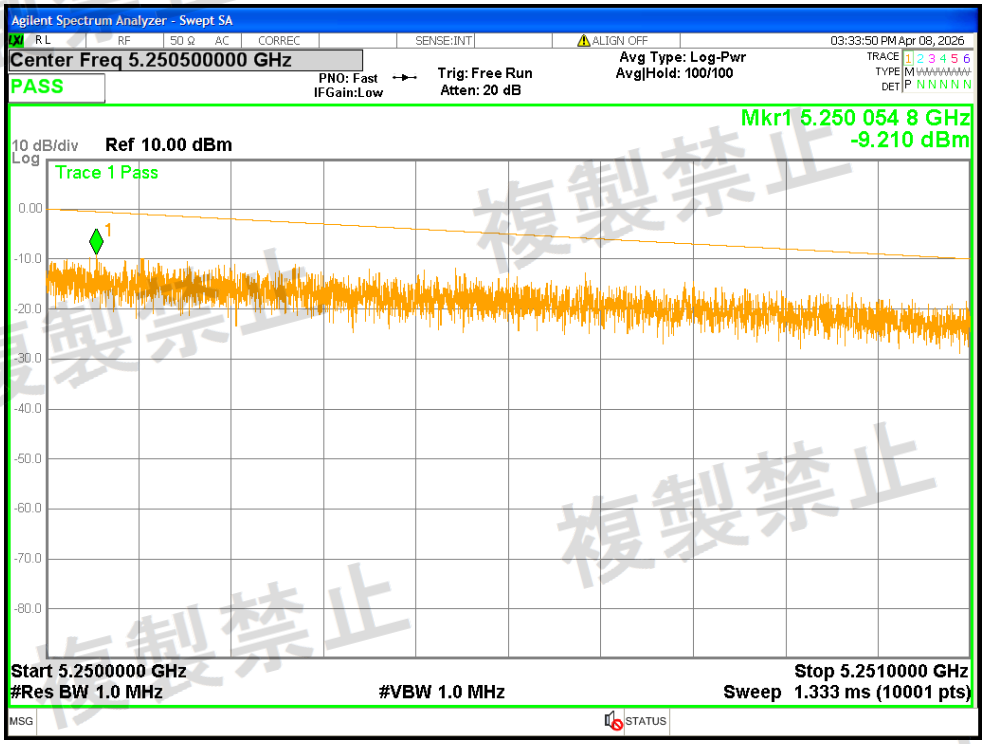


Tx. Spurious NVNT ac20 5240MHz Ant1 @ 5251MHz-5260MHz

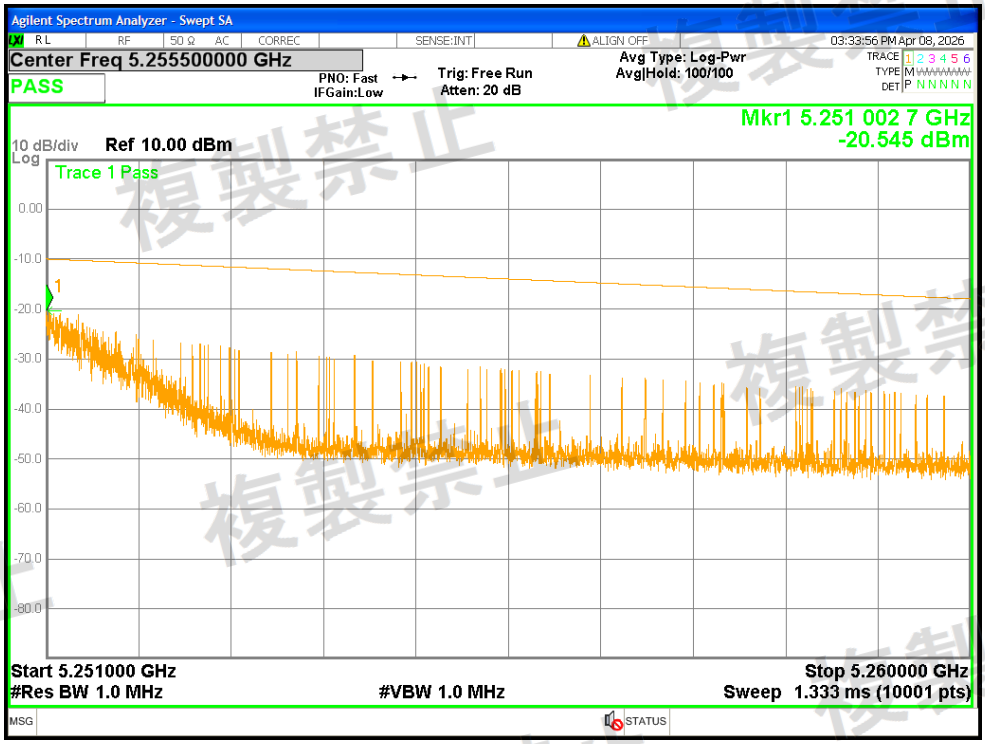


Tx. Spurious NVNT ac20 5240MHz Ant1 @ 5260MHz-5266.7MHz

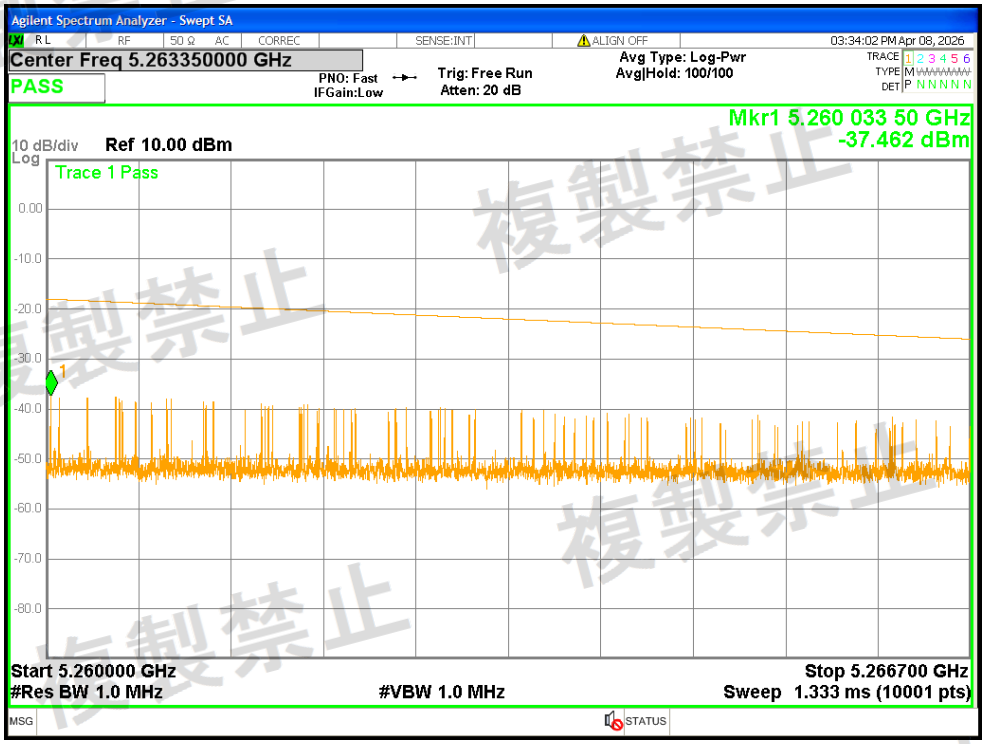


Tx. Spurious NVNT ac20 5240MHz Ant1 @ 5266.7MHz-26000MHz

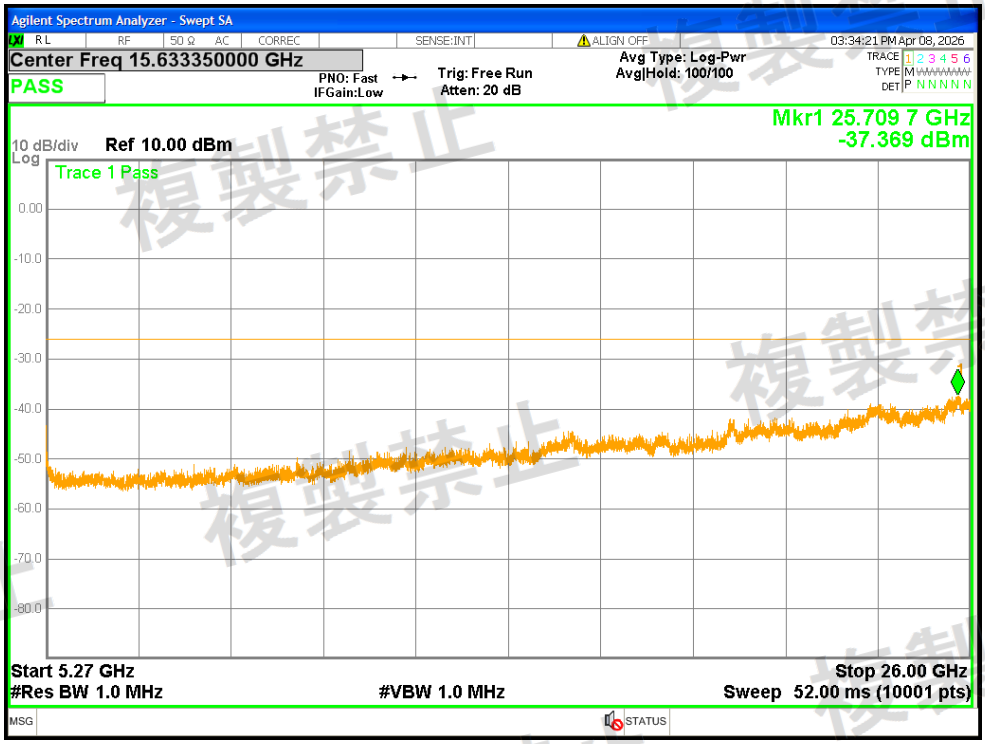


Tx. Spurious NVNT ac20 5240MHz Ant2 @ 30MHz-5142MHz

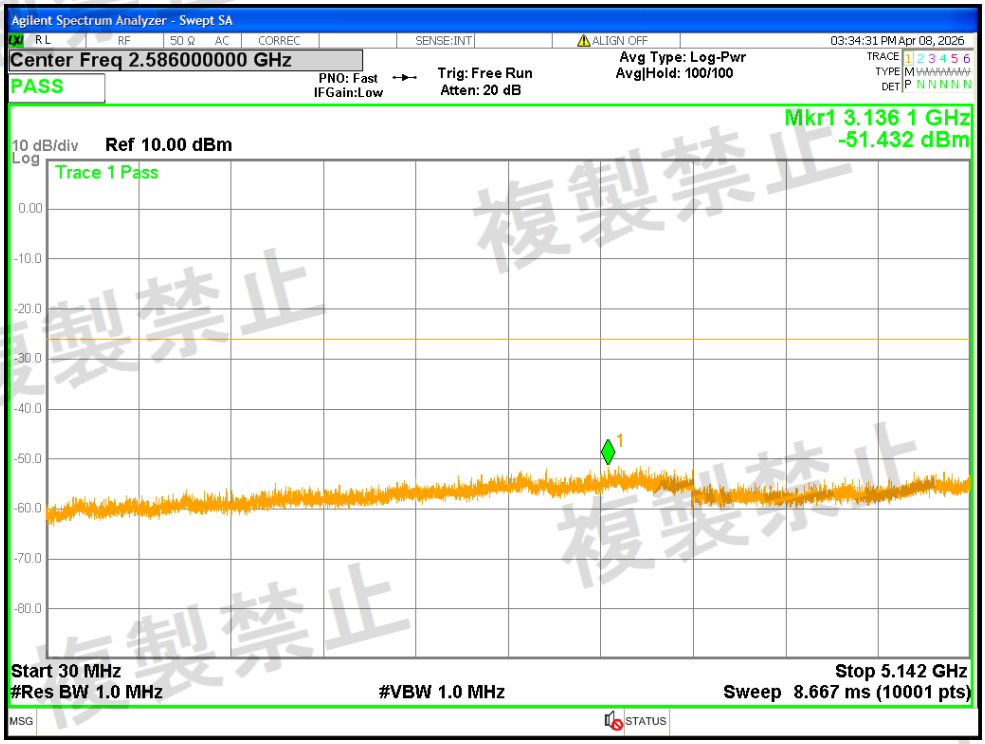


Tx. Spurious NVNT ac20 5240MHz Ant2 @ 5142MHz-5150MHz

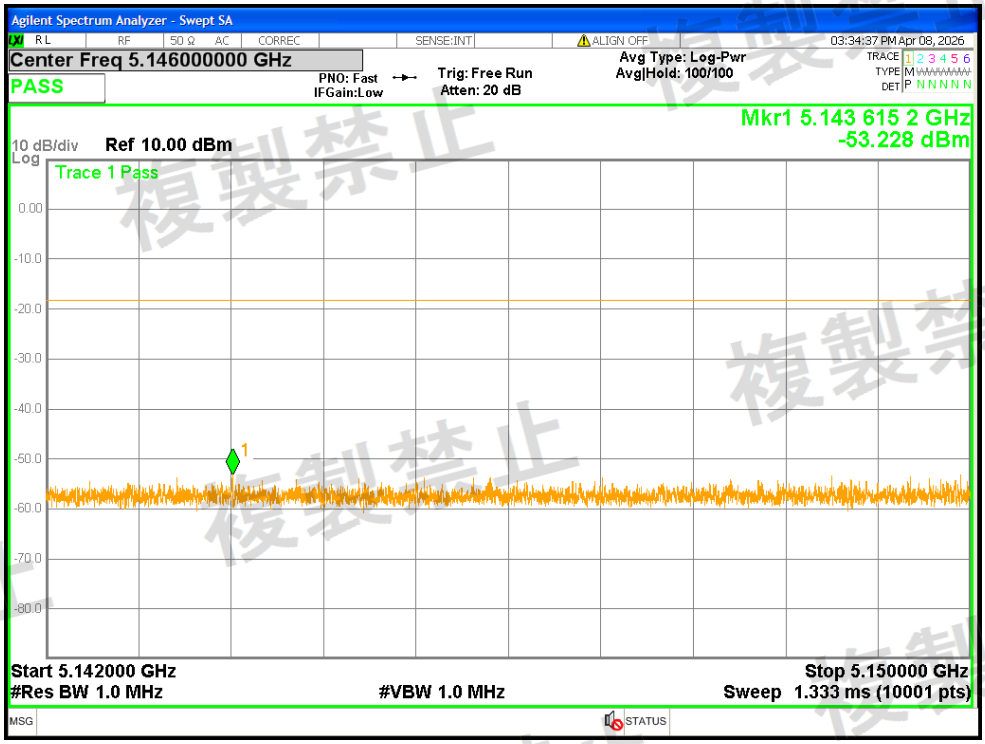


Tx. Spurious NVNT ac20 5240MHz Ant2 @ 5250MHz-5251MHz

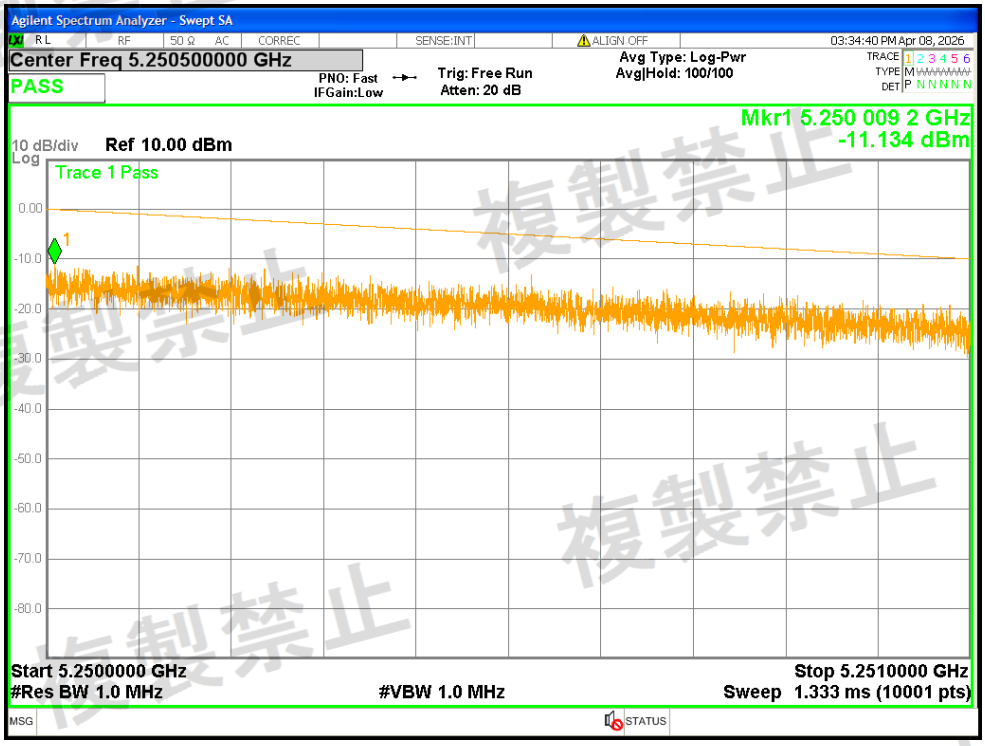


Tx. Spurious NVNT ac20 5240MHz Ant2 @ 5251MHz-5260MHz

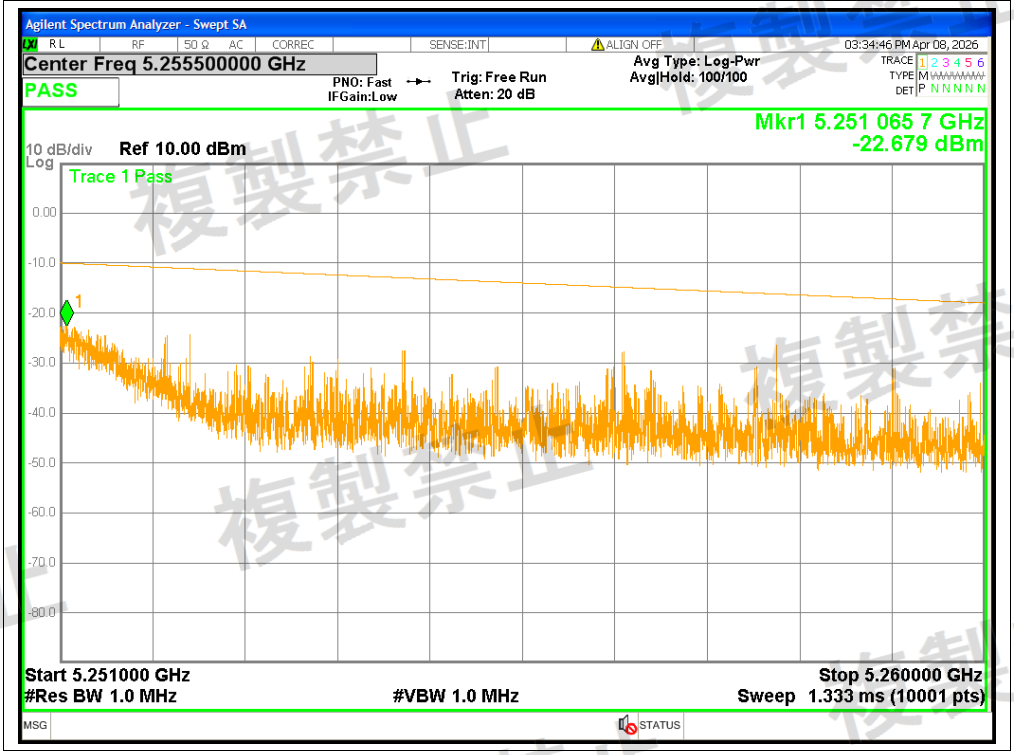


Tx. Spurious NVNT ac20 5240MHz Ant2 @ 5260MHz-5266.7MHz

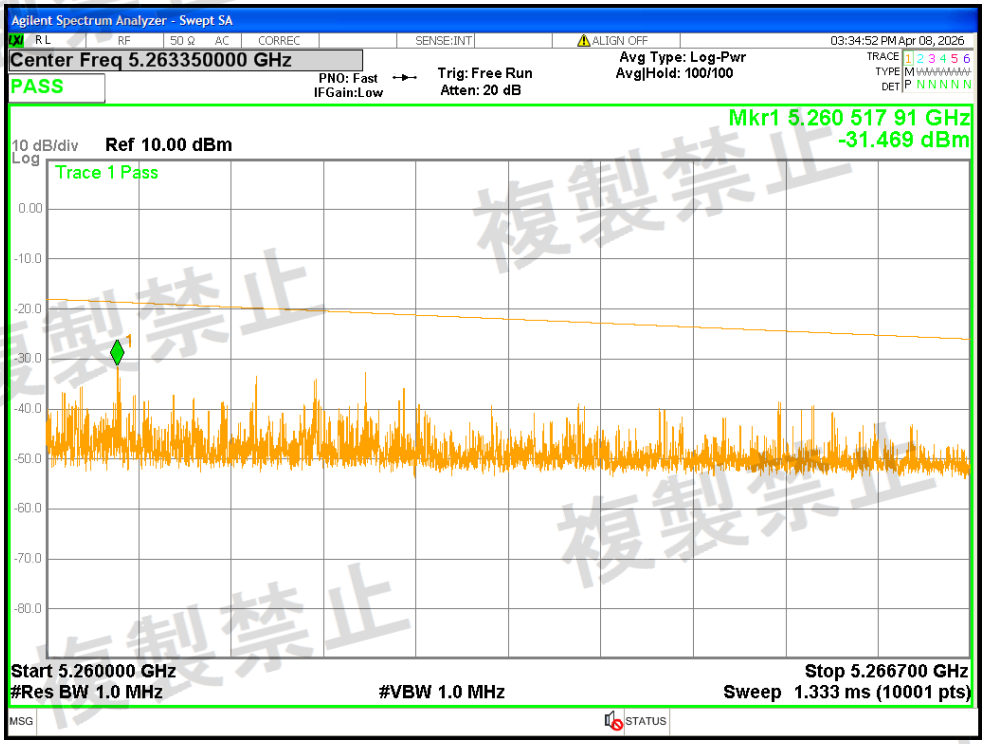


Tx. Spurious NVNT ac20 5240MHz Ant2 @ 5266.7MHz-26000MHz

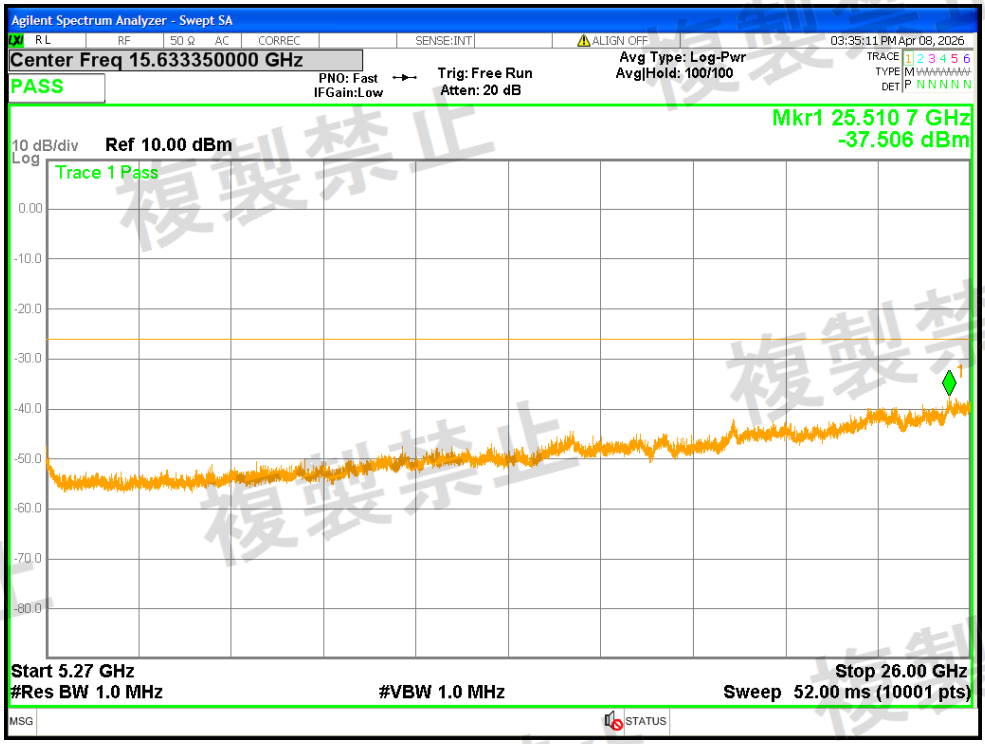


Tx. Spurious NVNT ac40 5190MHz Ant1 @ 30MHz-5141.6MHz

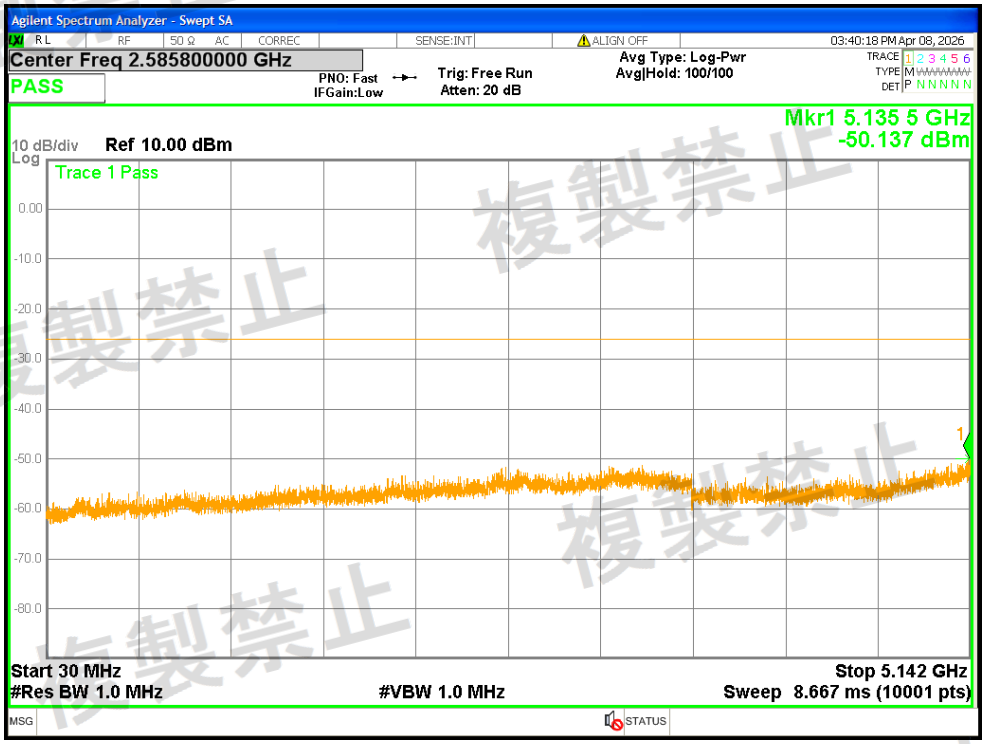


Tx. Spurious NVNT ac40 5190MHz Ant1 @ 5141.6MHz-5150MHz

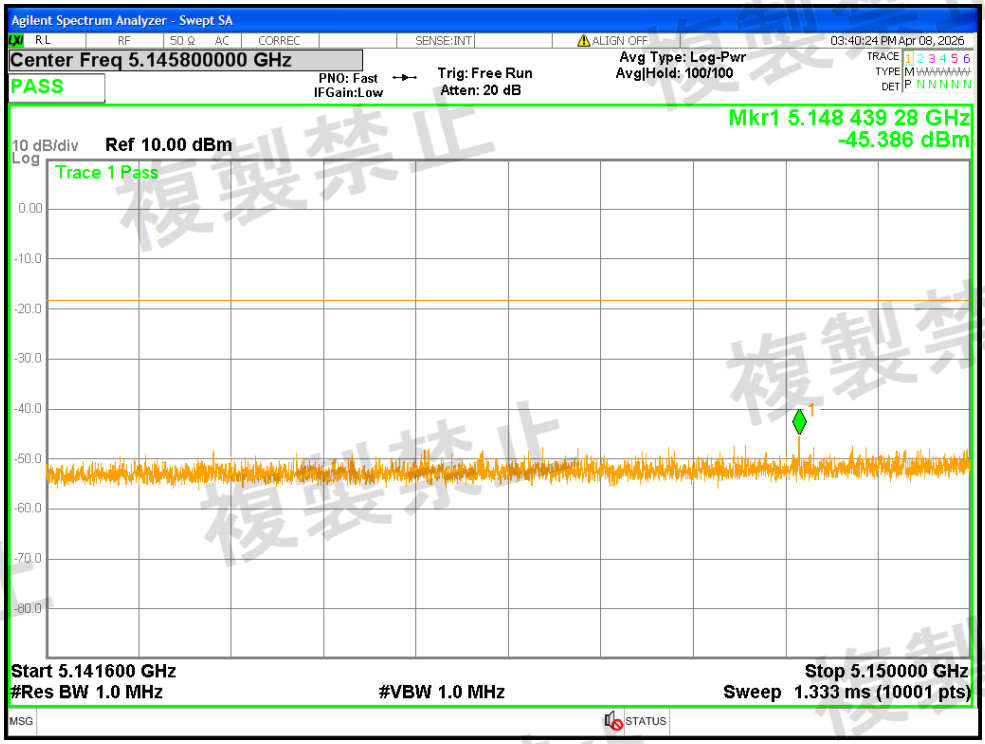


Tx. Spurious NVNT ac40 5190MHz Ant1 @ 5250MHz-5251MHz

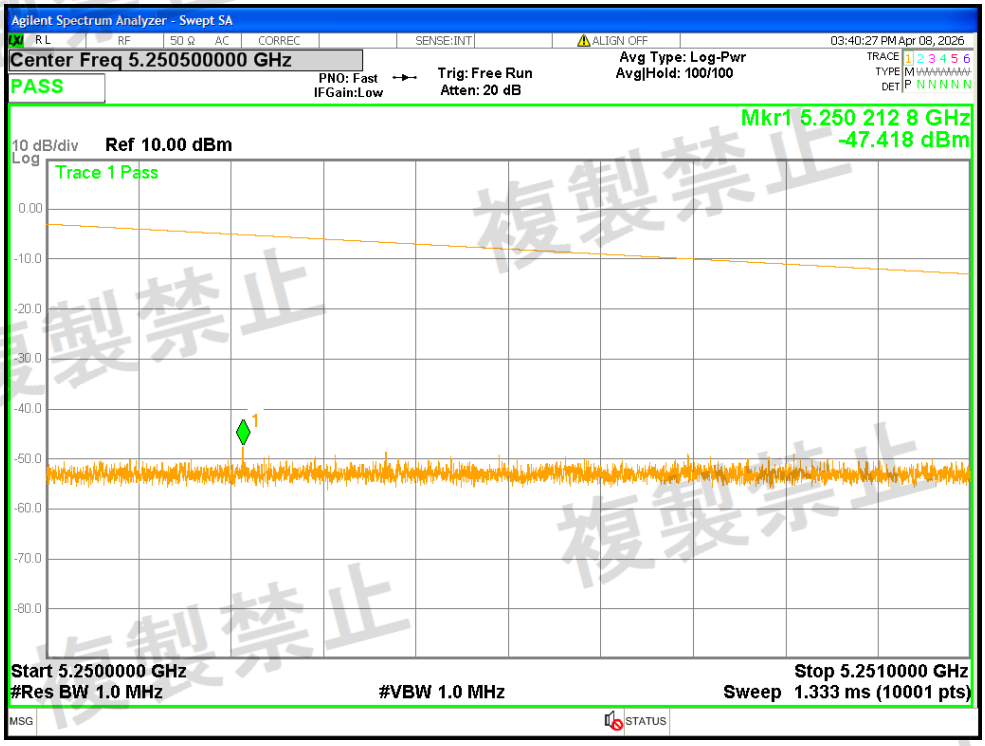


Tx. Spurious NVNT ac40 5190MHz Ant1 @ 5251MHz-5270MHz

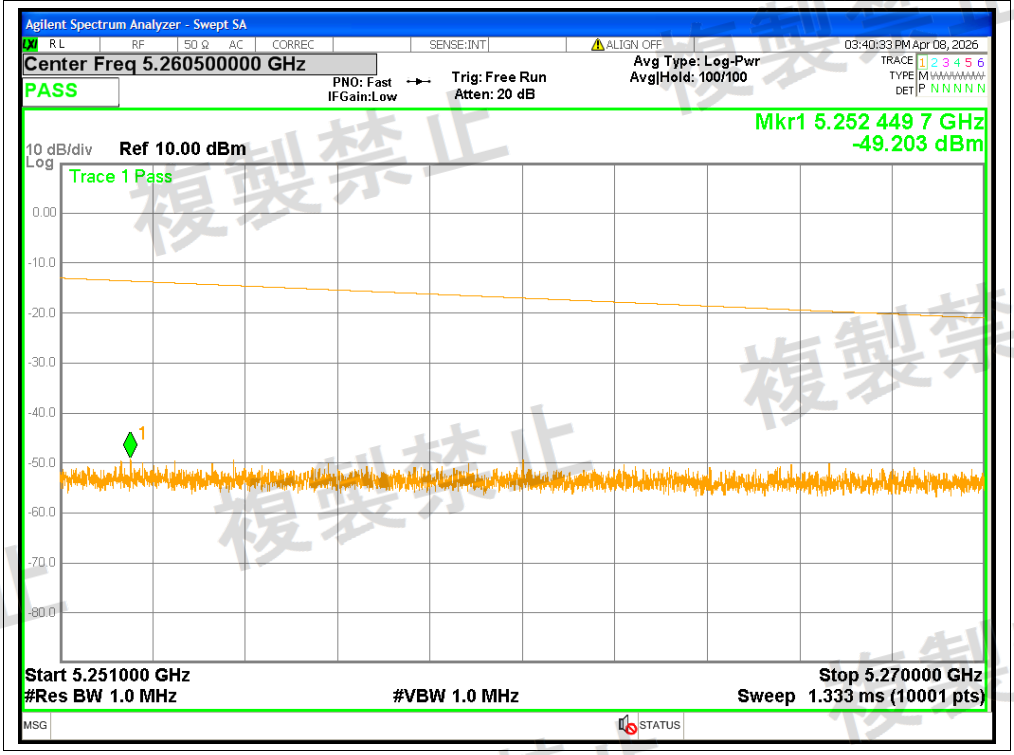


Tx. Spurious NVNT ac40 5190MHz Ant1 @ 5270MHz-5278.4MHz

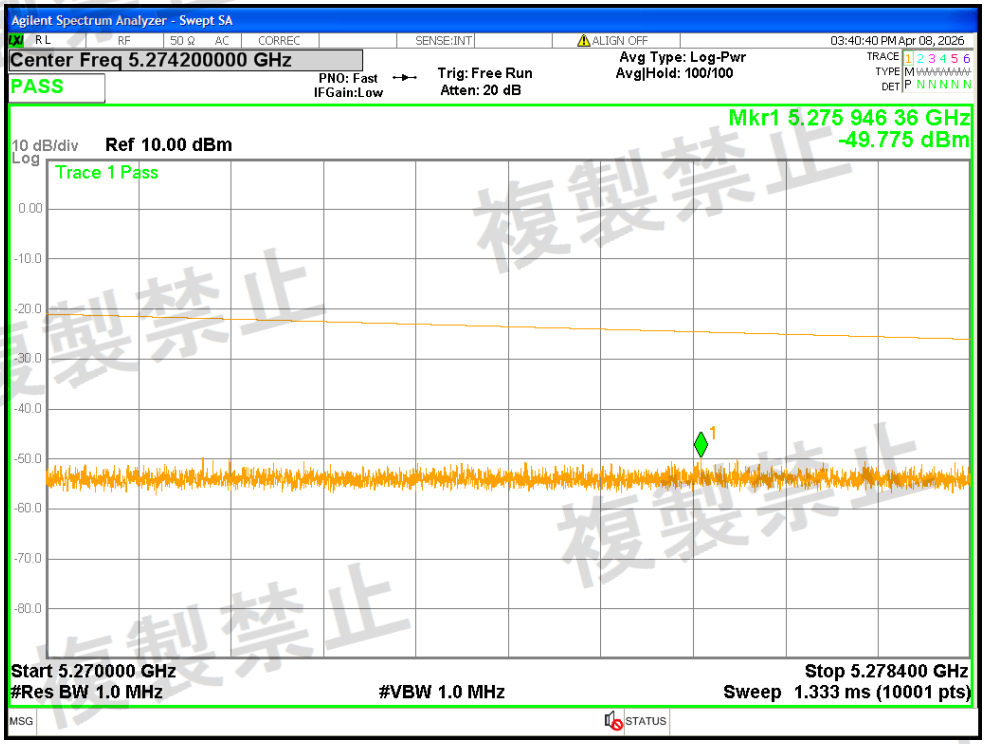


Tx. Spurious NVNT ac40 5190MHz Ant1 @ 5278.4MHz-26000MHz

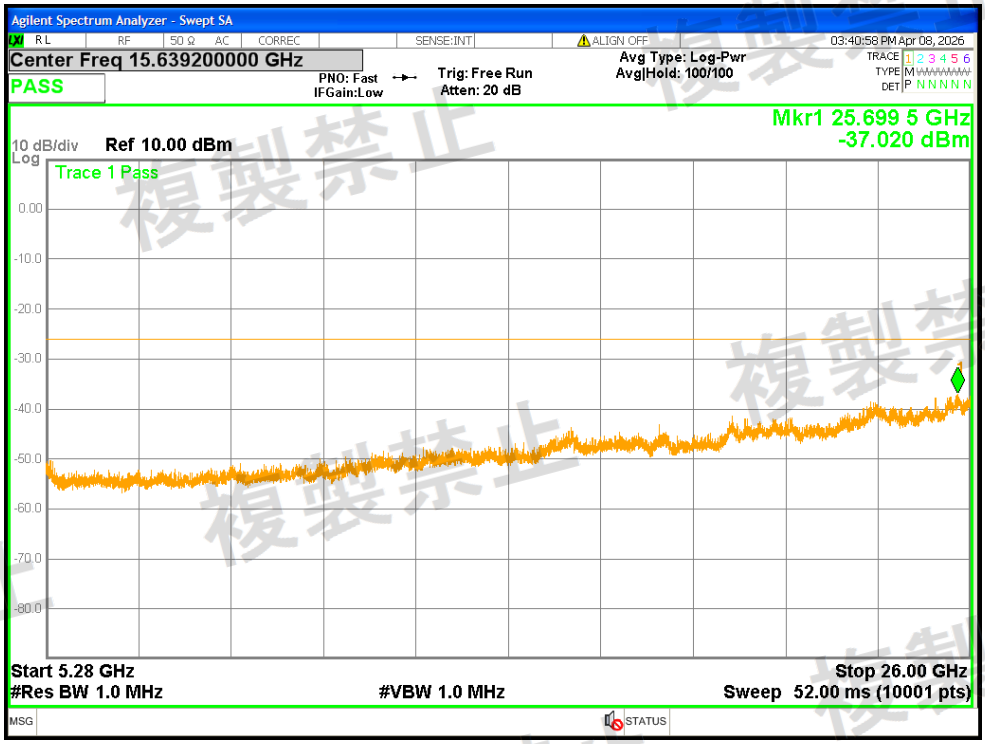


Tx. Spurious NVNT ac40 5190MHz Ant2 @ 30MHz-5141.6MHz

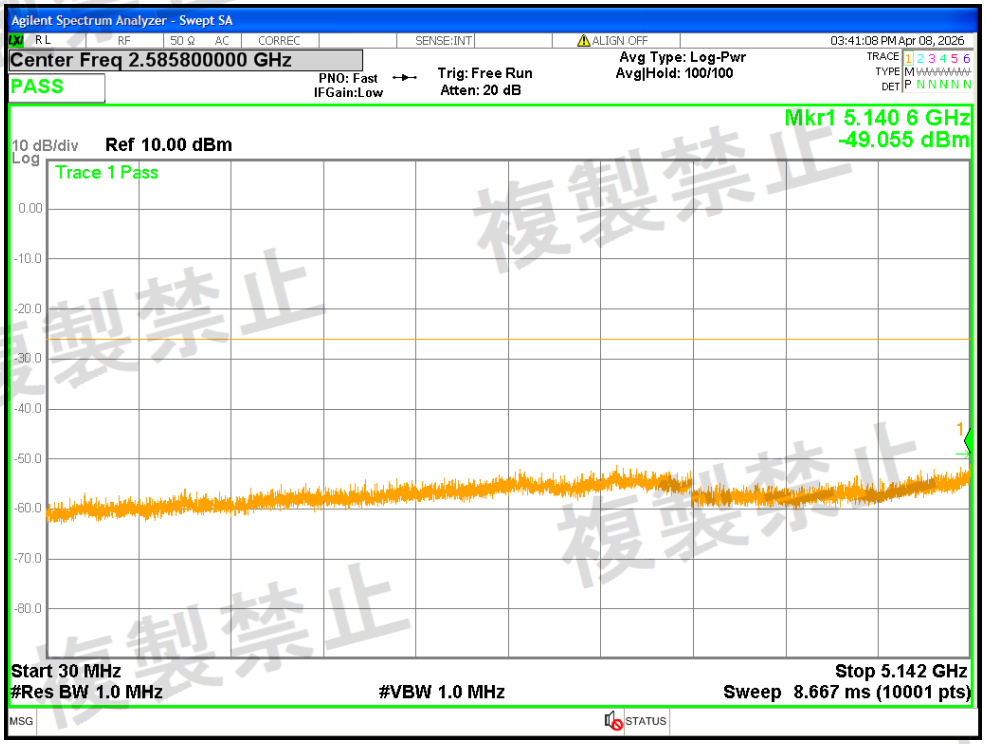


Tx. Spurious NVNT ac40 5190MHz Ant2 @ 5141.6MHz-5150MHz

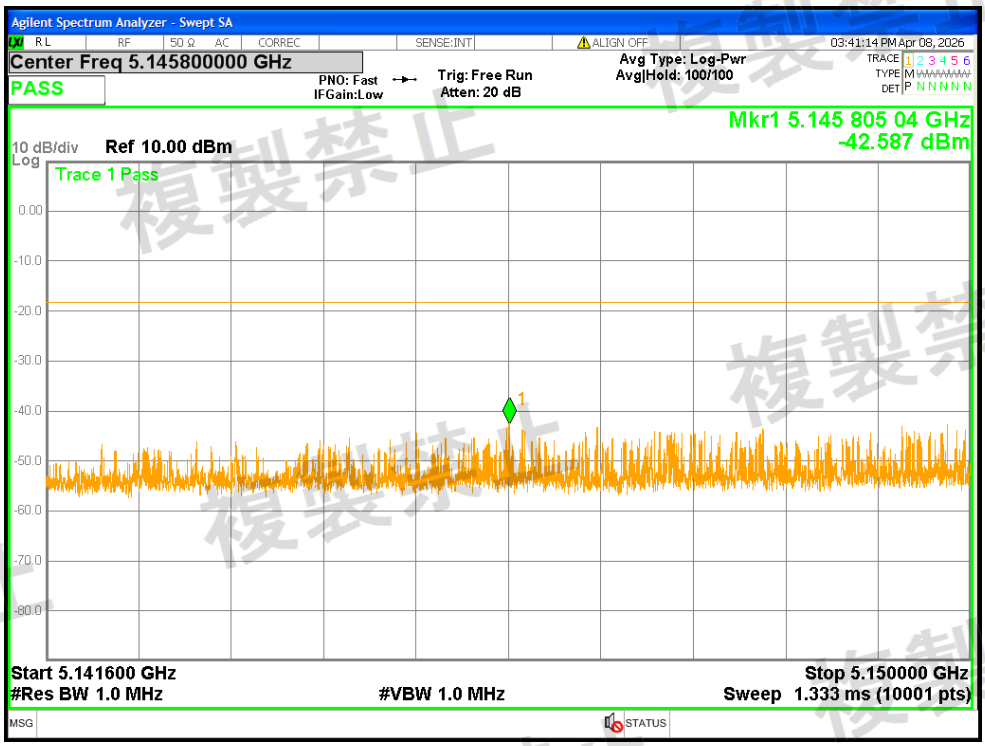


Tx. Spurious NVNT ac40 5190MHz Ant2 @ 5250MHz-5251MHz

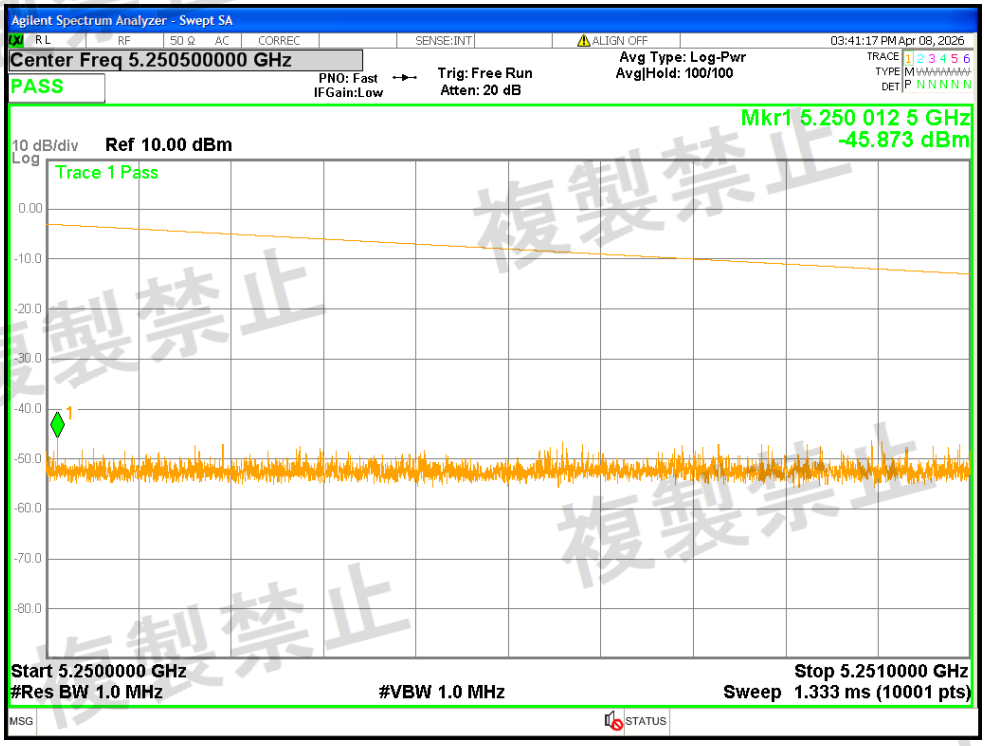


Tx. Spurious NVNT ac40 5190MHz Ant2 @ 5251MHz-5270MHz

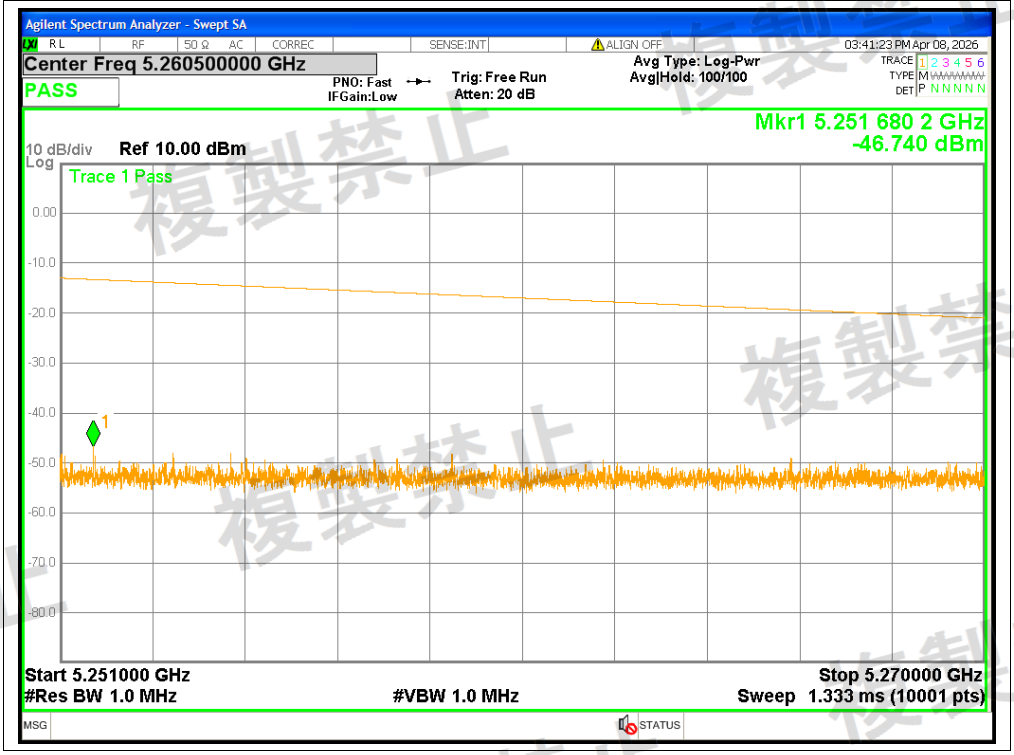


Tx. Spurious NVNT ac40 5190MHz Ant2 @ 5270MHz-5278.4MHz

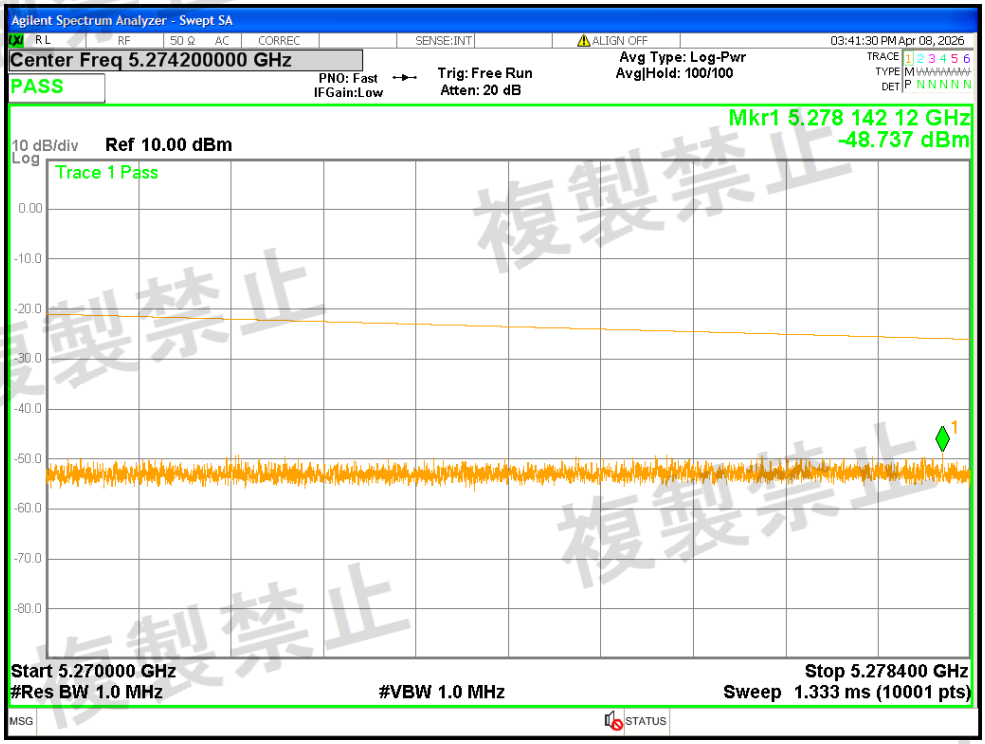


Tx. Spurious NVNT ac40 5190MHz Ant2 @ 5278.4MHz-26000MHz

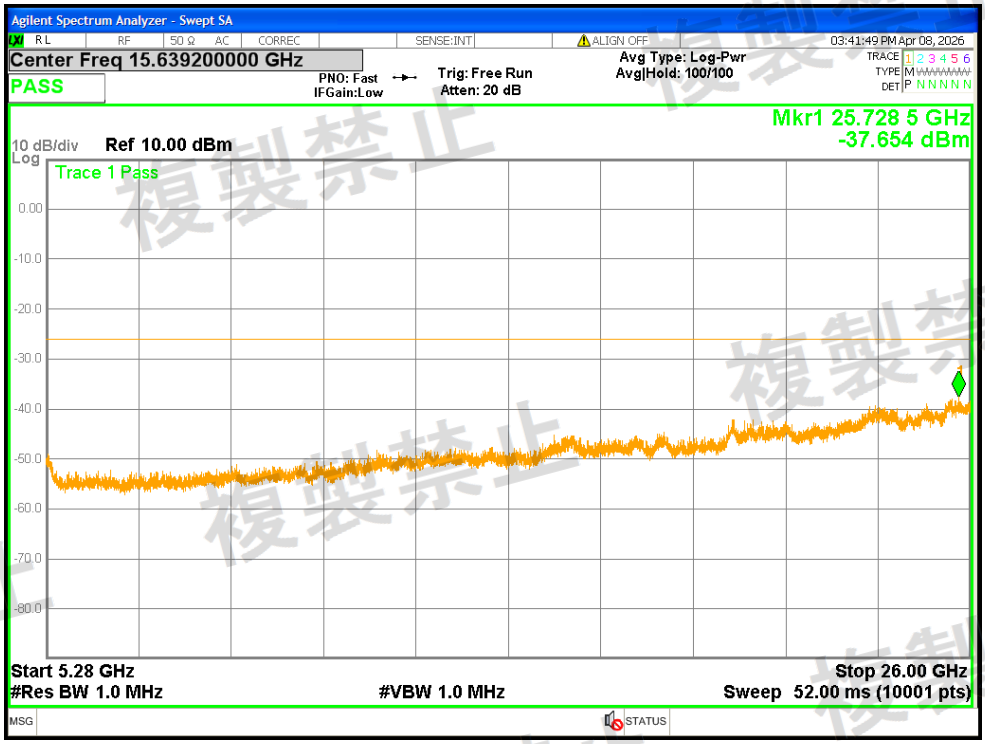


Tx. Spurious NVNT ac40 5230MHz Ant1 @ 30MHz-5141.6MHz

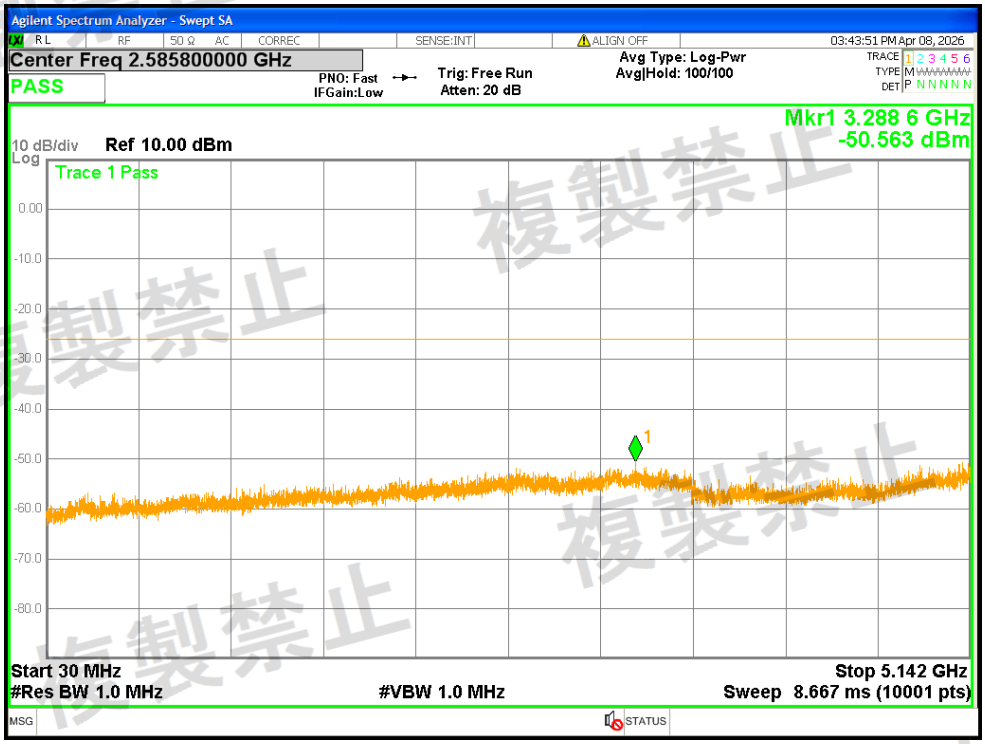


Tx. Spurious NVNT ac40 5230MHz Ant1 @ 5141.6MHz-5150MHz

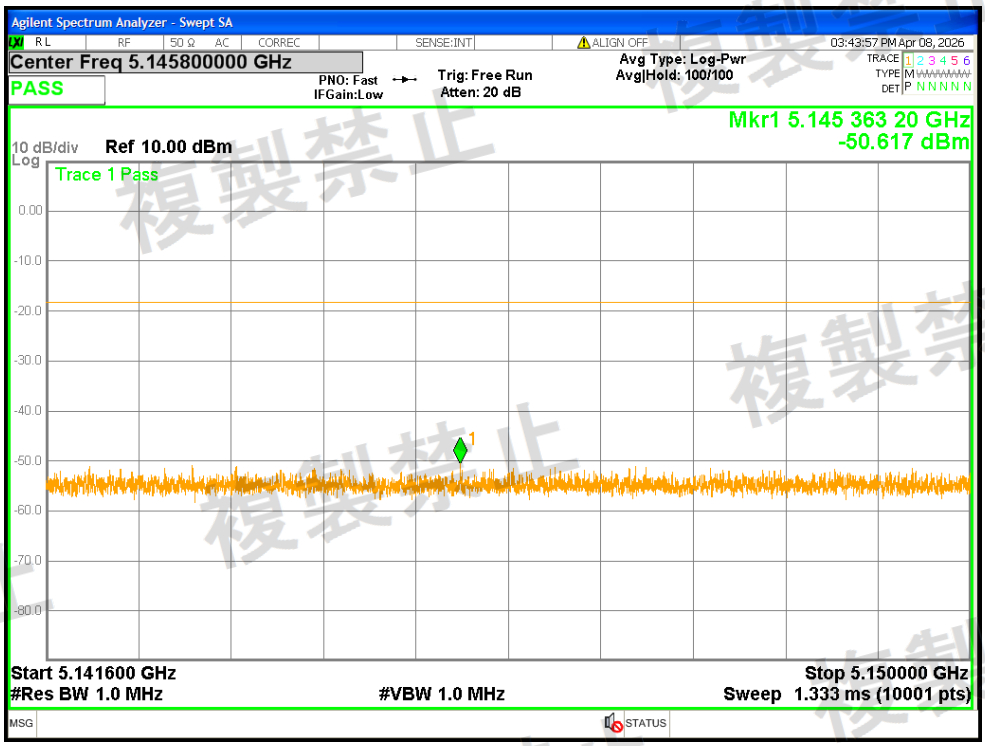


Tx. Spurious NVNT ac40 5230MHz Ant1 @ 5250MHz-5251MHz

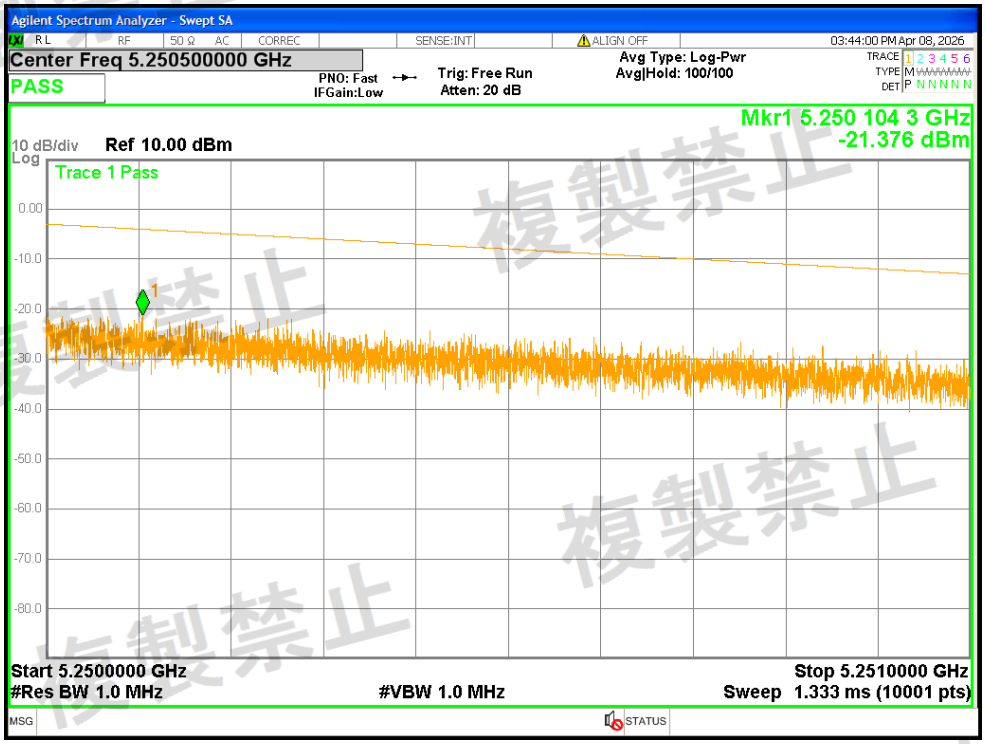


Tx. Spurious NVNT ac40 5230MHz Ant1 @ 5251MHz-5270MHz

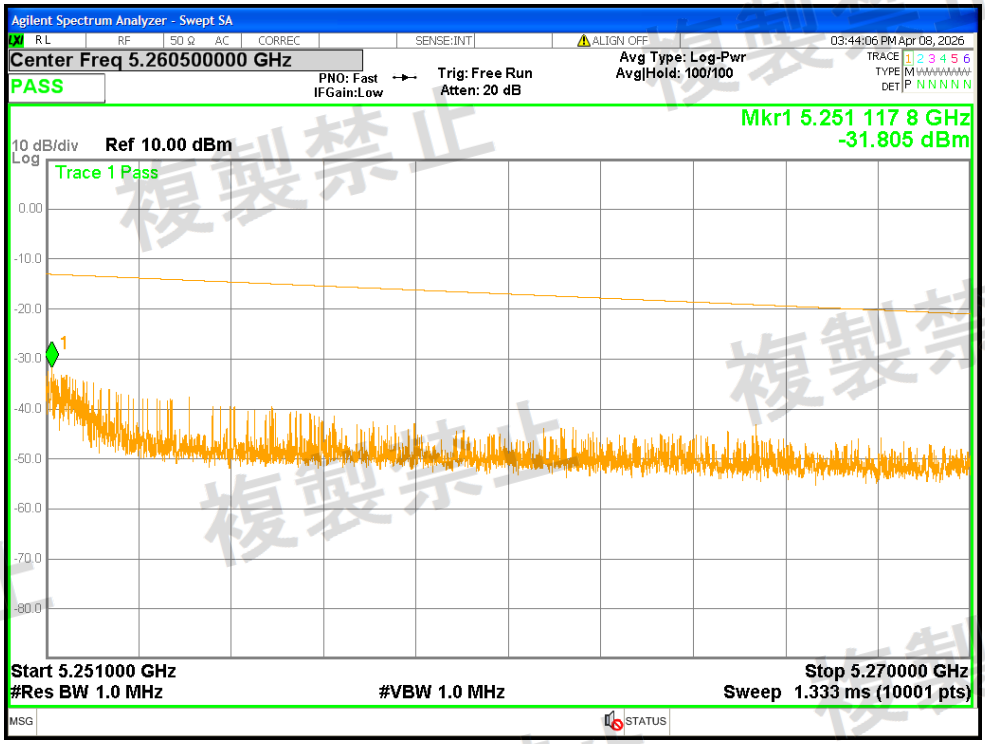


Tx. Spurious NVNT ac40 5230MHz Ant1 @ 5270MHz-5278.4MHz

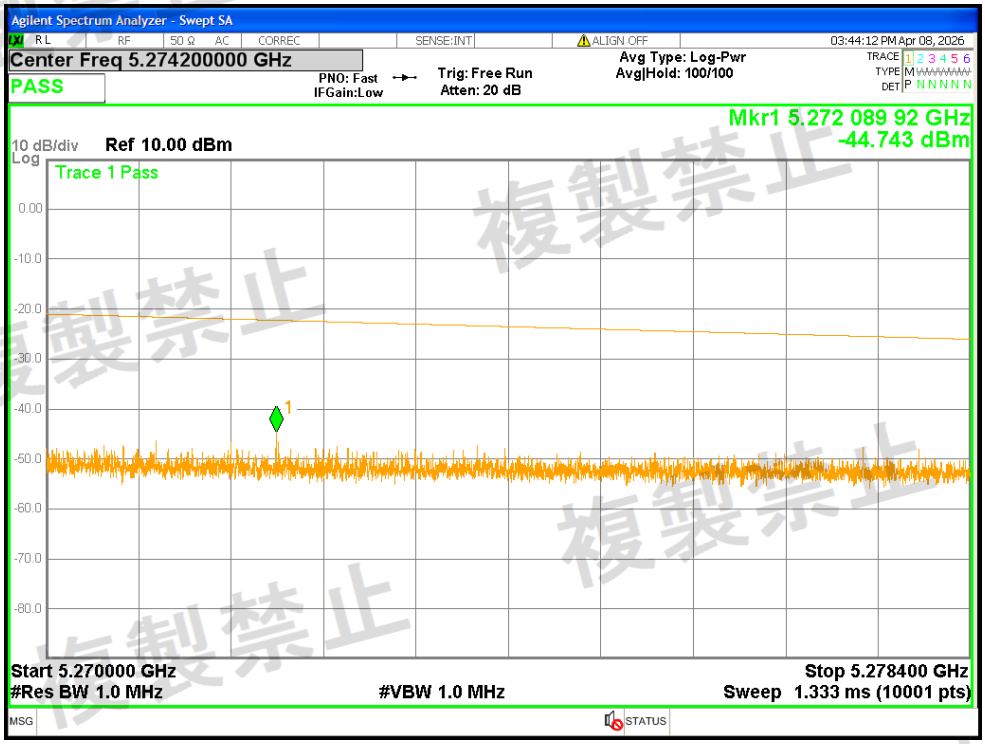


Tx. Spurious NVNT ac40 5230MHz Ant1 @ 5278.4MHz-26000MHz

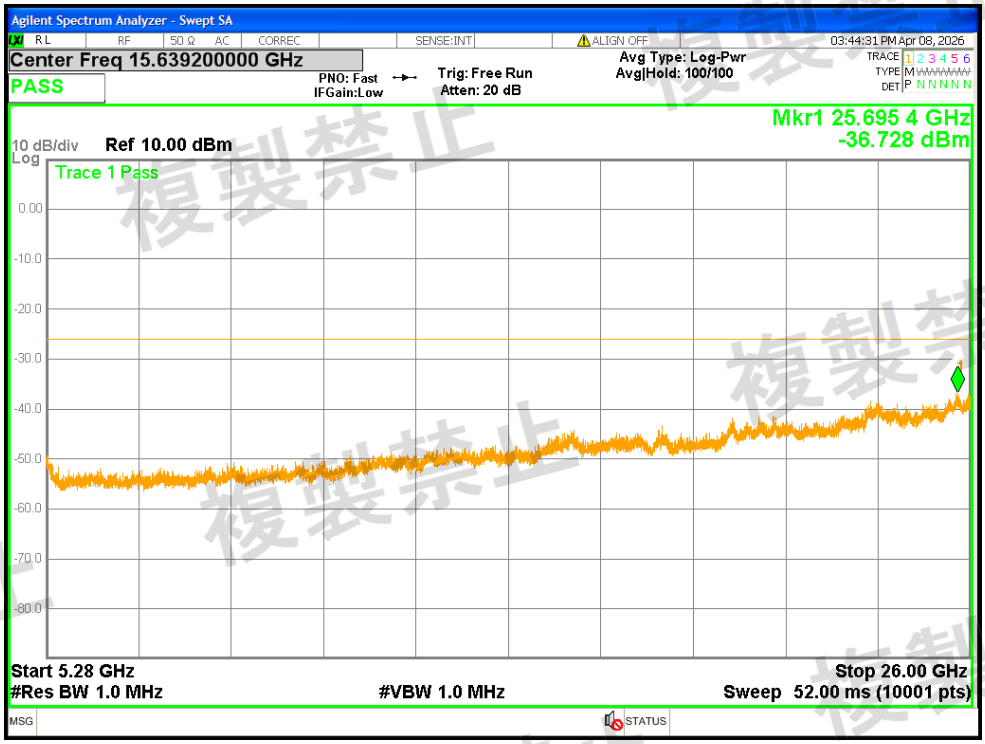


Tx. Spurious NVNT ac40 5230MHz Ant2 @ 30MHz-5141.6MHz

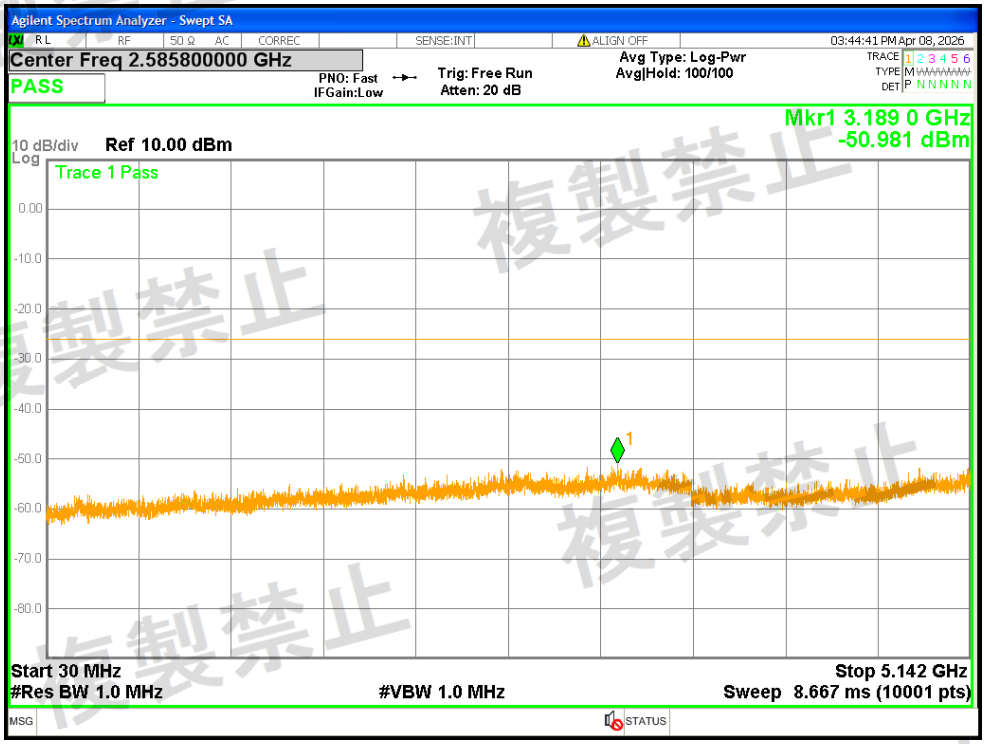


Tx. Spurious NVNT ac40 5230MHz Ant2 @ 5141.6MHz-5150MHz

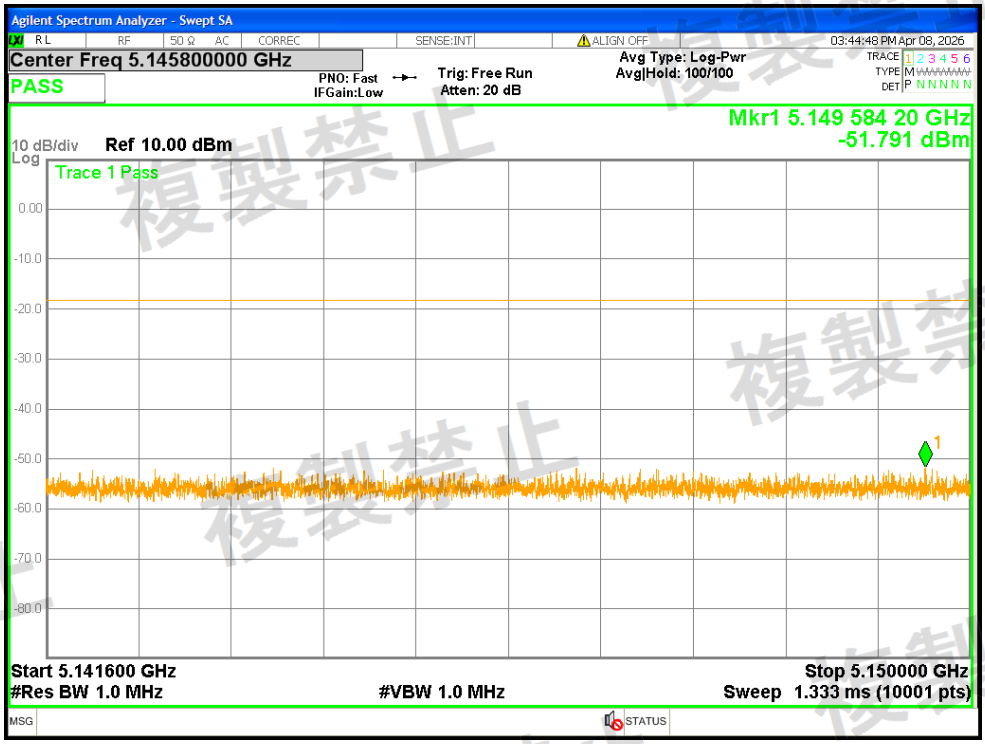


Tx. Spurious NVNT ac40 5230MHz Ant2 @ 5250MHz-5251MHz

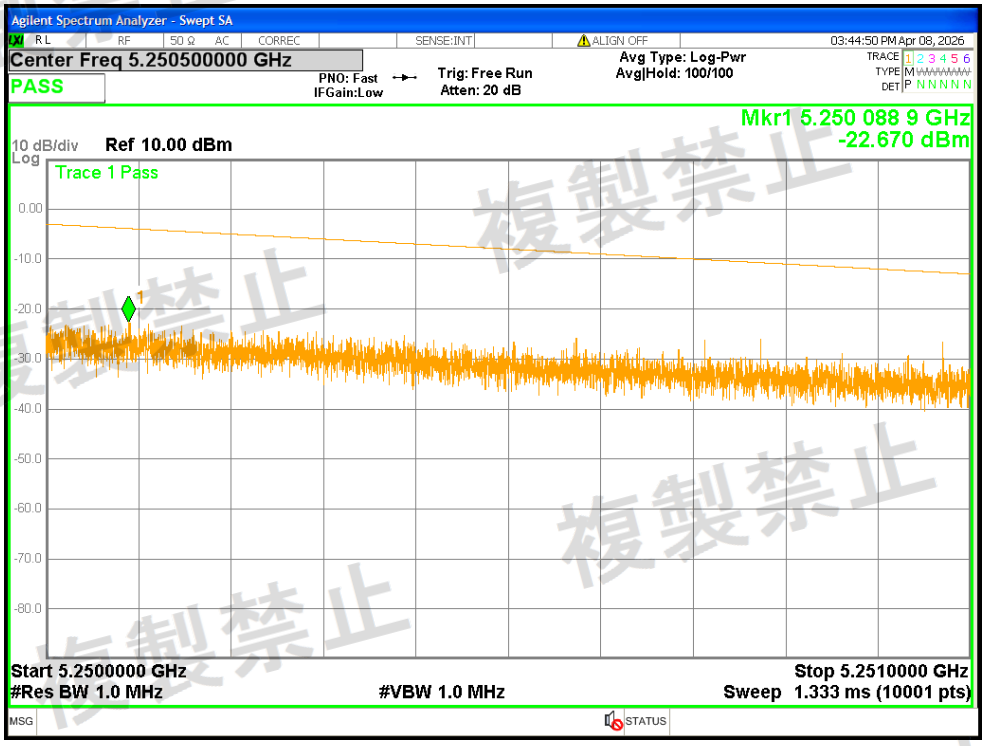


Tx. Spurious NVNT ac40 5230MHz Ant2 @ 5251MHz-5270MHz

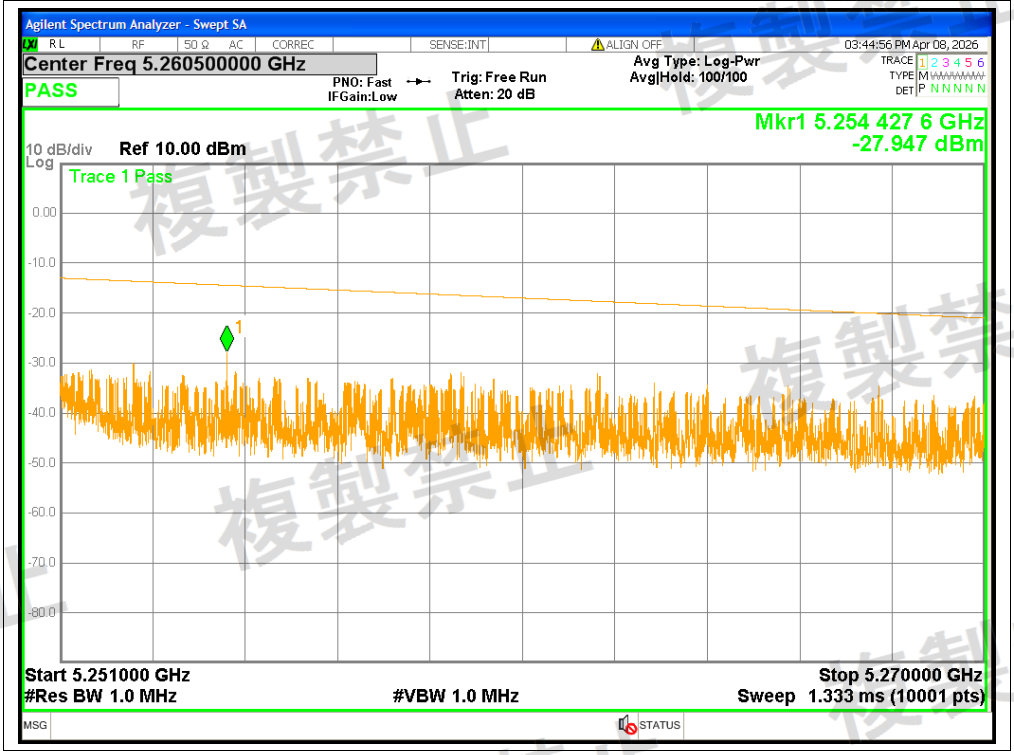


Tx. Spurious NVNT ac40 5230MHz Ant2 @ 5270MHz-5278.4MHz

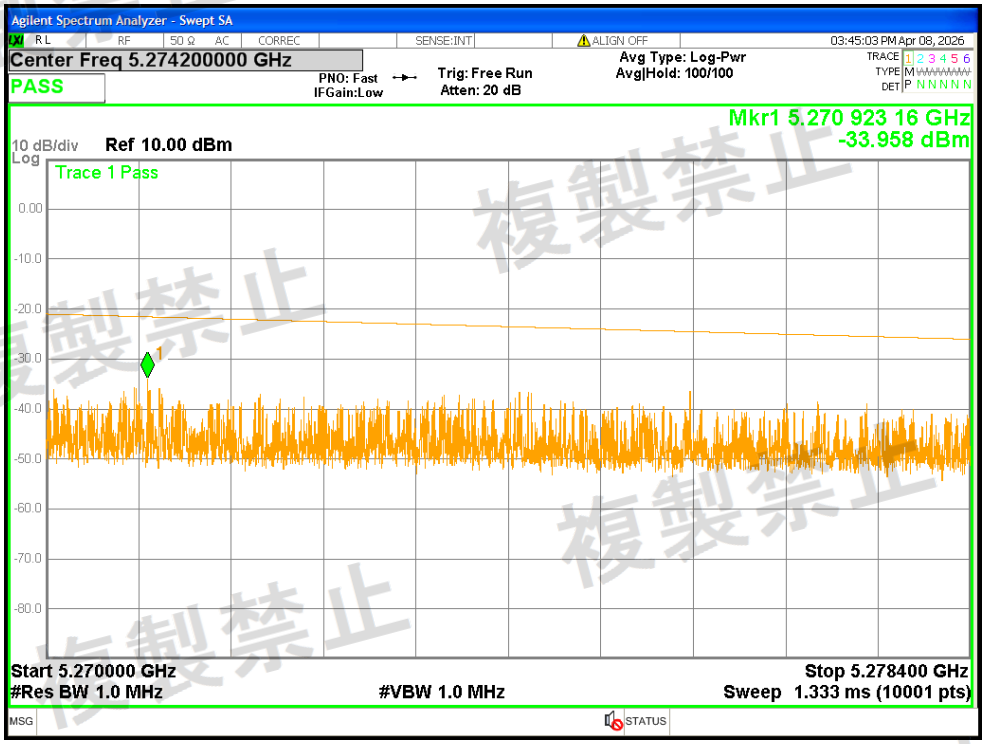


Tx. Spurious NVNT ac40 5230MHz Ant2 @ 5278.4MHz-26000MHz

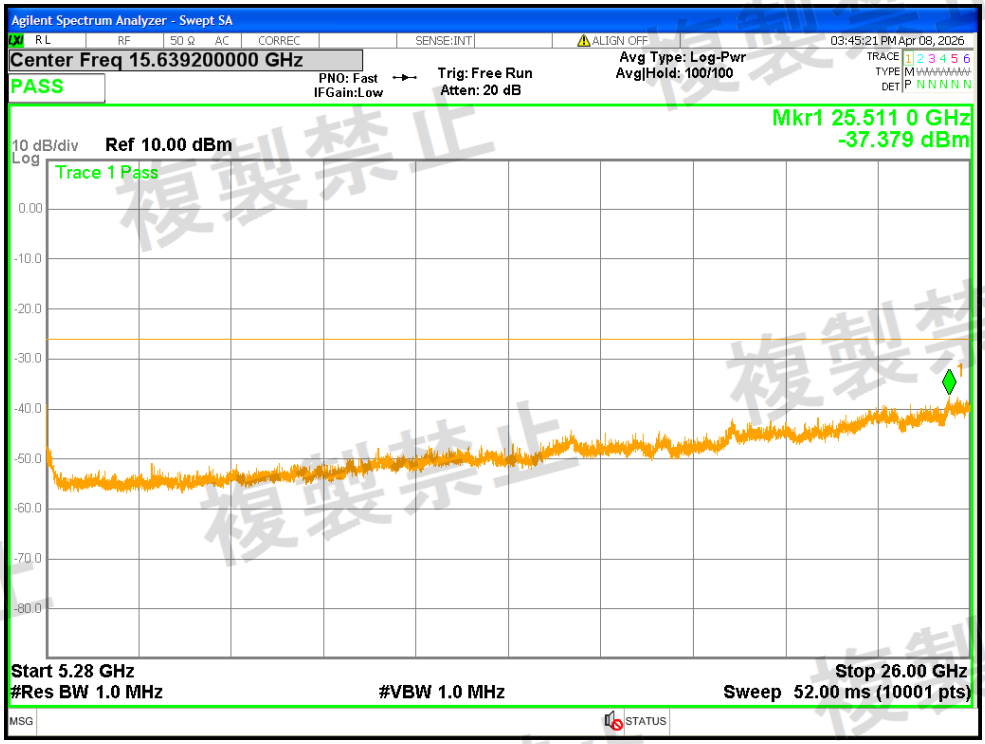


Tx. Spurious NVNT ac80 5210MHz Ant1 @ 30MHz-5123.2MHz

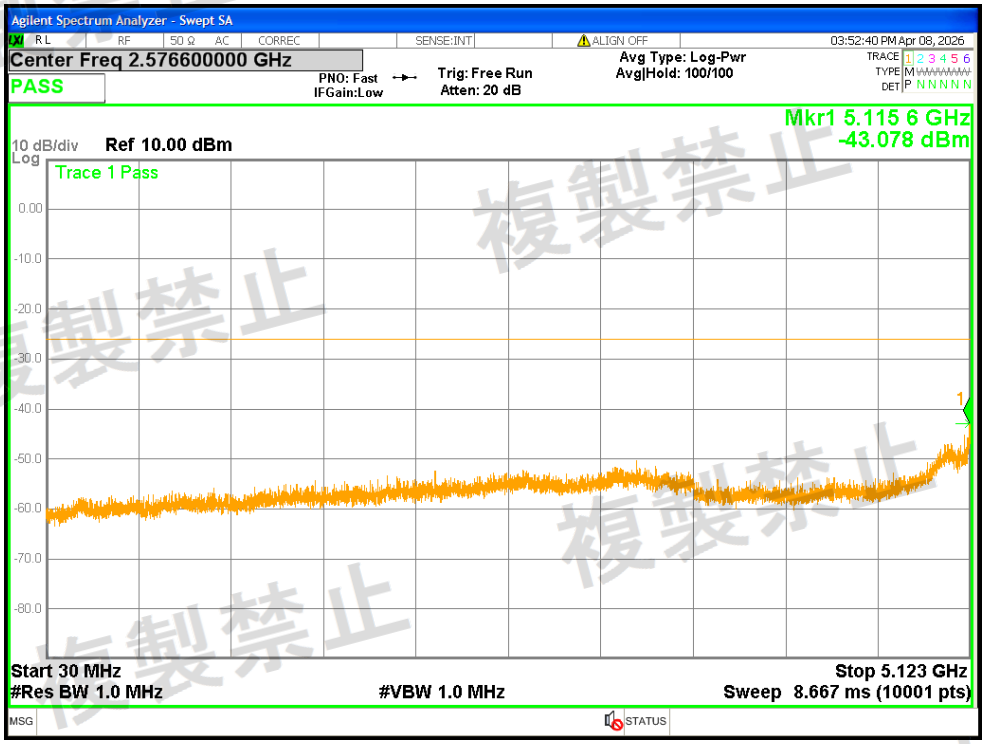


Tx. Spurious NVNT ac80 5210MHz Ant1 @ 5123.2MHz-5150MHz

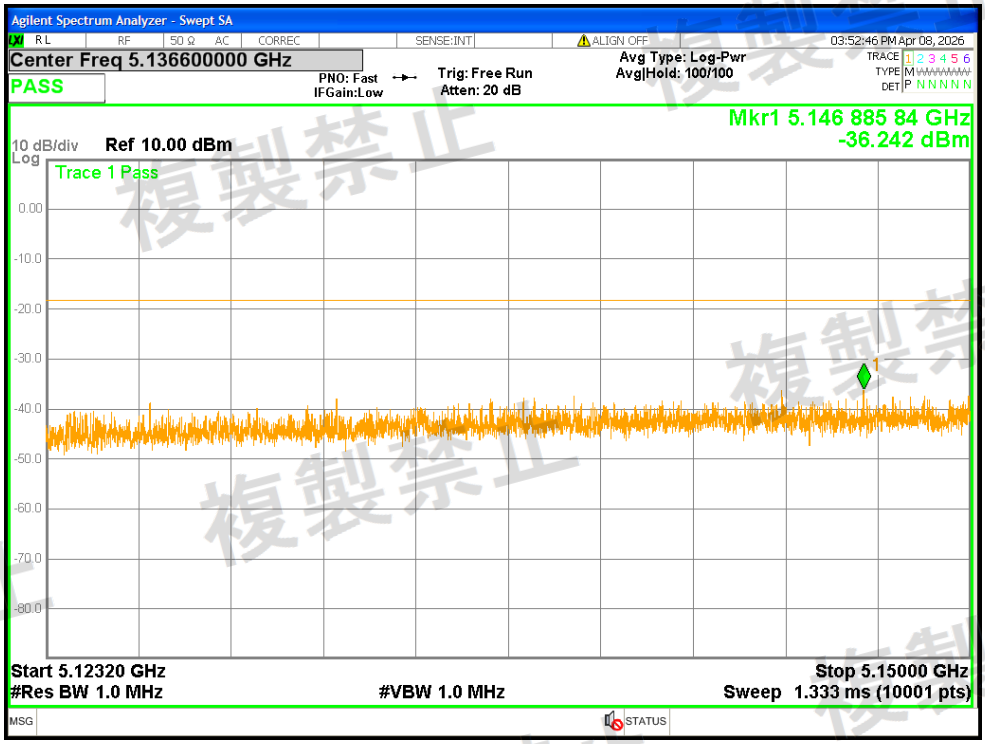


Tx. Spurious NVNT ac80 5210MHz Ant1 @ 5250MHz-5251MHz

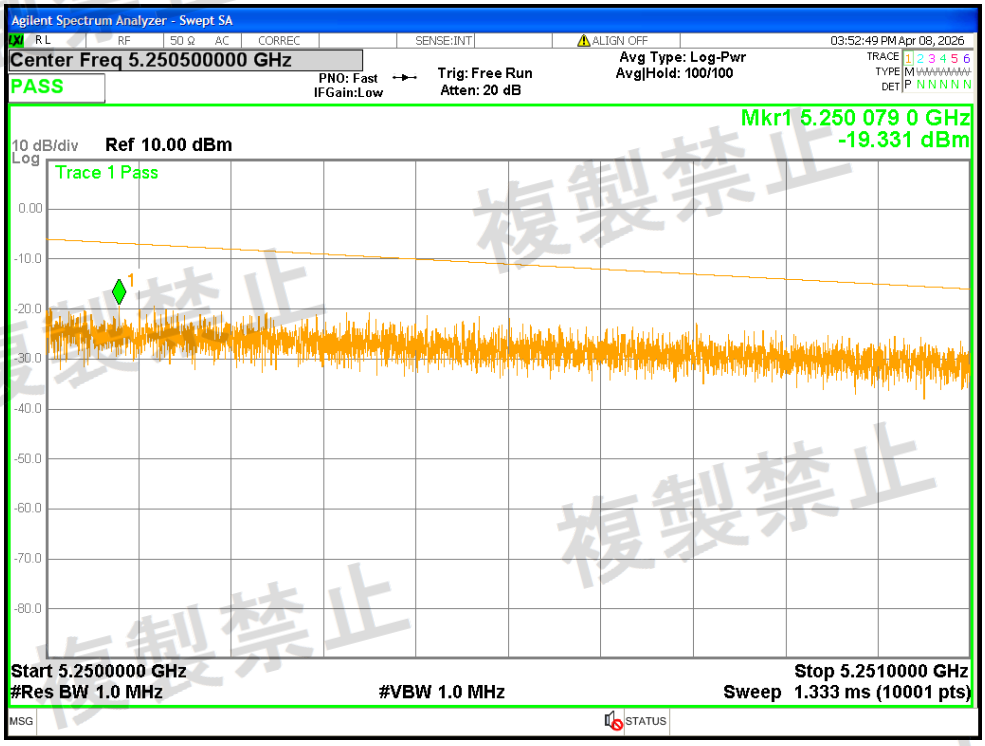


Tx. Spurious NVNT ac80 5210MHz Ant1 @ 5251MHz-5290MHz

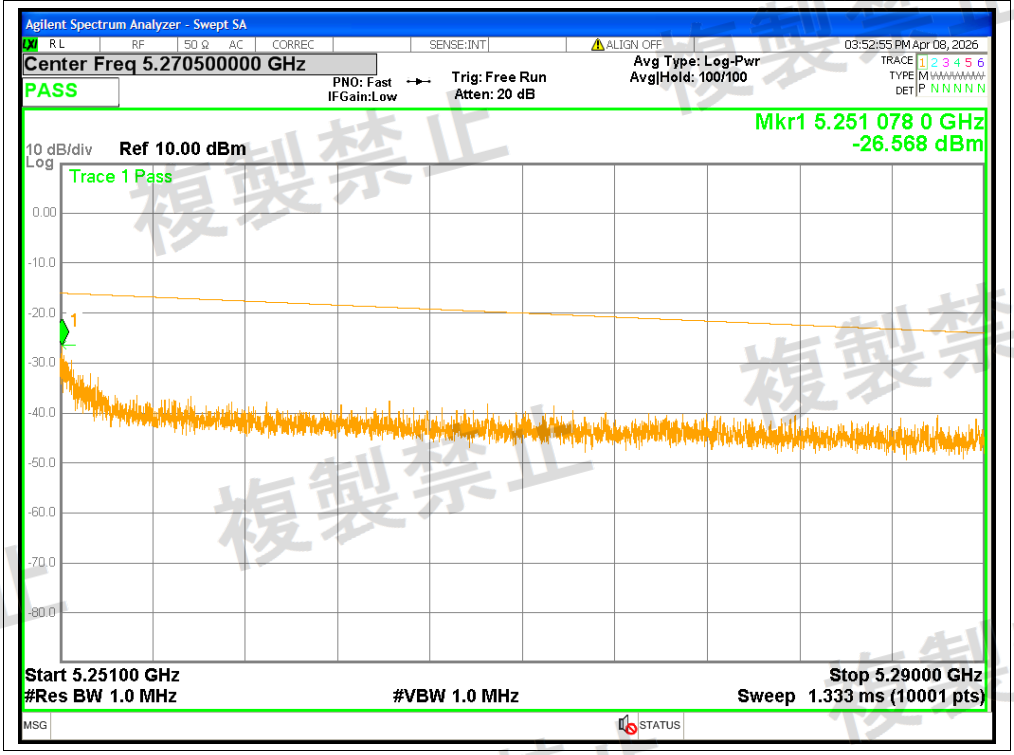


Tx. Spurious NVNT ac80 5210MHz Ant1 @ 5290MHz-5296.7MHz

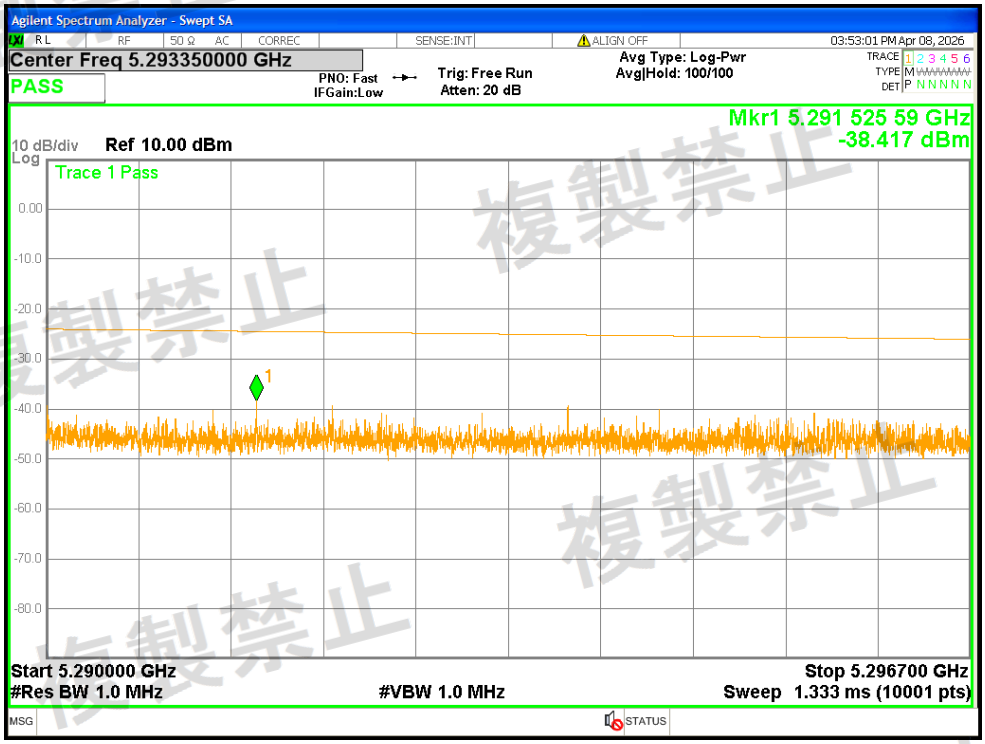


Tx. Spurious NVNT ac80 5210MHz Ant1 @ 5296.7MHz-26000MHz

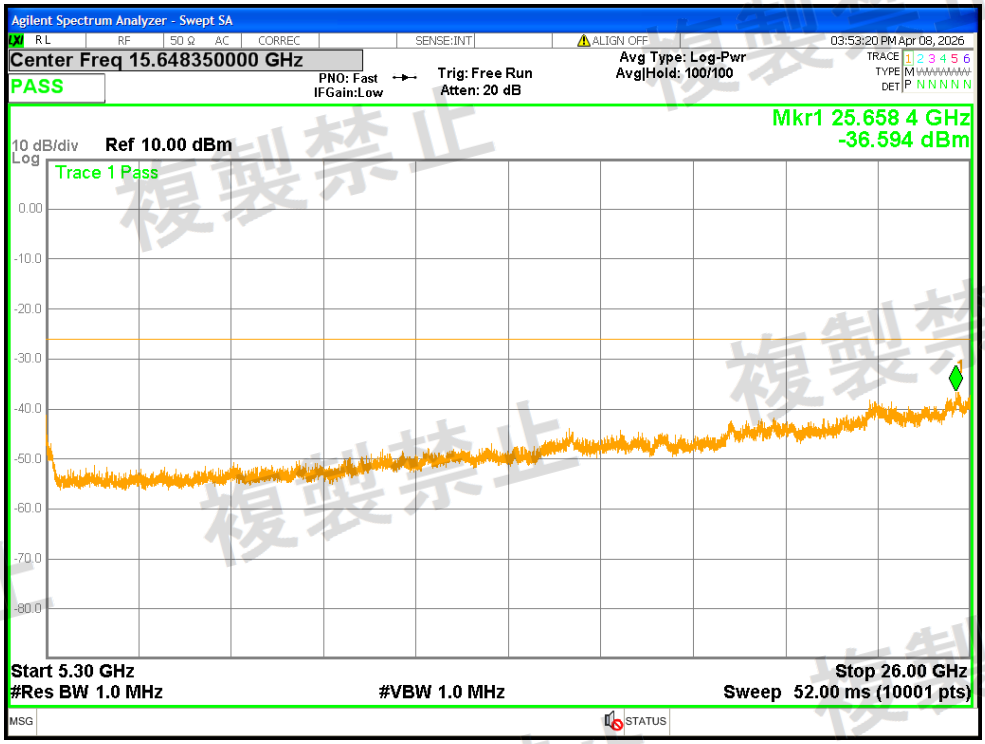


Tx. Spurious NVNT ac80 5210MHz Ant2 @ 30MHz-5123.2MHz

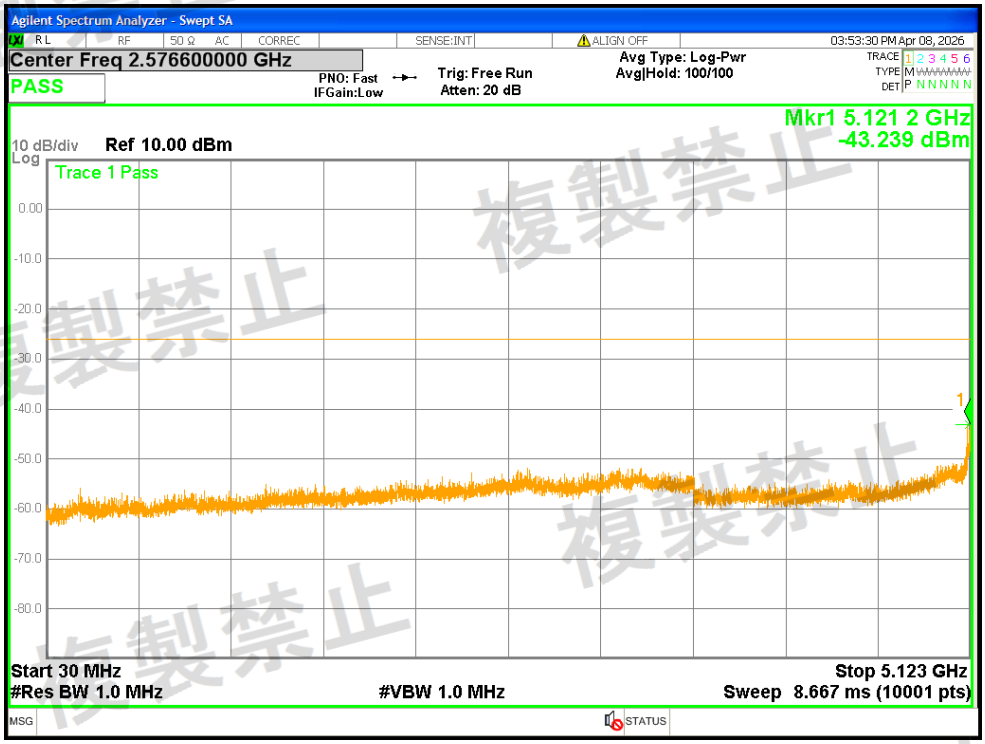


Tx. Spurious NVNT ac80 5210MHz Ant2 @ 5123.2MHz-5150MHz

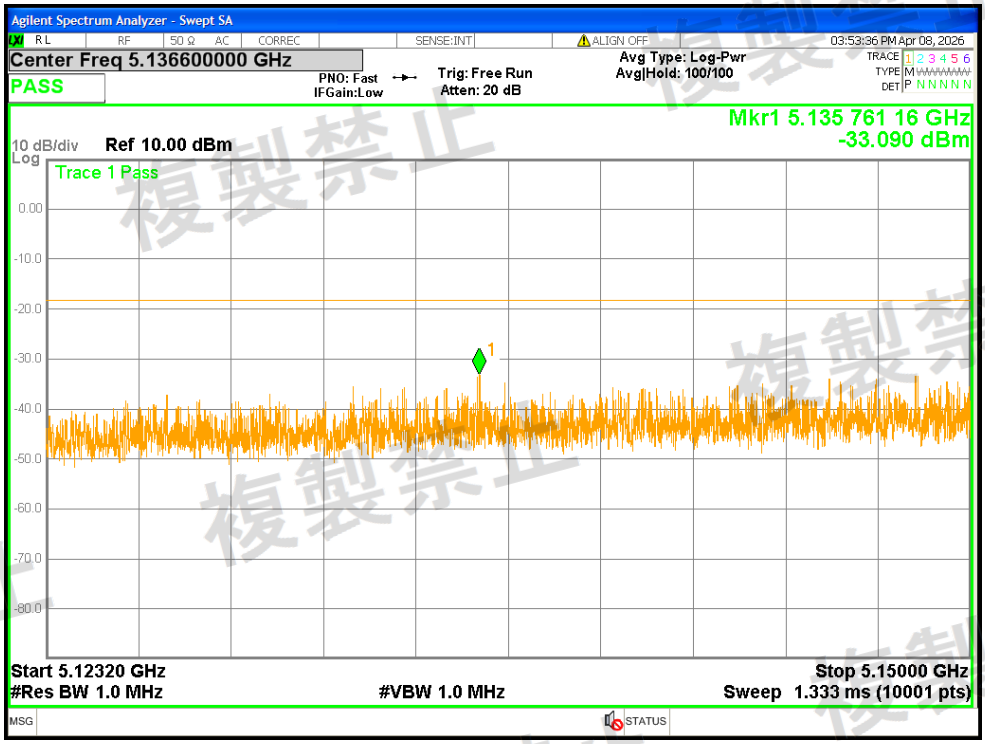


Tx. Spurious NVNT ac80 5210MHz Ant2 @ 5250MHz-5251MHz

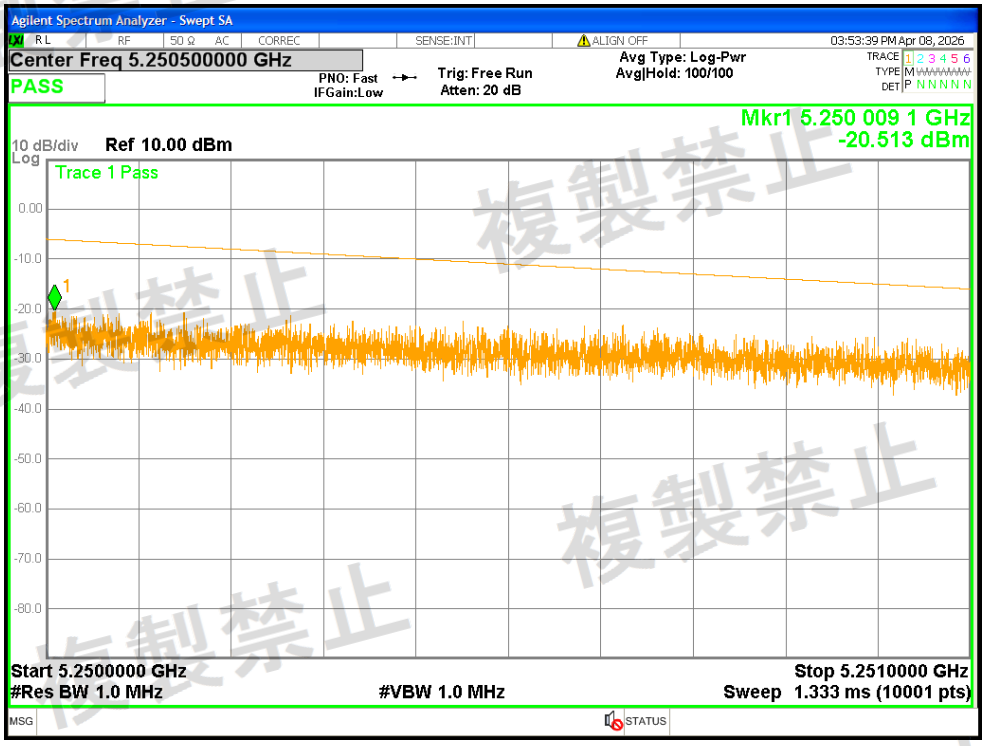


Tx. Spurious NVNT ac80 5210MHz Ant2 @ 5251MHz-5290MHz

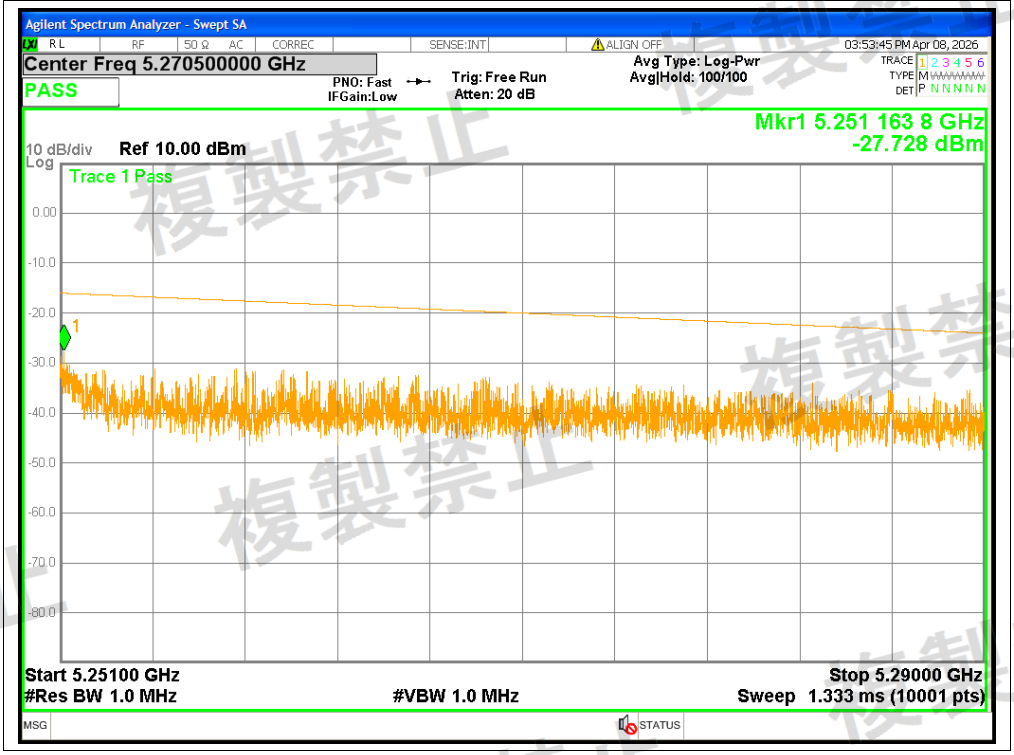


Tx. Spurious NVNT ac80 5210MHz Ant2 @ 5290MHz-5296.7MHz

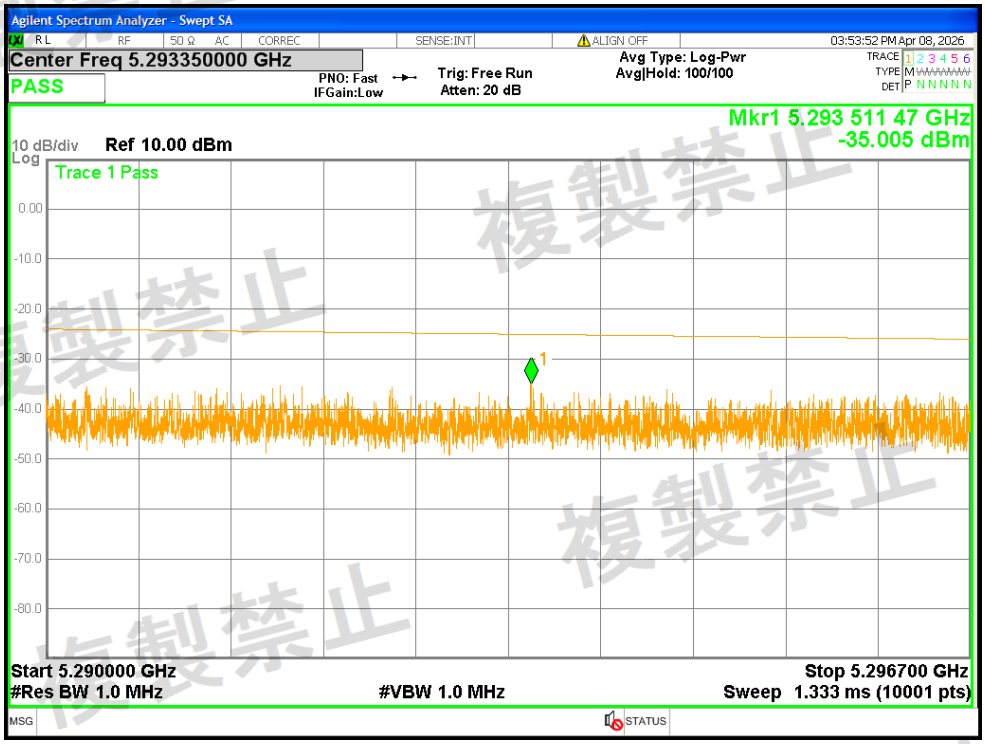


Tx. Spurious NVNT ac80 5210MHz Ant2 @ 5296.7MHz-26000MHz

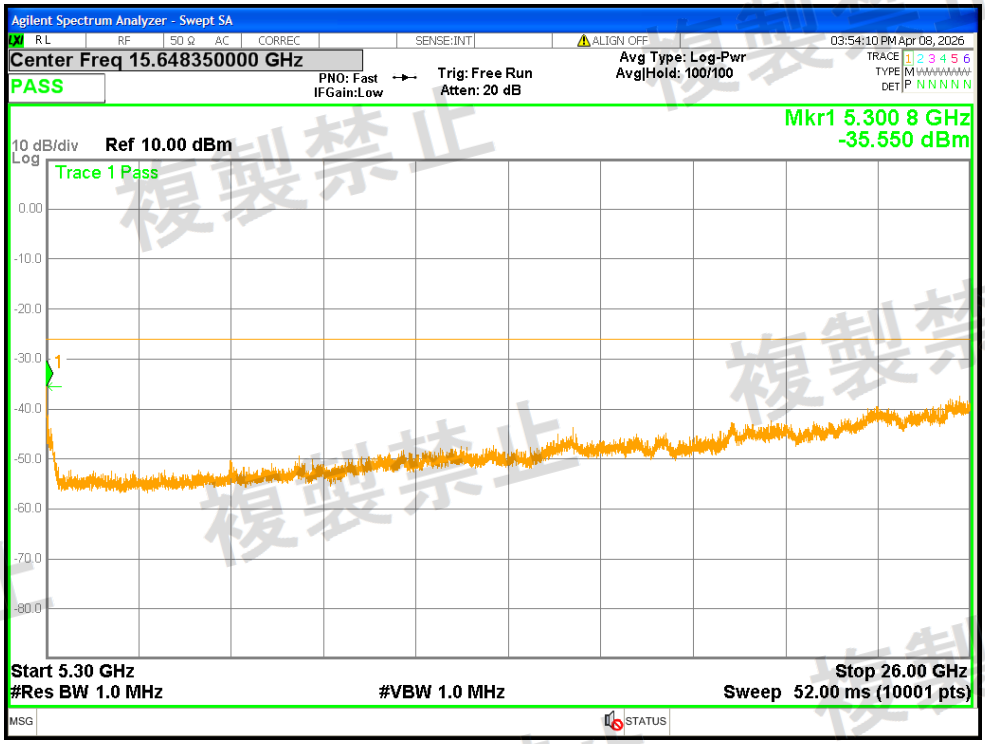


Tx. Spurious NVNT ax20 5180MHz Ant1 @ 30MHz-5142MHz

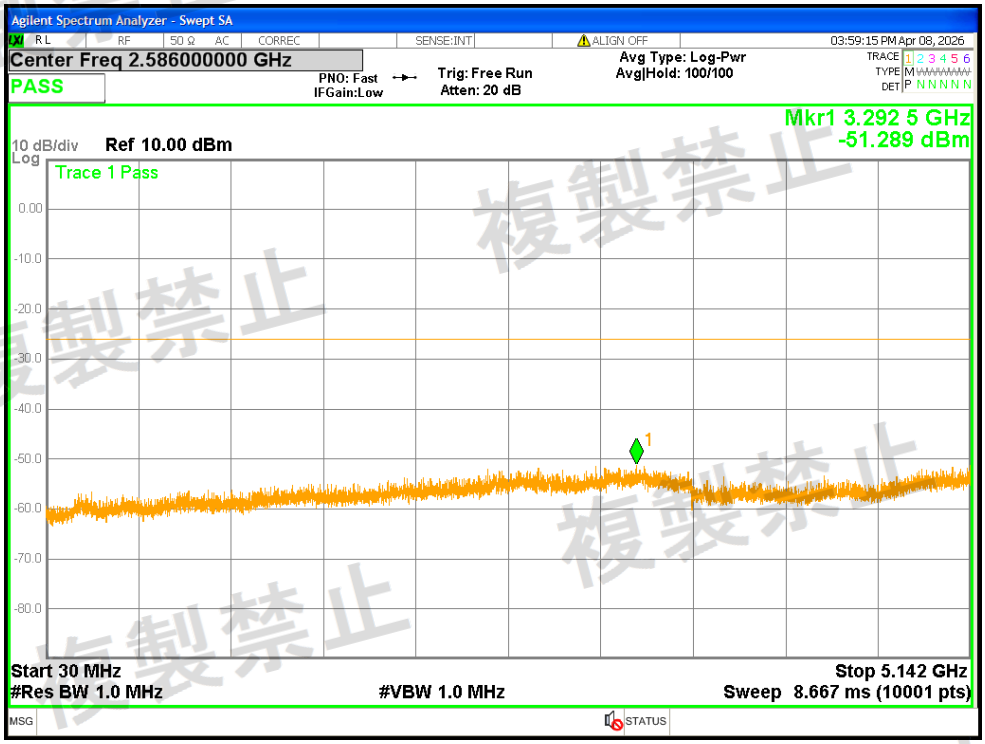


Tx. Spurious NVNT ax20 5180MHz Ant1 @ 5142MHz-5150MHz

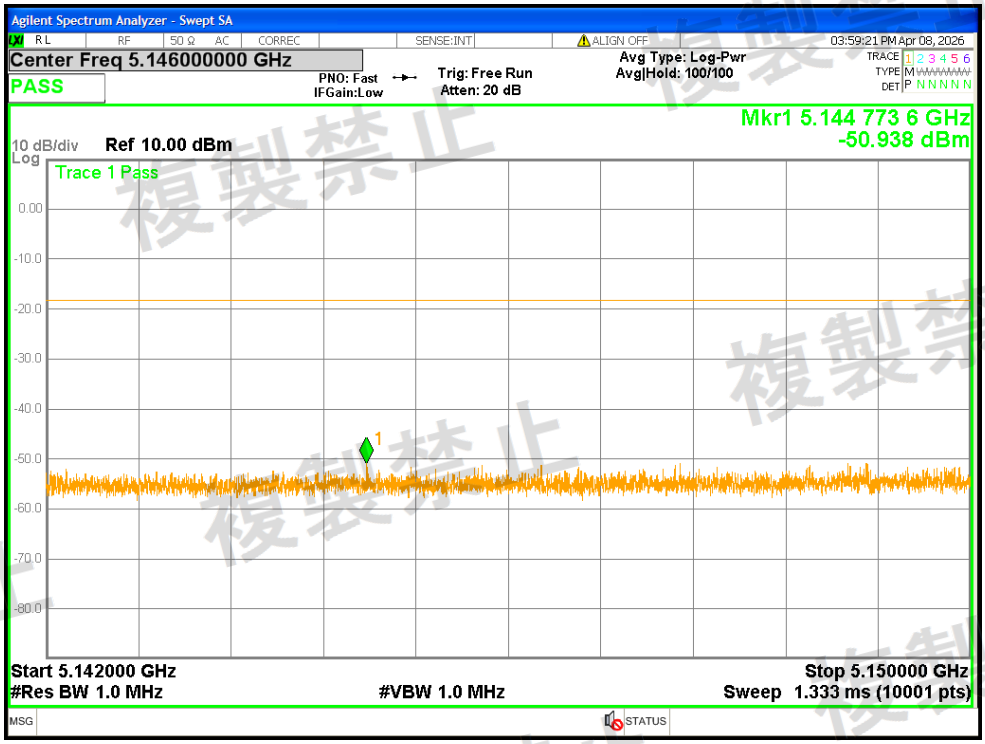


Tx. Spurious NVNT ax20 5180MHz Ant1 @ 5250MHz-5250.2MHz

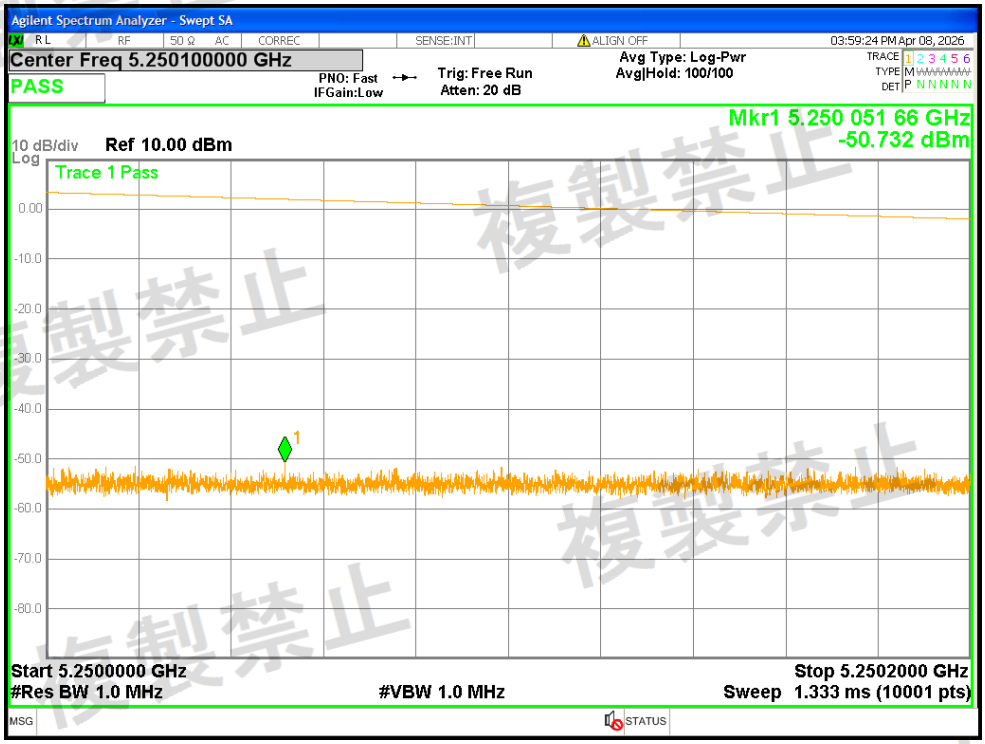


Tx. Spurious NVNT ax20 5180MHz Ant1 @ 5250.2MHz-5251MHz

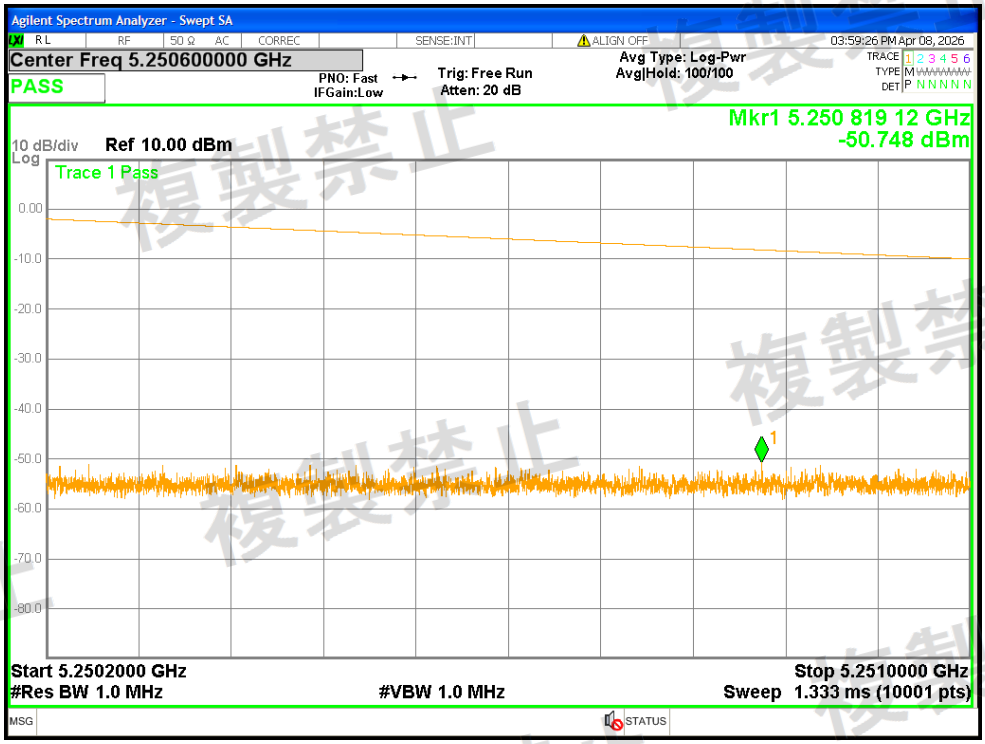


Tx. Spurious NVNT ax20 5180MHz Ant1 @ 5251MHz-5260MHz

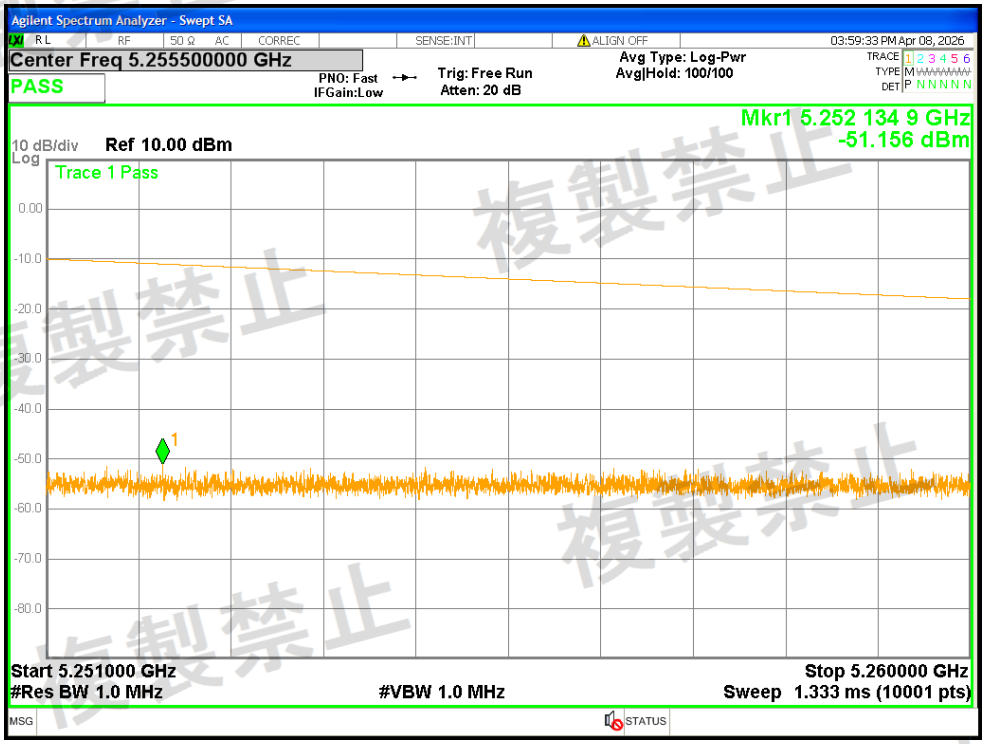


Tx. Spurious NVNT ax20 5180MHz Ant1 @ 5260MHz-5266.7MHz

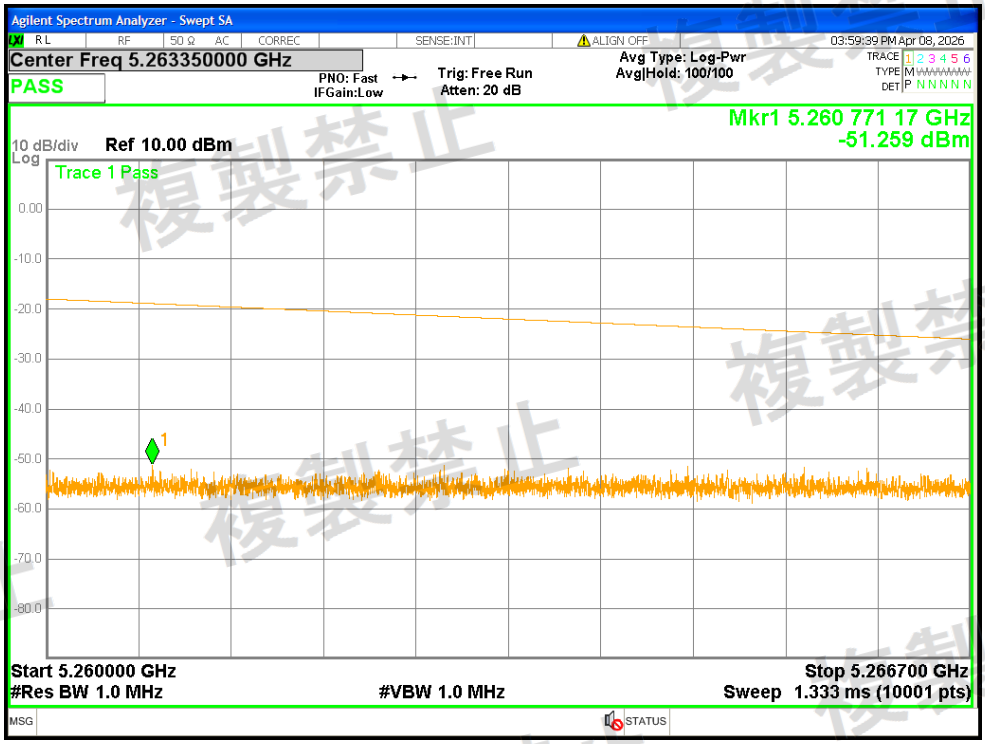


Tx. Spurious NVNT ax20 5180MHz Ant1 @ 5266.7MHz-26000MHz

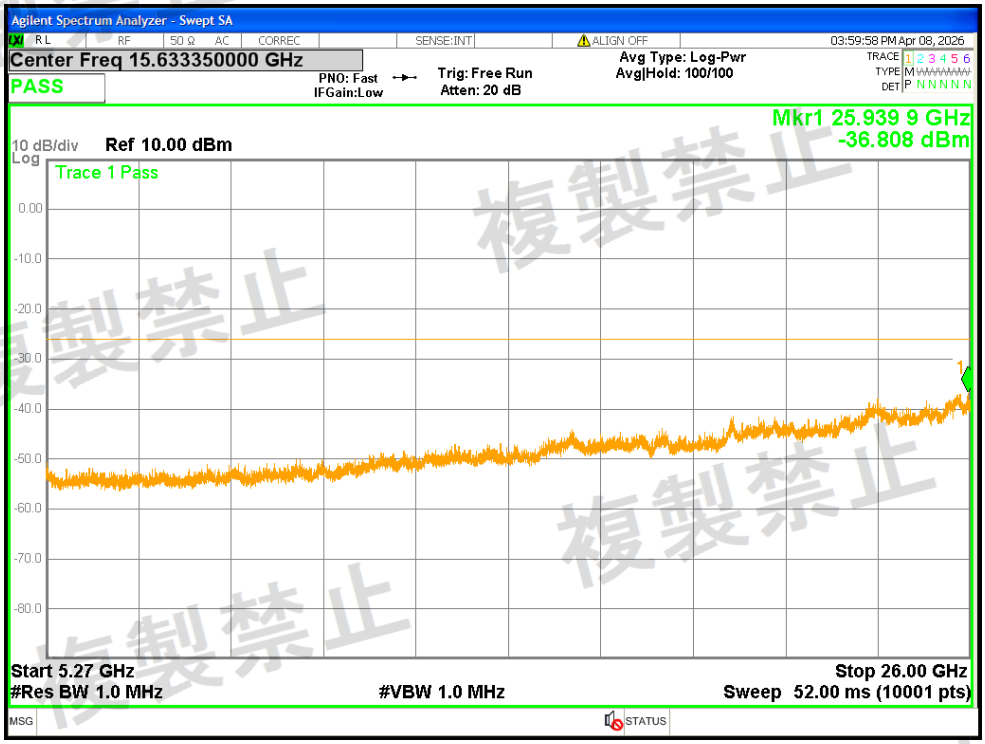


Tx. Spurious NVNT ax20 5180MHz Ant2 @ 30MHz-5142MHz

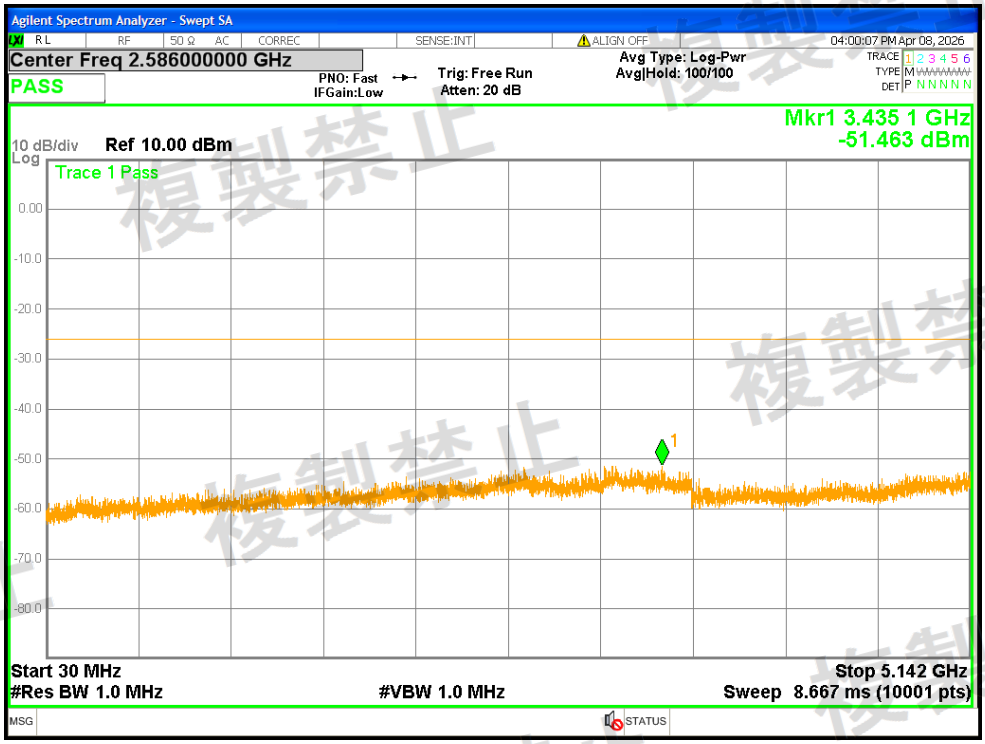


Tx. Spurious NVNT ax20 5180MHz Ant2 @ 5142MHz-5150MHz

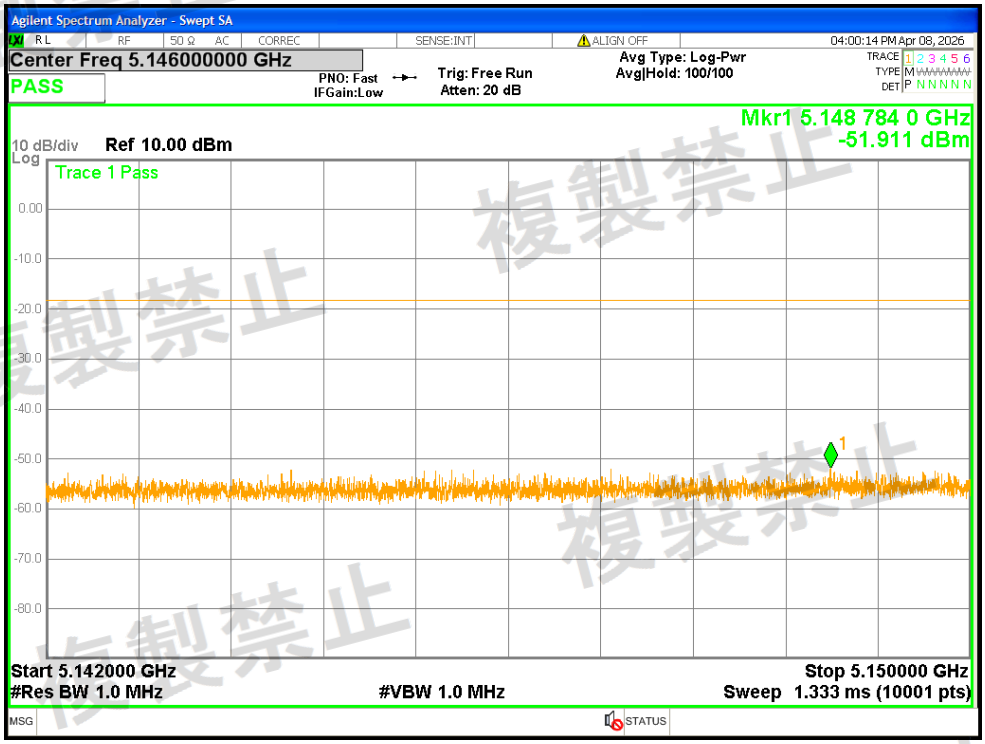


Tx. Spurious NVNT ax20 5180MHz Ant2 @ 5250MHz-5250.2MHz

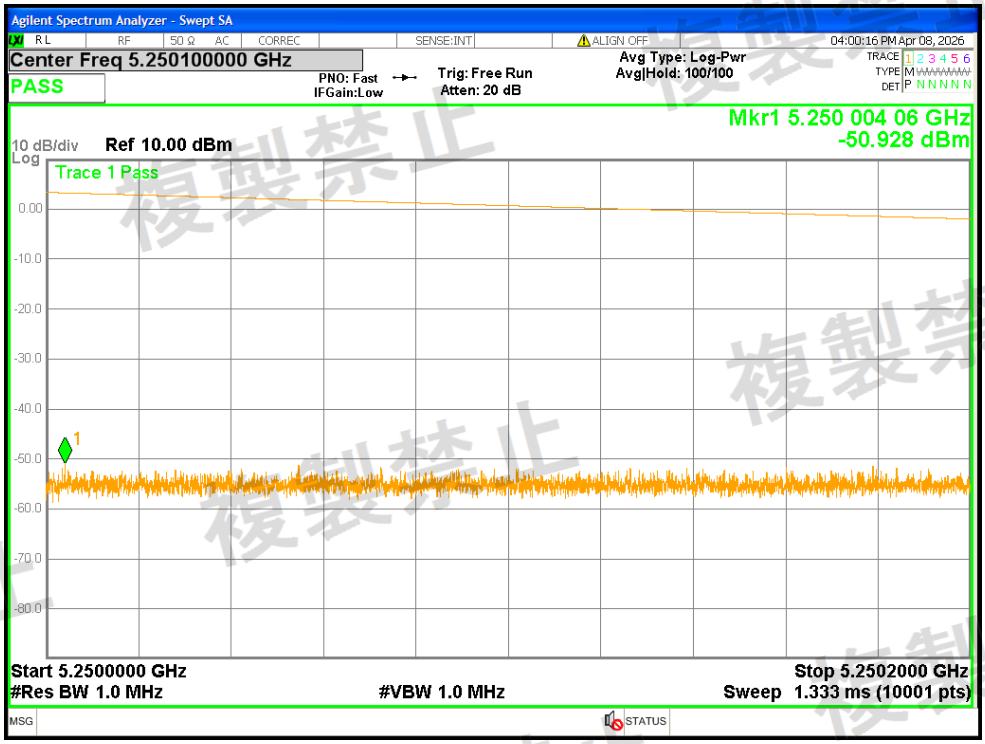


Tx. Spurious NVNT ax20 5180MHz Ant2 @ 5250.2MHz-5251MHz

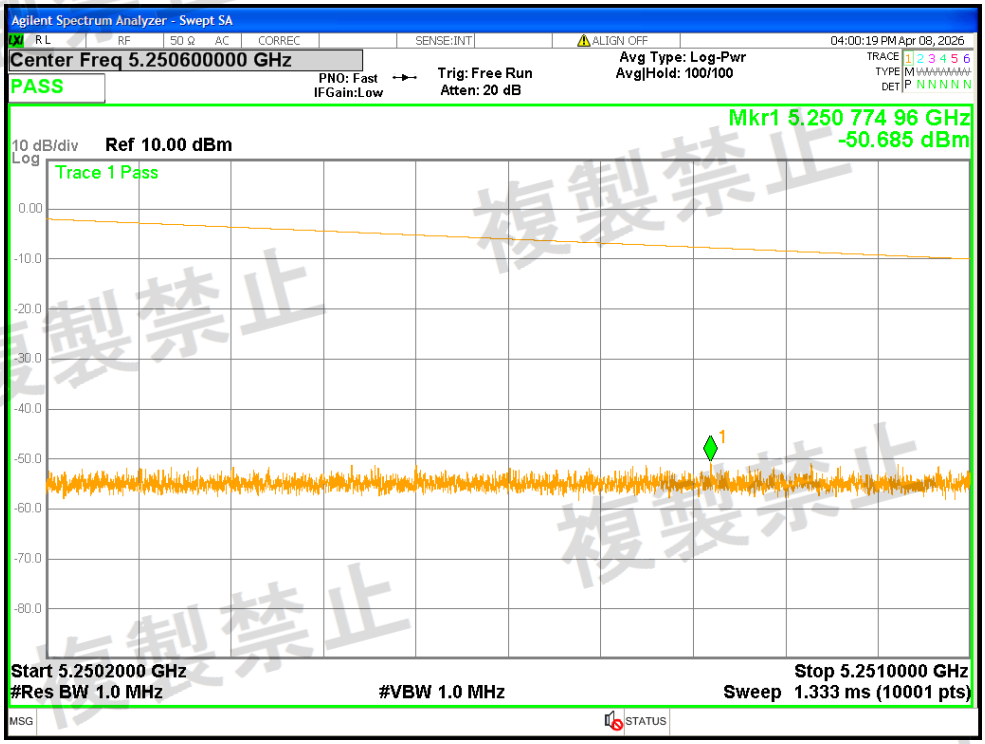


Tx. Spurious NVNT ax20 5180MHz Ant2 @ 5251MHz-5260MHz

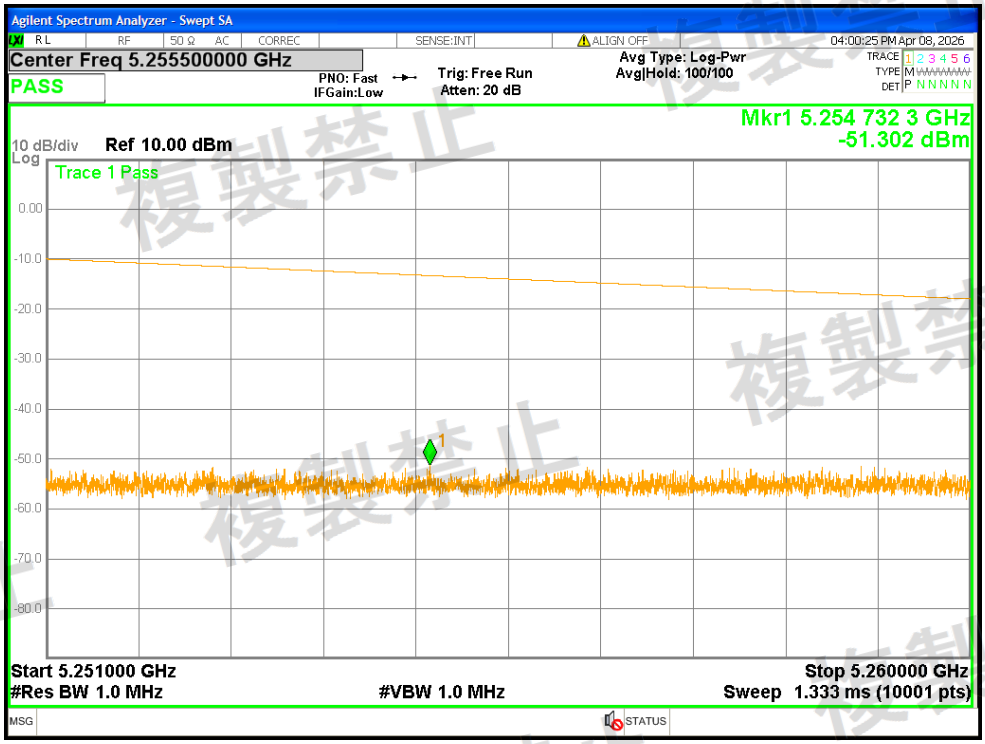


Tx. Spurious NVNT ax20 5180MHz Ant2 @ 5260MHz-5266.7MHz

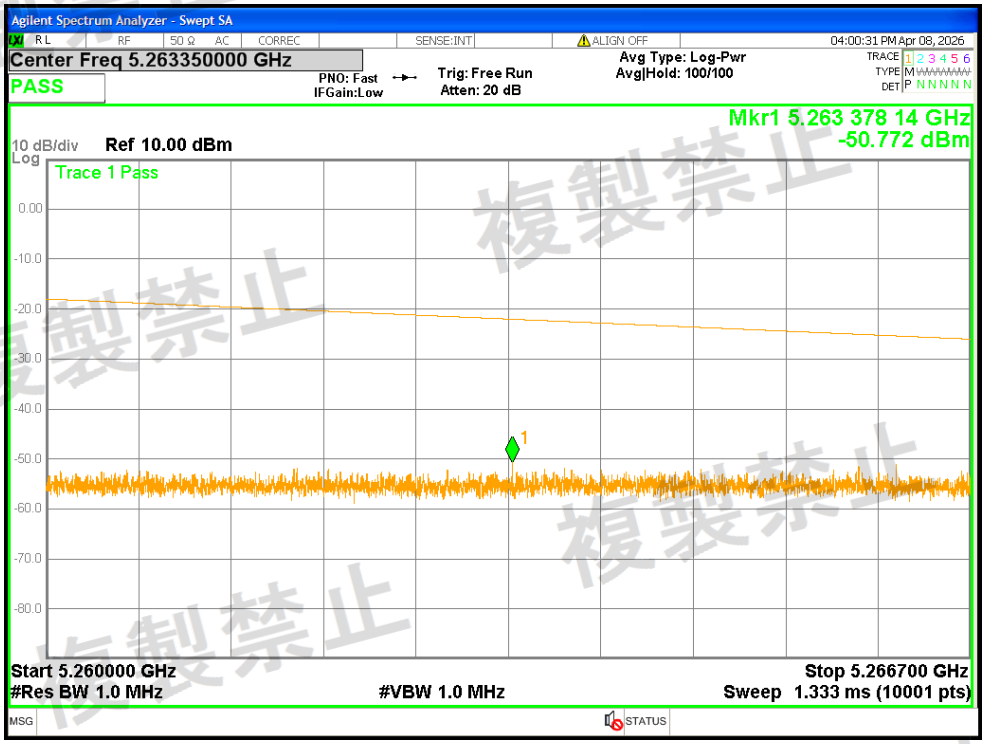


Tx. Spurious NVNT ax20 5180MHz Ant2 @ 5266.7MHz-26000MHz

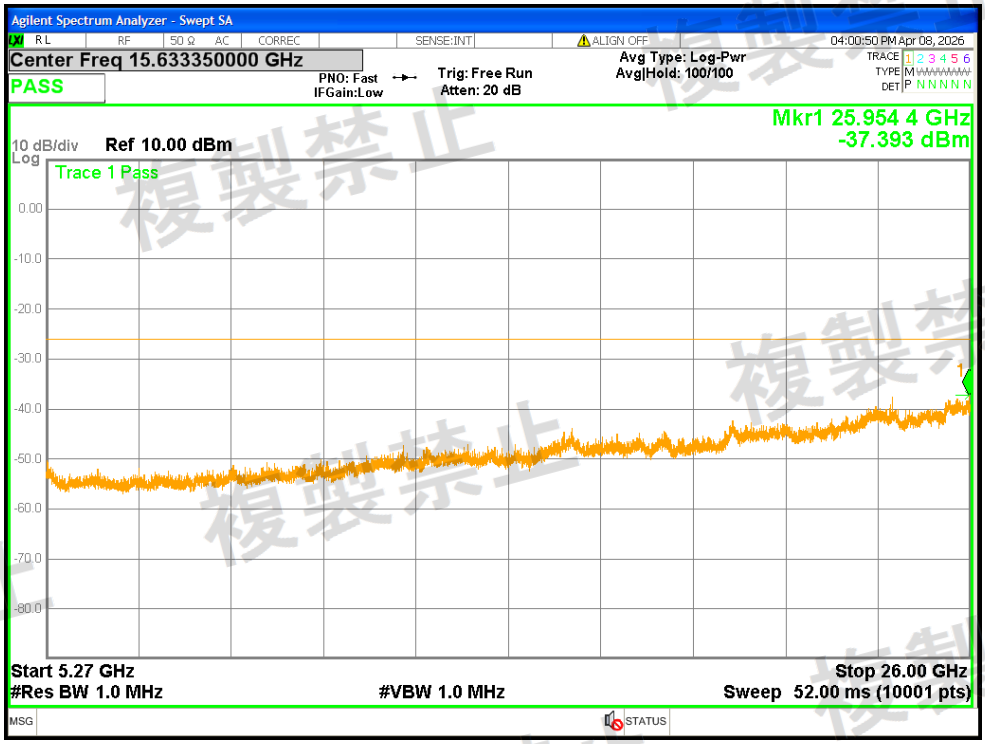


Tx. Spurious NVNT ax20 5200MHz Ant1 @ 30MHz-5142MHz

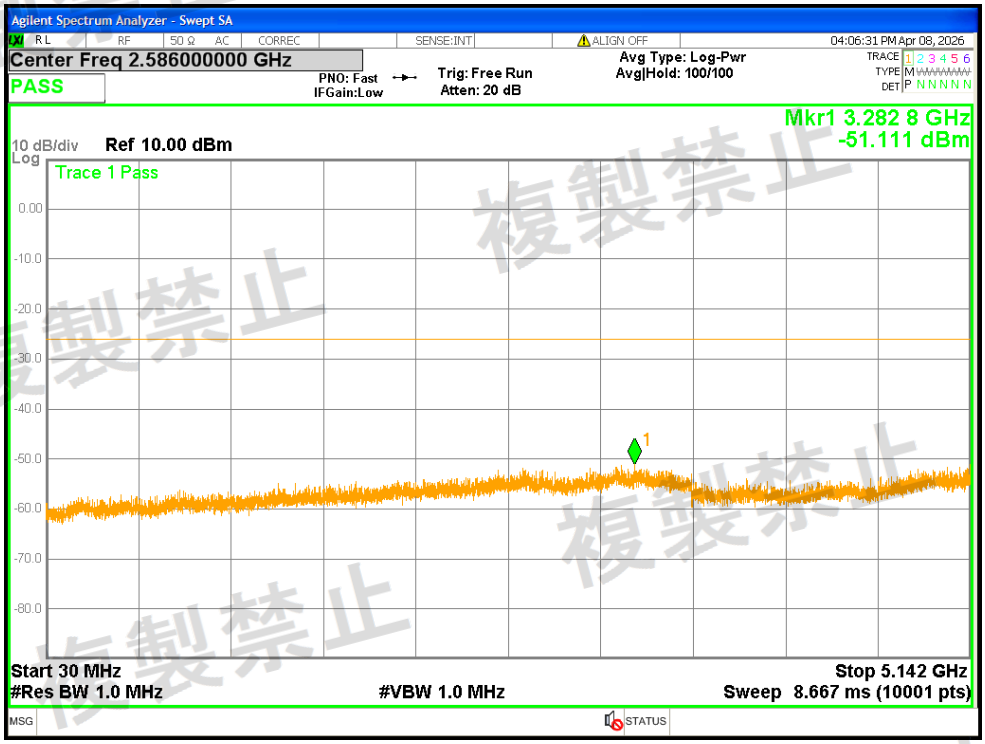


Tx. Spurious NVNT ax20 5200MHz Ant1 @ 5142MHz-5150MHz

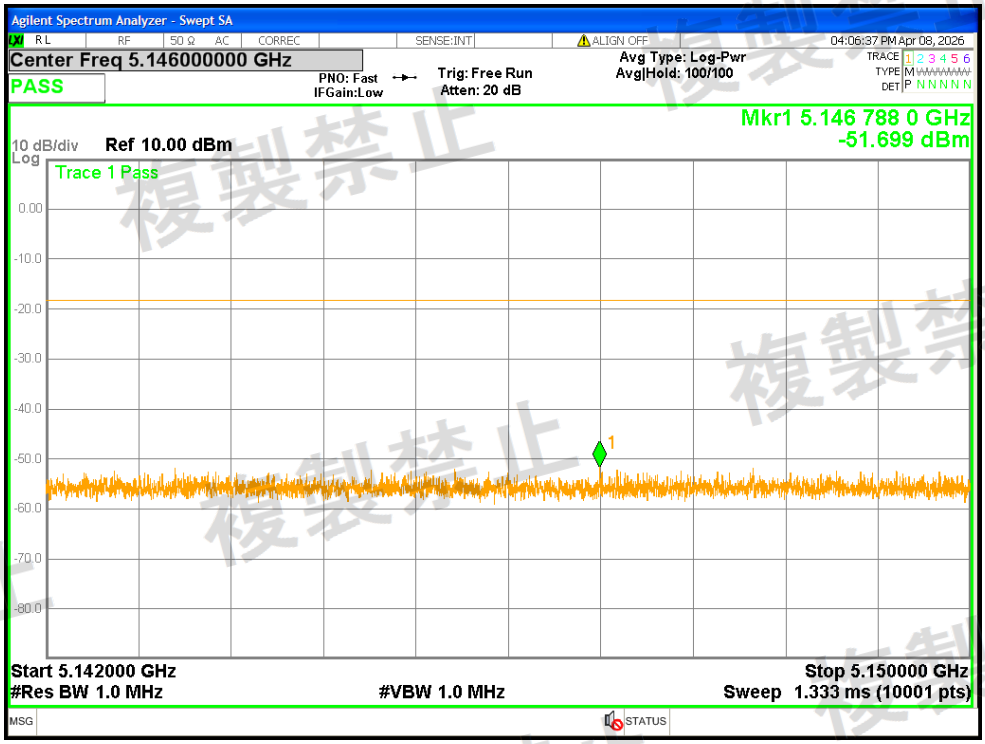


Tx. Spurious NVNT ax20 5200MHz Ant1 @ 5250MHz-5250.2MHz

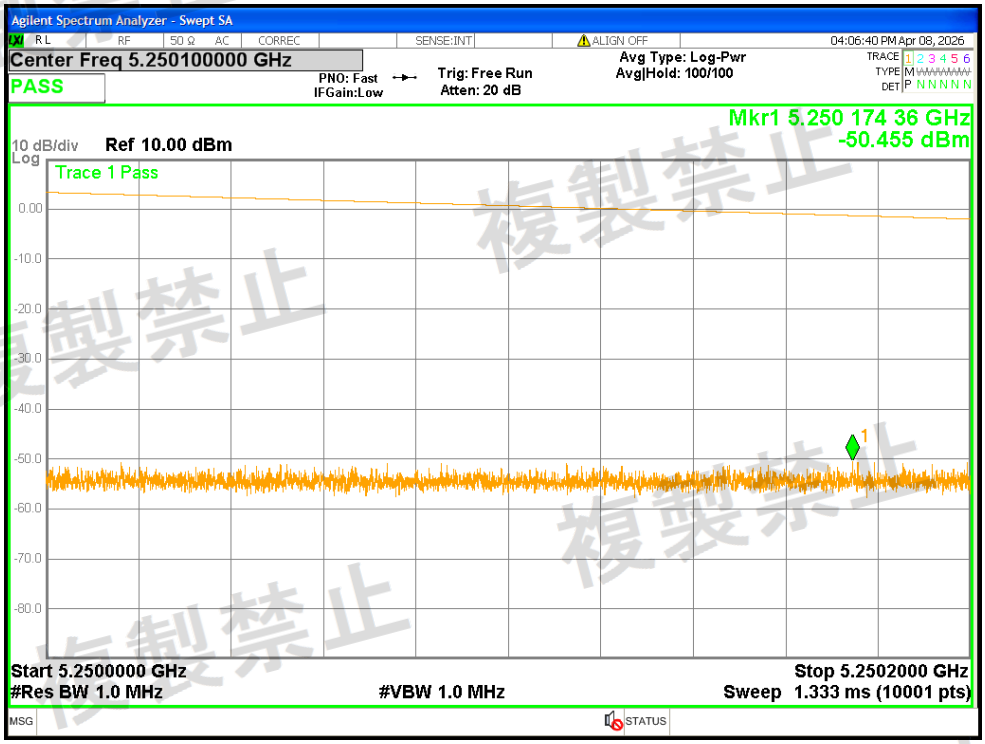


Tx. Spurious NVNT ax20 5200MHz Ant1 @ 5250.2MHz-5251MHz

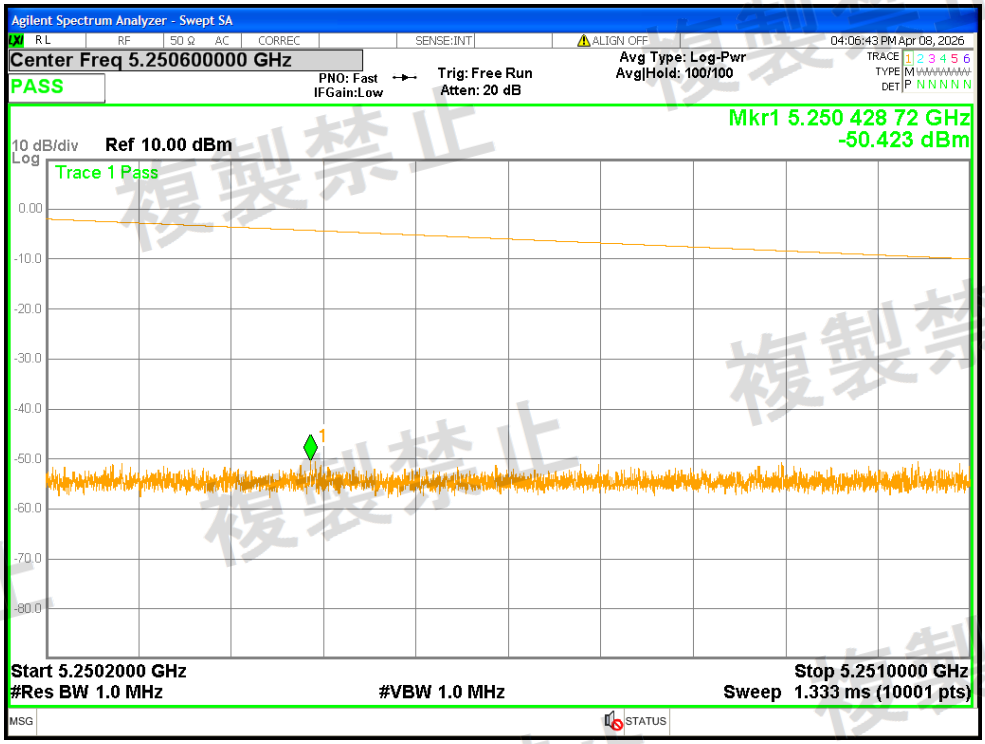


Tx. Spurious NVNT ax20 5200MHz Ant1 @ 5251MHz-5260MHz

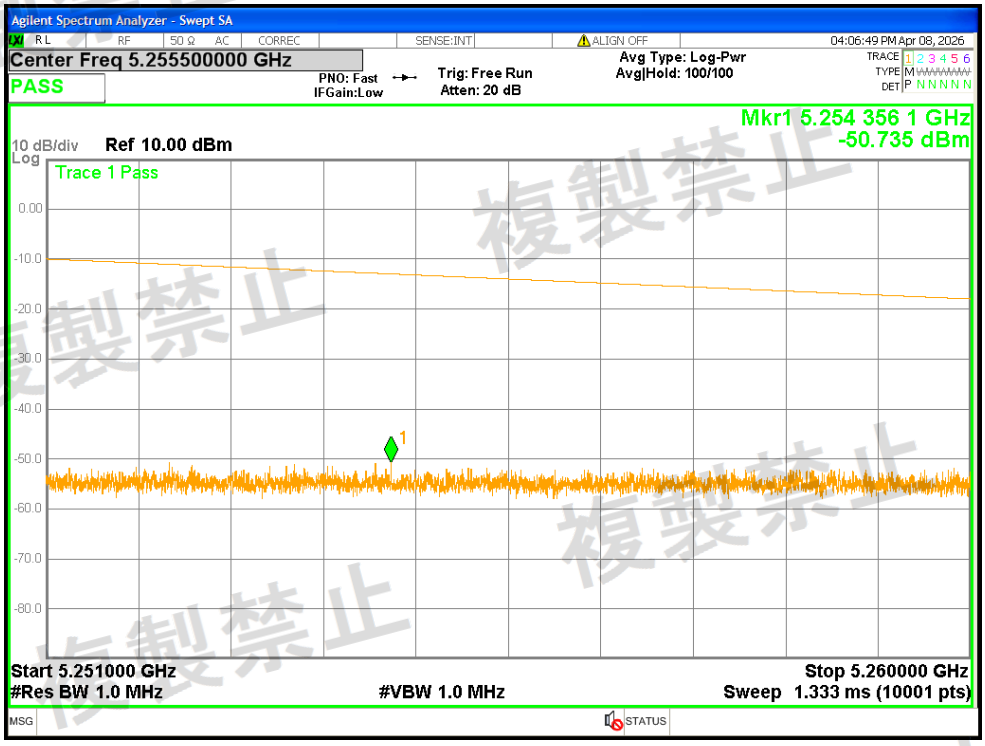


Tx. Spurious NVNT ax20 5200MHz Ant1 @ 5260MHz-5266.7MHz

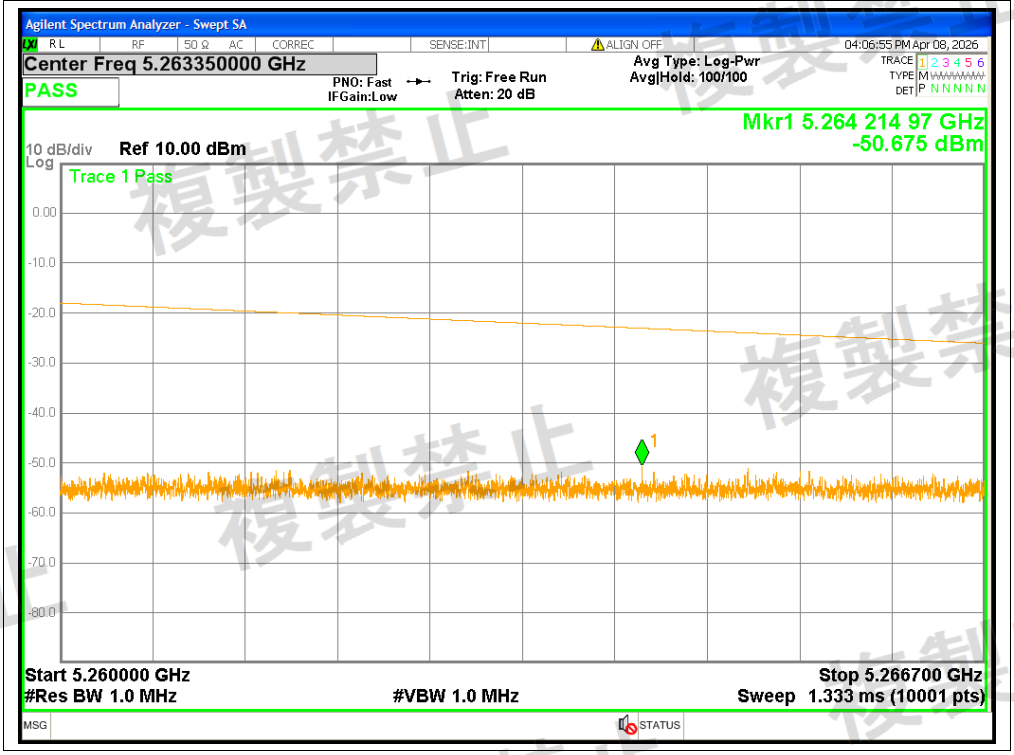


Tx. Spurious NVNT ax20 5200MHz Ant1 @ 5266.7MHz-26000MHz

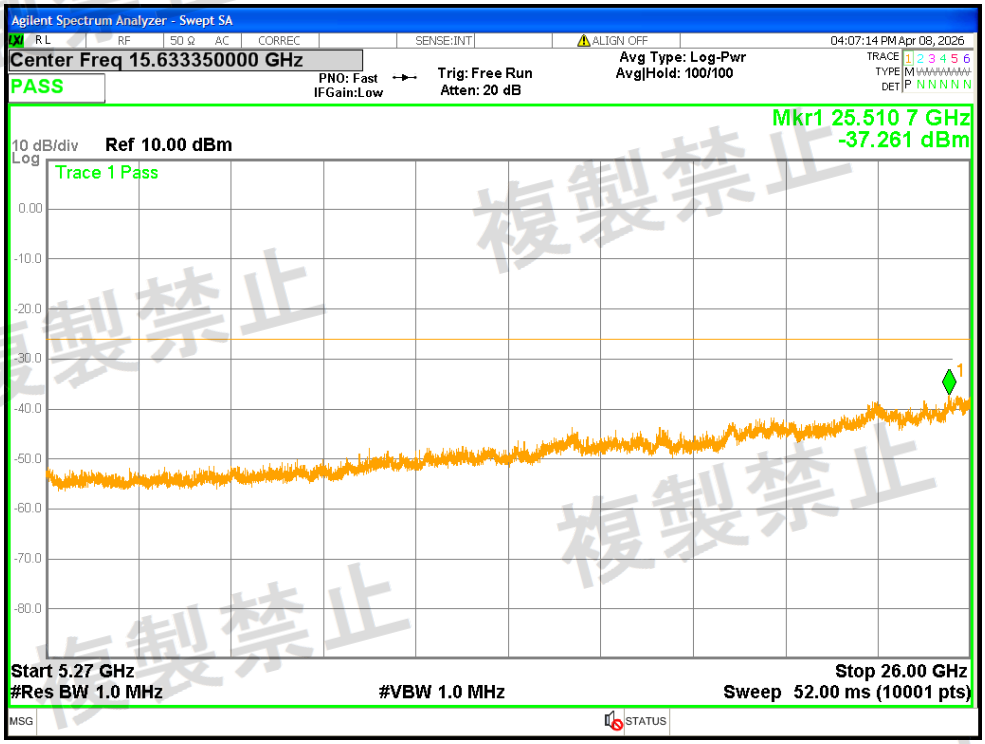


Tx. Spurious NVNT ax20 5200MHz Ant2 @ 30MHz-5142MHz

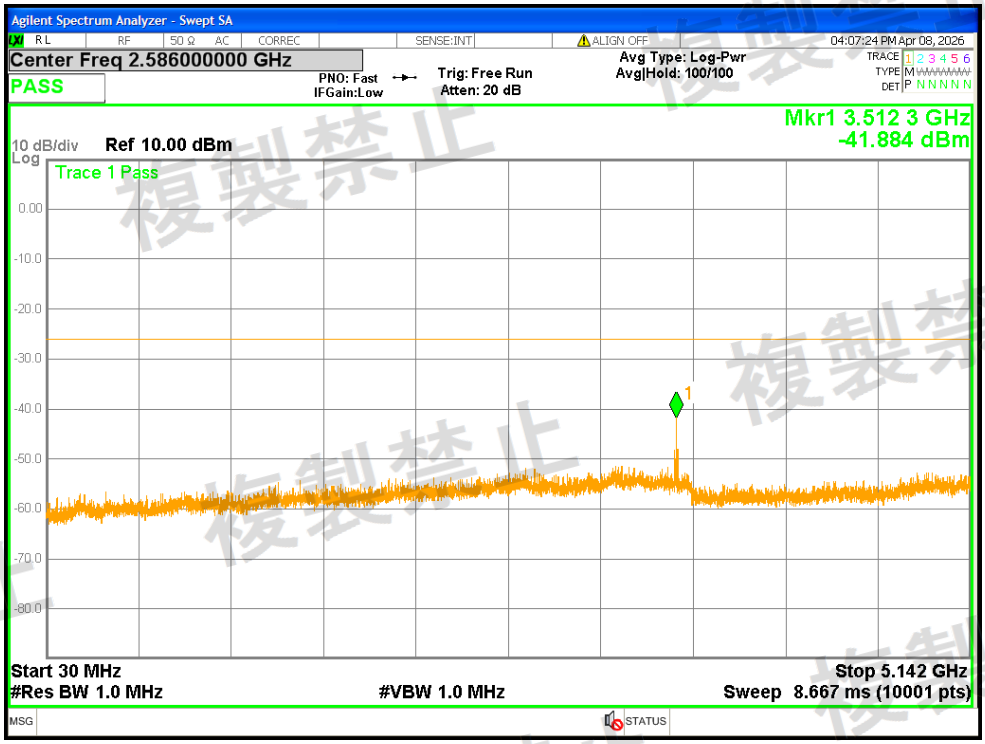


Tx. Spurious NVNT ax20 5200MHz Ant2 @ 5142MHz-5150MHz

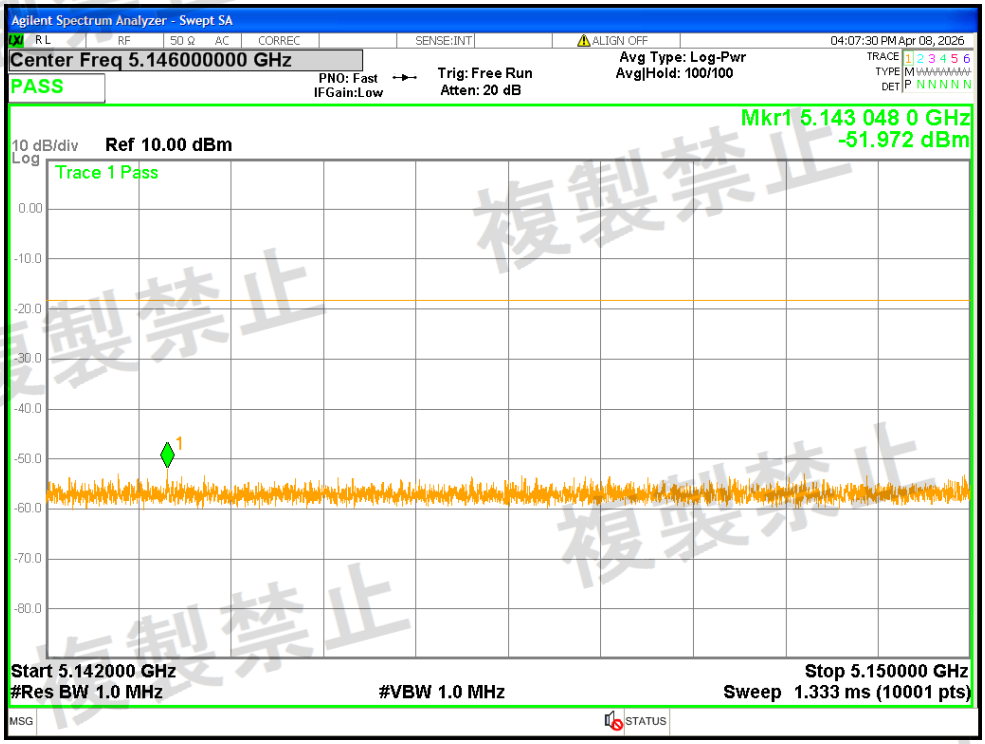


Tx. Spurious NVNT ax20 5200MHz Ant2 @ 5250MHz-5250.2MHz

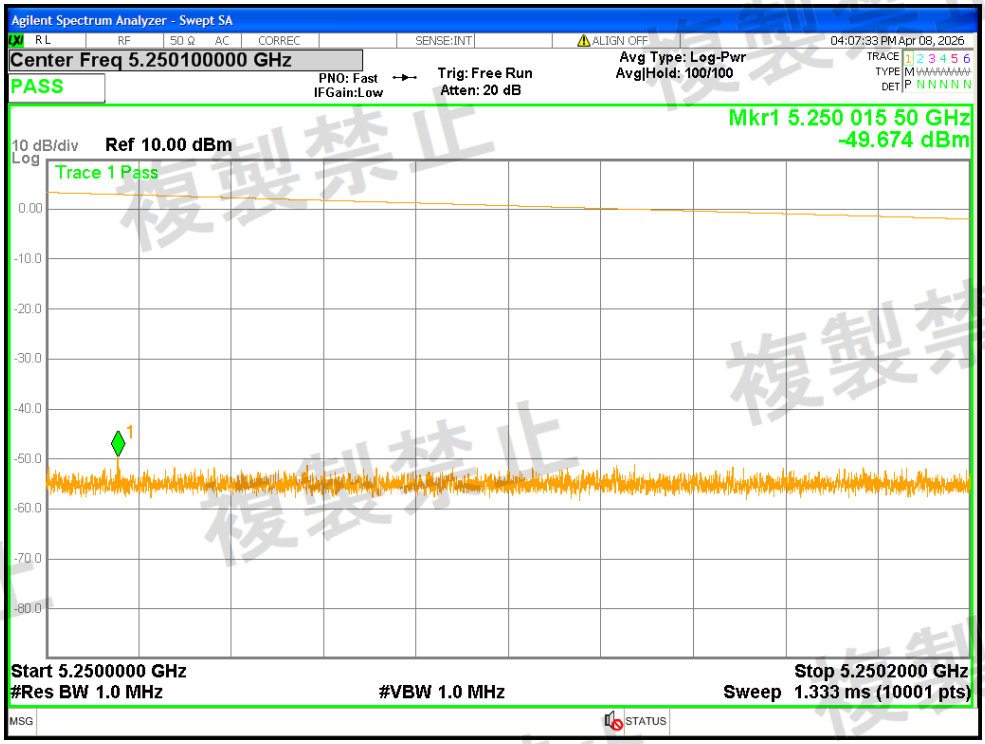


Tx. Spurious NVNT ax20 5200MHz Ant2 @ 5250.2MHz-5251MHz

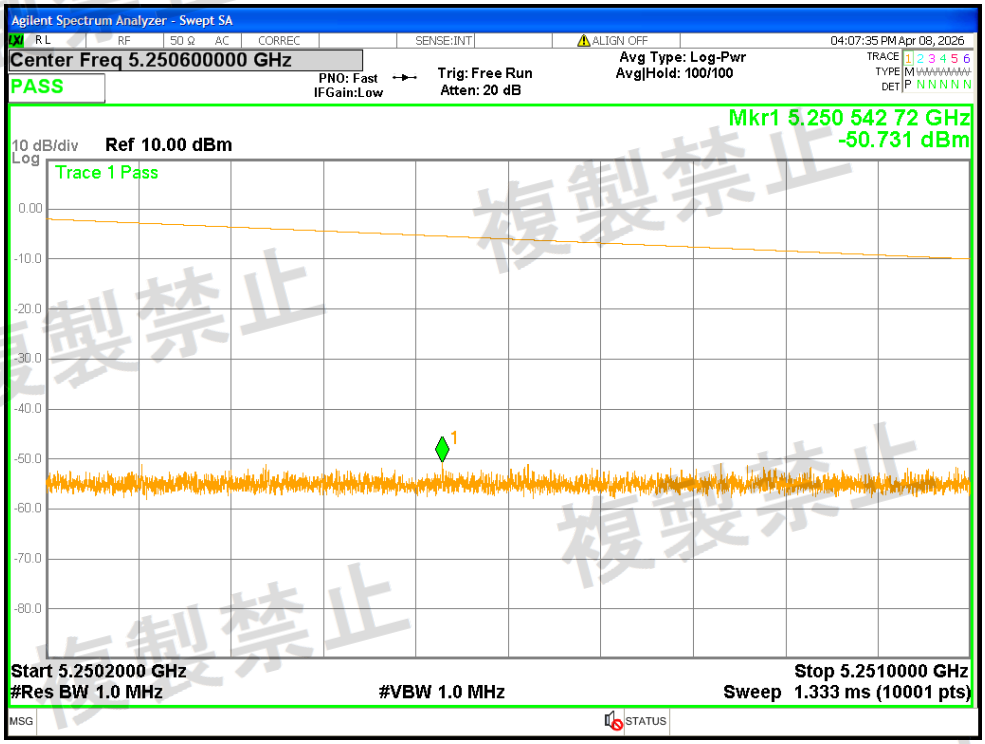


Tx. Spurious NVNT ax20 5200MHz Ant2 @ 5251MHz-5260MHz

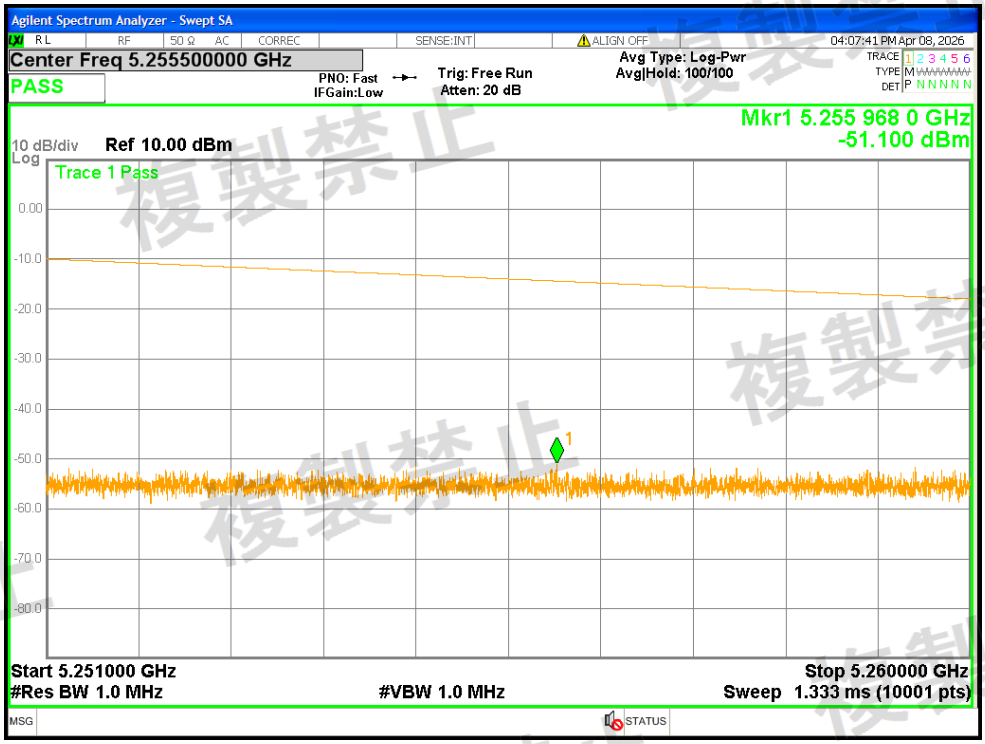


Tx. Spurious NVNT ax20 5200MHz Ant2 @ 5260MHz-5266.7MHz

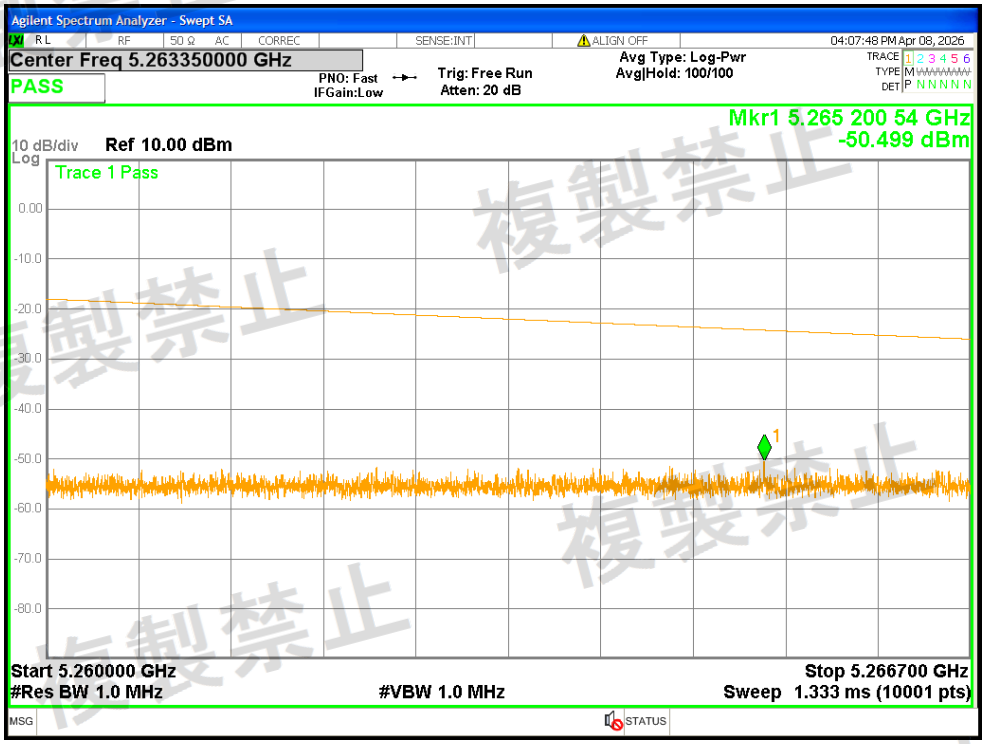


Tx. Spurious NVNT ax20 5200MHz Ant2 @ 5266.7MHz-26000MHz

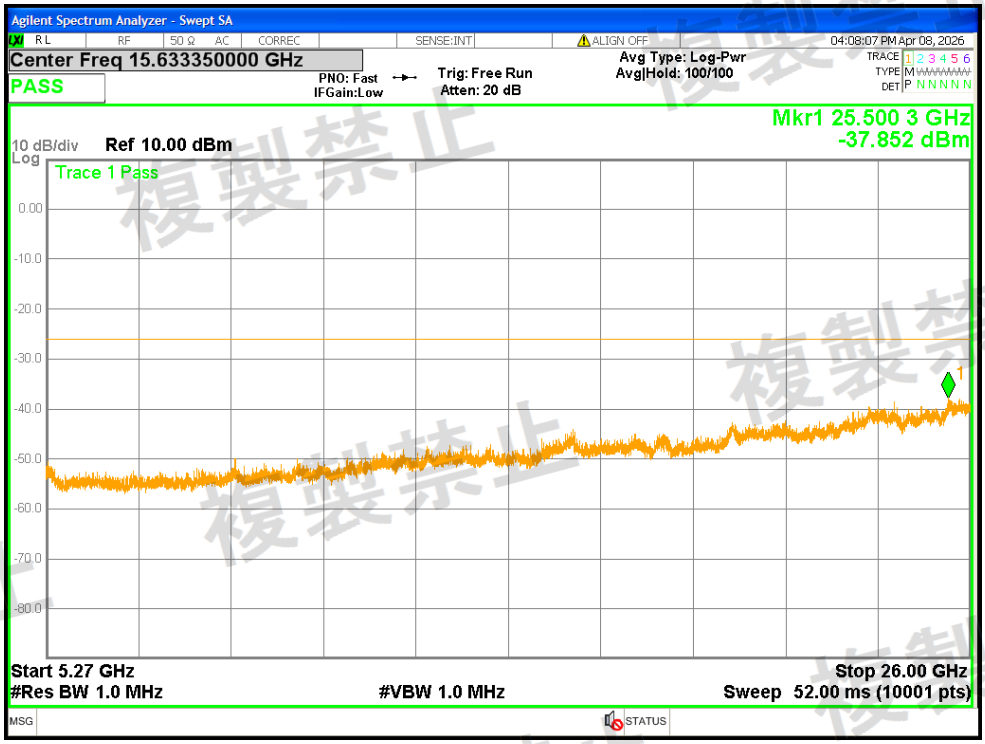


Tx. Spurious NVNT ax20 5240MHz Ant1 @ 30MHz-5142MHz

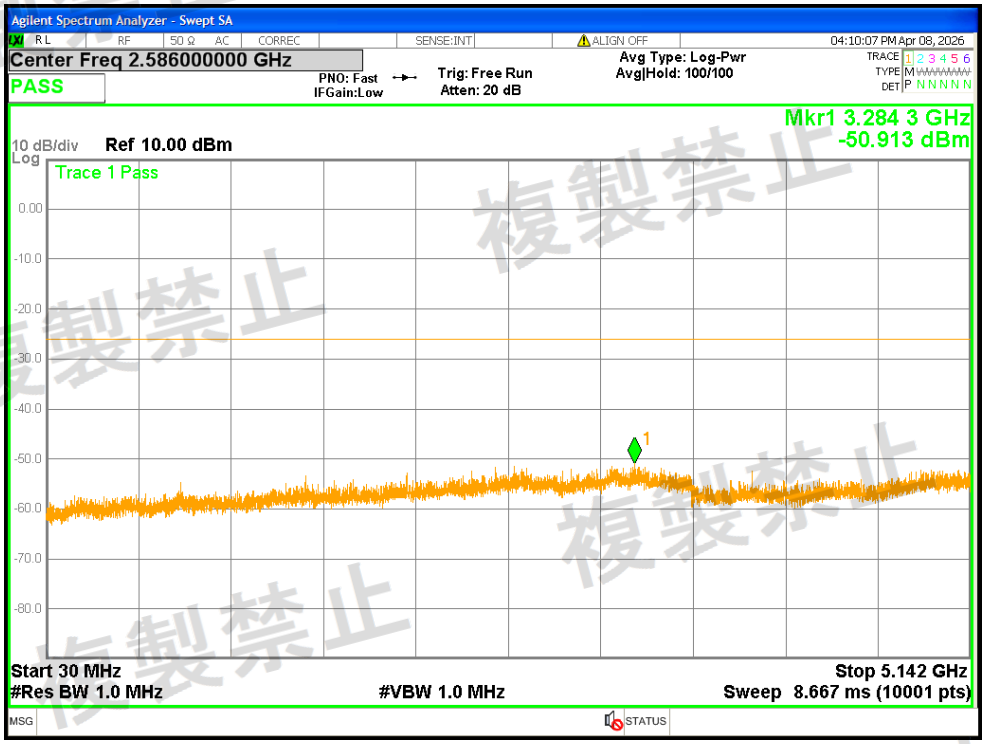


Tx. Spurious NVNT ax20 5240MHz Ant1 @ 5142MHz-5150MHz

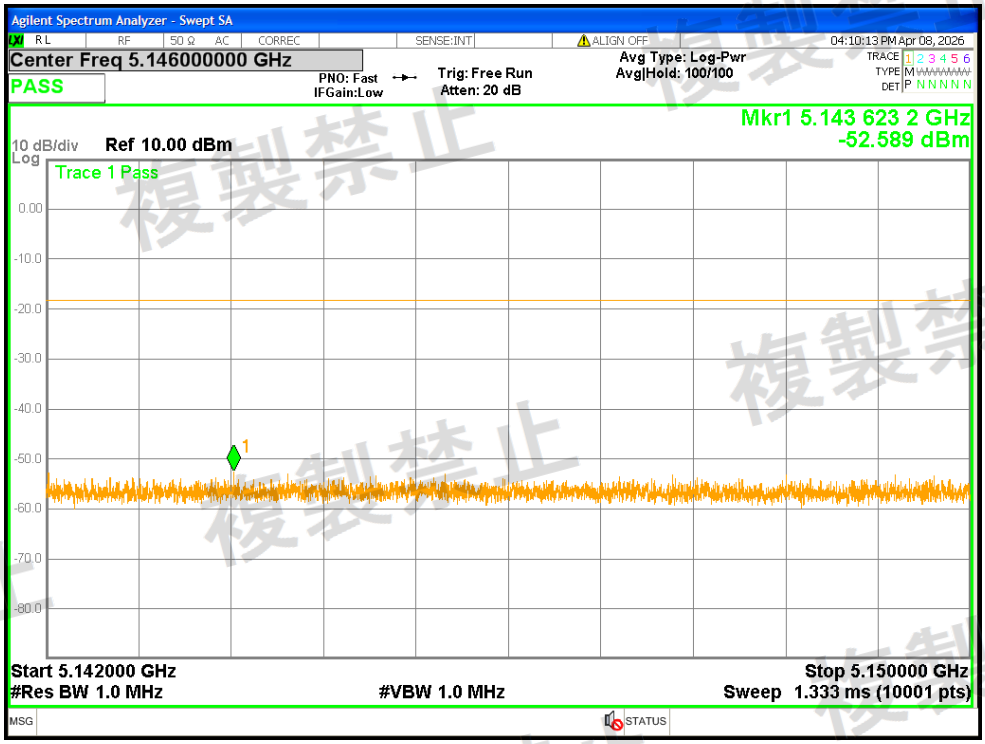


Tx. Spurious NVNT ax20 5240MHz Ant1 @ 5250MHz-5250.2MHz

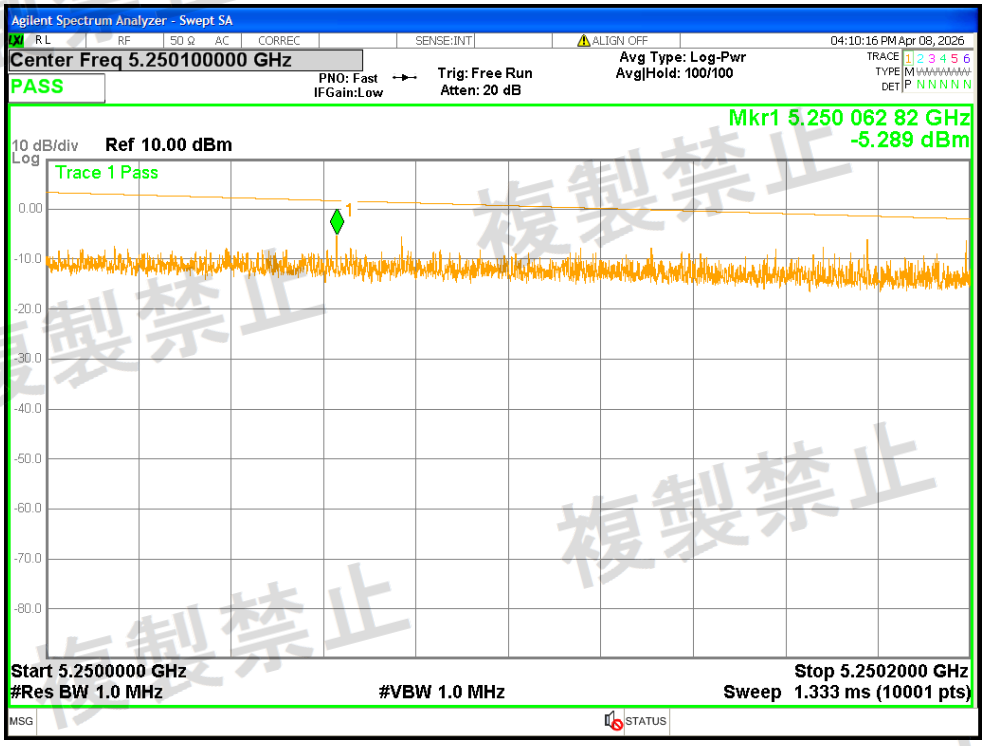


Tx. Spurious NVNT ax20 5240MHz Ant1 @ 5250.2MHz-5251MHz

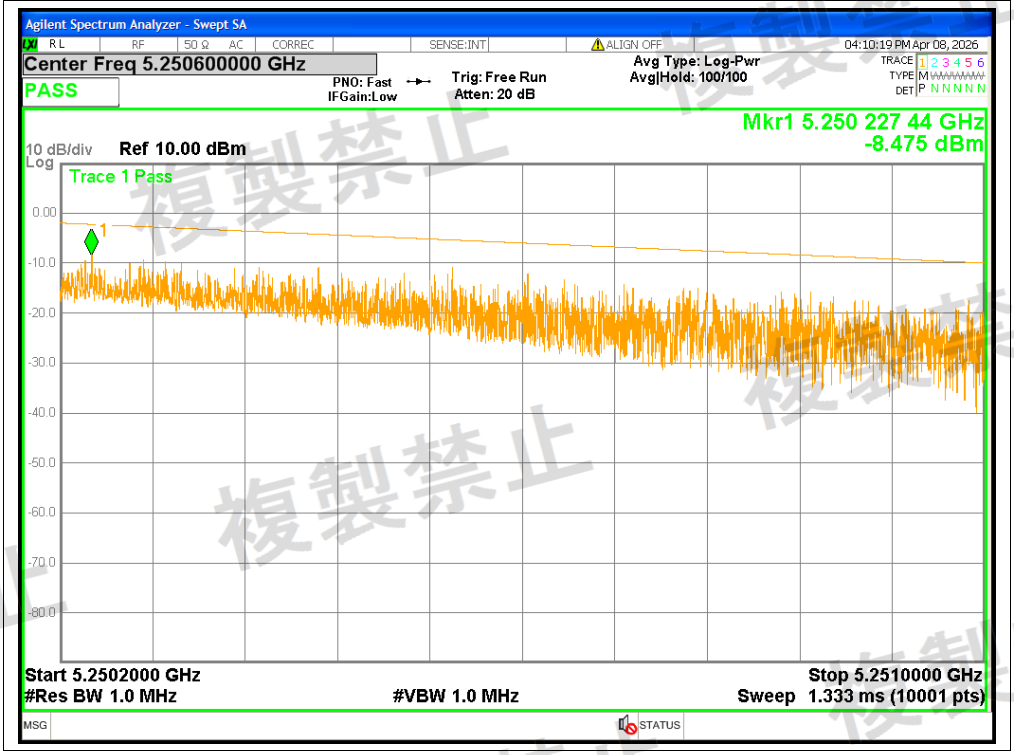


Tx. Spurious NVNT ax20 5240MHz Ant1 @ 5251MHz-5260MHz

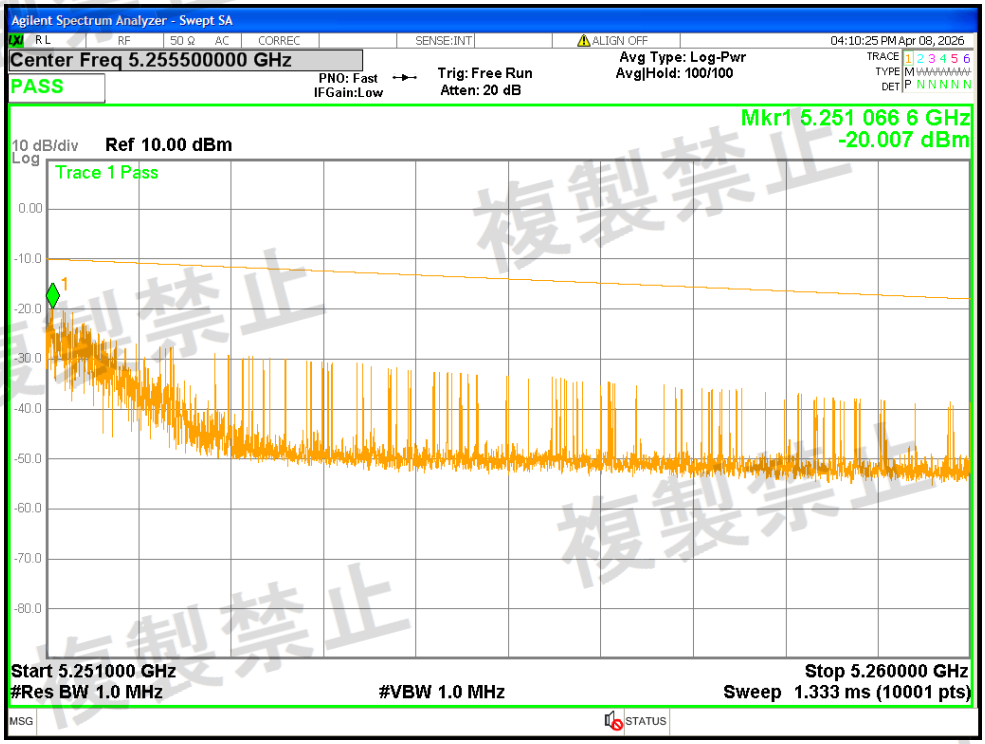


Tx. Spurious NVNT ax20 5240MHz Ant1 @ 5260MHz-5266.7MHz

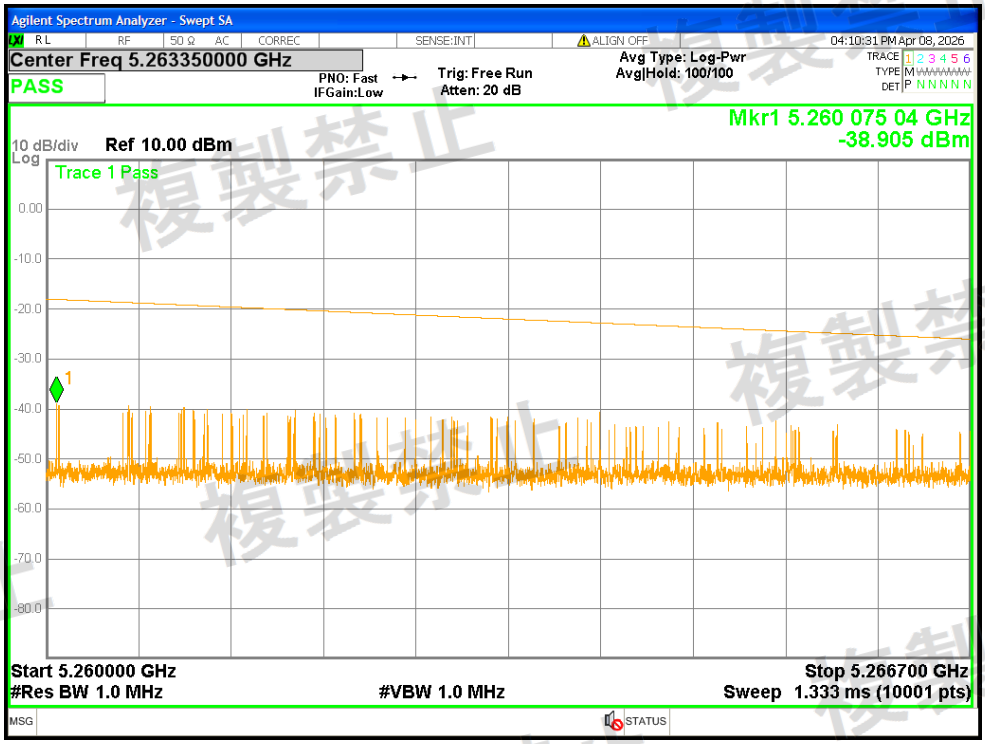


Tx. Spurious NVNT ax20 5240MHz Ant1 @ 5266.7MHz-26000MHz

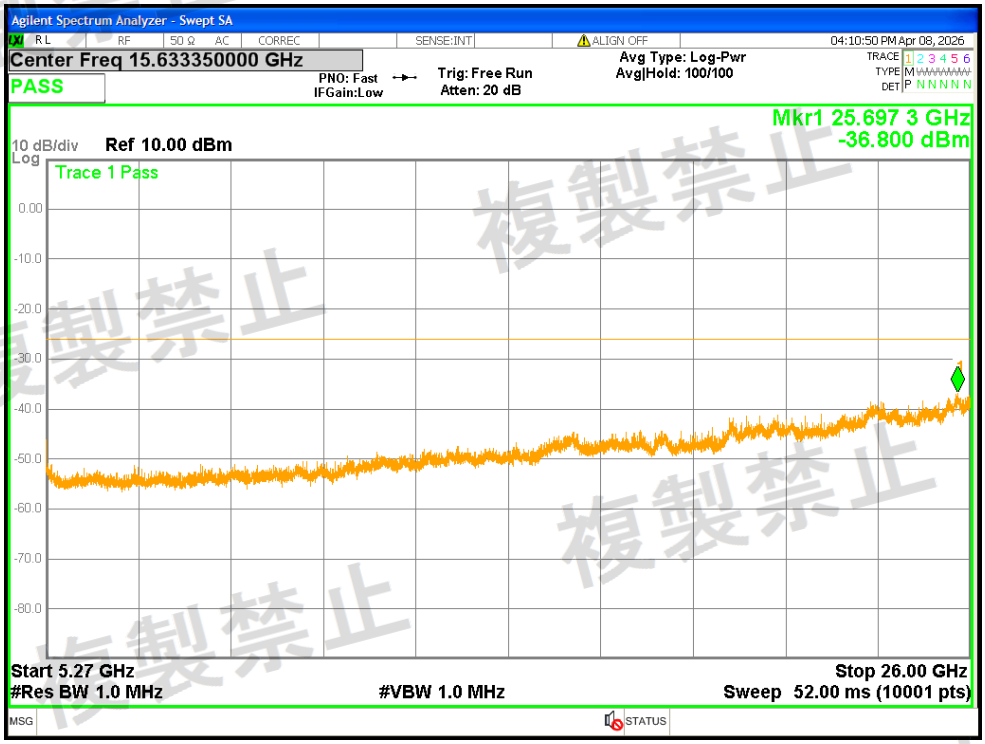


Tx. Spurious NVNT ax20 5240MHz Ant2 @ 30MHz-5142MHz

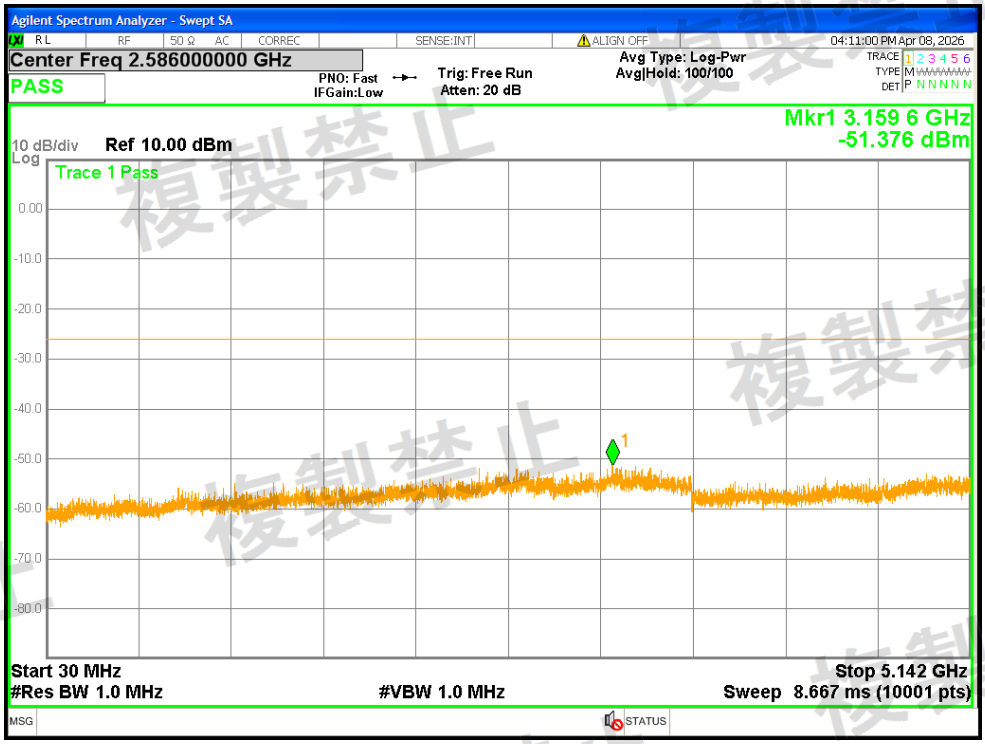


Tx. Spurious NVNT ax20 5240MHz Ant2 @ 5142MHz-5150MHz

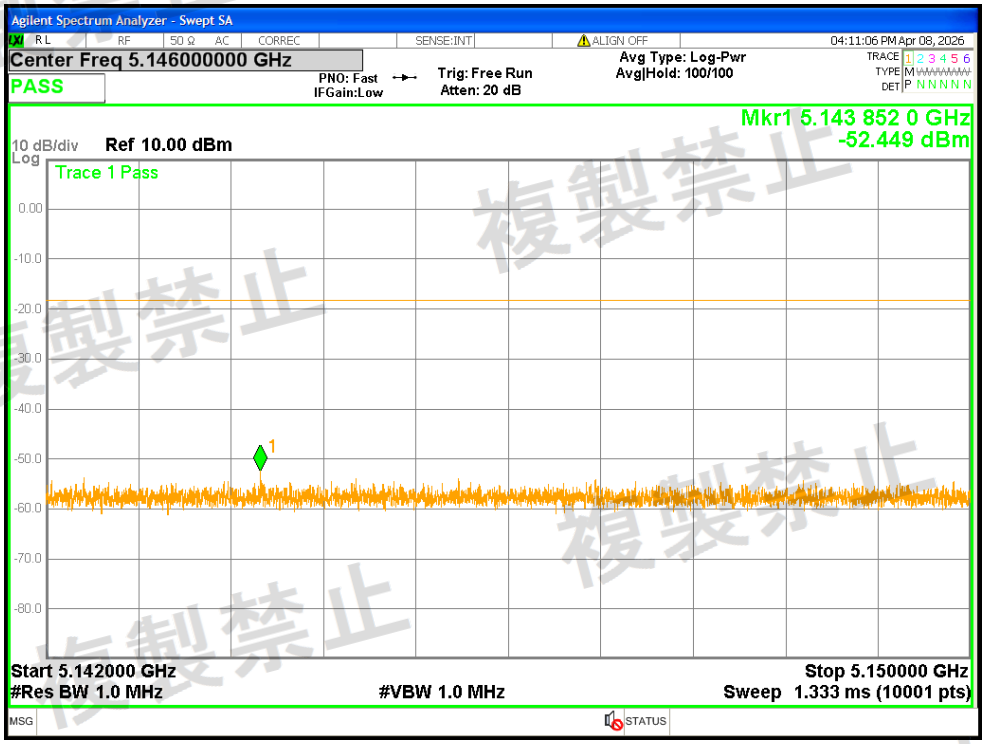


Tx. Spurious NVNT ax20 5240MHz Ant2 @ 5250MHz-5250.2MHz

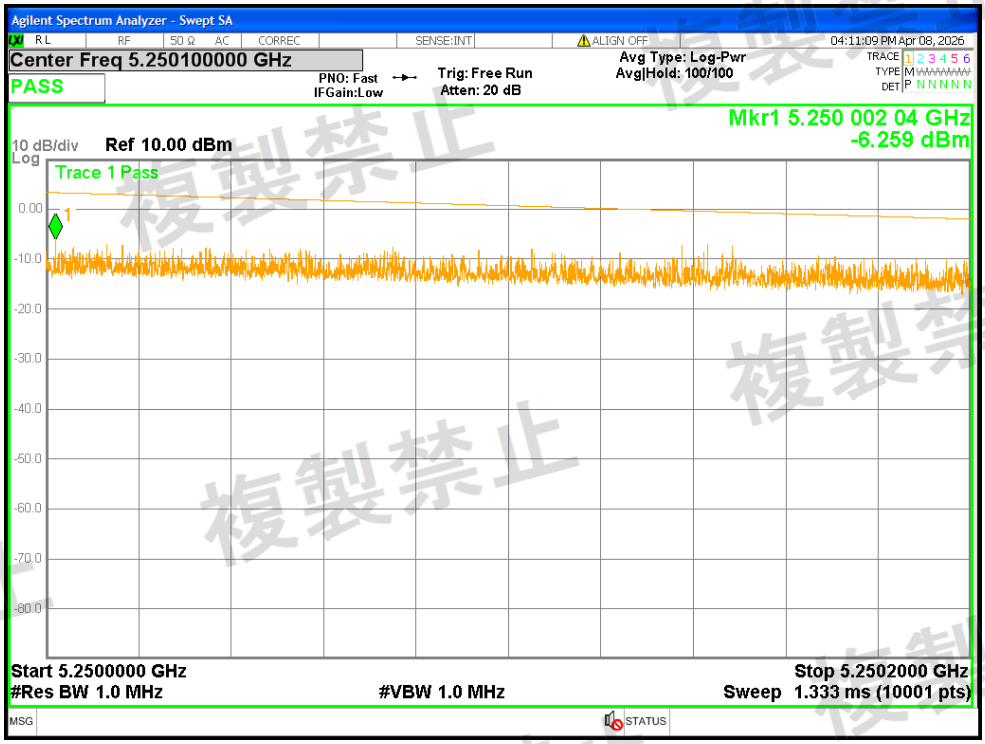


Tx. Spurious NVNT ax20 5240MHz Ant2 @ 5250.2MHz-5251MHz

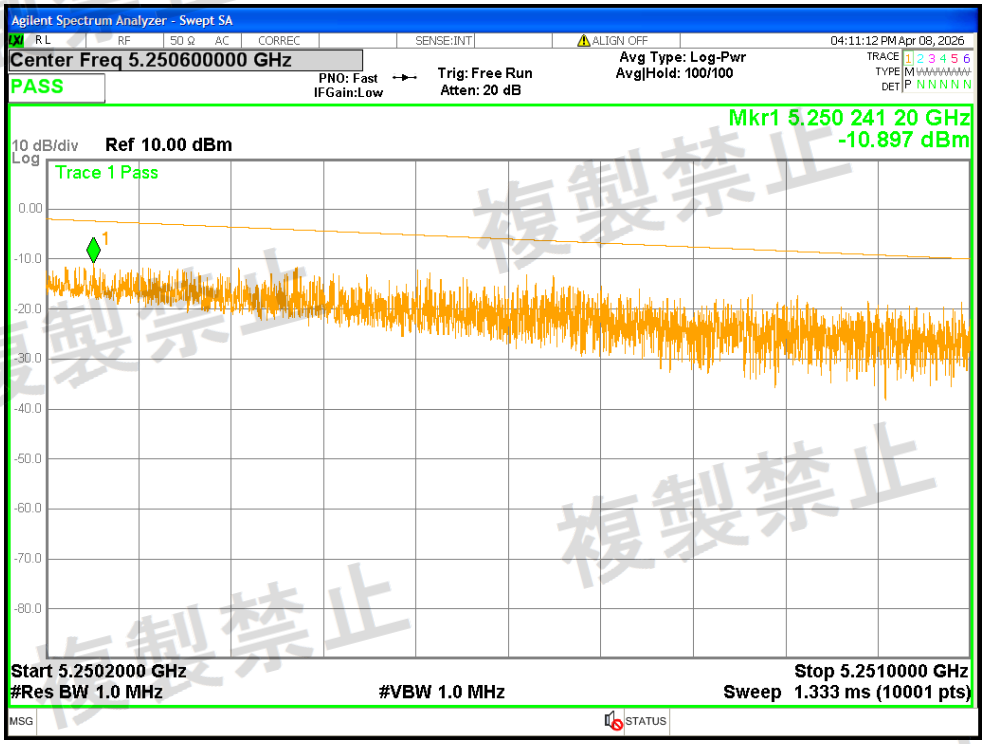


Tx. Spurious NVNT ax20 5240MHz Ant2 @ 5251MHz-5260MHz

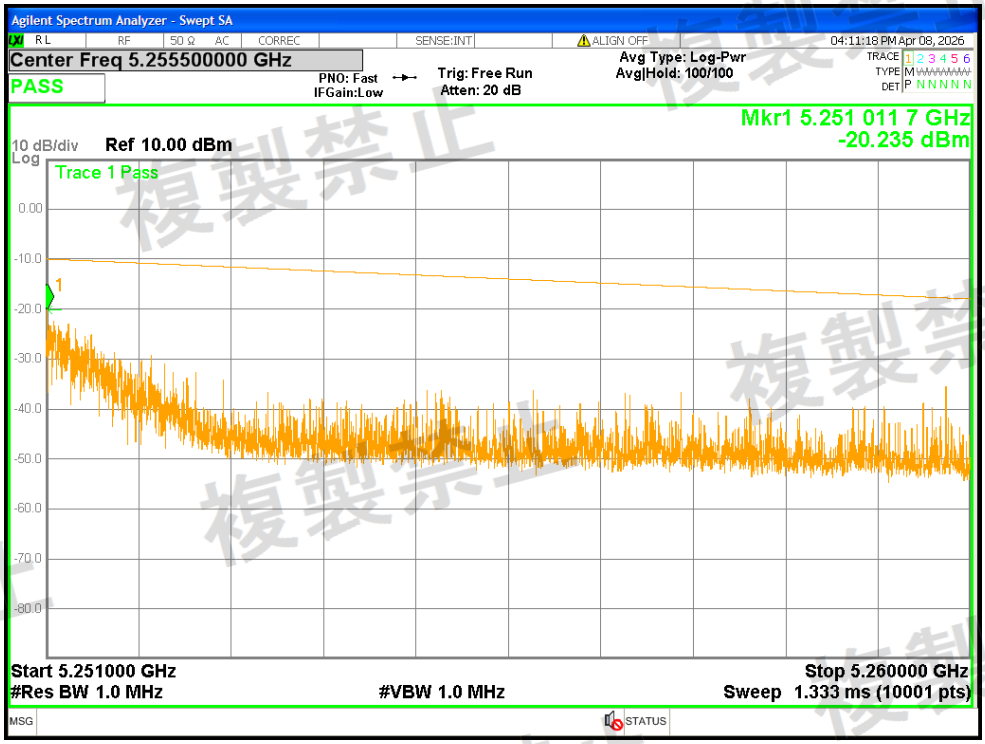


Tx. Spurious NVNT ax20 5240MHz Ant2 @ 5260MHz-5266.7MHz

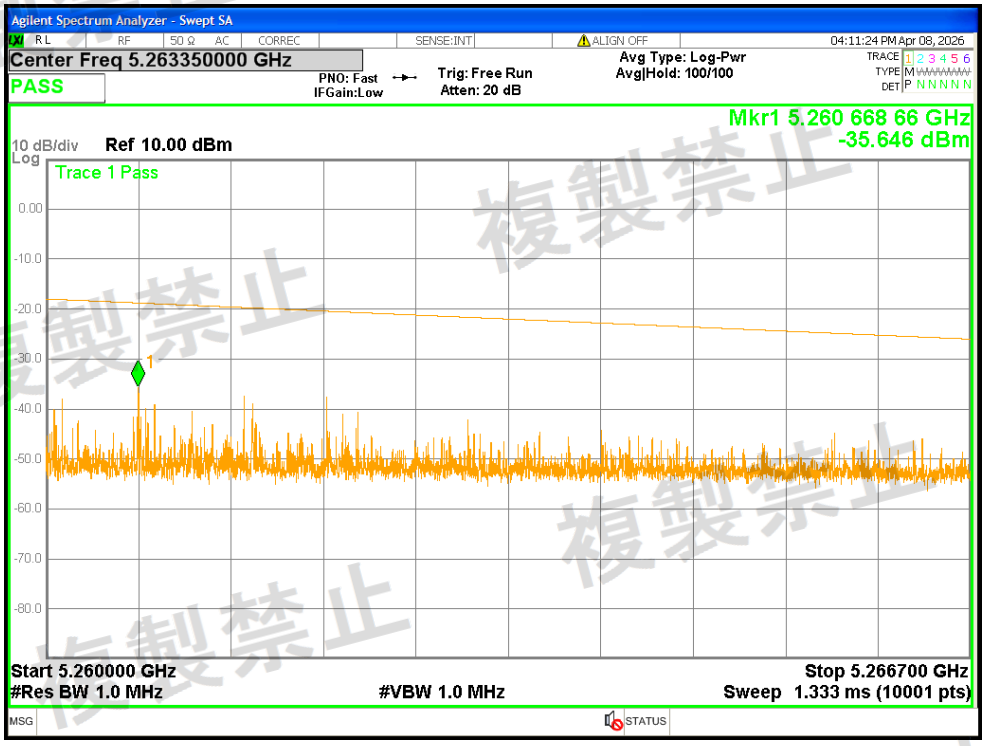


Tx. Spurious NVNT ax20 5240MHz Ant2 @ 5266.7MHz-26000MHz

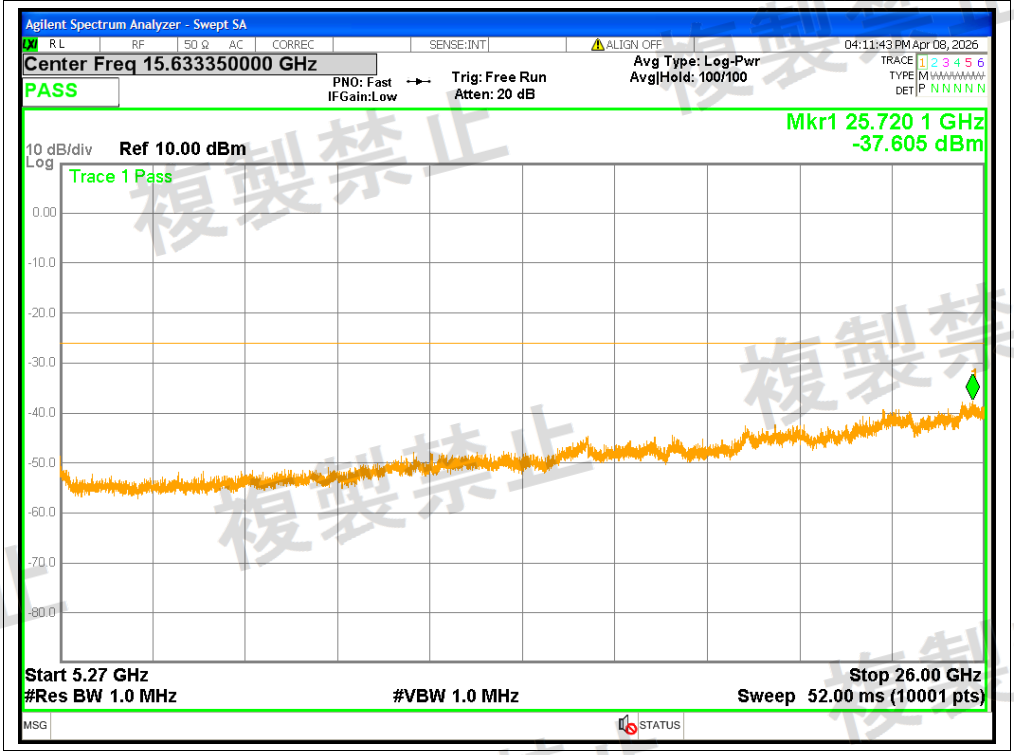


Tx. Spurious NVNT ax40 5190MHz Ant1 @ 30MHz-5141.6MHz

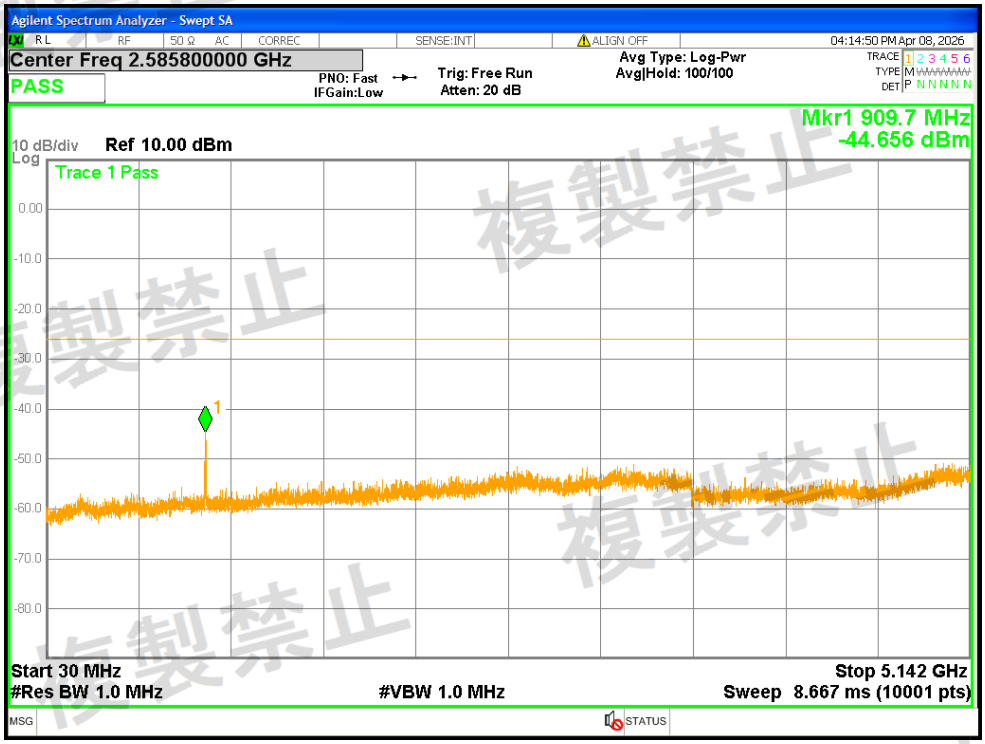


Tx. Spurious NVNT ax40 5190MHz Ant1 @ 5141.6MHz-5150MHz

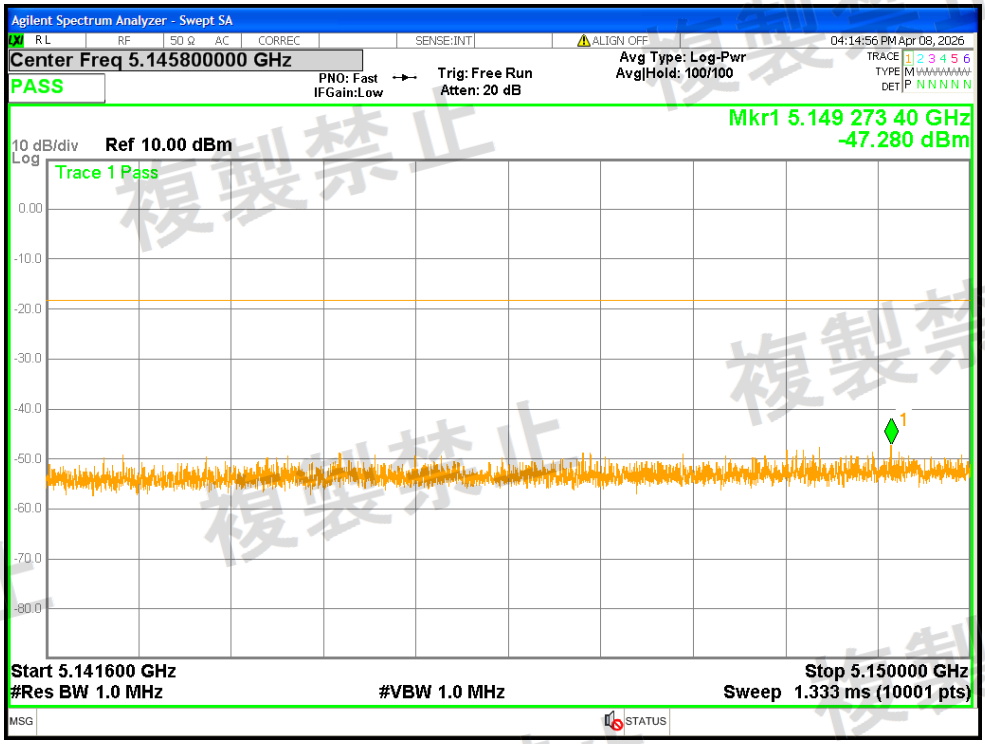


Tx. Spurious NVNT ax40 5190MHz Ant1 @ 5250MHz-5251MHz

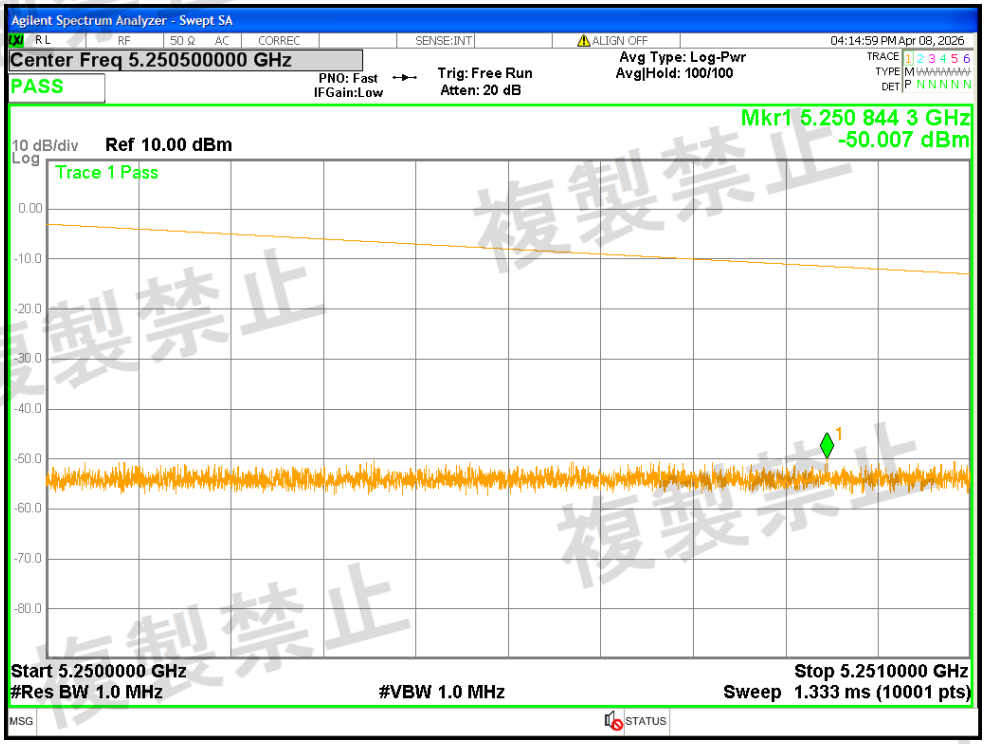


Tx. Spurious NVNT ax40 5190MHz Ant1 @ 5251MHz-5270MHz

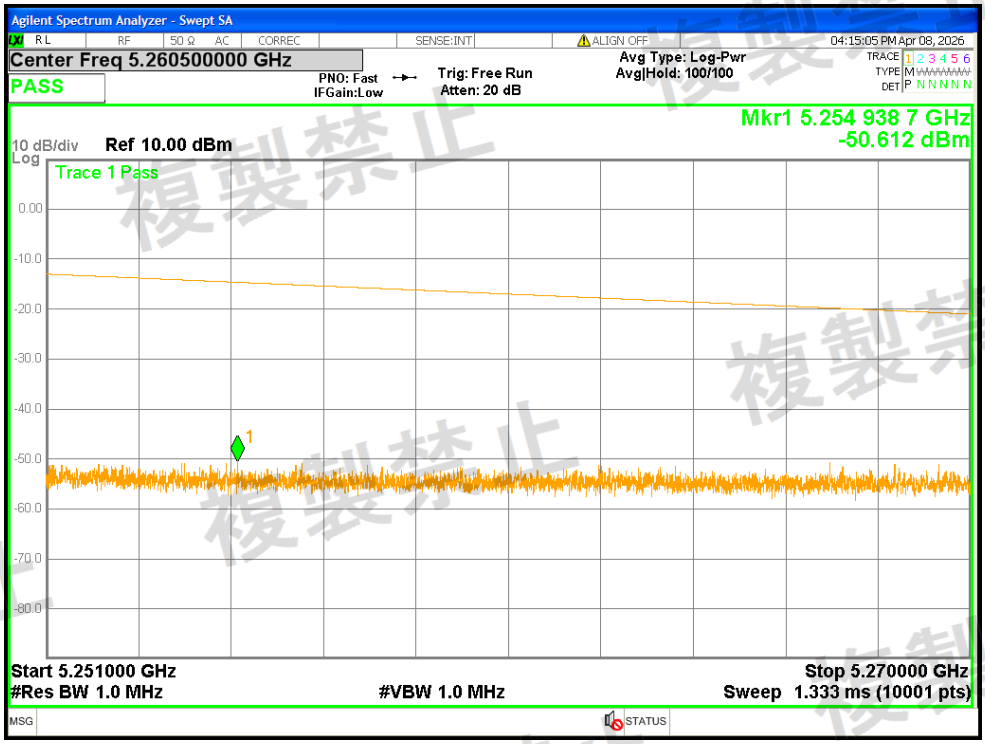


Tx. Spurious NVNT ax40 5190MHz Ant1 @ 5270MHz-5278.4MHz

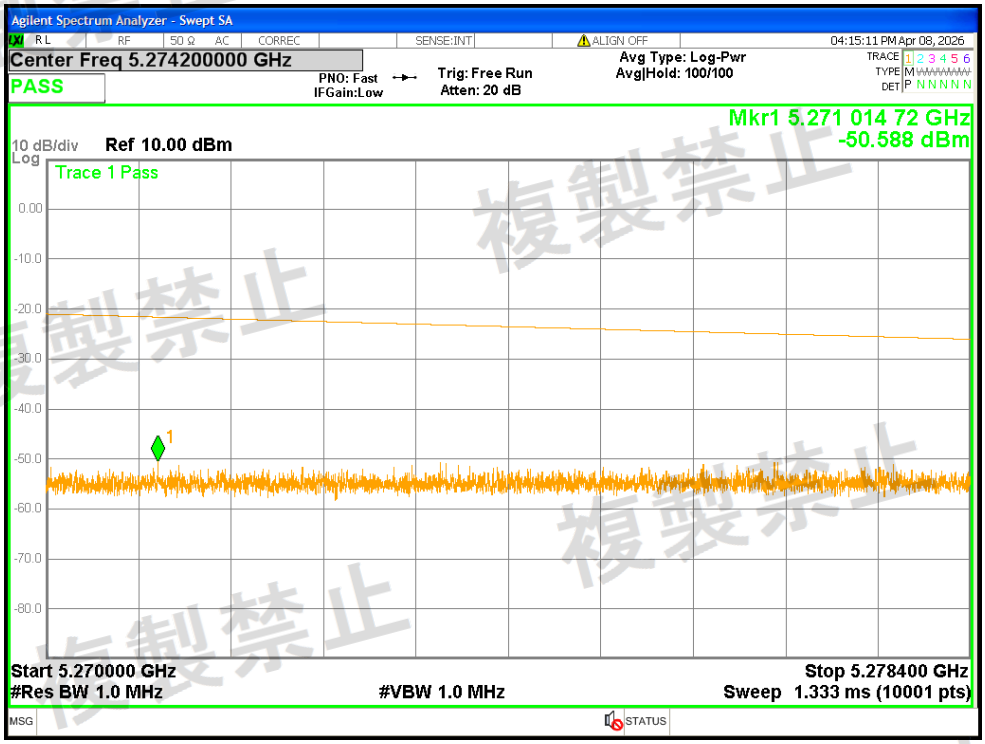


Tx. Spurious NVNT ax40 5190MHz Ant1 @ 5278.4MHz-26000MHz

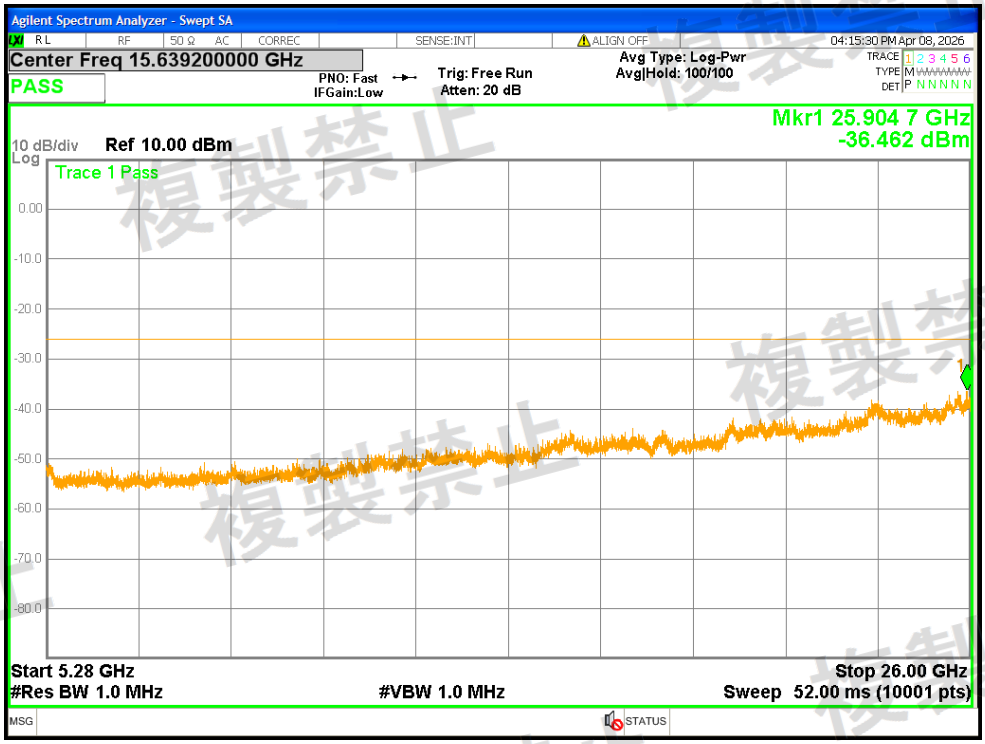


Tx. Spurious NVNT ax40 5190MHz Ant2 @ 30MHz-5141.6MHz

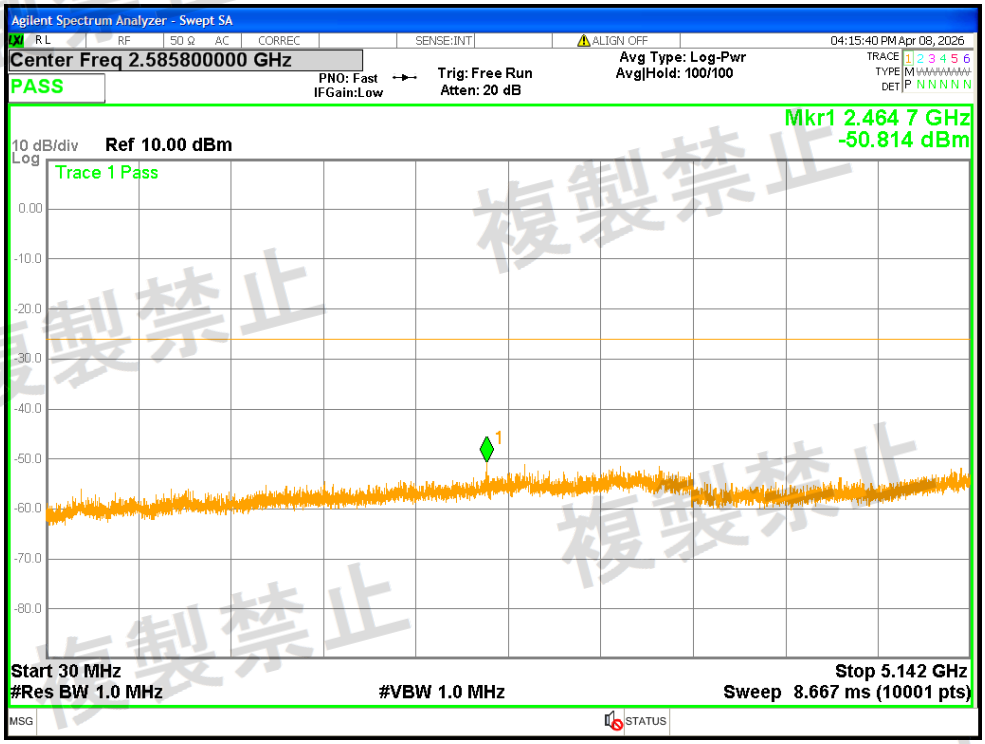


Tx. Spurious NVNT ax40 5190MHz Ant2 @ 5141.6MHz-5150MHz

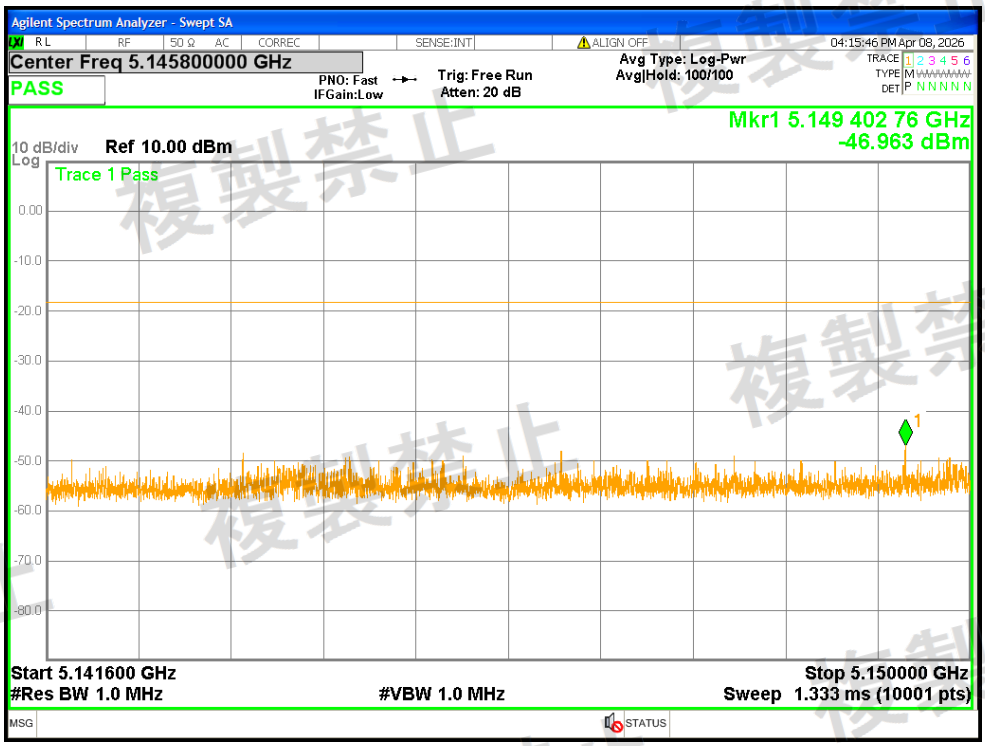


Tx. Spurious NVNT ax40 5190MHz Ant2 @ 5250MHz-5251MHz

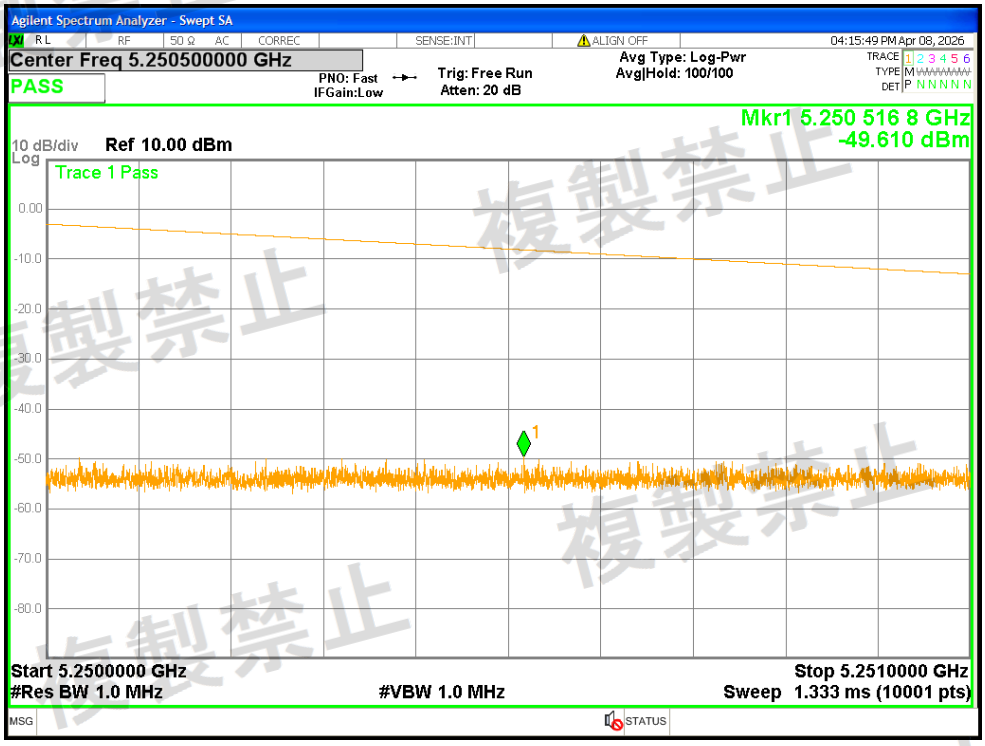


Tx. Spurious NVNT ax40 5190MHz Ant2 @ 5251MHz-5270MHz

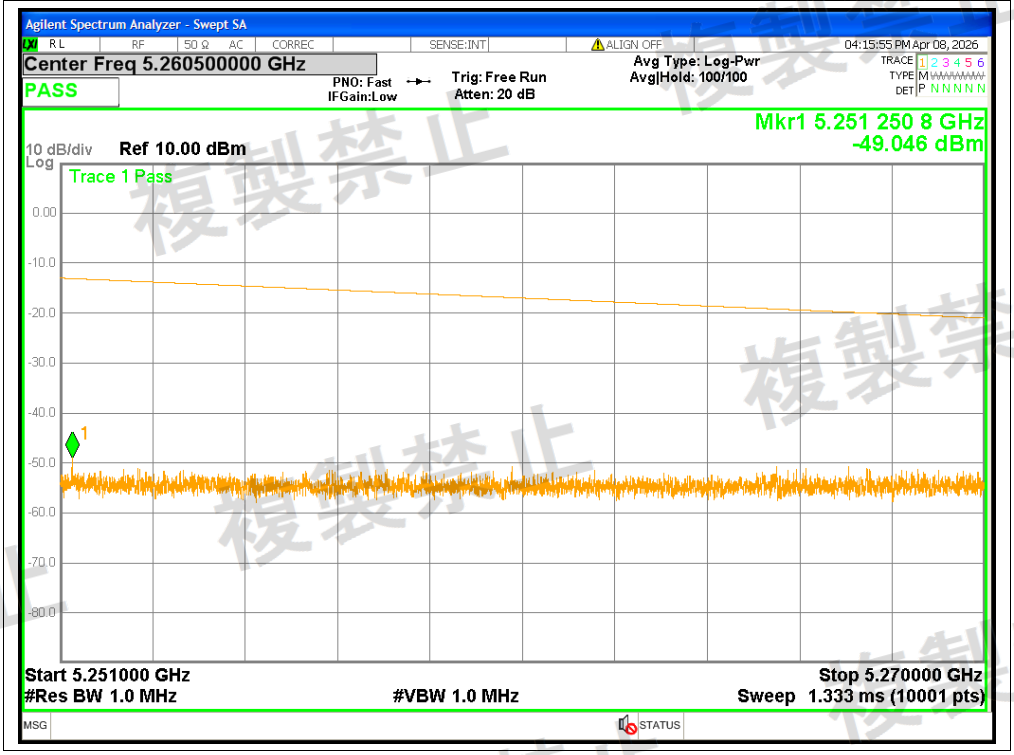


Tx. Spurious NVNT ax40 5190MHz Ant2 @ 5270MHz-5278.4MHz

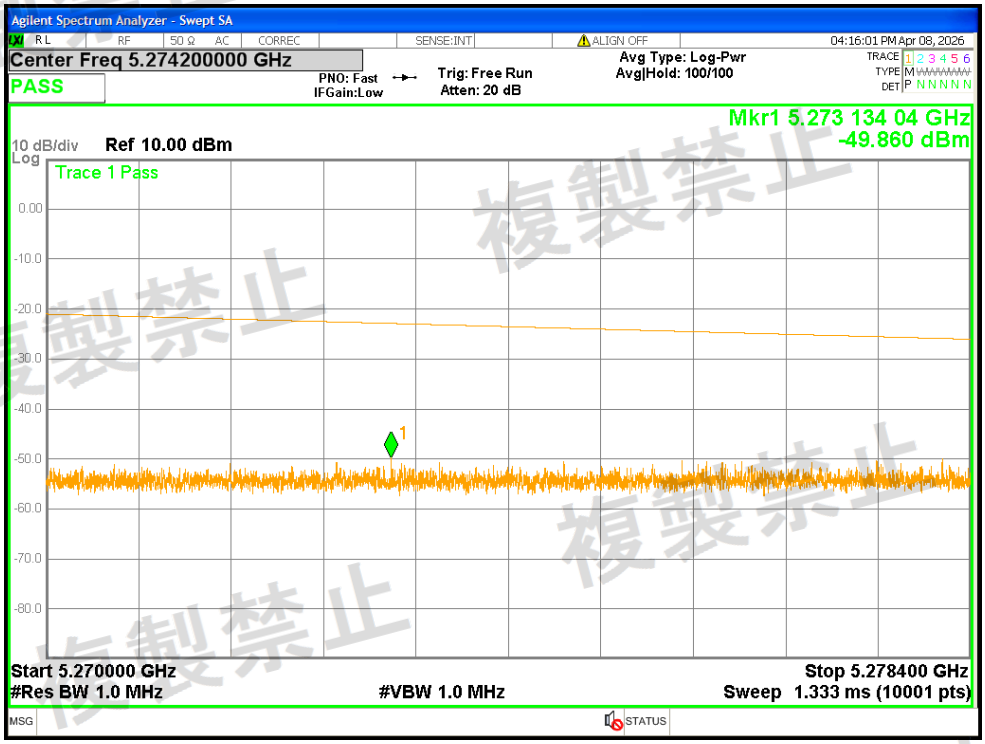


Tx. Spurious NVNT ax40 5190MHz Ant2 @ 5278.4MHz-26000MHz

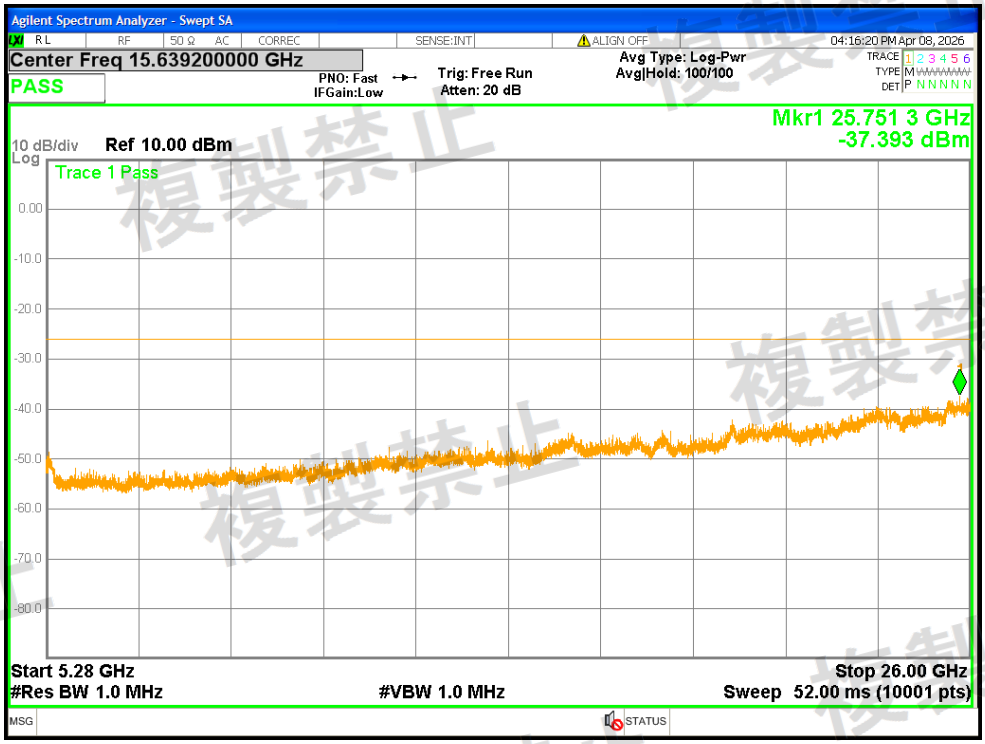


Tx. Spurious NVNT ax40 5230MHz Ant1 @ 30MHz-5141.6MHz

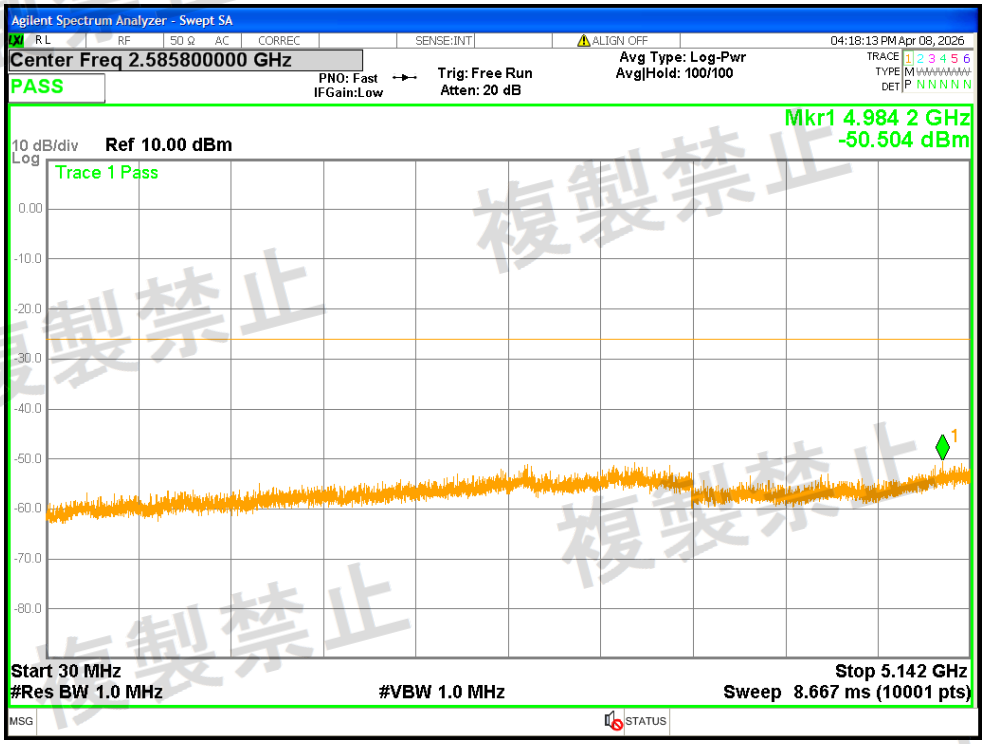


Tx. Spurious NVNT ax40 5230MHz Ant1 @ 5141.6MHz-5150MHz

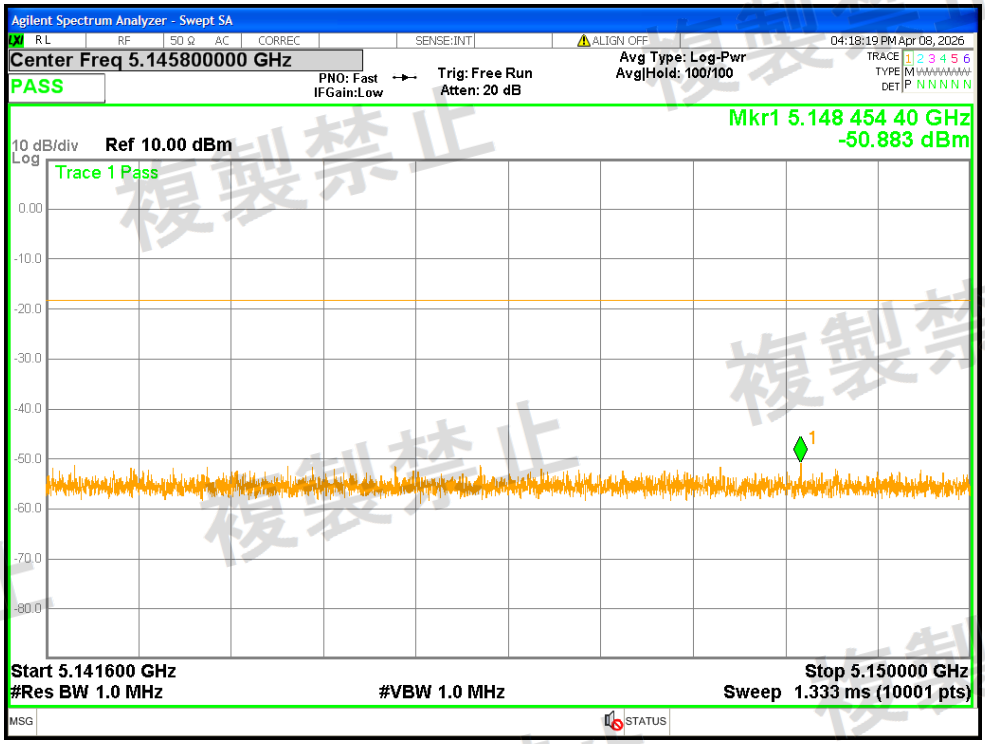


Tx. Spurious NVNT ax40 5230MHz Ant1 @ 5250MHz-5251MHz

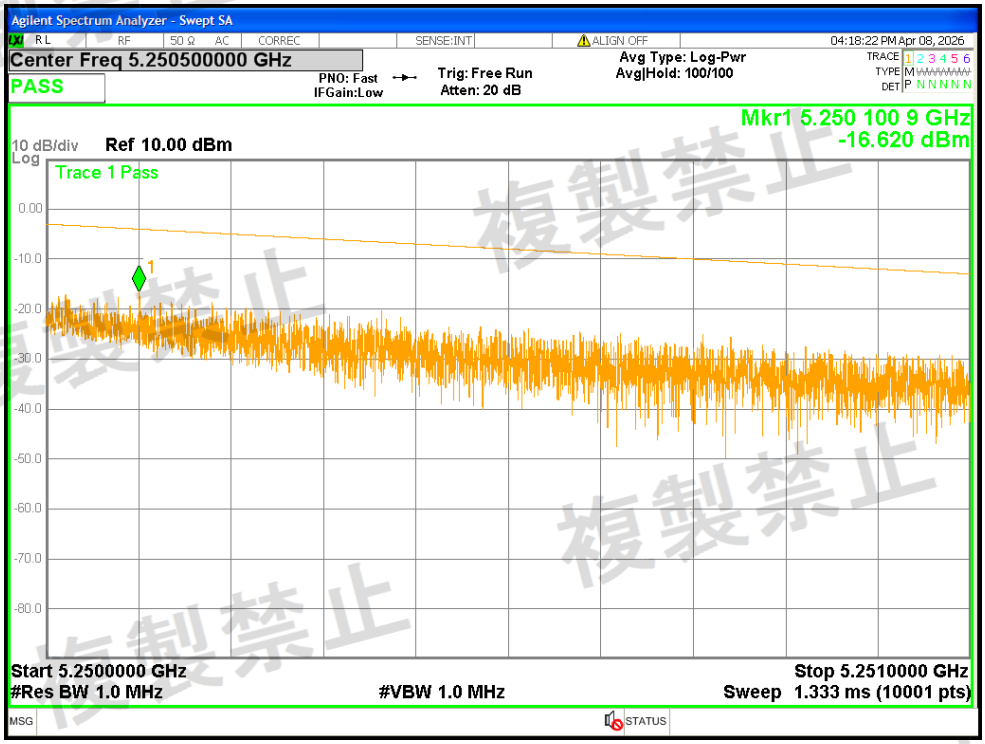


Tx. Spurious NVNT ax40 5230MHz Ant1 @ 5251MHz-5270MHz

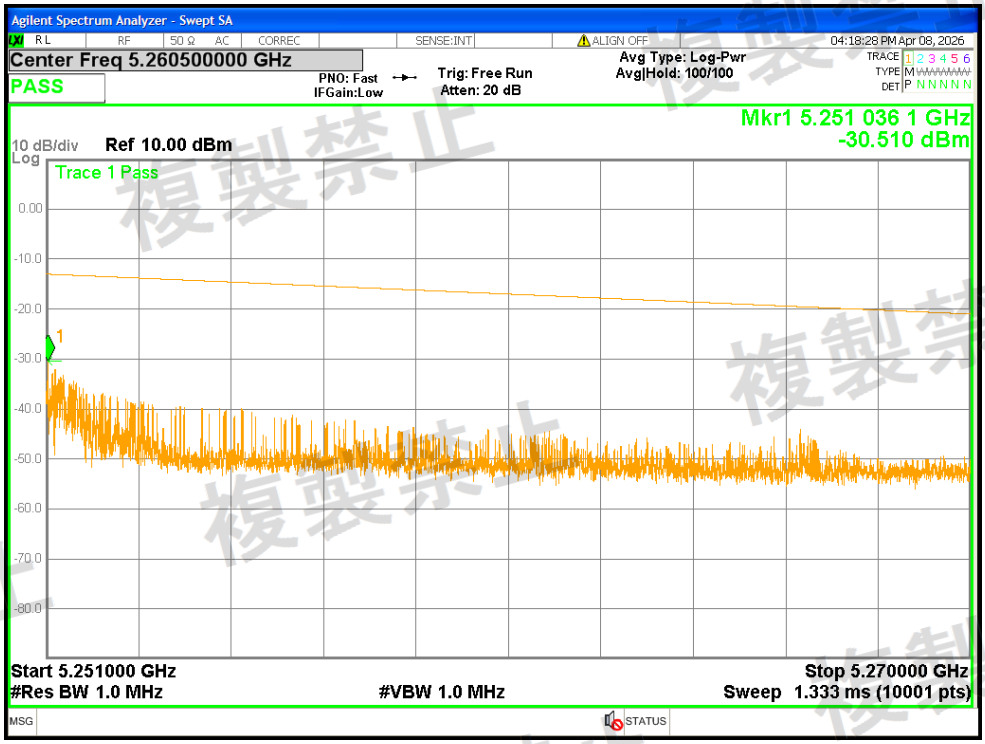


Tx. Spurious NVNT ax40 5230MHz Ant1 @ 5270MHz-5278.4MHz

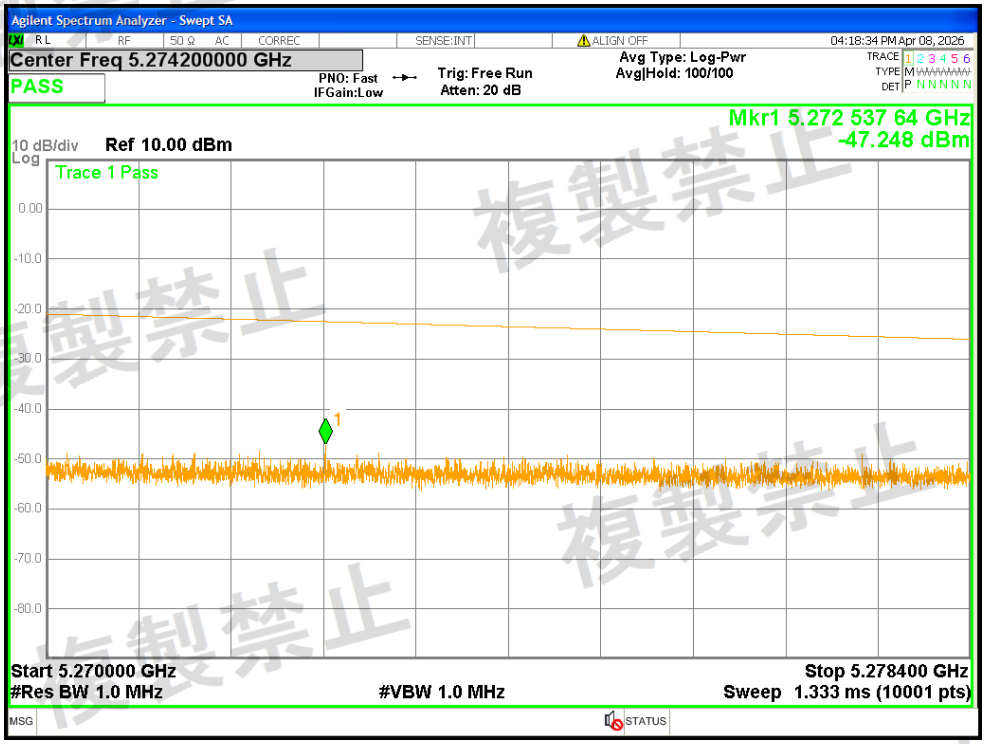


Tx. Spurious NVNT ax40 5230MHz Ant1 @ 5278.4MHz-26000MHz

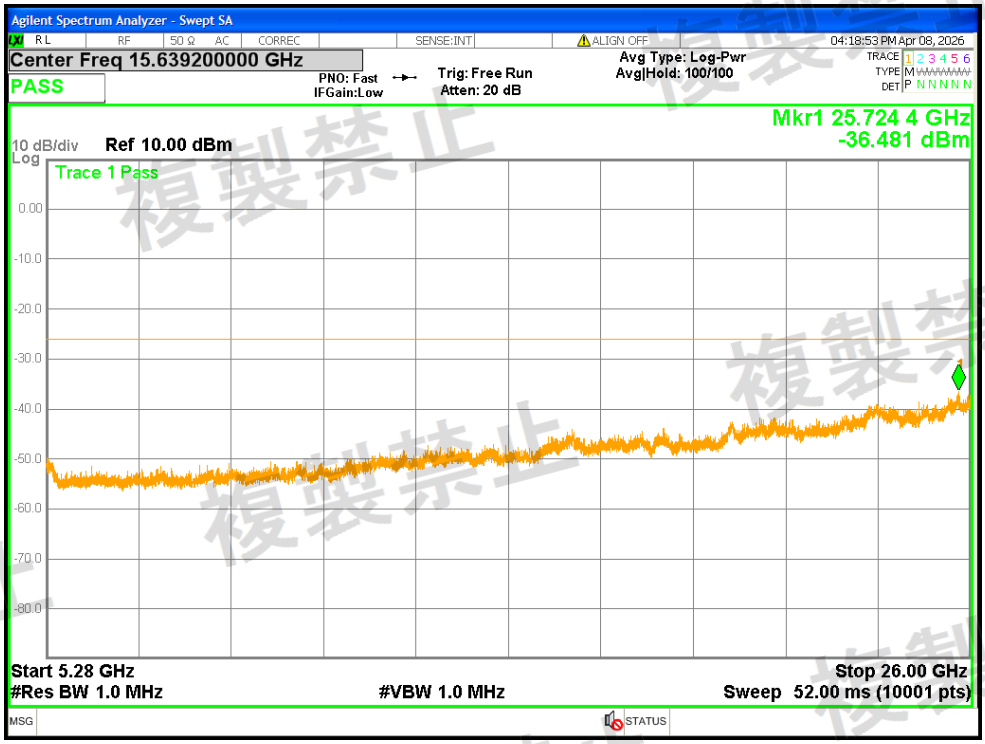


Tx. Spurious NVNT ax40 5230MHz Ant2 @ 30MHz-5141.6MHz

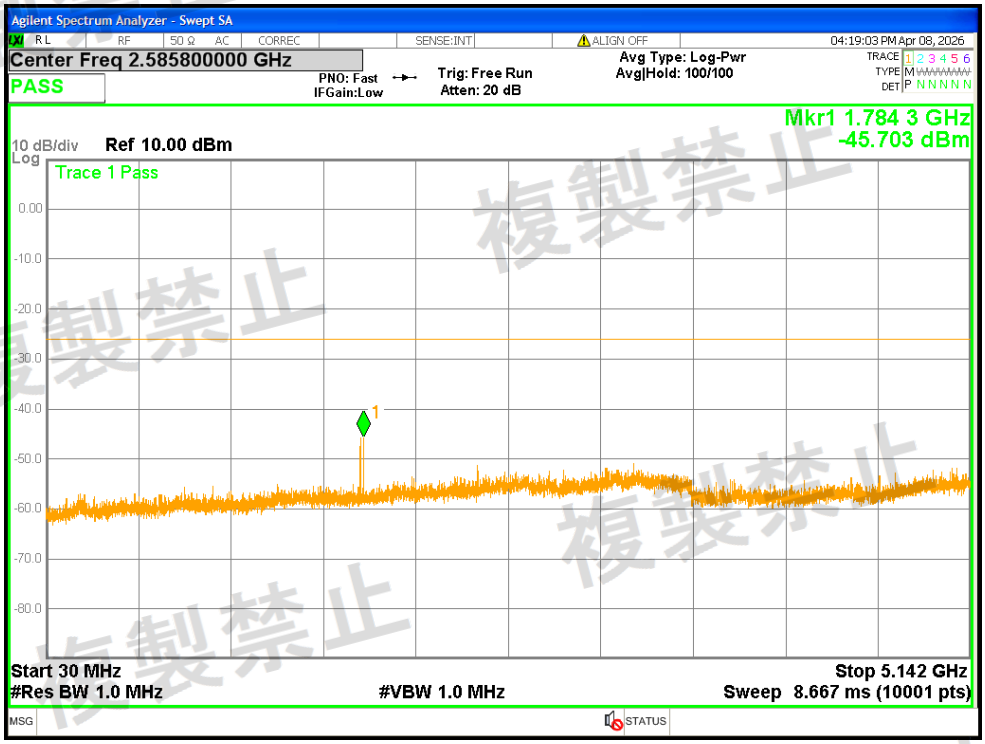


Tx. Spurious NVNT ax40 5230MHz Ant2 @ 5141.6MHz-5150MHz

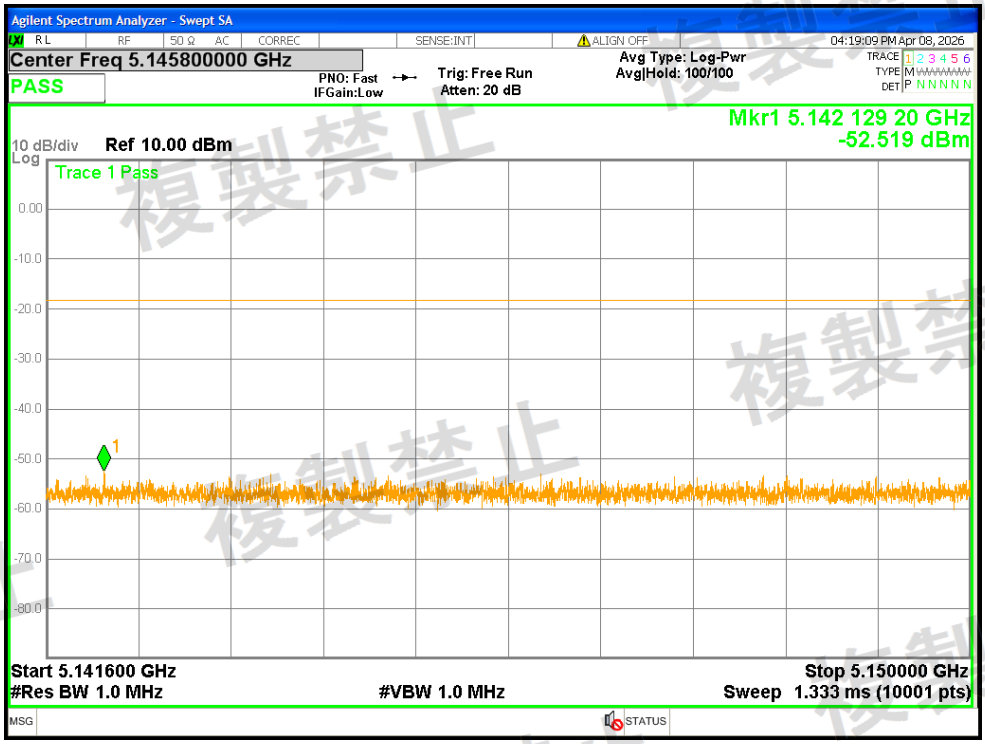


Tx. Spurious NVNT ax40 5230MHz Ant2 @ 5250MHz-5251MHz

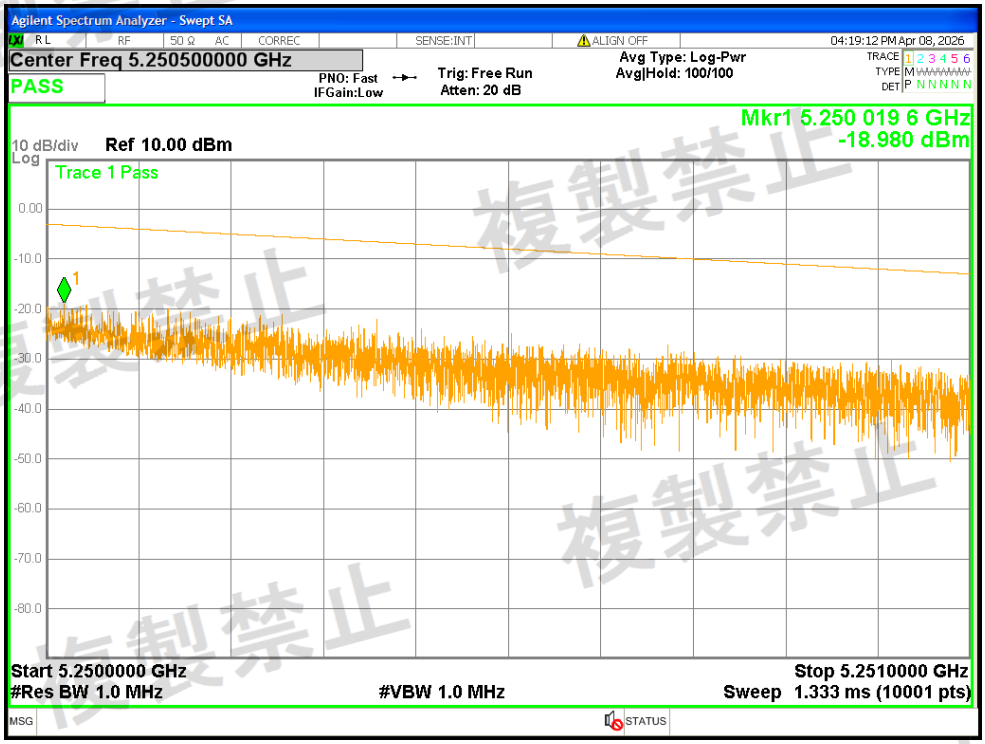


Tx. Spurious NVNT ax40 5230MHz Ant2 @ 5251MHz-5270MHz

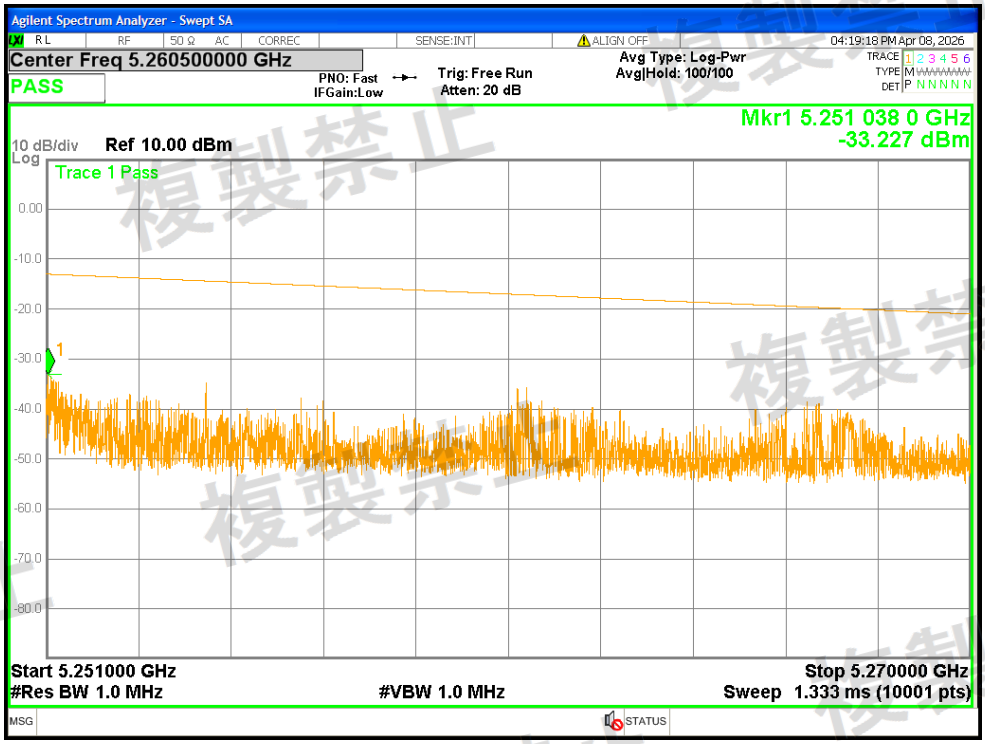


Tx. Spurious NVNT ax40 5230MHz Ant2 @ 5270MHz-5278.4MHz

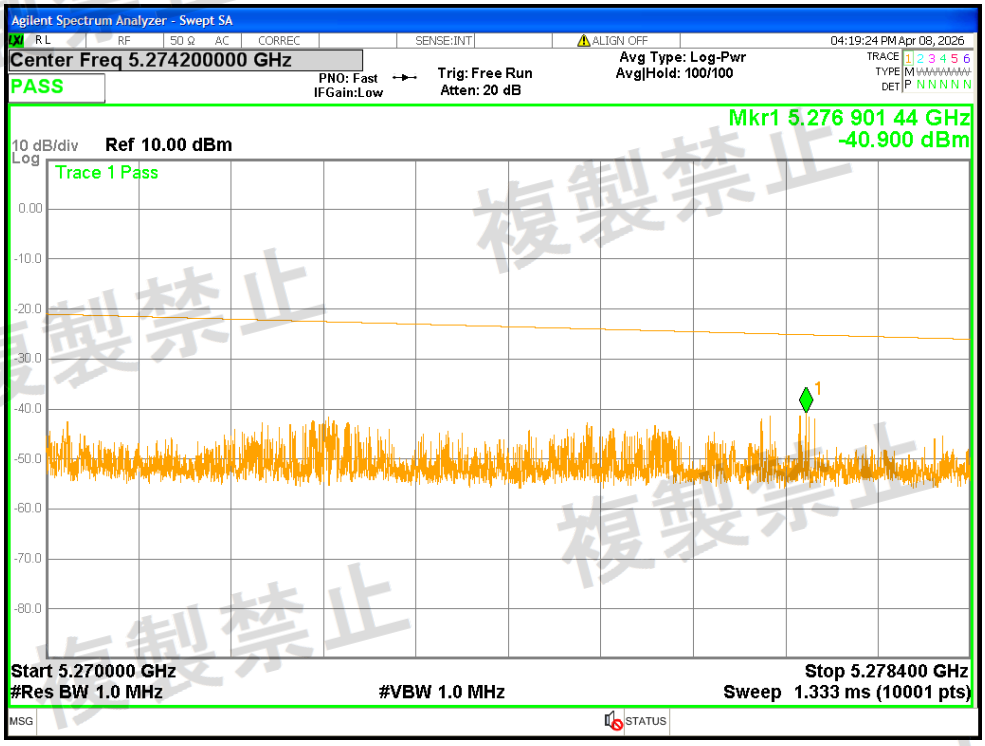


Tx. Spurious NVNT ax40 5230MHz Ant2 @ 5278.4MHz-26000MHz

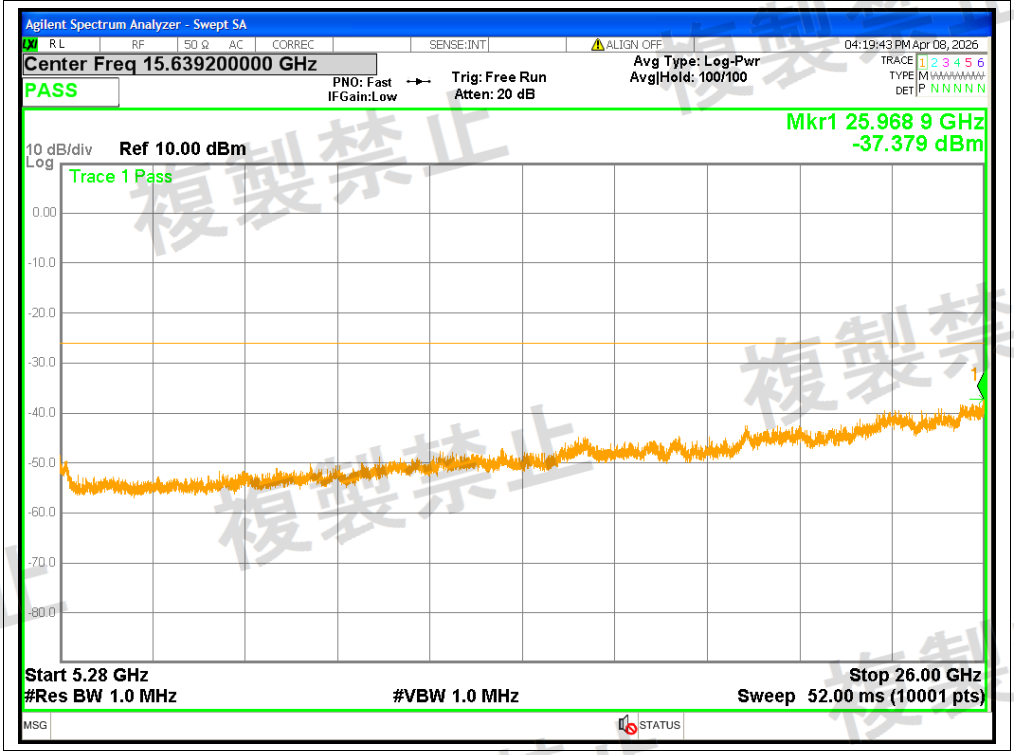


Tx. Spurious NVNT ax80 5210MHz Ant1 @ 30MHz-5123.2MHz

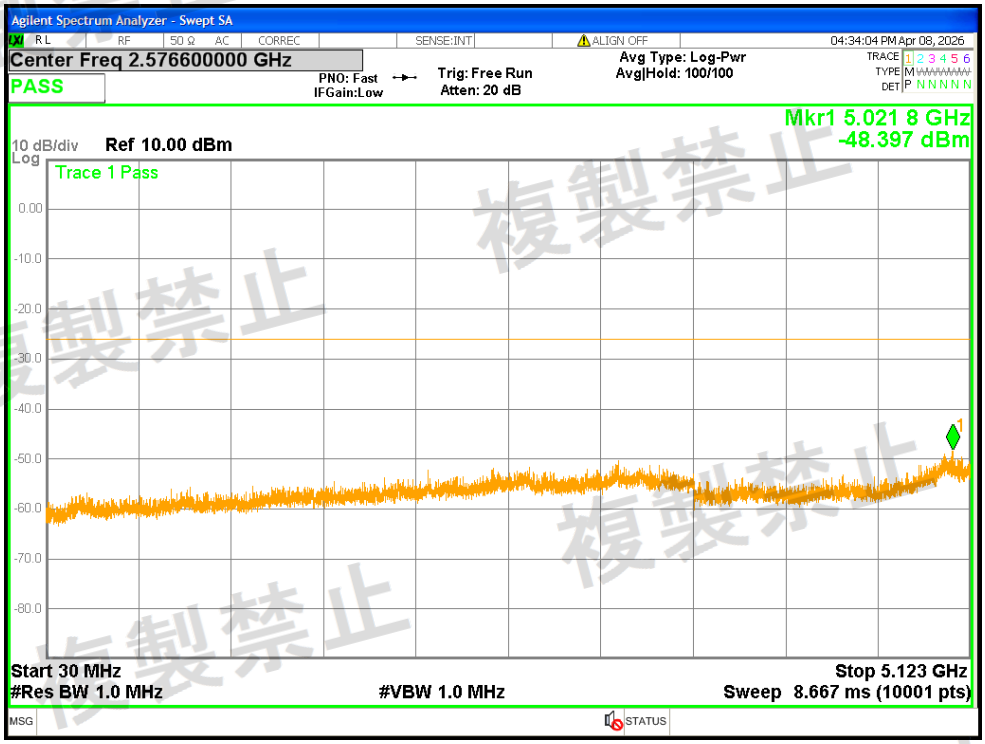


Tx. Spurious NVNT ax80 5210MHz Ant1 @ 5123.2MHz-5150MHz

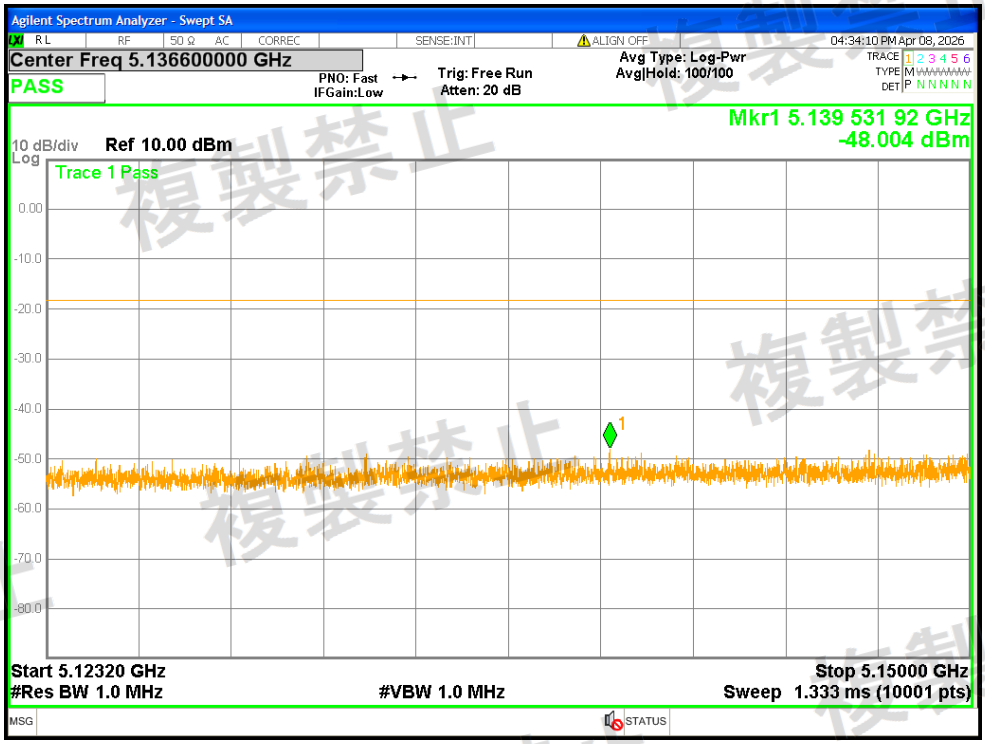


Tx. Spurious NVNT ax80 5210MHz Ant1 @ 5250MHz-5251MHz

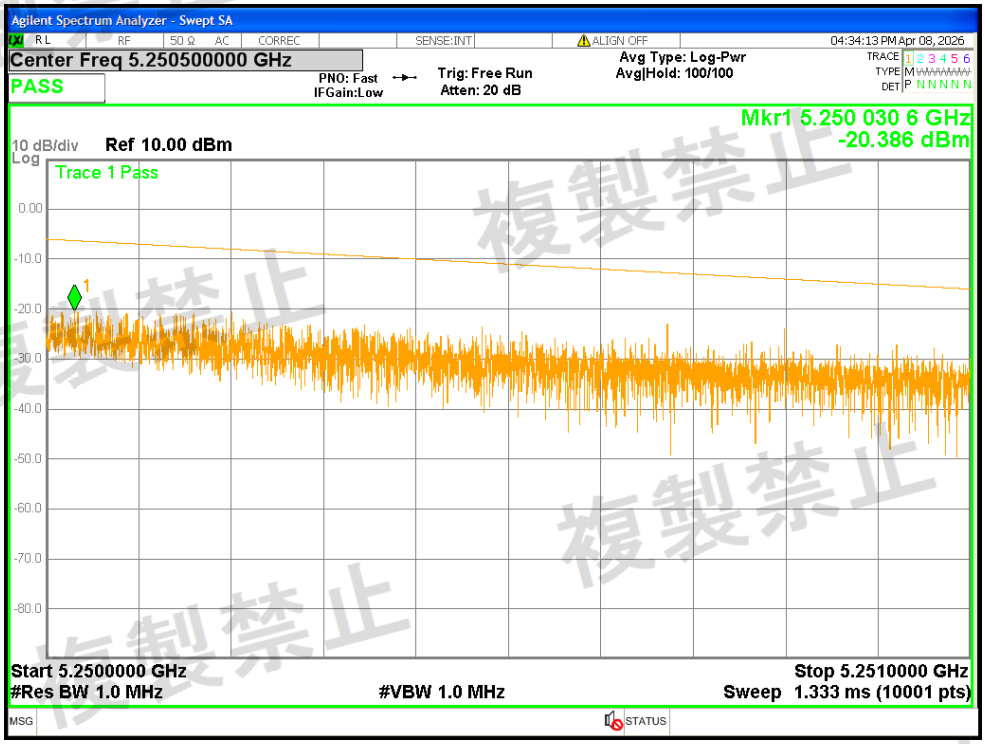


Tx. Spurious NVNT ax80 5210MHz Ant1 @ 5251MHz-5290MHz

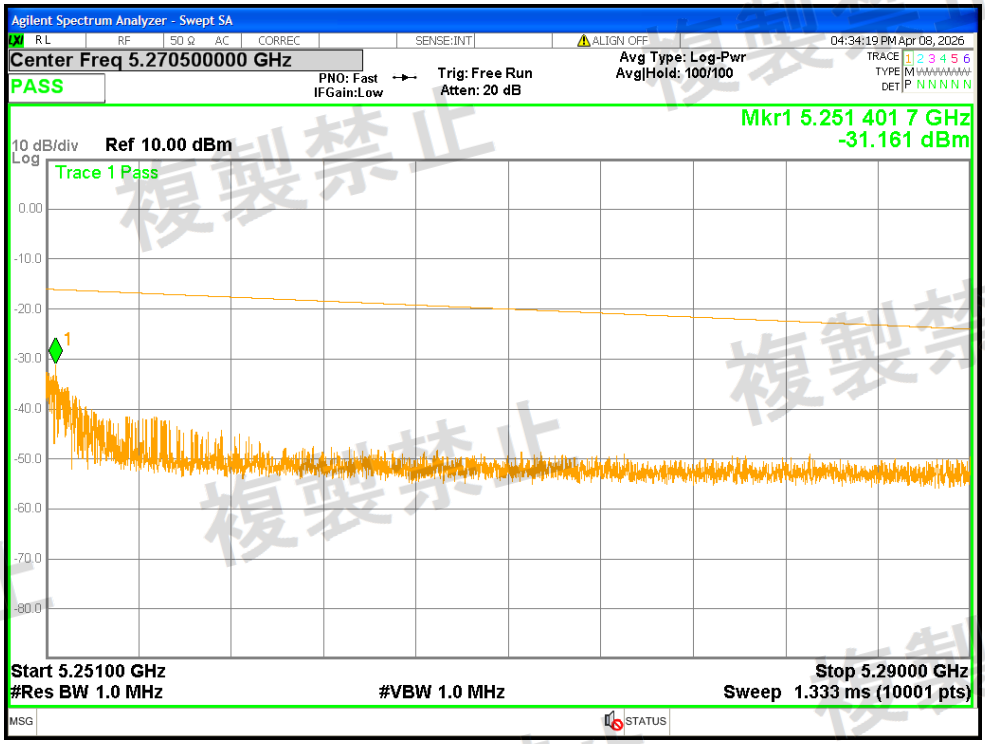


Tx. Spurious NVNT ax80 5210MHz Ant1 @ 5290MHz-5296.7MHz

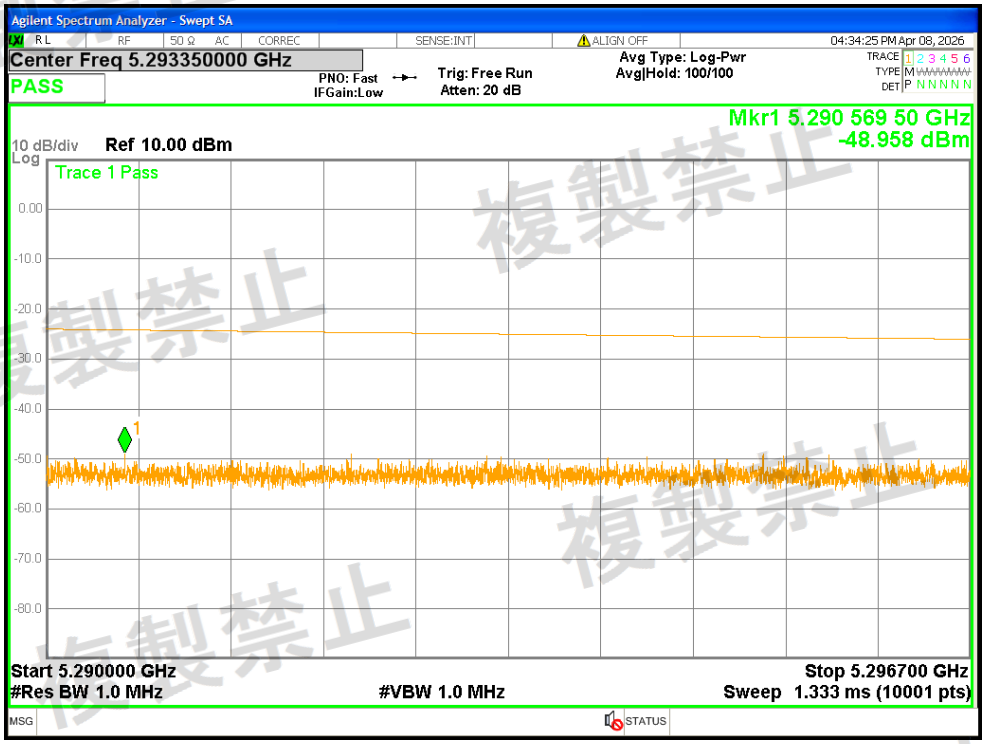


Tx. Spurious NVNT ax80 5210MHz Ant1 @ 5296.7MHz-26000MHz

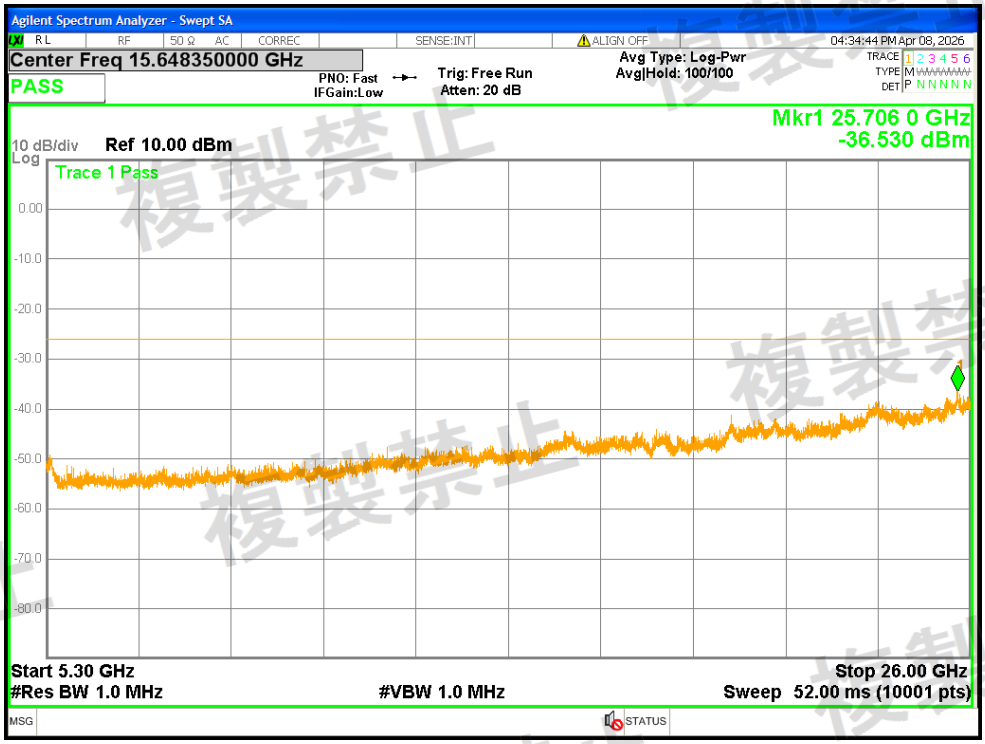


Tx. Spurious NVNT ax80 5210MHz Ant2 @ 30MHz-5123.2MHz

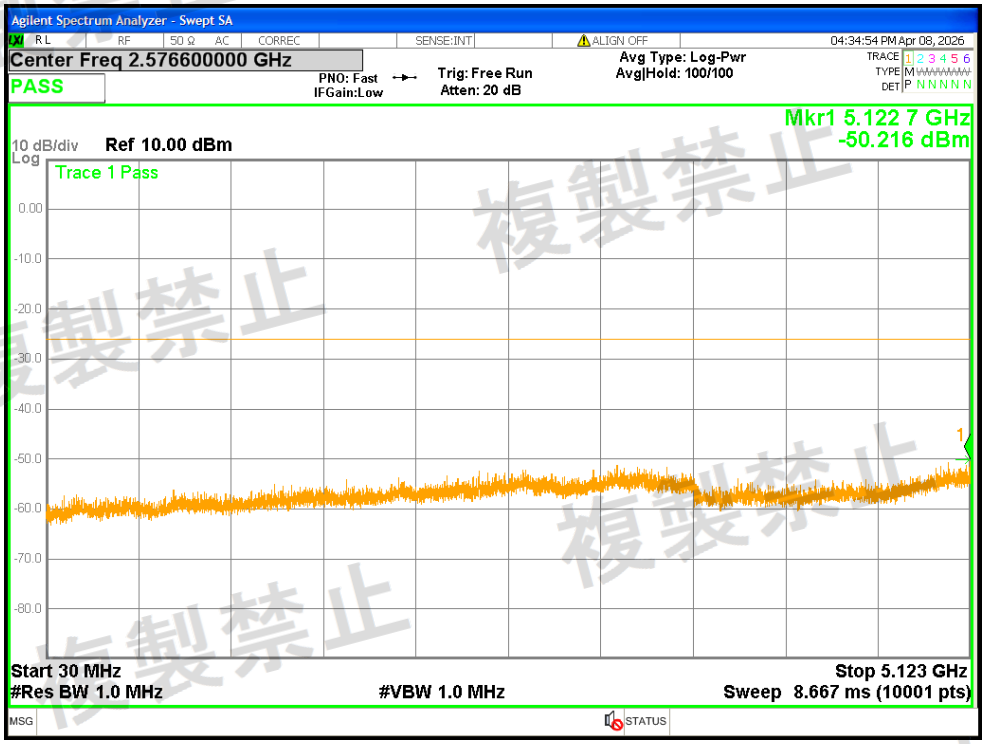


Tx. Spurious NVNT ax80 5210MHz Ant2 @ 5123.2MHz-5150MHz

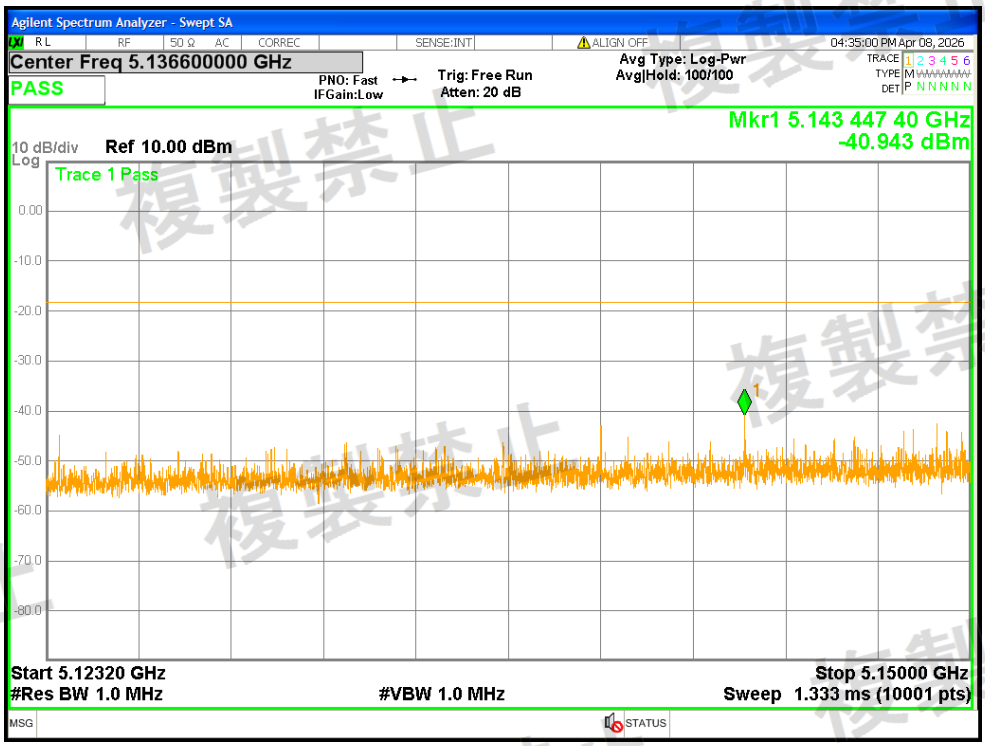


Tx. Spurious NVNT ax80 5210MHz Ant2 @ 5250MHz-5251MHz

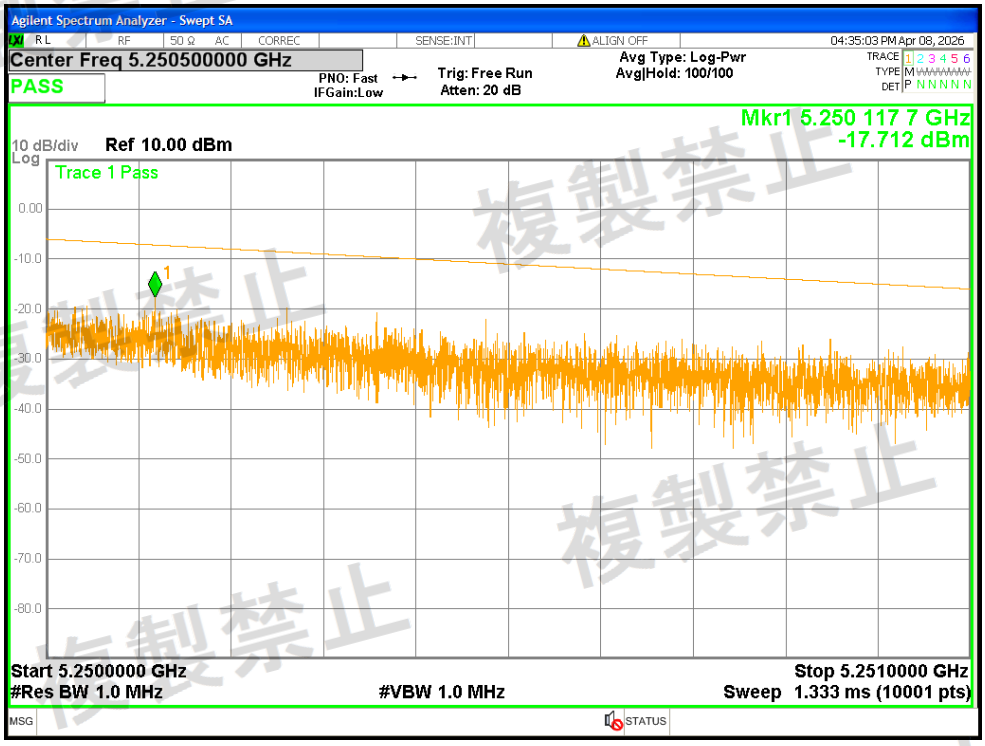


Tx. Spurious NVNT ax80 5210MHz Ant2 @ 5251MHz-5290MHz

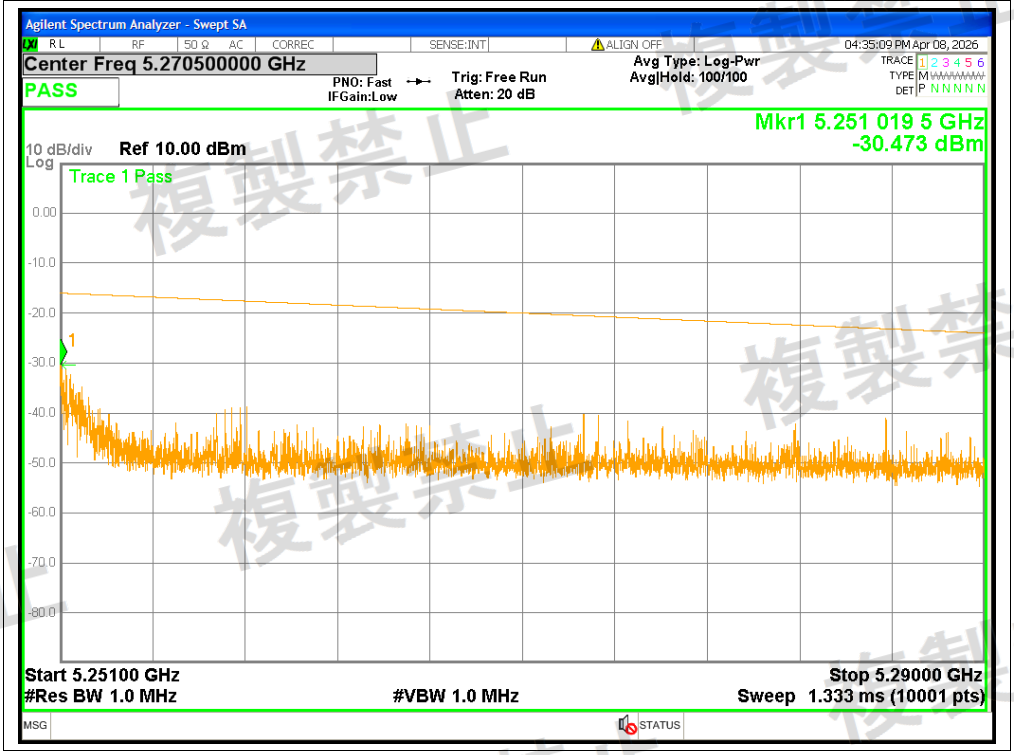

Tx. Spurious NVNT ax80 5210MHz Ant2 @ 5290MHz-5296.7MHz

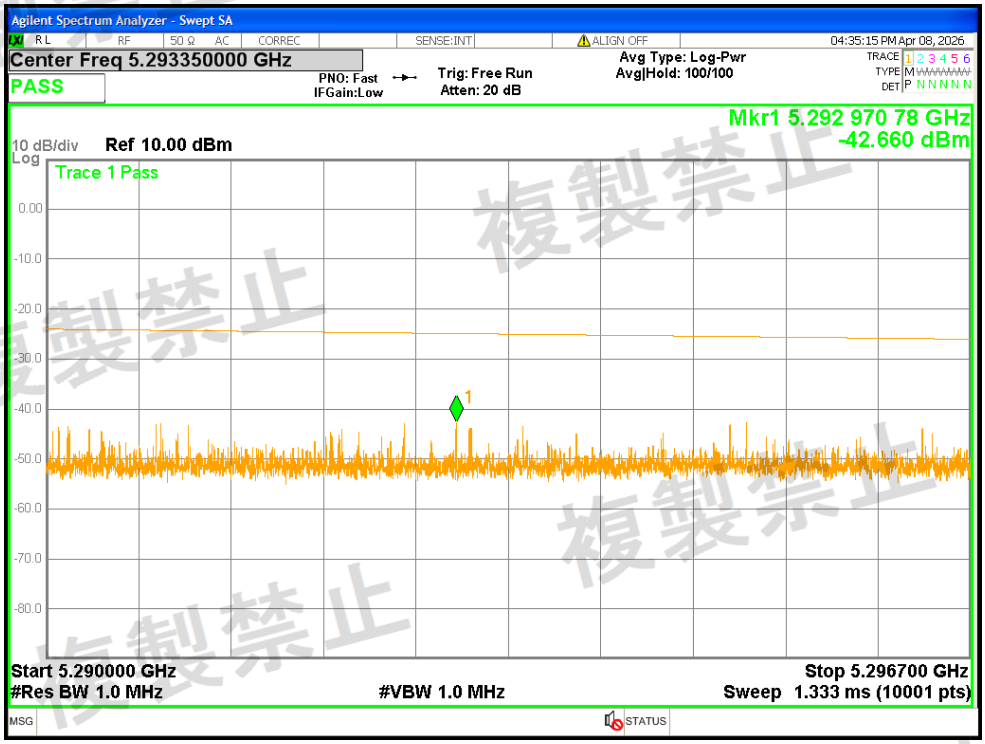

Tx. Spurious NVNT ax80 5210MHz Ant2 @ 5296.7MHz-26000MHz

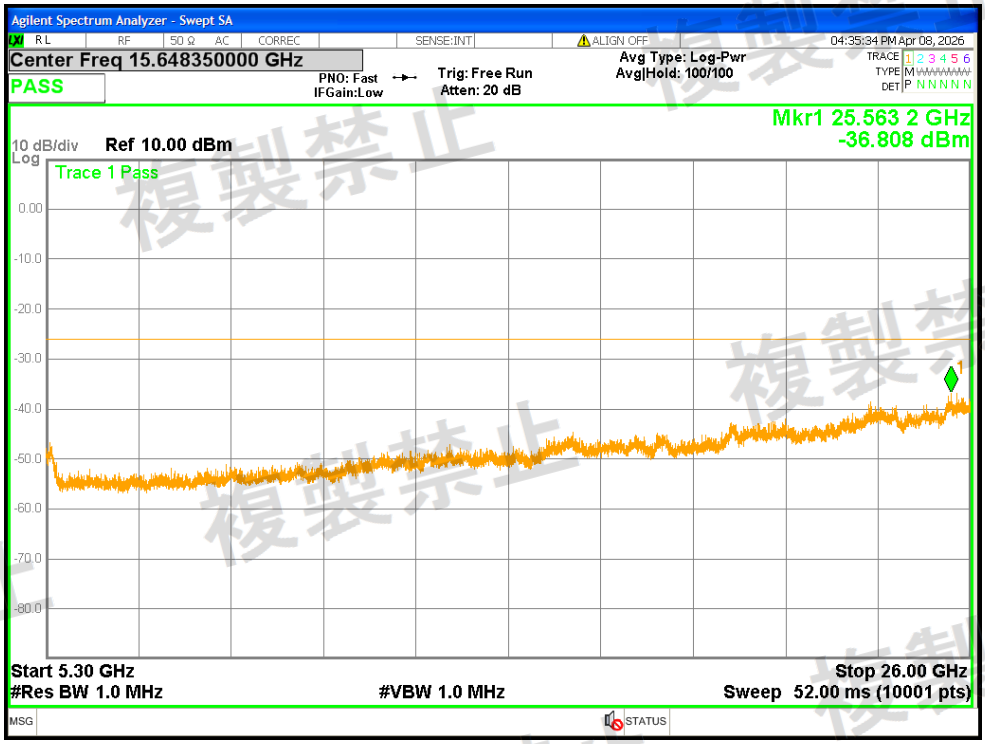


Burst Length


Condition	Mode	Frequency (MHz)	Antenna	Burst Length (ms)	Limit (ms)	Verdict
NVNT	a	5180	Ant1	1.396	<=8	Pass
NVNT	a	5200	Ant1	1.398	<=8	Pass
NVNT	a	5240	Ant1	1.396	<=8	Pass
NVNT	a	5180	Ant2	1.398	<=8	Pass
NVNT	a	5200	Ant2	1.398	<=8	Pass
NVNT	a	5240	Ant2	1.396	<=8	Pass
NVNT	n20	5180	MIMO	1.308	<=8	Pass
NVNT	n20	5200	MIMO	1.306	<=8	Pass
NVNT	n20	5240	MIMO	1.308	<=8	Pass
NVNT	n40	5190	MIMO	0.65	<=8	Pass
NVNT	n40	5230	MIMO	0.65	<=8	Pass
NVNT	ac20	5180	MIMO	1.317	<=8	Pass
NVNT	ac20	5200	MIMO	1.314	<=8	Pass
NVNT	ac20	5240	MIMO	1.317	<=8	Pass
NVNT	ac40	5190	MIMO	0.66	<=8	Pass
NVNT	ac40	5230	MIMO	0.657	<=8	Pass
NVNT	ac80	5210	MIMO	0.327	<=8	Pass
NVNT	ax20	5180	MIMO	1.02	<=8	Pass
NVNT	ax20	5200	MIMO	1.023	<=8	Pass
NVNT	ax20	5240	MIMO	1.02	<=8	Pass
NVNT	ax40	5190	MIMO	0.526	<=8	Pass
NVNT	ax40	5230	MIMO	0.534	<=8	Pass
NVNT	ax80	5210	MIMO	0.292	<=8	Pass

Test Graphs

Burst Length NVNT a 5180MHz Ant1

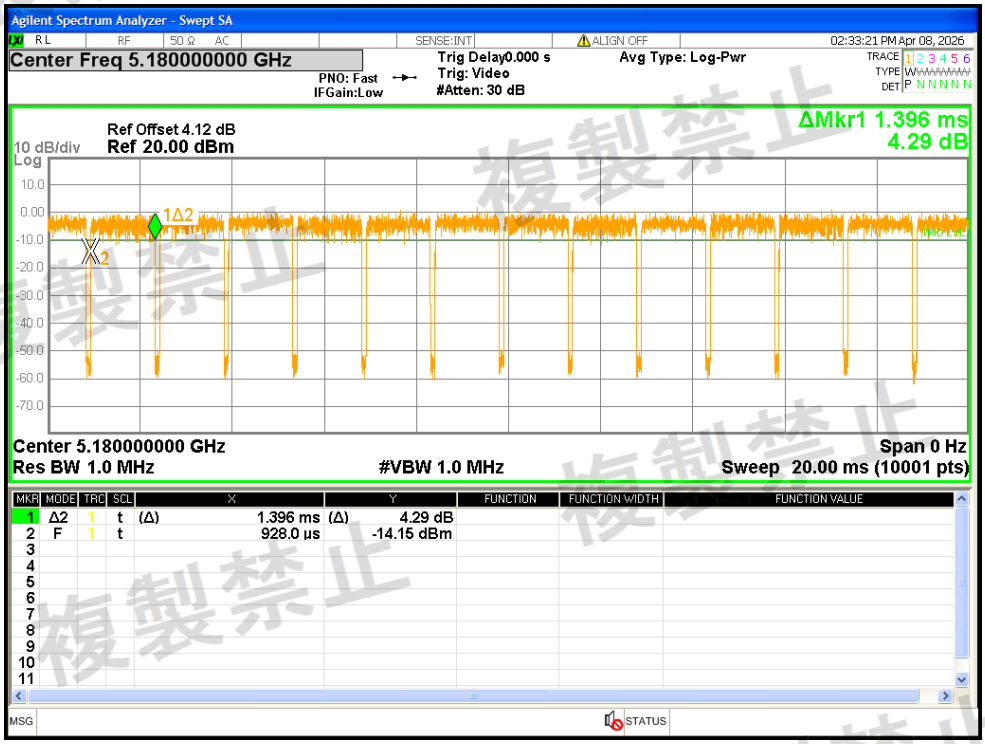


Burst Length NVNT a 5200MHz Ant1

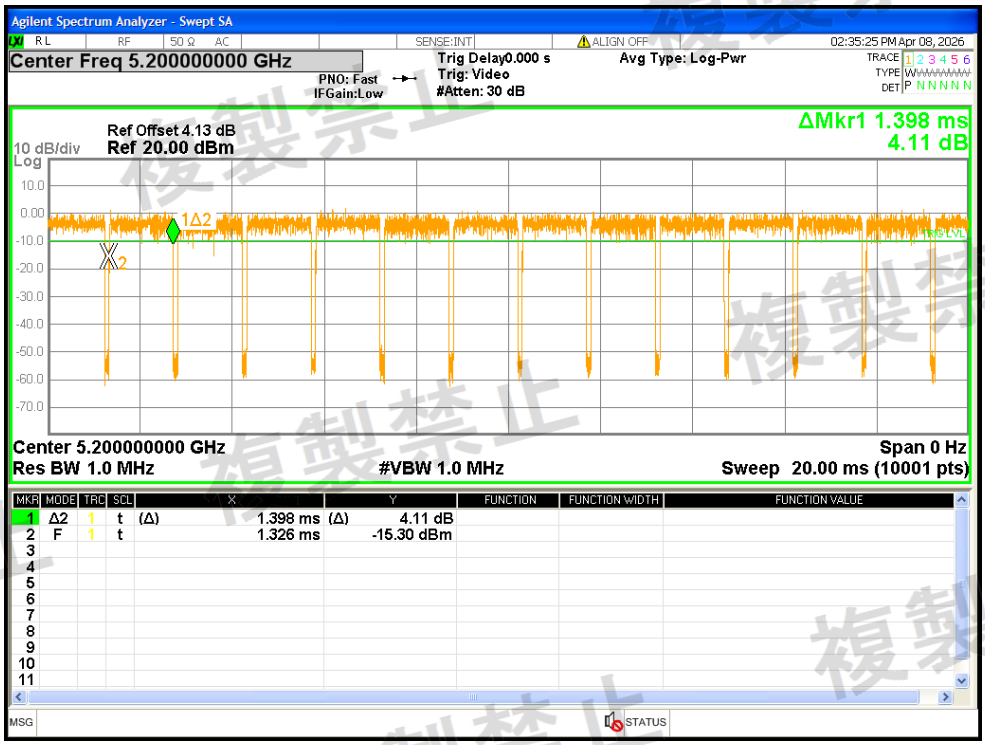


Burst Length NVNT a 5240MHz Ant1




Burst Length NVNT a 5180MHz Ant2

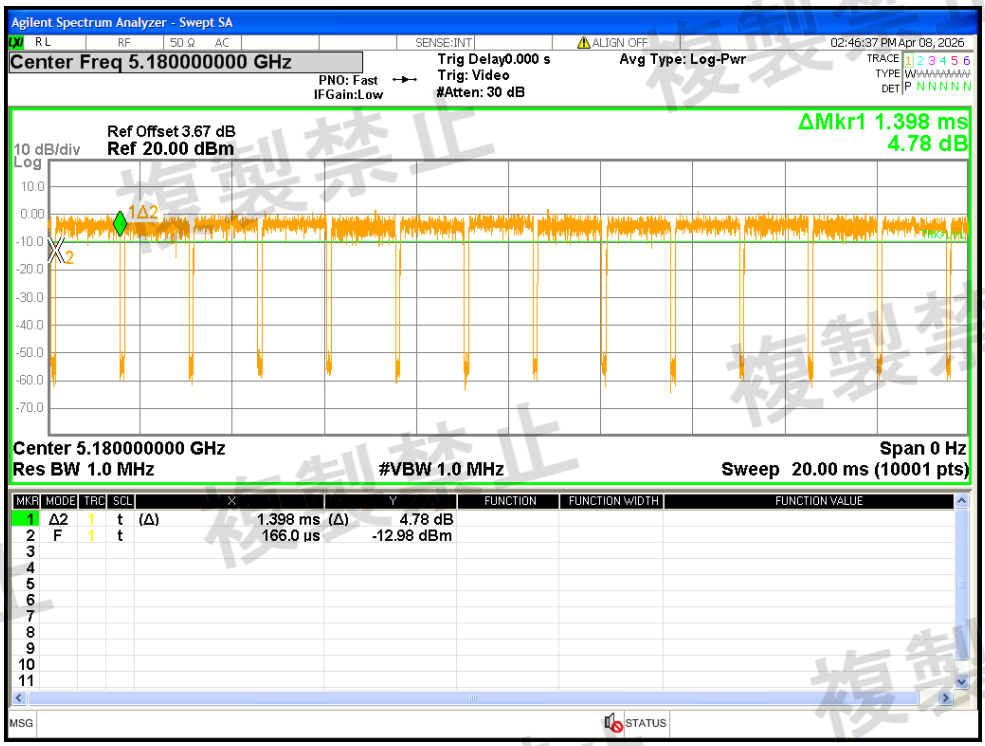


Burst Length NVNT a 5200MHz Ant2

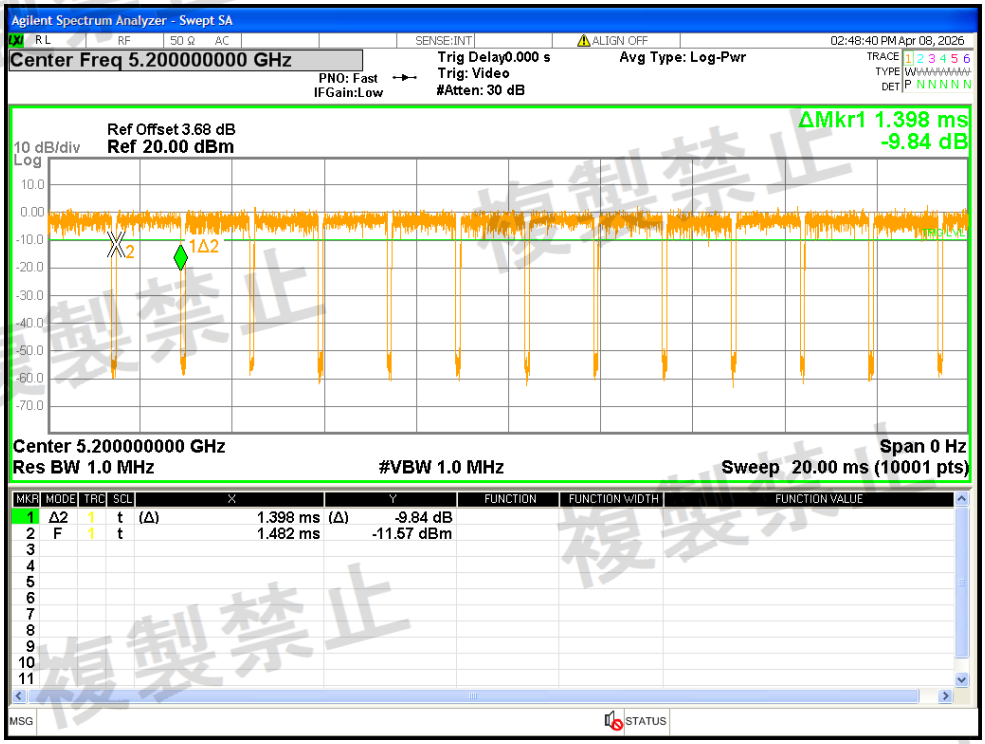


Burst Length NVNT a 5240MHz Ant2

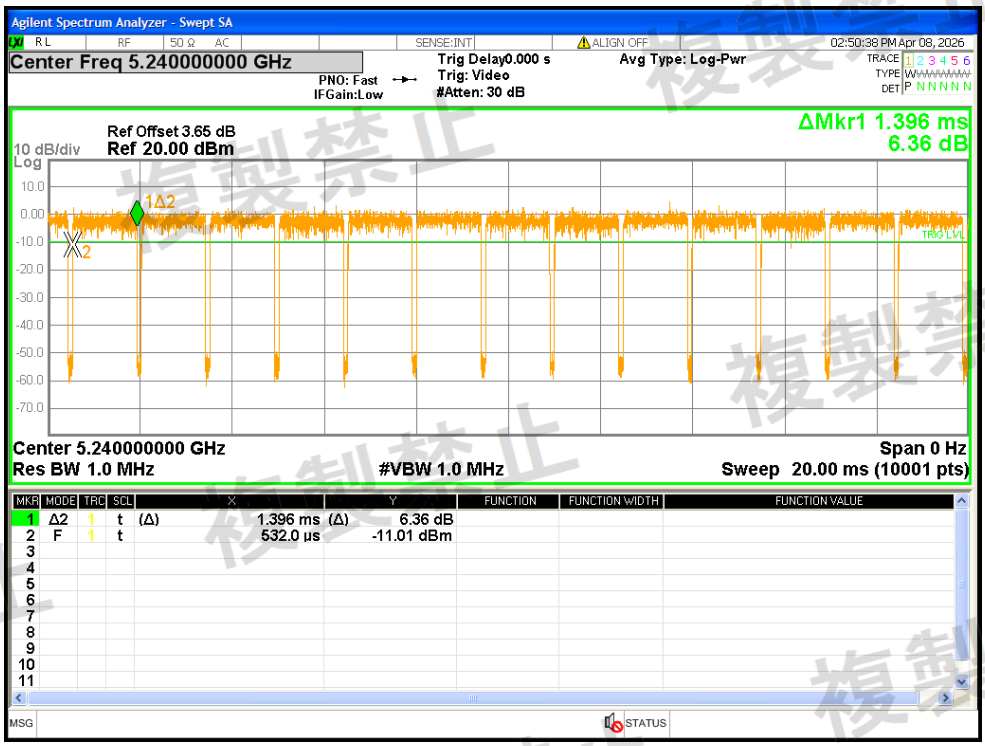


Burst Length NVNT n20 5180MHz MIMO

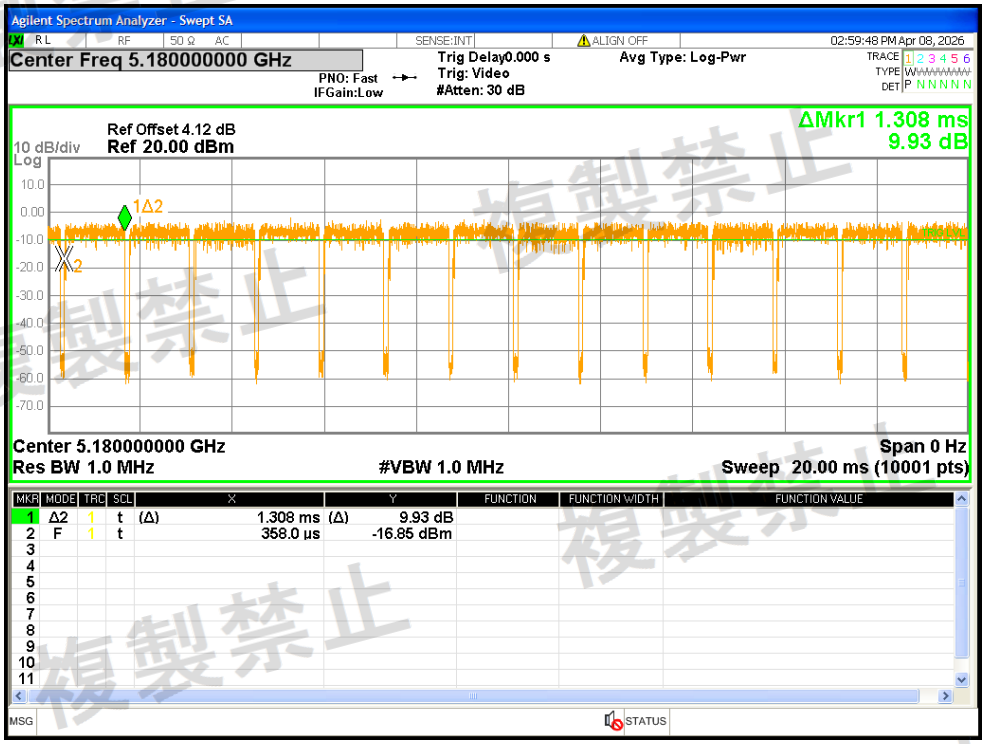


Burst Length NVNT n20 5200MHz MIMO

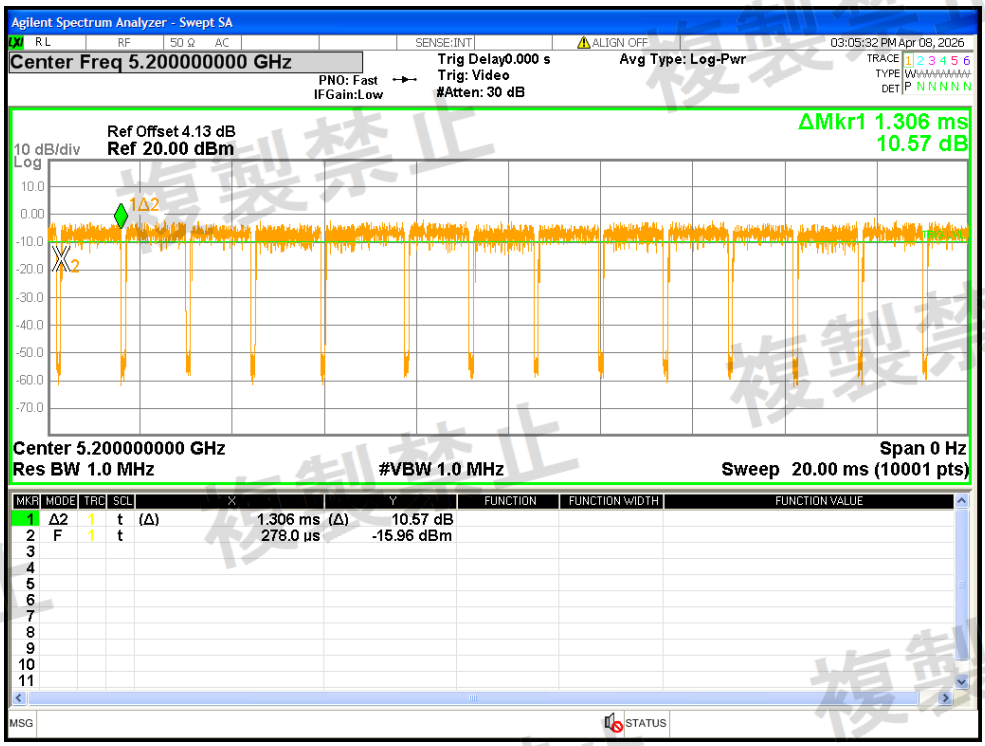


Burst Length NVNT n20 5240MHz MIMO

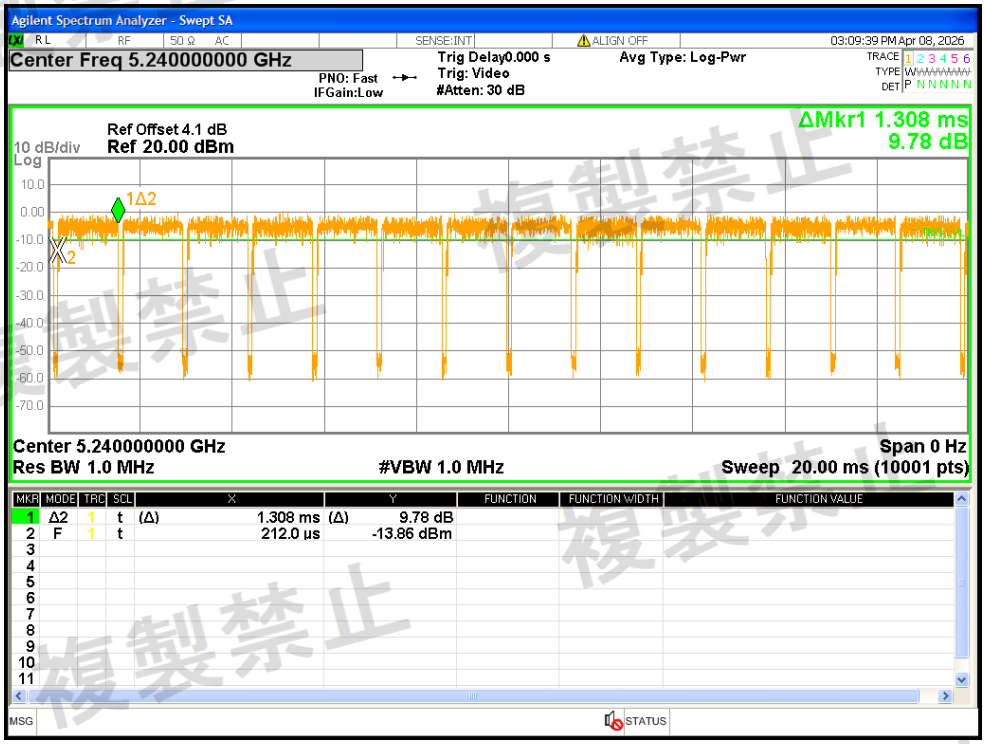


Burst Length NVNT n40 5190MHz MIMO

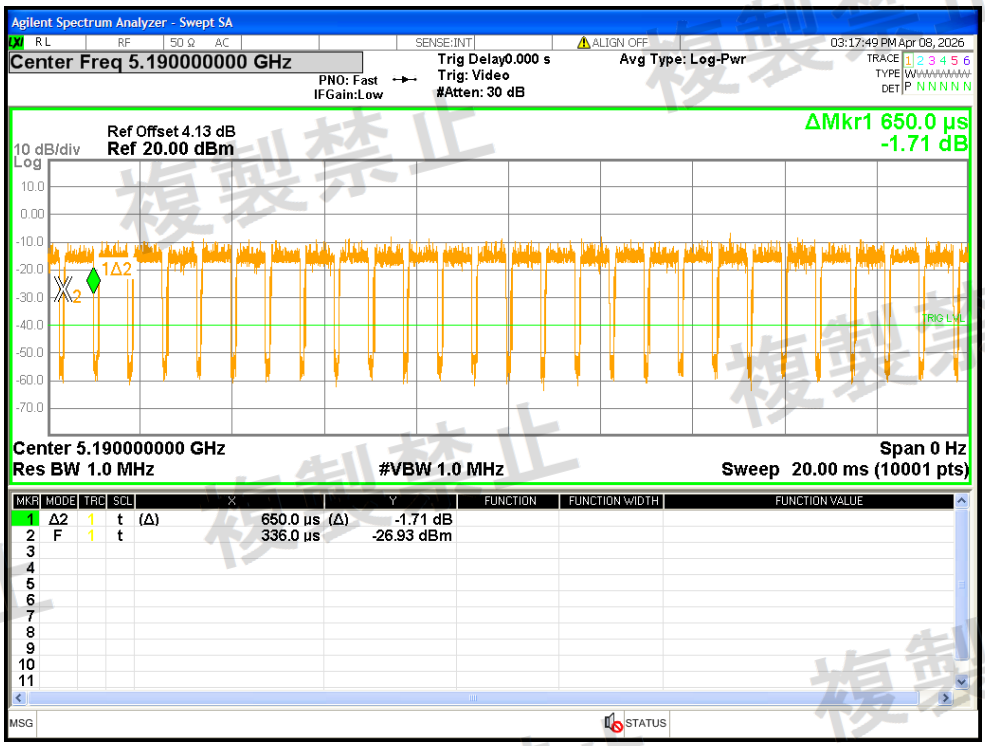


Burst Length NVNT n40 5230MHz MIMO

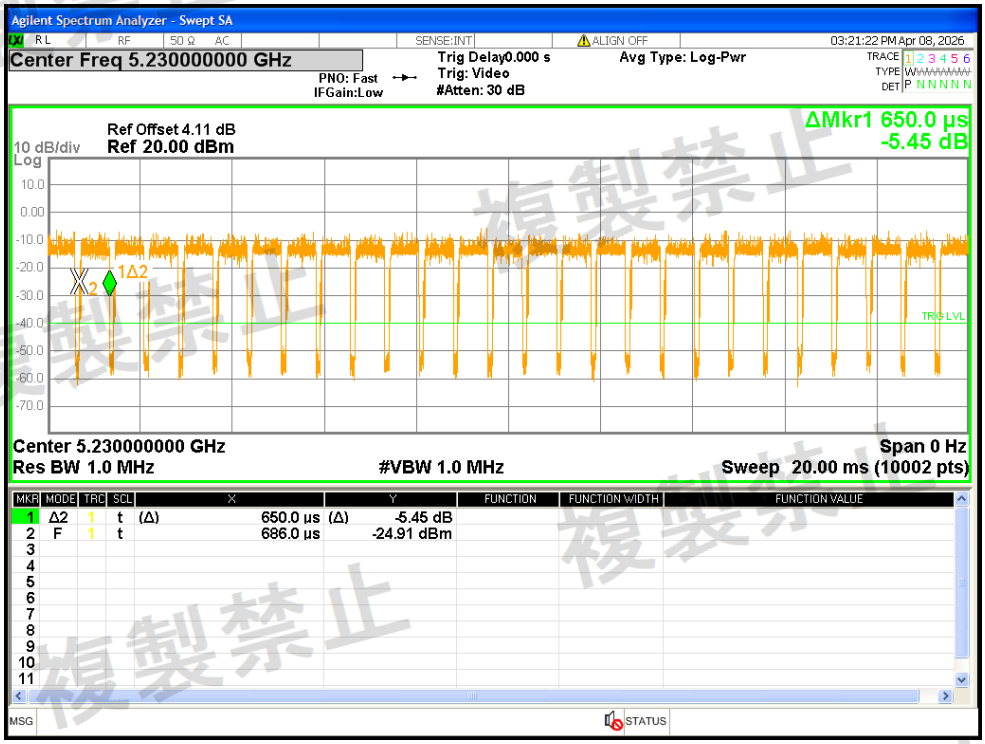


Burst Length NVNT ac20 5180MHz MIMO

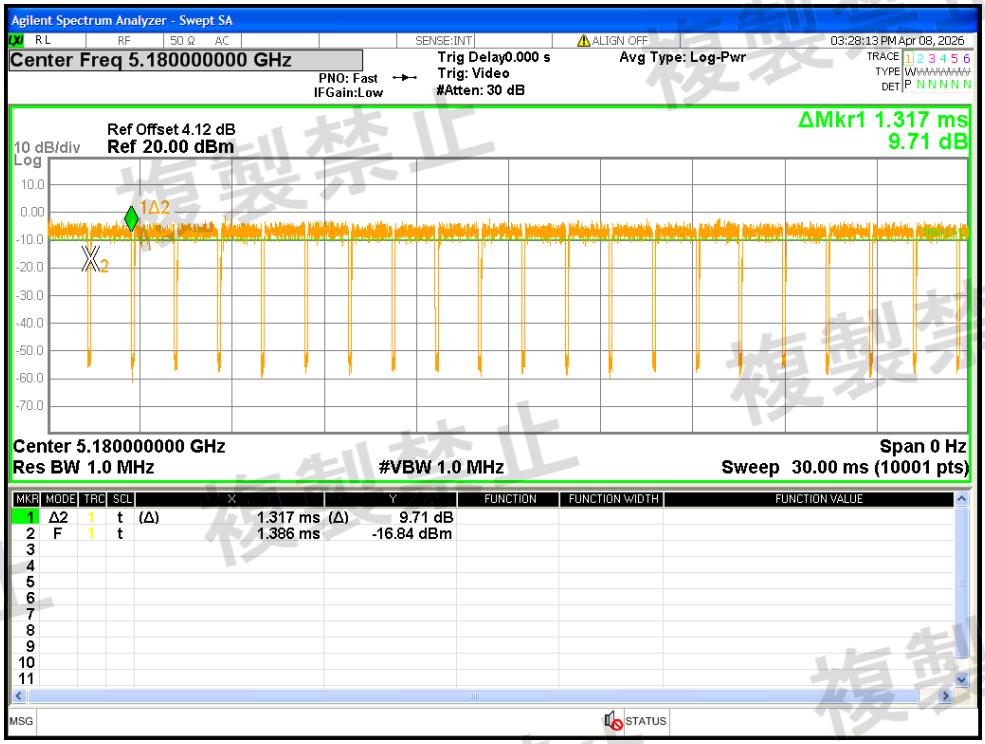


Burst Length NVNT ac20 5200MHz MIMO

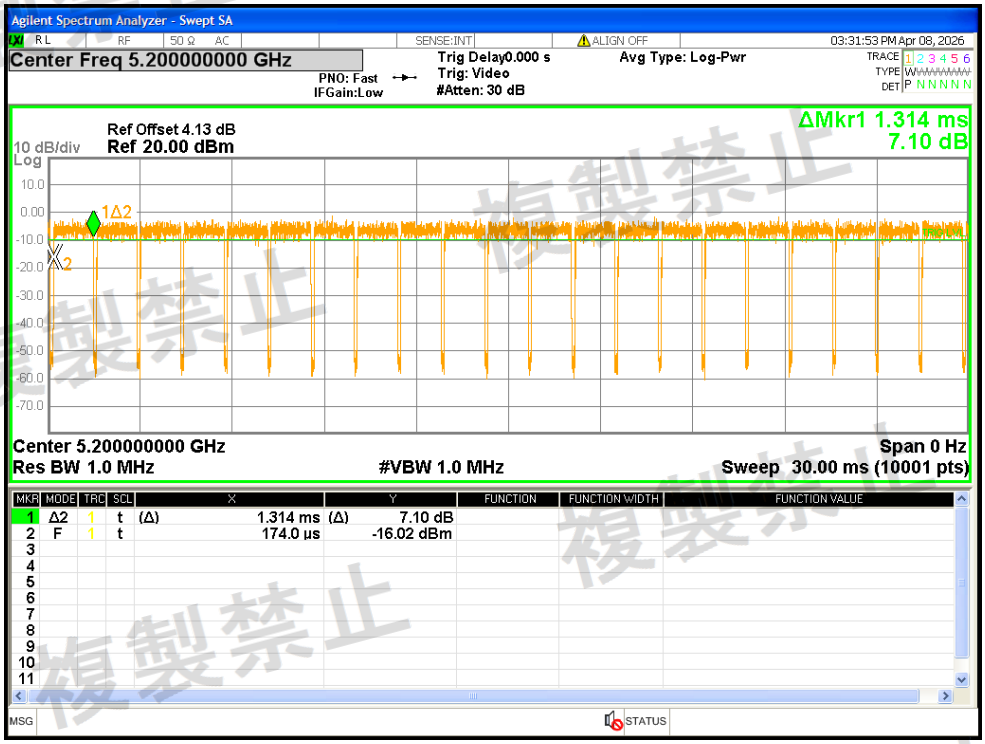


Burst Length NVNT ac20 5240MHz MIMO

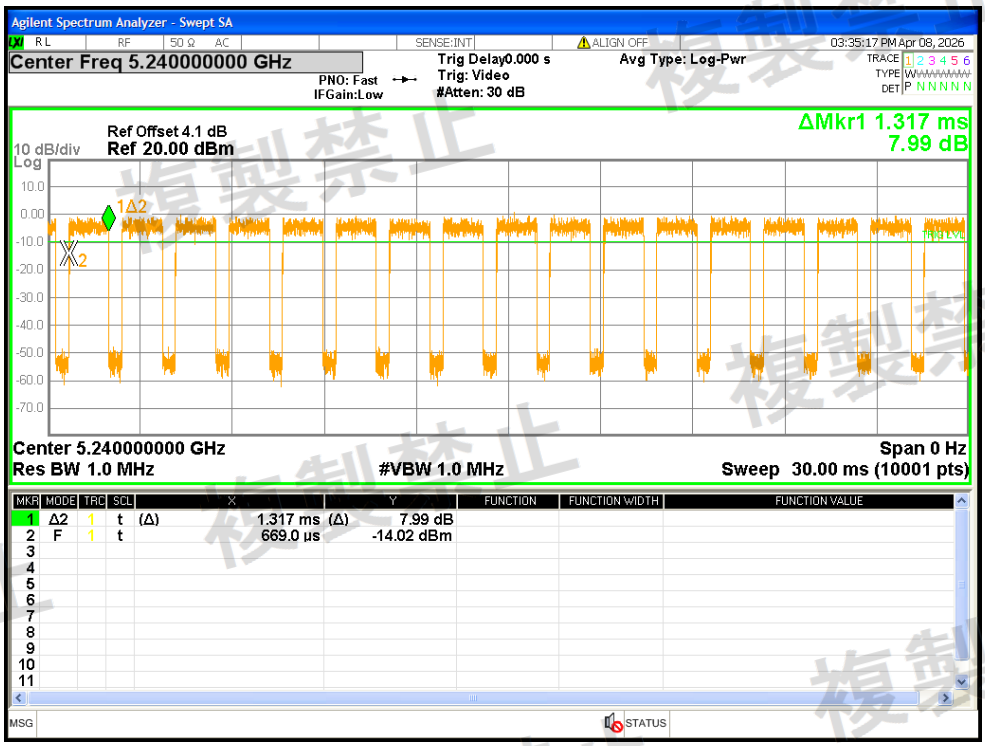


Burst Length NVNT ac40 5190MHz MIMO

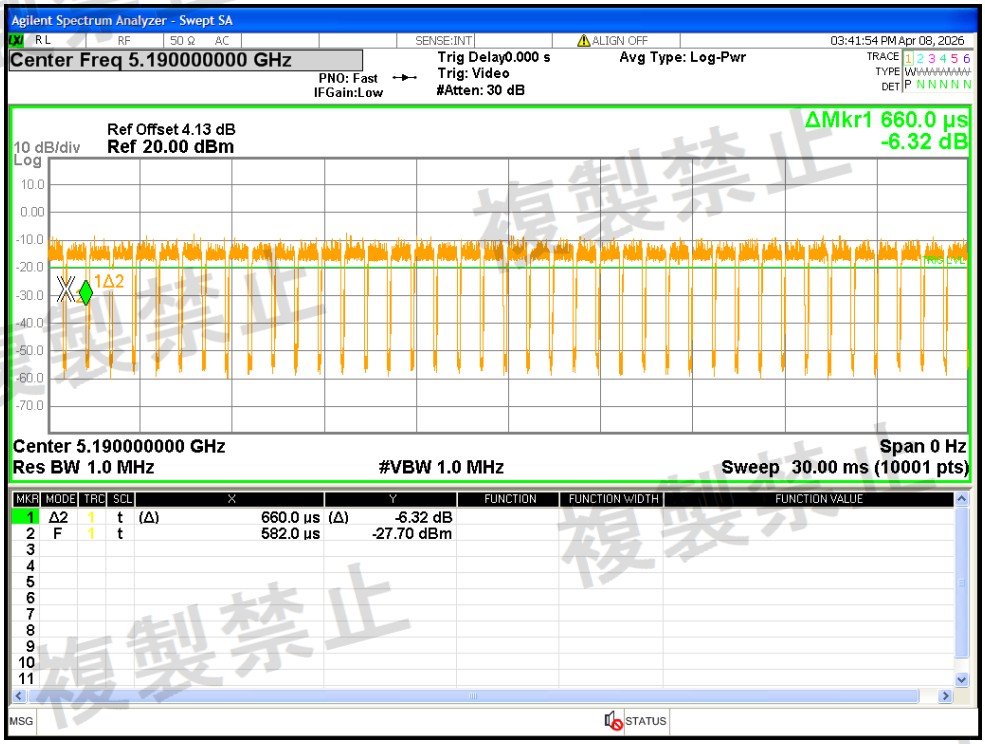


Burst Length NVNT ac40 5230MHz MIMO

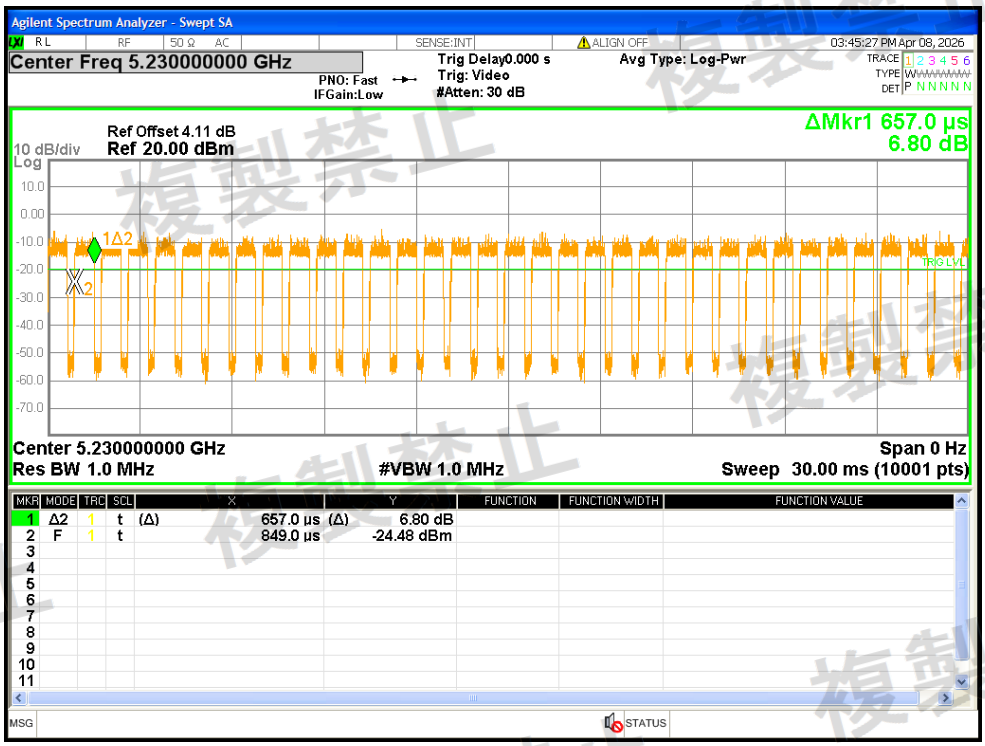


Burst Length NVNT ac80 5210MHz MIMO

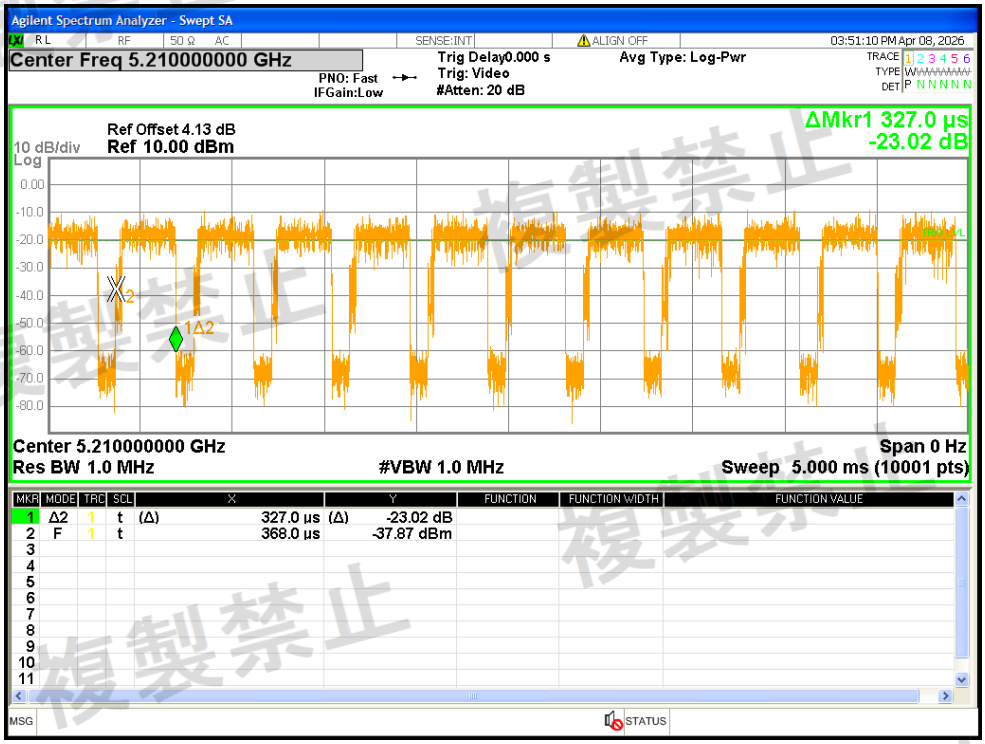


Burst Length NVNT ax20 5180MHz MIMO

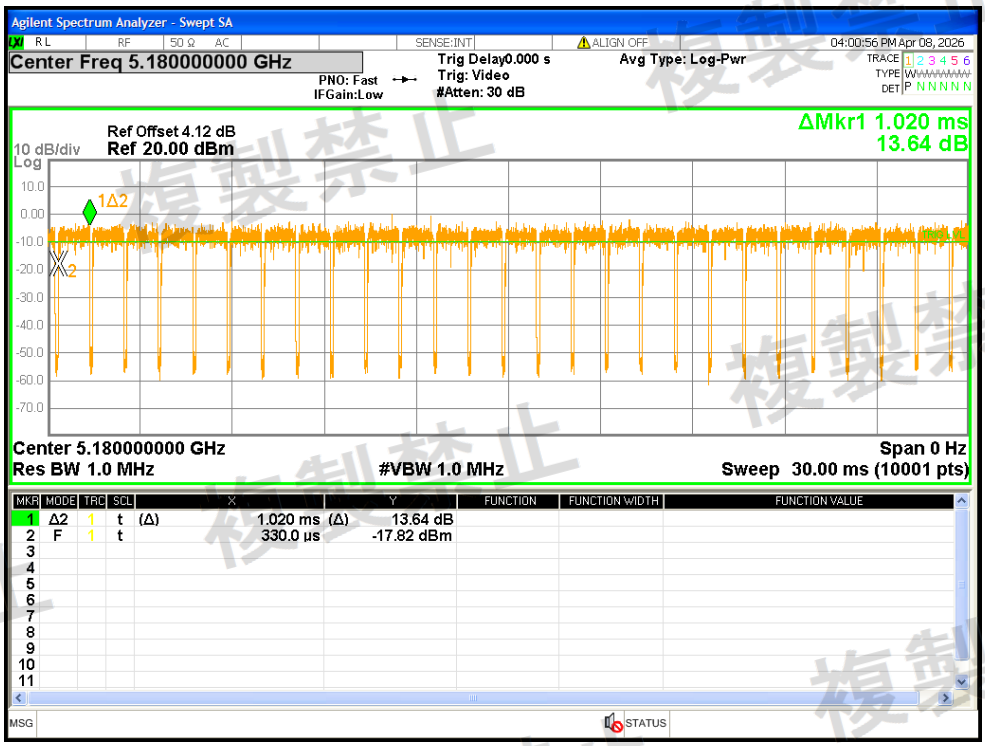


Burst Length NVNT ax20 5200MHz MIMO

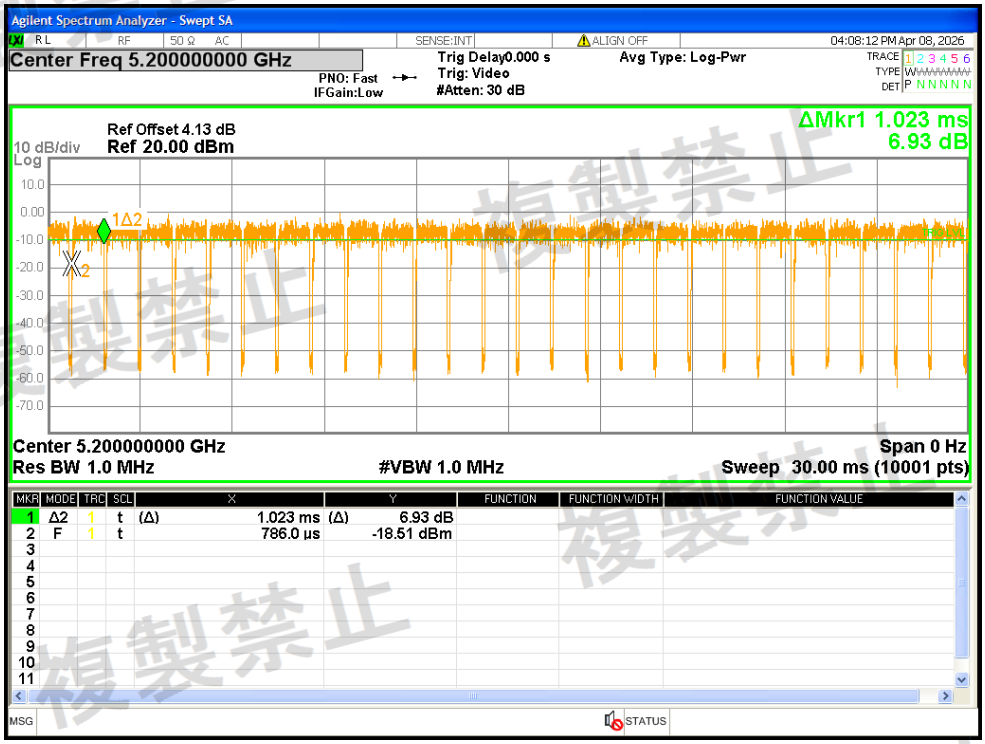


Burst Length NVNT ax20 5240MHz MIMO

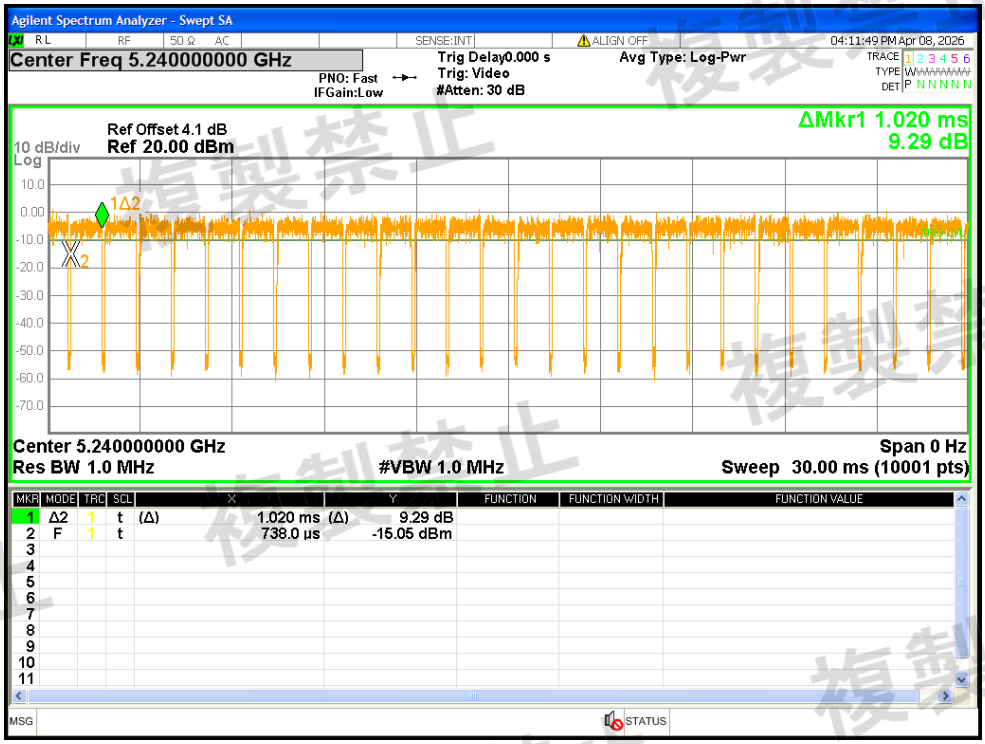


Burst Length NVNT ax40 5190MHz MIMO

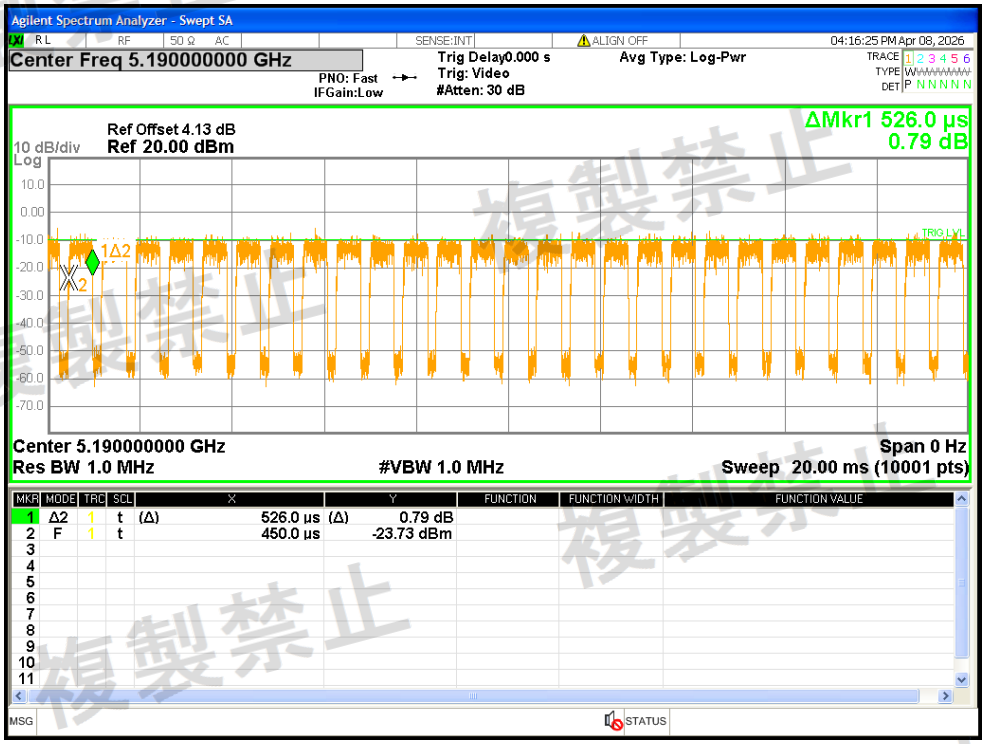

Burst Length NVNT ax40 5230MHz MIMO

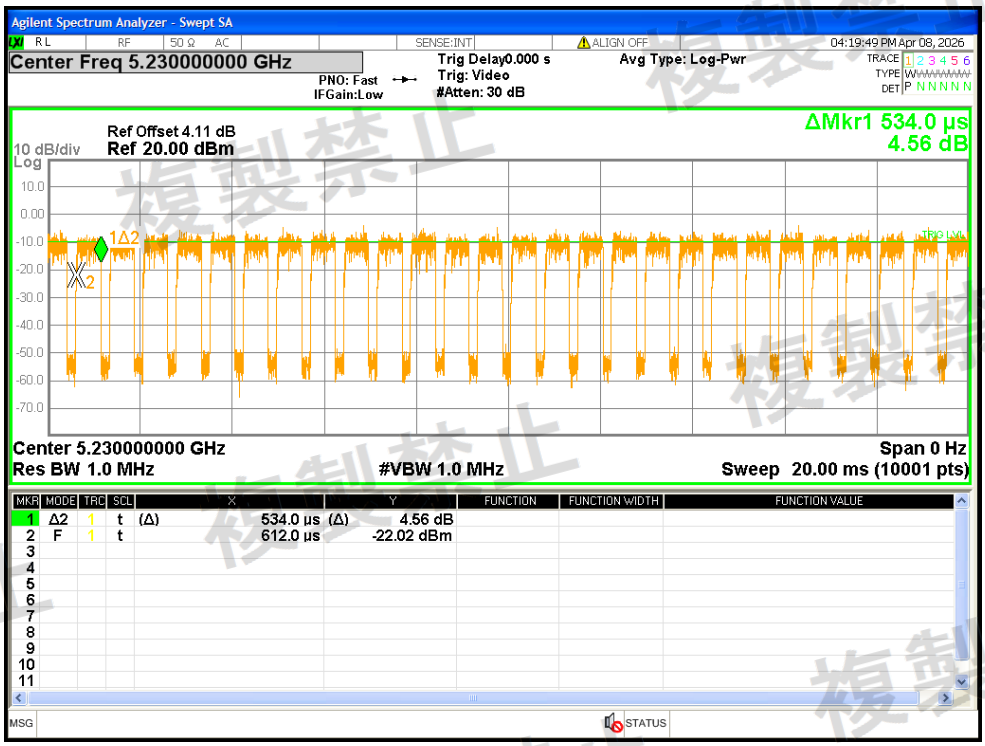

Burst Length NVNT ax80 5210MHz MIMO

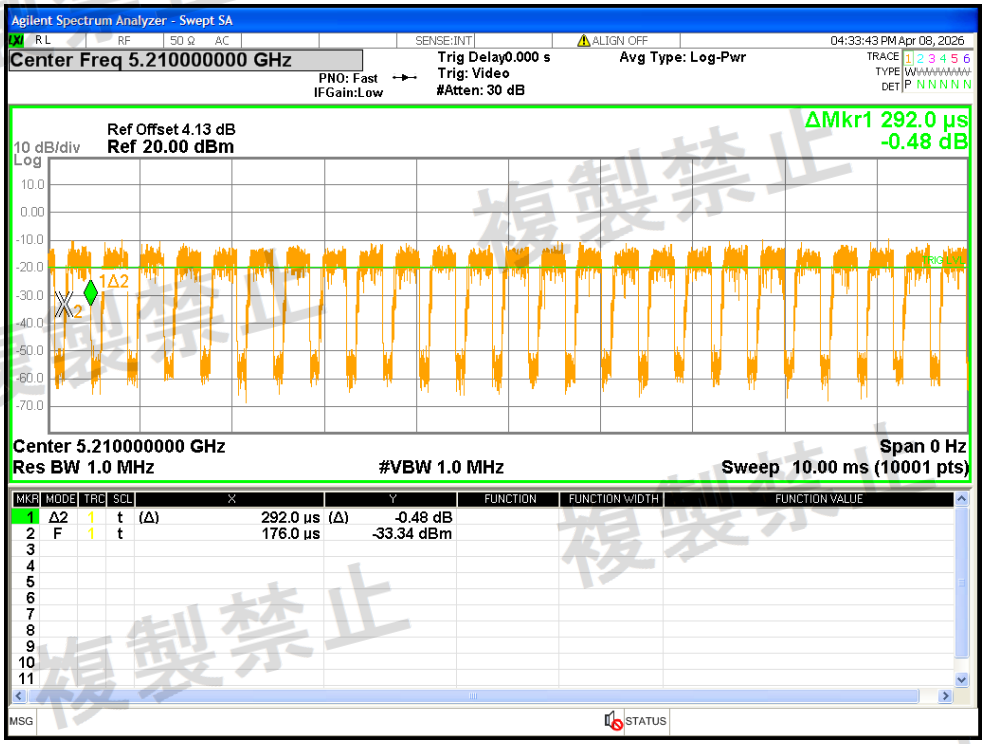

Rx Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Range (MHz)	Emission Frequency (MHz)	Max Value (dBm)	Max Value (nW)	Limit (nW)	Verdict
NVNT	a	5180	Ant1	30-1000	745.47	-83.89	0.0041	4	Pass
NVNT	a	5180	Ant1	1000-26000	25615	-62.7	0.537	20	Pass
NVNT	a	5200	Ant1	30-1000	979.44	-83.59	0.0044	4	Pass
NVNT	a	5200	Ant1	1000-26000	25662.5	-62.16	0.6081	20	Pass
NVNT	a	5240	Ant1	30-1000	906.01	-84.21	0.0038	4	Pass
NVNT	a	5240	Ant1	1000-26000	25695	-62.24	0.597	20	Pass
NVNT	a	5180	Ant2	30-1000	778.84	-84.31	0.0037	4	Pass
NVNT	a	5180	Ant2	1000-26000	25825	-62.24	0.597	20	Pass
NVNT	a	5200	Ant2	30-1000	711.52	-84.51	0.0035	4	Pass
NVNT	a	5200	Ant2	1000-26000	25182.5	-61.34	0.7345	20	Pass
NVNT	a	5240	Ant2	30-1000	727.33	-84.3	0.0037	4	Pass
NVNT	a	5240	Ant2	1000-26000	25220	-62.76	0.5297	20	Pass
NVNT	n20	5180	Ant1	30-1000	218.37	-84.28	0.0037	4	Pass
NVNT	n20	5180	Ant1	1000-26000	25715	-62.12	0.6138	20	Pass
NVNT	n20	5180	Ant2	30-1000	507.24	-84.43	0.0036	4	Pass
NVNT	n20	5180	Ant2	1000-26000	25727.5	-62.72	0.5346	20	Pass
NVNT	n20	5200	Ant1	30-1000	720.54	-83.94	0.004	4	Pass
NVNT	n20	5200	Ant1	1000-26000	25705	-62.13	0.6124	20	Pass
NVNT	n20	5200	Ant2	30-1000	210.42	-84.07	0.0039	4	Pass
NVNT	n20	5200	Ant2	1000-26000	25232.5	-62.37	0.5794	20	Pass
NVNT	n20	5240	Ant1	30-1000	881.08	-83.35	0.0046	4	Pass
NVNT	n20	5240	Ant1	1000-26000	25722.5	-62.22	0.5998	20	Pass
NVNT	n20	5240	Ant2	30-1000	776.22	-84.46	0.0036	4	Pass
NVNT	n20	5240	Ant2	1000-26000	25705	-63.1	0.4898	20	Pass
NVNT	n40	5190	Ant1	30-1000	806.78	-84.01	0.004	4	Pass
NVNT	n40	5190	Ant1	1000-26000	25645	-62.54	0.5572	20	Pass
NVNT	n40	5190	Ant2	30-1000	982.06	-84.14	0.0039	4	Pass
NVNT	n40	5190	Ant2	1000-26000	25732.5	-62.81	0.5236	20	Pass
NVNT	n40	5230	Ant1	30-1000	336.71	-84.26	0.0037	4	Pass
NVNT	n40	5230	Ant1	1000-26000	25722.5	-62.08	0.6194	20	Pass
NVNT	n40	5230	Ant2	30-1000	243.89	-84.34	0.0037	4	Pass
NVNT	n40	5230	Ant2	1000-26000	25225	-62.52	0.5598	20	Pass
NVNT	ac20	5180	Ant1	30-1000	275.51	-83.94	0.004	4	Pass
NVNT	ac20	5180	Ant1	1000-26000	24227.5	-62.64	0.5445	20	Pass
NVNT	ac20	5180	Ant2	30-1000	799.5	-84.24	0.0038	4	Pass
NVNT	ac20	5180	Ant2	1000-26000	25667.5	-62.96	0.5058	20	Pass
NVNT	ac20	5200	Ant1	30-1000	774.18	-83.64	0.0043	4	Pass
NVNT	ac20	5200	Ant1	1000-26000	25557.5	-62.06	0.6223	20	Pass
NVNT	ac20	5200	Ant2	30-1000	938.02	-84.6	0.0035	4	Pass

複製禁止


NVNT	ac20	5200	Ant2	1000-26000	25805	-63.02	0.4989	20	Pass
NVNT	ac20	5240	Ant1	30-1000	829.67	-84.2	0.0038	4	Pass
NVNT	ac20	5240	Ant1	1000-26000	25732.5	-61.83	0.6561	20	Pass
NVNT	ac20	5240	Ant2	30-1000	487.65	-84.64	0.0034	4	Pass
NVNT	ac20	5240	Ant2	1000-26000	25552.5	-62.26	0.5943	20	Pass
NVNT	ac40	5190	Ant1	30-1000	892.14	-83.37	0.0046	4	Pass
NVNT	ac40	5190	Ant1	1000-26000	25705	-62.39	0.5768	20	Pass
NVNT	ac40	5190	Ant2	30-1000	213.82	-84.26	0.0037	4	Pass
NVNT	ac40	5190	Ant2	1000-26000	25747.5	-62.02	0.6281	20	Pass
NVNT	ac40	5230	Ant1	30-1000	770.89	-84.12	0.0039	4	Pass
NVNT	ac40	5230	Ant1	1000-26000	24162.5	-62.5	0.5623	20	Pass
NVNT	ac40	5230	Ant2	30-1000	991.66	-84.45	0.0036	4	Pass
NVNT	ac40	5230	Ant2	1000-26000	25157.5	-62.33	0.5848	20	Pass
NVNT	ac80	5210	Ant1	30-1000	237	-83.16	0.0048	4	Pass
NVNT	ac80	5210	Ant1	1000-26000	24080	-61.68	0.6792	20	Pass
NVNT	ac80	5210	Ant2	30-1000	999.13	-83.88	0.0041	4	Pass
NVNT	ac80	5210	Ant2	1000-26000	25750	-62.48	0.5649	20	Pass
NVNT	ax20	5180	Ant1	30-1000	445.74	-83.84	0.0041	4	Pass
NVNT	ax20	5180	Ant1	1000-26000	25735	-61.72	0.673	20	Pass
NVNT	ax20	5180	Ant2	30-1000	944.52	-83.65	0.0043	4	Pass
NVNT	ax20	5180	Ant2	1000-26000	25640	-62.19	0.6039	20	Pass
NVNT	ax20	5200	Ant1	30-1000	914.25	-83.68	0.0043	4	Pass
NVNT	ax20	5200	Ant1	1000-26000	25662.5	-62.38	0.5781	20	Pass
NVNT	ax20	5200	Ant2	30-1000	702.4	-84.43	0.0036	4	Pass
NVNT	ax20	5200	Ant2	1000-26000	25697.5	-62.64	0.5445	20	Pass
NVNT	ax20	5240	Ant1	30-1000	791.74	-83.48	0.0045	4	Pass
NVNT	ax20	5240	Ant1	1000-26000	25725	-62.03	0.6266	20	Pass
NVNT	ax20	5240	Ant2	30-1000	248.64	-84.1	0.0039	4	Pass
NVNT	ax20	5240	Ant2	1000-26000	25947.5	-63.36	0.4613	20	Pass
NVNT	ax40	5190	Ant1	30-1000	967.51	-83.24	0.0047	4	Pass
NVNT	ax40	5190	Ant1	1000-26000	25145	-62.6	0.5495	20	Pass
NVNT	ax40	5190	Ant2	30-1000	724.52	-84.2	0.0038	4	Pass
NVNT	ax40	5190	Ant2	1000-26000	25162.5	-63.02	0.4989	20	Pass
NVNT	ax40	5230	Ant1	30-1000	241.17	-84.11	0.0039	4	Pass
NVNT	ax40	5230	Ant1	1000-26000	25837.5	-62.41	0.5741	20	Pass
NVNT	ax40	5230	Ant2	30-1000	691.35	-84.21	0.0038	4	Pass
NVNT	ax40	5230	Ant2	1000-26000	25155	-62.62	0.547	20	Pass
NVNT	ax80	5210	Ant1	30-1000	739.36	-83.89	0.0041	4	Pass
NVNT	ax80	5210	Ant1	1000-26000	25685	-61.47	0.7129	20	Pass
NVNT	ax80	5210	Ant2	30-1000	824.43	-84.49	0.0036	4	Pass
NVNT	ax80	5210	Ant2	1000-26000	25577.5	-62.27	0.5929	20	Pass

Test Graphs


Rx. Spurious NVNT a 5180MHz Ant1 @ 30MHz-1000MHz

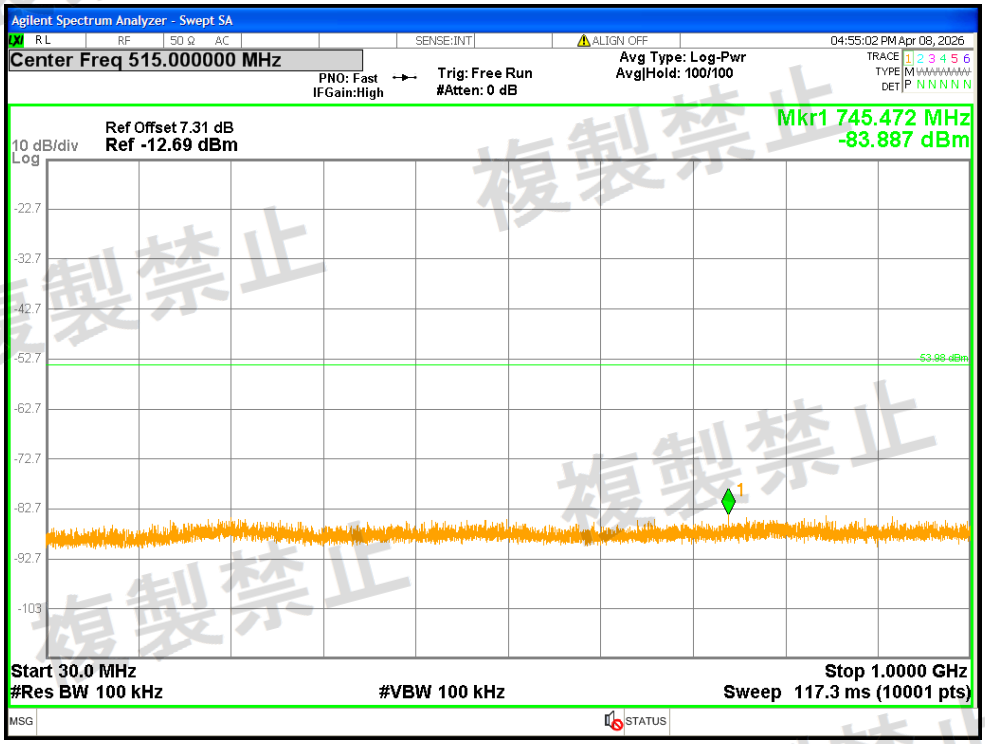


Rx. Spurious NVNT a 5180MHz Ant1 @ 1000MHz-26000MHz

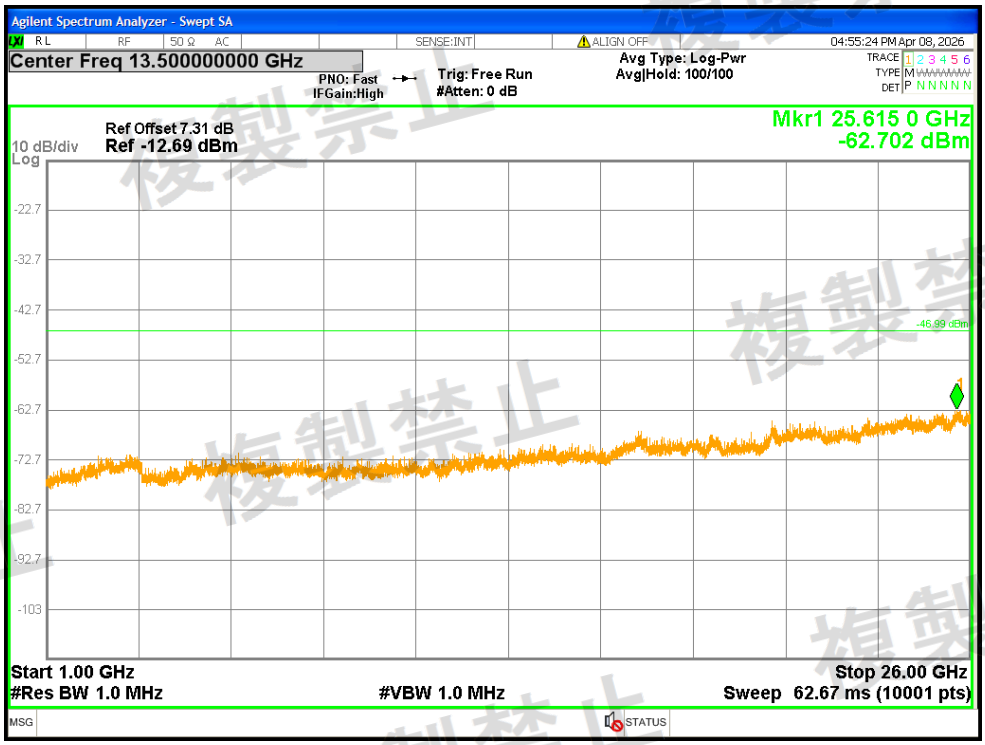


Rx. Spurious NVNT a 5200MHz Ant1 @ 30MHz-1000MHz

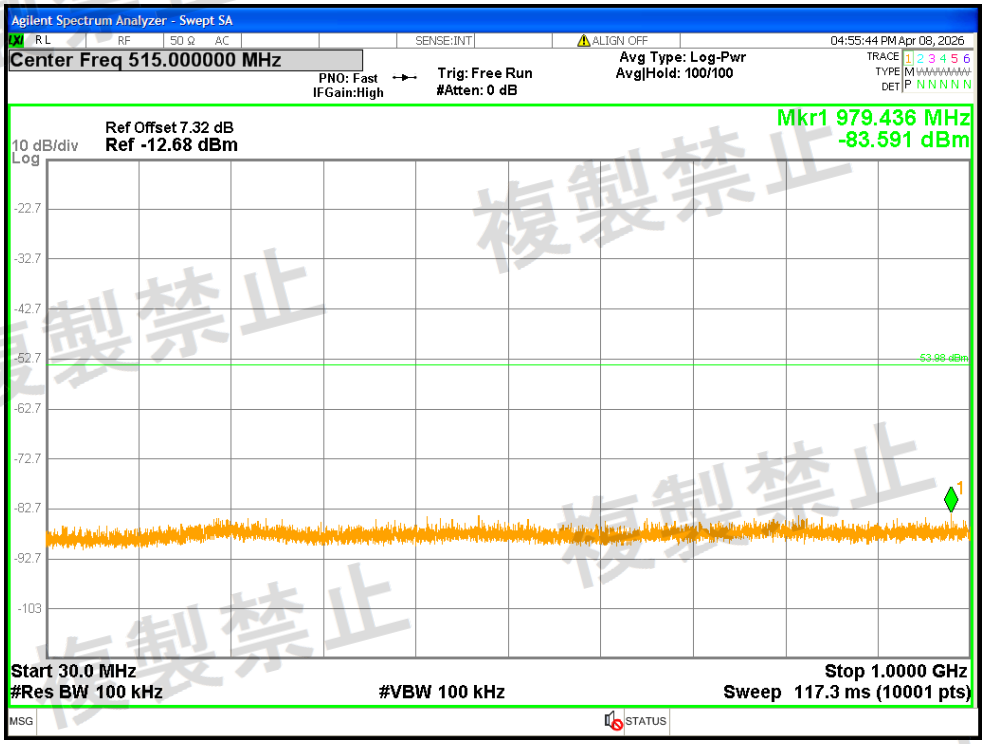


Rx. Spurious NVNT a 5200MHz Ant1 @ 1000MHz-26000MHz

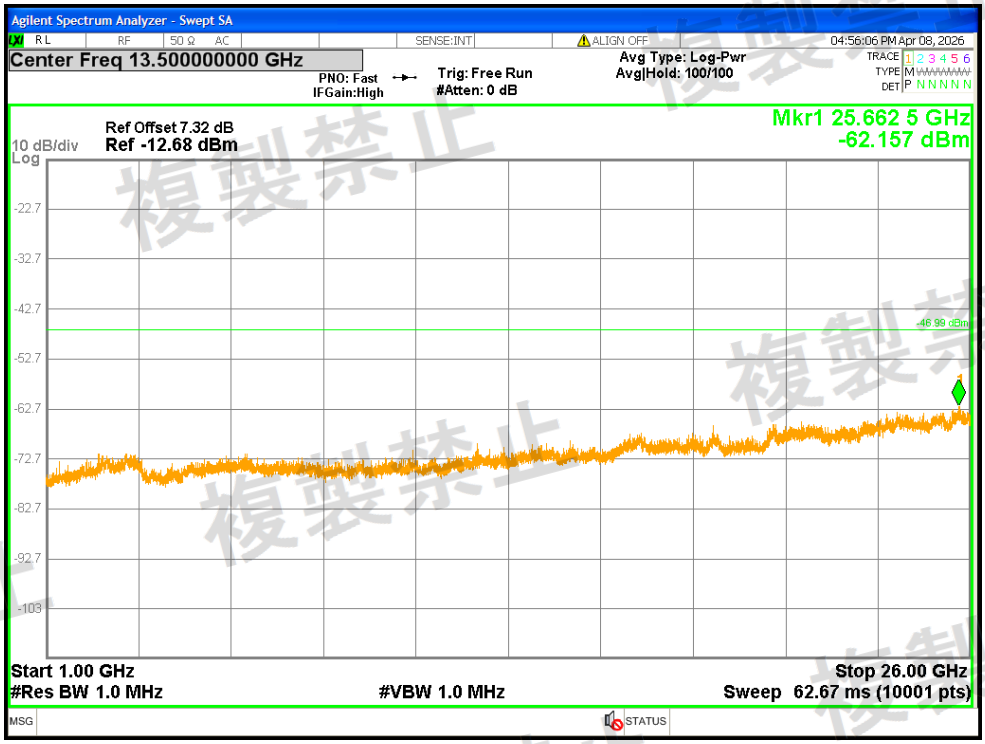


Rx. Spurious NVNT a 5240MHz Ant1 @ 30MHz-1000MHz

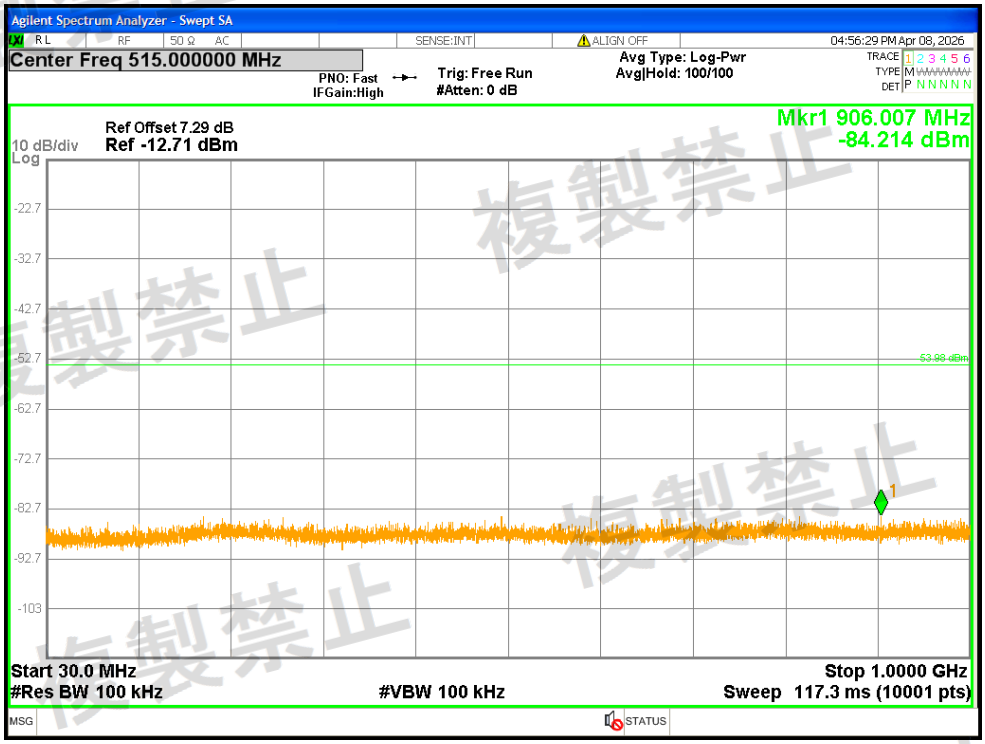


Rx. Spurious NVNT a 5240MHz Ant1 @ 1000MHz-26000MHz

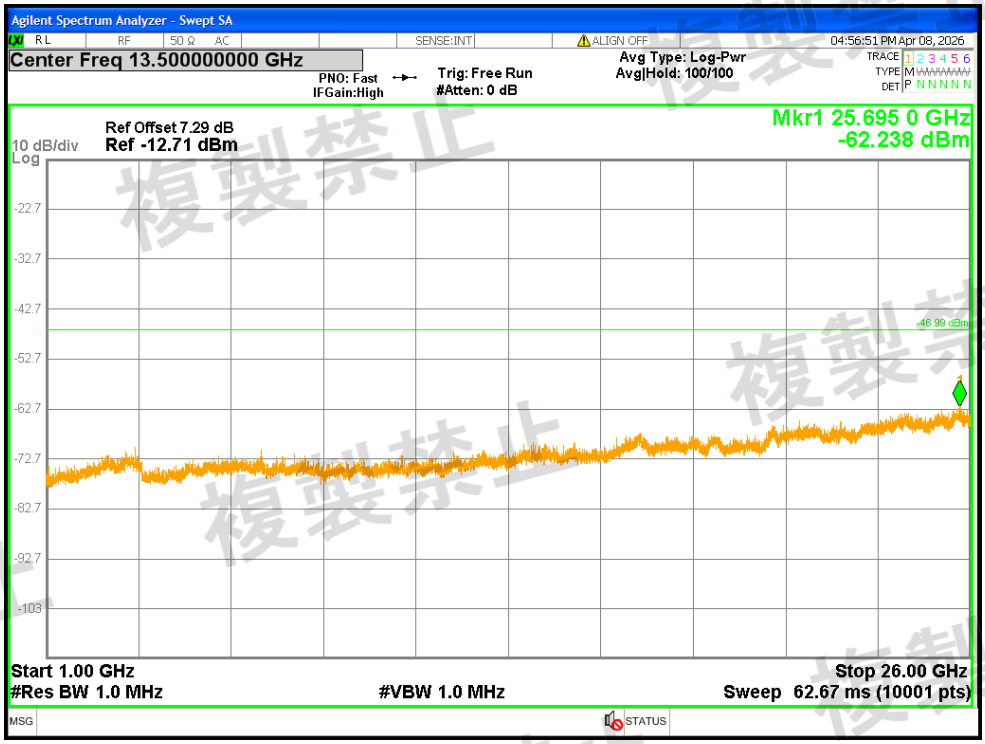


Rx. Spurious NVNT a 5180MHz Ant2 @ 30MHz-1000MHz

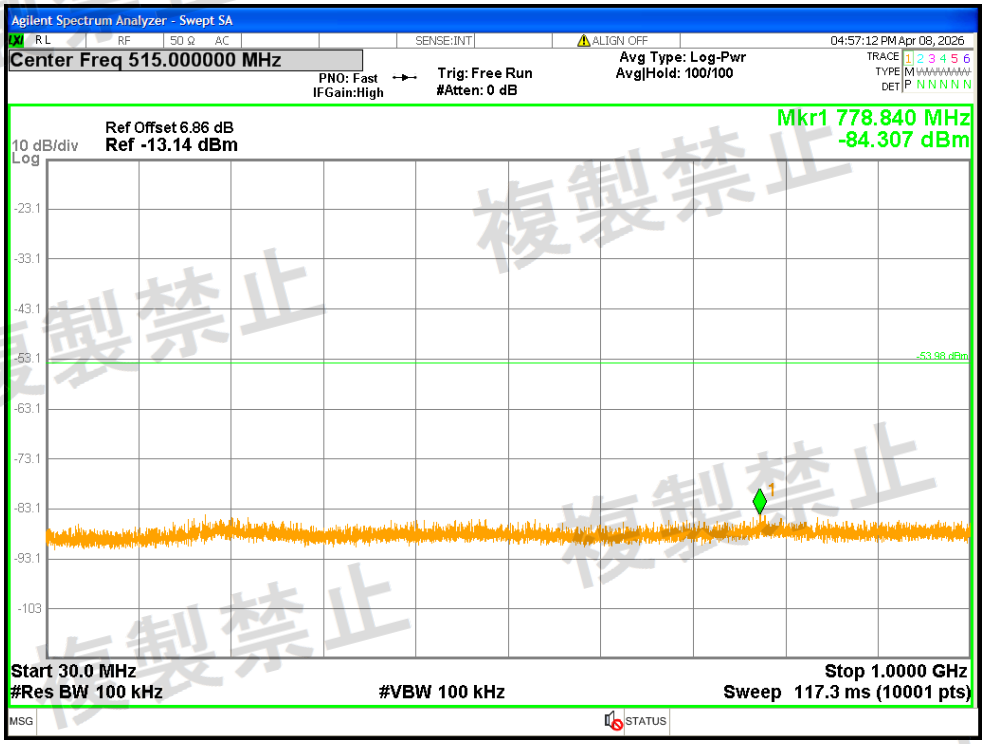


Rx. Spurious NVNT a 5180MHz Ant2 @ 1000MHz-26000MHz

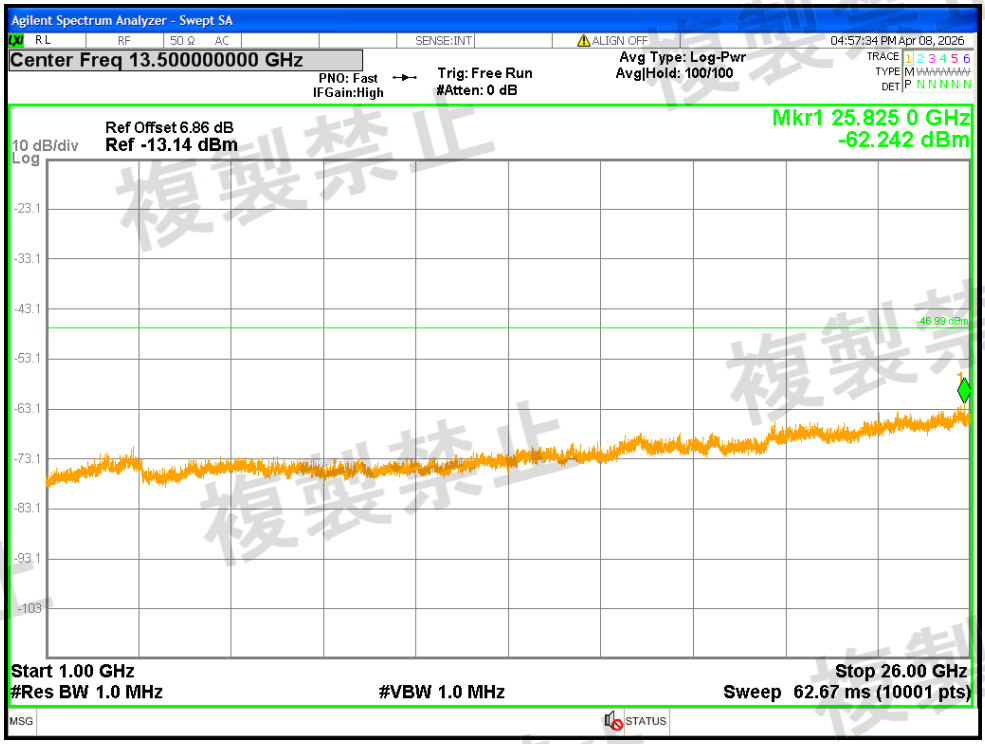


Rx. Spurious NVNT a 5200MHz Ant2 @ 30MHz-1000MHz

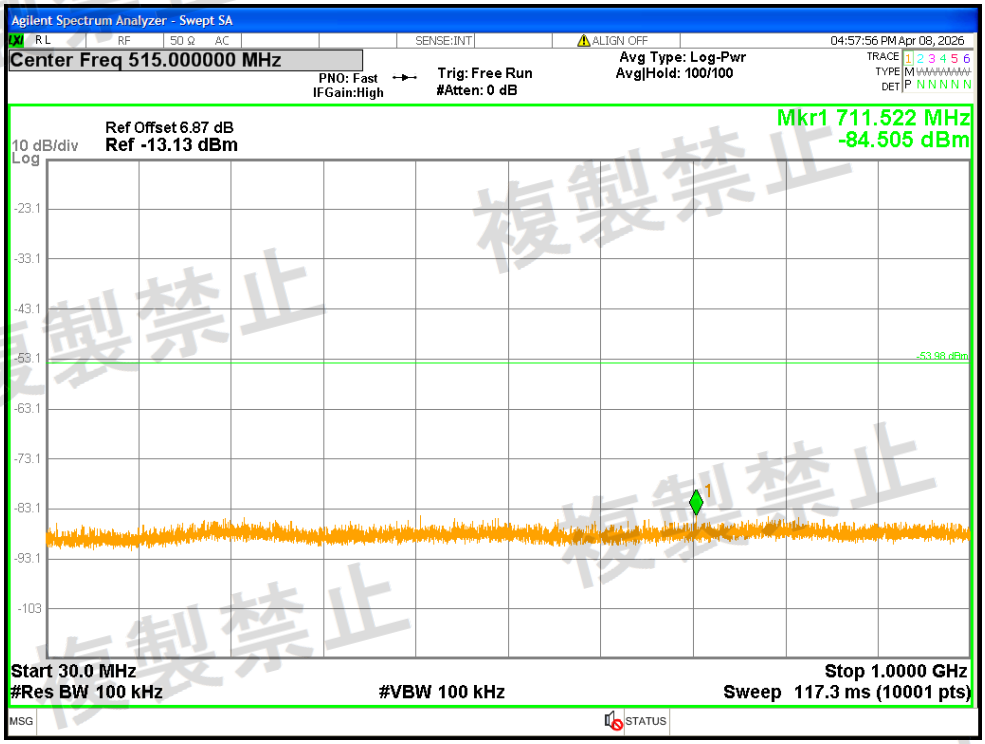


Rx. Spurious NVNT a 5200MHz Ant2 @ 1000MHz-26000MHz

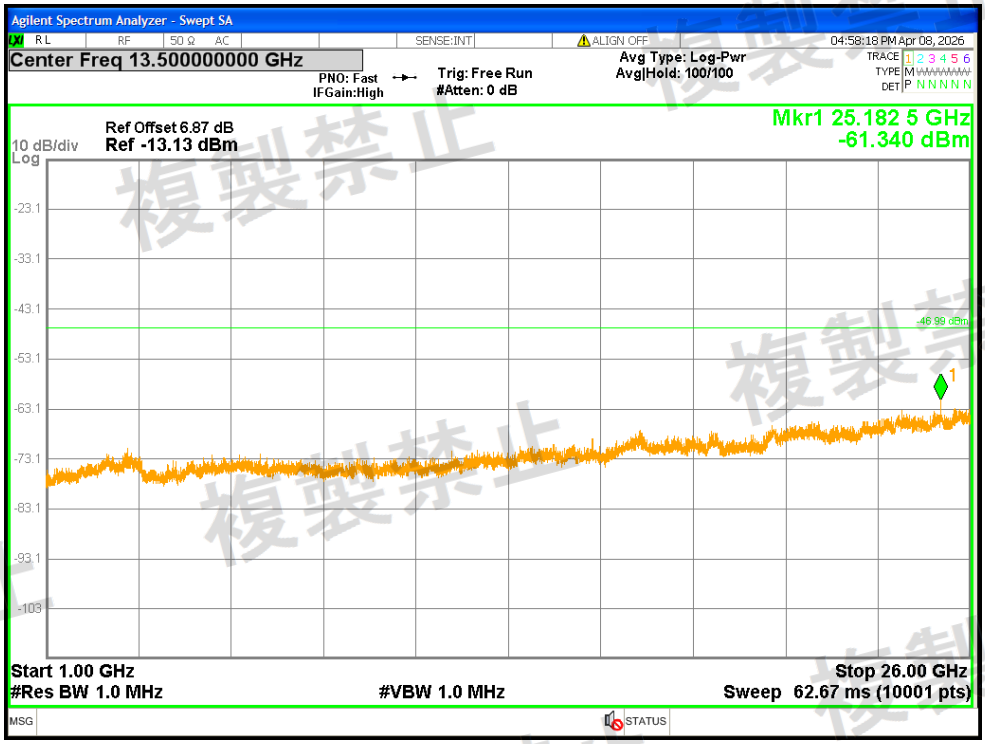


Rx. Spurious NVNT a 5240MHz Ant2 @ 30MHz-1000MHz

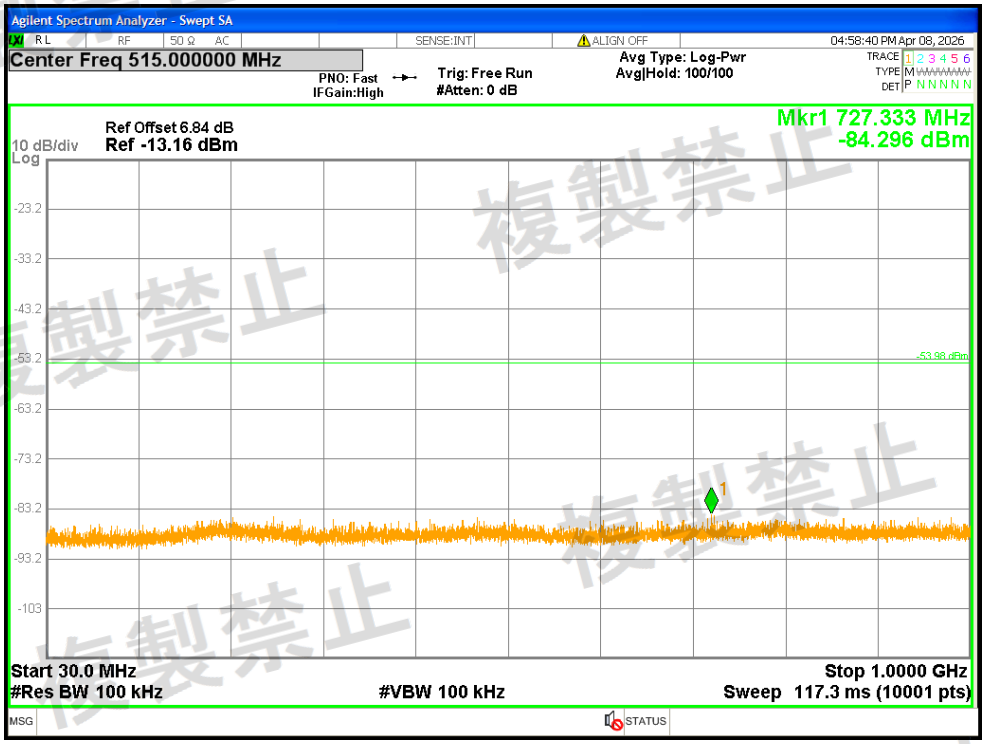


Rx. Spurious NVNT a 5240MHz Ant2 @ 1000MHz-26000MHz

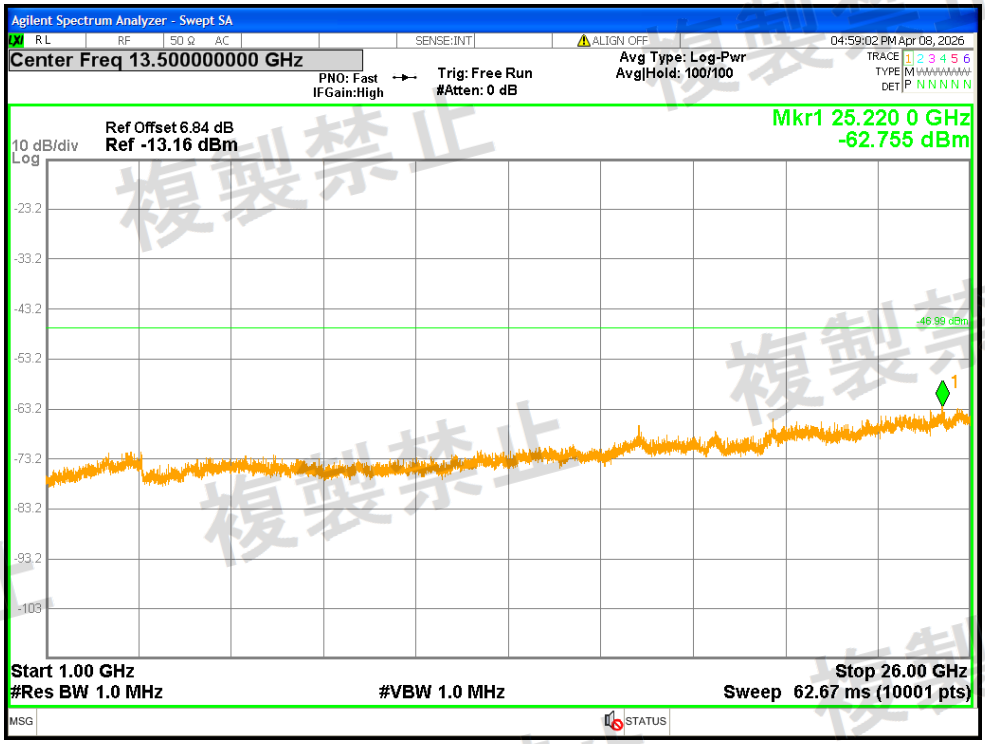


Rx. Spurious NVNT n20 5180MHz Ant1 @ 30MHz-1000MHz

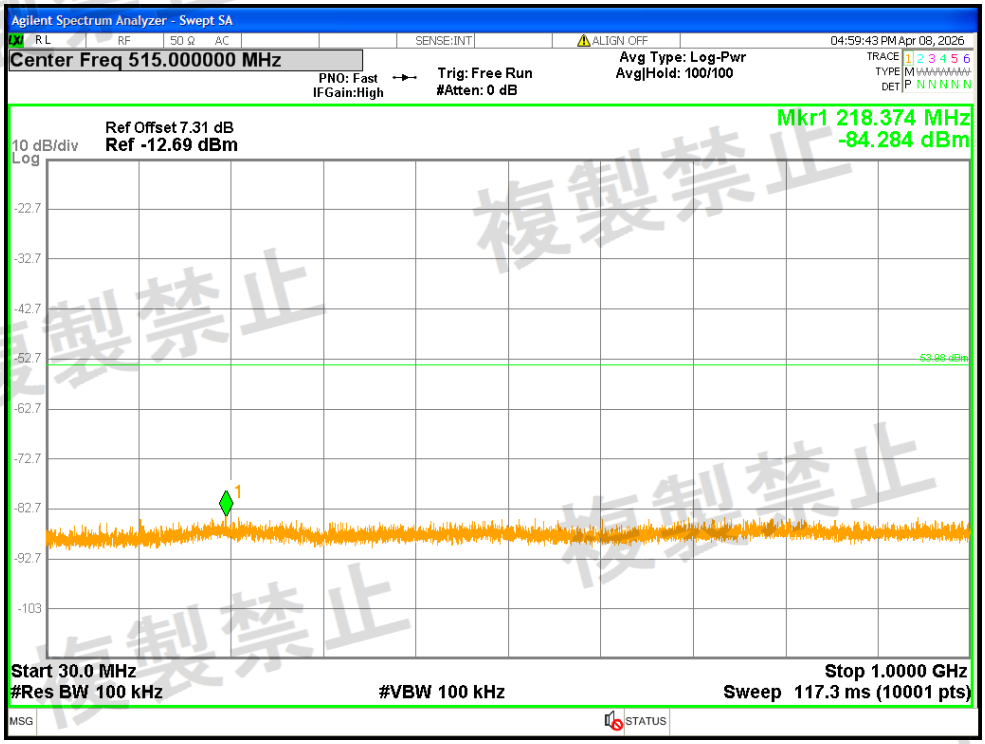


Rx. Spurious NVNT n20 5180MHz Ant1 @ 1000MHz-26000MHz

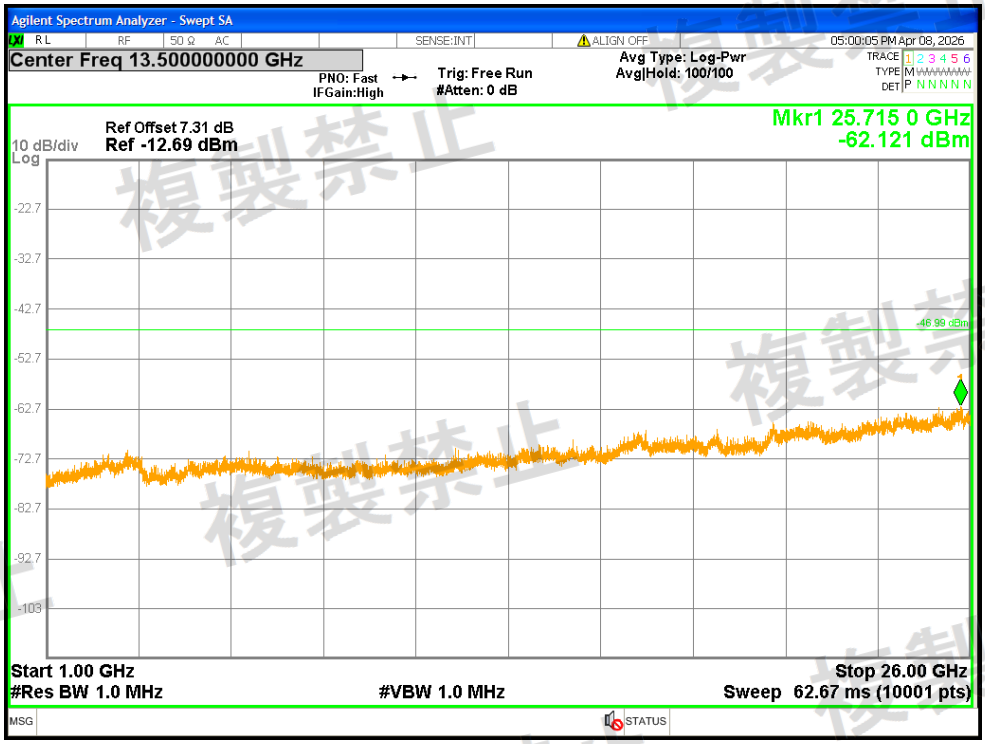


Rx. Spurious NVNT n20 5180MHz Ant2 @ 30MHz-1000MHz

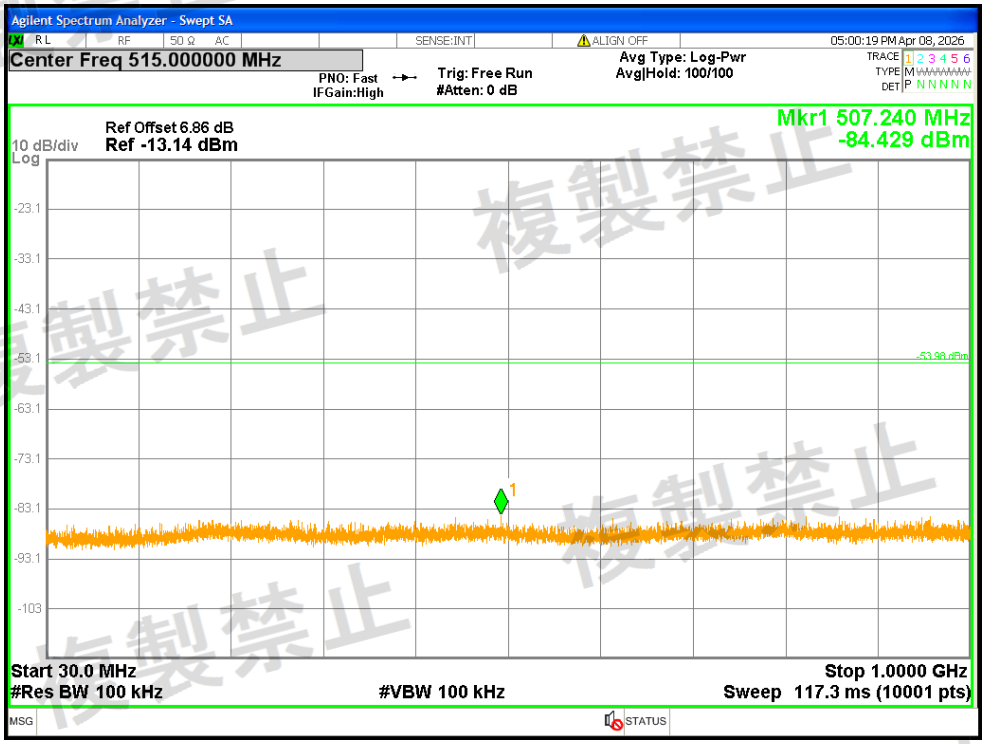


Rx. Spurious NVNT n20 5180MHz Ant2 @ 1000MHz-26000MHz

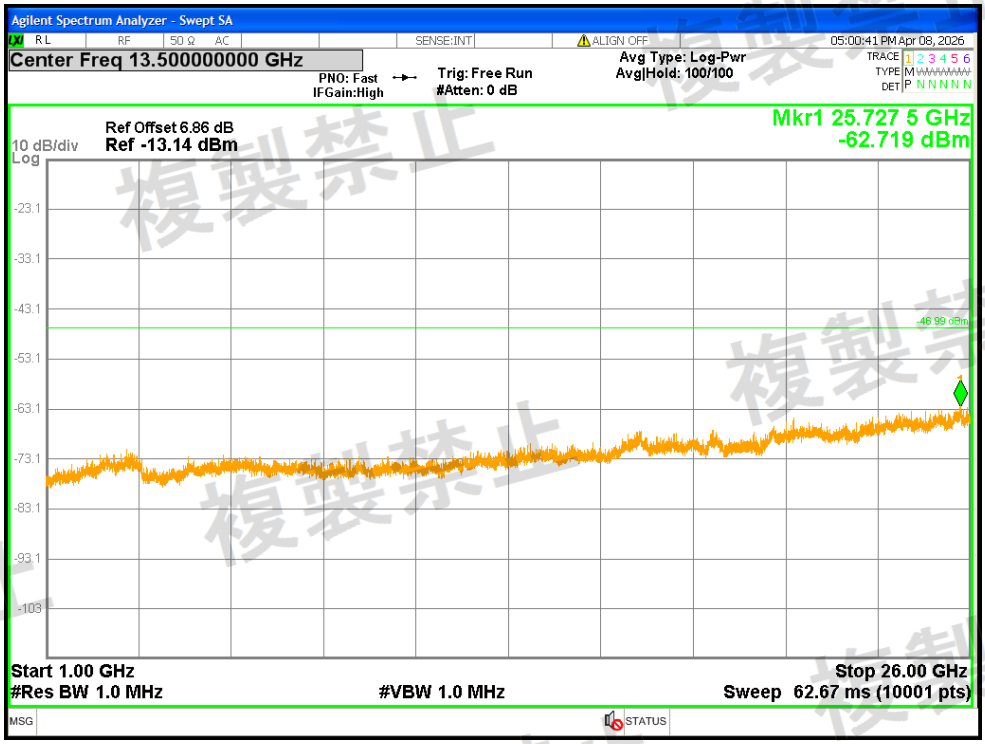


Rx. Spurious NVNT n20 5200MHz Ant1 @ 30MHz-1000MHz

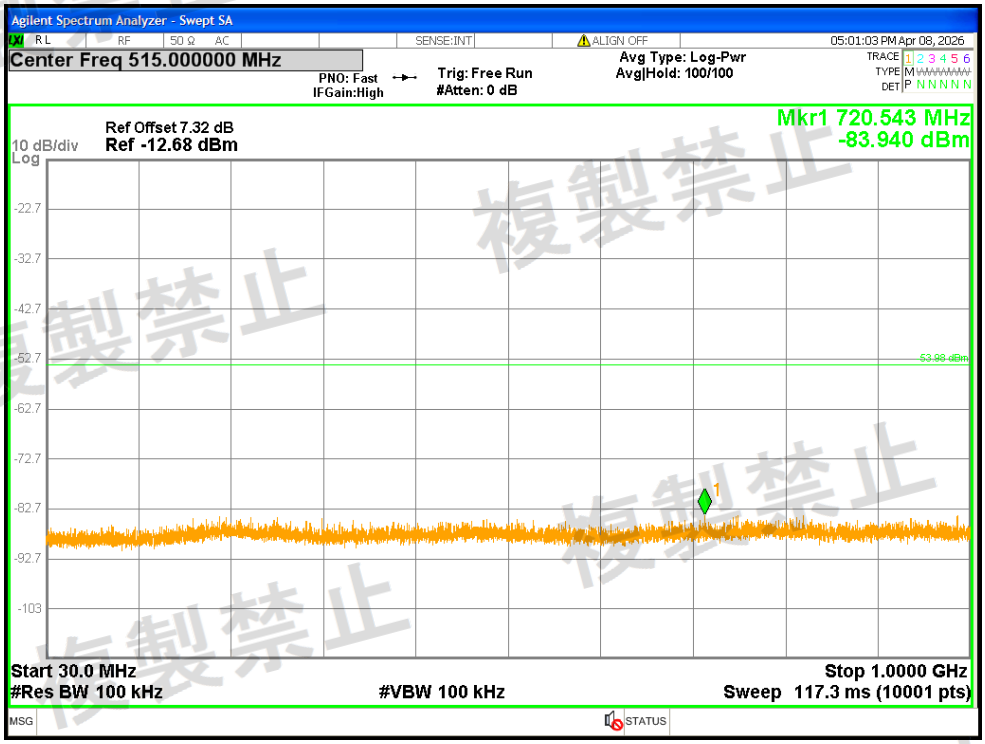


Rx. Spurious NVNT n20 5200MHz Ant1 @ 1000MHz-26000MHz

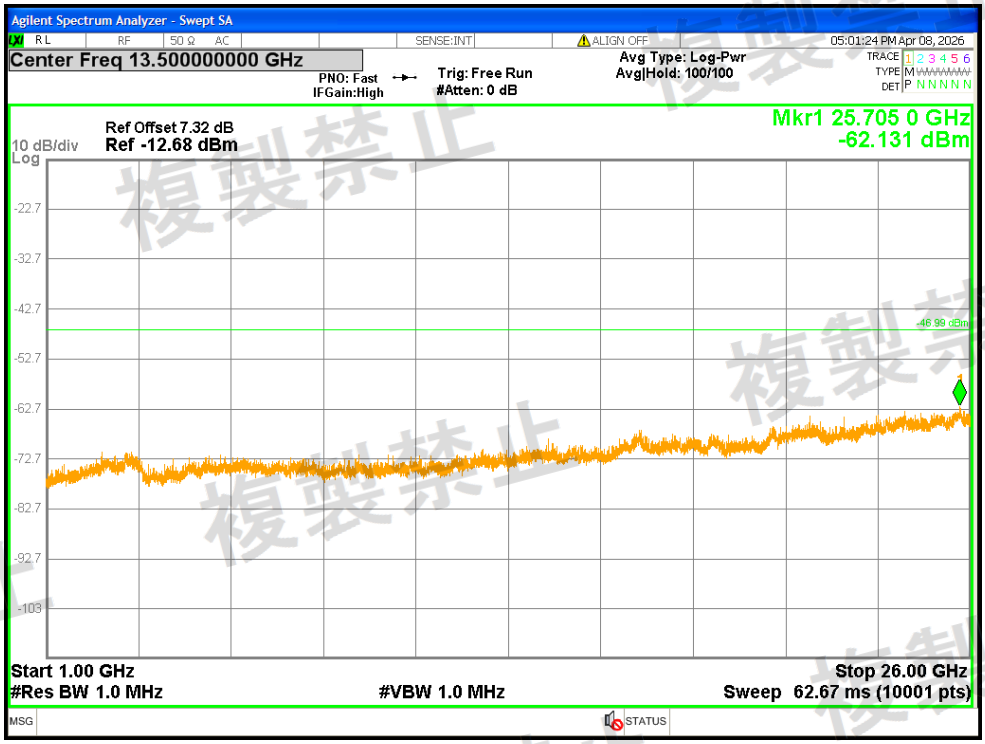


Rx. Spurious NVNT n20 5200MHz Ant2 @ 30MHz-1000MHz

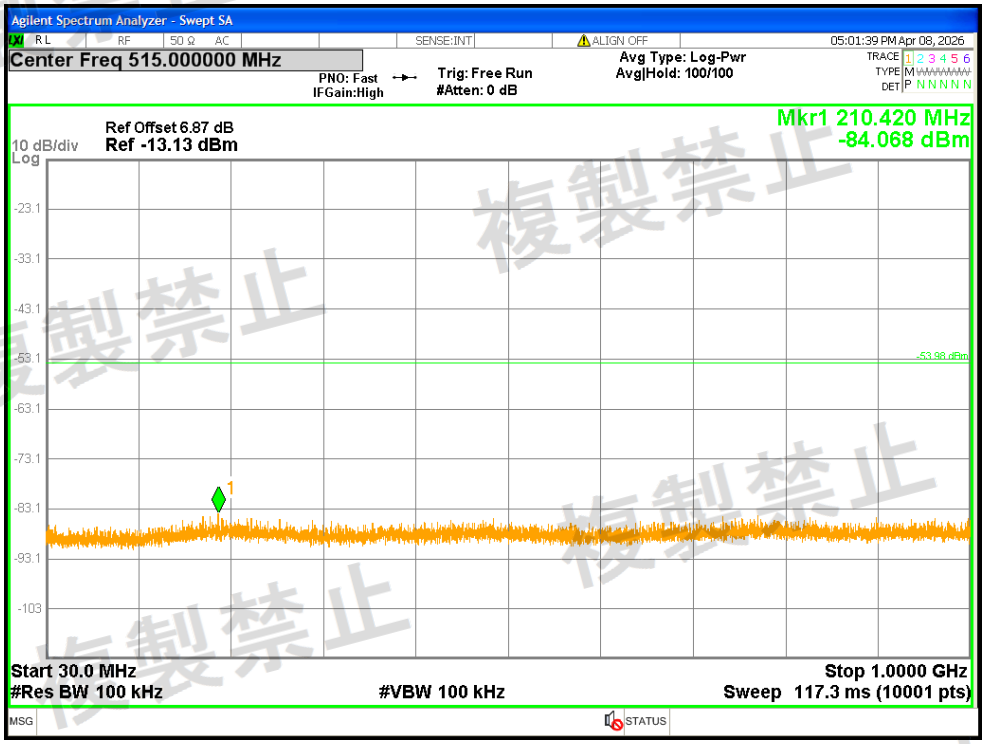


Rx. Spurious NVNT n20 5200MHz Ant2 @ 1000MHz-26000MHz

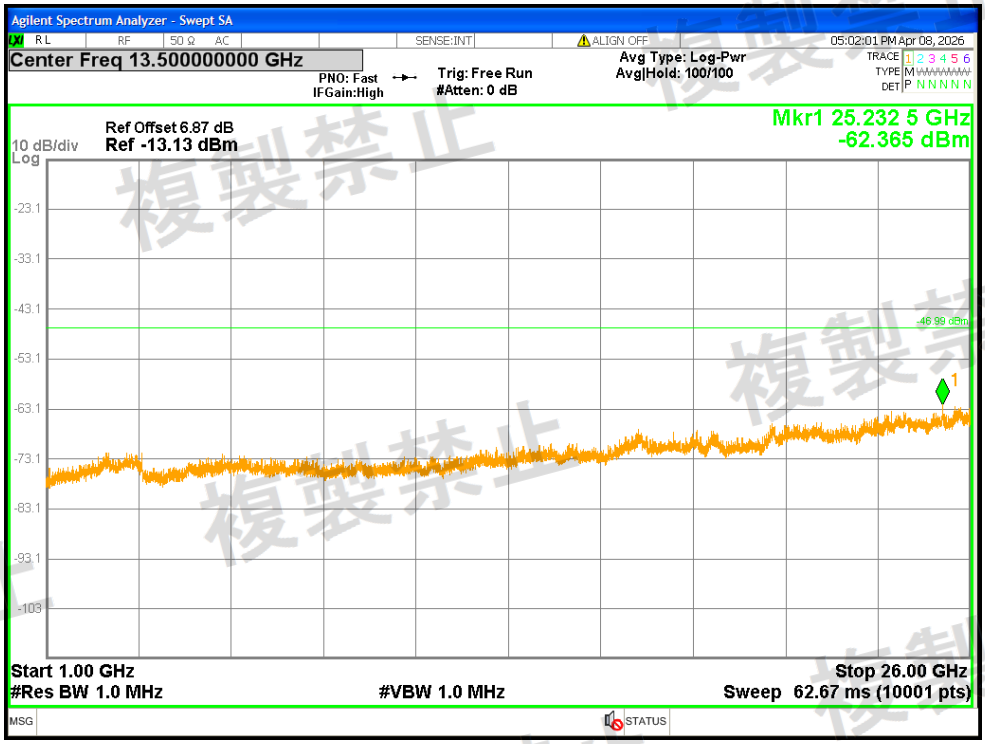


Rx. Spurious NVNT n20 5240MHz Ant1 @ 30MHz-1000MHz

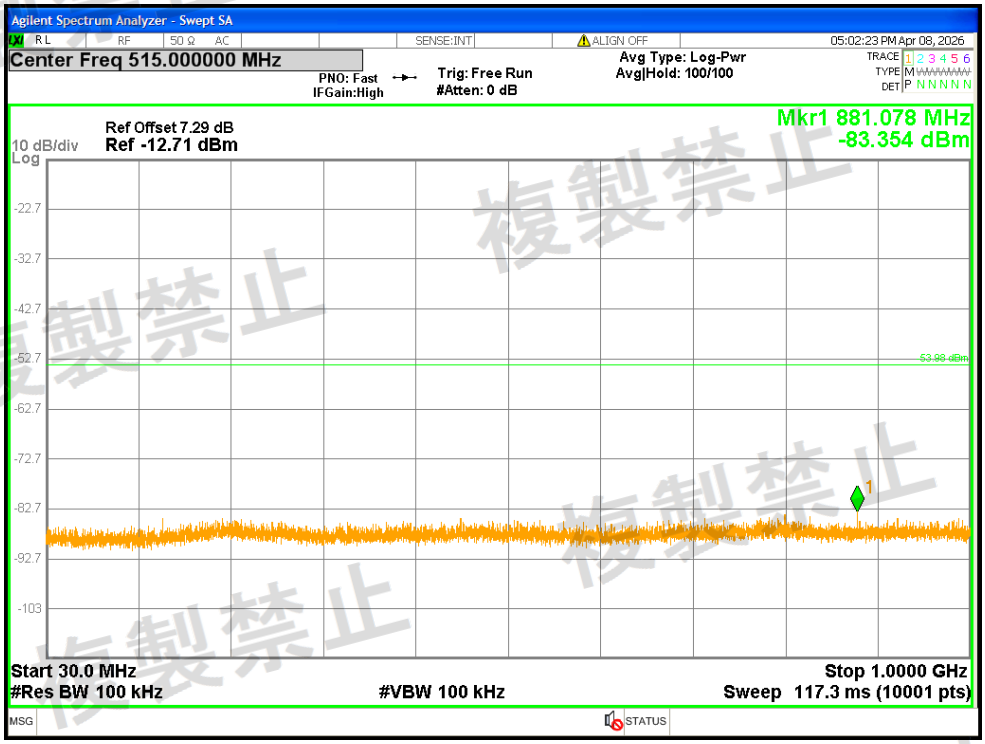


Rx. Spurious NVNT n20 5240MHz Ant1 @ 1000MHz-26000MHz

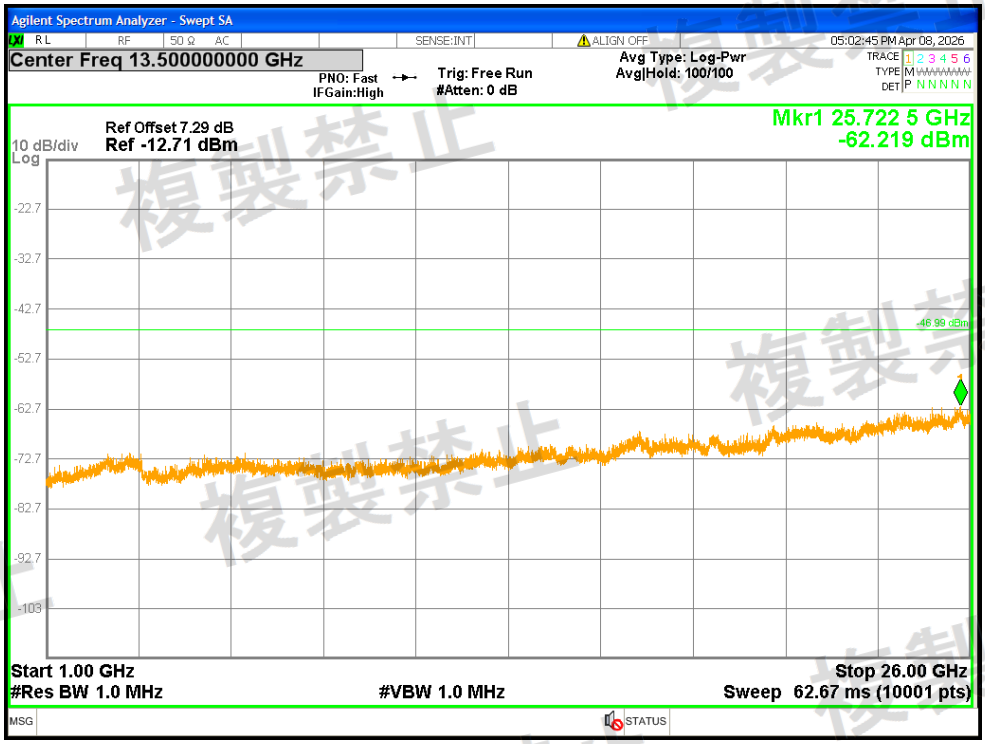


Rx. Spurious NVNT n20 5240MHz Ant2 @ 30MHz-1000MHz

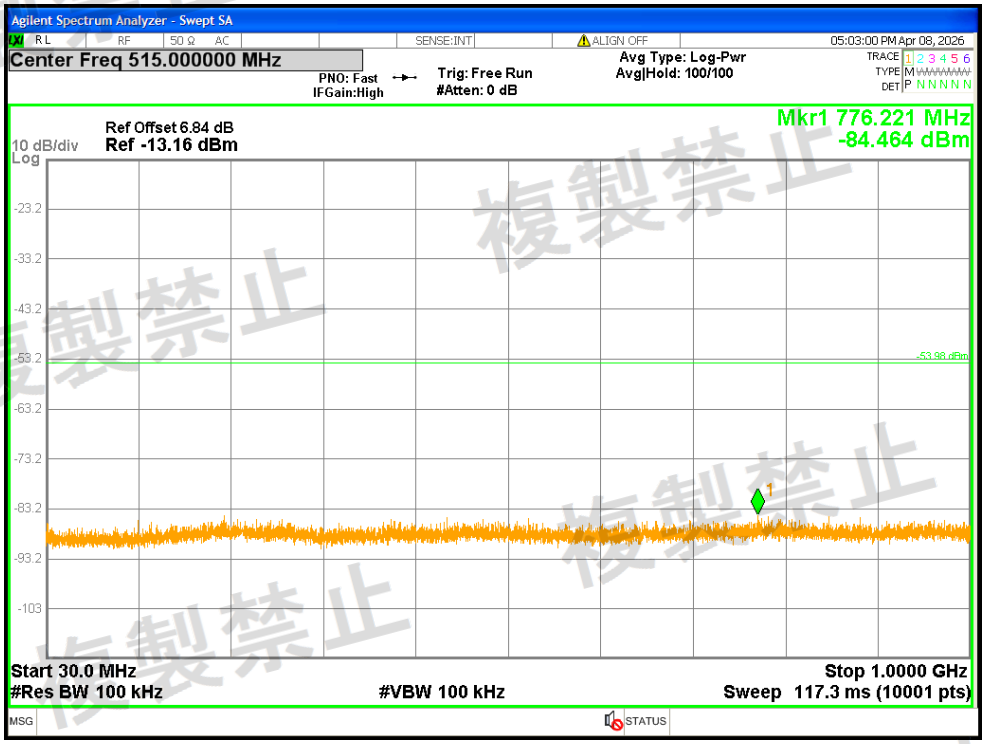


Rx. Spurious NVNT n20 5240MHz Ant2 @ 1000MHz-26000MHz

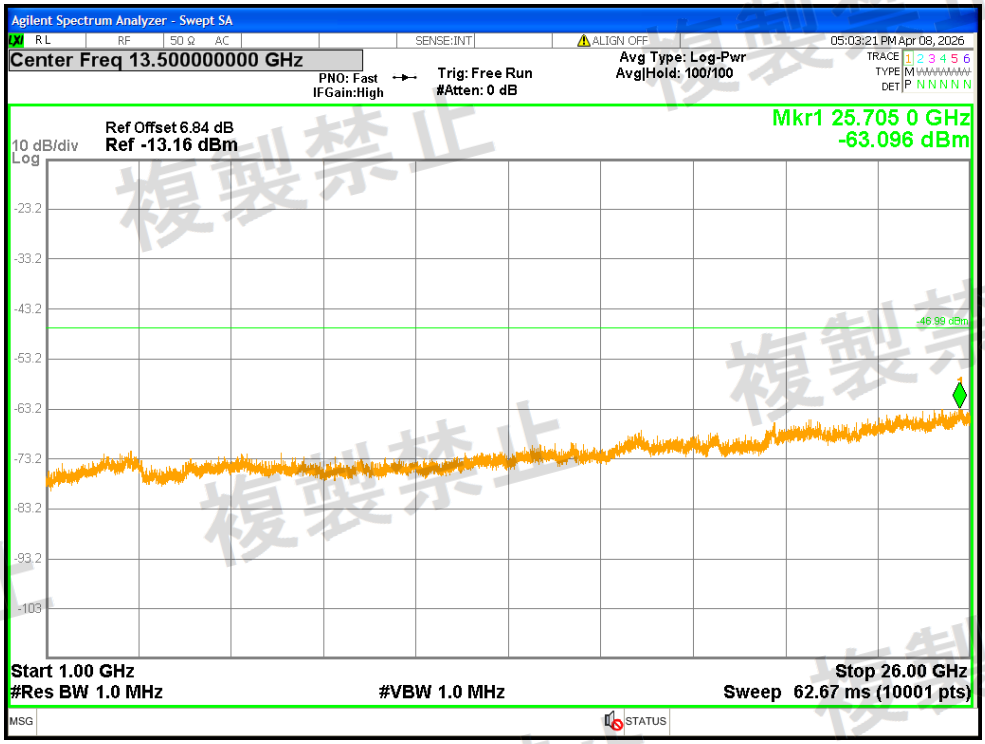


Rx. Spurious NVNT n40 5190MHz Ant1 @ 30MHz-1000MHz

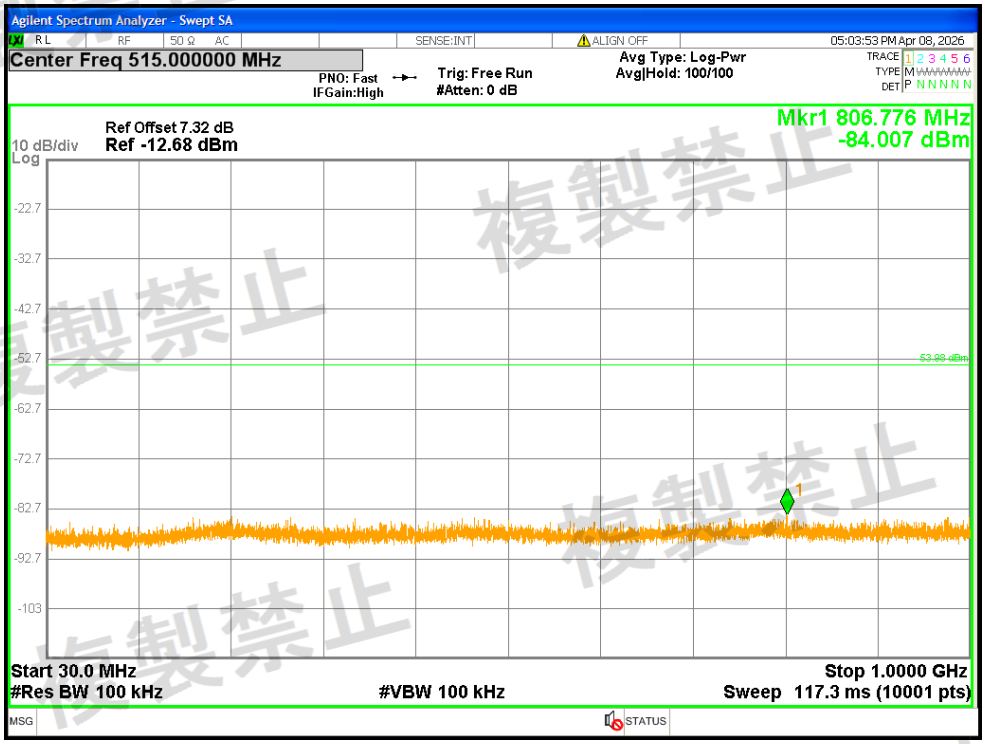


Rx. Spurious NVNT n40 5190MHz Ant1 @ 1000MHz-26000MHz

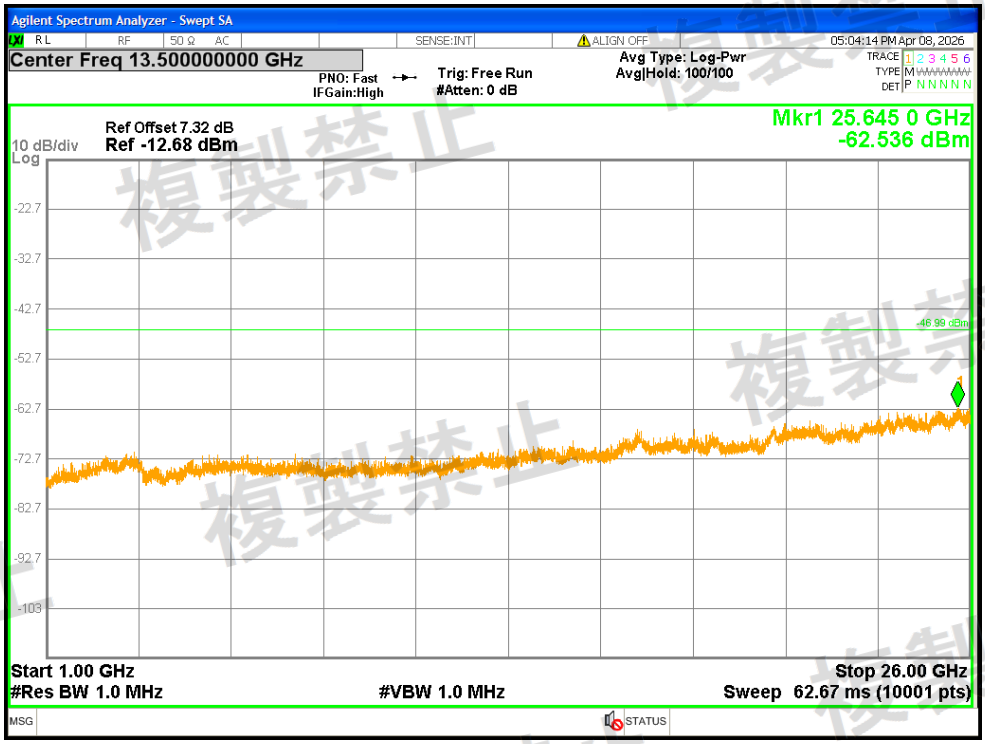


Rx. Spurious NVNT n40 5190MHz Ant2 @ 30MHz-1000MHz

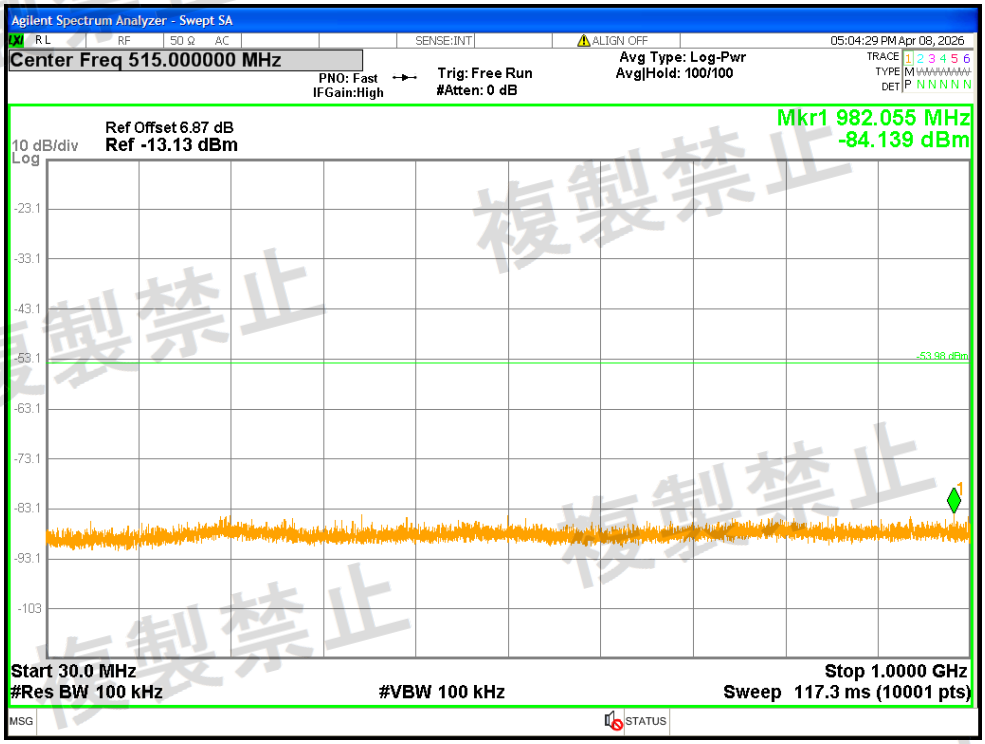


Rx. Spurious NVNT n40 5190MHz Ant2 @ 1000MHz-26000MHz

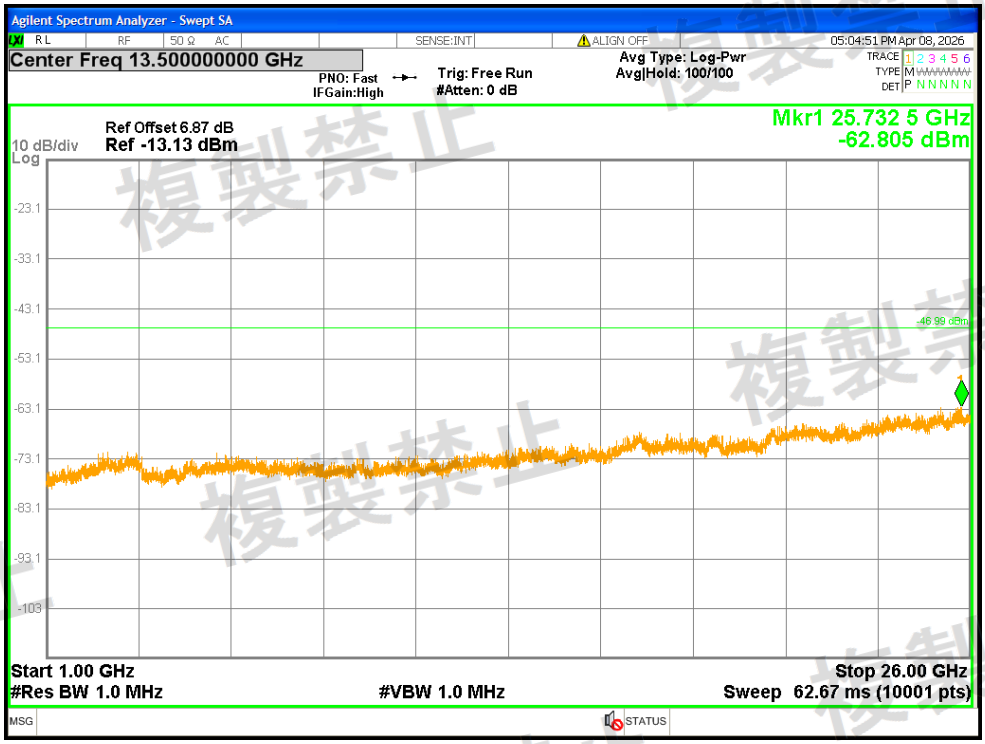


Rx. Spurious NVNT n40 5230MHz Ant1 @ 30MHz-1000MHz

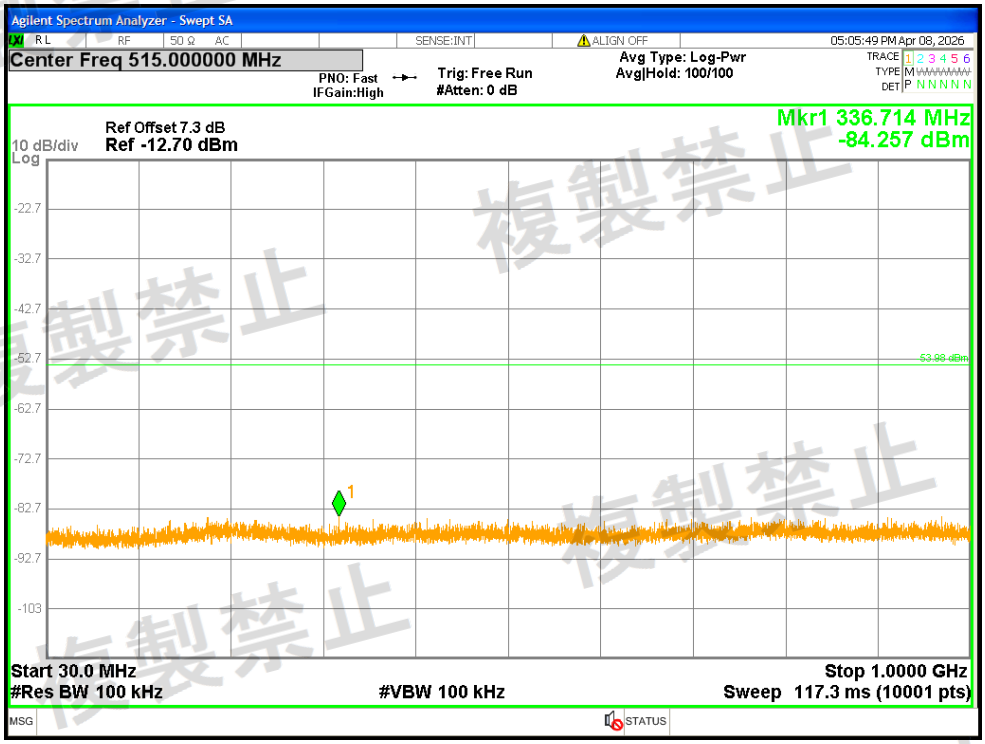


Rx. Spurious NVNT n40 5230MHz Ant1 @ 1000MHz-26000MHz

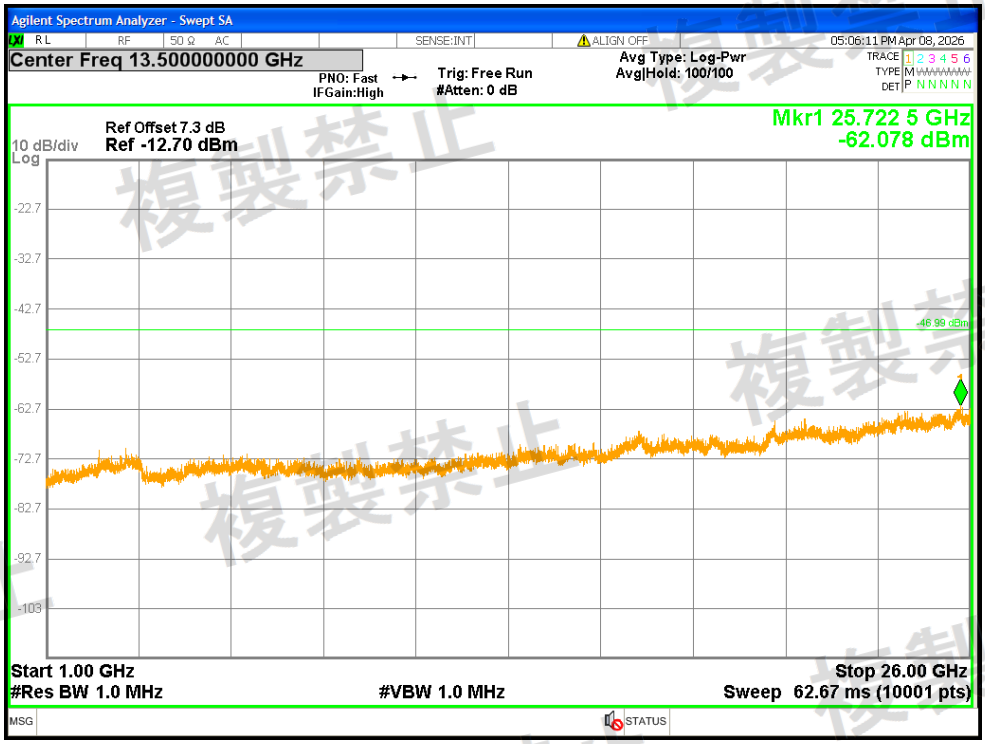


Rx. Spurious NVNT n40 5230MHz Ant2 @ 30MHz-1000MHz

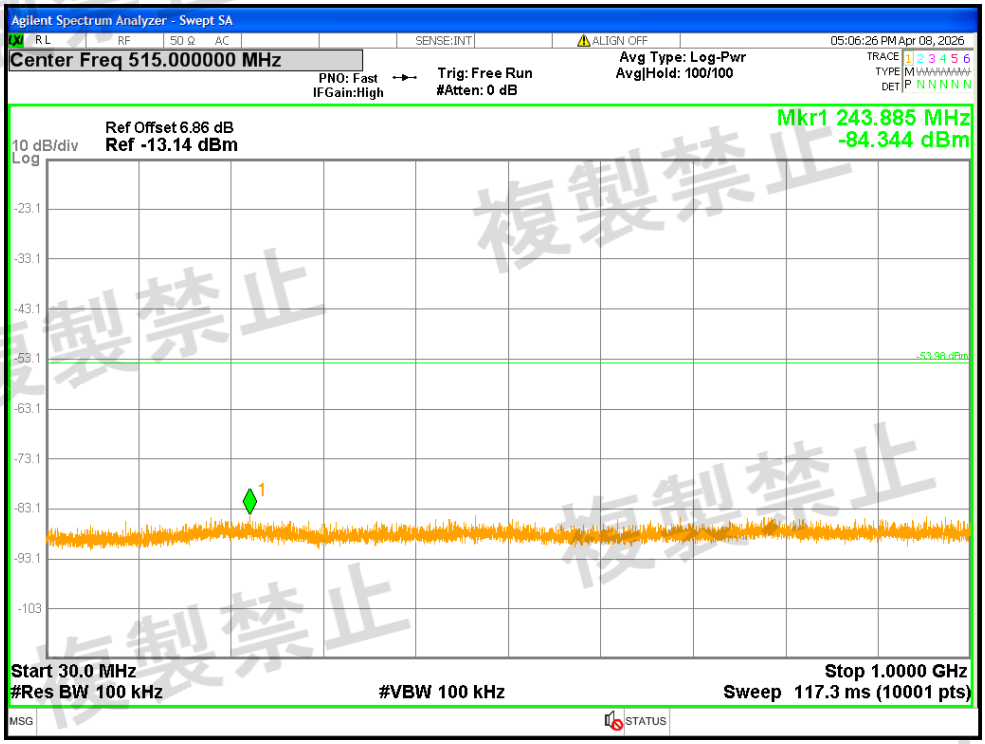


Rx. Spurious NVNT n40 5230MHz Ant2 @ 1000MHz-26000MHz

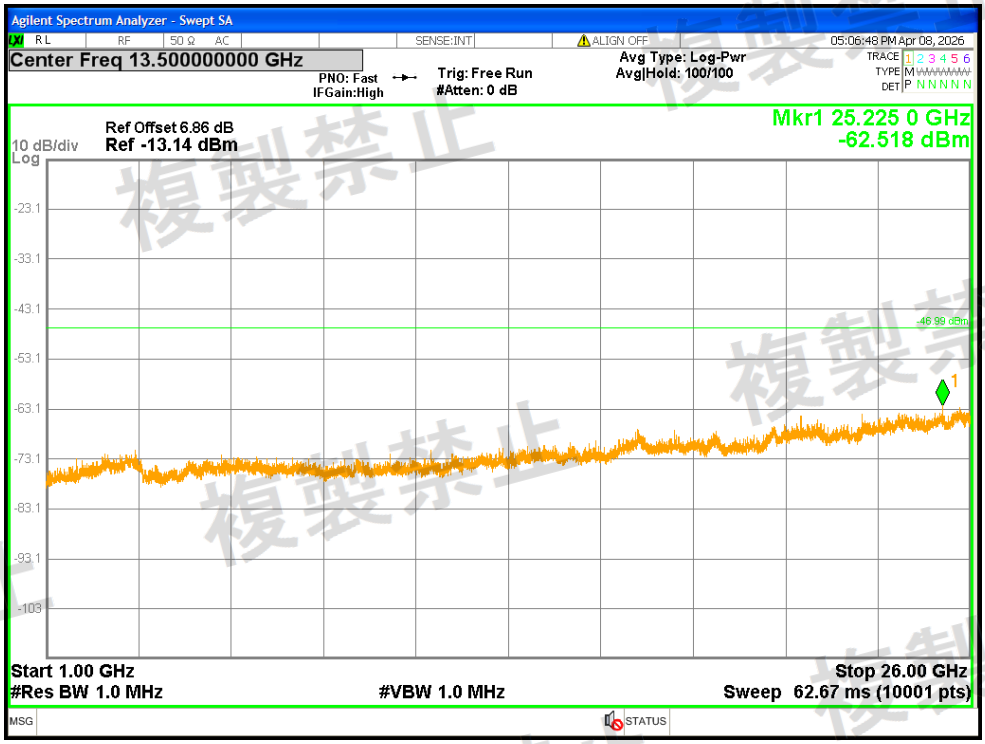


Rx. Spurious NVNT ac20 5180MHz Ant1 @ 30MHz-1000MHz

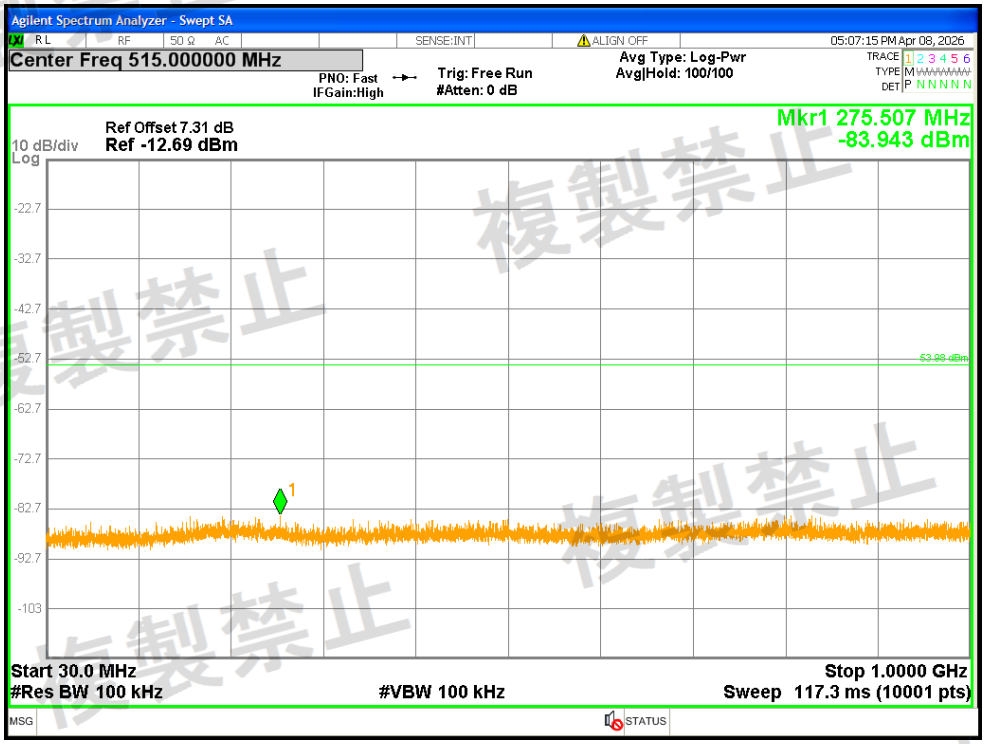


Rx. Spurious NVNT ac20 5180MHz Ant1 @ 1000MHz-26000MHz

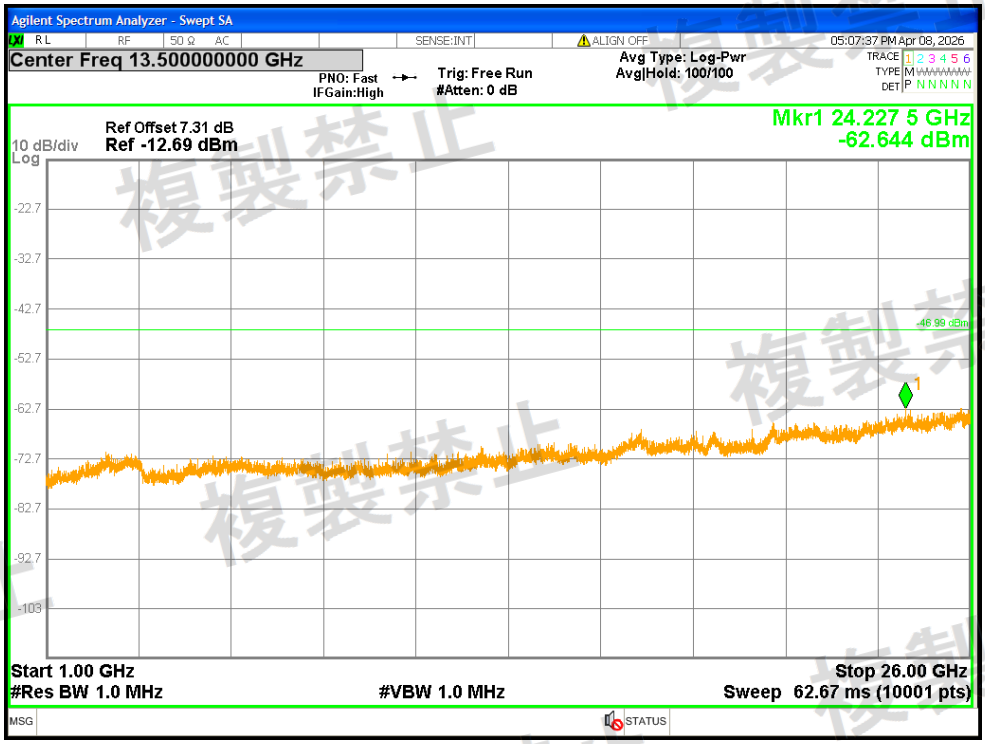


Rx. Spurious NVNT ac20 5180MHz Ant2 @ 30MHz-1000MHz

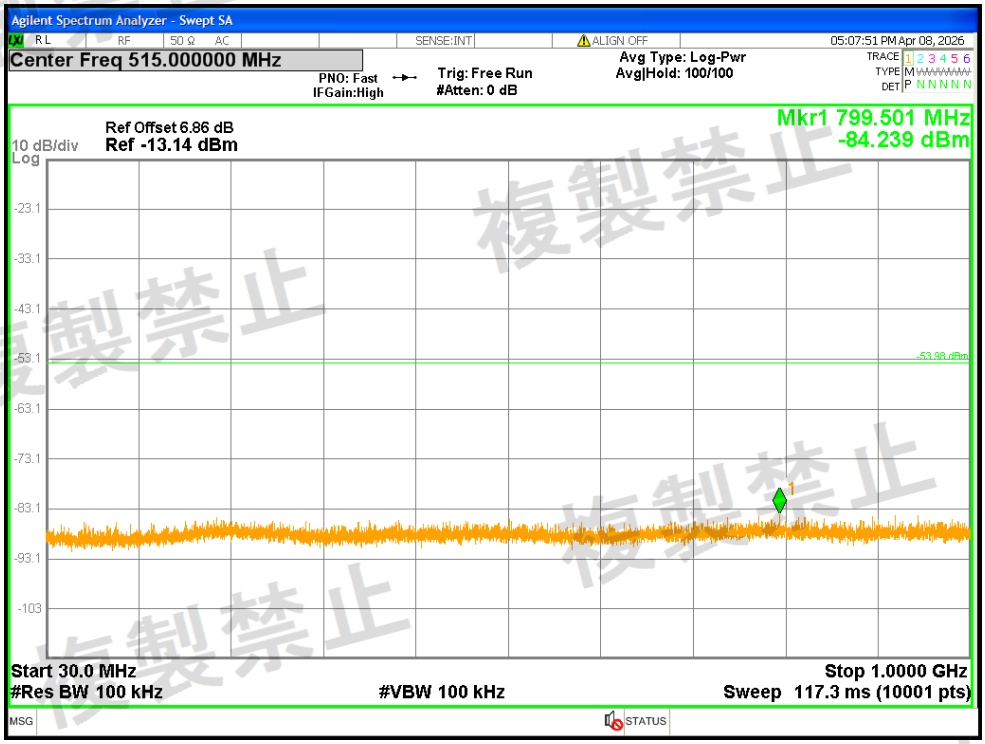


Rx. Spurious NVNT ac20 5180MHz Ant2 @ 1000MHz-26000MHz

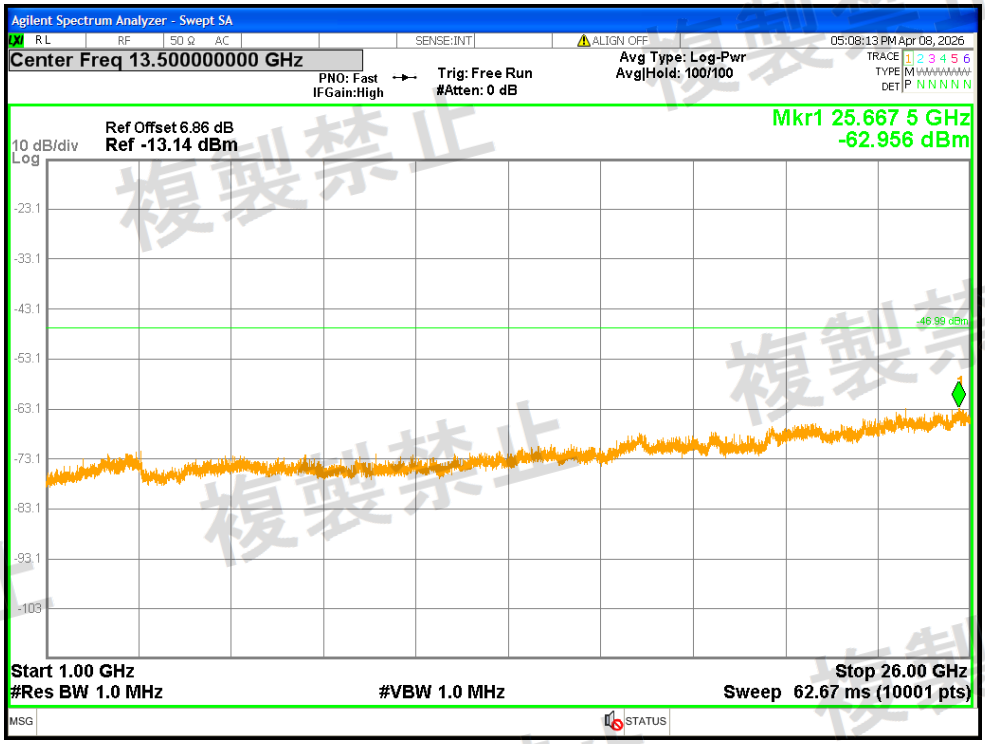


Rx. Spurious NVNT ac20 5200MHz Ant1 @ 30MHz-1000MHz

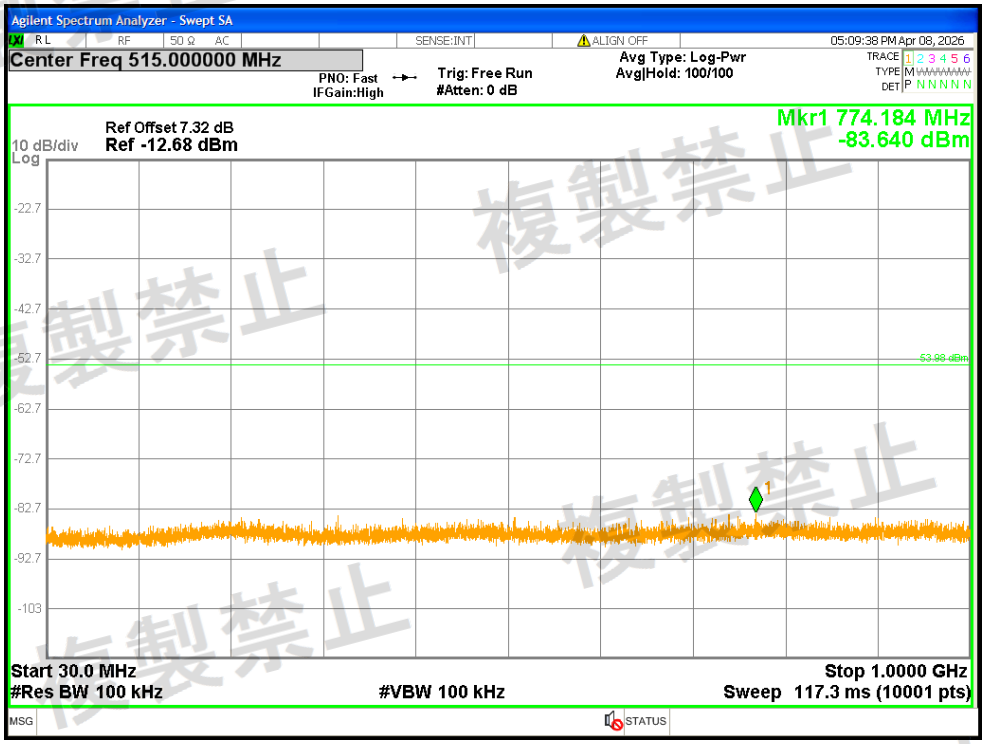


Rx. Spurious NVNT ac20 5200MHz Ant1 @ 1000MHz-26000MHz

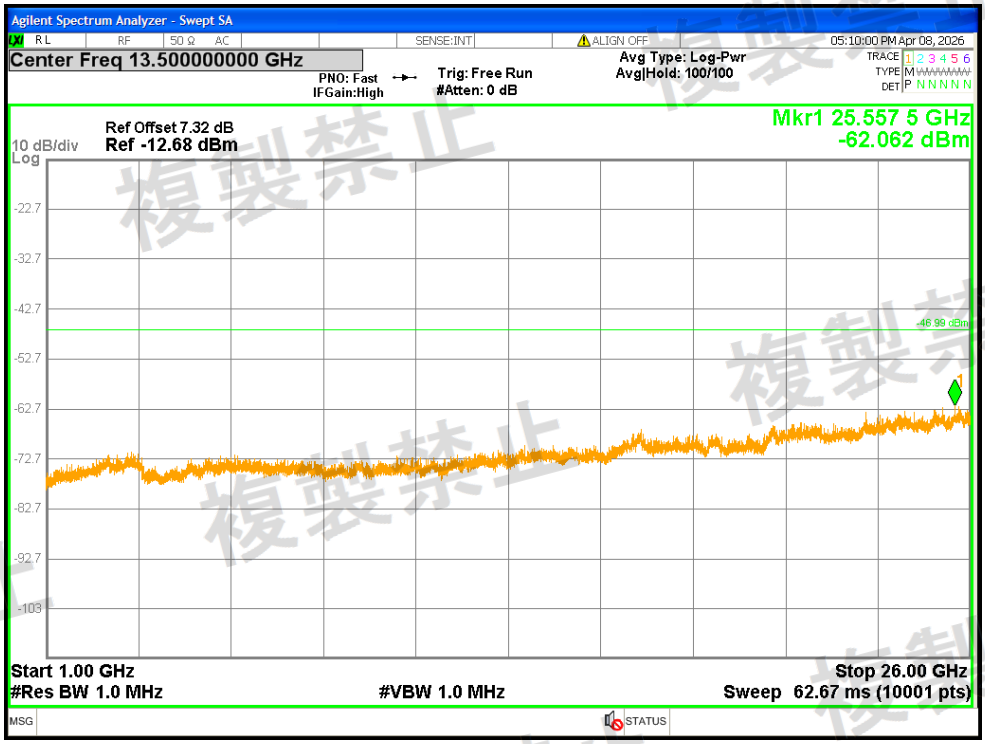


Rx. Spurious NVNT ac20 5200MHz Ant2 @ 30MHz-1000MHz

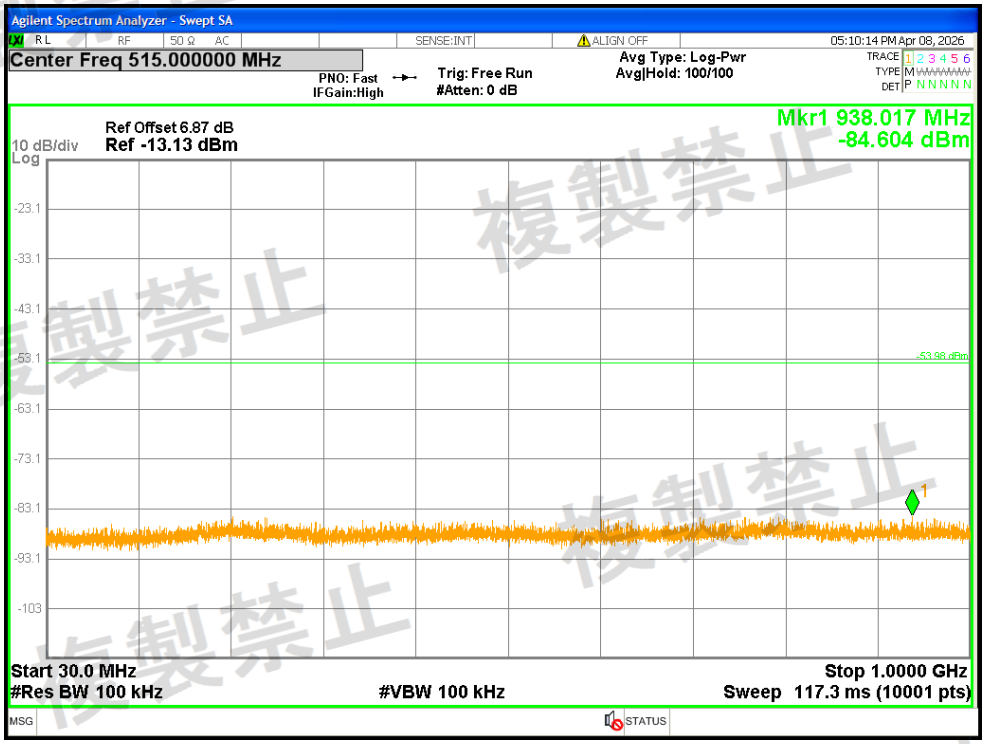


Rx. Spurious NVNT ac20 5200MHz Ant2 @ 1000MHz-26000MHz

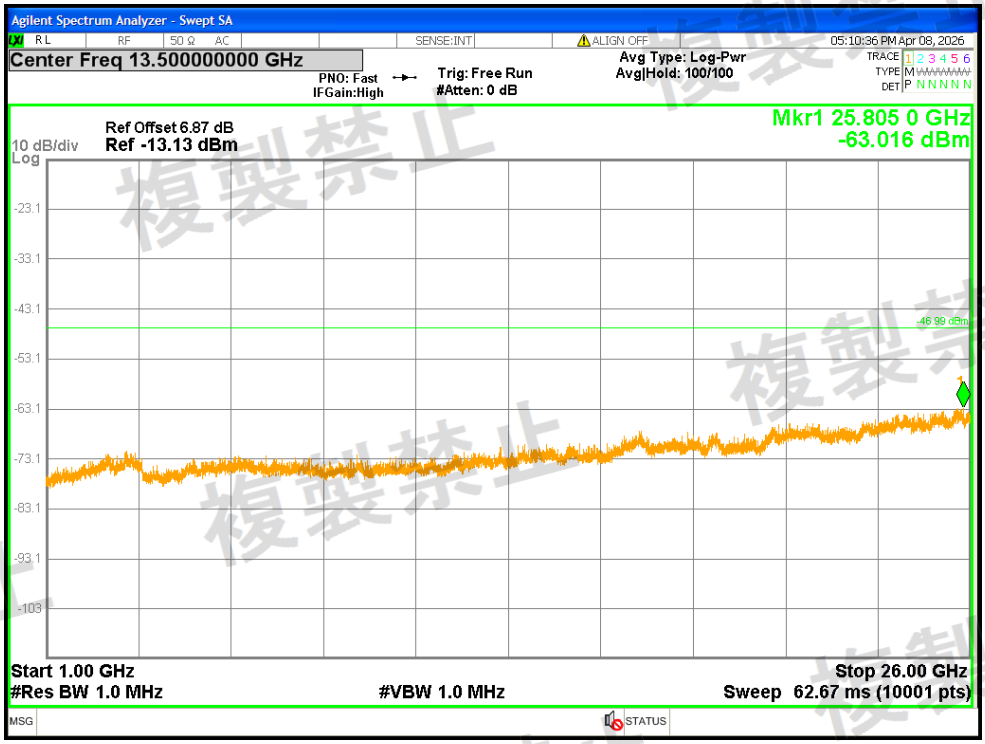


Rx. Spurious NVNT ac20 5240MHz Ant1 @ 30MHz-1000MHz

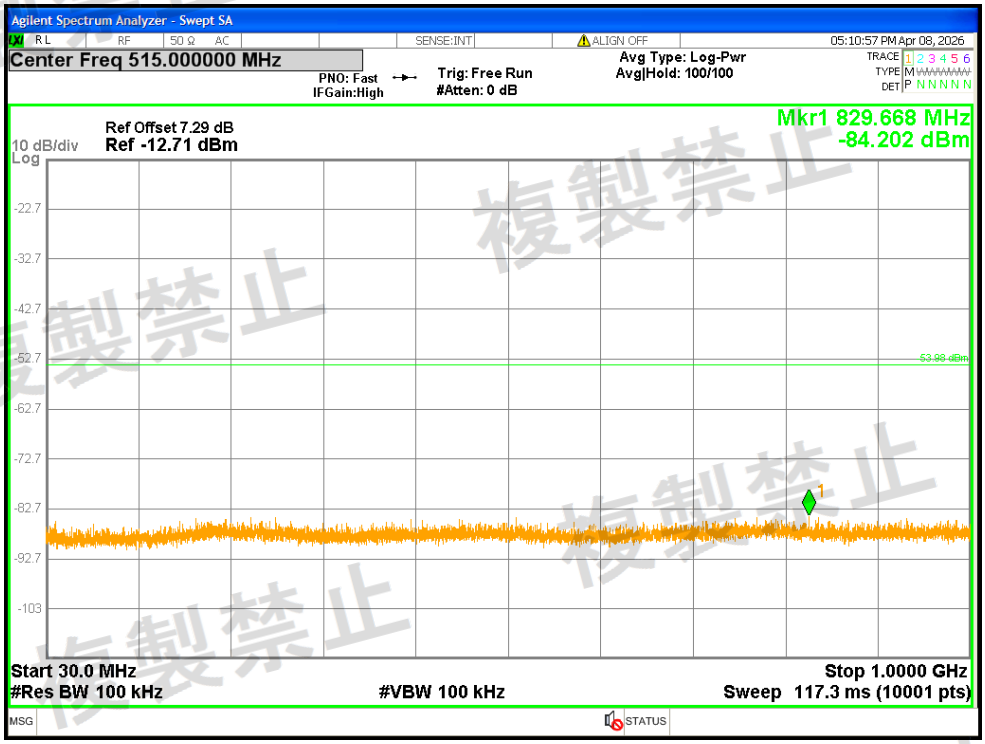


Rx. Spurious NVNT ac20 5240MHz Ant1 @ 1000MHz-26000MHz

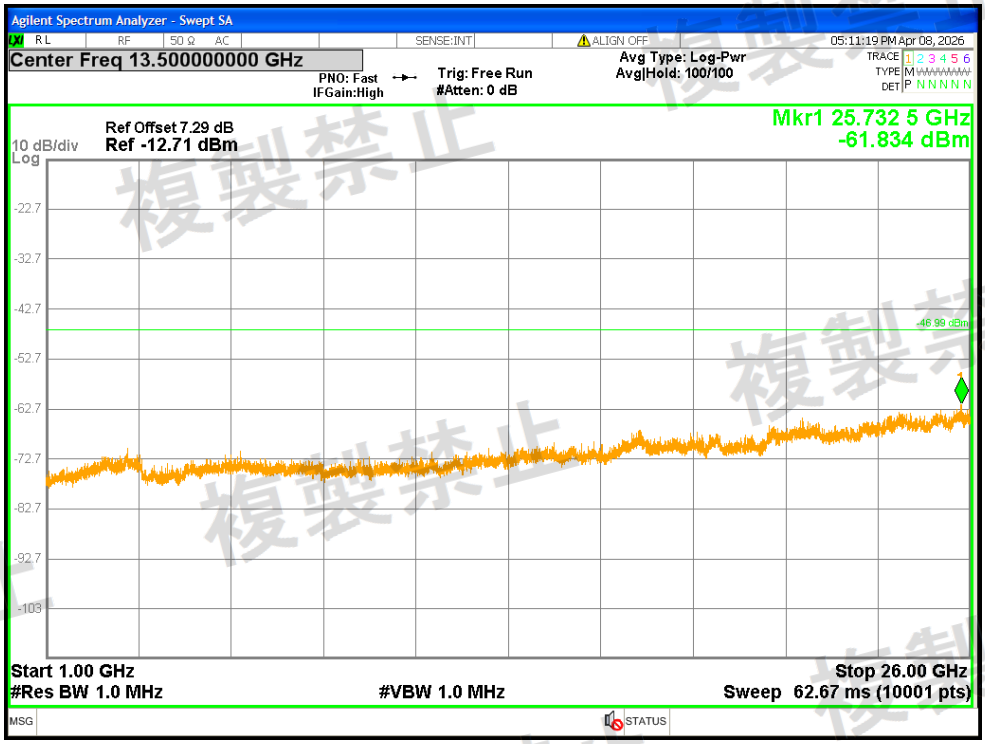


Rx. Spurious NVNT ac20 5240MHz Ant2 @ 30MHz-1000MHz

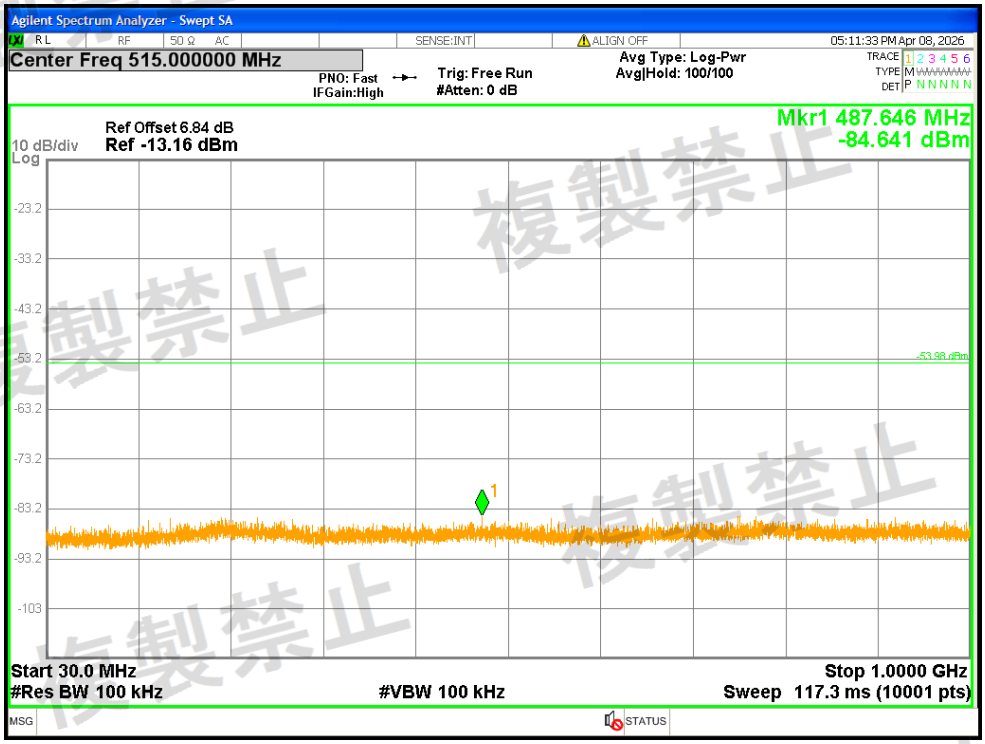


Rx. Spurious NVNT ac20 5240MHz Ant2 @ 1000MHz-26000MHz

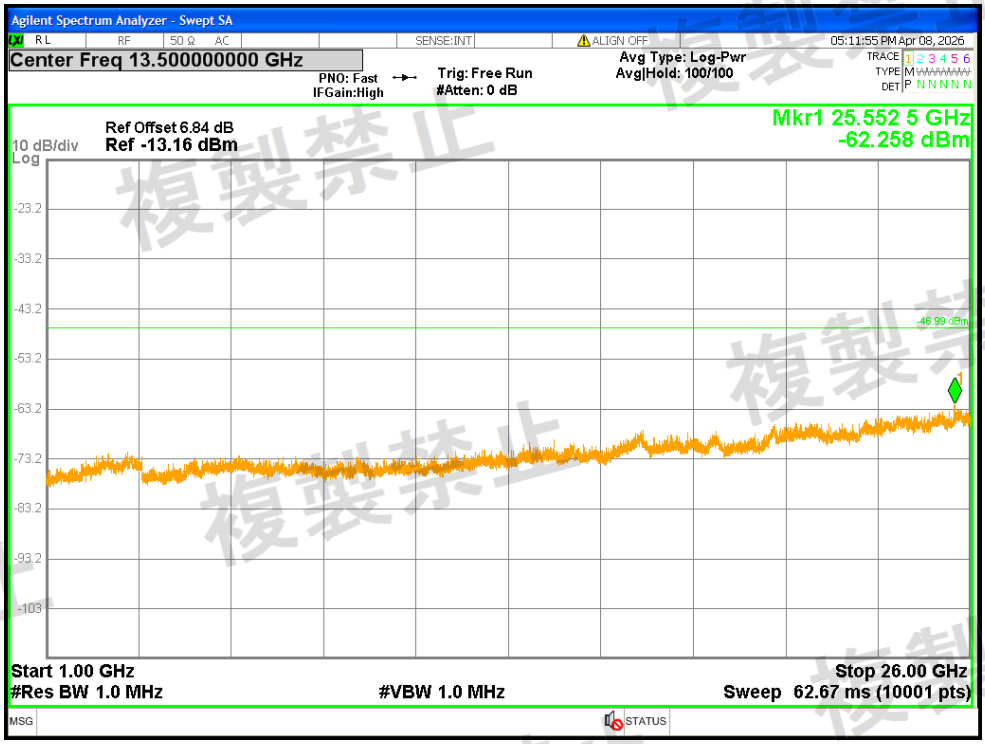


Rx. Spurious NVNT ac40 5190MHz Ant1 @ 30MHz-1000MHz

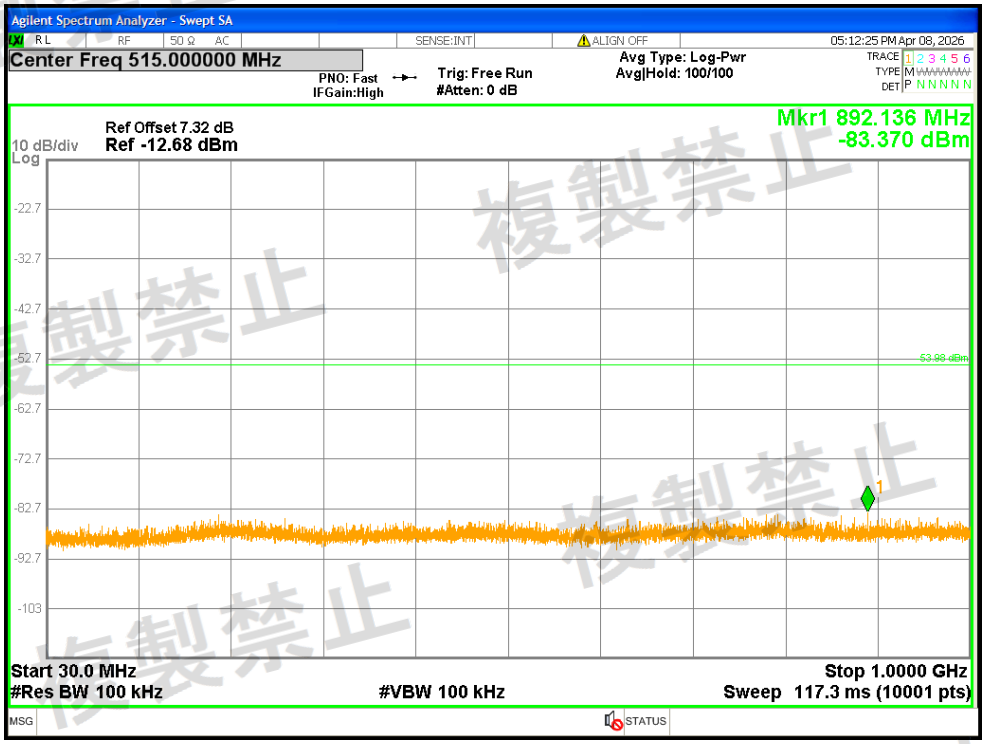


Rx. Spurious NVNT ac40 5190MHz Ant1 @ 1000MHz-26000MHz

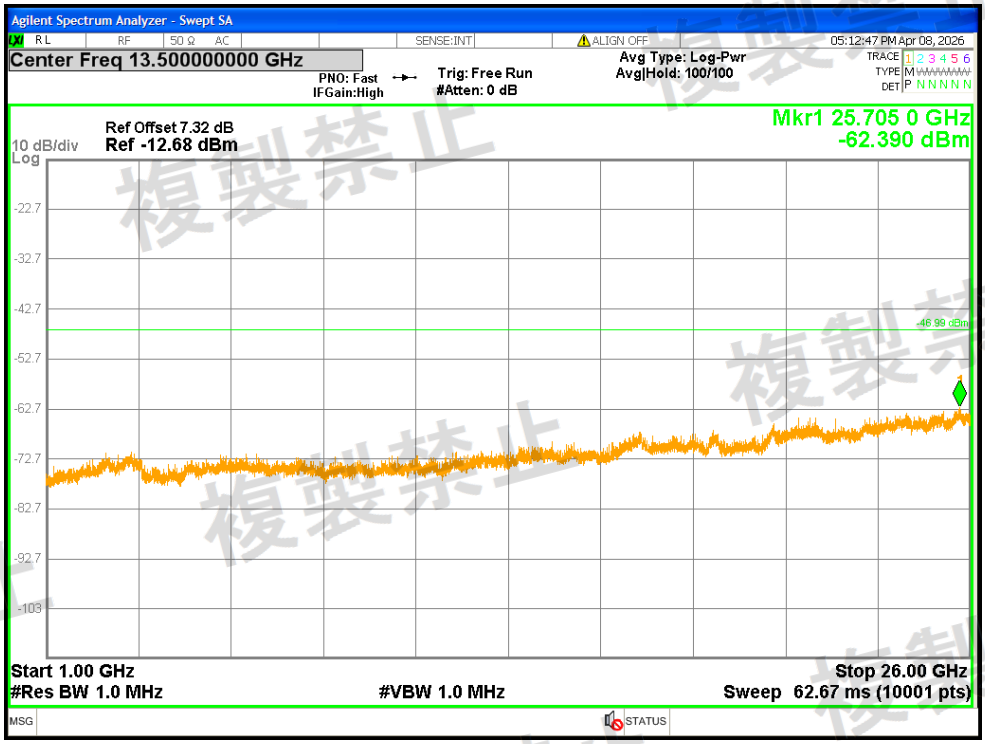


Rx. Spurious NVNT ac40 5190MHz Ant2 @ 30MHz-1000MHz

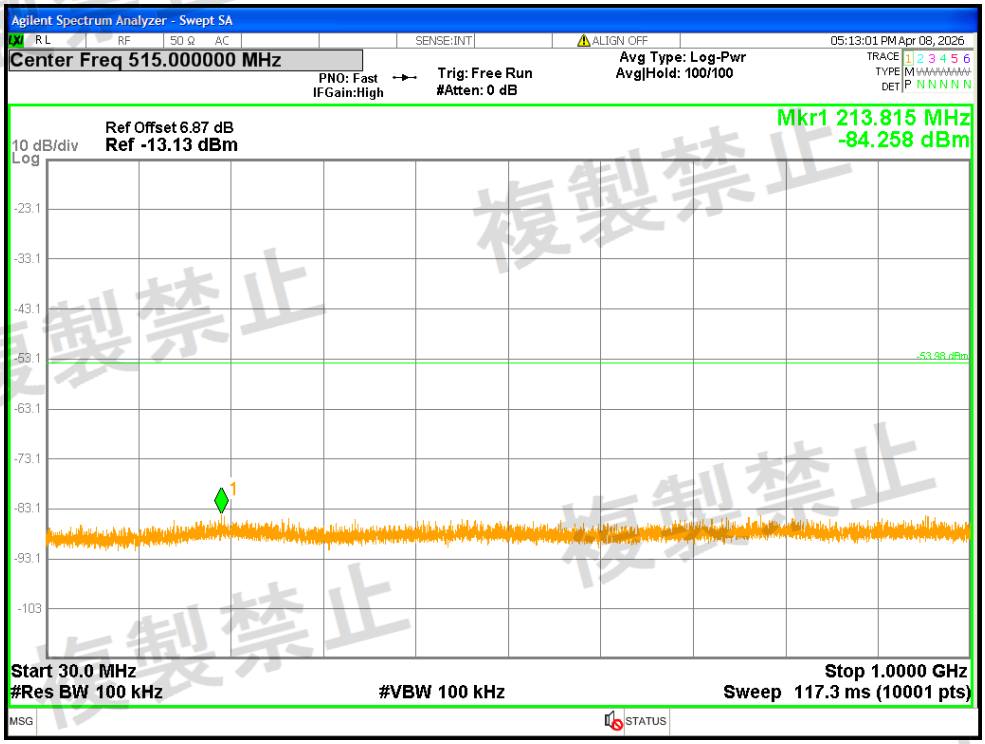


Rx. Spurious NVNT ac40 5190MHz Ant2 @ 1000MHz-26000MHz

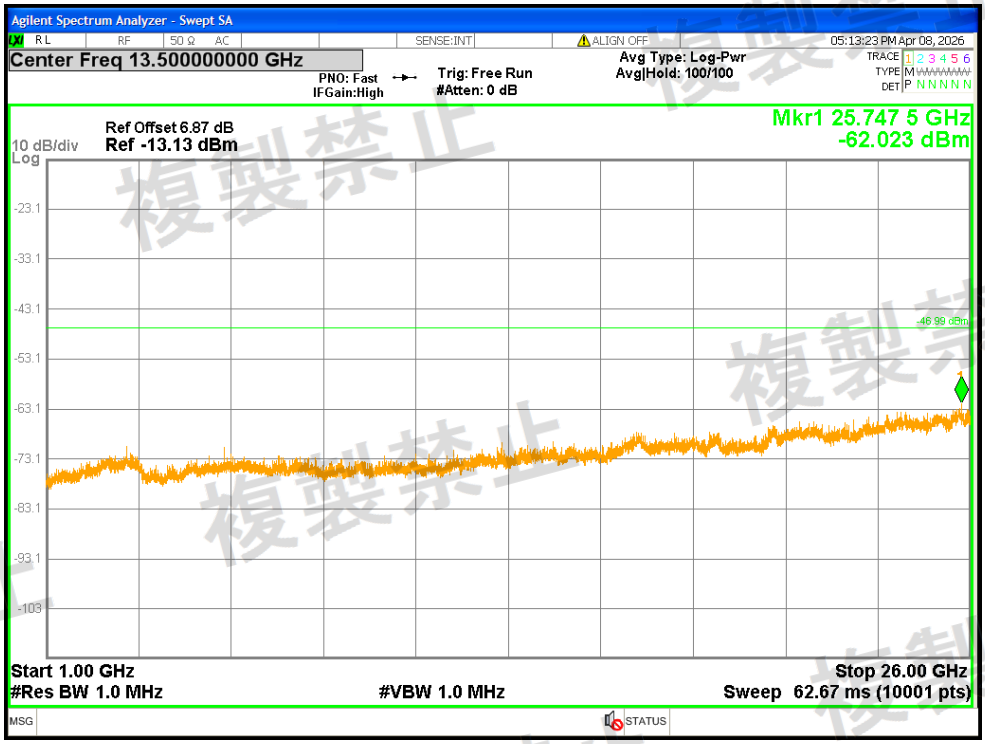


Rx. Spurious NVNT ac40 5230MHz Ant1 @ 30MHz-1000MHz

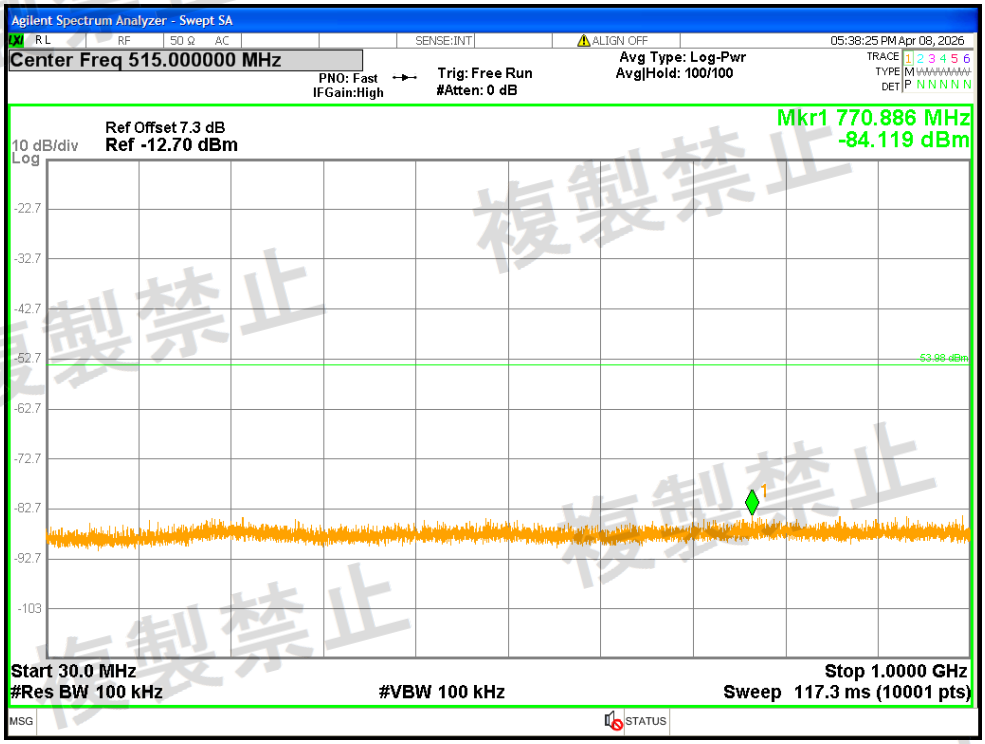


Rx. Spurious NVNT ac40 5230MHz Ant1 @ 1000MHz-26000MHz

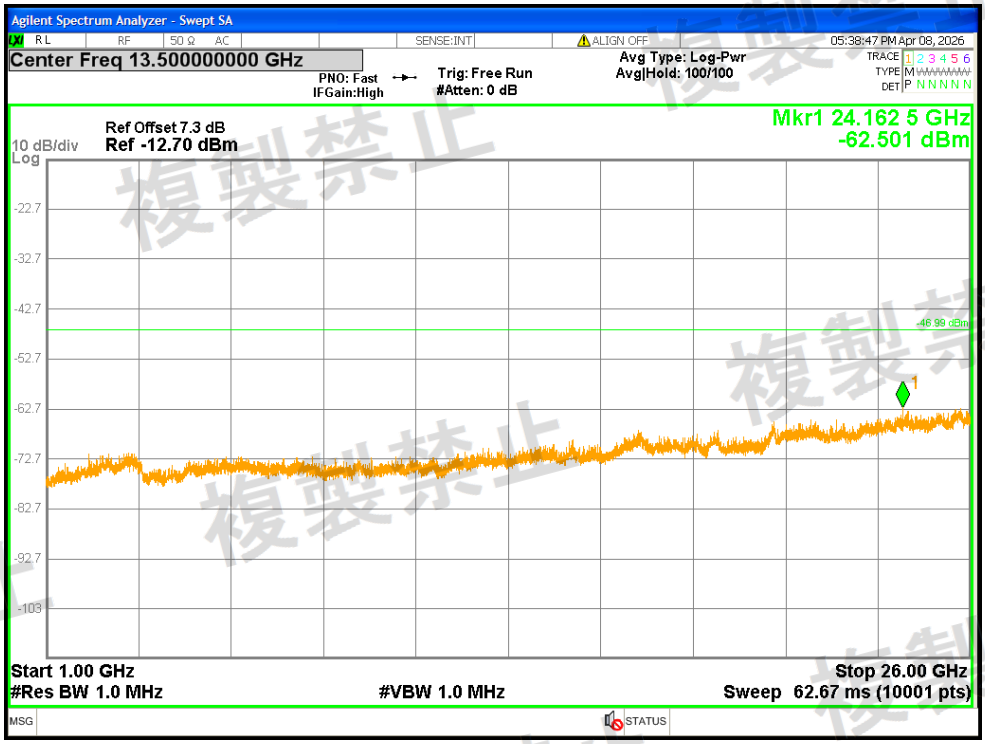


Rx. Spurious NVNT ac40 5230MHz Ant2 @ 30MHz-1000MHz

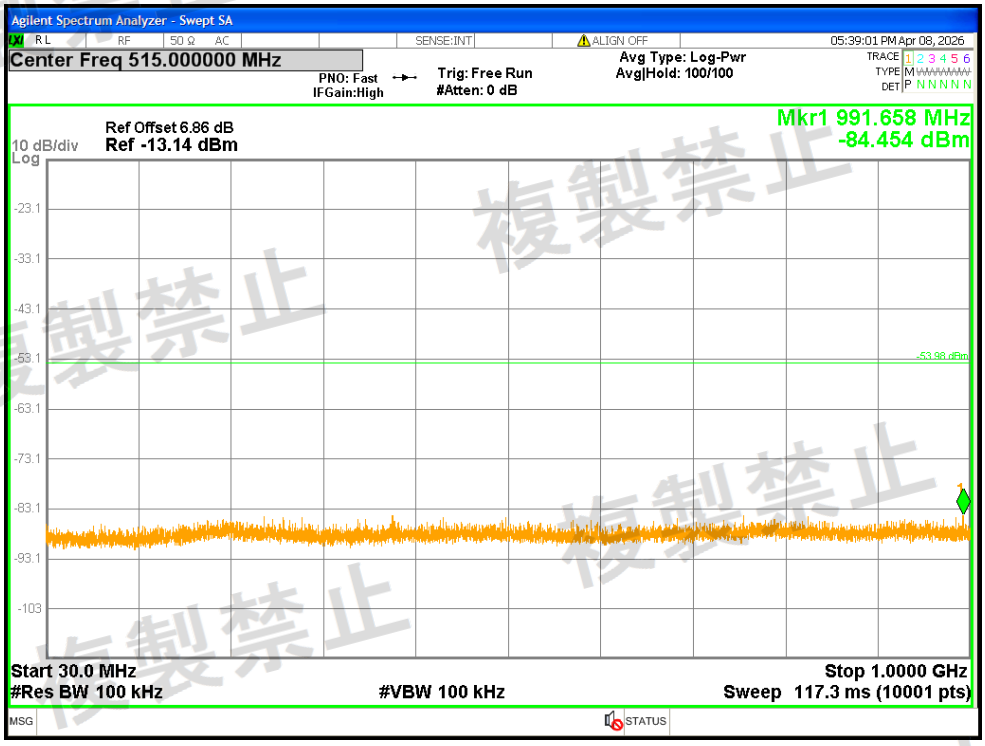


Rx. Spurious NVNT ac40 5230MHz Ant2 @ 1000MHz-26000MHz

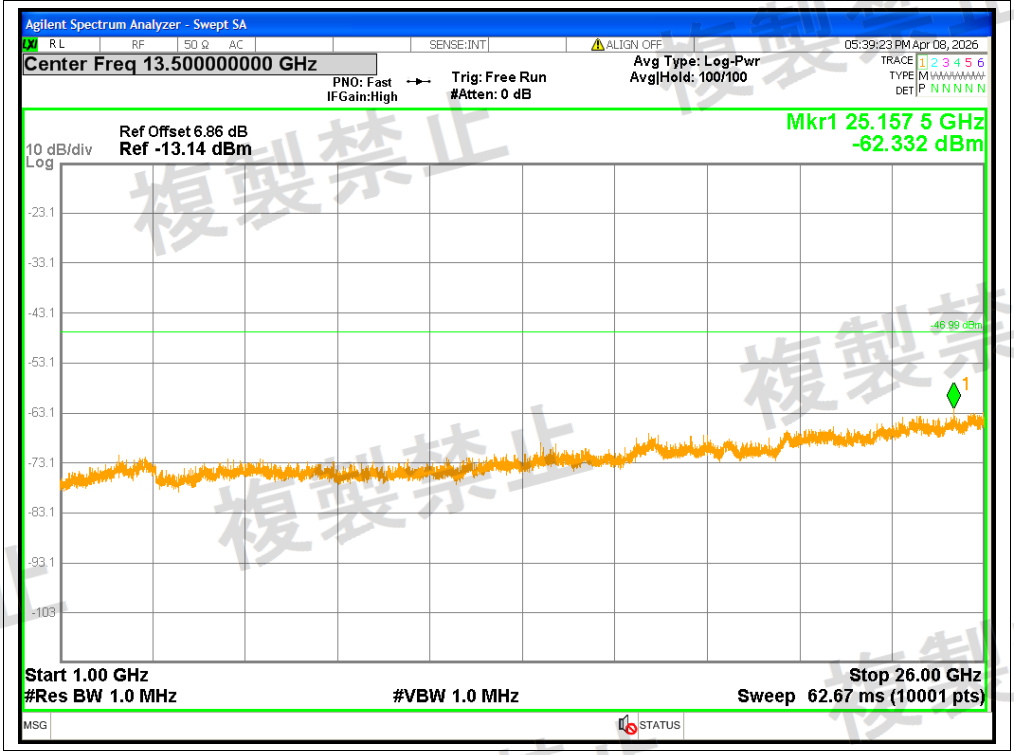


Rx. Spurious NVNT ac80 5210MHz Ant1 @ 30MHz-1000MHz

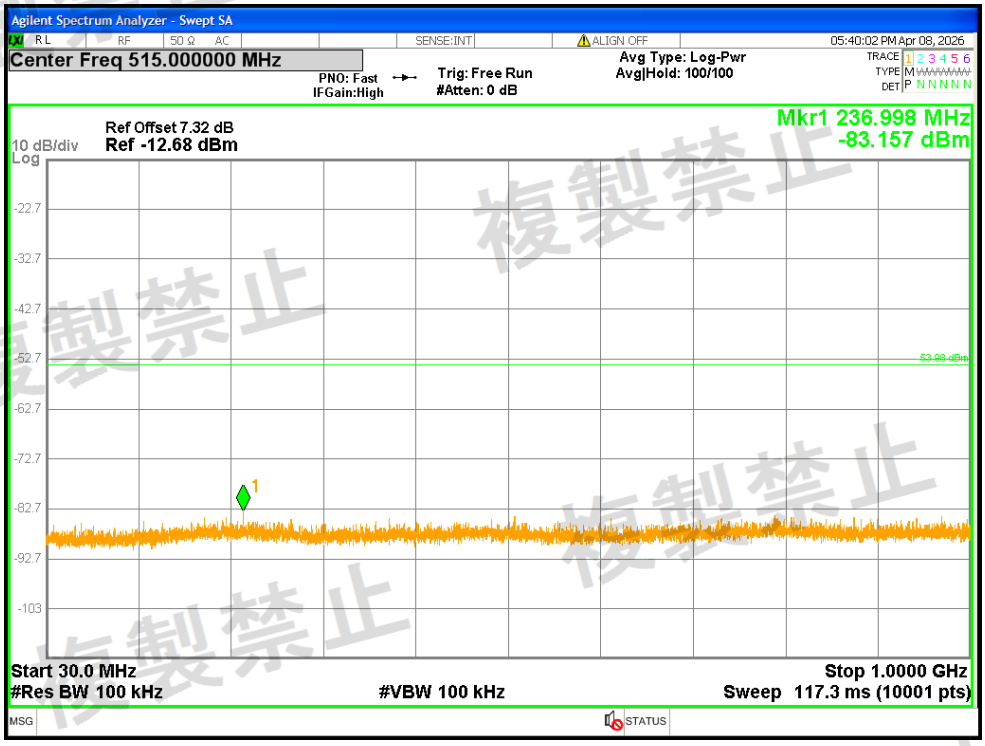


Rx. Spurious NVNT ac80 5210MHz Ant1 @ 1000MHz-26000MHz

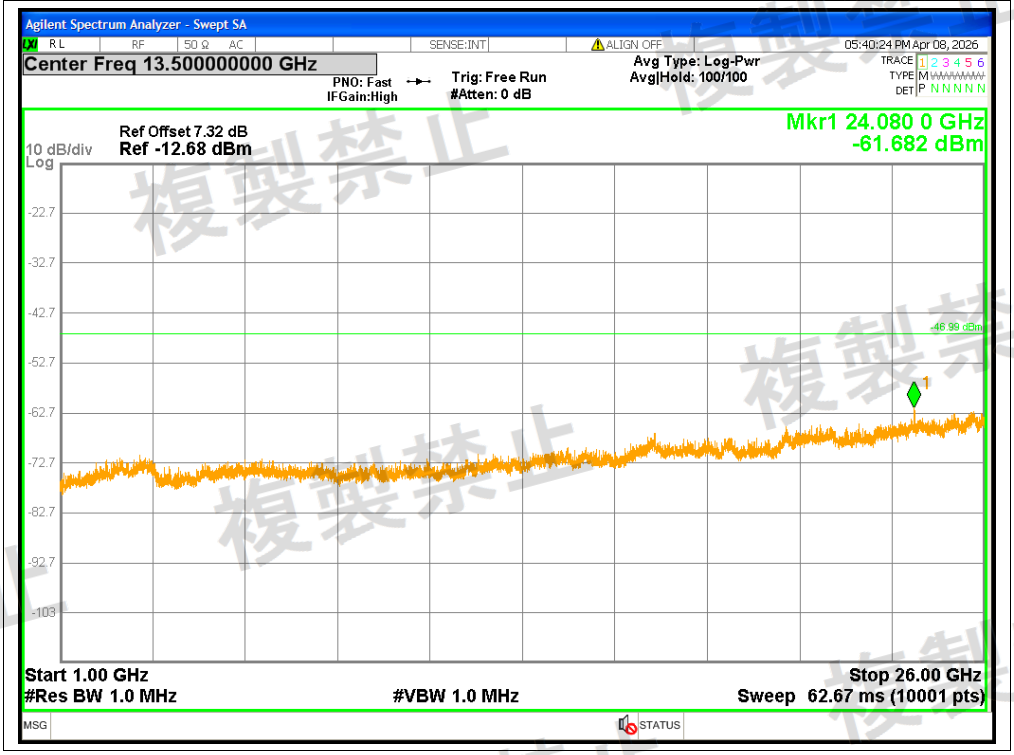


Rx. Spurious NVNT ac80 5210MHz Ant2 @ 30MHz-1000MHz

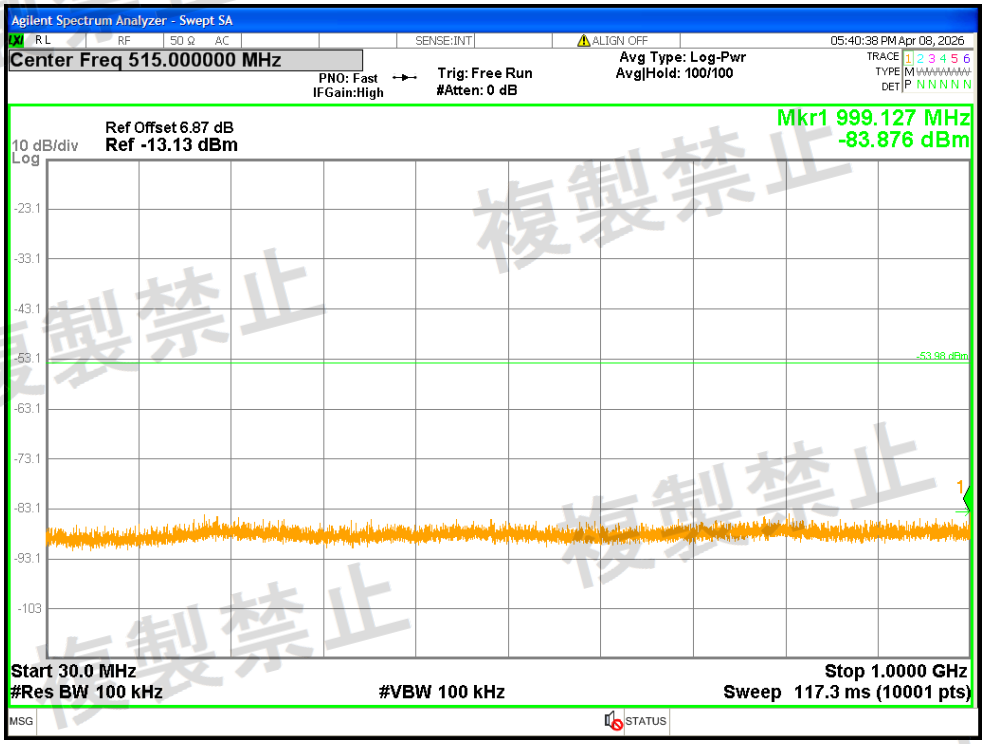


Rx. Spurious NVNT ac80 5210MHz Ant2 @ 1000MHz-26000MHz

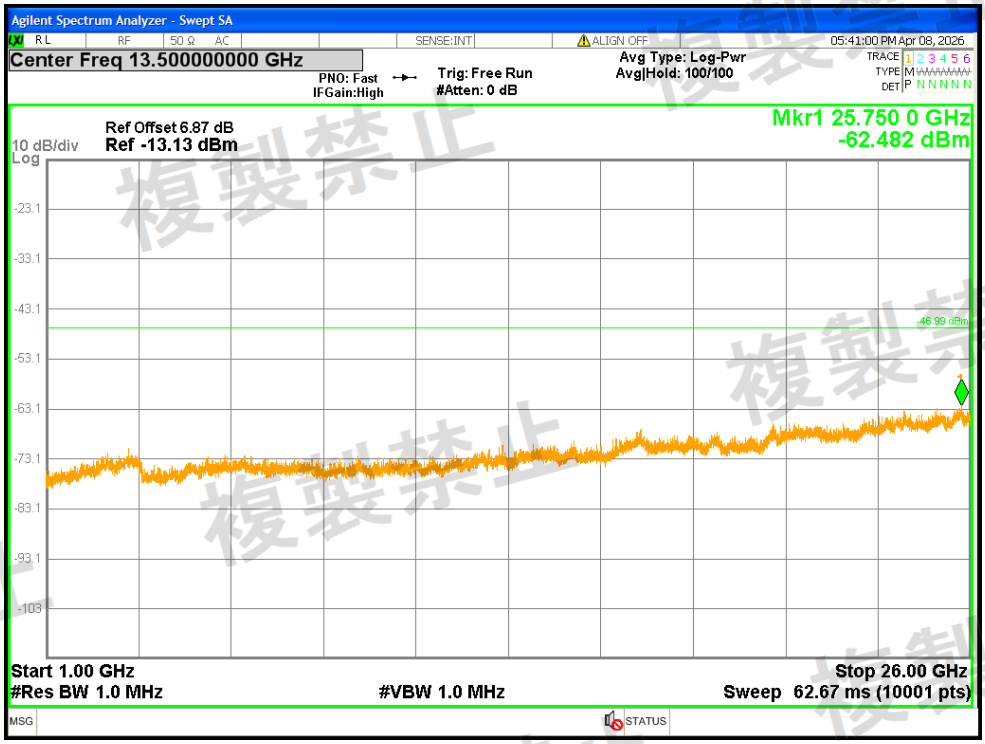


Rx. Spurious NVNT ax20 5180MHz Ant1 @ 30MHz-1000MHz

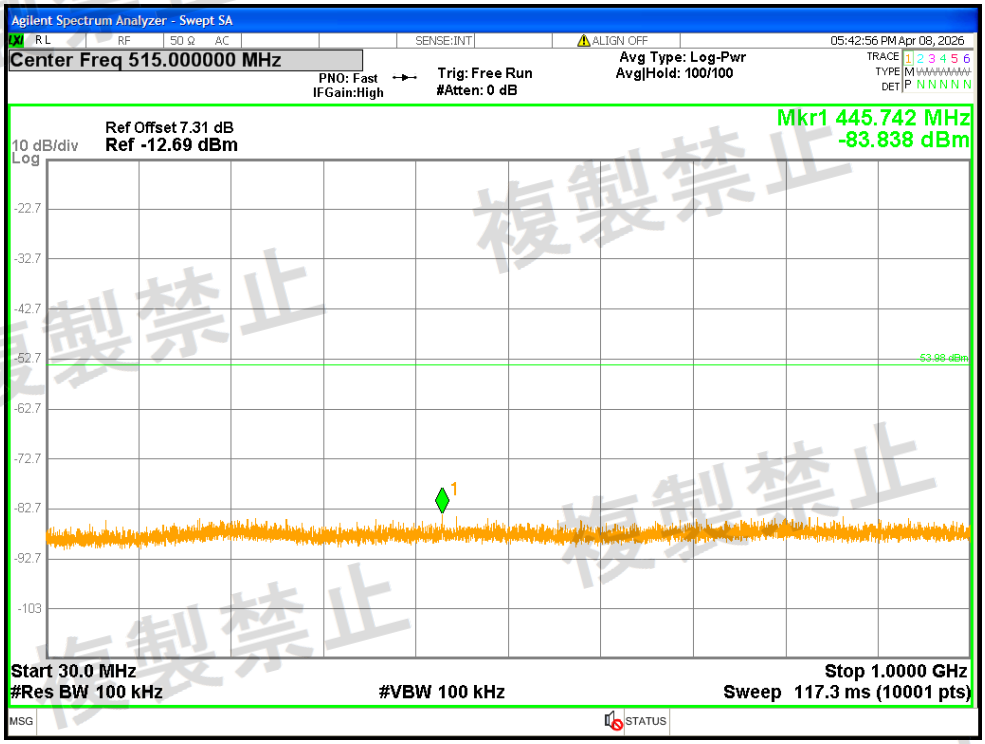


Rx. Spurious NVNT ax20 5180MHz Ant1 @ 1000MHz-26000MHz

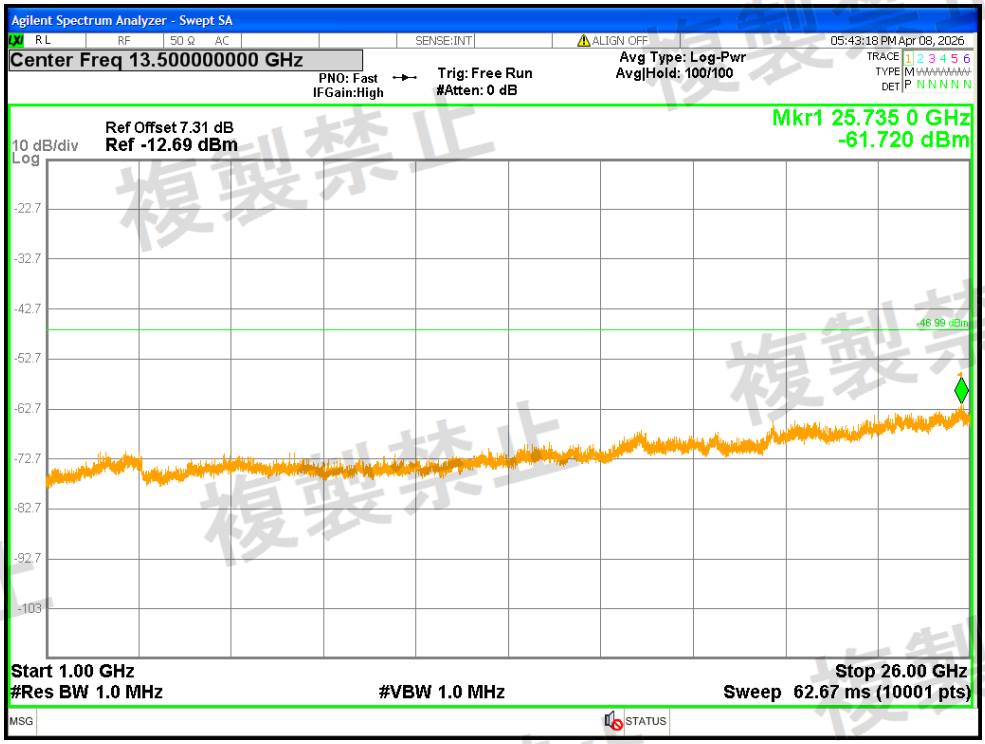


Rx. Spurious NVNT ax20 5180MHz Ant2 @ 30MHz-1000MHz

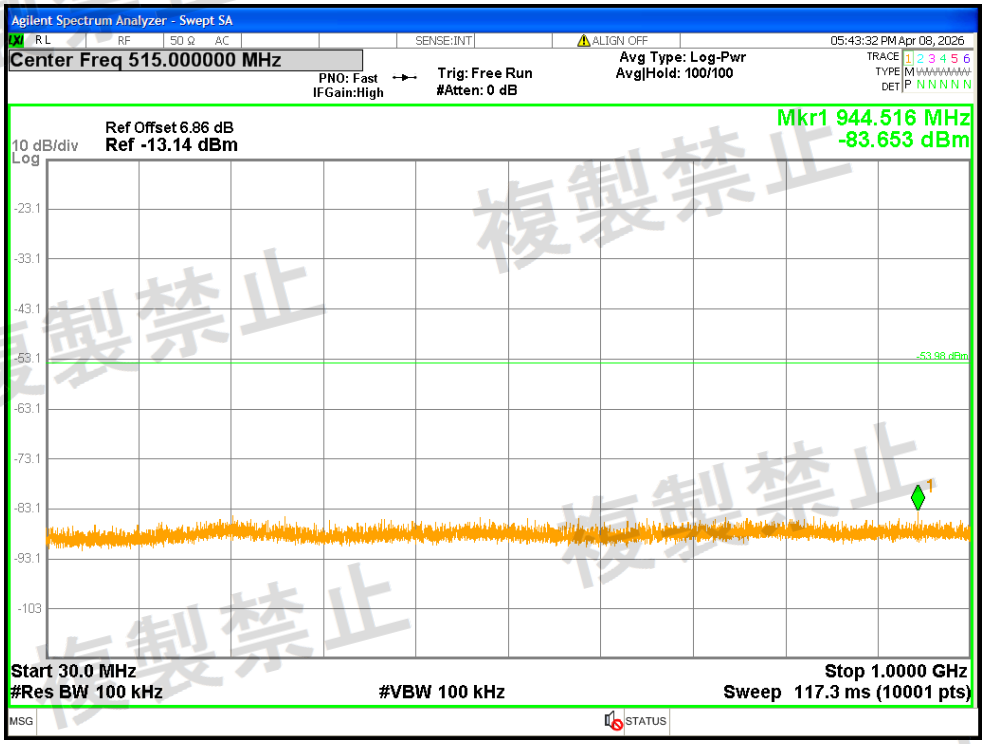


Rx. Spurious NVNT ax20 5180MHz Ant2 @ 1000MHz-26000MHz

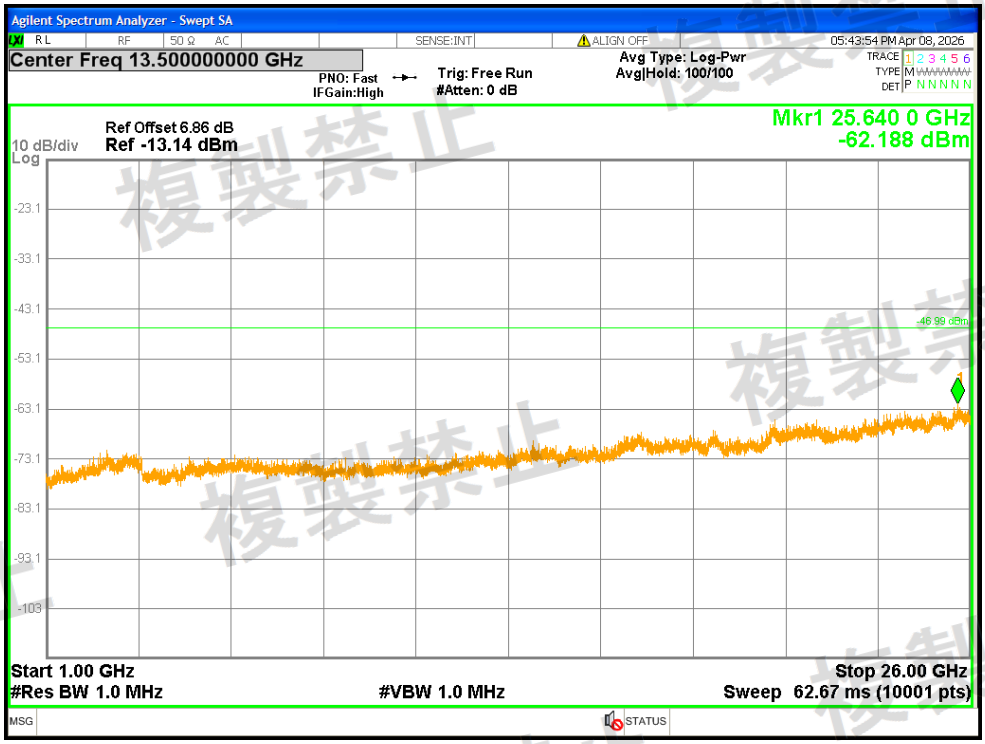


Rx. Spurious NVNT ax20 5200MHz Ant1 @ 30MHz-1000MHz

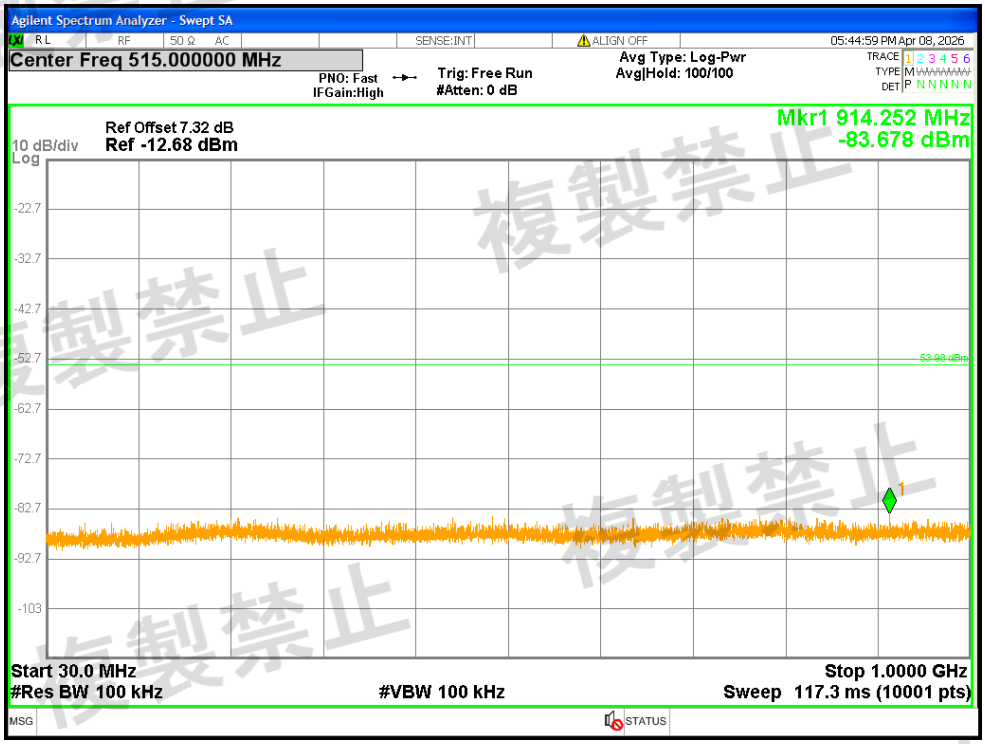


Rx. Spurious NVNT ax20 5200MHz Ant1 @ 1000MHz-26000MHz

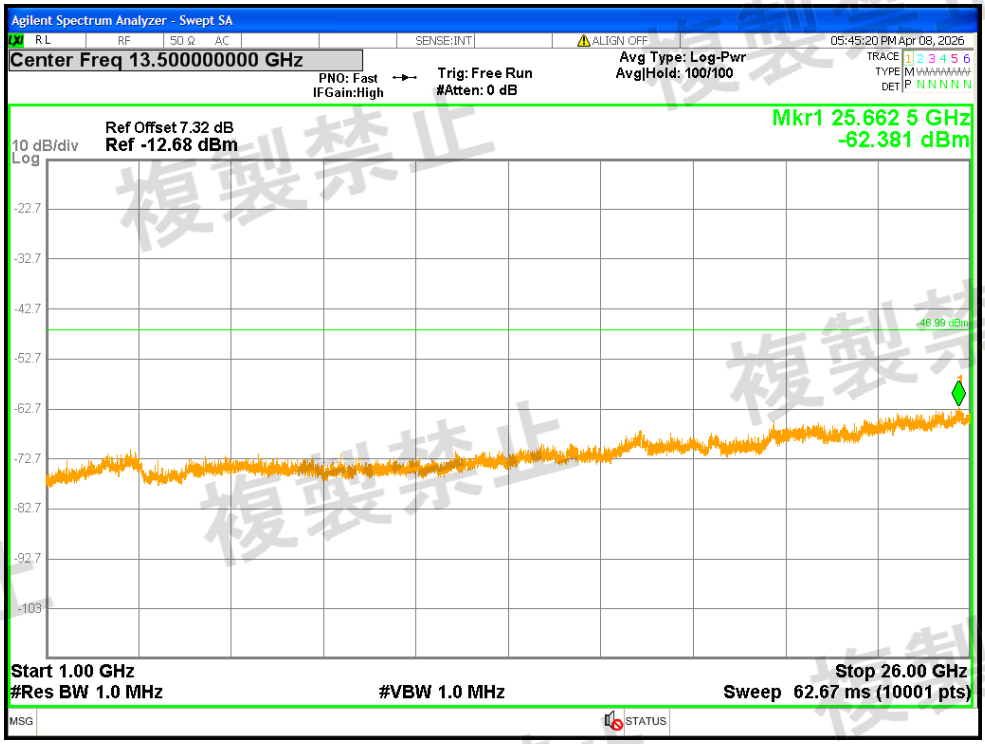


Rx. Spurious NVNT ax20 5200MHz Ant2 @ 30MHz-1000MHz

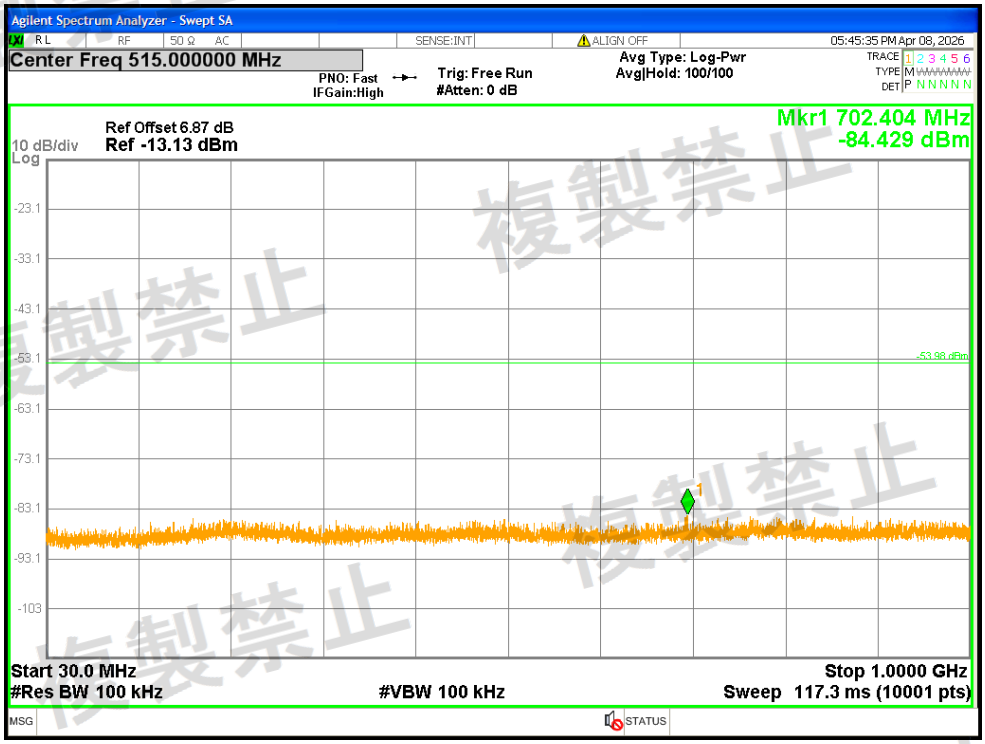


Rx. Spurious NVNT ax20 5200MHz Ant2 @ 1000MHz-26000MHz

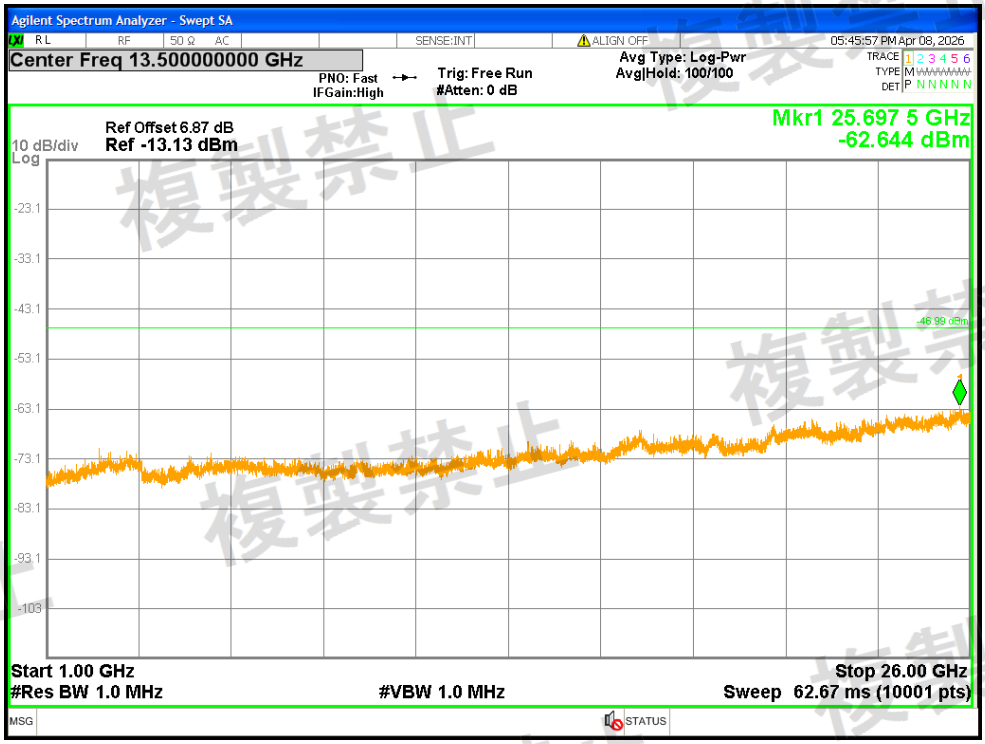


Rx. Spurious NVNT ax20 5240MHz Ant1 @ 30MHz-1000MHz

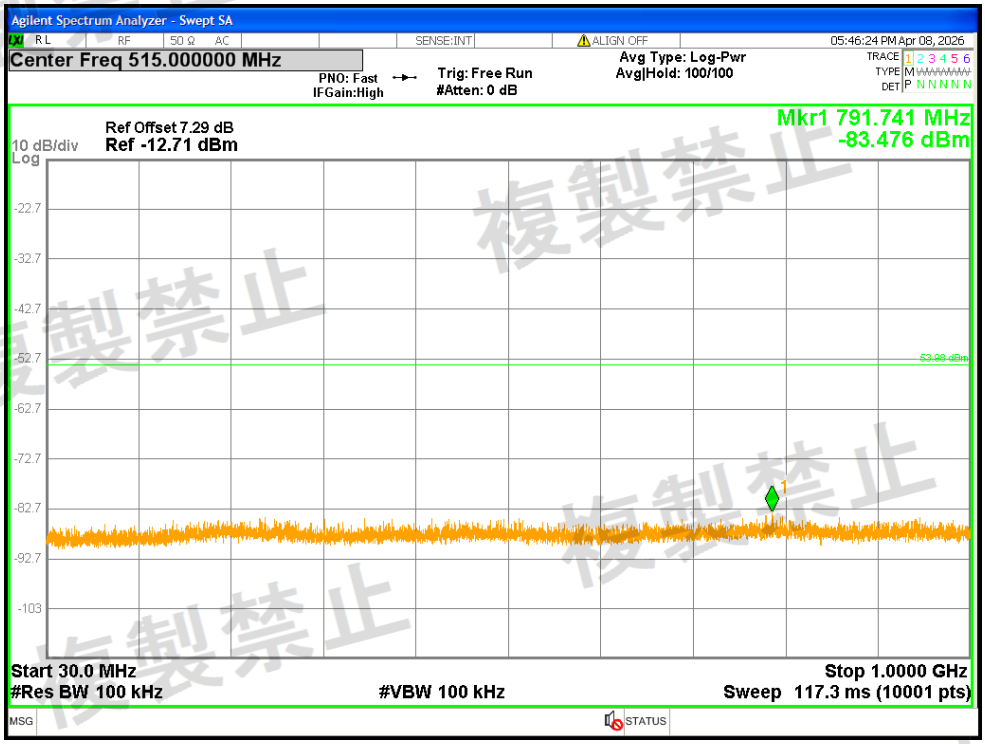


Rx. Spurious NVNT ax20 5240MHz Ant1 @ 1000MHz-26000MHz

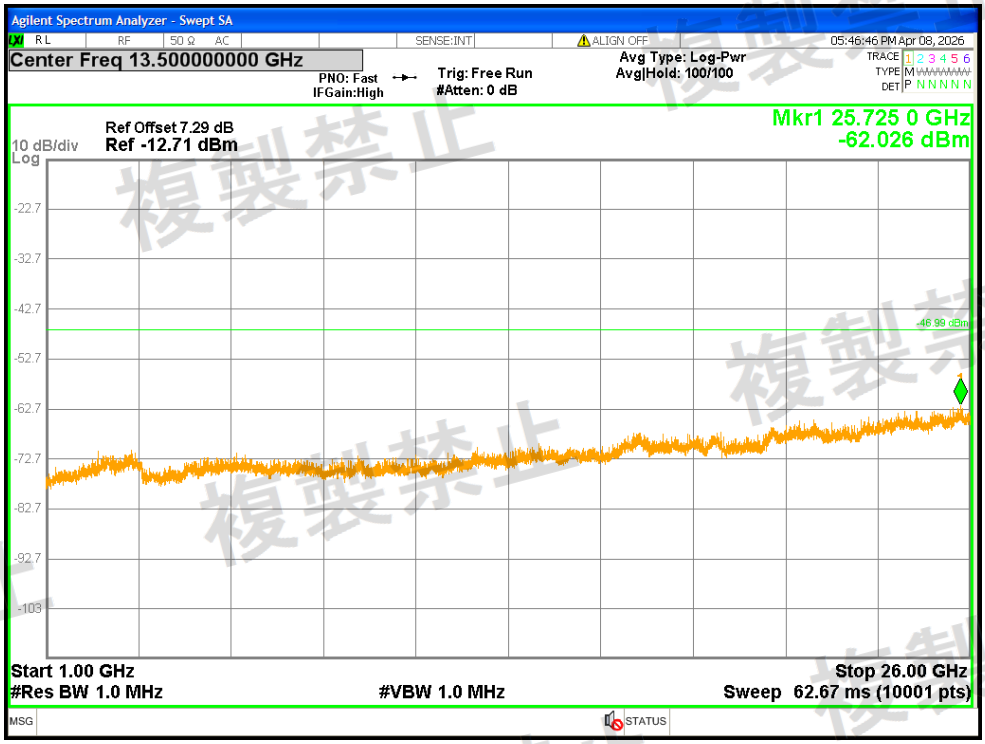


Rx. Spurious NVNT ax20 5240MHz Ant2 @ 30MHz-1000MHz

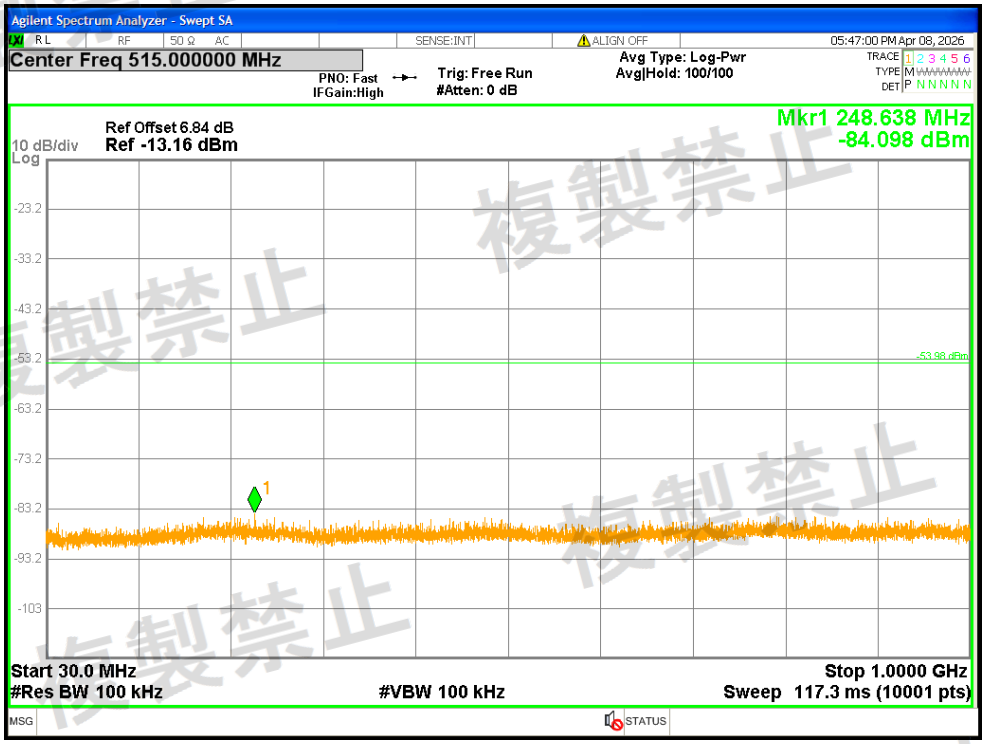


Rx. Spurious NVNT ax20 5240MHz Ant2 @ 1000MHz-26000MHz

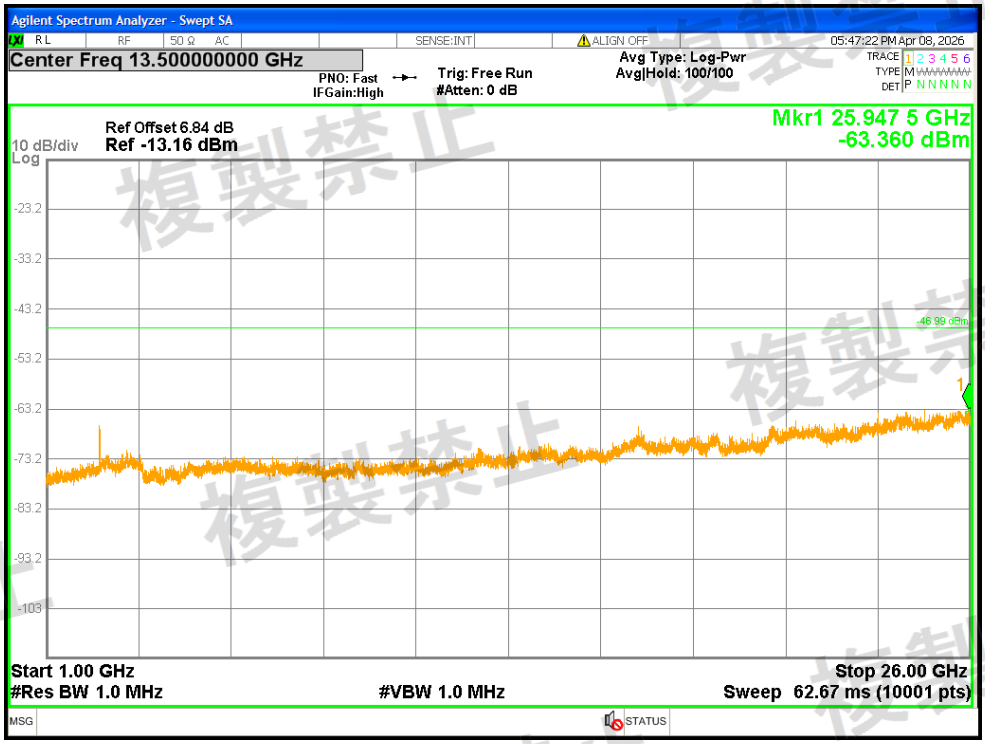


Rx. Spurious NVNT ax40 5190MHz Ant1 @ 30MHz-1000MHz

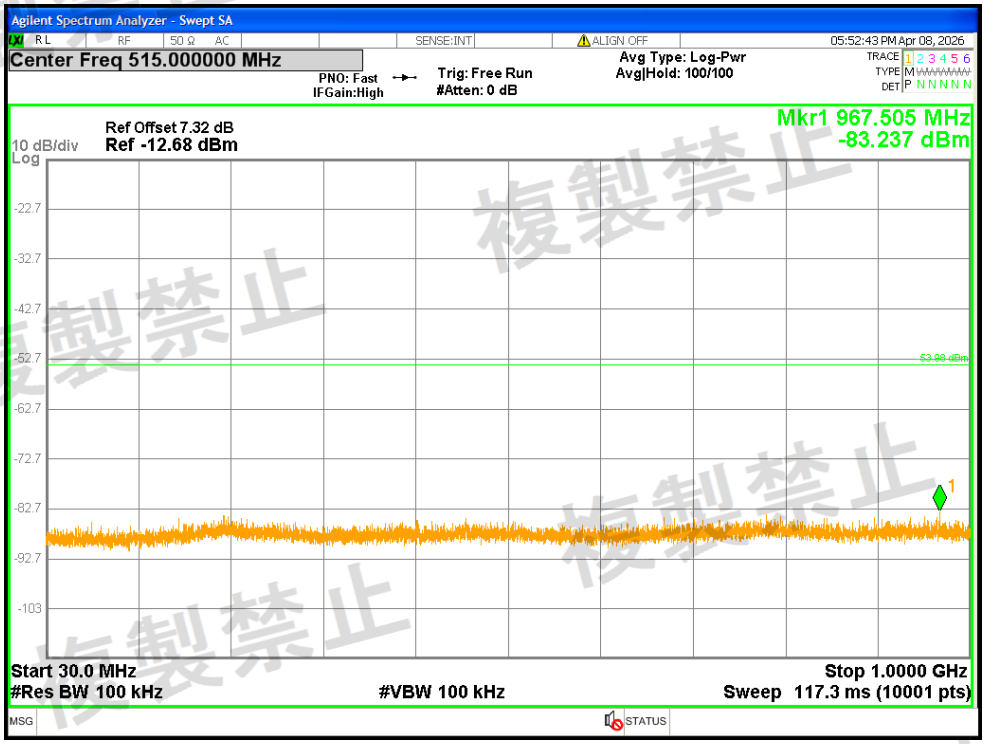


Rx. Spurious NVNT ax40 5190MHz Ant1 @ 1000MHz-26000MHz

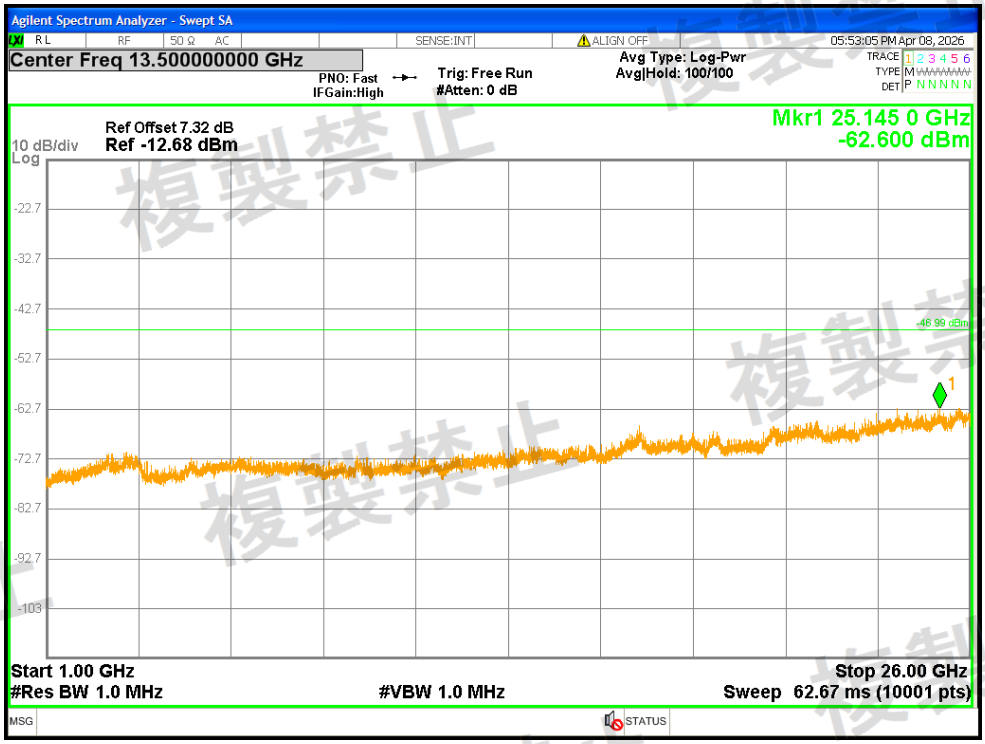


Rx. Spurious NVNT ax40 5190MHz Ant2 @ 30MHz-1000MHz

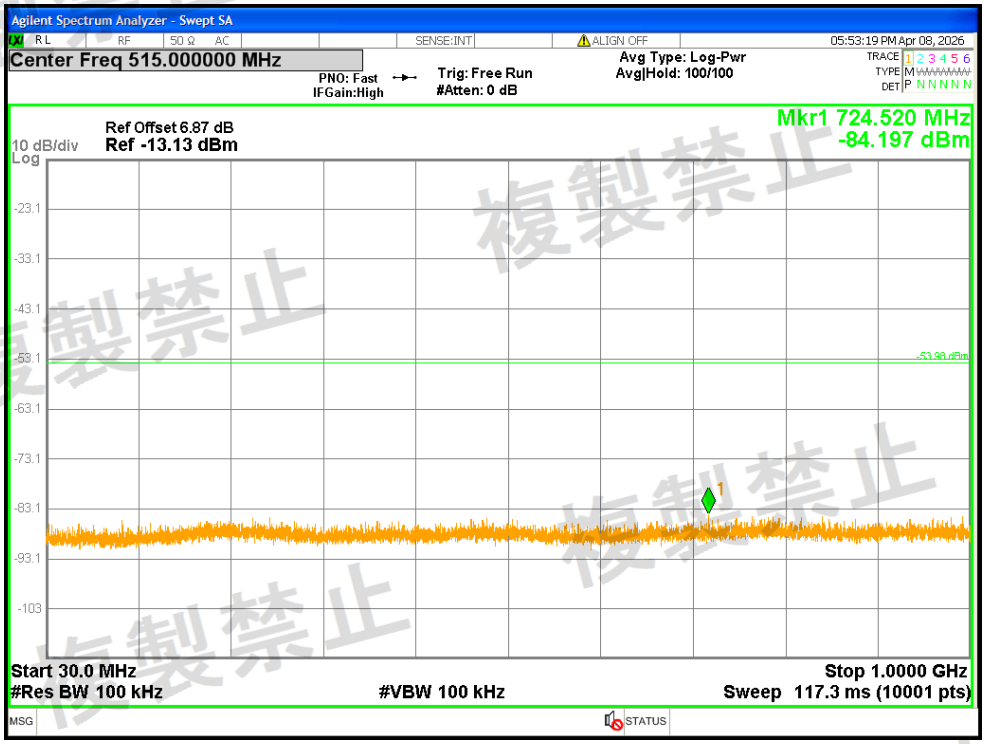


Rx. Spurious NVNT ax40 5190MHz Ant2 @ 1000MHz-26000MHz

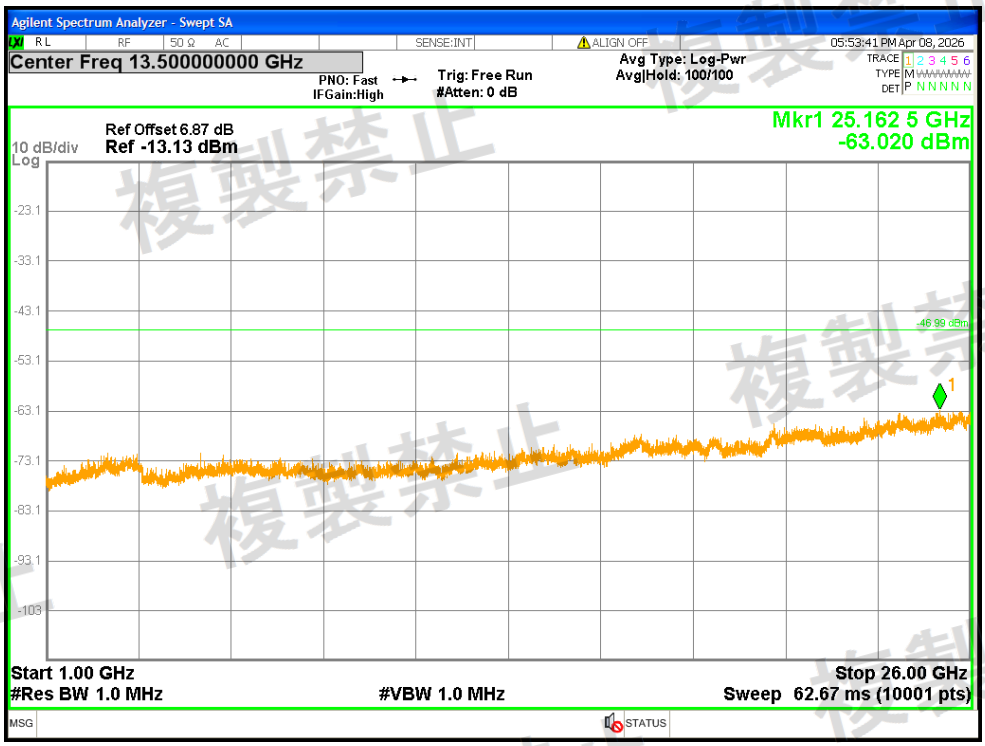


Rx. Spurious NVNT ax40 5230MHz Ant1 @ 30MHz-1000MHz

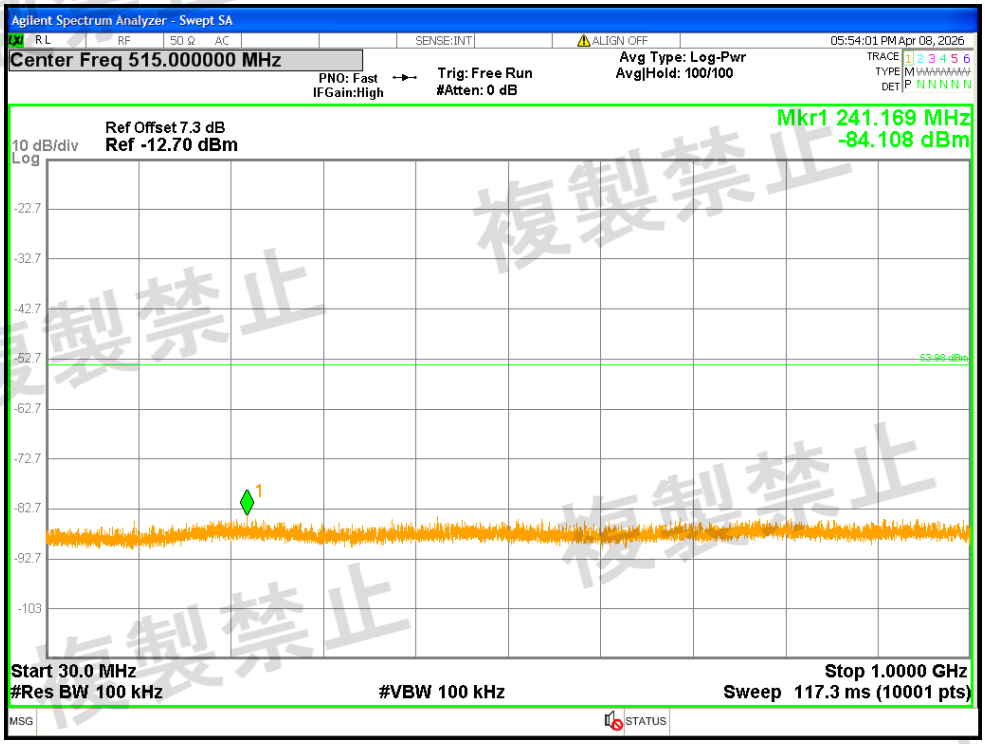


Rx. Spurious NVNT ax40 5230MHz Ant1 @ 1000MHz-26000MHz

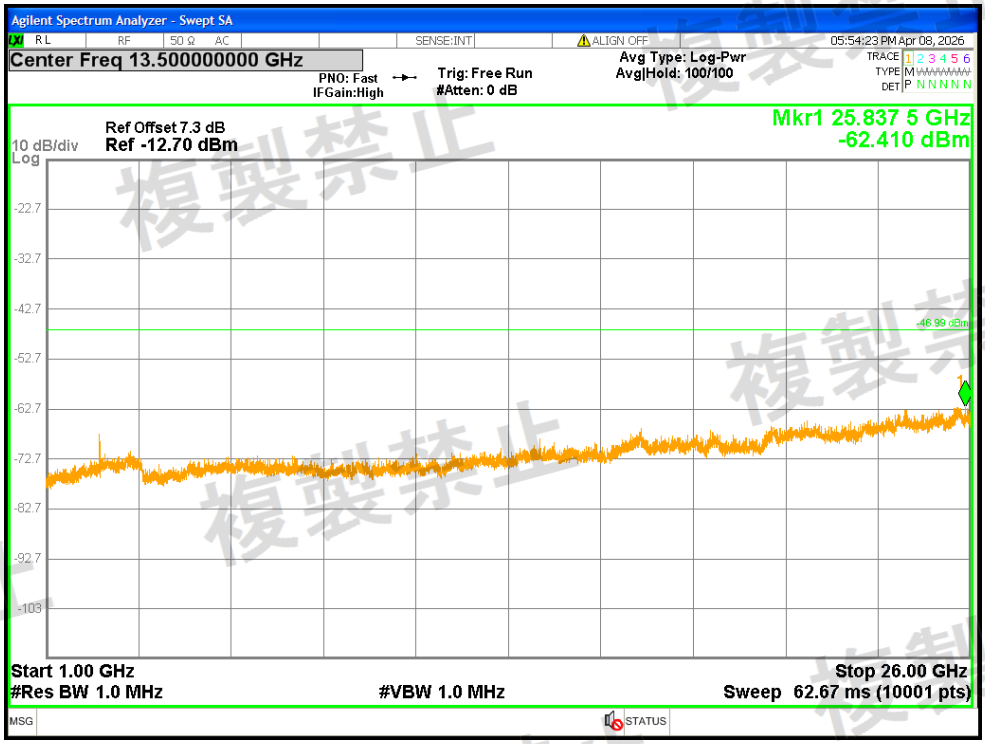


Rx. Spurious NVNT ax40 5230MHz Ant2 @ 30MHz-1000MHz

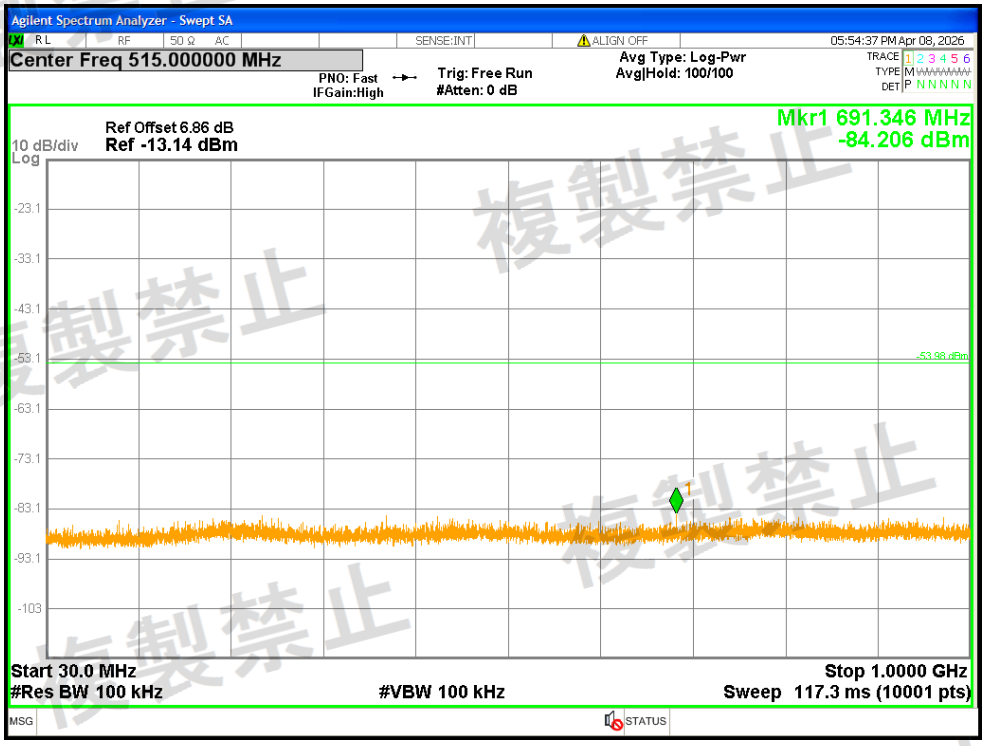


Rx. Spurious NVNT ax40 5230MHz Ant2 @ 1000MHz-26000MHz

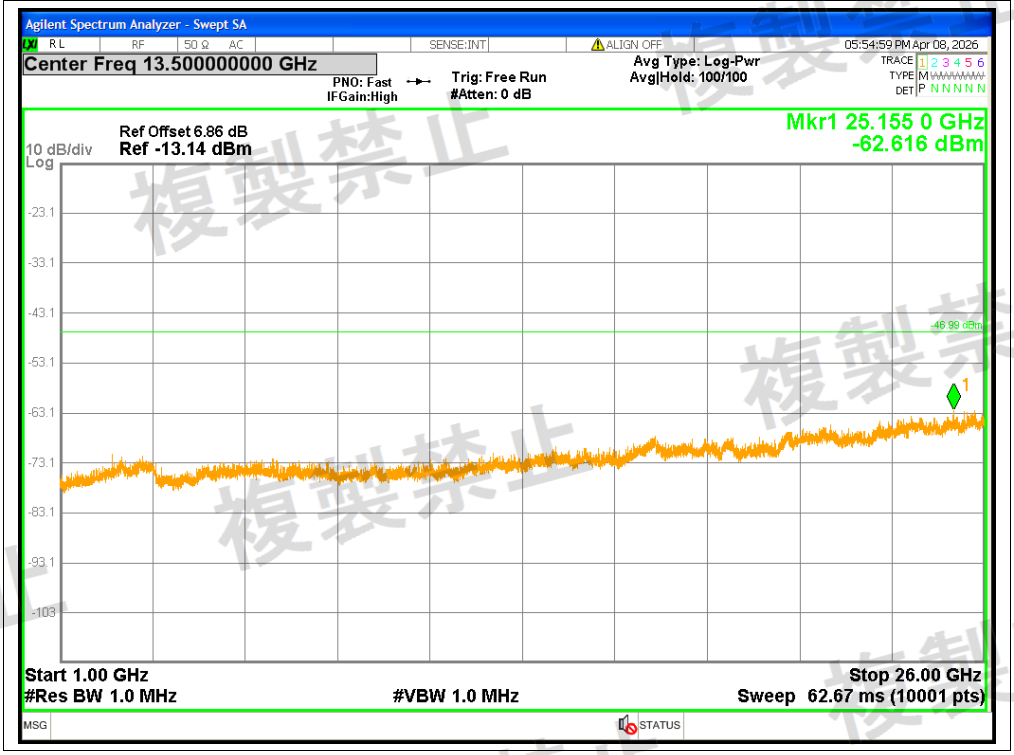


Rx. Spurious NVNT ax80 5210MHz Ant1 @ 30MHz-1000MHz

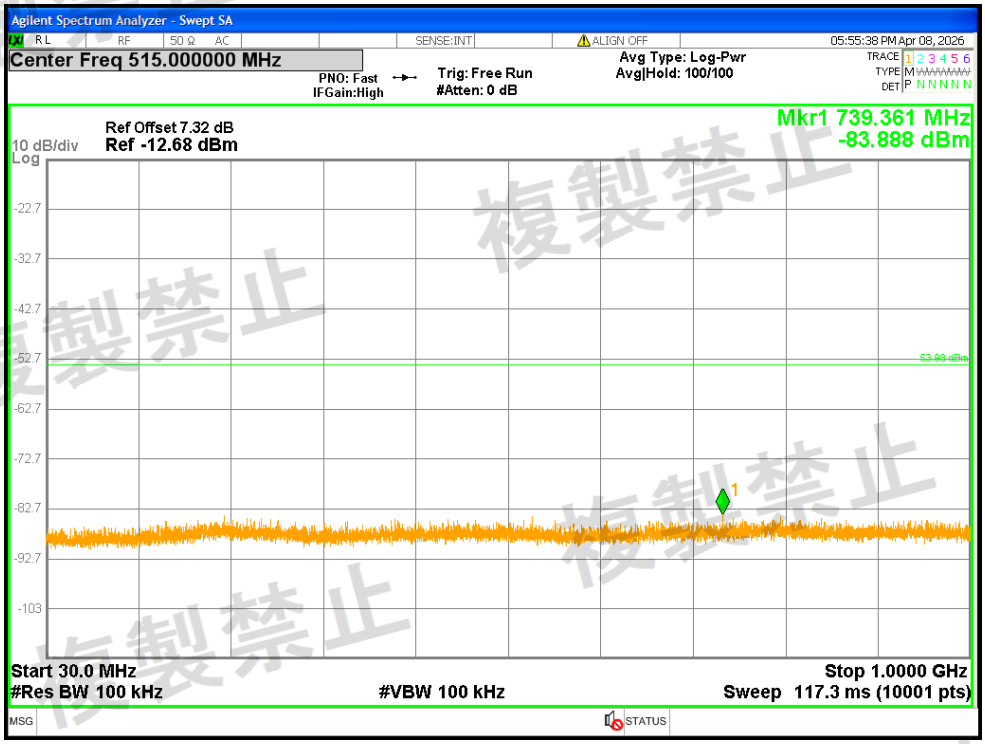


Rx. Spurious NVNT ax80 5210MHz Ant1 @ 1000MHz-26000MHz

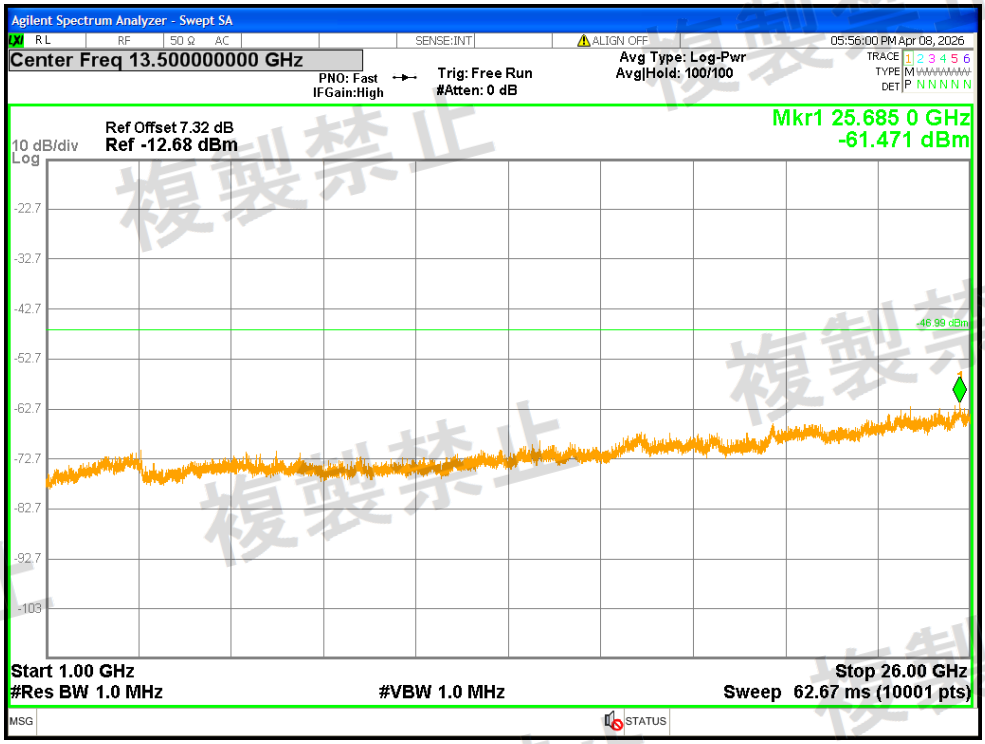

Rx. Spurious NVNT ax80 5210MHz Ant2 @ 30MHz-1000MHz

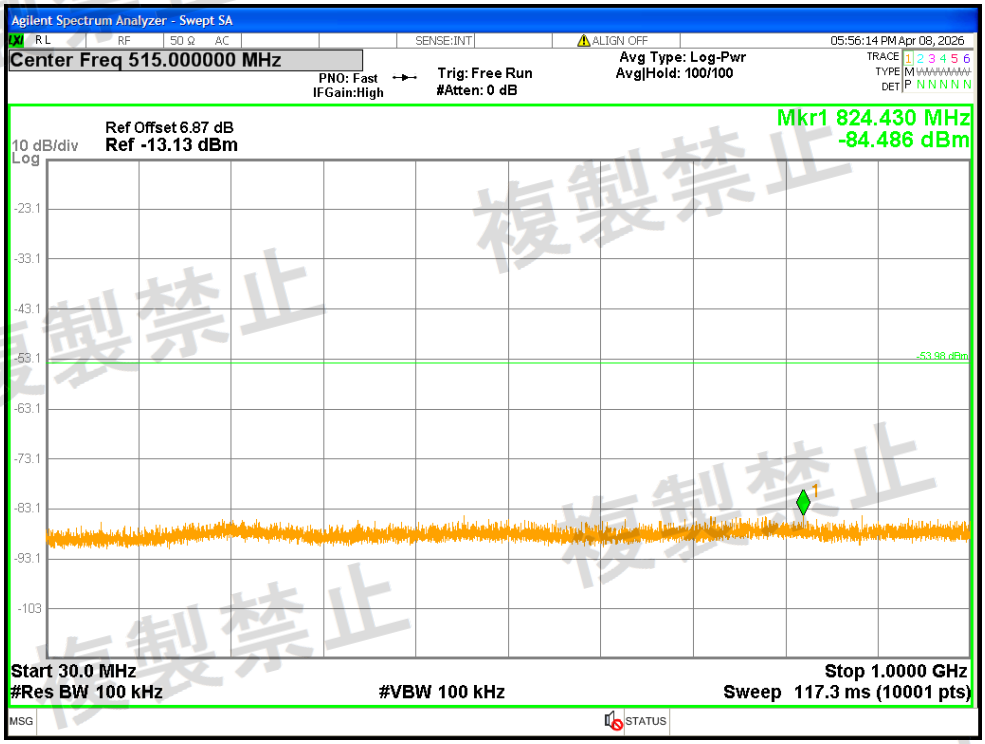

Rx. Spurious NVNT ax80 5210MHz Ant2 @ 1000MHz-26000MHz

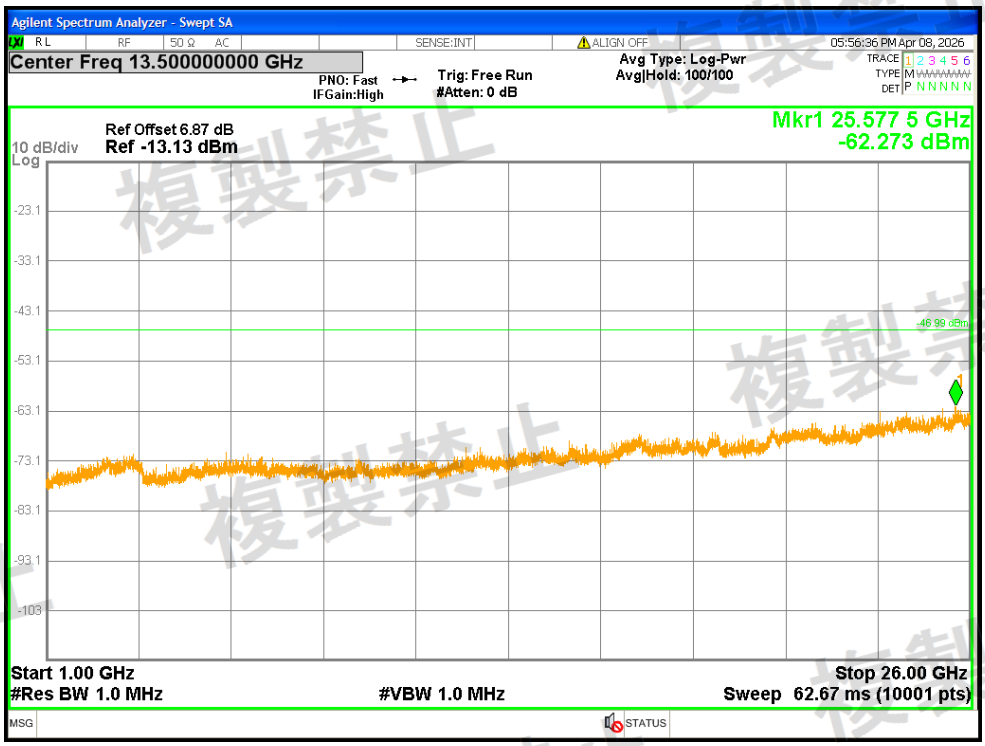

Adjacent Channel Emitted Power

Condition	Mode	Frequency (MHz)	Antenna	Offset (MHz)	Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5180	Ant1	-20	-32.23	<=-25	Pass
NVNT	a	5180	Ant1	-40	-45.96	<=-40	Pass
NVNT	a	5180	Ant1	20	-32.26	<=-25	Pass
NVNT	a	5180	Ant1	40	-45.47	<=-40	Pass
NVNT	a	5200	Ant1	-20	-32.38	<=-25	Pass
NVNT	a	5200	Ant1	-40	-46.47	<=-40	Pass
NVNT	a	5200	Ant1	20	-31.51	<=-25	Pass
NVNT	a	5200	Ant1	40	-45.48	<=-40	Pass
NVNT	a	5240	Ant1	-20	-32.59	<=-25	Pass
NVNT	a	5240	Ant1	-40	-48.25	<=-40	Pass
NVNT	a	5240	Ant1	20	-31.72	<=-25	Pass
NVNT	a	5240	Ant1	40	-47.46	<=-40	Pass
NVNT	a	5180	Ant2	-20	-29.97	<=-25	Pass
NVNT	a	5180	Ant2	-40	-46.4	<=-40	Pass
NVNT	a	5180	Ant2	20	-30.28	<=-25	Pass
NVNT	a	5180	Ant2	40	-45.17	<=-40	Pass
NVNT	a	5200	Ant2	-20	-30.33	<=-25	Pass
NVNT	a	5200	Ant2	-40	-47.42	<=-40	Pass
NVNT	a	5200	Ant2	20	-29.93	<=-25	Pass
NVNT	a	5200	Ant2	40	-46.35	<=-40	Pass
NVNT	a	5240	Ant2	-20	-28.8	<=-25	Pass
NVNT	a	5240	Ant2	-40	-46.14	<=-40	Pass
NVNT	a	5240	Ant2	20	-30.61	<=-25	Pass
NVNT	a	5240	Ant2	40	-45.32	<=-40	Pass
NVNT	n20	5180	Ant1	-20	-30.85	<=-25	Pass
NVNT	n20	5180	Ant1	-40	-43.39	<=-40	Pass
NVNT	n20	5180	Ant1	20	-30.83	<=-25	Pass
NVNT	n20	5180	Ant1	40	-43.02	<=-40	Pass
NVNT	n20	5180	Ant2	-20	-32.8	<=-25	Pass
NVNT	n20	5180	Ant2	-40	-44.17	<=-40	Pass
NVNT	n20	5180	Ant2	20	-31.65	<=-25	Pass
NVNT	n20	5180	Ant2	40	-43.36	<=-40	Pass
NVNT	n20	5200	Ant1	-20	-31.14	<=-25	Pass
NVNT	n20	5200	Ant1	-40	-43.83	<=-40	Pass
NVNT	n20	5200	Ant1	20	-29.73	<=-25	Pass
NVNT	n20	5200	Ant1	40	-43.12	<=-40	Pass
NVNT	n20	5200	Ant2	-20	-31.49	<=-25	Pass
NVNT	n20	5200	Ant2	-40	-45.06	<=-40	Pass
NVNT	n20	5200	Ant2	20	-30.91	<=-25	Pass
NVNT	n20	5200	Ant2	40	-44.11	<=-40	Pass
NVNT	n20	5240	Ant1	-20	-30.76	<=-25	Pass


NVNT	n20	5240	Ant1	-40	-45.49	<=-40	Pass
NVNT	n20	5240	Ant1	20	-30.46	<=-25	Pass
NVNT	n20	5240	Ant1	40	-44.75	<=-40	Pass
NVNT	n20	5240	Ant2	-20	-29.74	<=-25	Pass
NVNT	n20	5240	Ant2	-40	-45.25	<=-40	Pass
NVNT	n20	5240	Ant2	20	-30.94	<=-25	Pass
NVNT	n20	5240	Ant2	40	-44.46	<=-40	Pass
NVNT	n40	5190	Ant1	-40	-38.74	<=-25	Pass
NVNT	n40	5190	Ant1	-80	-40.97	<=-40	Pass
NVNT	n40	5190	Ant1	40	-38.09	<=-25	Pass
NVNT	n40	5190	Ant1	80	-40.35	<=-40	Pass
NVNT	n40	5190	Ant2	-40	-38.91	<=-25	Pass
NVNT	n40	5190	Ant2	-80	-41.82	<=-40	Pass
NVNT	n40	5190	Ant2	40	-37.93	<=-25	Pass
NVNT	n40	5190	Ant2	80	-40.73	<=-40	Pass
NVNT	n40	5230	Ant1	-40	-40.42	<=-25	Pass
NVNT	n40	5230	Ant1	-80	-43.23	<=-40	Pass
NVNT	n40	5230	Ant1	40	-39.67	<=-25	Pass
NVNT	n40	5230	Ant1	80	-42.05	<=-40	Pass
NVNT	n40	5230	Ant2	-40	-37.98	<=-25	Pass
NVNT	n40	5230	Ant2	-80	-43.24	<=-40	Pass
NVNT	n40	5230	Ant2	40	-38.7	<=-25	Pass
NVNT	n40	5230	Ant2	80	-41.78	<=-40	Pass
NVNT	ac20	5180	Ant1	-20	-31.7	<=-25	Pass
NVNT	ac20	5180	Ant1	-40	-43.35	<=-40	Pass
NVNT	ac20	5180	Ant1	20	-30.95	<=-25	Pass
NVNT	ac20	5180	Ant1	40	-42.89	<=-40	Pass
NVNT	ac20	5180	Ant2	-20	-32.79	<=-25	Pass
NVNT	ac20	5180	Ant2	-40	-44.37	<=-40	Pass
NVNT	ac20	5180	Ant2	20	-31.63	<=-25	Pass
NVNT	ac20	5180	Ant2	40	-43.52	<=-40	Pass
NVNT	ac20	5200	Ant1	-20	-31.29	<=-25	Pass
NVNT	ac20	5200	Ant1	-40	-43.94	<=-40	Pass
NVNT	ac20	5200	Ant1	20	-30.17	<=-25	Pass
NVNT	ac20	5200	Ant1	40	-43.32	<=-40	Pass
NVNT	ac20	5200	Ant2	-20	-32.63	<=-25	Pass
NVNT	ac20	5200	Ant2	-40	-45.23	<=-40	Pass
NVNT	ac20	5200	Ant2	20	-31.12	<=-25	Pass
NVNT	ac20	5200	Ant2	40	-44.4	<=-40	Pass
NVNT	ac20	5240	Ant1	-20	-31.26	<=-25	Pass
NVNT	ac20	5240	Ant1	-40	-45.54	<=-40	Pass
NVNT	ac20	5240	Ant1	20	-30.54	<=-25	Pass
NVNT	ac20	5240	Ant1	40	-45.02	<=-40	Pass
NVNT	ac20	5240	Ant2	-20	-30.41	<=-25	Pass

NVNT	ac20	5240	Ant2	-40	-45.4	<=-40	Pass
NVNT	ac20	5240	Ant2	20	-31.56	<=-25	Pass
NVNT	ac20	5240	Ant2	40	-44.66	<=-40	Pass
NVNT	ac40	5190	Ant1	-40	-38.61	<=-25	Pass
NVNT	ac40	5190	Ant1	-80	-40.9	<=-40	Pass
NVNT	ac40	5190	Ant1	40	-37.65	<=-25	Pass
NVNT	ac40	5190	Ant1	80	-40.16	<=-40	Pass
NVNT	ac40	5190	Ant2	-40	-38.88	<=-25	Pass
NVNT	ac40	5190	Ant2	-80	-41.92	<=-40	Pass
NVNT	ac40	5190	Ant2	40	-37.86	<=-25	Pass
NVNT	ac40	5190	Ant2	80	-40.76	<=-40	Pass
NVNT	ac40	5230	Ant1	-40	-40.31	<=-25	Pass
NVNT	ac40	5230	Ant1	-80	-43.38	<=-40	Pass
NVNT	ac40	5230	Ant1	40	-39.71	<=-25	Pass
NVNT	ac40	5230	Ant1	80	-42.2	<=-40	Pass
NVNT	ac40	5230	Ant2	-40	-36.61	<=-25	Pass
NVNT	ac40	5230	Ant2	-80	-43.32	<=-40	Pass
NVNT	ac40	5230	Ant2	40	-36.95	<=-25	Pass
NVNT	ac40	5230	Ant2	80	-41.64	<=-40	Pass
NVNT	ac80	5210	Ant1	-80	-35.78	<=-25	Pass
NVNT	ac80	5210	Ant1	-160	-44.11	<=-40	Pass
NVNT	ac80	5210	Ant1	80	-36.41	<=-25	Pass
NVNT	ac80	5210	Ant1	160	-44.24	<=-40	Pass
NVNT	ac80	5210	Ant2	-80	-36.05	<=-25	Pass
NVNT	ac80	5210	Ant2	-160	-47.77	<=-40	Pass
NVNT	ac80	5210	Ant2	80	-34.44	<=-25	Pass
NVNT	ac80	5210	Ant2	160	-42.45	<=-40	Pass
NVNT	ax20	5180	Ant1	-20	-31.68	<=-25	Pass
NVNT	ax20	5180	Ant1	-40	-43.66	<=-40	Pass
NVNT	ax20	5180	Ant1	20	-31.05	<=-25	Pass
NVNT	ax20	5180	Ant1	40	-43.21	<=-40	Pass
NVNT	ax20	5180	Ant2	-20	-32.35	<=-25	Pass
NVNT	ax20	5180	Ant2	-40	-44.42	<=-40	Pass
NVNT	ax20	5180	Ant2	20	-30.37	<=-25	Pass
NVNT	ax20	5180	Ant2	40	-43.82	<=-40	Pass
NVNT	ax20	5200	Ant1	-20	-31.66	<=-25	Pass
NVNT	ax20	5200	Ant1	-40	-44.2	<=-40	Pass
NVNT	ax20	5200	Ant1	20	-30.17	<=-25	Pass
NVNT	ax20	5200	Ant1	40	-43.6	<=-40	Pass
NVNT	ax20	5200	Ant2	-20	-32.76	<=-25	Pass
NVNT	ax20	5200	Ant2	-40	-45.37	<=-40	Pass
NVNT	ax20	5200	Ant2	20	-30.61	<=-25	Pass
NVNT	ax20	5200	Ant2	40	-44.69	<=-40	Pass
NVNT	ax20	5240	Ant1	-20	-31.16	<=-25	Pass


NVNT	ax20	5240	Ant1	-40	-46.05	<=-40	Pass
NVNT	ax20	5240	Ant1	20	-31.17	<=-25	Pass
NVNT	ax20	5240	Ant1	40	-45.37	<=-40	Pass
NVNT	ax20	5240	Ant2	-20	-31.8	<=-25	Pass
NVNT	ax20	5240	Ant2	-40	-45.75	<=-40	Pass
NVNT	ax20	5240	Ant2	20	-32.08	<=-25	Pass
NVNT	ax20	5240	Ant2	40	-44.98	<=-40	Pass
NVNT	ax40	5190	Ant1	-40	-39.44	<=-25	Pass
NVNT	ax40	5190	Ant1	-80	-41.45	<=-40	Pass
NVNT	ax40	5190	Ant1	40	-37.79	<=-25	Pass
NVNT	ax40	5190	Ant1	80	-40.83	<=-40	Pass
NVNT	ax40	5190	Ant2	-40	-39.74	<=-25	Pass
NVNT	ax40	5190	Ant2	-80	-42.04	<=-40	Pass
NVNT	ax40	5190	Ant2	40	-38.86	<=-25	Pass
NVNT	ax40	5190	Ant2	80	-41.02	<=-40	Pass
NVNT	ax40	5230	Ant1	-40	-40.53	<=-25	Pass
NVNT	ax40	5230	Ant1	-80	-43.56	<=-40	Pass
NVNT	ax40	5230	Ant1	40	-39.22	<=-25	Pass
NVNT	ax40	5230	Ant1	80	-42.48	<=-40	Pass
NVNT	ax40	5230	Ant2	-40	-38.2	<=-25	Pass
NVNT	ax40	5230	Ant2	-80	-43.03	<=-40	Pass
NVNT	ax40	5230	Ant2	40	-38.52	<=-25	Pass
NVNT	ax40	5230	Ant2	80	-41.68	<=-40	Pass
NVNT	ax80	5210	Ant1	-80	-41.05	<=-25	Pass
NVNT	ax80	5210	Ant1	-160	-44.82	<=-40	Pass
NVNT	ax80	5210	Ant1	80	-39.47	<=-25	Pass
NVNT	ax80	5210	Ant1	160	-44.3	<=-40	Pass
NVNT	ax80	5210	Ant2	-80	-41.56	<=-25	Pass
NVNT	ax80	5210	Ant2	-160	-47.54	<=-40	Pass
NVNT	ax80	5210	Ant2	80	-39.48	<=-25	Pass
NVNT	ax80	5210	Ant2	160	-42.56	<=-40	Pass

Test Graphs


ACEP NVNT a 5180MHz Ant1

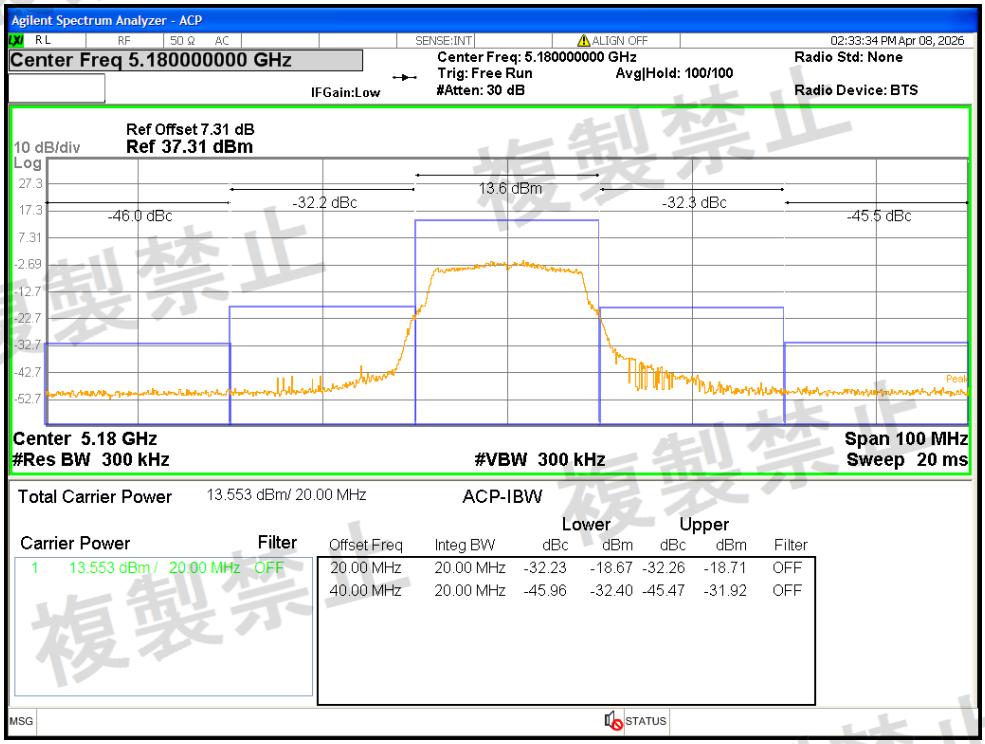


ACEP NVNT a 5200MHz Ant1

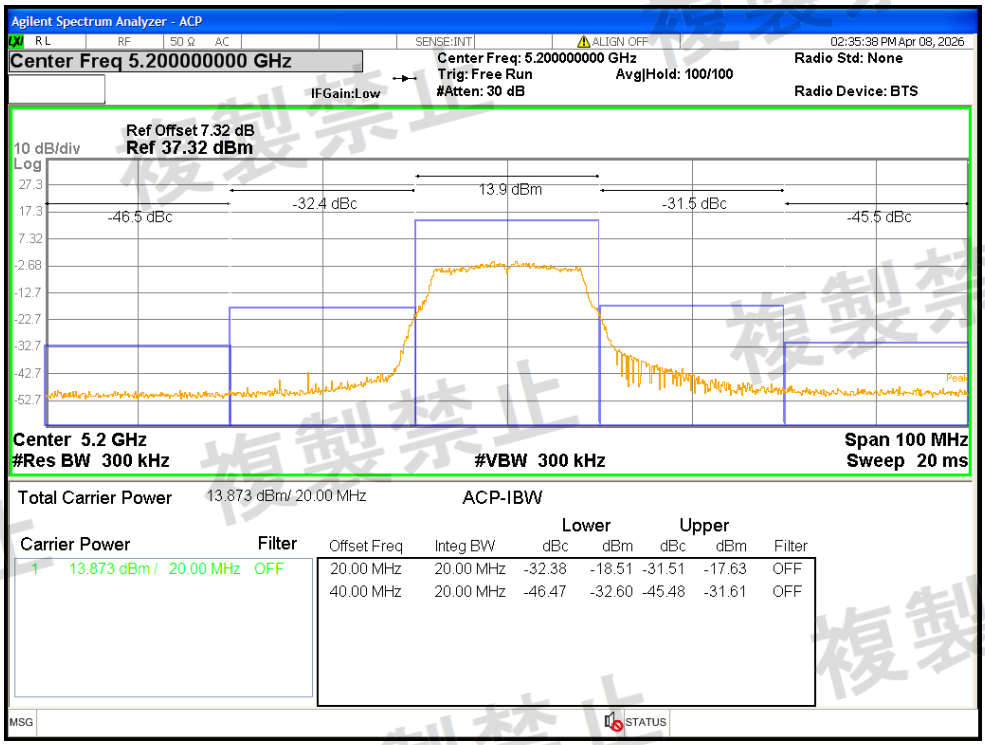


ACEP NVNT a 5240MHz Ant1

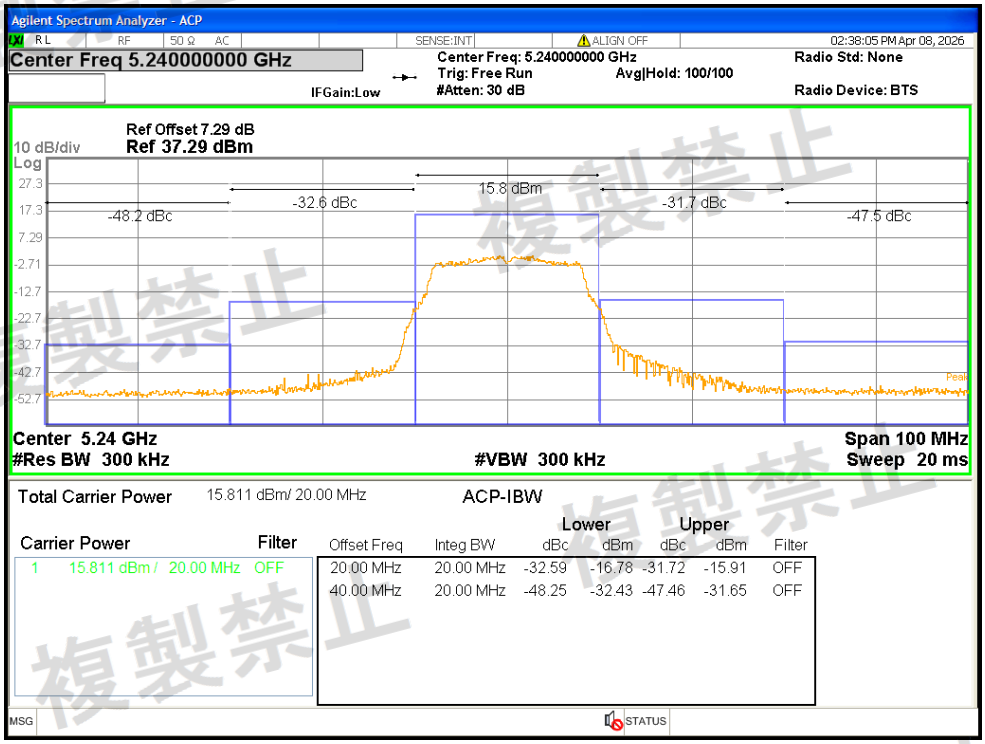


ACEP NVNT a 5180MHz Ant2

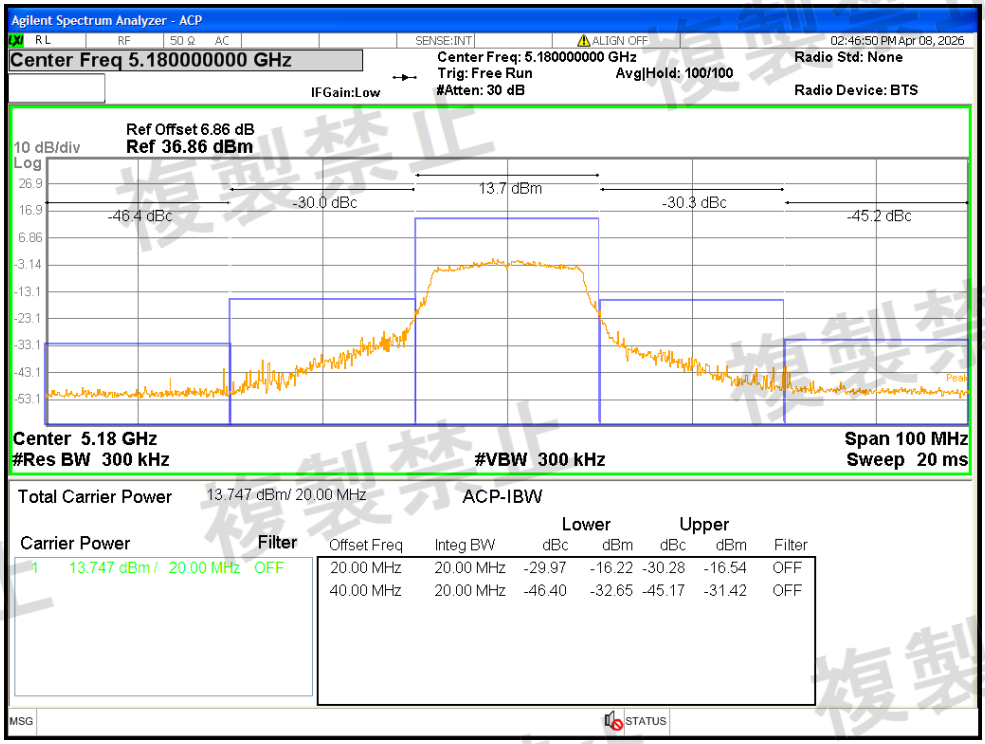


ACEP NVNT a 5200MHz Ant2

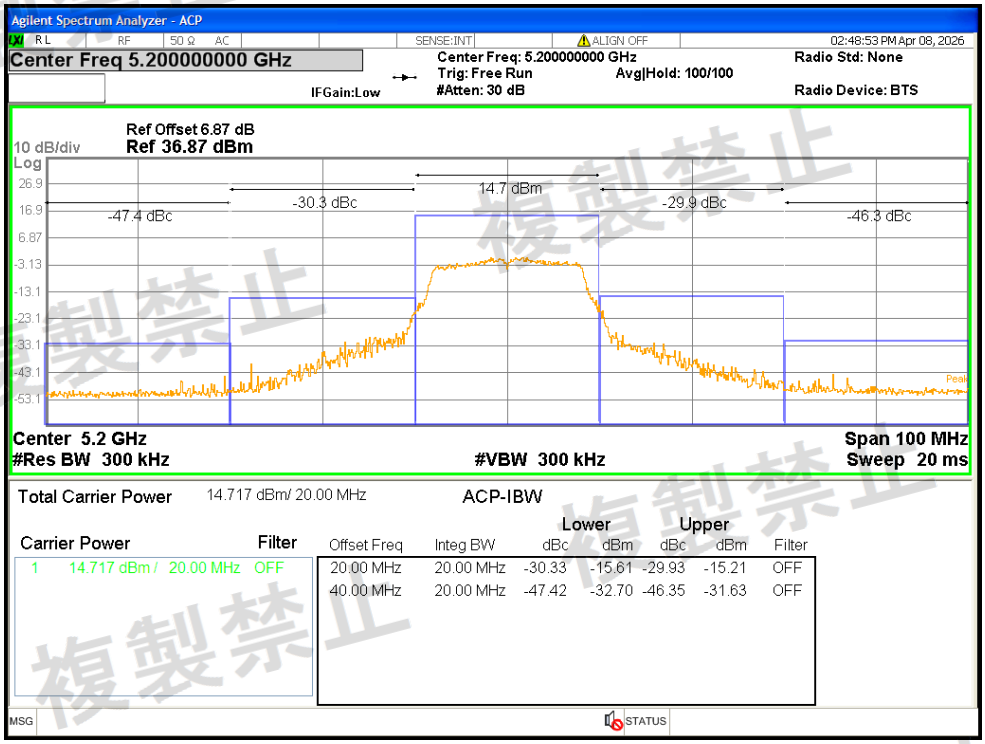


ACEP NVNT a 5240MHz Ant2

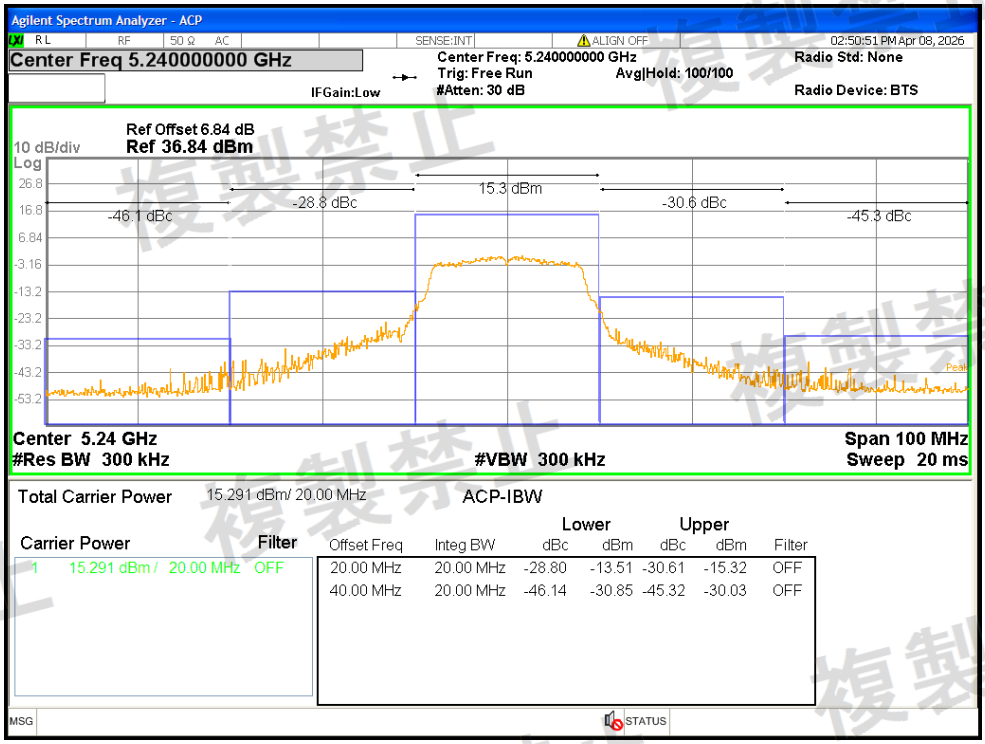


ACEP NVNT n20 5180MHz Ant1

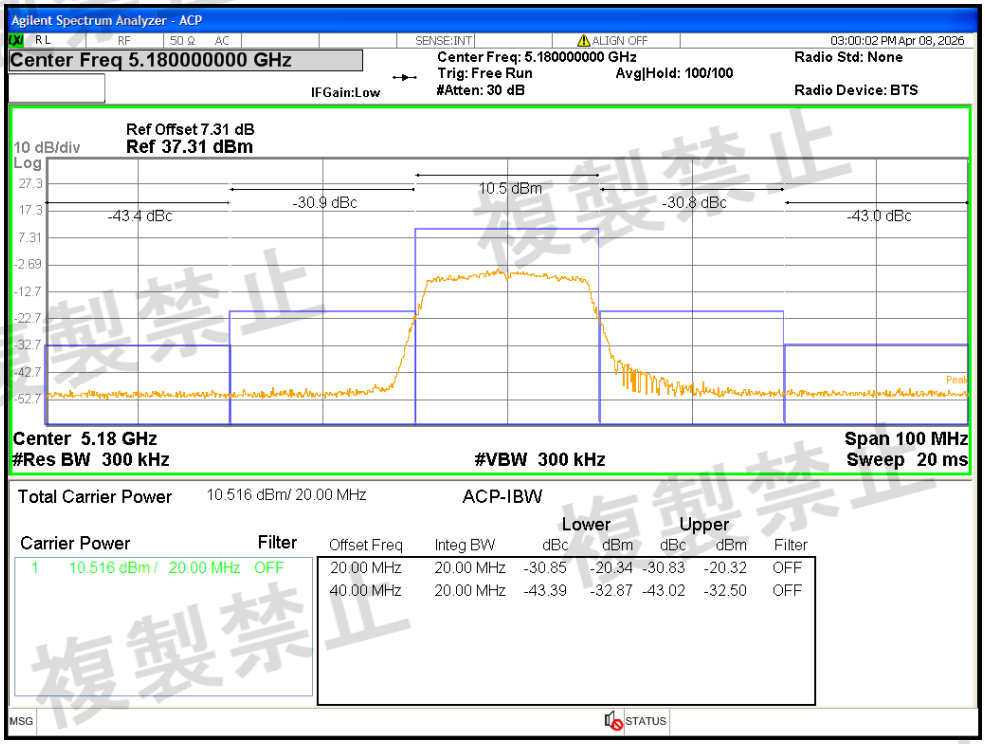


ACEP NVNT n20 5180MHz Ant2

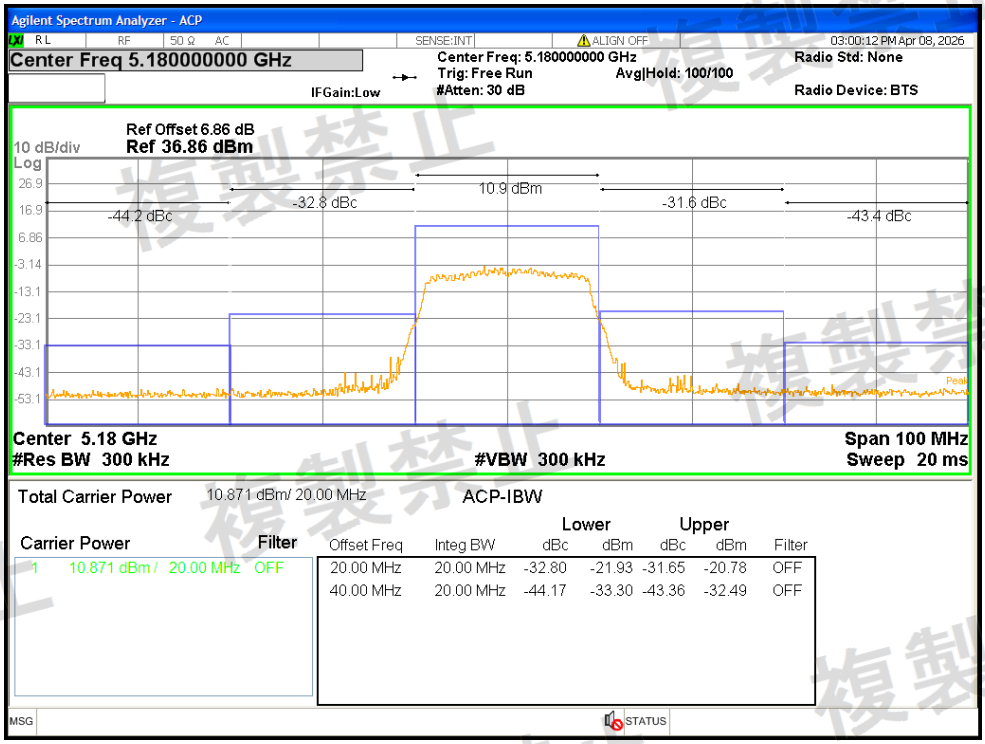


ACEP NVNT n20 5200MHz Ant1

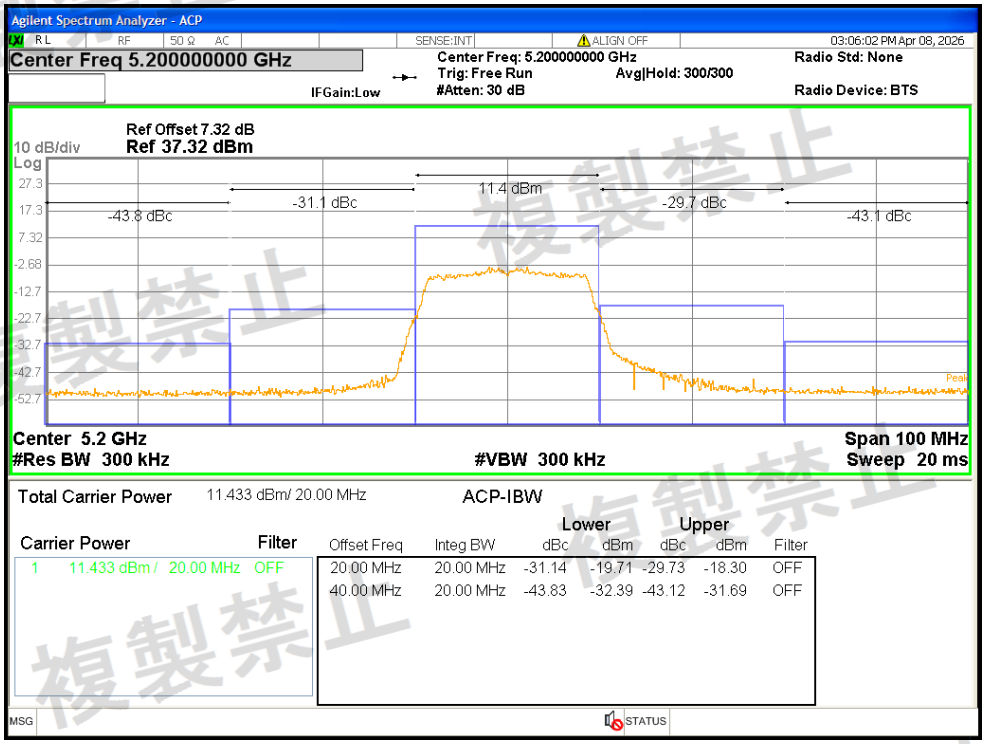


ACEP NVNT n20 5200MHz Ant2

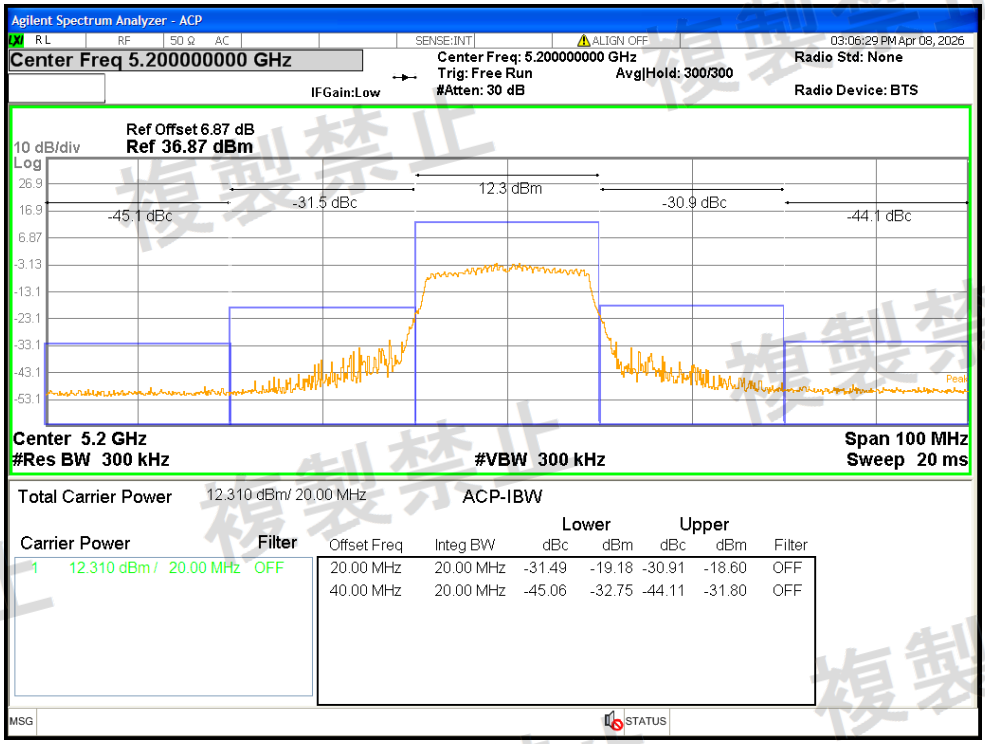


ACEP NVNT n20 5240MHz Ant1

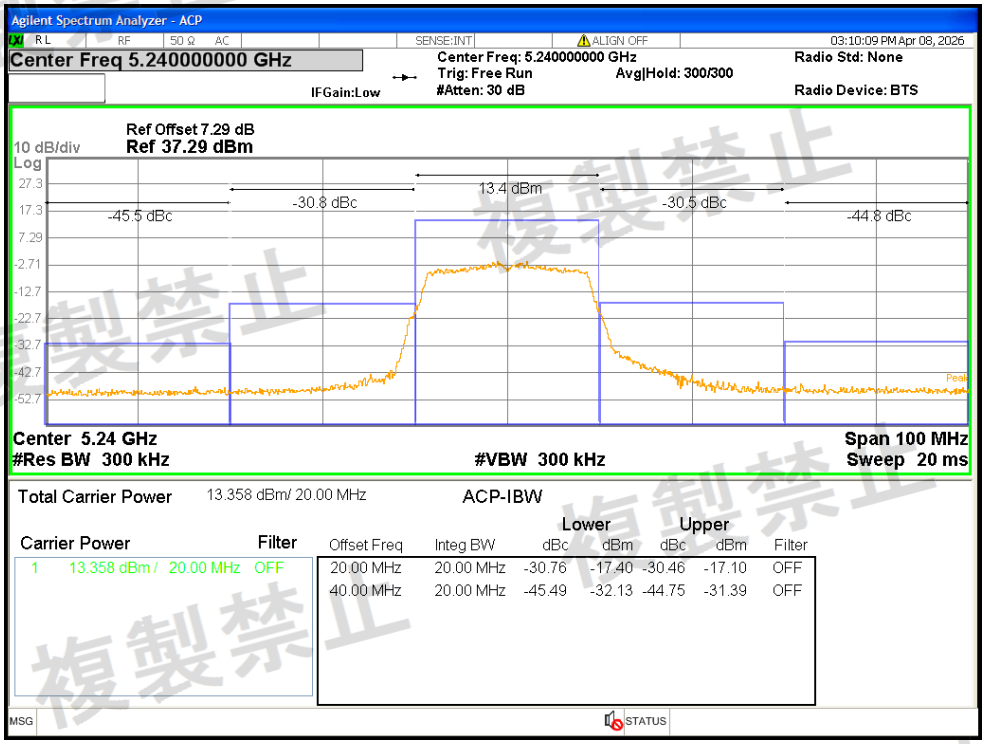


ACEP NVNT n20 5240MHz Ant2

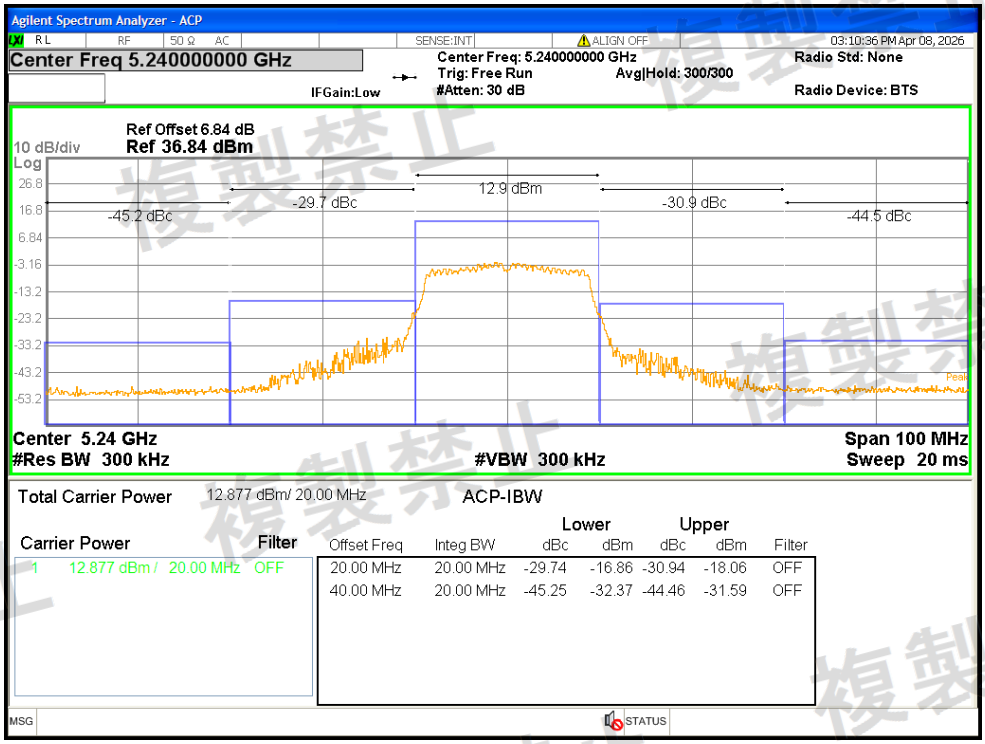


ACEP NVNT n40 5190MHz Ant1

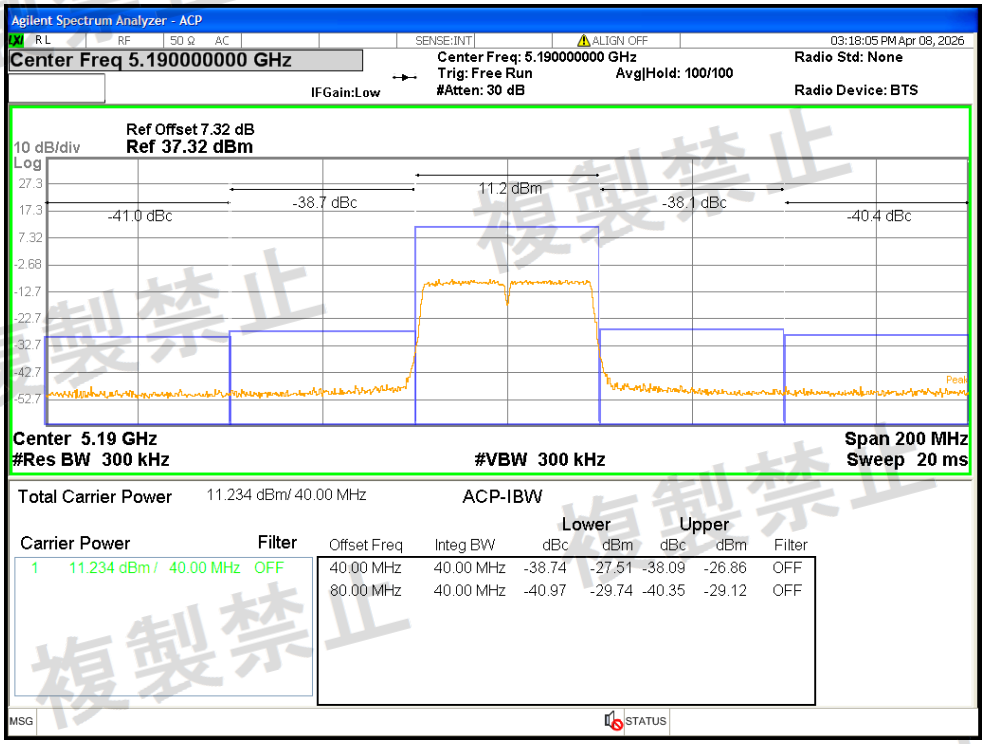


ACEP NVNT n40 5190MHz Ant2

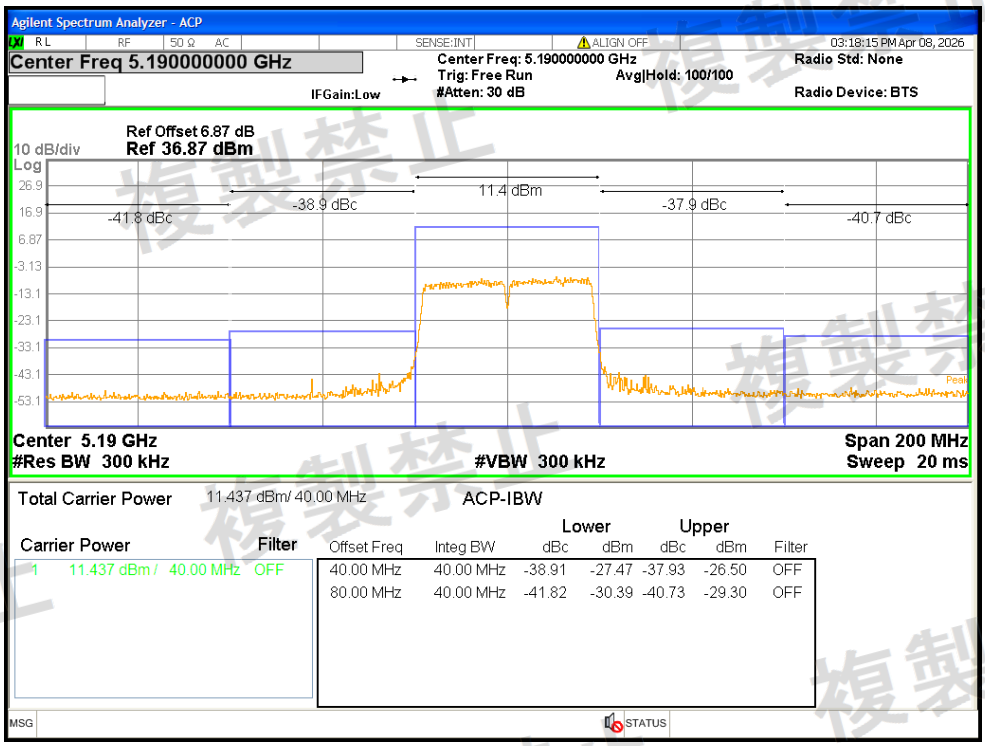


ACEP NVNT n40 5230MHz Ant1

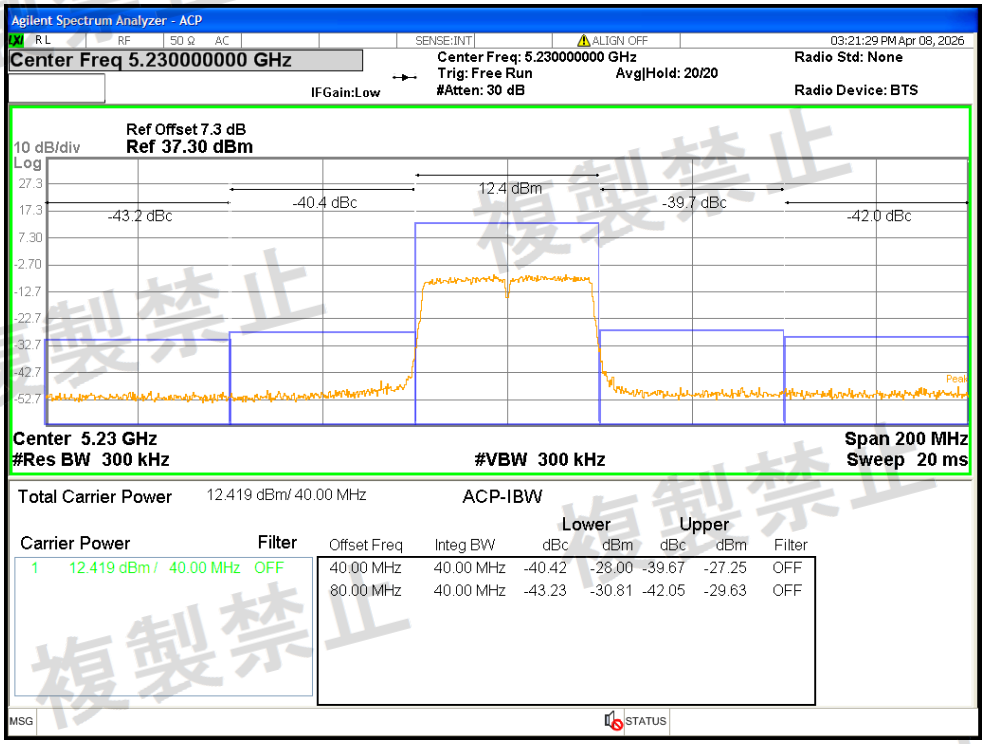


ACEP NVNT n40 5230MHz Ant2

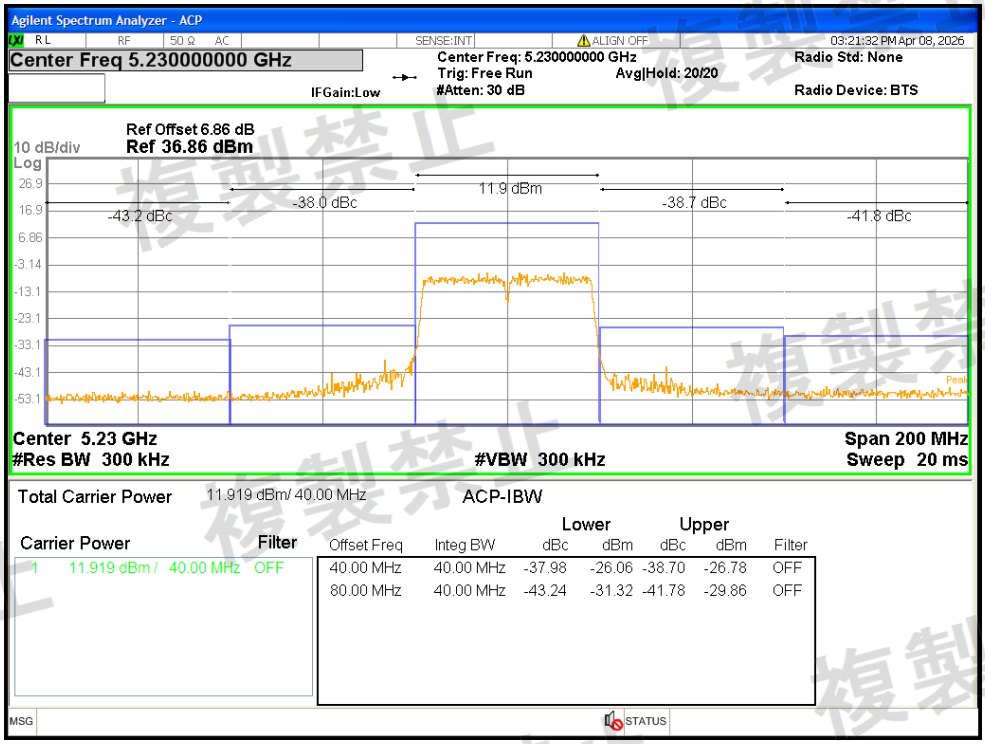


ACEP NVNT ac20 5180MHz Ant1

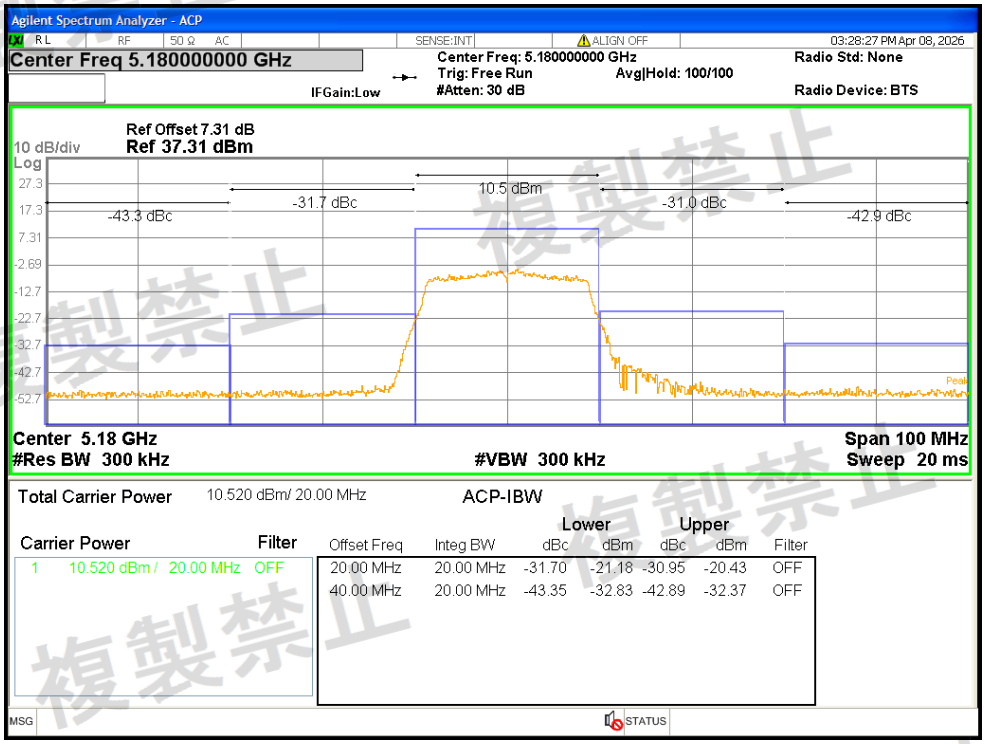


ACEP NVNT ac20 5180MHz Ant2

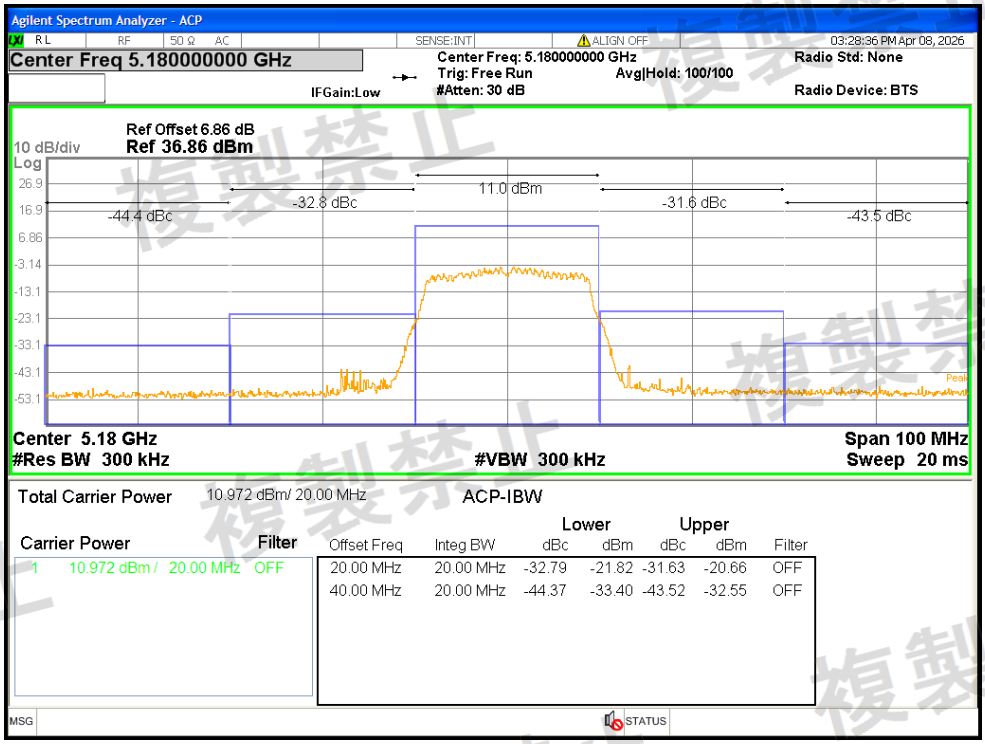


ACEP NVNT ac20 5200MHz Ant1

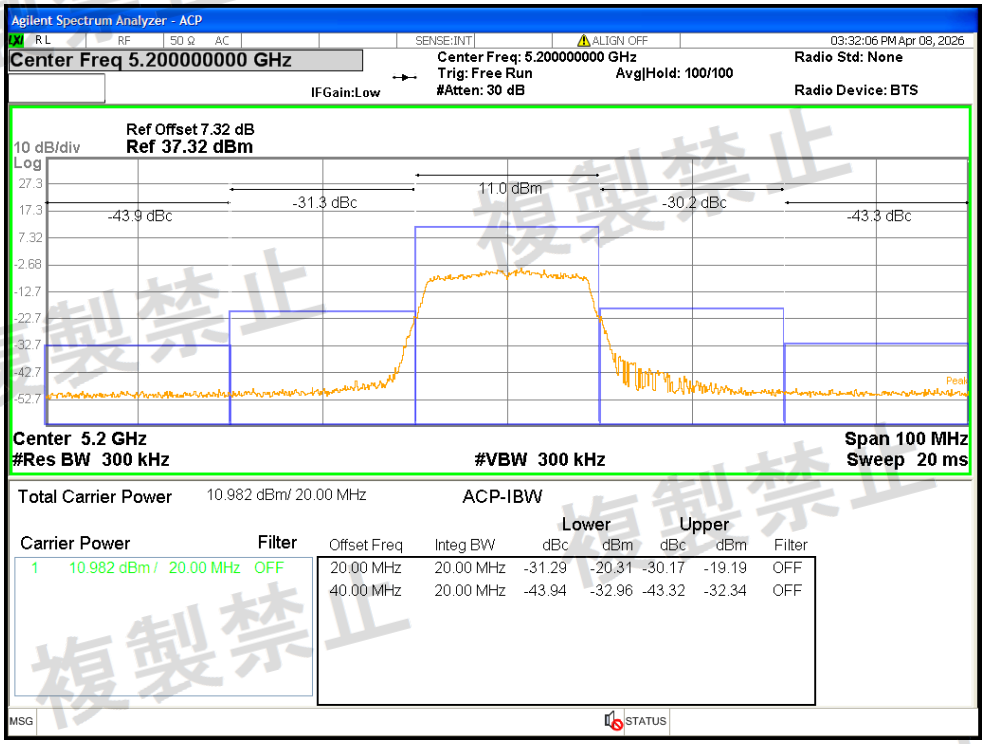


ACEP NVNT ac20 5200MHz Ant2

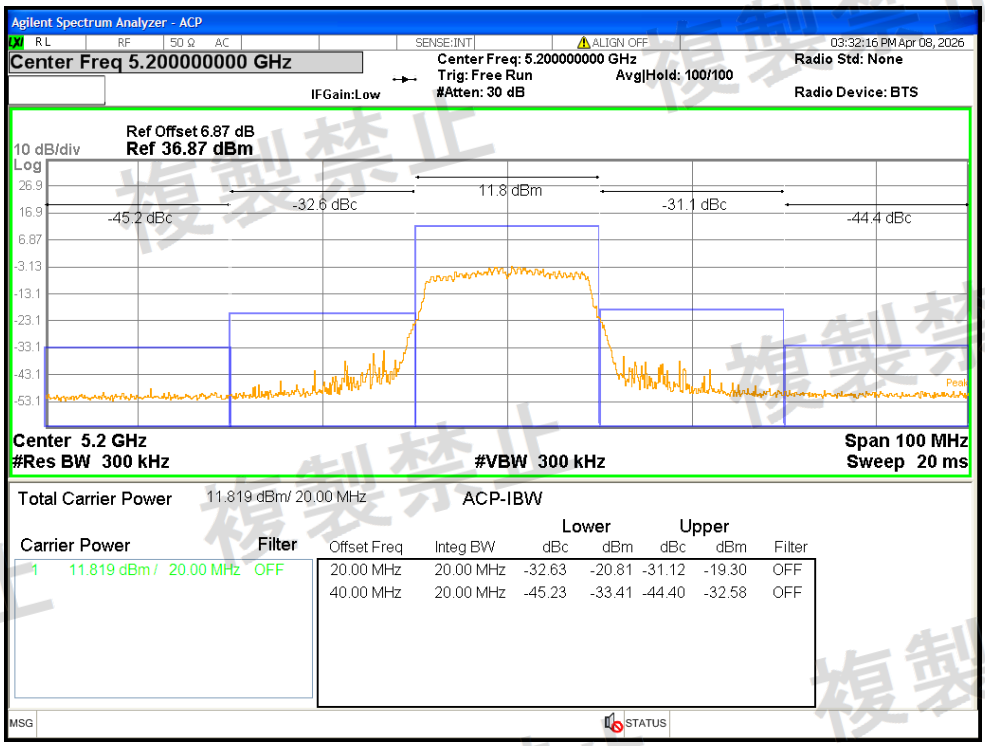


ACEP NVNT ac20 5240MHz Ant1

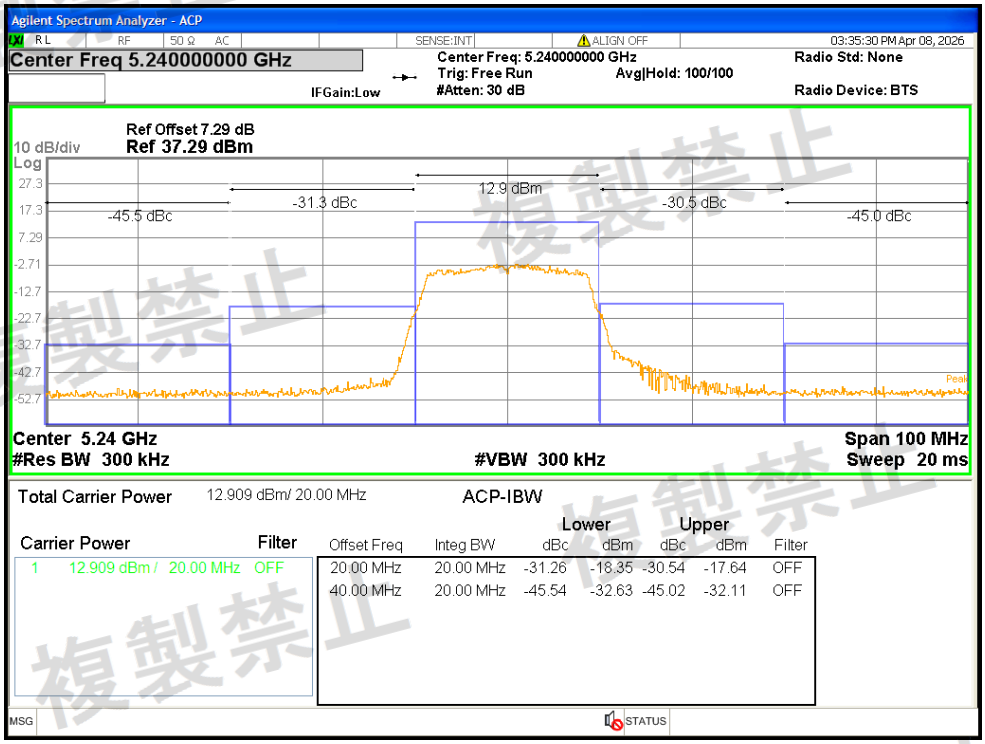


ACEP NVNT ac20 5240MHz Ant2

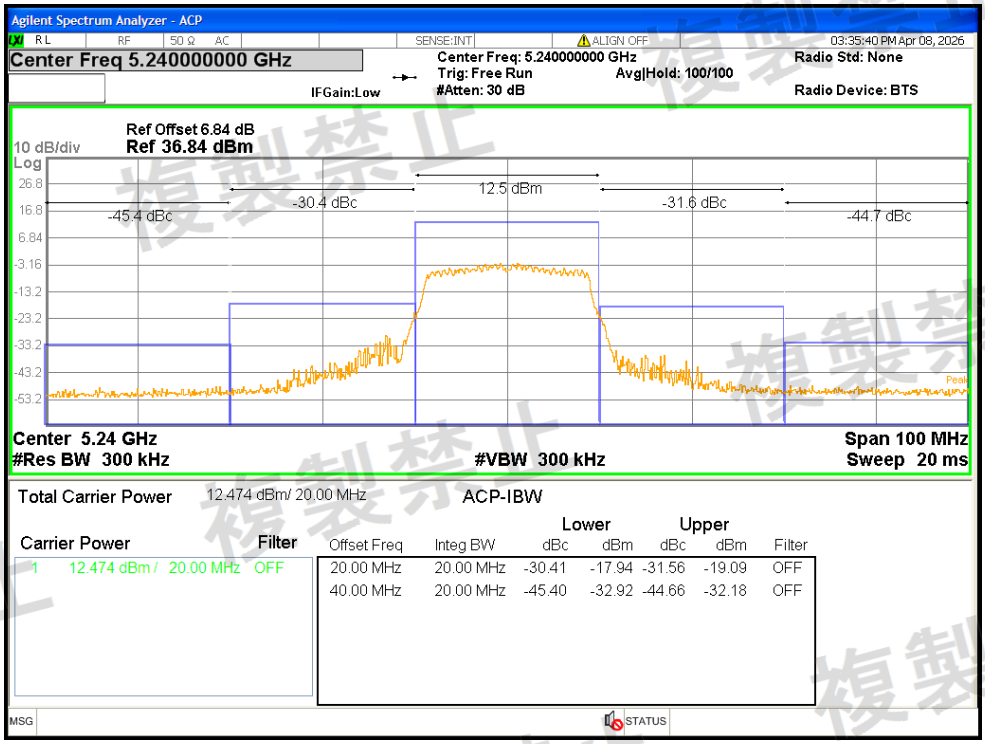


ACEP NVNT ac40 5190MHz Ant1

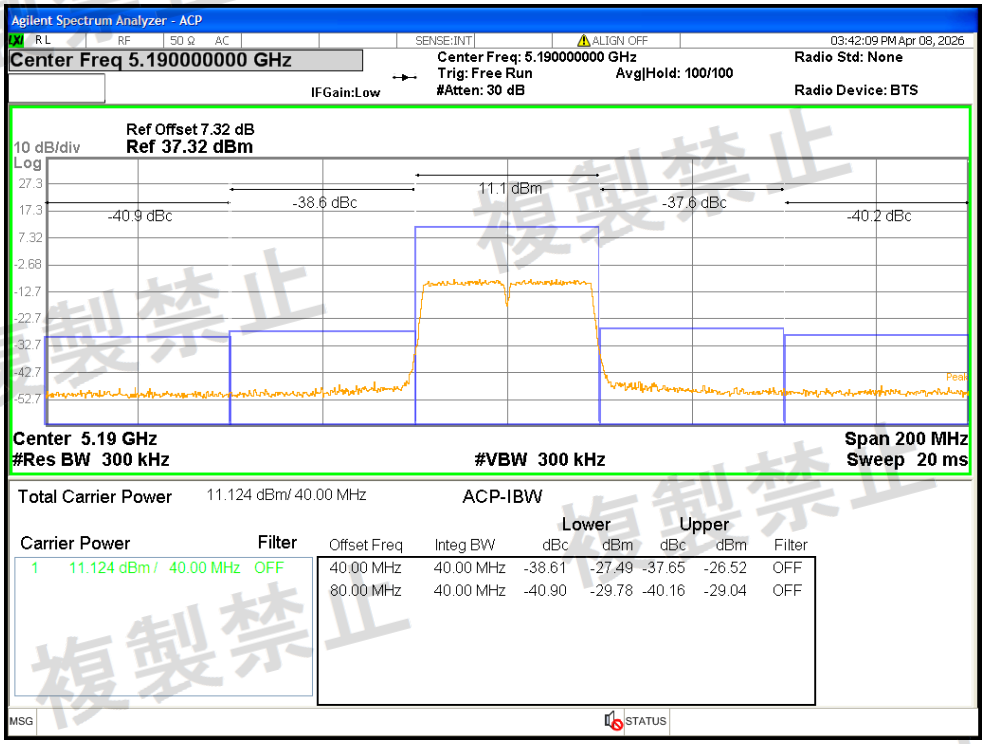


ACEP NVNT ac40 5190MHz Ant2

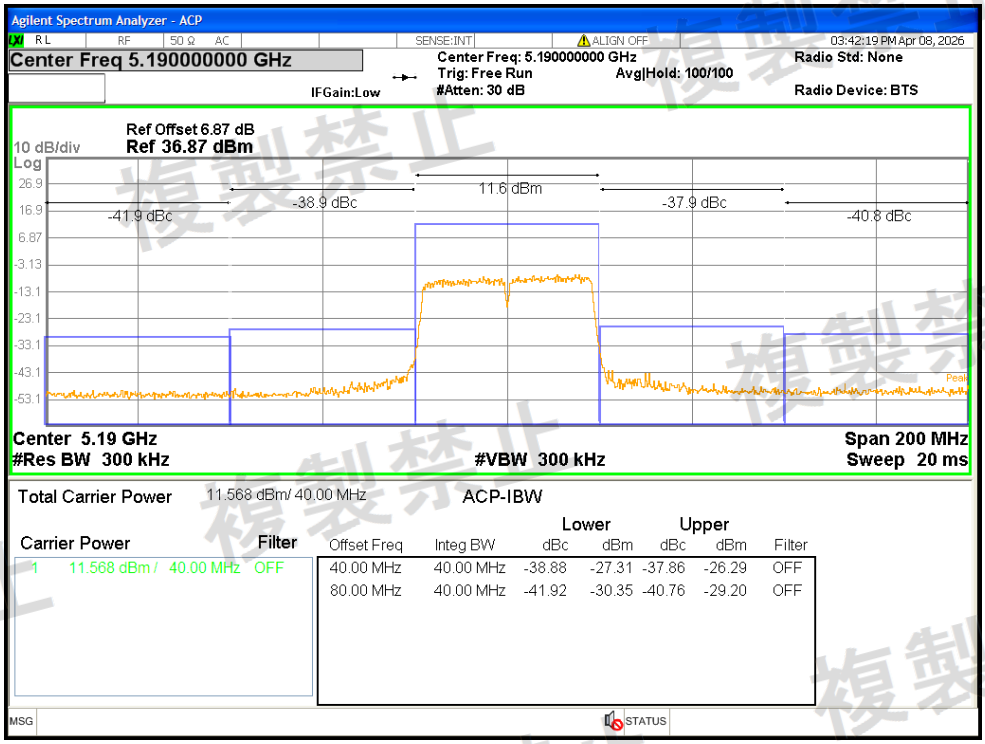


ACEP NVNT ac40 5230MHz Ant1

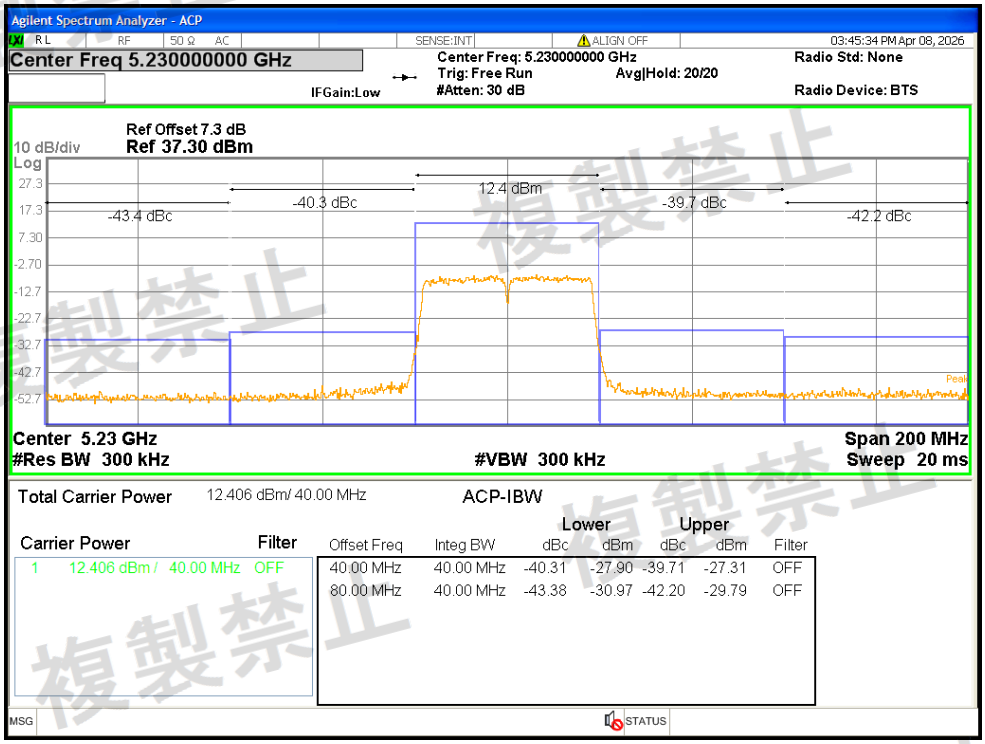


ACEP NVNT ac40 5230MHz Ant2

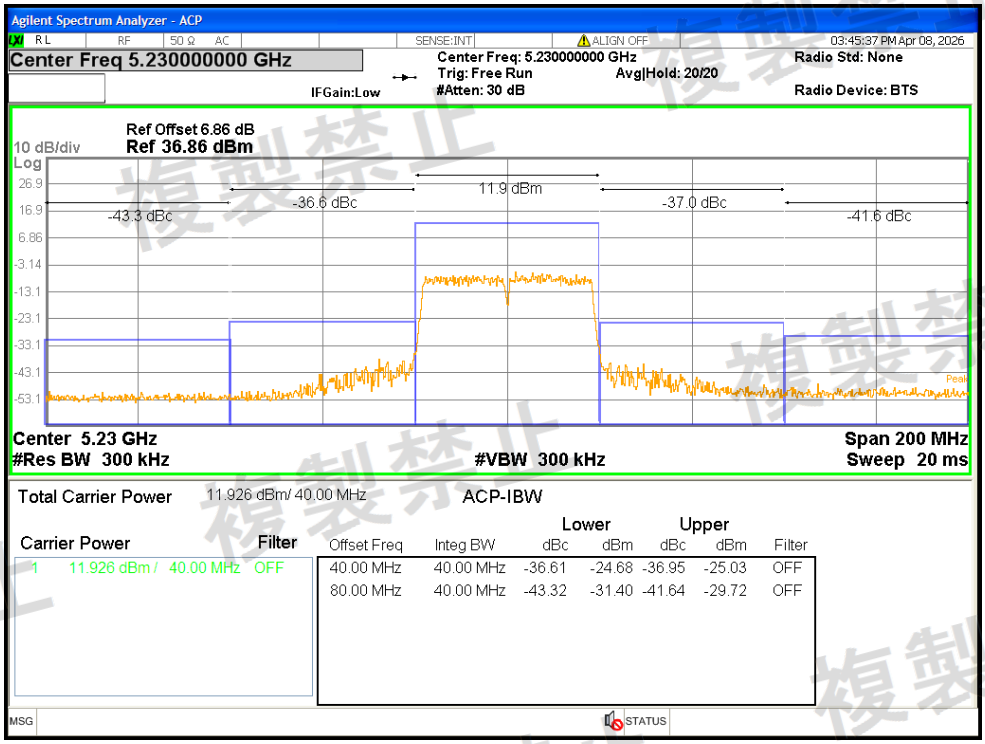


ACEP NVNT ac80 5210MHz Ant1

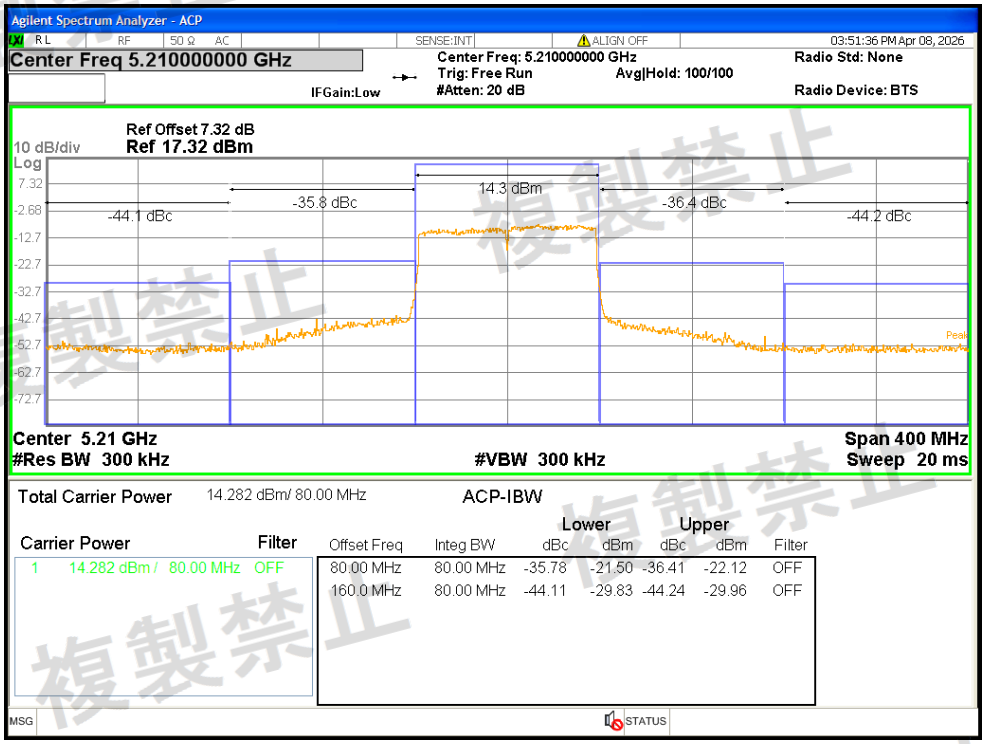


ACEP NVNT ac80 5210MHz Ant2

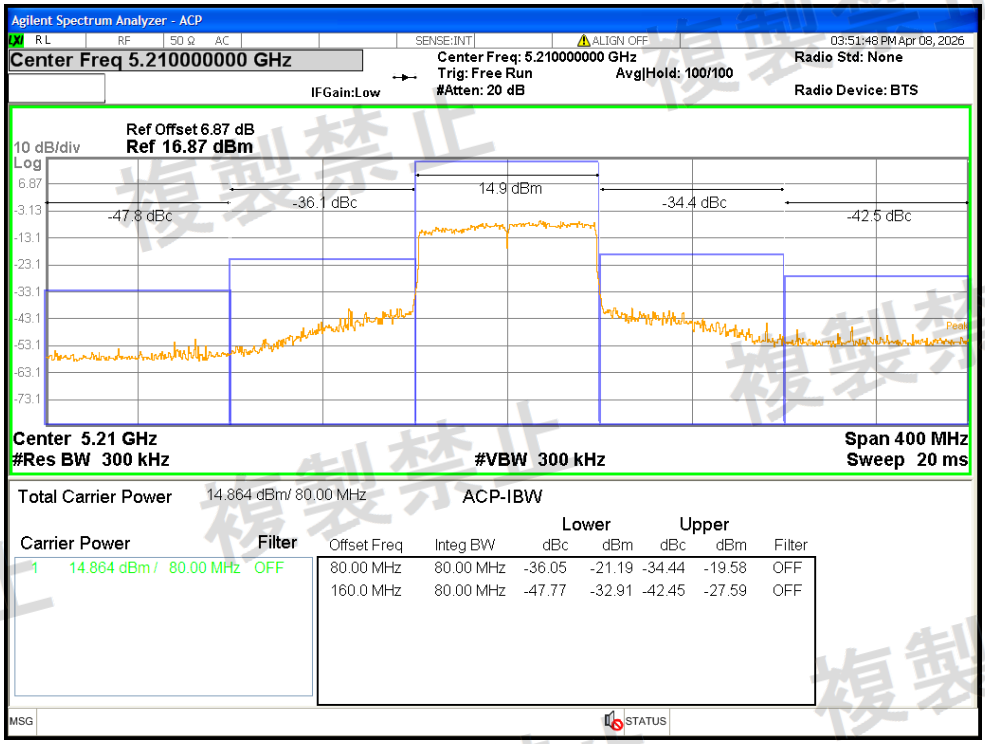


ACEP NVNT ax20 5180MHz Ant1

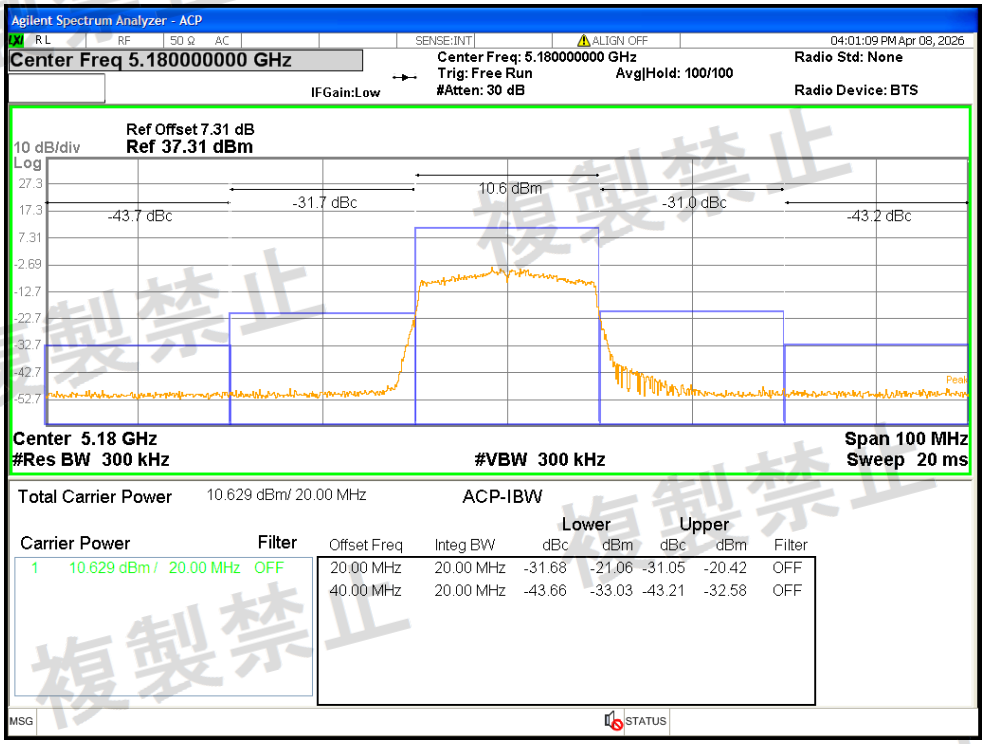


ACEP NVNT ax20 5180MHz Ant2

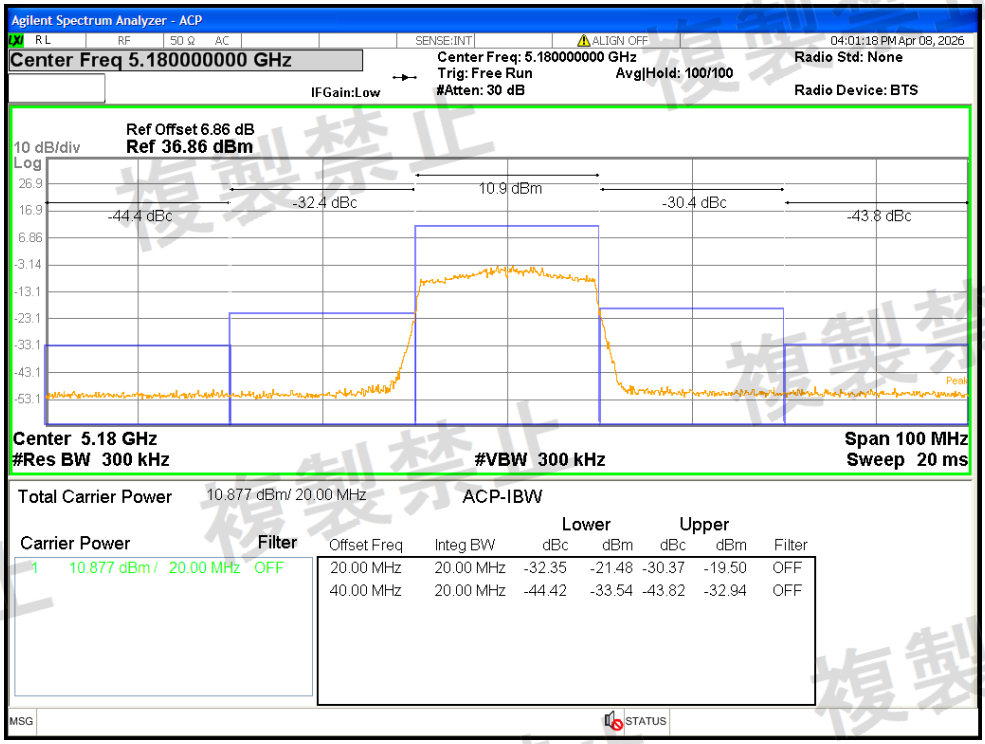


ACEP NVNT ax20 5200MHz Ant1

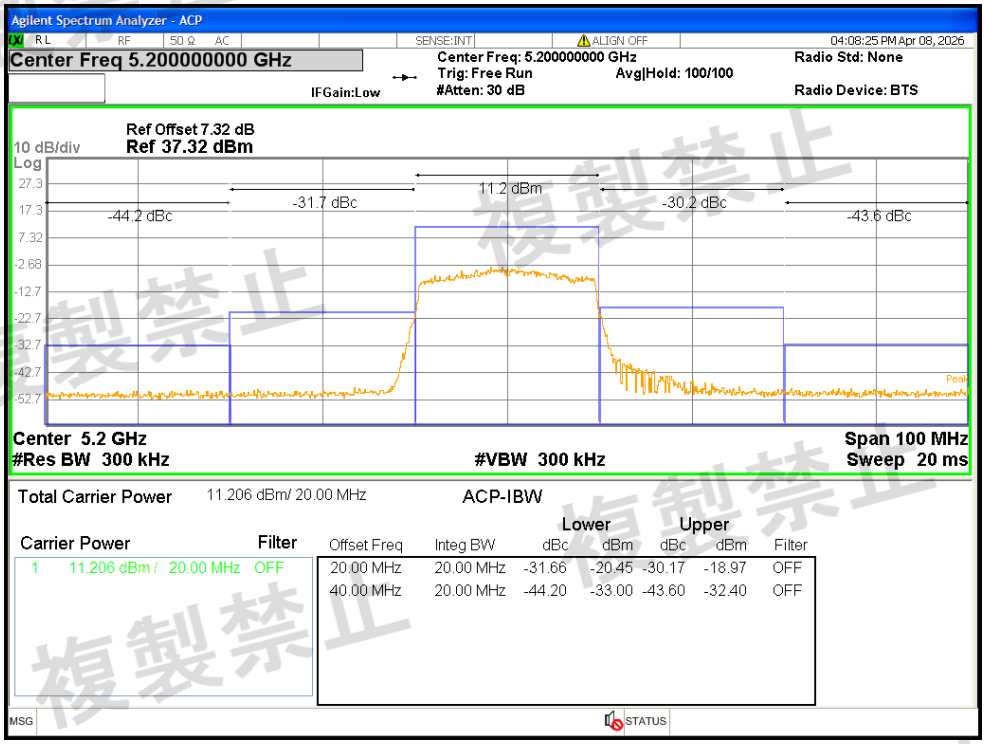


ACEP NVNT ax20 5200MHz Ant2

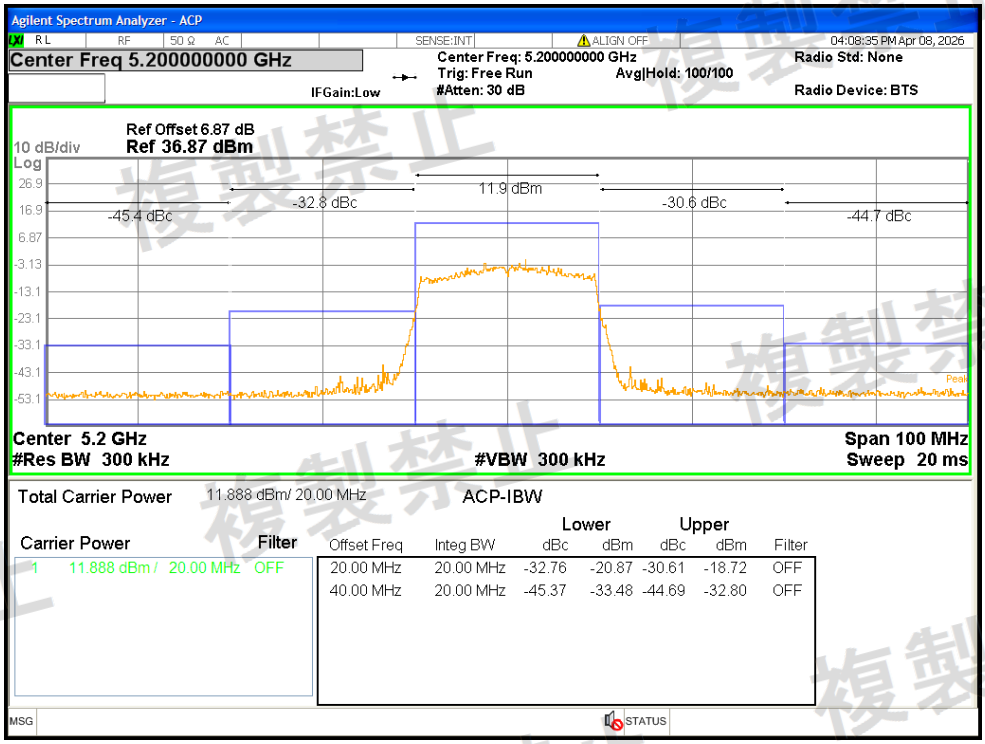


ACEP NVNT ax20 5240MHz Ant1

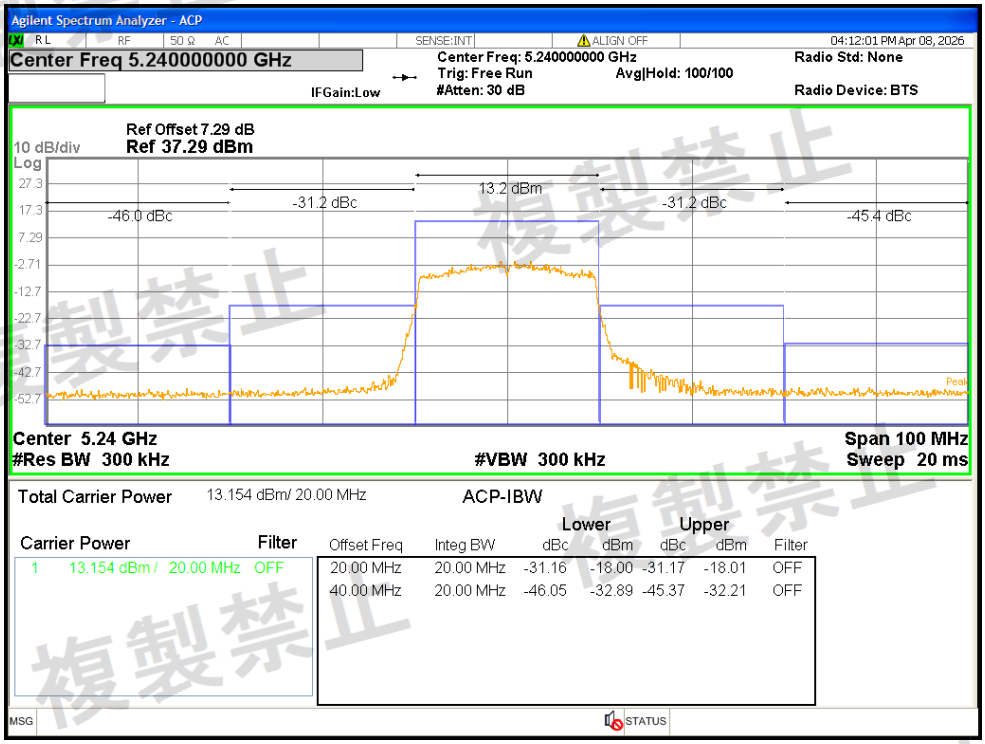


ACEP NVNT ax20 5240MHz Ant2

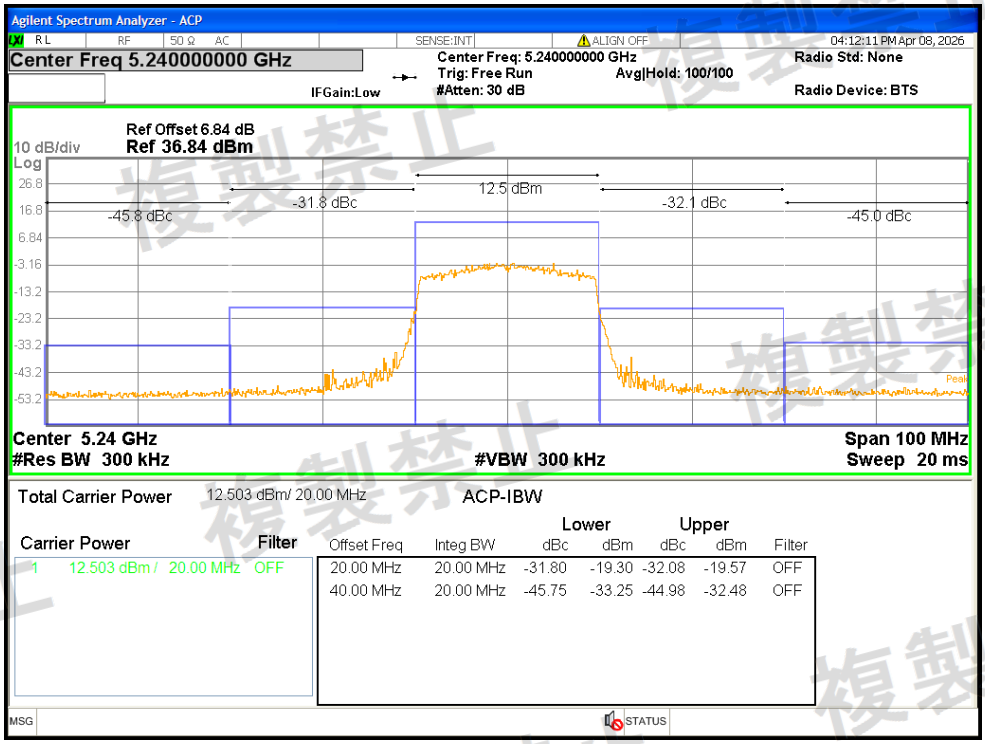


ACEP NVNT ax40 5190MHz Ant1

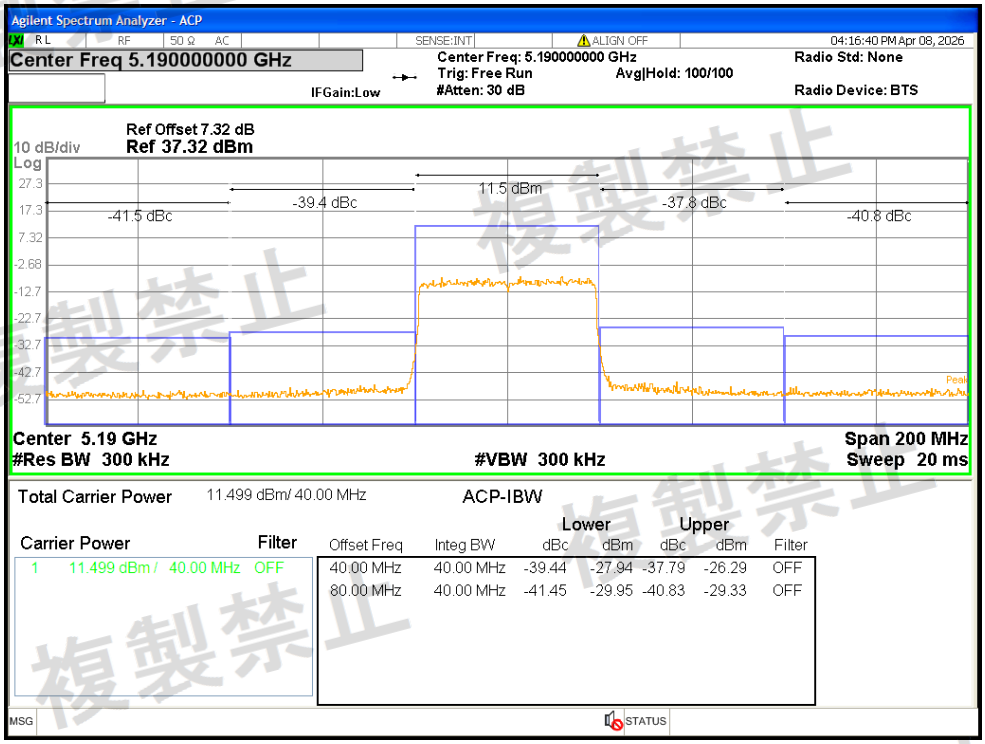


ACEP NVNT ax40 5190MHz Ant2

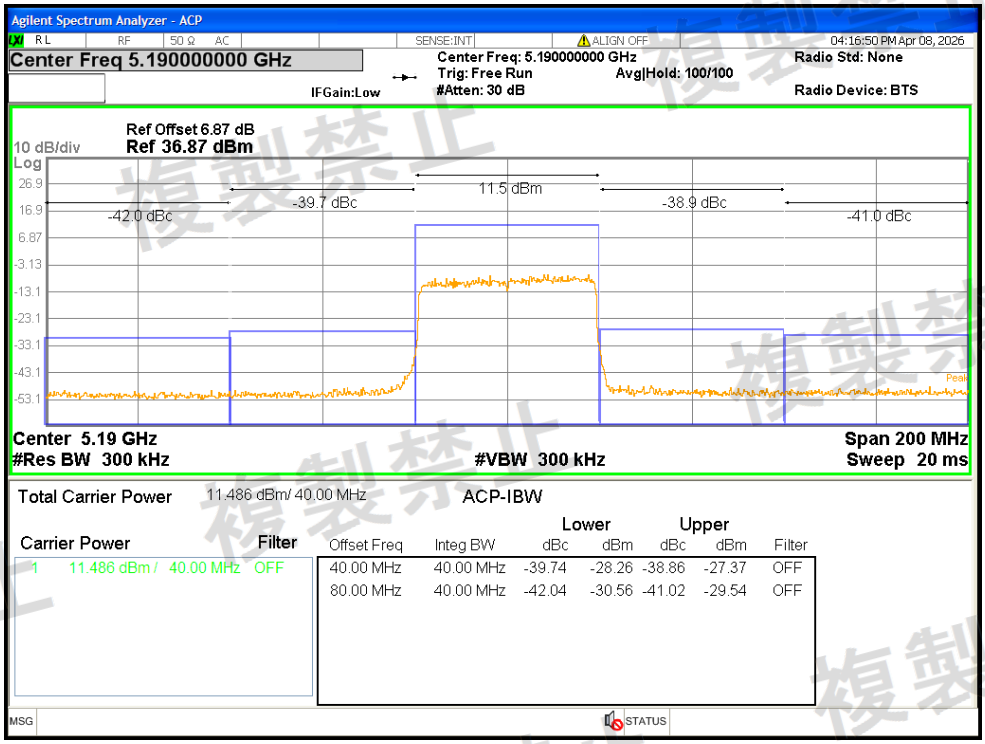


ACEP NVNT ax40 5230MHz Ant1

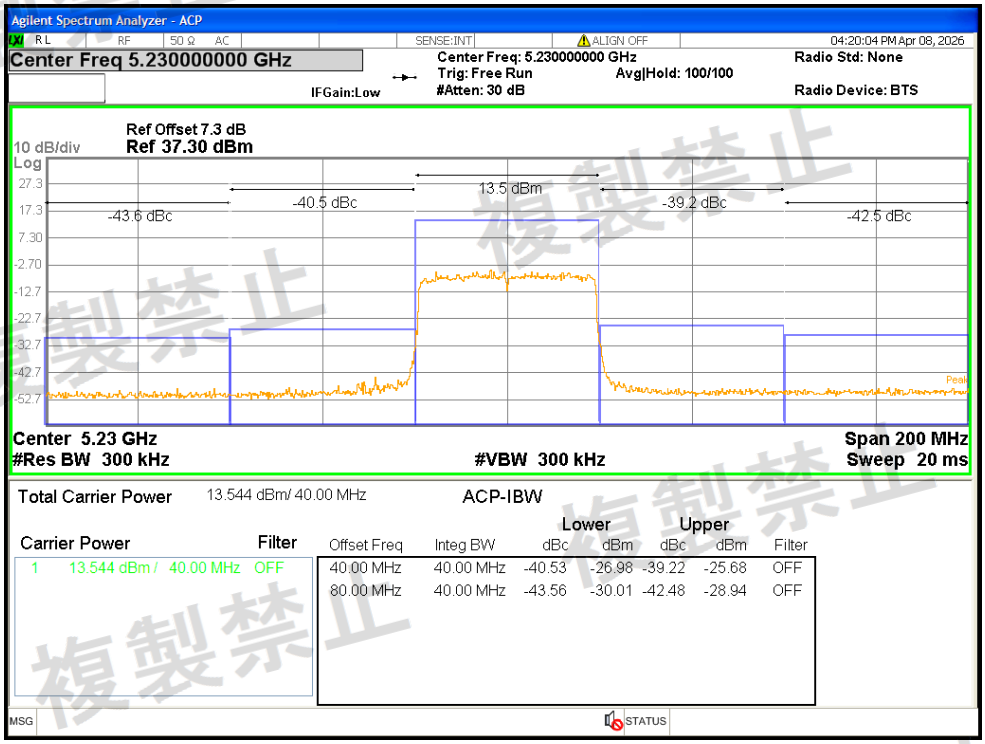

ACEP NVNT ax40 5230MHz Ant2

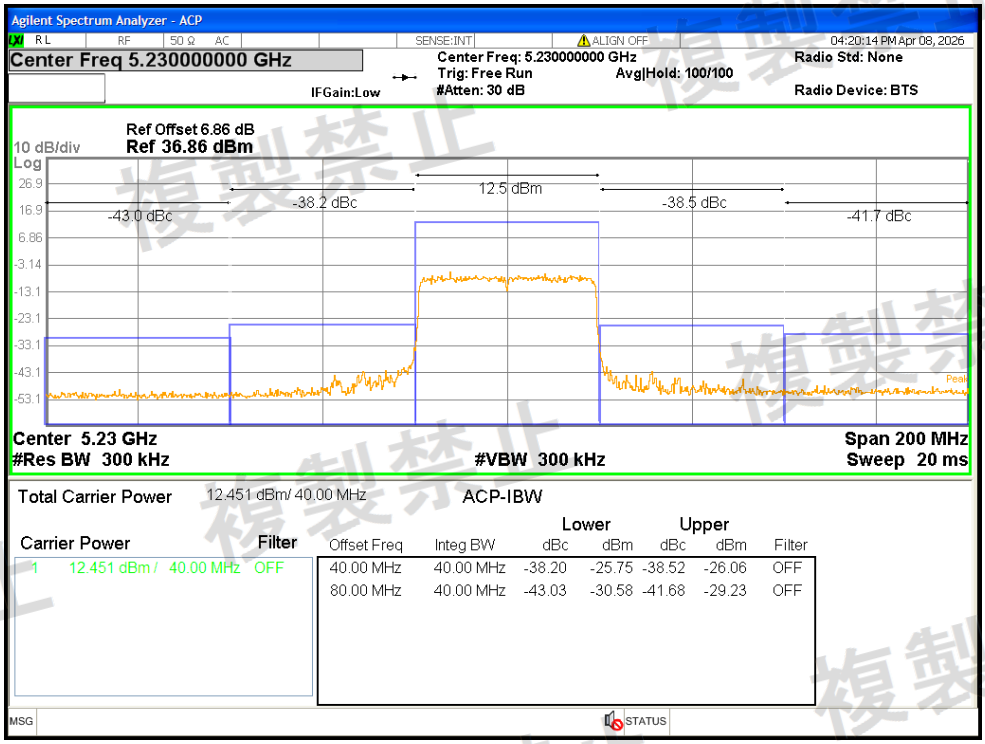

ACEP NVNT ax80 5210MHz Ant1

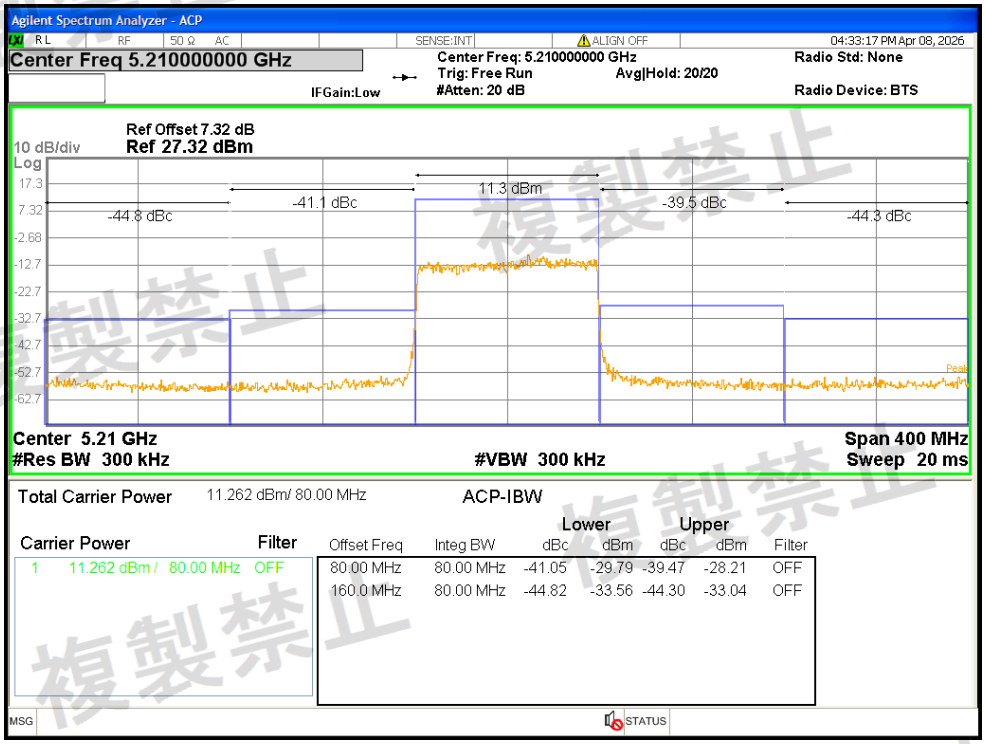

ACEP NVNT ax80 5210MHz Ant2

