

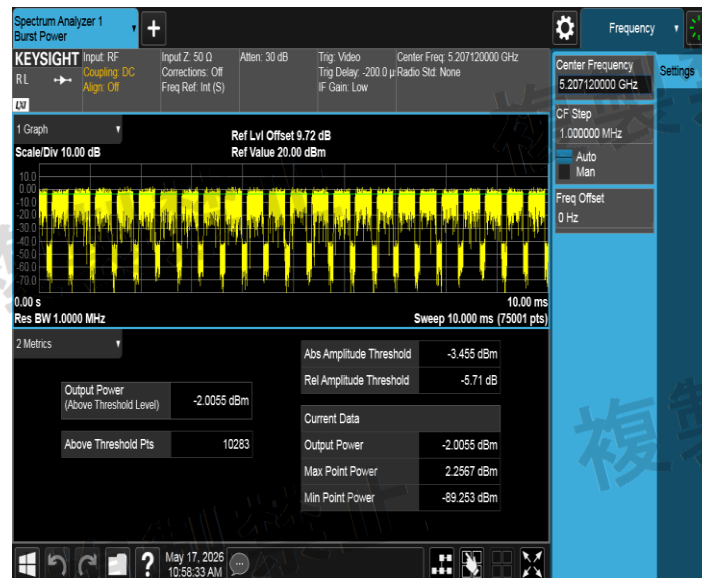




NTNV_11AC80SISO_Ant1_5210

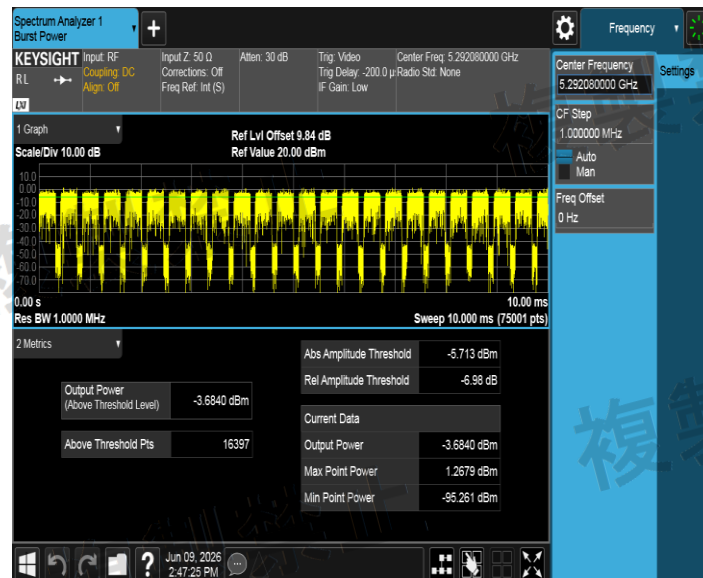



NTNV_11AC80SISO_Ant1_5290

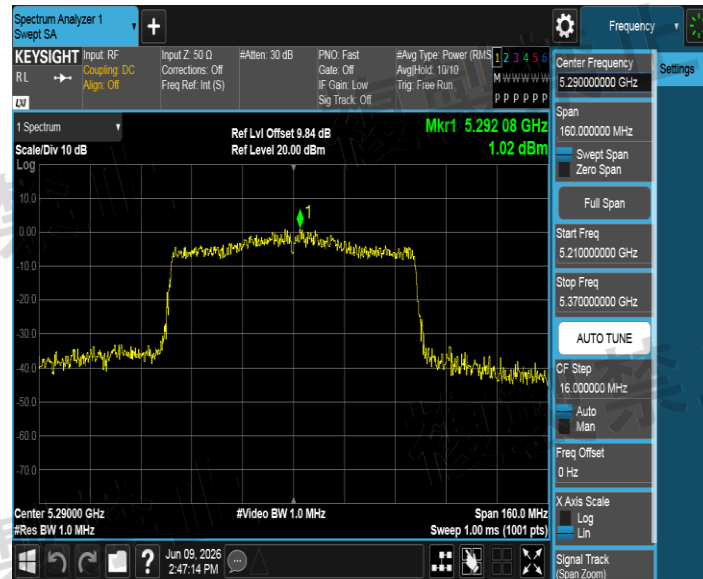



NTNV_11AC80SISO_Ant1_5530

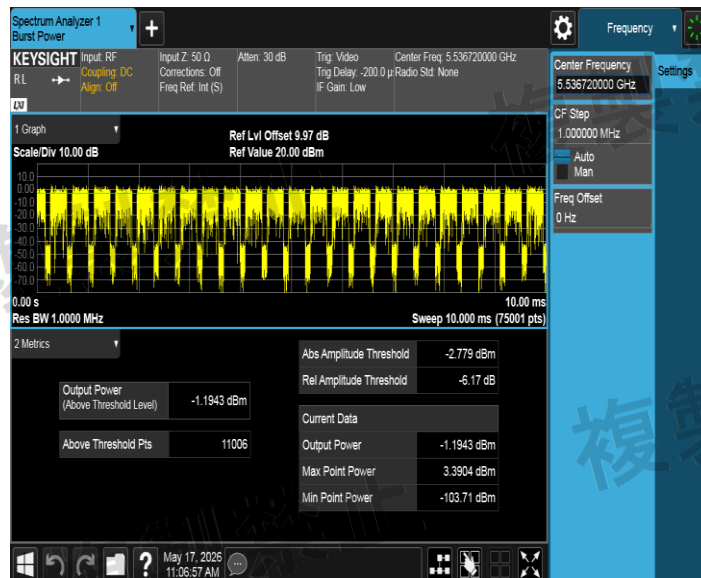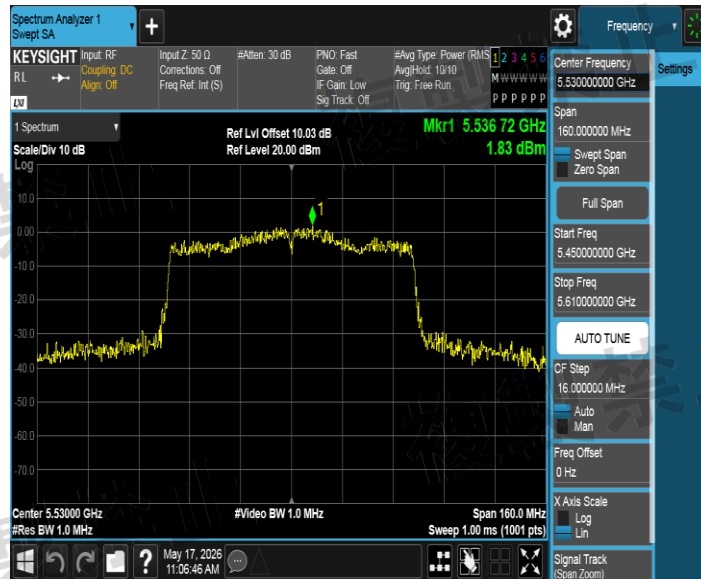

NTNV_11AC80SISO_Ant1_5610

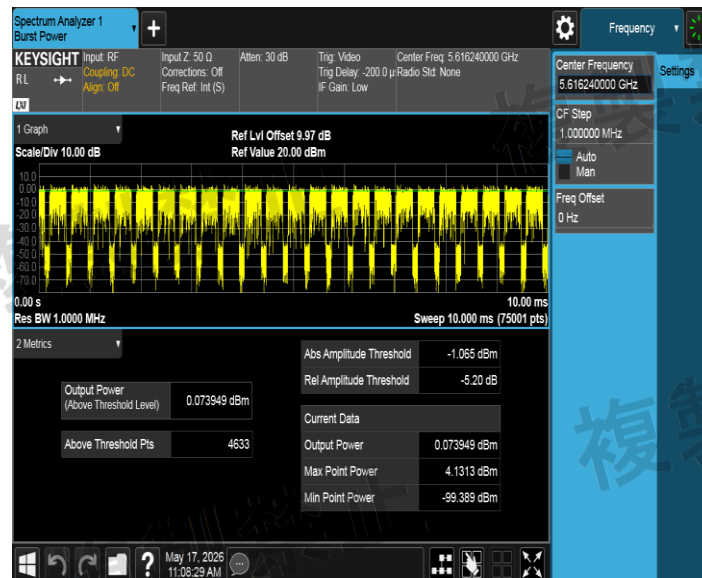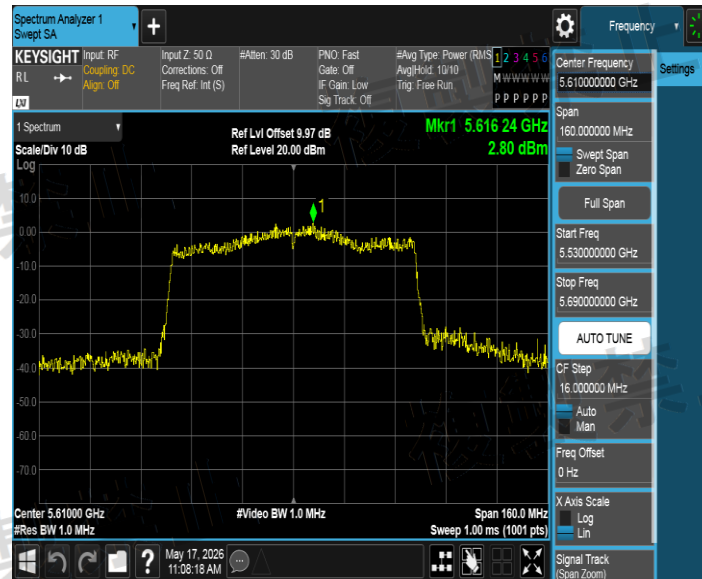

NTNV_11AC80SISO_Ant1_5690

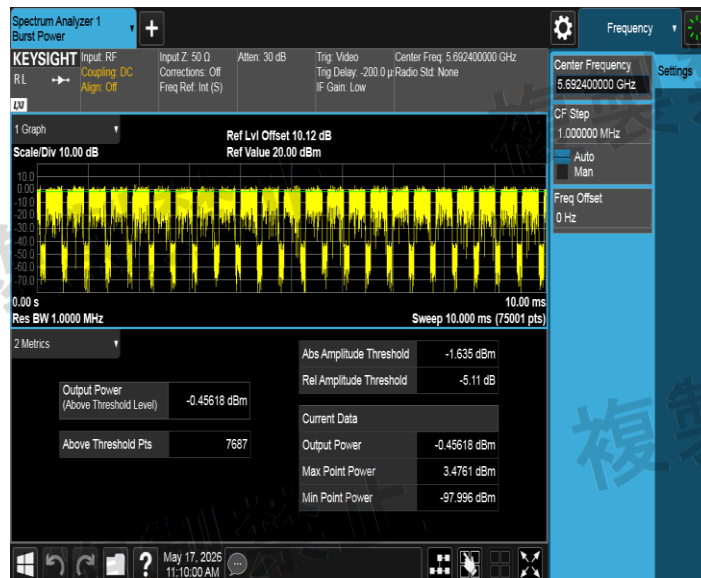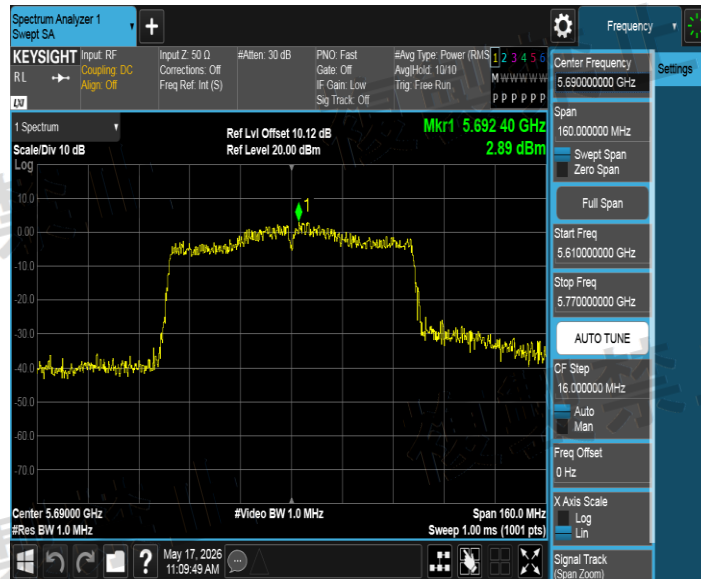

10. Adjacent Channel Power

10.1. Limit

Item	Limits
Adjacent Channel Power (Occupied Bandwidth: OBW)	$\geq 25\text{dB}$
	$f \pm 20\text{MHz}$ (OBW:20MHz)
	$f \pm 40\text{MHz}$ (OBW:40MHz)
	$f \pm 80\text{MHz}$ (OBW:80MHz)
	$\geq 40\text{dB}$
	$f \pm 40\text{MHz}$ (OBW:20MHz)
	$f \pm 80\text{MHz}$ (OBW:40MHz)

10.2. Test Setup



10.3. Test Procedure

- EUT have transmitted the maximum modulation signal and fixed channelize.
- Setting of SA is following as: RBW:300kHz / VBW:300kHz / SPAN: 120MHz (802.11a/n-HT20/ac-VHT20)/240MHz (802.11n-HT40/ac-VHT40)/480MHz (802.11ac-VHT80)/ Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold.
- SA set the Channel Power Function and Channel Bandwidth: 20MHz and Center Frequency: The center frequency of testing for EUT (Such as 5180MHz) $\pm 20\text{MHz}$. Then SA automatically calculates the power of the first adjacent channel on the left and right sides of EUT, A and B are the power of the first adjacent channel on the left and right sides of EUT respectively.
- SA set the Channel Power Function and Channel Bandwidth: 20MHz and Center Frequency: The center frequency of testing for EUT (Such as 5180MHz) $\pm 40\text{MHz}$. Then SA automatically calculates the power of the second adjacent channel on the left and right sides of EUT C and D are the power of the second adjacent channel on the left and right sides of EUT respectively.

5. All channels are measured according to the above operation and limit requirements, and the data is recorded in this report.

10.4. Test Result

Test environment:

Temperature:	23.1~27.5 °C
Relative Humidity:	46~51 %
ATM Pressure:	100.2~101.5 kPa
Test Date (yy-mm-dd):	2026-04-20~2026-06-09
Test Voltage:	DC 5V
Test Engineer:	Stone Zhang

Test Data:

Test Condition	Test Mode	Antenna	Frequency (MHz)	Offset [MHz]	Result [dBc]	Limit [dBc]	Verdict
NTNV	11A	Ant1	5180	-40	-53.17	≤-40	PASS
				-20	-32.84	≤-25	PASS
				+20	-35.06	≤-25	PASS
				+40	-52.97	≤-40	PASS
			5200	-40	-49.70	≤-40	PASS
				-20	-32.79	≤-25	PASS
				+20	-34.58	≤-25	PASS
				+40	-50.50	≤-40	PASS
			5240	-40	-49.70	≤-40	PASS
				-20	-33.07	≤-25	PASS
				+20	-35.07	≤-25	PASS
				+40	-50.13	≤-40	PASS
			5260	-40	-49.64	≤-40	PASS
				-20	-32.87	≤-25	PASS
				+20	-34.28	≤-25	PASS
				+40	-49.88	≤-40	PASS
			5280	-40	-50.27	≤-40	PASS
				-20	-32.94	≤-25	PASS
				+20	-34.39	≤-25	PASS
				+40	-50.03	≤-40	PASS

			5320	-40	-50.08	≤ -40	PASS
				-20	-33.04	≤ -25	PASS
				+20	-34.02	≤ -25	PASS
				+40	-49.63	≤ -40	PASS
			5500	-40	-50.12	≤ -40	PASS
				-20	-32.42	≤ -25	PASS
				+20	-34.15	≤ -25	PASS
				+40	-49.94	≤ -40	PASS
			5600	-40	-49.95	≤ -40	PASS
				-20	-32.99	≤ -25	PASS
				+20	-33.63	≤ -25	PASS
				+40	-50.08	≤ -40	PASS
			5720	-40	-49.70	≤ -40	PASS
				-20	-32.30	≤ -25	PASS
				+20	-33.96	≤ -25	PASS
				+40	-49.24	≤ -40	PASS
	11N20SISO	Ant1	5180	-40	-50.49	≤ -40	PASS
				-20	-33.36	≤ -25	PASS
				+20	-32.96	≤ -25	PASS
				+40	-51.18	≤ -40	PASS
			5200	-40	-50.52	≤ -40	PASS
				-20	-32.12	≤ -25	PASS
				+20	-33.12	≤ -25	PASS
				+40	-51.27	≤ -40	PASS
			5240	-40	-50.26	≤ -40	PASS
				-20	-31.96	≤ -25	PASS
				+20	-33.36	≤ -25	PASS
				+40	-51.17	≤ -40	PASS
			5260	-40	-50.30	≤ -40	PASS
				-20	-32.54	≤ -25	PASS
				+20	-33.25	≤ -25	PASS
				+40	-50.86	≤ -40	PASS
			5280	-40	-50.88	≤ -40	PASS
				-20	-32.38	≤ -25	PASS
				+20	-32.37	≤ -25	PASS
				+40	-50.86	≤ -40	PASS
			5320	-40	-50.94	≤ -40	PASS

				-20	-31.18	≤ -25	PASS
				+20	-32.08	≤ -25	PASS
				+40	-50.39	≤ -40	PASS
			5500	-40	-50.41	≤ -40	PASS
				-20	-31.51	≤ -25	PASS
				+20	-32.75	≤ -25	PASS
			5600	+40	-50.42	≤ -40	PASS
				-40	-50.65	≤ -40	PASS
				-20	-32.21	≤ -25	PASS
			5720	+20	-33.46	≤ -25	PASS
				+40	-50.62	≤ -40	PASS
				-40	-50.01	≤ -40	PASS
11N40SISO	Ant1		5190	-20	-32.53	≤ -25	PASS
				+20	-32.23	≤ -25	PASS
				+40	-49.60	≤ -40	PASS
			5230	-80	-44.0	≤ -40	PASS
				-40	-28.3	≤ -25	PASS
				+40	-28.0	≤ -25	PASS
			5270	+80	-45.7	≤ -40	PASS
				-80	-48.78	≤ -40	PASS
				-40	-37.38	≤ -25	PASS
			5310	+40	-39.39	≤ -25	PASS
				+80	-49.27	≤ -40	PASS
				-80	-48.63	≤ -40	PASS
			5510	-40	-37.62	≤ -25	PASS
				+40	-38.81	≤ -25	PASS
				+80	-48.71	≤ -40	PASS
			5590	-80	-49.03	≤ -40	PASS
				-40	-39.02	≤ -25	PASS
				+40	-38.56	≤ -25	PASS
				+80	-48.75	≤ -40	PASS
				-80	-49.11	≤ -40	PASS
				-40	-39.87	≤ -25	PASS
				+40	-39.01	≤ -25	PASS
				+80	-48.67	≤ -40	PASS
				-80	-48.75	≤ -40	PASS
				-40	-39.19	≤ -25	PASS


	11AC20SISO	Ant1	5710	+40	-39.17	≤ -25	PASS
				+80	-48.12	≤ -40	PASS
				-80	-48.27	≤ -40	PASS
				-40	-41.51	≤ -25	PASS
				+40	-38.52	≤ -25	PASS
				+80	-47.40	≤ -40	PASS
			5180	-40	-50.08	≤ -40	PASS
				-20	-31.43	≤ -25	PASS
				+20	-32.50	≤ -25	PASS
				+40	-50.73	≤ -40	PASS
			5200	-40	-50.10	≤ -40	PASS
				-20	-31.69	≤ -25	PASS
				+20	-33.55	≤ -25	PASS
				+40	-50.82	≤ -40	PASS
			5240	-40	-49.81	≤ -40	PASS
				-20	-31.97	≤ -25	PASS
				+20	-33.35	≤ -25	PASS
				+40	-50.69	≤ -40	PASS
			5260	-40	-50.29	≤ -40	PASS
				-20	-32.38	≤ -25	PASS
				+20	-33.59	≤ -25	PASS
				+40	-50.52	≤ -40	PASS
			5280	-40	-50.29	≤ -40	PASS
				-20	-31.92	≤ -25	PASS
				+20	-32.87	≤ -25	PASS
				+40	-50.14	≤ -40	PASS
			5320	-40	-50.26	≤ -40	PASS
				-20	-32.11	≤ -25	PASS
				+20	-32.13	≤ -25	PASS
				+40	-49.65	≤ -40	PASS
			5500	-40	-49.99	≤ -40	PASS
				-20	-32.81	≤ -25	PASS
				+20	-33.44	≤ -25	PASS
				+40	-50.01	≤ -40	PASS
			5600	-40	-50.83	≤ -40	PASS
				-20	-32.87	≤ -25	PASS
				+20	-33.02	≤ -25	PASS

				+40	-50.75	≤ -40	PASS
			5720	-40	-49.35	≤ -40	PASS
				-20	-32.11	≤ -25	PASS
				+20	-32.67	≤ -25	PASS
				+40	-48.93	≤ -40	PASS
	11AC40SISO	Ant1	5190	-80	-48.65	≤ -40	PASS
				-40	-38.25	≤ -25	PASS
				+40	-38.92	≤ -25	PASS
				+80	-49.24	≤ -40	PASS
			5230	-80	-48.24	≤ -40	PASS
				-40	-37.31	≤ -25	PASS
				+40	-39.15	≤ -25	PASS
				+80	-48.75	≤ -40	PASS
			5270	-80	-48.08	≤ -40	PASS
				-40	-37.97	≤ -25	PASS
				+40	-38.86	≤ -25	PASS
				+80	-48.28	≤ -40	PASS
			5310	-80	-48.40	≤ -40	PASS
				-40	-38.78	≤ -25	PASS
				+40	-38.29	≤ -25	PASS
				+80	-48.16	≤ -40	PASS
			5510	-80	-48.64	≤ -40	PASS
				-40	-38.19	≤ -25	PASS
				+40	-37.10	≤ -25	PASS
				+80	-47.98	≤ -40	PASS
			5590	-80	-48.49	≤ -40	PASS
				-40	-40.14	≤ -25	PASS
				+40	-40.46	≤ -25	PASS
				+80	-48.02	≤ -40	PASS
			5710	-80	-47.74	≤ -40	PASS
				-40	-40.28	≤ -25	PASS
				+40	-38.23	≤ -25	PASS
				+80	-46.88	≤ -40	PASS
	11AC80SISO	Ant1	5210	-80	-34.80	≤ -25	PASS
				+80	-38.44	≤ -25	PASS
			5290	-80	-35.50	≤ -25	PASS
				+80	-38.29	≤ -25	PASS




			5530	-80	-35.90	≤ -25	PASS
				+80	-37.05	≤ -25	PASS
			5610	-80	-37.64	≤ -25	PASS
				+80	-39.55	≤ -25	PASS
			5690	-80	-37.94	≤ -25	PASS
				+80	-37.45	≤ -25	PASS


Test Plots:

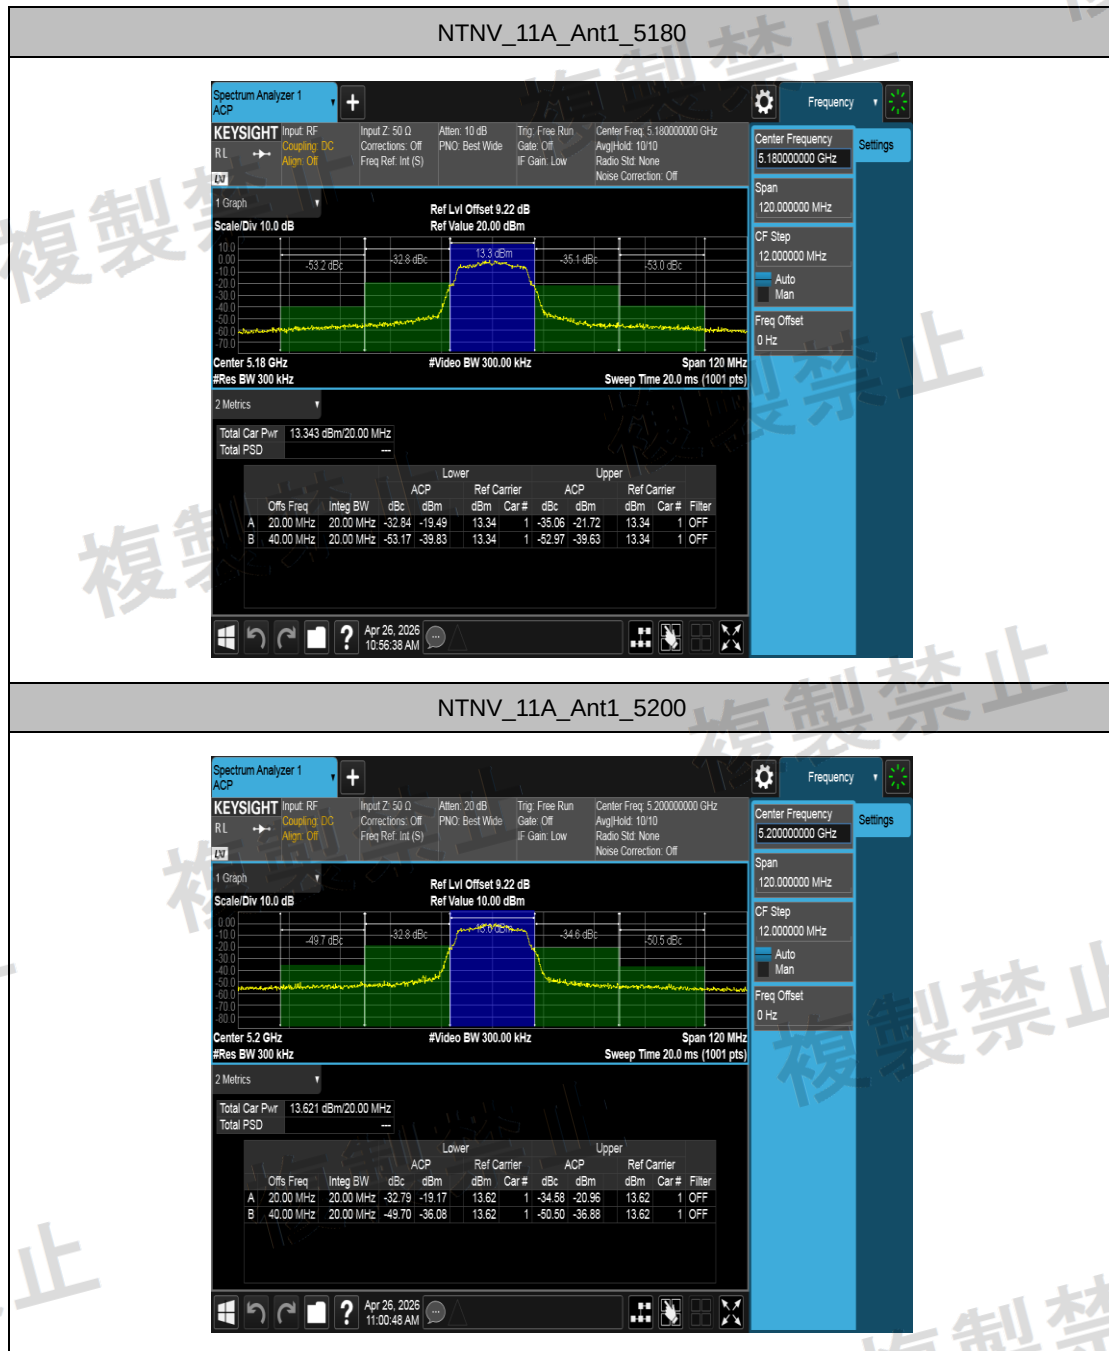


NTNV_11A_Ant1_5240

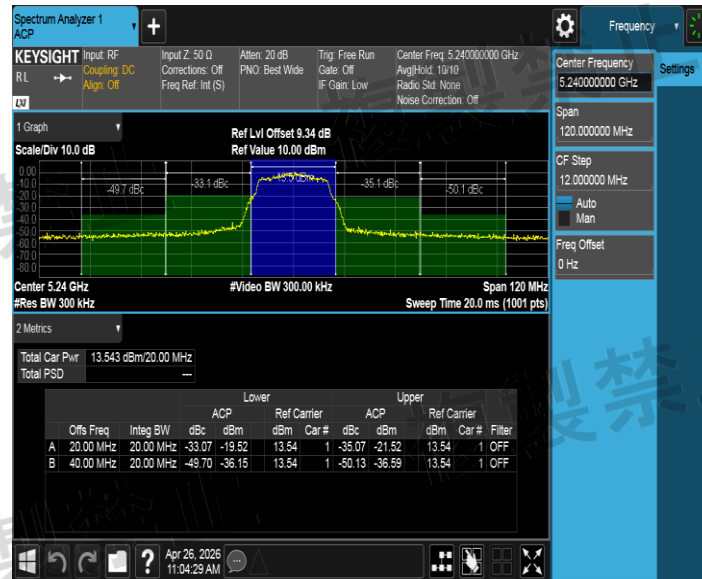


NTNV_11A_Ant1_5260

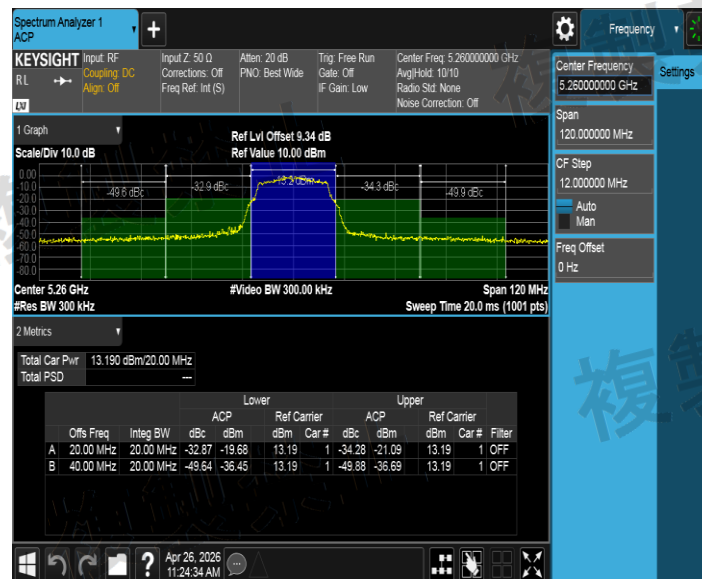


NTNV_11A_Ant1_5280

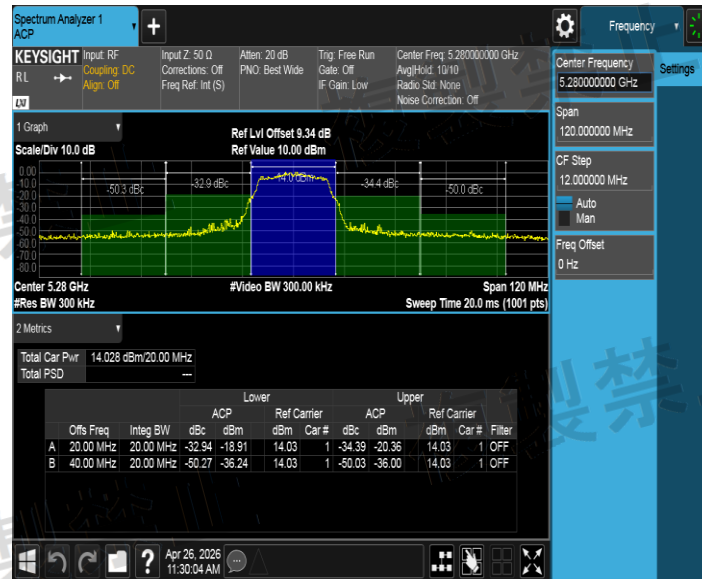


NTNV_11A_Ant1_5320

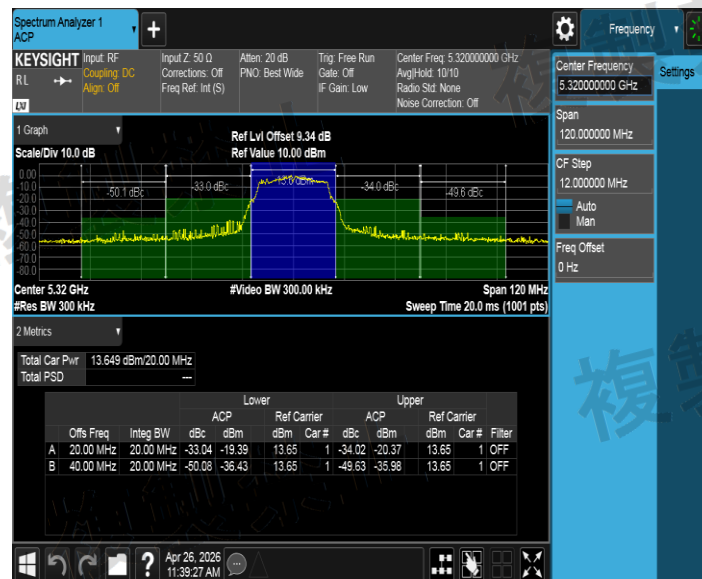


NTNV_11A_Ant1_5500

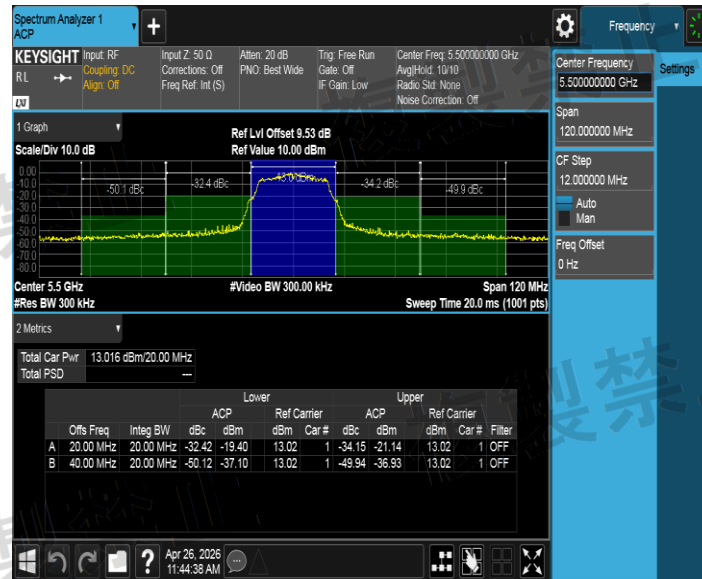


NTNV_11A_Ant1_5600

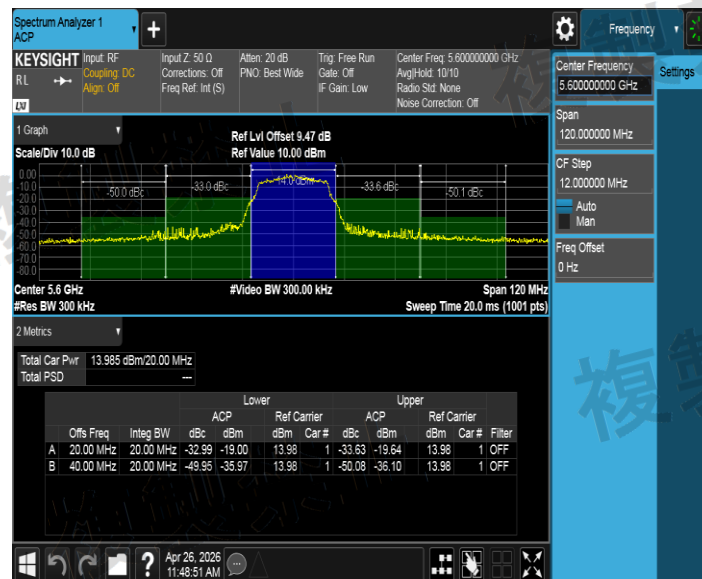


NTNV_11A_Ant1_5720

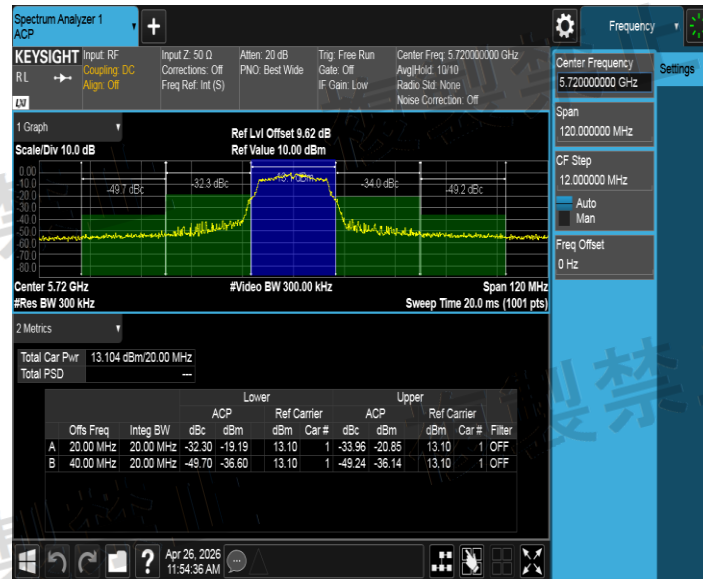


NTNV_11N20SISO_Ant1_5180

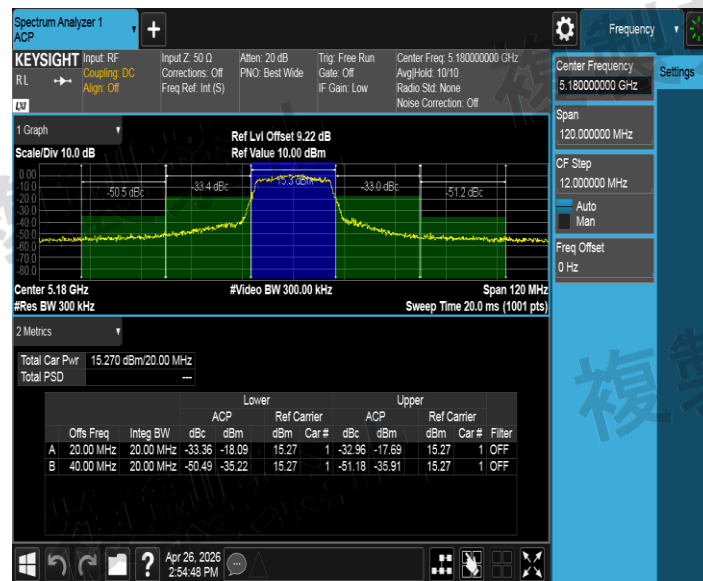


NTNV_11N20SISO_Ant1_5200

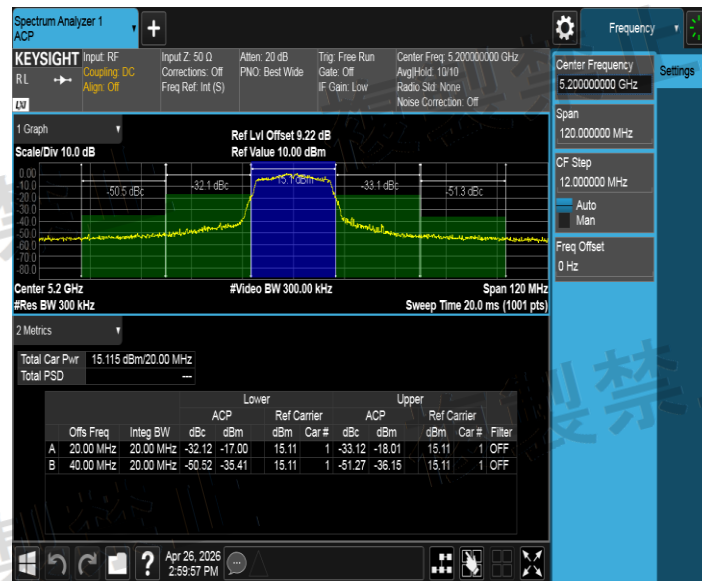


NTNV_11N20SISO_Ant1_5240

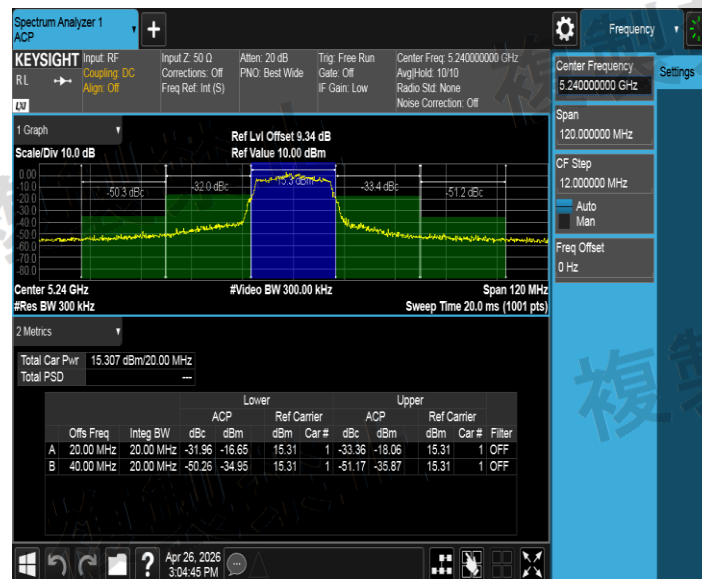


NTNV_11N20SISO_Ant1_5260

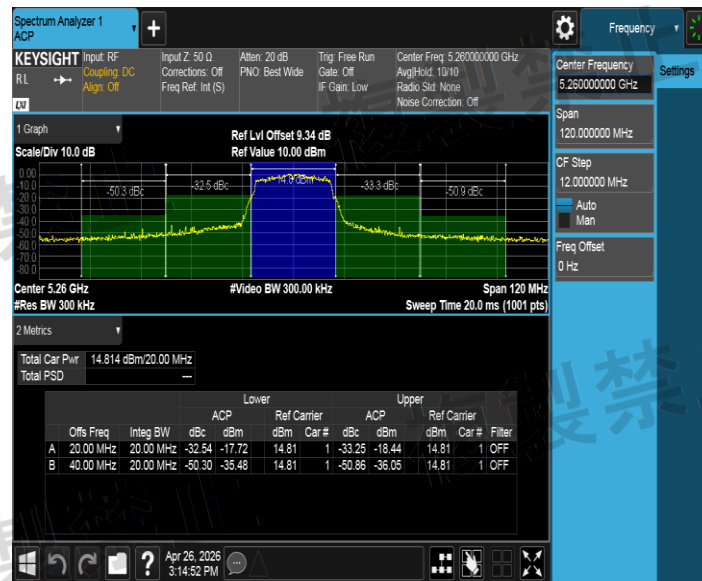


NTNV_11N20SISO_Ant1_5280

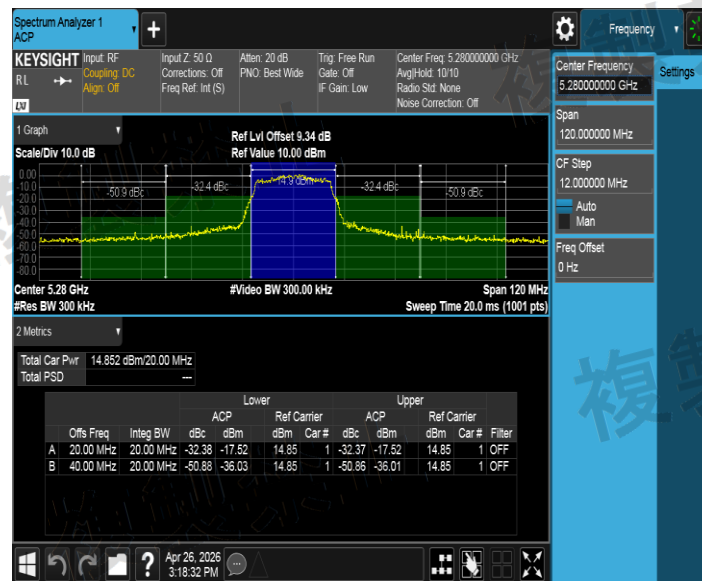


NTNV_11N20SISO_Ant1_5320

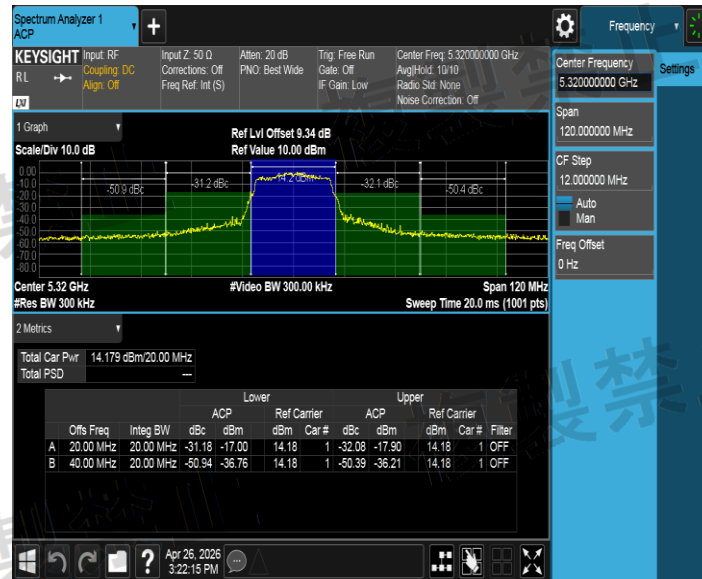


NTNV_11N20SISO_Ant1_5500

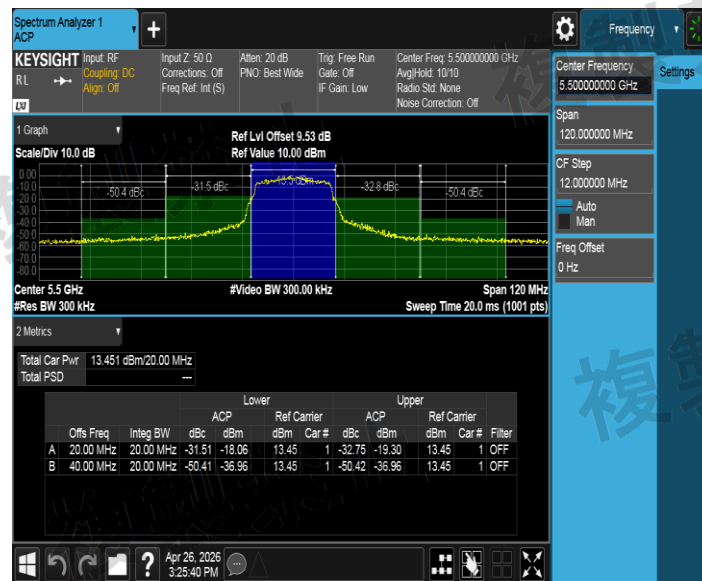


NTNV_11N20SISO_Ant1_5600

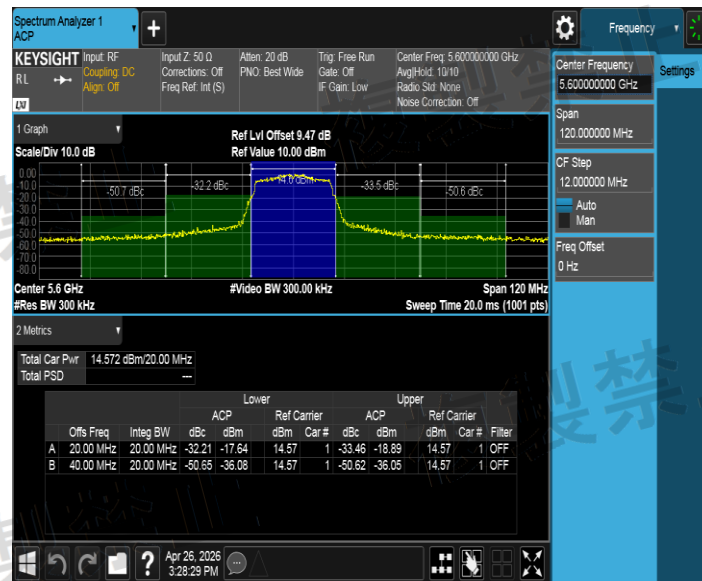


NTNV_11N20SISO_Ant1_5720

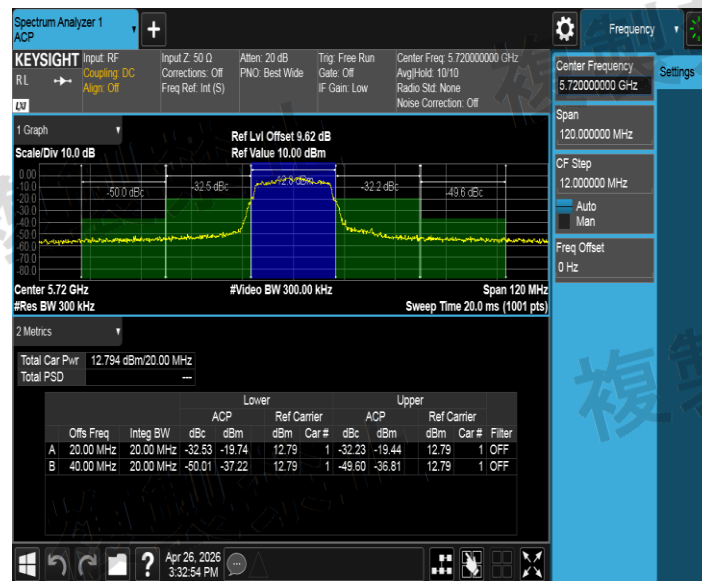


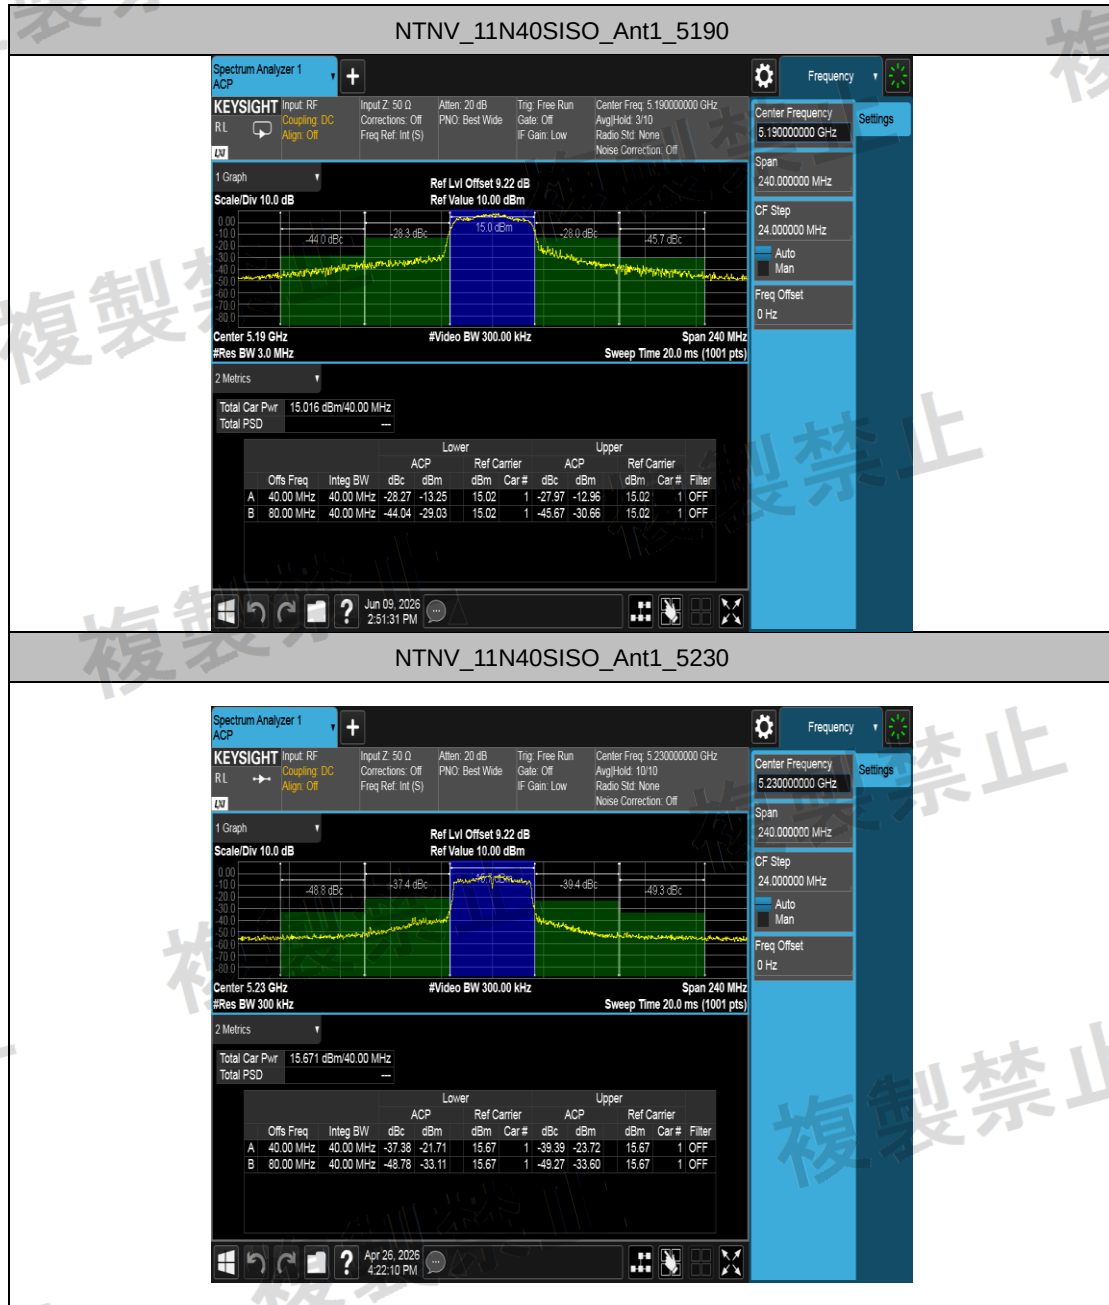


NTNV_11N40SISO_Ant1_5270

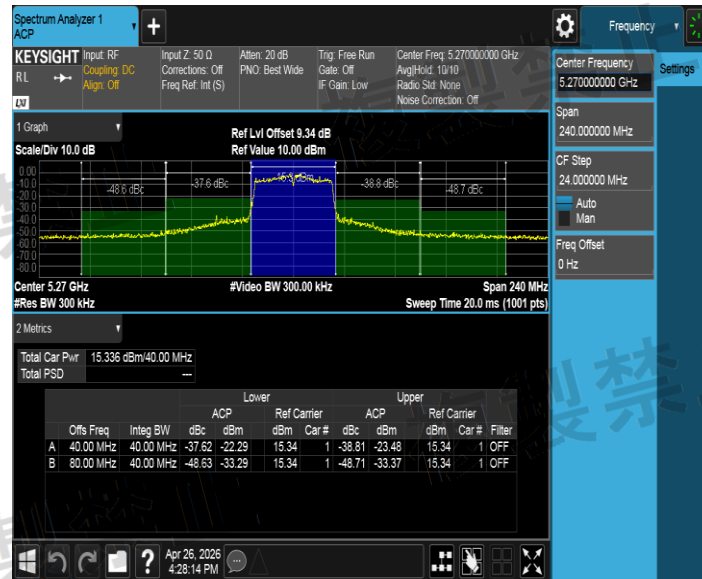


NTNV_11N40SISO_Ant1_5310

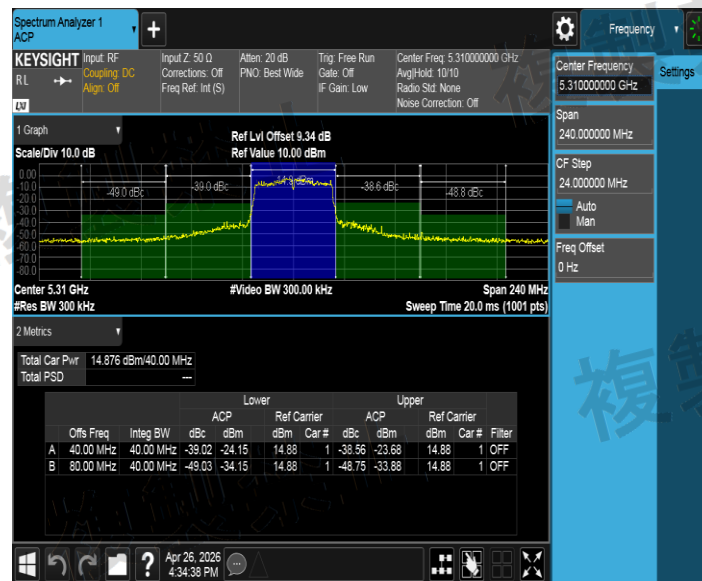


NTNV_11N40SISO_Ant1_5510

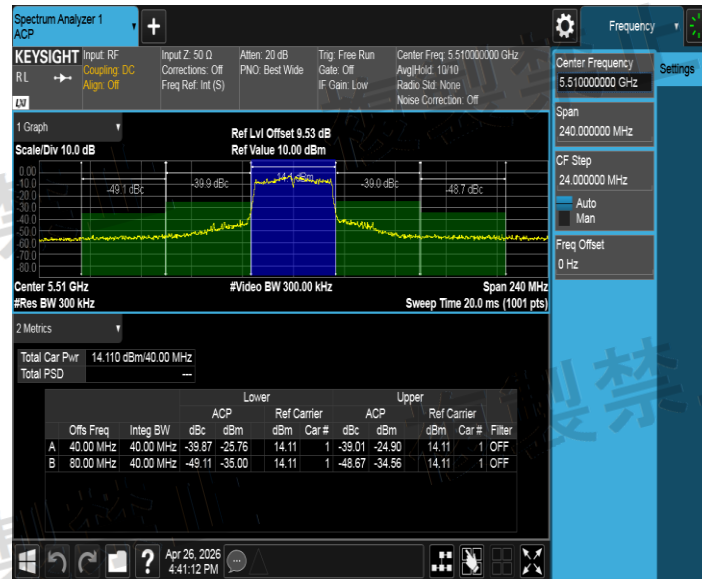


NTNV_11N40SISO_Ant1_5590

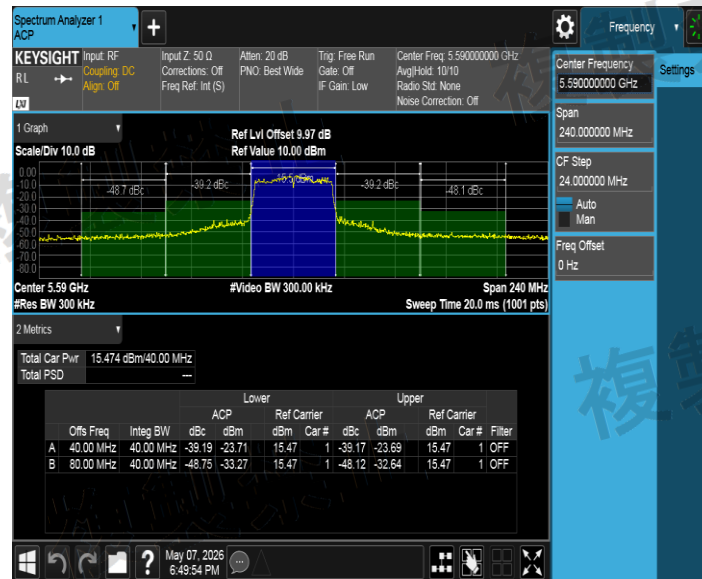


NTNV_11N40SISO_Ant1_5710

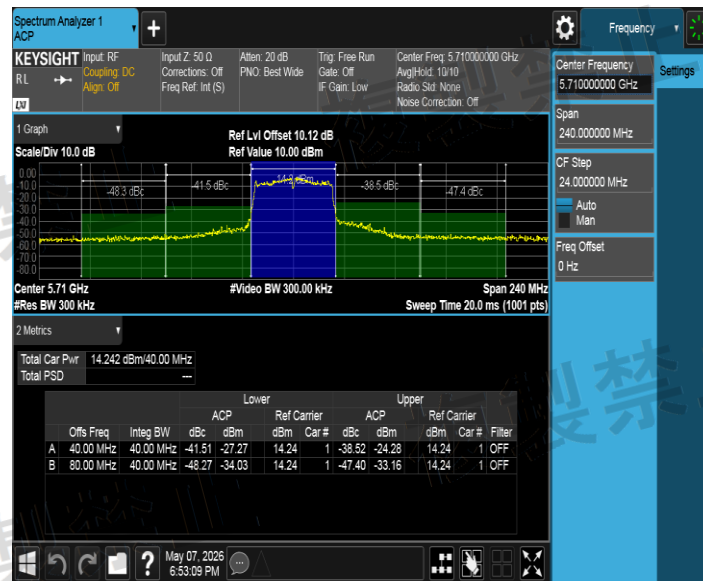


NTNV_11AC20SISO_Ant1_5180

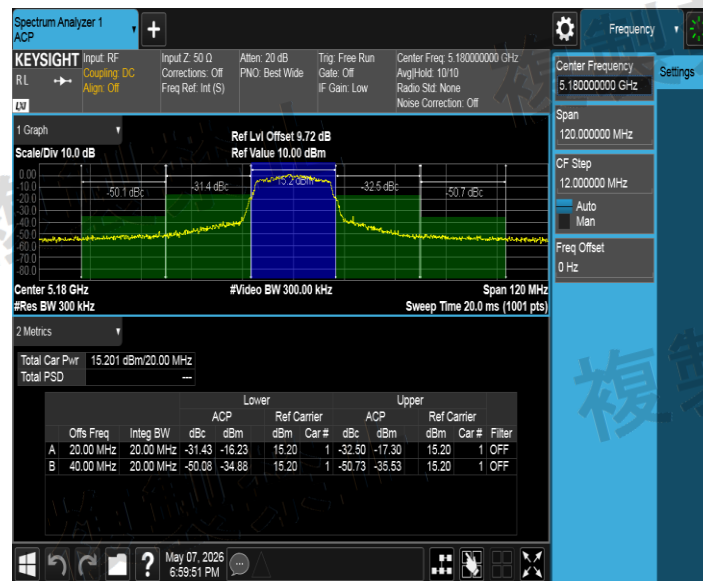


NTNV_11AC20SISO_Ant1_5200

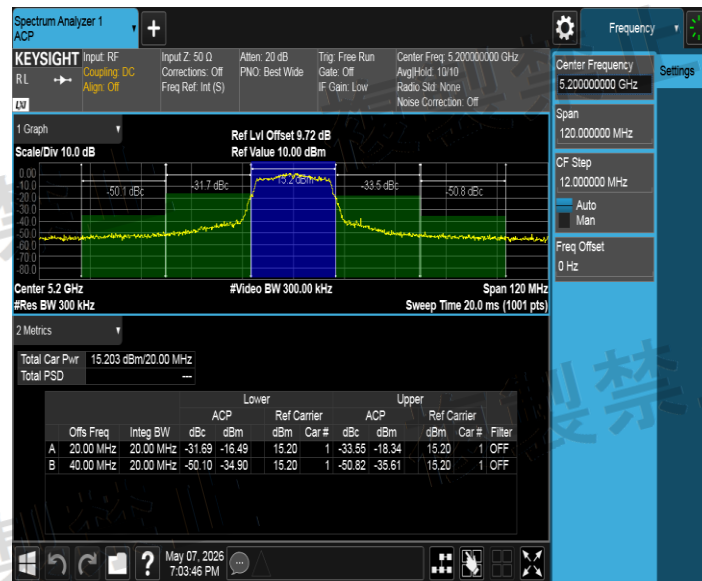


NTNV_11AC20SISO_Ant1_5240

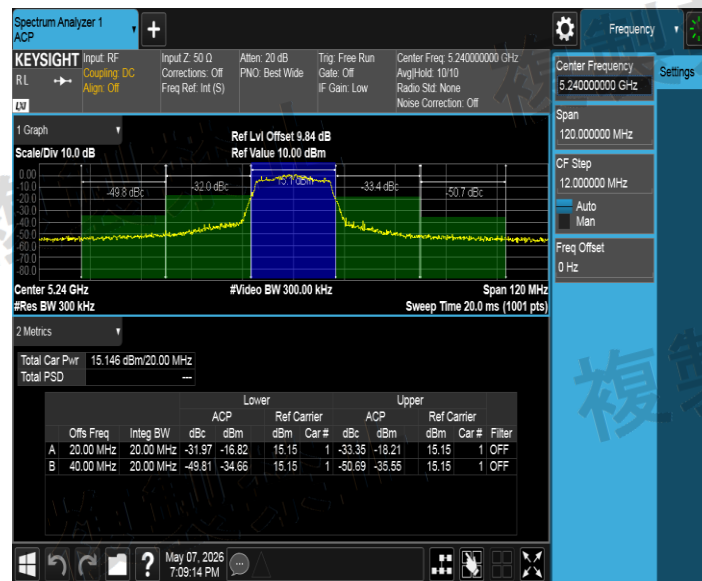


NTNV_11AC20SISO_Ant1_5260

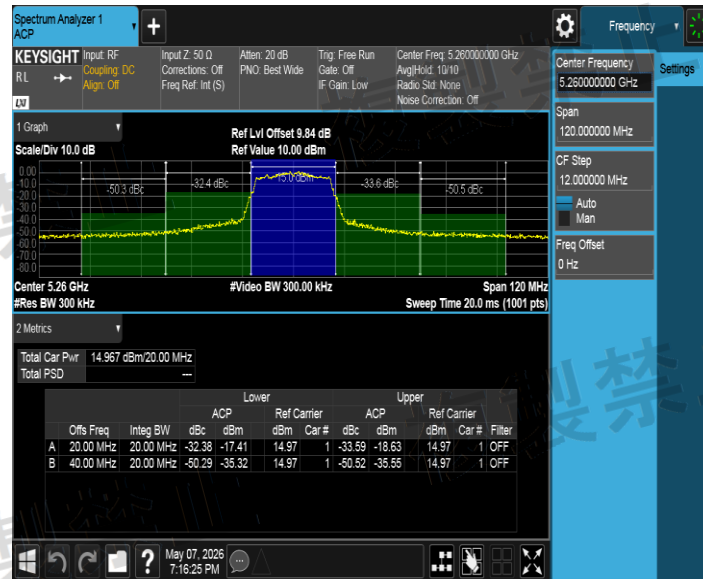


NTNV_11AC20SISO_Ant1_5280

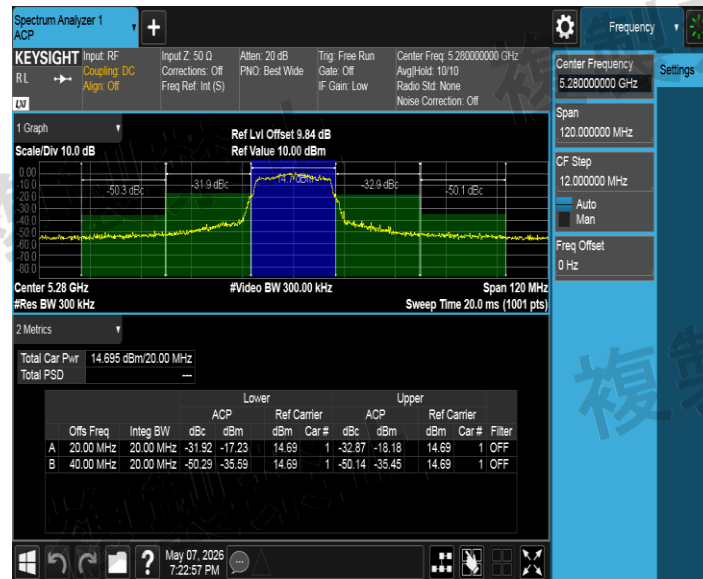


NTNV_11AC20SISO_Ant1_5320

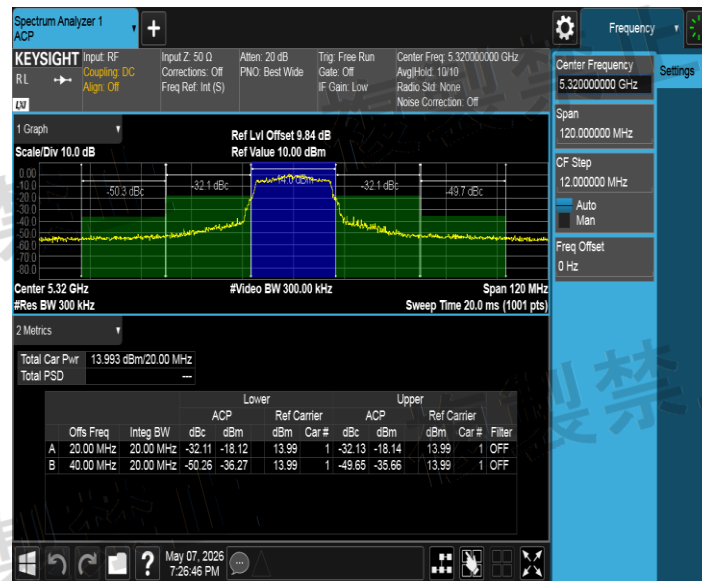


NTNV_11AC20SISO_Ant1_5500

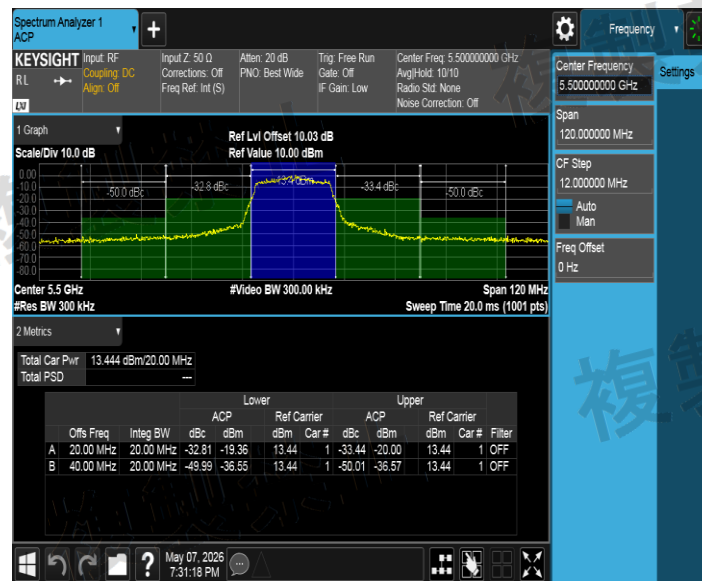


NTNV_11AC20SISO_Ant1_5600

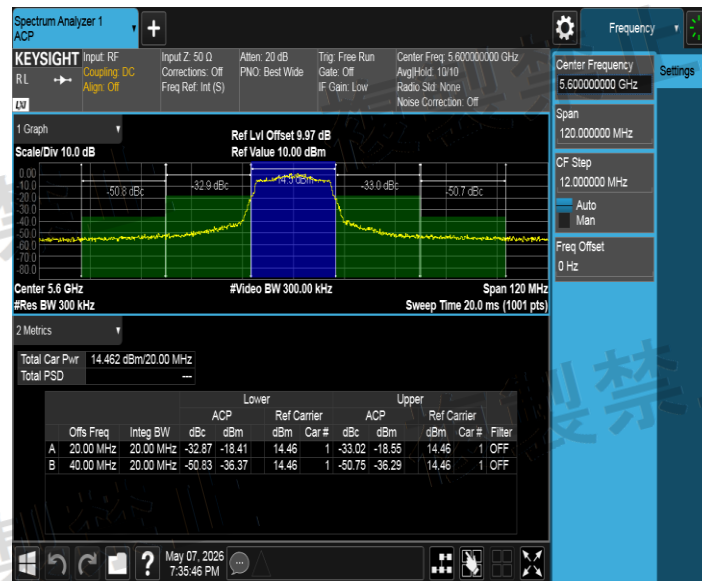


NTNV_11AC20SISO_Ant1_5720

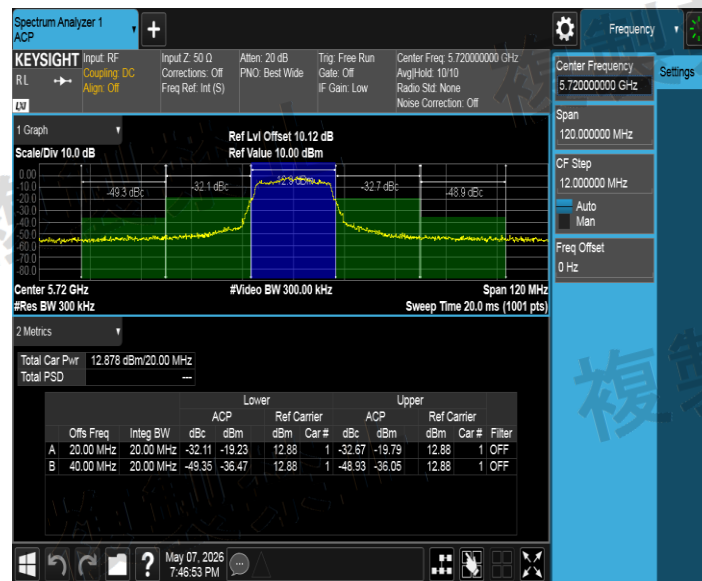


NTNV_11AC40SISO_Ant1_5190

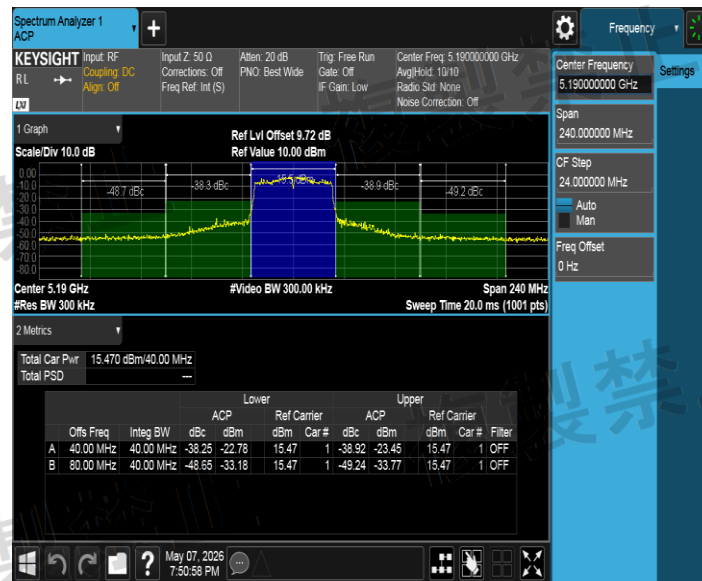


NTNV_11AC40SISO_Ant1_5230

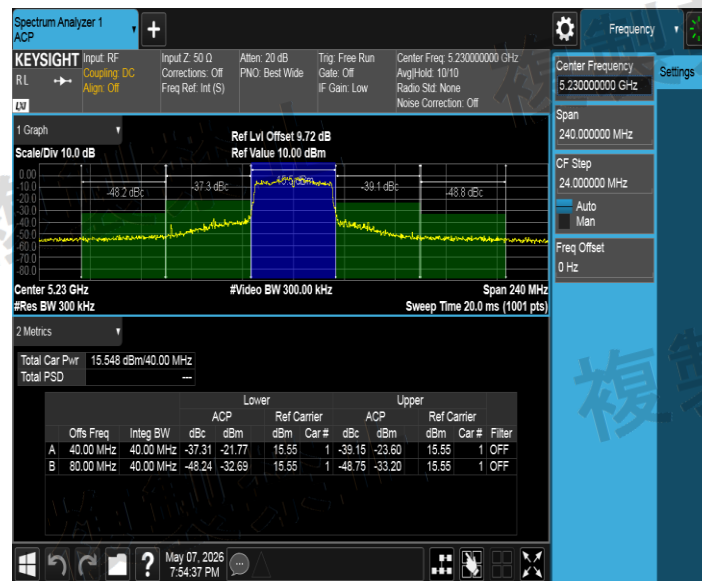


NTNV_11AC40SISO_Ant1_5270

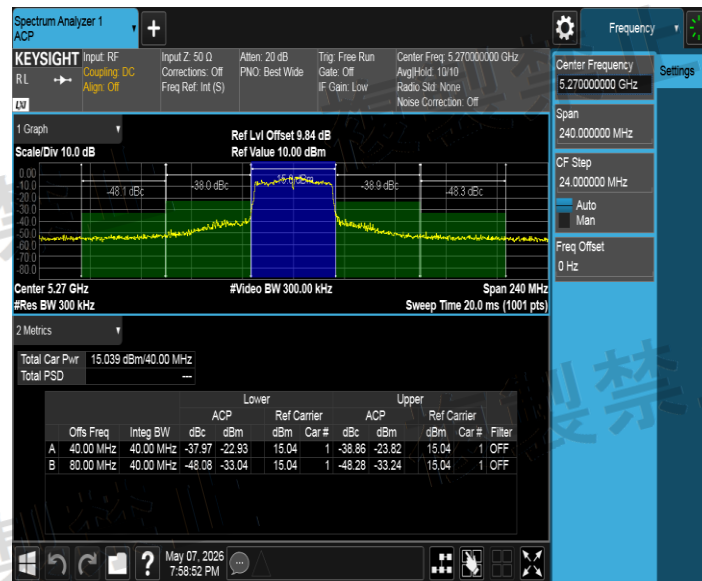


NTNV_11AC40SISO_Ant1_5310

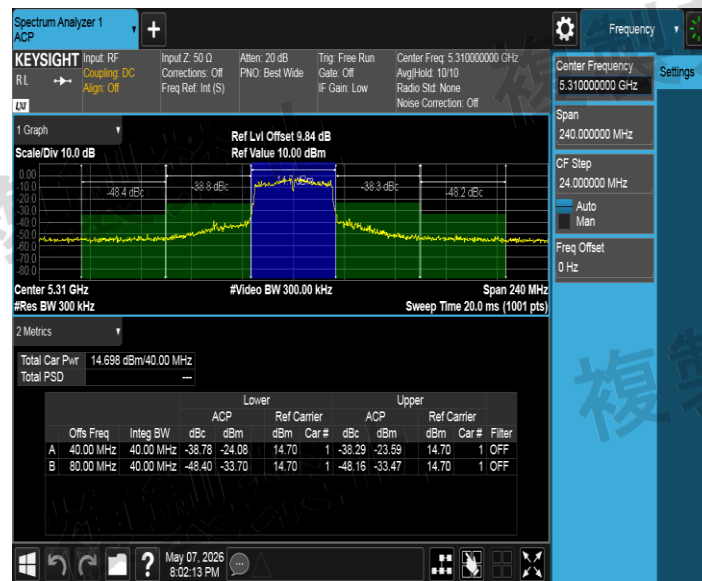


NTNV_11AC40SISO_Ant1_5510

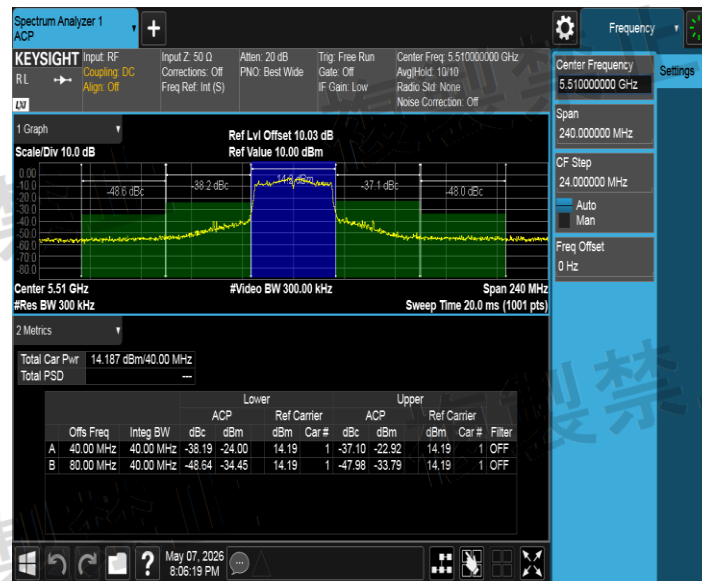


NTNV_11AC40SISO_Ant1_5590

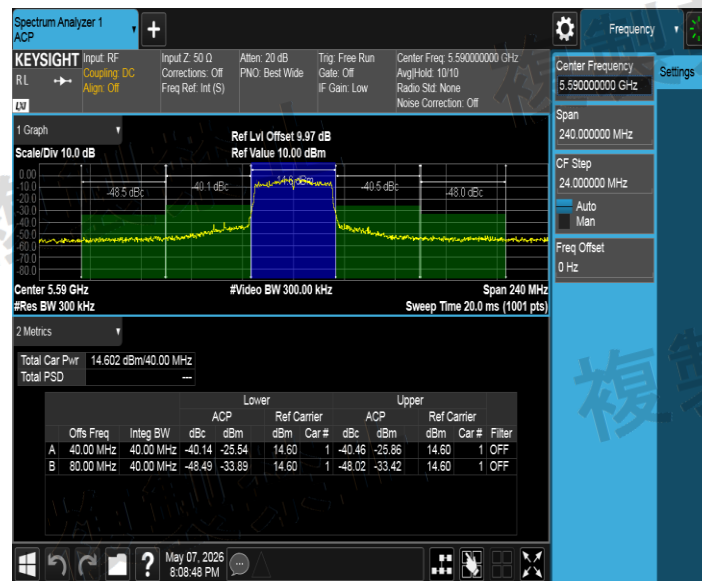


NTNV_11AC40SISO_Ant1_5710

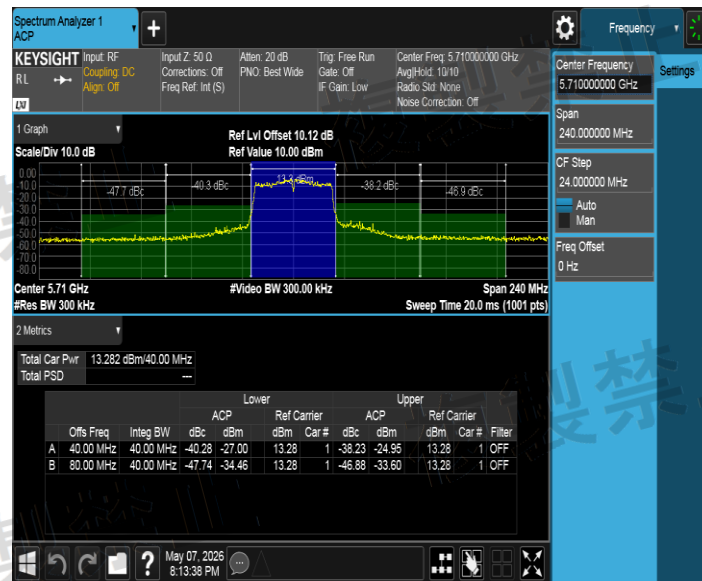


NTNV_11AC80SISO_Ant1_5210

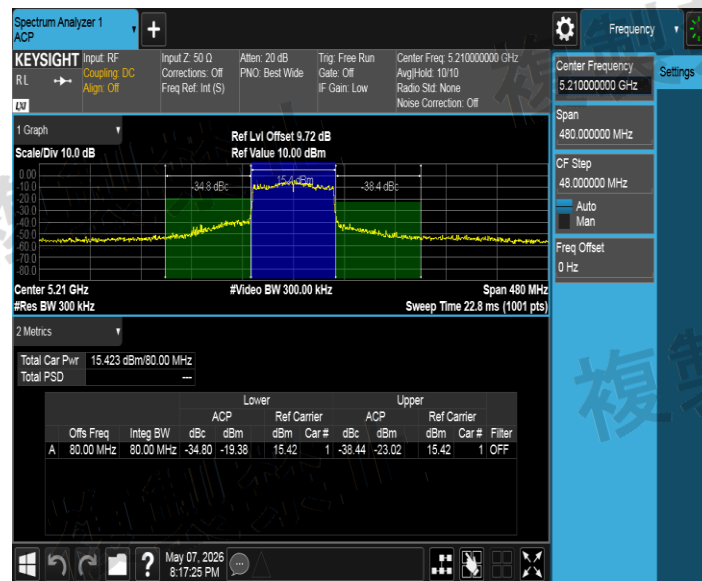


NTNV_11AC80SISO_Ant1_5290

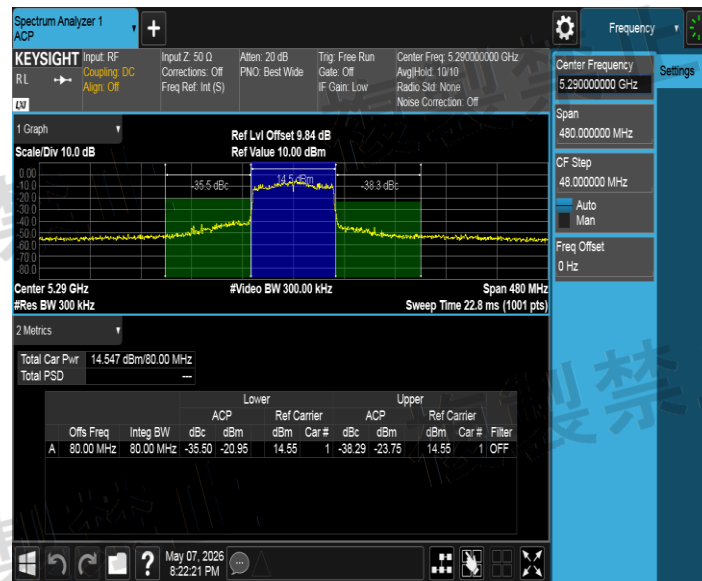


NTNV_11AC80SISO_Ant1_5530

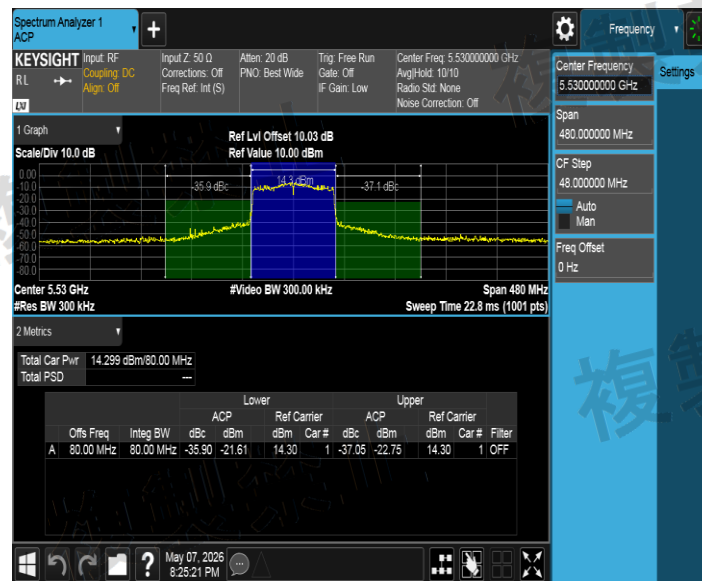

NTNV_11AC80SISO_Ant1_5610

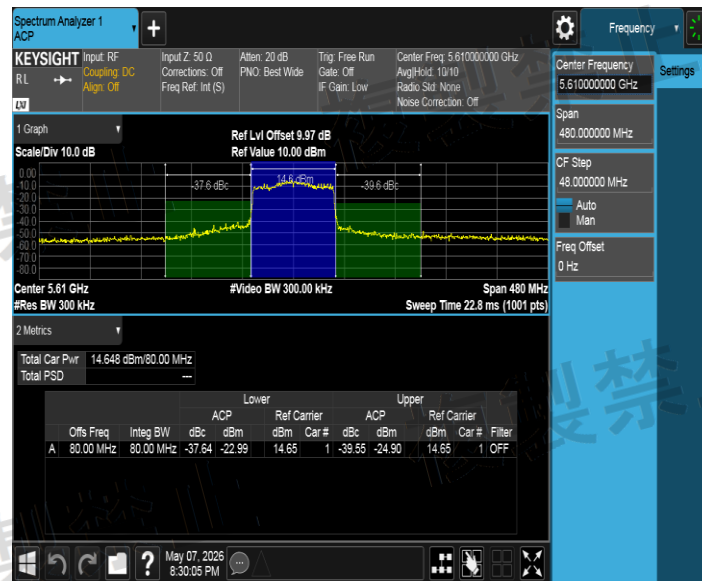

NTNV_11AC80SISO_Ant1_5690

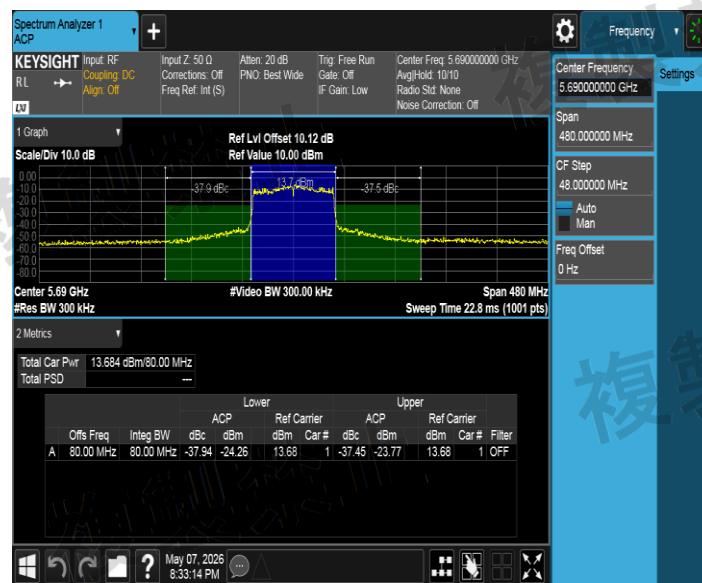

11. Limitation of Collateral Emission of Receiver

11.1. Limit

Item	Limits
RX Spurious Emission	$\leq 4 \text{ nW } (-54 \text{ dBm}) (f < 1\text{GHz})$ $\leq 20 \text{ nW } (-47 \text{ dBm}) (1\text{GHz} \leq f)$

11.2. Test Setup



11.3. Test Procedure

Spectrum Analyzer	Setting
Attenuation	Auto
RBW	$100 \text{ kHz: } 30 \text{ MHz} \leq f < 1000 \text{ MHz}$ $1 \text{ MHz: } 1000 \text{ MHz} \leq f < 5\text{th Harmonics}$
VBW	$100 \text{ kHz: } 30 \text{ MHz} \leq f < 1000 \text{ MHz}$ $1 \text{ MHz: } 1000 \text{ MHz} \leq f < 5\text{th Harmonics}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

a. EUT have the continuous reception mode and fixed only one channelize.

Start frequency 30MHz and stop frequency 1000MHz. Search to mark peak reading value + cable loss shall be less than 4nW.

Start frequency 1000MHz and stop frequency 5th Harmonics. Search to mark peak reading value + cable loss shall be less than 20nW.

Max. frequency point of power level of lower emissions is to be indicated in each paragraph.

b. If the power level of Max. frequency point in the pre-scan higher than the limit, then using the Max. frequency point as a benchmark, narrow down the test, find the real highest point, and read the point follow below:

Spectrum Analyzer	Setting
Attenuation	Auto
RBW	100 kHz: $30\text{ MHz} \leq f < 1000\text{ MHz}$ 1 MHz: $1000\text{ MHz} \leq f < 5\text{th Harmonics}$
VBW	100 kHz: $30\text{ MHz} \leq f < 1000\text{ MHz}$ 1 MHz: $1000\text{ MHz} \leq f < 5\text{th Harmonics}$
SPAN	0 MHz
Detector	RMS
Trace	Clear write
Sweep Time	Auto

11.4. Test Result

Test environment:

Temperature:	23.1~27.5 °C
Relative Humidity:	46~51 %
ATM Pressure:	100.2~101.5 kPa
Test Date (yy-mm-dd):	2026-04-20~2026-06-01
Test Voltage:	DC 5V
Test Engineer:	Stone Zhang

Test Data:

Test Condition	Test Mode	Antenna	Frequency Frequency (MHz)	Frequency Range [MHz]	Frequency. [MHz]	Result [dBm]	Limit [dBm]	Result [nW]	Limit [nW]	Verdict
NTNV	11A	Ant1	5180	30~1000	165.80	-70.18	≤-54	0.09594	≤4	PASS
				1000~26000	25682.50	-60.13	≤-47	0.97051	≤20	PASS
			5200	30~1000	165.80	-70.99	≤-54	0.07962	≤4	PASS
				1000~26000	24318.75	-60.00	≤-47	1.00000	≤20	PASS
			5240	30~1000	166.77	-71.43	≤-54	0.07194	≤4	PASS
				1000~26000	25632.50	-59.51	≤-47	1.11944	≤20	PASS
			5260	30~1000	716.76	-58.19	≤-54	1.51705	≤4	See table

		Ant1								below		
				1000~26000	2451.25	-56.41	≤-47	2.28560	≤20	See table below		
			5280	30~1000	726.46	-49.42	≤-54	11.42878	≤4	See table below		
				1000~26000	1751.25	-48.63	≤-47	13.70882	≤20	See table below		
			5320	30~1000	728.40	-65.20	≤-54	0.30200	≤4	PASS		
				1000~26000	25950.00	-59.50	≤-47	1.12202	≤20	PASS		
			5500	30~1000	165.80	-69.87	≤-54	0.10304	≤4	PASS		
				1000~26000	2451.25	-55.37	≤-47	2.90402	≤20	See table below		
			5600	30~1000	165.80	-72.08	≤-54	0.06194	≤4	PASS		
				1000~26000	25710.00	-59.54	≤-47	1.11173	≤20	PASS		
			5720	30~1000	166.77	-70.09	≤-54	0.09795	≤4	PASS		
				1000~26000	25780.00	-60.13	≤-47	0.97051	≤20	PASS		
			11N20SISO	Ant1	5180	30~1000	705.12	-43.17	≤-54	48.19478	≤4	See table below
						1000~26000	1762.5	-41.75	≤-47	66.83439	≤20	See table below
					5200	30~1000	165.80	-69.59	≤-54	0.10990	≤4	PASS
	1000~26000	23612.50				-59.34	≤-47	1.16413	≤20	PASS		
	5240	30~1000			166.77	-70.04	≤-54	0.09908	≤4	PASS		
		1000~26000			25973.75	-59.97	≤-47	1.00693	≤20	PASS		
	5260	30~1000			165.80	-69.69	≤-54	0.10740	≤4	PASS		
		1000~26000			25780.00	-59.30	≤-47	1.17490	≤20	PASS		
	5280	30~1000			165.80	-69.88	≤-54	0.10280	≤4	PASS		
		1000~26000			25750.00	-59.70	≤-47	1.07152	≤20	PASS		
	5320	30~1000	165.80	-70.43	≤-54	0.09057	≤4	PASS				
		1000~26000	2480.00	-57.95	≤-47	1.60325	≤20	PASS				
	5500	30~1000	165.80	-69.87	≤-54	0.10304	≤4	PASS				

				1000~26000	1951.25	-54.87	≤-47	3.25837	≤20	See table below
				30~1000	165.80	-70.05	≤-54	0.09886	≤4	PASS
			5600	1000~26000	25750.00	-59.66	≤-47	1.08143	≤20	PASS
				30~1000	165.80	-70.13	≤-54	0.09705	≤4	PASS
			5700	1000~26000	1952.5	-51.03	≤-47	7.88860	≤20	See table below
				30~1000	165.80	-69.96	≤-54	0.10093	≤4	PASS
			5720	1000~26000	1956.25	-57.06	≤-47	1.96789	≤20	PASS
				30~1000	165.80	-70.05	≤-54	0.09886	≤4	PASS
			5190	1000~26000	1956.25	-54.63	≤-47	3.44350	≤20	See table below
				30~1000	722.1	-54.06	≤-54	3.92645	≤4	See table below
11N40SISO	Ant1		5230	1000~26000	25978.75	-59.13	≤-47	1.22180	≤20	PASS
				30~1000	166.77	-70.63	≤-54	0.08650	≤4	PASS
			5270	1000~26000	24970.00	-59.66	≤-47	1.08143	≤20	PASS
				30~1000	165.80	-70.23	≤-54	0.09484	≤4	PASS
			5310	1000~26000	25098.75	-59.85	≤-47	1.03514	≤20	PASS
				30~1000	165.80	-70.53	≤-54	0.08851	≤4	PASS
			5510	1000~26000	25456.25	-59.44	≤-47	1.13763	≤20	PASS
				30~1000	165.80	-70.03	≤-54	0.09931	≤4	PASS
			5590	1000~26000	25638.75	-59.51	≤-47	1.11944	≤20	PASS
				30~1000	165.80	-70.47	≤-54	0.08974	≤4	PASS
			5710	1000~26000	25690.00	-59.70	≤-47	1.07152	≤20	PASS
				30~1000	165.80	-70.51	≤-54	0.08892	≤4	PASS
11AC20SISO	Ant1		5180	1000~26000	25760.00	-59.45	≤-47	1.13501	≤20	PASS
				30~1000	165.80	-70.09	≤-54	0.09795	≤4	PASS
			5200	1000~26000	25482.50	-59.26	≤-47	1.18577	≤20	PASS
				30~1000	165.80	-74.92	≤-54	0.03221	≤4	PASS
			5240	1000~26000	25735.00	-59.08	≤-47	1.23595	≤20	PASS
				30~1000	705.61	-62.86	≤-54	0.51761	≤4	See table below



			5260	30~1000	166.77	-70.80	≤-54	0.08318	≤4	PASS
				1000~26000	25612.50	-59.62	≤-47	1.09144	≤20	PASS
			5300	30~1000	717.25	-48.33	≤-54	14.68926	≤4	See table below
				1000~26000	2448.75	-57.43	≤-47	1.80717	≤20	PASS
			5320	30~1000	716.76	-46.00	≤-54	25.11886	≤4	See table below
				1000~26000	25923.75	-59.88	≤-47	1.02802	≤20	PASS
			5500	30~1000	165.80	-70.41	≤-54	0.09099	≤4	PASS
				1000~26000	25781.25	-60.23	≤-47	0.94842	≤20	PASS
			5600	30~1000	704.15	-56.38	≤-54	2.30144	≤4	See table below
				1000~26000	25622.50	-59.79	≤-47	1.04954	≤20	PASS
			5720	30~1000	705.61	-61.39	≤-54	0.72611	≤4	See table below
				1000~26000	25575.00	-59.64	≤-47	1.08643	≤20	PASS
	11AC40SISO	Ant1	5190	30~1000	165.80	-70.55	≤-54	0.08810	≤4	PASS
				1000~26000	25835.00	-59.97	≤-47	1.00693	≤20	PASS
			5230	30~1000	165.80	-70.64	≤-54	0.08630	≤4	PASS
				1000~26000	25693.75	-59.36	≤-47	1.15878	≤20	PASS
			5270	30~1000	165.80	-70.28	≤-54	0.09376	≤4	PASS
				1000~26000	25753.75	-59.47	≤-47	1.12980	≤20	PASS
			5310	30~1000	165.80	-70.98	≤-54	0.07980	≤4	PASS
				1000~26000	25548.75	-60.10	≤-47	0.97724	≤20	PASS
			5510	30~1000	165.80	-70.80	≤-54	0.08318	≤4	PASS
				1000~26000	25766.25	-58.86	≤-47	1.30017	≤20	PASS
			5590	30~1000	727.43	-65.79	≤-54	0.26363	≤4	PASS
				1000~26000	25470.00	-59.63	≤-47	1.08893	≤20	PASS
			5710	30~1000	710.94	-61.10	≤-54	0.77625	≤4	See table below
				1000~26000	25661.25	-59.77	≤-47	1.05439	≤20	PASS
	11AC80SISO	Ant1	5210	30~1000	165.80	-71.29	≤-54	0.07430	≤4	PASS




				1000~26000	25685.00	-58.95	≤-47	1.27350	≤20	PASS
			5290	30~1000	166.77	-71.85	≤-54	0.06531	≤4	PASS
				1000~26000	25761.25	-60.30	≤-47	0.93325	≤20	PASS
			5530	30~1000	165.80	-71.05	≤-54	0.07852	≤4	PASS
				1000~26000	25695.00	-59.55	≤-47	1.10917	≤20	PASS
			5610	30~1000	165.80	-71.38	≤-54	0.07278	≤4	PASS
				1000~26000	25795.00	-59.67	≤-47	1.07895	≤20	PASS
			5690	30~1000	165.80	-71.08	≤-54	0.07798	≤4	PASS
				1000~26000	25660.00	-59.76	≤-47	1.05682	≤20	PASS


Test Result_Step2

Test Condition	Test Mode	Antenna	Frequency (MHz)	Frequency [MHz]	Result [dBm]	Limit [dBm]	Result [nW]	Limit [nW]	Verdict
NTNV	11A	Ant1	5260	716.76	-96.78	≤-54	0.00021	≤4	PASS
			5280	726.46	-62.39	≤-54	0.57677	≤4	PASS
				1751.25	-85.04	≤-47	0.00313	≤20	PASS
			5500	2451.25	-57.84	≤-47	1.64437	≤20	PASS
	11N20SISO	Ant1	5180	705.12	-96.96	≤-54	0.00020	≤4	PASS
				1727.50	-85.10	≤-47	0.00309	≤20	PASS
				1762.50	-84.90	≤-47	0.00324	≤20	PASS
			5500	1951.25	-84.35	≤-47	0.00367	≤20	PASS
				5103.75	-78.65	≤-47	0.01365	≤20	PASS
			5700	1952.50	-77.06	≤-47	0.01968	≤20	PASS
	11N40SISO	Ant1	5190	722.10	-88.25	≤-54	0.00150	≤4	PASS
				1956.25	-64.87	≤-47	0.32584	≤20	PASS
	11AC20SISO	Ant1	5300	717.25	-94.74	≤-54	0.00034	≤4	PASS
			5320	716.76	-97.21	≤-54	0.00019	≤4	PASS
			5600	704.15	-82.40	≤-54	0.00575	≤4	PASS
			5720	705.61	-57.96	≤-54	1.59956	≤4	PASS
	11AC40SISO	Ant1	5710	710.94	-93.83	≤-54	0.00041	≤4	PASS


Test Plots:

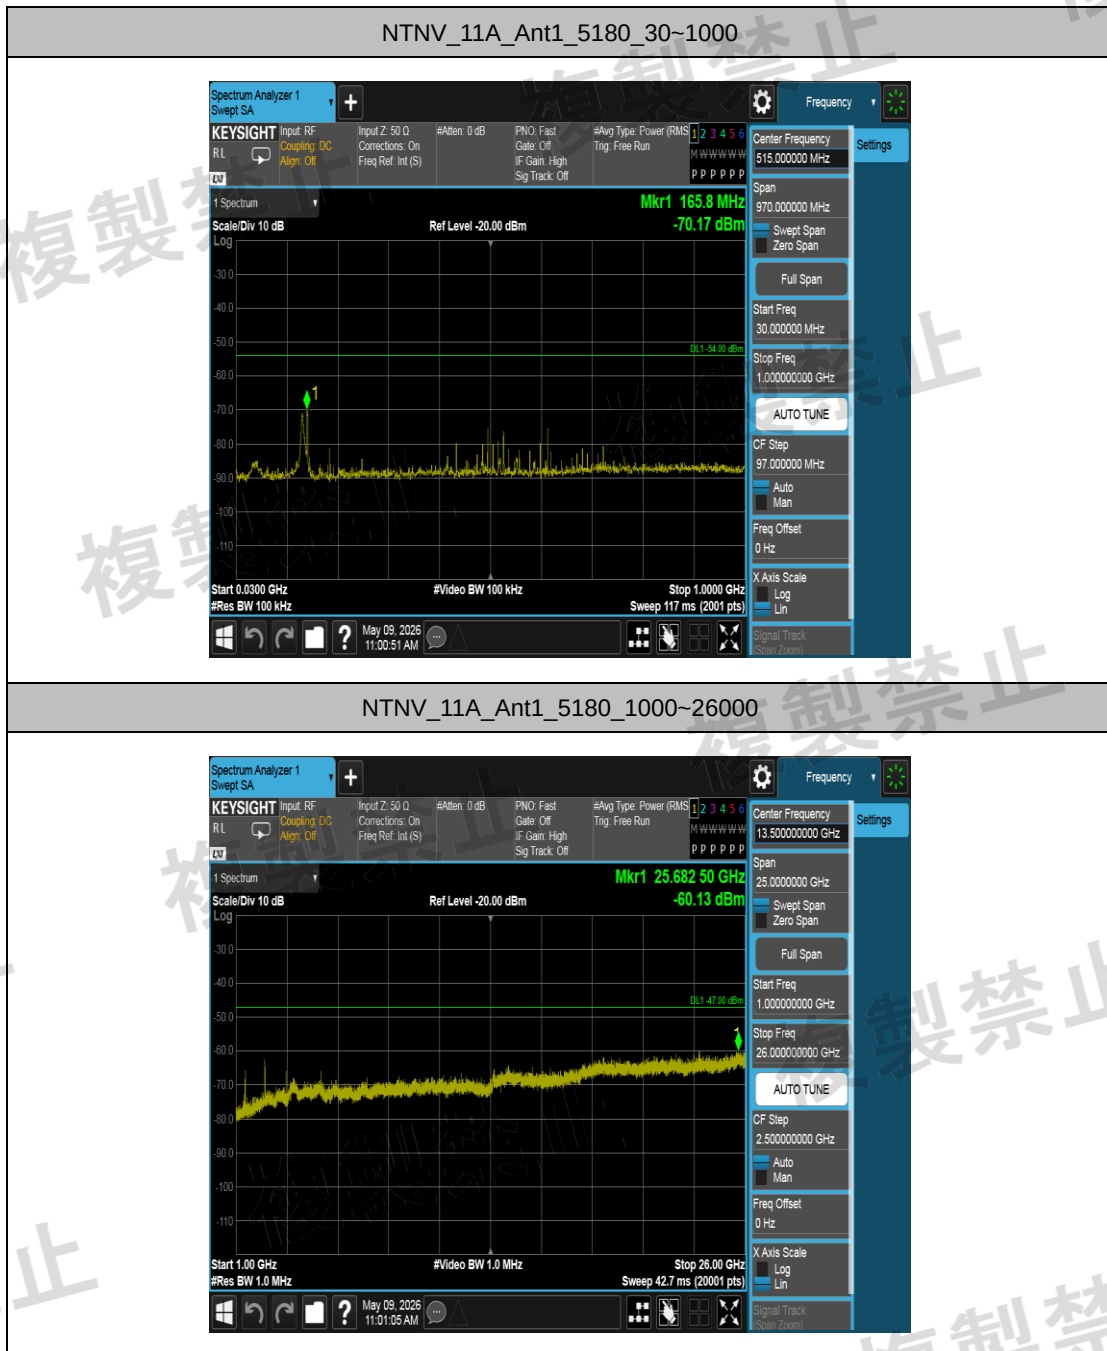


NTNV_11A_Ant1_5200_30~1000

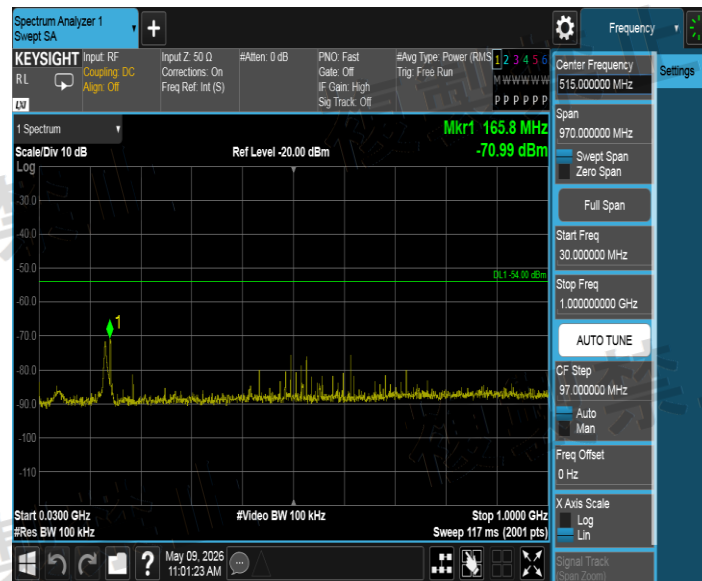


NTNV_11A_Ant1_5200_1000~26000

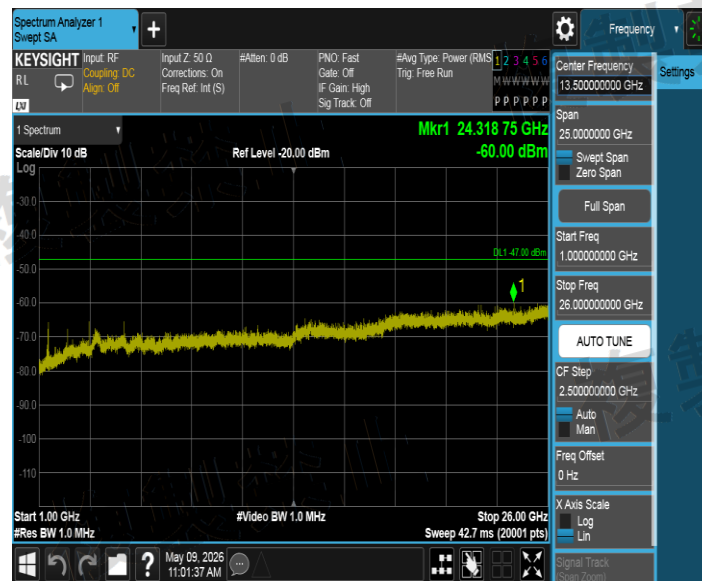


NTNV_11A_Ant1_5240_30~1000

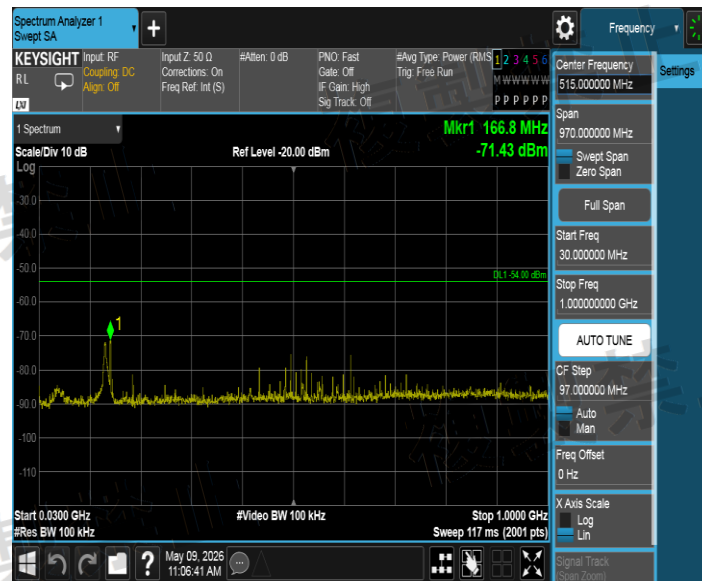


NTNV_11A_Ant1_5240_1000~26000

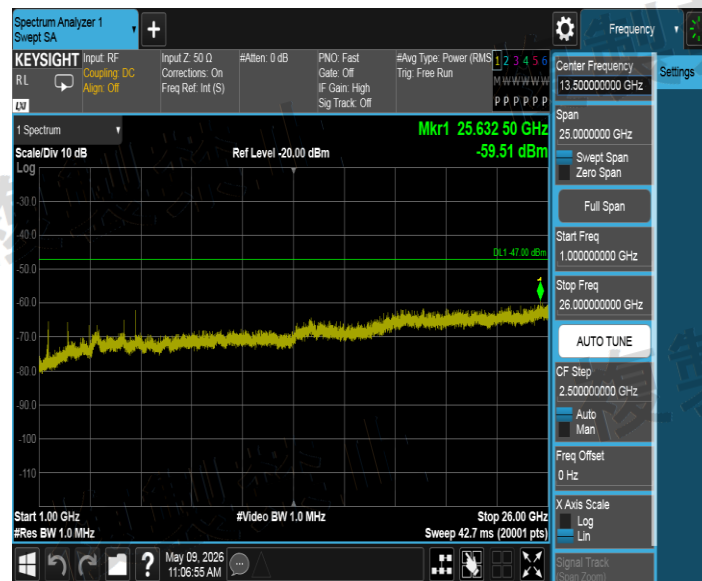


NTNV_11A_Ant1_5260_30~1000

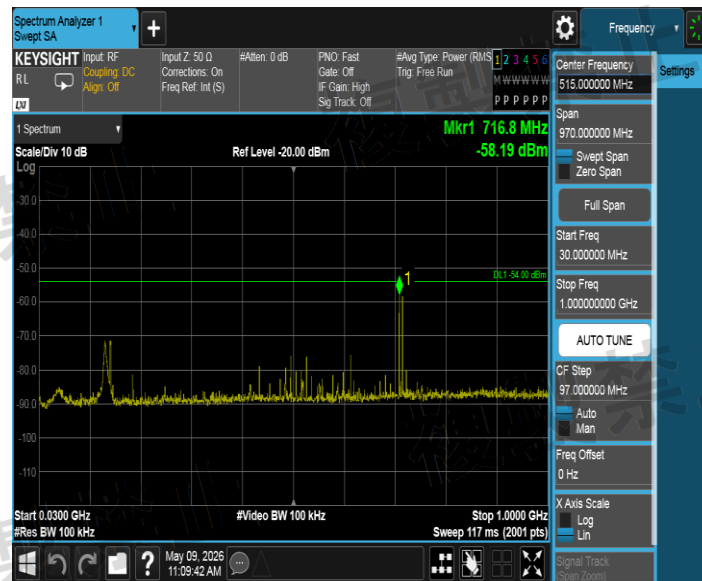


NTNV_11A_Ant1_5260_1000~26000

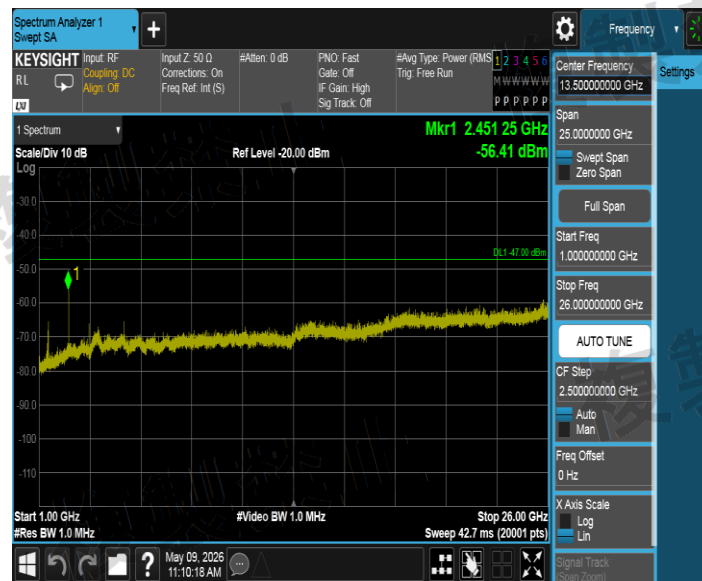


NTNV_11A_Ant1_5280_30~1000

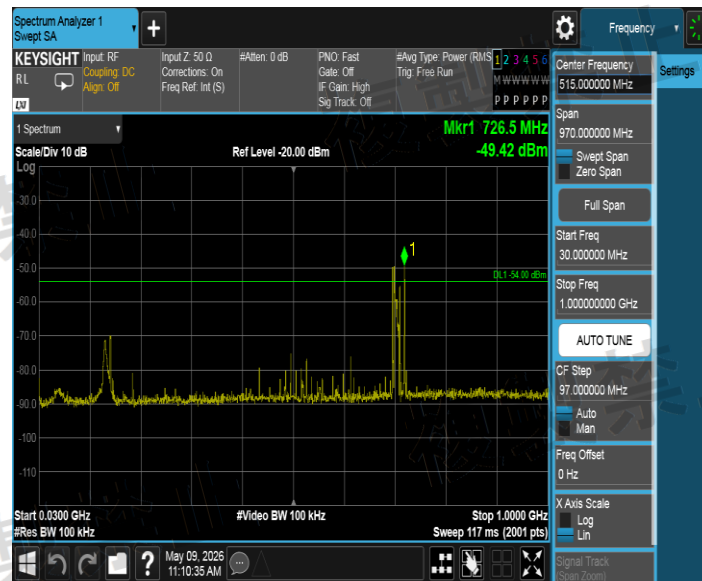


NTNV_11A_Ant1_5280_1000~26000

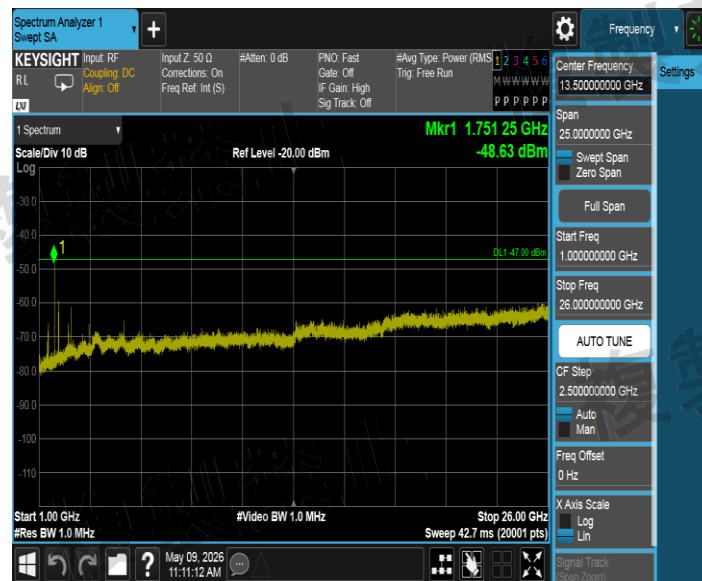


NTNV_11A_Ant1_5320_30~1000

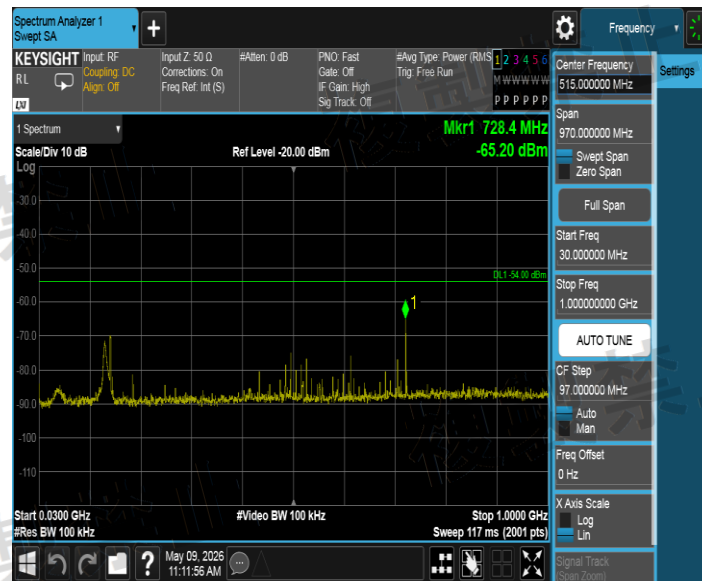


NTNV_11A_Ant1_5320_1000~26000

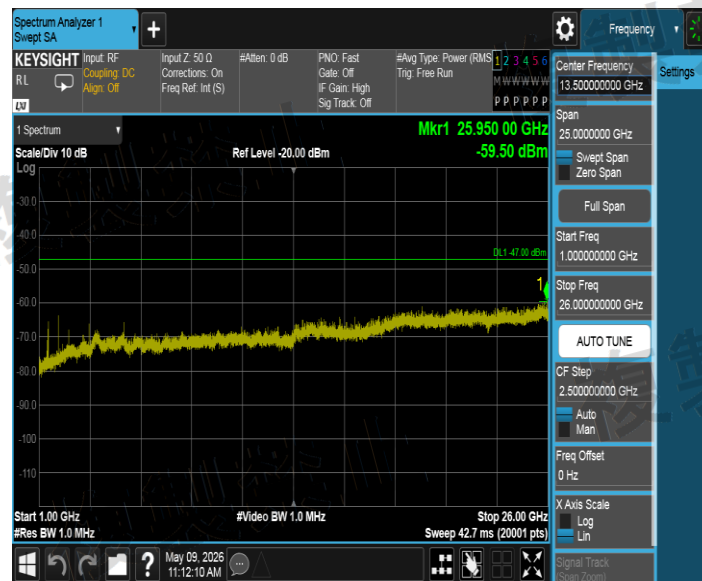


NTNV_11A_Ant1_5500_30~1000

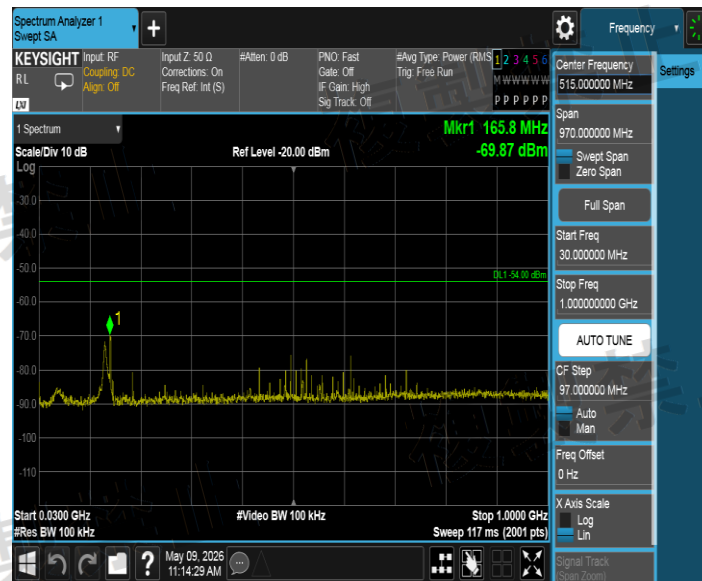


NTNV_11A_Ant1_5500_1000~26000

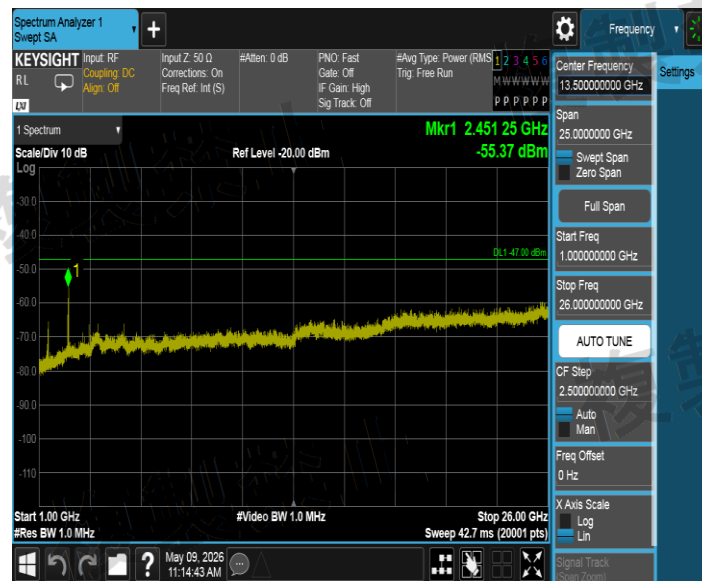


NTNV_11A_Ant1_5600_30~1000

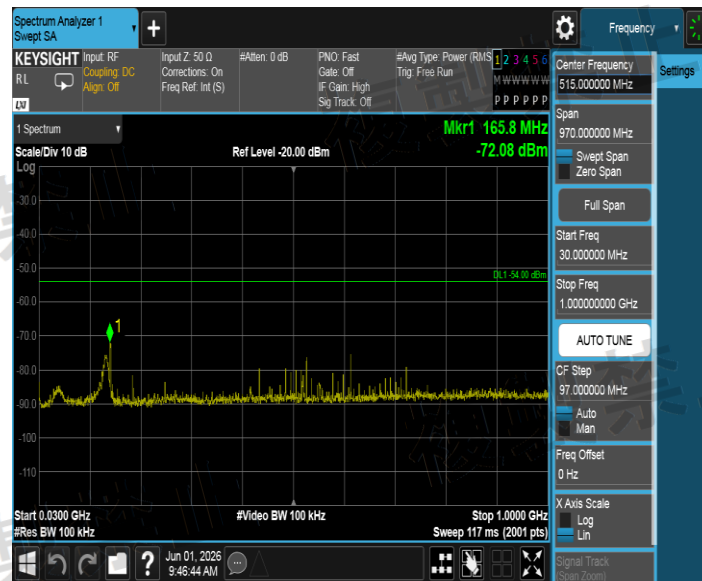


NTNV_11A_Ant1_5600_1000~26000

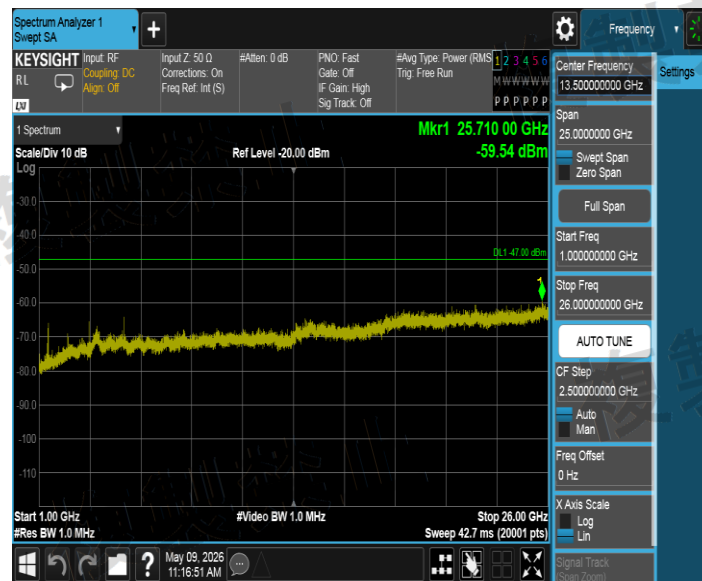


NTNV_11A_Ant1_5720_30~1000

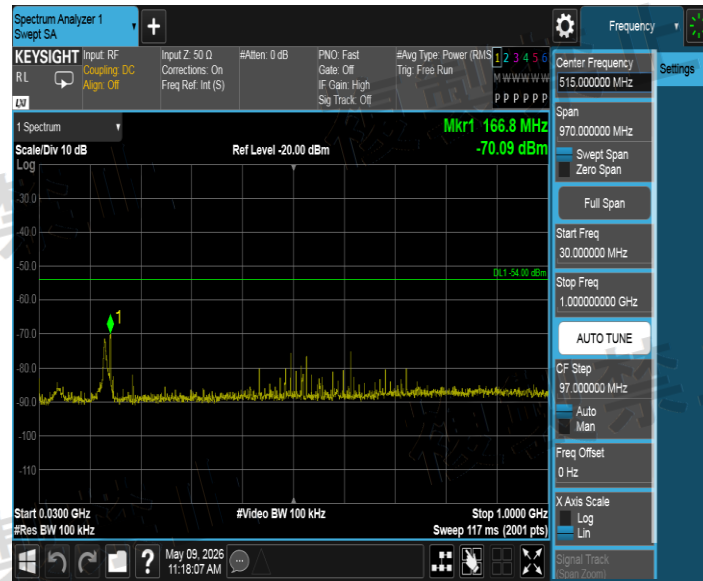


NTNV_11A_Ant1_5720_1000~26000

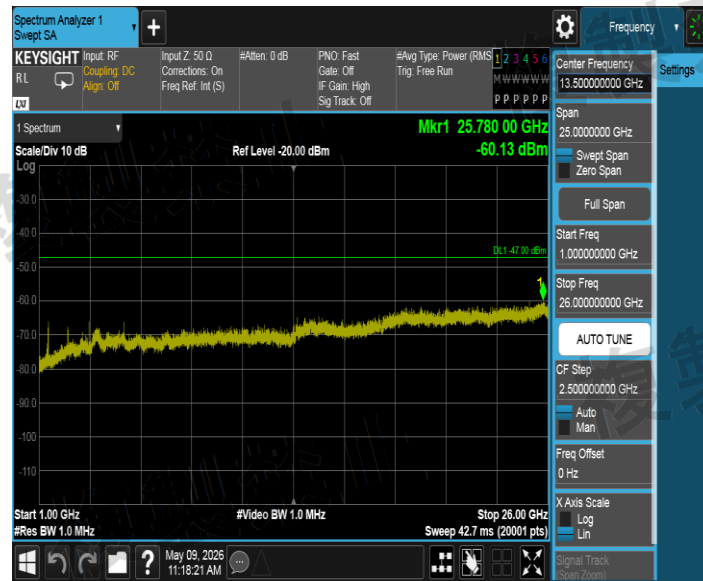


NTNV_11N20SISO_Ant1_5180_30~1000

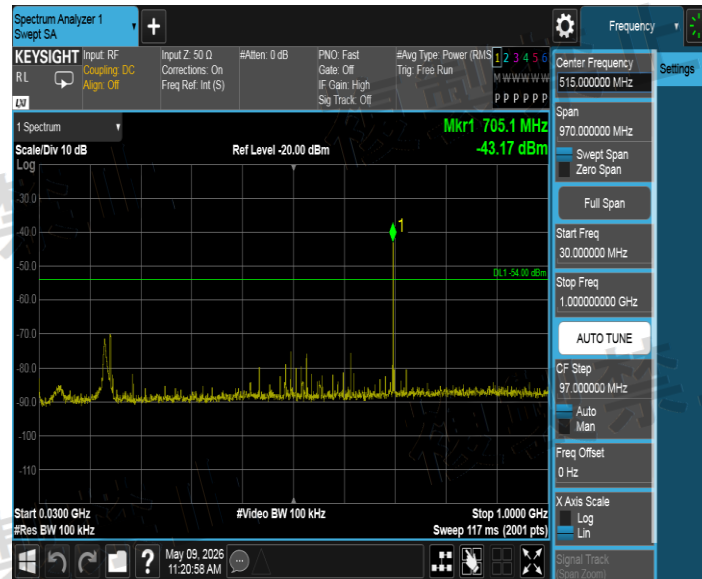


NTNV_11N20SISO_Ant1_5180_1000~26000

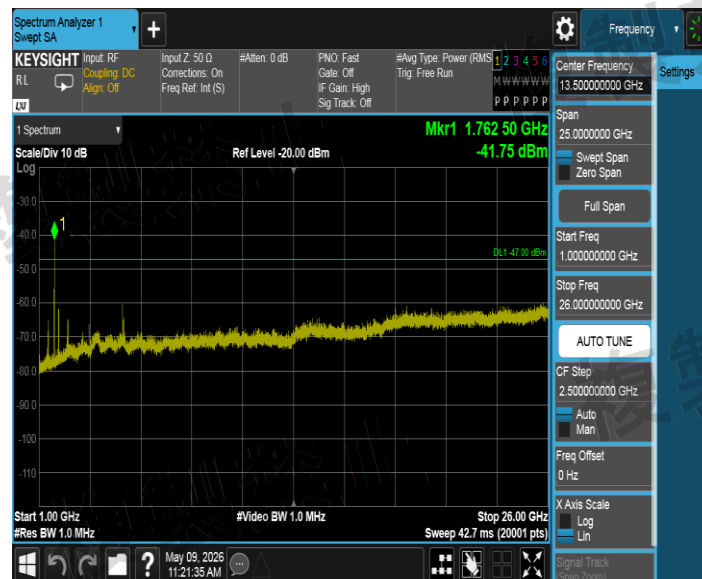


NTNV_11N20SISO_Ant1_5200_30~1000

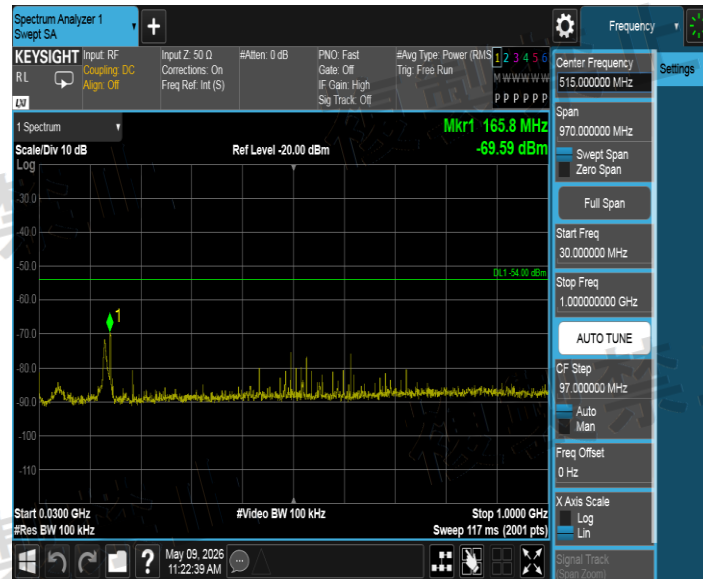


NTNV_11N20SISO_Ant1_5200_1000~26000

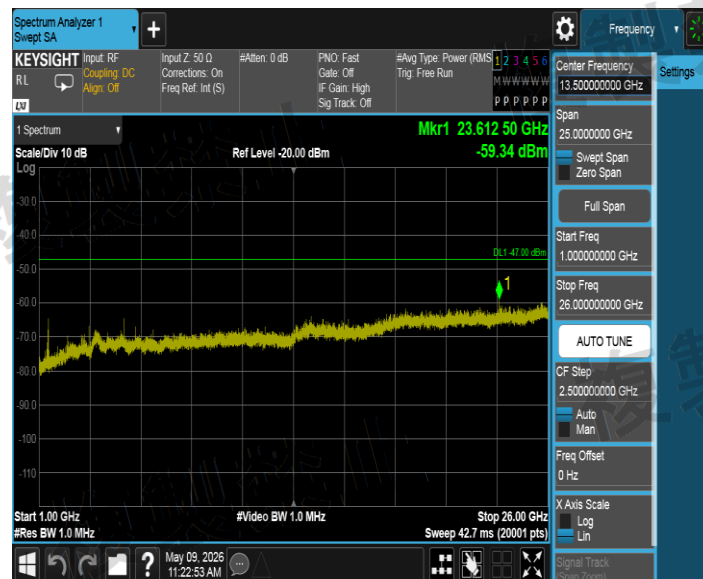


NTNV_11N20SISO_Ant1_5240_30~1000

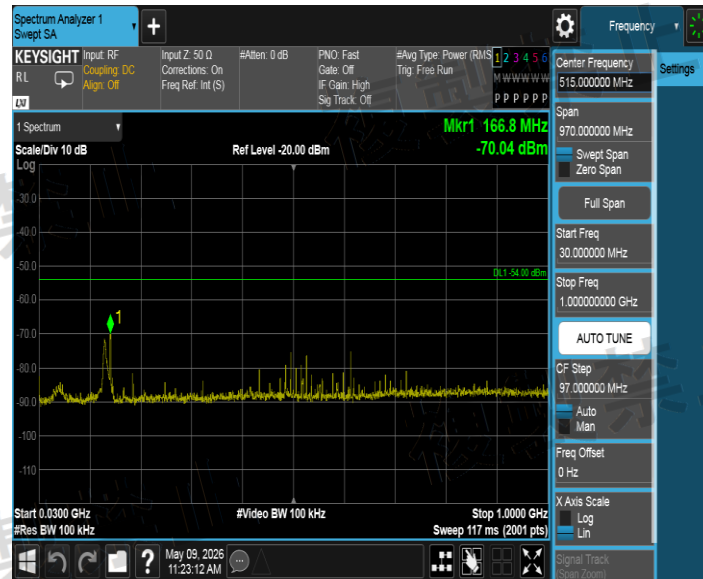


NTNV_11N20SISO_Ant1_5240_1000~26000

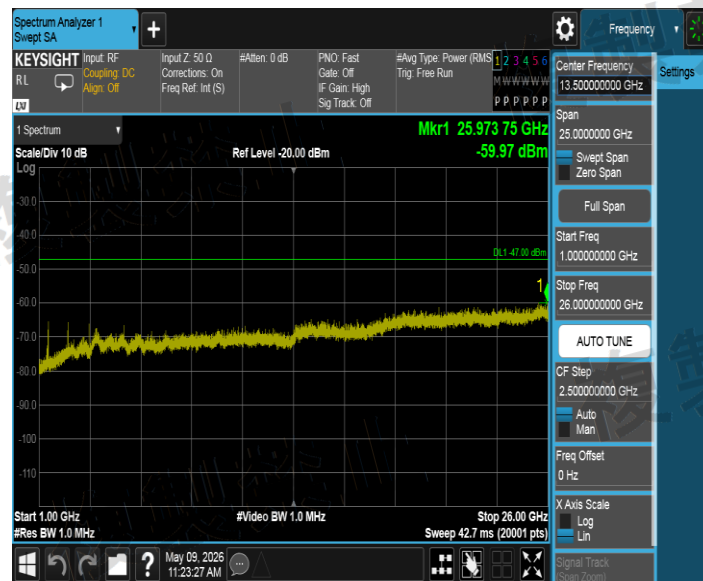


NTNV_11N20SISO_Ant1_5260_30~1000

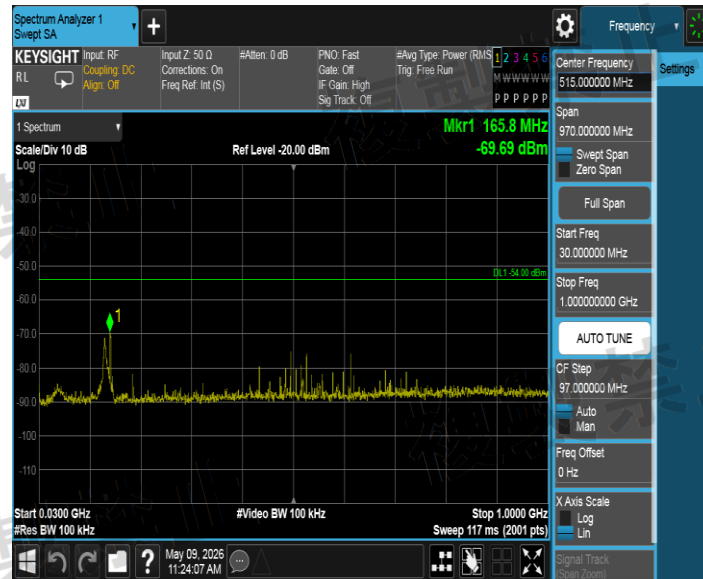


NTNV_11N20SISO_Ant1_5260_1000~26000

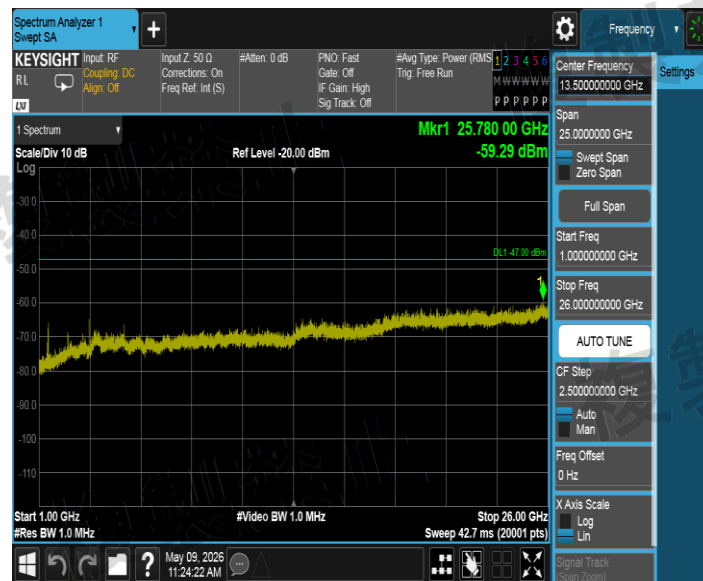


NTNV_11N20SISO_Ant1_5280_30~1000

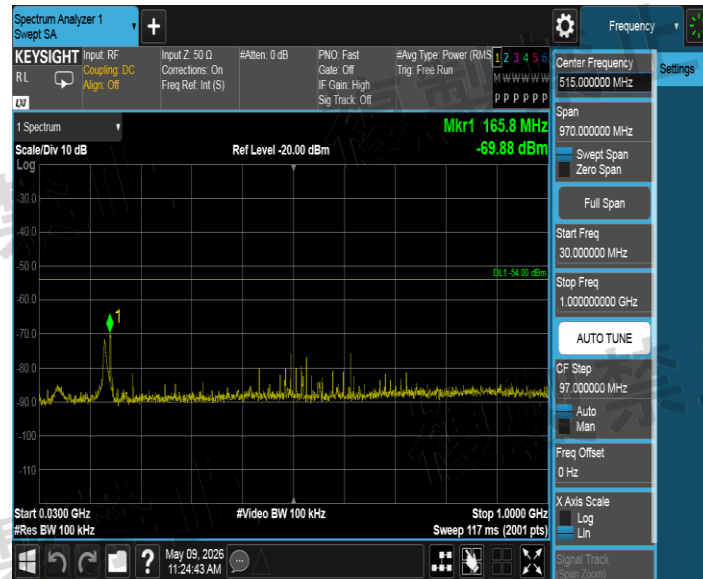


NTNV_11N20SISO_Ant1_5280_1000~26000

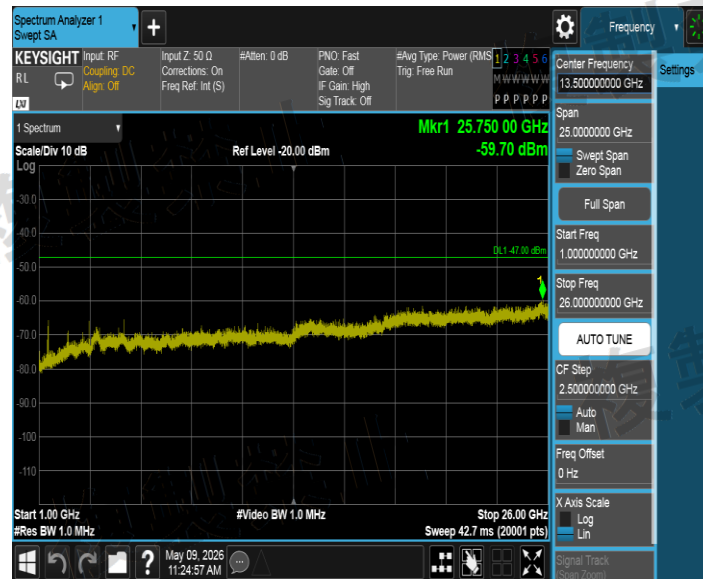


NTNV_11N20SISO_Ant1_5320_30~1000

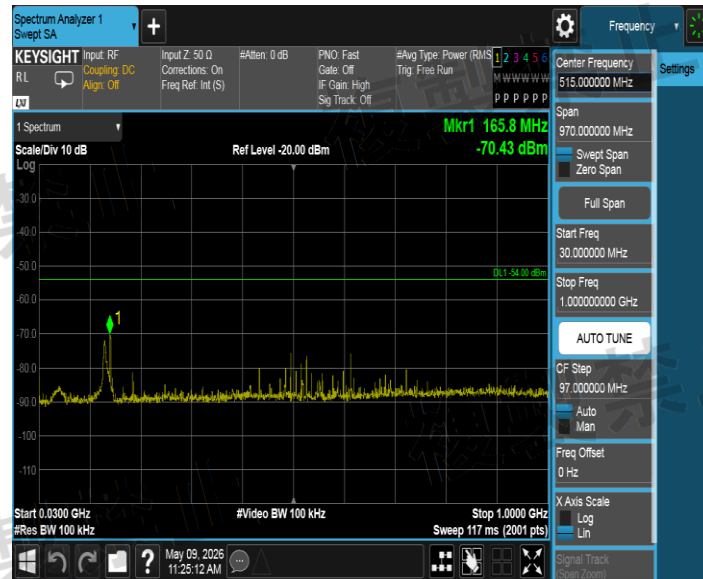


NTNV_11N20SISO_Ant1_5320_1000~26000

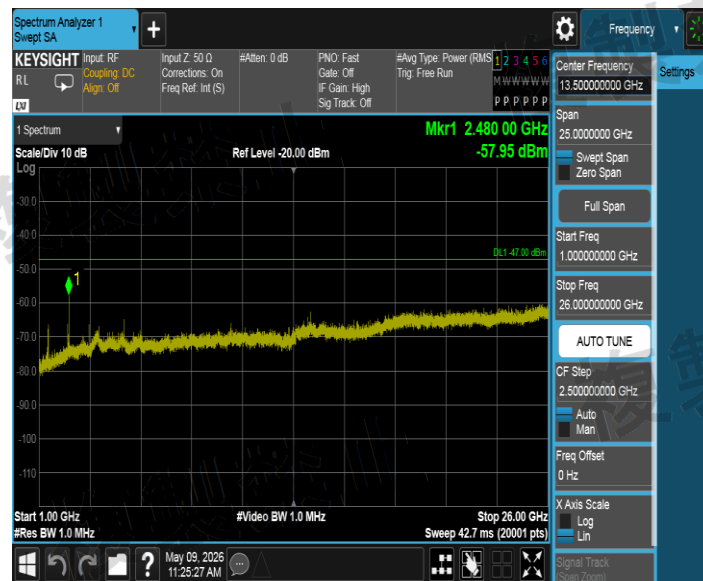


NTNV_11N20SISO_Ant1_5500_30~1000

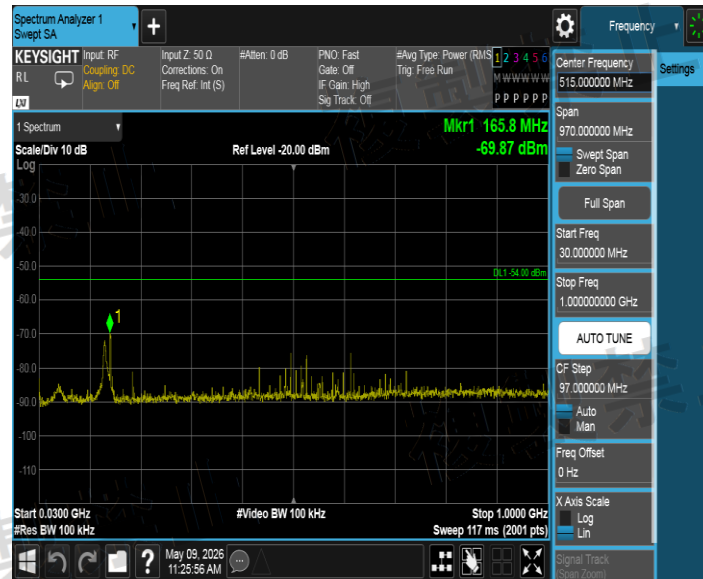


NTNV_11N20SISO_Ant1_5500_1000~26000

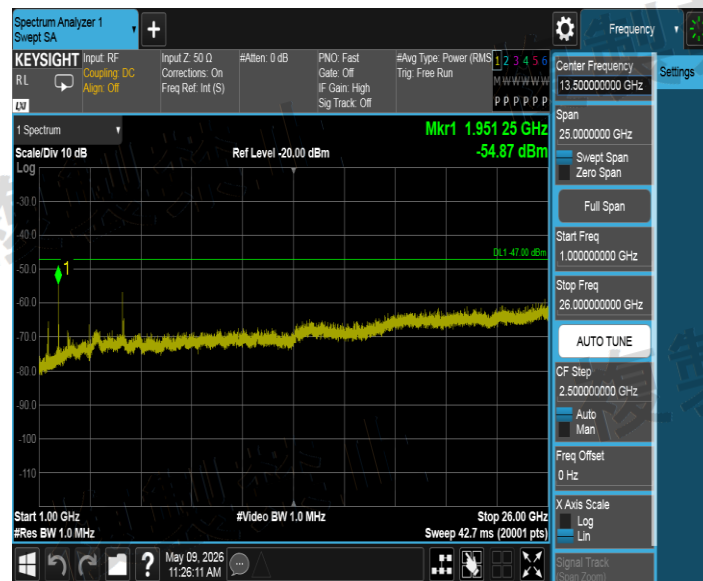


NTNV_11N20SISO_Ant1_5600_30~1000

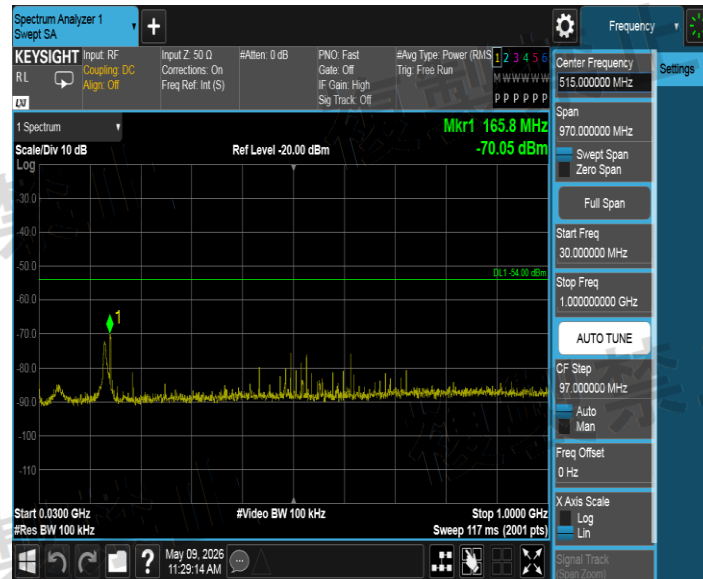


NTNV_11N20SISO_Ant1_5600_1000~26000

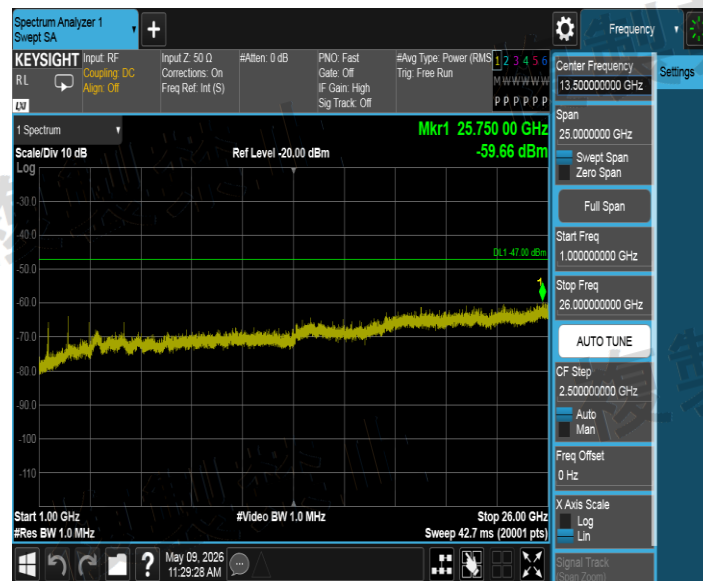


NTNV_11N20SISO_Ant1_5700_30~1000

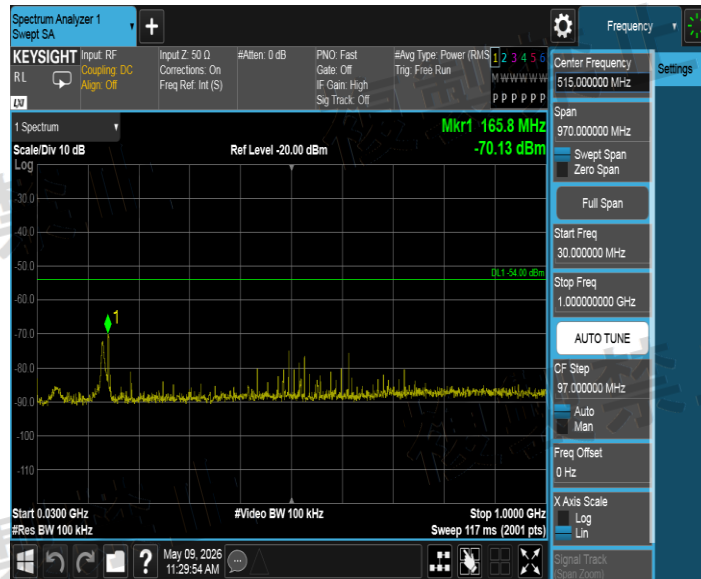


NTNV_11N20SISO_Ant1_5700_1000~26000

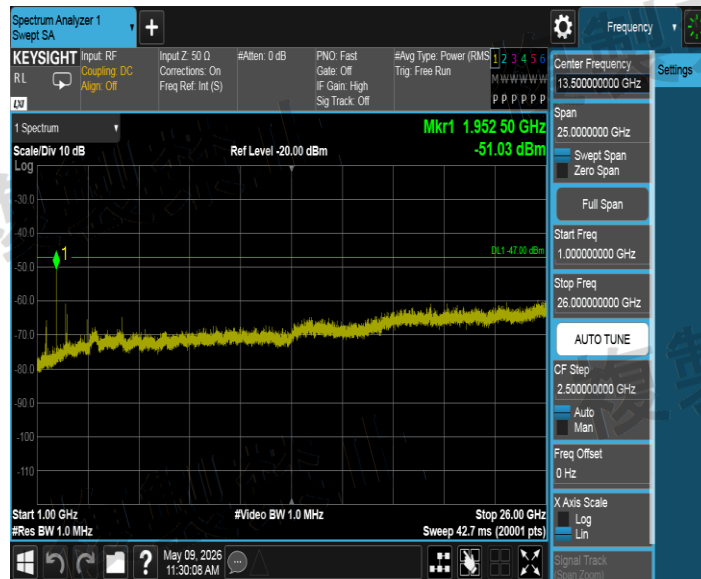


NTNV_11N20SISO_Ant1_5720_30~1000

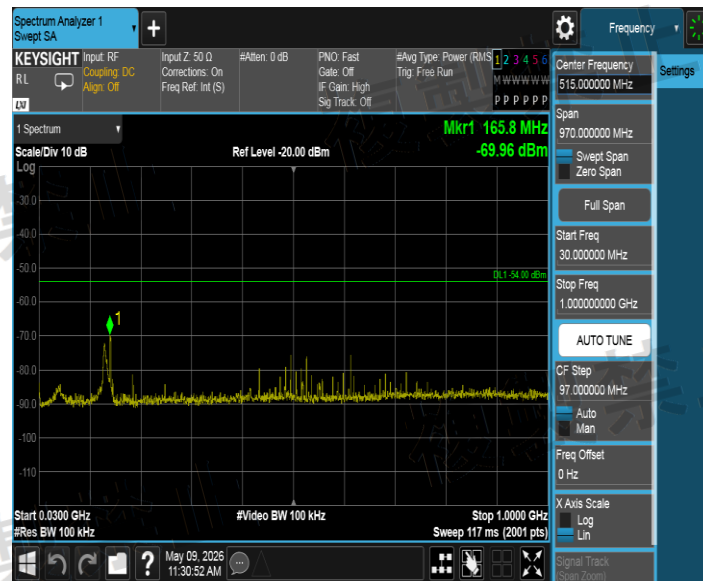


NTNV_11N20SISO_Ant1_5720_1000~26000

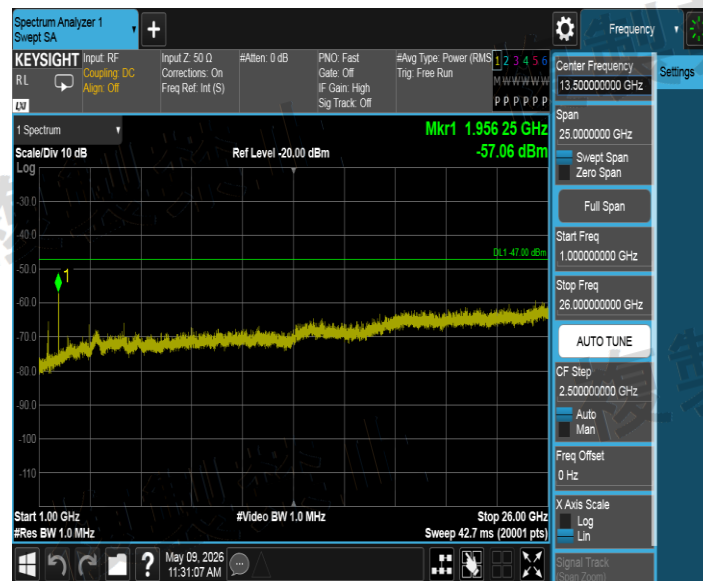


NTNV_11N40SISO_Ant1_5190_30~1000

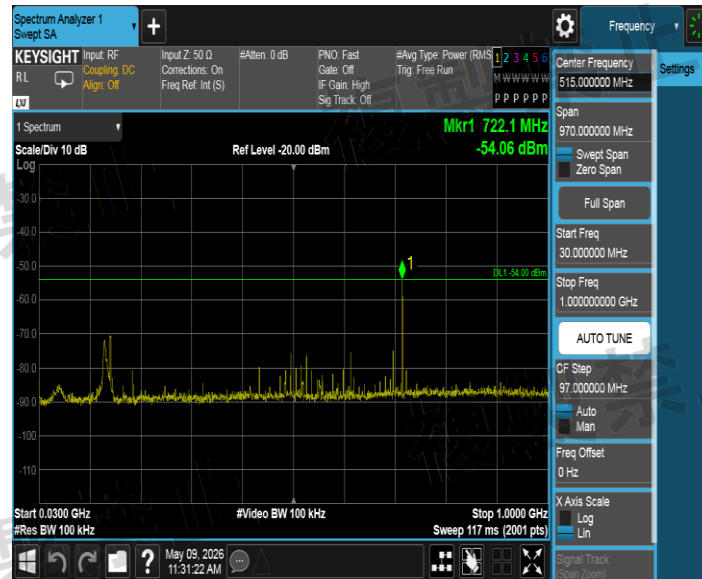


NTNV_11N40SISO_Ant1_5190_1000~26000

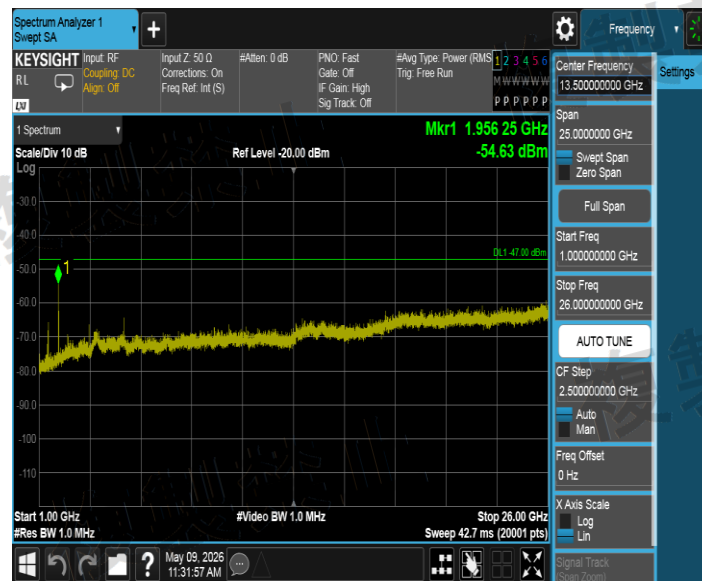


NTNV_11N40SISO_Ant1_5230_30~1000

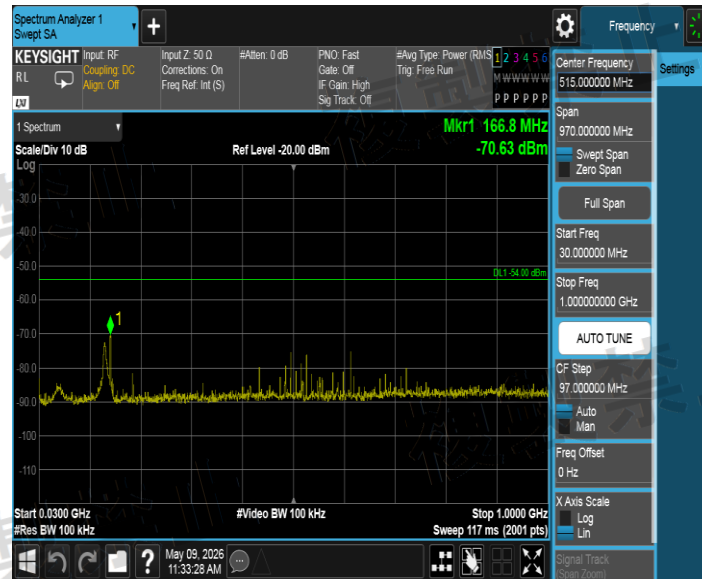


NTNV_11N40SISO_Ant1_5230_1000~26000

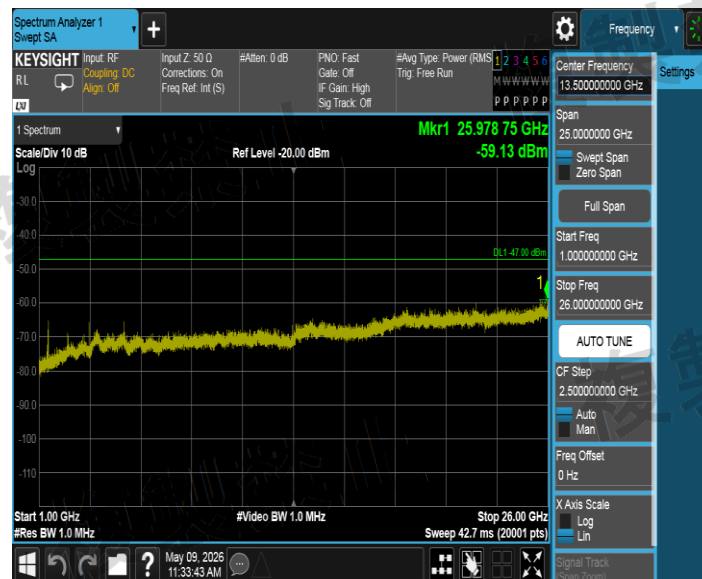


NTNV_11N40SISO_Ant1_5270_30~1000

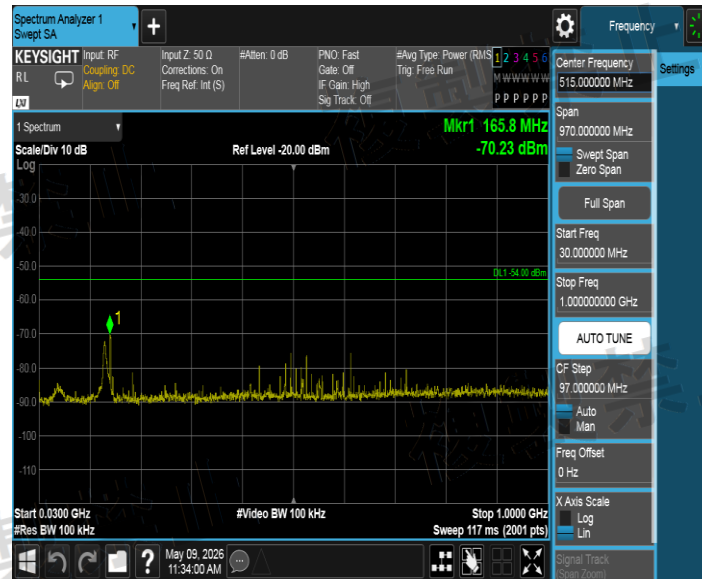


NTNV_11N40SISO_Ant1_5270_1000~26000

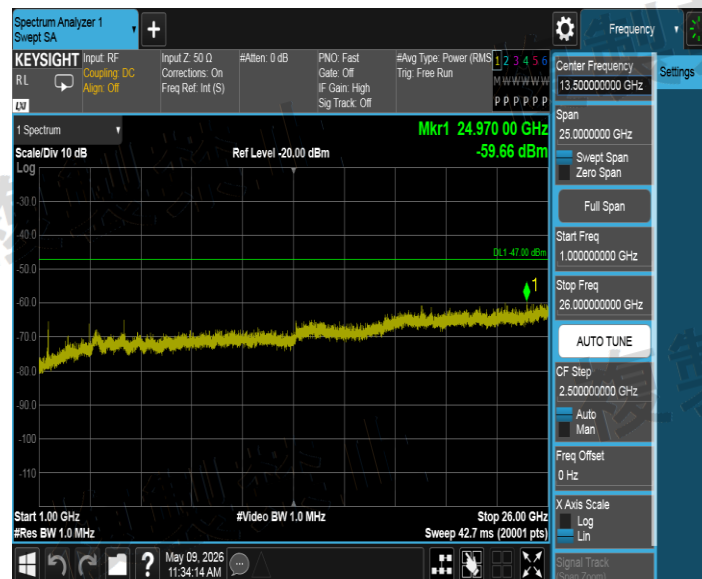


NTNV_11N40SISO_Ant1_5310_30~1000

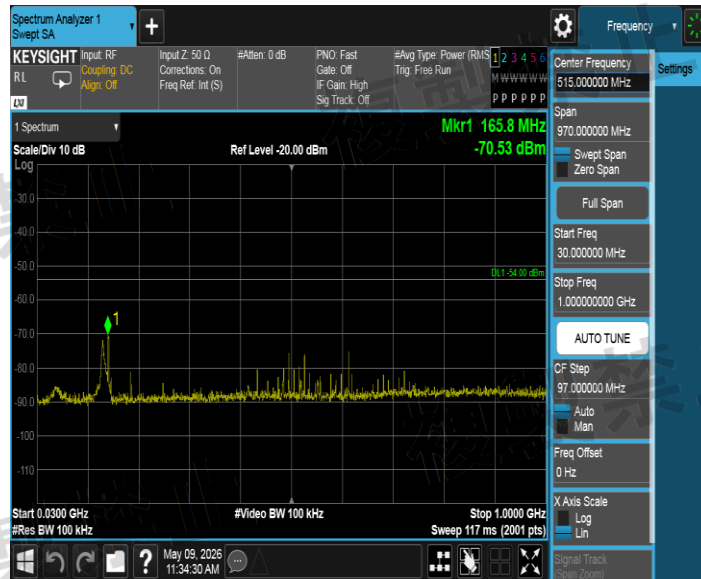


NTNV_11N40SISO_Ant1_5310_1000~26000

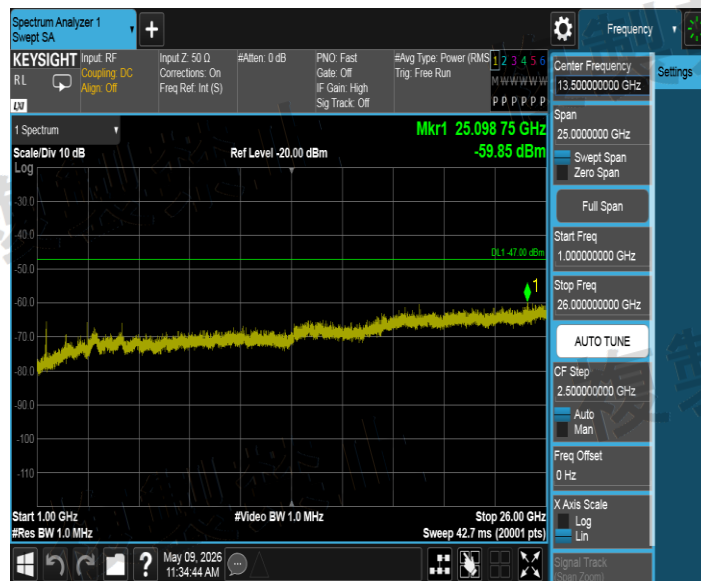


NTNV_11N40SISO_Ant1_5510_30~1000

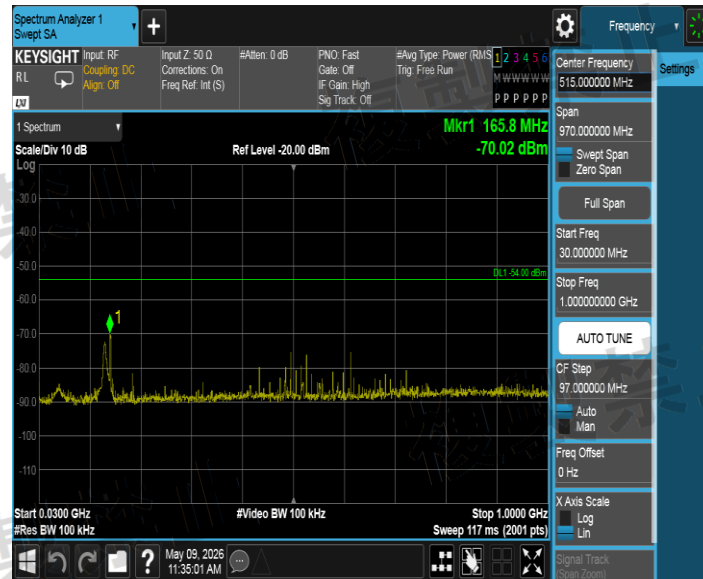


NTNV_11N40SISO_Ant1_5510_1000~26000

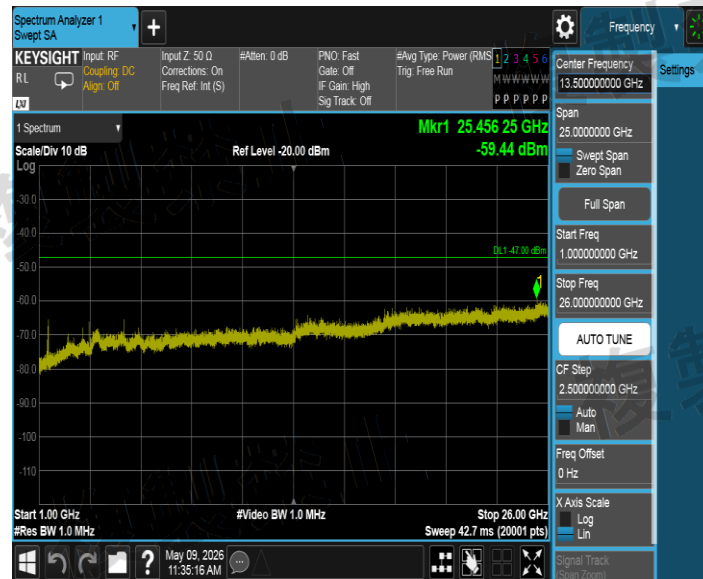


NTNV_11N40SISO_Ant1_5590_30~1000

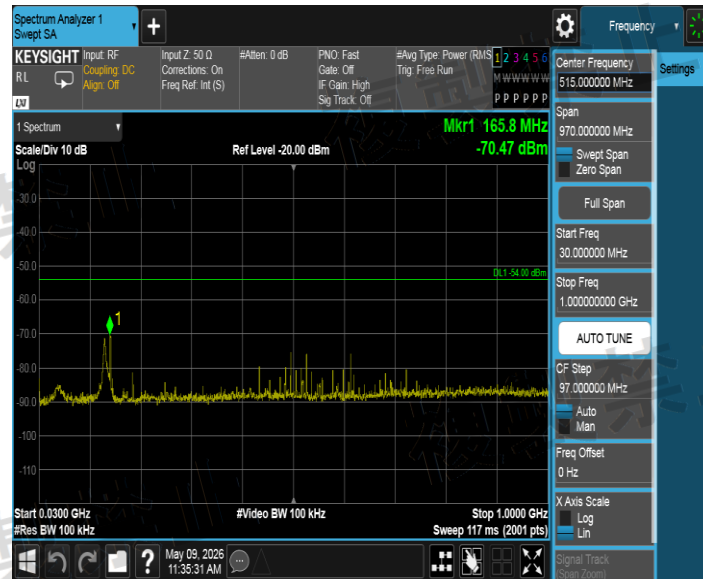


NTNV_11N40SISO_Ant1_5590_1000~26000

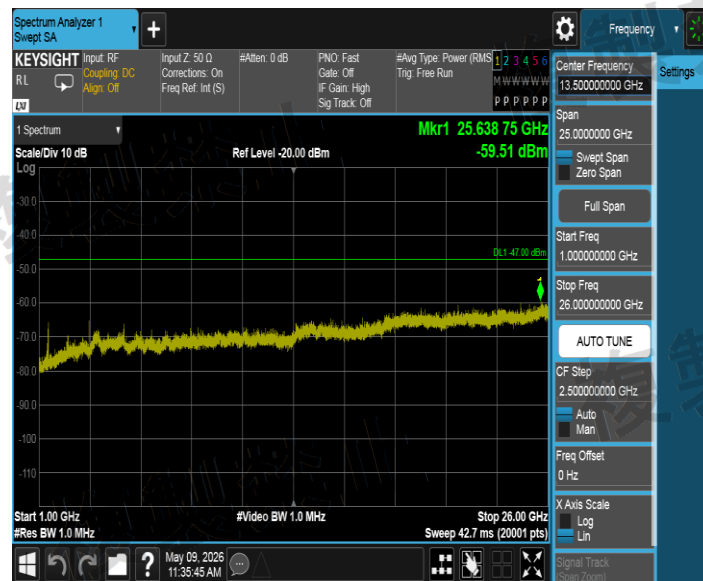


NTNV_11N40SISO_Ant1_5710_30~1000

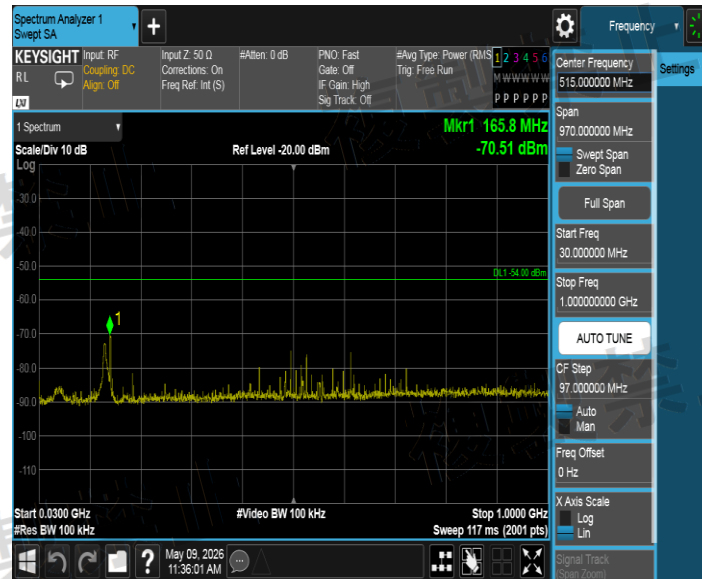


NTNV_11N40SISO_Ant1_5710_1000~26000

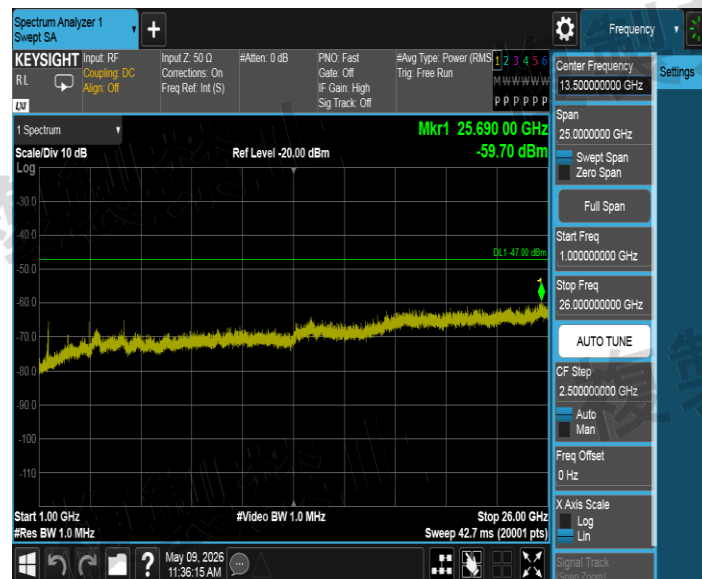


NTNV_11AC20SISO_Ant1_5180_30~1000

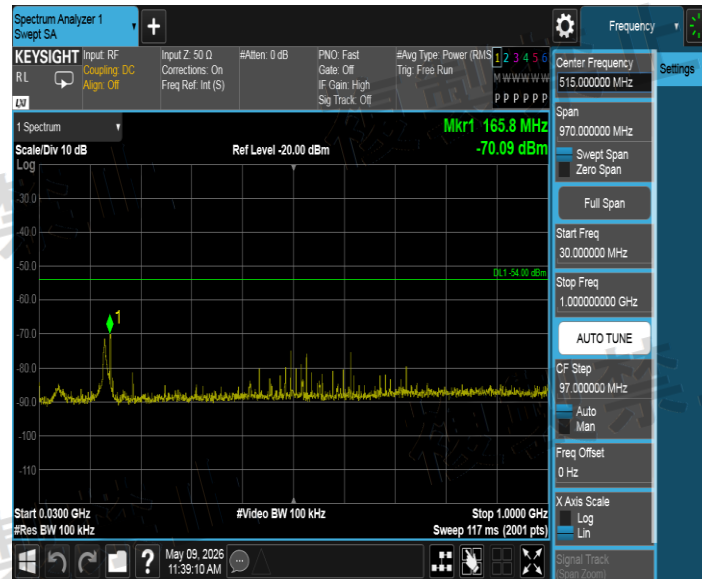


NTNV_11AC20SISO_Ant1_5180_1000~26000

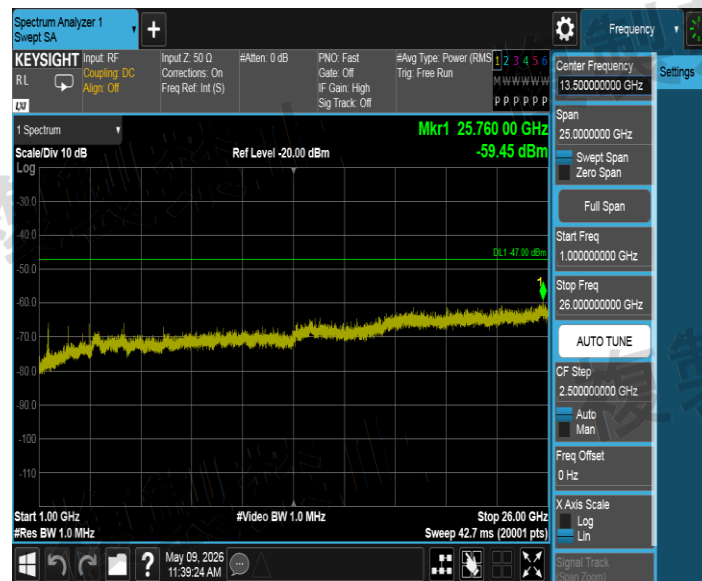


NTNV_11AC20SISO_Ant1_5200_30~1000

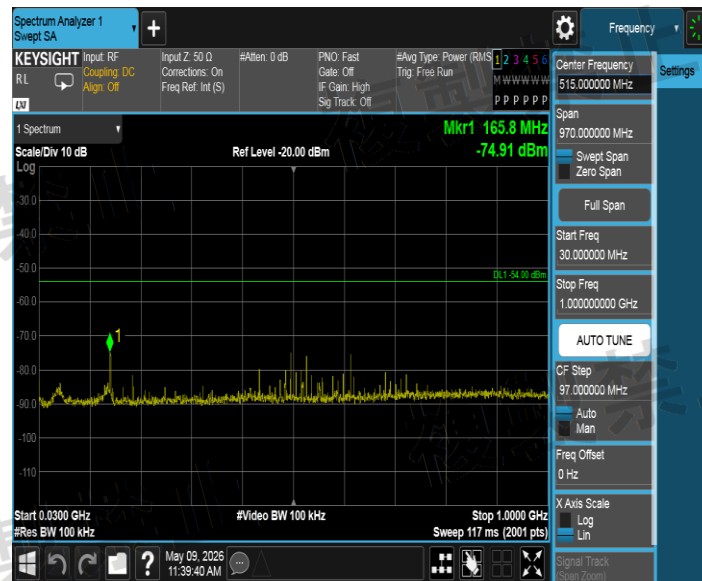


NTNV_11AC20SISO_Ant1_5200_1000~26000

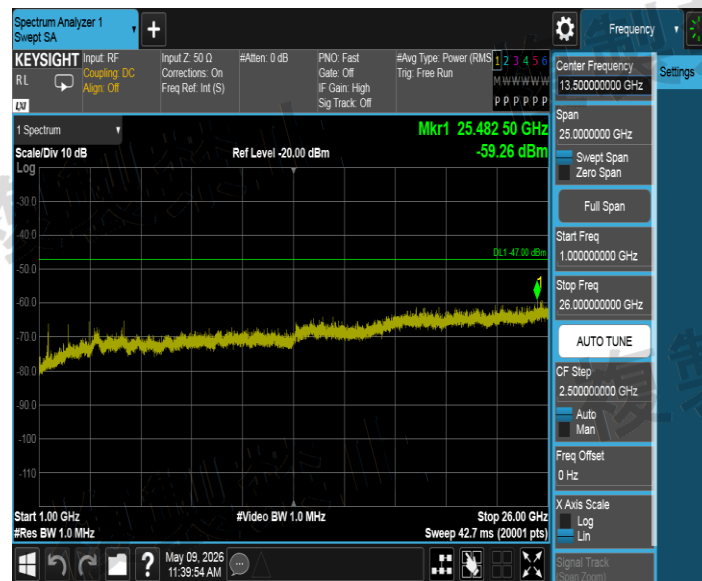


NTNV_11AC20SISO_Ant1_5240_30~1000

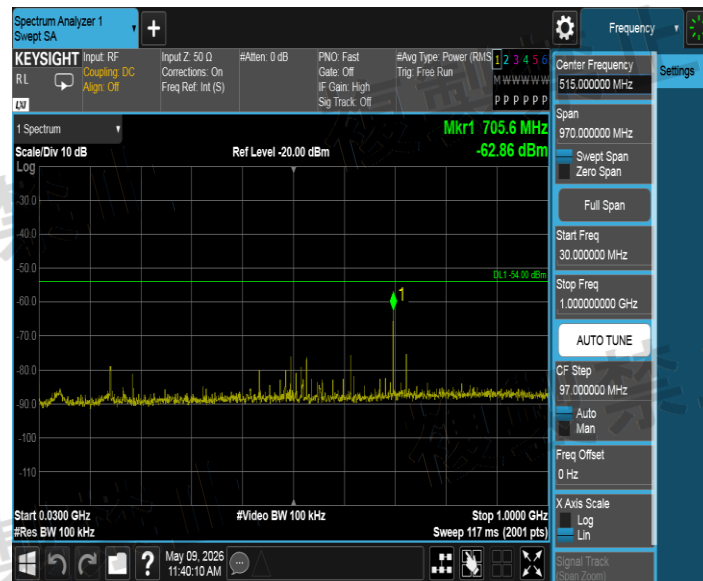


NTNV_11AC20SISO_Ant1_5240_1000~26000

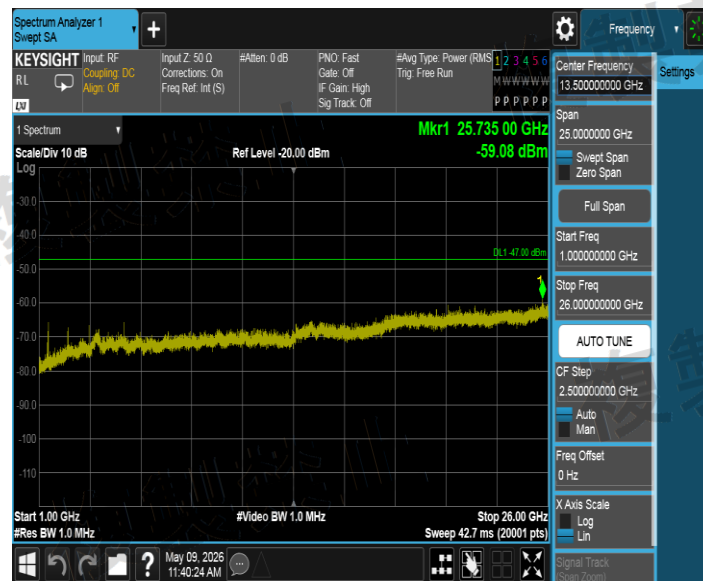


NTNV_11AC20SISO_Ant1_5260_30~1000

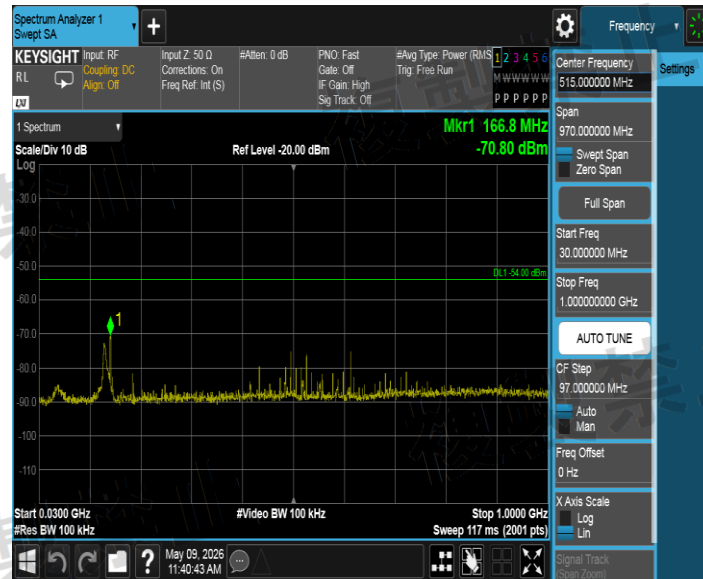


NTNV_11AC20SISO_Ant1_5260_1000~26000

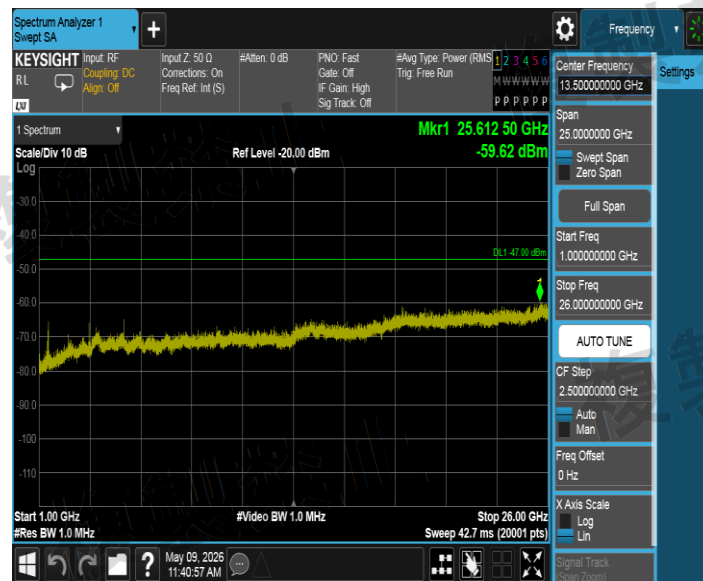


NTNV_11AC20SISO_Ant1_5300_30~1000

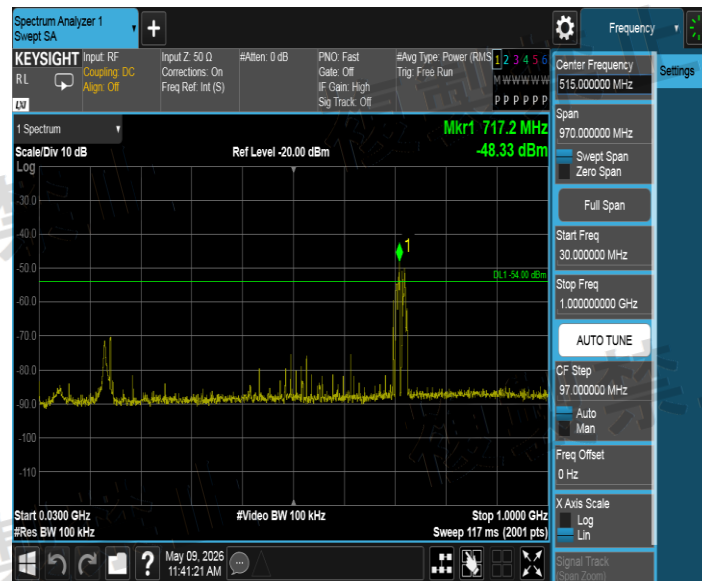


NTNV_11AC20SISO_Ant1_5300_1000~26000

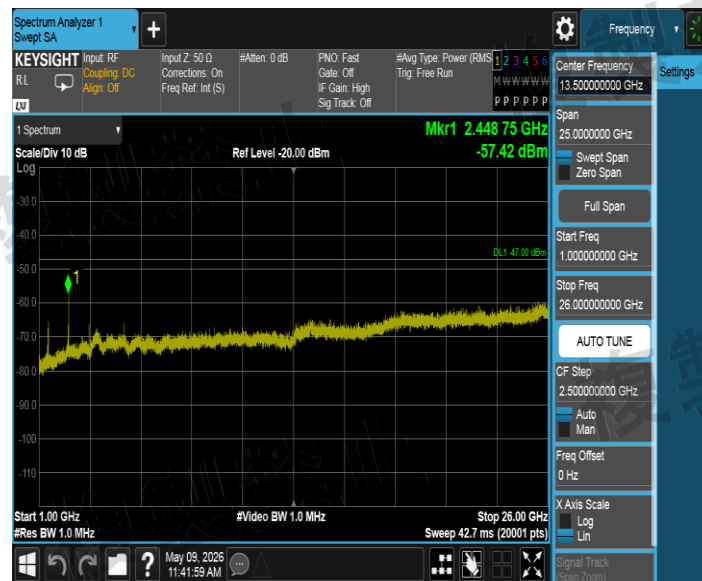


NTNV_11AC20SISO_Ant1_5320_30~1000

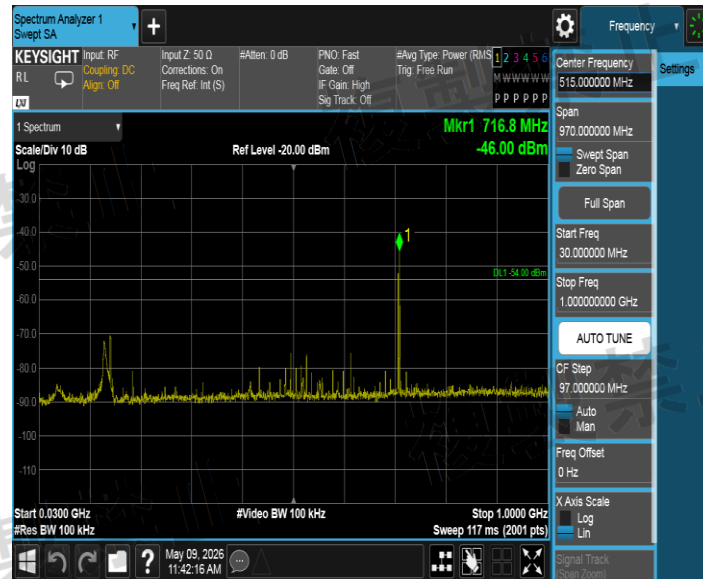


NTNV_11AC20SISO_Ant1_5320_1000~26000

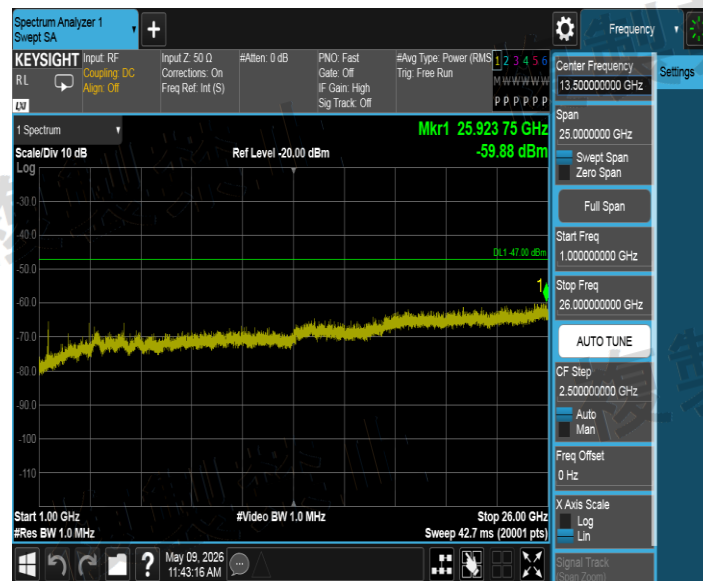


NTNV_11AC20SISO_Ant1_5500_30~1000

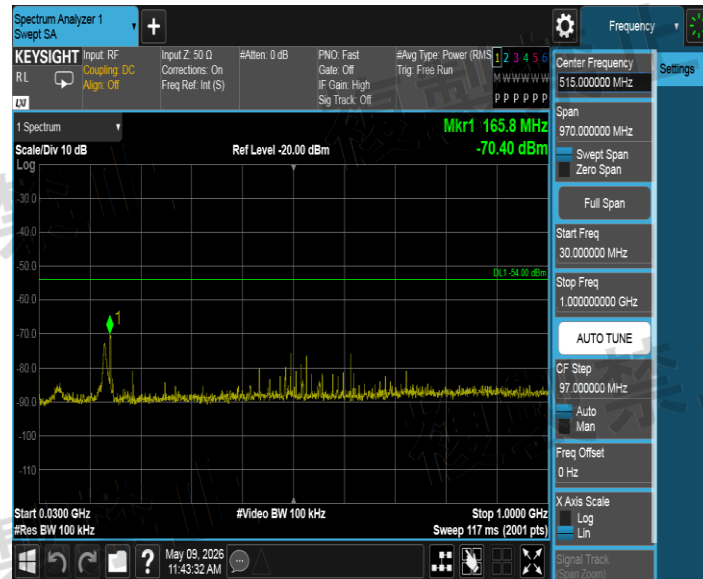


NTNV_11AC20SISO_Ant1_5500_1000~26000

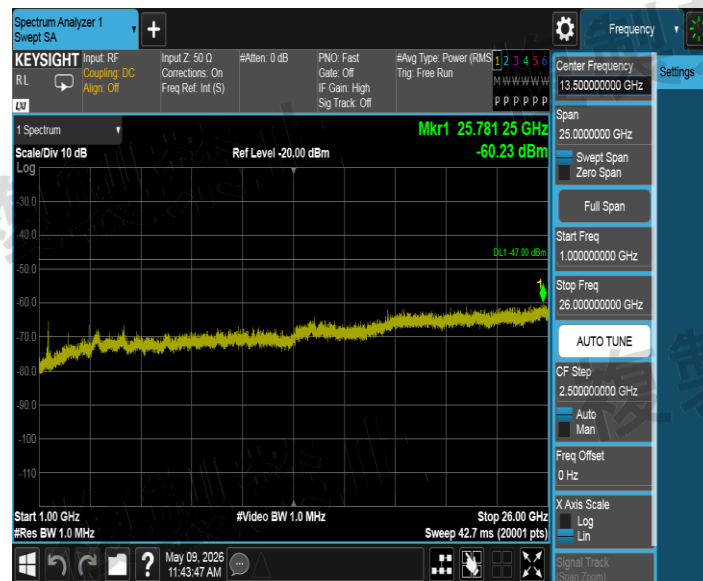


NTNV_11AC20SISO_Ant1_5600_30~1000

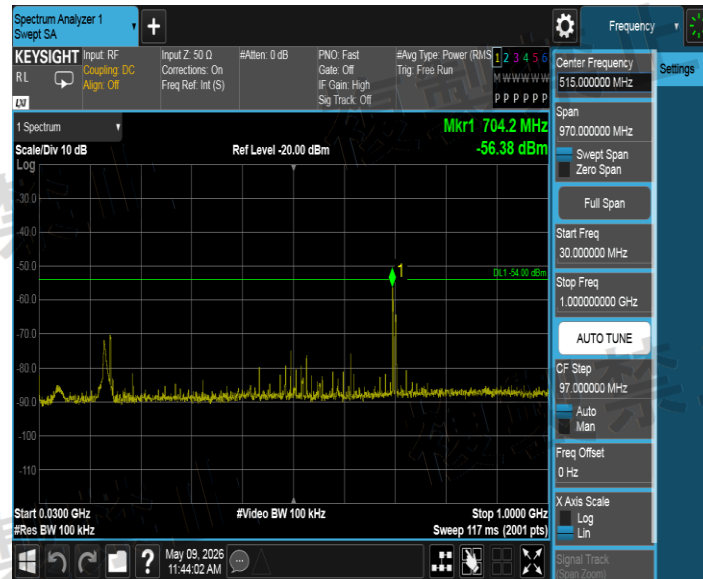


NTNV_11AC20SISO_Ant1_5600_1000~26000

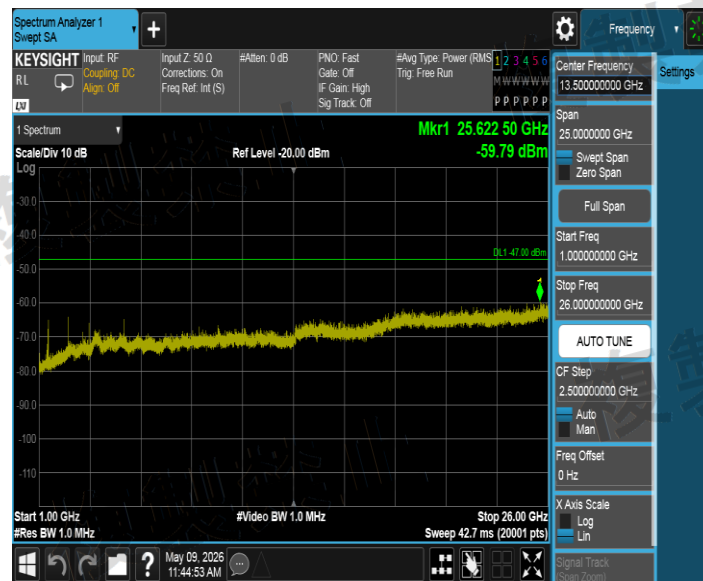


NTNV_11AC20SISO_Ant1_5720_30~1000

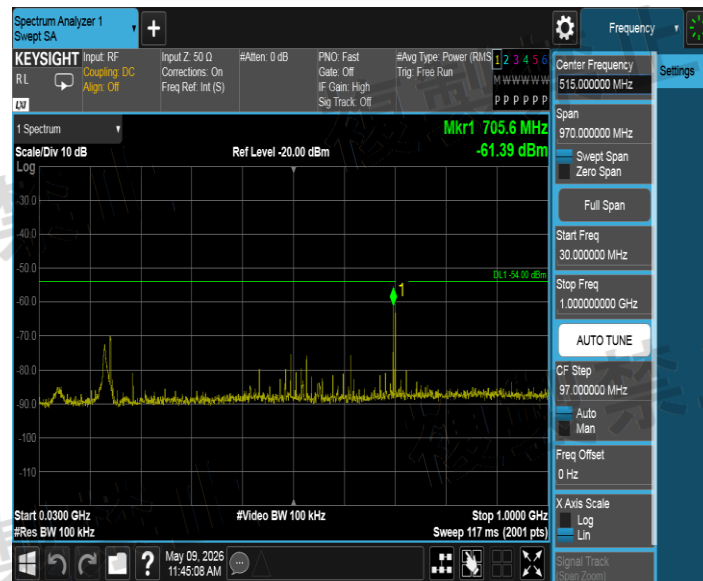


NTNV_11AC20SISO_Ant1_5720_1000~26000

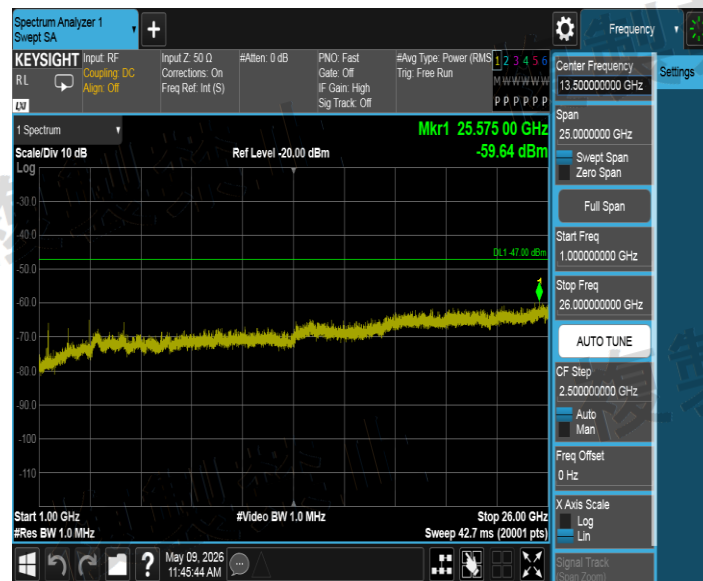


NTNV_11AC40SISO_Ant1_5190_30~1000

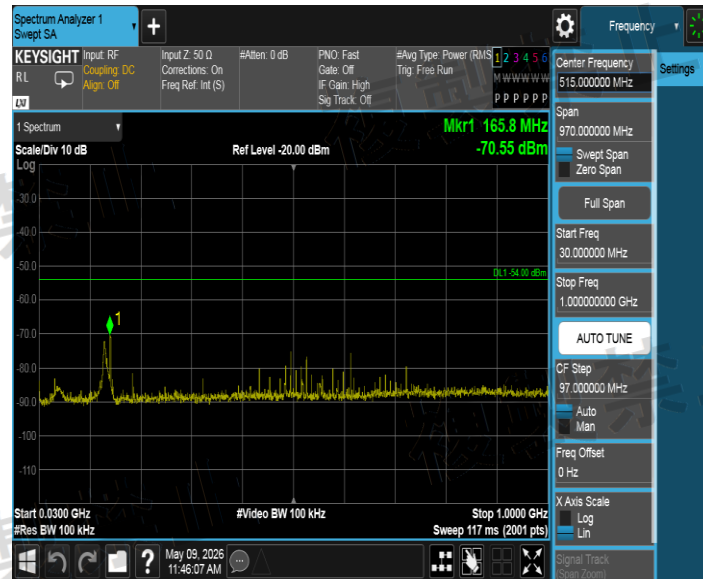


NTNV_11AC40SISO_Ant1_5190_1000~26000

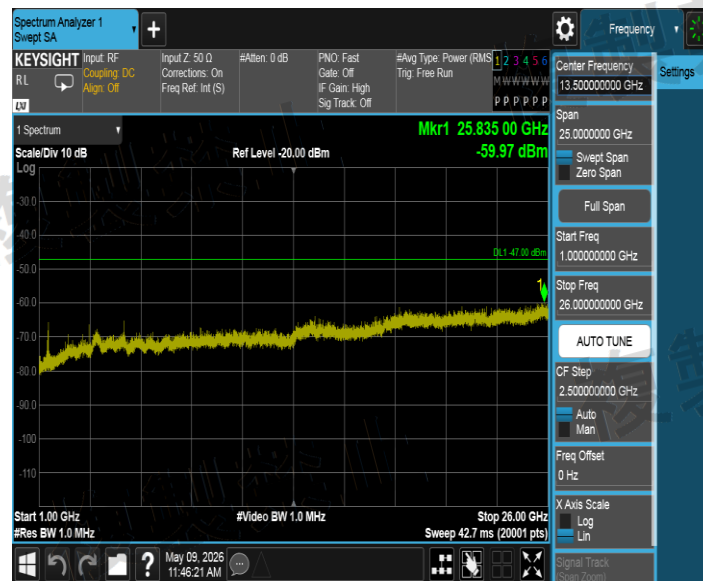


NTNV_11AC40SISO_Ant1_5230_30~1000

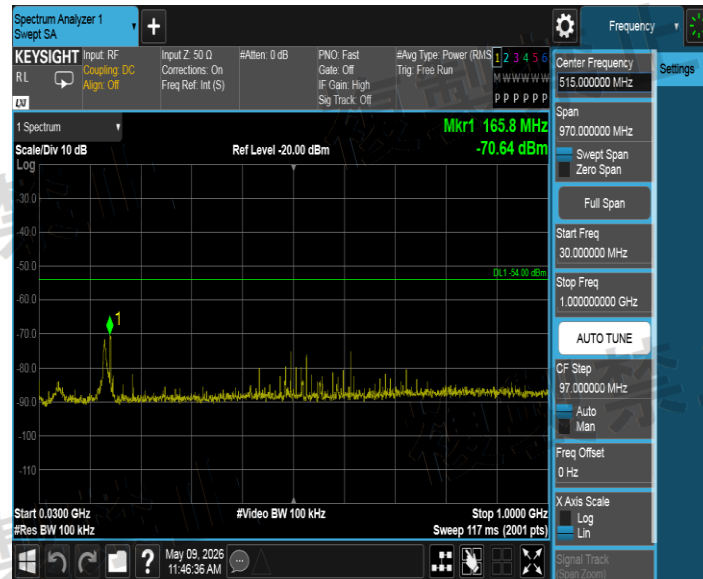


NTNV_11AC40SISO_Ant1_5230_1000~26000

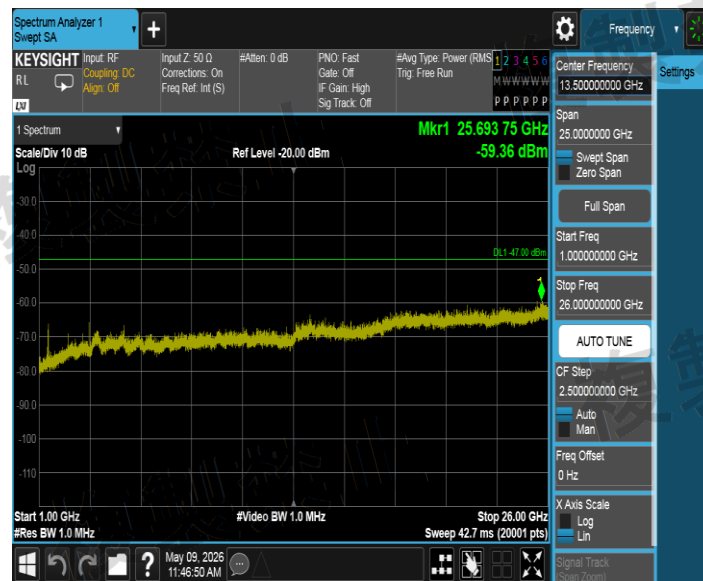


NTNV_11AC40SISO_Ant1_5270_30~1000

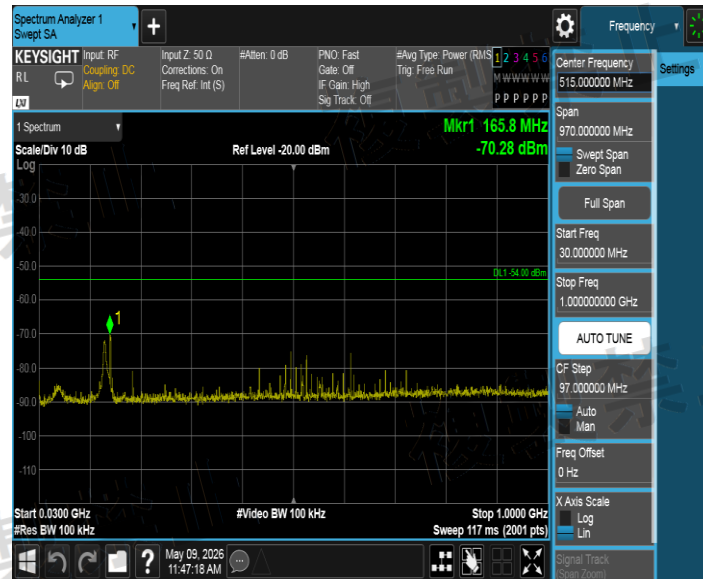


NTNV_11AC40SISO_Ant1_5270_1000~26000

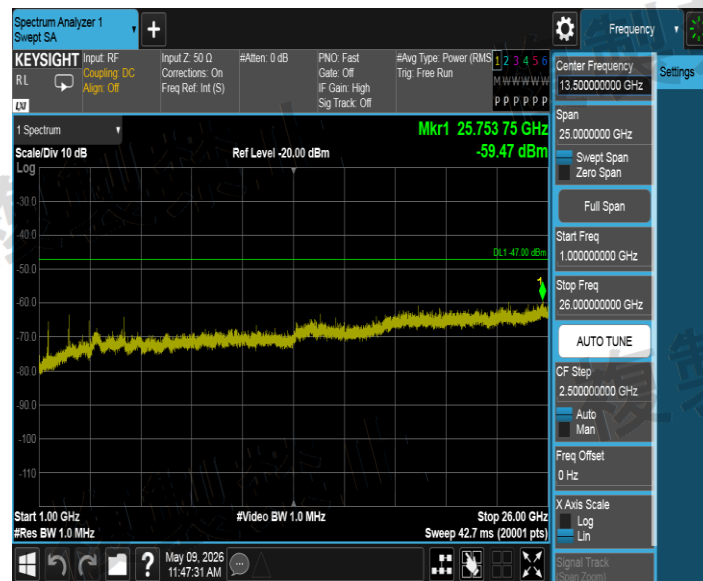


NTNV_11AC40SISO_Ant1_5310_30~1000

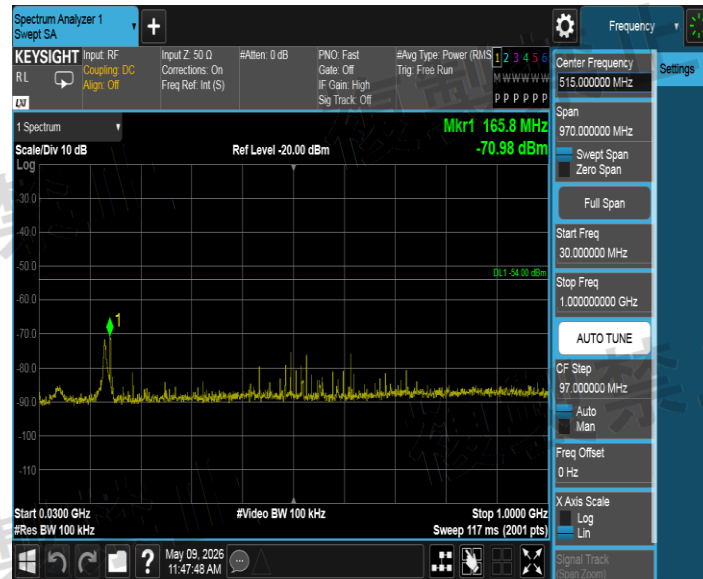


NTNV_11AC40SISO_Ant1_5310_1000~26000

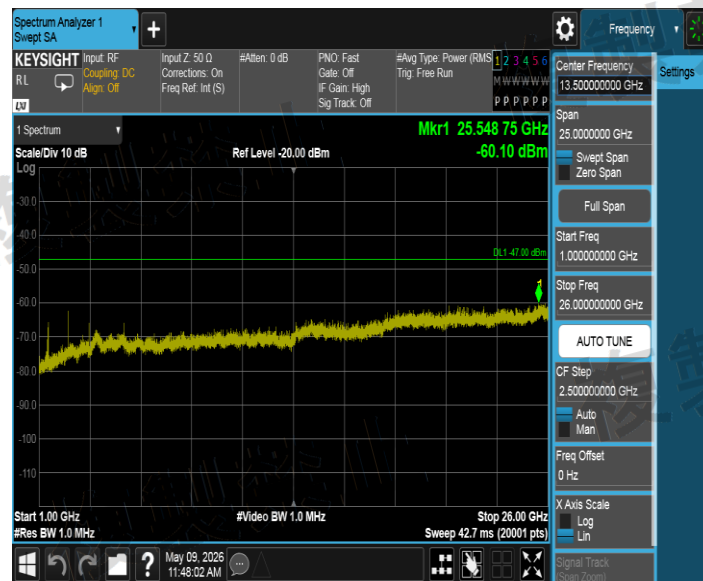


NTNV_11AC40SISO_Ant1_5510_30~1000

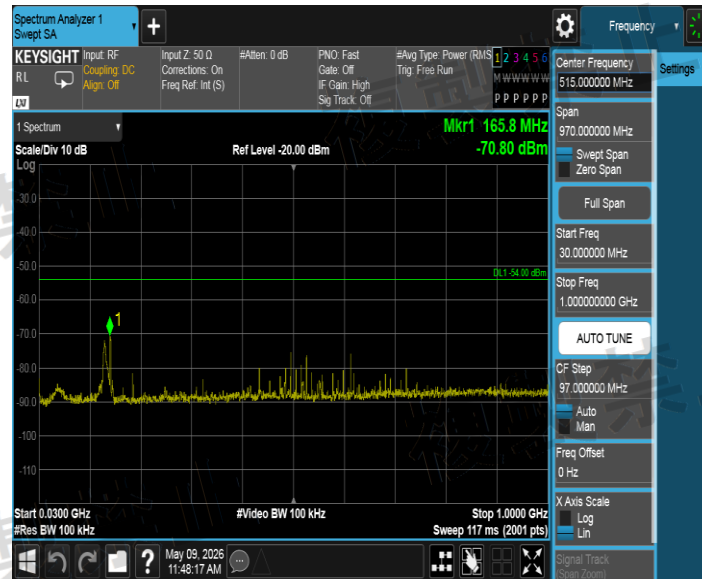


NTNV_11AC40SISO_Ant1_5510_1000~26000

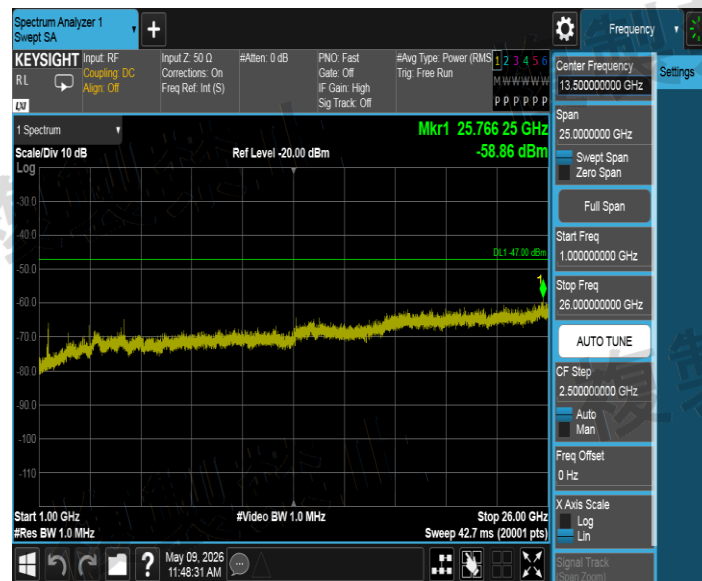


NTNV_11AC40SISO_Ant1_5590_30~1000

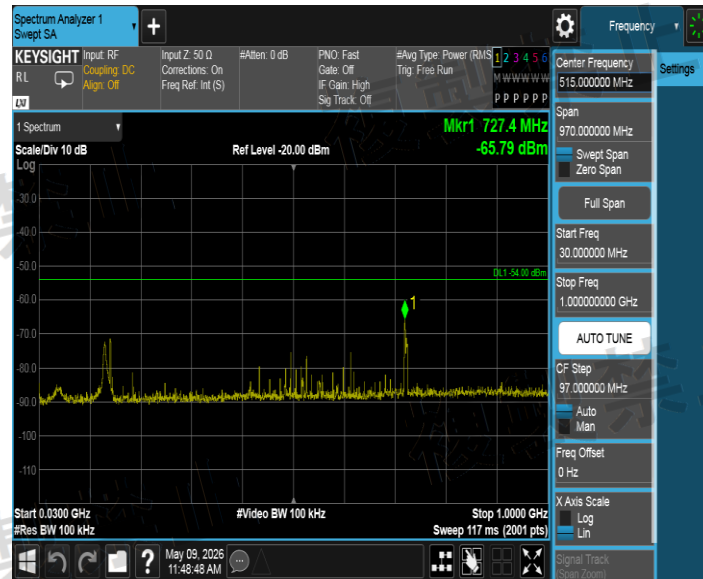


NTNV_11AC40SISO_Ant1_5590_1000~26000

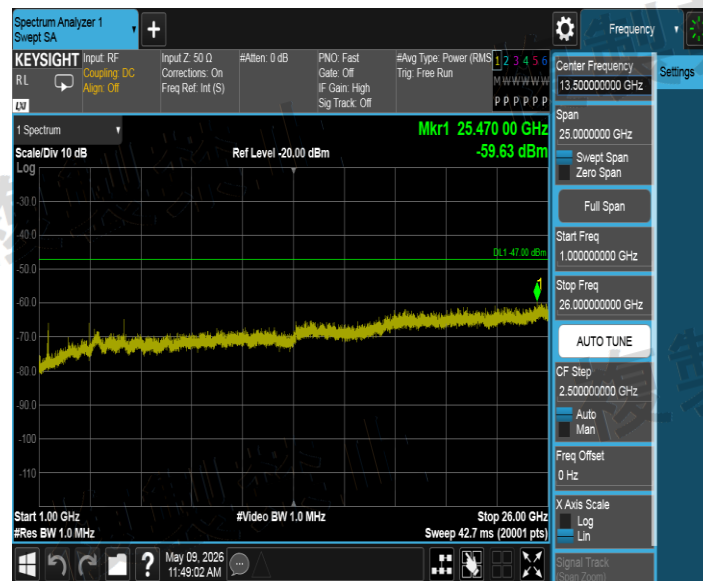


NTNV_11AC40SISO_Ant1_5710_30~1000

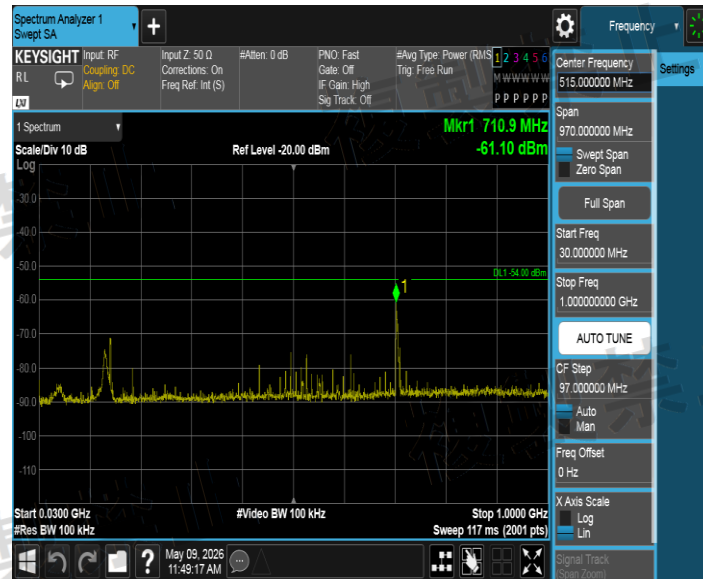


NTNV_11AC40SISO_Ant1_5710_1000~26000

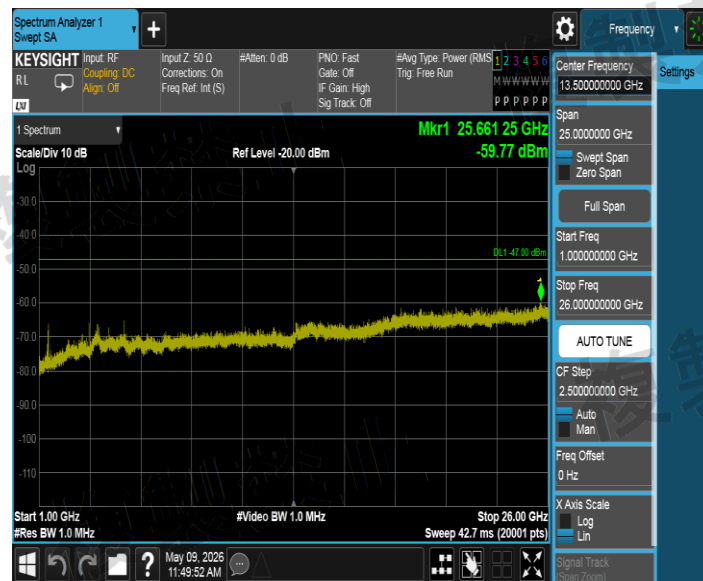


NTNV_11AC80SISO_Ant1_5210_30~1000

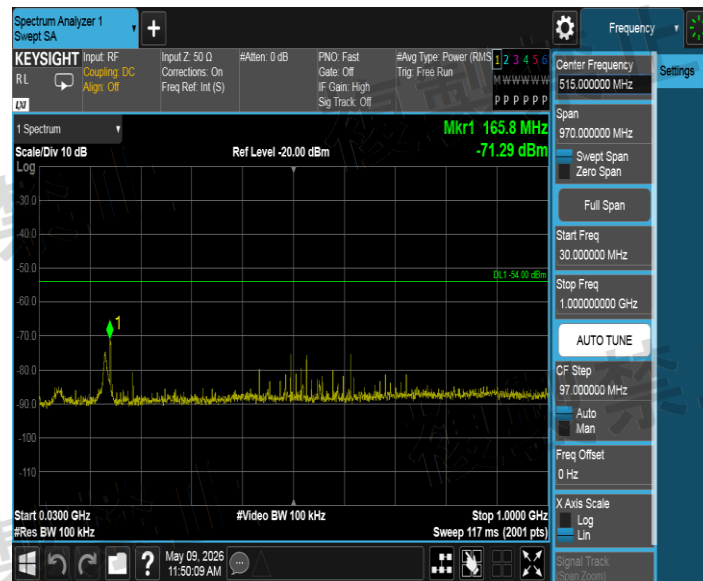


NTNV_11AC80SISO_Ant1_5210_1000~26000

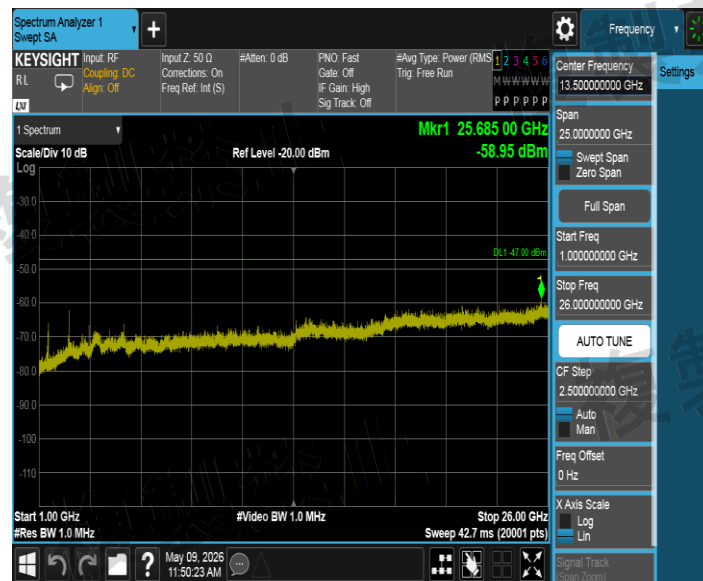


NTNV_11AC80SISO_Ant1_5290_30~1000

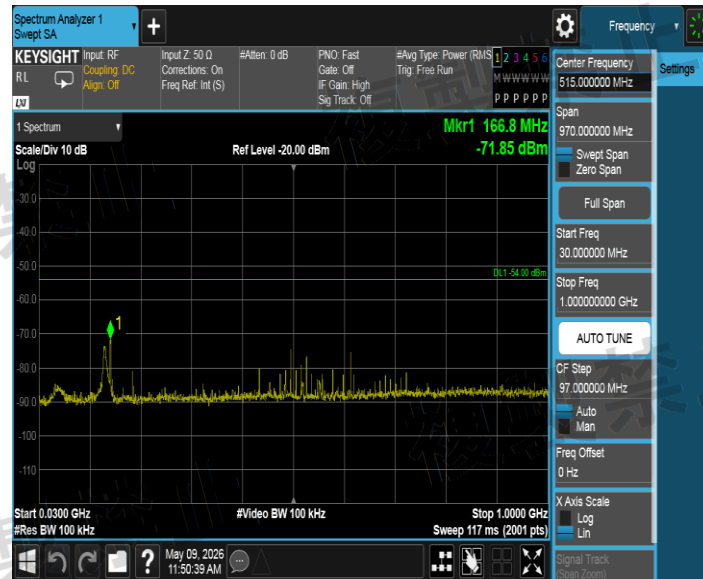


NTNV_11AC80SISO_Ant1_5290_1000~26000

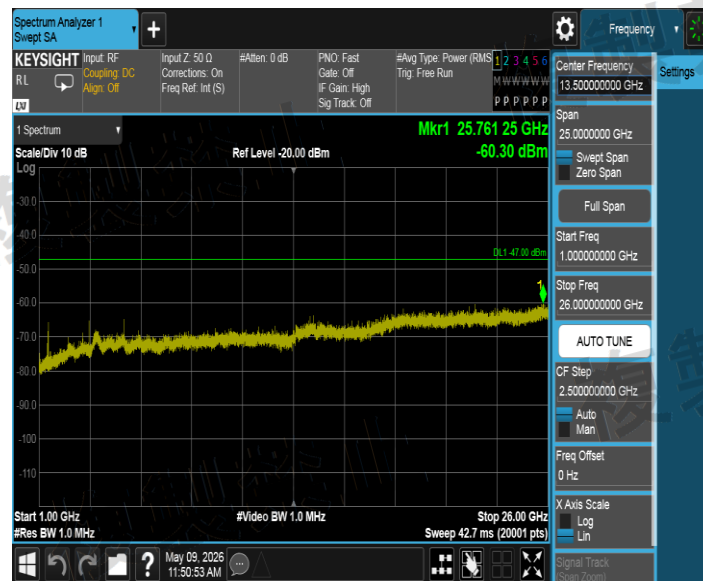


NTNV_11AC80SISO_Ant1_5530_30~1000

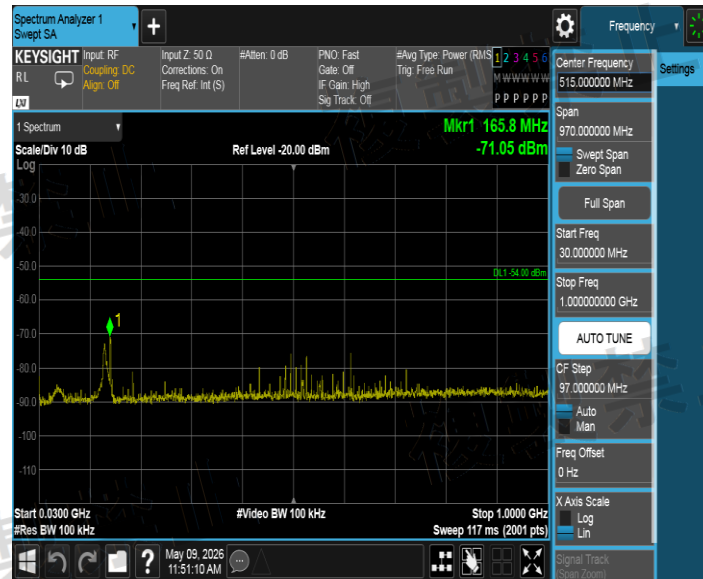


NTNV_11AC80SISO_Ant1_5530_1000~26000

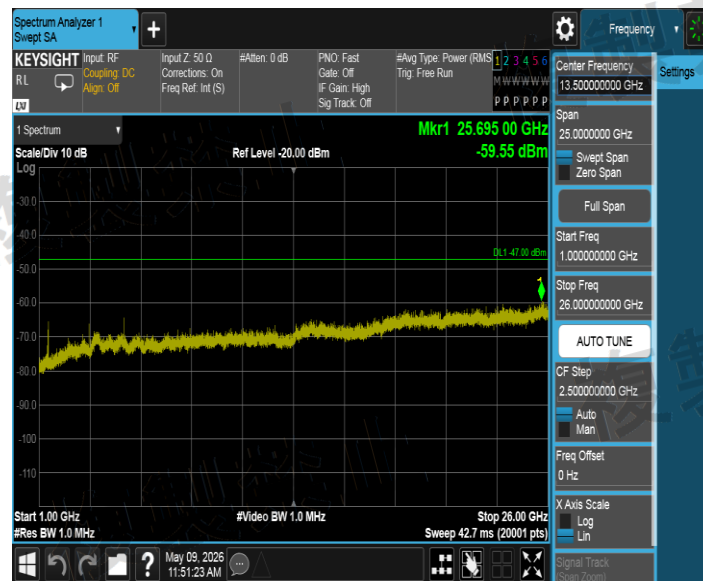


NTNV_11AC80SISO_Ant1_5610_30~1000

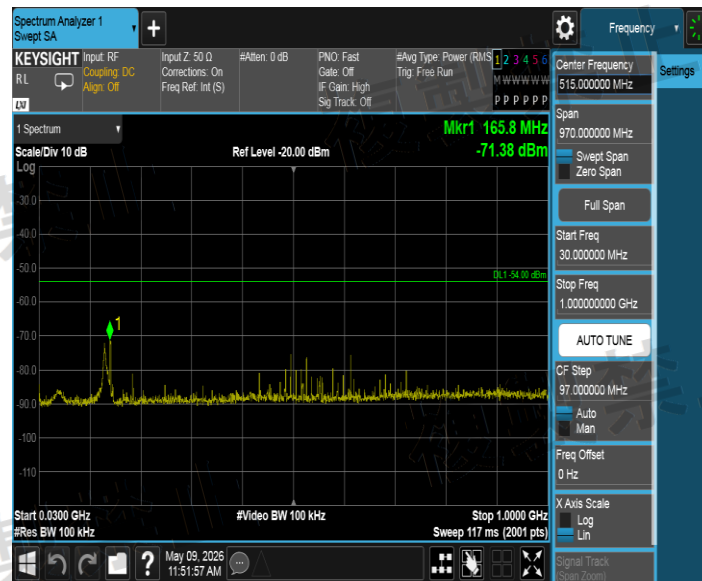


NTNV_11AC80SISO_Ant1_5610_1000~26000

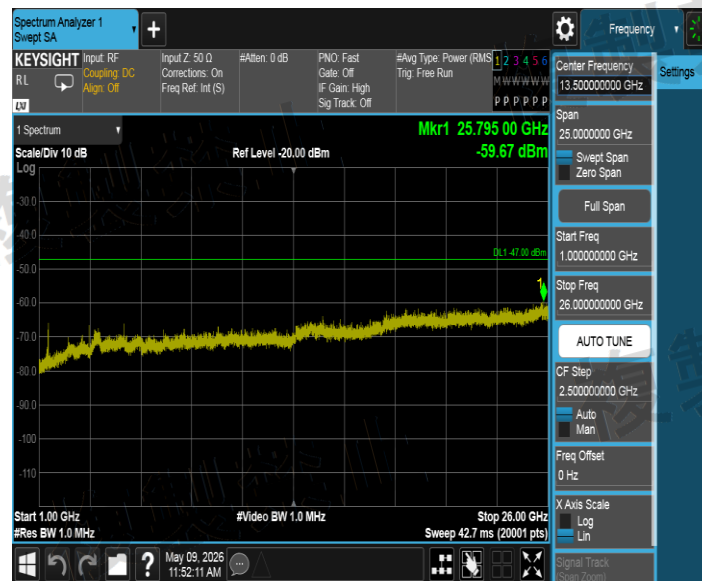

NTNV_11AC80SISO_Ant1_5690_30~1000

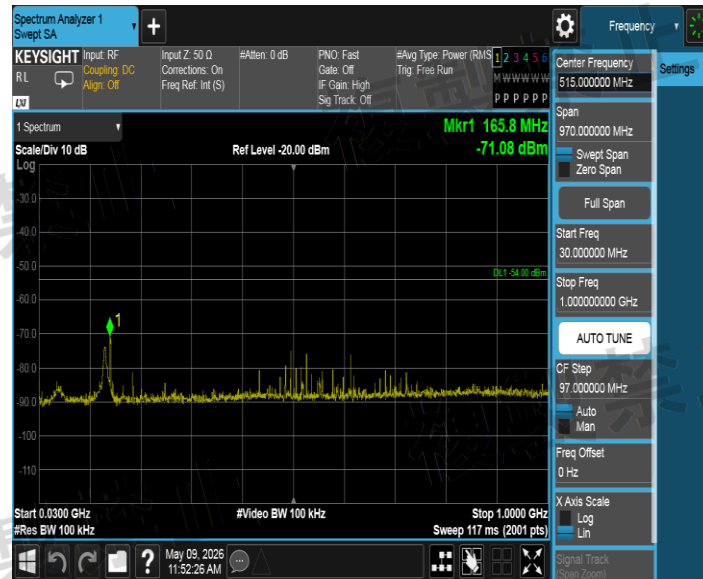


NTNV_11AC80SISO_Ant1_5690_1000~26000

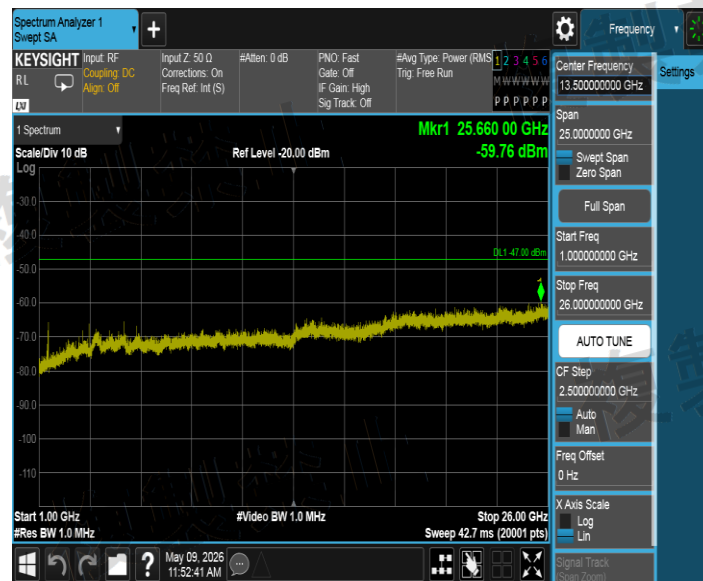






Test Graphs_Step2

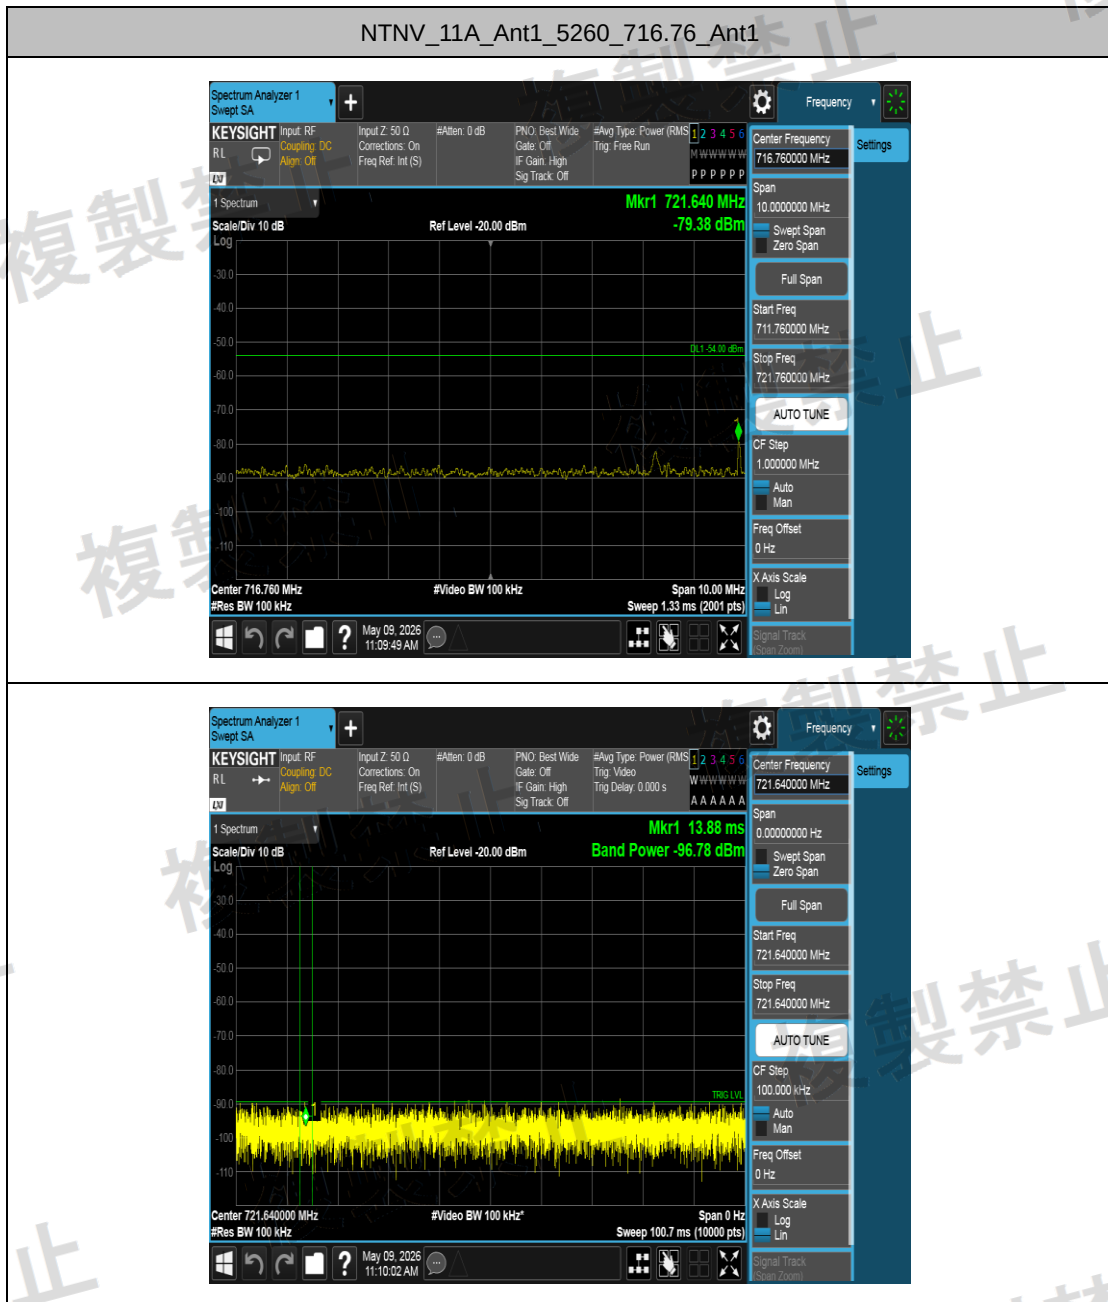



NTNV_11A_Ant1_5280_726.46_Ant1

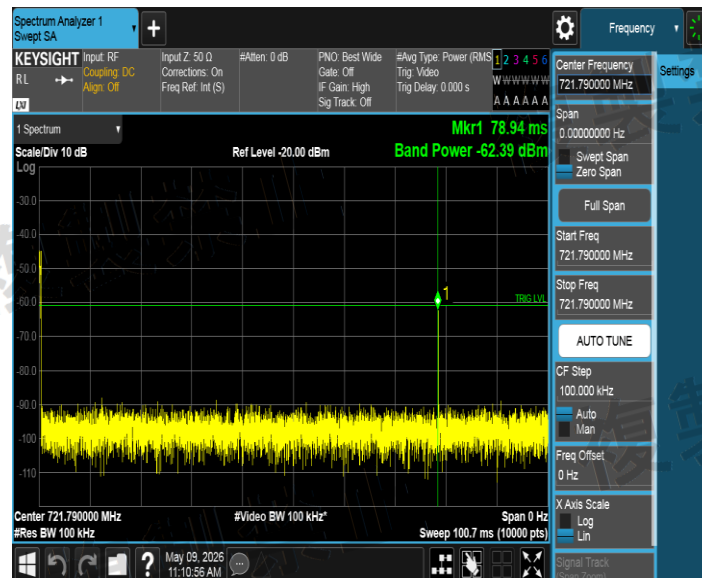



NTNV_11A_Ant1_5280_1751.25_Ant1

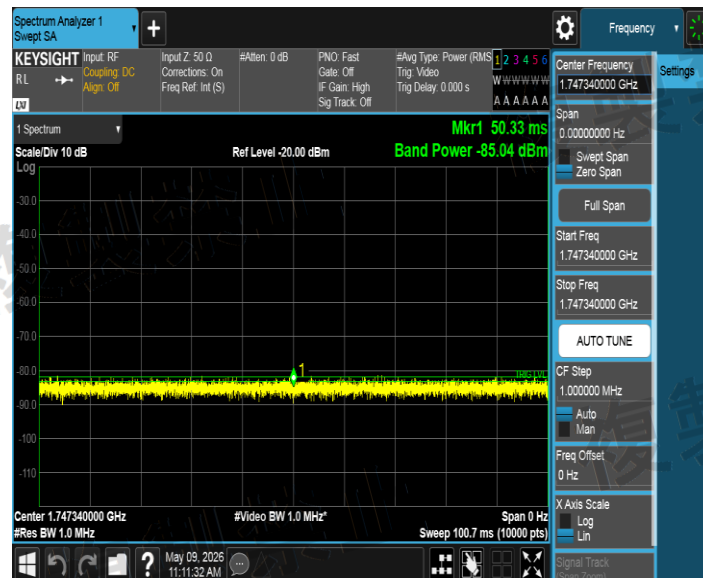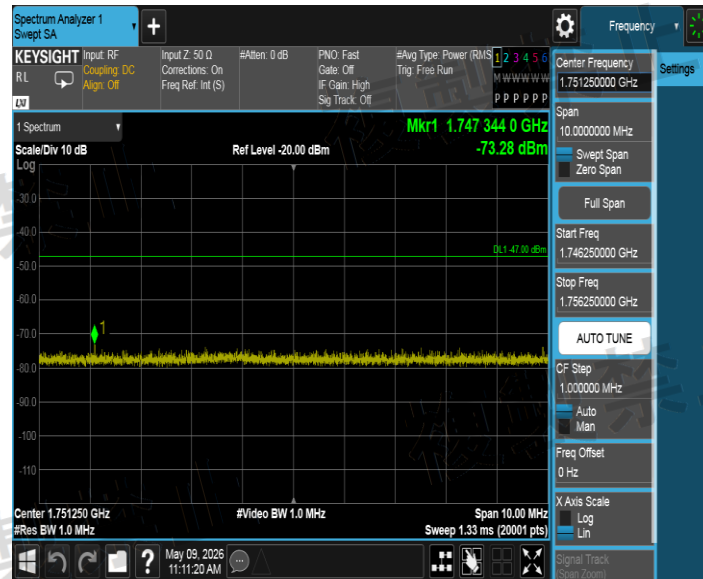


NTNV_11A_Ant1_5500_2451.25_Ant1

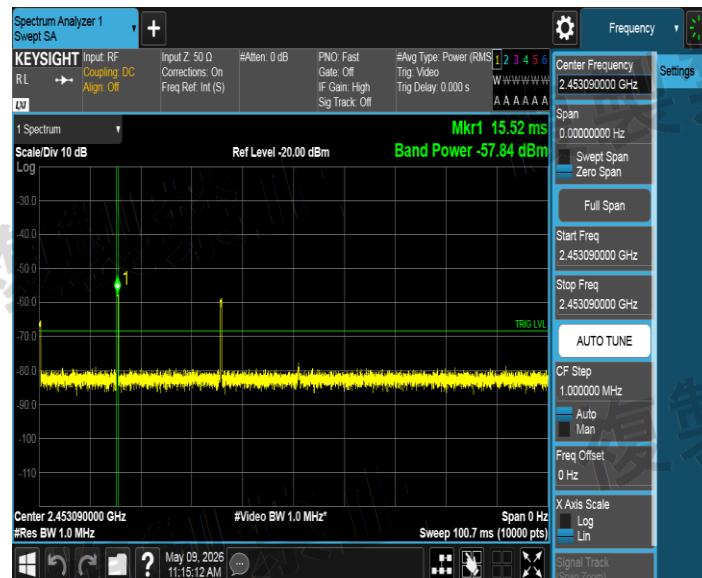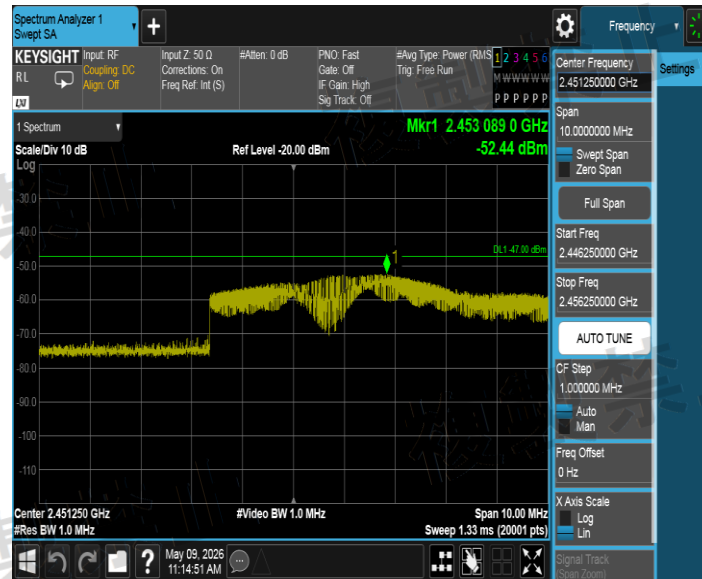



NTNV_11A_Ant1_5600_716.28_Ant1

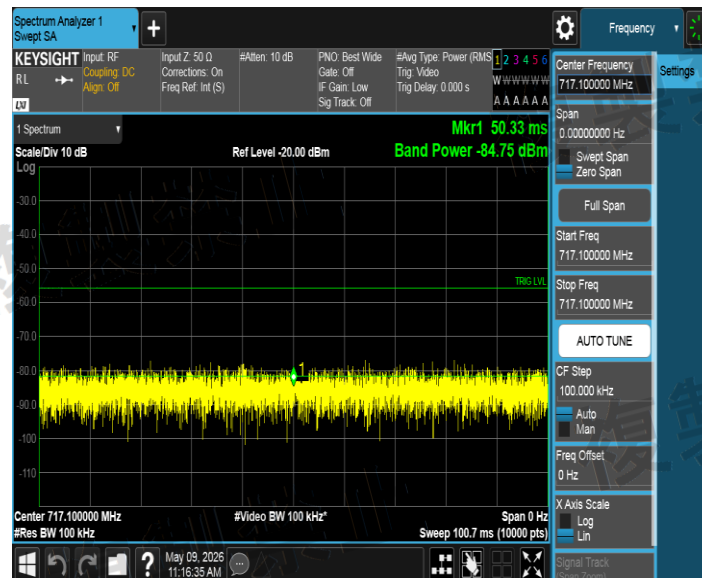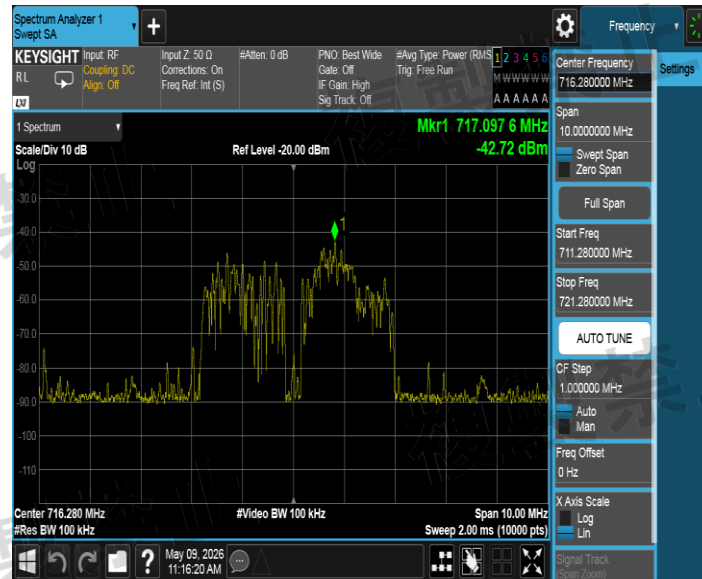



NTNV_11N20SISO_Ant1_5180_705.12_Ant1

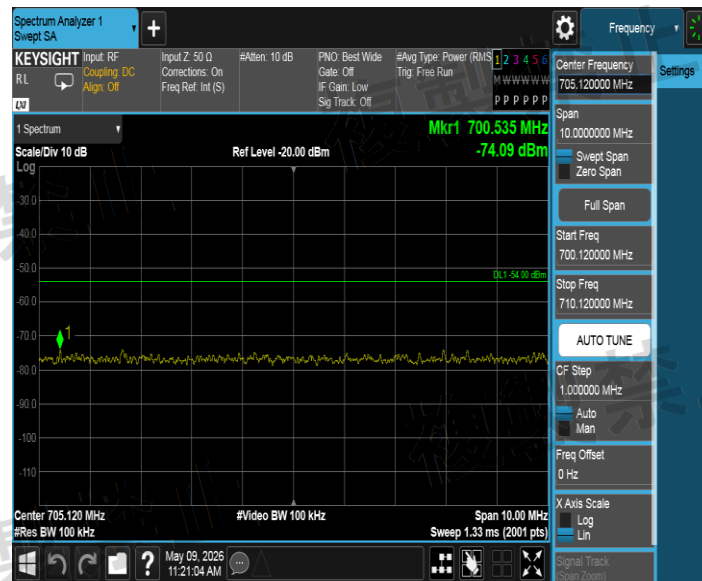



NTNV_11N20SISO_Ant1_5180_1727.50_Ant1

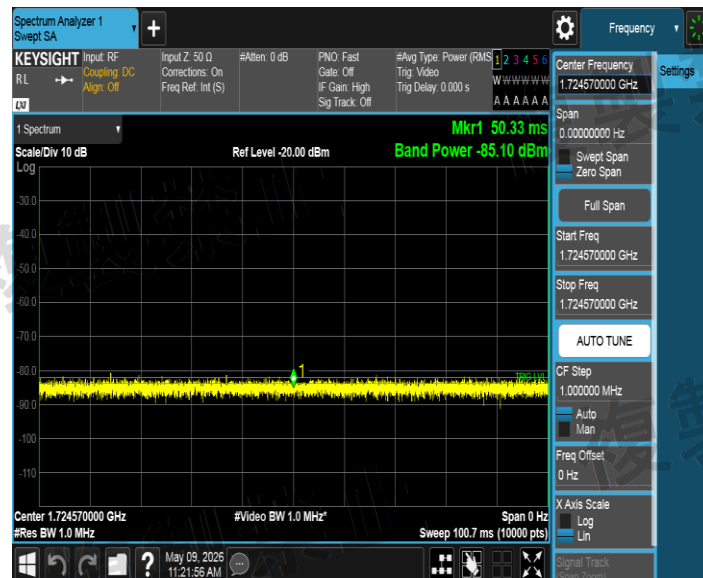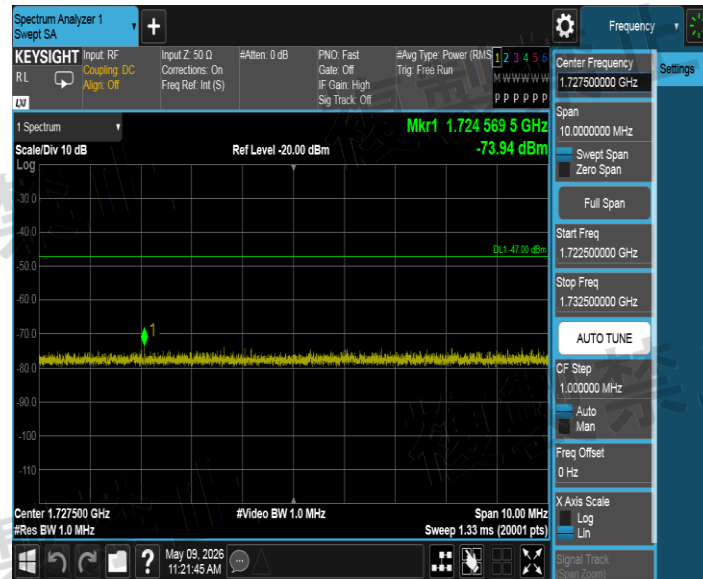



NTNV_11N20SISO_Ant1_5180_1762.50_Ant1

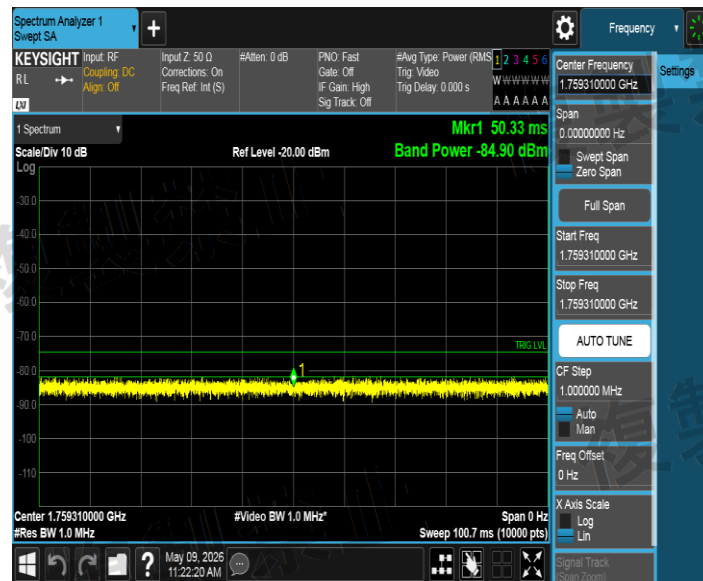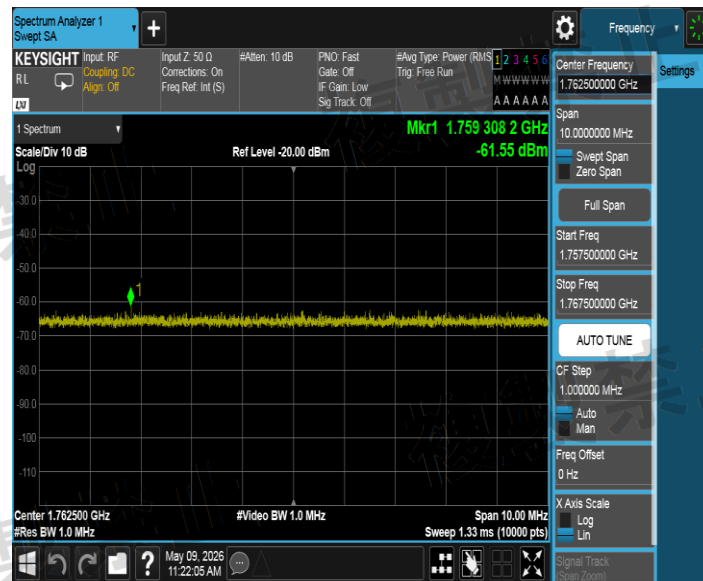



NTNV_11N20SISO_Ant1_5500_1951.25_Ant1

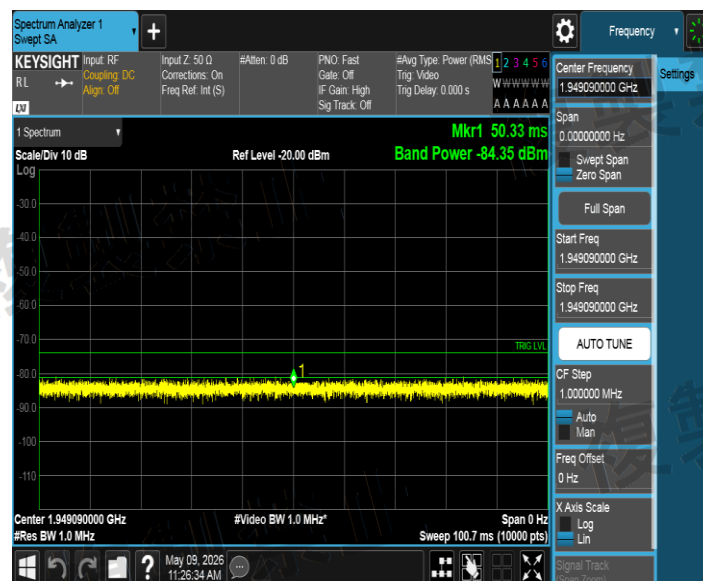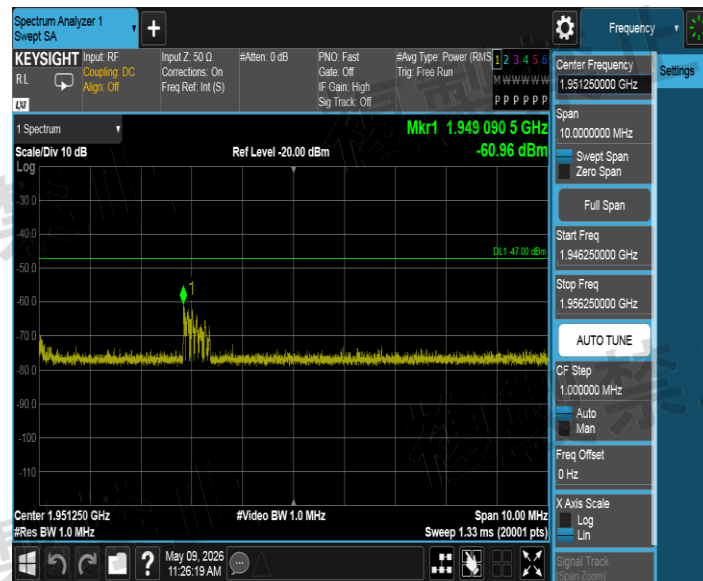

NTNV_11N20SISO_Ant1_5500_5103.75_Ant1

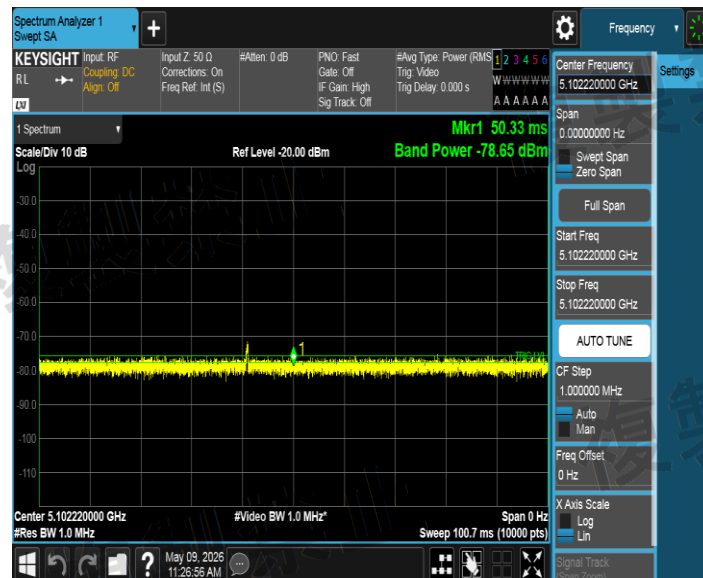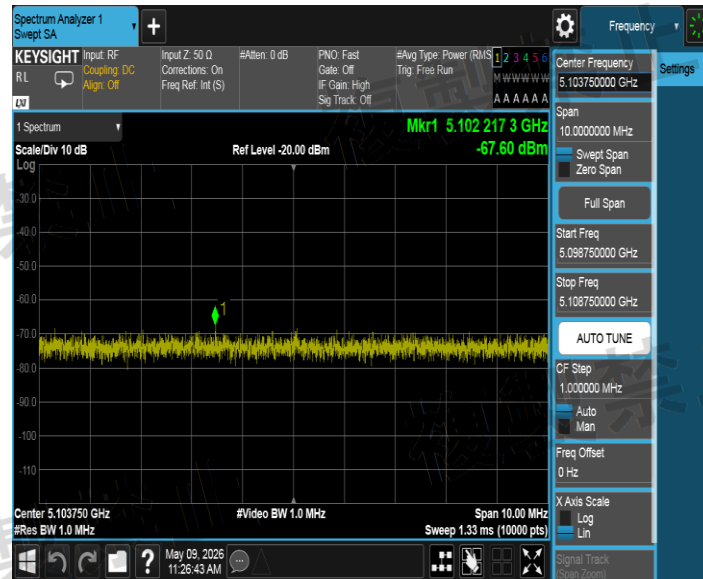

NTNV_11N20SISO_Ant1_5700_1952.50_Ant1

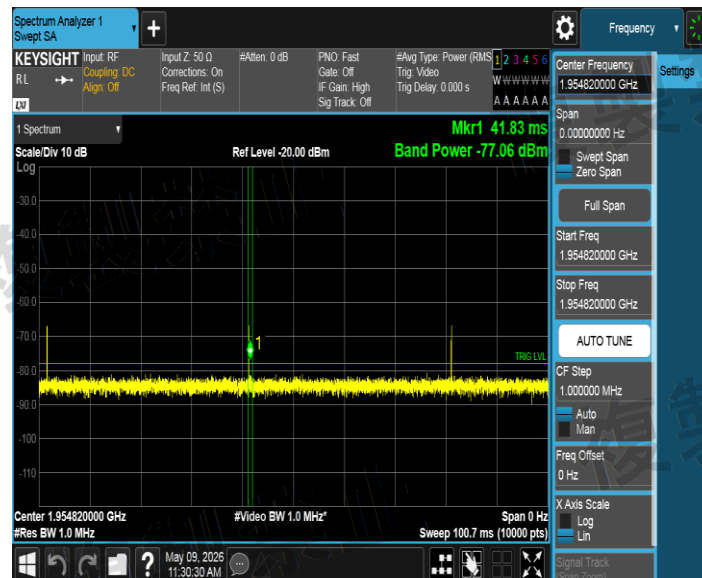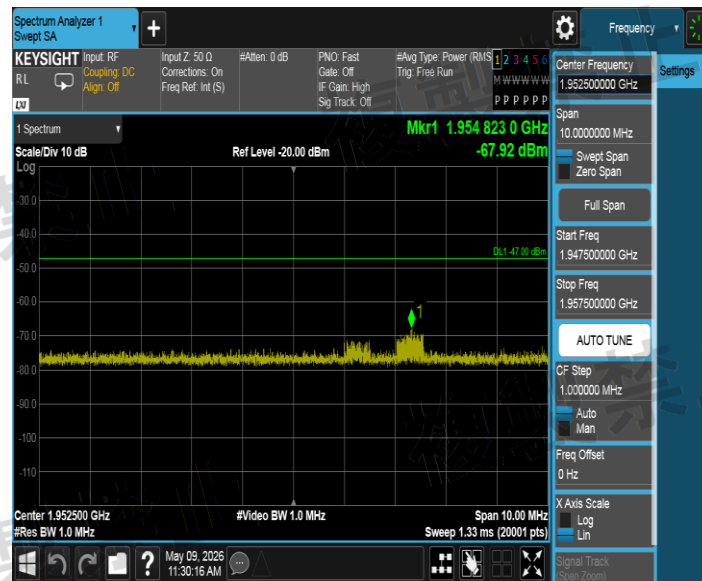

NTNV_11N40SISO_Ant1_5190_722.10_Ant1

