

RF Test Data for 5G Wi-Fi (Conducted Measurements)

General Description of EUT	
EUT Name:	Portable Gaming Computer(Tablet computer)
Model:	AYANEO Pocket BLOCK
Sample ID:	HC-C-202509-0277-01-03-2#
Test Standard:	FCC Part 15.407
Environmental Conditions	
Ambient Temperature:	25℃
Ambient Humidity:	45%RH
Test Power Supply:	DC 3.85V
Test Engineer:	Gold. zhang
Note: For a more detailed features description, please refer to the report TBR-C-202509-0277-163	

Contents



1: Emission Bandwidth	3
1.1 Test Result.....	3
1.2 Test Graphs	4
2: Occupied channel bandwidth.....	7
2.1 Test Result.....	7
2.2 Test Graphs	8
3: Min emission bandwidth	13
3.1 Test Result-B4.....	13
3.2 Test Graphs-B4	14
4: Duty Cycle.....	17
4.1 Test Result.....	17
4.2 Test Graphs	18
5: Maximum conducted output power	20
5.1 Test Result.....	20
6: Maximum power spectral density	21
6.1 Test Result.....	21
6.2 Test Graphs	22
7: Band edge measurements.....	27
7.1 Test Result B1	27
7.2 Test Result B4.....	28
7.3 Test Graphs B1	30
7.4 Test Graphs B4	32
8: Conducted Spurious Emission	34
8.1 Test Result.....	34
8.2 Test Graphs	36
9: Frequency Stability	46
9.1 Test Result.....	46
10: Emissions in Restricted Bands	50
10.1 Test Result.....	50
10.2 Test Graphs.....	53

1: Emission Bandwidth


1.1 Test Result

TestMode	Antenna	Frequency[MHz]	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	19.52	5170.24	5189.76	---	---
11A	Ant1	5200	19.40	5190.32	5209.72	---	---
11A	Ant1	5240	19.92	5230.08	5250.00	---	---
11N20SISO	Ant1	5180	20.36	5169.72	5190.08	---	---
11N20SISO	Ant1	5200	20.20	5189.96	5210.16	---	---
11N20SISO	Ant1	5240	20.12	5229.92	5250.04	---	---
11N40SISO	Ant1	5190	40.40	5169.60	5210.00	---	---
11N40SISO	Ant1	5230	40.32	5210.16	5250.48	---	---
11AC20SISO	Ant1	5180	19.88	5170.08	5189.96	---	---
11AC20SISO	Ant1	5200	19.96	5190.04	5210.00	---	---
11AC20SISO	Ant1	5240	19.96	5229.92	5249.88	---	---
11AC40SISO	Ant1	5190	40.08	5170.00	5210.08	---	---
11AC40SISO	Ant1	5230	39.36	5210.48	5249.84	---	---
11AC80SISO	Ant1	5210	80.00	5170.00	5250.00	---	---


1.2 Test Graphs

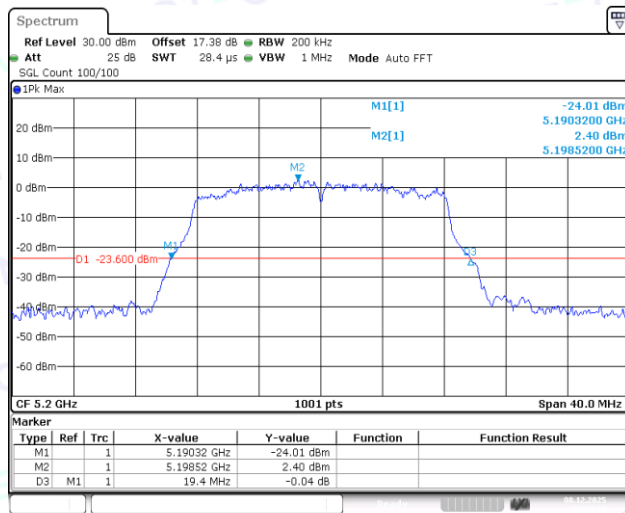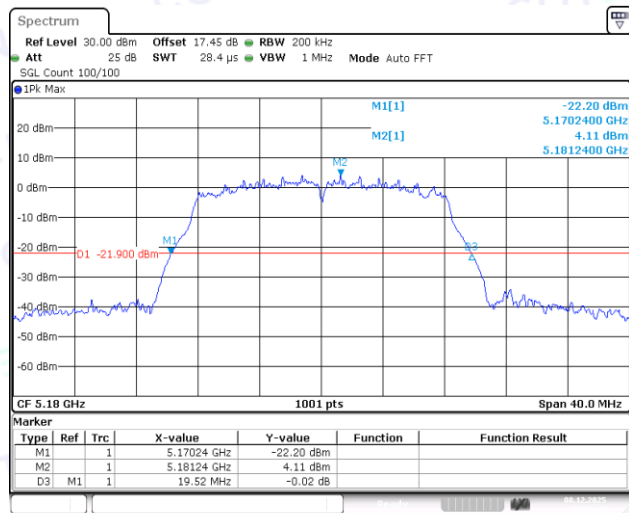


11A-Ant1-5180

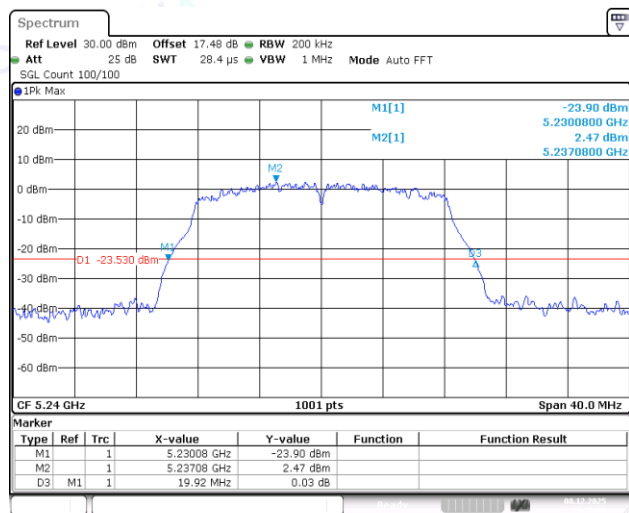


11A-Ant1-5200

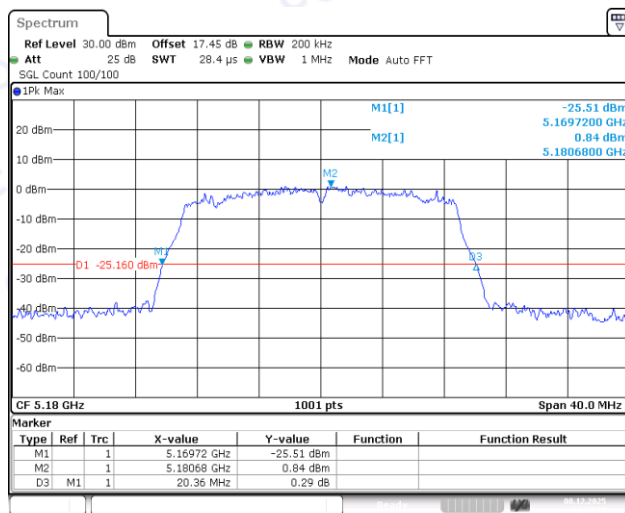

11A-Ant1-5240


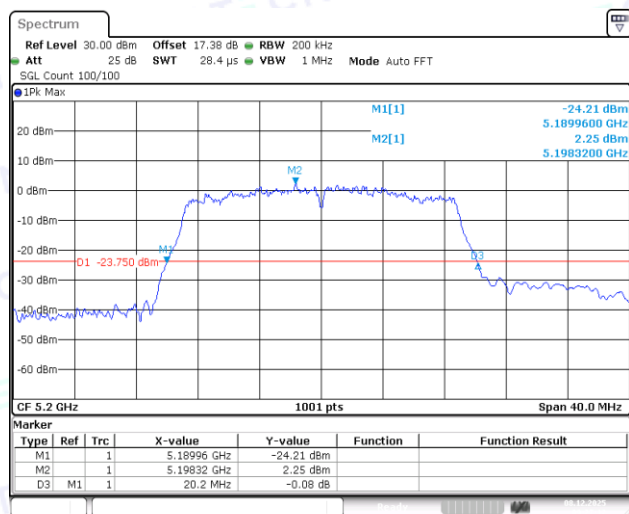


11N20SISO-Ant1-5180

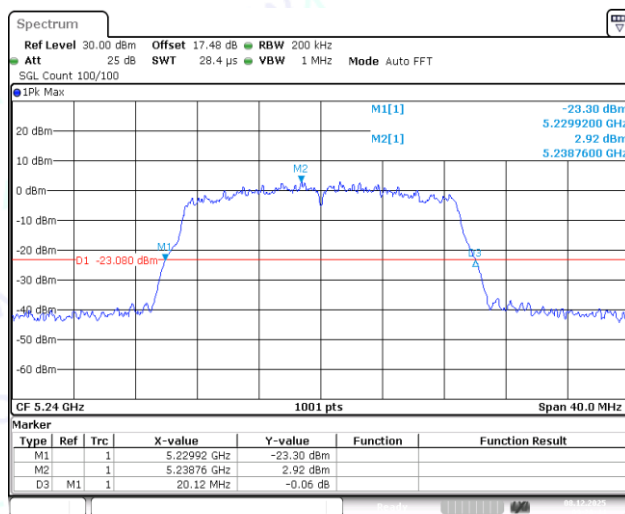



11N20SISO-Ant1-5200

11N20SISO-Ant1-5240

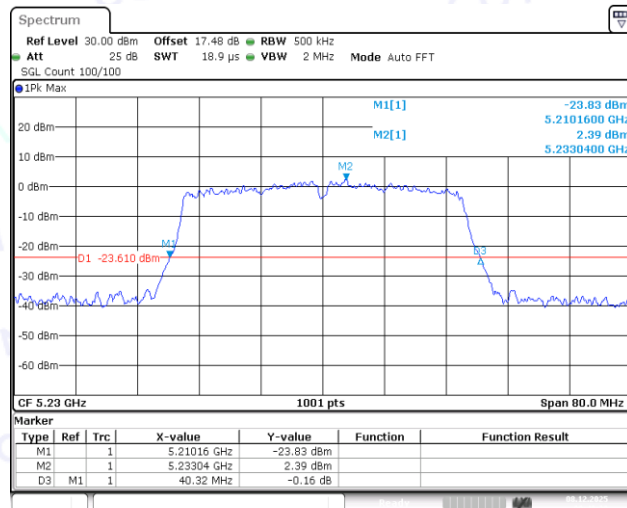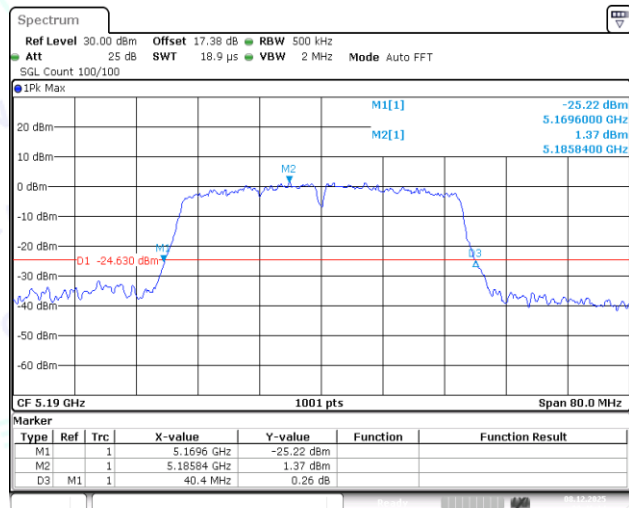



11N40SISO-Ant1-5190

11N40SISO-Ant1-5230

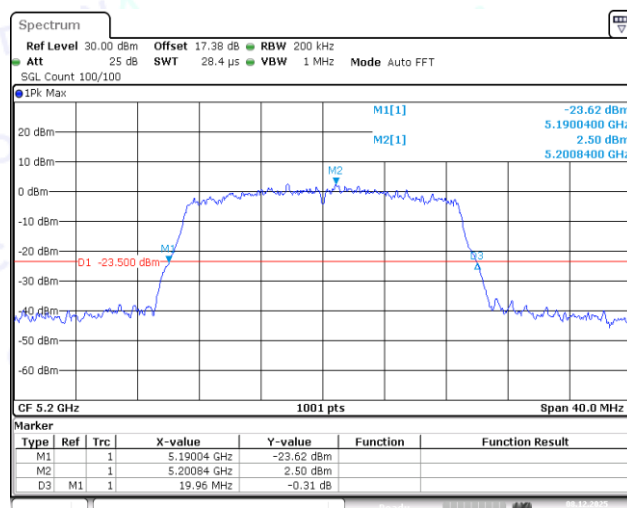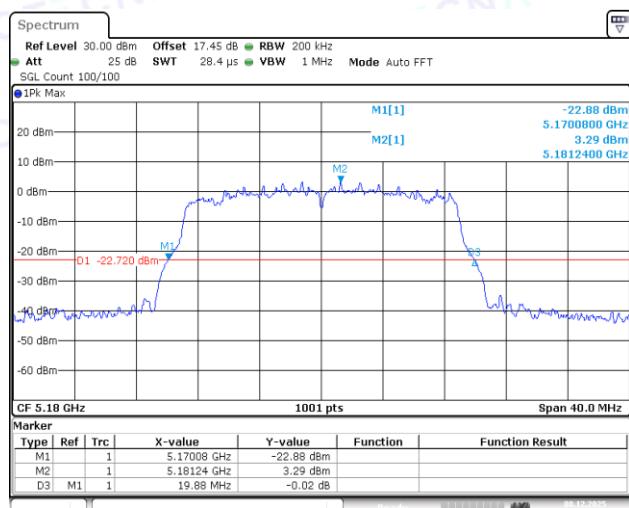


11AC20SISO-Ant1-5180

11AC20SISO-Ant1-5200

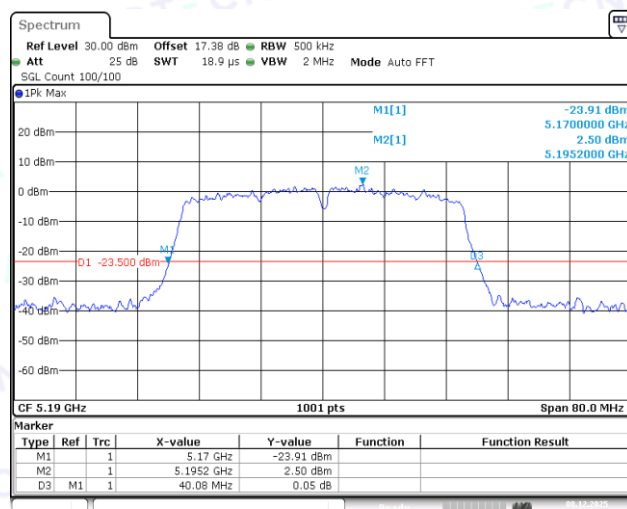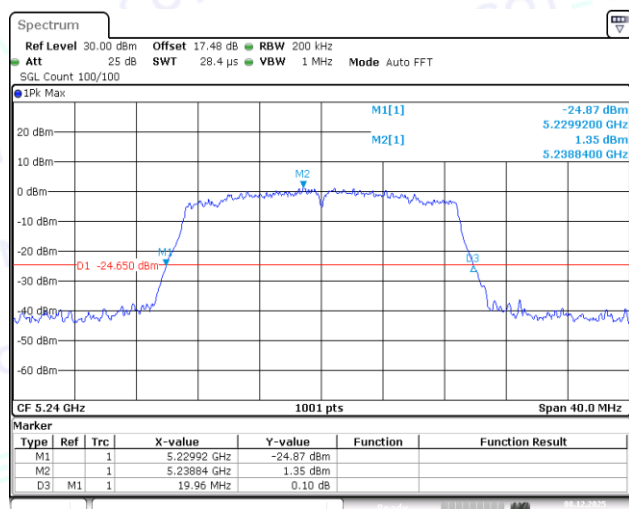


11AC20SISO-Ant1-5240

11AC40SISO-Ant1-5190

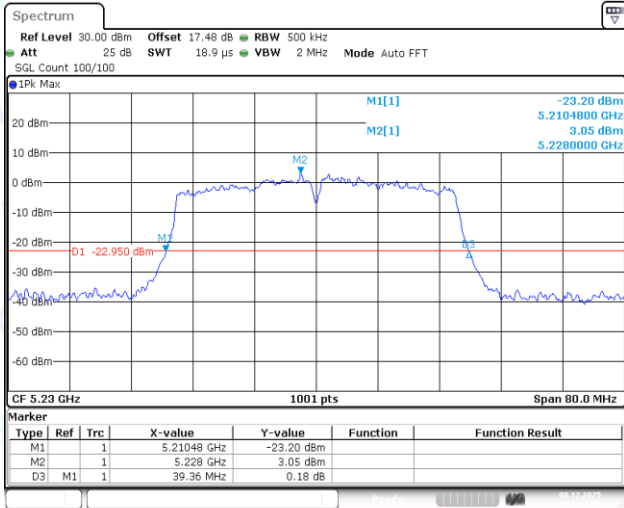

11AC40SISO-Ant1-5230

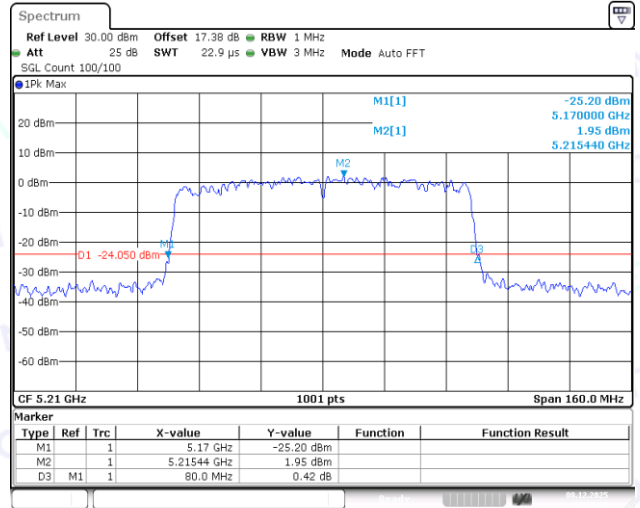


11AC80SISO-Ant1-5210

2: Occupied channel bandwidth


2.1 Test Result

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	16.663	5171.7283	5188.3916	---	---
11A	Ant1	5200	16.424	5191.8082	5208.2318	---	---
11A	Ant1	5240	16.424	5231.7283	5248.1518	---	---
11A	Ant1	5745	16.543	5736.6883	5753.2318	---	---
11A	Ant1	5785	16.583	5776.6883	5793.2717	---	---
11A	Ant1	5825	16.663	5816.6883	5833.3516	---	---
11N20SISO	Ant1	5180	17.622	5171.1688	5188.7912	---	---
11N20SISO	Ant1	5200	17.702	5191.1289	5208.8312	---	---
11N20SISO	Ant1	5240	17.782	5231.2088	5248.9910	---	---
11N20SISO	Ant1	5745	18.062	5736.0889	5754.1508	---	---
11N20SISO	Ant1	5785	17.702	5776.1688	5793.8711	---	---
11N20SISO	Ant1	5825	18.062	5816.1289	5834.1908	---	---
11N40SISO	Ant1	5190	36.124	5171.9381	5208.0619	---	---
11N40SISO	Ant1	5230	36.204	5211.8581	5248.0619	---	---
11N40SISO	Ant1	5755	35.964	5737.0979	5773.0619	---	---
11N40SISO	Ant1	5795	36.044	5776.9381	5812.9820	---	---
11AC20SISO	Ant1	5180	17.702	5171.2088	5188.9111	---	---
11AC20SISO	Ant1	5200	17.782	5191.1688	5208.9510	---	---
11AC20SISO	Ant1	5240	18.062	5230.7692	5248.8312	---	---
11AC20SISO	Ant1	5745	18.142	5735.8492	5753.9910	---	---
11AC20SISO	Ant1	5785	18.022	5775.9291	5793.9510	---	---
11AC20SISO	Ant1	5825	17.902	5816.0889	5833.9910	---	---
11AC40SISO	Ant1	5190	36.124	5171.8581	5207.9820	---	---
11AC40SISO	Ant1	5230	36.044	5212.0180	5248.0619	---	---
11AC40SISO	Ant1	5755	36.124	5736.8581	5772.9820	---	---
11AC40SISO	Ant1	5795	36.204	5776.9381	5813.1419	---	---
11AC80SISO	Ant1	5210	75.445	5172.4376	5247.8821	---	---
11AC80SISO	Ant1	5775	75.125	5737.4376	5812.5624	---	---


2.2 Test Graphs

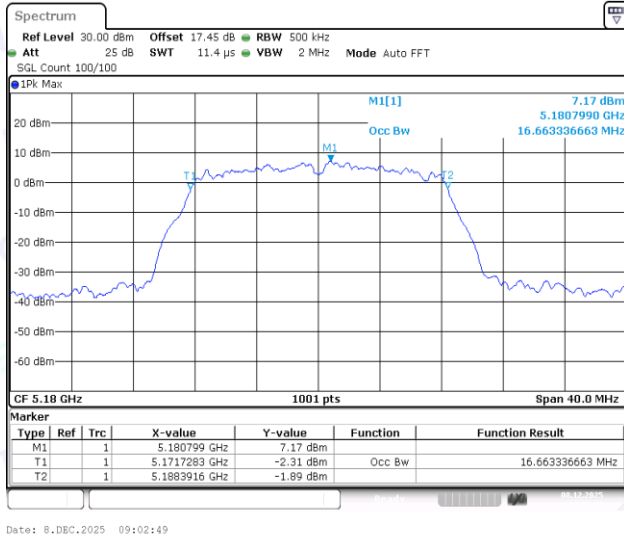


11A-Ant1-5180

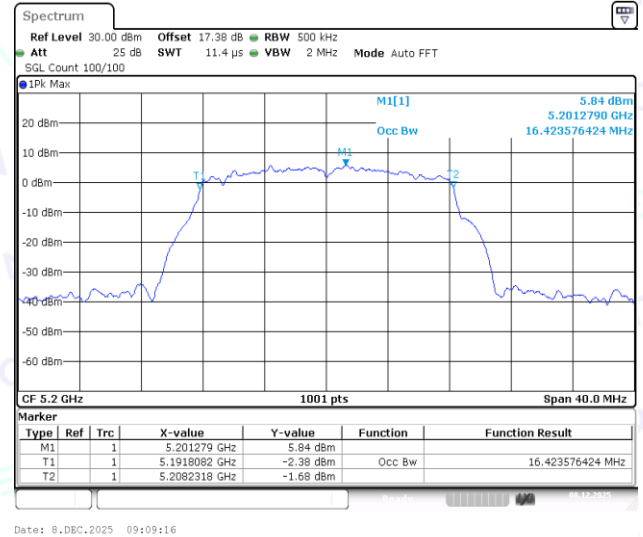


11A-Ant1-5200

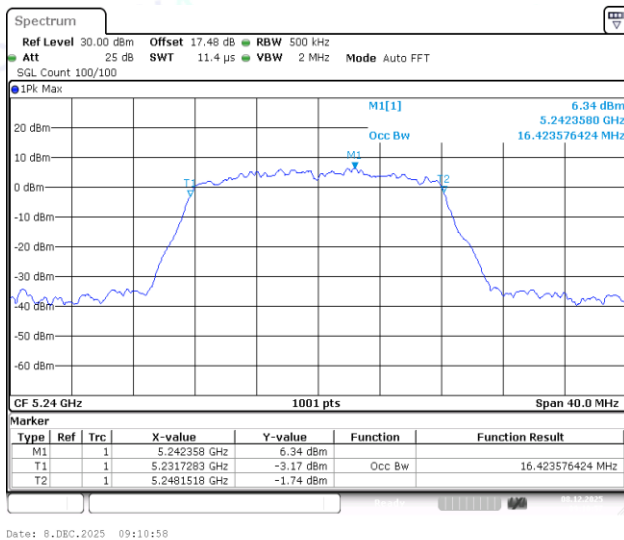


11A-Ant1-5240

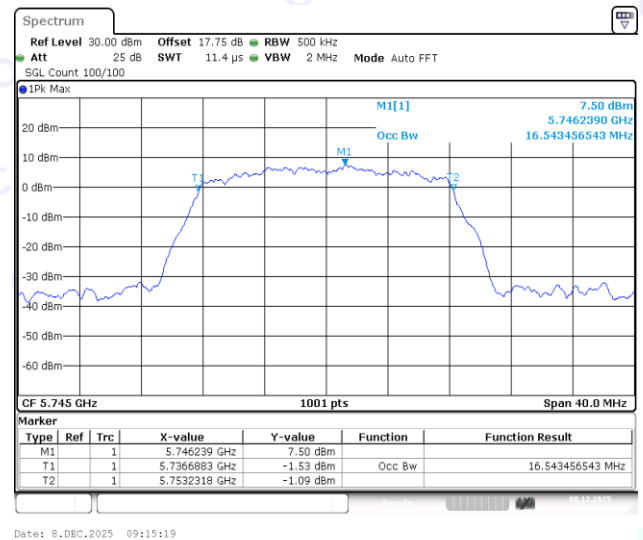


11A-Ant1-5745

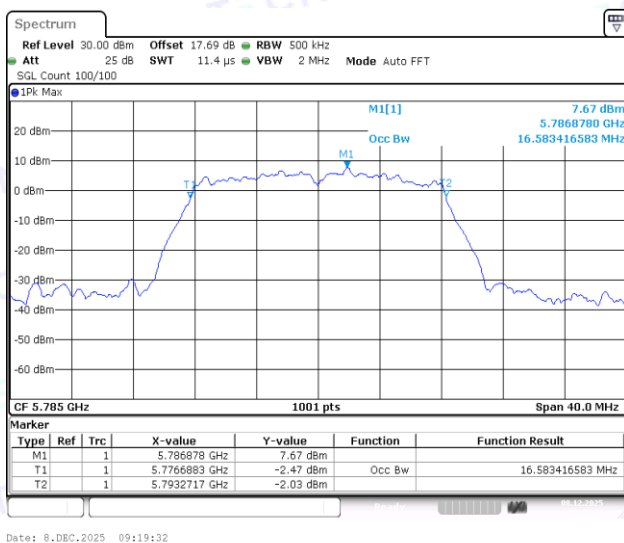


11A-Ant1-5785

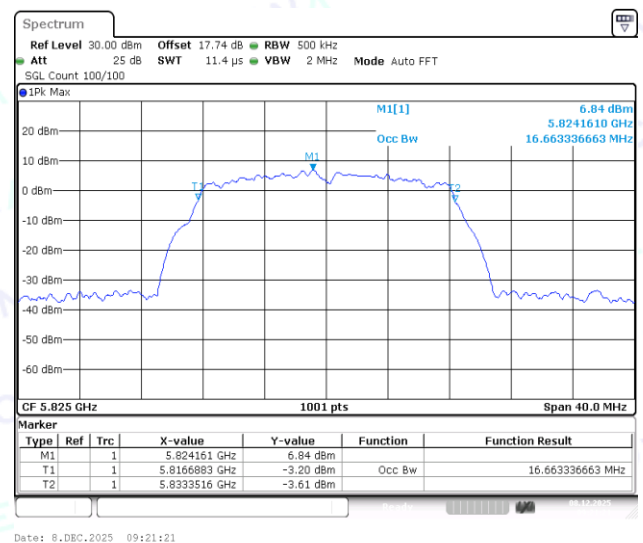


11A-Ant1-5825

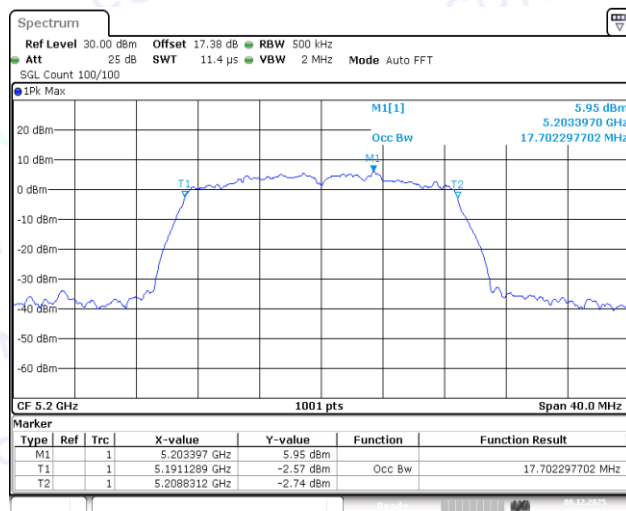


11N20SISO-Ant1-5180

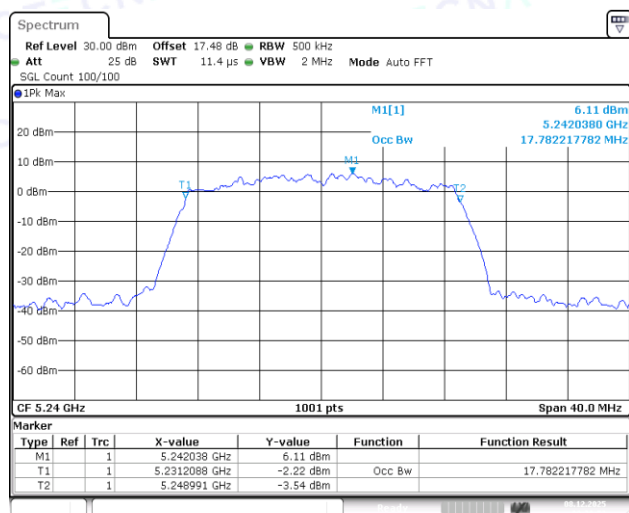


11N20SISO-Ant1-5200

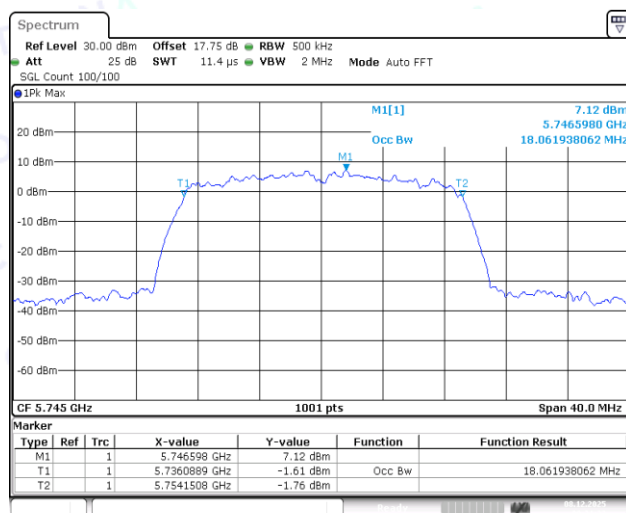

11N20SISO-Ant1-5240

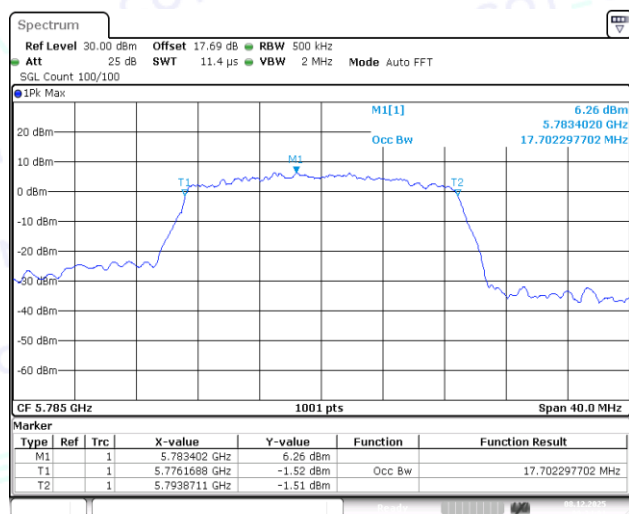



11N20SISO-Ant1-5745

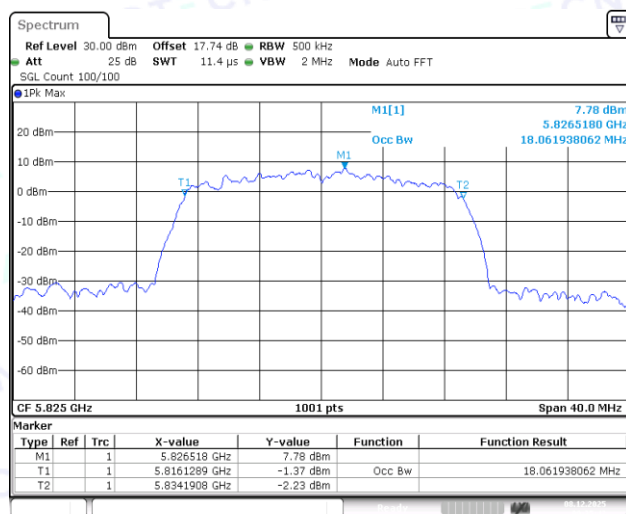

11N20SISO-Ant1-5785





11N20SISO-Ant1-5825

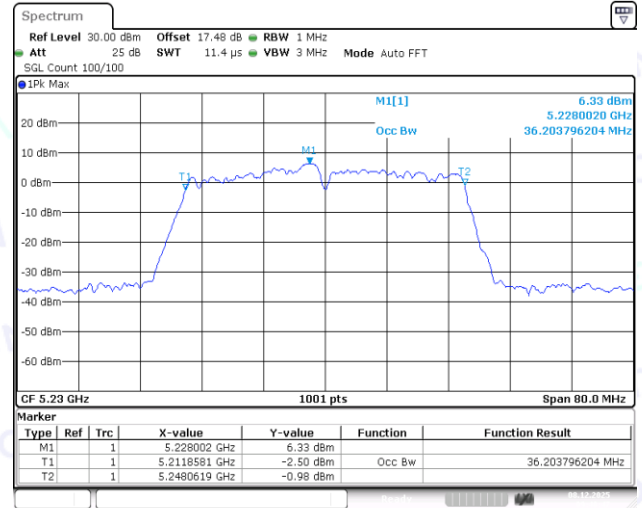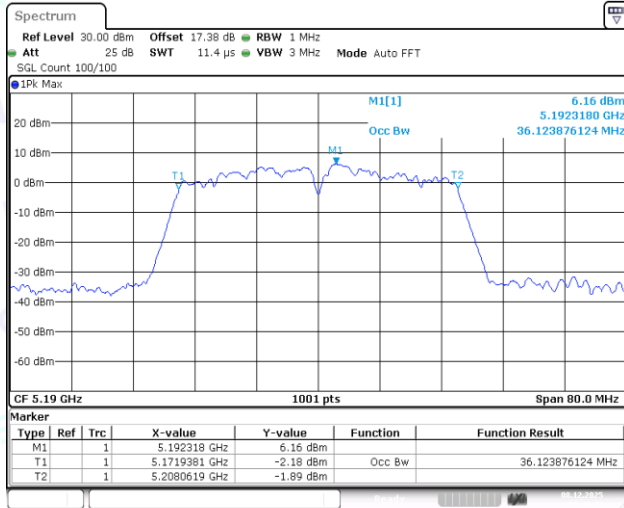



11N40SISO-Ant1-5190

11N40SISO-Ant1-5230

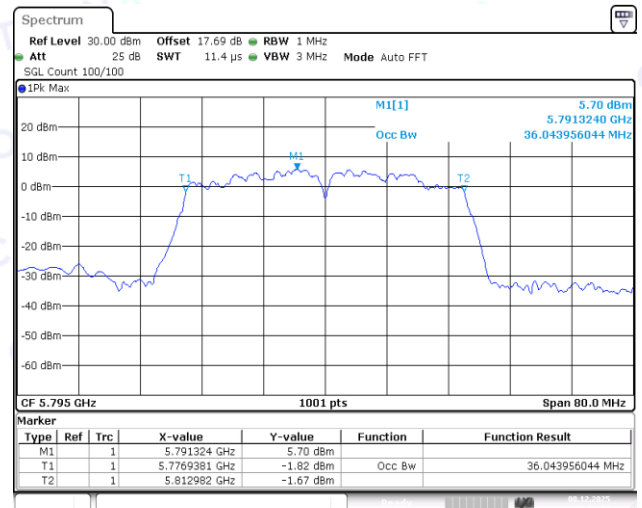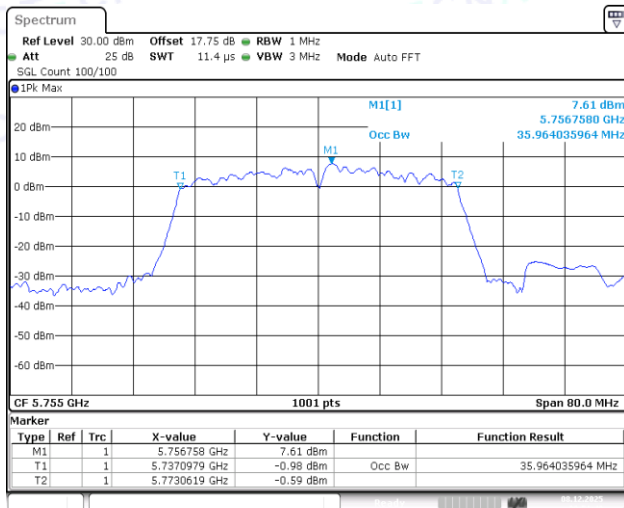



11N40SISO-Ant1-5755

11N40SISO-Ant1-5795

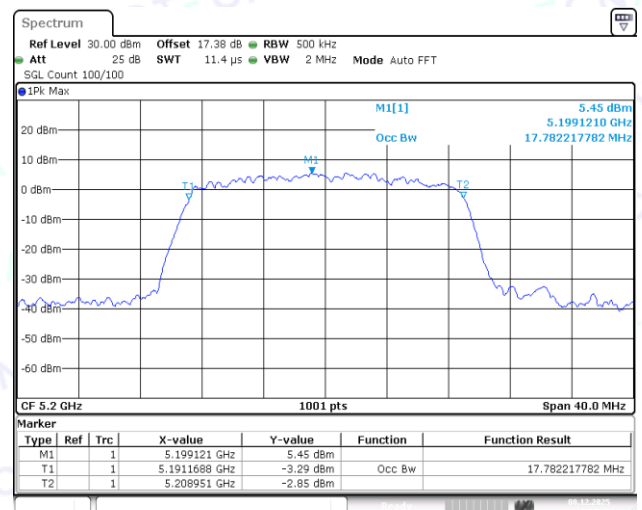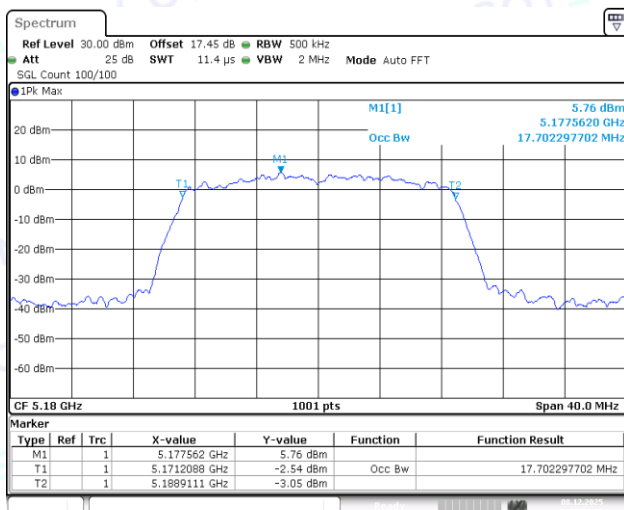



11AC20SISO-Ant1-5180

11AC20SISO-Ant1-5200

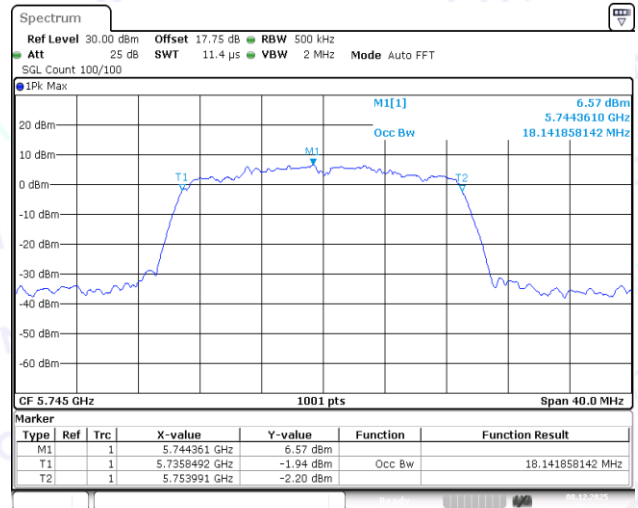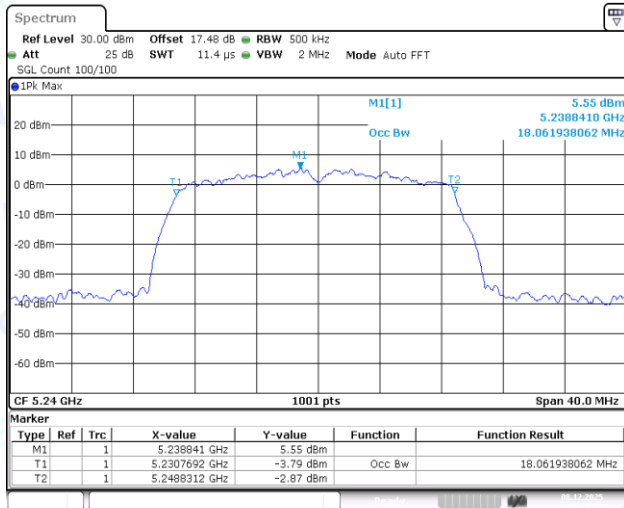



11AC20SISO-Ant1-5240

11AC20SISO-Ant1-5745

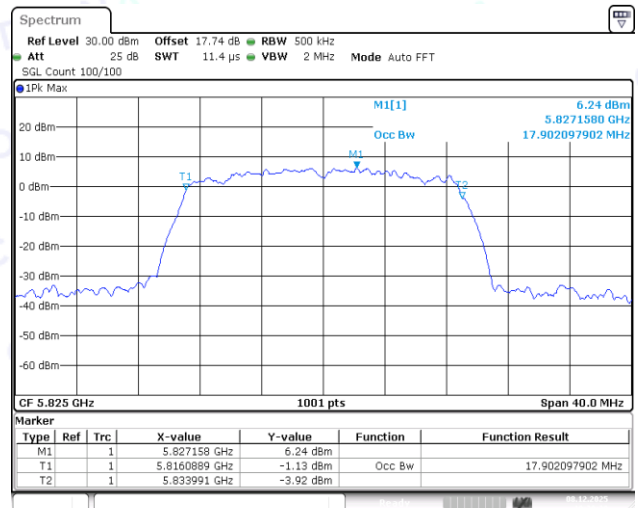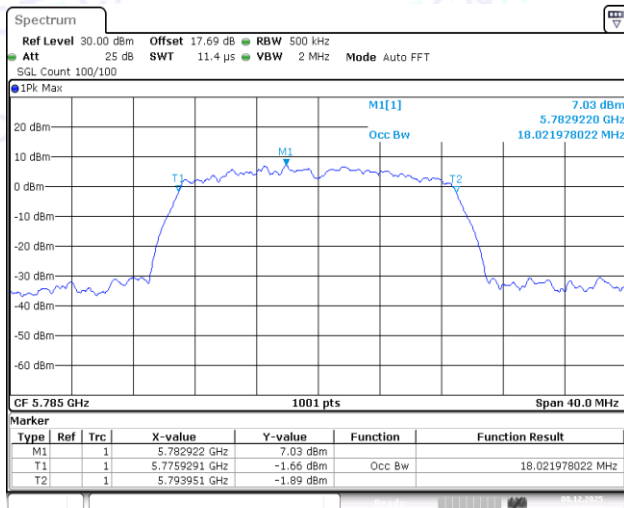



11AC20SISO-Ant1-5785

11AC20SISO-Ant1-5825

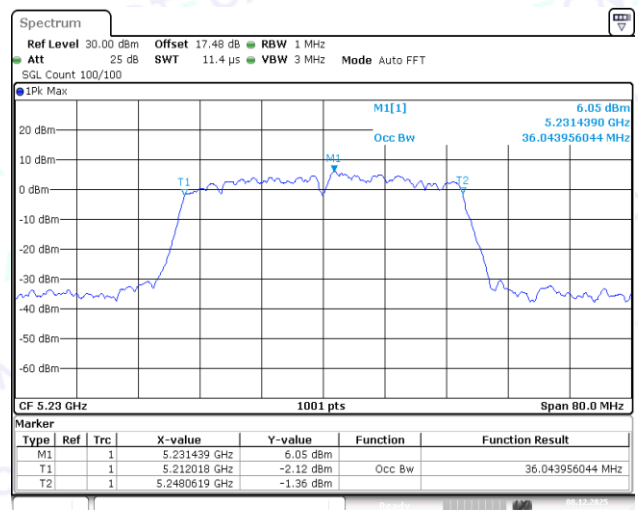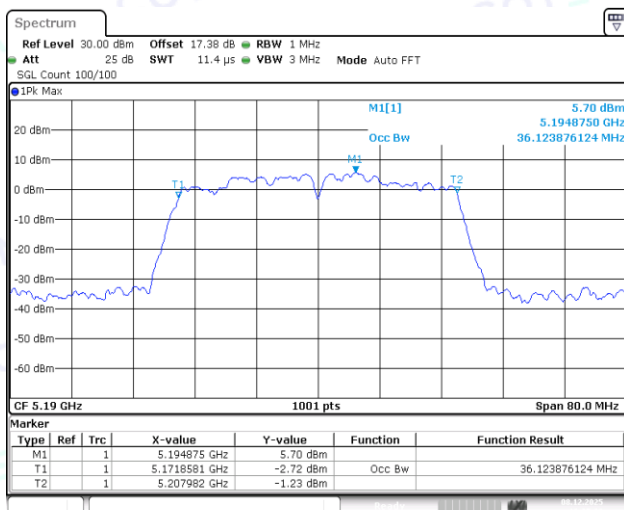



11AC40SISO-Ant1-5190

11AC40SISO-Ant1-5230

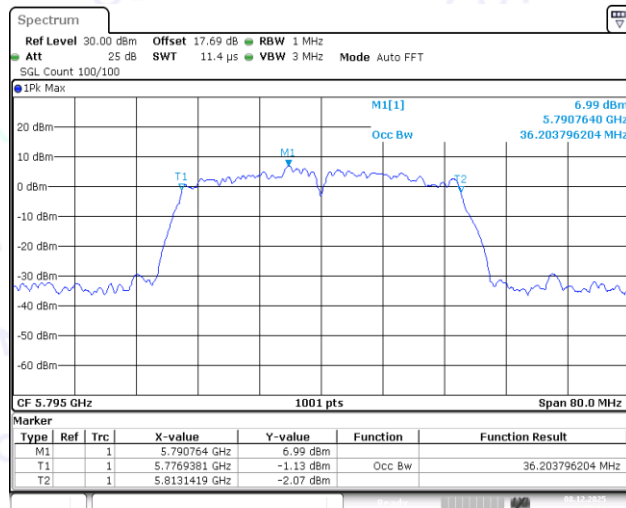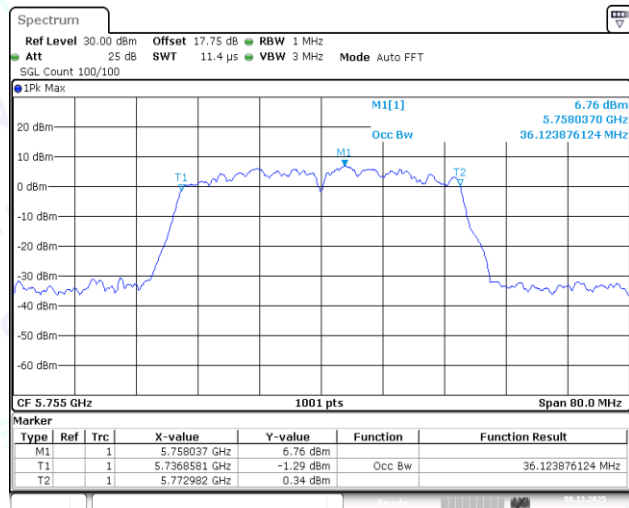

11AC40SISO-Ant1-5755

11AC40SISO-Ant1-5795

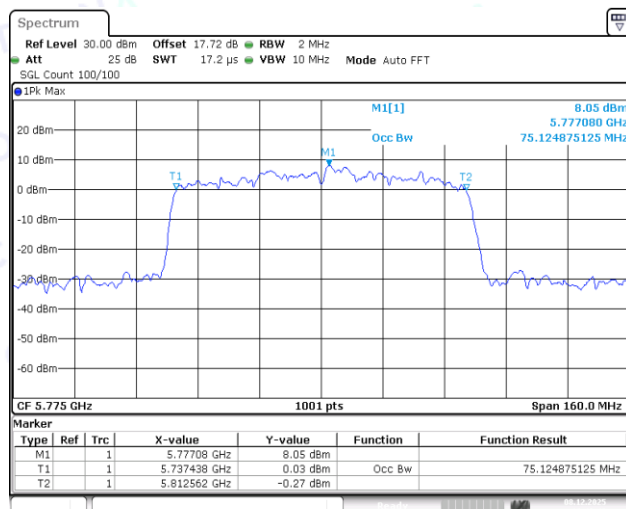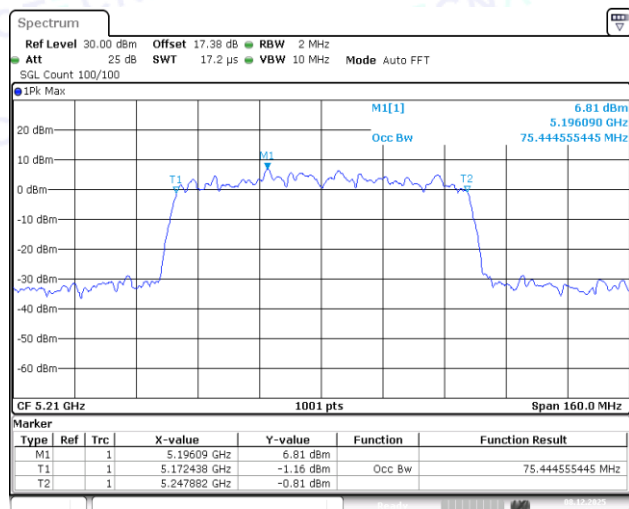

11AC80SISO-Ant1-5210


11AC80SISO-Ant1-5775



3: Min emission bandwidth

3.1 Test Result-B4

TestMode	Antenna	Frequency[MHz]	6dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.32	5736.84	5753.16	0.5	PASS
11A	Ant1	5785	15.12	5777.44	5792.56	0.5	PASS
11A	Ant1	5825	15.08	5817.48	5832.56	0.5	PASS
11N20SISO	Ant1	5745	15.04	5737.48	5752.52	0.5	PASS
11N20SISO	Ant1	5785	16.04	5777.48	5793.52	0.5	PASS
11N20SISO	Ant1	5825	17.52	5816.24	5833.76	0.5	PASS
11N40SISO	Ant1	5755	32.64	5739.96	5772.60	0.5	PASS
11N40SISO	Ant1	5795	35.20	5777.40	5812.60	0.5	PASS
11AC20SISO	Ant1	5745	17.52	5736.24	5753.76	0.5	PASS
11AC20SISO	Ant1	5785	17.60	5776.20	5793.80	0.5	PASS
11AC20SISO	Ant1	5825	17.28	5816.48	5833.76	0.5	PASS
11AC40SISO	Ant1	5755	36.32	5736.84	5773.16	0.5	PASS
11AC40SISO	Ant1	5795	22.80	5783.08	5805.88	0.5	PASS
11AC80SISO	Ant1	5775	66.40	5743.64	5810.04	0.5	PASS



3.2 Test Graphs-B4

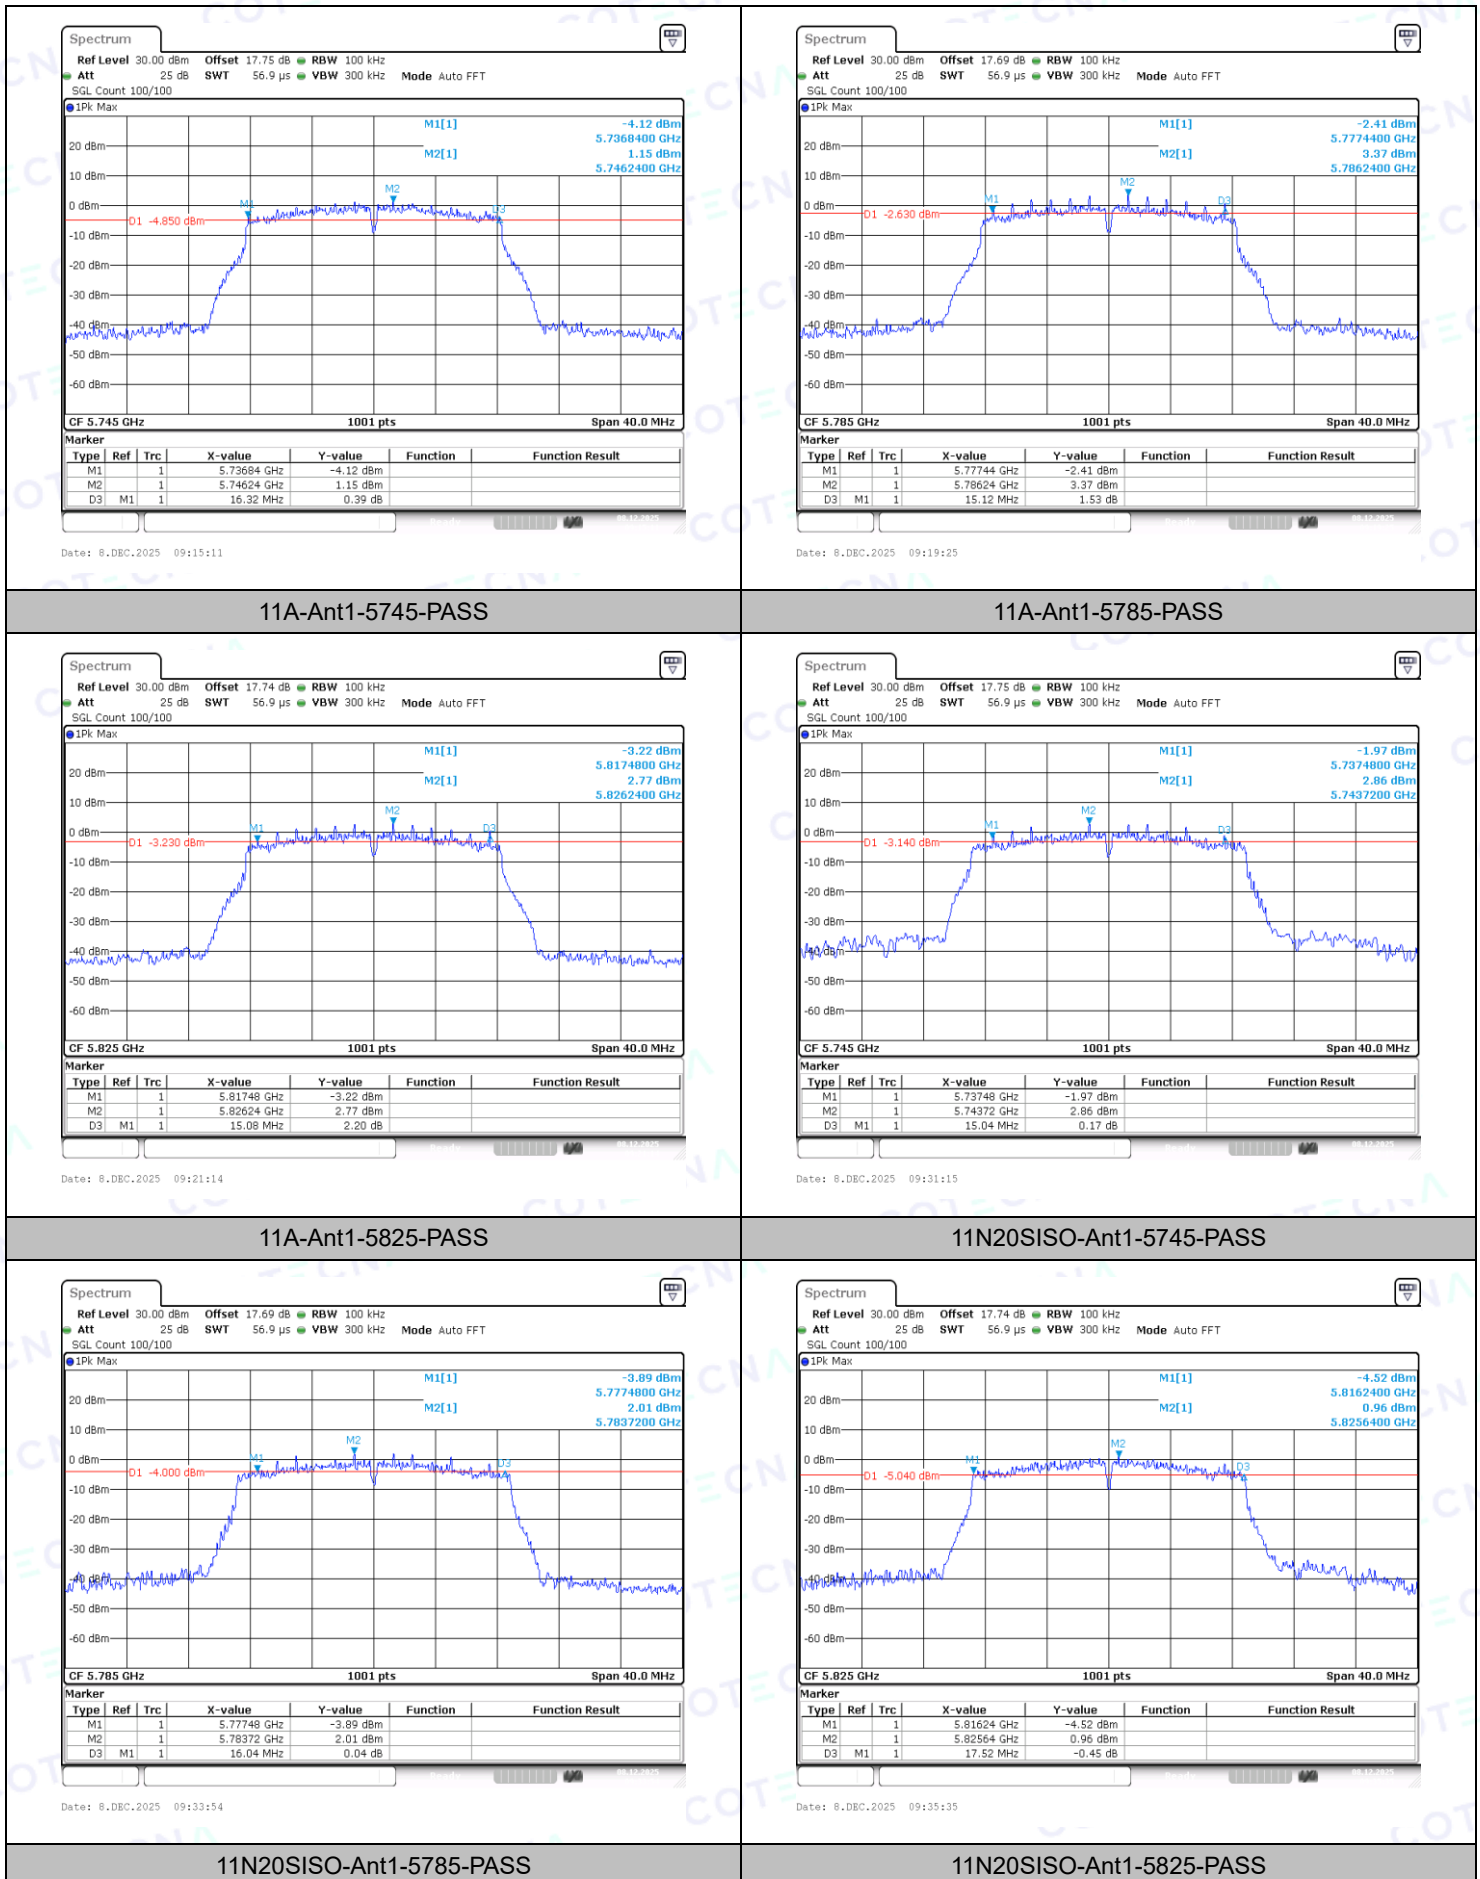

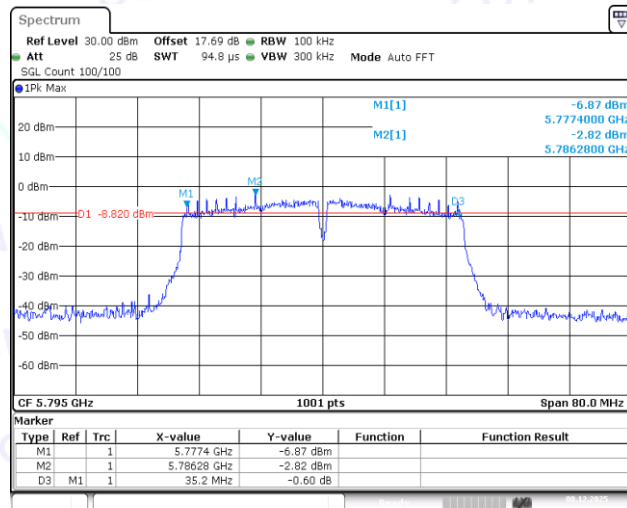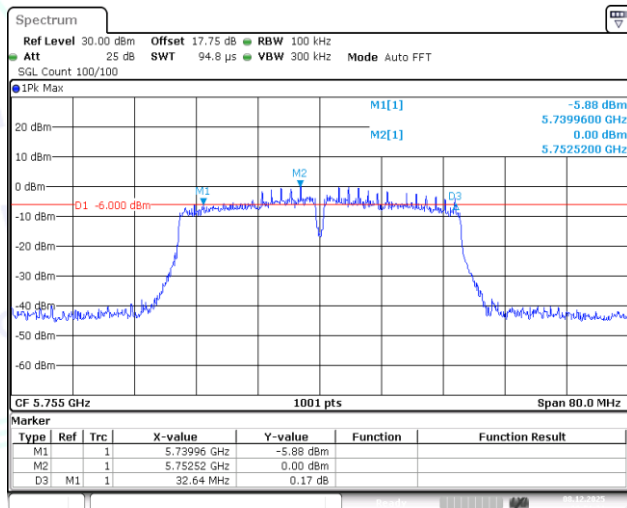



11N40SISO-Ant1-5755-PASS

11N40SISO-Ant1-5795-PASS

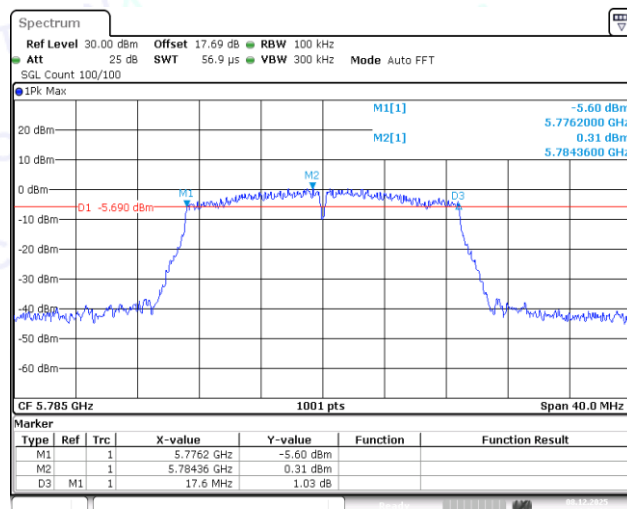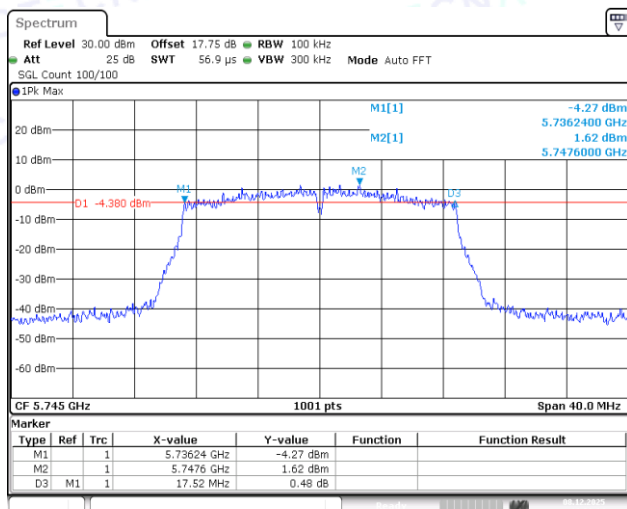


11AC20SISO-Ant1-5745-PASS

11AC20SISO-Ant1-5785-PASS

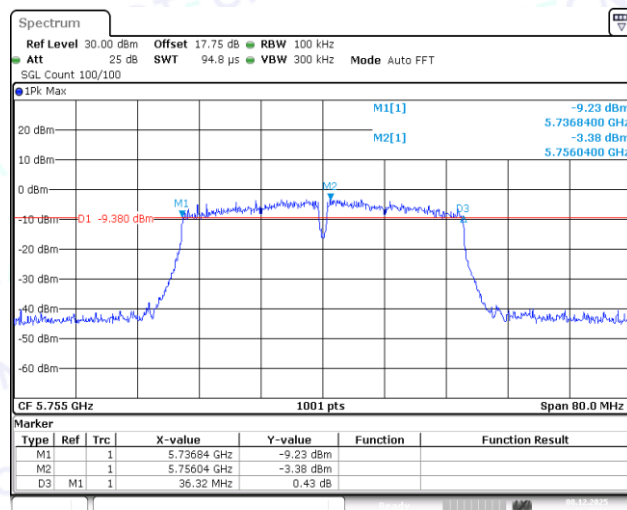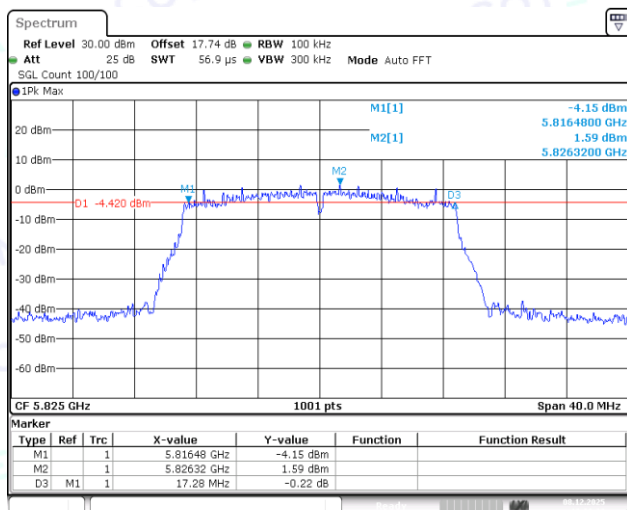


11AC20SISO-Ant1-5825-PASS

11AC40SISO-Ant1-5755-PASS

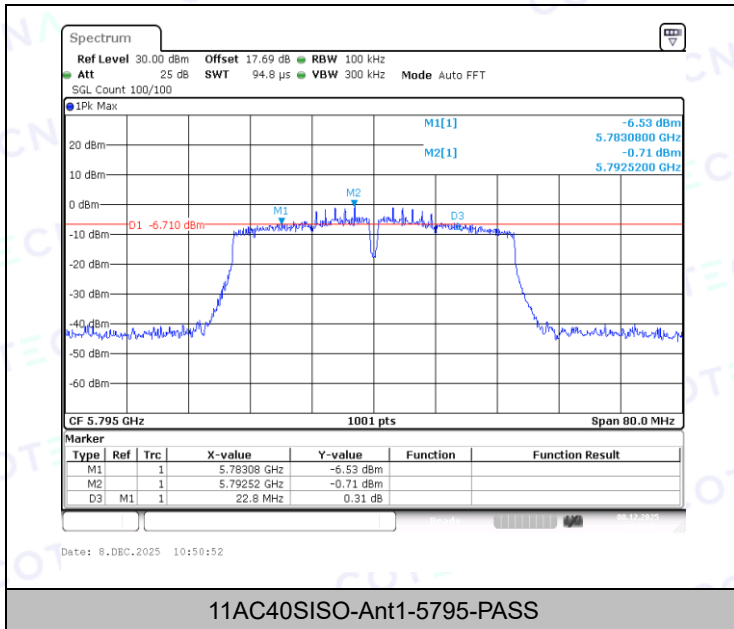

11AC40SISO-Ant1-5795-PASS

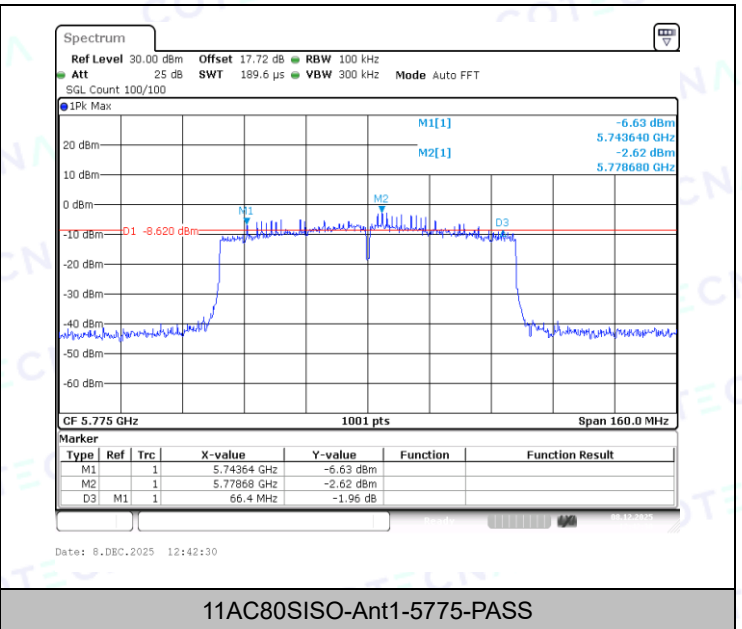

11AC80SISO-Ant1-5775-PASS

4: Duty Cycle

4.1 Test Result


TestMode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	DC Factor	1/T [kHz]
11A	Ant1	5180	1.40	1.44	97.22	0.12	0.71
11A	Ant1	5745	1.39	1.44	96.53	0.15	0.72
11N20SISO	Ant1	5180	1.30	1.35	96.30	0.16	0.77
11N20SISO	Ant1	5745	1.30	1.34	97.01	0.13	0.77
11N40SISO	Ant1	5190	0.65	0.70	92.86	0.32	1.54
11N40SISO	Ant1	5755	0.64	0.69	92.75	0.33	1.56
11AC20SISO	Ant1	5180	1.32	1.36	97.06	0.13	0.76
11AC20SISO	Ant1	5745	1.31	1.36	96.32	0.16	0.76
11AC40SISO	Ant1	5190	0.65	0.69	94.20	0.26	1.54
11AC40SISO	Ant1	5755	0.65	0.69	94.20	0.26	1.54
11AC80SISO	Ant1	5210	0.32	0.37	86.49	0.63	3.13
11AC80SISO	Ant1	5775	0.32	0.37	86.49	0.63	3.13



Note: 1, Duty Cycle= Transmission Duration/ Transmission Period

2, DC Factor= $10 \cdot \log_{10}(1/\text{Duty Cycle})$



3, $1/T = 1/\text{Transmission Duration}$

4.2 Test Graphs


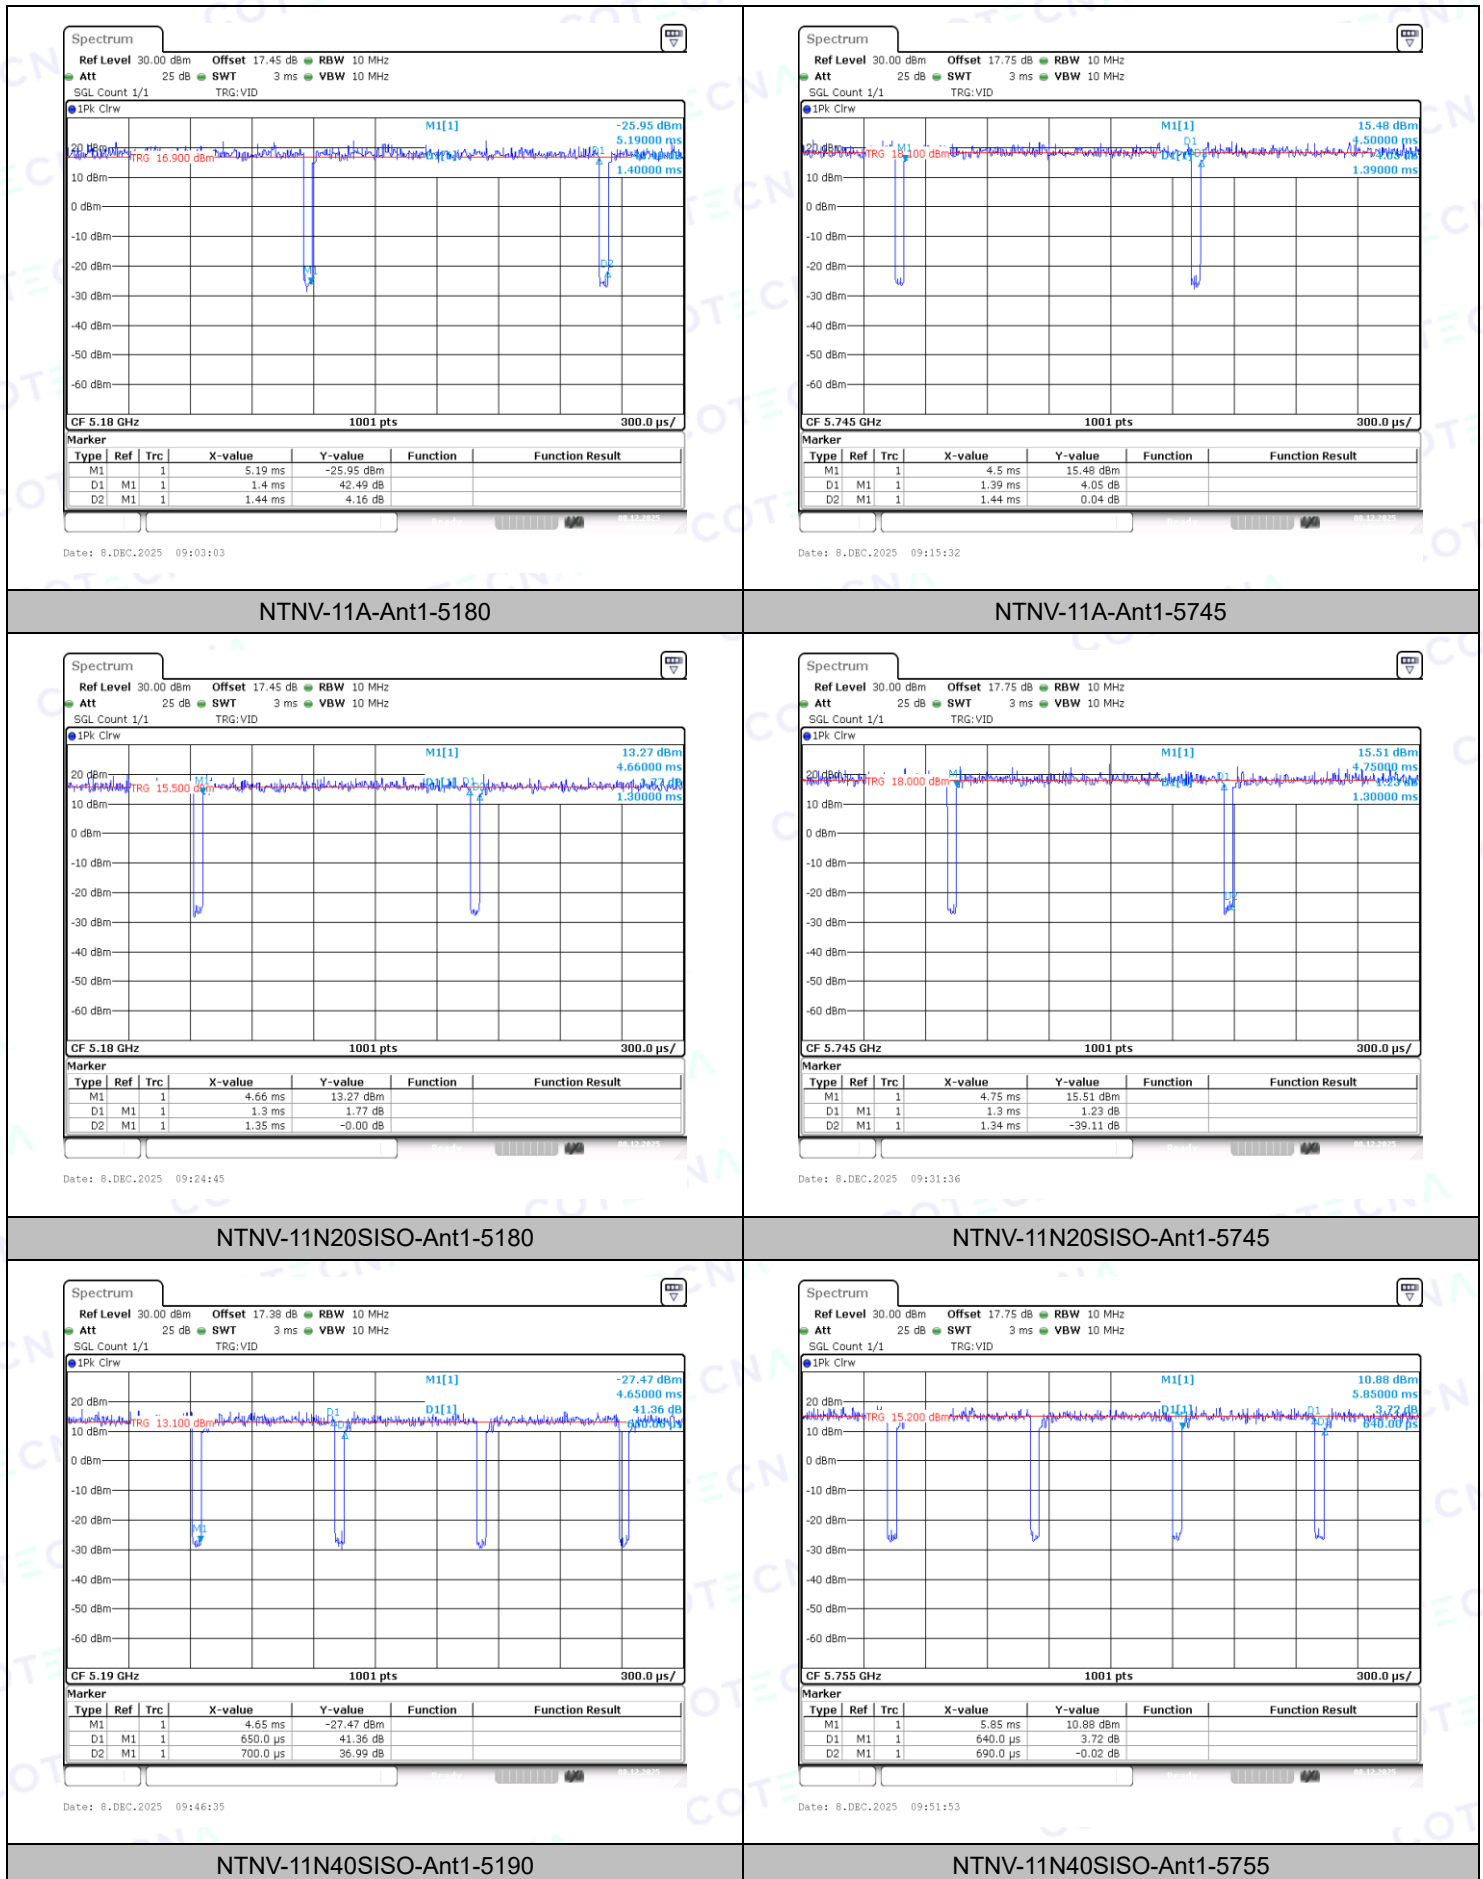


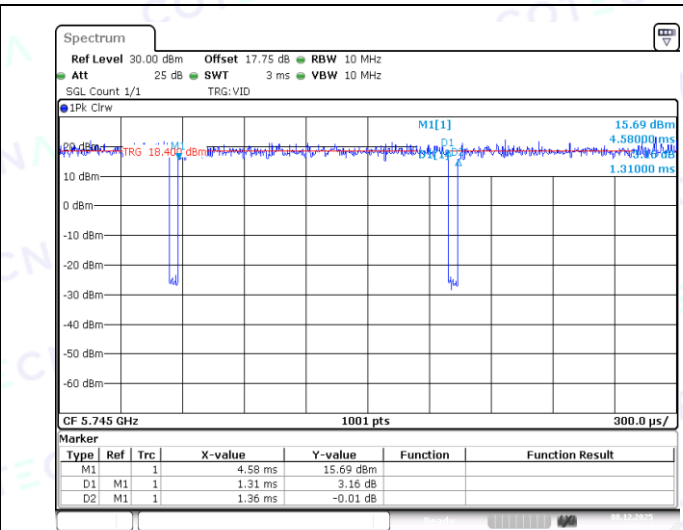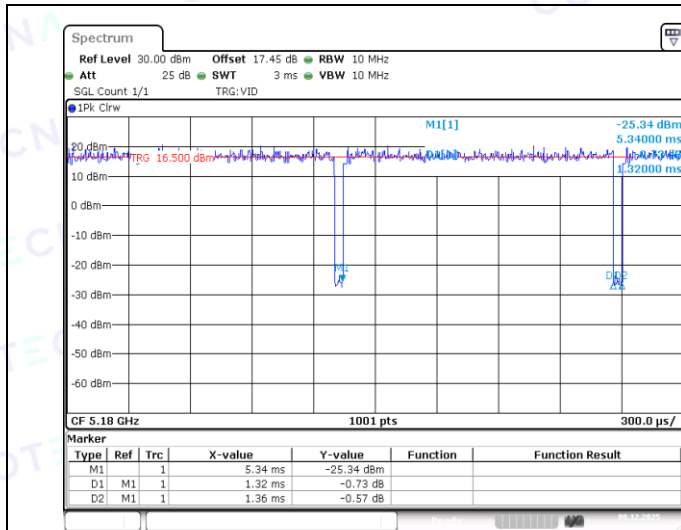

NTNV-11AC20SISO-Ant1-5180

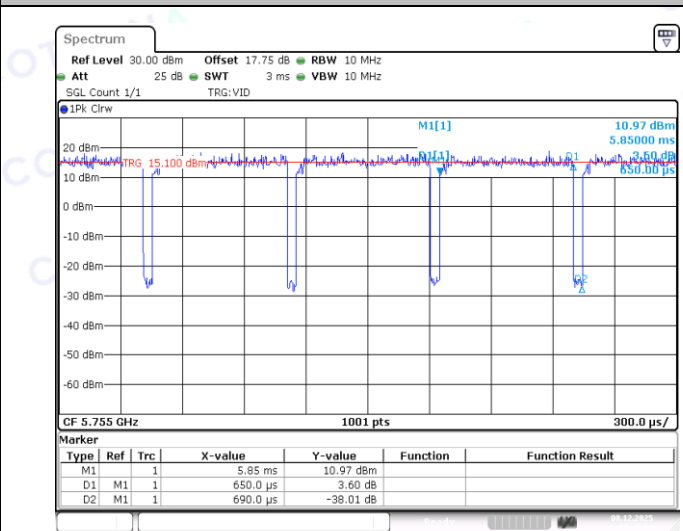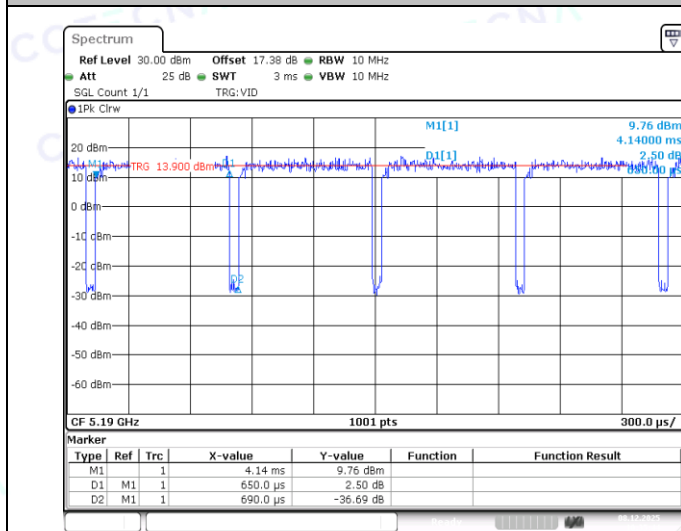

NTNV-11AC40SISO-Ant1-5190

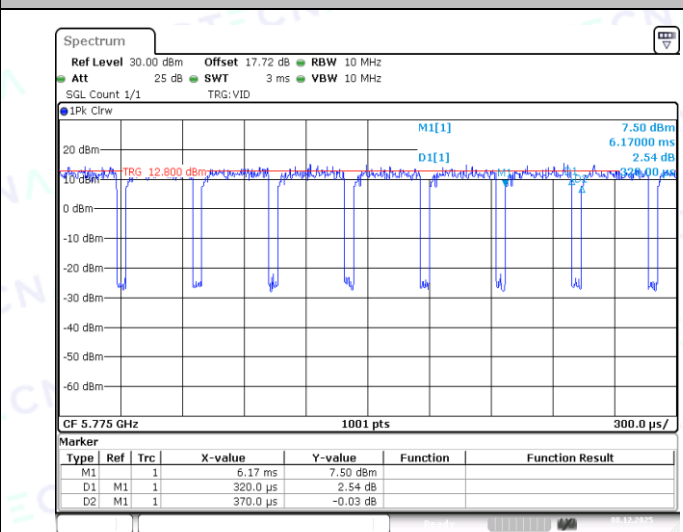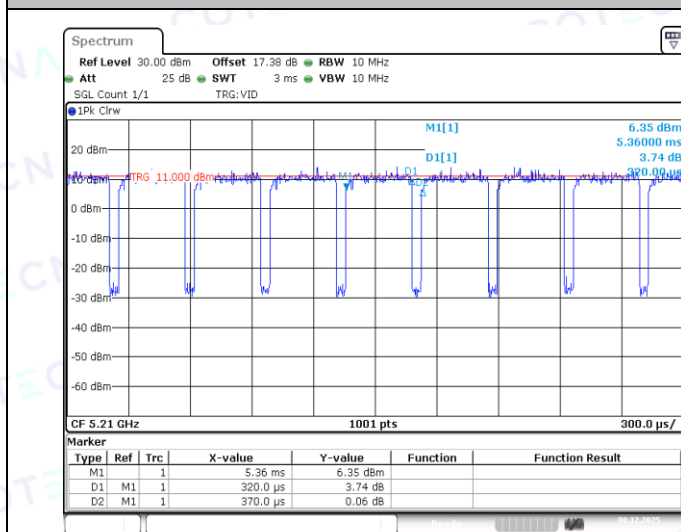

NTNV-11AC80SISO-Ant1-5210

NTNV-11AC80SISO-Ant1-5775

5: Maximum conducted output power

5.1 Test Result

TestMode	Antenna	Frequency [MHz]	Raw Power [dBm]	DC Factor	Result [dBm]	Limit[dBm]	Verdict
11A	Ant1	5180	12.80	0.12	12.92	≤23.98	PASS
11A	Ant1	5200	12.21	0.12	12.33	≤23.98	PASS
11A	Ant1	5240	12.52	0.12	12.64	≤23.98	PASS
11A	Ant1	5745	13.33	0.15	13.48	≤30.00	PASS
11A	Ant1	5785	13.07	0.15	13.22	≤30.00	PASS
11A	Ant1	5825	12.78	0.15	12.93	≤30.00	PASS
11N20SISO	Ant1	5180	11.93	0.16	12.09	≤23.98	PASS
11N20SISO	Ant1	5200	11.96	0.16	12.12	≤23.98	PASS
11N20SISO	Ant1	5240	12.14	0.16	12.30	≤23.98	PASS
11N20SISO	Ant1	5745	13.11	0.13	13.24	≤30.00	PASS
11N20SISO	Ant1	5785	13.06	0.13	13.19	≤30.00	PASS
11N20SISO	Ant1	5825	12.96	0.13	13.09	≤30.00	PASS
11N40SISO	Ant1	5190	10.81	0.32	11.13	≤23.98	PASS
11N40SISO	Ant1	5230	10.97	0.32	11.29	≤23.98	PASS
11N40SISO	Ant1	5755	11.92	0.33	12.25	≤30.00	PASS
11N40SISO	Ant1	5795	11.75	0.33	12.08	≤30.00	PASS
11AC20SISO	Ant1	5180	11.88	0.13	12.01	≤23.98	PASS
11AC20SISO	Ant1	5200	12.00	0.13	12.13	≤23.98	PASS
11AC20SISO	Ant1	5240	12.18	0.13	12.31	≤23.98	PASS
11AC20SISO	Ant1	5745	13.16	0.16	13.32	≤30.00	PASS
11AC20SISO	Ant1	5785	13.05	0.16	13.21	≤30.00	PASS
11AC20SISO	Ant1	5825	13.01	0.16	13.17	≤30.00	PASS
11AC40SISO	Ant1	5190	10.85	0.26	11.11	≤23.98	PASS
11AC40SISO	Ant1	5230	11.00	0.26	11.26	≤23.98	PASS
11AC40SISO	Ant1	5755	11.96	0.26	12.22	≤30.00	PASS
11AC40SISO	Ant1	5795	11.85	0.26	12.11	≤30.00	PASS
11AC80SISO	Ant1	5210	10.59	0.63	11.22	≤23.98	PASS
11AC80SISO	Ant1	5775	11.64	0.63	12.27	≤30.00	PASS

6: Maximum power spectral density


6.1 Test Result



Test Mode	Ant.	Frequency [MHz]	RawData [dBm/3kHz]	DC Factor	Result [dBm/MHz] Result [dBm/500kHz]	Limit[dBm/MHz] Limit[dBm/500kHz]	Verdict
11A	Ant1	5180	2.73	0.12	2.85	≤11.00	PASS
11A	Ant1	5200	2.31	0.12	2.43	≤11.00	PASS
11A	Ant1	5240	2.49	0.12	2.61	≤11.00	PASS
11A	Ant1	5745	0.63	0.15	0.78	≤30.00	PASS
11A	Ant1	5785	0.47	0.15	0.62	≤30.00	PASS
11A	Ant1	5825	-0.68	0.15	-0.53	≤30.00	PASS
11N20SISO	Ant1	5180	1.74	0.16	1.90	≤11.00	PASS
11N20SISO	Ant1	5200	1.74	0.16	1.90	≤11.00	PASS
11N20SISO	Ant1	5240	2.14	0.16	2.30	≤11.00	PASS
11N20SISO	Ant1	5745	-0.08	0.13	0.05	≤30.00	PASS
11N20SISO	Ant1	5785	0.33	0.13	0.46	≤30.00	PASS
11N20SISO	Ant1	5825	-0.62	0.13	-0.49	≤30.00	PASS
11N40SISO	Ant1	5190	-2.07	0.32	-1.75	≤11.00	PASS
11N40SISO	Ant1	5230	-1.94	0.32	-1.62	≤11.00	PASS
11N40SISO	Ant1	5755	-4.18	0.33	-3.85	≤30.00	PASS
11N40SISO	Ant1	5795	-4.04	0.33	-3.71	≤30.00	PASS
11AC20SISO	Ant1	5180	1.82	0.13	1.95	≤11.00	PASS
11AC20SISO	Ant1	5200	1.38	0.13	1.51	≤11.00	PASS
11AC20SISO	Ant1	5240	2.18	0.13	2.31	≤11.00	PASS
11AC20SISO	Ant1	5745	0.49	0.16	0.65	≤30.00	PASS
11AC20SISO	Ant1	5785	0.22	0.16	0.38	≤30.00	PASS
11AC20SISO	Ant1	5825	0.34	0.16	0.50	≤30.00	PASS
11AC40SISO	Ant1	5190	-2.62	0.26	-2.36	≤11.00	PASS
11AC40SISO	Ant1	5230	-1.81	0.26	-1.55	≤11.00	PASS
11AC40SISO	Ant1	5755	-4.25	0.26	-3.99	≤30.00	PASS
11AC40SISO	Ant1	5795	-3.89	0.26	-3.63	≤30.00	PASS
11AC80SISO	Ant1	5210	-5.46	0.63	-4.83	≤11.00	PASS
11AC80SISO	Ant1	5775	-6.91	0.63	-6.28	≤30.00	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.

2.RF Conducted test Offset= cable loss+ Attenuator



6.2 Test Graphs

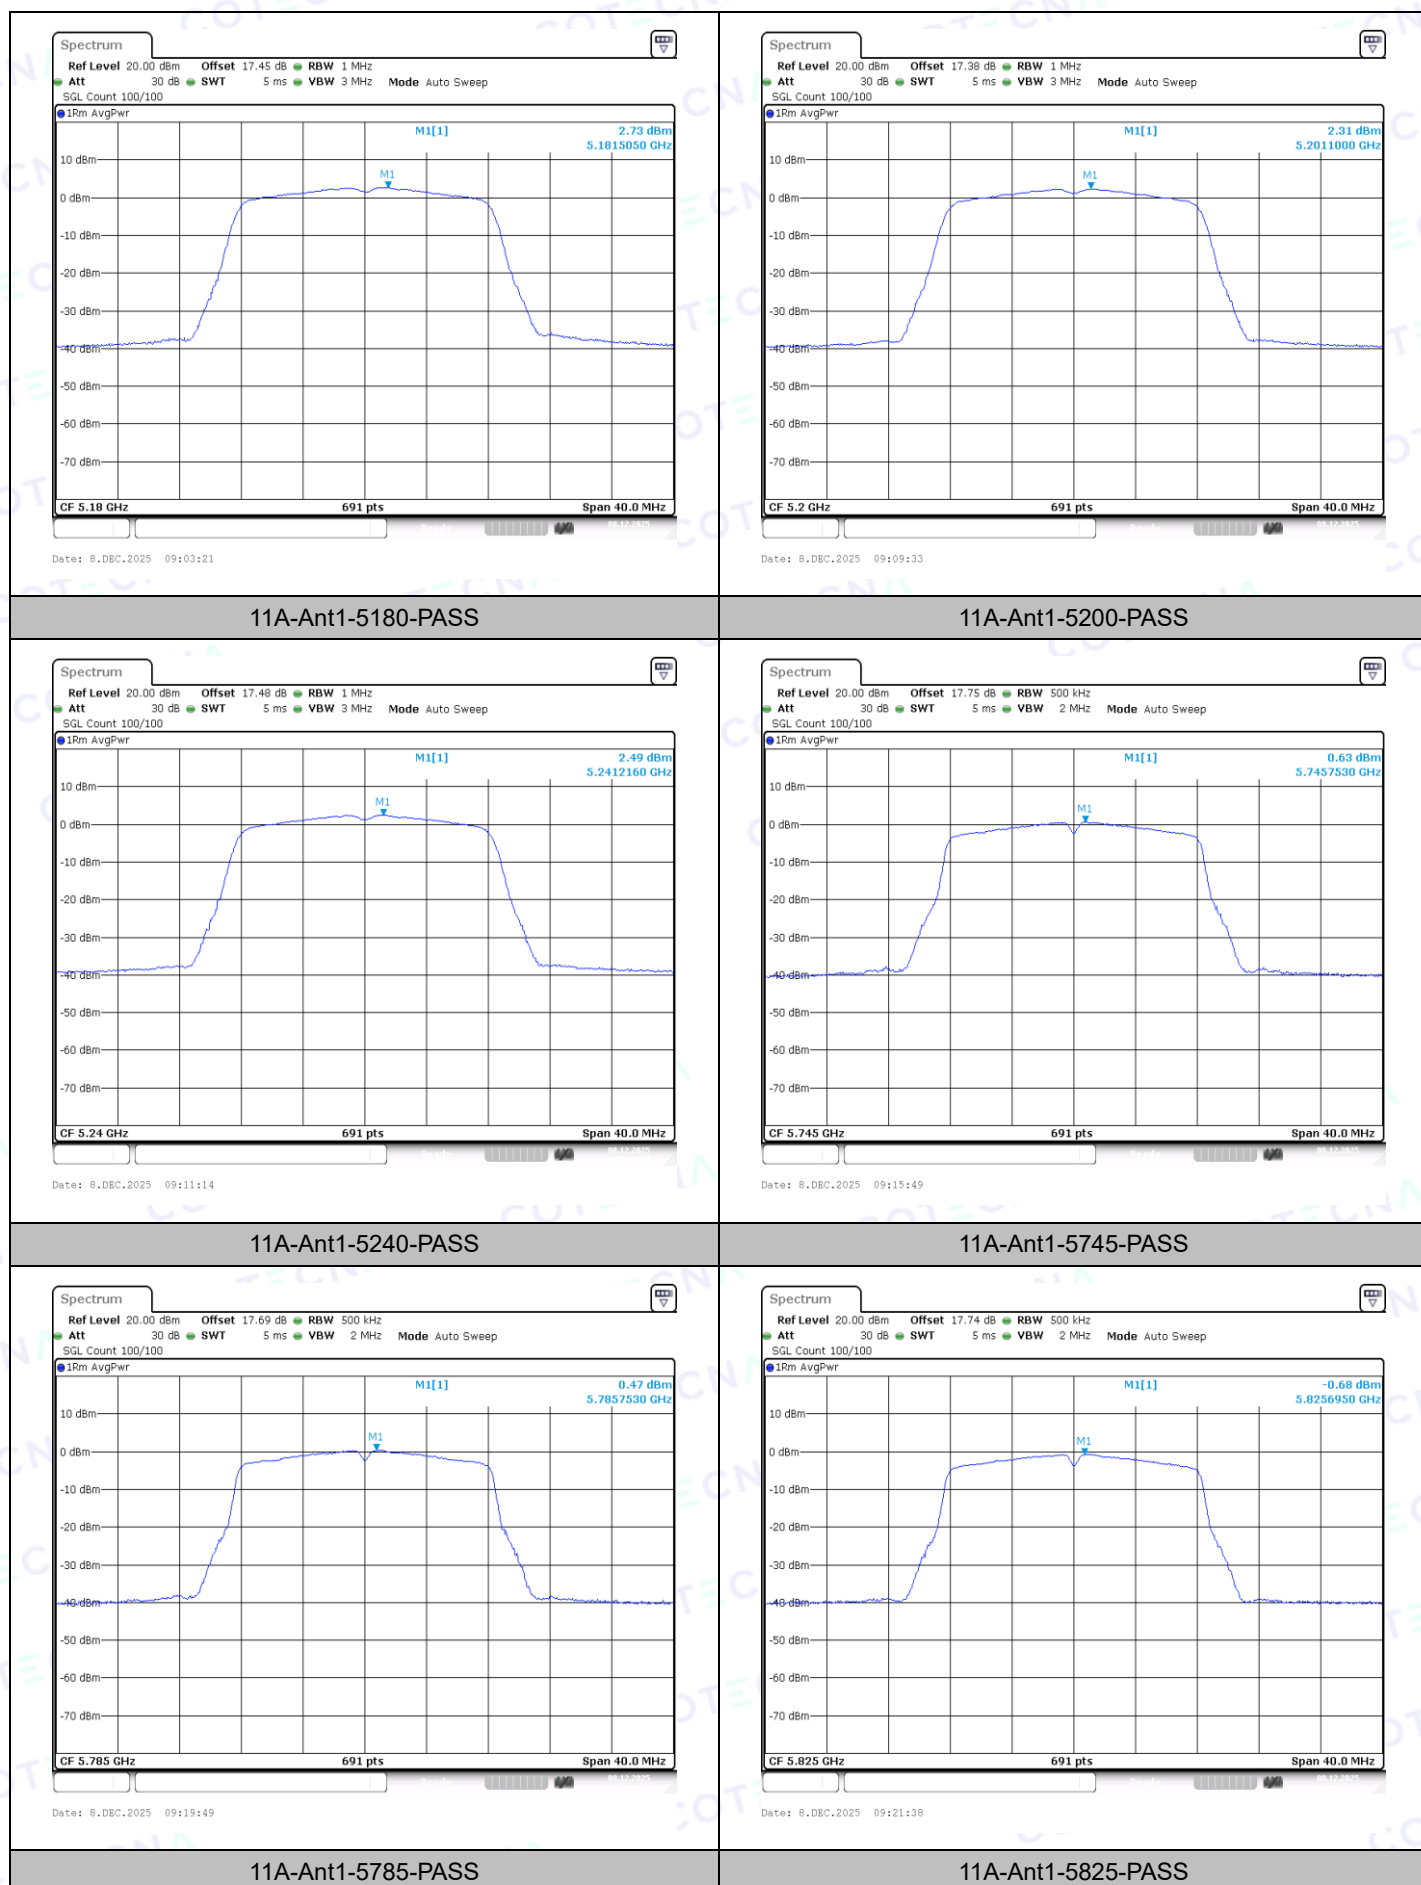

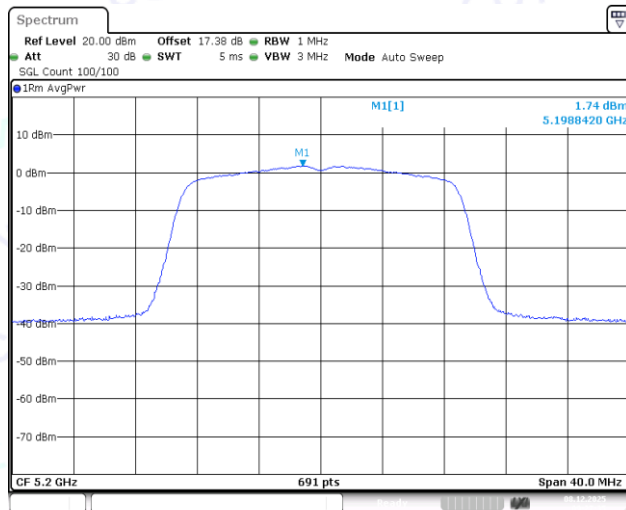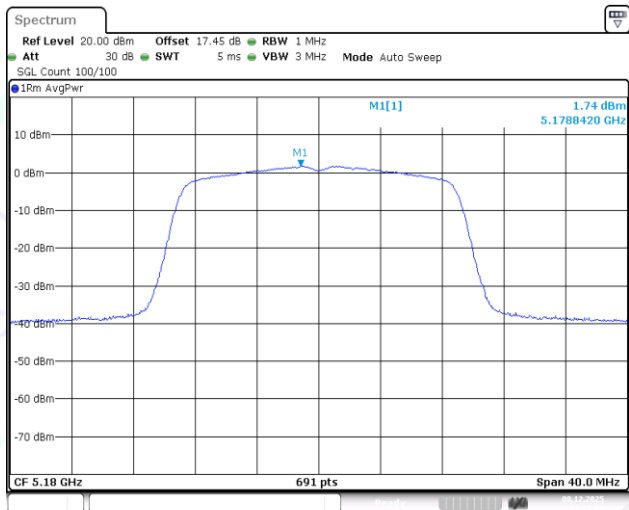



11N20SISO-Ant1-5180-PASS

11N20SISO-Ant1-5200-PASS

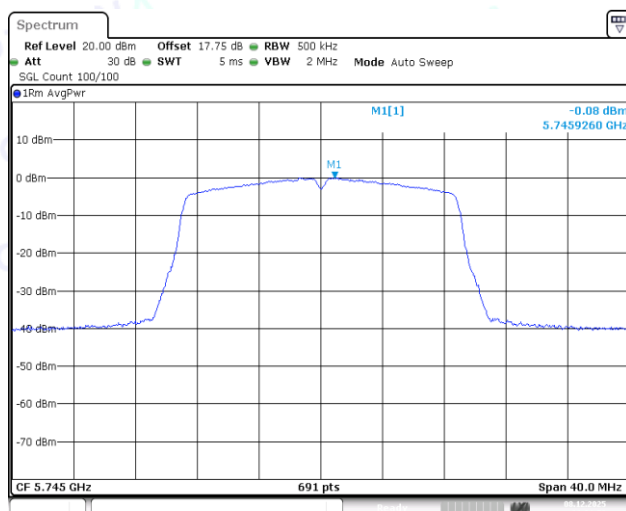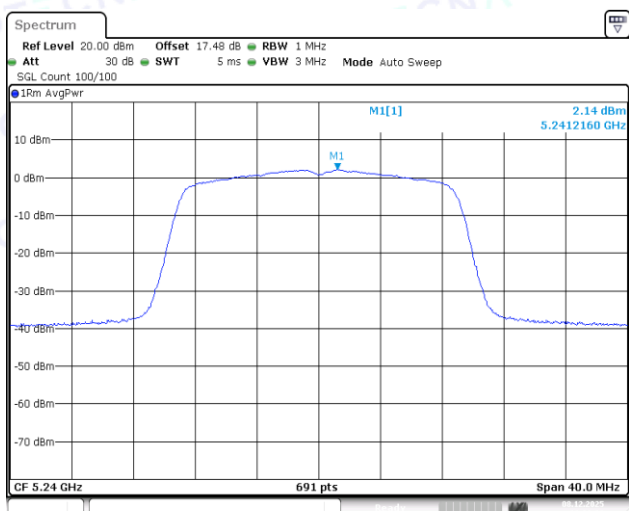


11N20SISO-Ant1-5240-PASS

11N20SISO-Ant1-5745-PASS

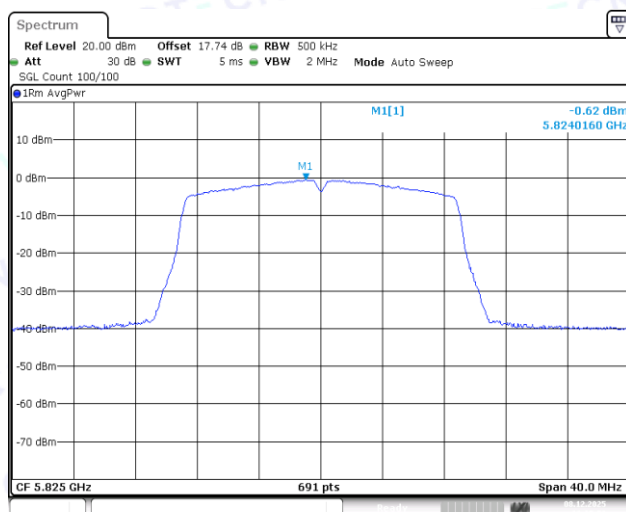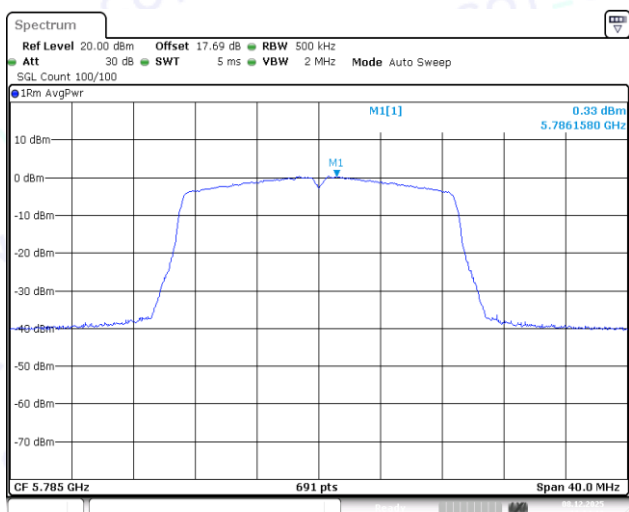


11N20SISO-Ant1-5785-PASS

11N20SISO-Ant1-5825-PASS

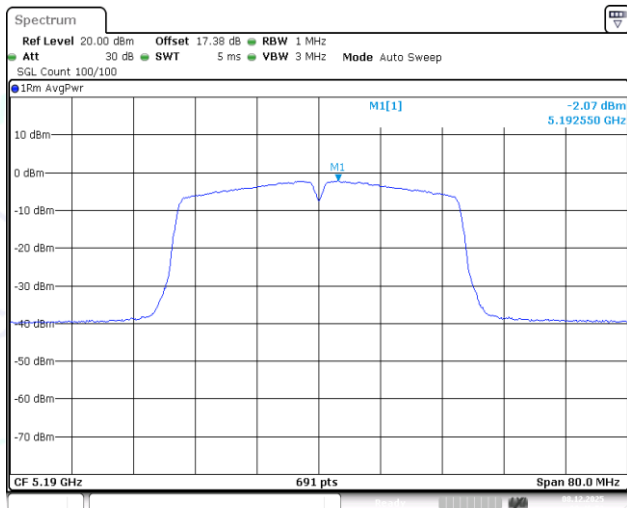


Date: 8.DEC.2025 09:46:53

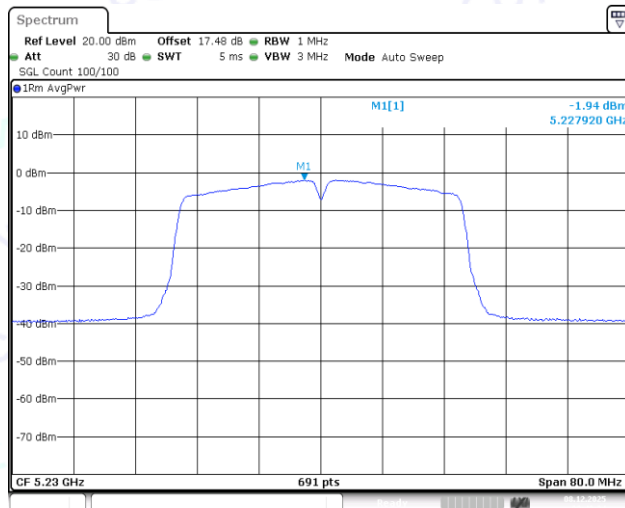


Date: 8.DEC.2025 09:49:04

11N40SISO-Ant1-5190-PASS

11N40SISO-Ant1-5230-PASS

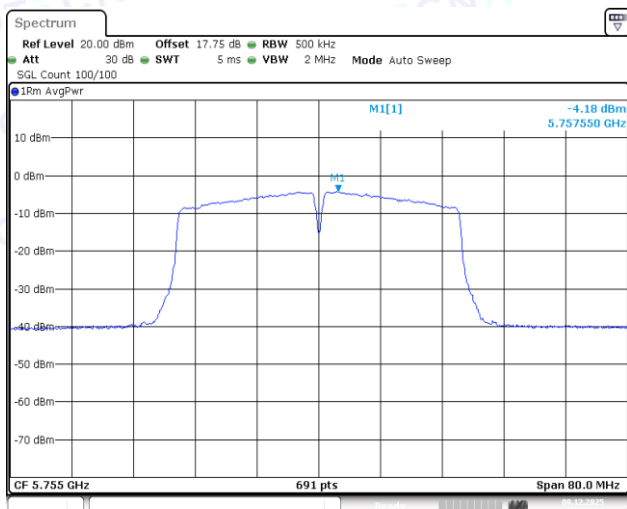


Date: 8.DEC.2025 09:52:10

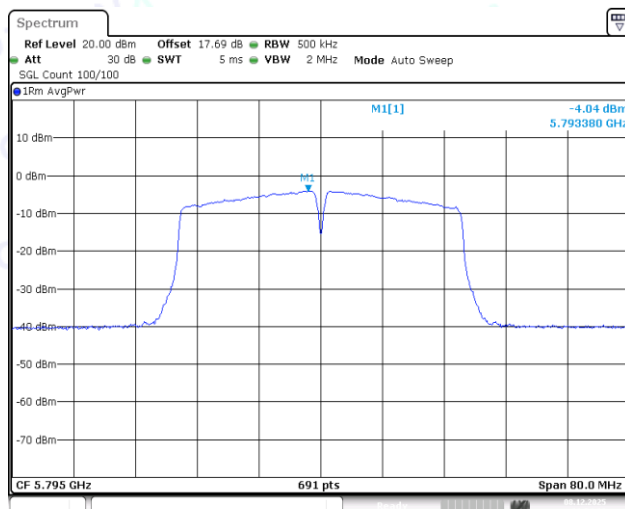


Date: 8.DEC.2025 09:54:26

11N40SISO-Ant1-5755-PASS

11N40SISO-Ant1-5795-PASS

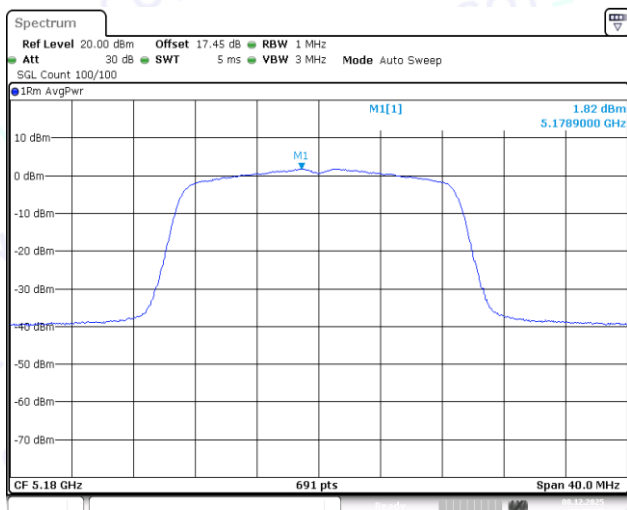


Date: 8.DEC.2025 09:58:48

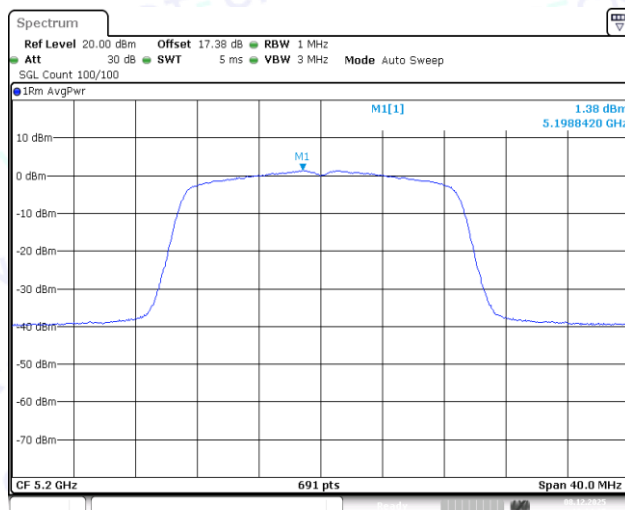


Date: 8.DEC.2025 10:14:25

11AC20SISO-Ant1-5180-PASS


11AC20SISO-Ant1-5200-PASS

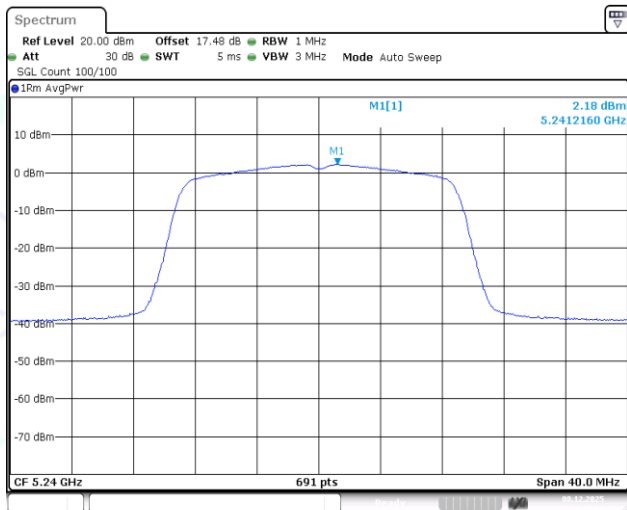


11AC20SISO-Ant1-5240-PASS

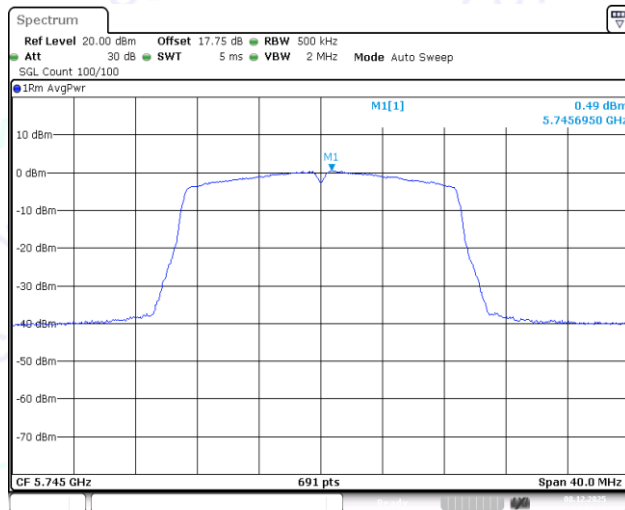


11AC20SISO-Ant1-5745-PASS

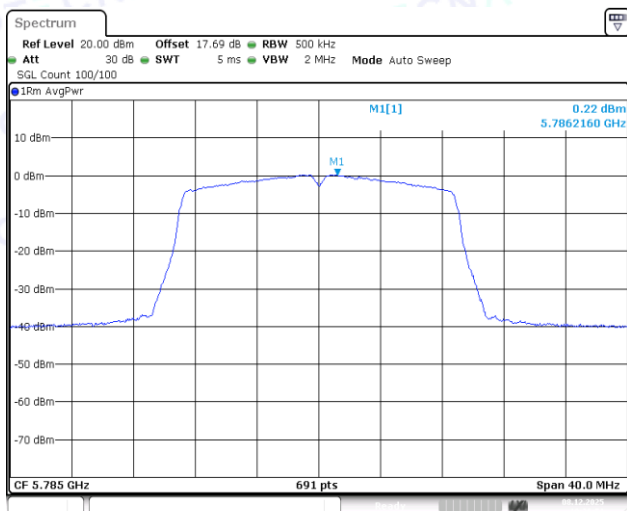


11AC20SISO-Ant1-5785-PASS

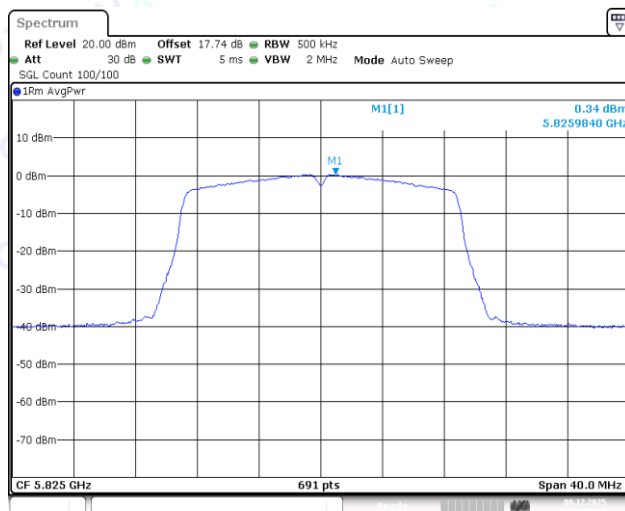


11AC20SISO-Ant1-5825-PASS

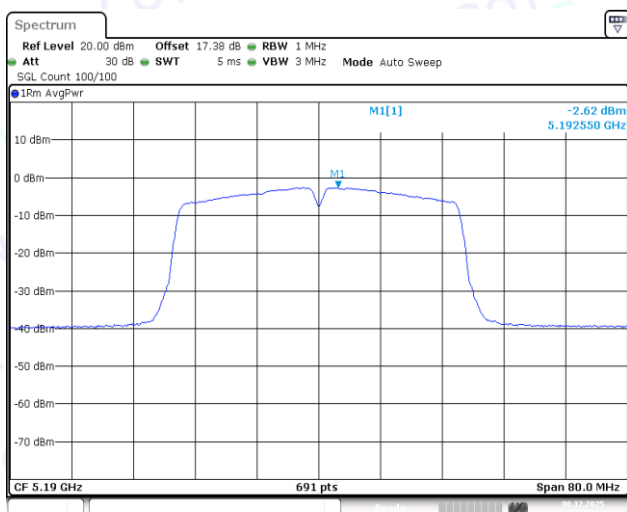


11AC40SISO-Ant1-5190-PASS

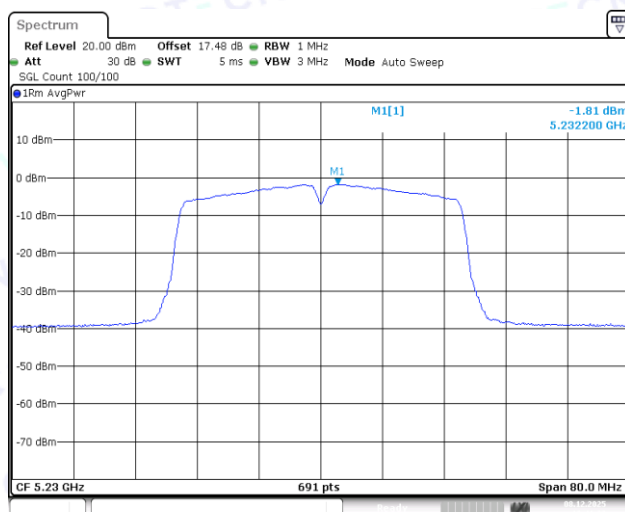

11AC40SISO-Ant1-5230-PASS

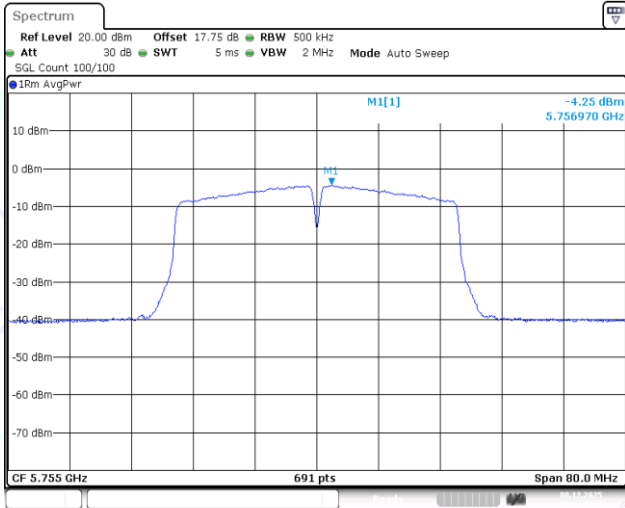


Date: 8.DEC.2025 10:46:44

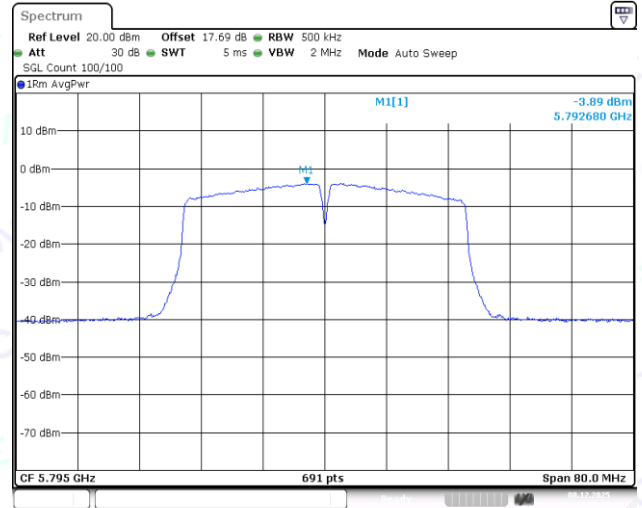


Date: 8.DEC.2025 10:51:17

11AC40SISO-Ant1-5755-PASS

11AC40SISO-Ant1-5795-PASS

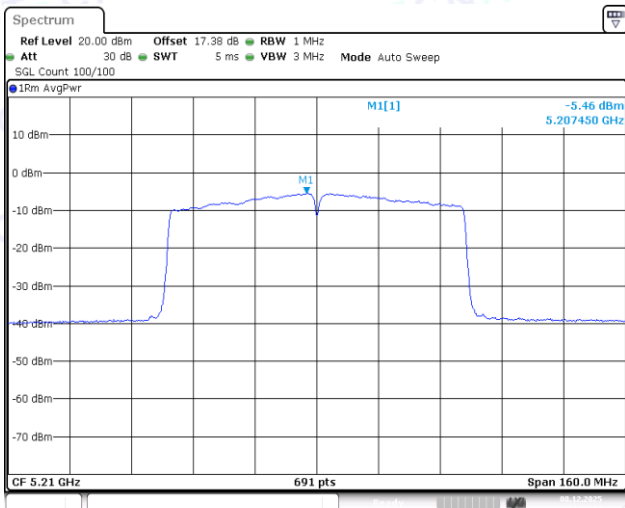

Date: 8.DEC.2025 11:01:14

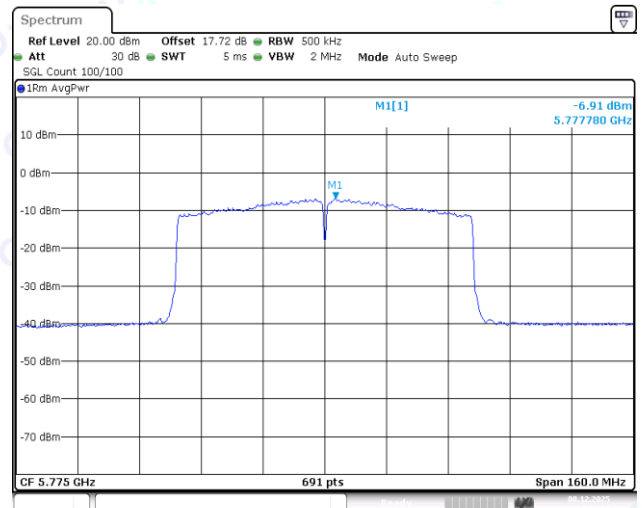

Date: 8.DEC.2025 12:43:13

11AC80SISO-Ant1-5210-PASS

11AC80SISO-Ant1-5775-PASS

7: Band edge measurements

7.1 Test Result B1



TestMode	Antenna	ChName	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	Low	5180	-34.37	≤ -27	PASS
11A	Ant1	High	5240	-34.42	≤ -27	PASS
11N20SISO	Ant1	Low	5180	-34.36	≤ -27	PASS
11N20SISO	Ant1	High	5240	-33.34	≤ -27	PASS
11N40SISO	Ant1	Low	5190	-32.15	≤ -27	PASS
11N40SISO	Ant1	High	5230	-34.06	≤ -27	PASS
11AC20SISO	Ant1	Low	5180	-34.76	≤ -27	PASS
11AC20SISO	Ant1	High	5240	-34.23	≤ -27	PASS
11AC40SISO	Ant1	Low	5190	-33.79	≤ -27	PASS
11AC40SISO	Ant1	High	5230	-34.42	≤ -27	PASS
11AC80SISO	Ant1	Low	5210	-31.53	≤ -27	PASS
11AC80SISO	Ant1	High	5210	-34.55	≤ -27	PASS

7.2 Test Result B4


TestMode	Antenna	ChName	Frequency [MHz]	FreqRange [MHz]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	Low	5745	5720~5725	-31.03	≤17.88	PASS
11A	Ant1	Low	5745	5700~5720	-32.34	≤10.70	PASS
11A	Ant1	Low	5745	5650~5700	-35.28	≤-26.88	PASS
11A	Ant1	Low	5745	5760~5650	-32.82	≤-27	PASS
11A	Ant1	High	5825	5850~5855	-33.1	≤15.65	PASS
11A	Ant1	High	5825	5855~5875	-32.31	≤11.61	PASS
11A	Ant1	High	5825	5875~5925	-32.37	≤-26.00	PASS
11A	Ant1	High	5825	5925~5935	-32.91	≤-27	PASS
11N20SISO	Ant1	Low	5745	5720~5725	-33.72	≤15.98	PASS
11N20SISO	Ant1	Low	5745	5700~5720	-33.49	≤10.05	PASS
11N20SISO	Ant1	Low	5745	5650~5700	-33.16	≤-26.88	PASS
11N20SISO	Ant1	Low	5745	5760~5650	-32.44	≤-27	PASS
11N20SISO	Ant1	High	5825	5850~5855	-30	≤15.65	PASS
11N20SISO	Ant1	High	5825	5855~5875	-31.93	≤11.61	PASS
11N20SISO	Ant1	High	5825	5875~5925	-33.75	≤-26.58	PASS
11N20SISO	Ant1	High	5825	5925~5935	-32.73	≤-27	PASS
11N40SISO	Ant1	Low	5755	5720~5725	-31.13	≤15.90	PASS
11N40SISO	Ant1	Low	5755	5700~5720	-32.44	≤11.25	PASS
11N40SISO	Ant1	Low	5755	5650~5700	-33.44	≤-26.36	PASS
11N40SISO	Ant1	Low	5755	5780~5650	-32.91	≤-27	PASS
11N40SISO	Ant1	High	5795	5850~5855	-34.03	≤15.85	PASS
11N40SISO	Ant1	High	5795	5855~5875	-30.96	≤11.35	PASS
11N40SISO	Ant1	High	5795	5875~5925	-33.95	≤-26.44	PASS
11N40SISO	Ant1	High	5795	5925~5935	-32.79	≤-27	PASS
11AC20SISO	Ant1	Low	5745	5720~5725	-34.38	≤15.98	PASS
11AC20SISO	Ant1	Low	5745	5700~5720	-32.3	≤11.26	PASS
11AC20SISO	Ant1	Low	5745	5650~5700	-34.32	≤-26.88	PASS
11AC20SISO	Ant1	Low	5745	5760~5650	-32.96	≤-27	PASS
11AC20SISO	Ant1	High	5825	5850~5855	-31.98	≤15.65	PASS
11AC20SISO	Ant1	High	5825	5855~5875	-33.01	≤10.18	PASS
11AC20SISO	Ant1	High	5825	5875~5925	-34.17	≤-26.73	PASS
11AC20SISO	Ant1	High	5825	5925~5935	-32.96	≤-27	PASS
11AC40SISO	Ant1	Low	5755	5720~5725	-31	≤15.90	PASS
11AC40SISO	Ant1	Low	5755	5700~5720	-33.06	≤10.38	PASS
11AC40SISO	Ant1	Low	5755	5650~5700	-33.43	≤-26.94	PASS
11AC40SISO	Ant1	Low	5755	5780~5650	-33.16	≤-27	PASS
11AC40SISO	Ant1	High	5795	5850~5855	-31.79	≤15.85	PASS
11AC40SISO	Ant1	High	5795	5855~5875	-30.52	≤11.35	PASS
11AC40SISO	Ant1	High	5795	5875~5925	-33.26	≤-26.61	PASS
11AC40SISO	Ant1	High	5795	5925~5935	-32.13	≤-27	PASS
11AC80SISO	Ant1	Low	5775	5720~5725	-31.39	≤17.71	PASS
11AC80SISO	Ant1	Low	5775	5700~5720	-30.34	≤10.20	PASS
11AC80SISO	Ant1	Low	5775	5650~5700	-36.21	≤-26.88	PASS

11AC80SISO	Ant1	Low	5775	5800~5650	-33.65	≤-27	PASS
11AC80SISO	Ant1	High	5775	5850~5855	-35.02	≤15.98	PASS
11AC80SISO	Ant1	High	5775	5855~5875	-29.35	≤11.22	PASS
11AC80SISO	Ant1	High	5775	5875~5925	-32.46	≤-25.07	PASS
11AC80SISO	Ant1	High	5775	5925~5935	-33.05	≤-27	PASS


7.3 Test Graphs B1

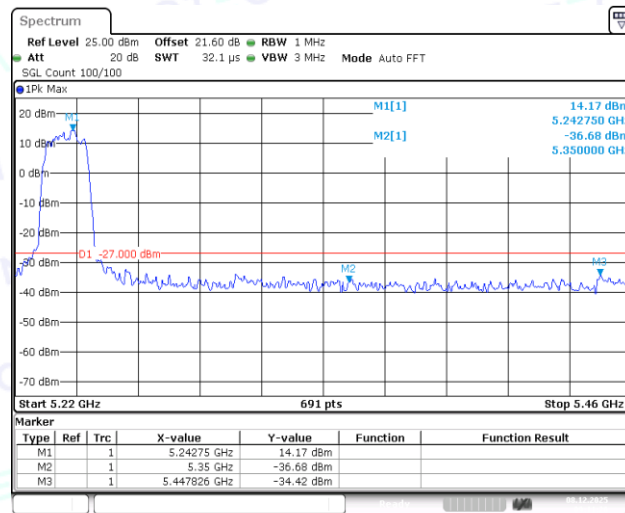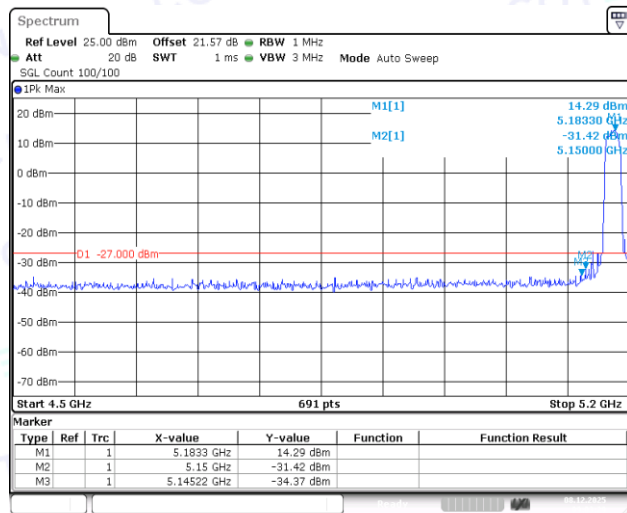


11A-Ant1-5180-PASS

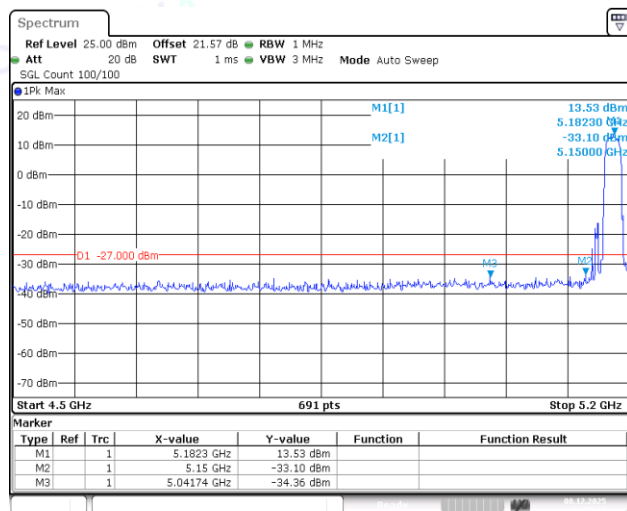


11A-Ant1-5240-PASS

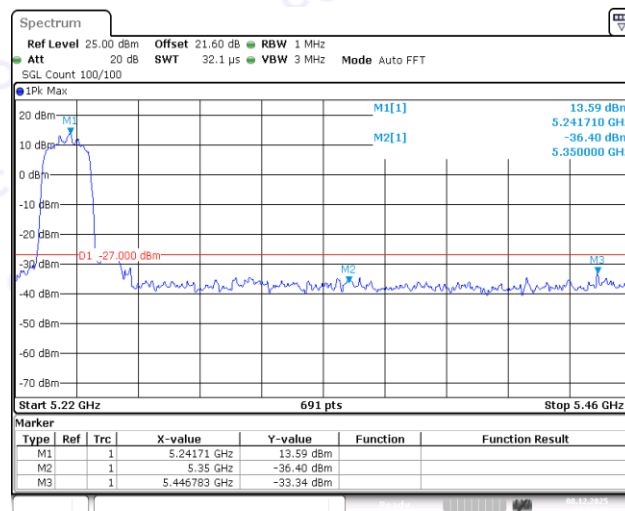

11N20SISO-Ant1-5180-PASS


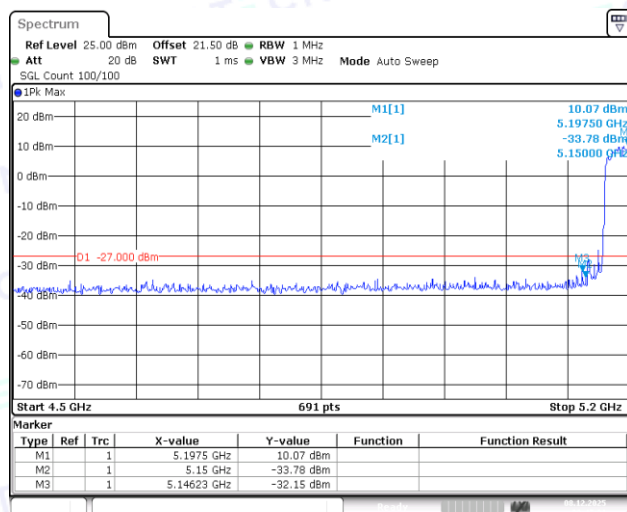


11N20SISO-Ant1-5240-PASS

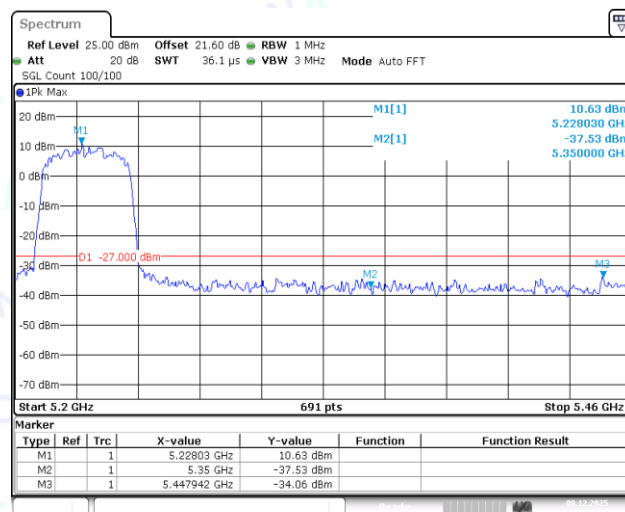



11N40SISO-Ant1-5190-PASS

11N40SISO-Ant1-5230-PASS

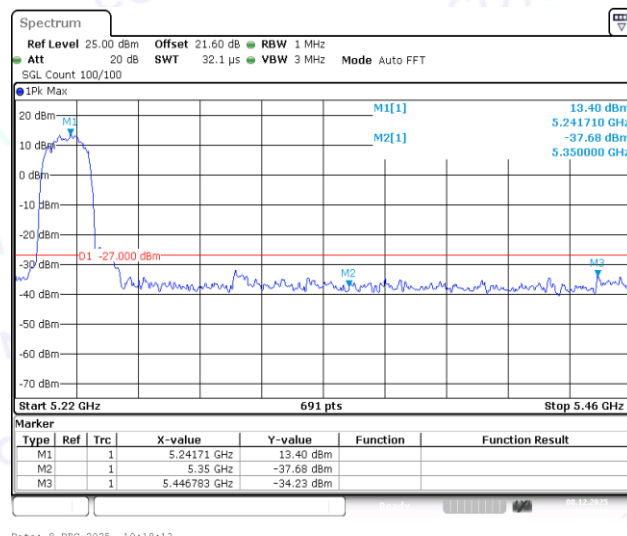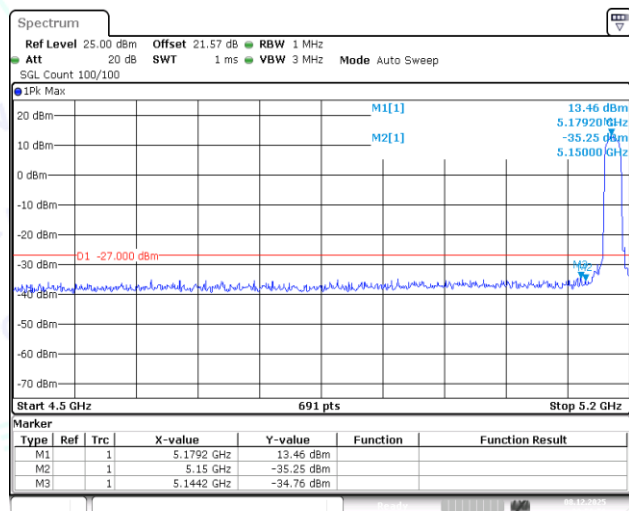



11AC20SISO-Ant1-5180-PASS

11AC20SISO-Ant1-5240-PASS

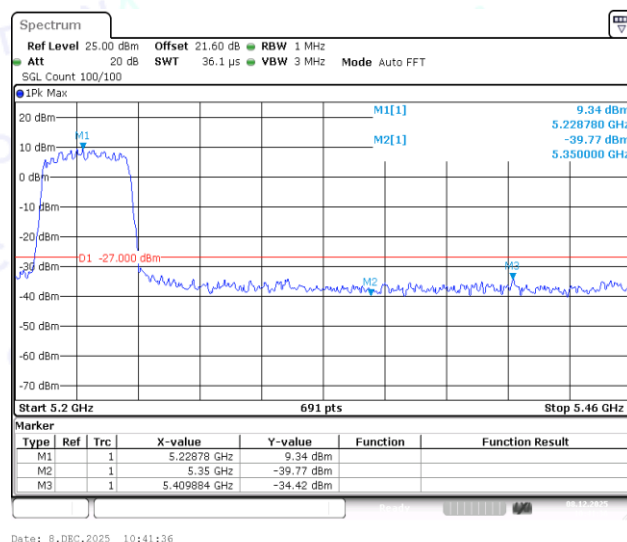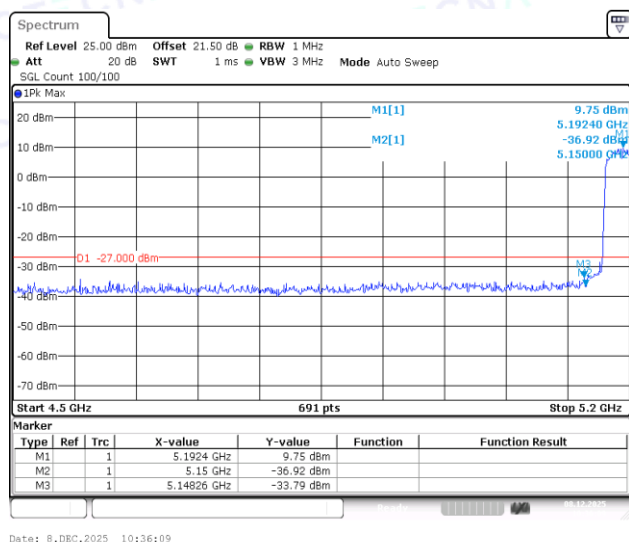

11AC40SISO-Ant1-5190-PASS

11AC40SISO-Ant1-5230-PASS

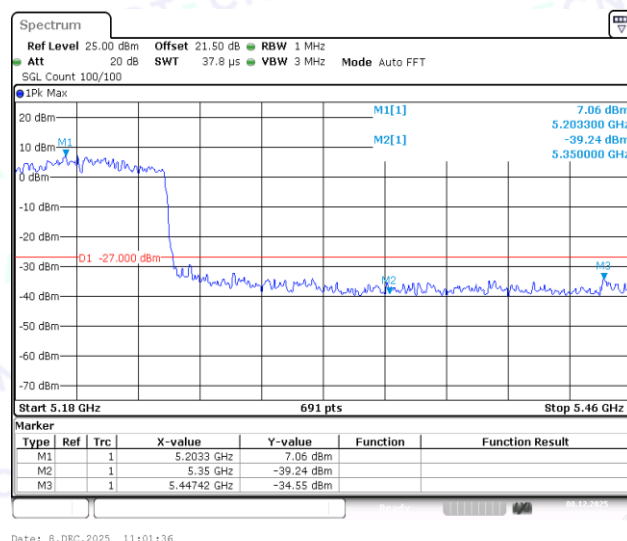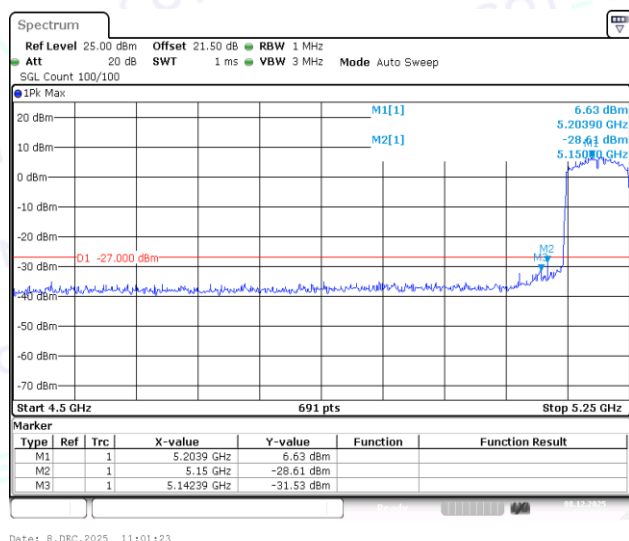

11AC80SISO-Ant1-5210-PASS

11AC80SISO-Ant1-5210-PASS