

RF Test Data for 5G Wi-Fi (Conducted Measurements)

General Description of EUT	
EUT Name:	Portable Gaming Computer
Model:	KONKR Pocket Advance
Sample ID:	HC-C-202603-0419-01-01-2#
Test Standard:	FCC Part 15.407
Environmental Conditions	
Ambient Temperature:	25°C
Ambient Humidity:	45%RH
Test Power Supply:	DC 3.8V
Test Engineer:	Gold. Zhang
Note: For a more detailed features description, please refer to the report TBR-C-202603-0419-102	

Contents


1: Emission Bandwidth	3
1.1 Test Result.....	3
1.2 Test Graphs	4
2: Occupied channel bandwidth.....	7
2.1 Test Result.....	7
2.2 Test Graphs	8
3: Min emission bandwidth	13
3.1 Test Result-B4.....	13
3.2 Test Graphs-B4	14
4: Duty Cycle.....	17
4.1 Test Result.....	17
4.2 Test Graphs	18
5: Maximum conducted output power	20
5.1 Test Result.....	20
6: Maximum power spectral density	21
6.1 Test Result.....	21
6.2 Test Graphs	22
7: Band edge measurements.....	27
7.1 Test Result B1.....	27
7.2 Test Result B4.....	28
7.3 Test Graphs B1	30
7.4 Test Graphs B4	32
8: Conducted Spurious Emission	34
8.1 Test Result.....	34
8.2 Test Graphs	36
9: Frequency Stability	46
9.1 Test Result.....	46
10: Emissions in Restricted Bands	49
10.1 Test Result.....	49
10.2 Test Graphs.....	52

1: Emission Bandwidth


1.1 Test Result

Test Mode	Antenna	Frequency[MHz]	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	23.96	5168.04	5192.00	---	---
11A	Ant1	5200	20.80	5189.92	5210.72	---	---
11A	Ant1	5240	24.64	5228.92	5253.56	---	---
11N20SISO	Ant1	5180	21.32	5170.08	5191.40	---	---
11N20SISO	Ant1	5200	20.56	5189.68	5210.24	---	---
11N20SISO	Ant1	5240	20.48	5229.56	5250.04	---	---
11N40SISO	Ant1	5190	39.52	5170.16	5209.68	---	---
11N40SISO	Ant1	5230	46.24	5210.08	5256.32	---	---
11AC20SISO	Ant1	5180	21.16	5168.80	5189.96	---	---
11AC20SISO	Ant1	5200	20.36	5190.00	5210.36	---	---
11AC20SISO	Ant1	5240	23.40	5229.80	5253.20	---	---
11AC40SISO	Ant1	5190	40.80	5169.76	5210.56	---	---
11AC40SISO	Ant1	5230	40.32	5210.24	5250.56	---	---
11AC80SISO	Ant1	5210	79.68	5170.32	5250.00	---	---

1.2 Test Graphs

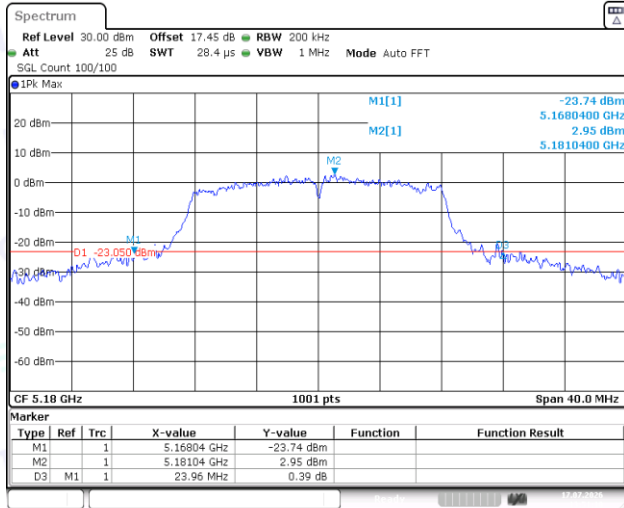


Date: 17.JUL.2026 13:51:11

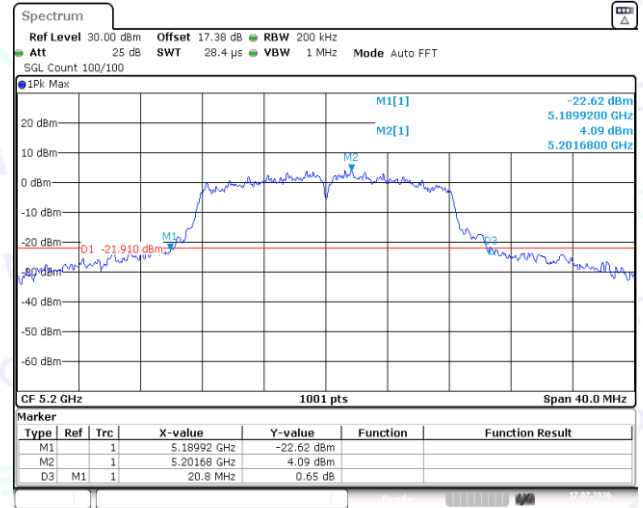


Date: 17.JUL.2026 13:53:23

11A-Ant1-5180

11A-Ant1-5200

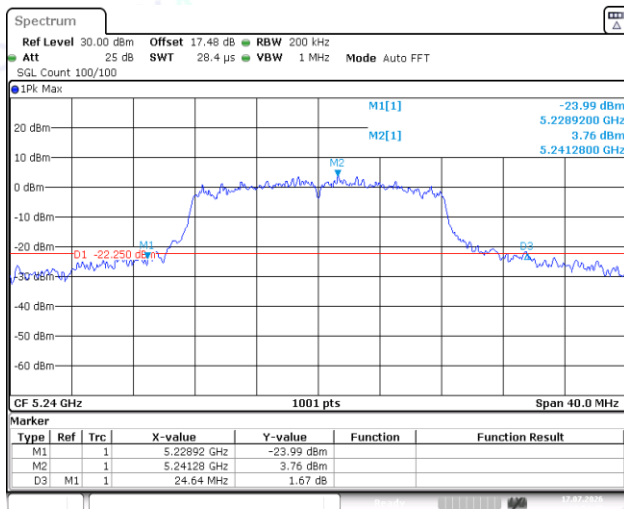


Date: 17.JUL.2026 13:54:47

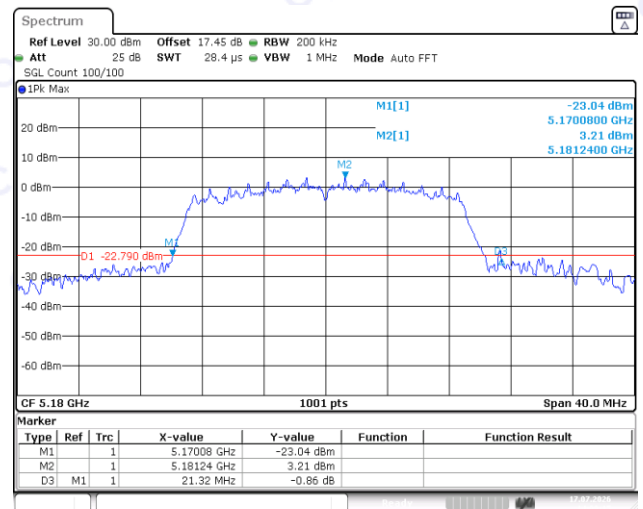


Date: 17.JUL.2026 14:09:15

11A-Ant1-5240

11N20SISO-Ant1-5180

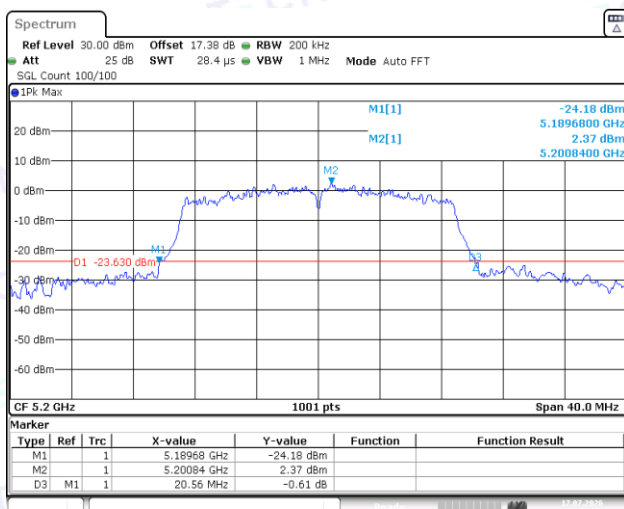



Date: 17.JUL.2026 14:11:18

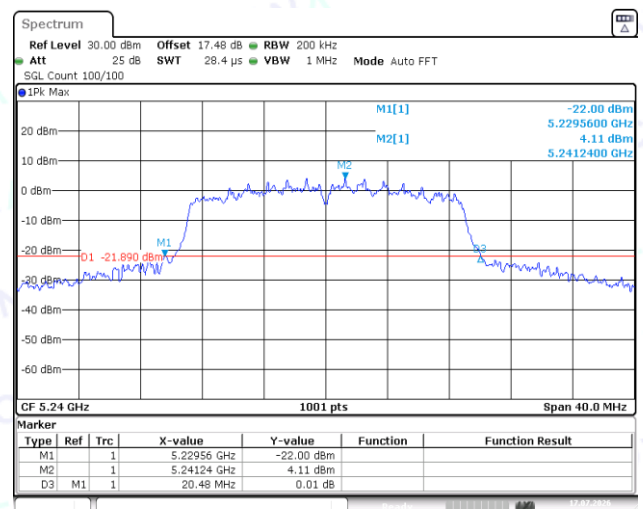

Date: 17.JUL.2026 14:13:00



11N20SISO-Ant1-5200

11N20SISO-Ant1-5240

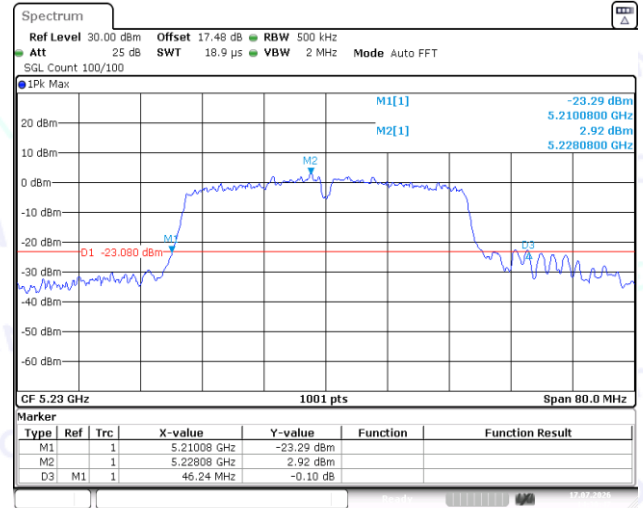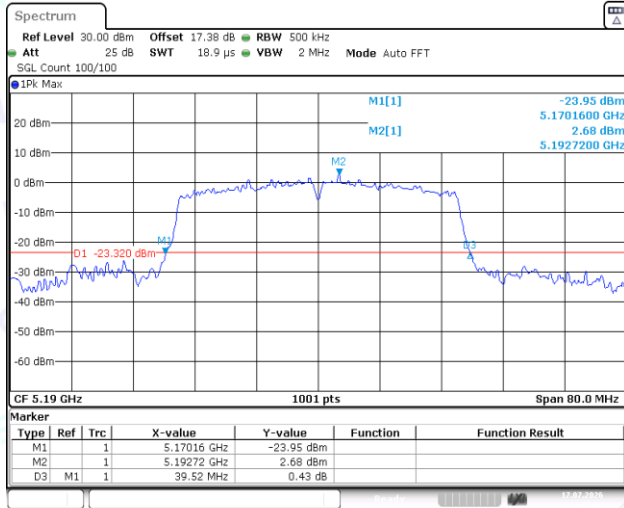



11N40SISO-Ant1-5190

11N40SISO-Ant1-5230

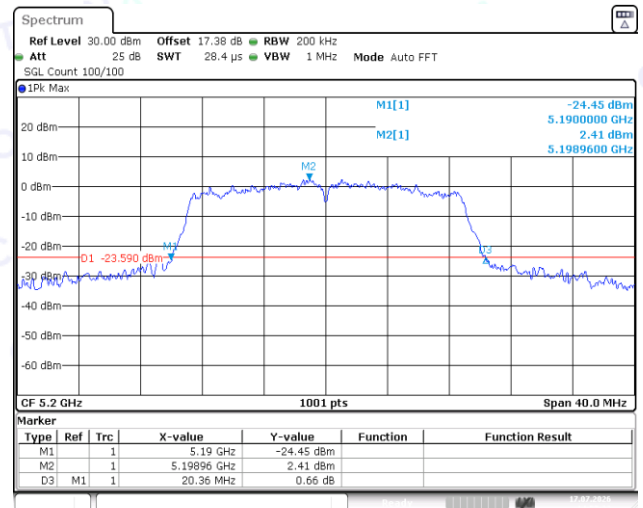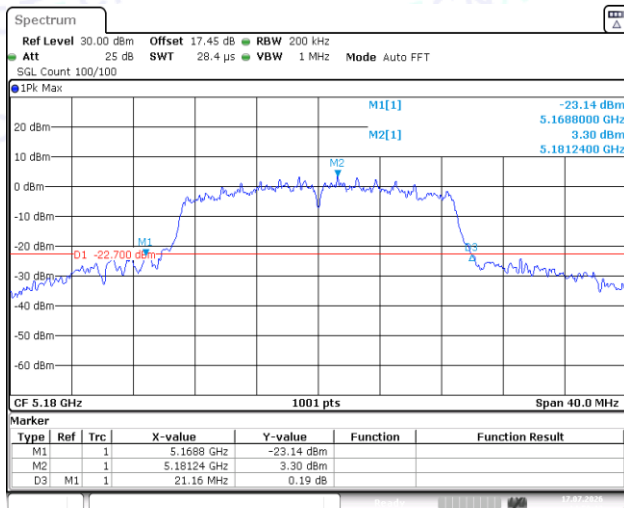



11AC20SISO-Ant1-5180

11AC20SISO-Ant1-5200

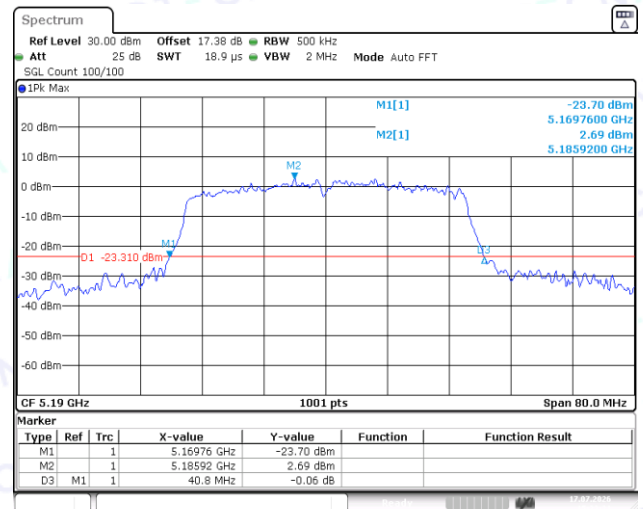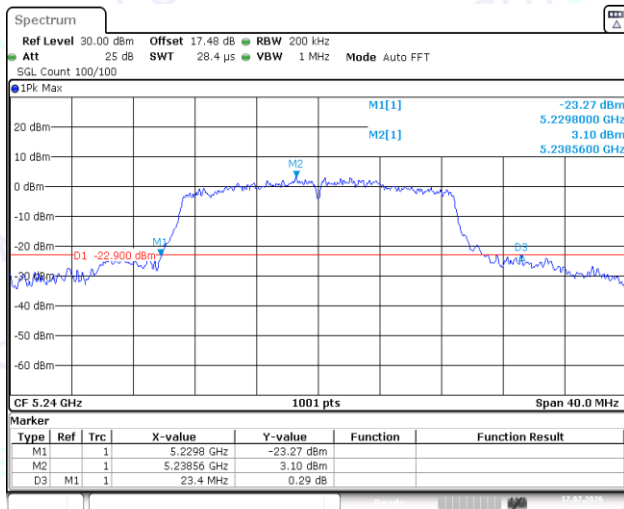

11AC20SISO-Ant1-5240

11AC40SISO-Ant1-5190

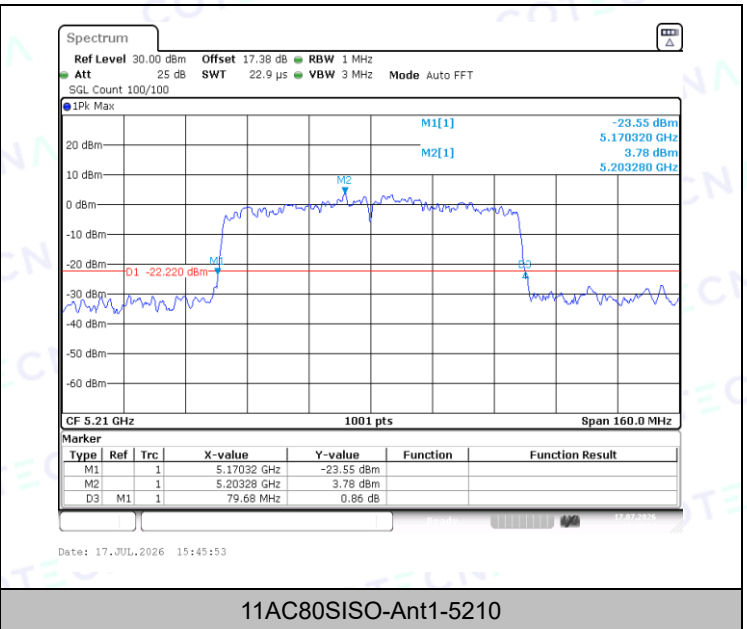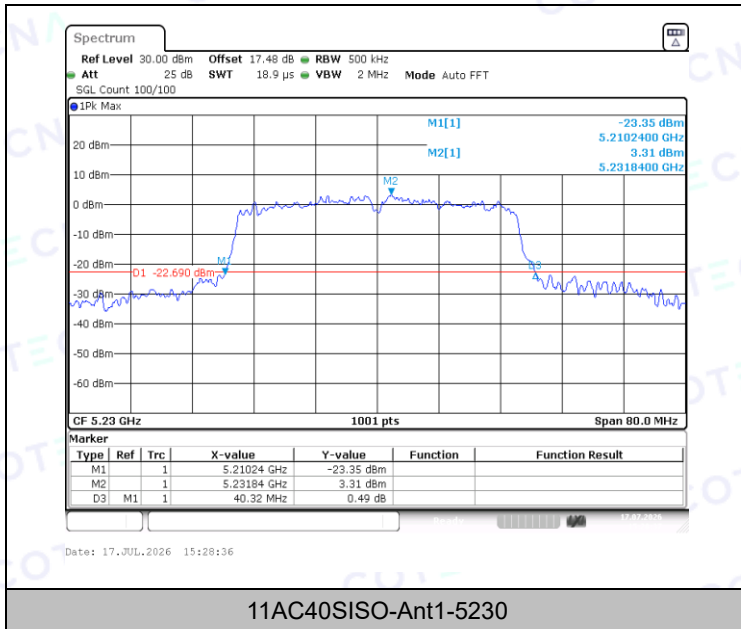


2: Occupied channel bandwidth


2.1 Test Result

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	16.983	5171.6084	5188.5914	---	---
11A	Ant1	5200	16.983	5191.5684	5208.5514	---	---
11A	Ant1	5240	17.383	5231.3686	5248.7512	---	---
11A	Ant1	5745	21.219	5734.4905	5755.7093	---	---
11A	Ant1	5785	21.938	5774.5704	5796.5085	---	---
11A	Ant1	5825	24.416	5814.2108	5838.6264	---	---
11N20SISO	Ant1	5180	18.262	5170.9291	5189.1908	---	---
11N20SISO	Ant1	5200	18.102	5190.9690	5209.0709	---	---
11N20SISO	Ant1	5240	18.062	5231.0490	5249.1109	---	---
11N20SISO	Ant1	5745	18.541	5735.8092	5754.3506	---	---
11N20SISO	Ant1	5785	19.620	5774.8501	5794.4705	---	---
11N20SISO	Ant1	5825	19.141	5815.4895	5834.6304	---	---
11N40SISO	Ant1	5190	36.364	5171.7782	5208.1419	---	---
11N40SISO	Ant1	5230	36.124	5211.9381	5248.0619	---	---
11N40SISO	Ant1	5755	38.282	5735.5794	5773.8611	---	---
11N40SISO	Ant1	5795	39.880	5775.7393	5815.6194	---	---
11AC20SISO	Ant1	5180	17.782	5171.2088	5188.9910	---	---
11AC20SISO	Ant1	5200	18.022	5191.0490	5209.0709	---	---
11AC20SISO	Ant1	5240	17.942	5231.1289	5249.0709	---	---
11AC20SISO	Ant1	5745	18.741	5735.7293	5754.4705	---	---
11AC20SISO	Ant1	5785	20.340	5774.1309	5794.4705	---	---
11AC20SISO	Ant1	5825	19.461	5815.5295	5834.9900	---	---
11AC40SISO	Ant1	5190	36.044	5172.0180	5208.0619	---	---
11AC40SISO	Ant1	5230	36.124	5212.0180	5248.1419	---	---
11AC40SISO	Ant1	5755	39.481	5734.7802	5774.2607	---	---
11AC40SISO	Ant1	5795	40.759	5776.2188	5816.9780	---	---
11AC80SISO	Ant1	5210	75.604	5172.4376	5248.0420	---	---
11AC80SISO	Ant1	5775	78.162	5735.9990	5814.1608	---	---


2.2 Test Graphs

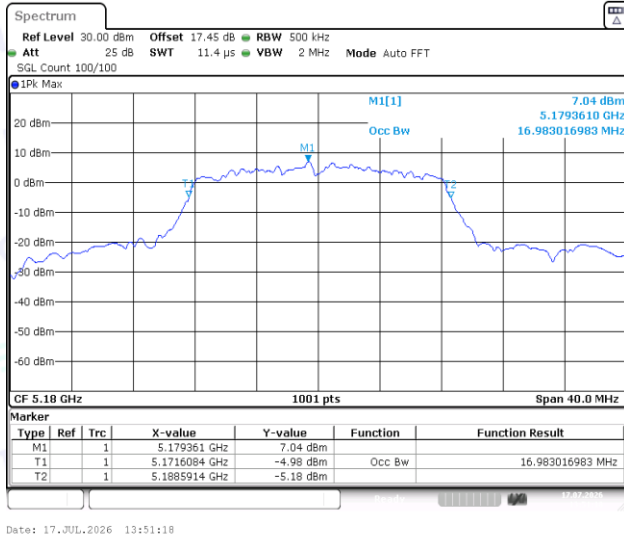


11A-Ant1-5180

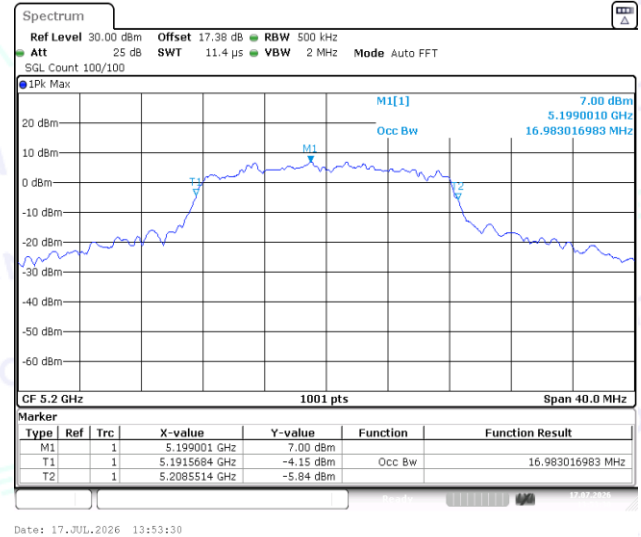


11A-Ant1-5200

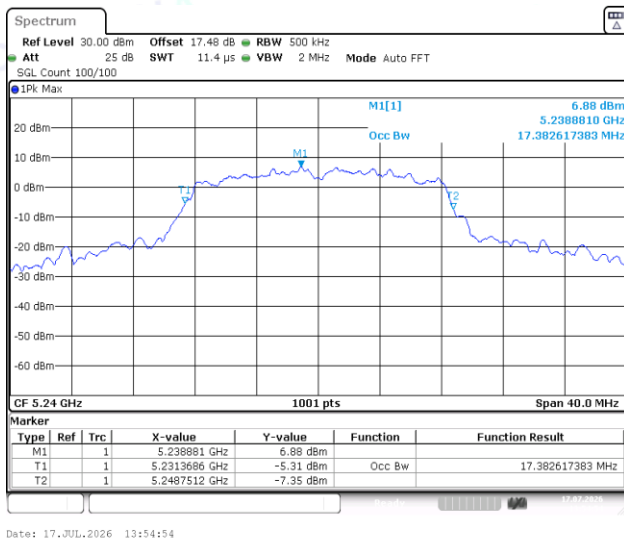

11A-Ant1-5240

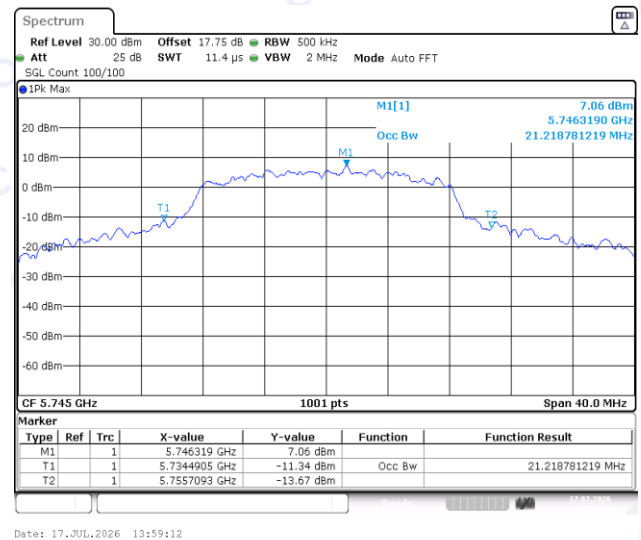



11A-Ant1-5745

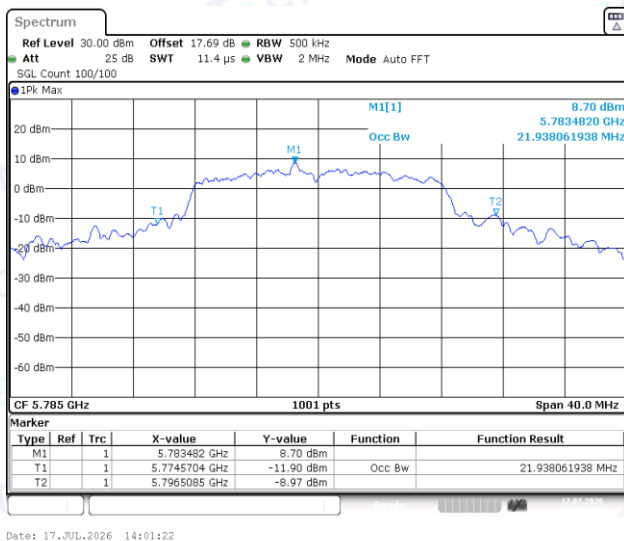

11A-Ant1-5785





11A-Ant1-5825

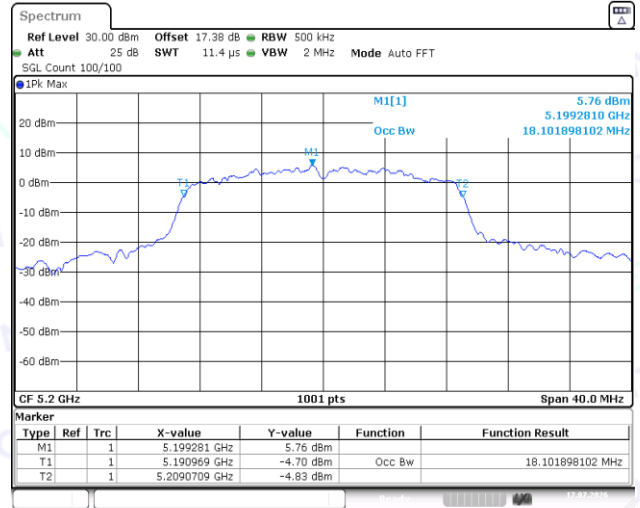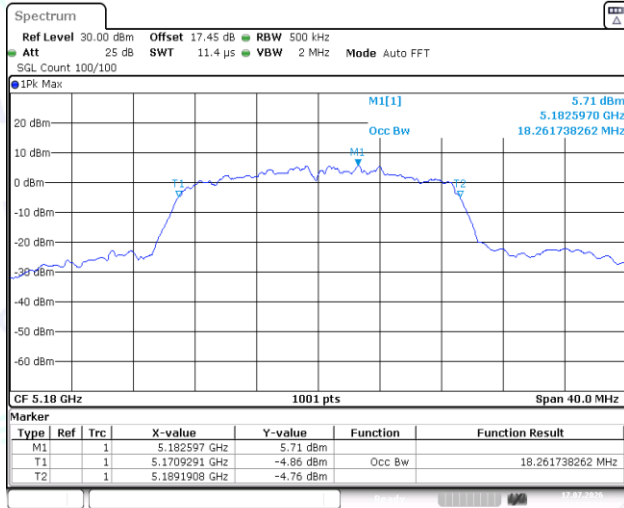



11N20SISO-Ant1-5180

11N20SISO-Ant1-5200

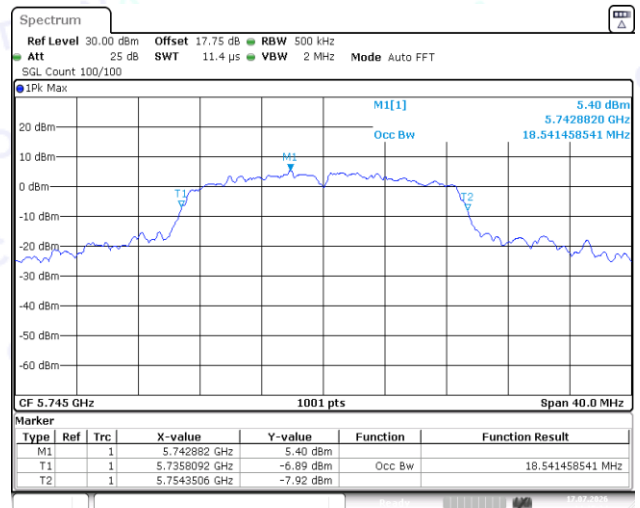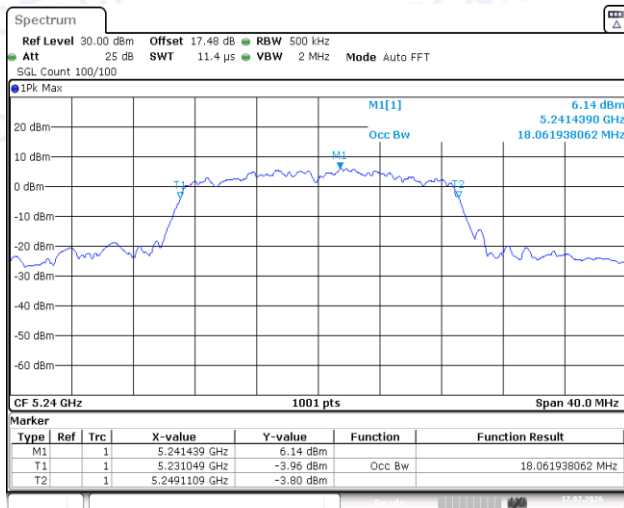



11N20SISO-Ant1-5240

11N20SISO-Ant1-5745

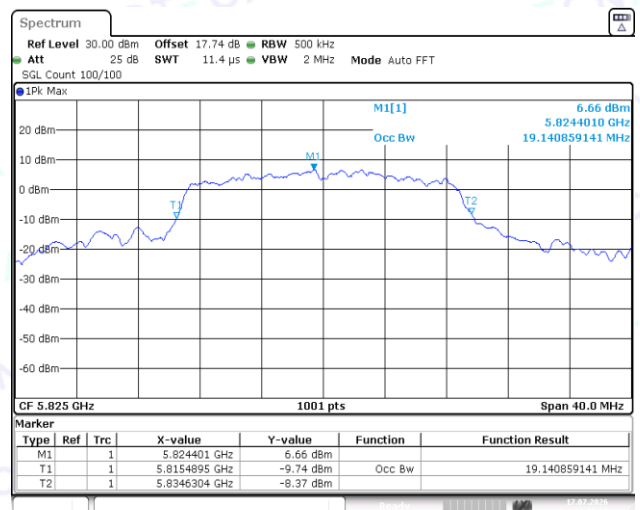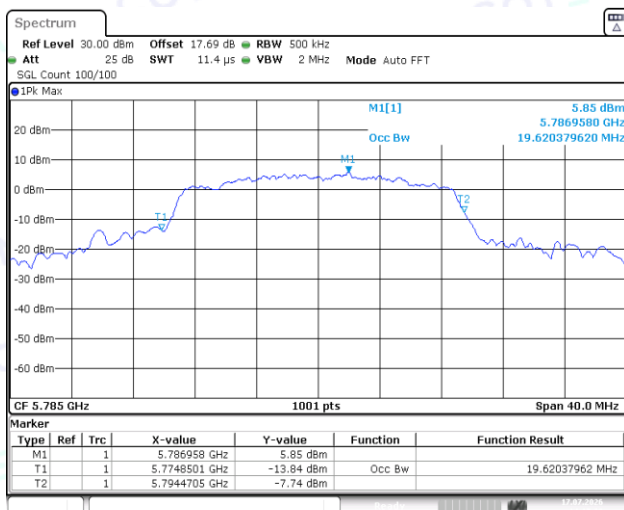



11N20SISO-Ant1-5785

11N20SISO-Ant1-5825

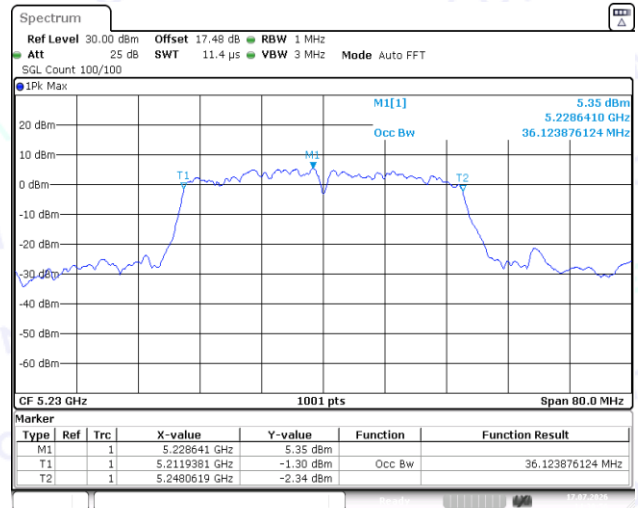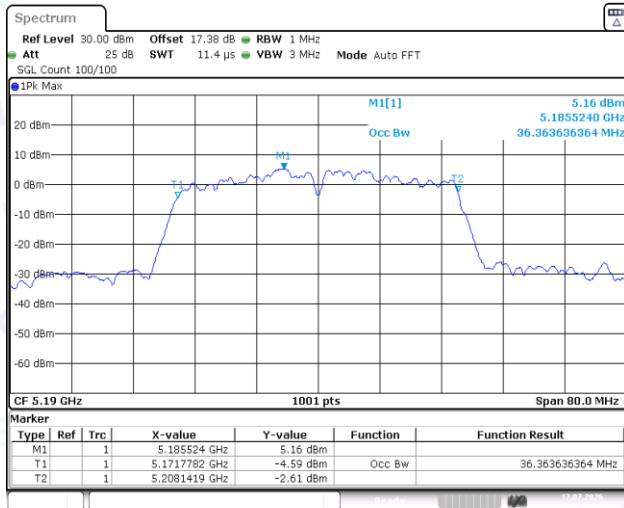


11N40SISO-Ant1-5190

11N40SISO-Ant1-5230

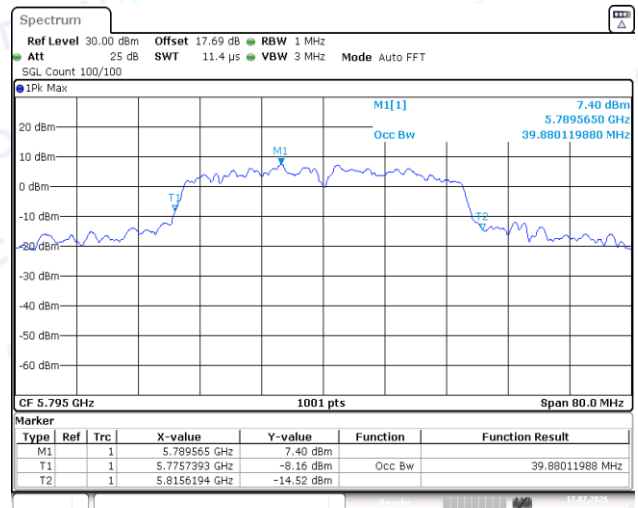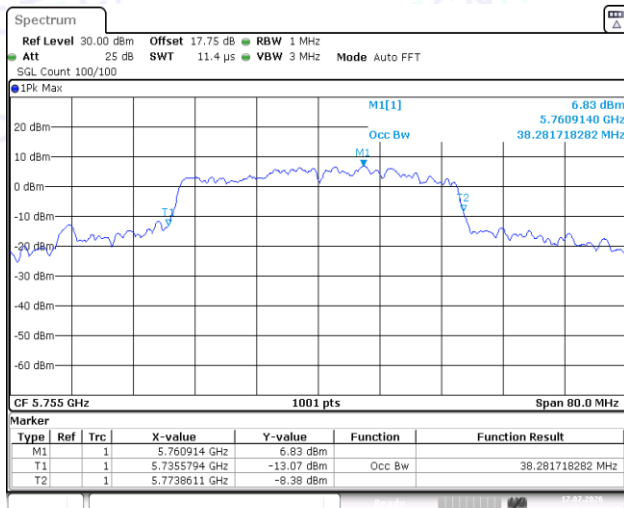



11N40SISO-Ant1-5755

11N40SISO-Ant1-5795

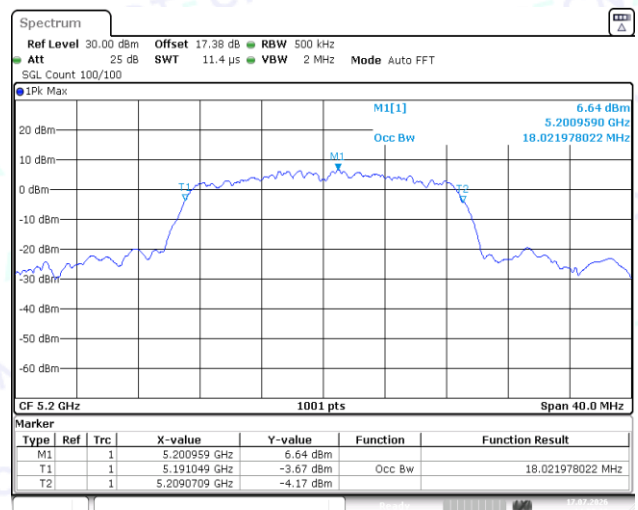



11AC20SISO-Ant1-5180

11AC20SISO-Ant1-5200

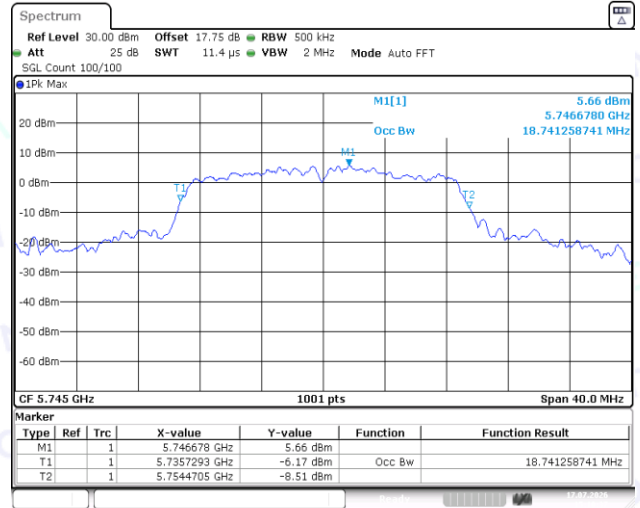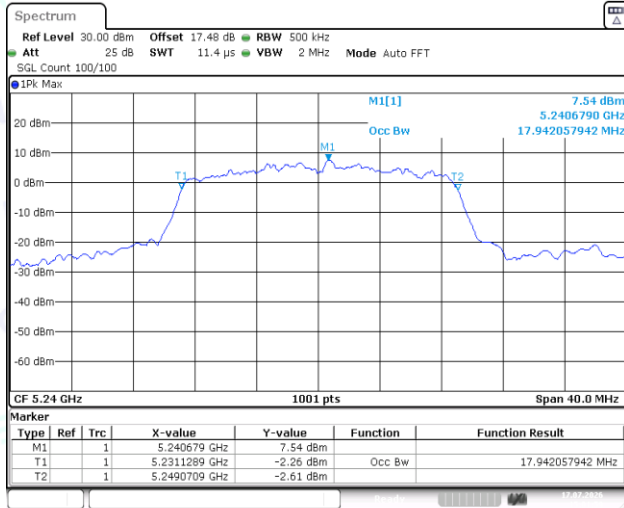



11AC20SISO-Ant1-5240

11AC20SISO-Ant1-5745

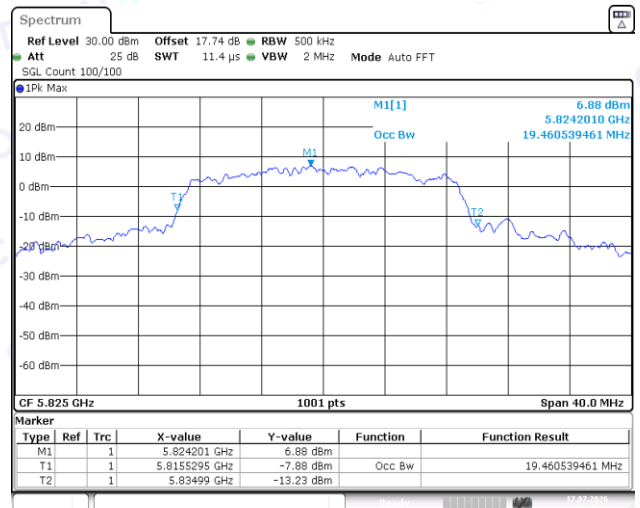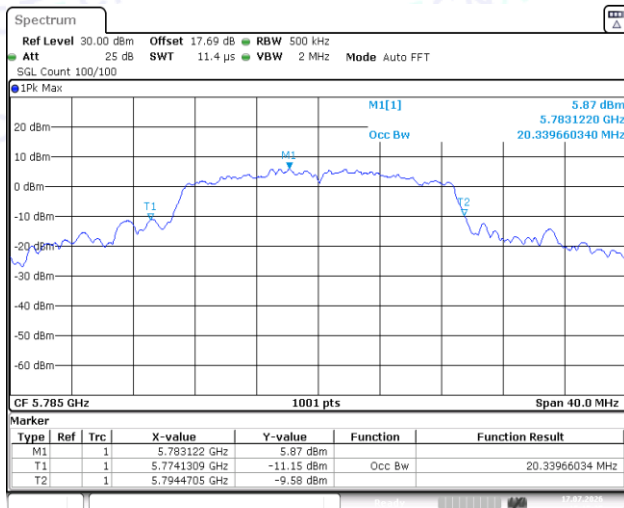



11AC20SISO-Ant1-5785

11AC20SISO-Ant1-5825

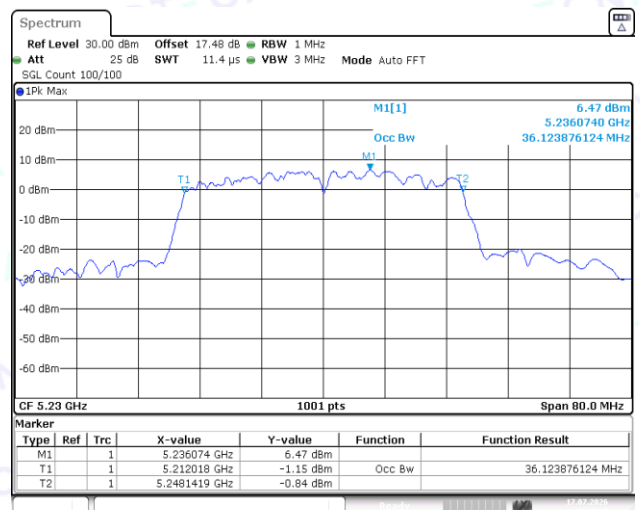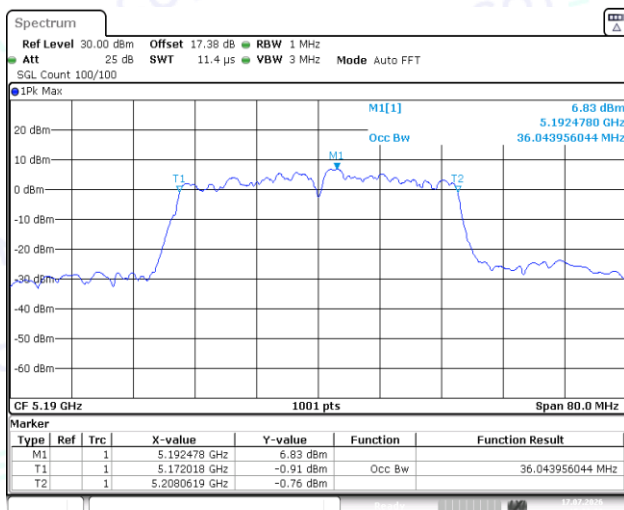



11AC40SISO-Ant1-5190

11AC40SISO-Ant1-5230

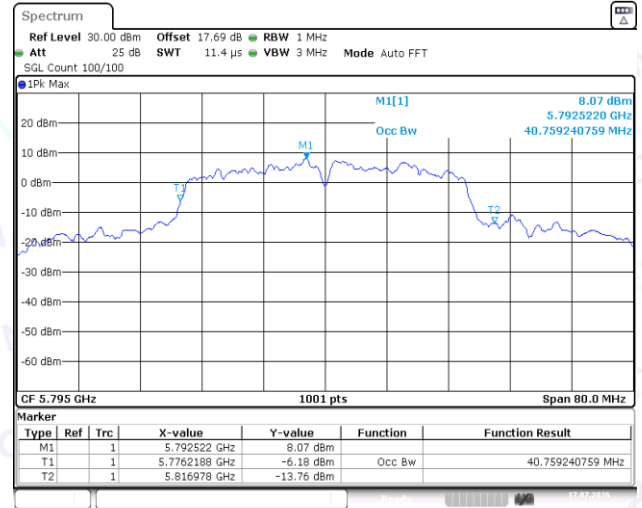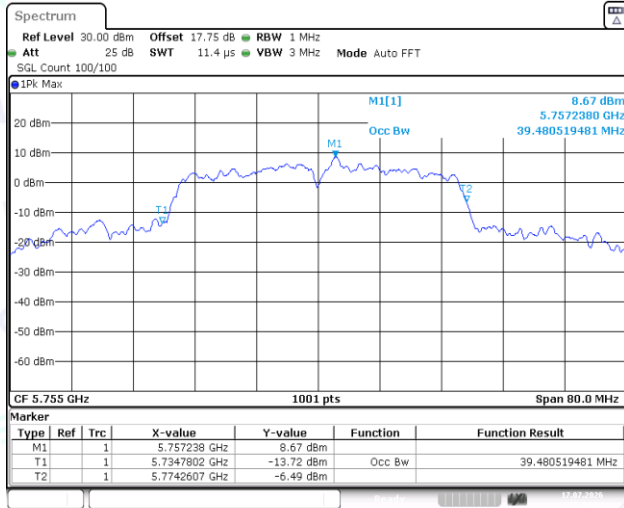

11AC40SISO-Ant1-5755

11AC40SISO-Ant1-5795

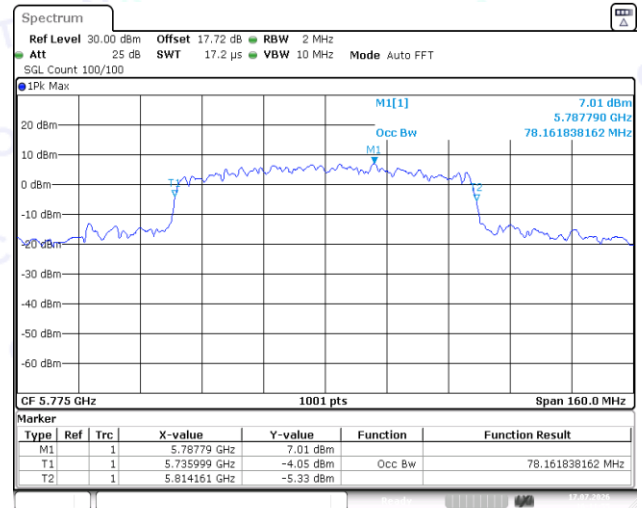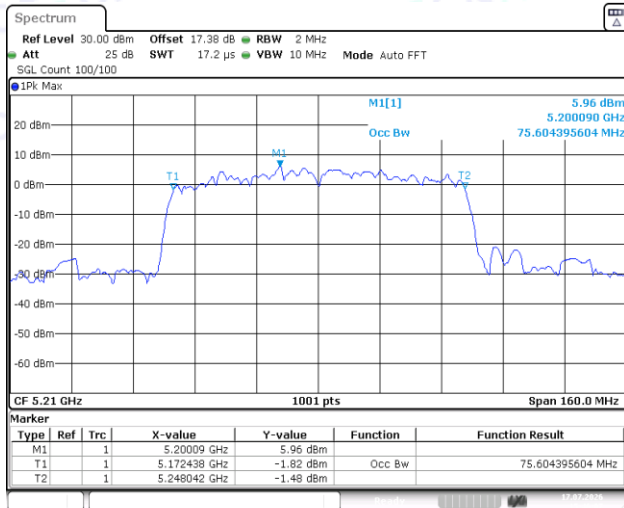

11AC80SISO-Ant1-5210


11AC80SISO-Ant1-5775



3: Min emission bandwidth

3.1 Test Result-B4

Test Mode	Antenna	Frequency[MHz]	6dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.36	5736.84	5753.20	0.5	PASS
11A	Ant1	5785	12.64	5778.68	5791.32	0.5	PASS
11A	Ant1	5825	16.32	5816.84	5833.16	0.5	PASS
11N20SISO	Ant1	5745	12.64	5738.68	5751.32	0.5	PASS
11N20SISO	Ant1	5785	15.12	5777.44	5792.56	0.5	PASS
11N20SISO	Ant1	5825	17.60	5816.20	5833.80	0.5	PASS
11N40SISO	Ant1	5755	30.16	5742.36	5772.52	0.5	PASS
11N40SISO	Ant1	5795	33.92	5778.68	5812.60	0.5	PASS
11AC20SISO	Ant1	5745	17.16	5736.24	5753.40	0.5	PASS
11AC20SISO	Ant1	5785	17.16	5776.60	5793.76	0.5	PASS
11AC20SISO	Ant1	5825	17.16	5816.60	5833.76	0.5	PASS
11AC40SISO	Ant1	5755	30.08	5737.48	5767.56	0.5	PASS
11AC40SISO	Ant1	5795	23.44	5785.32	5808.76	0.5	PASS
11AC80SISO	Ant1	5775	75.20	5737.40	5812.60	0.5	PASS



3.2 Test Graphs-B4

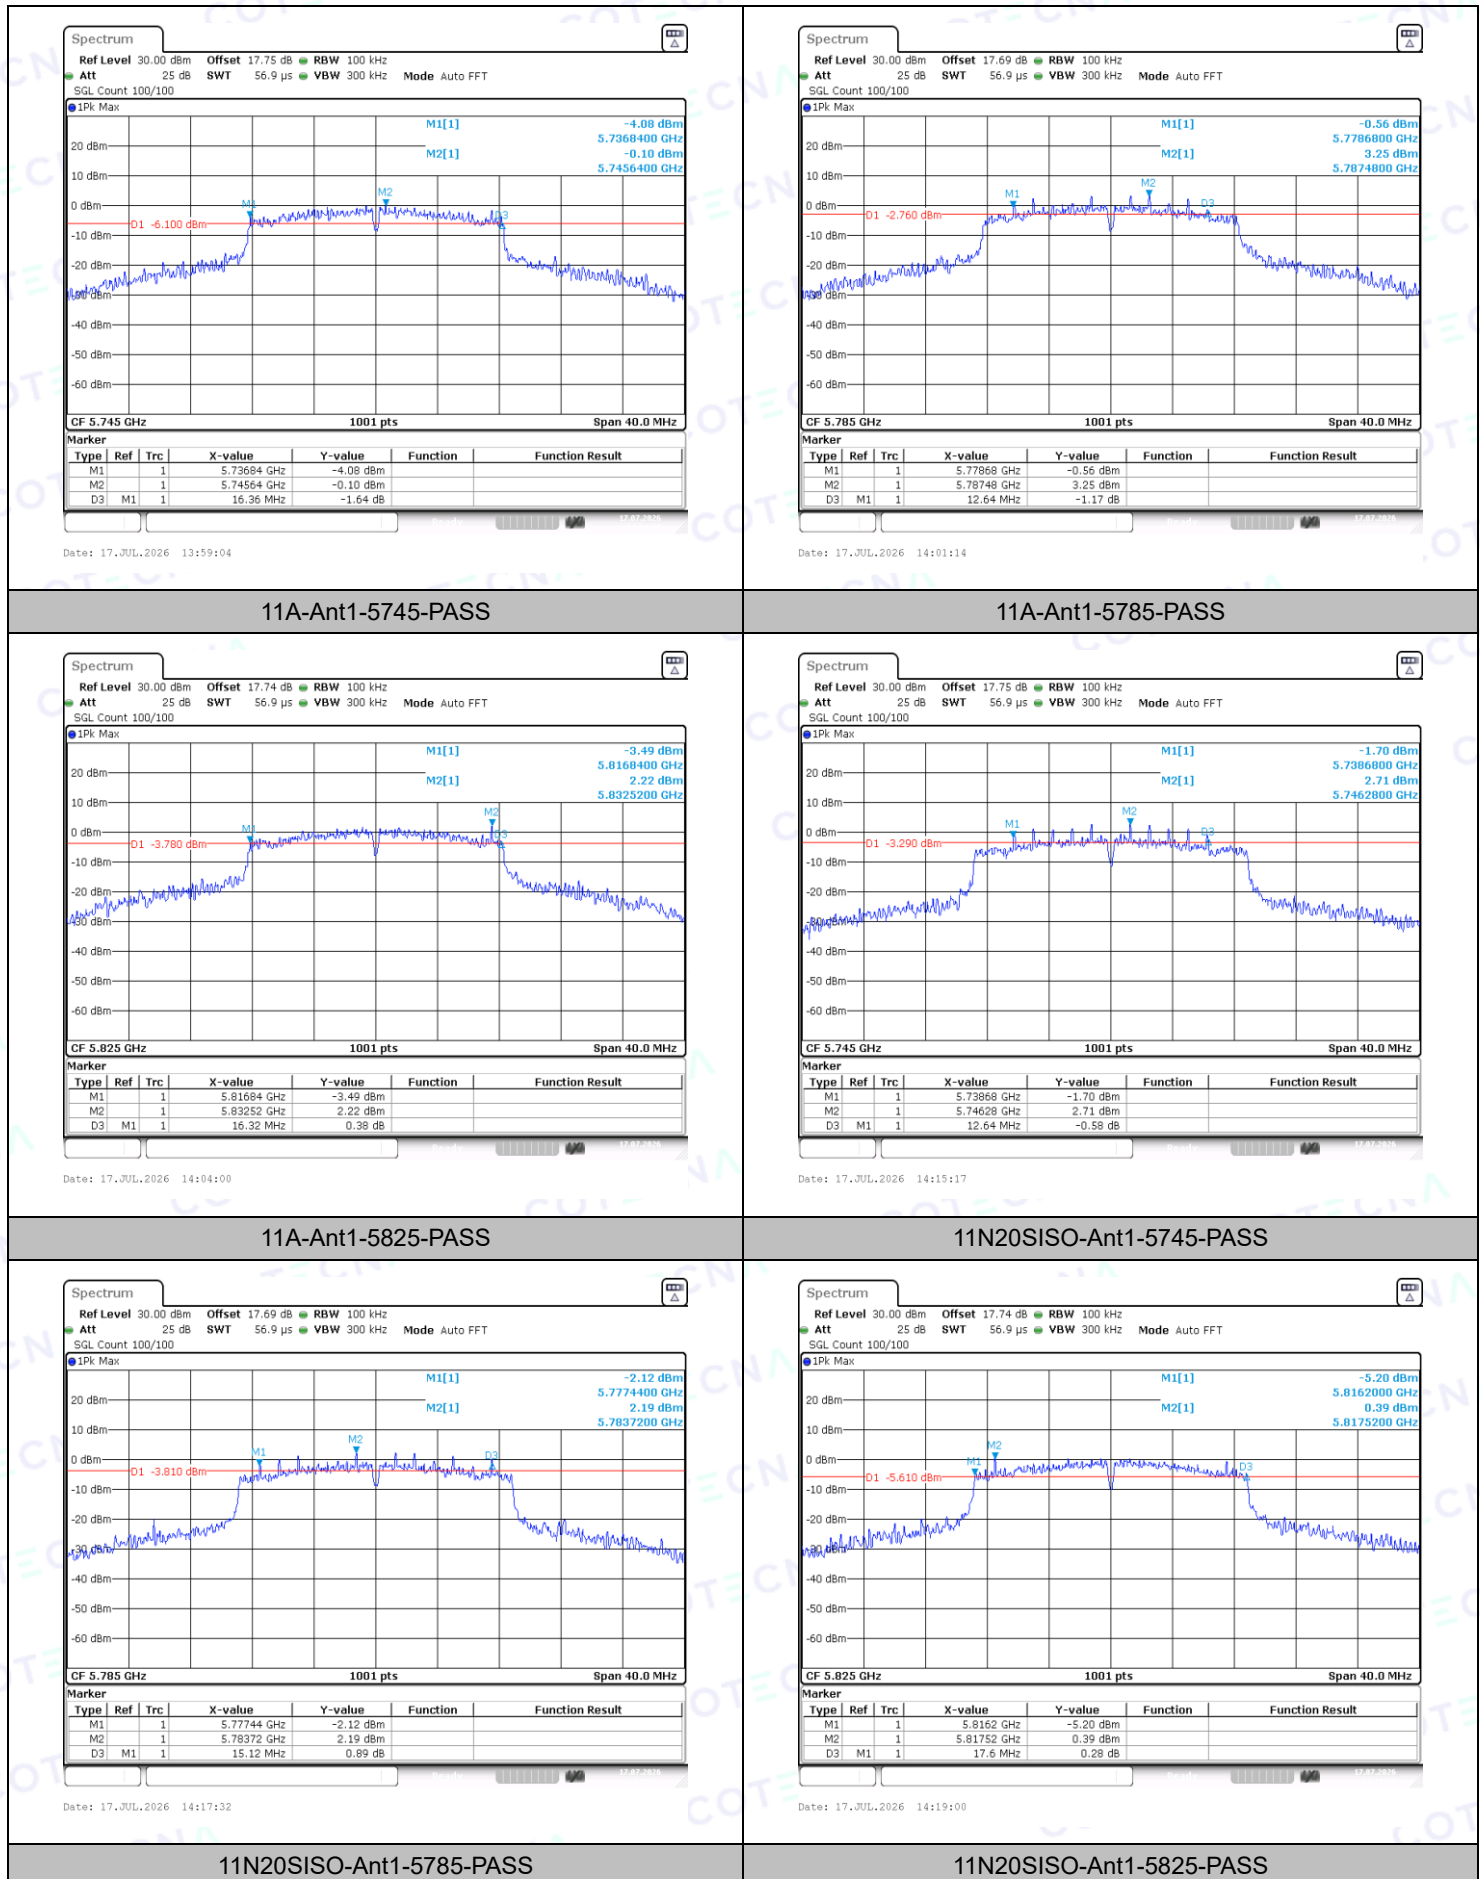

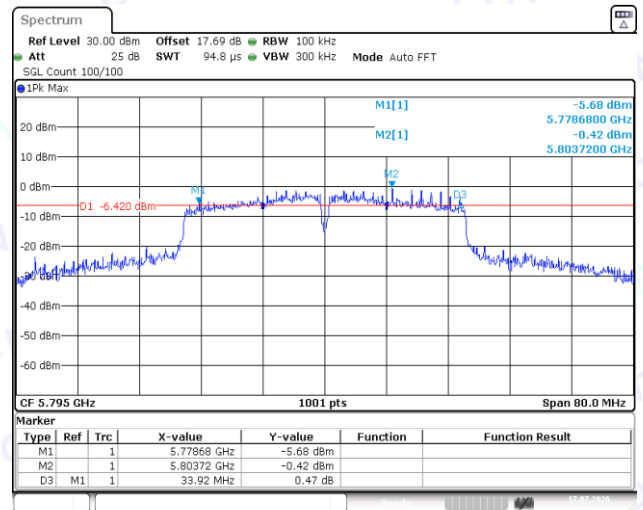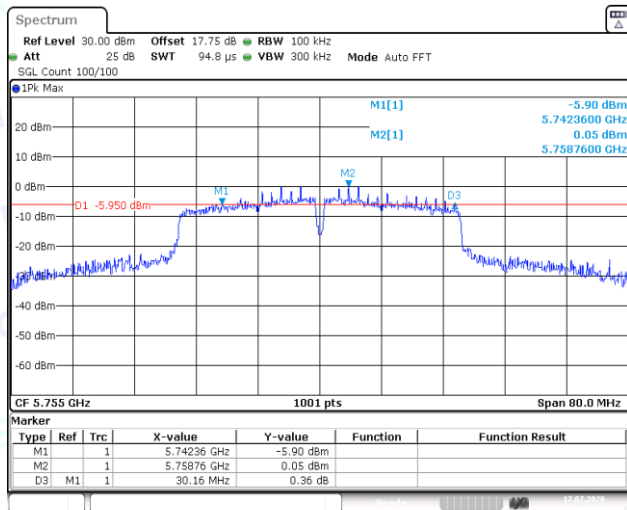



11N40SISO-Ant1-5755-PASS

11N40SISO-Ant1-5795-PASS

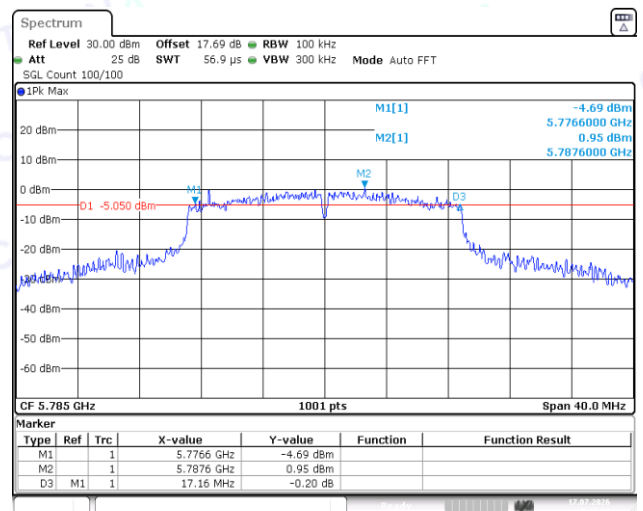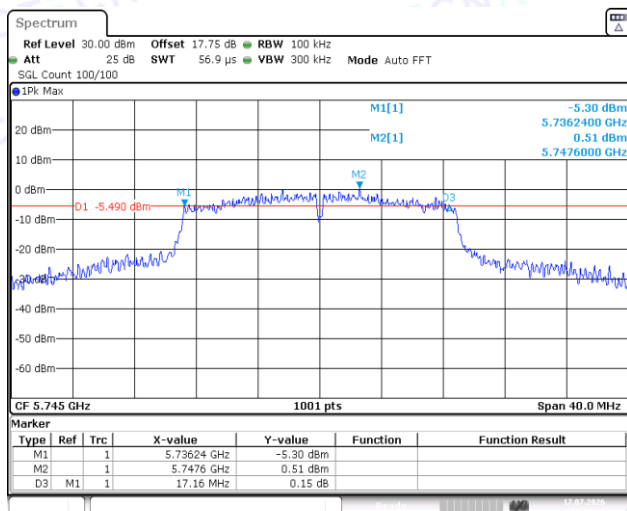


11AC20SISO-Ant1-5745-PASS

11AC20SISO-Ant1-5785-PASS

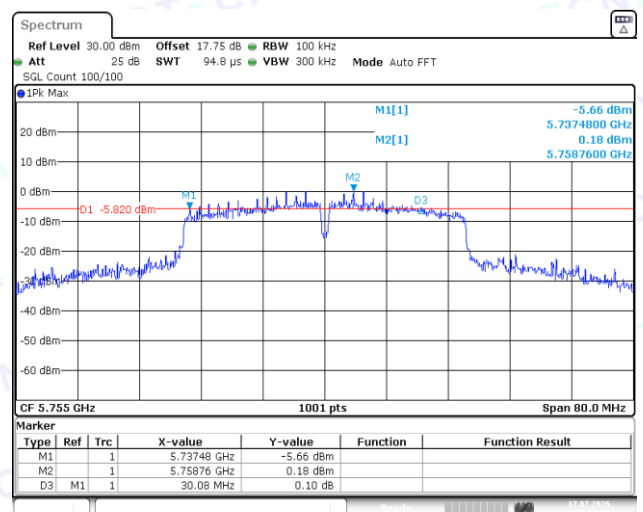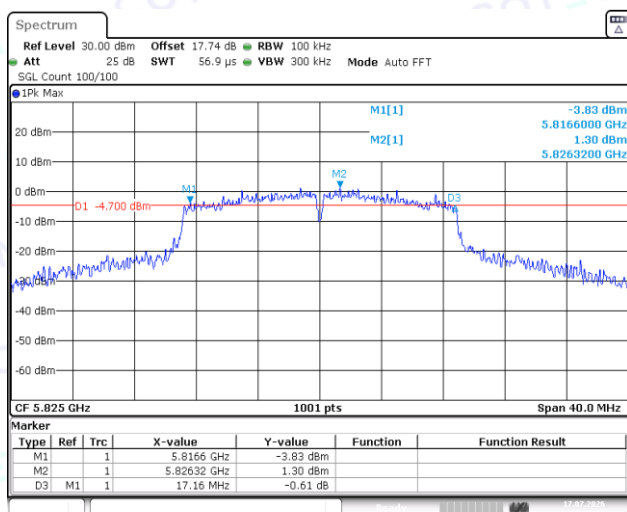


11AC20SISO-Ant1-5825-PASS

11AC40SISO-Ant1-5755-PASS

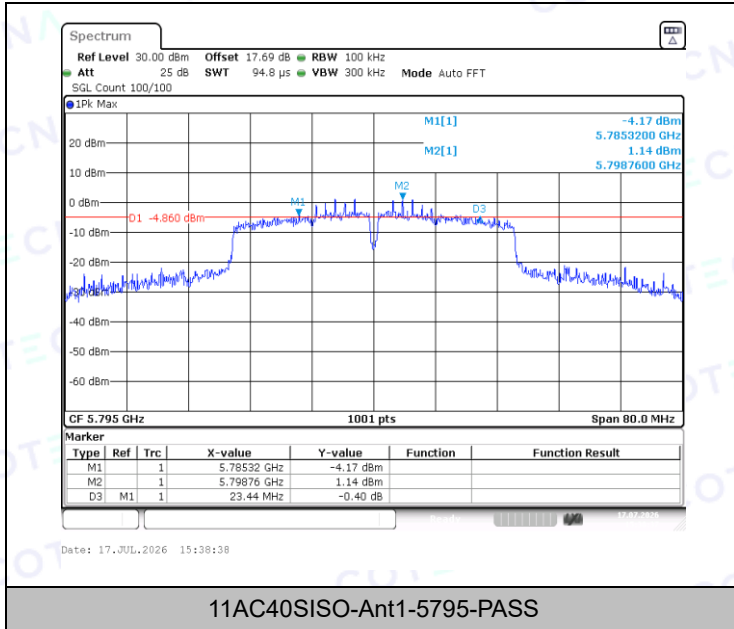

11AC40SISO-Ant1-5795-PASS

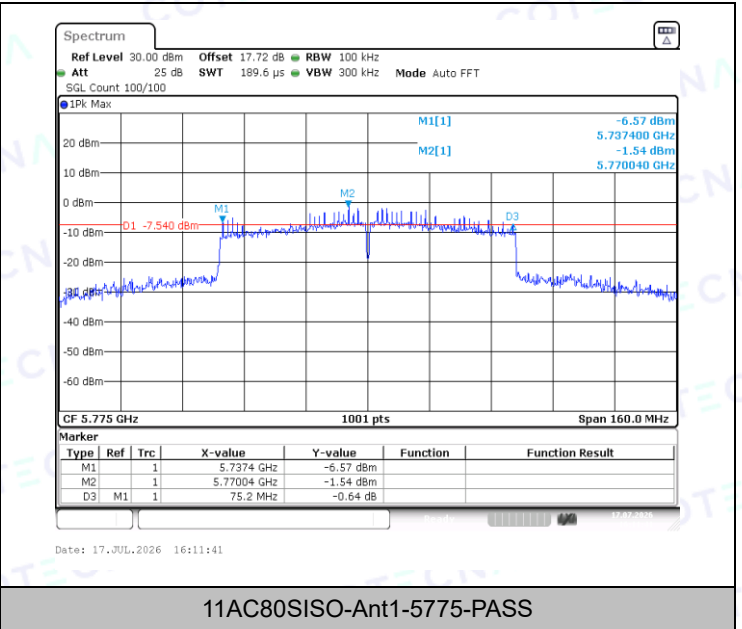

11AC80SISO-Ant1-5775-PASS

4: Duty Cycle

4.1 Test Result


Test Mode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	DC Factor	1/T [kHz]
11A	Ant1	5180	1.39	1.44	96.53	0.15	0.72
11A	Ant1	5745	1.40	1.44	97.22	0.12	0.71
11N20SISO	Ant1	5180	1.30	1.34	97.01	0.13	0.77
11N20SISO	Ant1	5745	1.30	1.34	97.01	0.13	0.77
11N40SISO	Ant1	5190	0.65	0.69	94.20	0.26	1.54
11N40SISO	Ant1	5755	0.64	0.69	92.75	0.33	1.56
11AC20SISO	Ant1	5180	1.31	1.35	97.04	0.13	0.76
11AC20SISO	Ant1	5745	1.31	1.36	96.32	0.16	0.76
11AC40SISO	Ant1	5190	0.66	0.70	94.29	0.26	1.52
11AC40SISO	Ant1	5755	0.65	0.70	92.86	0.32	1.54
11AC80SISO	Ant1	5210	0.32	0.37	86.49	0.63	3.13
11AC80SISO	Ant1	5775	0.32	0.36	88.89	0.51	3.13


Note: 1, Duty Cycle= Transmission Duration/ Transmission Period

2, DC Factor= $10 \cdot \log_{10}(1/\text{Duty Cycle})$


3, $1/T = 1/\text{Transmission Duration}$

4.2 Test Graphs

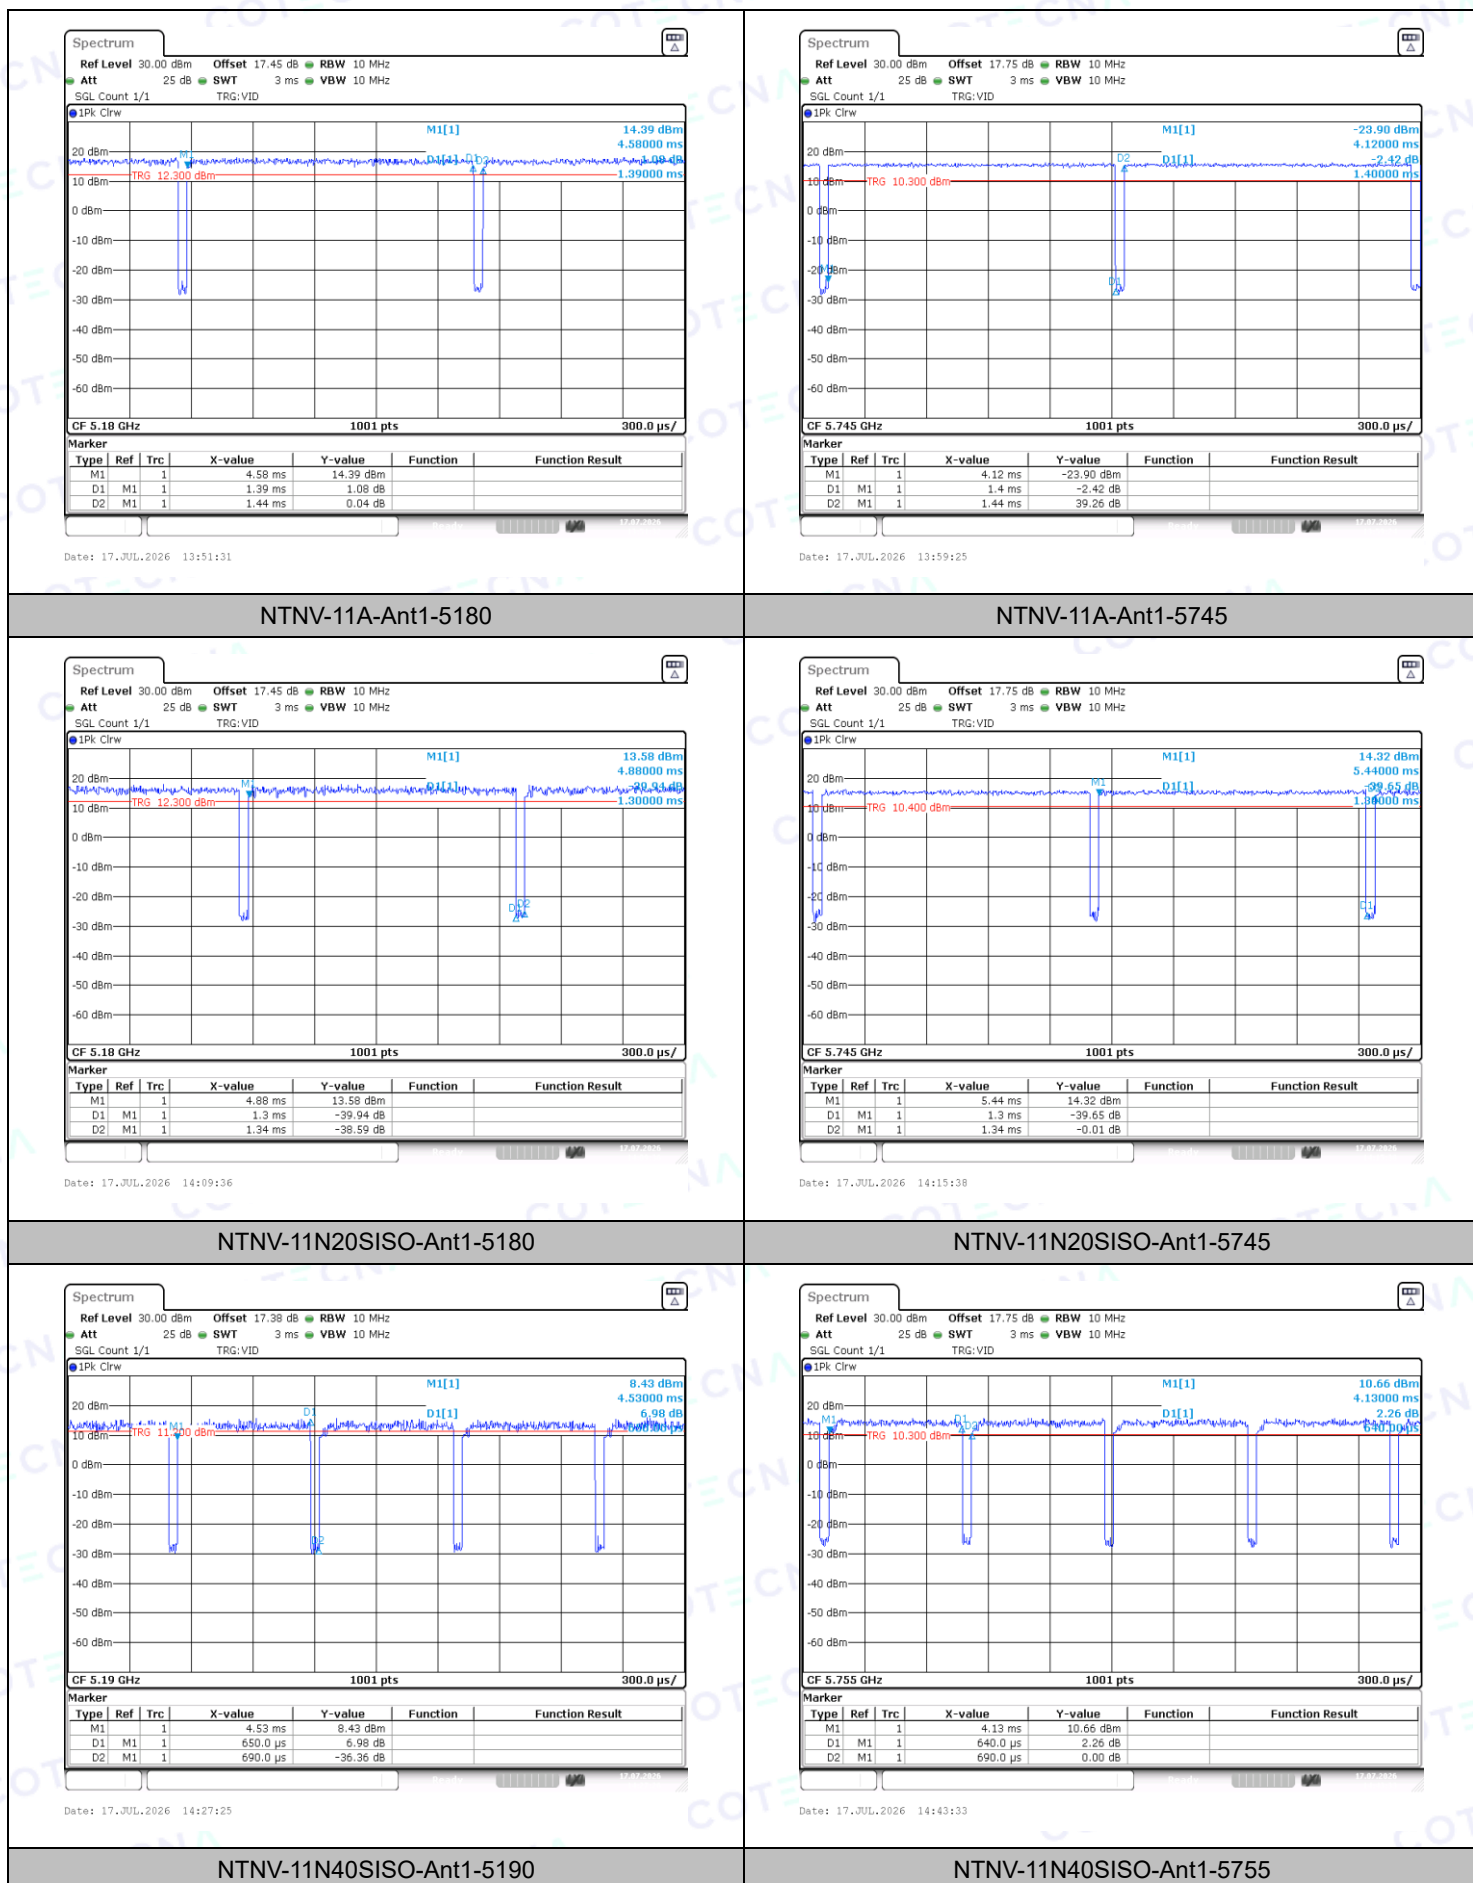


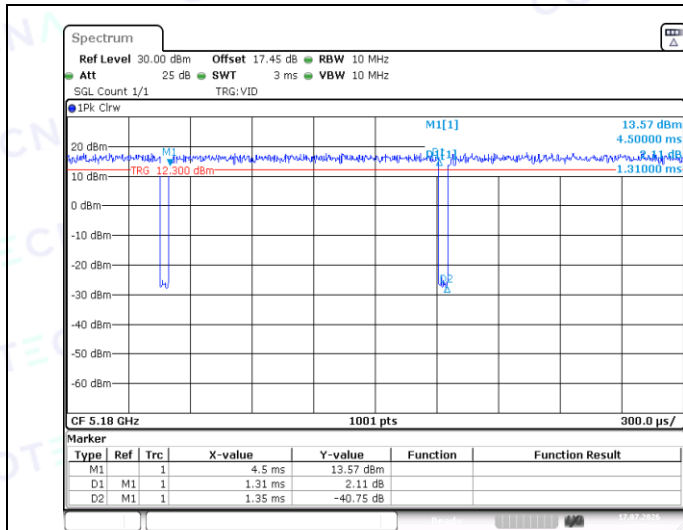


NTNV-11AC20SISO-Ant1-5180

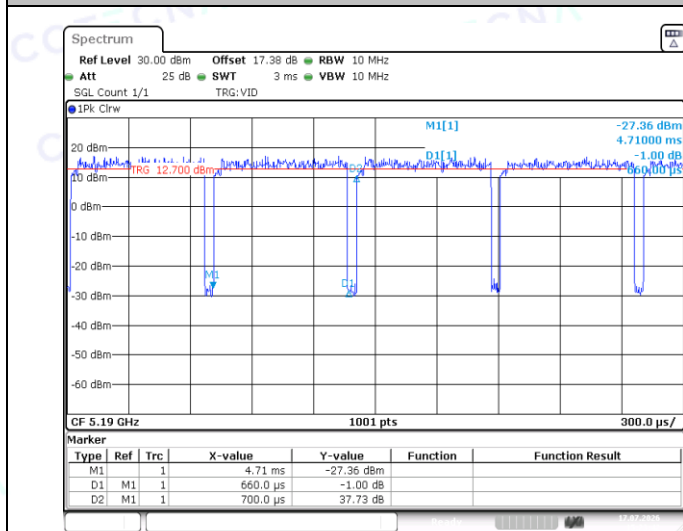


NTNV-11AC40SISO-Ant1-5190

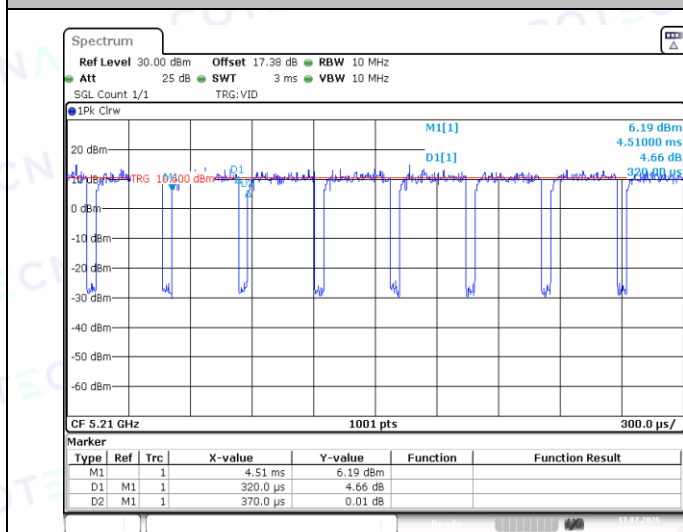


NTNV-11AC80SISO-Ant1-5210

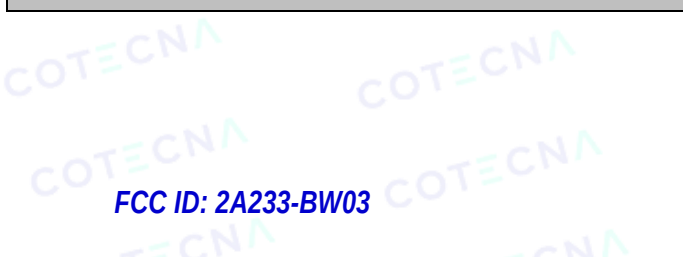

NTNV-11AC20SISO-Ant1-5745

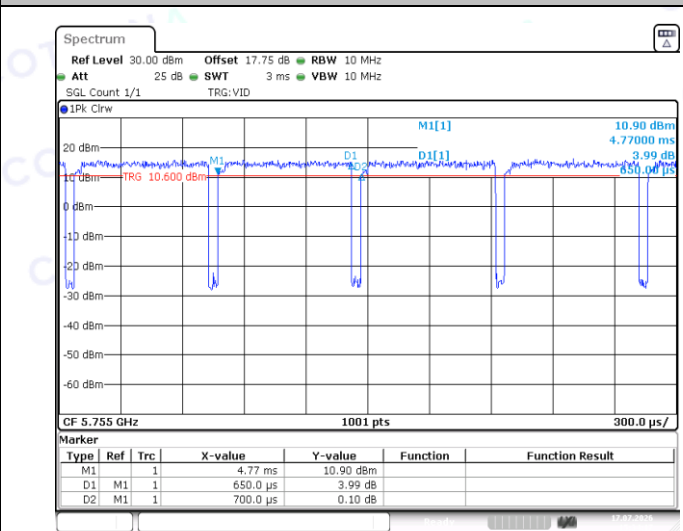

NTNV-11AC40SISO-Ant1-5755

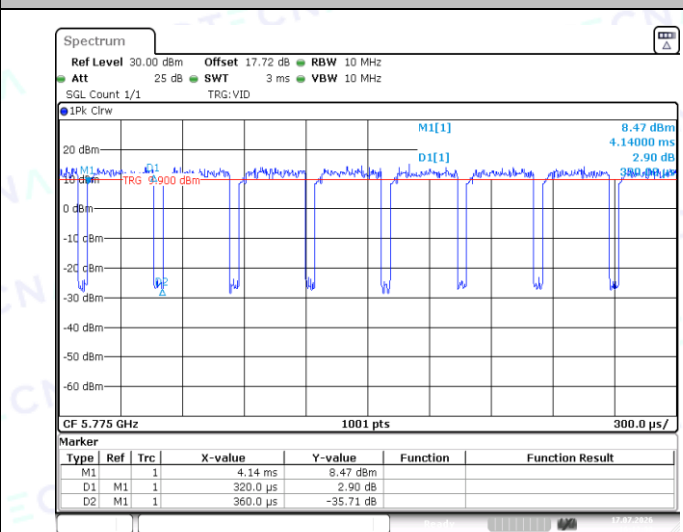

NTNV-11AC80SISO-Ant1-5775

5: Maximum conducted output power

5.1 Test Result

TestMode	Antenna	Frequency [MHz]	Raw Power [dBm]	DC Factor	Result [dBm]	Limit[dBm]	Verdict
11A	Ant1	5180	10.03	0.12	10.15	≤23.98	PASS
11A	Ant1	5200	9.61	0.12	9.73	≤23.98	PASS
11A	Ant1	5240	8.84	0.12	8.96	≤23.98	PASS
11A	Ant1	5745	9.80	0.12	9.92	≤30.00	PASS
11A	Ant1	5785	9.30	0.12	9.42	≤30.00	PASS
11A	Ant1	5825	8.44	0.12	8.56	≤30.00	PASS
11N20SISO	Ant1	5180	9.22	0.13	9.35	≤23.98	PASS
11N20SISO	Ant1	5200	9.09	0.13	9.22	≤23.98	PASS
11N20SISO	Ant1	5240	8.76	0.13	8.89	≤23.98	PASS
11N20SISO	Ant1	5745	9.82	0.13	9.95	≤30.00	PASS
11N20SISO	Ant1	5785	9.15	0.13	9.28	≤30.00	PASS
11N20SISO	Ant1	5825	8.27	0.13	8.40	≤30.00	PASS
11N40SISO	Ant1	5190	9.08	0.33	9.41	≤23.98	PASS
11N40SISO	Ant1	5230	8.80	0.33	9.13	≤23.98	PASS
11N40SISO	Ant1	5755	9.45	0.33	9.78	≤30.00	PASS
11N40SISO	Ant1	5795	8.81	0.33	9.14	≤30.00	PASS
11AC20SISO	Ant1	5180	9.18	0.16	9.34	≤23.98	PASS
11AC20SISO	Ant1	5200	9.03	0.16	9.19	≤23.98	PASS
11AC20SISO	Ant1	5240	8.84	0.16	9.00	≤23.98	PASS
11AC20SISO	Ant1	5745	9.88	0.16	10.04	≤30.00	PASS
11AC20SISO	Ant1	5785	9.11	0.16	9.27	≤30.00	PASS
11AC20SISO	Ant1	5825	8.30	0.16	8.46	≤30.00	PASS
11AC40SISO	Ant1	5190	9.00	0.32	9.32	≤23.98	PASS
11AC40SISO	Ant1	5230	8.65	0.32	8.97	≤23.98	PASS
11AC40SISO	Ant1	5755	9.54	0.32	9.86	≤30.00	PASS
11AC40SISO	Ant1	5795	8.79	0.32	9.11	≤30.00	PASS
11AC80SISO	Ant1	5210	8.57	0.51	9.08	≤23.98	PASS
11AC80SISO	Ant1	5775	8.72	0.51	9.23	≤30.00	PASS

6: Maximum power spectral density


6.1 Test Result


Test Mode	Ant.	Frequency [MHz]	RawData [dBm/500kHz]	DC Factor	Result [dBm/MHz] Result [dBm/500kHz]	Limit[dBm/MHz] Limit[dBm/500kHz]	Verdict
11A	Ant1	5180	0.09	0.12	0.21	≤11.00	PASS
11A	Ant1	5200	0.03	0.12	0.15	≤11.00	PASS
11A	Ant1	5240	-0.52	0.12	-0.40	≤11.00	PASS
11A	Ant1	5745	-2.5	0.12	-2.38	≤30.00	PASS
11A	Ant1	5785	-3.01	0.12	-2.89	≤30.00	PASS
11A	Ant1	5825	-3.68	0.12	-3.56	≤30.00	PASS
11N20SISO	Ant1	5180	-0.24	0.13	-0.11	≤11.00	PASS
11N20SISO	Ant1	5200	-0.46	0.13	-0.33	≤11.00	PASS
11N20SISO	Ant1	5240	-0.76	0.13	-0.63	≤11.00	PASS
11N20SISO	Ant1	5745	-2.59	0.13	-2.46	≤30.00	PASS
11N20SISO	Ant1	5785	-3.19	0.13	-3.06	≤30.00	PASS
11N20SISO	Ant1	5825	-3.96	0.13	-3.83	≤30.00	PASS
11N40SISO	Ant1	5190	-3.13	0.33	-2.80	≤11.00	PASS
11N40SISO	Ant1	5230	-3.5	0.33	-3.17	≤11.00	PASS
11N40SISO	Ant1	5755	-5.78	0.33	-5.45	≤30.00	PASS
11N40SISO	Ant1	5795	-6.58	0.33	-6.25	≤30.00	PASS
11AC20SISO	Ant1	5180	-0.14	0.16	0.02	≤11.00	PASS
11AC20SISO	Ant1	5200	-0.28	0.16	-0.12	≤11.00	PASS
11AC20SISO	Ant1	5240	-0.89	0.16	-0.73	≤11.00	PASS
11AC20SISO	Ant1	5745	-2.7	0.16	-2.54	≤30.00	PASS
11AC20SISO	Ant1	5785	-3.28	0.16	-3.12	≤30.00	PASS
11AC20SISO	Ant1	5825	-3.99	0.16	-3.83	≤30.00	PASS
11AC40SISO	Ant1	5190	-3.23	0.32	-2.91	≤11.00	PASS
11AC40SISO	Ant1	5230	-3.51	0.32	-3.19	≤11.00	PASS
11AC40SISO	Ant1	5755	-5.83	0.32	-5.51	≤30.00	PASS
11AC40SISO	Ant1	5795	-6.32	0.32	-6.00	≤30.00	PASS
11AC80SISO	Ant1	5210	-6.68	0.51	-6.17	≤11.00	PASS
11AC80SISO	Ant1	5775	-9.42	0.51	-8.91	≤30.00	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.

2.RF Conducted test Offset= cable loss+ Attenuator


6.2 Test Graphs

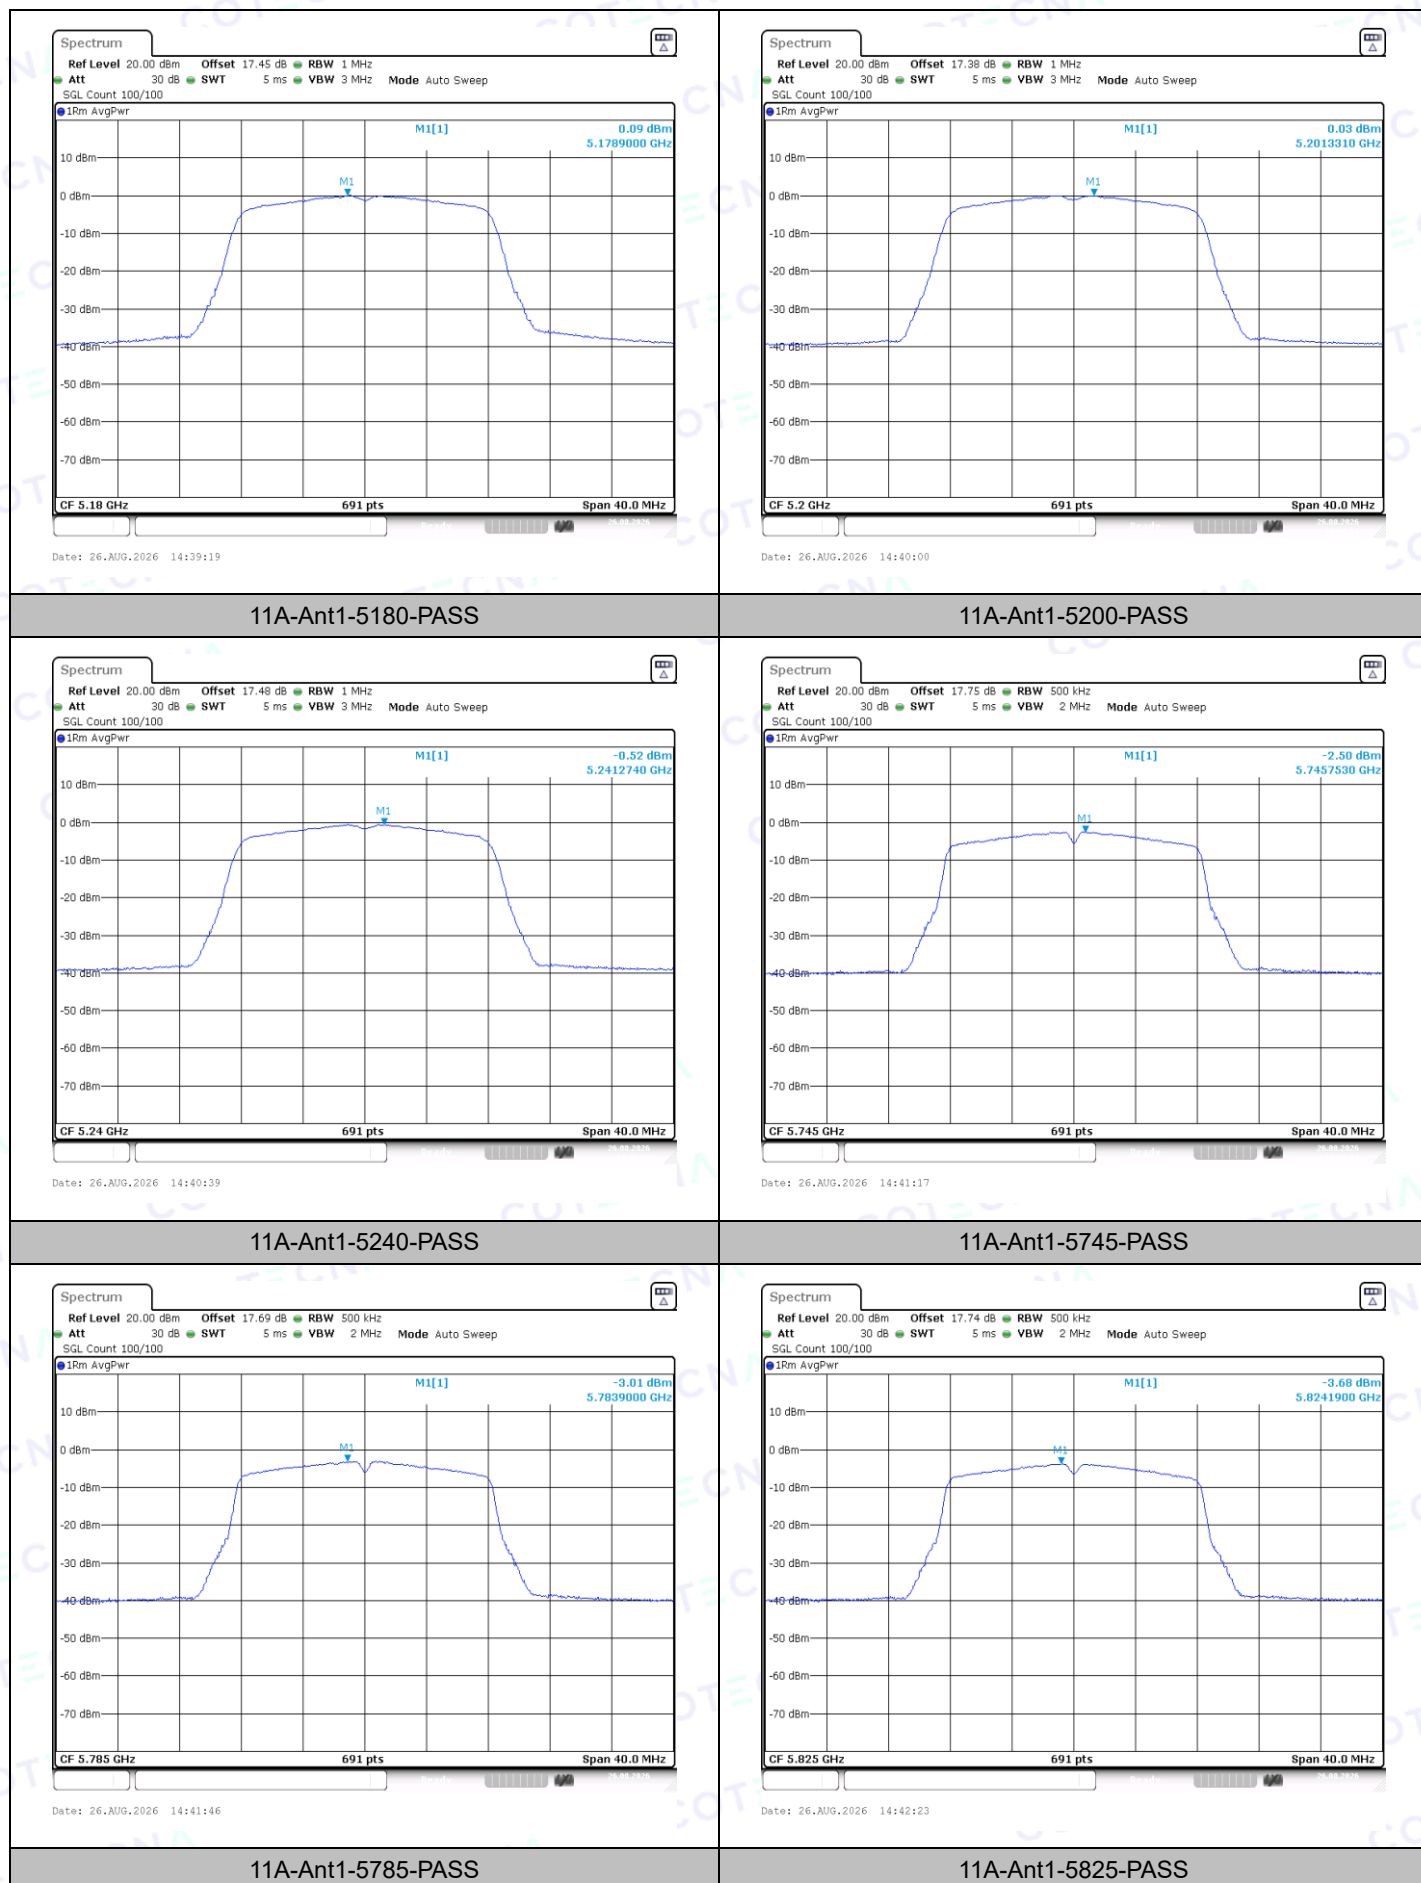

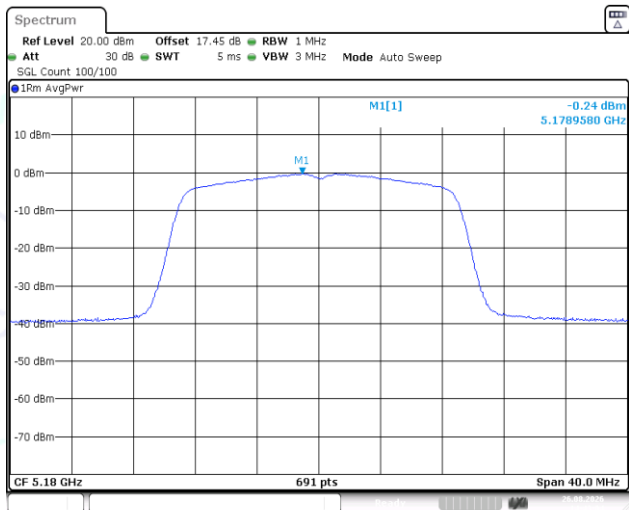


Date: 26.AUG.2026 14:43:04

11N20SISO-Ant1-5180-PASS

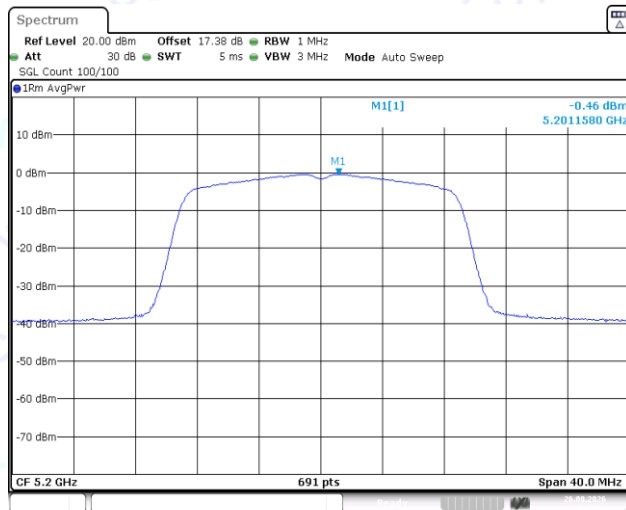


Date: 26.AUG.2026 14:43:34

11N20SISO-Ant1-5200-PASS

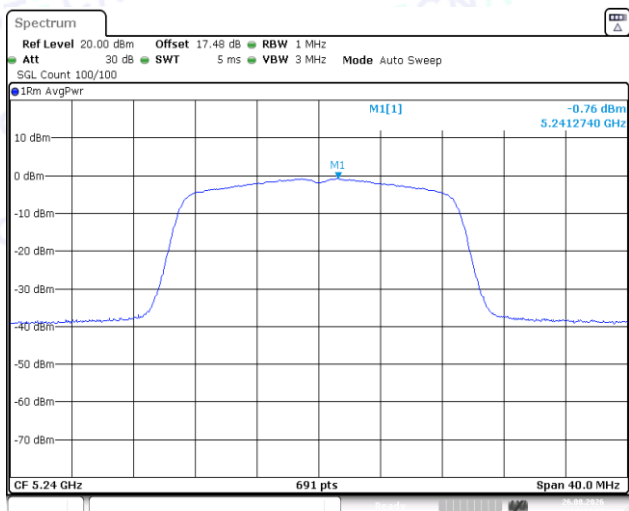


Date: 26.AUG.2026 14:44:13

11N20SISO-Ant1-5240-PASS

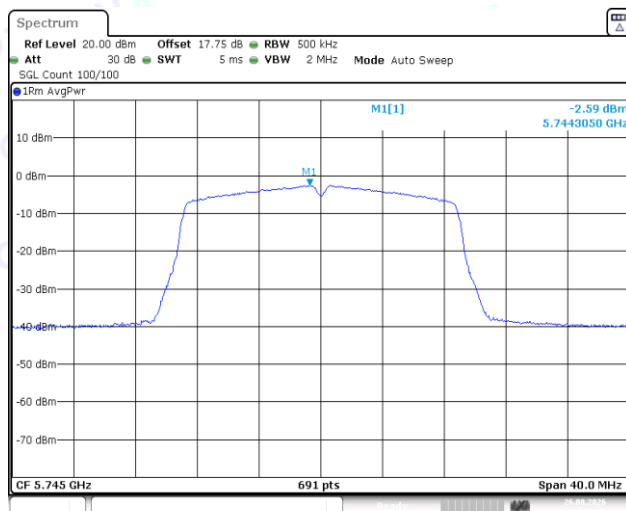


Date: 26.AUG.2026 14:44:47

11N20SISO-Ant1-5745-PASS

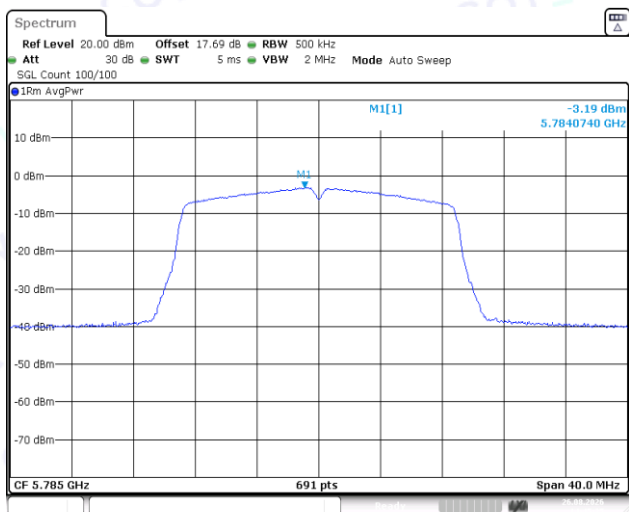


Date: 26.AUG.2026 14:45:25

11N20SISO-Ant1-5785-PASS

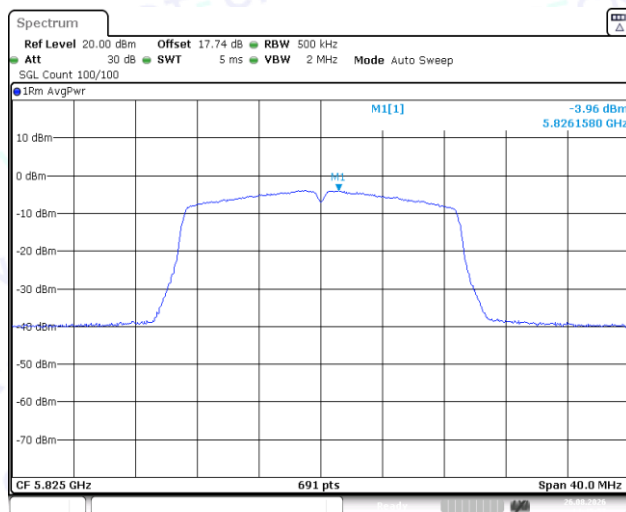


Date: 26.AUG.2026 14:45:57

11N20SISO-Ant1-5825-PASS

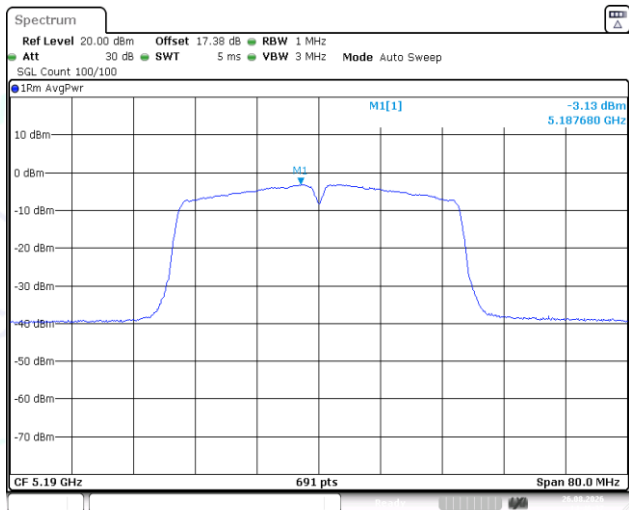


Date: 26.AUG.2026 14:46:37

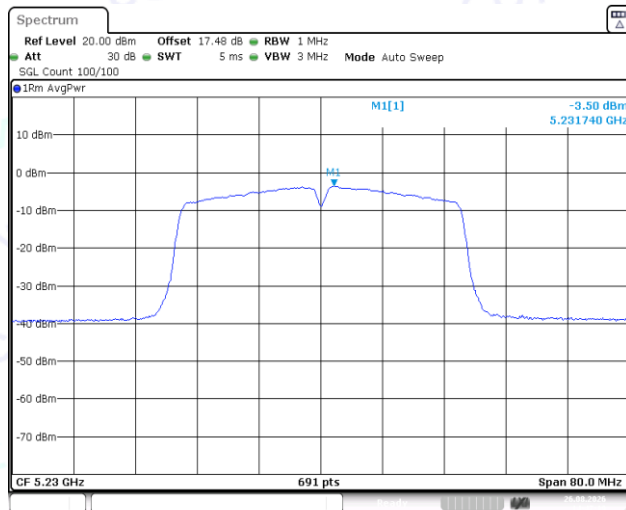


Date: 26.AUG.2026 14:47:19

11N40SISO-Ant1-5190-PASS

11N40SISO-Ant1-5230-PASS

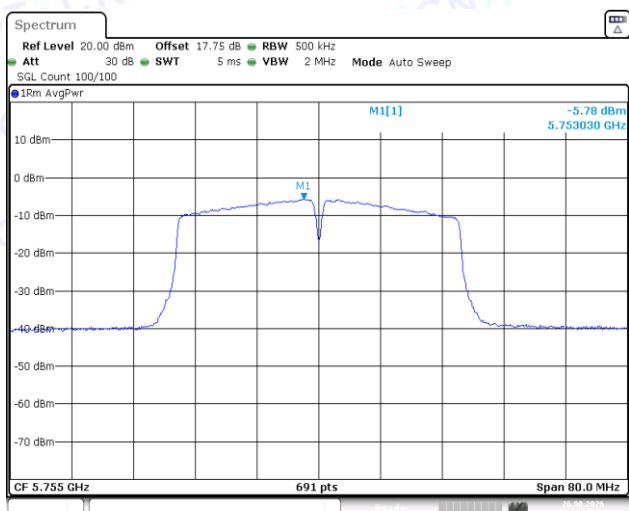


Date: 26.AUG.2026 14:47:57

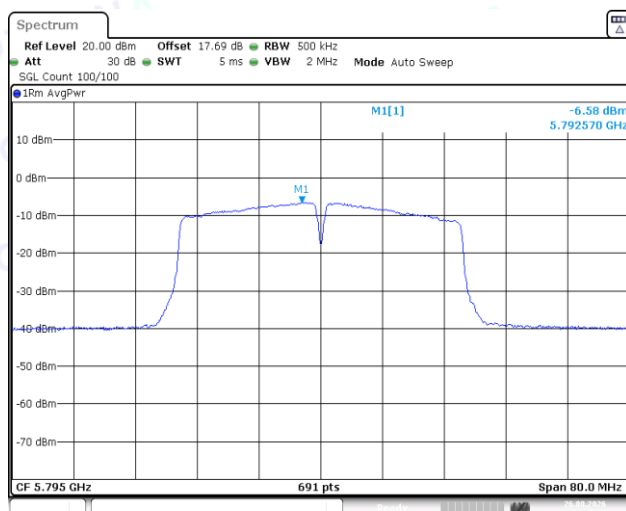


Date: 26.AUG.2026 14:48:29

11N40SISO-Ant1-5755-PASS

11N40SISO-Ant1-5795-PASS

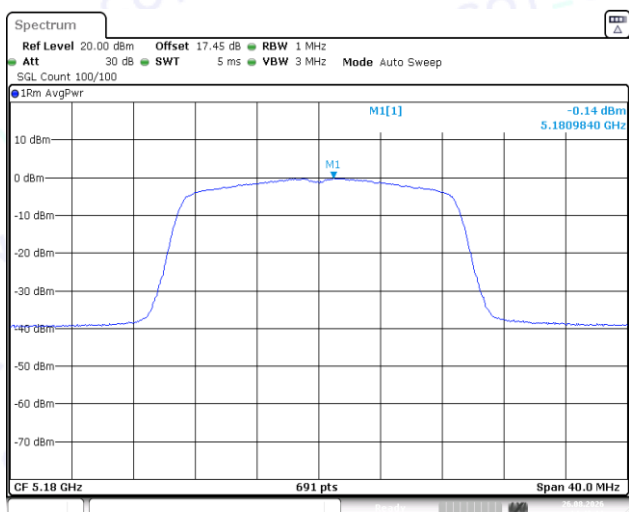


Date: 26.AUG.2026 14:49:11

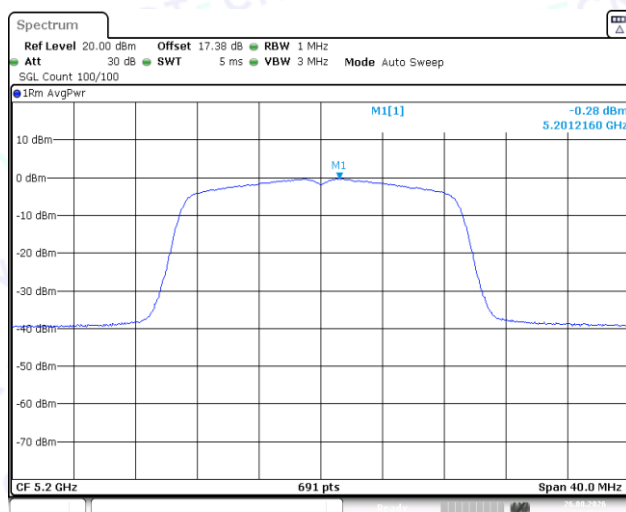


Date: 26.AUG.2026 14:49:48

11AC20SISO-Ant1-5180-PASS


11AC20SISO-Ant1-5200-PASS

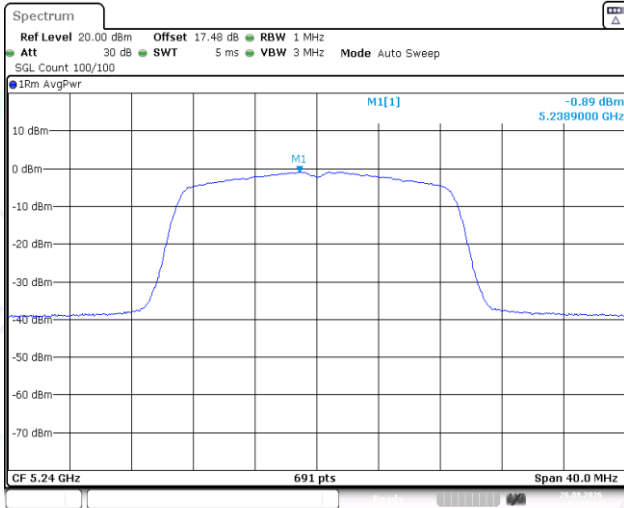


11AC20SISO-Ant1-5240-PASS

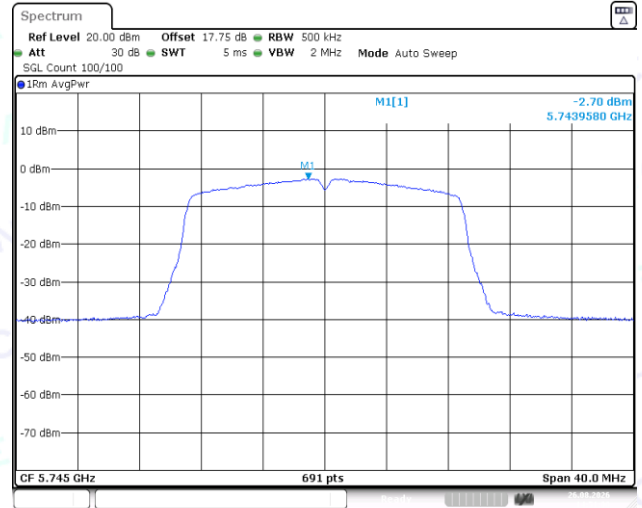


11AC20SISO-Ant1-5745-PASS

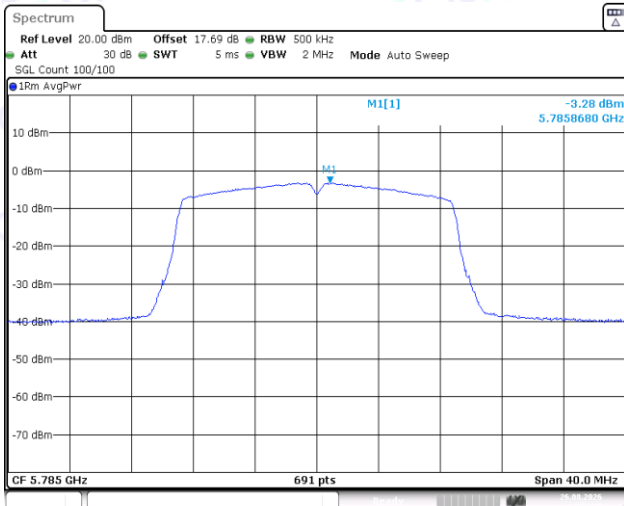


11AC20SISO-Ant1-5785-PASS

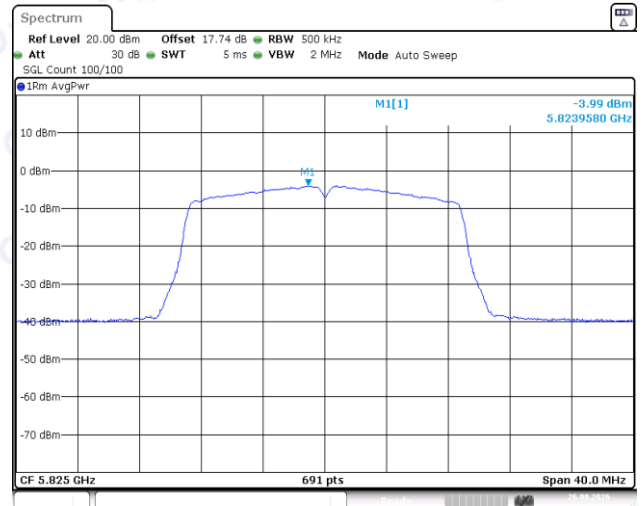


11AC20SISO-Ant1-5825-PASS

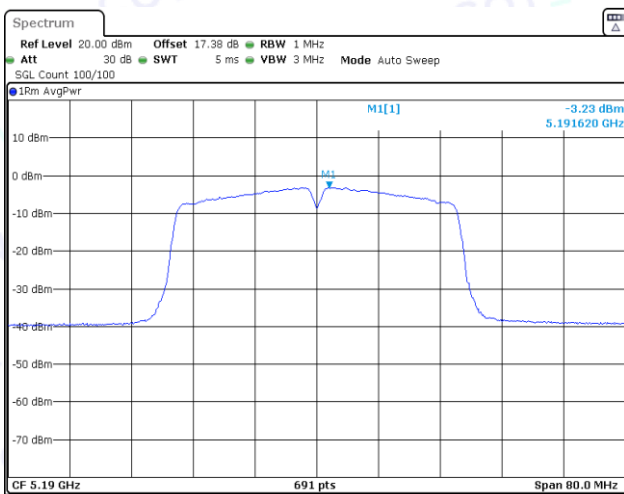

11AC40SISO-Ant1-5190-PASS

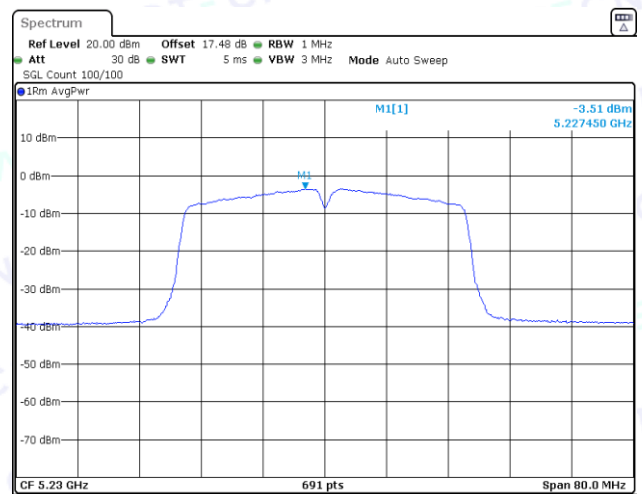


11AC40SISO-Ant1-5230-PASS

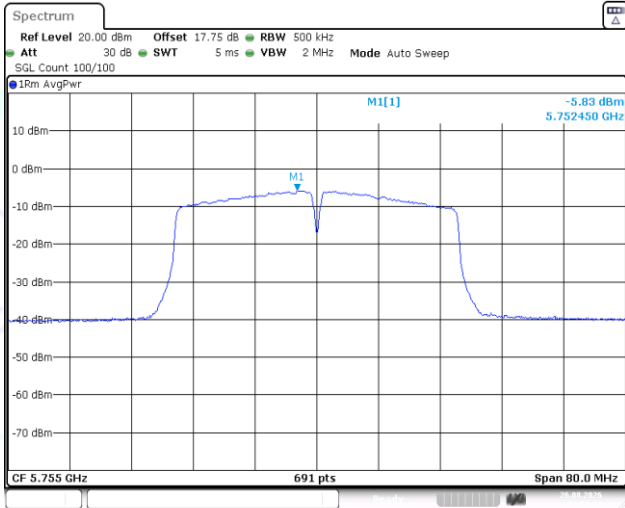


Date: 26.AUG.2026 14:54:39

11AC40SISO-Ant1-5755-PASS

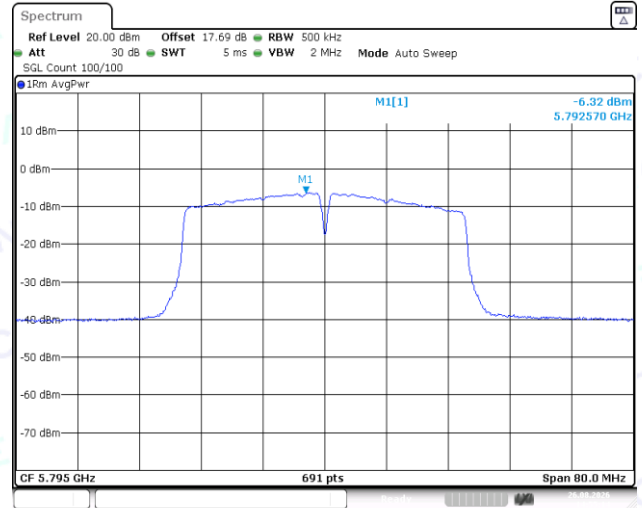


Date: 26.AUG.2026 14:55:15

11AC40SISO-Ant1-5795-PASS

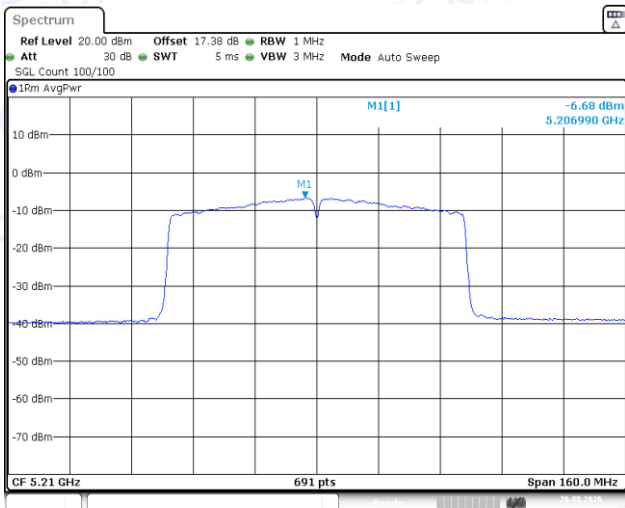

Date: 26.AUG.2026 14:56:21

11AC80SISO-Ant1-5210-PASS

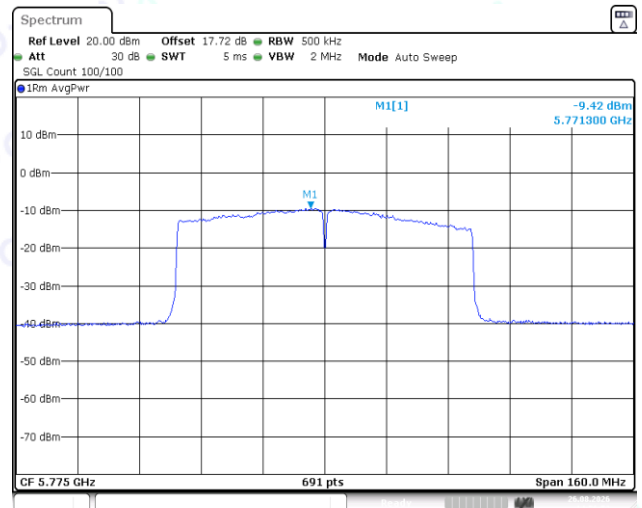

Date: 26.AUG.2026 14:56:52

11AC80SISO-Ant1-5775-PASS

7: Band edge measurements

7.1 Test Result B1


Test Mode	Antenna	ChName	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	Low	5180	-31.91	≤ -27	PASS
11A	Ant1	High	5240	-37.75	≤ -27	PASS
11N20SISO	Ant1	Low	5180	-29.47	≤ -27	PASS
11N20SISO	Ant1	High	5240	-37.26	≤ -27	PASS
11N40SISO	Ant1	Low	5190	-30.92	≤ -27	PASS
11N40SISO	Ant1	High	5230	-36.55	≤ -27	PASS
11AC20SISO	Ant1	Low	5180	-31.42	≤ -27	PASS
11AC20SISO	Ant1	High	5240	-36.93	≤ -27	PASS
11AC40SISO	Ant1	Low	5190	-29.76	≤ -27	PASS
11AC40SISO	Ant1	High	5230	-36.22	≤ -27	PASS
11AC80SISO	Ant1	Low	5210	-28.46	≤ -27	PASS
11AC80SISO	Ant1	High	5210	-36.28	≤ -27	PASS

7.2 Test Result B4


Test Mode	Antenna	ChName	Frequency[MHz]	FreqRange [MHz]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	Low	5745	5720~5725	-25.36	≤15.98	PASS
11A	Ant1	Low	5745	5700~5720	-24.59	≤15.46	PASS
11A	Ant1	Low	5745	5650~5700	-39.34	≤-26.38	PASS
11A	Ant1	Low	5745	5645~5650	-38.51	≤-27	PASS
11A	Ant1	High	5825	5850~5855	-21.13	≤21.45	PASS
11A	Ant1	High	5825	5855~5875	-24.83	≤15.06	PASS
11A	Ant1	High	5825	5875~5925	-37.52	≤-25.71	PASS
11A	Ant1	High	5825	5925~5935	-37.55	≤-27	PASS
11N20SISO	Ant1	Low	5745	5720~5725	-25.8	≤15.98	PASS
11N20SISO	Ant1	Low	5745	5700~5720	-27.04	≤14.43	PASS
11N20SISO	Ant1	Low	5745	5650~5700	-38.41	≤-26.63	PASS
11N20SISO	Ant1	Low	5745	5645~5650	-39.18	≤-27	PASS
11N20SISO	Ant1	High	5825	5850~5855	-28.96	≤15.65	PASS
11N20SISO	Ant1	High	5825	5855~5875	-29.34	≤13.52	PASS
11N20SISO	Ant1	High	5825	5875~5925	-38.49	≤-26.44	PASS
11N20SISO	Ant1	High	5825	5925~5935	-37.3	≤-27	PASS
11N40SISO	Ant1	Low	5755	5720~5725	-17.71	≤16.34	PASS
11N40SISO	Ant1	Low	5755	5700~5720	-16.3	≤15.14	PASS
11N40SISO	Ant1	Low	5755	5650~5700	-37.46	≤-25.63	PASS
11N40SISO	Ant1	Low	5755	5645~5650	-38.33	≤-27	PASS
11N40SISO	Ant1	High	5795	5850~5855	-30.11	≤15.85	PASS
11N40SISO	Ant1	High	5795	5855~5875	-28.3	≤13.22	PASS
11N40SISO	Ant1	High	5795	5875~5925	-37.45	≤-26.26	PASS
11N40SISO	Ant1	High	5795	5925~5935	-37.35	≤-27	PASS
11AC20SISO	Ant1	Low	5745	5720~5725	-23.44	≤16.74	PASS
11AC20SISO	Ant1	Low	5745	5700~5720	-23.97	≤15.27	PASS
11AC20SISO	Ant1	Low	5745	5650~5700	-39.4	≤-26.75	PASS
11AC20SISO	Ant1	Low	5745	5645~5650	-37.34	≤-27	PASS
11AC20SISO	Ant1	High	5825	5850~5855	-30.05	≤15.65	PASS
11AC20SISO	Ant1	High	5825	5855~5875	-26.78	≤14.73	PASS
11AC20SISO	Ant1	High	5825	5875~5925	-38.62	≤-26.87	PASS
11AC20SISO	Ant1	High	5825	5925~5935	-37.62	≤-27	PASS
11AC40SISO	Ant1	Low	5755	5720~5725	-16.85	≤16.34	PASS
11AC40SISO	Ant1	Low	5755	5700~5720	-18.1	≤14.05	PASS
11AC40SISO	Ant1	Low	5755	5650~5700	-39.37	≤-26.36	PASS
11AC40SISO	Ant1	Low	5755	5645~5650	-37.43	≤-27	PASS
11AC40SISO	Ant1	High	5795	5850~5855	-27.75	≤15.85	PASS
11AC40SISO	Ant1	High	5795	5855~5875	-28.31	≤12.68	PASS
11AC40SISO	Ant1	High	5795	5875~5925	-37.89	≤-26.79	PASS
11AC40SISO	Ant1	High	5795	5925~5935	-38.17	≤-27	PASS
11AC80SISO	Ant1	Low	5775	5720~5725	-15.74	≤15.67	PASS
11AC80SISO	Ant1	Low	5775	5700~5720	-19.23	≤10.20	PASS
11AC80SISO	Ant1	Low	5775	5650~5700	-30.03	≤-26.71	PASS

11AC80SISO	Ant1	Low	5775	5645~5650	-30.76	≤-27	PASS
11AC80SISO	Ant1	High	5775	5850~5855	-20.94	≤15.98	PASS
11AC80SISO	Ant1	High	5775	5855~5875	-21.98	≤11.89	PASS
11AC80SISO	Ant1	High	5775	5875~5925	-32.54	≤-26.86	PASS
11AC80SISO	Ant1	High	5775	5925~5935	-31.68	≤-27	PASS

7.3 Test Graphs B1

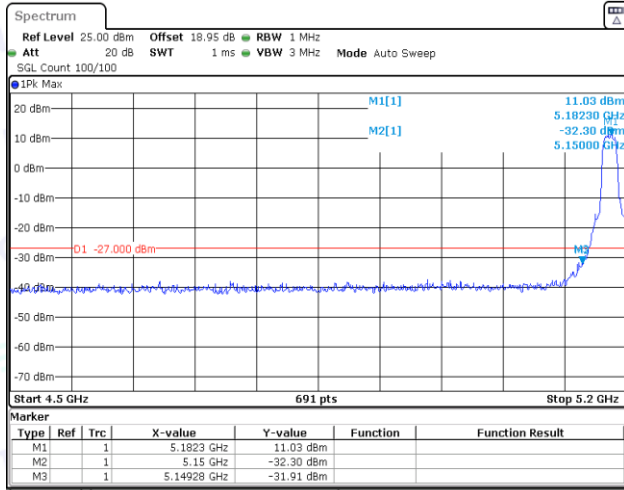


Date: 17.JUL.2026 13:51:57

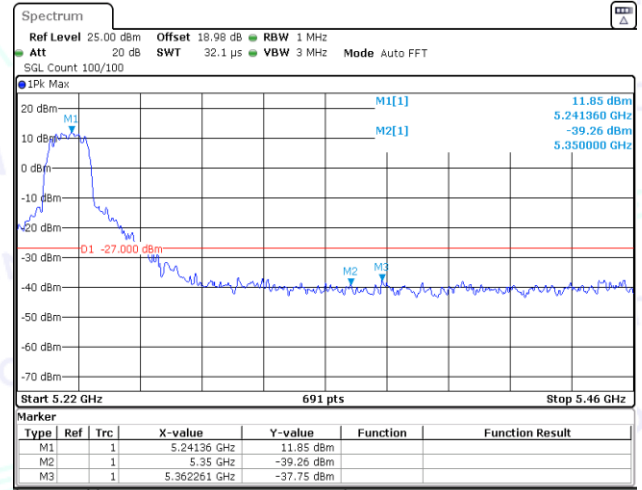


Date: 17.JUL.2026 13:55:23

11A-Ant1-5180-PASS

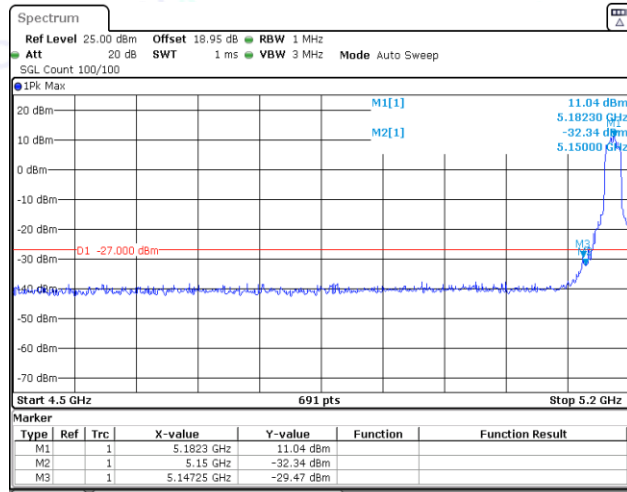


Date: 17.JUL.2026 14:10:02

11A-Ant1-5240-PASS

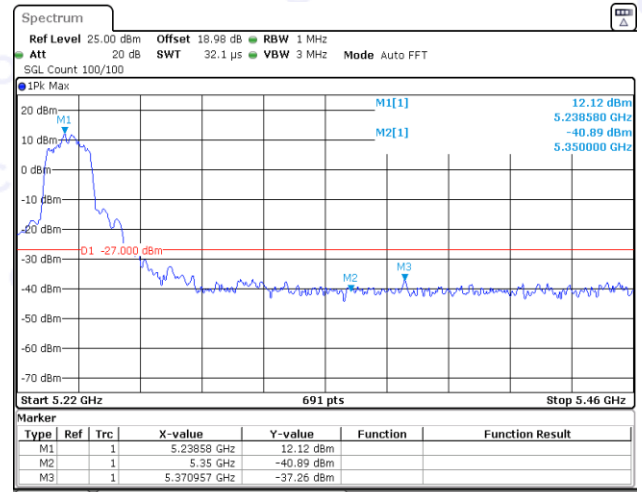


Date: 17.JUL.2026 14:13:35

11N20SISO-Ant1-5180-PASS

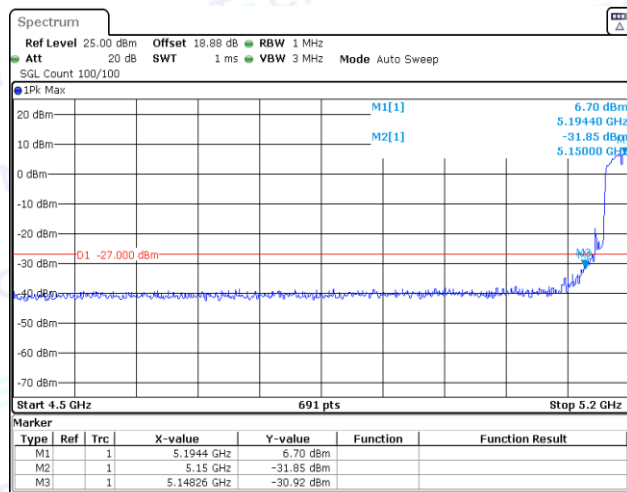

Date: 17.JUL.2026 14:27:50

11N20SISO-Ant1-5240-PASS

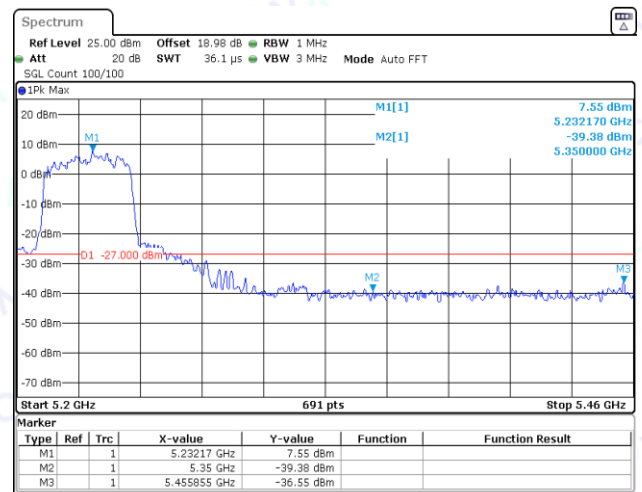

Date: 17.JUL.2026 14:31:25

11N40SISO-Ant1-5190-PASS





Date: 17.JUL.2026 14:27:50


11N40SISO-Ant1-5230-PASS




Date: 17.JUL.2026 14:31:25

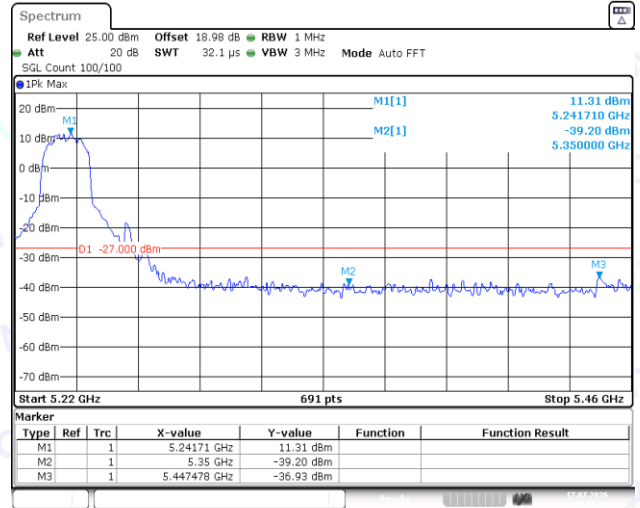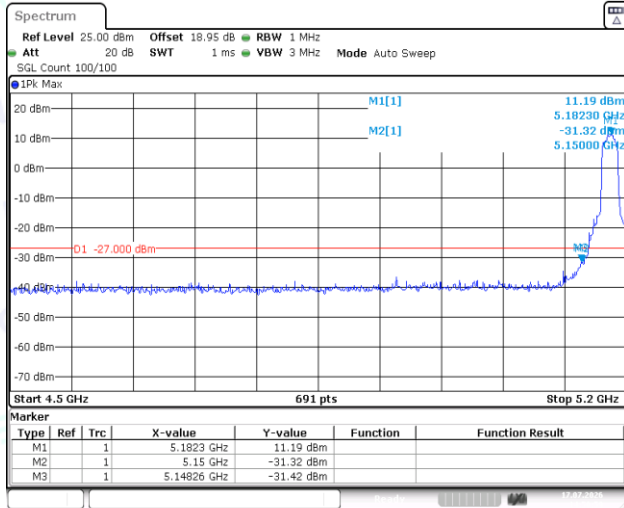


11AC20SISO-Ant1-5180-PASS

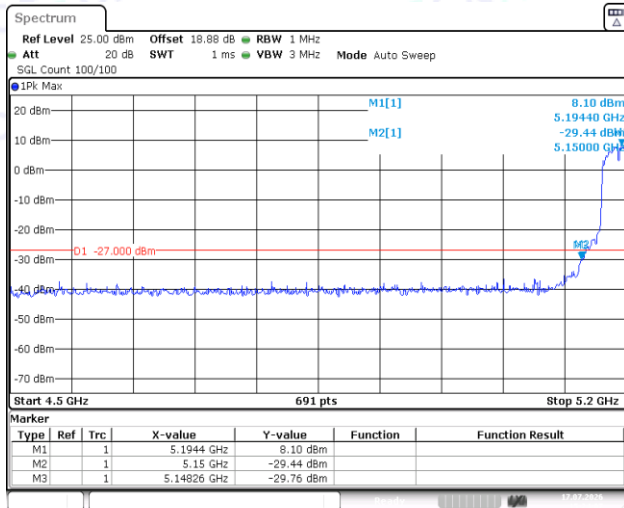


11AC20SISO-Ant1-5240-PASS

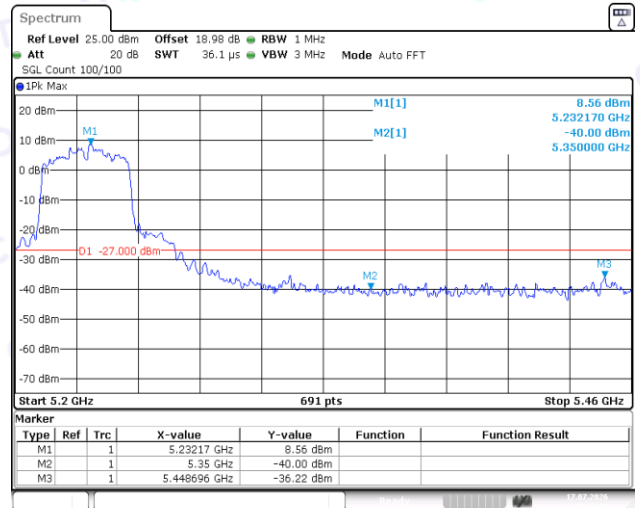

11AC40SISO-Ant1-5190-PASS

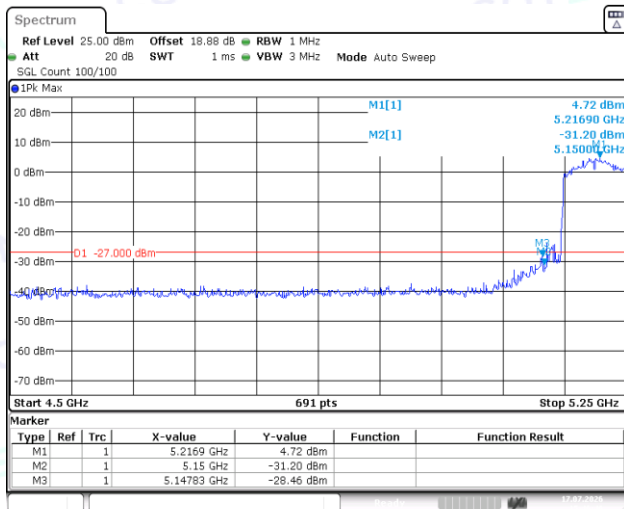



11AC40SISO-Ant1-5230-PASS

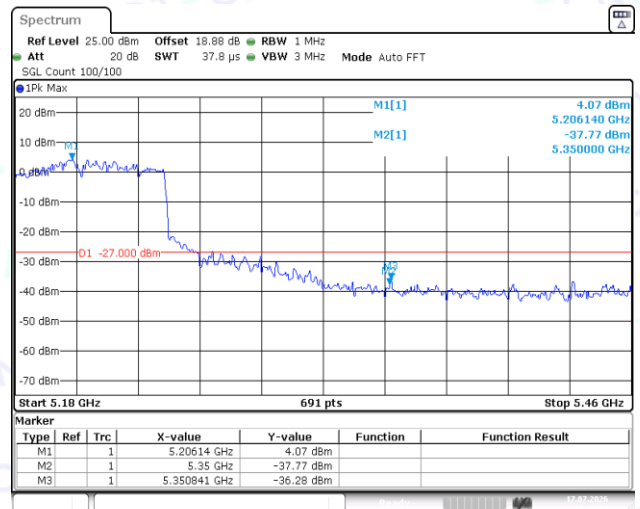


11AC80SISO-Ant1-5210-PASS

11AC80SISO-Ant1-5210-PASS


7.4 Test Graphs B4

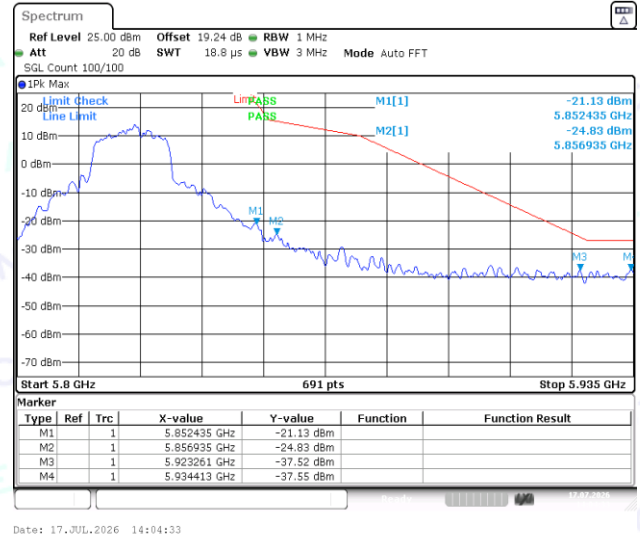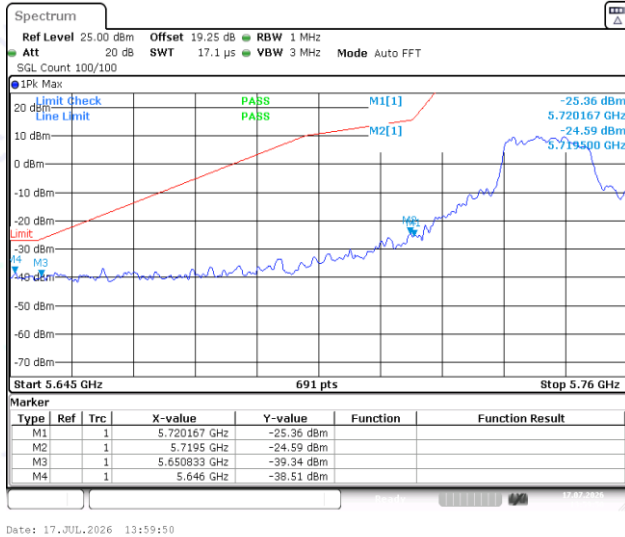


11A-Ant1-5745-PASS

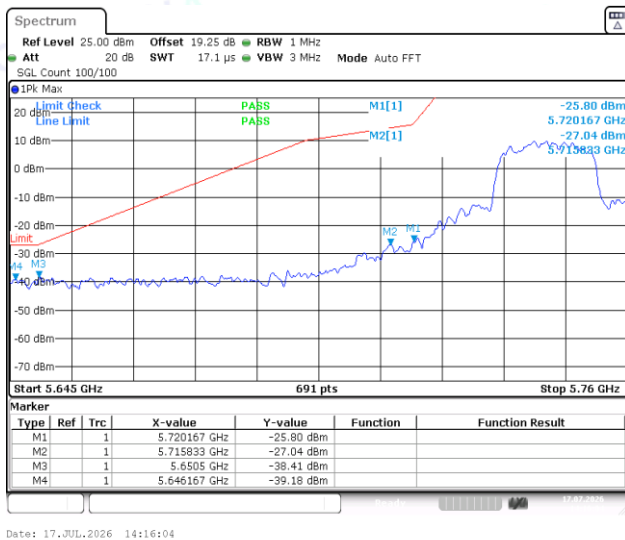

11A-Ant1-5825-PASS

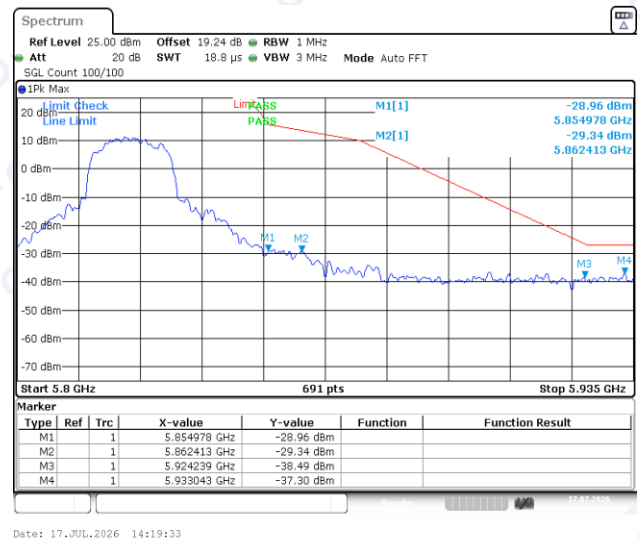

11N20SISO-Ant1-5745-PASS

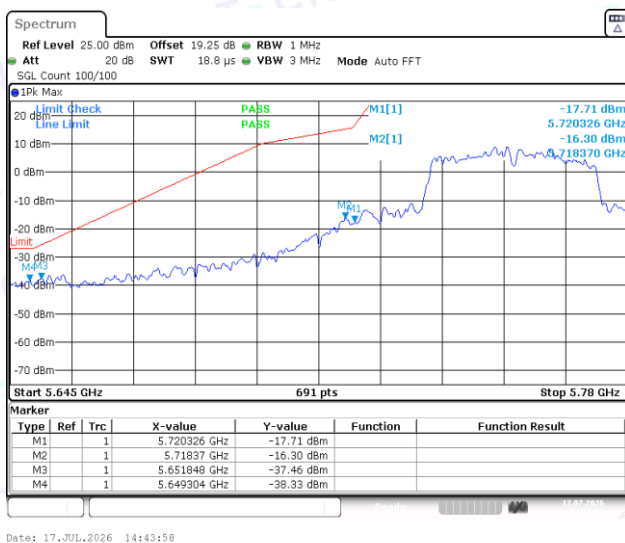

11N20SISO-Ant1-5825-PASS



11N40SISO-Ant1-5755-PASS

11N40SISO-Ant1-5795-PASS