

TEST REPORT

Product Name: Smart TV box
FCC ID: 2A273-Z1
Trademark: Dangbei
Model Number: Z1 Pro
Prepared For: Hangzhou Dangshi Science and Technology Co.,Ltd.
Address: Room 205, block C, building 3, No. 228, BINKANG Road, Xixing street, Binjiang District, Hangzhou City, Zhejiang Province, China
Manufacturer: Hangzhou Dangshi Science and Technology Co.,Ltd.
Address: Room 205, block C, building 3, No. 228, BINKANG Road, Xixing street, Binjiang District, Hangzhou City, Zhejiang Province, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China
Sample Received Date: Aug. 6, 2021
Sample tested Date: Aug. 6, 2021 to Sep. 14, 2021
Issue Date: Sep. 14, 2021
Report No.: CTB210903014RF
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

He Xiaona

He Xiaona

Reviewed by:

Arron Liu

Arron Liu

Approved by:

Bin Mei / Director


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	8
4.4 Channel List	9
4.5 Test Mode	9
4.6 Test Environment	9
5. TEST FACILITY AND TEST INSTRUMENT USED	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	47
8.1 Block Diagram Of Test Setup	47
8.2 Limit	47
8.3 Test procedure	47
8.4 Test Result	48
9. CONDUCTED OUTPUT POWER	64
9.1 Block Diagram Of Test Setup	64
9.2 Limit	64
9.3 Test procedure	64
9.4 Test Result	65
10. 6DB OCCUPIED BANDWIDTH	74
10.1 Block Diagram Of Test Setup	74
10.2 Limit	74
10.3 Test procedure	74
10.4 Test Result	75
11. POWER SPECTRAL DENSITY	85
11.1 Block Diagram Of Test Setup	85
11.2 Limit	85


11.3	Test procedure	85
11.4	Test Result	86
12.	ANTENNA REQUIREMENT	95
13.	EUT PHOTOGRAPHS	96
14.	EUT TEST SETUP PHOTOGRAPHS	97

(Note: N/A means not applicable)

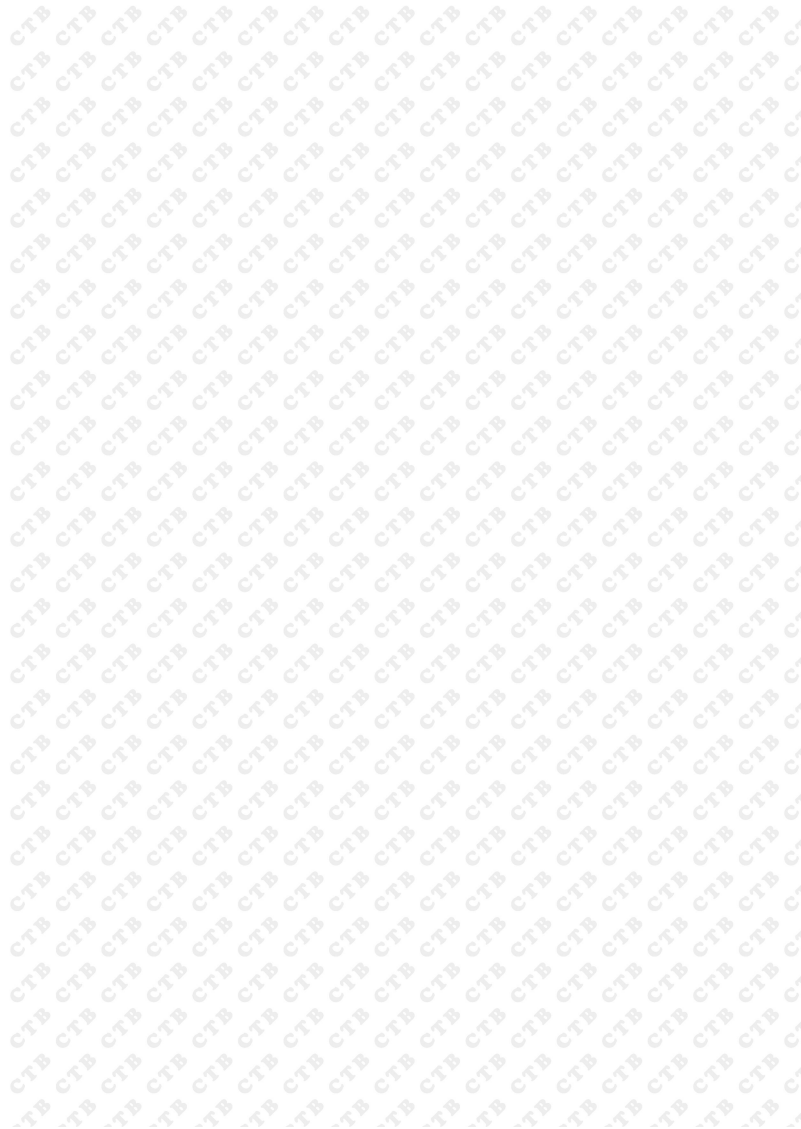

1. VERSION

Report No.	Issue Date	Description	Approved
CTB210903014RF	Sep. 14, 2021	Original	Valid

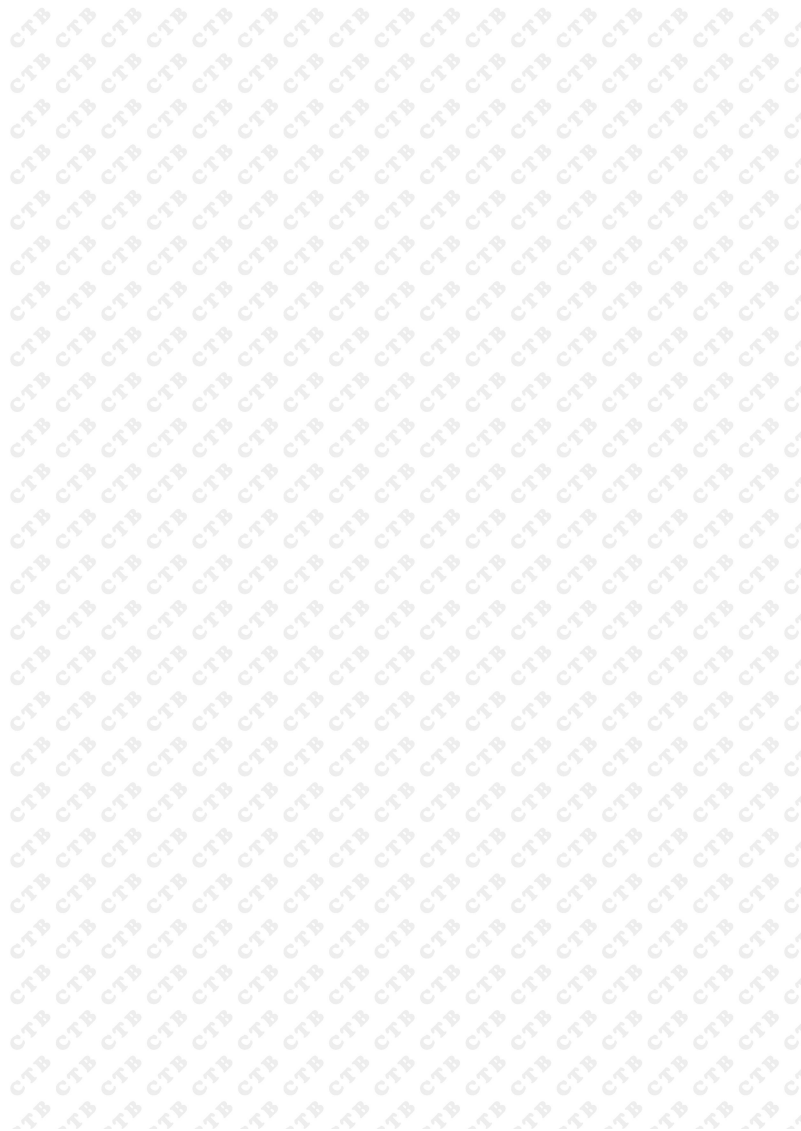

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m camber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	Z1 Pro
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	H3/V1.3/20210303
Software Version:	V2.3.0.1
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 10.824dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: Internal Antenna
Antenna Gain:	ANT 1 : 1.2dBi, ANT 2 : 1.2dBi
Ratings:	Input:100~240V~,50/60Hz,0.5A Output:12V $\overline{\text{---}}$ 1.5A

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC adapter	SHENZHEN TEKA TECHNOLOGY CO.,LTD	TEKA-TC120150XX	N/A	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 1.2dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=0dB,

So the directional gain for PSD is 1.2dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 1.2dBi

NOTE: Dutycycle>98%.

4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(AC):	100-240
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2021.09.27
2	Power Sensor	Agilent	U2021XA	MY56120032	2021.09.27
3	Power Sensor	Agilent	U2021XA	MY56120034	2021.09.27
4	Communication test set	R&S	CMW500	108058	2021.09.27
5	Spectrum Analyzer	R&S	FSP40	100550	2021.09.27
6	Signal Generator	Agilent	N5181A	MY49060920	2021.09.27
7	Signal Generator	Agilent	N5182A	MY47420195	2021.09.27
8	Communication test set	Agilent	E5515C	MY50102567	2021.09.27
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2021.09.27
10	band rejection filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2021.09.27
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2021.09.27
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2021.09.27
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2021.09.27
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2021.09.27
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	2021.09.27
16	966 chamber	C.R.T.	966 Room	966	2021.09.27
17	Receiver	R&S	ESPI	100362	2021.09.27
18	Amplifier	HP	8447E	2945A02747	2021.09.27
19	Amplifier	Agilent	8449B	3008A01838	2021.09.27
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2021.09.27


21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2021.09.27
22	Software	Fala	EZ-EMC	FA-03A2 RE	2021.09.27
23	3-Loop Antenna	Daze	ZN30401	17014	2021.09.27
24	loop antenna	ZHINAN	ZN30900A	/	2021.09.27
25	Horn antenna	A/H/System	SAS-574	588	2021.09.27
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.09.27

Continuous disturbance					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2021.09.27
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2021.09.27
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCS30	834115/006	2021.09.27
4	Coaxial cable	ZDECL	Z302S	18091904	2021.09.27
5	AAN	Schwarzbeck	NTFM8158	183	2021.09.27
6	Communication test set	Agilent	E5515C	MY50102567	2021.09.27
7	Communication test set	R&S	CMW500	108058	2021.09.27
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2021.11.01
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2021.11.01
3	Amplifier	Agilent	8449B	3008A01838	2021.09.27
4	Amplifier	HP	8447E	2945A02747	2021.09.27
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2021.09.27
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2021.09.27
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2021.09.27
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2021.09.27
9	Coaxial cable	ETS	RFC-NNS-100-NMS-30 0 NI	/	2021.09.27
10	Communication test set	Agilent	E5515C	MY50102567	2021.09.27
11	Communication test set	R&S	CMW500	108058	2021.09.27
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

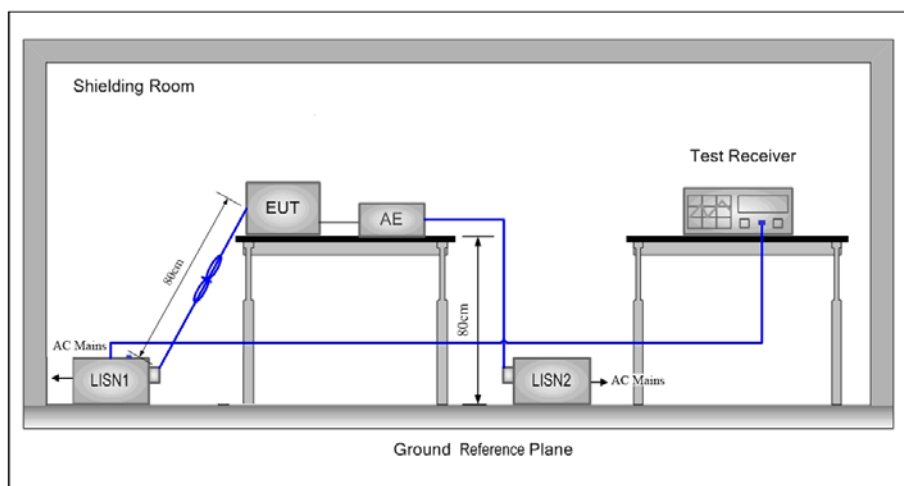

6.2 Limit

Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50


* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was


between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

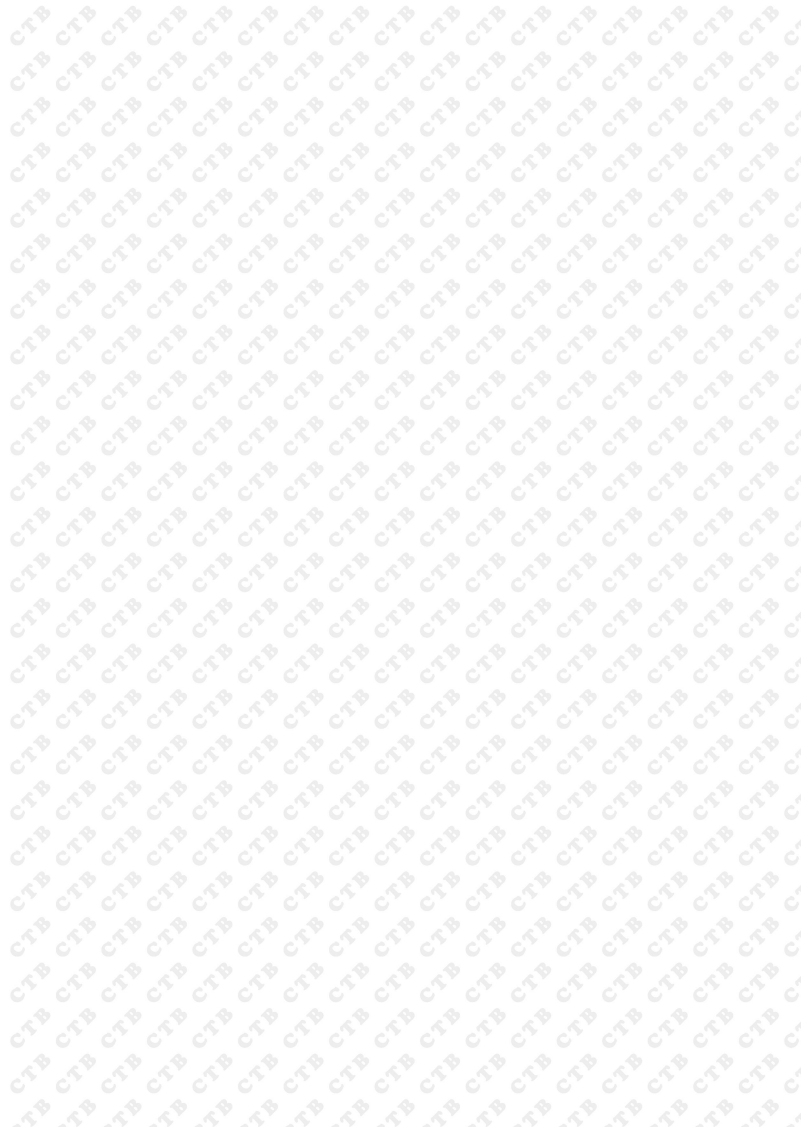

6.4 Test Result


Test Specification: Line
AC 120V 60Hz

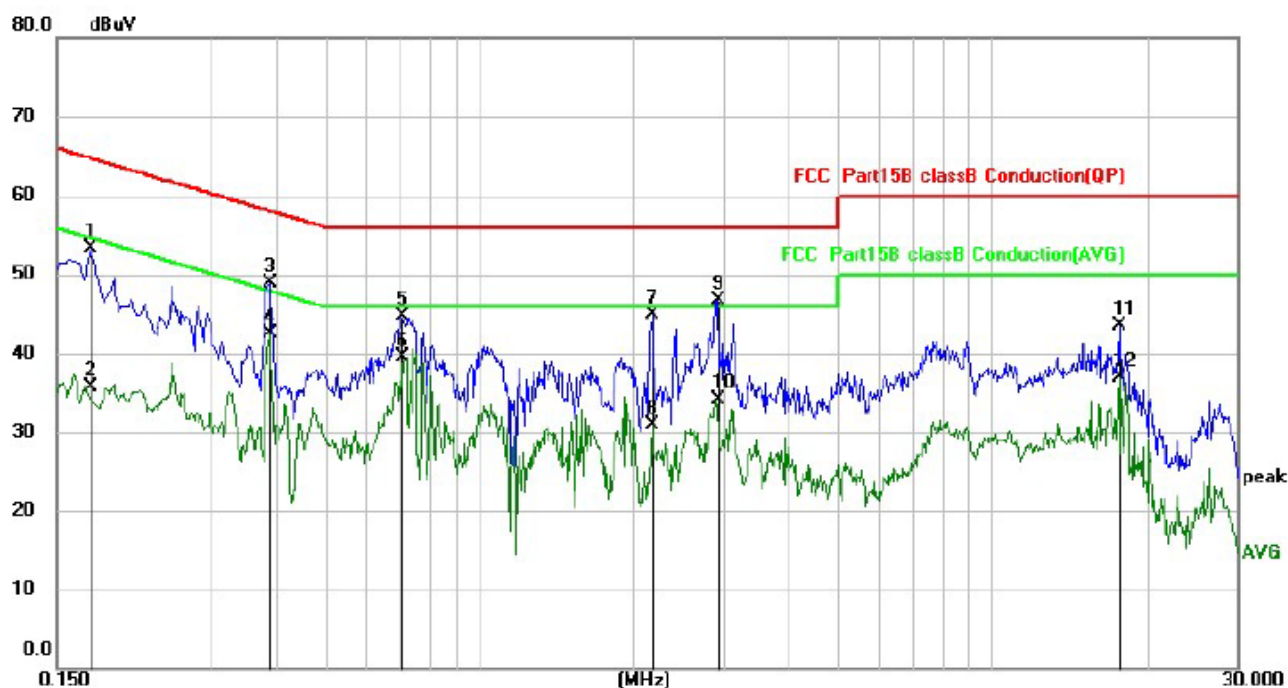

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.1737	43.34	9.96	53.30	64.78	-11.48	QP
2		0.1737	25.73	9.96	35.69	54.78	-19.09	AVG
3		0.3899	38.98	9.96	48.94	58.07	-9.13	QP
4	*	0.3899	32.60	9.96	42.56	48.07	-5.51	AVG
5		0.7017	34.83	9.96	44.79	56.00	-11.21	QP
6		0.7017	29.60	9.96	39.56	46.00	-6.44	AVG
7		2.1700	34.89	10.02	44.91	56.00	-11.09	QP
8		2.1700	20.82	10.02	30.84	46.00	-15.16	AVG
9		2.9020	36.64	10.06	46.70	56.00	-9.30	QP
10		2.9020	24.01	10.06	34.07	46.00	-11.93	AVG
11		17.6936	32.43	11.06	43.49	60.00	-16.51	QP
12		17.6936	25.91	11.06	36.97	50.00	-13.03	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

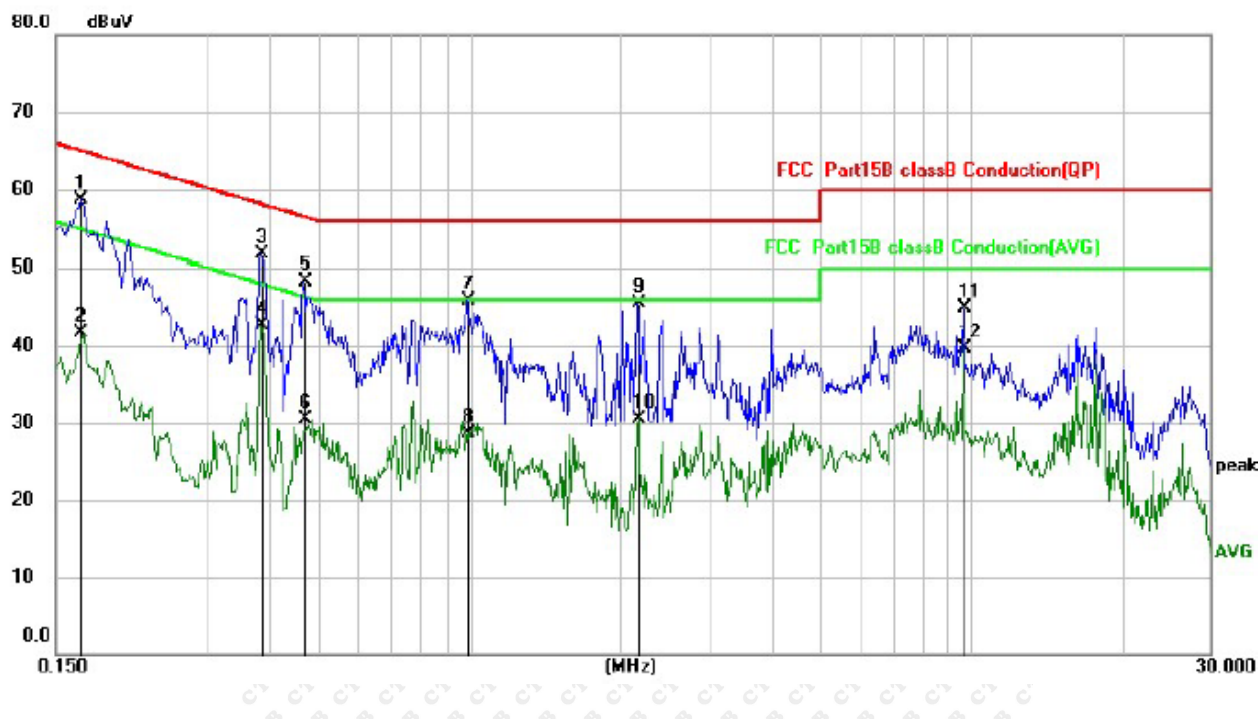

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.1685	48.71	9.96	58.67	65.03	-6.36	QP
2		0.1685	31.79	9.96	41.75	55.03	-13.28	AVG
3		0.3860	41.79	9.96	51.75	58.15	-6.40	QP
4	*	0.3860	32.74	9.96	42.70	48.15	-5.45	AVG
5		0.4700	38.29	9.96	48.25	56.51	-8.26	QP
6		0.4700	20.50	9.96	30.46	46.51	-16.05	AVG
7		0.9858	36.02	9.96	45.98	56.00	-10.02	QP
8		0.9858	18.83	9.96	28.79	46.00	-17.21	AVG
9		2.1659	35.39	10.02	45.41	56.00	-10.59	QP
10		2.1659	20.58	10.02	30.60	46.00	-15.40	AVG
11		9.6819	34.20	10.76	44.96	60.00	-15.04	QP
12		9.6819	28.95	10.76	39.71	50.00	-10.29	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

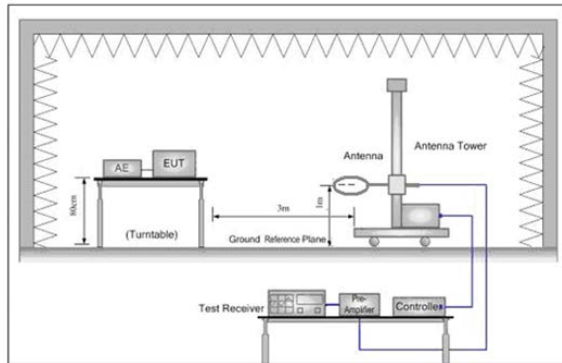


Figure 1. Below 30MHz

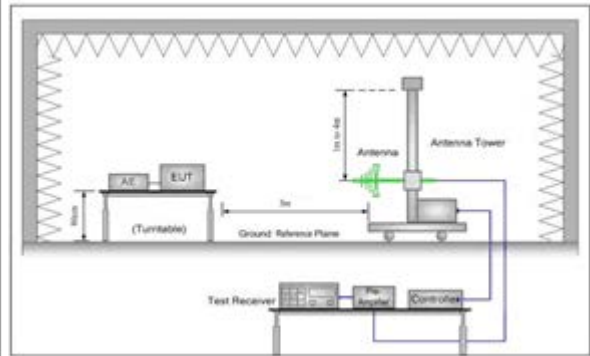


Figure 2. 30MHz to 1GHz

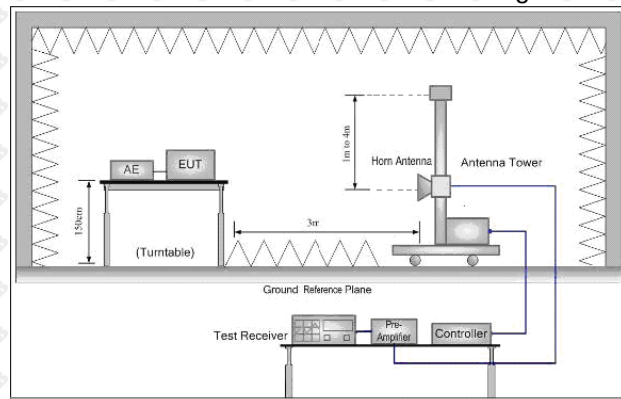


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.


Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Below 1GHz Test Results:


Antenna polarity: H

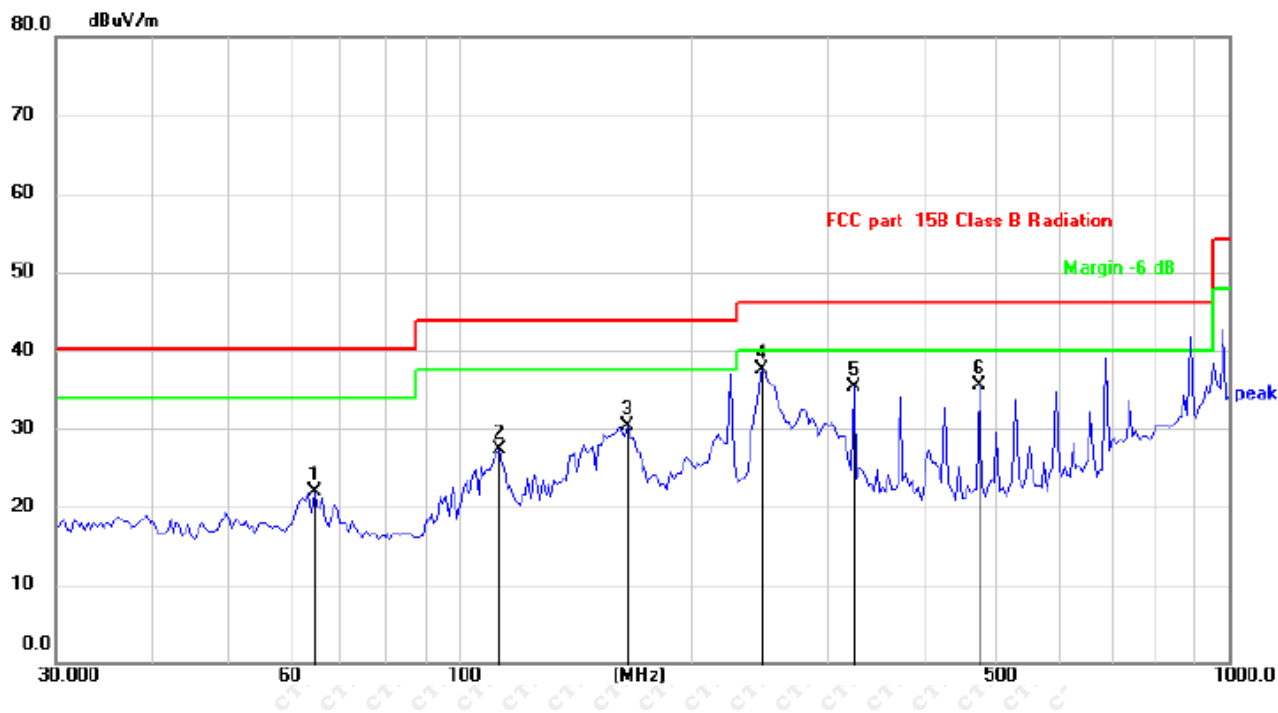

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		64.8863	30.64	-8.81	21.83	40.00	-18.17	QP
2		112.7218	36.47	-9.17	27.30	43.50	-16.20	QP
3		165.7768	37.56	-7.31	30.25	43.50	-13.25	QP
4	*	248.1165	45.61	-8.13	37.48	46.00	-8.52	QP
5		325.5957	41.51	-6.22	35.29	46.00	-10.71	QP
6		474.6659	38.39	-2.91	35.48	46.00	-10.52	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

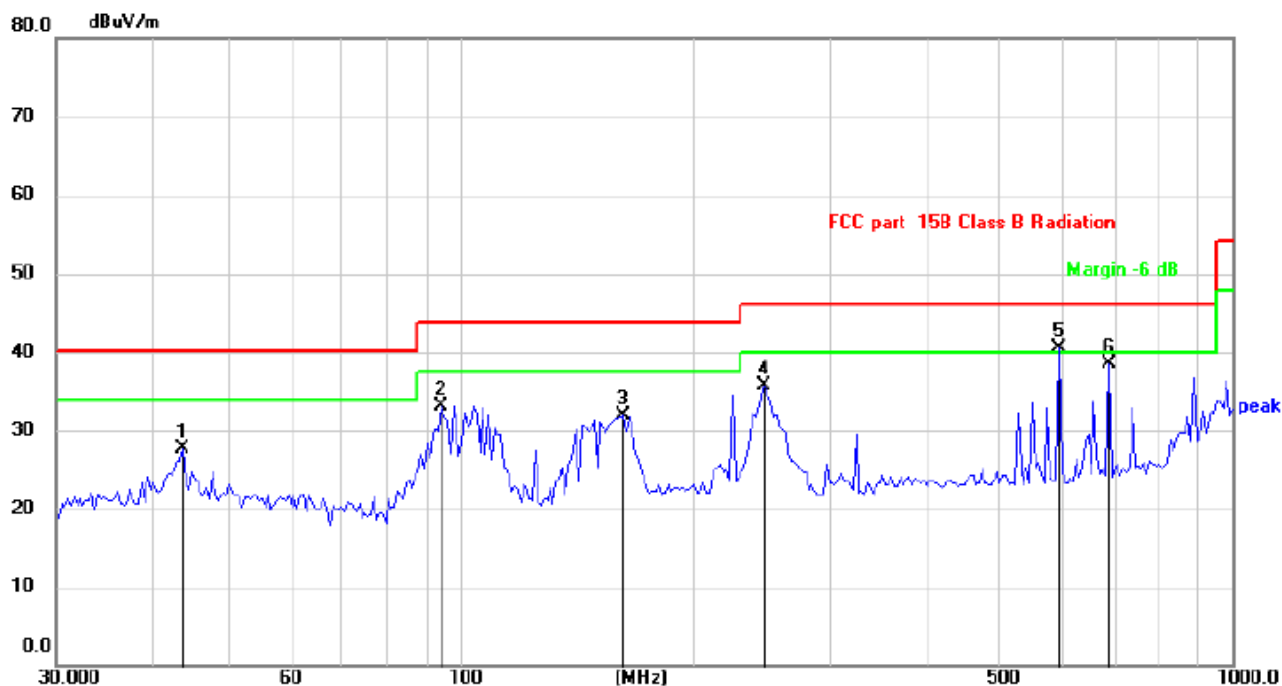

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		43.7351	34.50	-6.89	27.61	40.00	-12.39	QP
2		94.5939	43.99	-10.82	33.17	43.50	-10.33	QP
3		162.8959	38.87	-6.95	31.92	43.50	-11.58	QP
4		248.1165	43.84	-8.13	35.71	46.00	-10.29	QP
5	*	596.1770	39.88	0.67	40.55	46.00	-5.45	QP
6		691.9864	35.83	2.64	38.47	46.00	-7.53	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Above 1 GHz Test Results:

ANT 1

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	64.81	-3.64	61.17	74	-12.83	peak
2390	49.21	-3.64	45.57	54	-8.43	AVG
2382	58.77	-0.95	57.82	74	-16.18	peak
2382	44.37	-0.95	43.42	54	-10.58	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	66.82	-3.64	63.18	74	-10.82	peak
2390	47.53	-3.64	43.89	54	-10.11	AVG
2382	57.56	-0.95	56.61	74	-17.39	peak
2382	44.71	-0.95	43.76	54	-10.24	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2380	63.47	-3.51	59.96	74	-14.04	peak
2380	49.44	-3.51	45.93	54	-8.07	AVG
2498	58.36	-0.82	57.54	74	-16.46	peak
2498	44.06	-0.82	43.24	54	-10.76	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2380	63.74	-3.51	60.23	74	-13.77	peak
2380	46.82	-3.51	43.31	54	-10.69	AVG
2498	59.96	-0.82	59.14	74	-14.86	peak
2498	44.65	-0.82	43.83	54	-10.17	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483	63.96	-3.43	60.53	74	-13.47	peak
2483	46.18	-3.43	42.75	54	-11.25	AVG
2499	59.08	-0.75	58.33	74	-15.67	peak
2499	43.42	-0.75	42.67	54	-11.33	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483	65.35	-3.43	61.92	74	-12.08	peak
2483	47.00	-3.43	43.57	54	-10.43	AVG
2499	57.84	-0.75	57.09	74	-16.91	peak
2499	43.04	-0.75	42.29	54	-11.71	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT 2

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	65.23	-3.64	61.59	74	-12.41	peak
2390	50.25	-3.64	46.61	54	-7.39	AVG
2382	59.03	-0.95	58.08	74	-15.92	peak
2382	45.05	-0.95	44.10	54	-9.90	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	65.68	-3.64	62.04	74	-11.96	peak
2390	48.45	-3.64	44.81	54	-9.19	AVG
2382	57.69	-0.95	56.74	74	-17.26	peak
2382	44.92	-0.95	43.97	54	-10.03	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2380	66.15	-3.51	62.64	74	-11.36	peak
2380	48.70	-3.51	45.19	54	-8.81	AVG
2498	58.68	-0.82	57.86	74	-16.14	peak
2498	43.67	-0.82	42.85	54	-11.15	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2380	63.55	-3.51	60.04	74	-13.96	peak
2380	49.35	-3.51	45.84	54	-8.16	AVG
2498	58.33	-0.82	57.51	74	-16.49	peak
2498	42.92	-0.82	42.10	54	-11.90	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2482	63.35	-3.43	59.92	74	-14.08	peak
2482	47.18	-3.43	43.75	54	-10.25	AVG
2499	58.36	-0.75	57.61	74	-16.39	peak
2499	44.99	-0.75	44.24	54	-9.76	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2482	64.19	-3.43	60.76	74	-13.24	peak
2482	47.85	-3.43	44.42	54	-9.58	AVG
2499	57.34	-0.75	56.59	74	-17.41	peak
2499	43.68	-0.75	42.93	54	-11.07	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT 1

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	63.00	-3.43	59.57	74	-14.43	peak
2390	46.27	-3.43	42.84	54	-11.16	AVG
2340	57.17	-0.75	56.42	74	-17.58	peak
2340	42.36	-0.75	41.61	54	-12.39	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	65.31	-3.43	61.88	74	-12.12	peak
2390	46.29	-3.43	42.86	54	-11.14	AVG
2340	57.84	-0.75	57.09	74	-16.91	peak
2340	41.71	-0.75	40.96	54	-13.04	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	65.11	-3.51	61.60	74	-12.40	peak
2390	49.44	-3.51	45.93	54	-8.07	AVG
2488	58.06	-0.82	57.24	74	-16.76	peak
2488	43.09	-0.82	42.27	54	-11.73	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	63.07	-3.51	59.56	74	-14.44	peak
2390	47.77	-3.51	44.26	54	-9.74	AVG
2488	57.90	-0.82	57.08	74	-16.92	peak
2488	42.25	-0.82	41.43	54	-12.57	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2480	62.39	-3.43	58.96	74	-15.04	peak
2480	49.62	-3.43	46.19	54	-7.81	AVG
2488	58.88	-0.75	58.13	74	-15.87	peak
2488	41.45	-0.75	40.70	54	-13.30	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2480	62.06	-3.43	58.63	74	-15.37	peak
2480	48.31	-3.43	44.88	54	-9.12	AVG
2488	57.20	-0.75	56.45	74	-17.55	peak
2488	41.90	-0.75	41.15	54	-12.85	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT 2

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2482	63.35	-3.43	59.92	74	-14.08	peak
2482	47.18	-3.43	43.75	54	-10.25	AVG
2499	58.36	-0.75	57.61	74	-16.39	peak
2499	44.99	-0.75	44.24	54	-9.76	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2482	64.19	-3.43	60.76	74	-13.24	peak
2482	47.85	-3.43	44.42	54	-9.58	AVG
2499	57.34	-0.75	56.59	74	-17.41	peak
2499	43.68	-0.75	42.93	54	-11.07	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT 1

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	63.00	-3.43	59.57	74	-14.43	peak
2390	46.27	-3.43	42.84	54	-11.16	AVG
2340	57.17	-0.75	56.42	74	-17.58	peak
2340	42.36	-0.75	41.61	54	-12.39	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	65.34	-3.43	61.91	74	-12.09	peak
2390	47.59	-3.43	44.16	54	-9.84	AVG
2340	58.92	-0.75	58.17	74	-15.83	peak
2340	42.07	-0.75	41.32	54	-12.68	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	64.95	-3.51	61.44	74	-12.56	peak
2390	48.49	-3.51	44.98	54	-9.02	AVG
2488	59.83	-0.82	59.01	74	-14.99	peak
2488	44.04	-0.82	43.22	54	-10.78	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	63.63	-3.51	60.12	74	-13.88	peak
2390	47.68	-3.51	44.17	54	-9.83	AVG
2488	57.40	-0.82	56.58	74	-17.42	peak
2488	42.29	-0.82	41.47	54	-12.53	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2480	63.73	-3.43	60.30	74	-13.70	peak
2480	48.23	-3.43	44.80	54	-9.20	AVG
2488	57.08	-0.75	56.33	74	-17.67	peak
2488	42.57	-0.75	41.82	54	-12.18	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2480	62.84	-3.43	59.41	74	-14.59	peak
2480	47.65	-3.43	44.22	54	-9.78	AVG
2488	56.70	-0.75	55.95	74	-18.05	peak
2488	42.52	-0.75	41.77	54	-12.23	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 + ANT 2

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	64.53	-3.64	60.89	74	-13.11	peak
2390	48.78	-3.64	45.14	54	-8.86	AVG
2385	58.09	-0.95	57.14	74	-16.86	peak
2385	45.50	-0.95	44.55	54	-9.45	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	63.64	-3.64	60.00	74	-14.00	peak
2390	47.31	-3.64	43.67	54	-10.33	AVG
2385	58.80	-0.95	57.85	74	-16.15	peak
2385	42.71	-0.95	41.76	54	-12.24	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390.00	65.22	-3.51	61.71	74.00	-12.29	peak
2390.00	47.45	-3.51	43.94	54.00	-10.06	AVG
2487.00	58.78	-0.82	57.96	74.00	-16.04	peak
2487.00	46.69	-0.82	45.87	54.00	-8.13	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390.00	62.77	-3.51	59.26	74.00	-14.74	peak
2390.00	48.61	-3.51	45.10	54.00	-8.90	AVG
2487.00	56.90	-0.82	56.08	74.00	-17.92	peak
2487.00	43.23	-0.82	42.41	54.00	-11.59	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483	63.77	-3.43	60.34	74	-13.66	peak
2483	45.89	-3.43	42.46	54	-11.54	AVG
2487	56.95	-0.75	56.20	74	-17.80	peak
2487	43.63	-0.75	42.88	54	-11.12	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483	63.15	-3.43	59.72	74	-14.28	peak
2483	46.18	-3.43	42.75	54	-11.25	AVG
2487	57.14	-0.75	56.39	74	-17.61	peak
2487	41.18	-0.75	40.43	54	-13.57	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT 1+ANT 2
LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2380	64.36	-3.64	60.72	74	-13.28	peak
2380	46.55	-3.64	42.91	54	-11.09	AVG
2400	57.23	-0.95	56.28	74	-17.72	peak
2400	45.02	-0.95	44.07	54	-9.93	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2380	63.45	-3.64	59.81	74	-14.19	peak
2380	47.86	-3.64	44.22	54	-9.78	AVG
2400	58.08	-0.95	57.13	74	-16.87	peak
2400	44.15	-0.95	43.20	54	-10.80	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2380	63.96	-3.51	60.45	74	-13.55	peak
2380	46.86	-3.51	43.35	54	-10.65	AVG
2485	59.67	-0.82	58.85	74	-15.15	peak
2485	46.55	-0.82	45.73	54	-8.27	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2380	62.24	-3.51	58.73	74	-15.27	peak
2380	46.46	-3.51	42.95	54	-11.05	AVG
2485	56.67	-0.82	55.85	74	-18.15	peak
2485	43.34	-0.82	42.52	54	-11.48	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2485	63.81	-3.43	60.38	74	-13.62	peak
2485	48.64	-3.43	45.21	54	-8.79	AVG
2483	56.54	-0.75	55.79	74	-18.21	peak
2483	42.88	-0.75	42.13	54	-11.87	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2485	62.71	-3.43	59.28	74	-14.72	peak
2485	45.79	-3.43	42.36	54	-11.64	AVG
2483	56.87	-0.75	56.12	74	-17.88	peak
2483	42.32	-0.75	41.57	54	-12.43	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.81	-5.81	52.00	74	-22.00	peak
2390	/	-5.81	/	54	/	AVG
2399	63.59	-5.84	57.75	74	-16.25	peak
2399	48.12	-5.84	42.28	54	-11.72	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.51	-5.81	51.70	74	-22.30	peak
2390	/	-5.81	/	54	/	AVG
2399	61.79	-5.84	55.95	74	-18.05	peak
2399	46.43	-5.84	40.59	54	-13.41	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.77	-5.65	51.12	74	-22.88	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.06	-5.65	51.41	74	-22.59	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.91	-5.81	53.10	74	-20.90	peak
2390	/	-5.81	/	54	/	AVG
2399	61.90	-5.84	56.06	74	-17.94	peak
2399	45.70	-5.84	39.86	54	-14.14	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.07	-5.81	51.26	74	-22.74	peak
2390	/	-5.81	/	54	/	AVG
2399	61.84	-5.84	56.00	74	-18.00	peak
2399	46.01	-5.84	40.17	54	-13.83	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.21	-5.65	50.56	74	-23.44	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	58.10	-5.65	52.45	74	-21.55	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.48	-5.81	51.67	74	-22.33	peak
2390	/	-5.81	/	54	/	AVG
2399	63.42	-5.84	57.58	74	-16.42	peak
2399	46.98	-5.84	41.14	54	-12.86	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.14	-5.81	51.33	74	-22.67	peak
2390	/	-5.81	/	54	/	AVG
2399	60.03	-5.84	54.19	74	-19.81	peak
2399	47.99	-5.84	42.15	54	-11.85	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.61	-5.65	51.96	74	-22.04	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.85	-5.65	50.20	74	-23.80	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.27	-5.81	53.46	74	-20.54	peak
2390	/	-5.81	/	54	/	AVG
2399	63.86	-5.84	58.02	74	-15.98	peak
2399	46.55	-5.84	40.71	54	-13.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.06	-5.81	52.25	74	-21.75	peak
2390	/	-5.81	/	54	/	AVG
2399	60.81	-5.84	54.97	74	-19.03	peak
2399	46.25	-5.84	40.41	54	-13.59	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2452MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	58.27	-5.65	52.62	74	-21.38	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.58	-5.65	49.93	74	-24.07	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

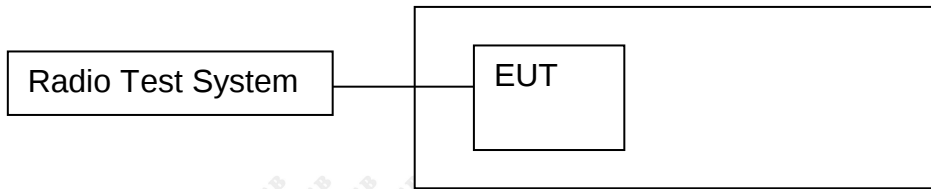

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

Above 30MHz:


RBW = 100KHz, VBW = 300KHz, Sweep = auto

Detector function = peak, Trace = max hold

8.4 Test Result


Above 12.75GHz Test Results: Power below the limit of 20dbm, so do not put the test results.

ANT1:

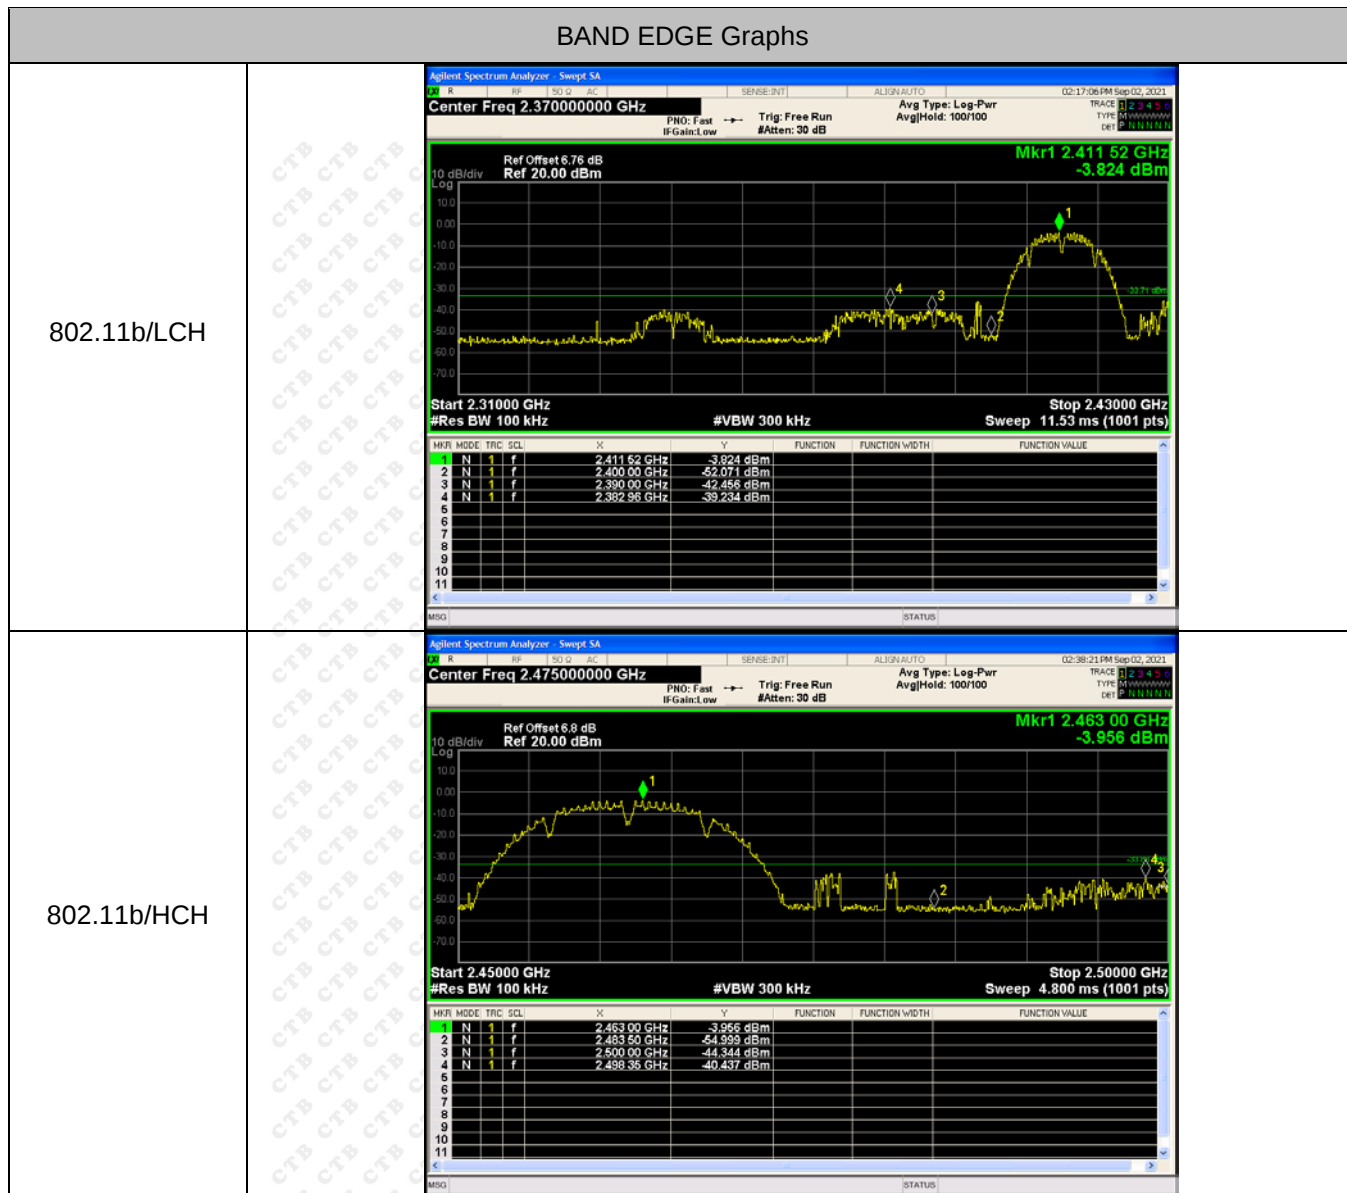


BAND EDGE Graphs

802.11g/LCH

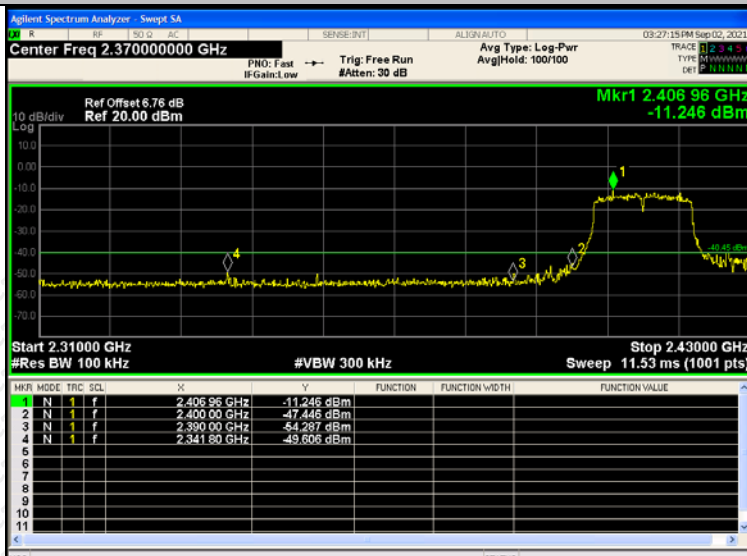


802.11g/HCH

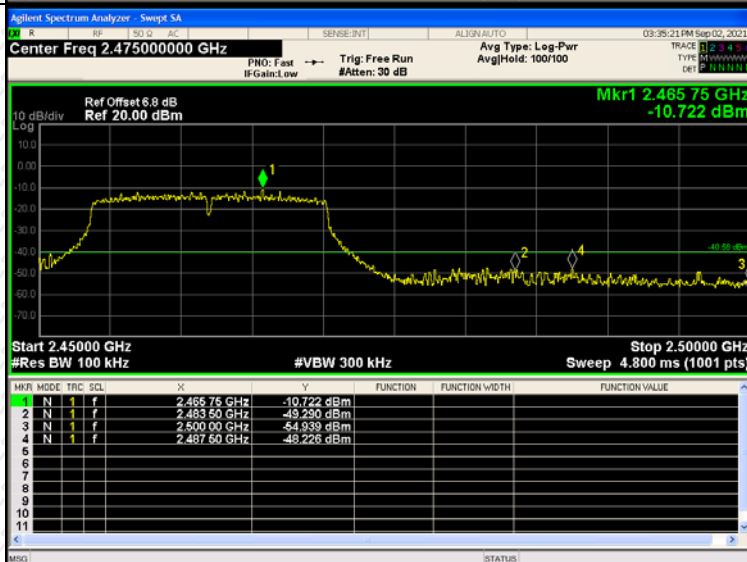


BAND EDGE Graphs

802.11n(HT20)/L
CH

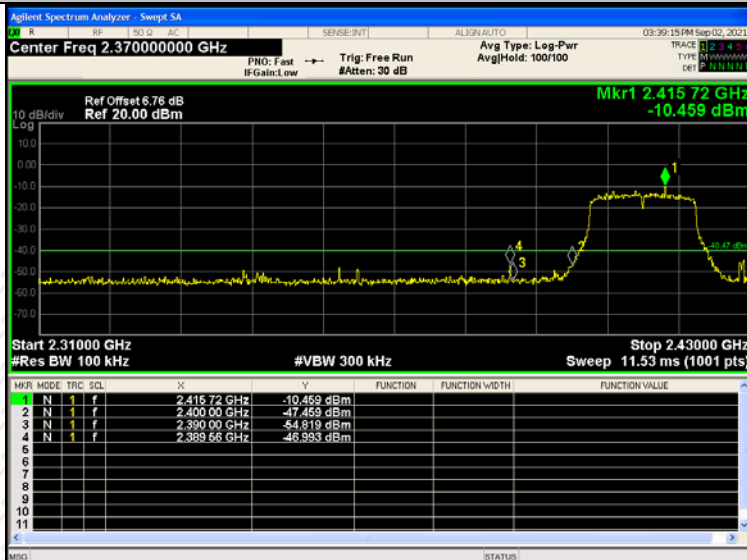


802.11n(HT20)/H
CH

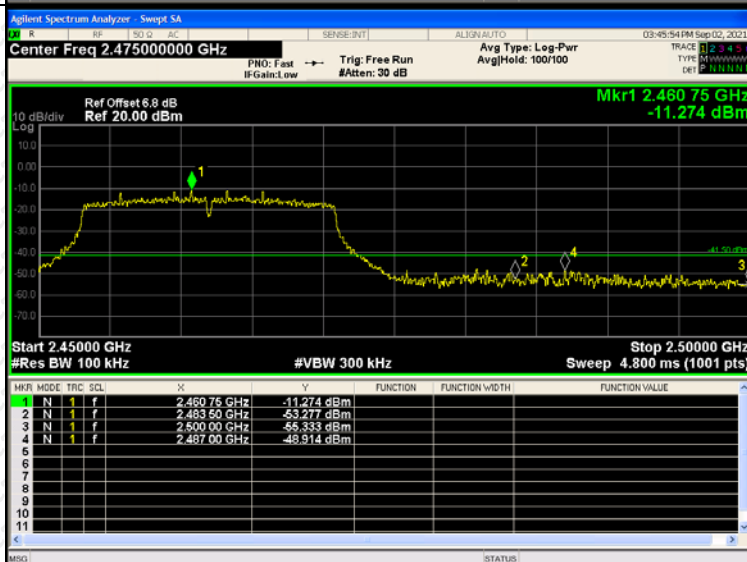


BAND EDGE Graphs


802.11n(HT40)/L
CH

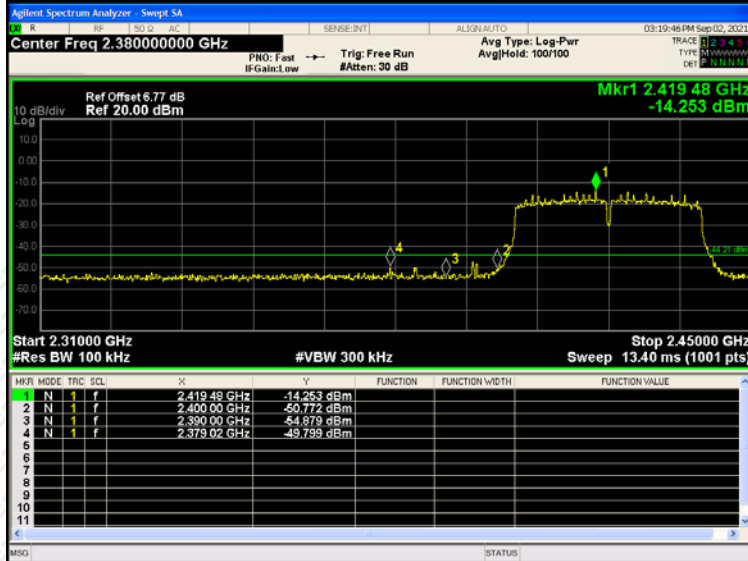




802.11n(HT40)/H
CH

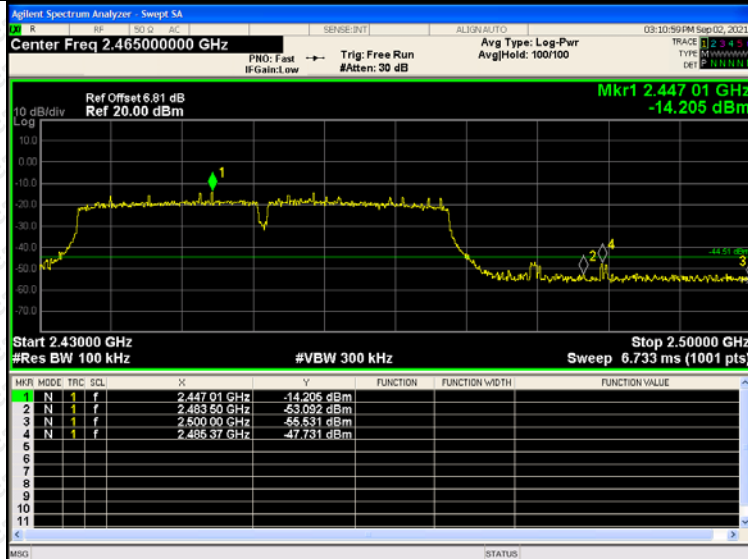

RF Conducted Spurious Emissions Graphs

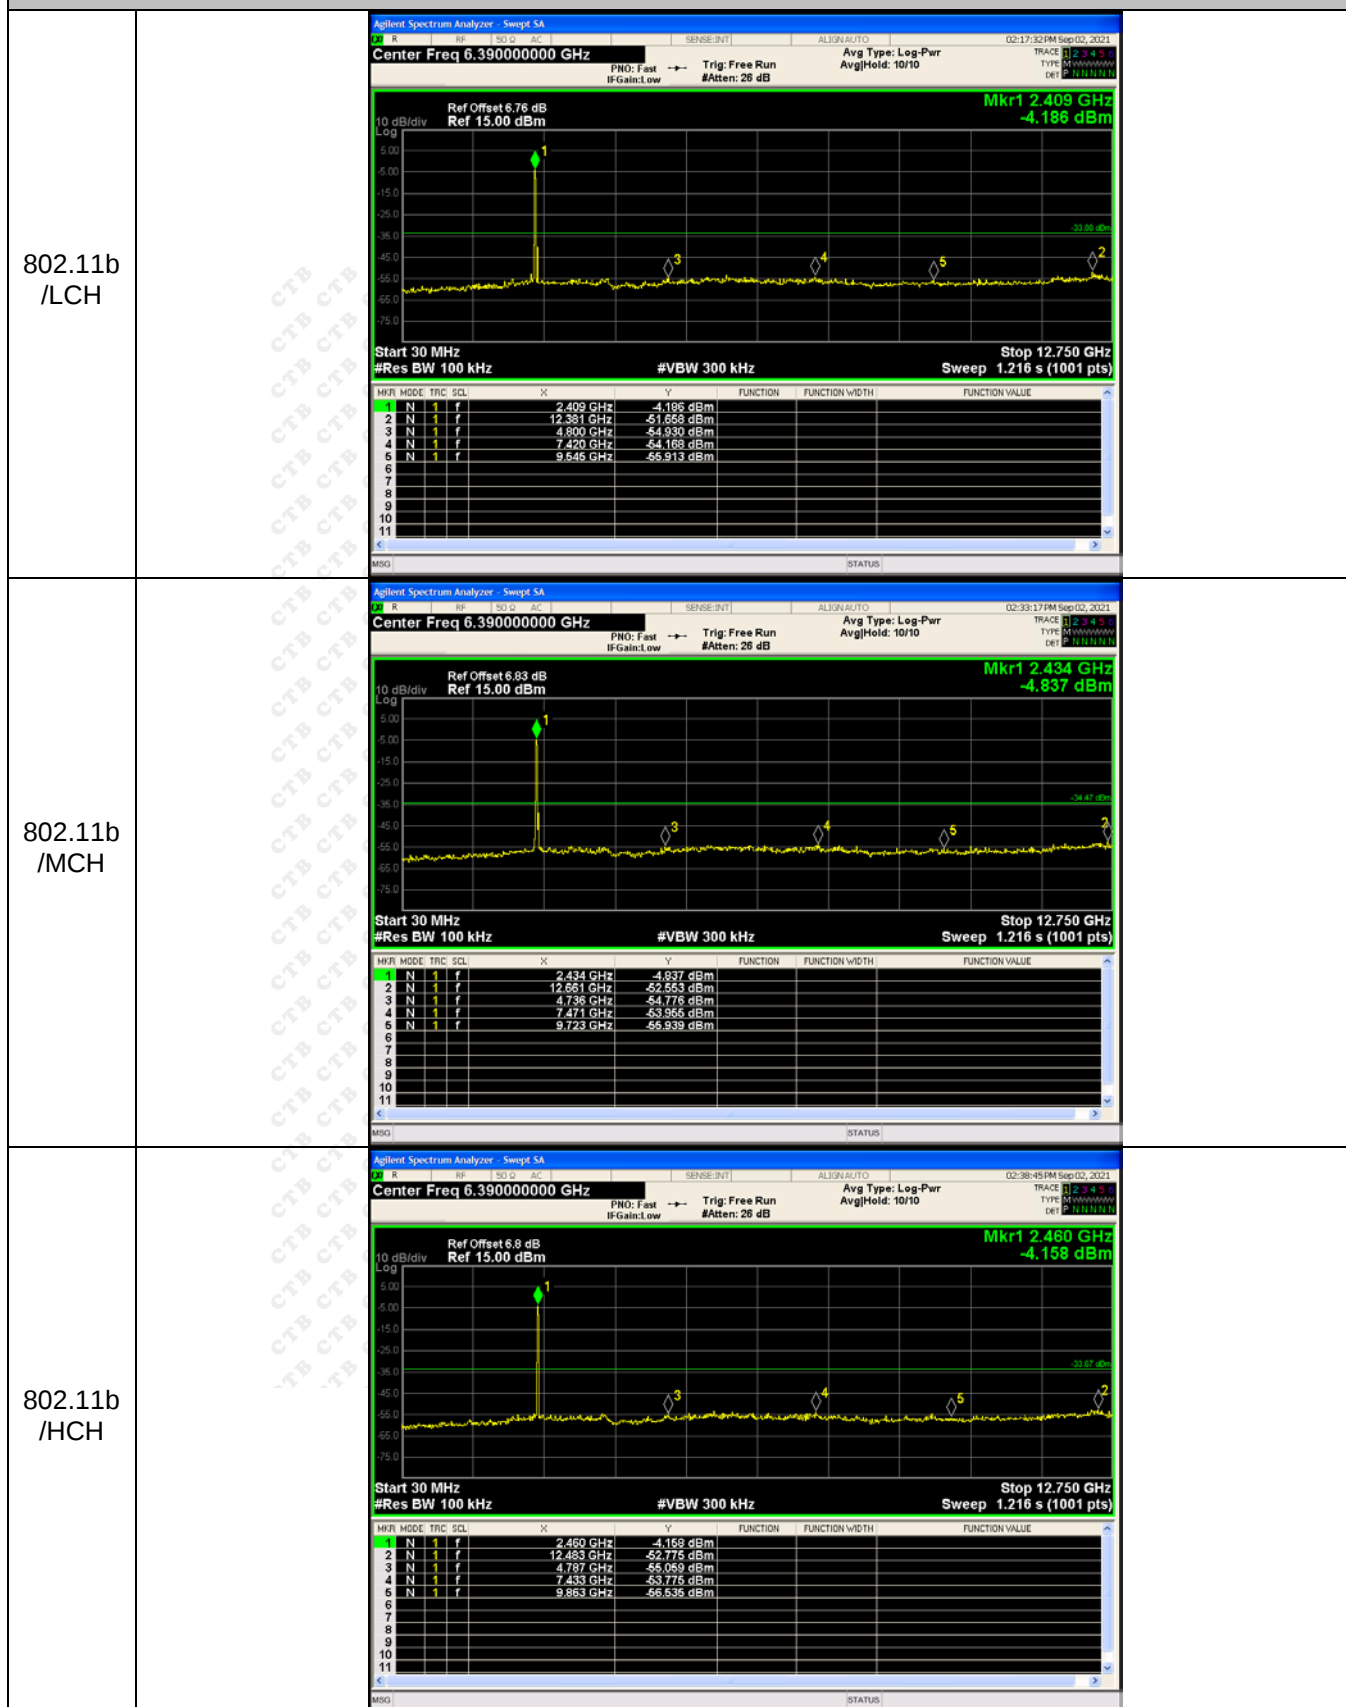




RF Conducted Spurious Emissions Graphs

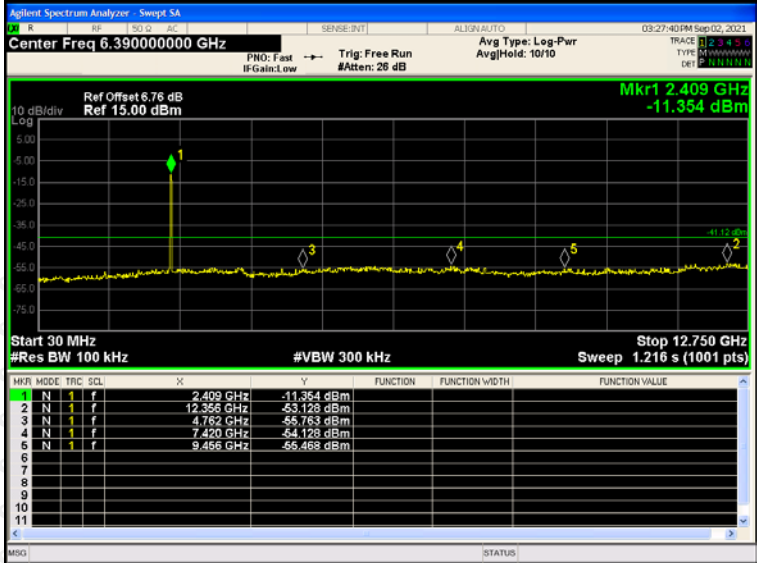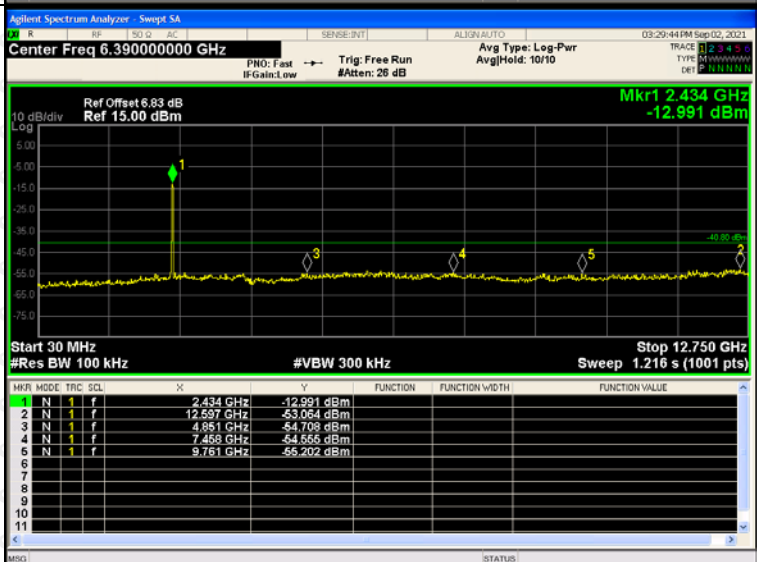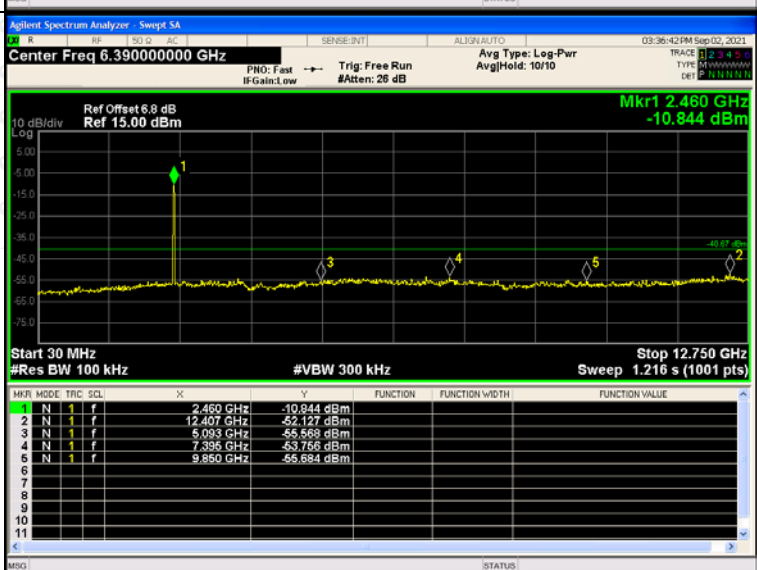802.11g /LCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.409 GHz</td><td>-11.354 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>12.356 GHz</td><td>-53.123 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.762 GHz</td><td>-55.763 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.420 GHz</td><td>-54.128 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.456 GHz</td><td>-55.468 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.409 GHz	-11.354 dBm				2	N	1	f	12.356 GHz	-53.123 dBm				3	N	1	f	4.762 GHz	-55.763 dBm				4	N	1	f	7.420 GHz	-54.128 dBm				5	N	1	f	9.456 GHz	-55.468 dBm				
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.409 GHz	-11.354 dBm																																																			
2	N	1	f	12.356 GHz	-53.123 dBm																																																			
3	N	1	f	4.762 GHz	-55.763 dBm																																																			
4	N	1	f	7.420 GHz	-54.128 dBm																																																			
5	N	1	f	9.456 GHz	-55.468 dBm																																																			
802.11g /MCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.434 GHz</td><td>-12.991 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>12.597 GHz</td><td>-53.064 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.851 GHz</td><td>-54.709 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.458 GHz</td><td>-54.553 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.751 GHz</td><td>-55.202 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.434 GHz	-12.991 dBm				2	N	1	f	12.597 GHz	-53.064 dBm				3	N	1	f	4.851 GHz	-54.709 dBm				4	N	1	f	7.458 GHz	-54.553 dBm				5	N	1	f	9.751 GHz	-55.202 dBm				
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.434 GHz	-12.991 dBm																																																			
2	N	1	f	12.597 GHz	-53.064 dBm																																																			
3	N	1	f	4.851 GHz	-54.709 dBm																																																			
4	N	1	f	7.458 GHz	-54.553 dBm																																																			
5	N	1	f	9.751 GHz	-55.202 dBm																																																			
802.11g /HCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.460 GHz</td><td>-10.844 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>12.407 GHz</td><td>-52.127 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.093 GHz</td><td>-55.569 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.396 GHz</td><td>-53.756 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.850 GHz</td><td>-55.694 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.460 GHz	-10.844 dBm				2	N	1	f	12.407 GHz	-52.127 dBm				3	N	1	f	5.093 GHz	-55.569 dBm				4	N	1	f	7.396 GHz	-53.756 dBm				5	N	1	f	9.850 GHz	-55.694 dBm				
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.460 GHz	-10.844 dBm																																																			
2	N	1	f	12.407 GHz	-52.127 dBm																																																			
3	N	1	f	5.093 GHz	-55.569 dBm																																																			
4	N	1	f	7.396 GHz	-53.756 dBm																																																			
5	N	1	f	9.850 GHz	-55.694 dBm																																																			


RF Conducted Spurious Emissions Graphs

802.11n (HT20)/ LCH	Agilent Spectrum Analyzer - Swept SA Center Freq 6.390000000 GHz Ref Offset 6.76 dB Ref 15.00 dBm Mkr1 2.409 GHz -12.058 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 12.750 GHz Sweep 1.216 s (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.409 GHz</td><td>-12.058 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>12.534 GHz</td><td>-42.323 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.016 GHz</td><td>-44.585 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.357 GHz</td><td>-44.865 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.632 GHz</td><td>-45.186 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.409 GHz	-12.058 dBm				2	N	1	f	12.534 GHz	-42.323 dBm				3	N	1	f	5.016 GHz	-44.585 dBm				4	N	1	f	7.357 GHz	-44.865 dBm				5	N	1	f	9.632 GHz	-45.186 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.409 GHz	-12.058 dBm																																																		
2	N	1	f	12.534 GHz	-42.323 dBm																																																		
3	N	1	f	5.016 GHz	-44.585 dBm																																																		
4	N	1	f	7.357 GHz	-44.865 dBm																																																		
5	N	1	f	9.632 GHz	-45.186 dBm																																																		
802.11 n(HT20) /MCH	Agilent Spectrum Analyzer - Swept SA Center Freq 6.390000000 GHz Ref Offset 6.83 dB Ref 15.00 dBm Mkr1 2.447 GHz -11.195 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 12.750 GHz Sweep 1.216 s (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.447 GHz</td><td>-11.195 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>5.685 GHz</td><td>-43.153 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.942 GHz</td><td>-45.097 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.458 GHz</td><td>-44.683 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.608 GHz</td><td>-45.176 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.447 GHz	-11.195 dBm				2	N	1	f	5.685 GHz	-43.153 dBm				3	N	1	f	5.942 GHz	-45.097 dBm				4	N	1	f	7.458 GHz	-44.683 dBm				5	N	1	f	9.608 GHz	-45.176 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.447 GHz	-11.195 dBm																																																		
2	N	1	f	5.685 GHz	-43.153 dBm																																																		
3	N	1	f	5.942 GHz	-45.097 dBm																																																		
4	N	1	f	7.458 GHz	-44.683 dBm																																																		
5	N	1	f	9.608 GHz	-45.176 dBm																																																		
802.11 n(HT20) /HCH	Agilent Spectrum Analyzer - Swept SA Center Freq 6.390000000 GHz Ref Offset 6.8 dB Ref 15.00 dBm Mkr1 2.460 GHz -11.340 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 12.750 GHz Sweep 1.216 s (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.460 GHz</td><td>-11.340 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>12.546 GHz</td><td>-42.497 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.800 GHz</td><td>-45.106 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.446 GHz</td><td>-45.061 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.786 GHz</td><td>-45.771 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.460 GHz	-11.340 dBm				2	N	1	f	12.546 GHz	-42.497 dBm				3	N	1	f	4.800 GHz	-45.106 dBm				4	N	1	f	7.446 GHz	-45.061 dBm				5	N	1	f	9.786 GHz	-45.771 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.460 GHz	-11.340 dBm																																																		
2	N	1	f	12.546 GHz	-42.497 dBm																																																		
3	N	1	f	4.800 GHz	-45.106 dBm																																																		
4	N	1	f	7.446 GHz	-45.061 dBm																																																		
5	N	1	f	9.786 GHz	-45.771 dBm																																																		

RF Conducted Spurious Emissions Graphs

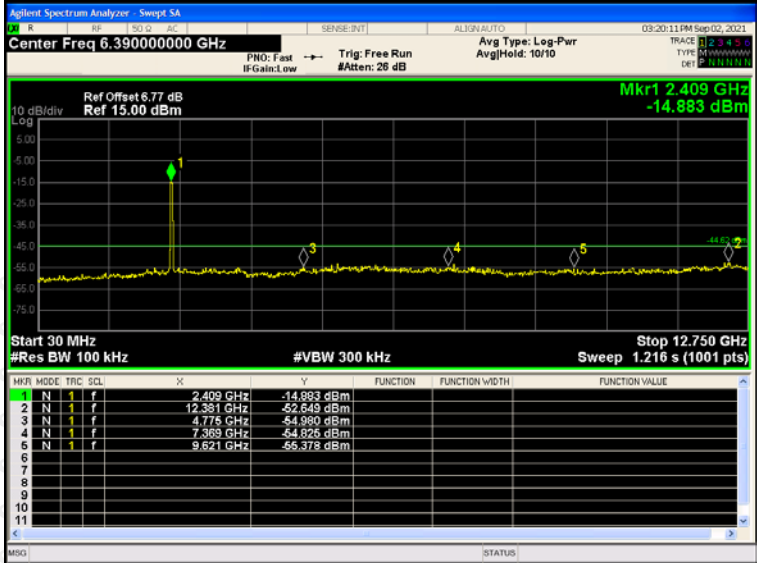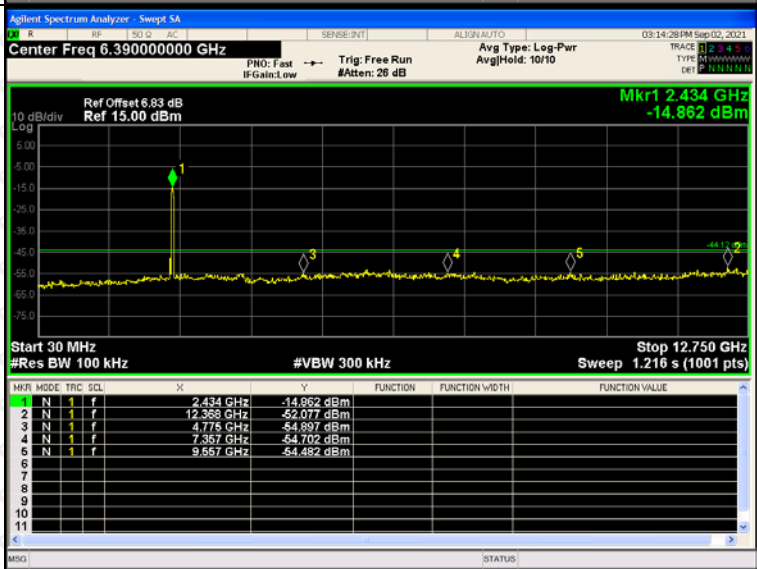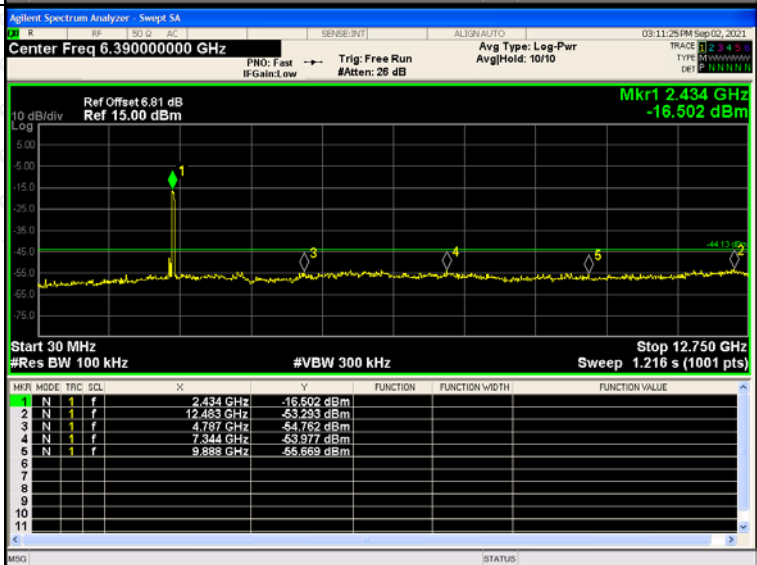
802.11 n(HT40) /LCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.409 GHz</td><td>-14.993 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>12.381 GHz</td><td>-52.649 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.775 GHz</td><td>-54.980 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.369 GHz</td><td>-54.826 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.621 GHz</td><td>-55.378 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.409 GHz	-14.993 dBm				2	N	1	f	12.381 GHz	-52.649 dBm				3	N	1	f	4.775 GHz	-54.980 dBm				4	N	1	f	7.369 GHz	-54.826 dBm				5	N	1	f	9.621 GHz	-55.378 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.409 GHz	-14.993 dBm																																																		
2	N	1	f	12.381 GHz	-52.649 dBm																																																		
3	N	1	f	4.775 GHz	-54.980 dBm																																																		
4	N	1	f	7.369 GHz	-54.826 dBm																																																		
5	N	1	f	9.621 GHz	-55.378 dBm																																																		
802.11 n(HT40) /MCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.434 GHz</td><td>-14.962 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>12.368 GHz</td><td>-52.077 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.775 GHz</td><td>-54.897 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.367 GHz</td><td>-54.702 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.657 GHz</td><td>-54.482 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.434 GHz	-14.962 dBm				2	N	1	f	12.368 GHz	-52.077 dBm				3	N	1	f	4.775 GHz	-54.897 dBm				4	N	1	f	7.367 GHz	-54.702 dBm				5	N	1	f	9.657 GHz	-54.482 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.434 GHz	-14.962 dBm																																																		
2	N	1	f	12.368 GHz	-52.077 dBm																																																		
3	N	1	f	4.775 GHz	-54.897 dBm																																																		
4	N	1	f	7.367 GHz	-54.702 dBm																																																		
5	N	1	f	9.657 GHz	-54.482 dBm																																																		
802.11 n(HT40) /HCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.434 GHz</td><td>-16.502 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>12.483 GHz</td><td>-53.293 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.787 GHz</td><td>-54.762 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.344 GHz</td><td>-53.977 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.888 GHz</td><td>-55.669 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.434 GHz	-16.502 dBm				2	N	1	f	12.483 GHz	-53.293 dBm				3	N	1	f	4.787 GHz	-54.762 dBm				4	N	1	f	7.344 GHz	-53.977 dBm				5	N	1	f	9.888 GHz	-55.669 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.434 GHz	-16.502 dBm																																																		
2	N	1	f	12.483 GHz	-53.293 dBm																																																		
3	N	1	f	4.787 GHz	-54.762 dBm																																																		
4	N	1	f	7.344 GHz	-53.977 dBm																																																		
5	N	1	f	9.888 GHz	-55.669 dBm																																																		

ANT2:

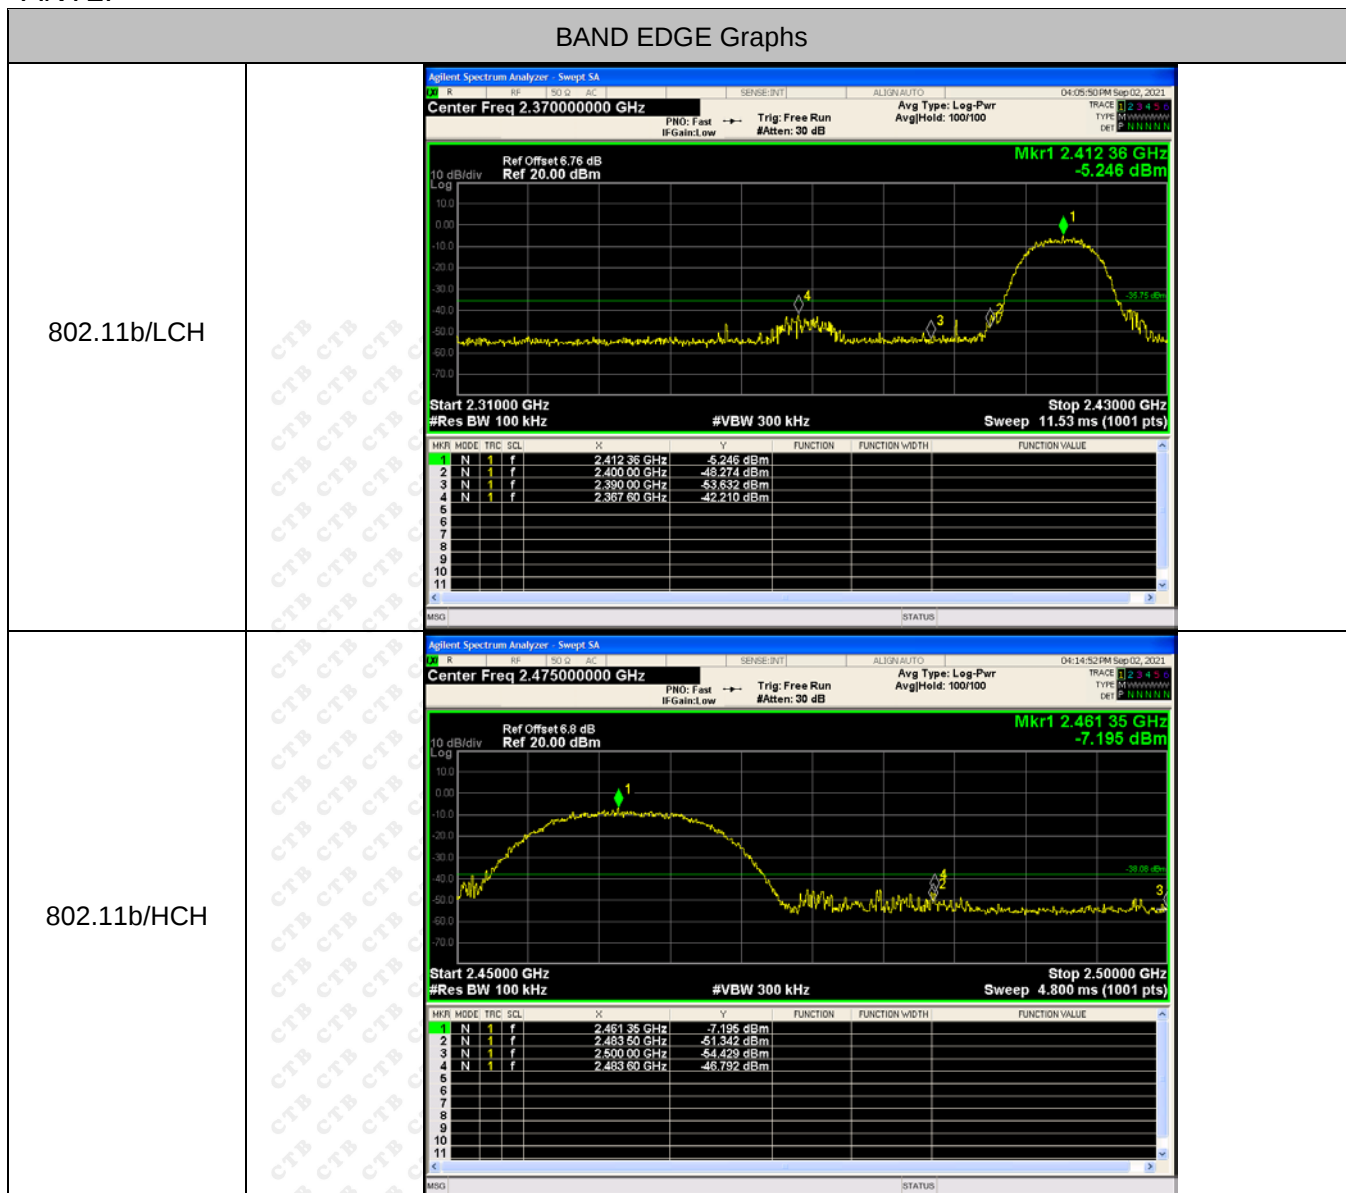


BAND EDGE Graphs

802.11g/LCH

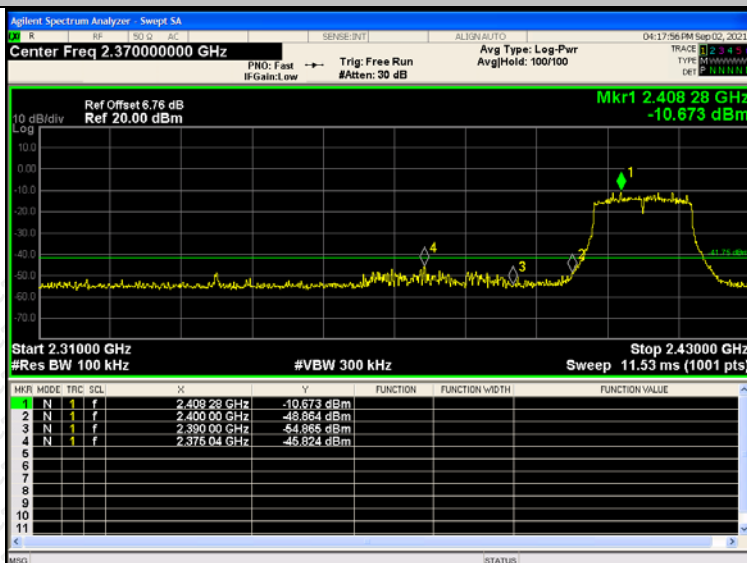


802.11g/HCH

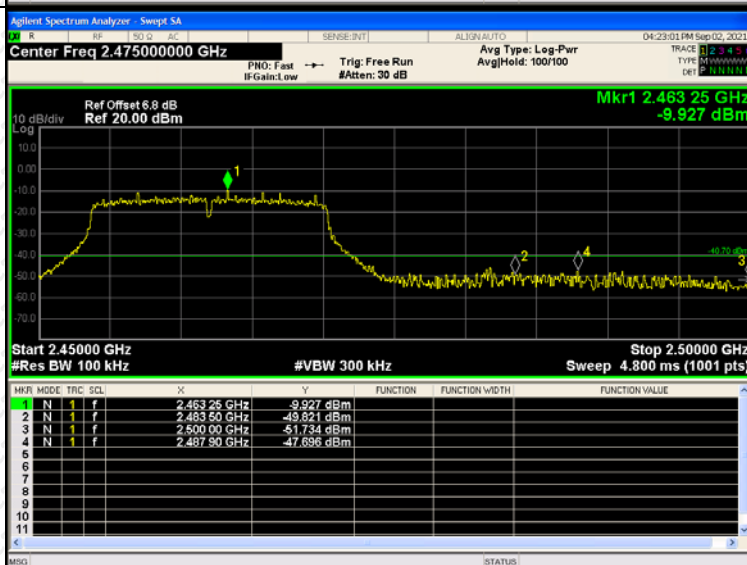


BAND EDGE Graphs

802.11n(HT20)/L
CH

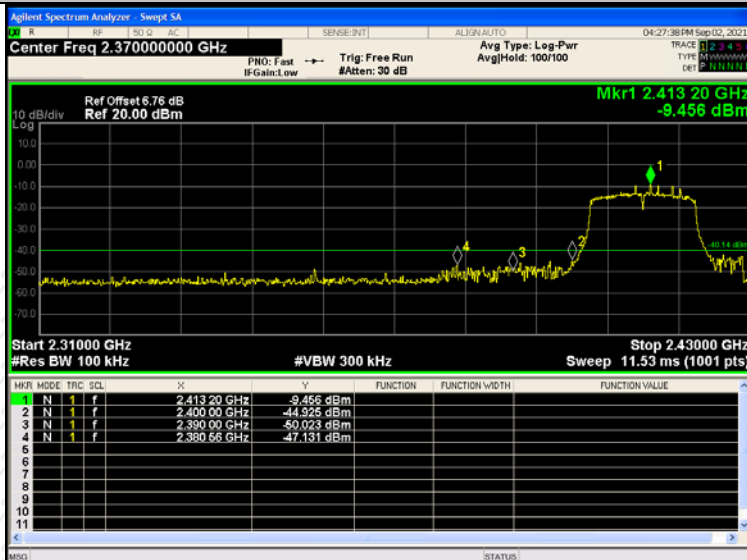


802.11n(HT20)/H
CH

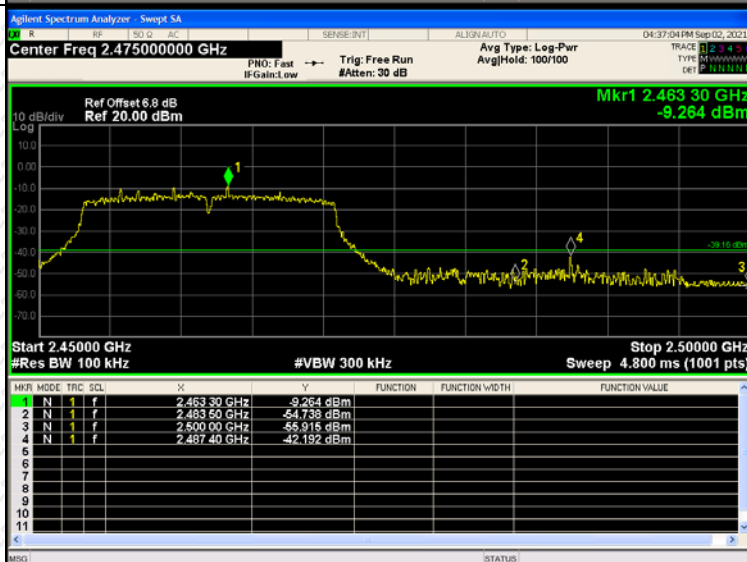


BAND EDGE Graphs


802.11n(HT40)/L
CH

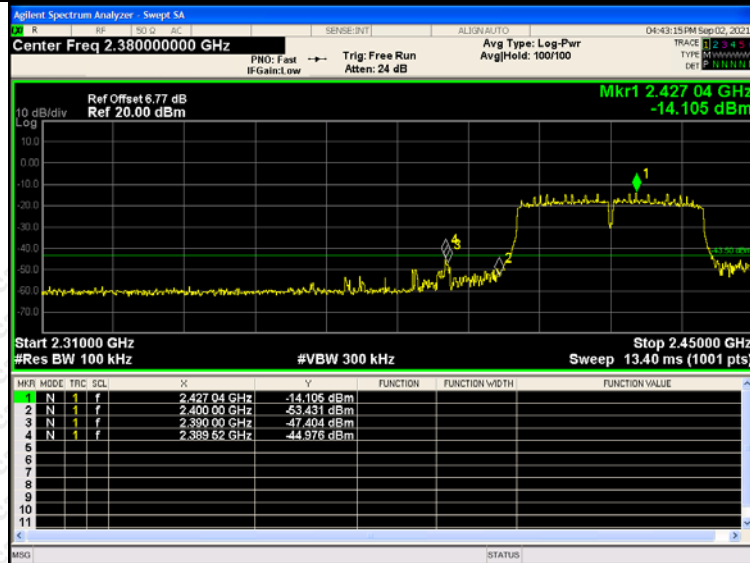




802.11n(HT40)/H
CH

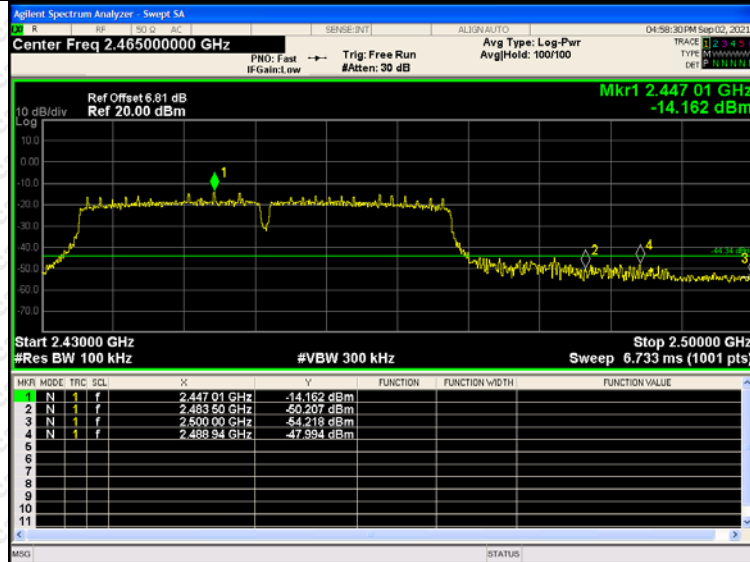


RF Conducted Spurious Emissions Graphs

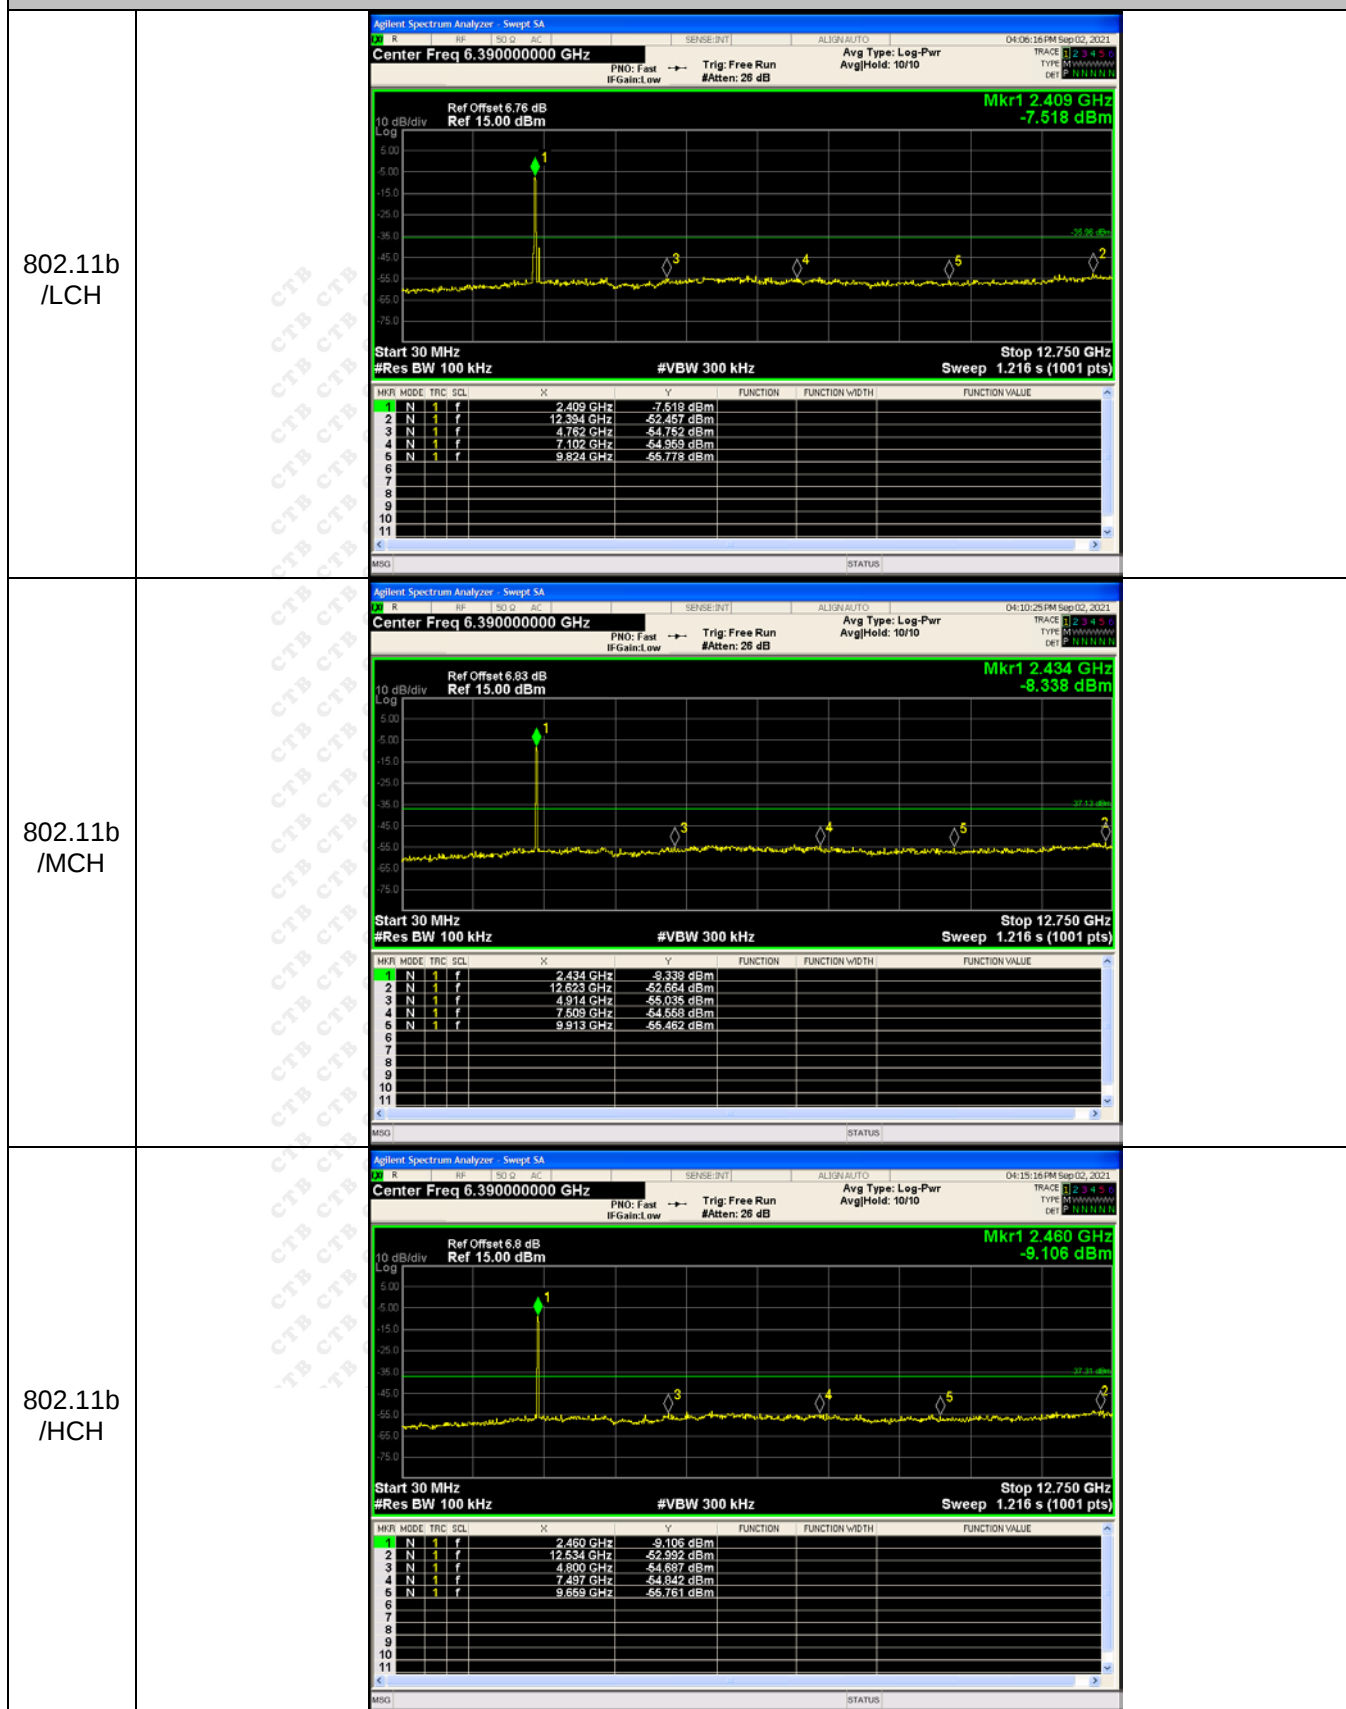

RF Conducted Spurious Emissions Graphs

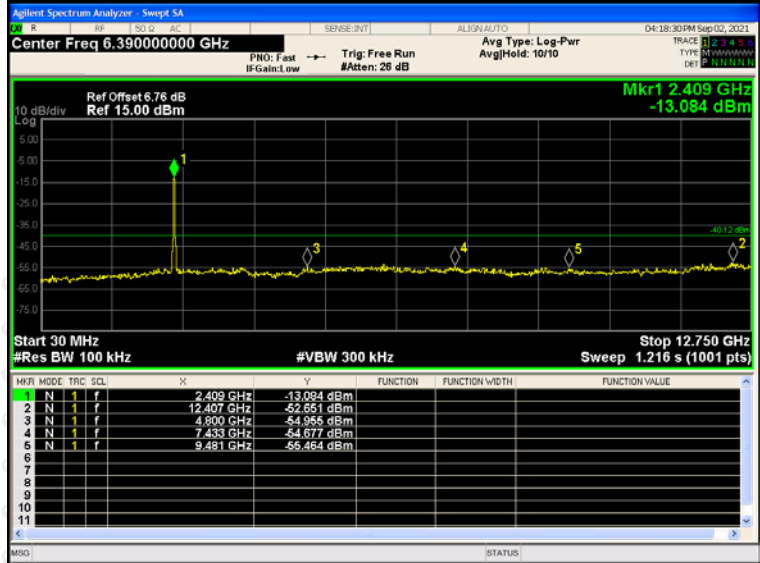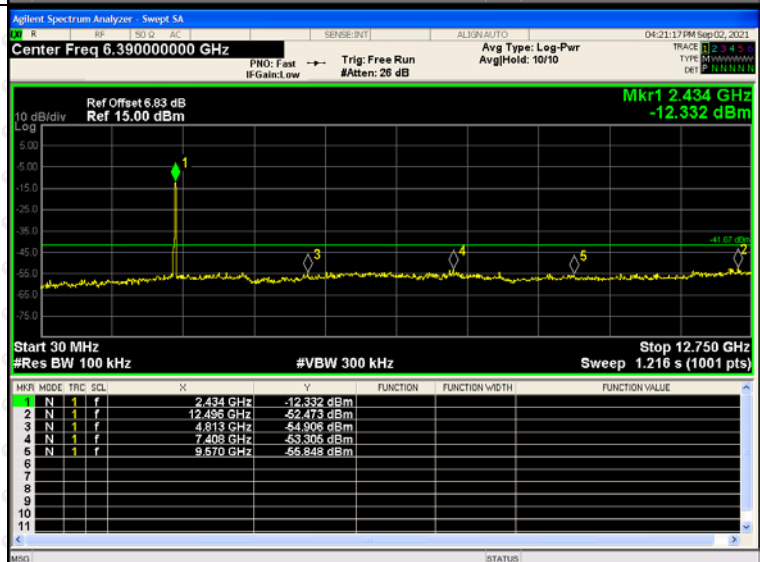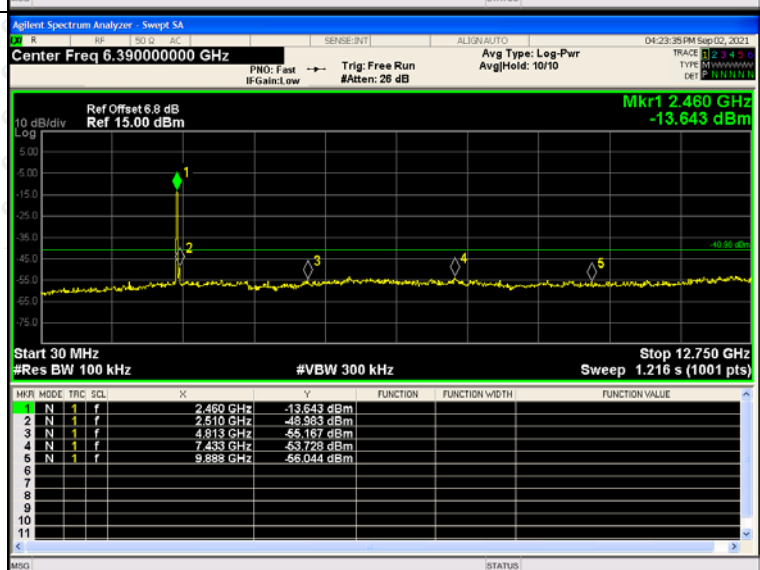802.11g /LCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.409 GHz</td><td>-13.084 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>12.407 GHz</td><td>-52.551 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.800 GHz</td><td>-54.955 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.433 GHz</td><td>-54.677 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.481 GHz</td><td>-55.464 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.409 GHz	-13.084 dBm				2	N	1	f	12.407 GHz	-52.551 dBm				3	N	1	f	4.800 GHz	-54.955 dBm				4	N	1	f	7.433 GHz	-54.677 dBm				5	N	1	f	9.481 GHz	-55.464 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.409 GHz	-13.084 dBm																																																		
2	N	1	f	12.407 GHz	-52.551 dBm																																																		
3	N	1	f	4.800 GHz	-54.955 dBm																																																		
4	N	1	f	7.433 GHz	-54.677 dBm																																																		
5	N	1	f	9.481 GHz	-55.464 dBm																																																		
802.11g /MCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.434 GHz</td><td>-12.332 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>12.486 GHz</td><td>-52.473 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.813 GHz</td><td>-54.906 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.408 GHz</td><td>-53.305 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.570 GHz</td><td>-55.848 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.434 GHz	-12.332 dBm				2	N	1	f	12.486 GHz	-52.473 dBm				3	N	1	f	4.813 GHz	-54.906 dBm				4	N	1	f	7.408 GHz	-53.305 dBm				5	N	1	f	9.570 GHz	-55.848 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.434 GHz	-12.332 dBm																																																		
2	N	1	f	12.486 GHz	-52.473 dBm																																																		
3	N	1	f	4.813 GHz	-54.906 dBm																																																		
4	N	1	f	7.408 GHz	-53.305 dBm																																																		
5	N	1	f	9.570 GHz	-55.848 dBm																																																		
802.11g /HCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.460 GHz</td><td>-13.643 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.510 GHz</td><td>-48.983 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.813 GHz</td><td>-55.167 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.433 GHz</td><td>-53.723 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.888 GHz</td><td>-55.044 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.460 GHz	-13.643 dBm				2	N	1	f	2.510 GHz	-48.983 dBm				3	N	1	f	4.813 GHz	-55.167 dBm				4	N	1	f	7.433 GHz	-53.723 dBm				5	N	1	f	9.888 GHz	-55.044 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.460 GHz	-13.643 dBm																																																		
2	N	1	f	2.510 GHz	-48.983 dBm																																																		
3	N	1	f	4.813 GHz	-55.167 dBm																																																		
4	N	1	f	7.433 GHz	-53.723 dBm																																																		
5	N	1	f	9.888 GHz	-55.044 dBm																																																		

RF Conducted Spurious Emissions Graphs

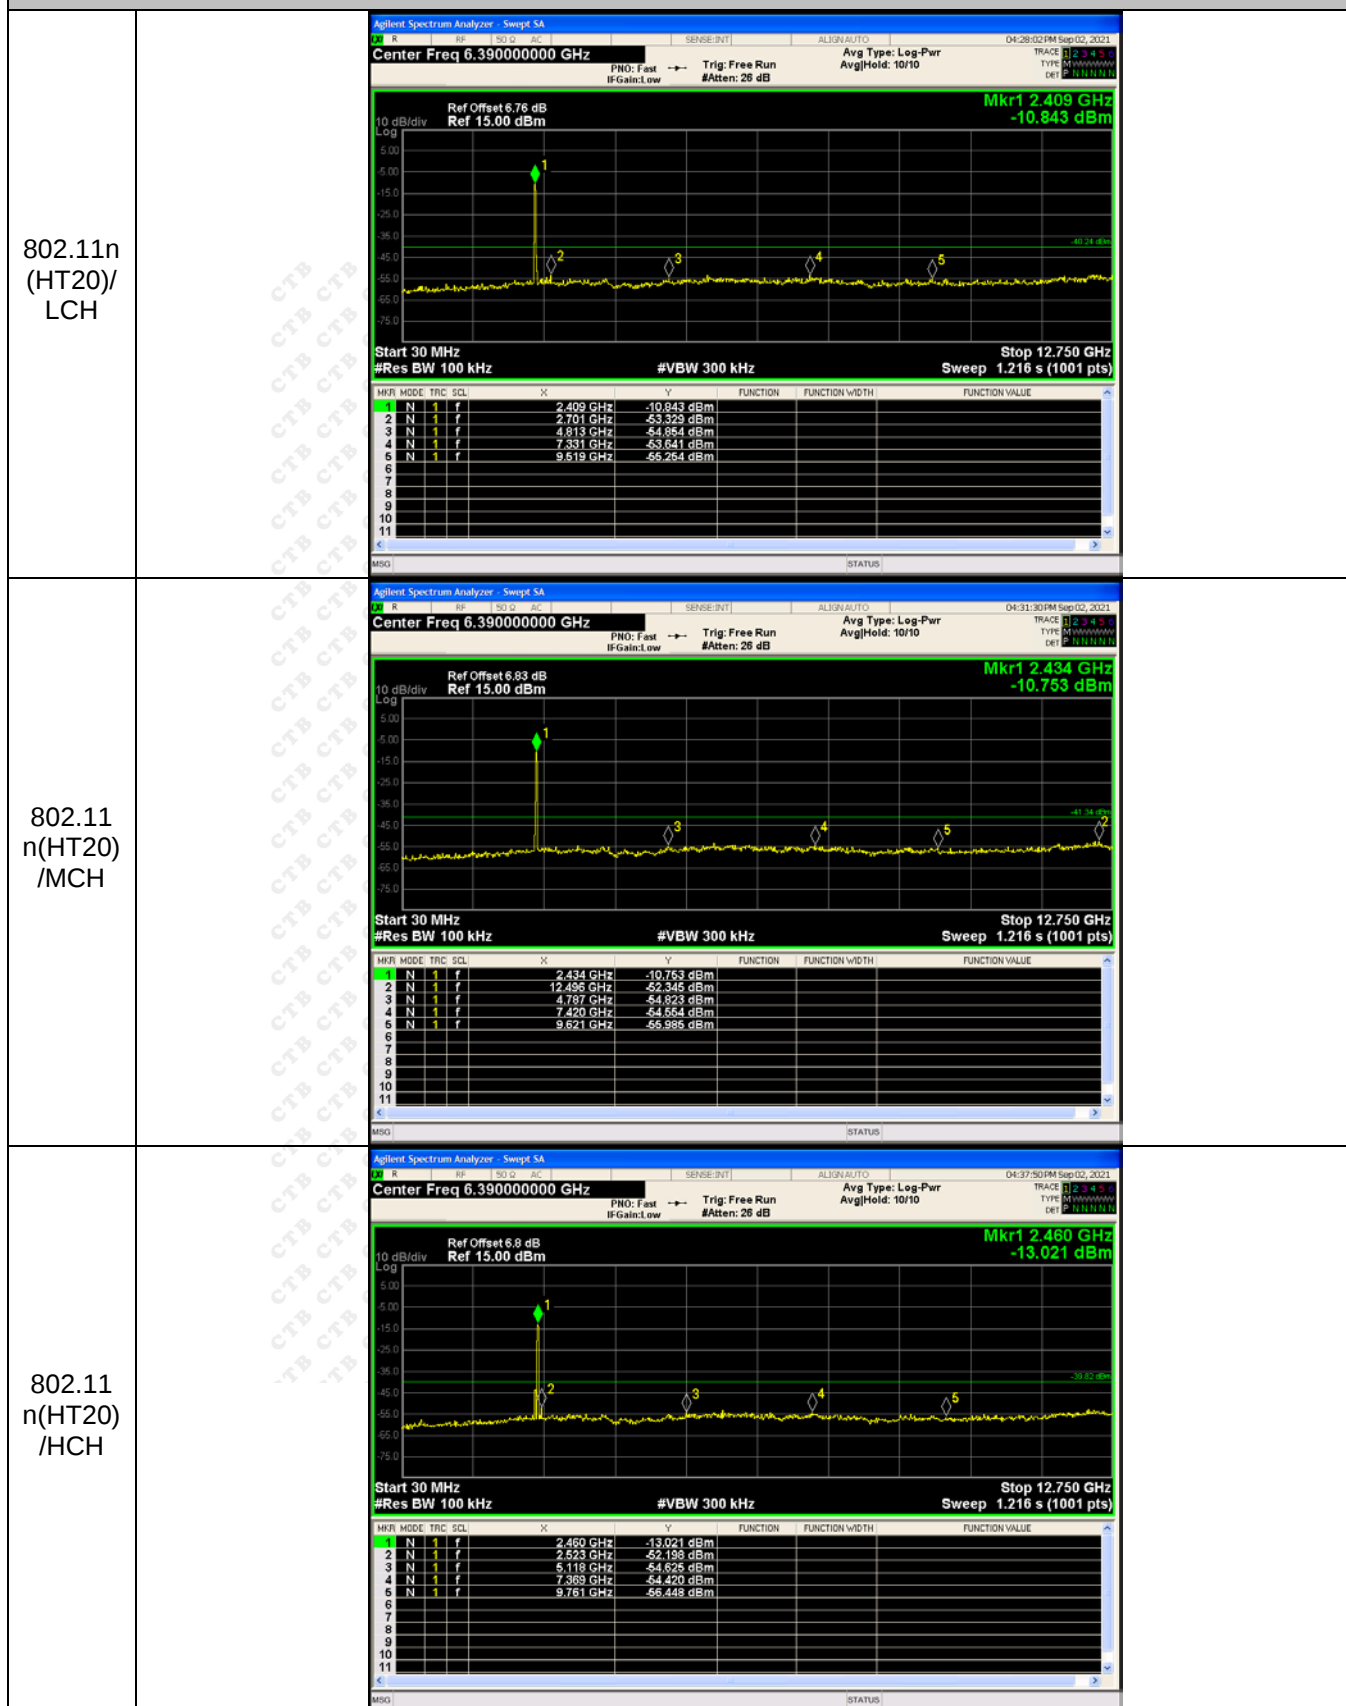


RF Conducted Spurious Emissions Graphs

802.11 n(HT40) /LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 6.390000000 GHz Ref Offset 6.77 dB Ref 15.00 dBm Mkr1 2.409 GHz -15.901 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 12.750 GHz Sweep 1.216 s (1001 pts) <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.409 GHz</td><td>-15.901 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>12.419 GHz</td><td>-53.003 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.813 GHz</td><td>-55.374 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.433 GHz</td><td>-54.670 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.494 GHz</td><td>-55.757 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.409 GHz	-15.901 dBm				2	N	1	f	12.419 GHz	-53.003 dBm				3	N	1	f	4.813 GHz	-55.374 dBm				4	N	1	f	7.433 GHz	-54.670 dBm				5	N	1	f	9.494 GHz	-55.757 dBm				
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.409 GHz	-15.901 dBm																																																			
2	N	1	f	12.419 GHz	-53.003 dBm																																																			
3	N	1	f	4.813 GHz	-55.374 dBm																																																			
4	N	1	f	7.433 GHz	-54.670 dBm																																																			
5	N	1	f	9.494 GHz	-55.757 dBm																																																			
802.11 n(HT40) /MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 6.390000000 GHz Ref Offset 6.83 dB Ref 15.00 dBm Mkr1 2.434 GHz -14.732 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 12.750 GHz Sweep 1.216 s (1001 pts) <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.434 GHz</td><td>-14.732 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>12.381 GHz</td><td>-52.738 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.800 GHz</td><td>-54.973 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.363 GHz</td><td>-54.703 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.570 GHz</td><td>-54.558 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.434 GHz	-14.732 dBm				2	N	1	f	12.381 GHz	-52.738 dBm				3	N	1	f	4.800 GHz	-54.973 dBm				4	N	1	f	7.363 GHz	-54.703 dBm				5	N	1	f	9.570 GHz	-54.558 dBm				
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.434 GHz	-14.732 dBm																																																			
2	N	1	f	12.381 GHz	-52.738 dBm																																																			
3	N	1	f	4.800 GHz	-54.973 dBm																																																			
4	N	1	f	7.363 GHz	-54.703 dBm																																																			
5	N	1	f	9.570 GHz	-54.558 dBm																																																			
802.11 n(HT40) /HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 6.390000000 GHz Ref Offset 6.81 dB Ref 15.00 dBm Mkr1 2.447 GHz -14.607 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 12.750 GHz Sweep 1.216 s (1001 pts) <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.447 GHz</td><td>-14.607 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.510 GHz</td><td>-52.112 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.800 GHz</td><td>-54.750 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.344 GHz</td><td>-54.332 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.853 GHz</td><td>-55.964 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.447 GHz	-14.607 dBm				2	N	1	f	2.510 GHz	-52.112 dBm				3	N	1	f	4.800 GHz	-54.750 dBm				4	N	1	f	7.344 GHz	-54.332 dBm				5	N	1	f	9.853 GHz	-55.964 dBm				
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.447 GHz	-14.607 dBm																																																			
2	N	1	f	2.510 GHz	-52.112 dBm																																																			
3	N	1	f	4.800 GHz	-54.750 dBm																																																			
4	N	1	f	7.344 GHz	-54.332 dBm																																																			
5	N	1	f	9.853 GHz	-55.964 dBm																																																			

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

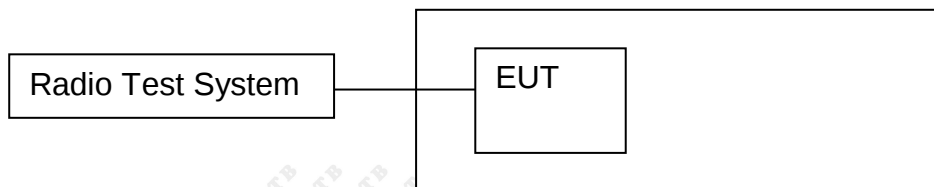

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure




1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = RMS. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.




9.4 Test Result




Mode	Channel.	Maximum Output Power [dBm] ant 1	Maximum Output Power [dBm] ant 2	Total Power Conducted Output Power(PK)	Limit[dBm]
802.11b	LCH	8.763	8.659	/	30
	MCH	8.012	8.436	/	30
	HCH	8.538	8.186	/	30
802.11g	LCH	8.012	8.281	/	30
	MCH	8.032	8.783	/	30
	HCH	8.208	8.286	/	30
802.11n(HT20)	LCH	7.874	7.752	10.824	30
	MCH	7.336	7.32	10.338	30
	HCH	7.155	7.176	10.176	30
802.11n(HT40)	LCH	6.544	6.419	9.492	30
	MCH	6.436	6.215	9.337	30
	HCH	6.458	6.606	9.543	30

ANT1:



Mode	Channel.	Maximum Output Power [dBm]
802.11b	LCH	Agilent Spectrum Analyzer - Channel Power Center Freq: 2.412000000 GHz Channel Power: 8.76 dBm / 20 MHz Power Spectral Density: -64.25 dBm / Hz
	MCH	Agilent Spectrum Analyzer - Channel Power Center Freq: 2.437000000 GHz Channel Power: 8.01 dBm / 20 MHz Power Spectral Density: -65.00 dBm / Hz
	HCH	Agilent Spectrum Analyzer - Channel Power Center Freq: 2.462000000 GHz Channel Power: 8.54 dBm / 20 MHz Power Spectral Density: -64.47 dBm / Hz

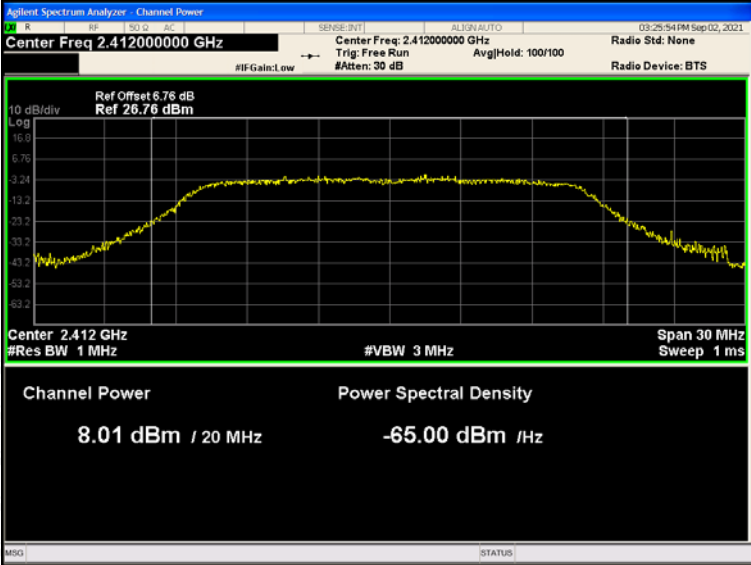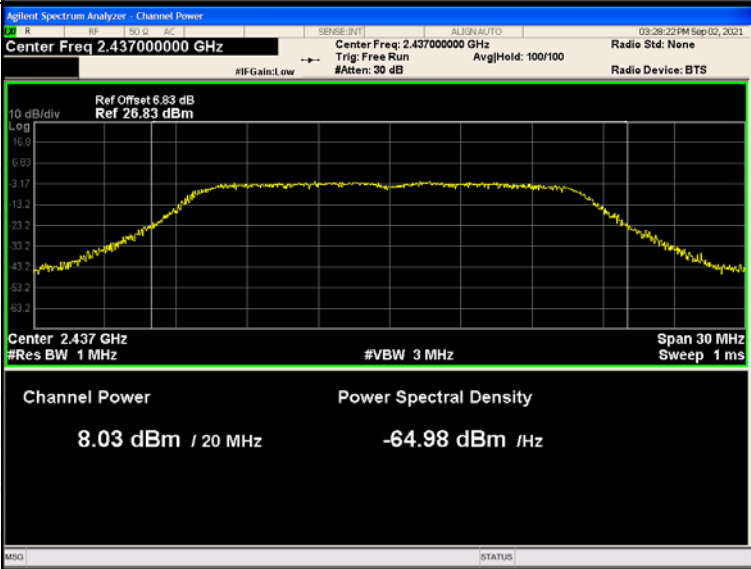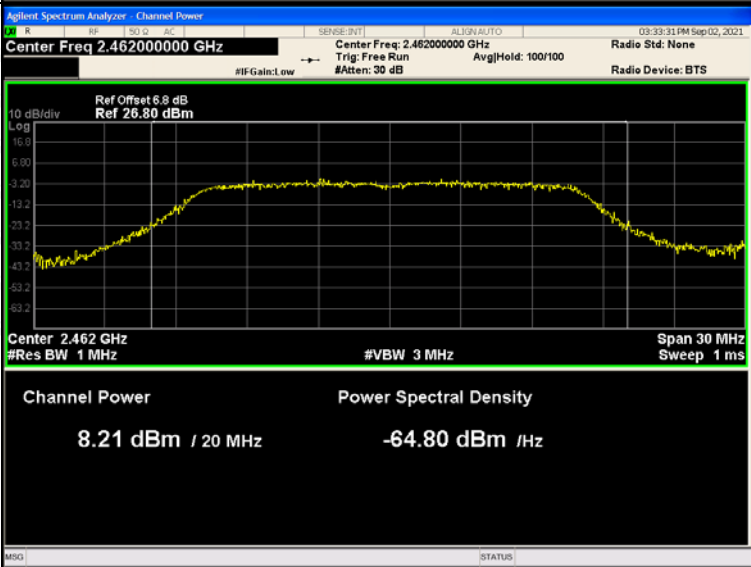	LCH	 Agilent Spectrum Analyzer - Channel Power Center Freq: 2.412000000 GHz Ref Offset: 6.76 dB, Ref: 26.76 dBm Channel Power: 8.01 dBm / 20 MHz Power Spectral Density: -65.00 dBm / Hz
802.11g	MCH	 Agilent Spectrum Analyzer - Channel Power Center Freq: 2.437000000 GHz Ref Offset: 6.83 dB, Ref: 26.83 dBm Channel Power: 8.03 dBm / 20 MHz Power Spectral Density: -64.98 dBm / Hz
	HCH	 Agilent Spectrum Analyzer - Channel Power Center Freq: 2.462000000 GHz Ref Offset: 6.8 dB, Ref: 26.80 dBm Channel Power: 8.21 dBm / 20 MHz Power Spectral Density: -64.80 dBm / Hz

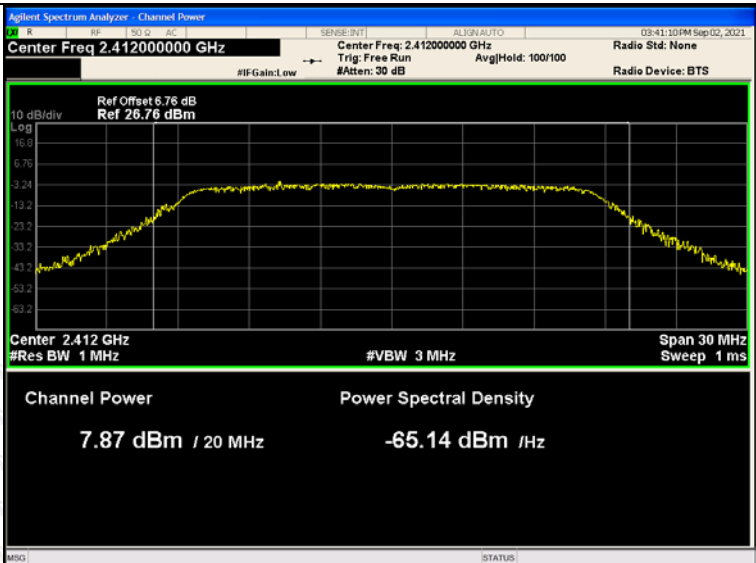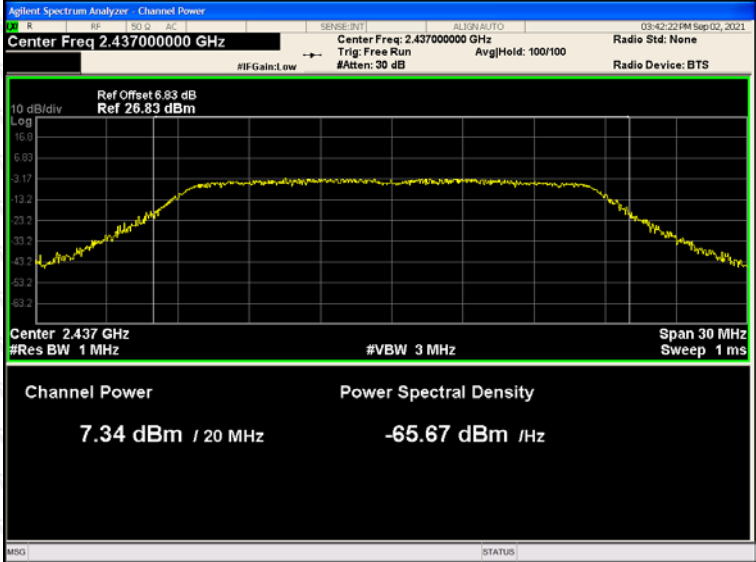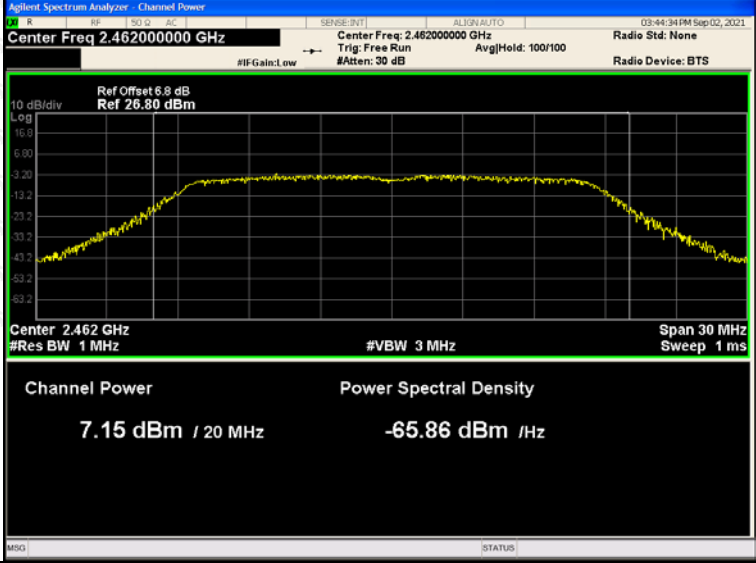802.11n(HT20)	LCH	 Agilent Spectrum Analyzer - Channel Power Center Freq: 2.412000000 GHz Ref Offset: 6.76 dB, Ref: 26.76 dBm Channel Power: 7.87 dBm / 20 MHz Power Spectral Density: -65.14 dBm / Hz
	MCH	 Agilent Spectrum Analyzer - Channel Power Center Freq: 2.437000000 GHz Ref Offset: 6.83 dB, Ref: 26.83 dBm Channel Power: 7.34 dBm / 20 MHz Power Spectral Density: -65.67 dBm / Hz
	HCH	 Agilent Spectrum Analyzer - Channel Power Center Freq: 2.462000000 GHz Ref Offset: 6.8 dB, Ref: 26.80 dBm Channel Power: 7.15 dBm / 20 MHz Power Spectral Density: -65.86 dBm / Hz

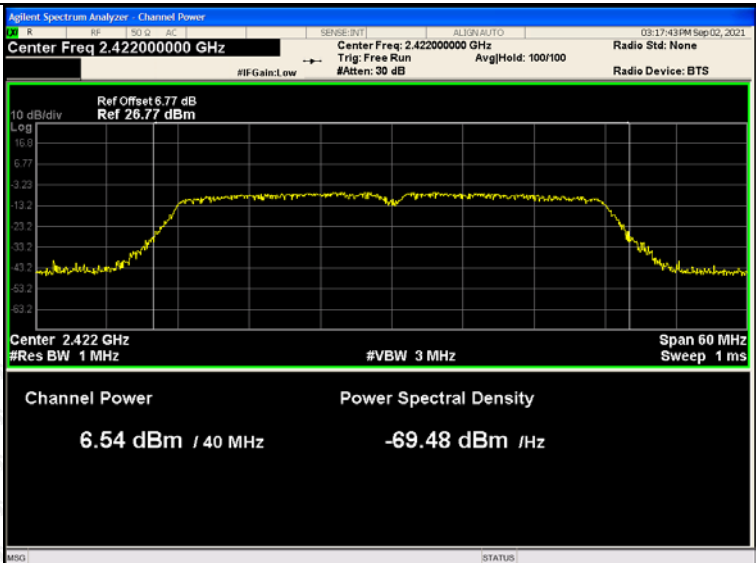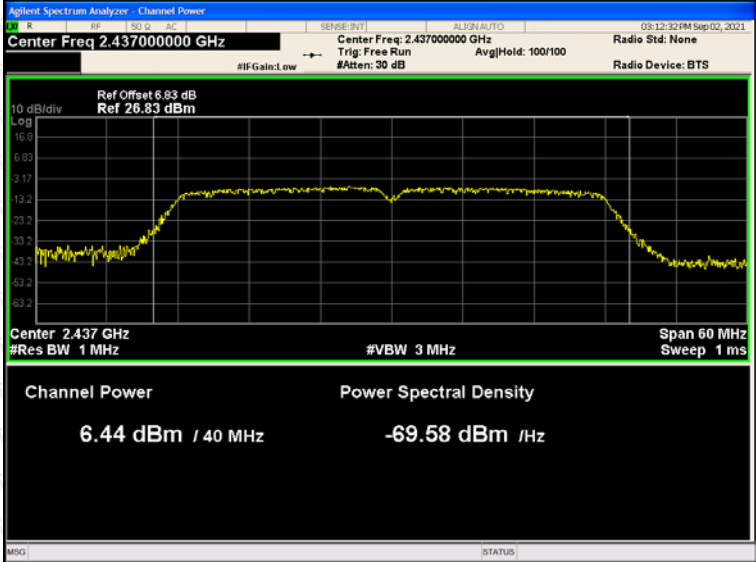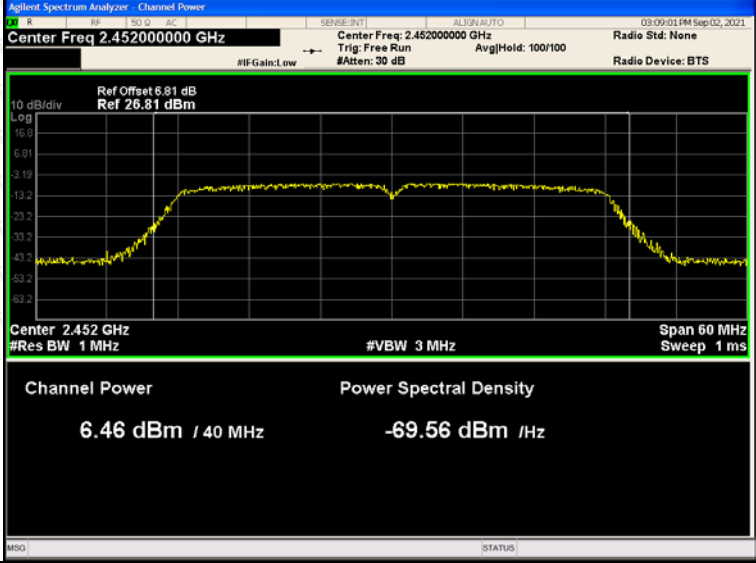802.11n(HT40)	LCH	
	MCH	
	HCH	

ANT2:

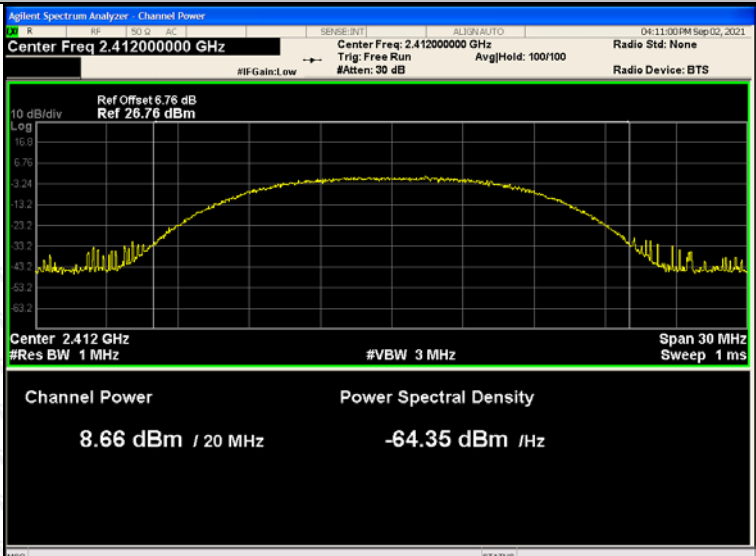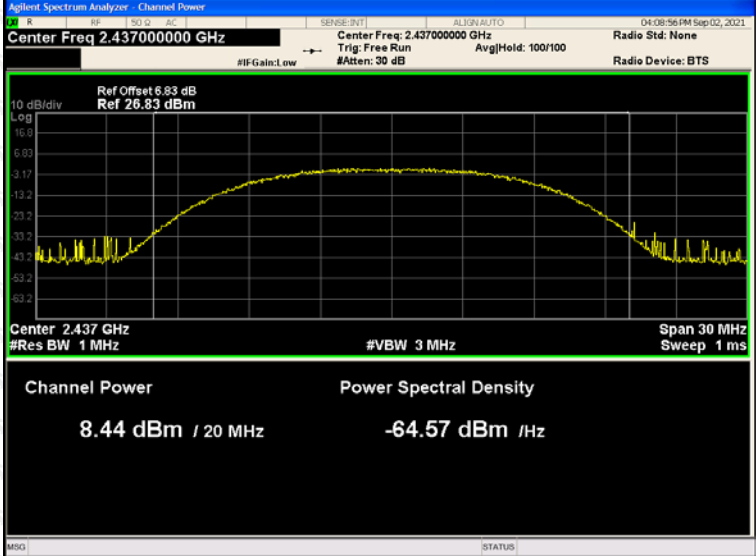Mode	Channel.	Maximum Output Power [dBm]
802.11b	LCH	
	MCH	
	HCH	