

FRONT

USER MANUAL



TREXA H1  
WIRELESS MICROPHONES


Thank you for choosing our products  
This product is a wireless lavalier microphone, which can provide professional-level recording output. Plug-and-play, no APP.  
Multiple uses: Can be used for live streaming, video blog shooting, Interview, recording, video teaching and other occasions.

IN THE BOX:

1. Charging case - 1  
2-3 Microphone -----2  
4. Receiver-----1  
5. Charging cable -1



The wireless radio microphone consists of two parts, the microphone Transmitter, and the receiver. (As shown in the pictures)

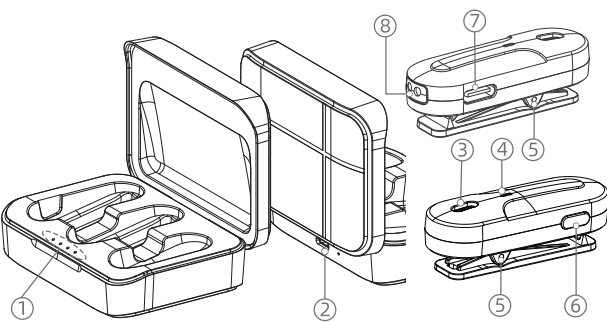

- ① Indicator light on the case      ⑤ Clip  
② Type-C charging port on the case      ⑥ Microphone Power button/ reset key  
③ Microphone sound pickup hole      ⑦ Microphone Type-C charging port  
④ Indicator light on the microphone      ⑧ Metal touch pin on microphone

1. If the mobile phone has OTG - function, please manually Turn on OTG



Step 1: open the phone "Settings"      Step 2: ENTER "OTG" to search      Step 3: Open "OTG Connection"

2. Some models of OPP O may need to set up manual as below: Settings> Sound & vibration>Default recorder>Add on

HOW TO USE:

• Charging case function description

| Function/status     | Light status                        |
|---------------------|-------------------------------------|
| Charging            | Green light ( 25%, 50%, 75%, 100% ) |
| Fully Charged       | Green light always on               |
| Microphone charging | Red light flashes 3 s               |

| Function/status    | Operation                                                                                           |
|--------------------|-----------------------------------------------------------------------------------------------------|
| Power on           | Press the power button for 3 s, red and green light Flashes alternately                             |
| Power off          | Press the power button for 3 s, green light is off                                                  |
| Search for pairing | Red and green light flashes alternately                                                             |
| Clear pairing      | Press the power button for 4 consecutive times, Red and green light flashes quickly and alternately |
| Paired             | Green light is always on                                                                            |
| Charging           | Red light is always on                                                                              |
| Fully charged      | Red light off                                                                                       |
| Low battery alarm  | Red light flashes slowly                                                                            |
| Auto shut-down     | No connection for 3 minutes                                                                         |
| Noise level switch | Single Click the power button green light always on                                                 |
| Mute               | Double click the power Button, green light flashes                                                  |

• Receiver function description

| Function/status | Operation                              |
|-----------------|----------------------------------------|
| Power on        | Plug in the phone, the red light is on |


BACK

HOW TO USE:

|                    |                                                          |
|--------------------|----------------------------------------------------------|
| Power off          | Unplug the phone                                         |
| Search for pairing | Red light flashes                                        |
| Clear pairing      | Press the reset key 4 times, green light flashes quickly |
| Paired             | Red light is always on                                   |

• TYPE-C receiver diagram

- ① Type-C head  
② Receiver reset key  
③ Indicator light on the receiver  
④ Type-C Charging port



Specifications:

**Charging case specifications**  
Input voltage: DC 4.8 - 5.4 V  
Charging time: about 1.5 hour  
Weight about 64 g

**Microphone specifications**  
Frequency range: 2.4 G Hz  
Latency: 25 ms  
Frequency response Range: 20-20 K Hz Input  
Voltage: DC 4.8 - 5.4 V  
Sensitivity: -38 DBMS

**Receiver specification**  
Frequency range: 2.4 ( 31- Hz)  
Latency: 25 ms  
Frequency response rang: 20-20 K Hz


**Batteries Specifications:**  
Battery capacity : 600 m Ah  
Recharging times: 4 H mes  
Size: 90\*62\* J 0.7 mm

Battery capacity: 70 m Ah  
Working time: 5 hours  
Charging time: about 1.5 hours  
Weight: about 8.3 g  
Size: 9\*46.97\*17.4\*16.64 mm


Weight: about 4.9 g  
Input voltage: DC 4.8~5.4 V  
Size: 41\*26.6\*10 mm

• How to use with Android and iPhone 15

Step 1: Open the charging case and remove the microphone. The microphone's red and green lights will flash alternately, while the Type-C receiver will not display any light.

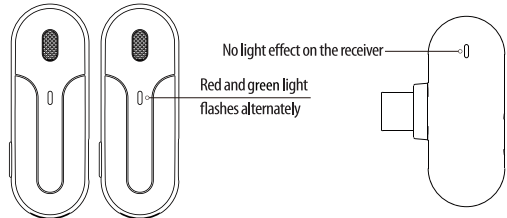

Step 2: Connect the Type-C receiver to your phone's Type-C port. The receiver's green light and the microphone's blue light will remain steadily on, indicating successful pairing. You can now open the phone's camera or other apps, and the microphone will be ready for sound pickup.

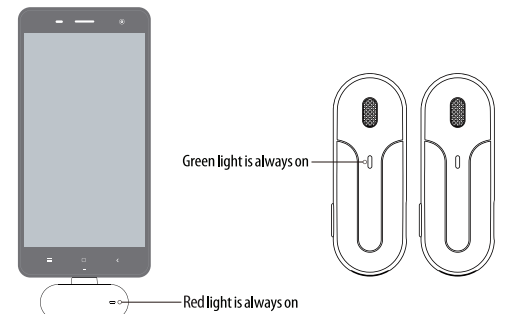

FCC Statement

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.  
The device has evaluated to meet general RF exposure requirement. The device can be used in portable exposure without restriction.

108mm

83.8mm