


|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE80) Mode 5690 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

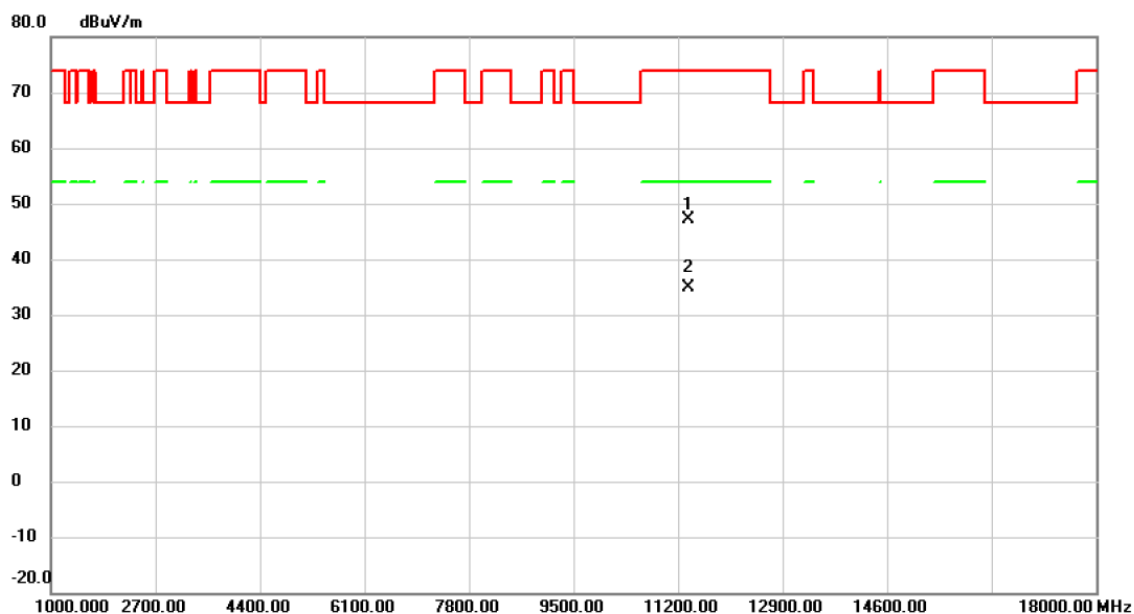


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11377.790    | 38.82                    | 8.34                    | 47.16                      | 74.00           | -26.84       | peak     |         |
| 2   | *   | 11377.823    | 26.58                    | 8.34                    | 34.92                      | 54.00           | -19.08       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE160) Mode 5570 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

130 dBuV/m

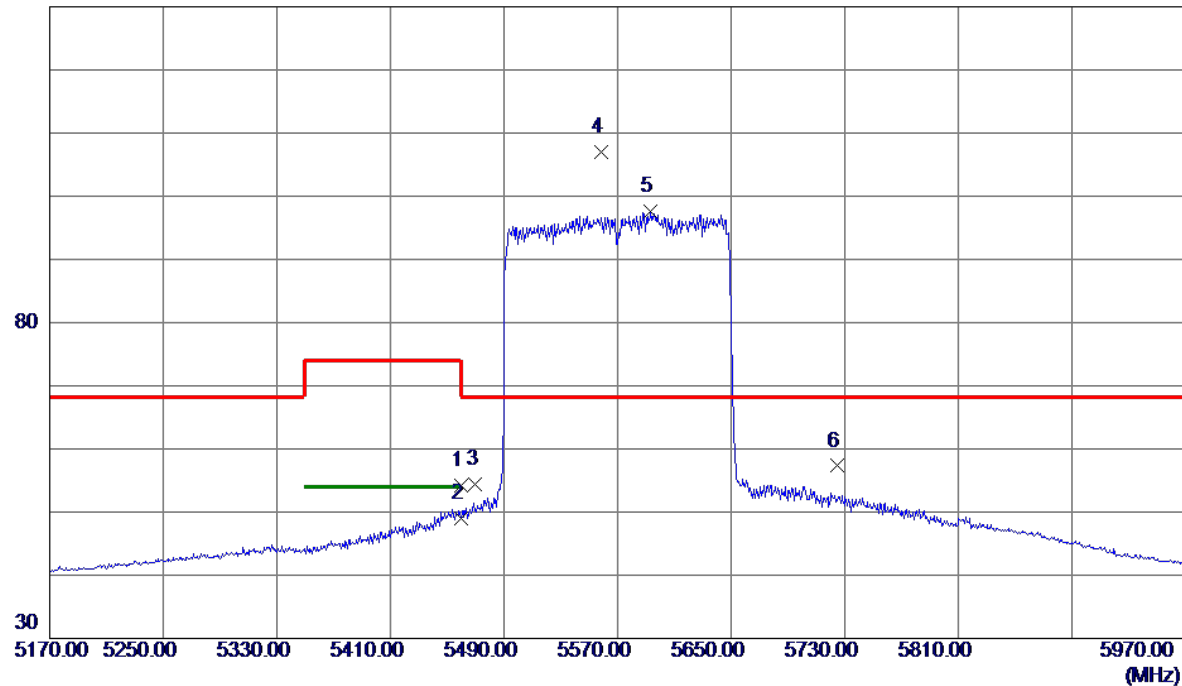


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 41.64                      | 12.53                   | 54.17                     | 74.00           | -19.83       | Peak     |          |
| 2   | 5460.0000    | 36.54                      | 12.53                   | 49.07                     | 54.00           | -4.93        | AVG      |          |
| 3   | 5470.0000    | 41.79                      | 12.56                   | 54.35                     | 68.20           | -13.85       | Peak     |          |
| 4 * | 5558.4000    | 94.18                      | 12.81                   | 106.99                    | 68.20           | 38.79        | Peak     | No Limit |
| 5   | 5593.2000    | 84.74                      | 12.92                   | 97.66                     | 999.00          | -901.34      | AVG      | No Limit |
| 6   | 5725.0000    | 43.97                      | 13.33                   | 57.30                     | 68.20           | -10.90       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE160) Mode 5570 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

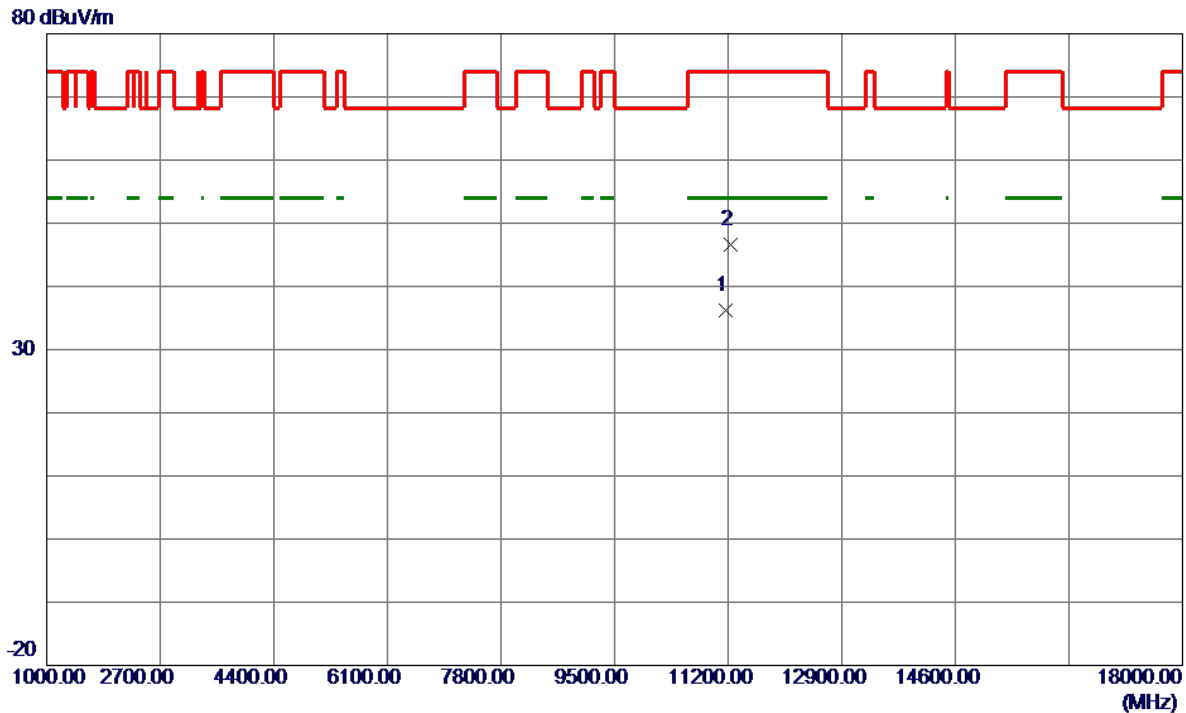


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11154.6000   | 27.50                      | 8.69                    | 36.19                     | 54.00           | -17.81       | AVG      |         |
| 2   | 11229.8000   | 37.78                      | 8.76                    | 46.54                     | 74.00           | -27.46       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |            |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-3_TX A Mode 5745 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

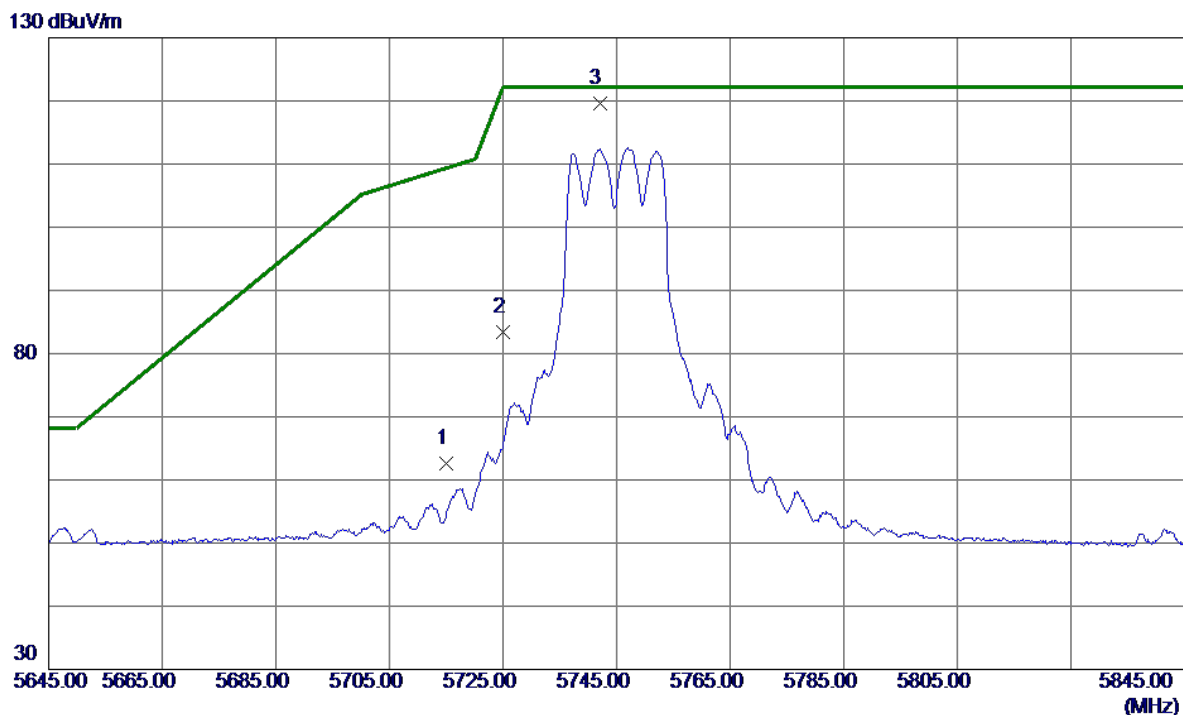


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 49.28                      | 13.30                   | 62.58                     | 109.40          | -46.82       | Peak     |          |
| 2   | 5725.0000    | 70.07                      | 13.33                   | 83.40                     | 122.20          | -38.80       | Peak     |          |
| 3 * | 5742.0000    | 106.17                     | 13.39                   | 119.56                    | 122.20          | -2.64        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |            |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-3_TX A Mode 5745 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

80 dBuV/m

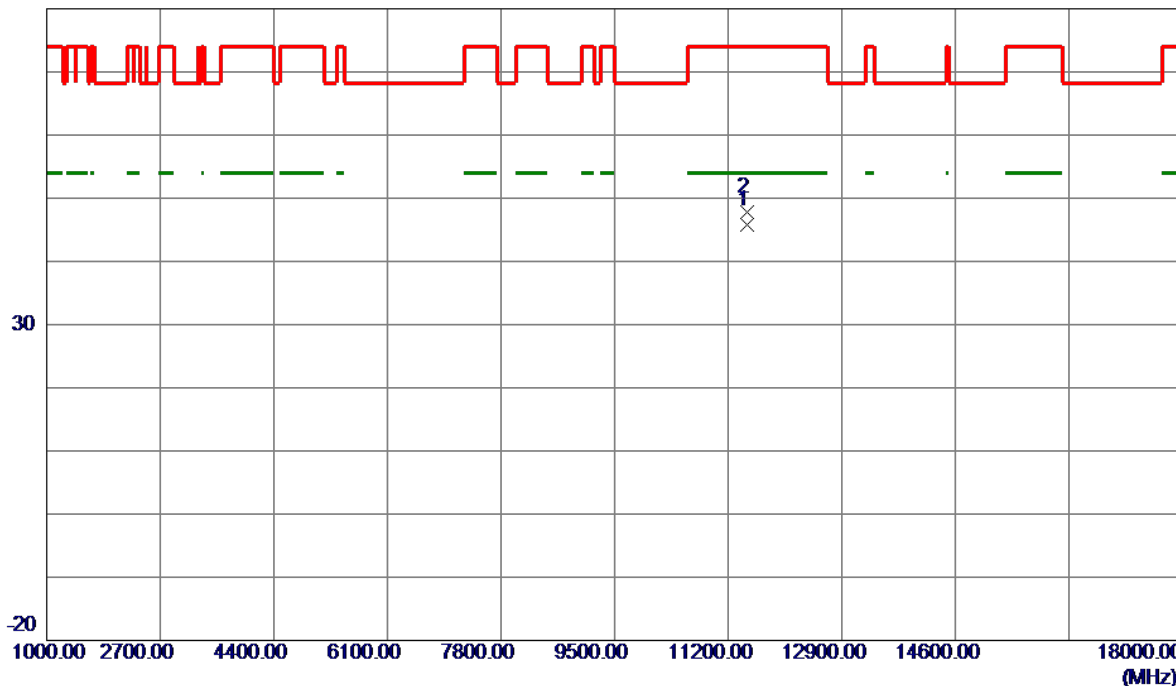


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11486.5250   | 37.43                      | 8.45                    | 45.88                     | 74.00           | -28.12       | Peak     |         |
| 2 * | 11486.8000   | 39.33                      | 8.45                    | 47.78                     | 54.00           | -6.22        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |            |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-3_TX A Mode 5785 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

80 dBuV/m

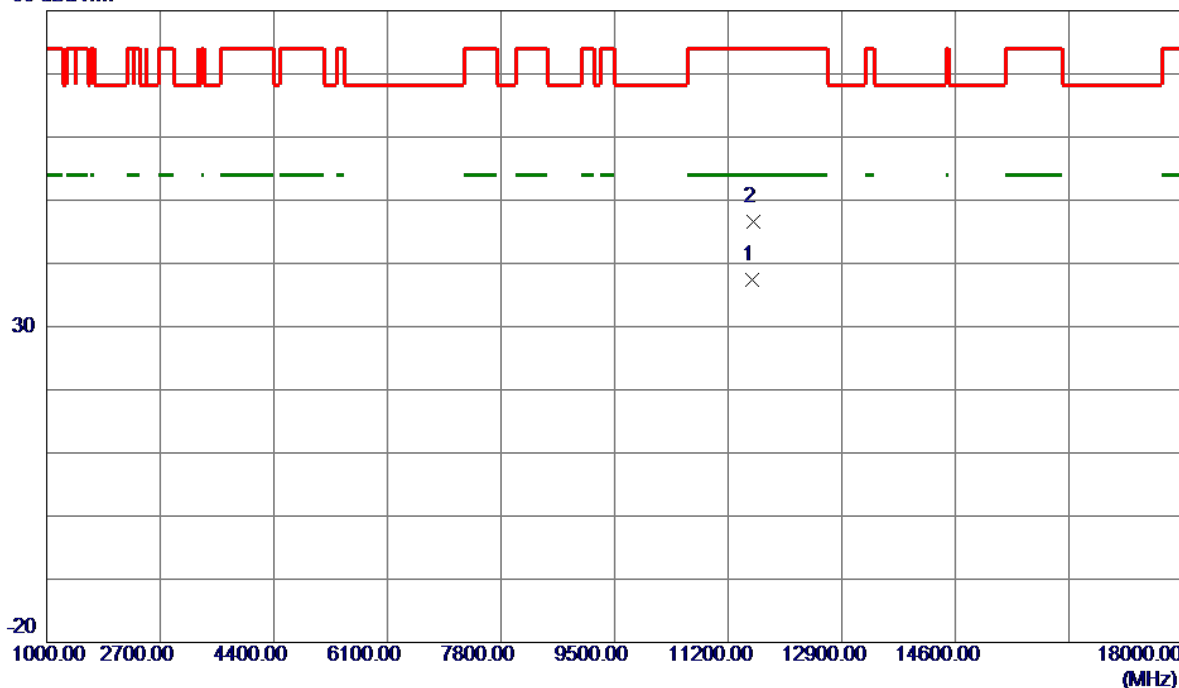


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11565.2500   | 29.08                      | 8.40                    | 37.48                     | 54.00           | -16.52       | AVG      |         |
| 2   | 11570.7750   | 38.27                      | 8.40                    | 46.67                     | 74.00           | -27.33       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |            |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-3_TX A Mode 5825 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

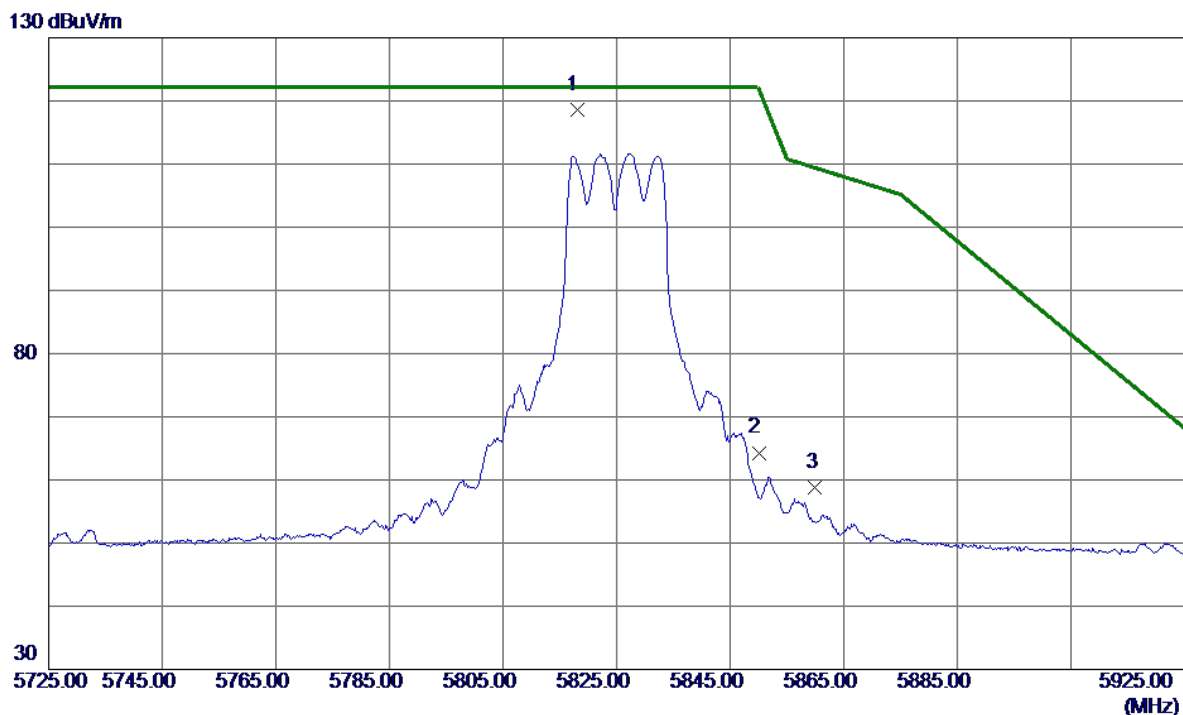


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5818.0000    | 104.90                     | 13.63                   | 118.53                    | 122.20          | -3.67        | Peak     | No Limit |
| 2   | 5850.0000    | 50.57                      | 13.73                   | 64.30                     | 122.20          | -57.90       | Peak     |          |
| 3   | 5860.0000    | 45.12                      | 13.76                   | 58.88                     | 109.40          | -50.52       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |            |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-3_TX A Mode 5825 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

80 dBuV/m

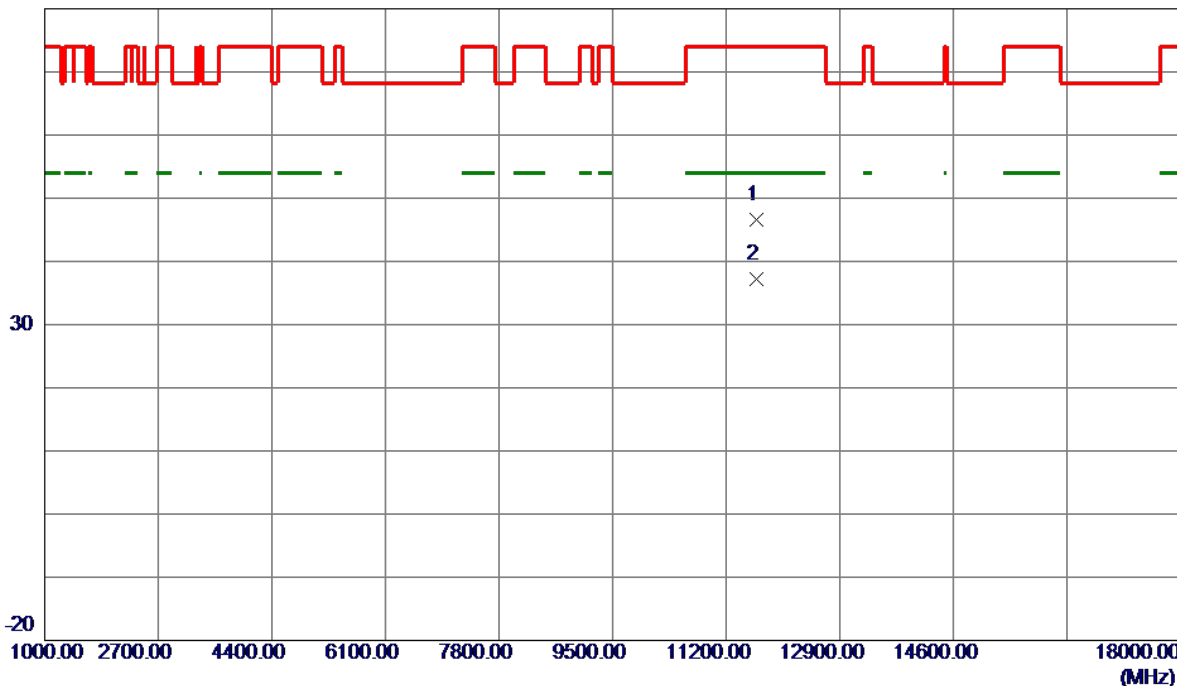


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11654.0250   | 38.20                      | 8.32                    | 46.52                     | 74.00           | -27.48       | Peak     |         |
| 2 * | 11655.0250   | 28.92                      | 8.32                    | 37.24                     | 54.00           | -16.76       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5745 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

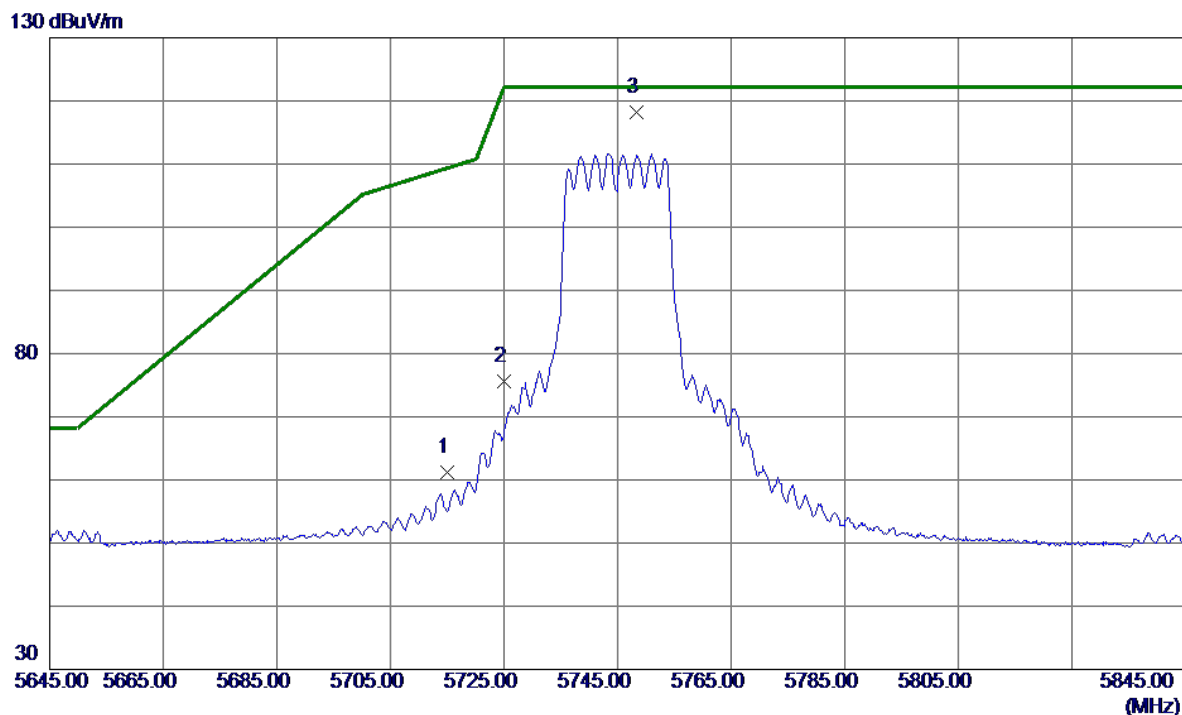


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 47.84                      | 13.30                   | 61.14                     | 109.40          | -48.26       | Peak     |          |
| 2   | 5725.0000    | 62.18                      | 13.33                   | 75.51                     | 122.20          | -46.69       | Peak     |          |
| 3 * | 5748.4000    | 104.87                     | 13.41                   | 118.28                    | 122.20          | -3.92        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5745 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

80 dBuV/m

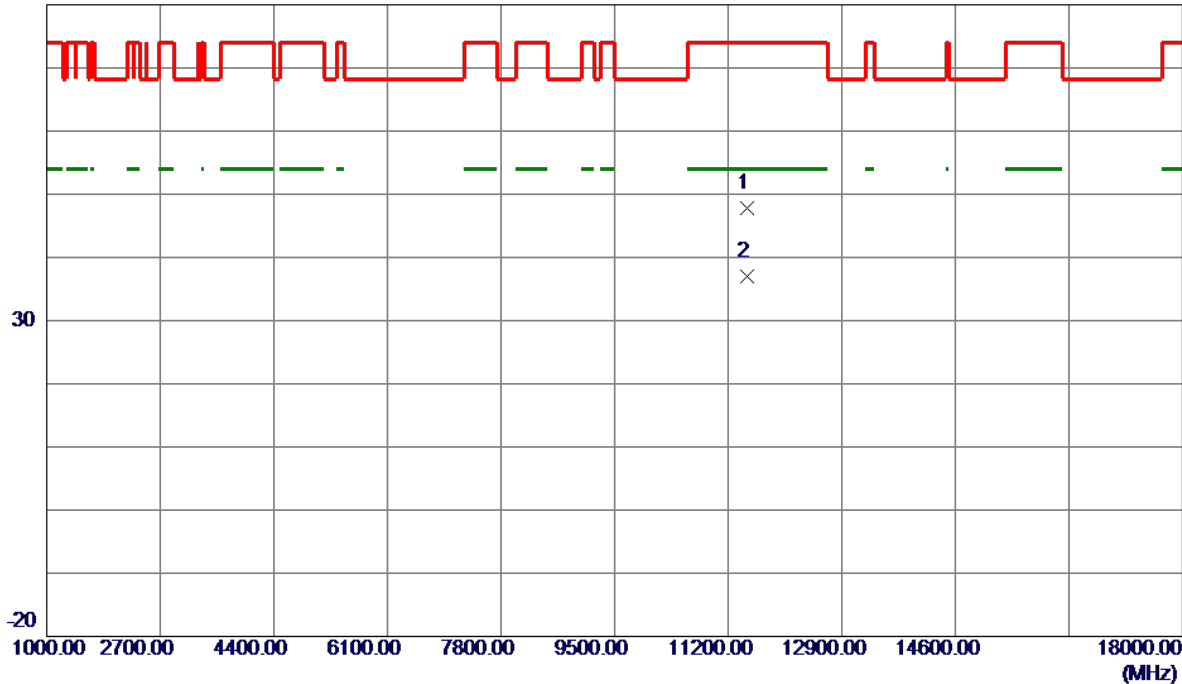


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11486.0250   | 39.31                      | 8.45                    | 47.76                     | 74.00           | -26.24       | Peak     |         |
| 2 * | 11491.0750   | 28.53                      | 8.46                    | 36.99                     | 54.00           | -17.01       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5785 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

80 dBuV/m

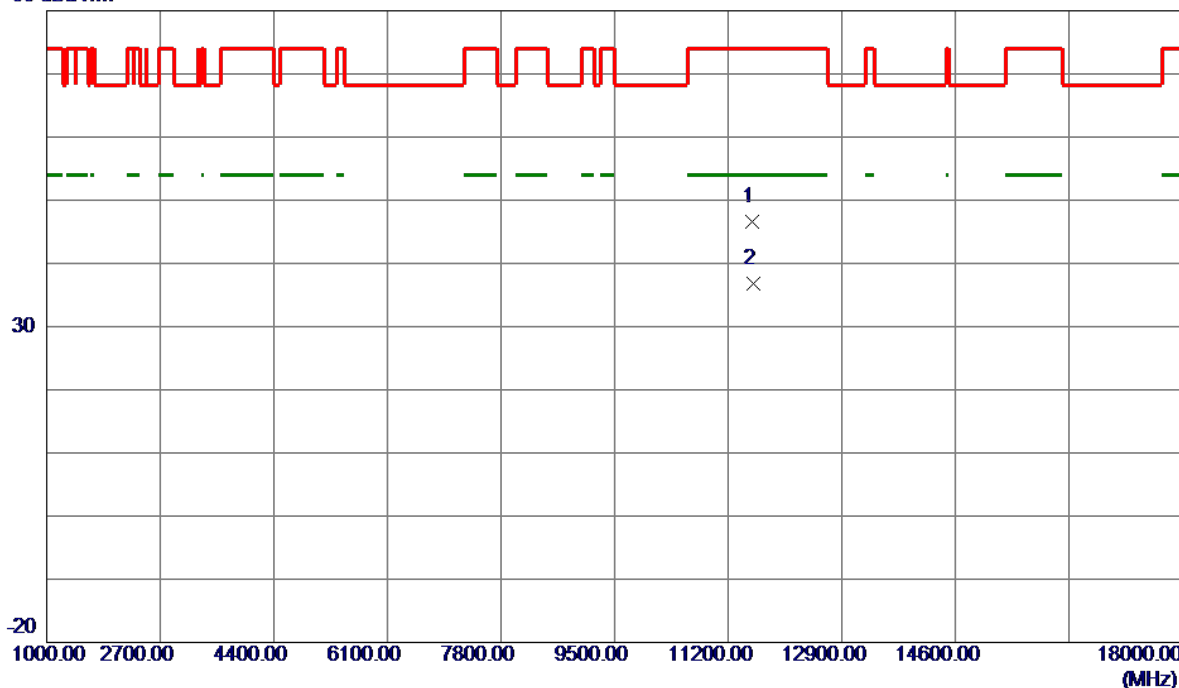


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11556.3750   | 38.21                      | 8.41                    | 46.62                     | 74.00           | -27.38       | Peak     |         |
| 2 * | 11571.2250   | 28.39                      | 8.40                    | 36.79                     | 54.00           | -17.21       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5825 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

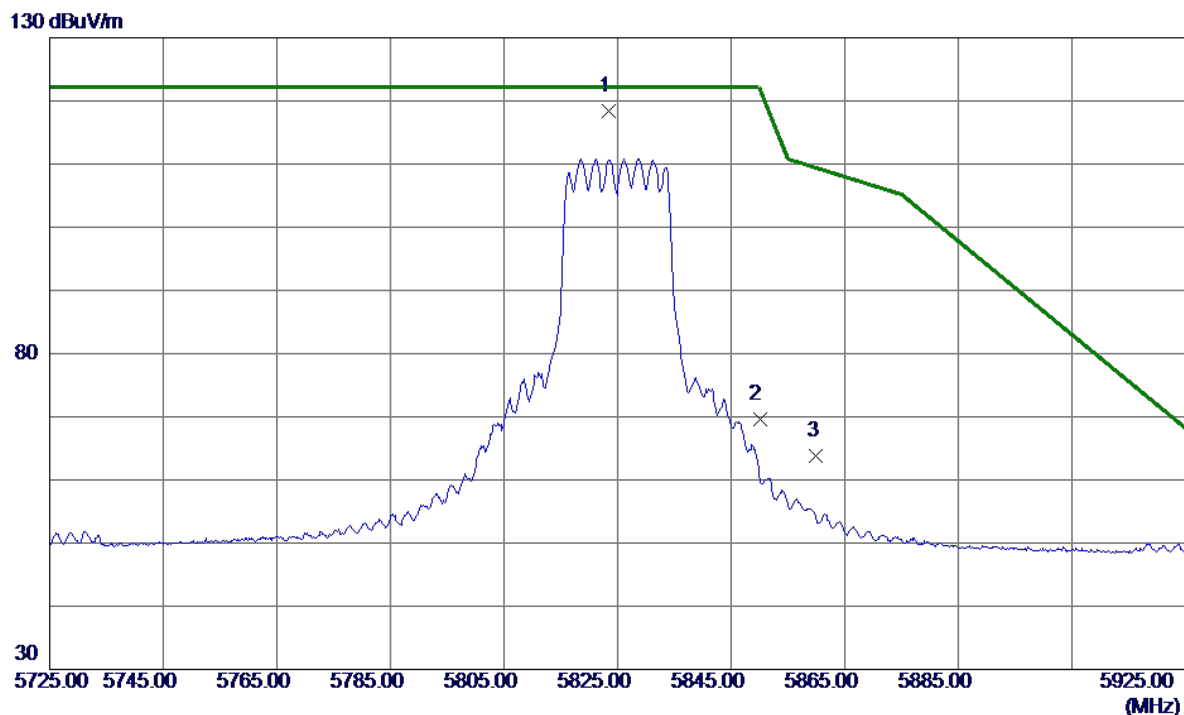


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5823.5000    | 104.69                     | 13.64                   | 118.33                    | 122.20          | -3.87        | Peak     | No Limit |
| 2   | 5850.0000    | 55.91                      | 13.73                   | 69.64                     | 122.20          | -52.56       | Peak     |          |
| 3   | 5860.0000    | 50.01                      | 13.76                   | 63.77                     | 109.40          | -45.63       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5825 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

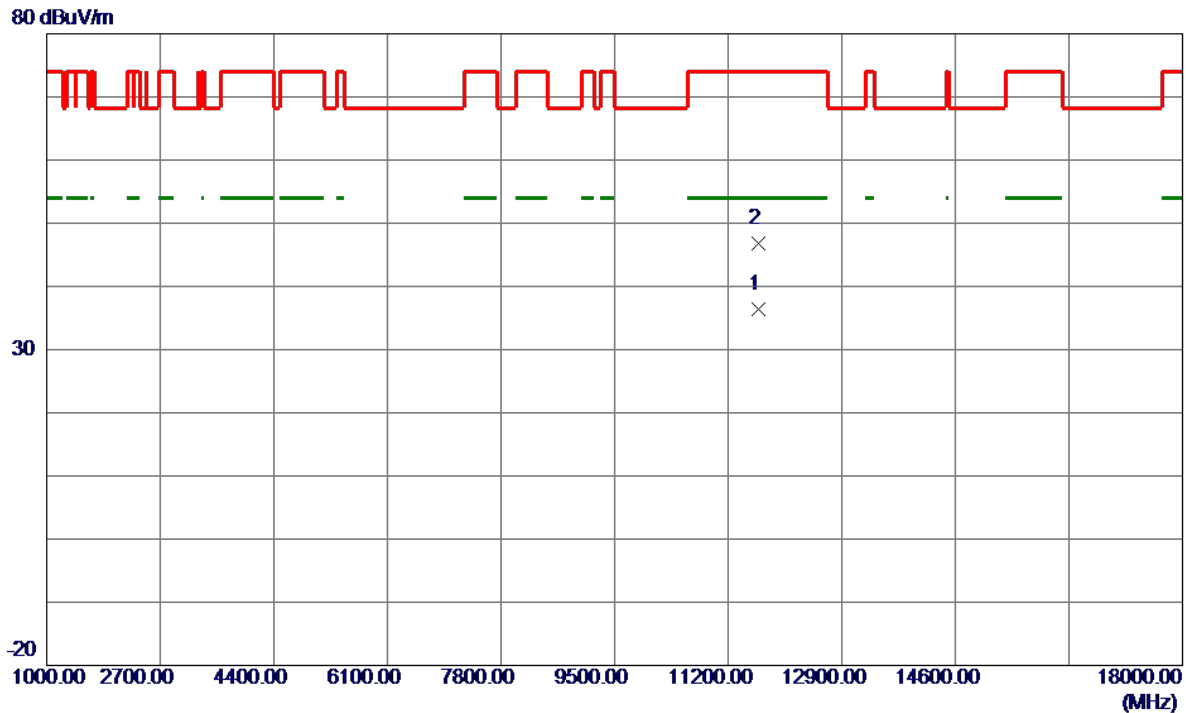


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11652.5750   | 28.01                      | 8.32                    | 36.33                     | 54.00           | -17.67       | AVG      |         |
| 2   | 11653.7750   | 38.51                      | 8.32                    | 46.83                     | 74.00           | -27.17       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT40) Mode 5755 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

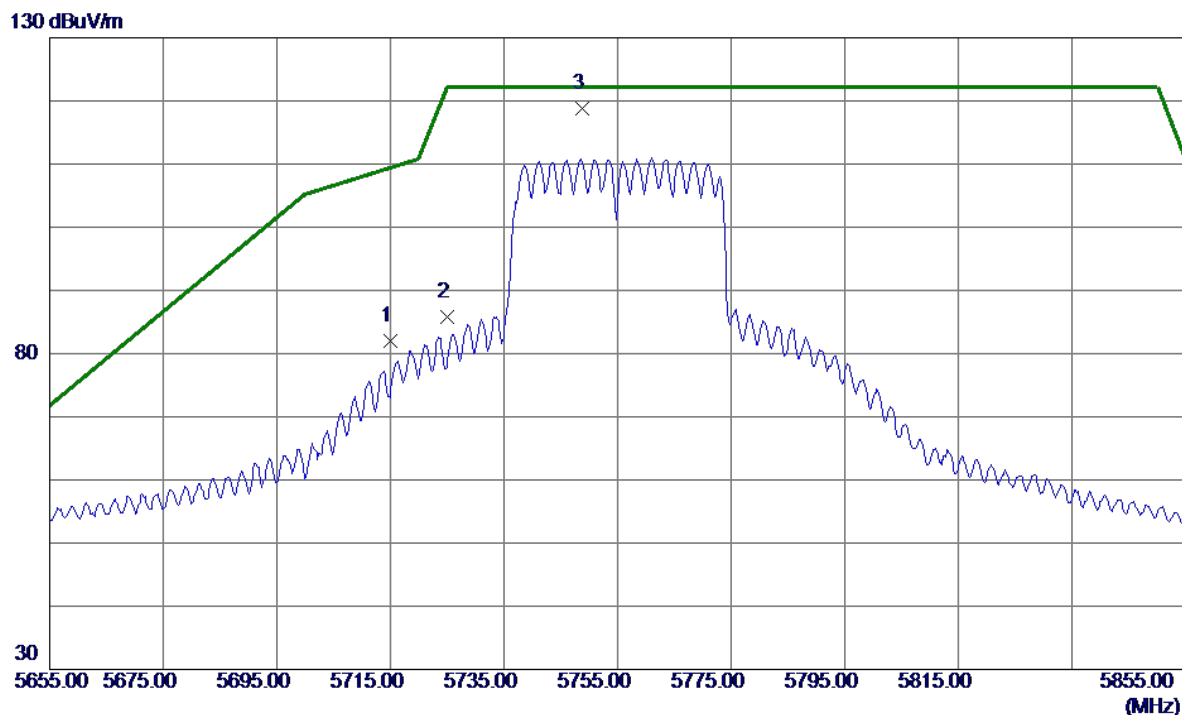


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 68.69                      | 13.30                   | 81.99                     | 109.40          | -27.41       | Peak     |          |
| 2   | 5725.0000    | 72.45                      | 13.33                   | 85.78                     | 122.20          | -36.42       | Peak     |          |
| 3 * | 5748.8000    | 105.41                     | 13.41                   | 118.82                    | 122.20          | -3.38        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT40) Mode 5755 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

80 dBuV/m

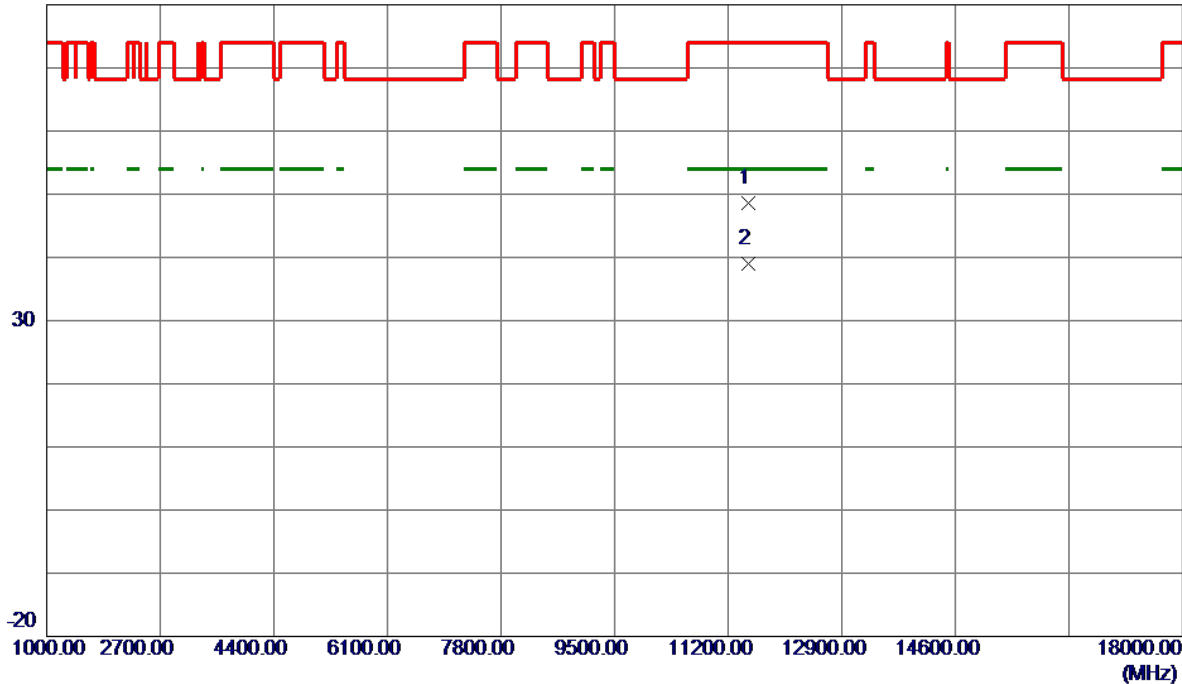


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11497.9500   | 40.23                      | 8.46                    | 48.69                     | 74.00           | -25.31       | Peak     |         |
| 2 * | 11502.9250   | 30.59                      | 8.46                    | 39.05                     | 54.00           | -14.95       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT40) Mode 5795 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

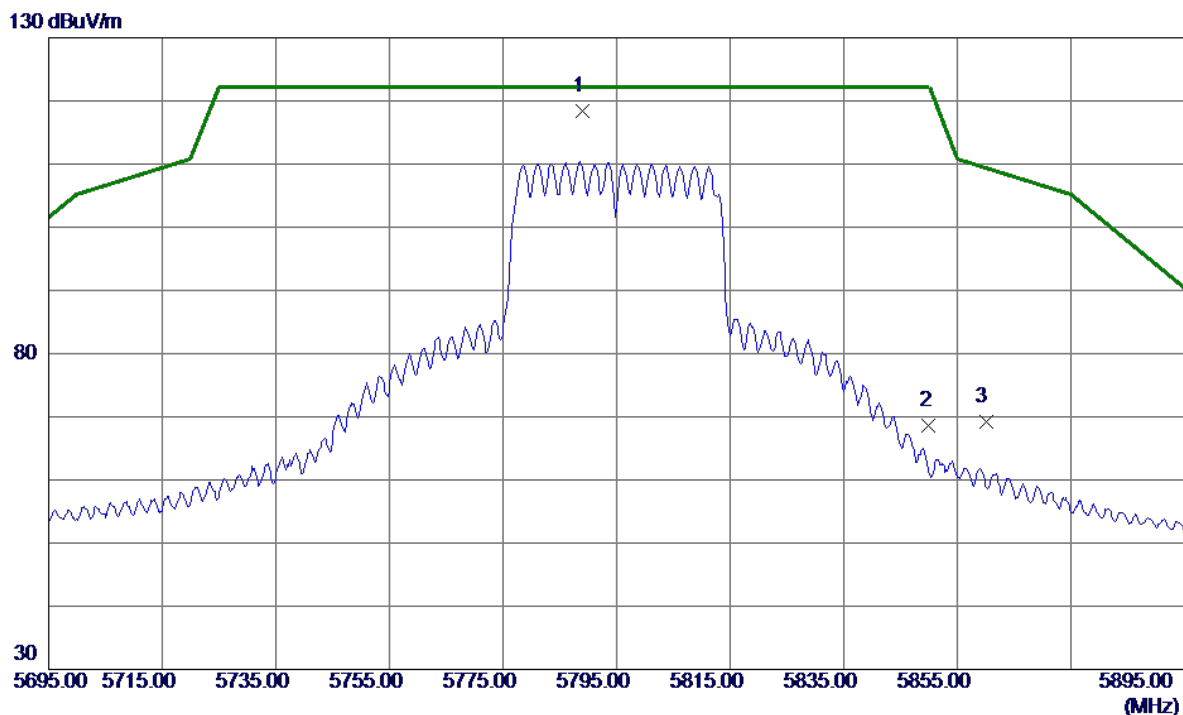


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5788.9000    | 104.87                     | 13.53                   | 118.40                    | 122.20          | -3.80        | Peak     | No Limit |
| 2   | 5850.0000    | 54.96                      | 13.73                   | 68.69                     | 122.20          | -53.51       | Peak     |          |
| 3   | 5860.0000    | 55.43                      | 13.76                   | 69.19                     | 109.40          | -40.21       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT40) Mode 5795 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

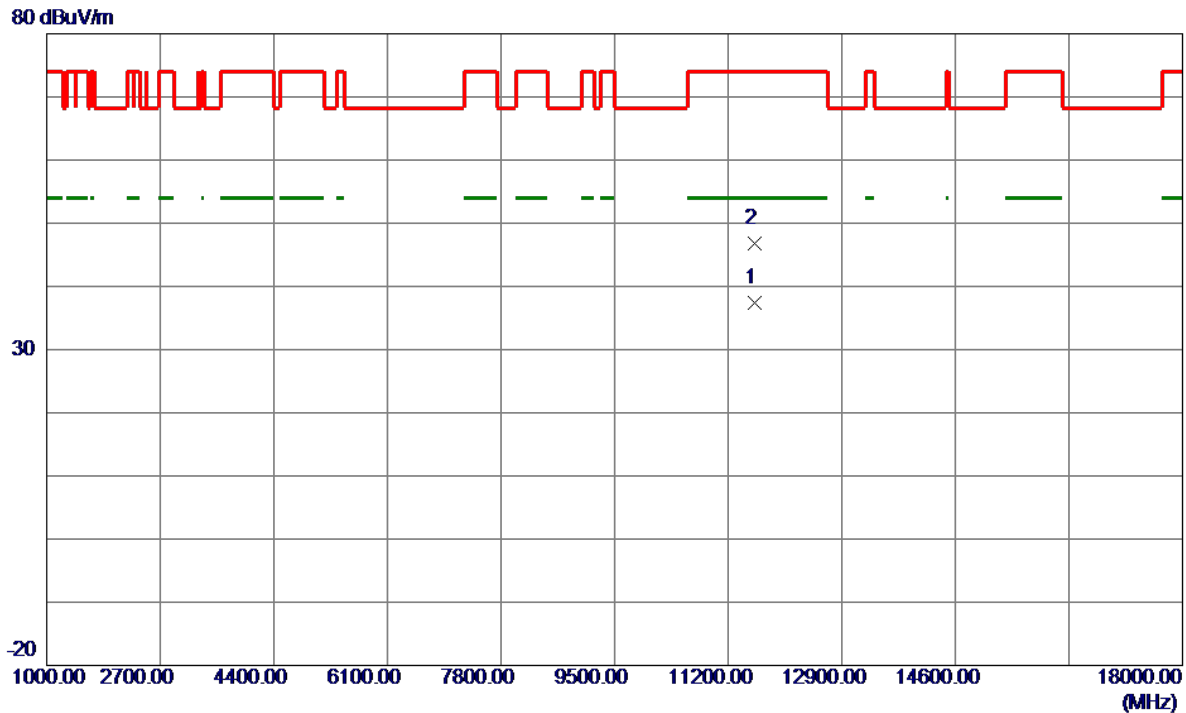


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11587.7750   | 29.04                      | 8.38                    | 37.42                     | 54.00           | -16.58       | AVG      |         |
| 2   | 11592.3750   | 38.40                      | 8.38                    | 46.78                     | 74.00           | -27.22       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT80) Mode 5775 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

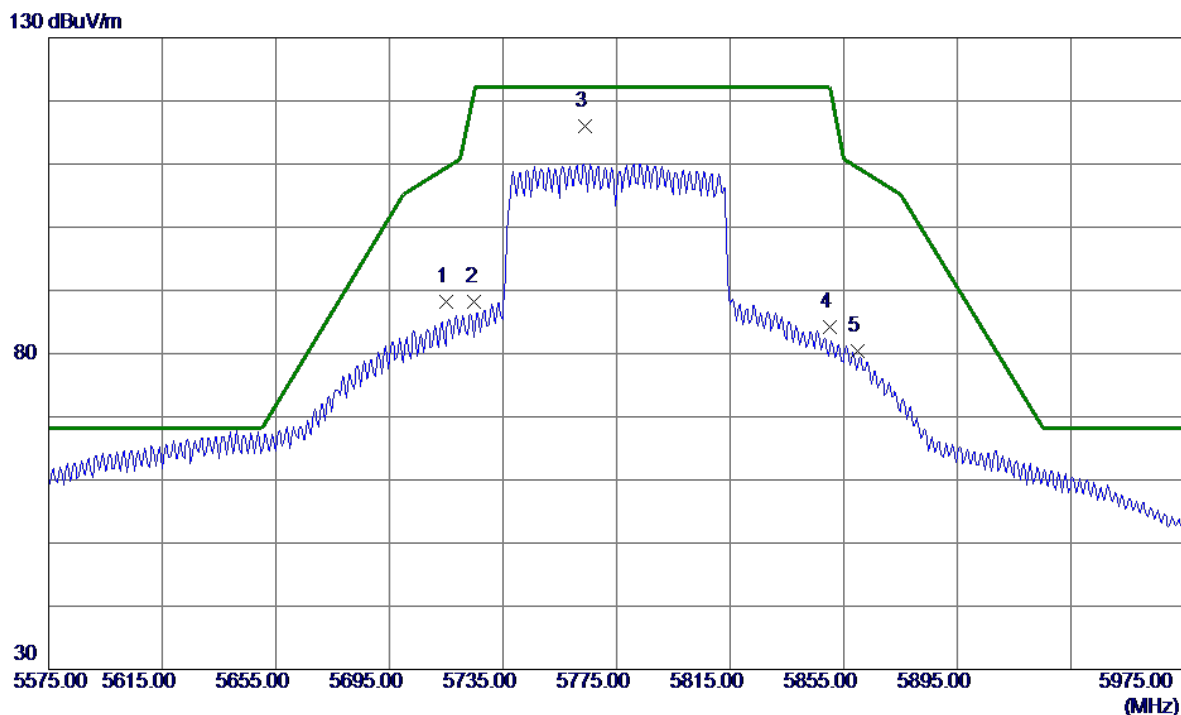


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 74.93                      | 13.30                   | 88.23                     | 109.40          | -21.17       | Peak     |          |
| 2   | 5725.0000    | 74.91                      | 13.33                   | 88.24                     | 122.20          | -33.96       | Peak     |          |
| 3 * | 5763.8000    | 102.63                     | 13.46                   | 116.09                    | 122.20          | -6.11        | Peak     | No Limit |
| 4   | 5850.0000    | 70.55                      | 13.73                   | 84.28                     | 122.20          | -37.92       | Peak     |          |
| 5   | 5860.0000    | 66.62                      | 13.76                   | 80.38                     | 109.40          | -29.02       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT80) Mode 5775 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

80 dBuV/m

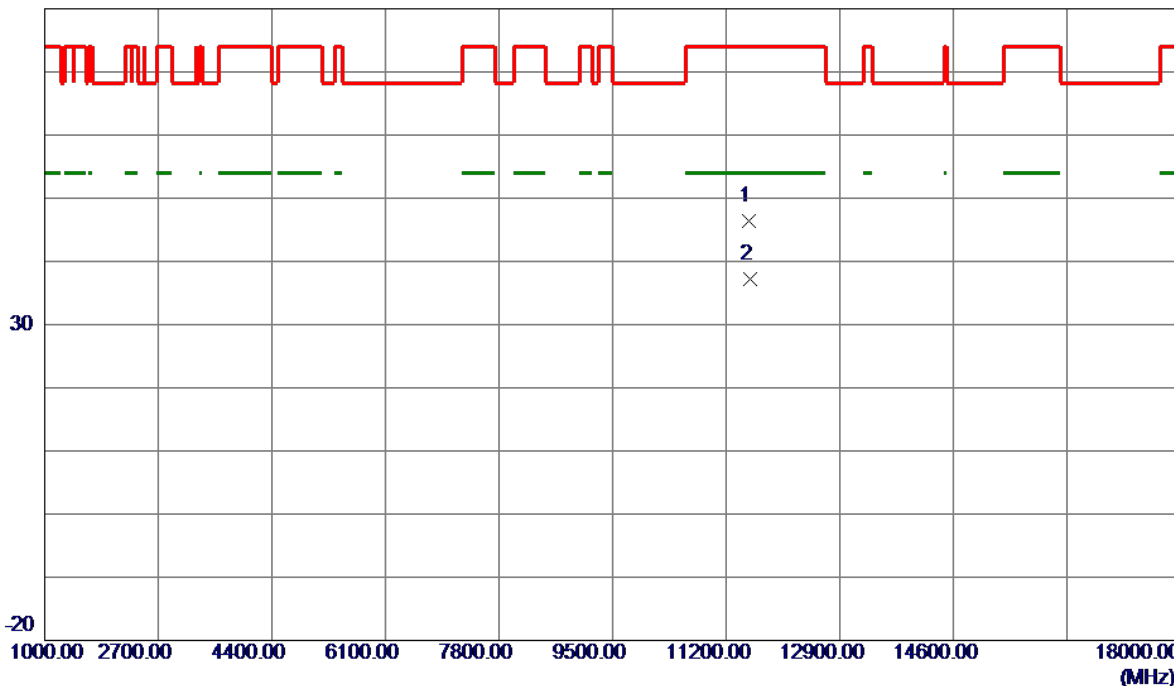


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11549.0500   | 37.99                      | 8.42                    | 46.41                     | 74.00           | -27.59       | Peak     |         |
| 2 * | 11563.4500   | 28.75                      | 8.40                    | 37.15                     | 54.00           | -16.85       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5745 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

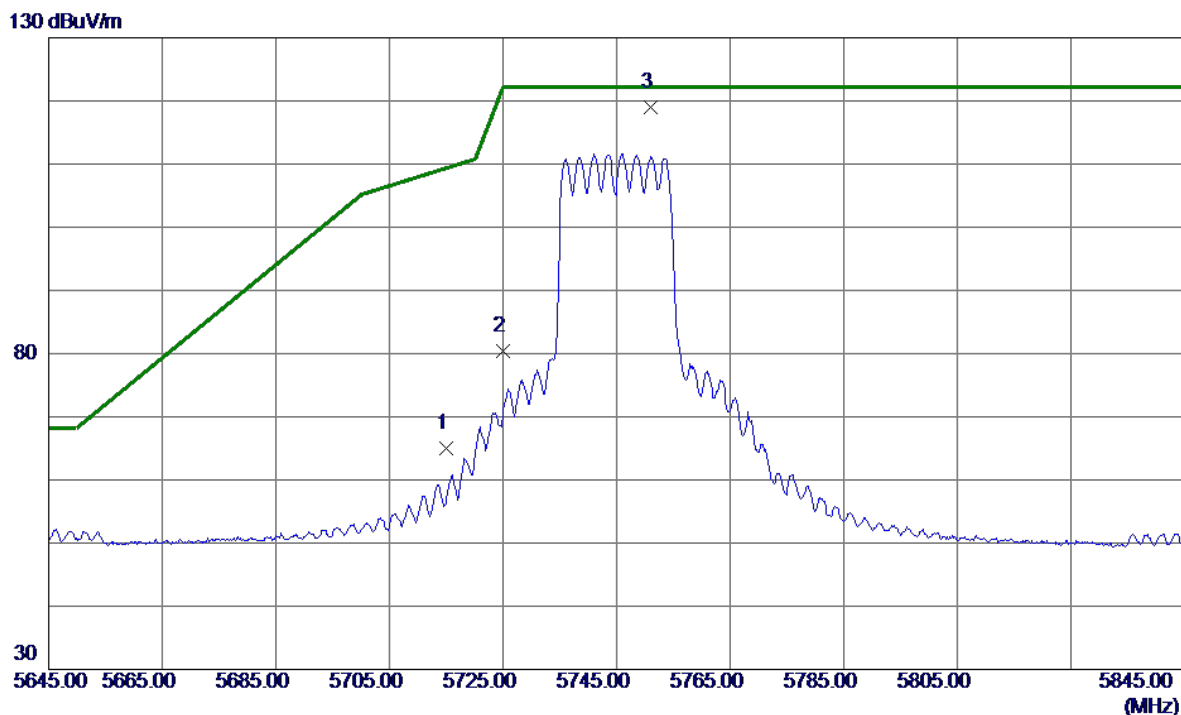


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 51.61                      | 13.30                   | 64.91                     | 109.40          | -44.49       | Peak     |          |
| 2   | 5725.0000    | 67.05                      | 13.33                   | 80.38                     | 122.20          | -41.82       | Peak     |          |
| 3 * | 5750.9000    | 105.56                     | 13.42                   | 118.98                    | 122.20          | -3.22        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5745 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

80 dBuV/m

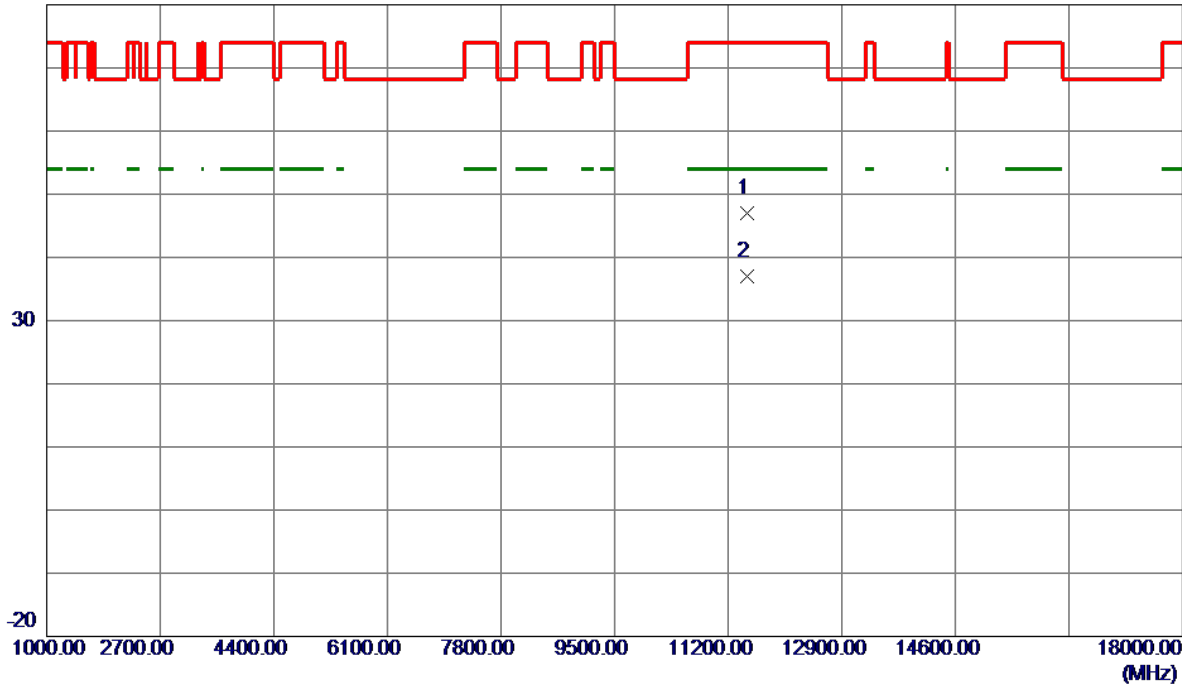


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11484.5500   | 38.59                      | 8.45                    | 47.04                     | 74.00           | -26.96       | Peak     |         |
| 2 * | 11491.3000   | 28.60                      | 8.46                    | 37.06                     | 54.00           | -16.94       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5785 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

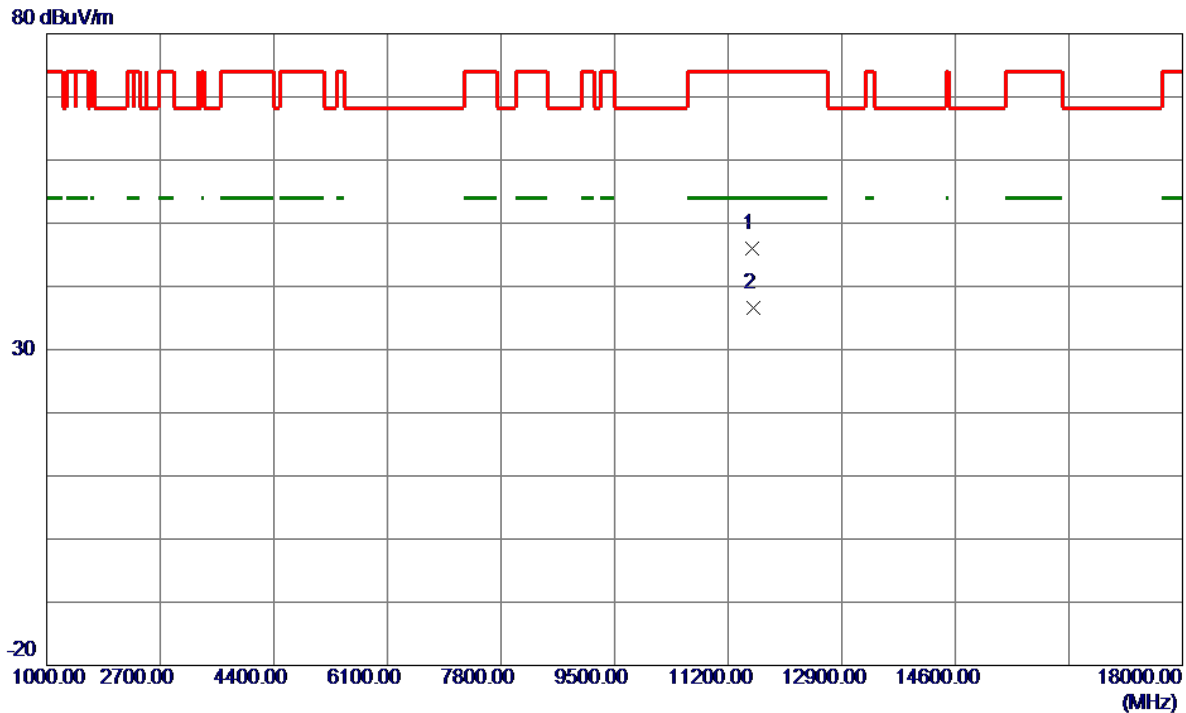


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11561.6750   | 37.60                      | 8.41                    | 46.01                     | 74.00           | -27.99       | Peak     |         |
| 2 * | 11571.3500   | 28.27                      | 8.40                    | 36.67                     | 54.00           | -17.33       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5825 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

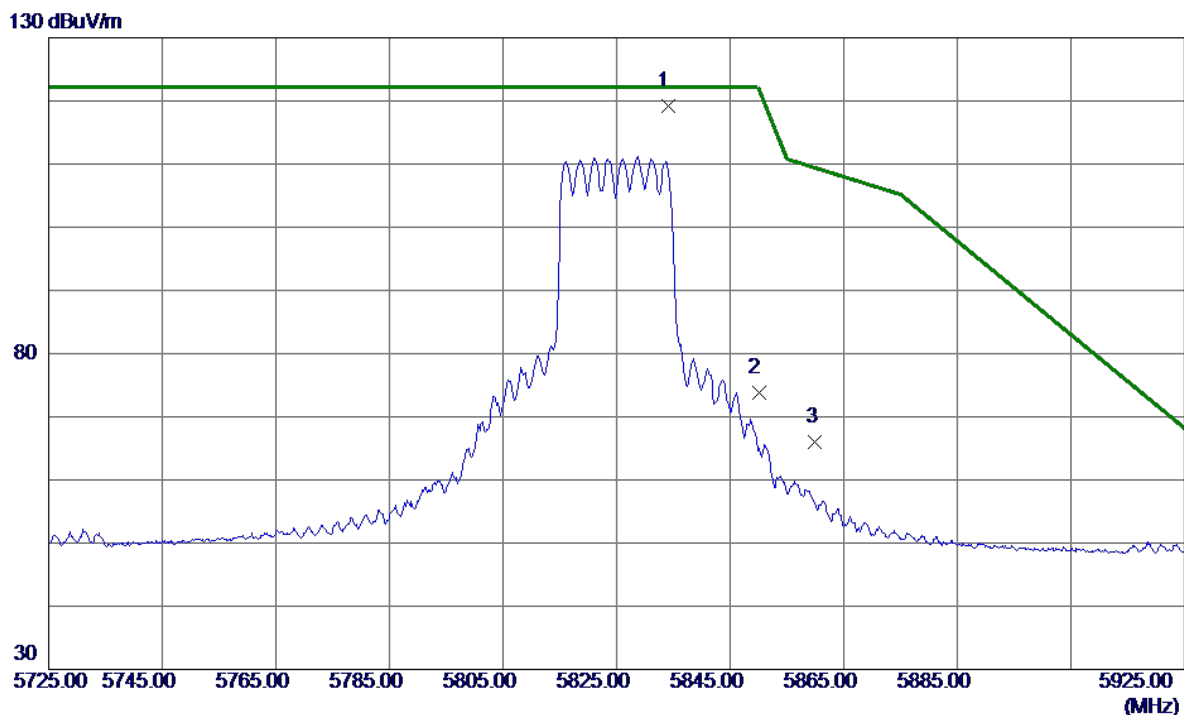


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5834.0000    | 105.49                     | 13.68                   | 119.17                    | 122.20          | -3.03        | Peak     | No Limit |
| 2   | 5850.0000    | 60.05                      | 13.73                   | 73.78                     | 122.20          | -48.42       | Peak     |          |
| 3   | 5860.0000    | 52.28                      | 13.76                   | 66.04                     | 109.40          | -43.36       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5825 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

80 dBuV/m

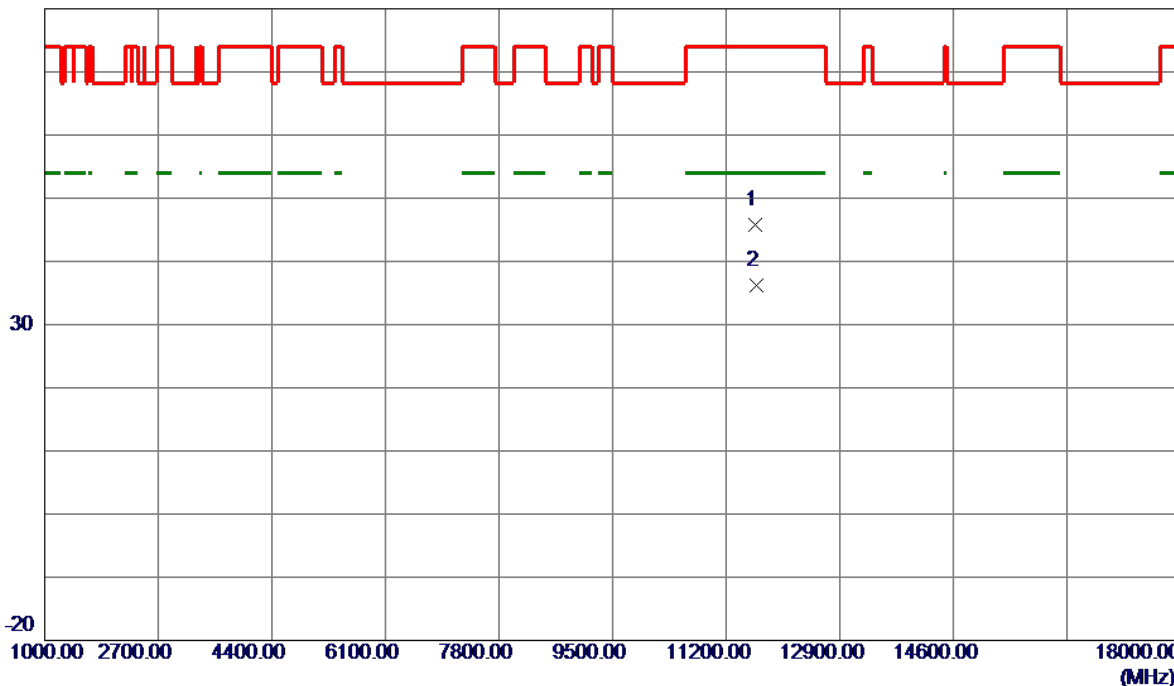


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11631.8500   | 37.38                      | 8.34                    | 45.72                     | 74.00           | -28.28       | Peak     |         |
| 2 * | 11651.3750   | 27.81                      | 8.32                    | 36.13                     | 54.00           | -17.87       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE40) Mode 5755 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

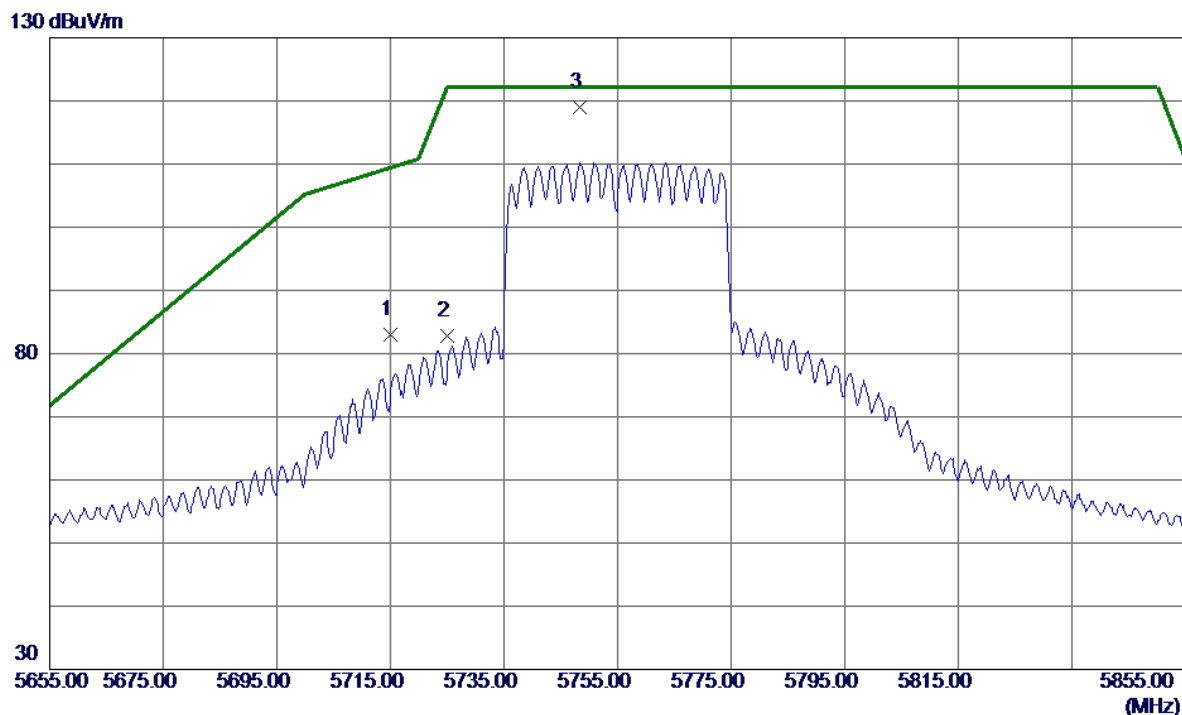


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 69.65                      | 13.30                   | 82.95                     | 109.40          | -26.45       | Peak     |          |
| 2   | 5725.0000    | 69.39                      | 13.33                   | 82.72                     | 122.20          | -39.48       | Peak     |          |
| 3 * | 5748.3000    | 105.52                     | 13.41                   | 118.93                    | 122.20          | -3.27        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE40) Mode 5755 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

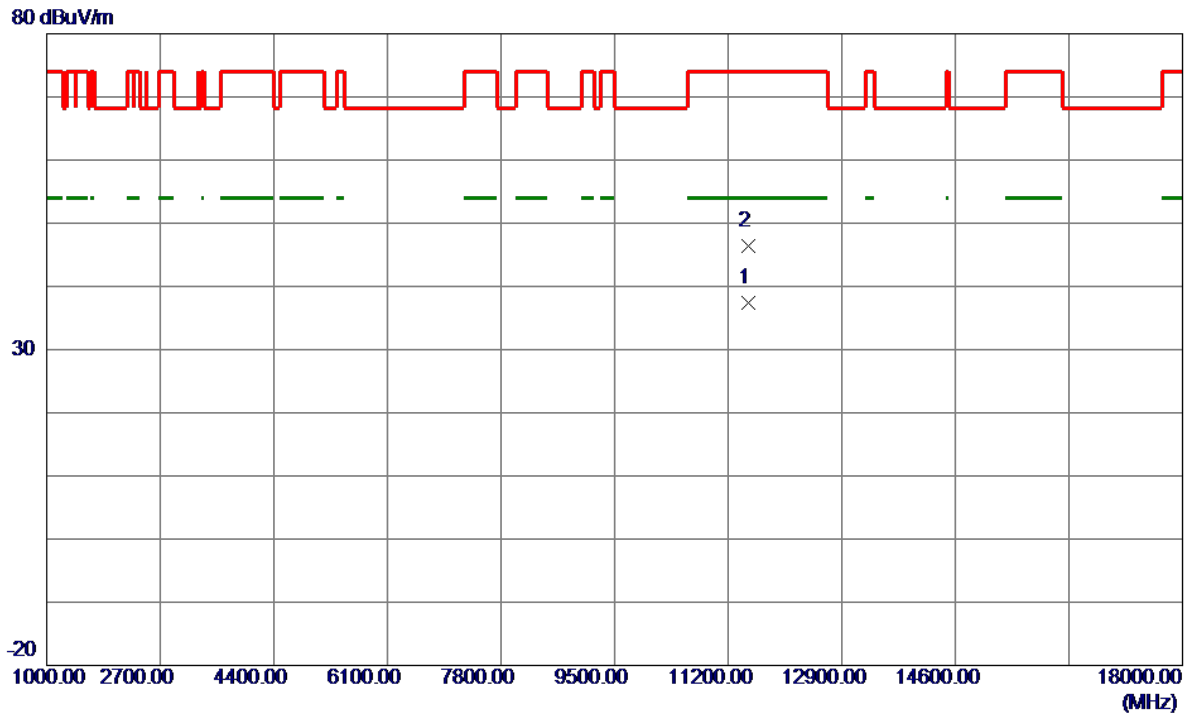


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11502.9000   | 28.98                      | 8.46                    | 37.44                     | 54.00           | -16.56       | AVG      |         |
| 2   | 11511.3500   | 38.04                      | 8.45                    | 46.49                     | 74.00           | -27.51       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE40) Mode 5795 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

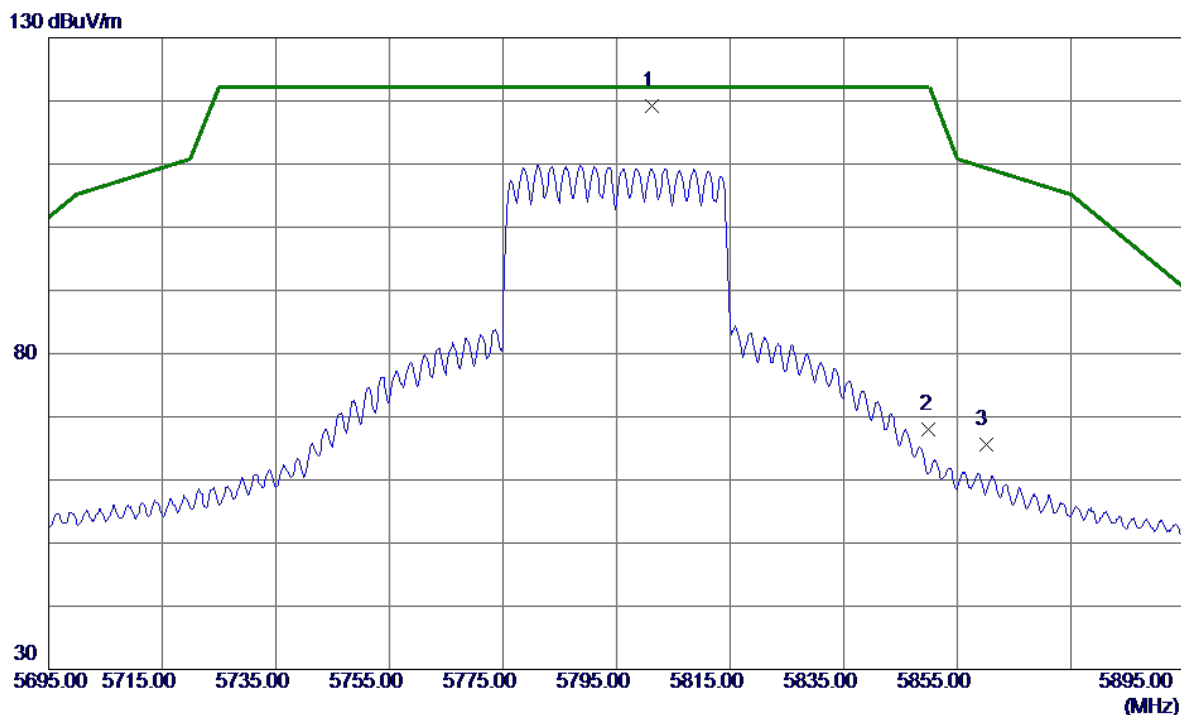


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5801.2000    | 105.59                     | 13.57                   | 119.16                    | 122.20          | -3.04        | Peak     | No Limit |
| 2   | 5850.0000    | 54.30                      | 13.73                   | 68.03                     | 122.20          | -54.17       | Peak     |          |
| 3   | 5860.0000    | 51.78                      | 13.76                   | 65.54                     | 109.40          | -43.86       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE40) Mode 5795 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

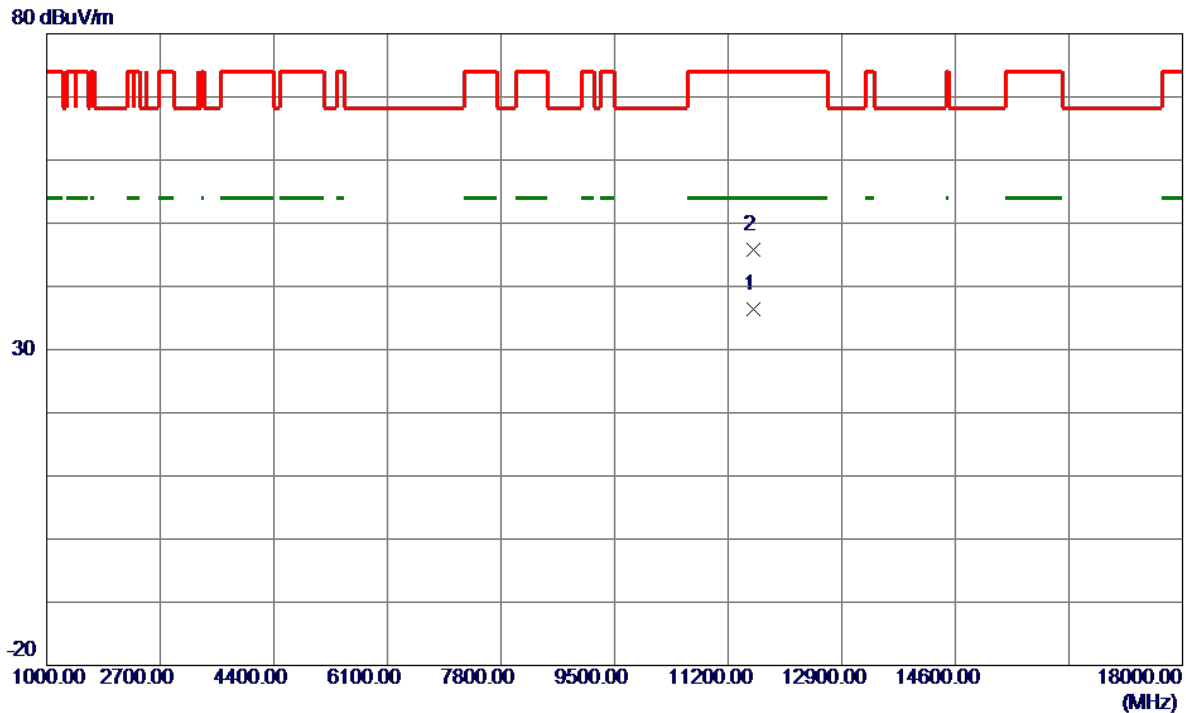


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11582.8500   | 27.94                      | 8.39                    | 36.33                     | 54.00           | -17.67       | AVG      |         |
| 2   | 11585.7000   | 37.44                      | 8.38                    | 45.82                     | 74.00           | -28.18       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE80) Mode 5775 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

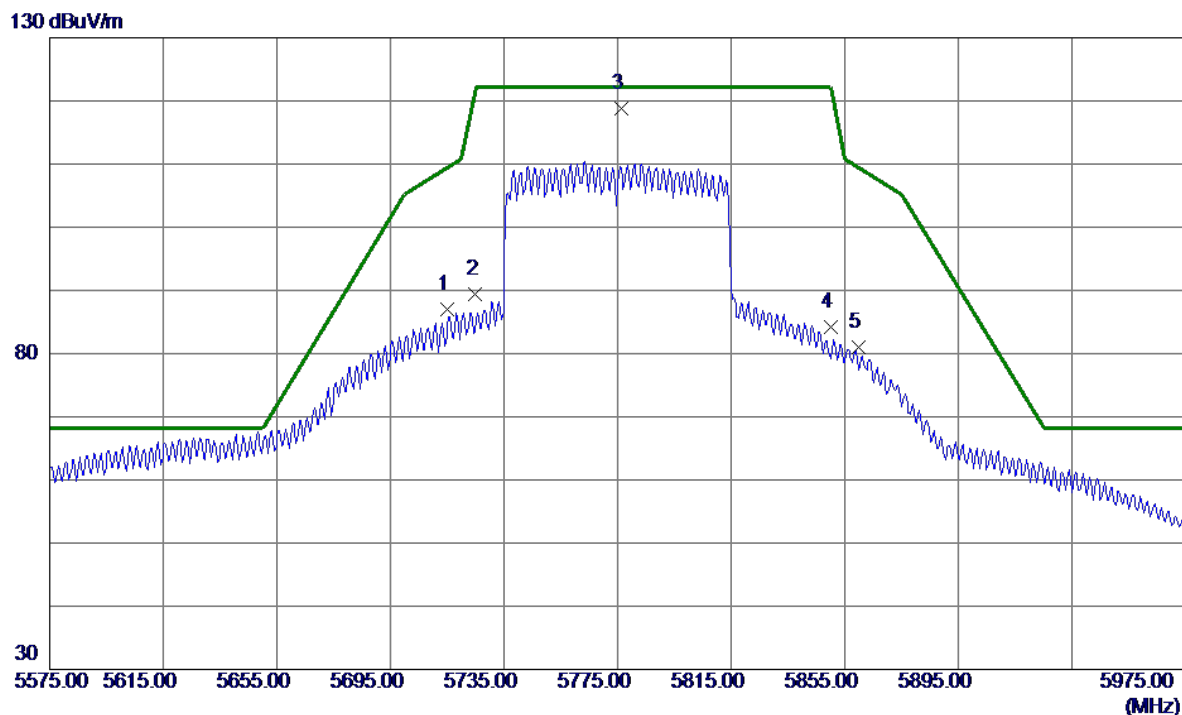


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 73.64                      | 13.30                   | 86.94                     | 109.40          | -22.46       | Peak     |          |
| 2   | 5725.0000    | 76.03                      | 13.33                   | 89.36                     | 122.20          | -32.84       | Peak     |          |
| 3 * | 5776.2000    | 105.39                     | 13.49                   | 118.88                    | 122.20          | -3.32        | Peak     | No Limit |
| 4   | 5850.0000    | 70.48                      | 13.73                   | 84.21                     | 122.20          | -37.99       | Peak     |          |
| 5   | 5860.0000    | 67.29                      | 13.76                   | 81.05                     | 109.40          | -28.35       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE80) Mode 5775 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

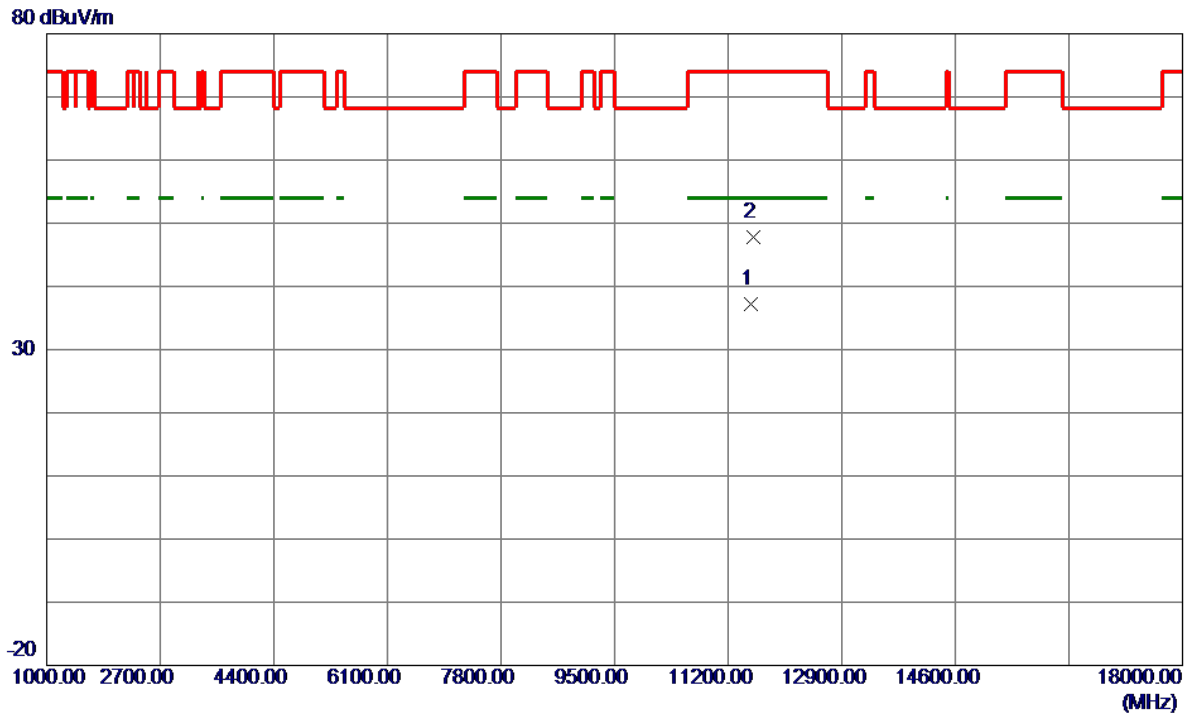


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11542.8000   | 28.74                      | 8.42                    | 37.16                     | 54.00           | -16.84       | AVG      |         |
| 2   | 11572.4500   | 39.38                      | 8.40                    | 47.78                     | 74.00           | -26.22       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5785 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

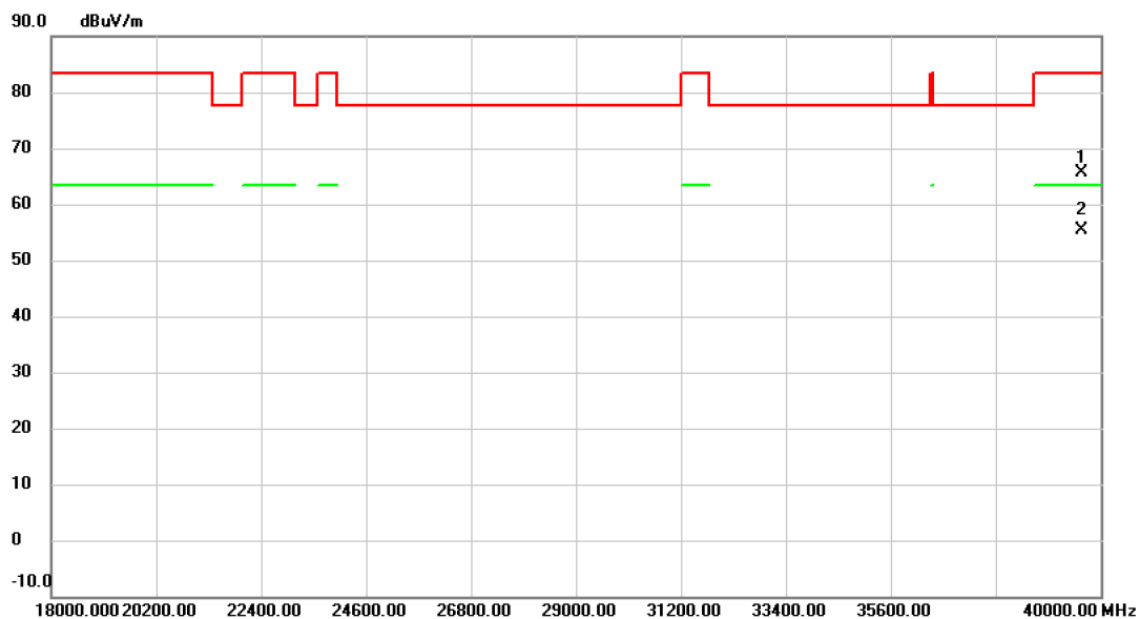


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 39604.000    | 53.73                    | 11.96                   | 65.69                      | 83.50           | -17.81       | peak     |         |
| 2   | *   | 39604.000    | 43.48                    | 11.96                   | 55.44                      | 63.50           | -8.06        | AVG      |         |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT20) Mode 5785 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

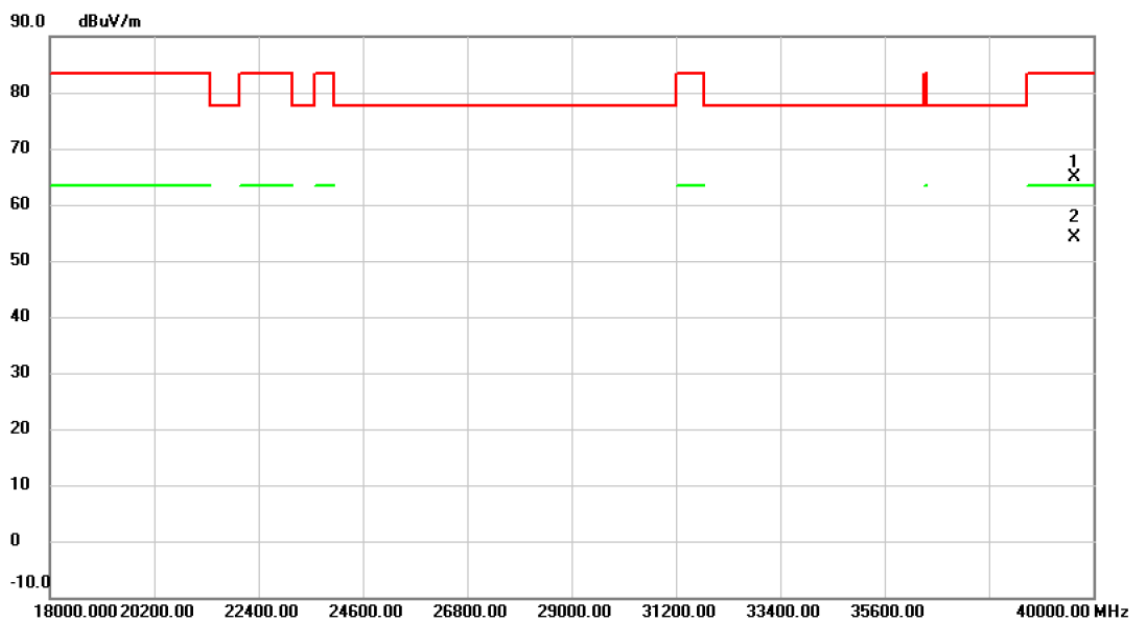

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 39593.000    | 52.81                    | 11.96                   | 64.77                      | 83.50           | -18.73       | peak     |         |
| 2   | *   | 39593.000    | 42.15                    | 11.96                   | 54.11                      | 63.50           | -9.39        | AVG      |         |

## REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX E - BANDWIDTH**

|           |                  |
|-----------|------------------|
| Test Mode | UNII-1_TX A Mode |
|-----------|------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36      | 5180            | 36.589                | 17.800                        |
| 40      | 5200            | 33.889                | 17.800                        |
| 48      | 5240            | 27.890                | 17.600                        |

CH36

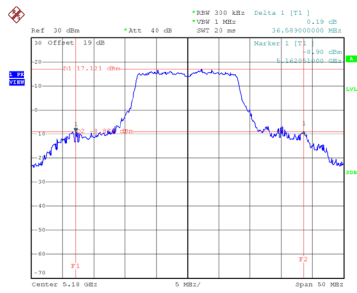


Date: 1.FEB.2024 06:00:29

CH40  
26 dB Bandwidth

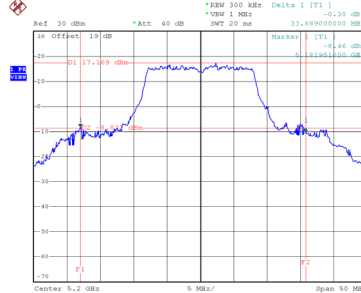


Date: 1.FEB.2024 06:01:38

CH48

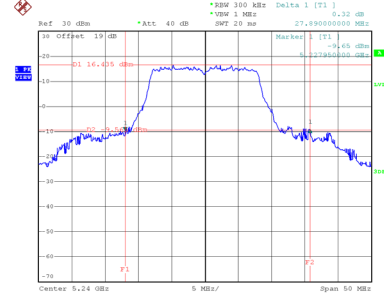


Date: 1.FEB.2024 06:03:46


99 % Occupied Bandwidth

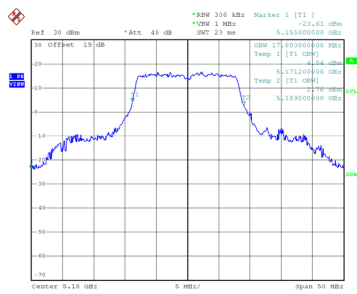

Date: 1.FEB.2024 06:00:04

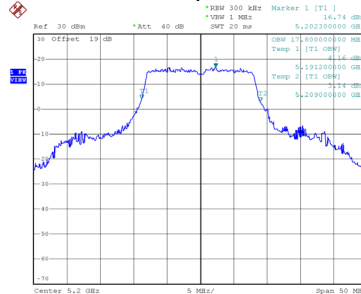

Date: 1.FEB.2024 06:00:56

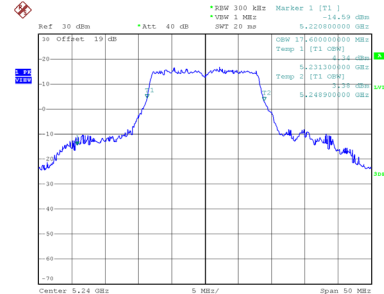


Date: 1.FEB.2024 06:02:59

|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-1_TX AC(VHT20) Mode |
|-----------|--------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36      | 5180            | 27.288                | 18.500                        |
| 40      | 5200            | 29.350                | 18.600                        |
| 48      | 5240            | 25.090                | 18.500                        |

CH36

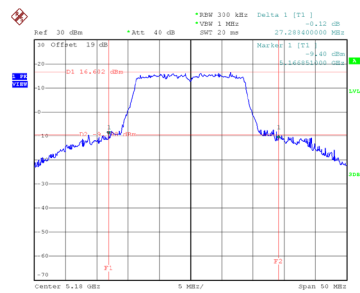


Date: 1.FEB.2024 06:34:10

CH40  
26 dB Bandwidth

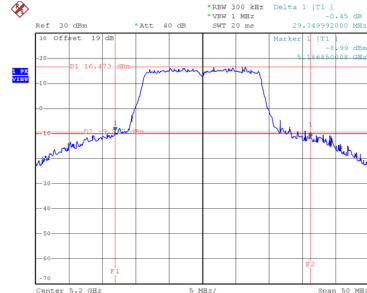


Date: 1.FEB.2024 06:35:24

CH48

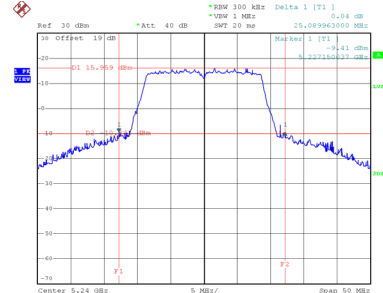


Date: 1.FEB.2024 06:36:55


99 % Occupied Bandwidth

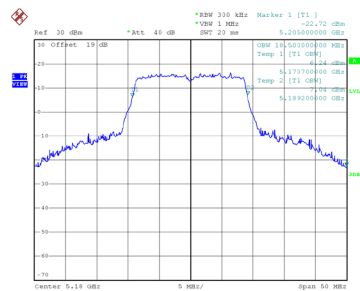

Date: 1.FEB.2024 06:33:41

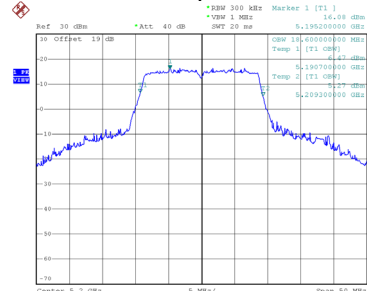

Date: 1.FEB.2024 06:34:54

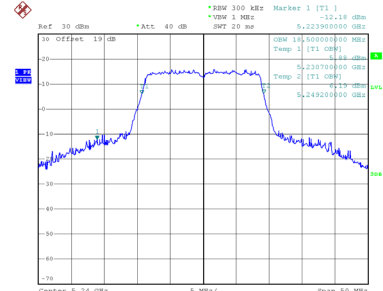


Date: 1.FEB.2024 06:36:12

|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-1_TX AC(VHT40) Mode |
|-----------|--------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 38      | 5190            | 70.198                | 38.200                        |
| 46      | 5230            | 72.500                | 38.000                        |

CH38

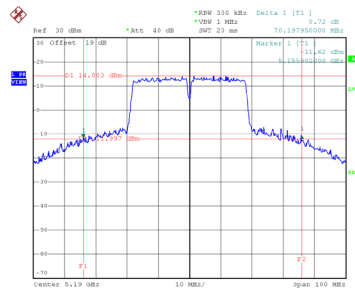


Date: 1.FEB.2024 07:08:27

CH46  
26 dB Bandwidth

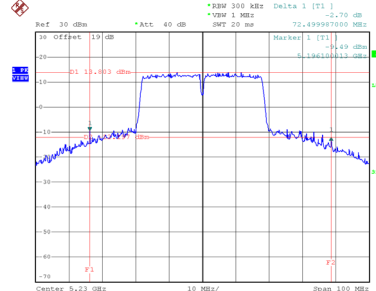


Date: 1.FEB.2024 07:10:10

99 % Occupied Bandwidth

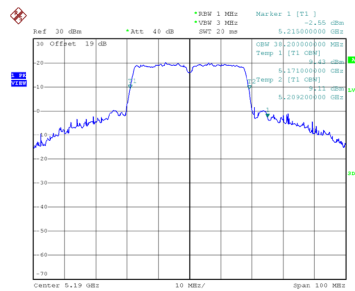

Date: 1.FEB.2024 07:07:50

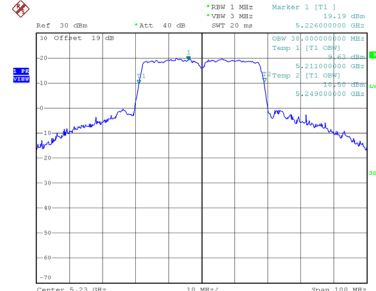


Date: 1.FEB.2024 07:09:47

|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-1_TX AC(VHT80) Mode |
|-----------|--------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 42      | 5210            | 97.796                | 76.400                        |

## CH42 26 dB Bandwidth

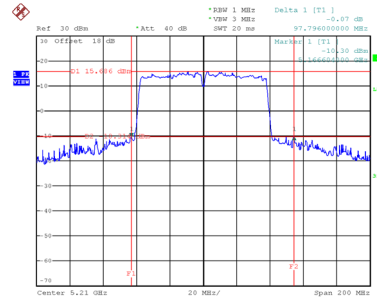

Date: 14.JUN.2024 17:52:36

## 99 % Occupied Bandwidth

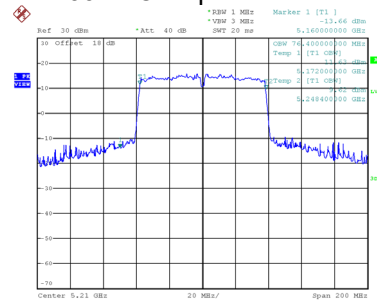


Date: 14.JUN.2024 17:51:11

|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-1_TX AX(HE20) Mode |
|-----------|-------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36      | 5180            | 31.249                | 19.300                        |
| 40      | 5200            | 29.490                | 19.400                        |
| 48      | 5240            | 24.199                | 19.200                        |

CH36

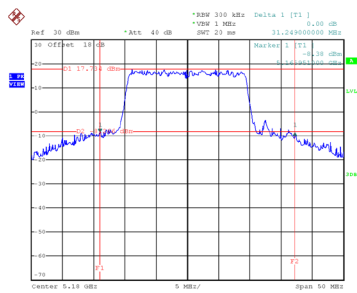


Date: 14.JUN.2024 18:46:21

CH40  
26 dB Bandwidth

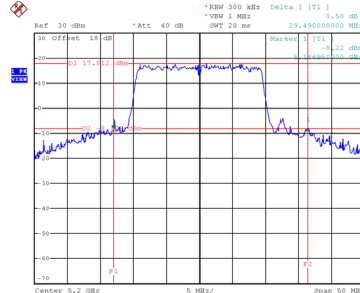


Date: 14.JUN.2024 18:47:11

CH48

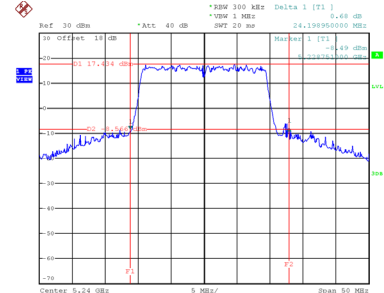


Date: 14.JUN.2024 18:49:25


99 % Occupied Bandwidth

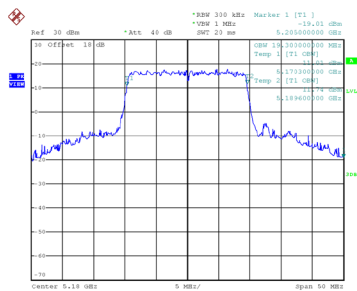

Date: 14.JUN.2024 18:45:59

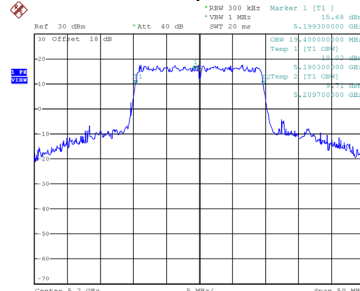

Date: 14.JUN.2024 18:46:49

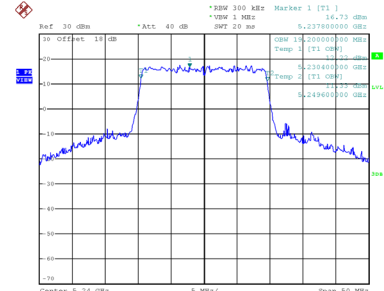


Date: 14.JUN.2024 18:48:55

|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-1_TX AX(HE40) Mode |
|-----------|-------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 38      | 5190            | 47.597                | 38.200                        |
| 46      | 5230            | 42.790                | 38.200                        |

CH38

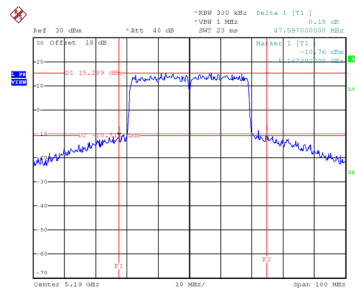


Date: 14.JUN.2024 19:06:27

CH46  
26 dB Bandwidth

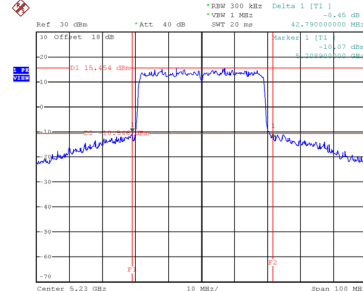


Date: 14.JUN.2024 19:07:39

99 % Occupied Bandwidth

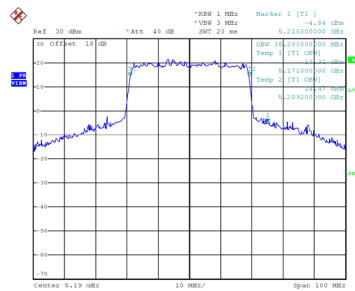

Date: 14.JUN.2024 19:05:52

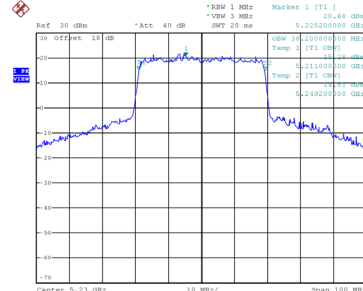


Date: 14.JUN.2024 19:07:07

|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-1_TX AX(HE80) Mode |
|-----------|-------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 42      | 5210            | 107.190               | 77.600                        |

## CH42 26 dB Bandwidth

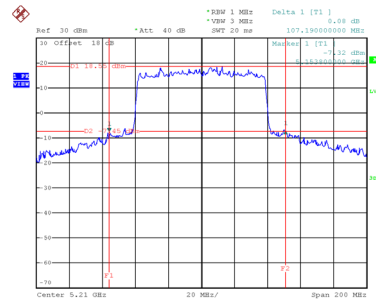

Date: 14.JUN.2024 19:17:58

## 99 % Occupied Bandwidth

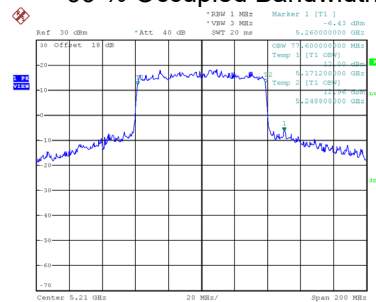


Date: 14.JUN.2024 19:17:29

|           |                   |
|-----------|-------------------|
| Test Mode | UNII-2A_TX A Mode |
|-----------|-------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 52      | 5260            | 21.850                | 17.300                        |
| 60      | 5300            | 21.650                | 17.300                        |
| 64      | 5320            | 21.750                | 17.300                        |

CH52

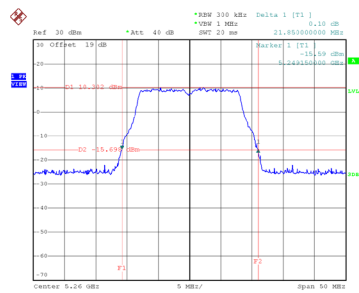


Date: 1.FEB.2024 06:05:17

CH60  
26 dB Bandwidth

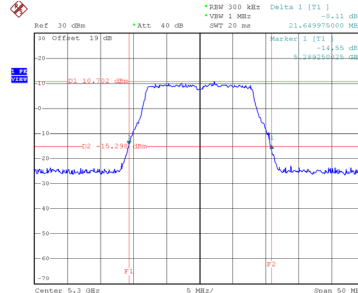


Date: 1.FEB.2024 06:06:29

CH64

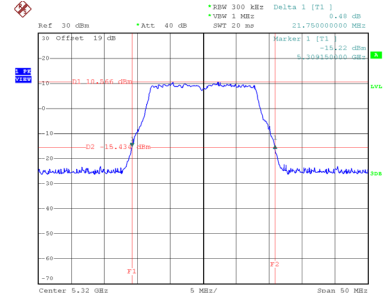


Date: 1.FEB.2024 06:07:39


99 % Occupied Bandwidth

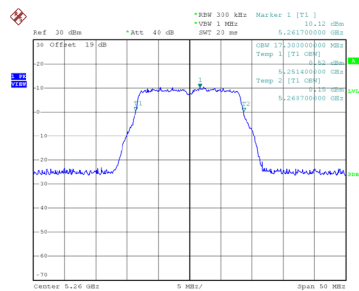

Date: 1.FEB.2024 06:04:38

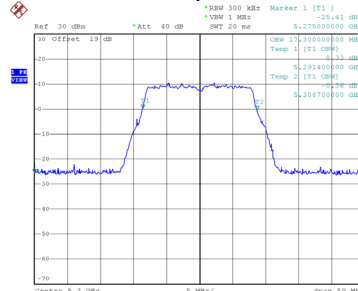

Date: 1.FEB.2024 06:05:49

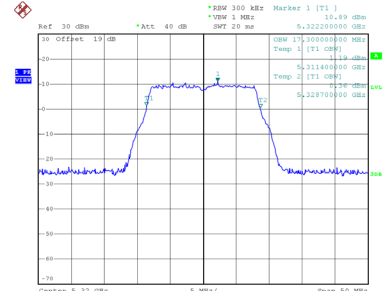


Date: 1.FEB.2024 06:07:01


|           |                           |
|-----------|---------------------------|
| Test Mode | UNII-2A_TX AC(VHT20) Mode |
|-----------|---------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 52      | 5260            | 22.089                | 18.300                        |
| 60      | 5300            | 22.100                | 18.300                        |
| 64      | 5320            | 22.009                | 18.300                        |


CH52

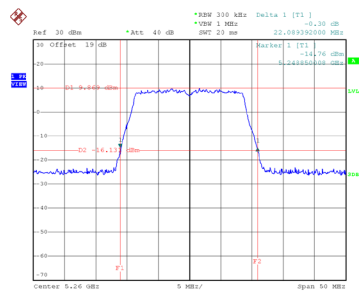




CH60  
26 dB Bandwidth

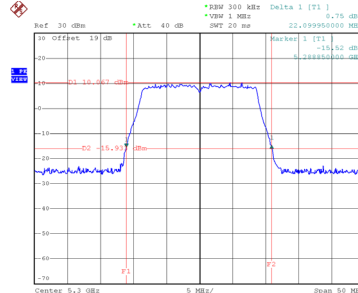

CH64

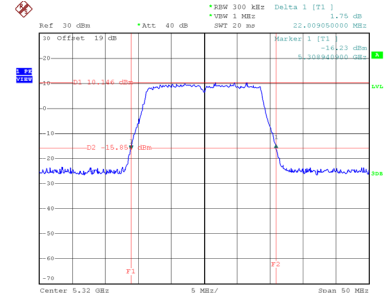


99 % Occupied Bandwidth

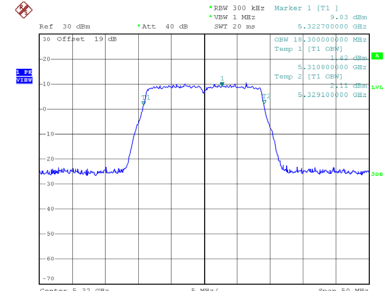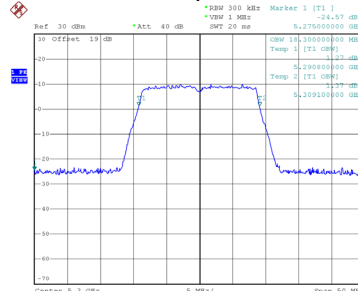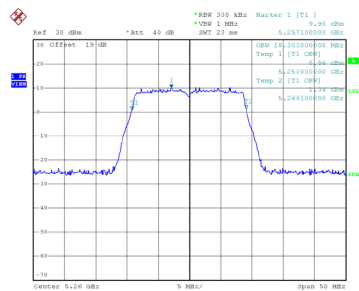

|           |                           |
|-----------|---------------------------|
| Test Mode | UNII-2A_TX AC(VHT40) Mode |
|-----------|---------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 54      | 5270            | 40.190                | 37.200                        |
| 62      | 5310            | 40.400                | 37.200                        |

## CH54

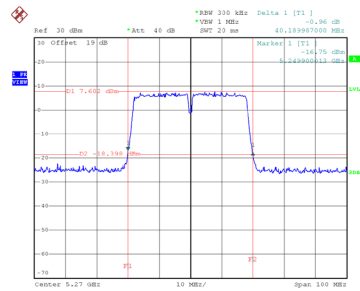


Date: 1.FEB.2024 07:11:39

## CH62 26 dB Bandwidth

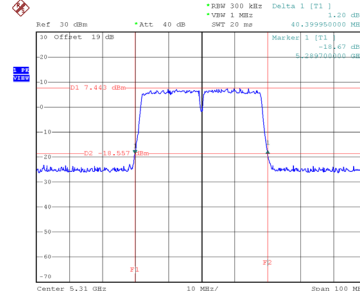


Date: 1.FEB.2024 07:13:02

## 99 % Occupied Bandwidth

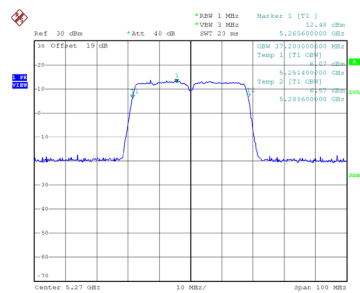

Date: 1.FEB.2024 07:10:56

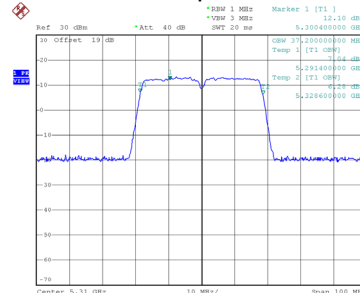


Date: 1.FEB.2024 07:12:21

|           |                           |
|-----------|---------------------------|
| Test Mode | UNII-2A_TX AC(VHT80) Mode |
|-----------|---------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 58      | 5290            | 83.000                | 76.000                        |

## CH58 26 dB Bandwidth

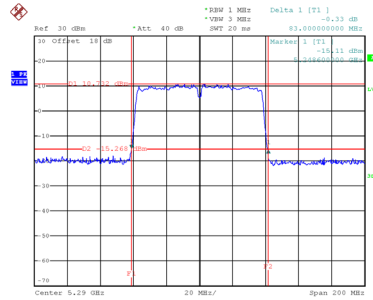

Date: 14.JUN.2024 17:54:31

## 99 % Occupied Bandwidth

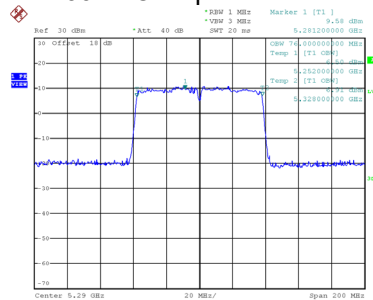


Date: 14.JUN.2024 17:54:02

|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-2A_TX AX(HE20) Mode |
|-----------|--------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 52      | 5260            | 21.950                | 19.200                        |
| 60      | 5300            | 21.809                | 19.200                        |
| 64      | 5320            | 21.790                | 19.300                        |

CH52

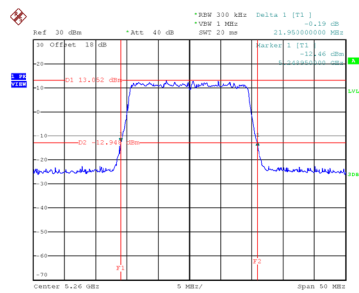


Date: 14.JUN.2024 18:50:08

CH60  
26 dB Bandwidth

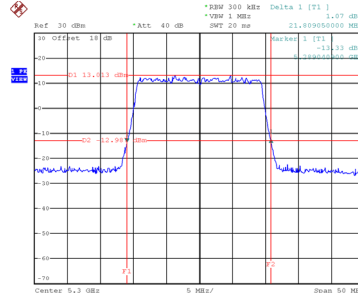


Date: 14.JUN.2024 18:54:38

CH64

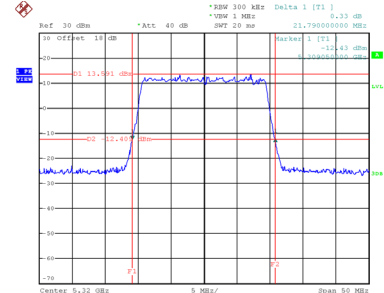


Date: 14.JUN.2024 18:55:36


99 % Occupied Bandwidth

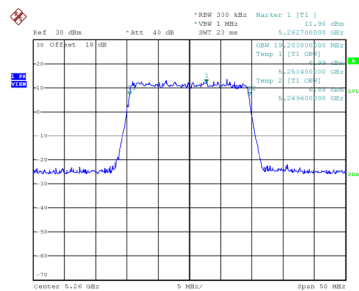

Date: 14.JUN.2024 18:50:26

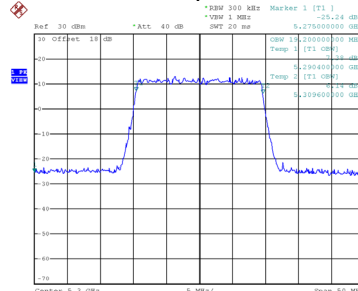

Date: 14.JUN.2024 18:54:15

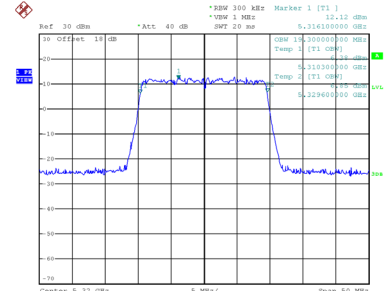


Date: 14.JUN.2024 18:55:13

|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-2A_TX AX(HE40) Mode |
|-----------|--------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 54      | 5270            | 40.100                | 38.000                        |
| 62      | 5310            | 39.900                | 38.200                        |

CH54

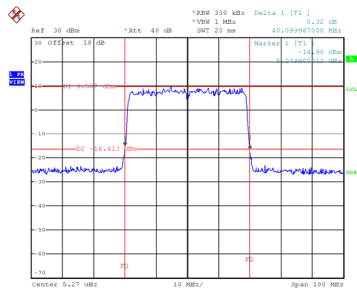


Date: 14.JUN.2024 19:09:03

CH62  
26 dB Bandwidth

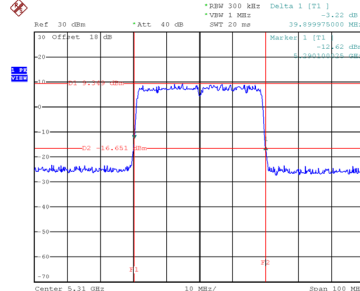


Date: 14.JUN.2024 19:10:15

99 % Occupied Bandwidth

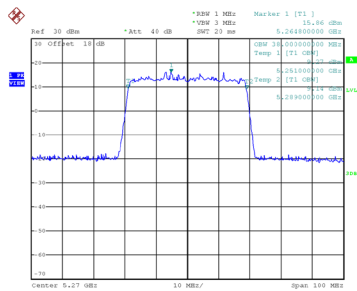

Date: 14.JUN.2024 19:08:30

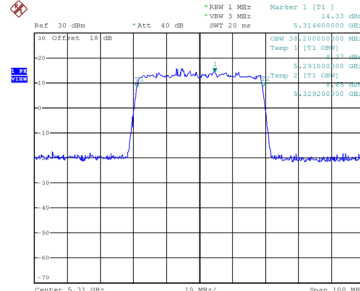


Date: 14.JUN.2024 19:09:41

|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-2A_TX AX(HE80) Mode |
|-----------|--------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 58      | 5290            | 82.600                | 77.600                        |

## CH58 26 dB Bandwidth

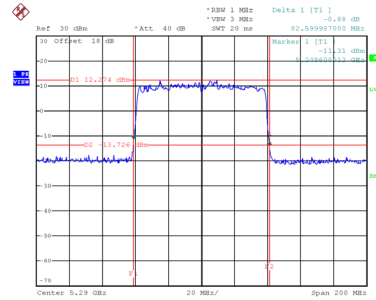

Date: 14.JUN.2024 19:19:03

## 99 % Occupied Bandwidth

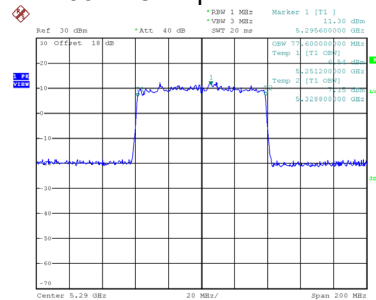


Date: 14.JUN.2024 19:18:34

|           |                                  |
|-----------|----------------------------------|
| Test Mode | UNII-1+UNII-2A_TX AX(HE160) Mode |
|-----------|----------------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 50      | 5250            | 163.996               | 157.600                       |

## CH50 26 dB Bandwidth

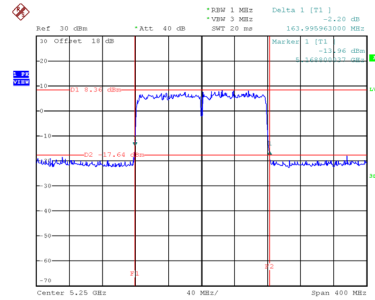

Date: 14.JUN.2024 19:28:32

## 99 % Occupied Bandwidth

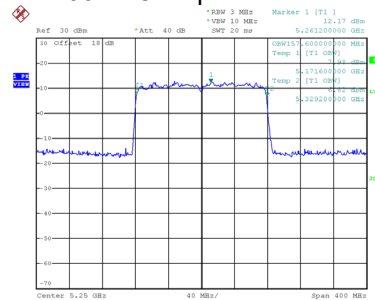


Date: 14.JUN.2024 19:23:45




## 99 % Occupied Bandwidth

### CH100

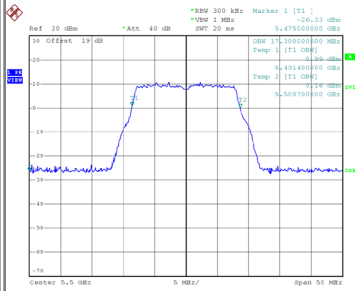


Date: 1.FEB.2024 06:09:28

### CH116

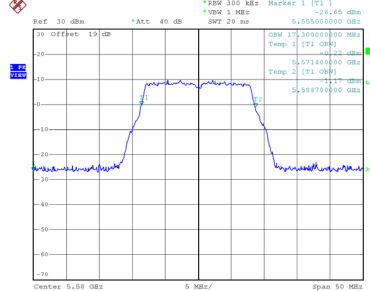


Date: 1.FEB.2024 06:09:46

### CH140

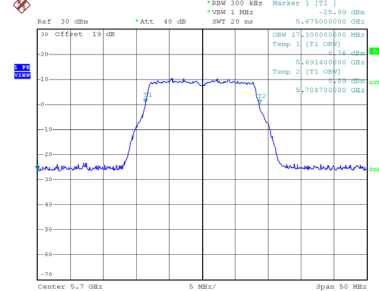

Date: 1.FEB.2024 06:11:07

### CH144

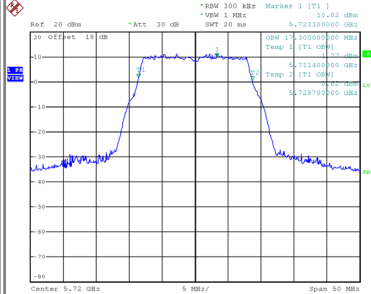


Date: 17.JUN.2024 10:45:39

|           |                           |
|-----------|---------------------------|
| Test Mode | UNII-2C_TX AC(VHT20) Mode |
|-----------|---------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 100     | 5500            | 22.150                | 18.300                        |
| 116     | 5580            | 21.989                | 18.300                        |
| 140     | 5700            | 22.100                | 18.300                        |
| 144     | 5720            | 15.850                | 17.300                        |

## 26 dB Bandwidth CH116

### CH100

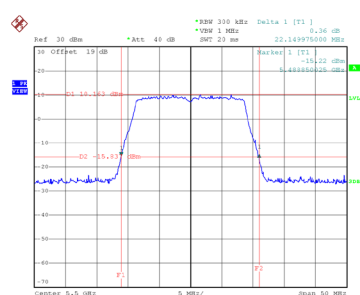


Date: 1.FEB.2024 06:45:01

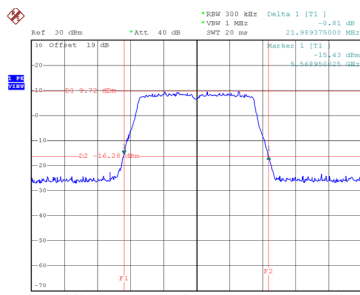


Date: 1.FEB.2024 06:46:37

### CH140

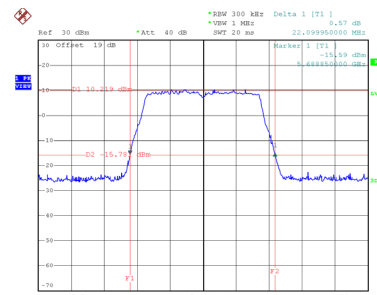


Date: 1.FEB.2024 06:48:16

### CH144

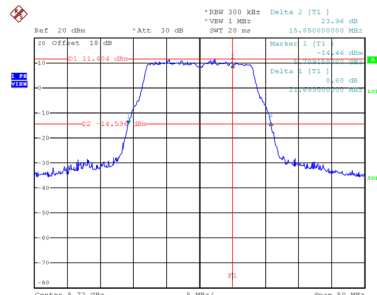


Date: 17.JUN.2024 11:12:40


## 99 % Occupied Bandwidth CH116

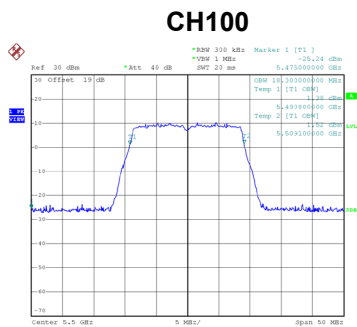


Date: 1.FEB.2024 06:44:21

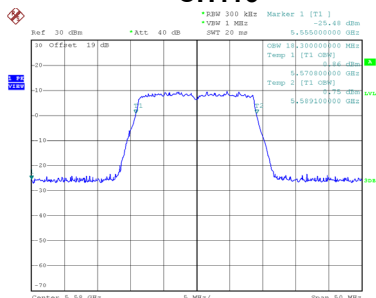

Date: 1.FEB.2024 06:45:57

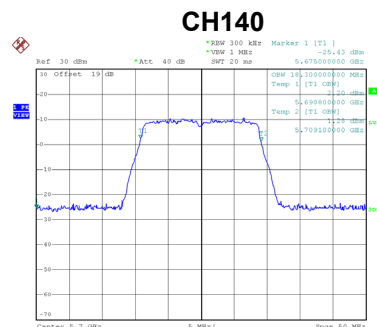

Date: 1.FEB.2024 06:47:37

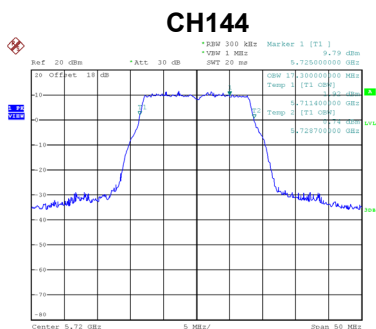


Date: 17.JUN.2024 11:08:29

|           |                           |
|-----------|---------------------------|
| Test Mode | UNII-2C_TX AC(VHT40) Mode |
|-----------|---------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 102     | 5510            | 40.100                | 37.200                        |
| 110     | 5550            | 40.100                | 37.200                        |
| 134     | 5670            | 40.100                | 37.200                        |
| 142     | 5710            | 35.100                | 37.200                        |

## 26 dB Bandwidth


### CH102

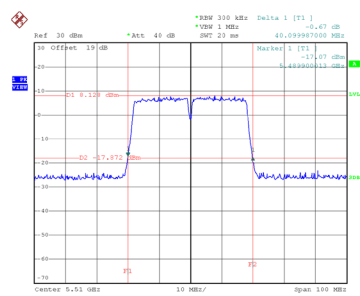


### CH110

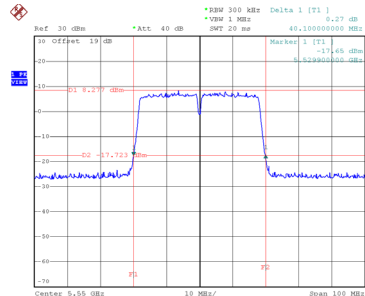


### CH134

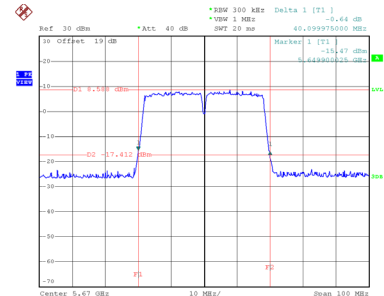

### CH142

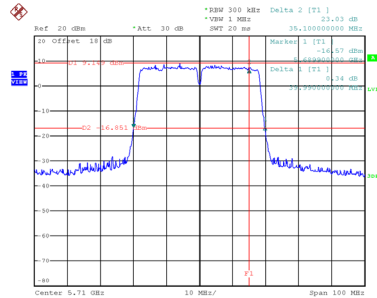


CH102

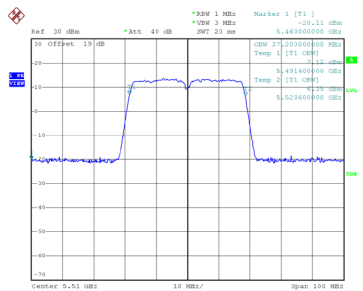


Date: 1.FEB.2024 07:13:34

99 % Occupied Bandwidth  
CH110

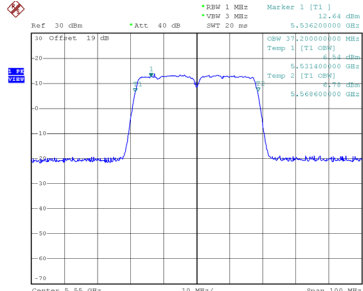


Date: 1.FEB.2024 07:14:52

CH134

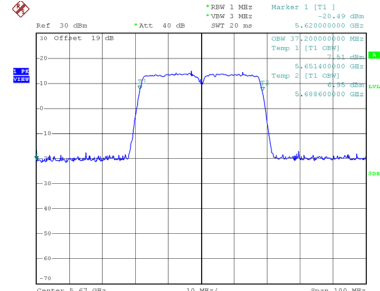

Date: 1.FEB.2024 07:16:15

CH142

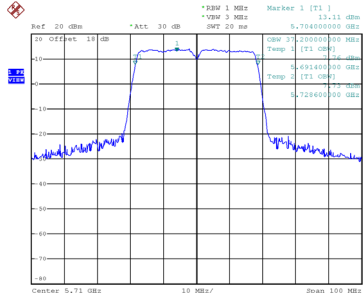


Date: 17.JUN.2024 11:23:23

|           |                           |
|-----------|---------------------------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode |
|-----------|---------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 106     | 5530            | 82.600                | 76.400                        |
| 122     | 5610            | 82.000                | 76.000                        |
| 138     | 5690            | 78.006                | 78.800                        |

CH106

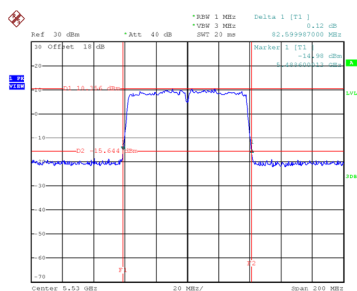


Date: 14.JUN.2024 17:55:55

CH122  
26 dB Bandwidth

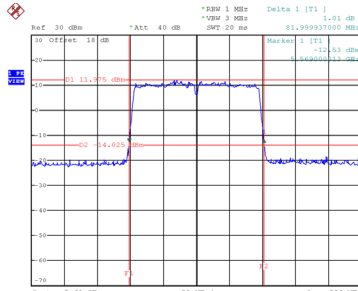


Date: 14.JUN.2024 17:57:11

CH138

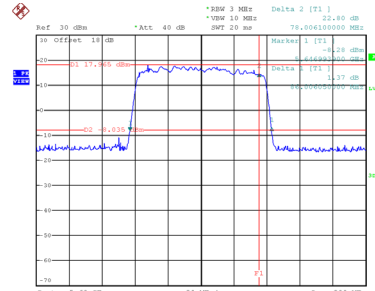


Date: 17.JUN.2024 11:45:11


99 % Occupied Bandwidth

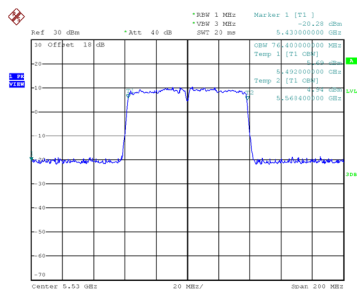

Date: 14.JUN.2024 17:55:25

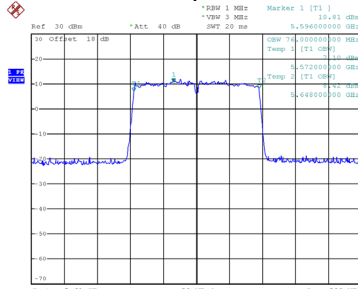

Date: 14.JUN.2024 17:56:40

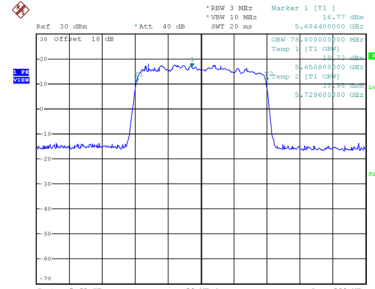


Date: 17.JUN.2024 11:49:53


|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-2C_TX AX(HE20) Mode |
|-----------|--------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 100     | 5500            | 21.790                | 19.200                        |
| 116     | 5580            | 21.849                | 19.200                        |
| 140     | 5700            | 21.989                | 19.300                        |
| 144     | 5720            | 15.850                | 19.300                        |


26 dB Bandwidth  
CH116

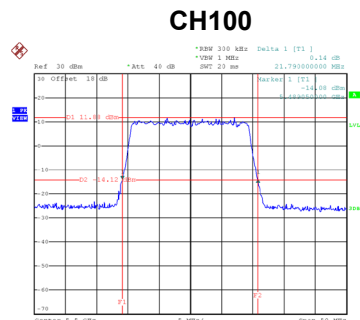


Date: 14.JUN.2024 18:57:25

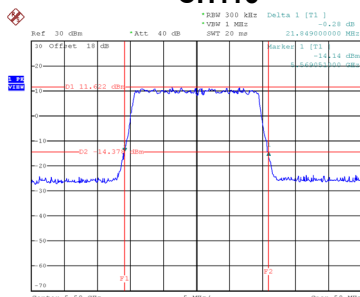

Date: 14.JUN.2024 18:59:12

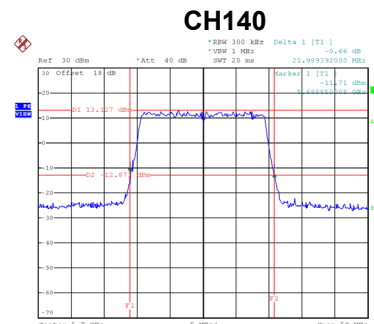


Date: 14.JUN.2024 19:00:26

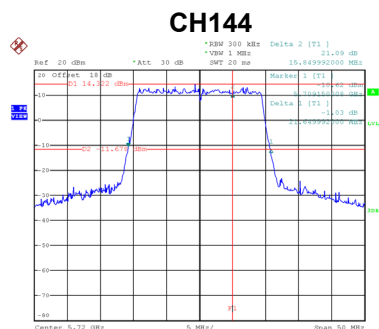


Date: 17.JUN.2024 11:20:42

## CH100

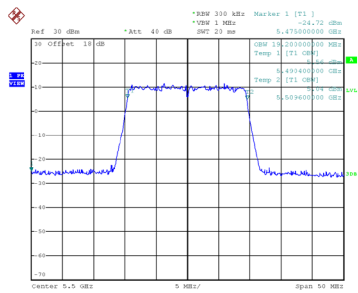


Date: 14.JUN.2024 18:57:03

## 99 % Occupied Bandwidth CH116

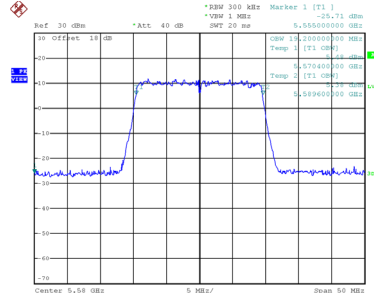


Date: 14.JUN.2024 18:58:50

## CH140

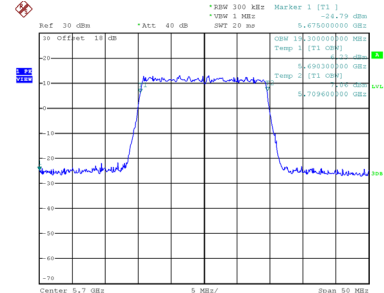

Date: 14.JUN.2024 19:00:04

## CH144

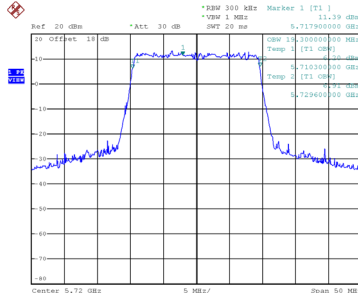


Date: 17.JUN.2024 11:16:24


|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-2C_TX AX(HE40) Mode |
|-----------|--------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 102     | 5510            | 40.200                | 38.000                        |
| 110     | 5550            | 40.200                | 38.000                        |
| 134     | 5670            | 40.200                | 38.200                        |
| 142     | 5710            | 35.900                | 38.200                        |


26 dB Bandwidth  
CH110

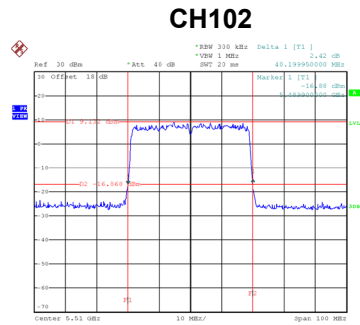

Date: 14.JUN.2024 19:11:22

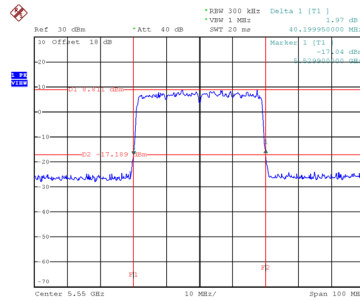


Date: 14.JUN.2024 19:12:22

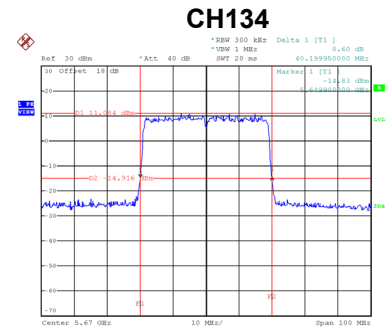

Date: 14.JUN.2024 19:13:21

CH142

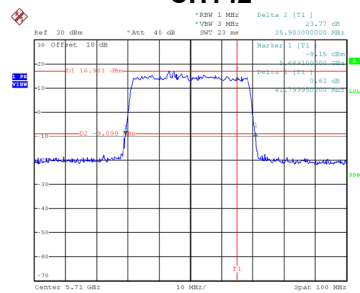

Date: 17.JUN.2024 11:35:15