

FCC TEST REPORT

FCC ID:2A2UK-JJT-C09PULS

Applicant Name..... : Dongguan Jiajiaotong Plastic Mould Co., Ltd.

Address..... : No. 10, Qiaojiao Middle Road, Pingshan 188 Industrial Zone, Tangxia Town, Dongguan City, Guangdong Province, China

Manufacturer Name..... : Dongguan Jiajiaotong Plastic Mould Co., Ltd.

Address..... : No. 10, Qiaojiao Middle Road, Pingshan 188 Industrial Zone, Tangxia Town, Dongguan City, Guangdong Province, China

Product..... : 5 in 1 Wireless Charger

Model(s)..... : JJT-C09PULS, JJT-C09PRO

Additional Model(s)..... : C09Puls, C09pro, C09Pro-Ai, C09Puls-Ai, C09Pro-2, C09Puls-2, C09-Ai

Trademark..... : /

Model Difference..... : JJT-C09PULS and JJT-C099PRO are test models, model JJT-C09PULS, C09Puls, C09Puls-Ai, C09-Ai and C09Puls-2 do not come with a heat sink and only have different colors. model JJT-C09PRO, C09pro, C09Pro-Ai, and C09Pro-2 come with heat sinks and only have different colors. So the test data of JJT-C09PULS and JJT-C09PRO can represent the remaining models. JJT-C09PULS and JJT-C099PRO have evaluated the differences in conducted emission and radiated emission testing.

Prepared by..... : Guangdong Zhonghan Testing Technology Co., Ltd.

Address..... : Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Date of Receipt..... : Jan. 27, 2026

Date of Test(s)..... : Jan. 27, 2026-Apr. 8, 2026

Date of Issue..... : Apr. 9, 2026

Test Requested..... : Select test(s) as requested by the client.

Test Standard(s)..... : FCC CFR Title 47 Part 15 Subpart C

Test procedure..... : ANSI C63.10-2020+Cor 1-2023

In the configuration tested, the EUT complied with the standards specified above.

Prepared by:

Kimi Lu

Kimi Lu/ Engineer

Reviewed by:

Baret Wu

Baret Wu/ Director

Approved by:

Levi Lee

Levi Lee/ Manager

Note: The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report shall not be reproduced except in full, without prior written approval of ZHT. This document may be altered or revised by ZHT, personnel only, and shall be noted in the revision of the document.



TABLE OF CONTENTS

1. TEST SUMMARY	3
2. GENERAL INFORMATION	4
2.1 GENERAL DESCRIPTION OF EUT	4
2.2 TEST MODE	5
2.3 BLOCK DIAGRAM OF EUT CONFIGURATION	7
2.4 TEST CONDITIONS	7
2.5 DESCRIPTION OF SUPPORT UNITS	7
3. TEST FACILITY AND TEST INSTRUMENT USED	8
3.1 TEST FACILITY	8
3.2 INSTRUMENT LIST FOR ALL TEST ITEMS	8
3.3 TESTING SOFTWARE	9
3.4 MEASUREMENT UNCERTAINTY	9
4. CONDUCTED EMISSION TEST	10
4.1 CONDUCTED EMISSION MEASUREMENT	10
4.1.1 POWER LINE CONDUCTED EMISSION Limits	10
4.1.2 TEST PROCEDURE	10
4.1.3 DEVIATION FROM TEST STANDARD	10
4.1.4 TEST SETUP	11
4.1.5 EUT OPERATING CONDITIONS	11
4.1.6 TEST RESULT	12
5. RADIATED EMISSION MEASUREMENT	16
5.1 RADIATED EMISSION LIMITS	16
5.2 ANECHOIC CHAMBER TEST SETUP DIAGRAM	17
5.3 TEST PROCEDURE	17
5.4 DEVIATION FROM TEST STANDARD	17
5.5 TEST RESULT	18
6. BANDWIDTH TEST	24
7. ANTENNA REQUIREMENT	28
8. TEST SETUP PHOTO	29
9. EUT CONSTRUCTIONAL DETAILS	29

1. TEST SUMMARY

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Spurious Emission	15.209(a)(f)	Pass
20dB Bandwidth	15.215	Pass

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	5 in 1 Wireless Charger
Test Model No:	JJT-C09PULS, JJT-C09PRO
Hardware version:	V1.0
Software version:	V1.0
Operation Frequency:	Phone: 115-205kHz, 360kHz Earbuds: 115-205kHz Watch: 280-310kHz
Modulation type:	ASK
Antenna Type:	Inductive loop coil Antenna
Antenna gain:	0dBi
Power supply:	Input : DC 15 V/3 A Phone output: 5W / 7.5W / 10W / 15W / 25W Earbuds output: 5W Watch: 1-3W
Sample Number:	260127119YP001
Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Guangdong Zhonghan Testing Technology Co., Ltd. does not assume any responsibility.	



2.2 TEST MODE

Test Modes:	
Mode 1	AC Mains + Phone charging port(115-205kHz) + Earbuds charging port + Watch charging port -(Battery Status:≤1%)-Model: JJT-C09PULS
Mode 2	AC Mains + Phone charging port(115-205kHz) + Earbuds charging port + Watch charging port -(Battery Status:50%)-Model: JJT-C09PULS
Mode 3	AC Mains + Phone charging port(115-205kHz) + Earbuds charging port + Watch charging port -(Battery Status:≥98%)-Model: JJT-C09PULS
Mode 4	AC Mains + Phone charging port(360kHz) + Earbuds charging port + Watch charging port -(Battery Status:≤1%)-Model: JJT-C09PULS
Mode 5	AC Mains + Phone charging port(360kHz) + Earbuds charging port + Watch charging port -(Battery Status:50%)-Model: JJT-C09PULS
Mode 6	AC Mains + Phone charging port(360kHz) + Earbuds charging port + Watch charging port -(Battery Status:≥98%)-Model: JJT-C09PULS
Mode 7	AC Mains + Phone charging port(Battery Status:≤1%)(115-205kHz)-Model: JJT-C09PULS
Mode 8	AC Mains + Phone charging port(Battery Status:50%)(115-205kHz)-Model: JJT-C09PULS
Mode 9	AC Mains + Phone charging port(Battery Status:≥98%)(115-205kHz)-Model: JJT-C09PULS
Mode 10	AC Mains + Phone charging port(Battery Status:≤1%)(360kHz)-Model: JJT-C09PULS
Mode 11	AC Mains + Phone charging port(Battery Status:50%)(360kHz)-Model: JJT-C09PULS
Mode 12	AC Mains + Phone charging port(Battery Status:≥98%)(360kHz)-Model: JJT-C09PULS
Mode 13	AC Mains + Watch charging port(Battery Status:≤1%)-Model: JJT-C09PULS
Mode 14	AC Mains + Watch charging port(Battery Status:50%)-Model: JJT-C09PULS
Mode 15	AC Mains + Watch charging port(Battery Status:≥98%)-Model: JJT-C09PULS
Mode 16	AC Mains + Earbuds charging port(Battery Status:≤1%)-Model: JJT-C09PULS
Mode 17	AC Mains + Earbuds charging port(Battery Status:50%)-Model: JJT-C09PULS
Mode 18	AC Mains + Earbuds charging port(Battery Status:≥98%)-Model: JJT-C09PULS
Mode 19	Standby-Model: JJT-C09PULS
Mode 20	AC Mains + Phone charging port(115-205kHz) + Earbuds charging port + Watch charging port -(Battery Status:≤1%)-Model: JJT-C09PRO
Mode 21	AC Mains + Phone charging port(115-205kHz) + Earbuds charging port + Watch charging port -(Battery Status:50%)-Model: JJT-C09PRO
Mode 22	AC Mains + Phone charging port(115-205kHz) + Earbuds charging port + Watch charging port -(Battery Status:≥98%)-Model: JJT-C09PRO
Mode 23	AC Mains + Phone charging port(360kHz) + Earbuds charging port + Watch charging port -(Battery Status:≤1%)-Model: JJT-C09PRO




Mode 24	AC Mains + Phone charging port(360kHz) + Earbuds charging port + Watch charging port -(Battery Status:50%)-Model: JJT-C09PRO
Mode 25	AC Mains + Phone charging port(360kHz) + Earbuds charging port + Watch charging port -(Battery Status:≥98%)-Model: JJT-C09PRO
Mode 26	AC Mains + Phone charging port(Battery Status:≤1%)(115-205kHz)-Model: JJT-C09PRO
Mode 27	AC Mains + Phone charging port(Battery Status:50%)(115-205kHz)-Model: JJT-C09PRO
Mode 28	AC Mains + Phone charging port(Battery Status:≥98%)(115-205kHz)-Model: JJT-C09PRO
Mode 29	AC Mains + Phone charging port(Battery Status:≤1%)(360kHz)-Model: JJT-C09PRO
Mode 30	AC Mains + Phone charging port(Battery Status:50%)(360kHz)-Model: JJT-C09PRO
Mode 31	AC Mains + Phone charging port(Battery Status:≥98%)(360kHz)-Model: JJT-C09PRO
Mode 32	AC Mains + Watch charging port(Battery Status:≤1%)-Model: JJT-C09PRO
Mode 33	AC Mains + Watch charging port(Battery Status:50%)-Model: JJT-C09PRO
Mode 34	AC Mains + Watch charging port(Battery Status:≥98%)-Model: JJT-C09PRO
Mode 35	AC Mains + Earbuds charging port(Battery Status:≤1%)-Model: JJT-C09PRO
Mode 36	AC Mains + Earbuds charging port(Battery Status:50%)-Model: JJT-C09PRO
Mode 37	AC Mains + Earbuds charging port(Battery Status:≥98%)-Model: JJT-C09PRO
Mode 38	Standby-Model: JJT-C09PRO
Note: All modes were tested, only the worst-case was recorded in the report. Mode 1 and Mode 20 is the worst mode.	




2.3 BLOCK DIAGRAM OF EUT CONFIGURATION

Conducted Emission

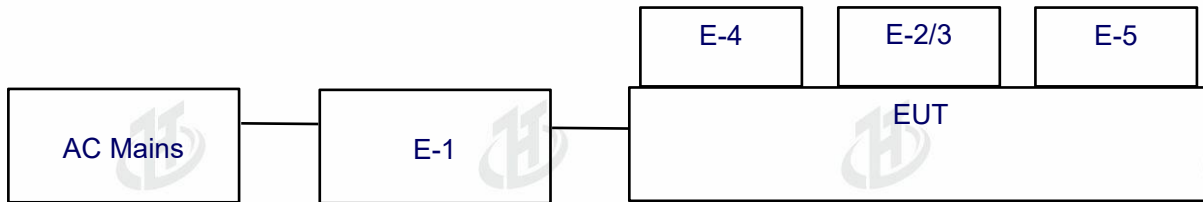

Radiated Emission

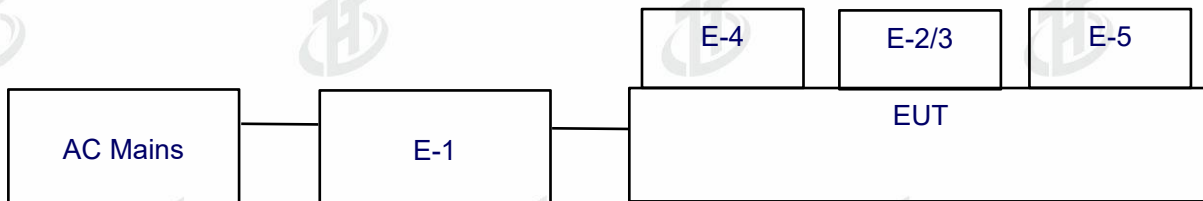

2.4 TEST CONDITIONS

Temperature: 25.6℃

Relative Humidity: 54.3%RH

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC Adapter	iforg	191106C	/	AE
2	Mobile phone	iQOO	iQOO 12 Pro	/	AE
3	Mobile phone	Apple Inc.	iPhone16 Plus	/	AE
4	Earphone	Apple Inc.	A2031	/	AE
5	Apple watch	Apple Inc.	ultra 2	/	AE

Item	Shielded Type	Ferrite Core	Length	Note

Note:	
(1)	The support equipment was authorized by Declaration of Confirmation.
(2)	For detachable type I/O cable should be specified the length in cm in 『Length』 column.
(3)	“YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.



3. TEST FACILITY AND TEST INSTRUMENT USED

3.1 TEST FACILITY

Guangdong Zhonghan Testing Technology Co., Ltd.

Add. :Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

FCC Registration Number:255941

Designation Number: CN0325

IC Registered No.: 29832

CAB identifier: CN0143

3.2 INSTRUMENT LIST FOR ALL TEST ITEMS

Item	Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
1	Receiver	R&S	ESCI	100874	May 6, 2025	May 5, 2026
2	Loop antenna	EMCI	LAP600	272	Sept. 8, 2025	Sept. 7, 2026
3	Amplifier	Schwarzbeck	BBV 9743 B	00378	May 6, 2025	May 5, 2026
4	Amplifier	Schwarzbeck	BBV 9718 B	00040	May 7, 2025	May 6, 2026
5	Bilog Antenna	Schwarzbeck	VULB9162	00498	May 15, 2025	May 14, 2026
6	Horn Antenna	Schwarzbeck	BBHA9120D	02623	May 15, 2025	May 14, 2026
7	Horn Antenna	A.H.SYSTEMS	SAS574	588	Oct. 20, 2025	Oct. 19, 2026
8	Amplifier	AEROFLEX	100KHz-40GHz	097	Oct. 20, 2025	Oct. 19, 2026
9	Spectrum Analyzer	R&S	FSV40	101413	Oct. 20, 2025	Oct. 19, 2026
10	Spectrum Analyzer	KEYSIGHT	N9020A	MY53420208	May 7, 2025	May 6, 2026
11	WIDBAND RADIO COMMUNICATION TESTER	R&S	CMW500	109863	May 7, 2025	May 6, 2026
12	Single Generator	Agilent	N5182A	MY48180575	May 7, 2025	May 6, 2026
13	Power Sensor	MWRFTest	MW100-RFCB	/	May 7, 2025	May 6, 2026
14	CABLE	EMToni	DA800-NM-NM-11000MM	/	Nov. 25, 2021	Nov. 24, 2026

Conduction Test equipment

Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
Receiver	R&S	ESCI	100874	May 6, 2025	May 5, 2026
LISN	R&S	ENV216	102794	May 6, 2025	May 5, 2026
ISN CAT 6	Schwarzbeck	NTFM 8158	00318	May 7, 2025	May 6, 2026
ISN CAT 5	Schwarzbeck	CAT5 8158	00343	May 7, 2025	May 6, 2026
Capacitive Voltage Probe	Schwarzbeck	CVP 9222 C	00101	May 8, 2025	May 7, 2026
Current Transformer Clamp	Schwarzbeck	SW 9605	SW9605 #209	May 8, 2025	May 7, 2026
CABLE	EMToni	G223-NM-BNCM-2000MM	/	May 6, 2025	May 5, 2026

3.3 TESTING SOFTWARE

Project	Software name	Edition
Conducted Emission	EZ-EMC	EMC-CON 3A1.1+
Radiated Emission	EZ-EMC	FA-03A2 RE+
RF Test	MTS 8310	2.0.0.0

3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	0.92dB
2	RF conducted power	0.16dB
3	Conducted spurious emissions	0.21dB
4	All radiated emissions (9k-30MHz)	4.68dB
5	All radiated emissions (30-1GHz)	5.1dB
6	All radiated emissions (1-6GHz)	3.9dB
7	All radiated emissions (6GHz-18GHz)	4.3dB
8	All radiated emissions (18-40GHz)	4.65dB
9	Temperature	0.5°C
10	Humidity	2%
11	Occupied Bandwidth	4.96%

Decision Rule

- ☒ Uncertainty is not included
☐ Uncertainty is included



4. CONDUCTED EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10-2020+Cor 1-2023
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	QP	AVG	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

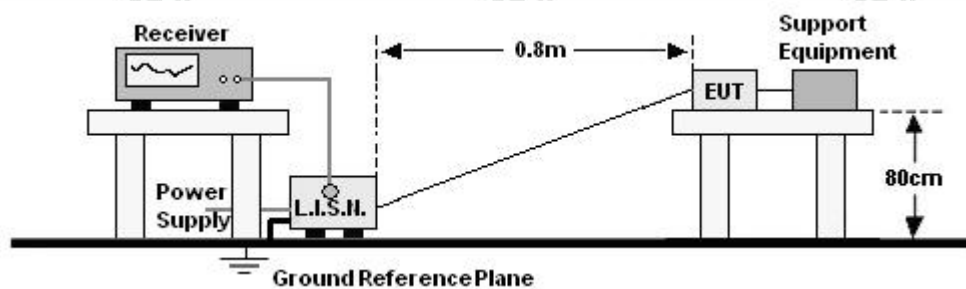


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 TEST RESULT

Temperature:	24.6°C	Relative Humidity:	54.7%
Pressure:	101kPa	Phase :	L
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

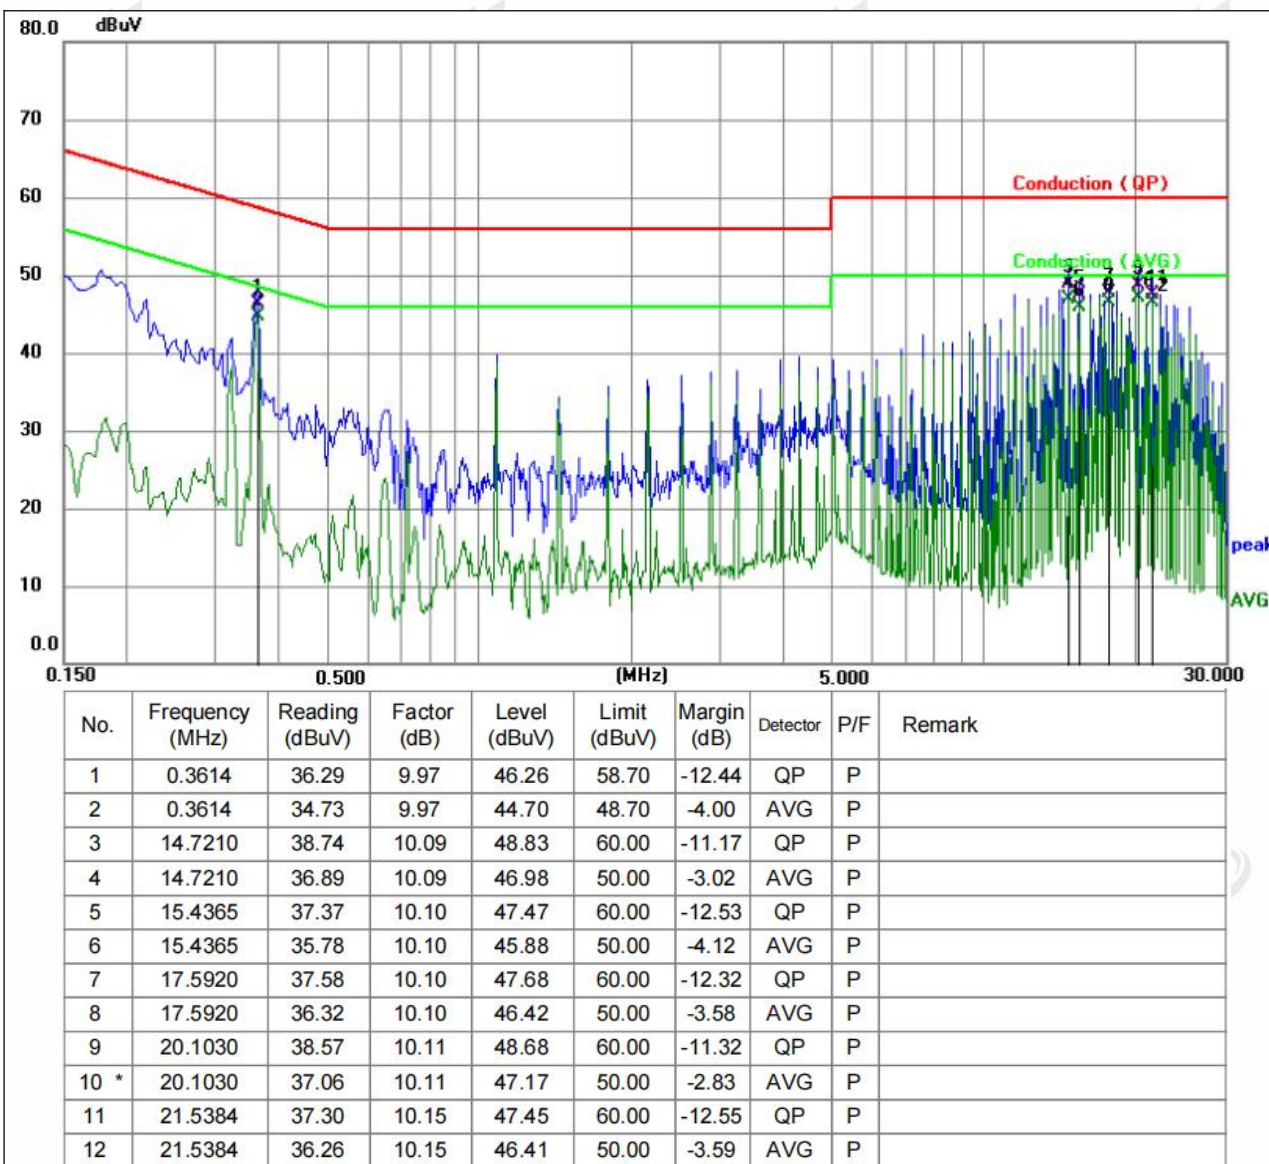


Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



Temperature:	24.6°C	Relative Humidity:	54.7%
Pressure:	101kPa	Phase :	N
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

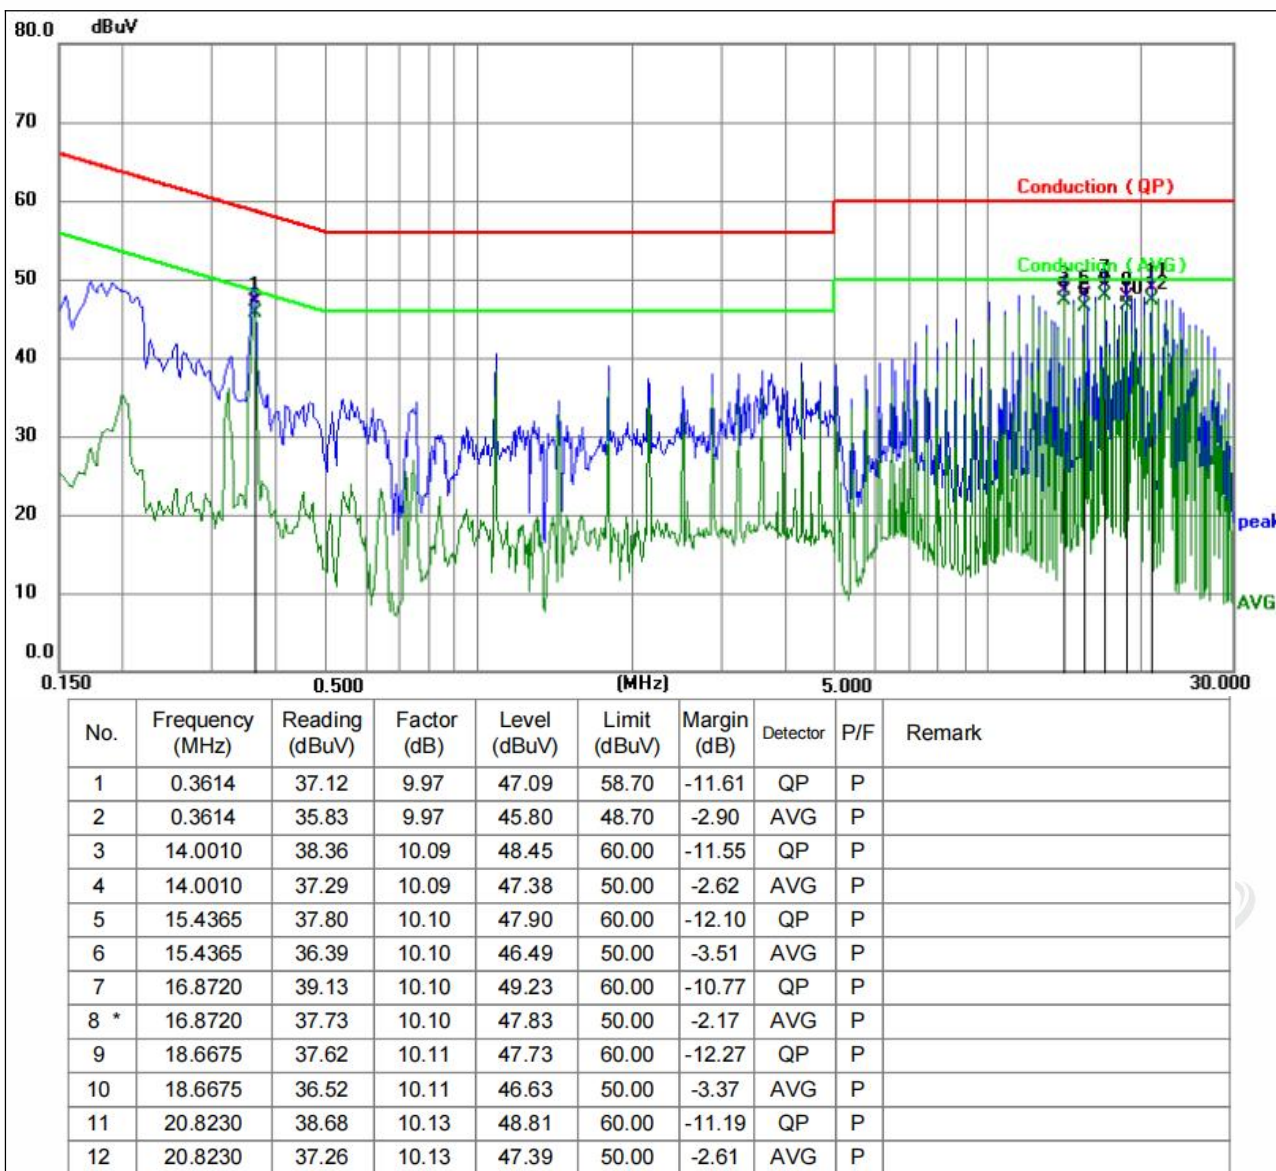


Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



Temperature:	24.6°C	Relative Humidity:	54.7%
Pressure:	101kPa	Phase :	L
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 14

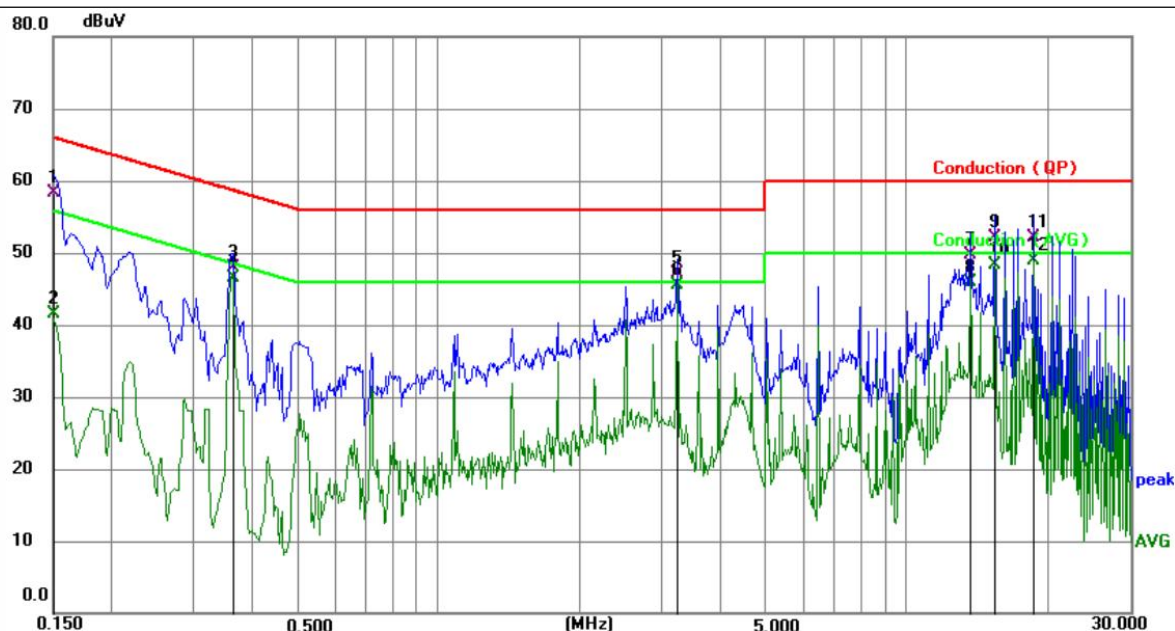


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	48.36	9.89	58.25	66.00	-7.75	QP	P	
2	0.1500	31.70	9.89	41.59	56.00	-14.41	AVG	P	
3	0.3614	37.97	9.97	47.94	58.70	-10.76	QP	P	
4	0.3614	36.49	9.97	46.46	48.70	-2.24	AVG	P	
5	3.2324	36.97	10.08	47.05	56.00	-8.95	QP	P	
6 *	3.2324	35.50	10.08	45.58	46.00	-0.42	AVG	P	
7	13.6410	39.59	10.09	49.68	60.00	-10.32	QP	P	
8	13.6410	35.77	10.09	45.86	50.00	-4.14	AVG	P	
9	15.4365	42.08	10.10	52.18	60.00	-7.82	QP	P	
10	15.4365	38.21	10.10	48.31	50.00	-1.69	AVG	P	
11	18.6675	42.01	10.11	52.12	60.00	-7.88	QP	P	
12	18.6675	38.71	10.11	48.82	50.00	-1.18	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



Temperature:	24.6°C	Relative Humidity:	54.7%
Pressure:	101kPa	Phase :	N
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 14

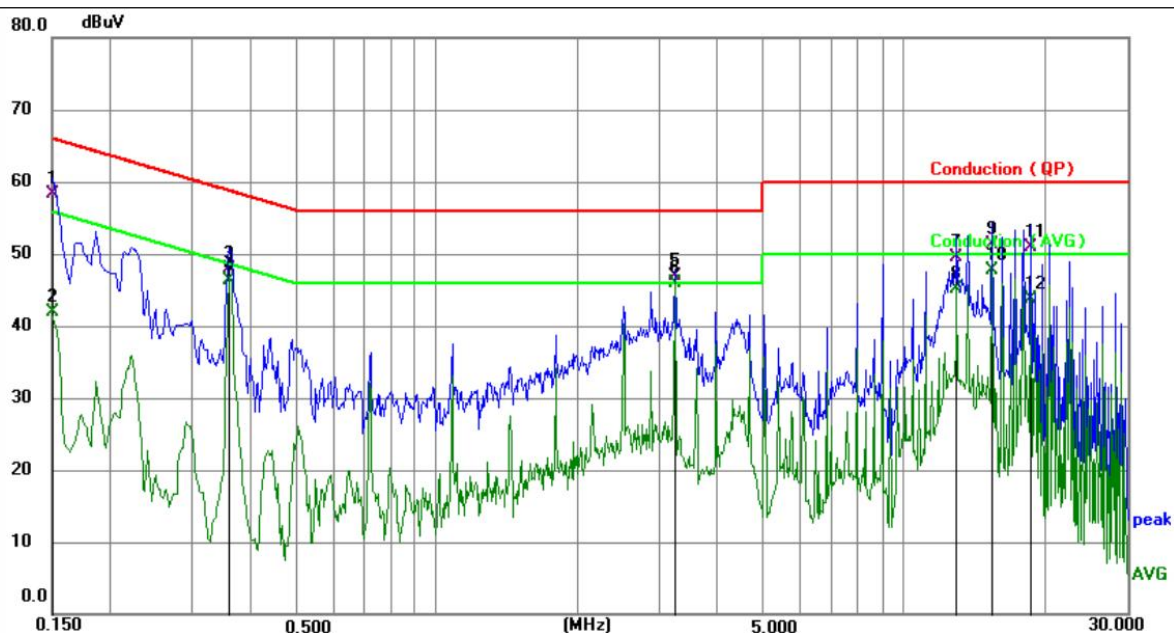

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	48.40	9.89	58.29	66.00	-7.71	QP	P	
2	0.1500	32.00	9.89	41.89	56.00	-14.11	AVG	P	
3	0.3570	37.95	9.97	47.92	58.80	-10.88	QP	P	
4	0.3570	36.42	9.97	46.39	48.80	-2.41	AVG	P	
5	3.2325	36.91	10.08	46.99	56.00	-9.01	QP	P	
6 *	3.2325	35.78	10.08	45.86	46.00	-0.14	AVG	P	
7	12.9210	39.35	10.09	49.44	60.00	-10.56	QP	P	
8	12.9210	35.07	10.09	45.16	50.00	-4.84	AVG	P	
9	15.4365	41.25	10.10	51.35	60.00	-8.65	QP	P	
10	15.4365	37.67	10.10	47.77	50.00	-2.23	AVG	P	
11	18.6675	40.74	10.11	50.85	60.00	-9.15	QP	P	
12	18.6675	33.66	10.11	43.77	50.00	-6.23	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

5. RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10-2020+Cor 1-2023				
Test Frequency Range:	9kHz to 1GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

5.1 RADIATED EMISSION LIMITS

Limits for frequency below 30MHz


Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.490	2400/F(kHz)	300	Peak Value
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

Limits for frequency Above 30MHz


Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 1GHz	54.00	Average Value
	74.00	Peak Value

5.2 ANECHOIC CHAMBER TEST SETUP DIAGRAM

(A) Radiated Emission Test-Up Frequency Below 30MHz

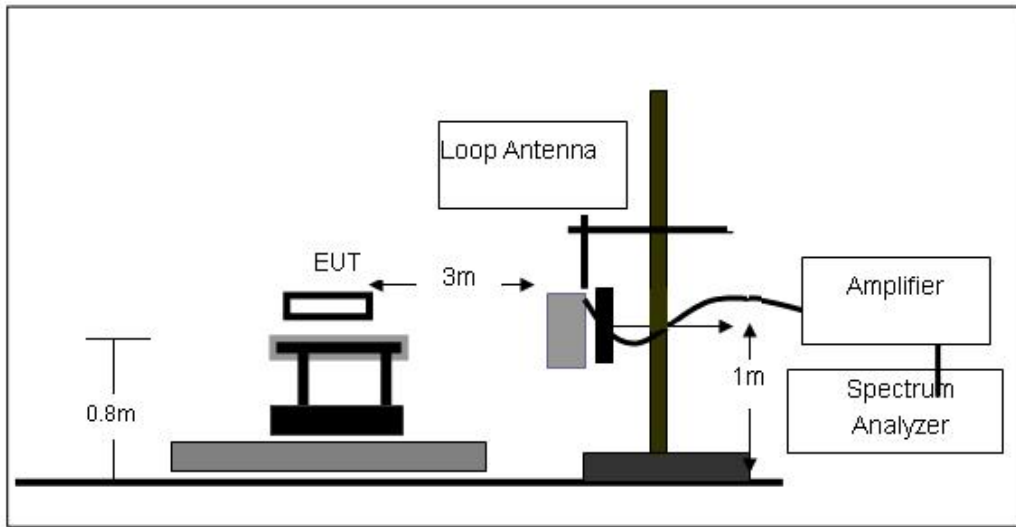

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

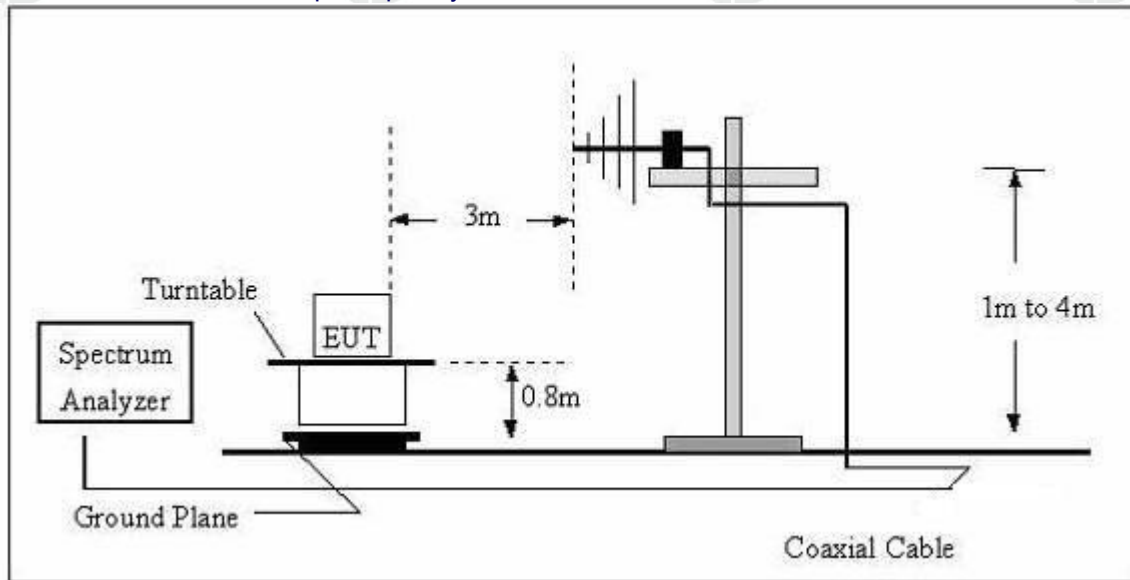

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2020+Cor 1-2023. The specification used was the FCC 15.209 and FCC 15.205 limits.

5.3 TEST PROCEDURE

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement.

5.4 DEVIATION FROM TEST STANDARD

No deviation



5.5 TEST RESULT


Measurement data:

Note: Limit dBuV/m @3m = Limit dBuV/m @300m+ 80

Limit dBuV/m @3m = Limit dBuV/m @30m + 40

9 kHz~30 MHz


Temperature:	23.6℃	Relative Humidity:	53.5%
Pressure:	101.4kPa	Polarization:	coaxial
Test Voltage:	AC 120V/60Hz	Test Modes:	Mode 1

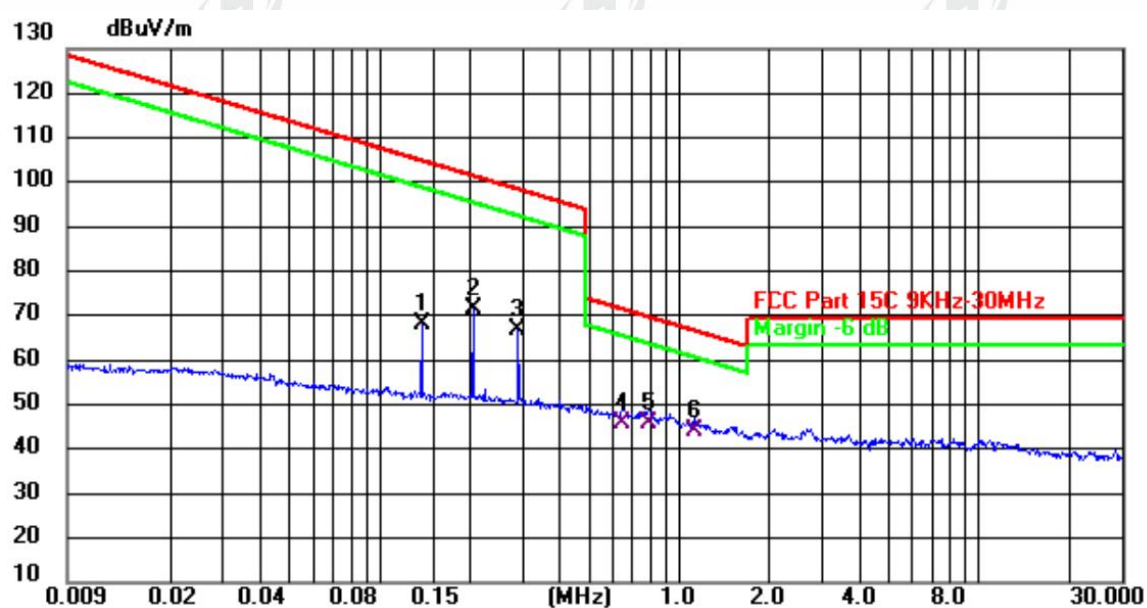

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	0.1368	68.12	0.16	68.28	104.88	-36.60	peak	-	-	P
2	0.2049	70.87	0.55	71.42	101.37	-29.95	peak	-	-	P
3	0.2884	66.22	0.71	66.93	98.40	-31.47	peak	-	-	P
4	0.6468	44.51	1.40	45.91	71.39	-25.48	QP	-	-	P
5	0.7858	44.03	1.69	45.72	69.70	-23.98	QP	-	-	P
6 *	1.1130	41.57	2.34	43.91	66.67	-22.76	QP	-	-	P



Temperature:	23.6°C	Relative Humidity:	53.5%
Pressure:	101.4kPa	Polarization:	coaxial
Test Voltage:	AC 120V/60Hz	Test Modes:	Mode 20

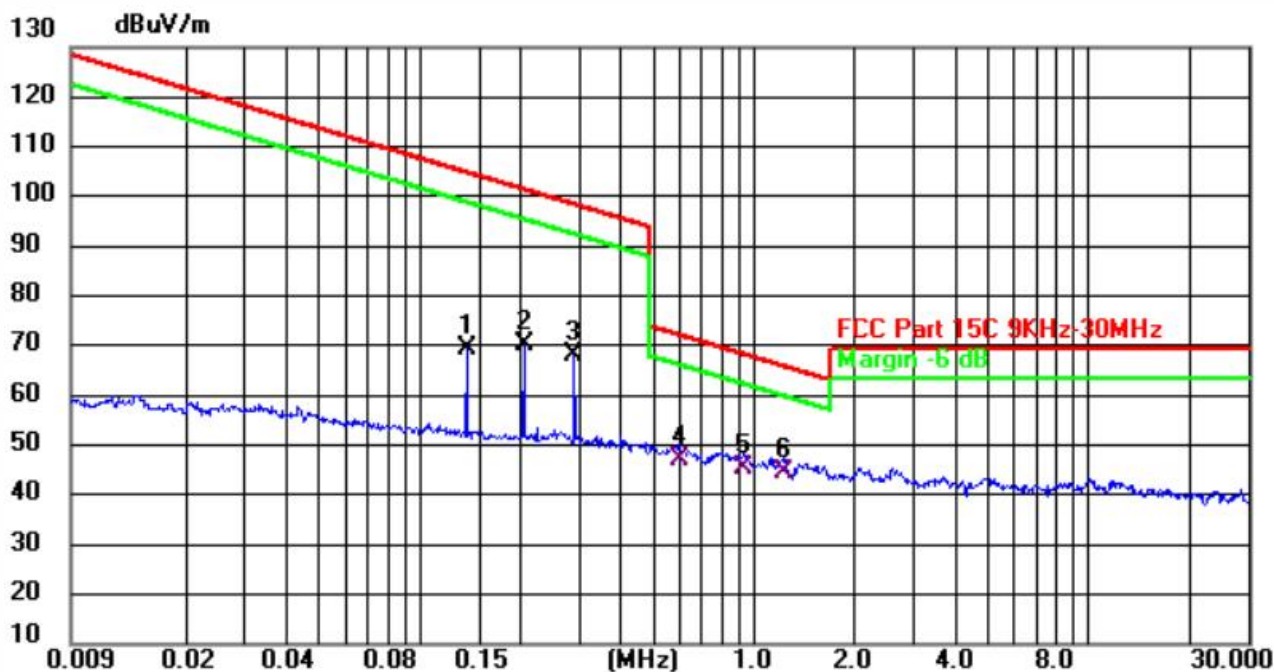

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	0.1368	69.10	0.16	69.26	104.88	-35.62	peak	-	-	P
2	0.2049	69.85	0.55	70.40	101.37	-30.97	peak	-	-	P
3	0.2884	67.26	0.71	67.97	98.40	-30.43	peak	-	-	P
4	0.6010	45.96	1.30	47.26	72.03	-24.77	QP	-	-	P
5	0.9314	43.25	1.97	45.22	68.22	-23.00	QP	-	-	P
6 *	1.2177	41.85	2.56	44.41	65.89	-21.48	QP	-	-	P

Note:

Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Emission Level = Meter Reading - Factor

Margin = Emission Level- Limit.


The amplitude of emissions which are attenuated by more than 20db below the permissible value has no need to be reported.

'-'Means the test Degree and Height are not recorded by the test software and only show the worst case in the test report.




30MHz-1GHz

Temperature:	23.6℃	Relative Humidity:	53.5%
Pressure:	101.4kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Modes:	Mode 1

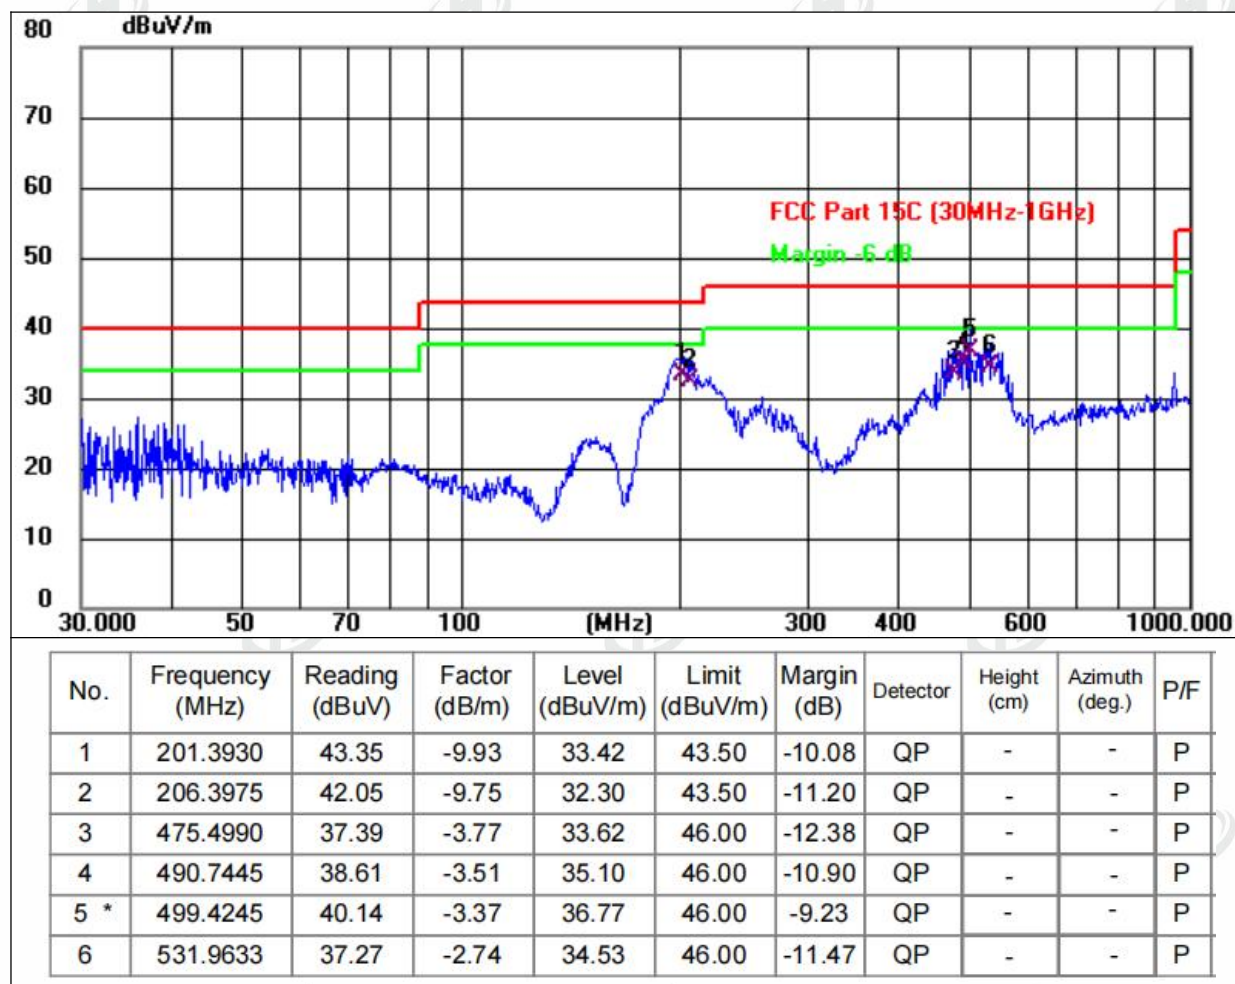




Temperature:	23.6°C	Relative Humidity:	53.5%
Pressure:	101.4kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test Modes:	Mode 1

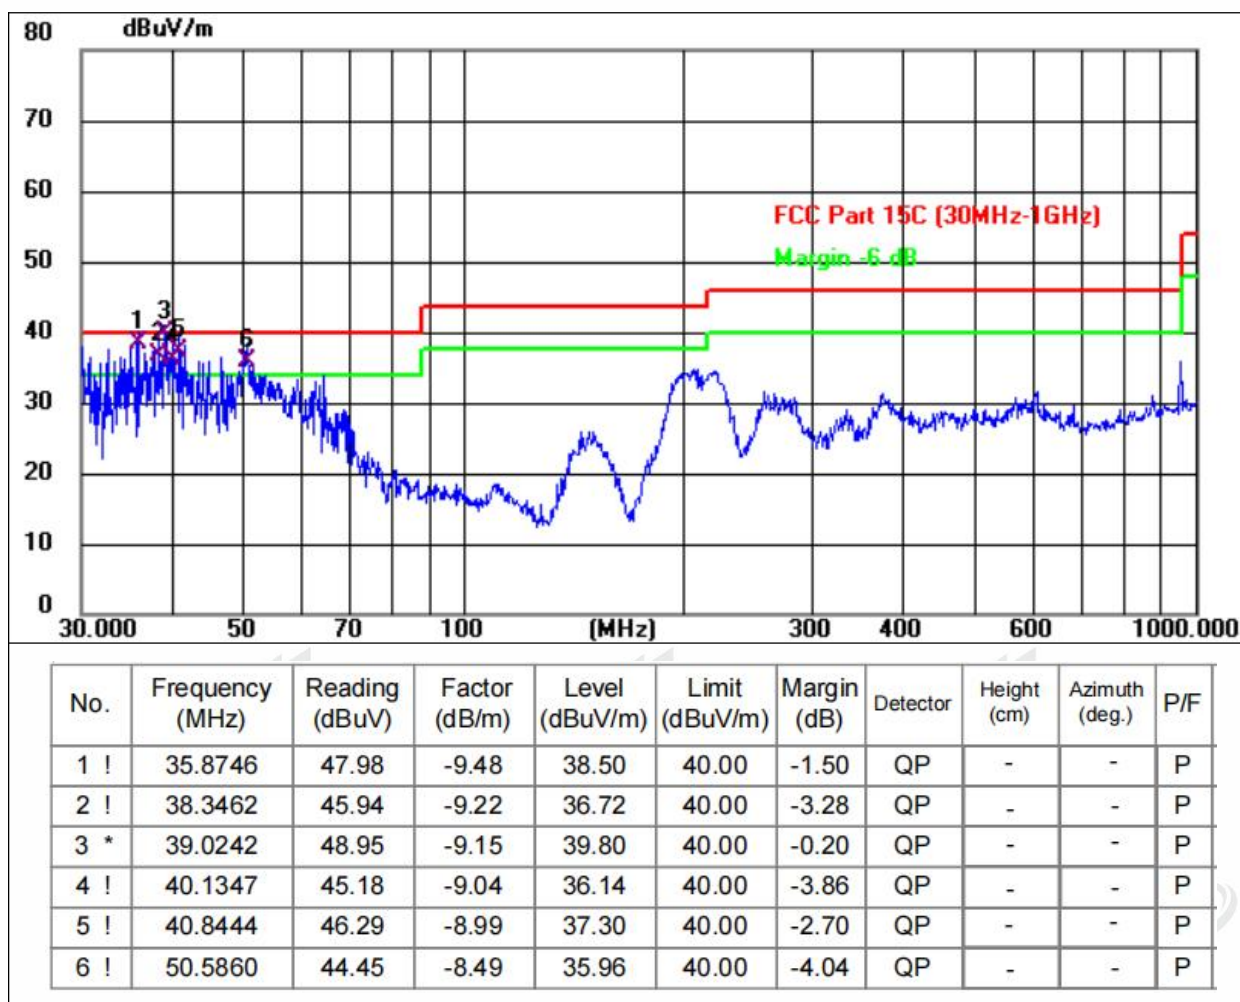




Temperature:	23.6°C	Relative Humidity:	53.5%
Pressure:	101.4kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Modes:	Mode 20

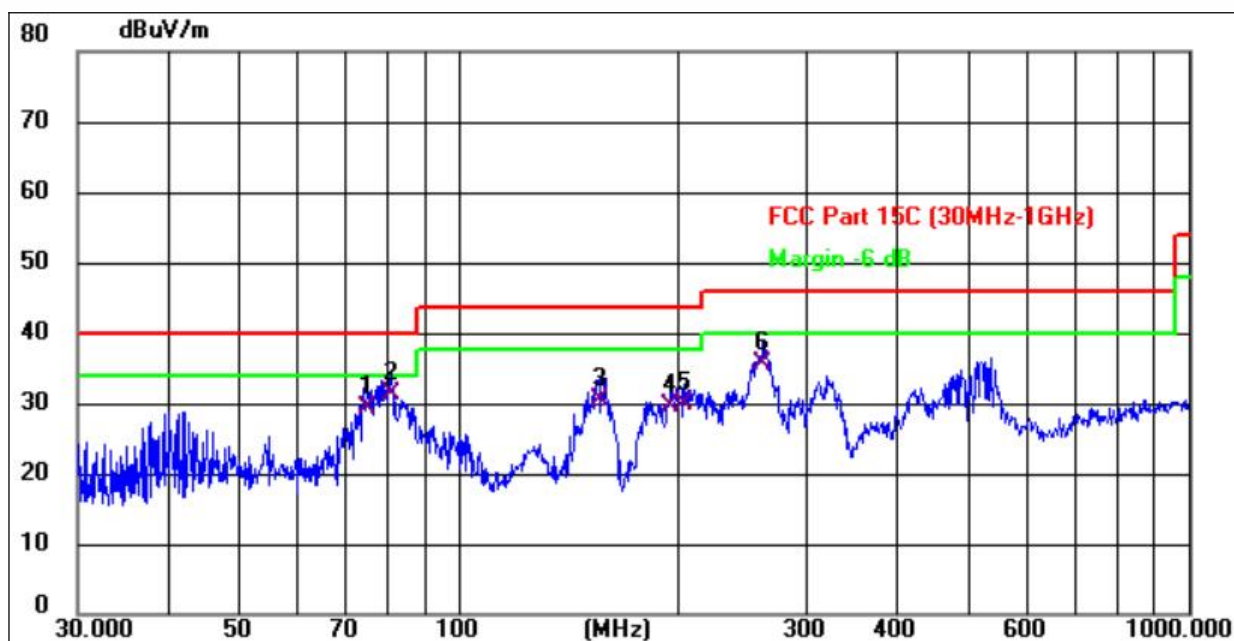

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	74.6568	41.88	-12.63	29.25	40.00	-10.75	QP	-	-	P
2 *	80.6440	44.34	-13.17	31.17	40.00	-8.83	QP	-	-	P
3	155.9100	43.14	-12.60	30.54	43.50	-12.96	QP	-	-	P
4	195.1363	39.88	-10.31	29.57	43.50	-13.93	QP	-	-	P
5	203.5226	39.58	-9.85	29.73	43.50	-13.77	QP	-	-	P
6	261.0581	43.64	-7.94	35.70	46.00	-10.30	QP	-	-	P



Temperature:	23.6°C	Relative Humidity:	53.5%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test Modes:	Mode 20

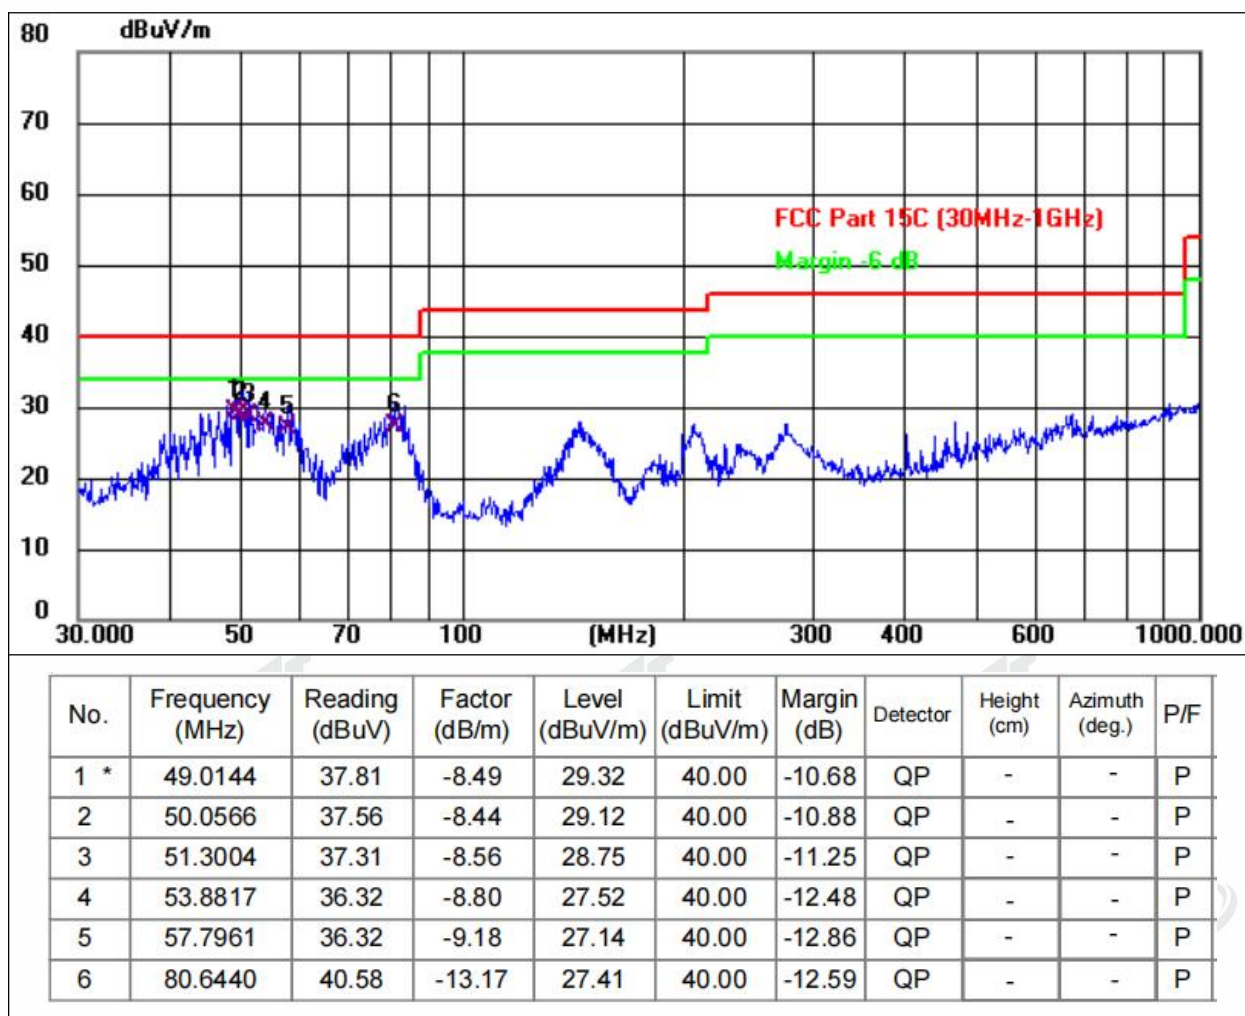

Remarks:

1. Factor = Antenna Factor + Cable Loss – Preamplifier Factor
2. Level = Reading + Factor
3. Margin = Emission Level- Limit.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. '-' Means the test Degree and Height are not recorded by the test software and only show the worst case in the test report.



6. BANDWIDTH TEST

1. Set RBW = 1%-5%OBW.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP







Temperature:	24.2 °C	Relative Humidity:	54.6%
Pressure:	101kPa		

Coil	Frequency (kHz)	20dB bandwidth (kHz)	Result
Phone coil	204.9	0.025	Pass
	359	0.060	Pass
Earbuds	136.8	0.025	Pass
Watch	288.5	0.297	Pass

Phone coil

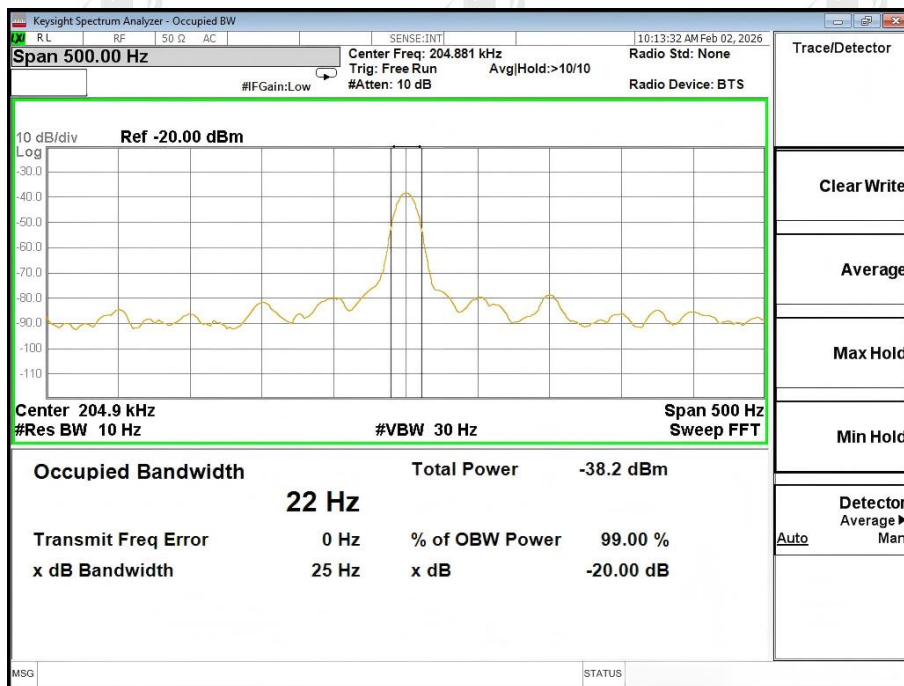


Because the measured signal is CW-like, adjusting the RBW per C63.10 would not be practical since measurement bandwidth will always follow the RBW. The RBW is set to 10 Hz to perform the 20dB bandwidth test.

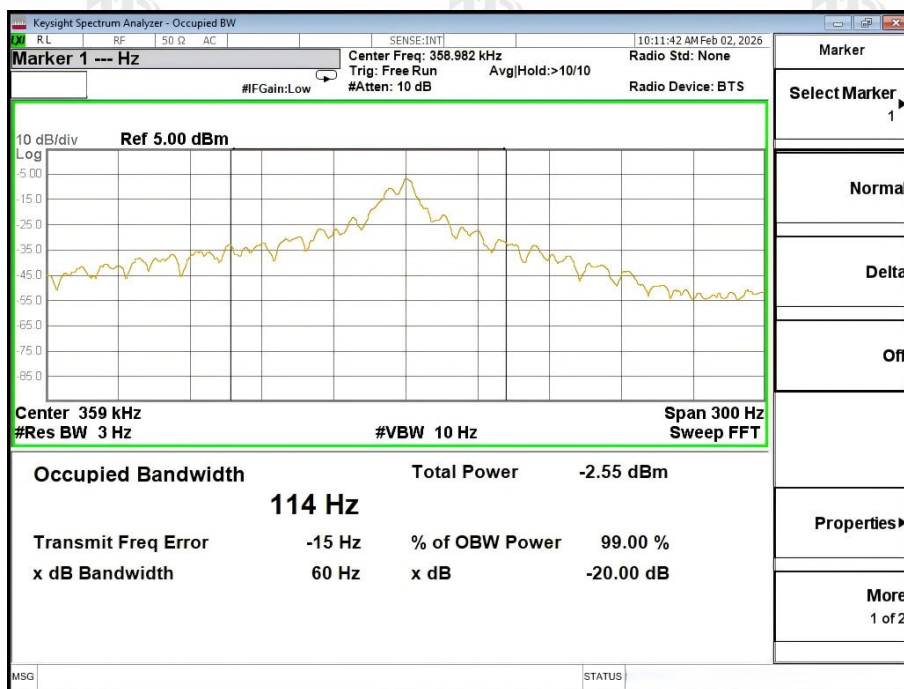

Earbuds



Watch

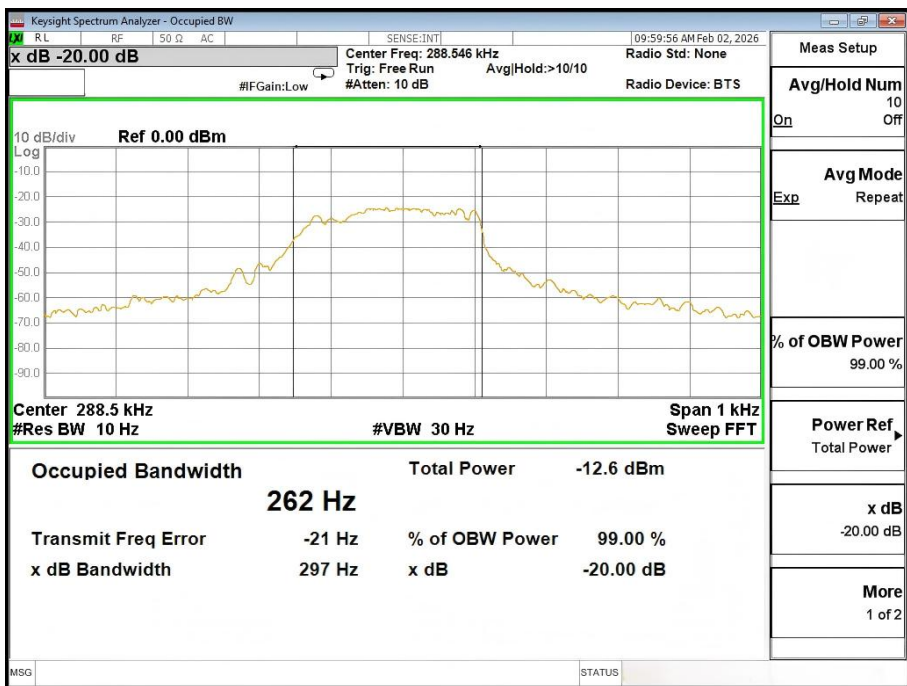

7. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is Inductive loop coil Antenna, the best case gain of the antennas is 0dBi, reference to the appendix II for details	

8. TEST SETUP PHOTO

Reference to the appendix I for details.

9. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

******* END OF REPORT *******