


Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

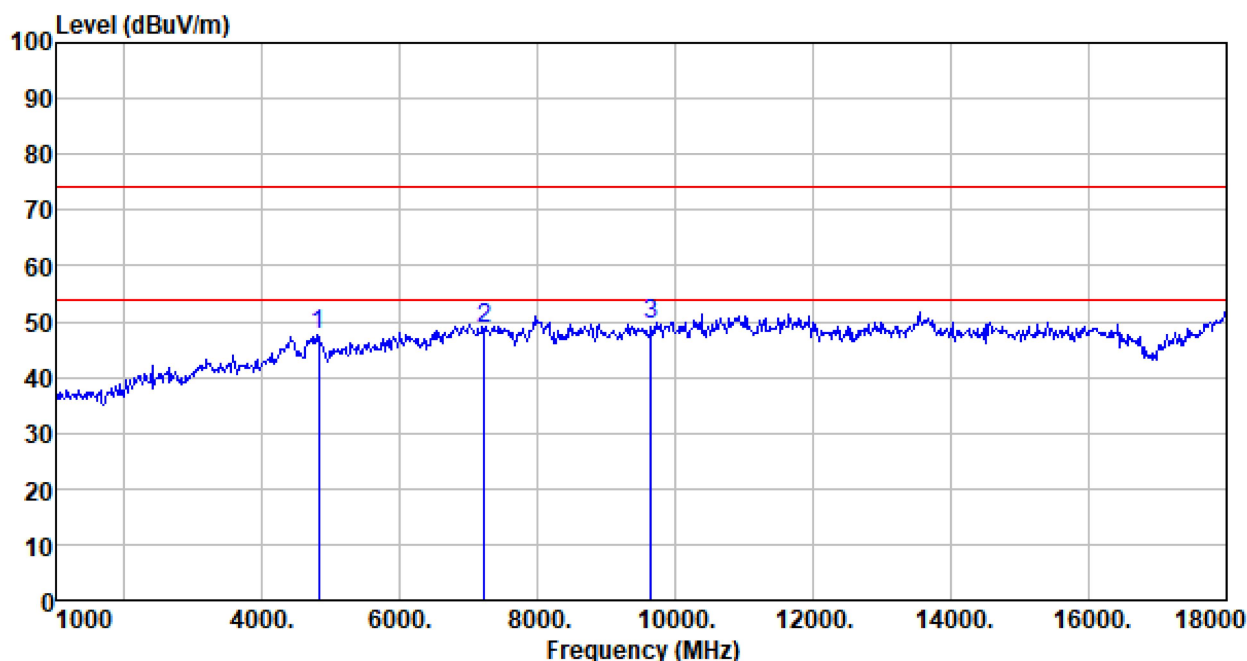


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4816.000	44.23	35.96	5.57	38.01	47.75	74.00	-26.25	Peak
7224.000	42.92	36.56	7.18	37.98	48.68	74.00	-25.32	Peak
9648.000	41.39	38.20	9.09	39.19	49.49	74.00	-24.51	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Middle	Polarization:	Horizontal
---------------	--------	---------------	------------

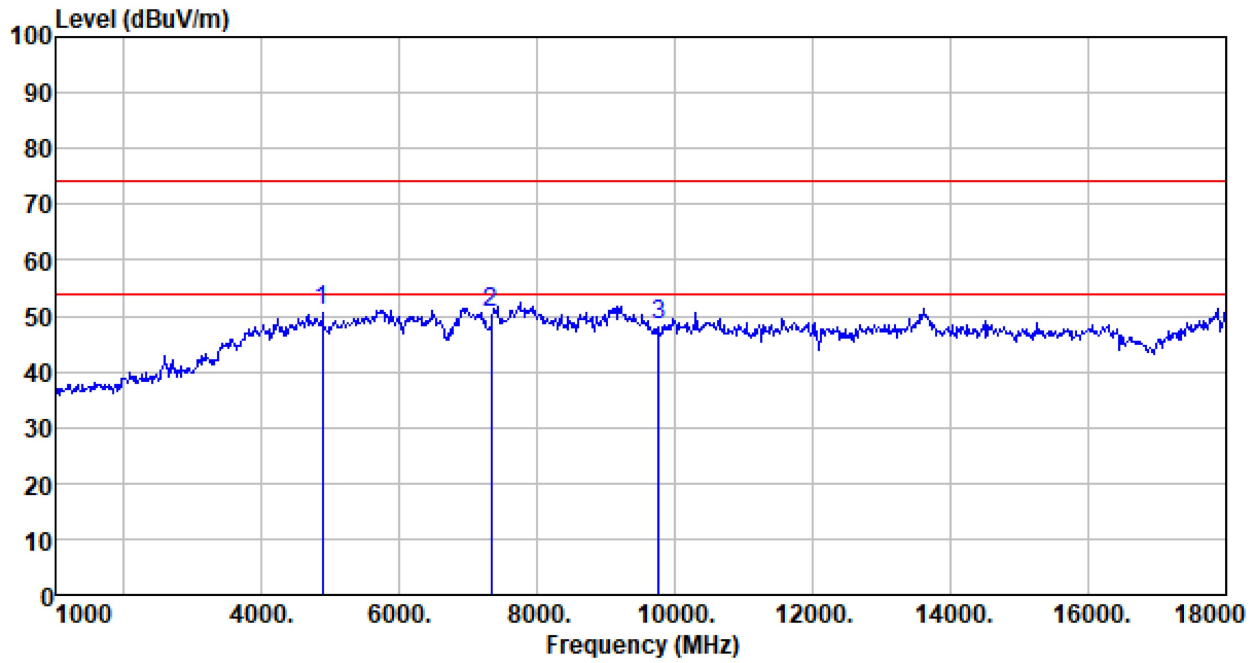


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	44.52	38.56	5.66	37.97	50.77	74.00	-23.23	Peak
7320.000	39.09	42.42	7.26	38.06	50.71	74.00	-23.29	Peak
9760.000	40.12	38.30	9.17	39.23	48.36	74.00	-25.64	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Middle	Polarization:	Vertical
---------------	--------	---------------	----------

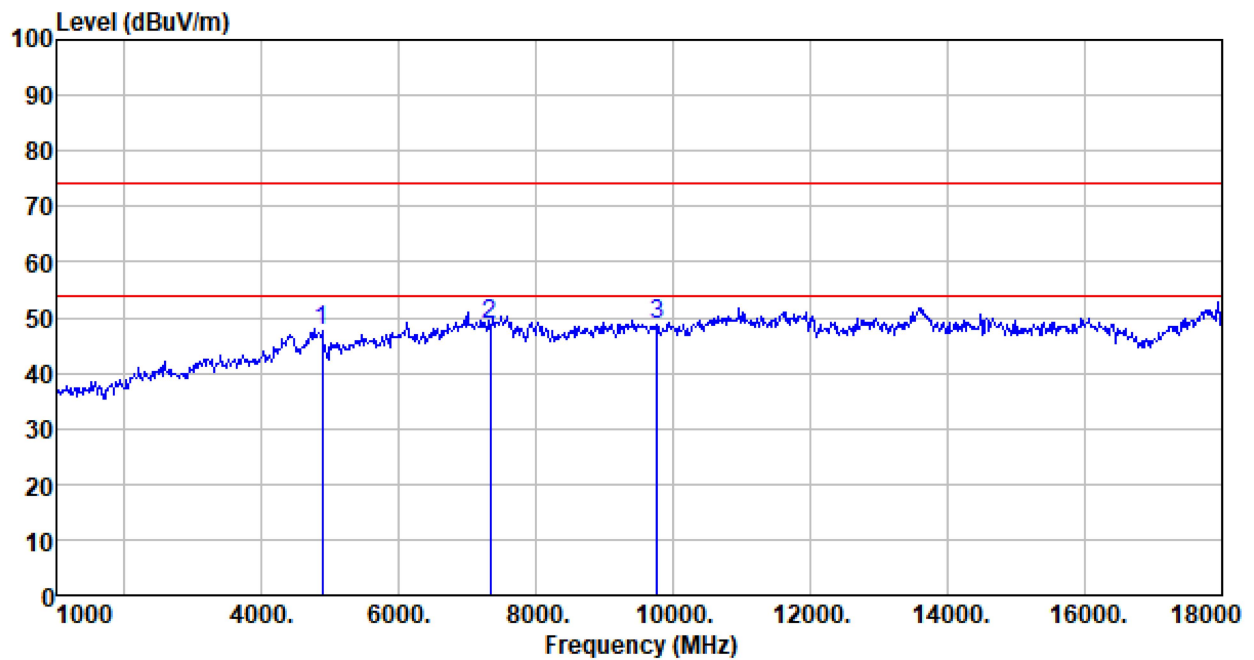


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	45.26	34.67	5.66	37.97	47.62	74.00	-26.38	Peak
7320.000	43.40	36.02	7.26	38.06	48.62	74.00	-25.38	Peak
9760.000	40.51	38.30	9.17	39.23	48.75	74.00	-25.25	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

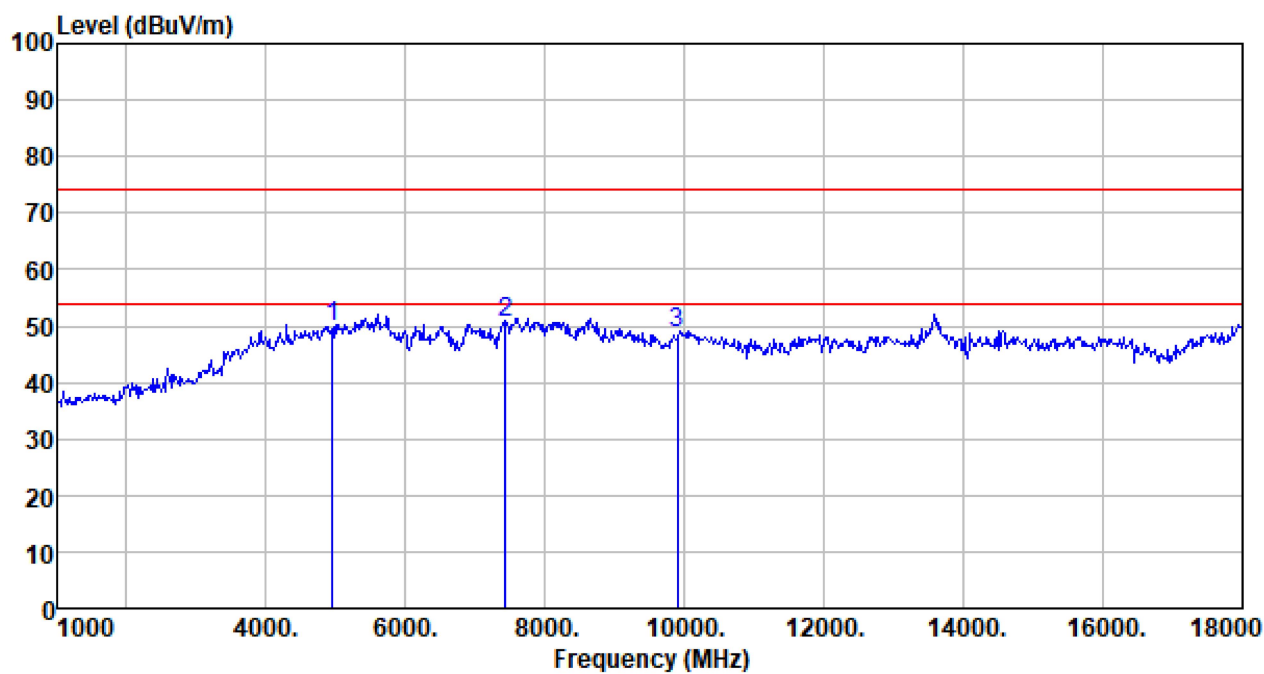


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4950.000	44.18	37.70	5.76	37.93	49.71	74.00	-24.29	Peak
7425.000	36.16	45.04	7.33	38.14	50.39	74.00	-23.61	Peak
9900.000	40.42	38.40	9.24	39.27	48.79	74.00	-25.21	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

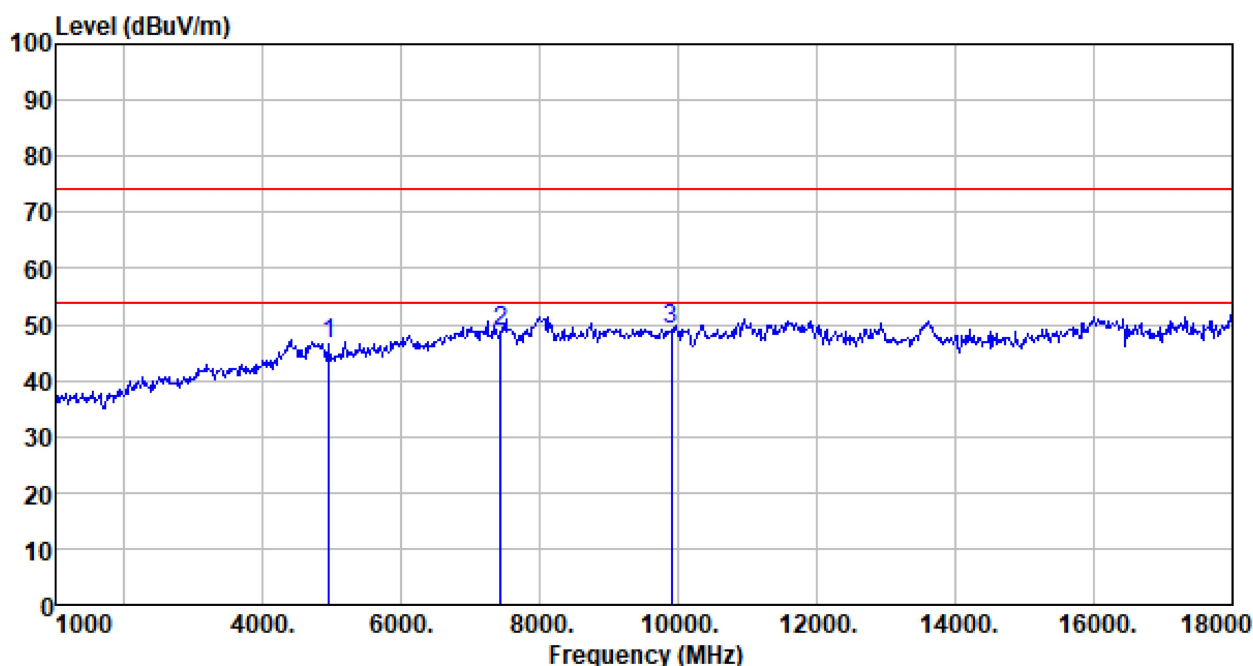

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4950.000	45.83	32.70	5.76	37.93	46.36	74.00	-27.64	Peak
7425.000	43.21	36.26	7.33	38.14	48.66	74.00	-25.34	Peak
9900.000	40.82	38.40	9.24	39.27	49.19	74.00	-24.81	Peak

Remarks:

Final level (dBuV/m) = Reading level (dBuV) + Antenna factor (dB/m) + Cable loss (dB) - Preamp Factor (dB)


Remark:

1. The emission levels of other frequencies are very lower than the limit and not show in test report.
2. For above 18GHz, no emission found.

■ Unwanted Emissions in Restricted Frequency Bands

ANT1

Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

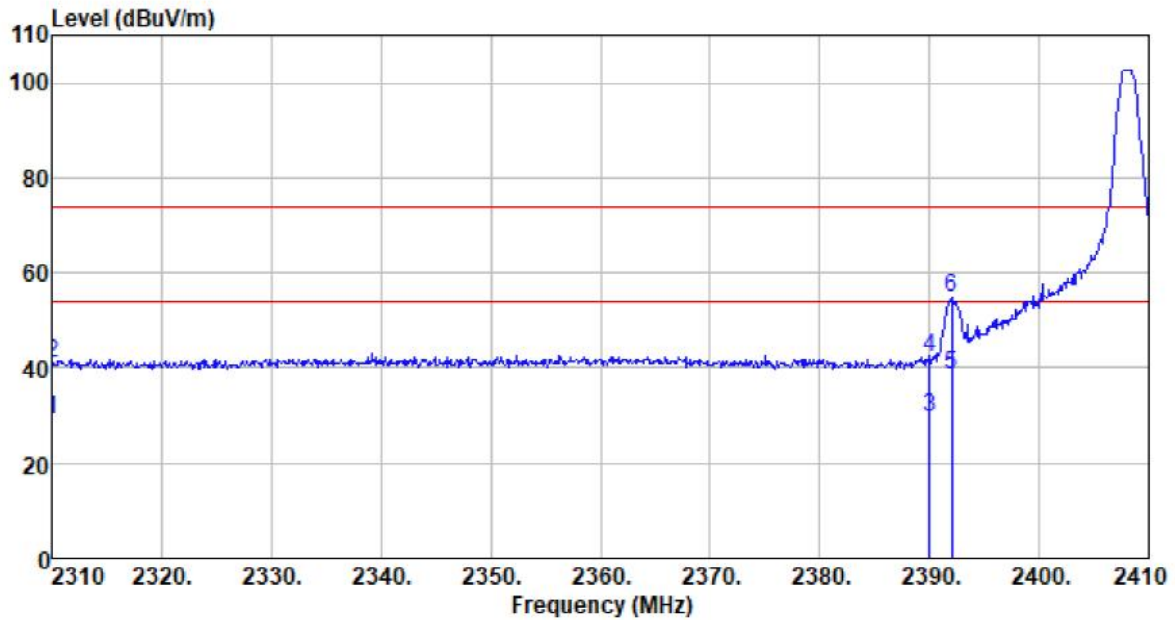


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	37.41	26.66	4.09	38.86	29.30	54.00	-24.70	Average
2310.000	49.12	26.66	4.09	38.86	41.01	74.00	-32.99	Peak
2390.000	37.76	26.62	4.11	38.88	29.61	54.00	-24.39	Average
2390.000	50.33	26.62	4.11	38.88	42.18	74.00	-31.82	Peak
2392.000	46.64	26.59	4.11	38.88	38.46	54.00	-15.54	Average
2392.000	62.98	26.59	4.11	38.88	54.80	74.00	-19.20	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

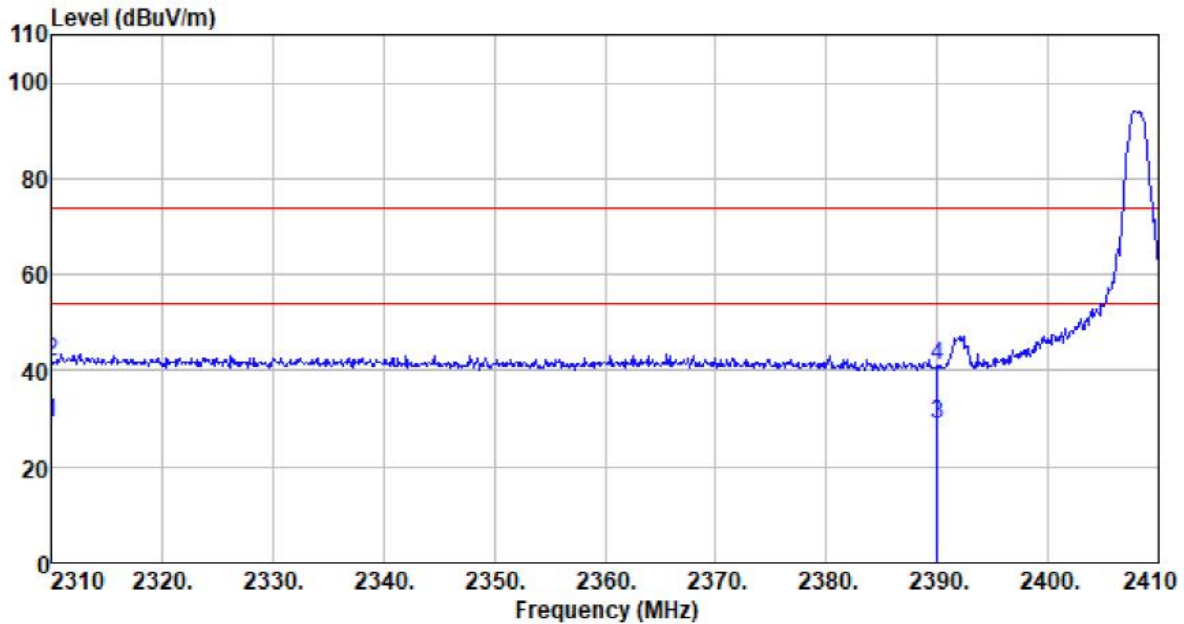


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	36.01	28.05	4.09	38.86	29.29	54.00	-24.71	Average
2310.000	48.61	28.05	4.09	38.86	41.89	74.00	-32.11	Peak
2390.000	36.52	27.03	4.11	38.88	28.78	54.00	-25.22	Average
2390.000	48.58	27.03	4.11	38.88	40.84	74.00	-33.16	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

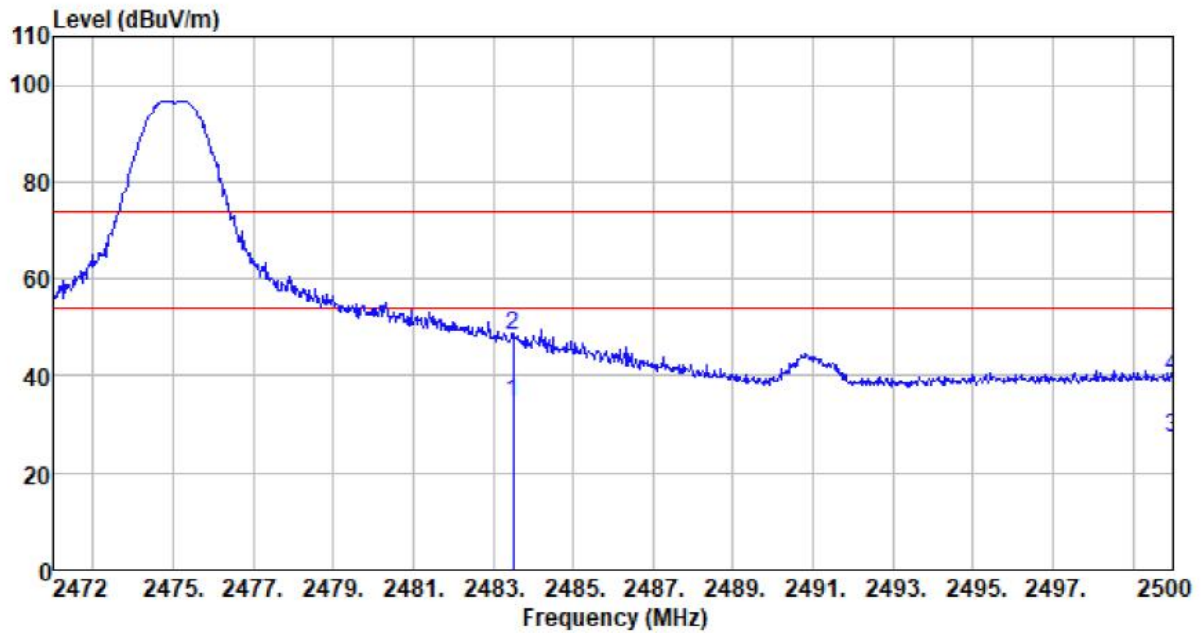


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2483.500	40.89	28.22	4.13	38.90	34.34	54.00	-19.66	Average
2483.500	54.95	28.22	4.13	38.90	48.40	74.00	-25.60	Peak
2500.000	33.38	28.63	4.14	38.90	27.25	54.00	-26.75	Average
2500.000	45.85	28.63	4.14	38.90	39.72	74.00	-34.28	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

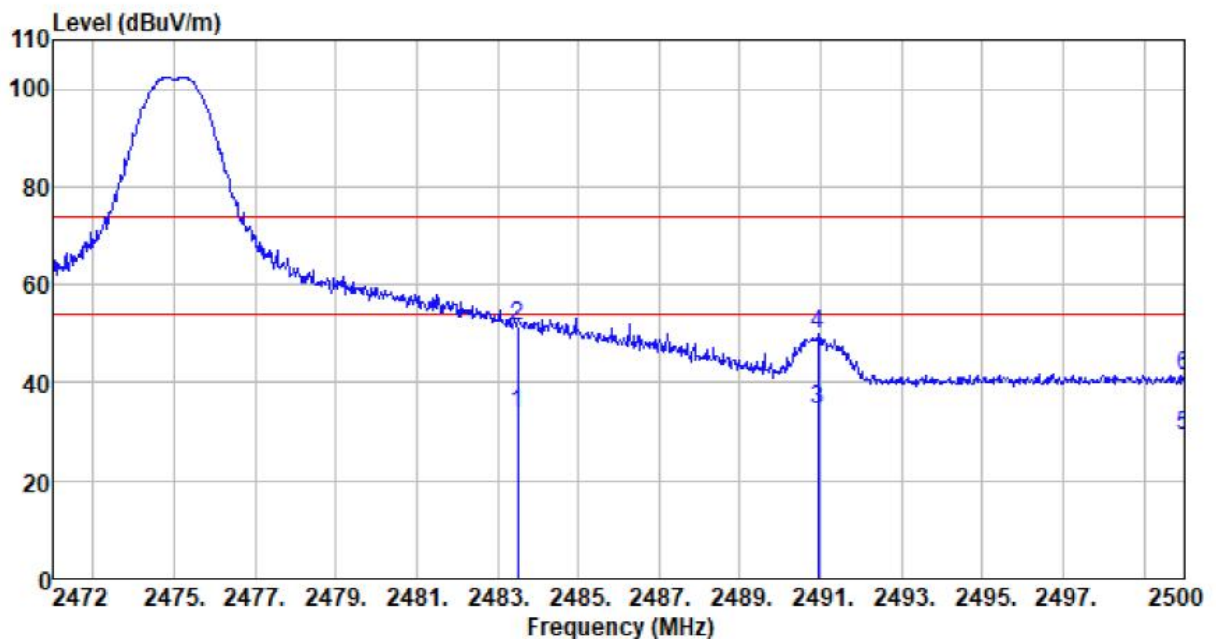


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2483.500	41.78	26.78	4.13	38.90	33.79	54.00	-20.21	Average
2483.500	59.61	26.78	4.13	38.90	51.62	74.00	-22.38	Peak
2490.928	42.47	26.65	4.13	38.90	34.35	54.00	-19.65	Average
2490.928	57.85	26.65	4.13	38.90	49.73	74.00	-24.27	Peak
2500.000	37.36	26.48	4.14	38.90	29.08	54.00	-24.92	Average
2500.000	49.60	26.48	4.14	38.90	41.32	74.00	-32.68	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

ANT2

Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

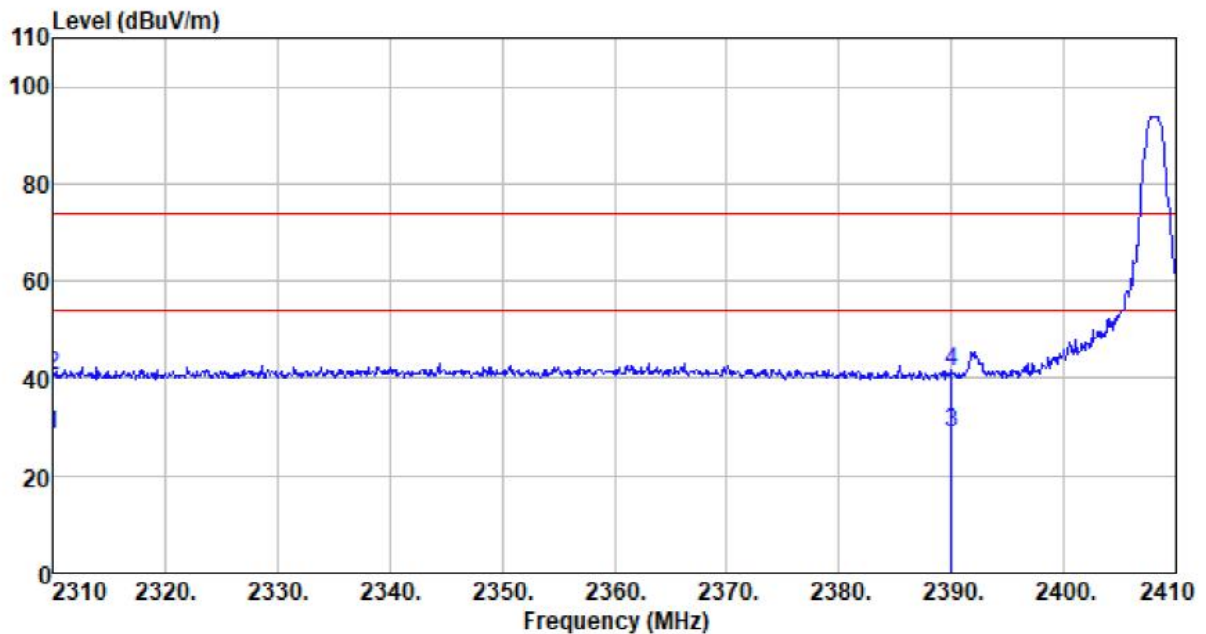


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	36.48	26.66	4.09	38.86	28.37	54.00	-25.63	Average
2310.000	48.73	26.66	4.09	38.86	40.62	74.00	-33.38	Peak
2390.000	36.92	26.62	4.11	38.88	28.77	54.00	-25.23	Average
2390.000	49.46	26.62	4.11	38.88	41.31	74.00	-32.69	Peak

Remarks:

Final level (dBuV/m) = Reading level (dBuV) + Antenna factor (dB/m) + Cable loss (dB) - Preamp Factor (dB)

Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

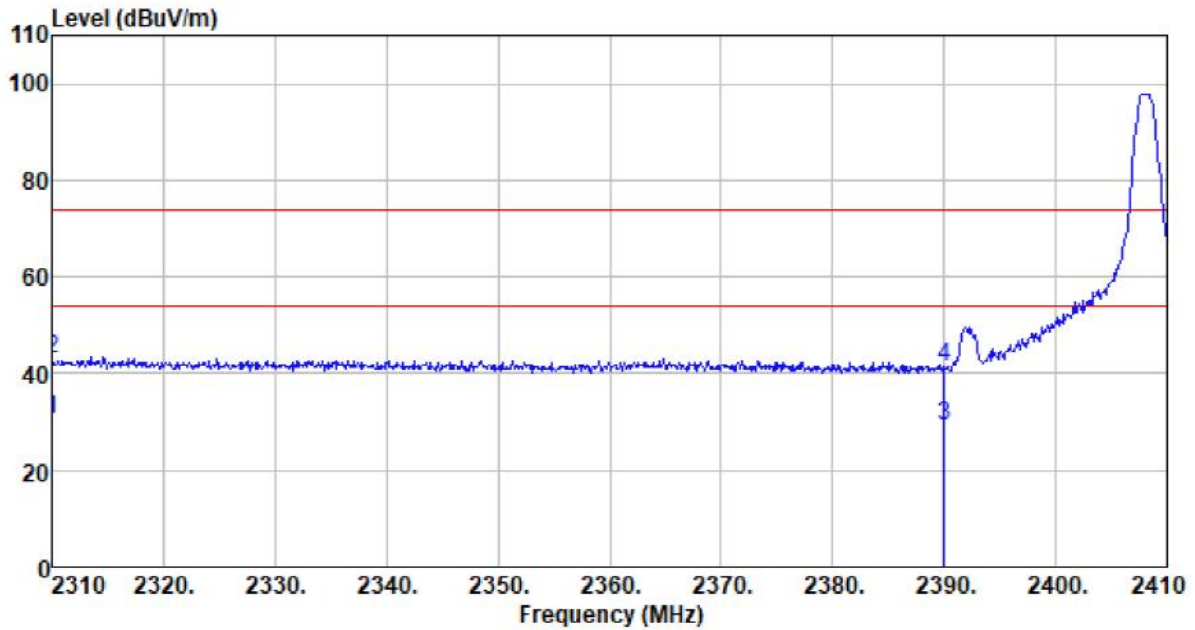


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	37.24	28.05	4.09	38.86	30.52	54.00	-23.48	Average
2310.000	49.60	28.05	4.09	38.86	42.88	74.00	-31.12	Peak
2390.000	37.12	27.03	4.11	38.88	29.38	54.00	-24.62	Average
2390.000	49.09	27.03	4.11	38.88	41.35	74.00	-32.65	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

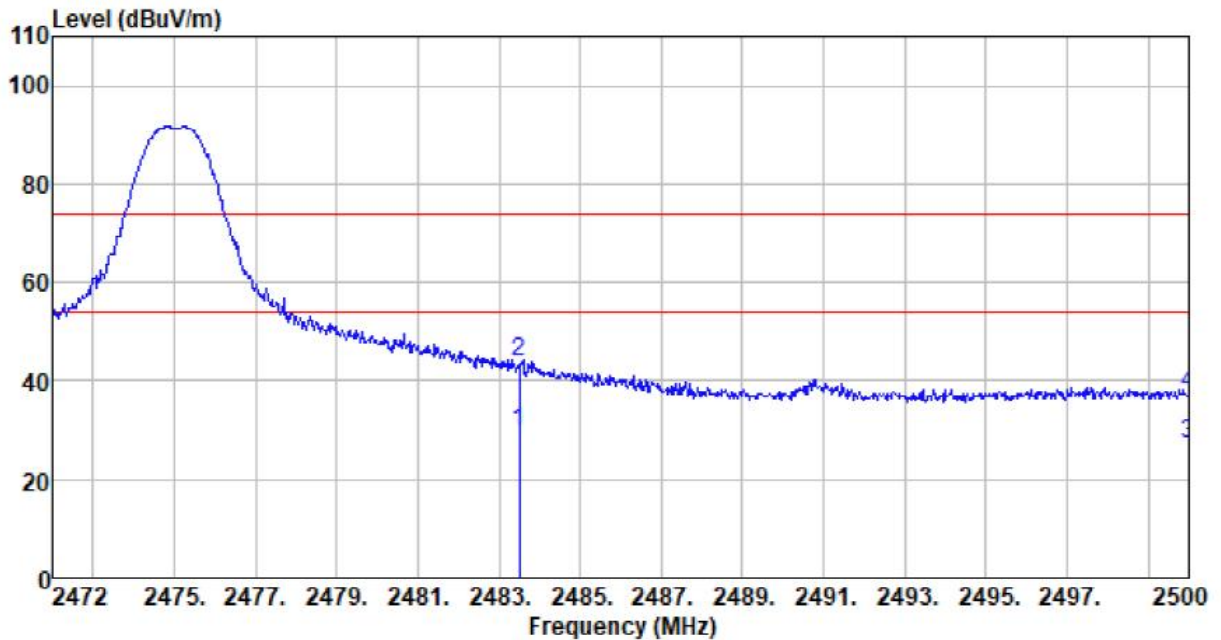


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2483.500	37.60	26.78	4.13	38.90	29.61	54.00	-24.39	Average
2483.500	51.94	26.78	4.13	38.90	43.95	74.00	-30.05	Peak
2500.000	35.44	26.48	4.14	38.90	27.16	54.00	-26.84	Average
2500.000	45.71	26.48	4.14	38.90	37.43	74.00	-36.57	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

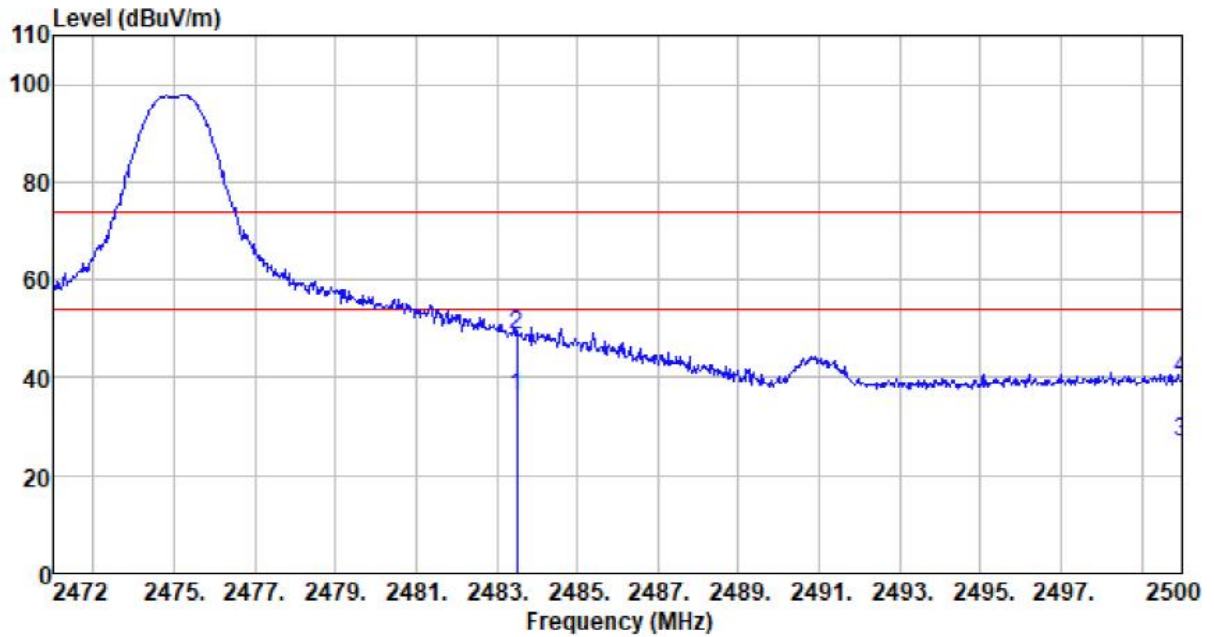

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2483.500	42.64	28.22	4.13	38.90	36.09	54.00	-17.91	Average
2483.500	55.37	28.22	4.13	38.90	48.82	74.00	-25.18	Peak
2500.000	33.00	28.63	4.14	38.90	26.87	54.00	-27.13	Average
2500.000	45.93	28.63	4.14	38.90	39.80	74.00	-34.20	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Remarks:

1. The emission levels of other frequencies are very lower than the limit and not show in test report.

8 Test Setup Photo

Reference to the appendix I for details.

9 EUT Construcational Details

Reference to the appendix II for details.

---End---