


AppendixA: 20dB Emission Bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	Limit[MHz]	Verdict
TX	Ant1	2408	1.033	---	---
TX	Ant1	2440	1.035	---	---
TX	Ant1	2475	1.035	---	---

Test Graphs

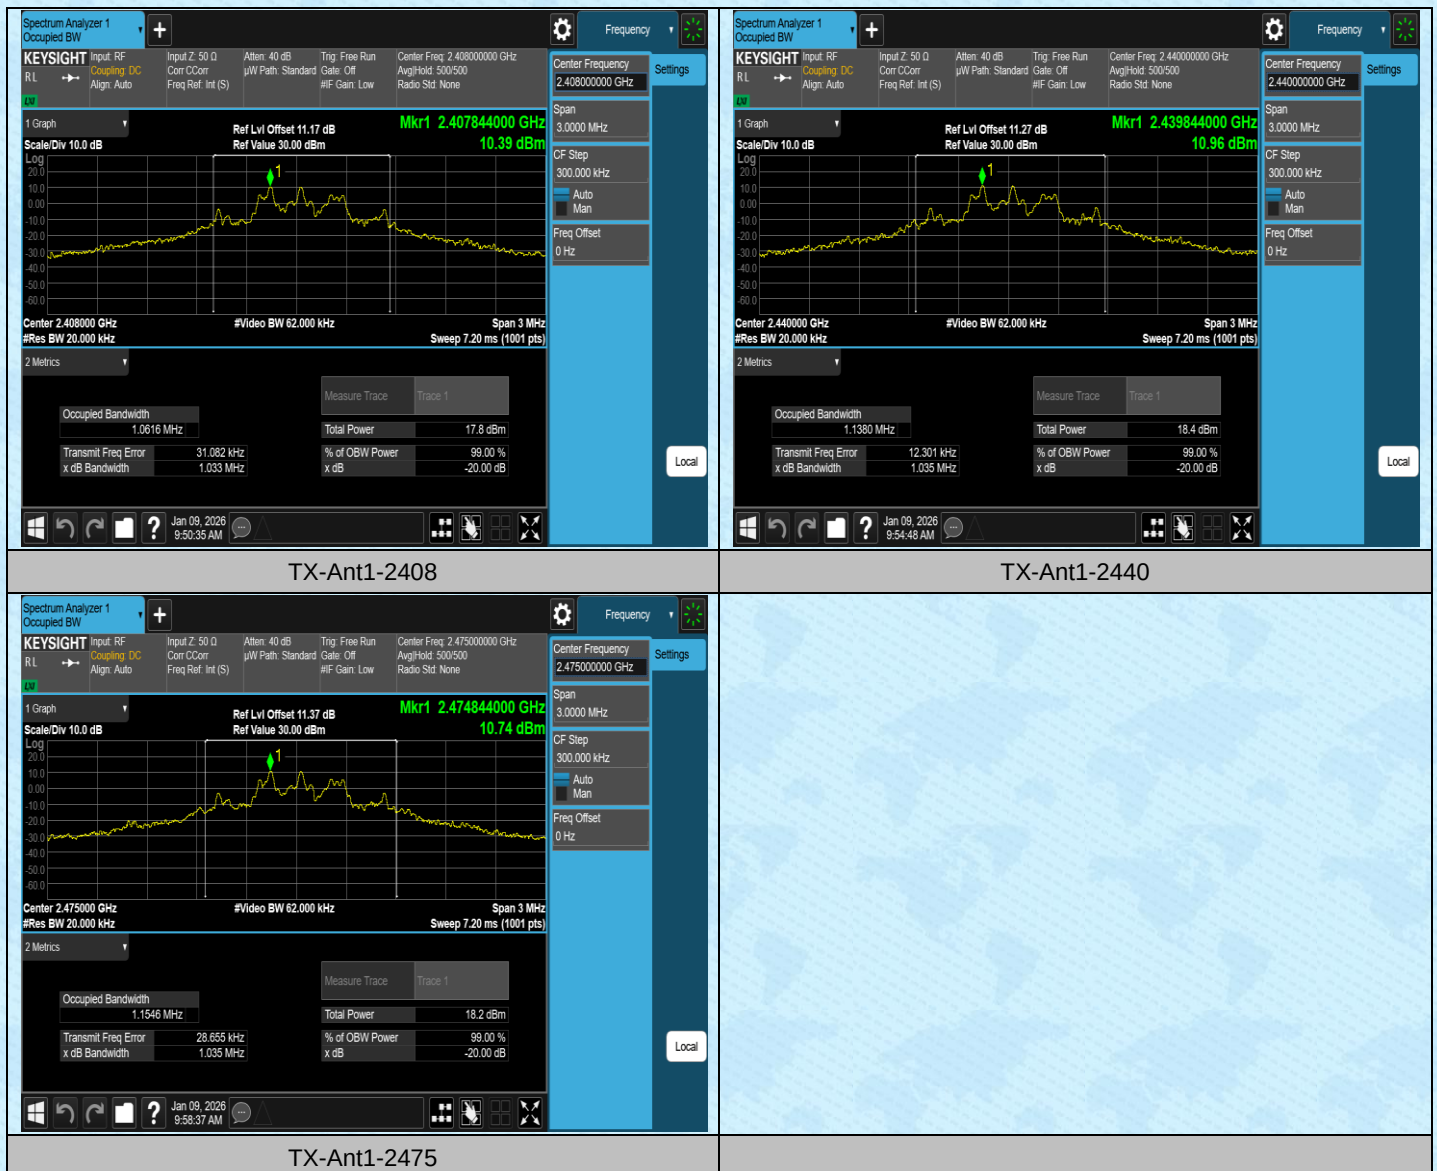


AppendixB: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
TX	Ant1	2408	1.0749	2407.4931	2408.5680	---	---
TX	Ant1	2440	1.1126	2439.4634	2440.5760	---	---
TX	Ant1	2475	1.1918	2474.4241	2475.6159	---	---

Test Graphs

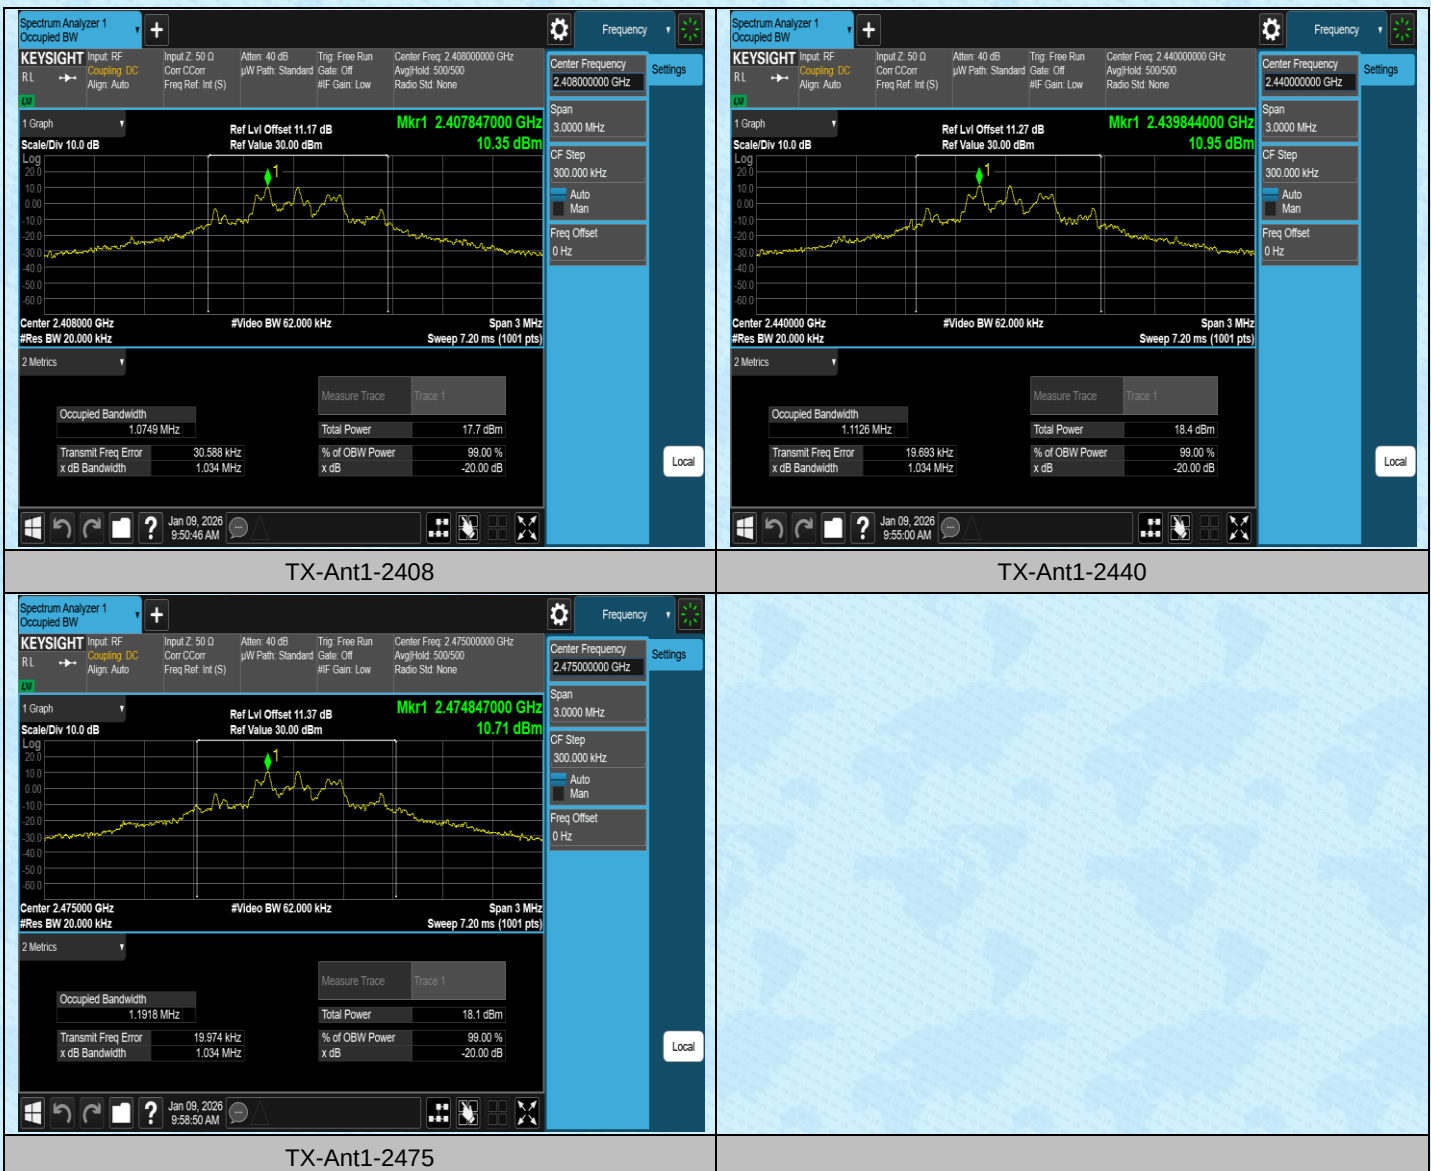


AppendixC: Maximum conducted output power

Test Result

TestMode	Antenna	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
TX	Ant1	2408	11.56	≤30	PASS
TX	Ant1	2440	12.06	≤30	PASS
TX	Ant1	2475	11.96	≤30	PASS

Test Graphs

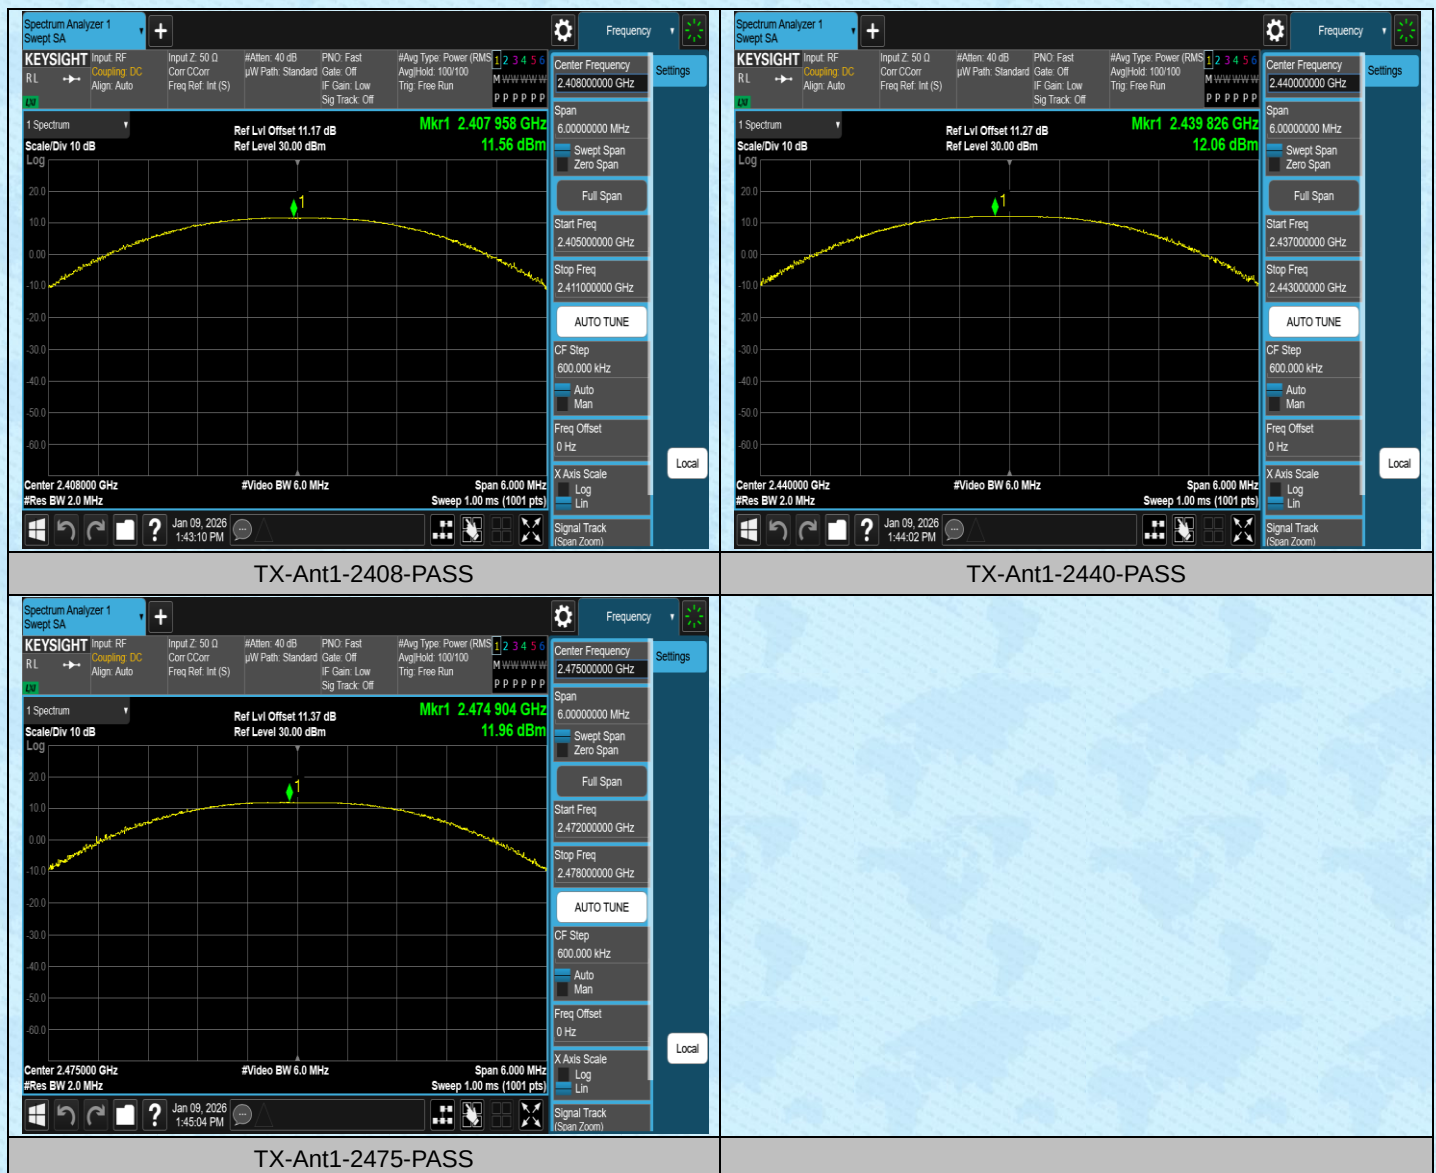


AppendixD: Carrier frequency separation

Test Result

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
TX	Ant1	Hop_2408	4.51	0.689	PASS
TX	Ant1	Hop_2440	4.491	0.690	PASS
TX	Ant1	Hop_2475	3.996	0.690	PASS

Test Graphs

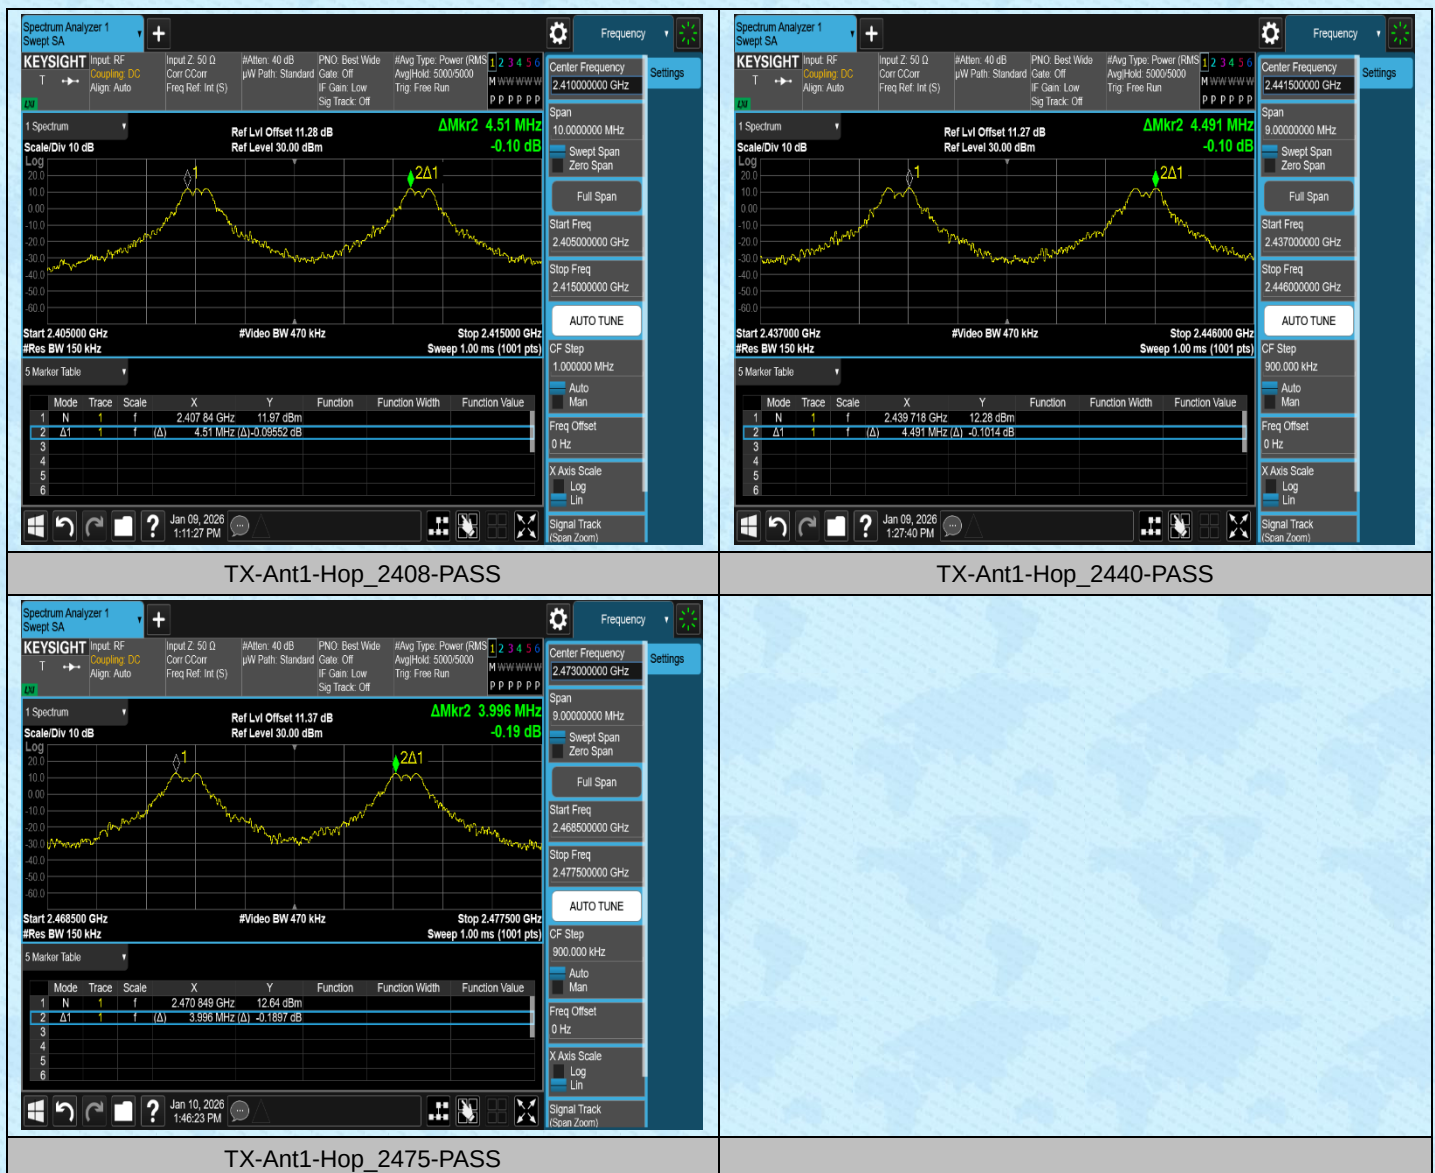


AppendixE: Time of occupancy

Test Result

TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
TX	Ant1	Hop_2408	1.338	7	0.009	≤0.4	PASS
TX	Ant1	Hop_2440	1.329	6	0.008	≤0.4	PASS
TX	Ant1	Hop_2475	1.338	6	0.008	≤0.4	PASS

Test Graphs

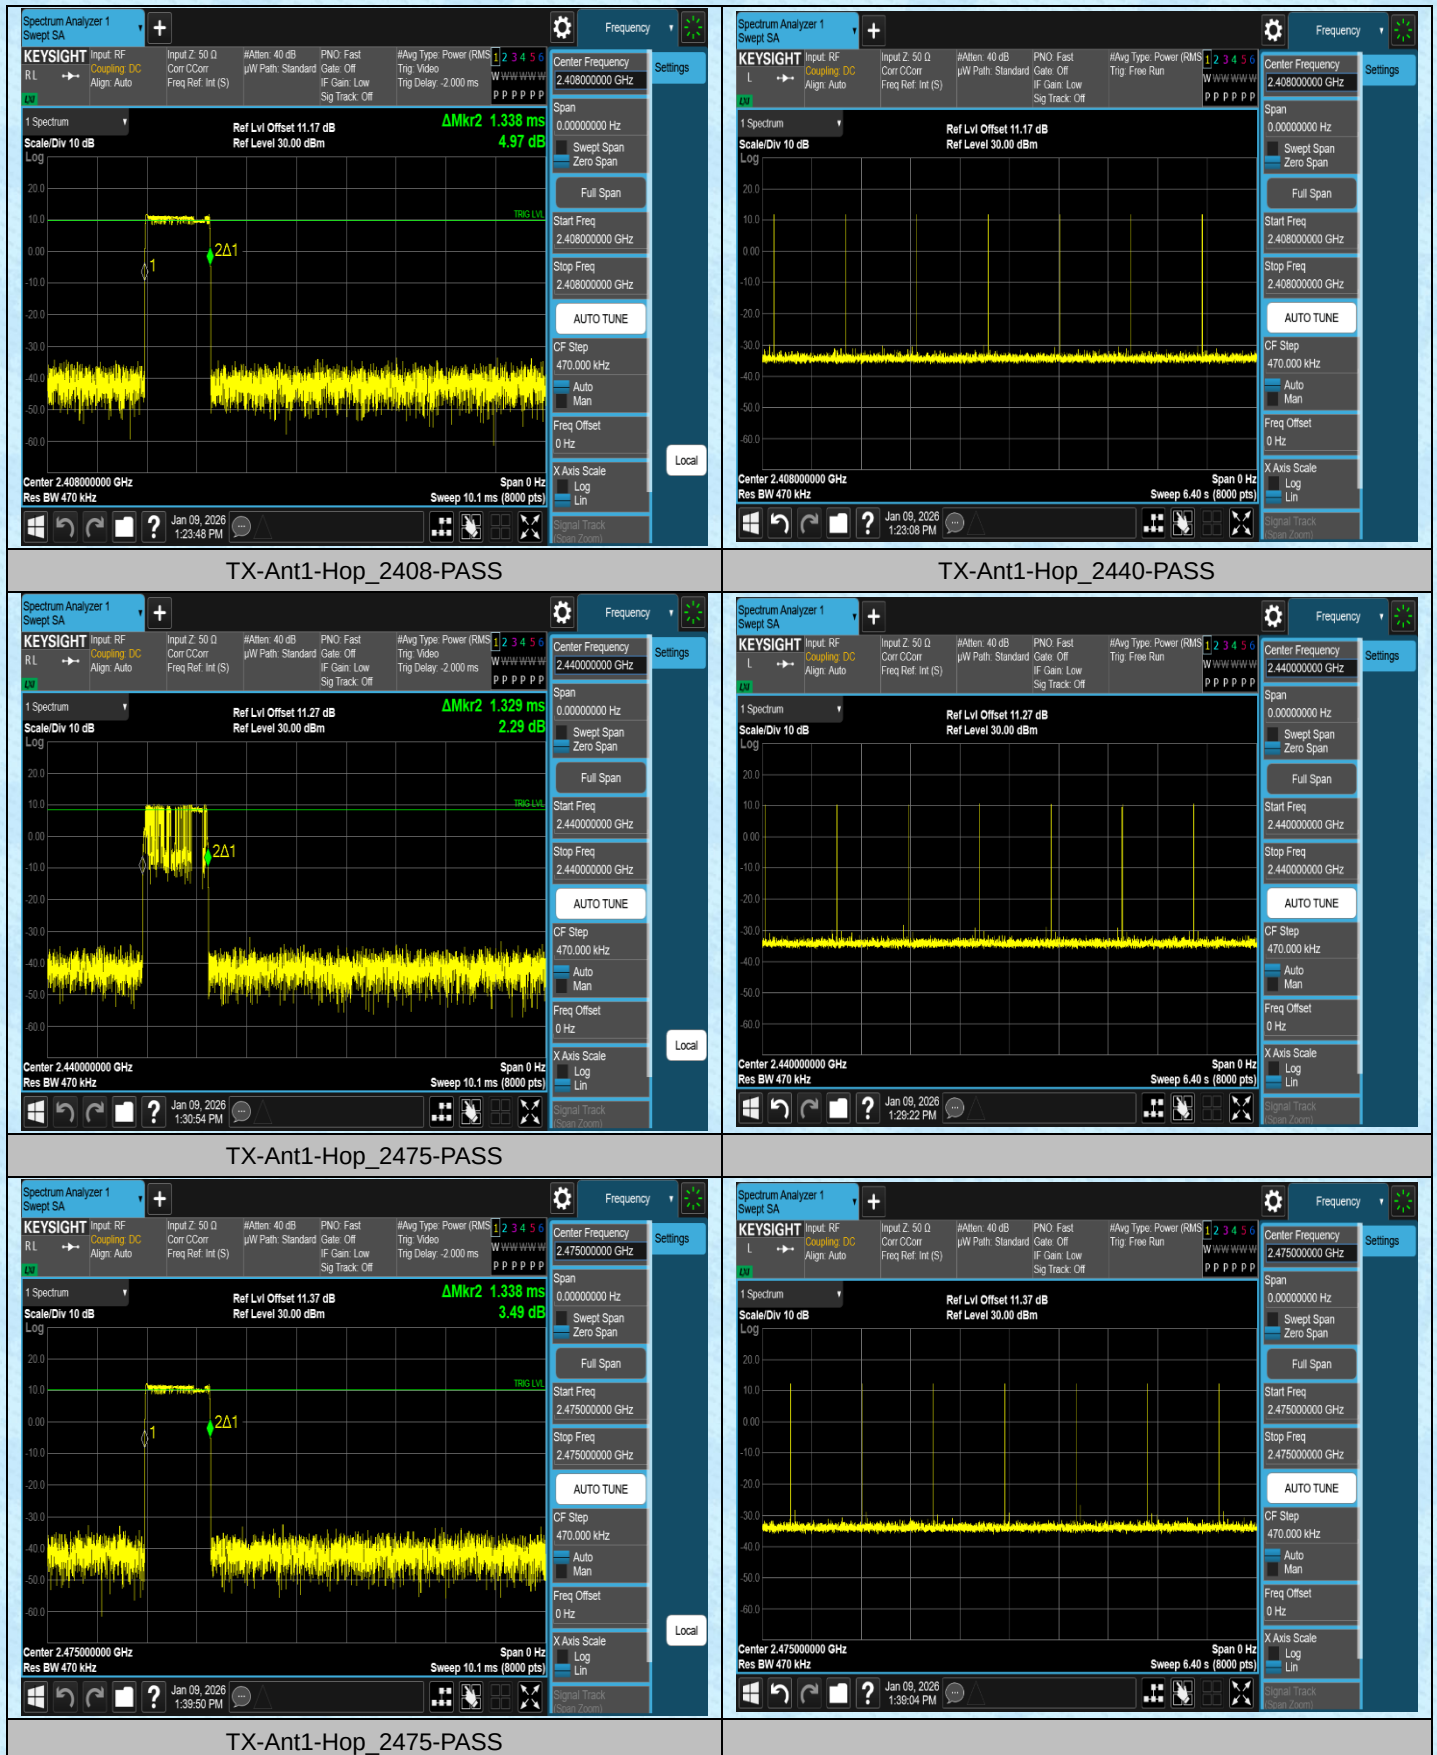

AppendixF: Number of hopping channels

Test Result

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
TX	Ant1	Hop_2408	16	≥15	PASS

Test Graphs




AppendixG:Band edge measurements

Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
TX	Ant1	Low	2408	11.16	-38.73	≤-8.84	PASS
TX	Ant1	High	2475	11.59	-35.84	≤-8.41	PASS
TX	Ant1	Low	Hop_2408	11.47	-38.75	≤-8.53	PASS
TX	Ant1	High	Hop_2475	12.07	-36.67	≤-7.93	PASS


Test Graphs

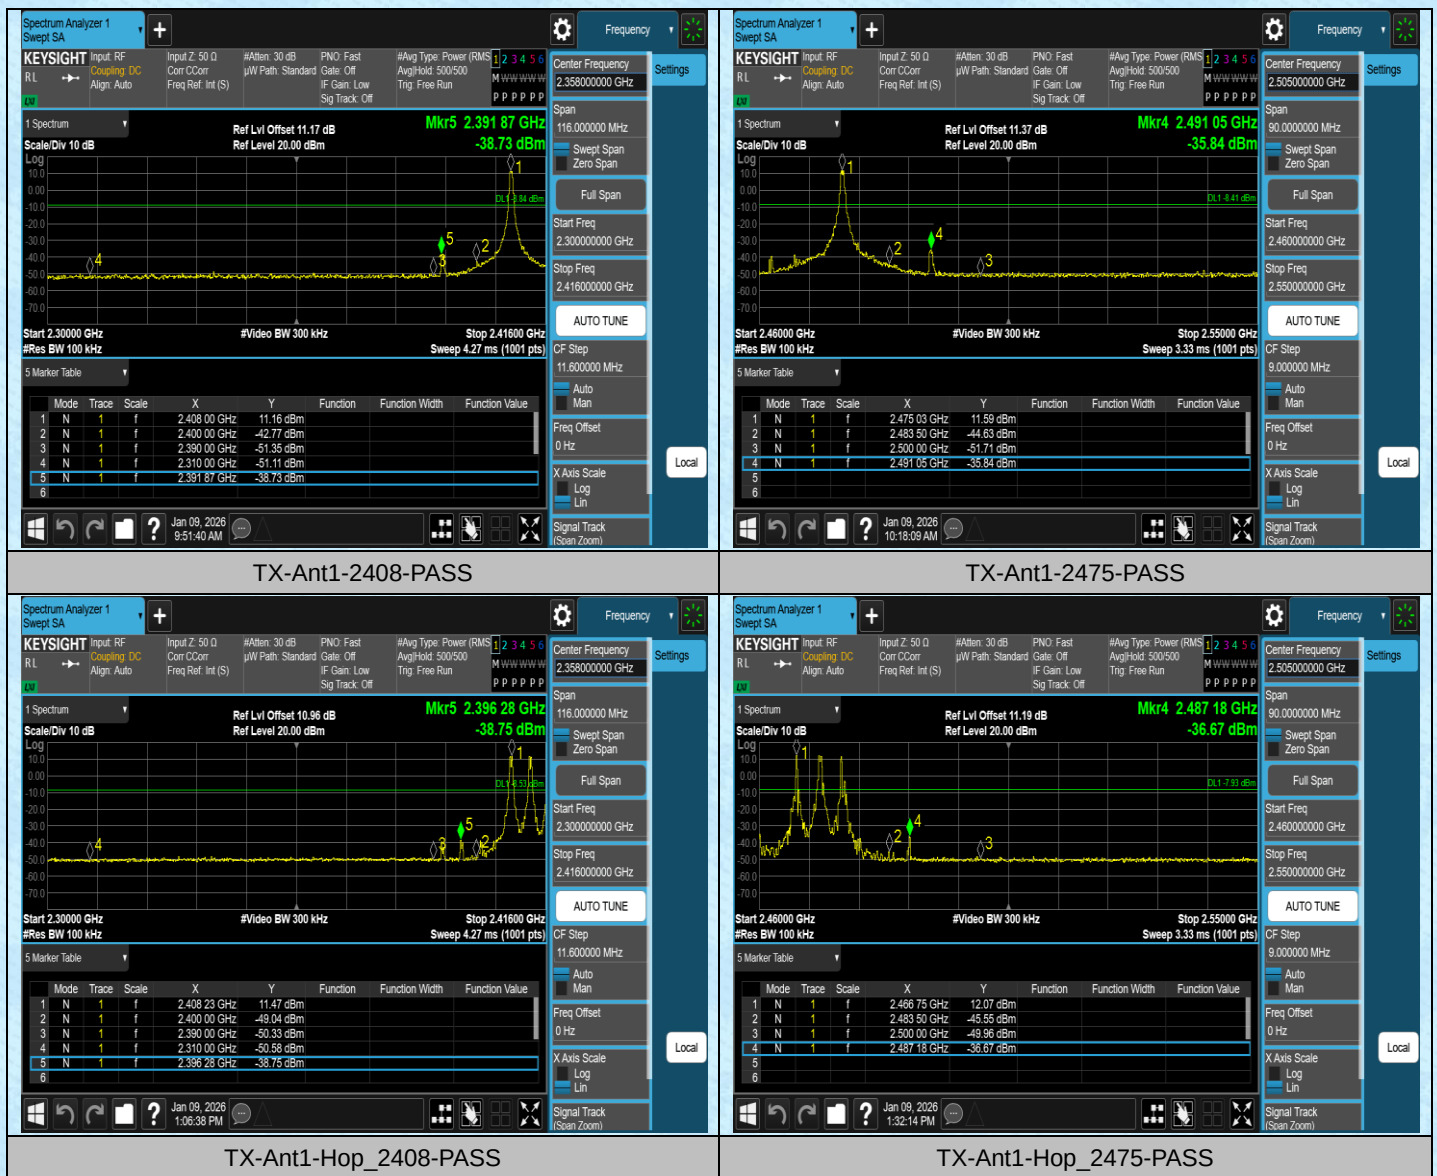


AppendixH:Conducted Spurious Emission**Test Result**

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
TX	Ant1	2408	0~Reference	11.12	11.12	---	PASS
TX	Ant1	2408	30~1000	11.12	-63.3	≤-8.88	PASS
TX	Ant1	2408	1000~26500	11.12	-43.36	≤-8.88	PASS
TX	Ant1	2440	0~Reference	11.72	11.72	---	PASS
TX	Ant1	2440	30~1000	11.72	-62.97	≤-8.28	PASS
TX	Ant1	2440	1000~26500	11.72	-43.68	≤-8.28	PASS
TX	Ant1	2475	0~Reference	11.67	11.67	---	PASS
TX	Ant1	2475	30~1000	11.67	-62.37	≤-8.33	PASS
TX	Ant1	2475	1000~26500	11.67	-43.86	≤-8.33	PASS

Test Graphs

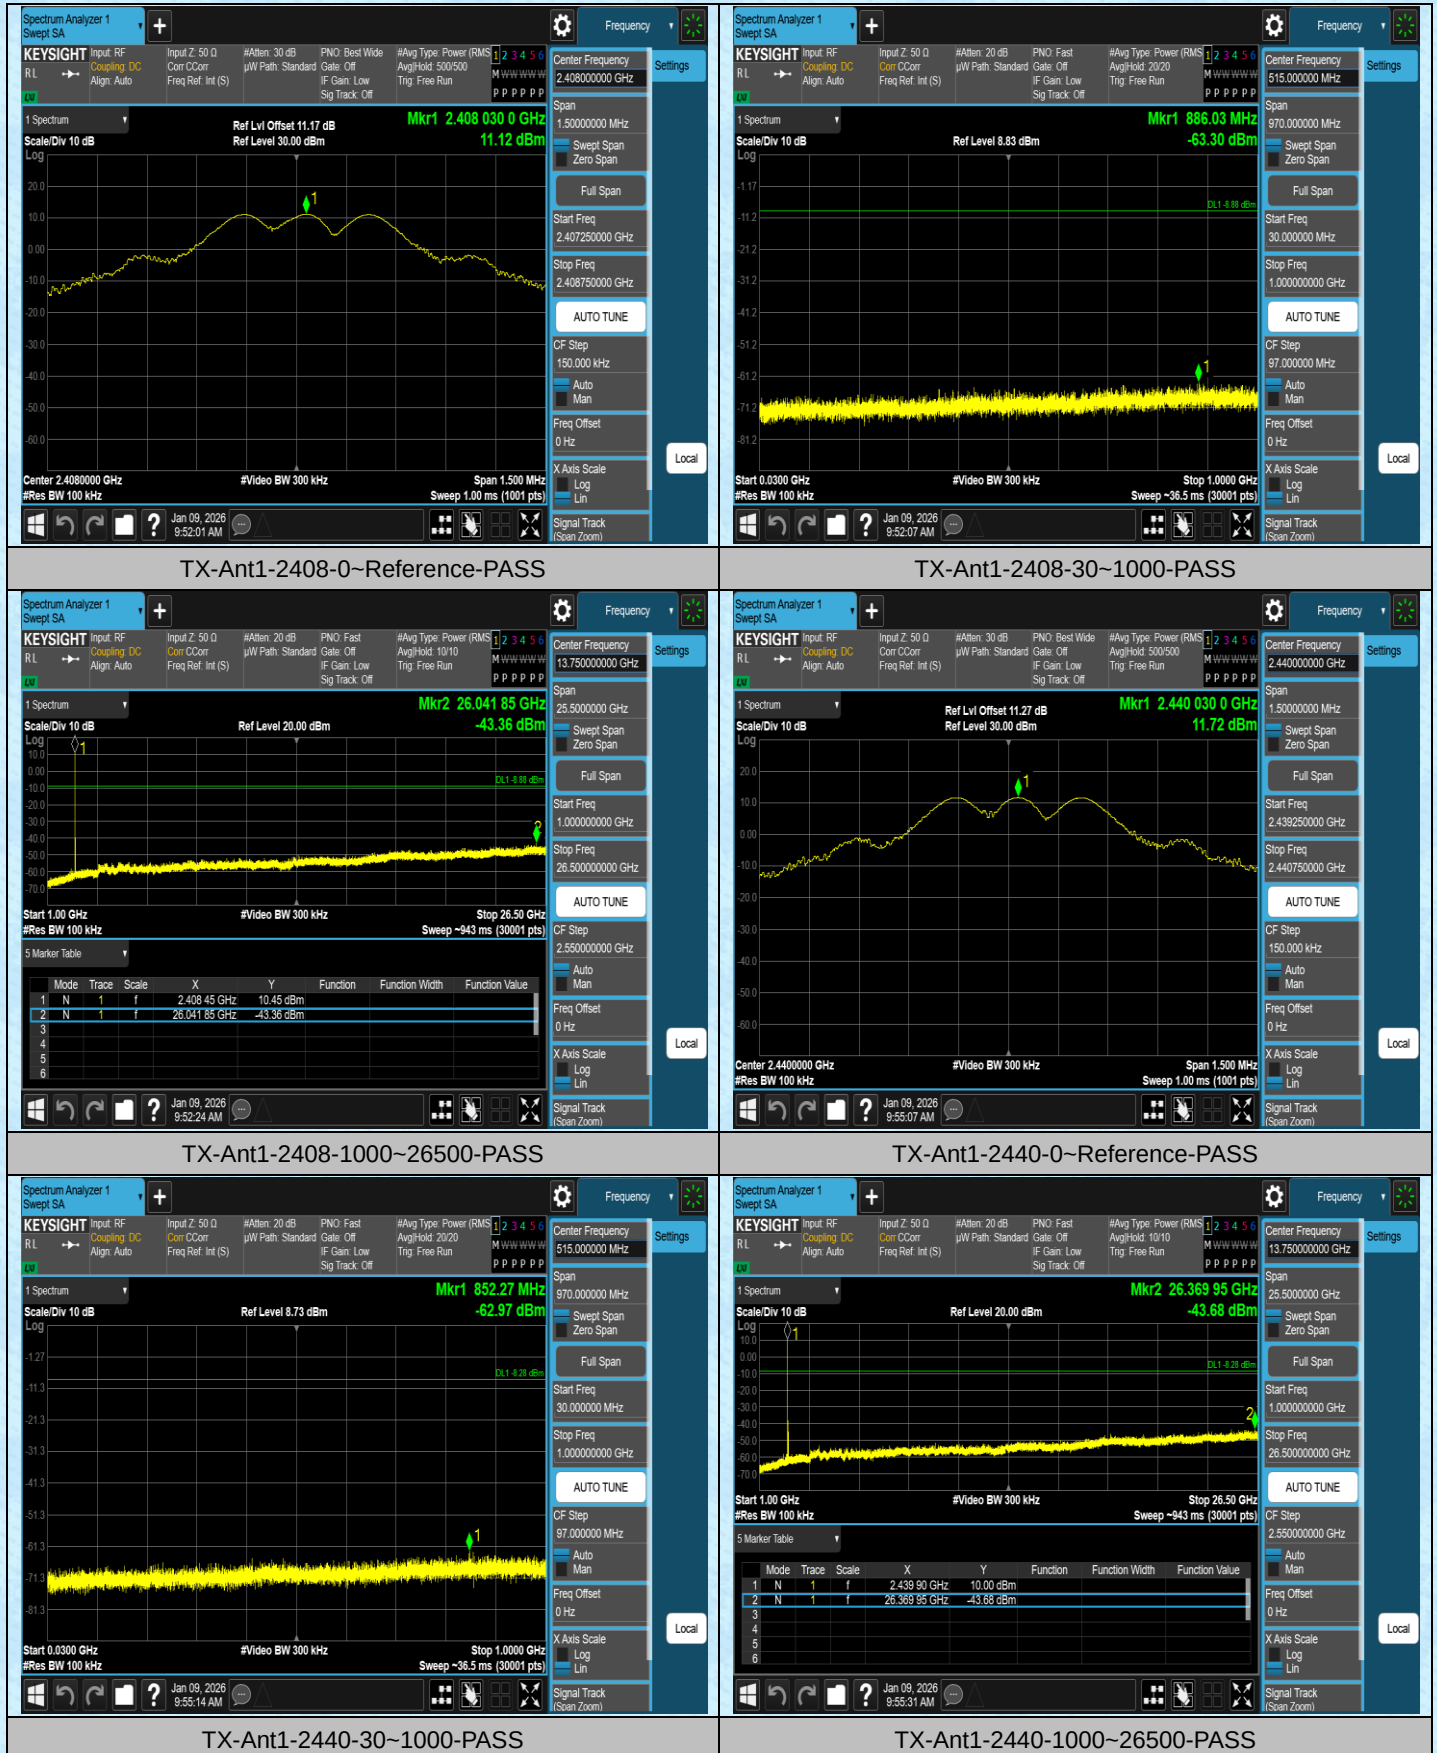

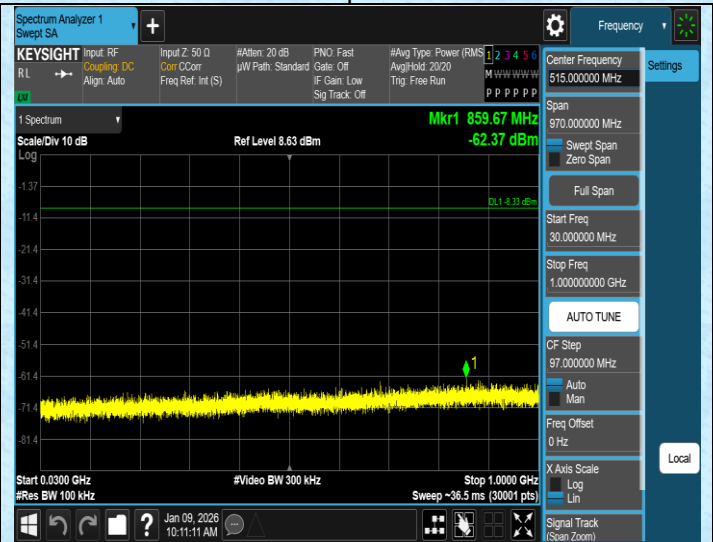


TX-Ant1-2475-0~Reference-PASS



TX-Ant1-2475-1000~26500-PASS

TX-Ant1-2475-30~1000-PASS

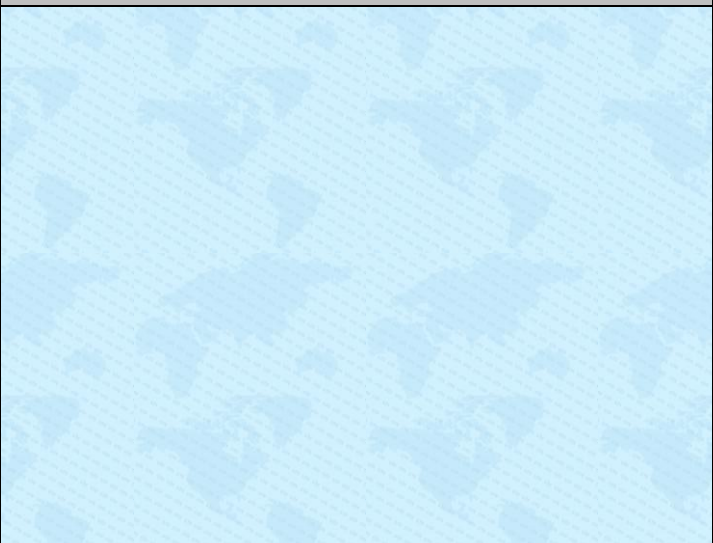


AppendixI: Duty Cycle

Test Result

TestMode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Limit	Verdict
TX	Ant1	2408	1.35	3.86	34.97	---	---
TX	Ant1	2440	1.33	3.84	34.64	---	---
TX	Ant1	2475	1.33	3.84	34.64	---	---

Test Graphs

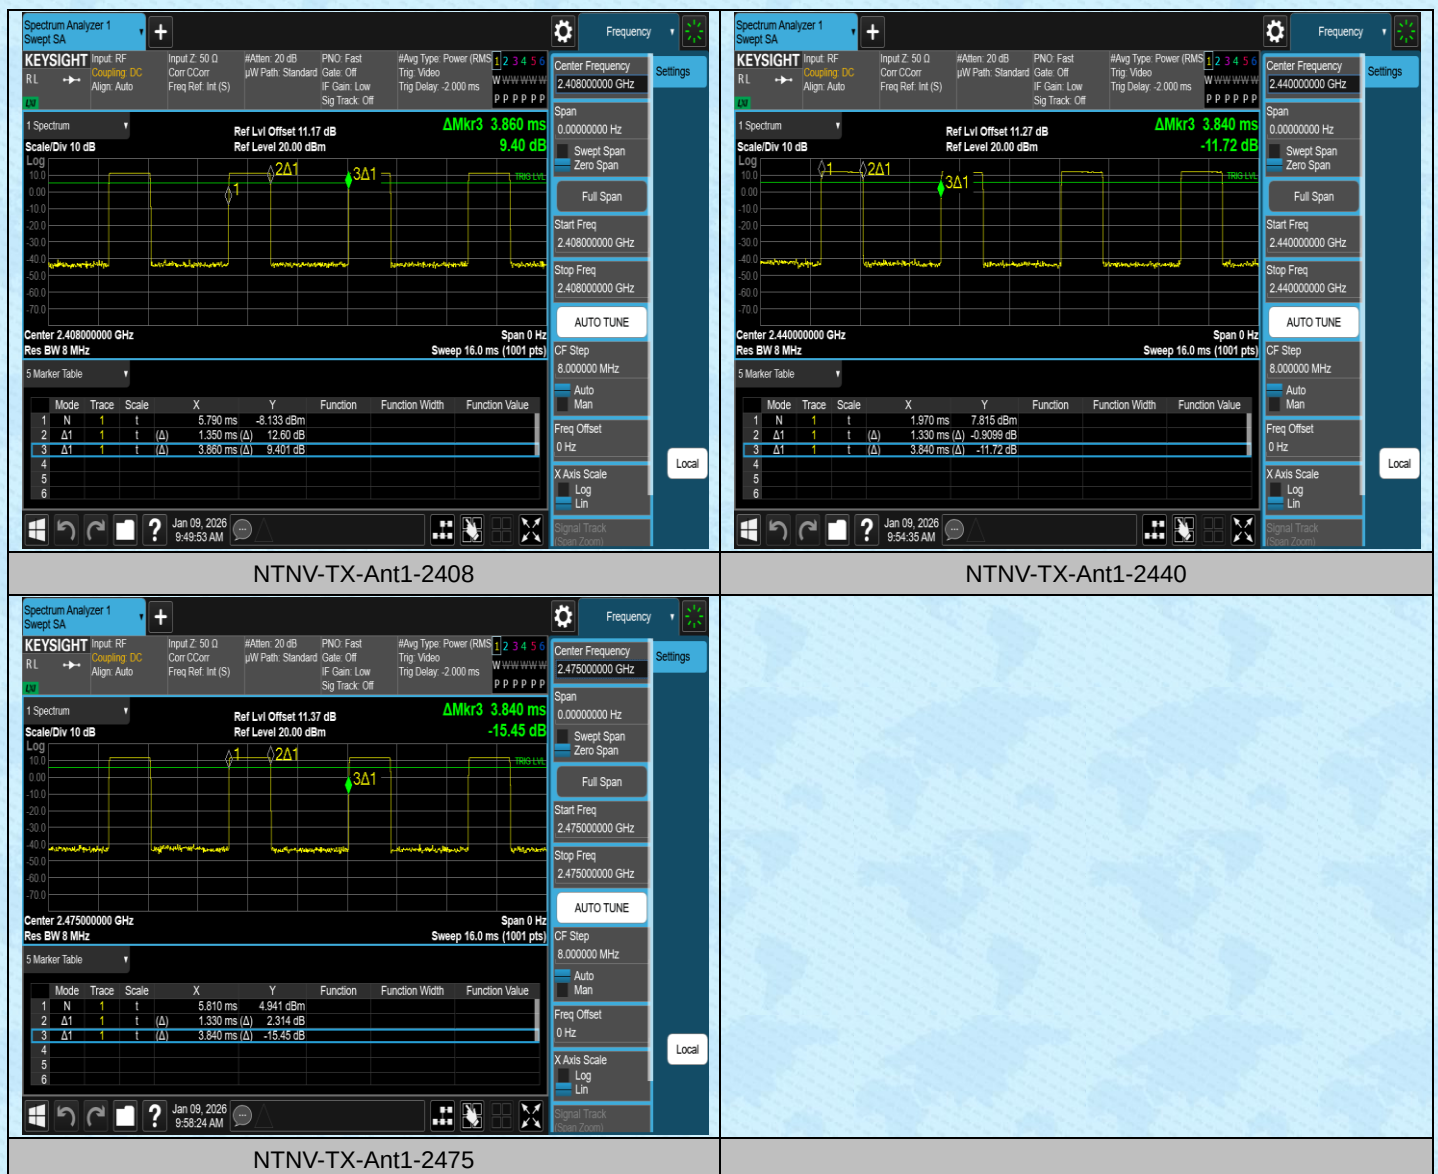

---End---