


TEST REPORT

Product Name: Eden Snacker
FCC ID: 2A2YGSNK01
Trademark: Eden
Model Number: SNK-01
Prepared For: Eden Immersive Limited
Address: Ground Floor, 71 Lower Baggot Street Dublin, Ireland D02 P593
Manufacturer: Eden Immersive Limited
Address: Ground Floor, 71 Lower Baggot Street Dublin, Ireland D02 P593
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinghe Road, Xinqiao Street, Baoan District, Shenzhen China
Sample Received Date: Dec. 27, 2021
Sample tested Date: Dec. 27, 2021 to Jan 07, 2022
Issue Date: Jan 07, 2022
Report No.: CTB220107012RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. This report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	27
8.1 Block Diagram Of Test Setup	27
8.2 Limit	27
8.3 Test procedure	27
8.4 Test Result	28
9. CONDUCTED PEAK OUTPUT POWER	36
9.1 Block Diagram Of Test Setup	36
9.2 Limit	36
9.3 Test procedure	36
9.4 Test Result	37
10. 20DB OCCUPIED BANDWIDTH	41
10.1 Block Diagram Of Test Setup	41
10.2 Limit	41
10.3 Test procedure	41
10.4 Test Result	41
11. CARRIER FREQUENCIES SEPARATION	45
11.1 Block Diagram Of Test Setup	45
11.2 Limit	45

11.3	Test procedure	45
11.4	Test Result	45
12.	HOPPING CHANNEL NUMBER	49
12.1	Block Diagram Of Test Setup	49
12.2	Limit	49
12.3	Test procedure	49
12.4	Test Result	49
13.	DWELL TIME	51
13.1	Block Diagram Of Test Setup	51
13.2	Limit	51
13.3	Test procedure	51
13.4	Test Result	52
14.	PSEUDORANDOM FREQUENCY	56
14.1	Limit	56
14.2	Test procedure	56
14.3	Test Result	57
15.	ANTENNA REQUIREMENT	58
16.	EUT PHOTOGRAPHS	59
17.	EUT TEST SETUP PHOTOGRAPHS	60

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB220107012RFX	Jan 07, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m camber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m camber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63℃
frequency	1×10^{-7}
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	SNK-01
Model Difference:	N/A
Bluetooth Version:	Bluetooth V5.0
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth: 3.376dBm
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna installation:	Bluetooth: Internal Antenna
Antenna Gain:	Bluetooth: 3dBi
Ratings:	Input: AC 100-240V, 50~60Hz Output: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/4.35A

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC adapter	N/A	PD871A	N/A	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(AC):	120V
Normal Temperature($^{\circ}\text{C}$)	25
Low Temperature($^{\circ}\text{C}$)	0
High Temperature($^{\circ}\text{C}$)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2021.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2021.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2021.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2021.09.27	2022.08.05
6	Signal Generator	Agilent	N5181A	MY49060920	2021.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY47420195	2021.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2021.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-5850MS-1155	20181015001	2021.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2021.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2021.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2021.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2021.09.27	2022.08.05
15	234G Automatic test	Microwave	MTS8200	Ver. 2.0.0.0	2021.09.27	2022.08.05

	software					
16	966 chamber	C.R.T.	966 Room	966	2021.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2021.09.27	2022.08.05
18	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2021.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2021.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2021.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2021.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2021.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2021.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.09.27	2022.08.05

Continuous disturbance


No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2021.09.27	2022.08.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2021.09.27	2022.08.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCS30	834115/006	2021.09.27	2022.08.05
4	Coaxial cable	ZDECL	Z302S	18091904	2021.09.27	2022.08.05
5	AAN	Schwarzbeck	NTFM8158	183	2021.09.27	2022.08.05
6	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.05
7	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2021.11.01	2022.08.05
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2021.11.01	2022.08.05
3	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2021.09.27	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2021.09.27	2022.08.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2021.09.27	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2021.09.27	2022.08.05
9	Coaxial cable	ETS	RFC-SNS-100-NMS-30 NI	/	2021.09.27	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.05
11	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

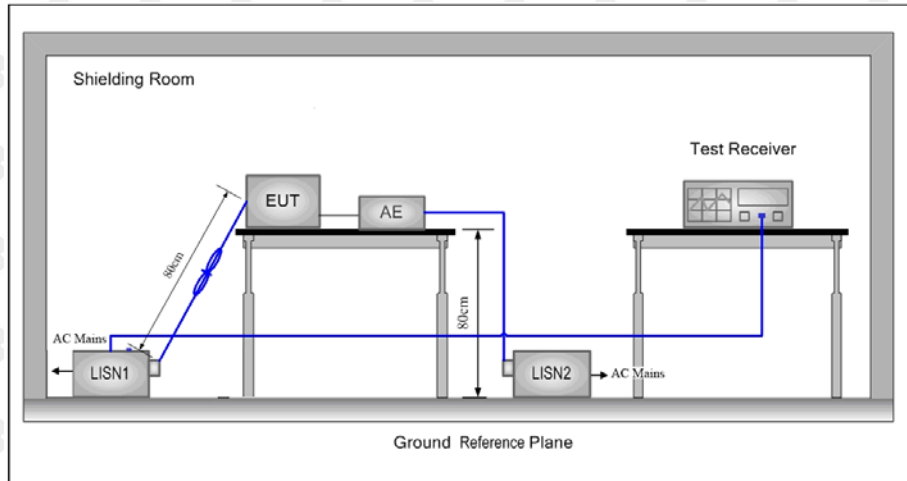

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference

plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L:

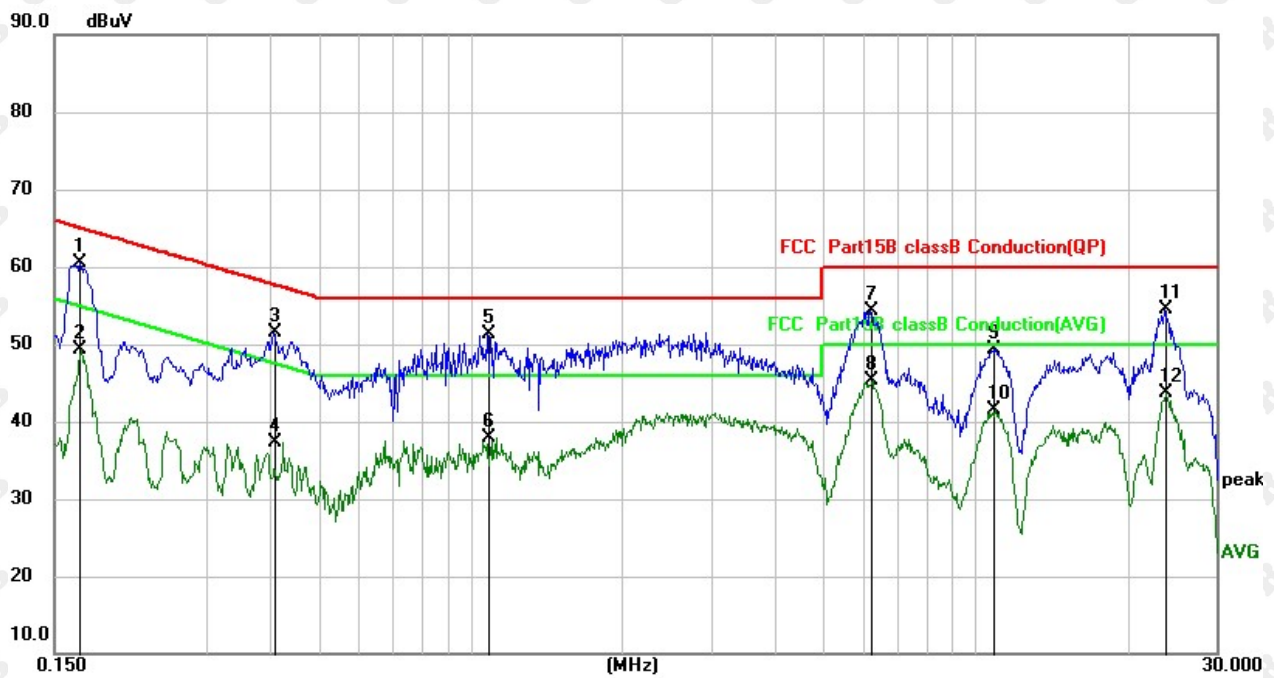


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	*	0.1685	50.48	9.96	60.44	65.03	-4.59	QP
2		0.1685	39.29	9.96	49.25	55.03	-5.78	AVG
3		0.4100	41.62	9.96	51.58	57.65	-6.07	QP
4		0.4100	27.25	9.96	37.21	47.65	-10.44	AVG
5		1.0859	41.43	9.96	51.39	56.00	-4.61	QP
6		1.0859	27.87	9.96	37.83	46.00	-8.17	AVG
7		6.1900	43.98	10.32	54.30	60.00	-5.70	QP
8		6.1900	34.92	10.32	45.24	50.00	-4.76	AVG
9		10.8978	38.42	10.83	49.25	60.00	-10.75	QP
10		10.8978	30.58	10.83	41.41	50.00	-8.59	AVG
11		23.7099	43.38	11.20	54.58	60.00	-5.42	QP
12		23.7099	32.54	11.20	43.74	50.00	-6.26	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

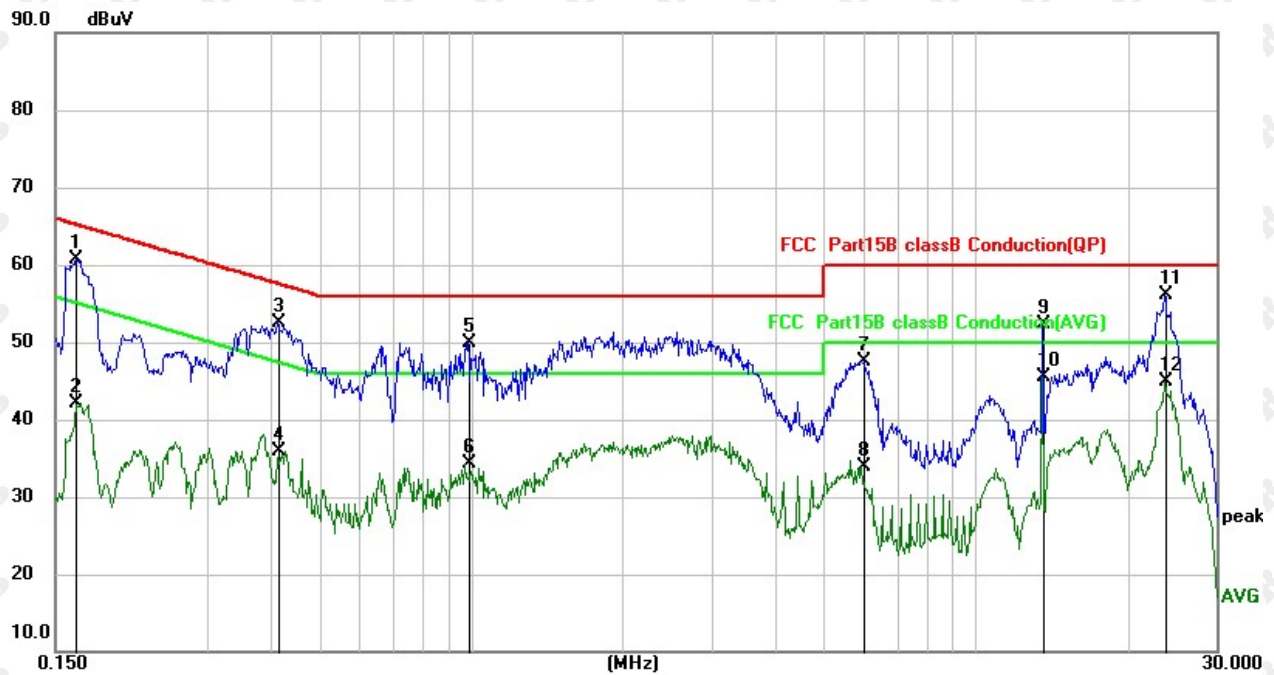

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1650	50.76	9.96	60.72	65.21	-4.49	QP
2		0.1650	32.05	9.96	42.01	55.21	-13.20	AVG
3		0.4138	42.64	9.96	52.60	57.57	-4.97	QP
4		0.4138	25.99	9.96	35.95	47.57	-11.62	AVG
5		0.9858	40.03	9.96	49.99	56.00	-6.01	QP
6		0.9858	24.28	9.96	34.24	46.00	-11.76	AVG
7		6.0217	37.27	10.30	47.57	60.00	-12.43	QP
8		6.0217	23.52	10.30	33.82	50.00	-16.18	AVG
9		13.5579	41.36	10.92	52.28	60.00	-7.72	QP
10		13.5579	34.66	10.92	45.58	50.00	-4.42	AVG
11	*	23.6380	44.97	11.20	56.17	60.00	-3.83	QP
12		23.6380	33.61	11.20	44.81	50.00	-5.19	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

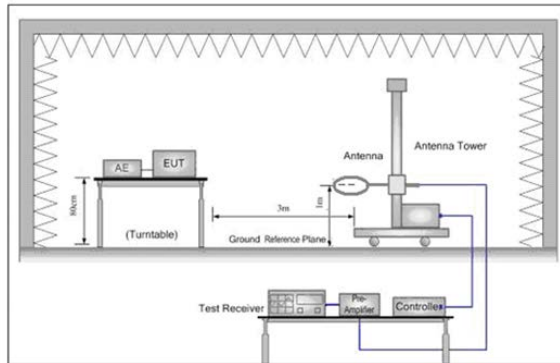


Figure 1. Below 30MHz

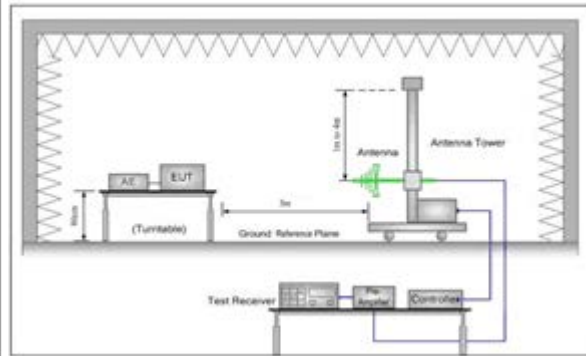


Figure 2. 30MHz to 1GHz

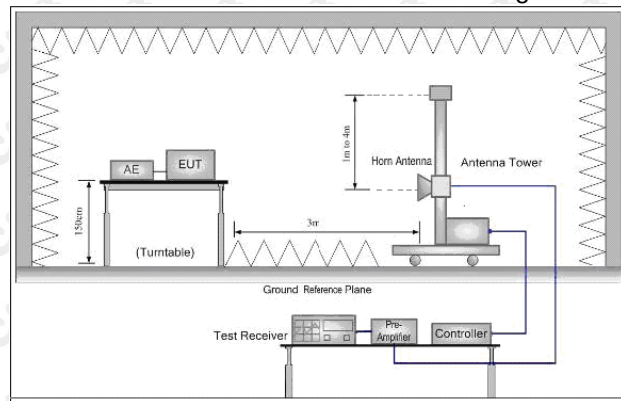


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test


Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Below 1GHz Test Results:


Antenna polarity: H

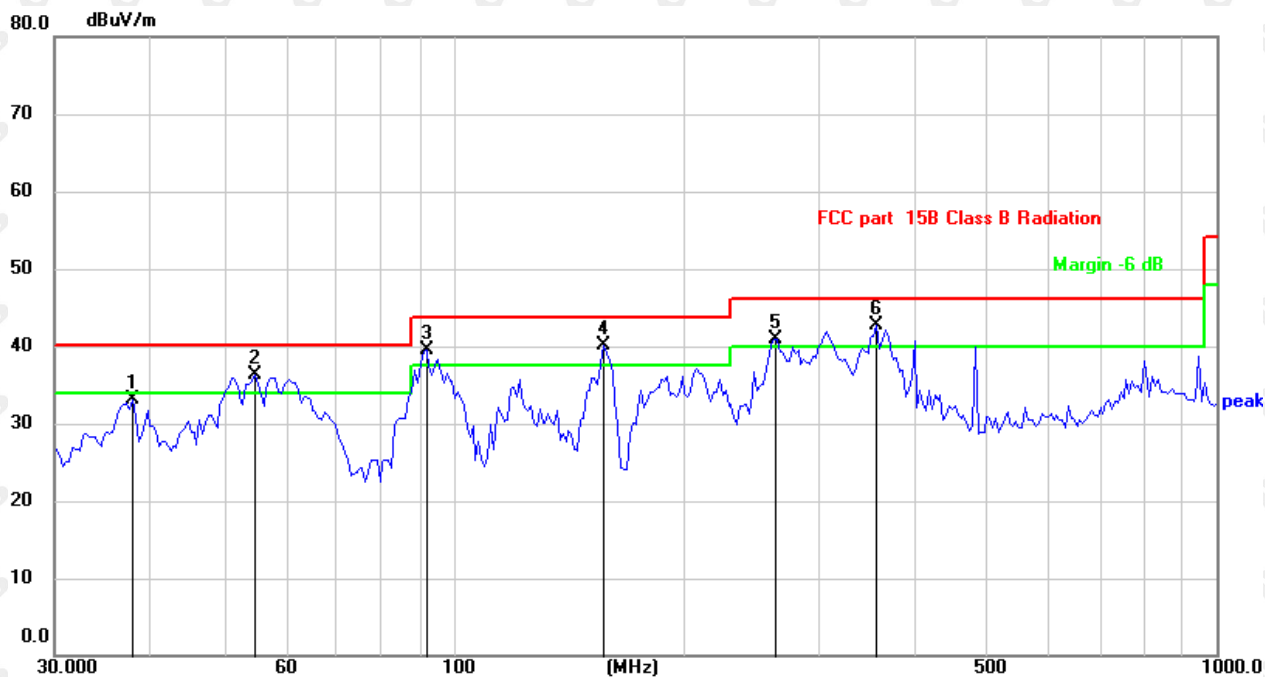

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		38.0114	38.85	-5.75	33.10	40.00	-6.90	QP
2	!	54.9309	42.19	-5.90	36.29	40.00	-3.71	QP
3	!	92.1386	48.99	-9.50	39.49	43.50	-4.01	QP
4	!	157.2828	45.69	-5.55	40.14	43.50	-3.36	QP
5	!	263.8190	46.50	-5.57	40.93	46.00	-5.07	QP
6	*	358.5568	45.93	-3.15	42.78	46.00	-3.22	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V

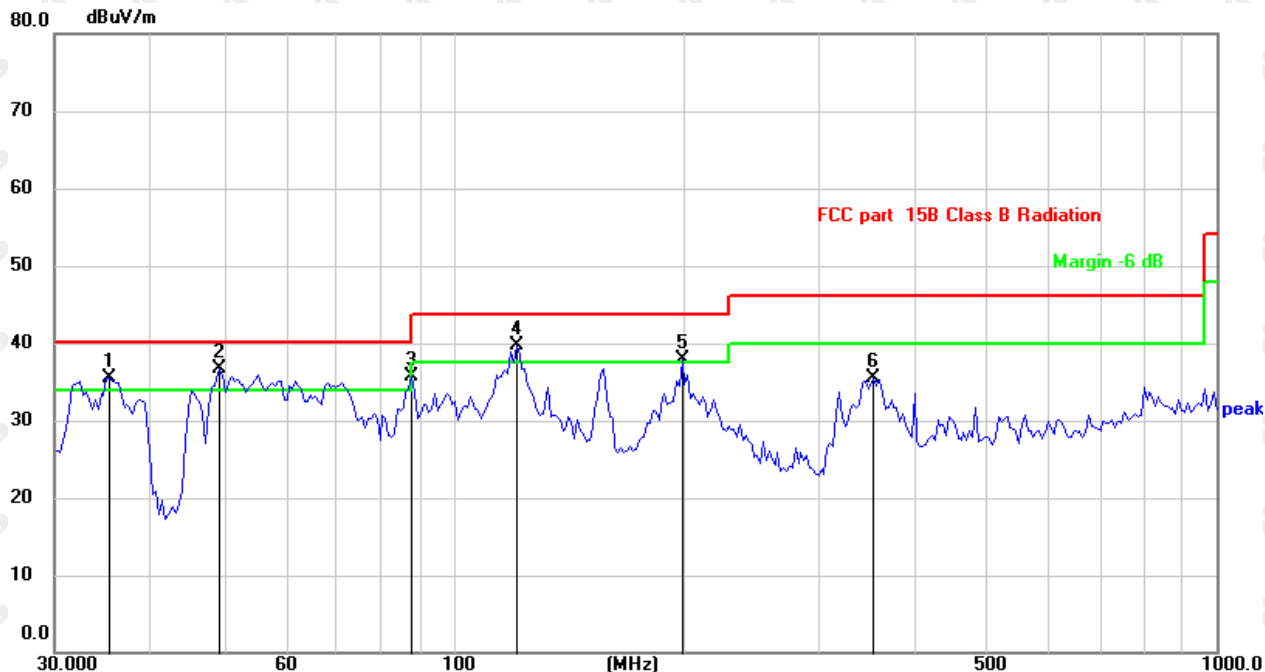

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	!	35.4369	41.95	-6.37	35.58	40.00	-4.42	QP
2	*	49.4459	42.34	-5.62	36.72	40.00	-3.28	QP
3		88.1872	45.42	-9.74	35.68	43.50	-7.82	QP
4	!	120.9108	46.54	-6.82	39.72	43.50	-3.78	QP
5	!	199.2855	46.12	-8.27	37.85	43.50	-5.65	QP
6		355.4272	38.80	-3.26	35.54	46.00	-10.46	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	58.79	-3.65	55.14	74.00	-18.86	peak
4804	49.35	-3.65	45.70	54.00	-8.30	AVG
7206	59.74	-0.95	58.79	74.00	-15.21	peak
7206	42.64	-0.95	41.69	54.00	-12.31	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	57.62	-3.65	53.97	74.00	-20.03	peak
4804	50.18	-3.65	46.53	54.00	-7.47	AVG
7206	59.10	-0.95	58.15	74.00	-15.85	peak
7206	42.89	-0.95	41.94	54.00	-12.06	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH Middle (2441MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	59.86	-3.54	56.32	74.00	-17.68	peak
4882.00	48.64	-3.54	45.10	54.00	-8.90	AVG
7323.00	56.49	-0.81	55.68	74.00	-18.32	peak
7323.00	43.84	-0.81	43.03	54.00	-10.97	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	57.59	-3.54	54.05	74.00	-19.95	peak
4882.00	50.49	-3.54	46.95	54.00	-7.05	AVG
7323.00	56.69	-0.81	55.88	74.00	-18.12	peak
7323.00	41.02	-0.81	40.21	54.00	-13.79	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	59.26	-3.43	55.83	74.00	-18.17	peak
4960	49.85	-3.44	46.41	54.00	-7.59	AVG
7440	61.13	-0.77	60.36	74.00	-13.64	peak
7440	42.11	-0.77	41.34	54.00	-12.66	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	57.43	-3.43	54.00	74.00	-20.00	peak
4960	50.12	-3.44	46.68	54.00	-7.32	AVG
7440	60.70	-0.77	59.93	74.00	-14.07	peak
7440	42.49	-0.77	41.72	54.00	-12.28	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) All modes of GFSK, $\pi/4$ DQPSK, 8DPSK were test at Low, Middle, and High channel, only the worst result of GFSK DH5 Low Channel was reported for below 1GHz test.
- (3) For BT above 1GHz test all modes of GFSK, $\pi/4$ DQPSK, 8DPSK were test at Low, Middle, and High channel, only the worst result of GFSK DH5 was reported.
- (4) By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
- (5) Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.
- (6) Other emissions for frequency 1GHz~25GHz are attenuated 20dB below the limit, so it does not record in report

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low -GFSK (Worst case)

Horizontal (Worst case)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.74	-5.81	50.93	74.00	-23.07	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.30	-5.84	50.46	74.00	-23.54	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	57.21	-5.81	51.40	74.00	-22.60	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.58	-5.84	50.74	74.00	-23.26	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High -GFSK (Worst case)
Horizontal (Worst case)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.54	-5.81	49.73	74.00	-24.27	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.23	-6.06	47.17	74.00	-26.83	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.58	-5.81	51.77	74.00	-22.23	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.65	-6.06	47.59	74.00	-26.41	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

NO hopping

Operation Mode: TX CH Low -GFSK (Worst case)
Horizontal (Worst case)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	54.45	-5.81	48.64	74.00	-25.36	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.52	-5.84	48.68	74.00	-25.32	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.22	-5.81	50.41	74.00	-23.59	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	52.99	-5.84	47.15	74.00	-26.85	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High -GFSK (Worst case)
Horizontal (Worst case)


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.90	-5.81	51.09	74.00	-22.91	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	57.17	-6.06	51.11	74.00	-22.89	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.65	-5.81	50.84	74.00	-23.16	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.39	-6.06	48.33	74.00	-25.67	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

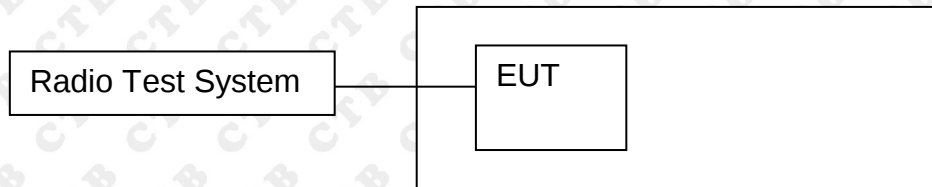

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold


Above 30MHz:

RBW = 100KHz, VBW = 300KHz, Sweep = auto


Detector function = peak, Trace = max hold

8.4 Test Result


Above 12.75GHz Test Results: Power below the limit of 20dbm, so do not put the test results.

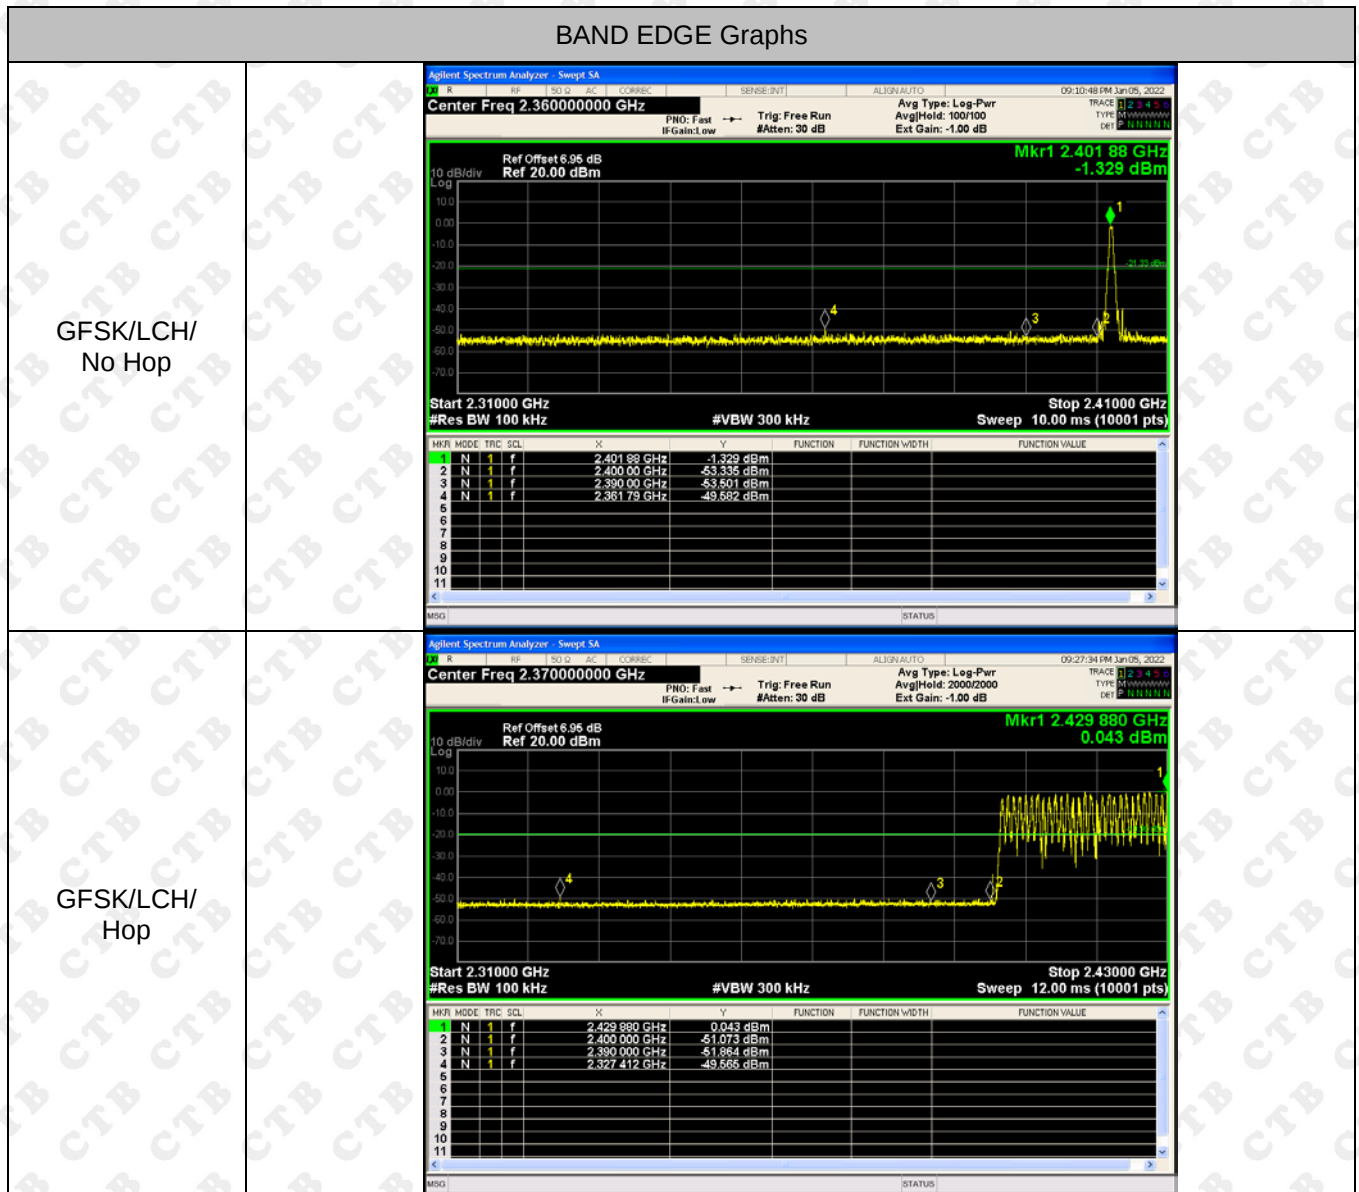


GFSK/HCH/
No Hop



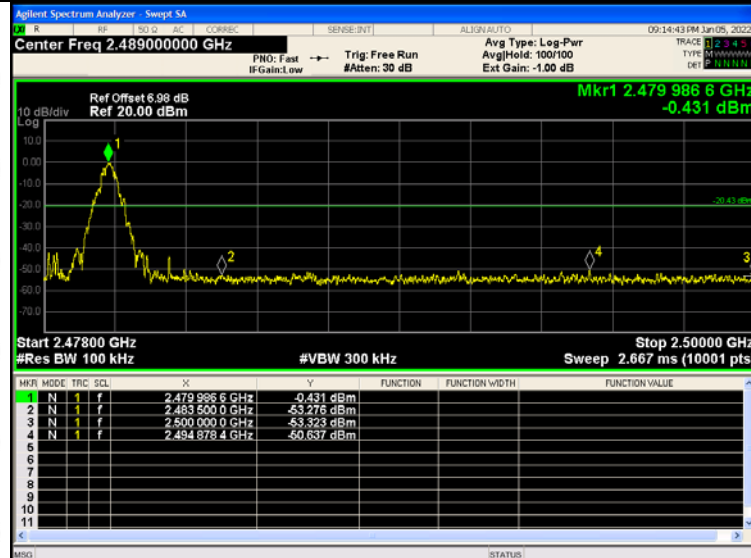


GFSK/HCH/
Hop

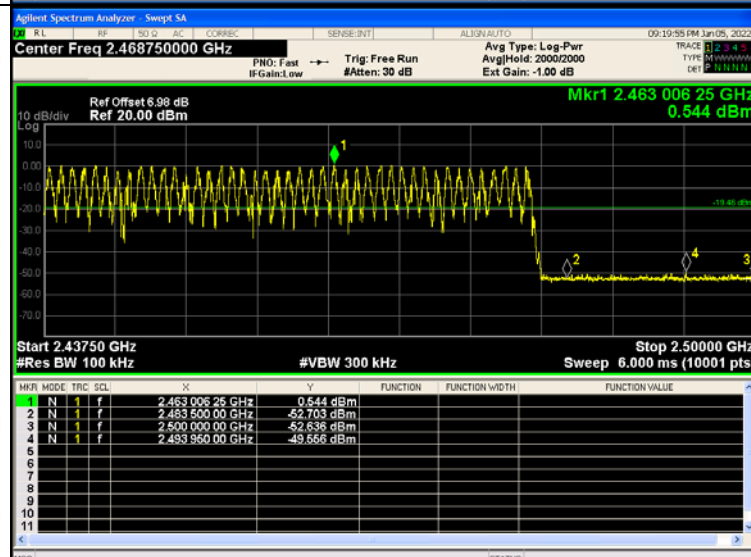


$\pi/4$ DQPSK/LCH/
No Hop

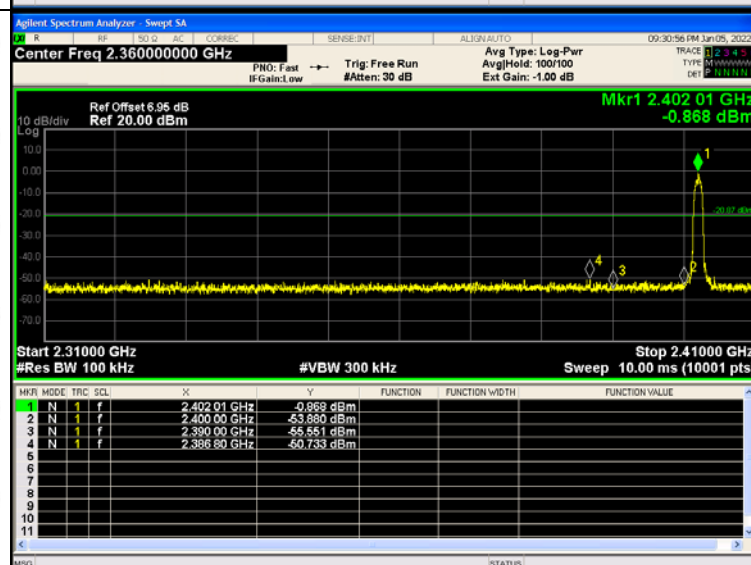

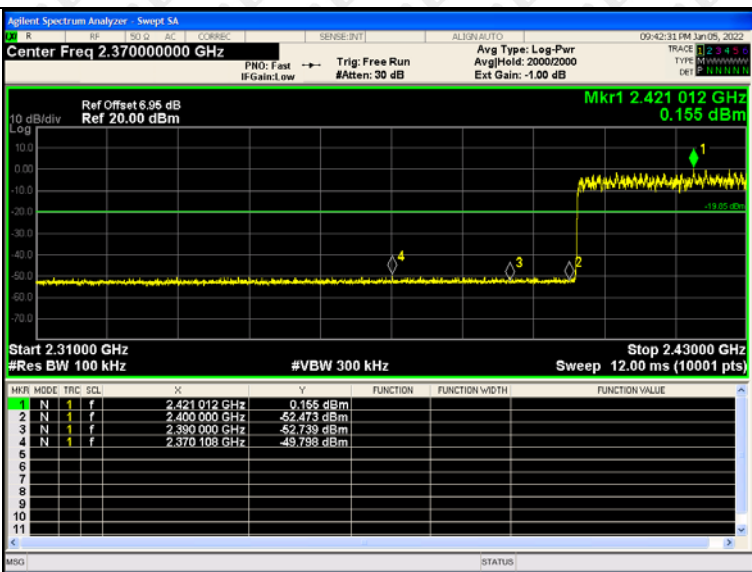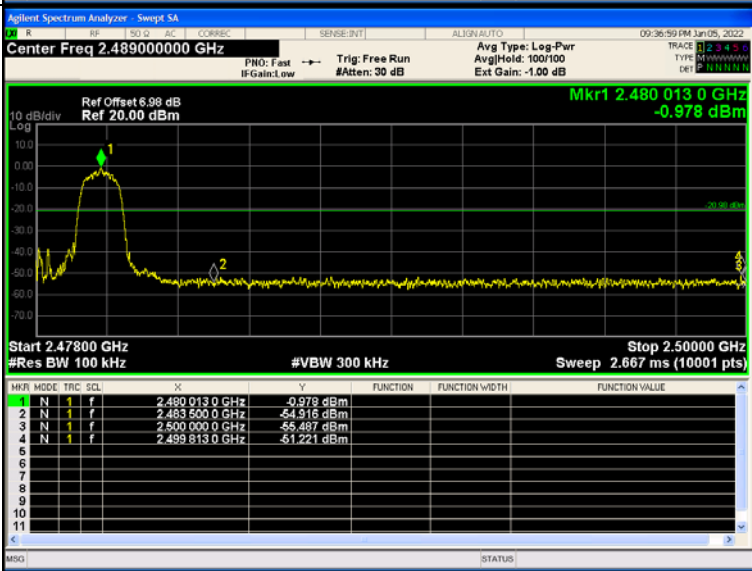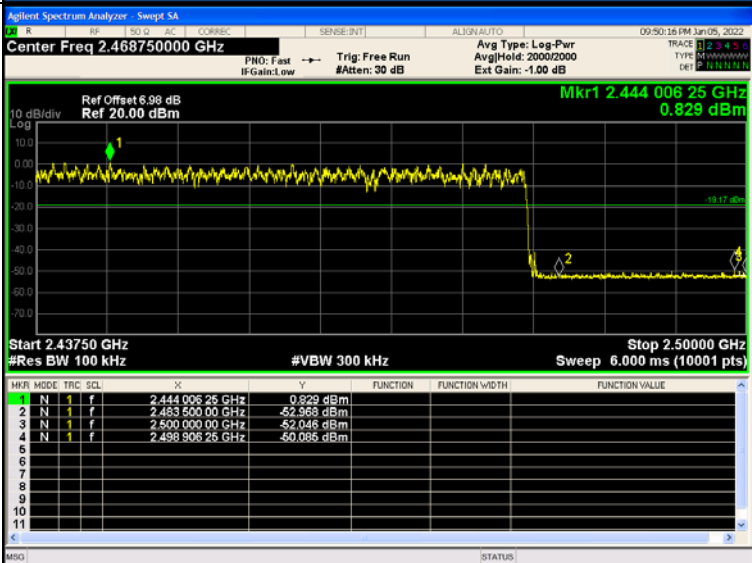$\pi/4$ DQPSK/LCH/ Hop	 <table><tr><th>MFR</th><th>MODE</th><th>TRIG</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.421012 GHz</td><td>0.155 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400000 GHz</td><td>-52.473 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390000 GHz</td><td>-52.739 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.370108 GHz</td><td>-49.798 dBm</td><td></td><td></td><td></td></tr></table>	MFR	MODE	TRIG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.421012 GHz	0.155 dBm				2	N	1	f	2.400000 GHz	-52.473 dBm				3	N	1	f	2.390000 GHz	-52.739 dBm				4	N	1	f	2.370108 GHz	-49.798 dBm			
MFR	MODE	TRIG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.421012 GHz	0.155 dBm																																									
2	N	1	f	2.400000 GHz	-52.473 dBm																																									
3	N	1	f	2.390000 GHz	-52.739 dBm																																									
4	N	1	f	2.370108 GHz	-49.798 dBm																																									
$\pi/4$ DQPSK/HCH/ No Hop	 <table><tr><th>MFR</th><th>MODE</th><th>TRIG</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480013 GHz</td><td>-0.978 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483500 GHz</td><td>-54.916 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500000 GHz</td><td>-55.487 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.499913 GHz</td><td>-51.221 dBm</td><td></td><td></td><td></td></tr></table>	MFR	MODE	TRIG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480013 GHz	-0.978 dBm				2	N	1	f	2.483500 GHz	-54.916 dBm				3	N	1	f	2.500000 GHz	-55.487 dBm				4	N	1	f	2.499913 GHz	-51.221 dBm			
MFR	MODE	TRIG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480013 GHz	-0.978 dBm																																									
2	N	1	f	2.483500 GHz	-54.916 dBm																																									
3	N	1	f	2.500000 GHz	-55.487 dBm																																									
4	N	1	f	2.499913 GHz	-51.221 dBm																																									
$\pi/4$ DQPSK/HCH/ Hop	 <table><tr><th>MFR</th><th>MODE</th><th>TRIG</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.444006 GHz</td><td>0.829 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483500 GHz</td><td>-52.968 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500000 GHz</td><td>-52.046 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.498906 GHz</td><td>-50.085 dBm</td><td></td><td></td><td></td></tr></table>	MFR	MODE	TRIG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.444006 GHz	0.829 dBm				2	N	1	f	2.483500 GHz	-52.968 dBm				3	N	1	f	2.500000 GHz	-52.046 dBm				4	N	1	f	2.498906 GHz	-50.085 dBm			
MFR	MODE	TRIG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.444006 GHz	0.829 dBm																																									
2	N	1	f	2.483500 GHz	-52.968 dBm																																									
3	N	1	f	2.500000 GHz	-52.046 dBm																																									
4	N	1	f	2.498906 GHz	-50.085 dBm																																									


8DPSK/LCH/No Hop	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.360000000 GHz Ref Offset 6.95 dB Ref 20.00 dBm Mkr1 2.401 87 GHz -3.054 dBm Start 2.31000 GHz #Res BW 100 kHz Stop 2.41000 GHz Sweep 10.00 ms (10001 pts) <table><thead><tr><th>MFR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 87 GHz</td><td>-3.054 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 00 GHz</td><td>-53.590 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 00 GHz</td><td>-53.285 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.371 15 GHz</td><td>-49.662 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MFR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 87 GHz	-3.054 dBm				2	N	1	f	2.400 00 GHz	-53.590 dBm				3	N	1	f	2.390 00 GHz	-53.285 dBm				4	N	1	f	2.371 15 GHz	-49.662 dBm			
MFR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.401 87 GHz	-3.054 dBm																																									
2	N	1	f	2.400 00 GHz	-53.590 dBm																																									
3	N	1	f	2.390 00 GHz	-53.285 dBm																																									
4	N	1	f	2.371 15 GHz	-49.662 dBm																																									
8DPSK /LCH/Hop	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.370000000 GHz Ref Offset 6.95 dB Ref 20.00 dBm Mkr1 2.422 008 GHz -0.362 dBm Start 2.31000 GHz #Res BW 100 kHz Stop 2.43000 GHz Sweep 12.00 ms (10001 pts) <table><thead><tr><th>MFR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.422 008 GHz</td><td>-0.362 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-51.070 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 GHz</td><td>-52.926 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.364 976 GHz</td><td>-49.861 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MFR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.422 008 GHz	-0.362 dBm				2	N	1	f	2.400 000 GHz	-51.070 dBm				3	N	1	f	2.390 000 GHz	-52.926 dBm				4	N	1	f	2.364 976 GHz	-49.861 dBm			
MFR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.422 008 GHz	-0.362 dBm																																									
2	N	1	f	2.400 000 GHz	-51.070 dBm																																									
3	N	1	f	2.390 000 GHz	-52.926 dBm																																									
4	N	1	f	2.364 976 GHz	-49.861 dBm																																									
8DPSK /HCH/No Hop	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.489000000 GHz Ref Offset 6.99 dB Ref 20.00 dBm Mkr1 2.480 127 4 GHz -2.135 dBm Start 2.47800 GHz #Res BW 100 kHz Stop 2.50000 GHz Sweep 2.667 ms (10001 pts) <table><thead><tr><th>MFR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 127 4 GHz</td><td>-2.135 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 500 0 GHz</td><td>-54.050 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 000 0 GHz</td><td>-54.272 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.494 682 6 GHz</td><td>-50.603 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MFR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 127 4 GHz	-2.135 dBm				2	N	1	f	2.483 500 0 GHz	-54.050 dBm				3	N	1	f	2.500 000 0 GHz	-54.272 dBm				4	N	1	f	2.494 682 6 GHz	-50.603 dBm			
MFR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480 127 4 GHz	-2.135 dBm																																									
2	N	1	f	2.483 500 0 GHz	-54.050 dBm																																									
3	N	1	f	2.500 000 0 GHz	-54.272 dBm																																									
4	N	1	f	2.494 682 6 GHz	-50.603 dBm																																									

8DPSK
/HCH/Hop

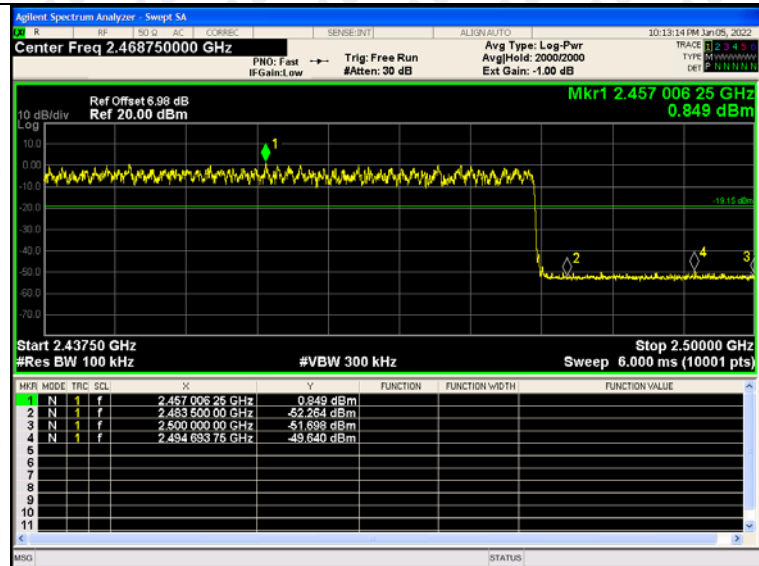


RF Conducted Spurious Emissions Graphs


GFSK/LCH

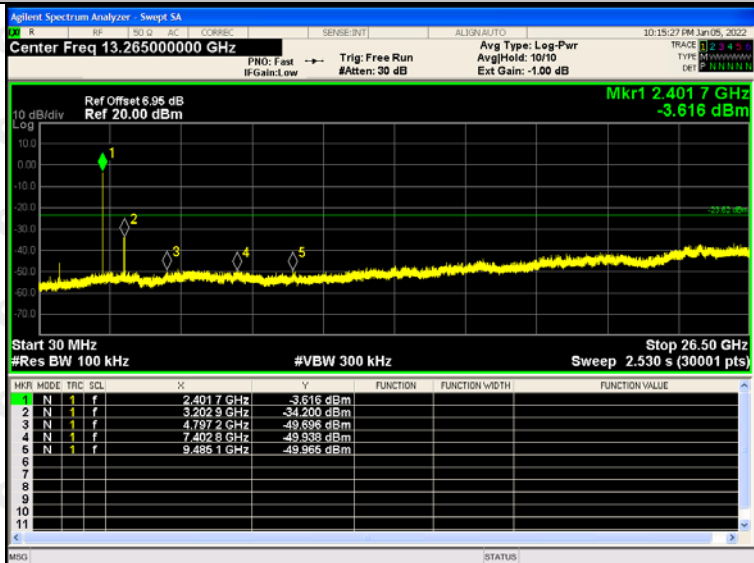

GFSK/MCH

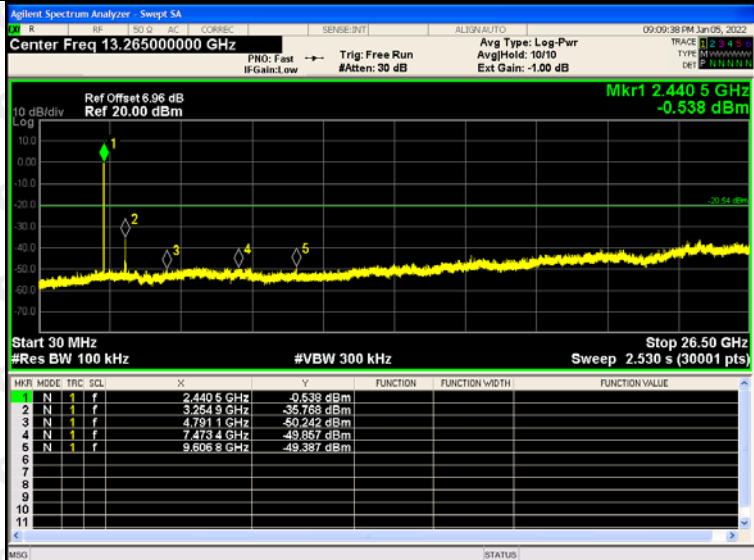


GFSK/HCH

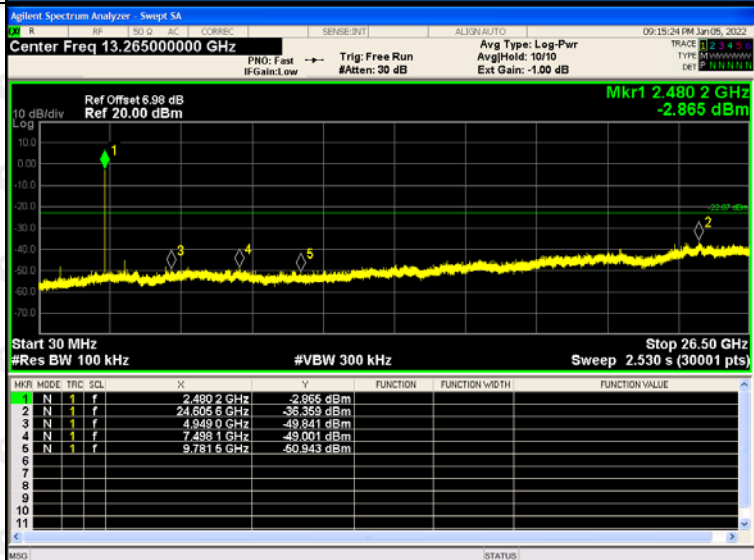


$\pi/4$ DQPSK /LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.401 7 GHz -3.752 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 7 GHz</td><td>-3.752 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>3.202 9 GHz</td><td>-34.126 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.991 4 GHz</td><td>-49.688 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.027 8 GHz</td><td>-49.390 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.545 1 GHz</td><td>-50.604 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 7 GHz	-3.752 dBm				2	N	1	f	3.202 9 GHz	-34.126 dBm				3	N	1	f	4.991 4 GHz	-49.688 dBm				4	N	1	f	7.027 8 GHz	-49.390 dBm				5	N	1	f	9.545 1 GHz	-50.604 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.401 7 GHz	-3.752 dBm																																																		
2	N	1	f	3.202 9 GHz	-34.126 dBm																																																		
3	N	1	f	4.991 4 GHz	-49.688 dBm																																																		
4	N	1	f	7.027 8 GHz	-49.390 dBm																																																		
5	N	1	f	9.545 1 GHz	-50.604 dBm																																																		
$\pi/4$ DQPSK/MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.440 5 GHz -2.998 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.440 5 GHz</td><td>-2.998 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>3.254 9 GHz</td><td>-36.055 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.823 7 GHz</td><td>-50.443 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.454 0 GHz</td><td>-49.710 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.643 0 GHz</td><td>-51.053 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 5 GHz	-2.998 dBm				2	N	1	f	3.254 9 GHz	-36.055 dBm				3	N	1	f	4.823 7 GHz	-50.443 dBm				4	N	1	f	7.454 0 GHz	-49.710 dBm				5	N	1	f	9.643 0 GHz	-51.053 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.440 5 GHz	-2.998 dBm																																																		
2	N	1	f	3.254 9 GHz	-36.055 dBm																																																		
3	N	1	f	4.823 7 GHz	-50.443 dBm																																																		
4	N	1	f	7.454 0 GHz	-49.710 dBm																																																		
5	N	1	f	9.643 0 GHz	-51.053 dBm																																																		
$\pi/4$ DQPSK/HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.98 dB Ref 20.00 dBm Mkr1 2.479 4 GHz -3.501 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.479 4 GHz</td><td>-3.501 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.656 9 GHz</td><td>-36.387 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.791 1 GHz</td><td>-48.603 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.410 7 GHz</td><td>-48.856 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.844 2 GHz</td><td>-51.176 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 4 GHz	-3.501 dBm				2	N	1	f	24.656 9 GHz	-36.387 dBm				3	N	1	f	4.791 1 GHz	-48.603 dBm				4	N	1	f	7.410 7 GHz	-48.856 dBm				5	N	1	f	9.844 2 GHz	-51.176 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.479 4 GHz	-3.501 dBm																																																		
2	N	1	f	24.656 9 GHz	-36.387 dBm																																																		
3	N	1	f	4.791 1 GHz	-48.603 dBm																																																		
4	N	1	f	7.410 7 GHz	-48.856 dBm																																																		
5	N	1	f	9.844 2 GHz	-51.176 dBm																																																		


8DPSK /LCH

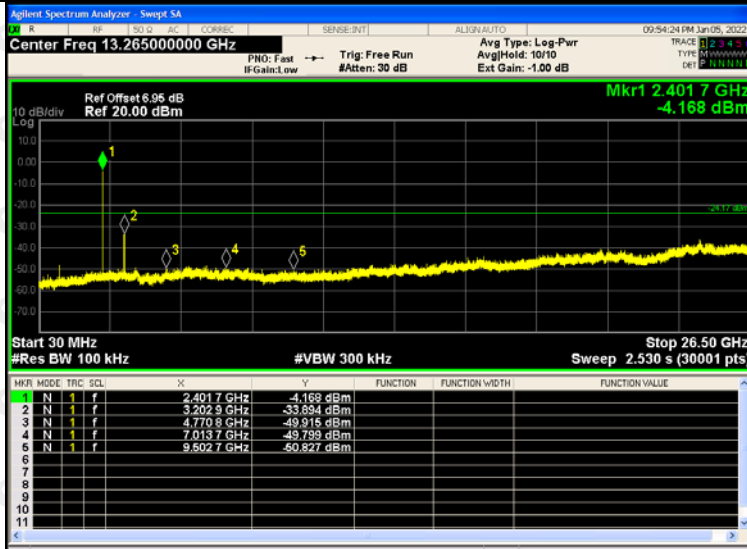

8DPSK /MCH

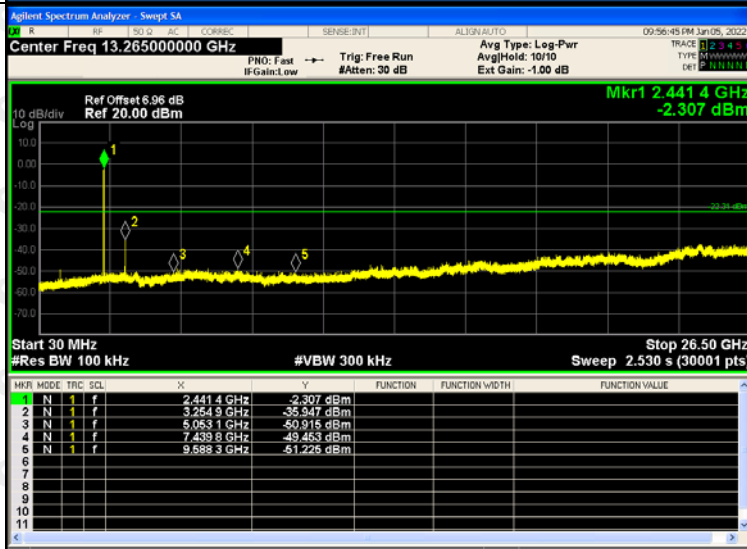


8DPSK /HCH

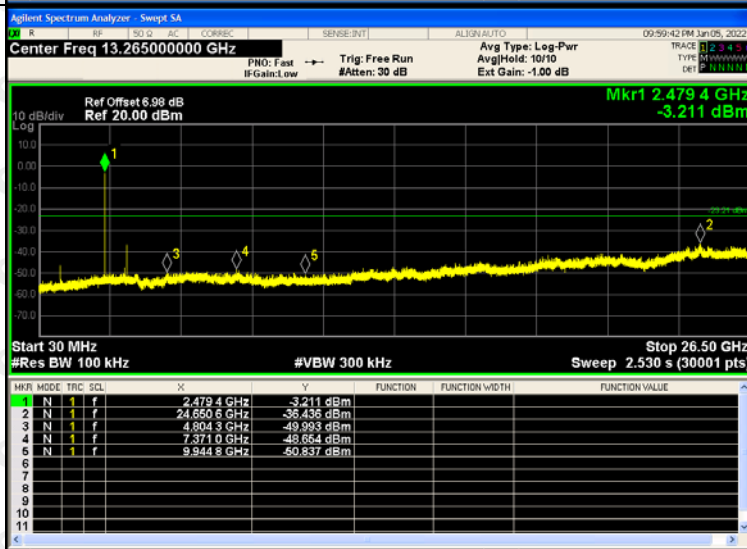

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

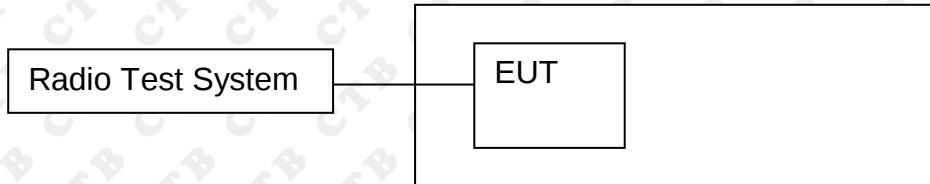

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.


9.3 Test procedure




1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.


9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
EDR mode (GFSK)	LCH	-0.692	PASS
	MCH	1.012	PASS
	HCH	0.586	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	1.129	PASS
	MCH	2.874	PASS
	HCH	2.334	PASS
EDR mode (8DPSK)	LCH	1.513	PASS
	MCH	3.376	PASS
	HCH	3.003	PASS

Test Graph:

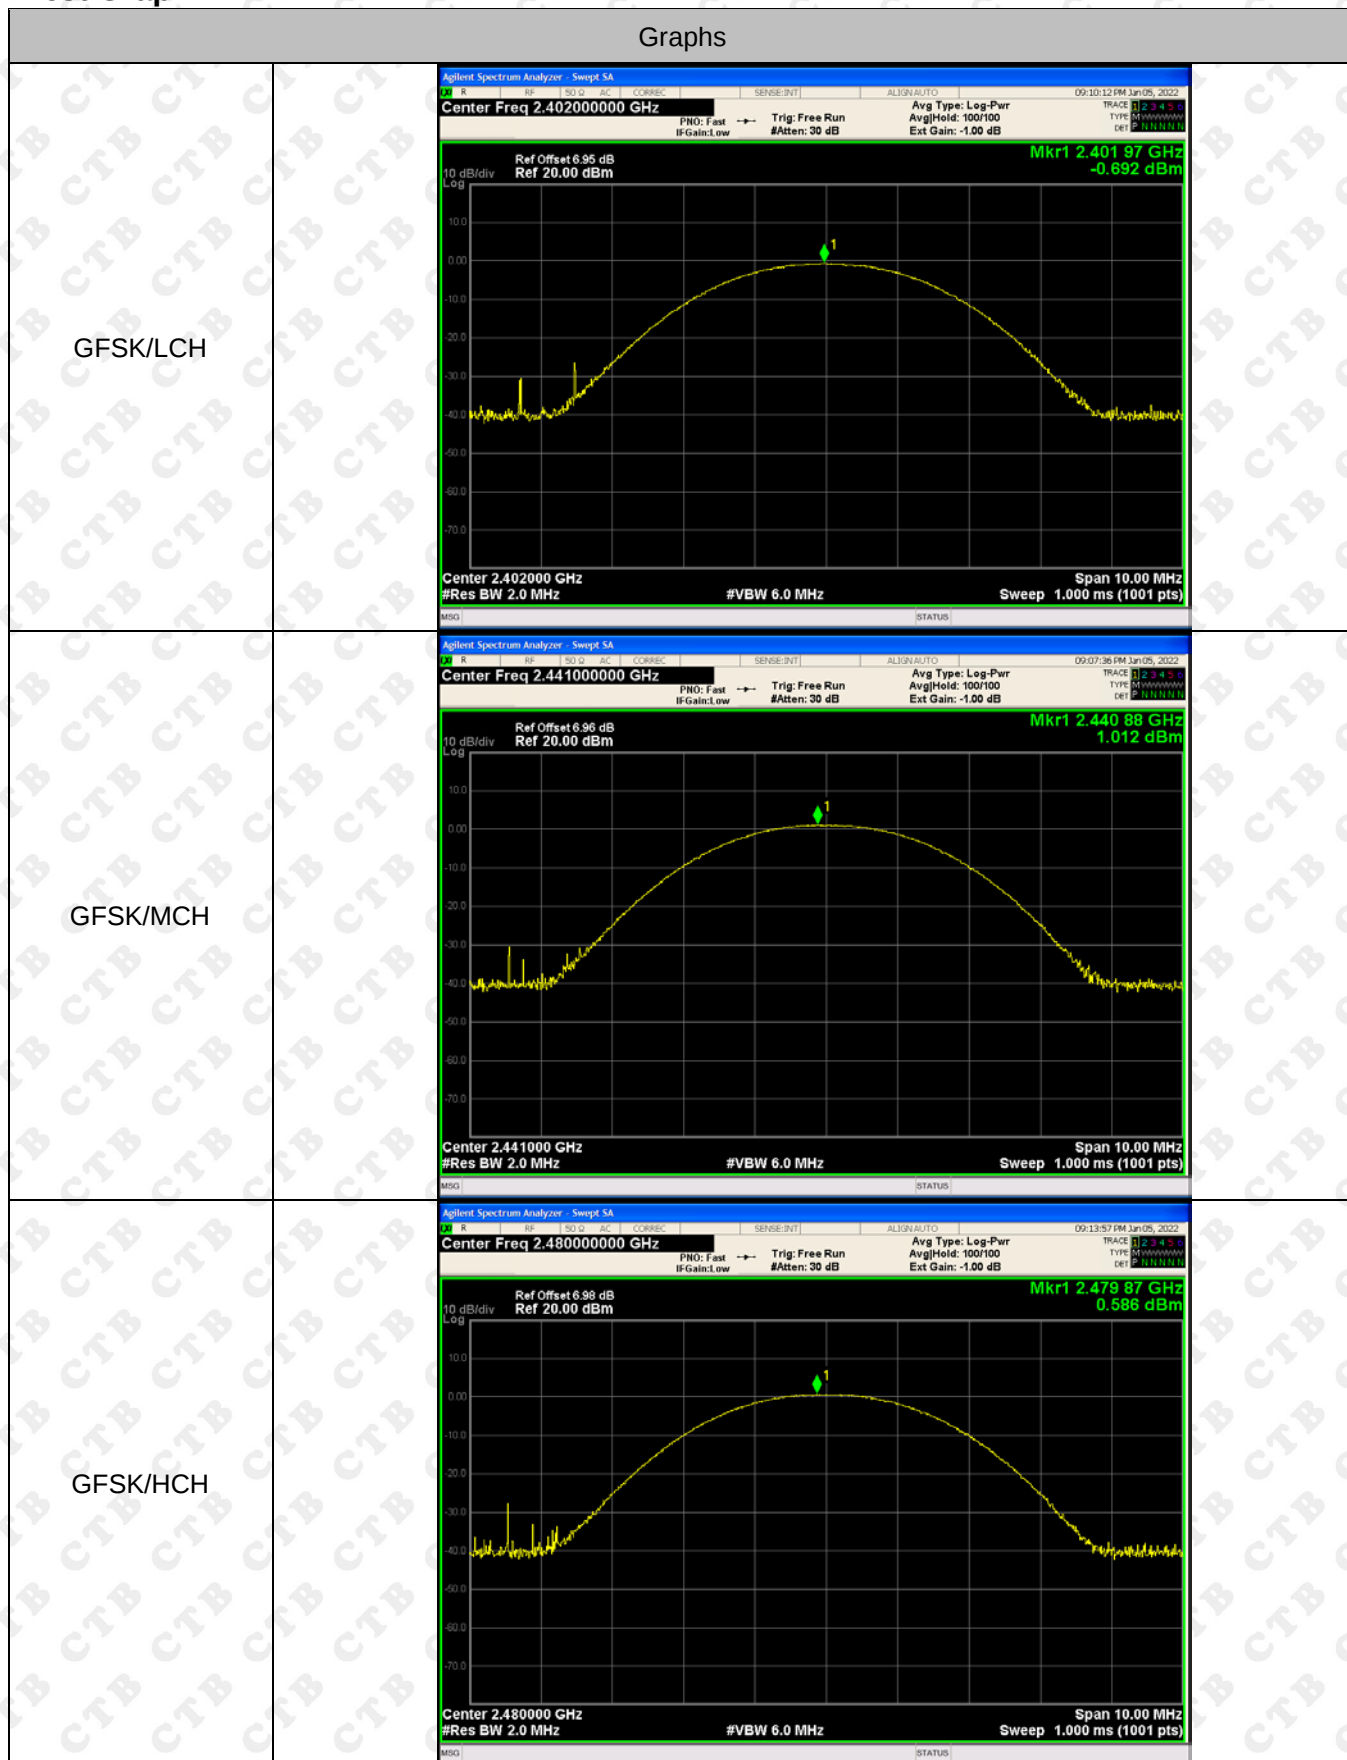


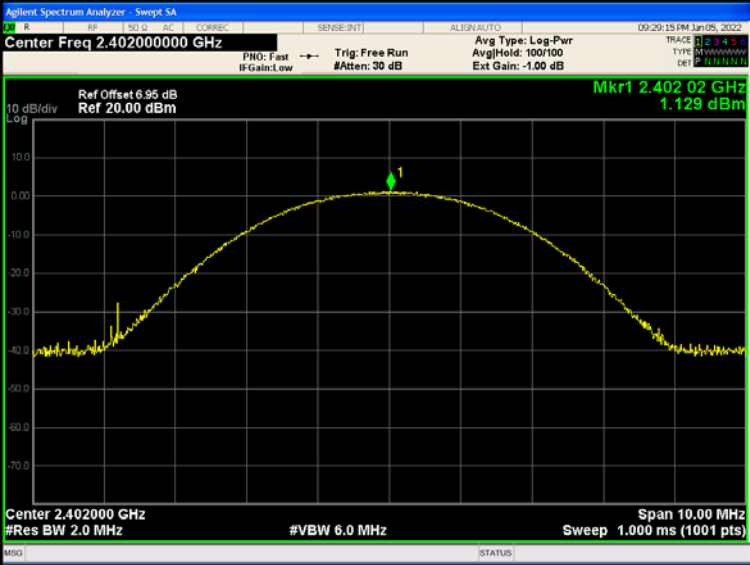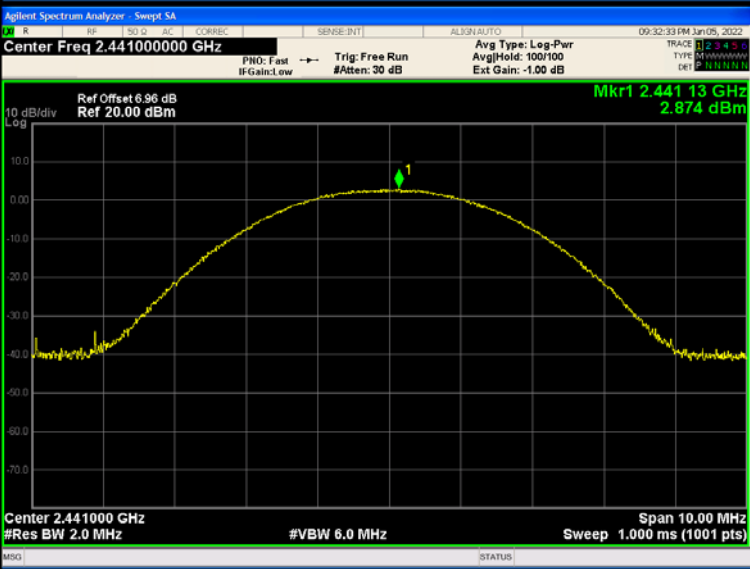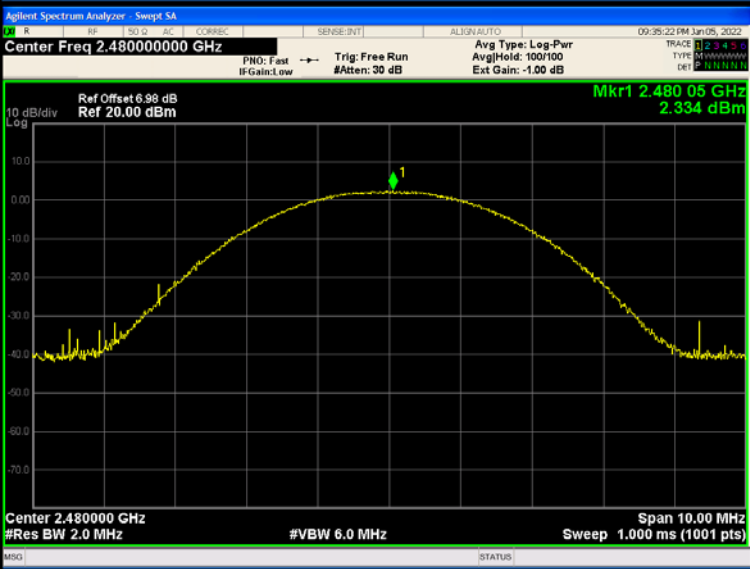$\pi/4$ DQPSK/LCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 6.95 dB Ref 20.00 dBm Mkr1 2.402 02 GHz 1.129 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$ DQPSK/MCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.44100000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.441 13 GHz 2.874 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$ DQPSK/HCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz Ref Offset 6.98 dB Ref 20.00 dBm Mkr1 2.480 05 GHz 2.334 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

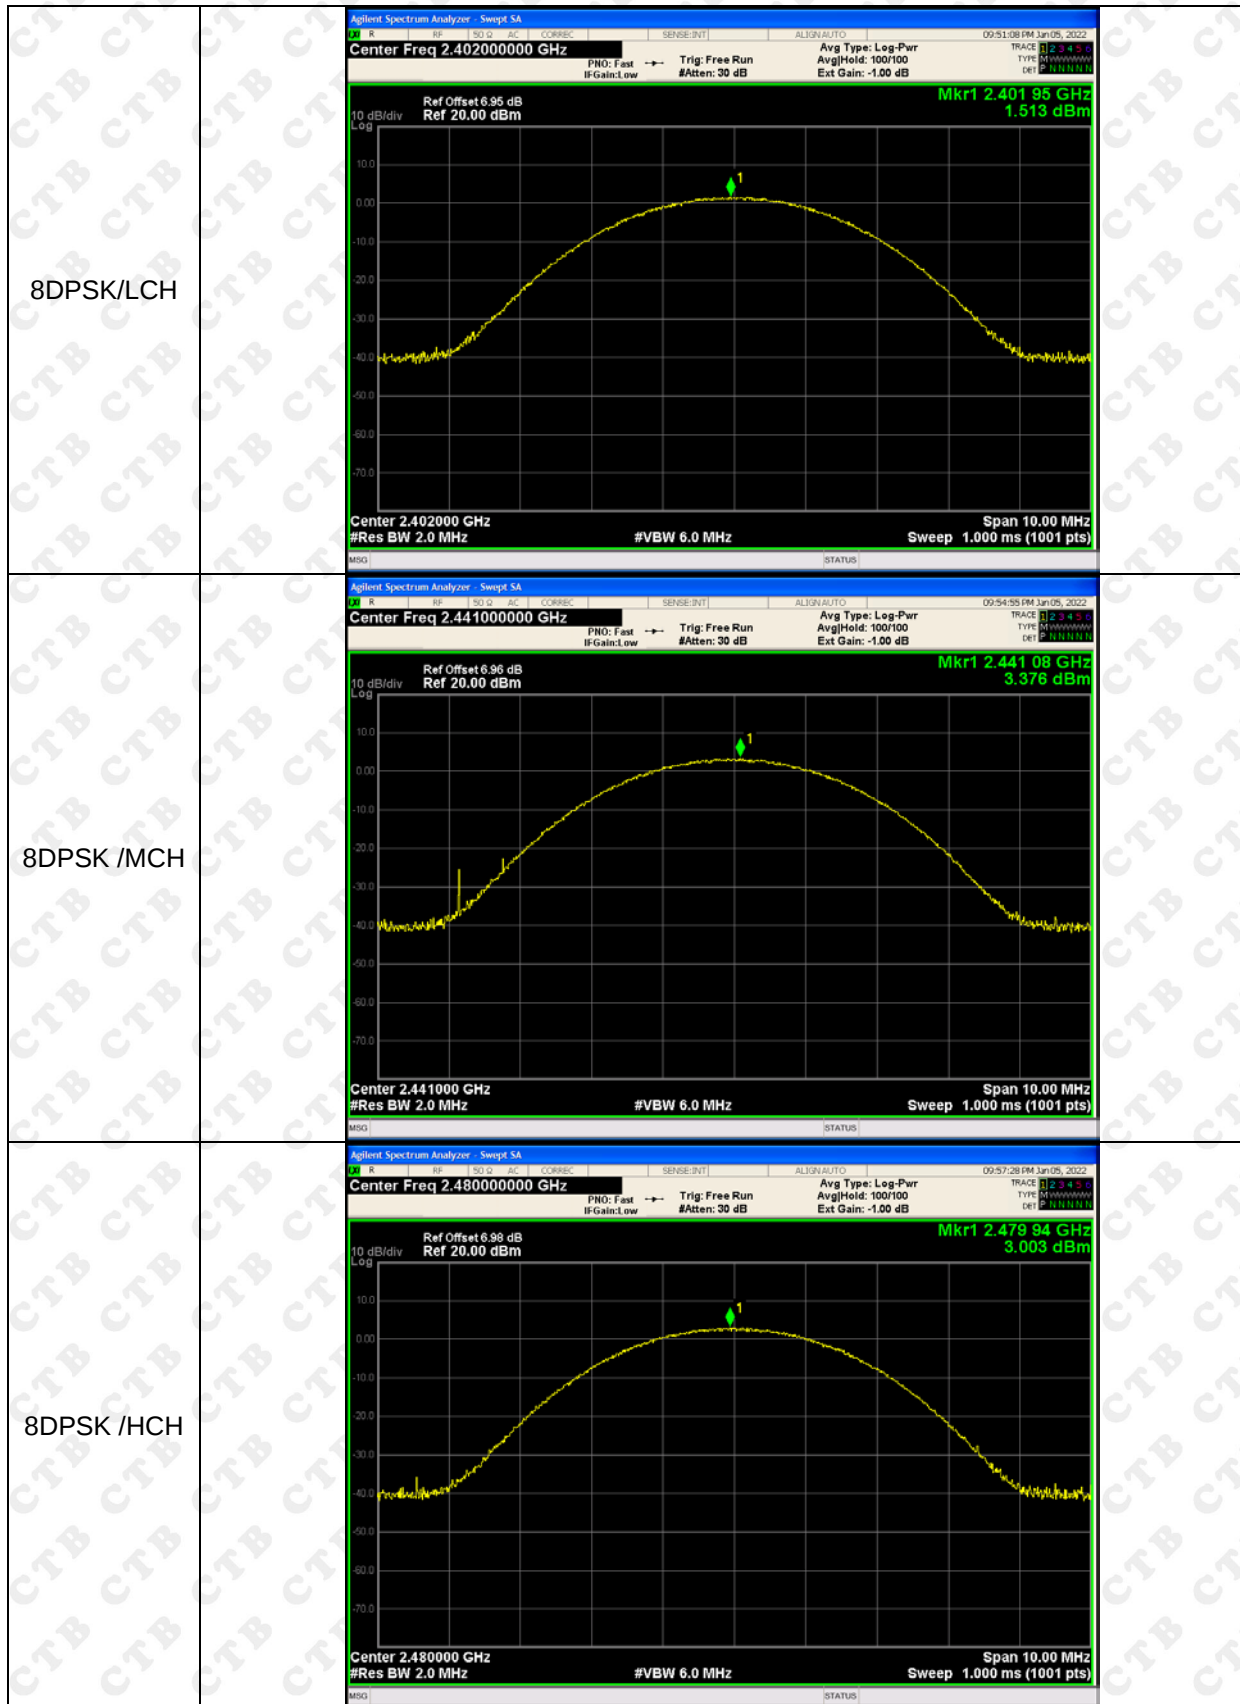

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

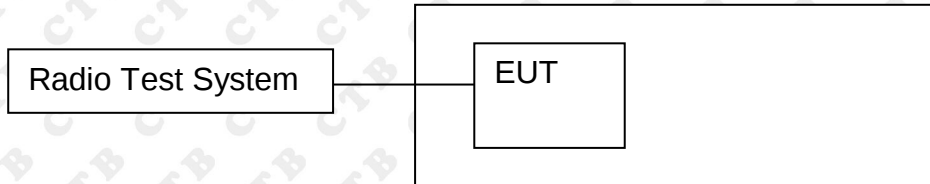

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



10.4 Test Result

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.904	PASS
	Mid channel	0.863	PASS
	High channel	0.865	PASS
$\pi/4$ DQPSK	Low channel	1.324	PASS
	Mid channel	1.316	PASS
	High channel	1.305	PASS
8DPSK	Low channel	1.308	PASS
	Mid channel	1.343	PASS
	High channel	1.309	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:


GFSK Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.40200000 GHz Ref Offset: 6.96 dB Ref: 26.95 dBm Occupied Bandwidth: 801.33 kHz Total Power: 4.26 dBm Transmit Freq Error: -8.702 kHz x dB Bandwidth: 904.0 kHz
GFSK Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.44100000 GHz Ref Offset: 6.96 dB Ref: 26.96 dBm Occupied Bandwidth: 794.62 kHz Total Power: 6.00 dBm Transmit Freq Error: 7.787 kHz x dB Bandwidth: 863.2 kHz
GFSK High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.48000000 GHz Ref Offset: 6.96 dB Ref: 26.96 dBm Occupied Bandwidth: 770.26 kHz Total Power: 6.18 dBm Transmit Freq Error: 11.516 kHz x dB Bandwidth: 864.9 kHz

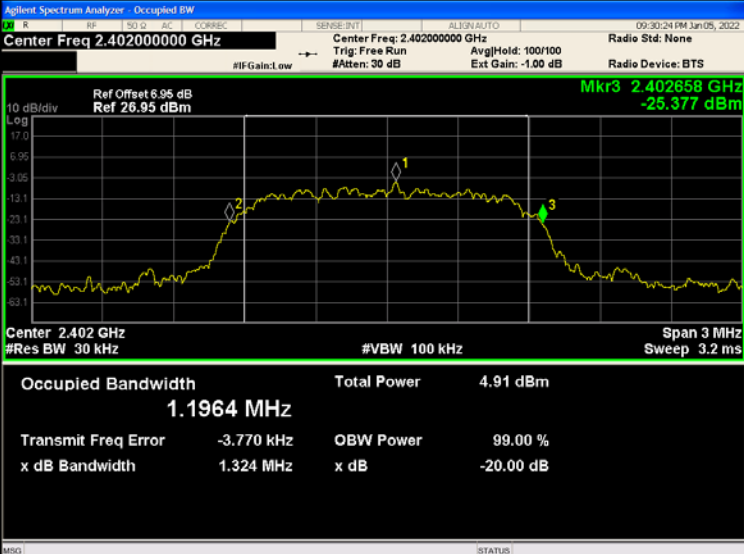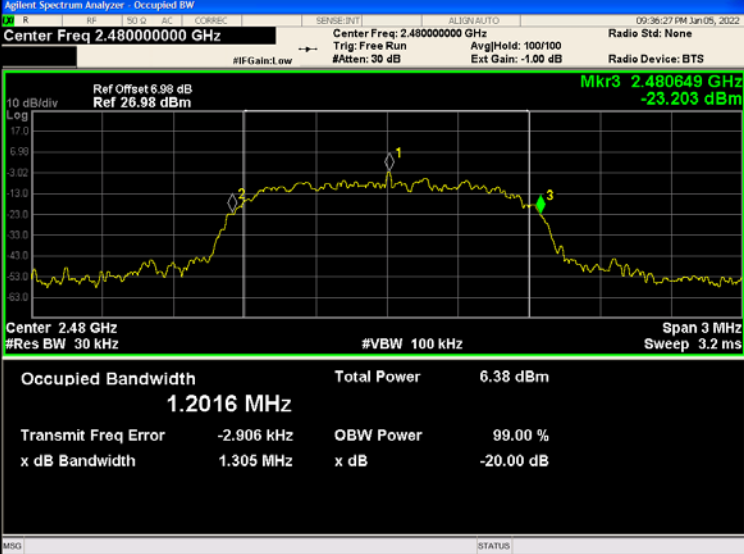$\pi/4$-DQPSK Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.40200000 GHz Ref Offset: 6.95 dB Ref: 26.95 dBm Mkr3: 2.402658 GHz -25.377 dBm Center: 2.402 GHz #Res BW: 30 kHz Occupied Bandwidth: 1.1964 MHz Total Power: 4.91 dBm Transmit Freq Error: -3.770 kHz x dB Bandwidth: 1.324 MHz
$\pi/4$-DQPSK Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.44100000 GHz Ref Offset: 6.96 dB Ref: 26.96 dBm Mkr3: 2.44165 GHz -23.398 dBm Center: 2.441 GHz #Res BW: 30 kHz Occupied Bandwidth: 1.1834 MHz Total Power: 7.19 dBm Transmit Freq Error: -8.441 kHz x dB Bandwidth: 1.316 MHz
$\pi/4$-DQPSK High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.48000000 GHz Ref Offset: 6.98 dB Ref: 26.98 dBm Mkr3: 2.480649 GHz -23.203 dBm Center: 2.48 GHz #Res BW: 30 kHz Occupied Bandwidth: 1.2016 MHz Total Power: 6.38 dBm Transmit Freq Error: -2.906 kHz x dB Bandwidth: 1.305 MHz

8DPSK Low channel	Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.40200000 GHz Ref Offset: 6.95 dB Ref: 26.95 dBm Mkr3: 2.402648 GHz -23.865 dBm Center: 2.402 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms Occupied Bandwidth: 1.1889 MHz Total Power: 5.85 dBm Transmit Freq Error: -6.317 kHz OBW Power: 99.00 % x dB Bandwidth: 1.308 MHz x dB: -20.00 dB
8DPSK Mid channel	Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.44100000 GHz Ref Offset: 6.96 dB Ref: 26.96 dBm Mkr3: 2.441669 GHz -27.221 dBm Center: 2.441 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms Occupied Bandwidth: 1.1920 MHz Total Power: 6.92 dBm Transmit Freq Error: -2.103 kHz OBW Power: 99.00 % x dB Bandwidth: 1.343 MHz x dB: -20.00 dB
8DPSK High channel	Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.48000000 GHz Ref Offset: 6.98 dB Ref: 26.98 dBm Mkr3: 2.480651 GHz -23.757 dBm Center: 2.48 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms Occupied Bandwidth: 1.1814 MHz Total Power: 7.41 dBm Transmit Freq Error: -3.372 kHz OBW Power: 99.00 % x dB Bandwidth: 1.309 MHz x dB: -20.00 dB

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

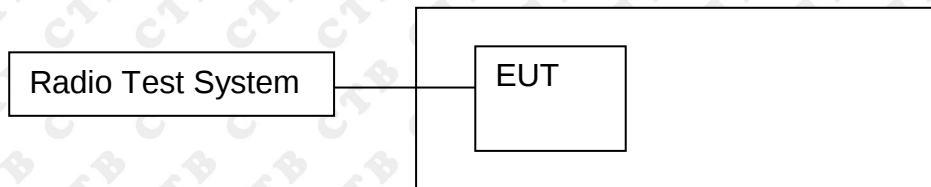

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz , Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.002	PASS
GFSK	MCH	1.000	PASS
GFSK	HCH	1.000	PASS
$\pi/4$ DQPSK	LCH	1.002	PASS
$\pi/4$ DQPSK	MCH	1.000	PASS
$\pi/4$ DQPSK	HCH	1.000	PASS
8DPSK	LCH	1.000	PASS
8DPSK	MCH	1.002	PASS
8DPSK	HCH	1.000	PASS

Test Graph

Graphs

GFSK/LCH






GFSK/MCH




GFSK/HCH

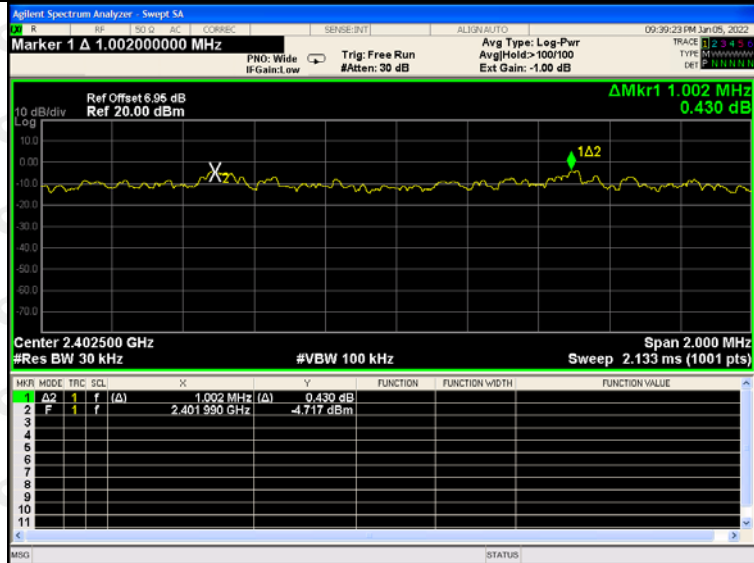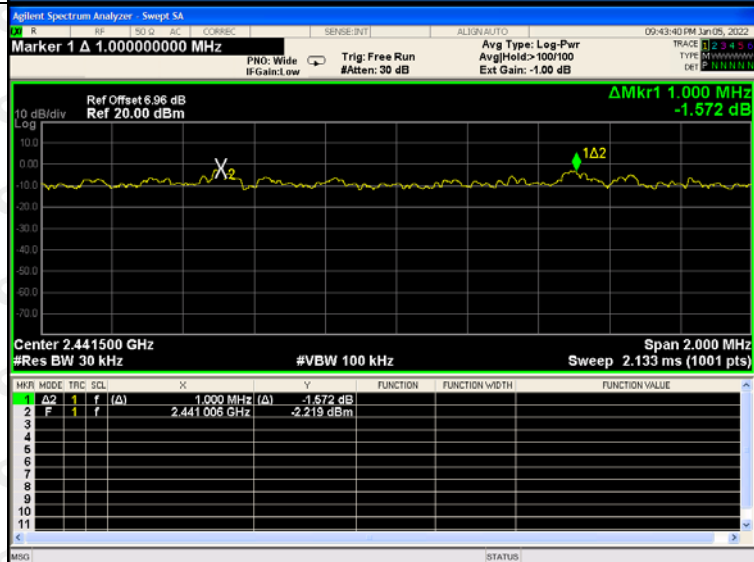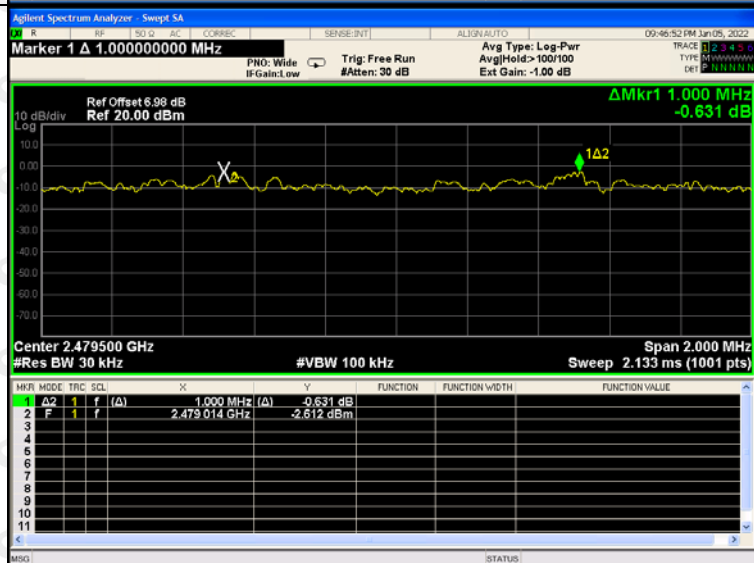


$\pi/4$ DQPSK/LCH

 $\pi/4$ DQPSK/MCH

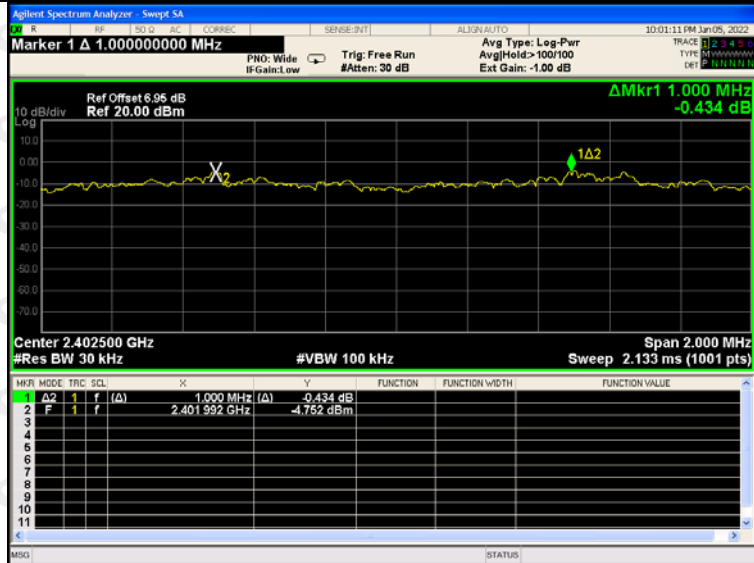 $\pi/4$ DQPSK/HCH


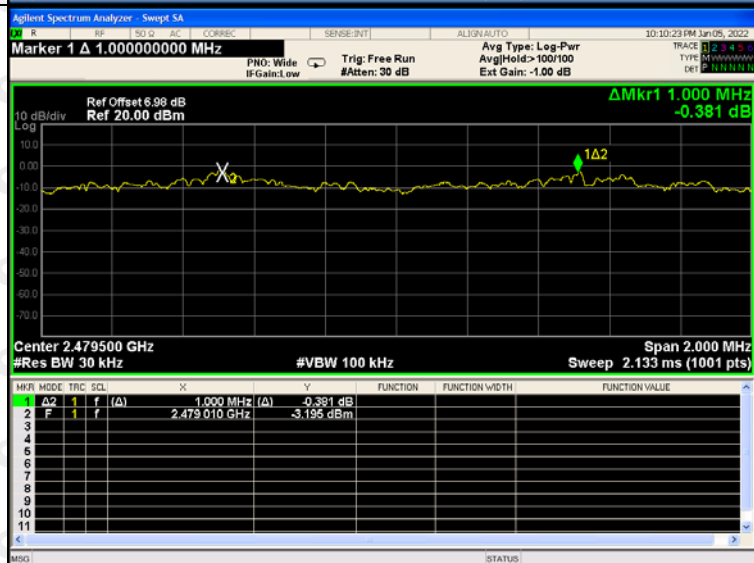
8DPSK/LCH

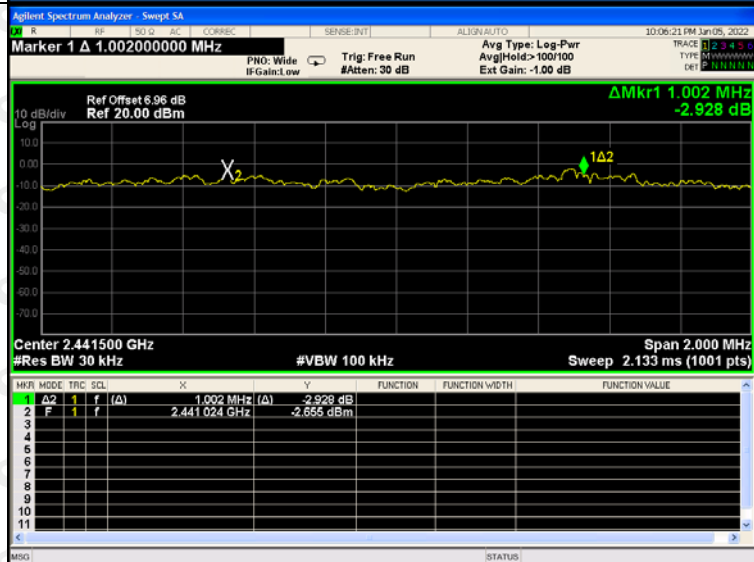

8DPSK /MCH




8DPSK /HCH



12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

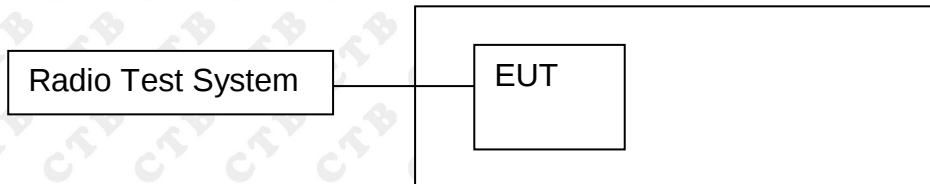

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


12.4 Test Result

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS


Test Graph

Graphs

GFSK/Hop

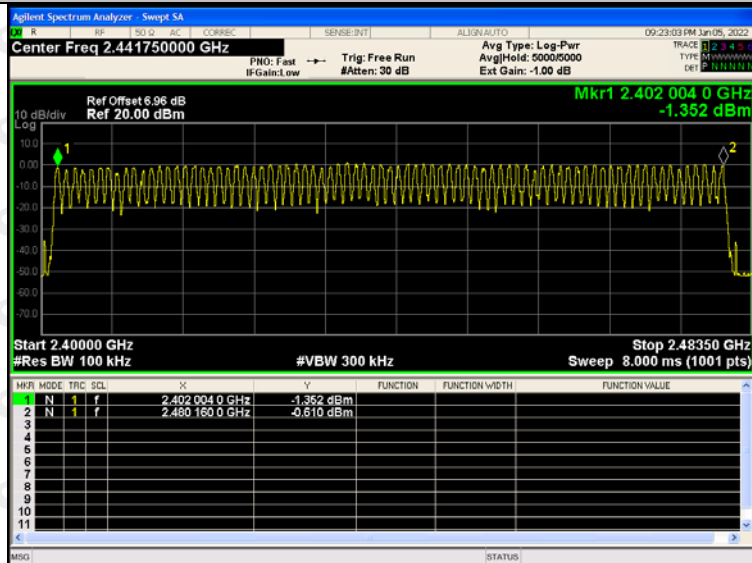

$\pi/4$ DQPSK/Hop

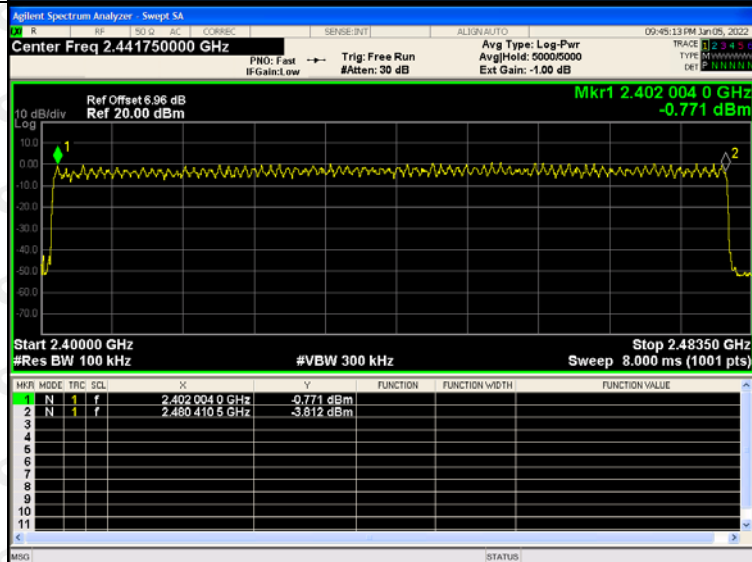

8DPSK/Hop

