

**CFR 47 FCC PART 22 H
CFR 47 FCC PART 24 E
CFR 47 FCC PART 27**

TEST REPORT

For

Jupiter AI Kit

MODEL NUMBER: SS23-QE-VA

REPORT NUMBER: 4791370812-RF-3

ISSUE DATE: June 19, 2025

FCC ID: 2A36J-SS23-QE-VA

Prepared for

**Yi Tunnel (Beijing)Technology Co., Ltd
Room1511, Block B, SOHO Shangdu North Tower, Dongdaqiao Road 8 Chaoyang
District Beijing, China**

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan,
Guangdong, China**

**Tel: +86 769 22038881
Fax: +86 769 33244054
Website: www.ul.com**

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	June 19, 2025	Initial Issue	\

Note:

1. This test report is only published to and used by the applicant, and it is not for evidence purpose in China.
2. The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 22 H >< CFR 47 FCC PART 24 E>< CFR 47 FCC PART 27> when < Simple Acceptance > decision rule is applied.
3. This is a report based on report No.: FCC022023-00372RF2 which issued by Beijing TIRT Technology Service Co.,Ltd Shenzhen on March. 23, 2023. The module has been certified for FCC ID, the antenna type and gain changed. The RF technical construction including circuit diagram, PCB Layout, components, component layout and performance does not change. The output power is verified with new antenna gain, the ERP/EIRP is not greater than the corresponding one on the original grant, only radiated test item performed and reported in this report.

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION.....	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. MEASUREMENT UNCERTAINTY.....	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. TEST CHANNEL CONFIGURATION.....	8
5.3. MAXIMUM ERP/EIRP POWER AND EMISSION DESIGNATOR	8
5.4. WORST-CASE CONFIGURATION AND MODE.....	9
5.5. DESCRIPTION OF AVAILABLE ANTENNAS	10
5.1. DESCRIPTION OF TEST SETUP	11
6. MEASURING INSTRUMENT AND SOFTWARE USED	12
7. ANTENNA TERMINAL TEST RESULTS.....	13
7.1. EFFECTIVE (ISOTROPIC) RADIATED POWER OF TRANSMITTER.....	13
8. RADIATED SPURIOUS EMISSIONS	16

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Yi Tunnel (Beijing)Technology Co., Ltd
Address: Room1511, Block B, SOHO Shangdu North Tower, Dongdaqiao
Road 8 Chaoyang District Beijing, China

Manufacturer Information


Company Name: Yi Tunnel (Beijing)Technology Co., Ltd
Address: Room1511, Block B, SOHO Shangdu North Tower, Dongdaqiao
Road 8 Chaoyang District Beijing, China

EUT Information

EUT Name: Jupiter AI Kit
Model: SS23-QE-VA
Series Model: \
Brand: \
Sample Received Date: May 15, 2025
Sample Status: Normal
Sample ID: 7809095-1
Date of Tested: May 15, 2025 to June 10, 2025


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 22 H	PASS
CFR 47 FCC PART 24 E	PASS
CFR 47 FCC PART 27	PASS

Prepared By:



James Qin
Project Engineer

Checked By:



Kebo Zhang
Senior Project Engineer

Approved By:



Stephen Guo
Operations Manager

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.26-2015, 971168 D01 Power Meas License Digital Systems v03r01, 971168 D02 Misc Rev Approv License Devices v02r01, 412172 D01 v01r01 Determining ERP and EIRP, CFR 47 FCC Part 2, Part 22 H, Part 24 E, Part 27.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.
---------------------------	---

Note 1:

All tests measurement facilities use to collect the measurement data are located at Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 40 GHz)	5.78 dB (1 GHz-18 GHz)
	5.23dB (18 GHz-26 GHz)
	5.64 dB (26 GHz-40 GHz)
Bandwidth	1.1 %
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.	

Remark: For Radiated Emission measurements (200 MHz - 18 GHz), the EUT support table is made of Expanded Polystyrene (EPS). This material is characterized by a low dielectric constant, as recognized in CISPR 16-1-4, to minimize its influence on field strength measurements. This influence has been considered in the uncertainty budget.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name:	Jupiter AI Kit
Model:	SS23-QE-VA
Series Model:	\
Model Difference:	\
Rated Input:	DC 12 V

5.2. TEST CHANNEL CONFIGURATION

Band	Mode	Low	Middle	High
WCDMA Band 2	HSDPA/HSUPA	9262	9400	9538
		1852.4 MHz	1880.0 MHz	1907.6 MHz
WCDMA Band 4	HSDPA/HSUPA	1312	1413	1513
		1712.4 MHz	1732.6 MHz	1752.6 MHz
WCDMA Band 5	HSDPA/HSUPA	4132	4182	4233
		826.4 MHz	836.4 MHz	846.6 MHz

5.3. MAXIMUM ERP/EIRP POWER AND EMISSION DESIGNATOR

General note: 99% OBW and Emission Designator are referred to original report.

WCDMA Band2					
Part 24 / RSS-133					
EIRP Limit (W)		2			
Antenna Gain (dBi)		4.19			
Mode	Freq. Range (MHz)	Conducted Average power (dBm)	EIRP (W)	99% OBW (MHz)	Emission Designator
REL. 99	1852.4 ~ 1907.6	19.02	0.209	\	\
HSDPA		18.06	0.168	\	\
HSUPA		17.00	0.132	\	\

WCDMA Band4					
Part 27 / RSS-139					
EIRP Limit (W)		1			
Antenna Gain (dBi)		4.19			
Mode	Freq. Range (MHz)	Conducted Average power (dBm)	EIRP (W)	99% OBW (MHz)	Emission Designator
REL. 99	1712.4 ~ 1752.6	18.51	0.186	\	\
HSDPA		17.58	0.150	\	\
HSUPA		16.55	0.119	\	\

WCDMA Band5					
Part 22 / RSS-132					
ERP Limit (W) for FCC		7			
Antenna Gain (dBi)		0.99			
Mode	Freq. Range (MHz)	Conducted Average power (dBm)	ERP (W)	99% OBW (MHz)	Emission Designator
REL. 99	826.4 ~ 846.6	21.35	0.104	\	\
HSDPA		20.42	0.084	\	\
HSUPA		19.39	0.067	\	\

5.4. WORST-CASE CONFIGURATION AND MODE

The radiated spurious emissions measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that X orientation was the worst-case orientation.

Radiated spurious emissions were investigated below 30 MHz, 30 MHz - 1 GHz and above 1 GHz. There were no emissions found on below 1GHz and above 18 GHz, the emissions between 1 GHz – 18 GHz were tested at the low, mid, high channel and the worst configuration. Only the worst result is reported.

5.5. DESCRIPTION OF AVAILABLE ANTENNAS


Antenna	Band	Antenna Type	MAX Antenna Gain (dBi)
Main	WCDMA Band 2	FPC	4.19
Main	WCDMA Band 4	FPC	4.19
Main	WCDMA Band 5	FPC	0.99

Band	Transmit and Receive Mode	Description
WCDMA Band 2	☒ 1TX, 1RX	Main antenna can be used as transmitting/receiving antenna, DIV antenna can be used as receiving antenna
WCDMA Band 4	☒ 1TX, 1RX	Main antenna can be used as transmitting/receiving antenna, DIV antenna can be used as receiving antenna
WCDMA Band 5	☒ 1TX, 1RX	Main antenna can be used as transmitting/receiving antenna, DIV antenna can be used as receiving antenna

Note: The value of the antenna gain was declared by customer.

5.1. DESCRIPTION OF TEST SETUP

Radiated

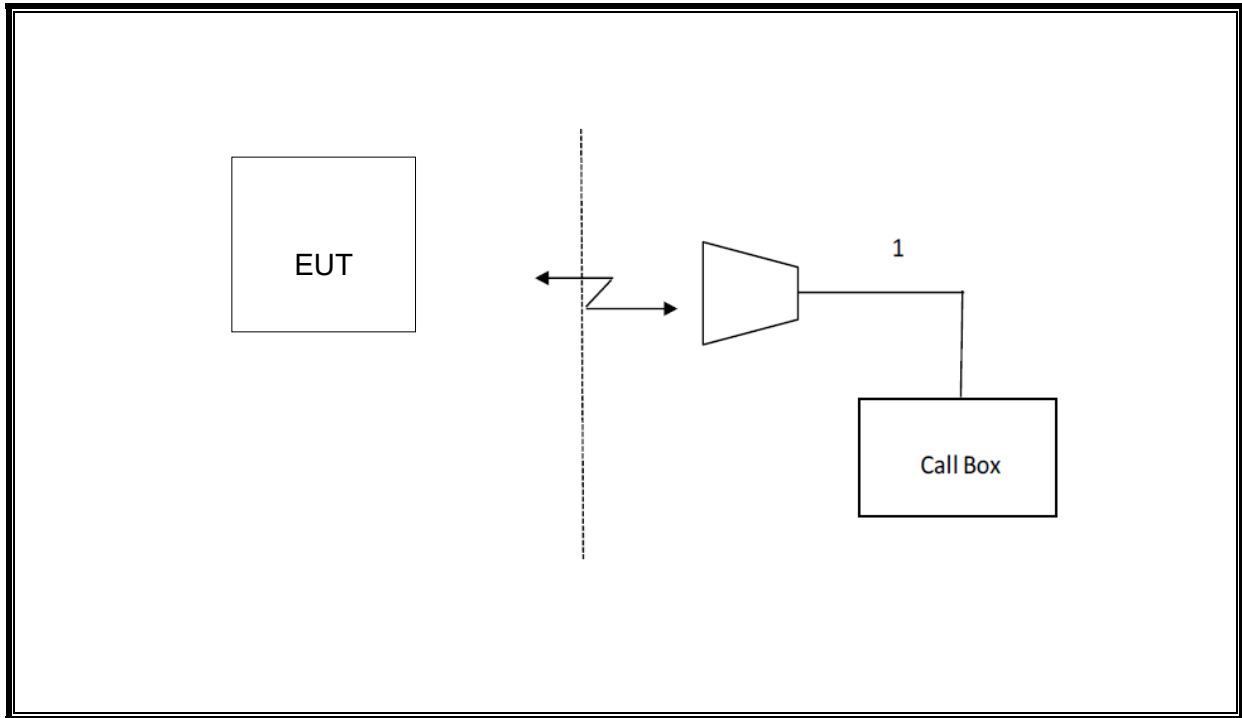

6. MEASURING INSTRUMENT AND SOFTWARE USED

Antenna Terminal Test						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	Spectrum Analyzer	R&S	FSW	1312.8000K26-103950-sj	Sept. 28, 2024	Sept. 27, 2025
☒	Wideband Radio Communication Tester	R&S	CMW500	155523	Sept. 28, 2024	Sept. 27, 2025
Software						
Used	Description		Manufacturer	Name		Version
☒	Tonsend Cellular Test System		Tonsend	JS1120 RF Auto Test System		3.1.46
Radiated Test						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sept.28, 2024	Sept.27, 2025
☒	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	June.28, 2024	June.27, 2027
☒	Preamplifier	HP	8447D	2944A09099	June.18, 2024	June.17, 2025
☒	EMI Measurement Receiver	R&S	ESR26	101377	Sept.28, 2024	Sept.27, 2025
☒	Horn Antenna	TDK	HRN-0118	130940	Dece. 12, 2024	Dece. 11, 2027
☒	Horn Antenna	Schwarzbeck	BBHA9170	697	June.30, 2024	June.29, 2027
☒	Preamplifier	TDK	PA-02-0118	TRS-305-00066	June.18, 2024	June.17, 2025
☒	Preamplifier	TDK	PA-02-2	TRS-307-00003	June.18, 2024	June.17, 2025
☒	Loop antenna	Schwarzbeck	1519B	00008	Dec.09, 2024	Dec.08, 2027
☒	High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	June.18, 2024	June.17, 2025
Software						
Used	Description		Manufacturer	Name		Version
☒	Test Software for Radiated disturbance		Farad	EZ-EMC		Ver. UL-3A1

7. ANTENNA TERMINAL TEST RESULTS

7.1. EFFECTIVE (ISOTROPIC) RADIATED POWER OF TRANSMITTER

RULE PART(S)

FCC: §2.1046, §22.913, §24.232, §27.50

LIMITS

22.913(a) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

27.50(c) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

27.50(d) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watts EIRP.

27.50(h) Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

TEST PROCEDURE

Refer to ANSI C63.26:2015 and KDB 971168 D01 Section 5.6

$ERP/ EIRP = P_{Meas} + GT - LC$

where:

ERP or EIRP = effective or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , typically dBW or dBm);


P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB

The transmitter has a maximum output powers as follows and maximum ERP/EIRP is tabulated in section 5.3.

TEST SETUP

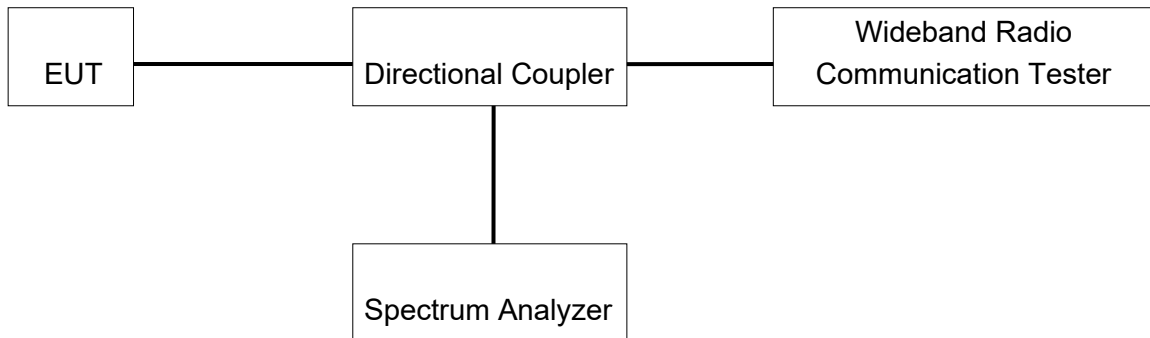

TEST ENVIRONMENT

Temperature	23.4°C	Relative Humidity	59.9%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60HZ

RESULTS

Band II		Channel No.		
		9262	9400	9538
		Fre. (MHz)		
		1852.4	1880	1907.6
WCDMA	12.2kbps RMC	19.02	18.61	18.55
HSDPA	Subtest 1	18.06	17.68	17.59
	Subtest 2	17.56	17.12	17.09
	Subtest 3	17.58	17.21	17.13
	Subtest 4	17.56	17.16	17.13
HSUPA	Subtest 1	16.02	15.64	15.61
	Subtest 2	16.01	15.60	15.57
	Subtest 3	17.00	16.60	16.57
	Subtest 4	15.54	15.15	15.10
	Subtest 5	16.99	16.63	16.57

Band IV		Channel No.		
		1312	1413	1513
		Fre. (MHz)		
		1712.4	1732.6	1752.6
WCDMA	12.2kbps RMC	18.26	18.14	18.51
HSDPA	Subtest 1	17.31	17.13	17.58
	Subtest 2	16.81	16.64	17.01
	Subtest 3	16.80	16.64	17.02
	Subtest 4	16.74	16.68	17.03
HSUPA	Subtest 1	15.32	15.13	15.54
	Subtest 2	15.28	15.14	15.53
	Subtest 3	16.28	16.12	16.51
	Subtest 4	14.79	14.66	15.04
	Subtest 5	16.29	16.10	16.55

Band V		Channel No.		
		4132	4182	4233
		Fre. (MHz)		
		826.4	836.4	846.6
WCDMA	12.2kbps RMC	21.28	21.15	21.35
HSDPA	Subtest 1	20.30	20.20	20.42
	Subtest 2	19.73	19.60	19.93
	Subtest 3	19.78	19.65	19.86
	Subtest 4	19.76	19.63	19.84
HSUPA	Subtest 1	18.31	18.19	18.39
	Subtest 2	18.32	18.19	18.39
	Subtest 3	19.34	19.21	19.39
	Subtest 4	17.82	17.66	17.93
	Subtest 5	19.30	19.20	19.37

8. RADIATED SPURIOUS EMISSIONS

LIMIT

FCC: §24.238(a) (WCDMA Band 2)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

FCC: §22.917(a) (WCDMA Band 5)


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

FCC: §27.53(h) (WCDMA Band 4)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

TEST PROCEDURE

Following the test configuration shown below, radiated emissions measured directly from the EUT and convert the measured field strength or received power to ERP or EIRP, as required, for comparison to the applicable limits. As stated in section 5.5.1 of ANSI C63.26-2015. The field strength measurement method by using a test site validated to the requirement of ANSI C63.4 is an alternative method to the substitution measurement.

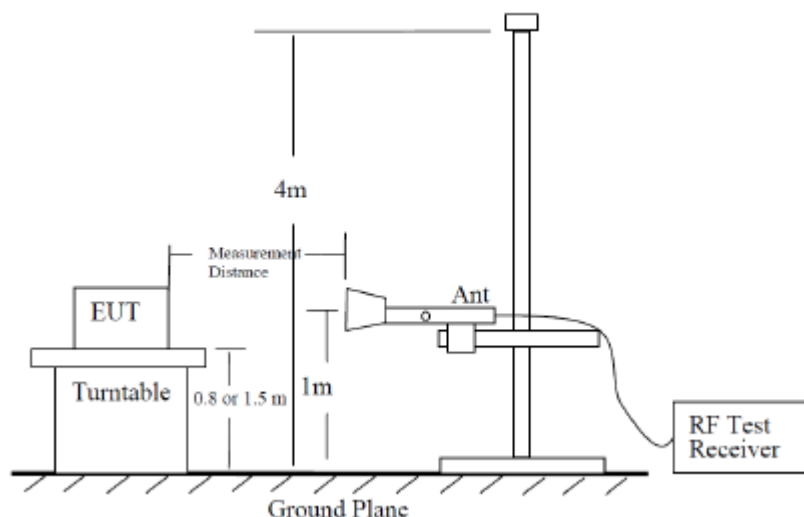

Radiated Power Measurement Calculation According to ANSI C63.26-2015

a) $E \text{ (dB}\mu\text{V/m)} = \text{Measured amplitude level (dB}\mu\text{V)} + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}.$


- b) $E \text{ (dB}\mu\text{V/m)} = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$.
- c) $E \text{ (dB}\mu\text{V/m)} = \text{EIRP (dBm)} - 20\log(D) + 104.8$, where D is the measurement distance (in the far field region) in m.
- d) $\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8$, where D is the measurement distance (in the far field region) in m.

So, from d)

The measuring distance is at 3m, then $20 \cdot \log(3) = 9.5424$


Then, $\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 9.5424 - 104.8 = E \text{ (dB}\mu\text{V/m)} - 95.2576$

X axis, Y axis, Z axis positions:

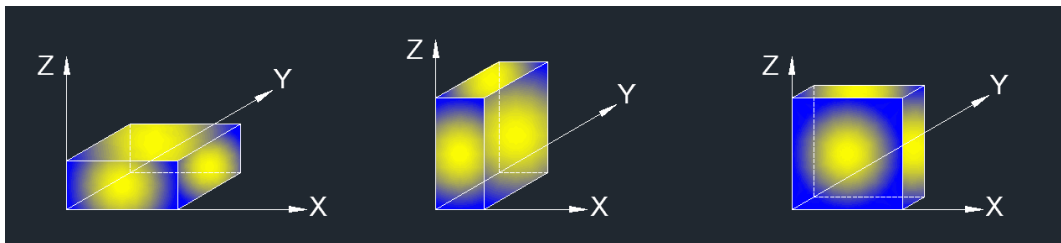

Note: The EUT was investigated in three orthogonal orientations X/Y/Z on MAIN to determine the worst-case orientation. X orientation is finally determined the worst.


RESULTS

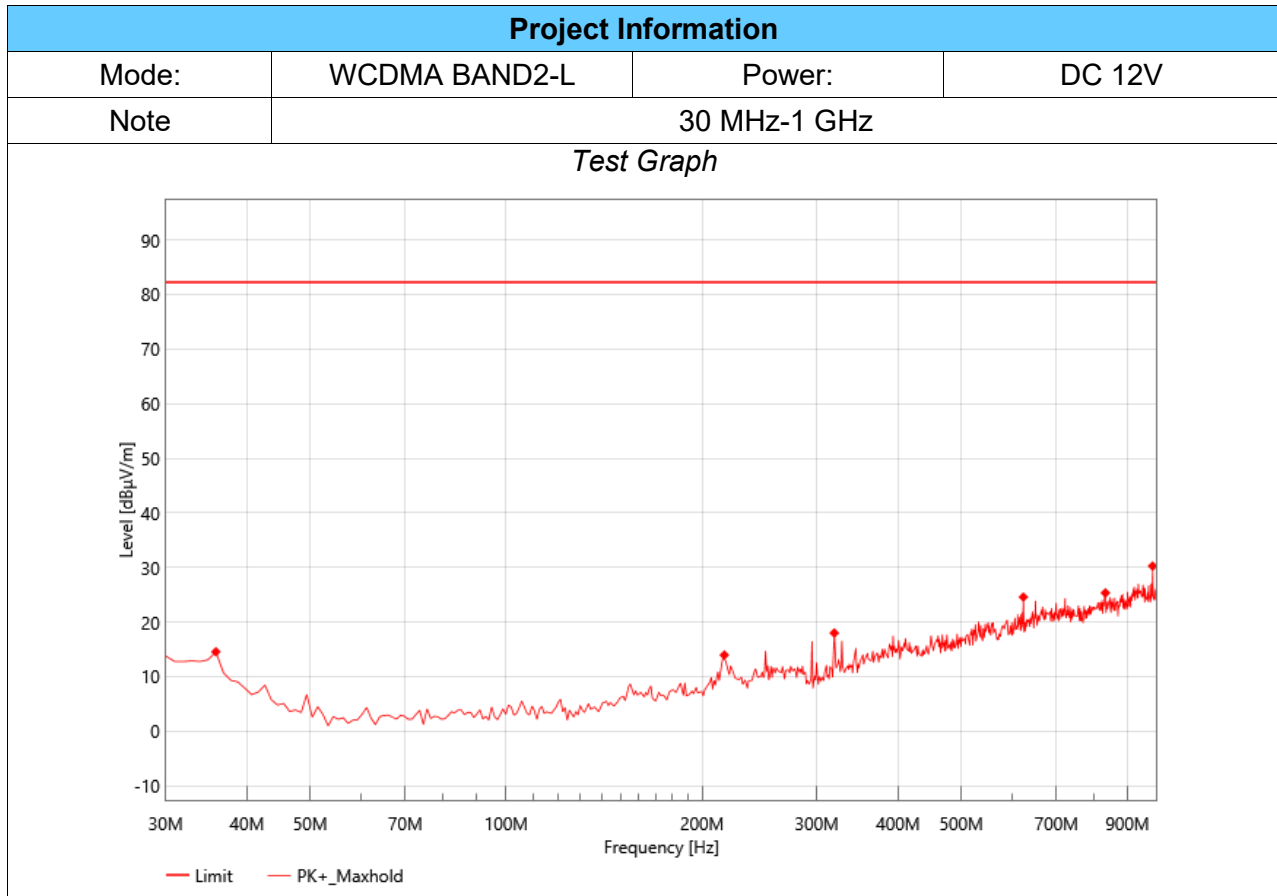

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	35.82	32.31	14.55	-17.76	82.30	67.75	Horizontal	PK	PASS
2	216.24	34.69	13.96	-20.73	82.30	68.34	Horizontal	PK	PASS
3	319.06	35.61	18.00	-17.61	82.30	64.30	Horizontal	PK	PASS
4	622.67	33.45	24.58	-8.87	82.30	57.72	Horizontal	PK	PASS
5	832.19	30.62	25.35	-5.27	82.30	56.95	Horizontal	PK	PASS
6	983.51	32.87	30.26	-2.61	82.30	52.04	Horizontal	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

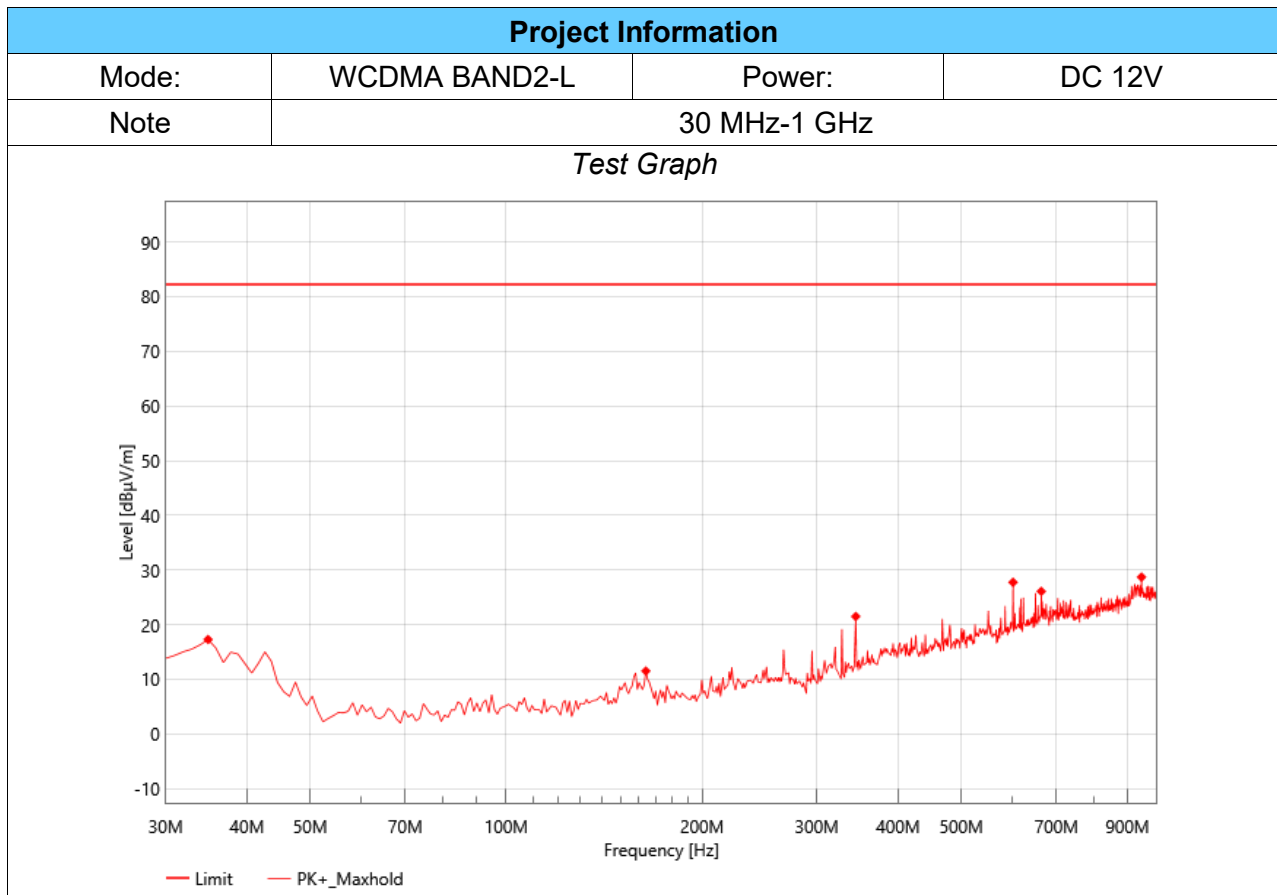

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	34.85	34.47	17.29	-17.18	82.30	65.01	Vertical	PK	PASS
2	163.86	33.63	11.53	-22.1	82.30	70.77	Vertical	PK	PASS
3	344.28	37.98	21.50	-16.48	82.30	60.80	Vertical	PK	PASS
4	600.36	37.19	27.76	-9.43	82.30	54.54	Vertical	PK	PASS
5	663.41	33.83	26.10	-7.73	82.30	56.20	Vertical	PK	PASS
6	945.68	30.85	28.71	-2.14	82.30	53.59	Vertical	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

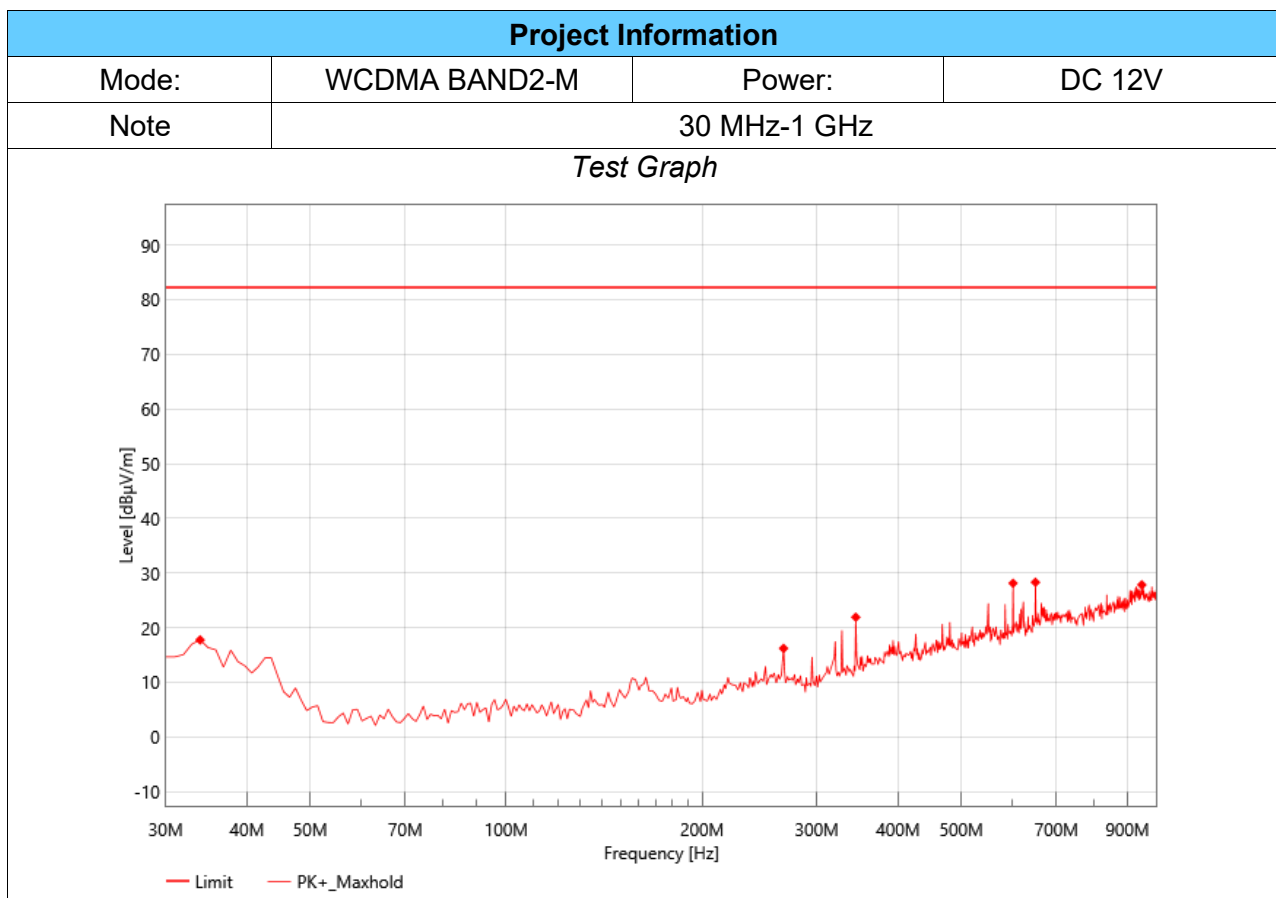

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	33.88	34.40	17.77	-16.63	82.30	64.53	Vertical	PK	PASS
2	266.68	34.39	16.22	-18.17	82.30	66.08	Vertical	PK	PASS
3	344.28	38.40	21.92	-16.48	82.30	60.38	Vertical	PK	PASS
4	600.36	37.57	28.14	-9.43	82.30	54.16	Vertical	PK	PASS
5	649.83	36.32	28.30	-8.02	82.30	54.00	Vertical	PK	PASS
6	946.65	30.03	27.85	-2.18	82.30	54.45	Vertical	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

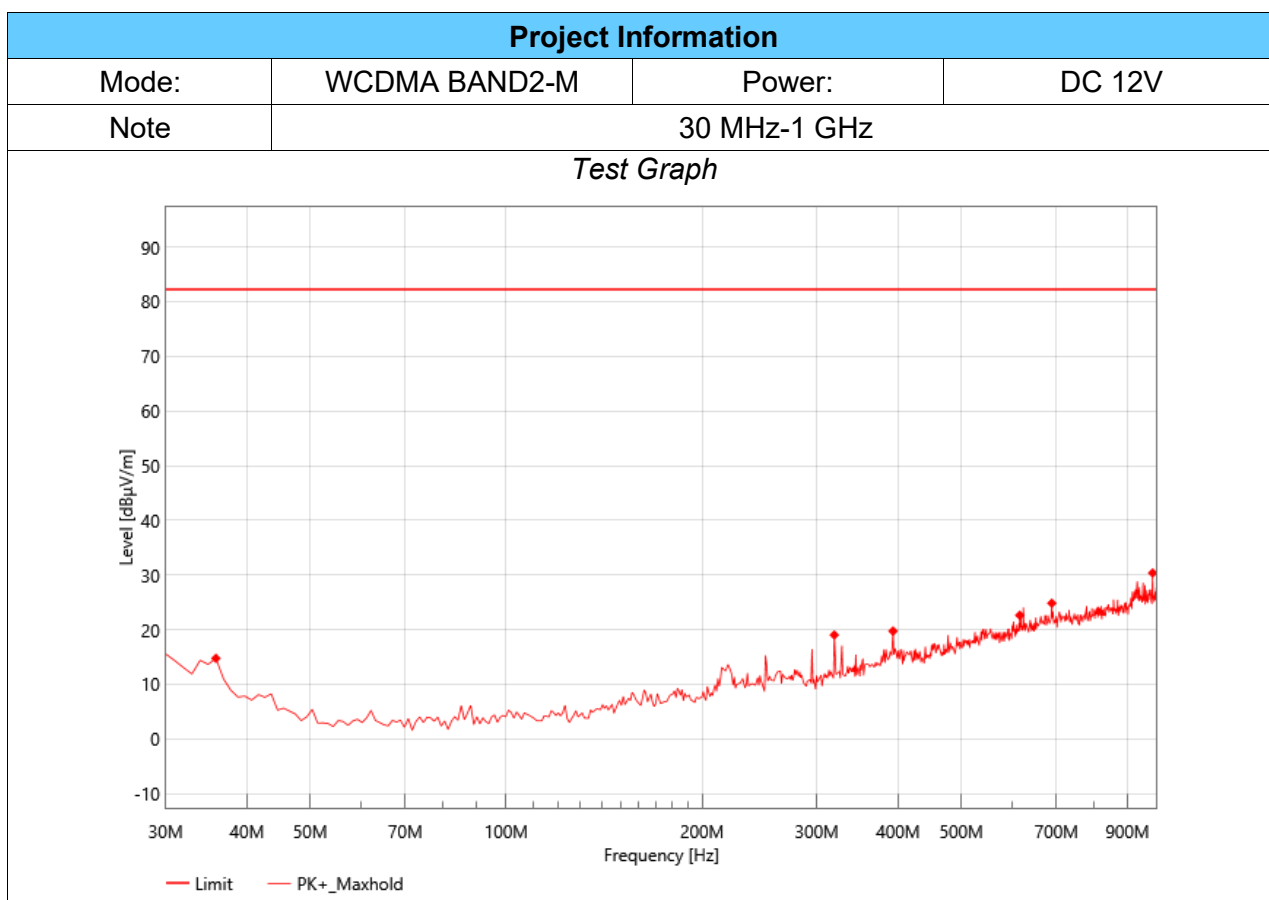

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	35.82	32.52	14.76	-17.76	82.30	67.54	Horizontal	PK	PASS
2	319.06	36.65	19.04	-17.61	82.30	63.26	Horizontal	PK	PASS
3	392.78	33.65	19.75	-13.9	82.30	62.55	Horizontal	PK	PASS
4	614.91	31.64	22.63	-9.01	82.30	59.67	Horizontal	PK	PASS
5	688.63	32.05	24.85	-7.2	82.30	57.45	Horizontal	PK	PASS
6	983.51	32.98	30.37	-2.61	82.30	51.93	Horizontal	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

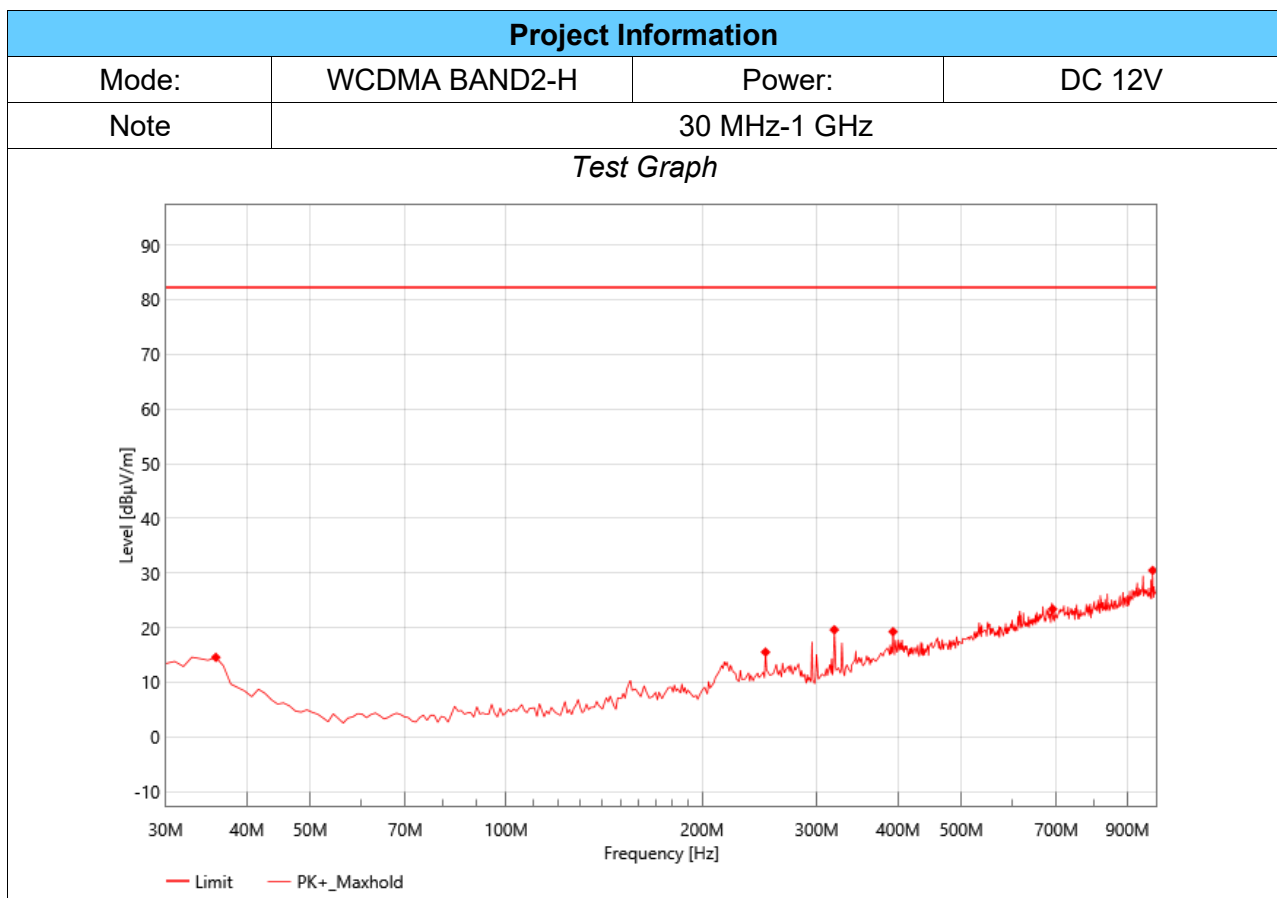

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	35.82	32.33	14.57	-17.76	82.30	67.73	Horizontal	PK	PASS
2	250.19	34.27	15.53	-18.74	82.30	66.77	Horizontal	PK	PASS
3	319.06	37.23	19.62	-17.61	82.30	62.68	Horizontal	PK	PASS
4	392.78	33.17	19.27	-13.9	82.30	63.03	Horizontal	PK	PASS
5	690.57	30.59	23.39	-7.2	82.30	58.91	Horizontal	PK	PASS
6	983.51	33.08	30.47	-2.61	82.30	51.83	Horizontal	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

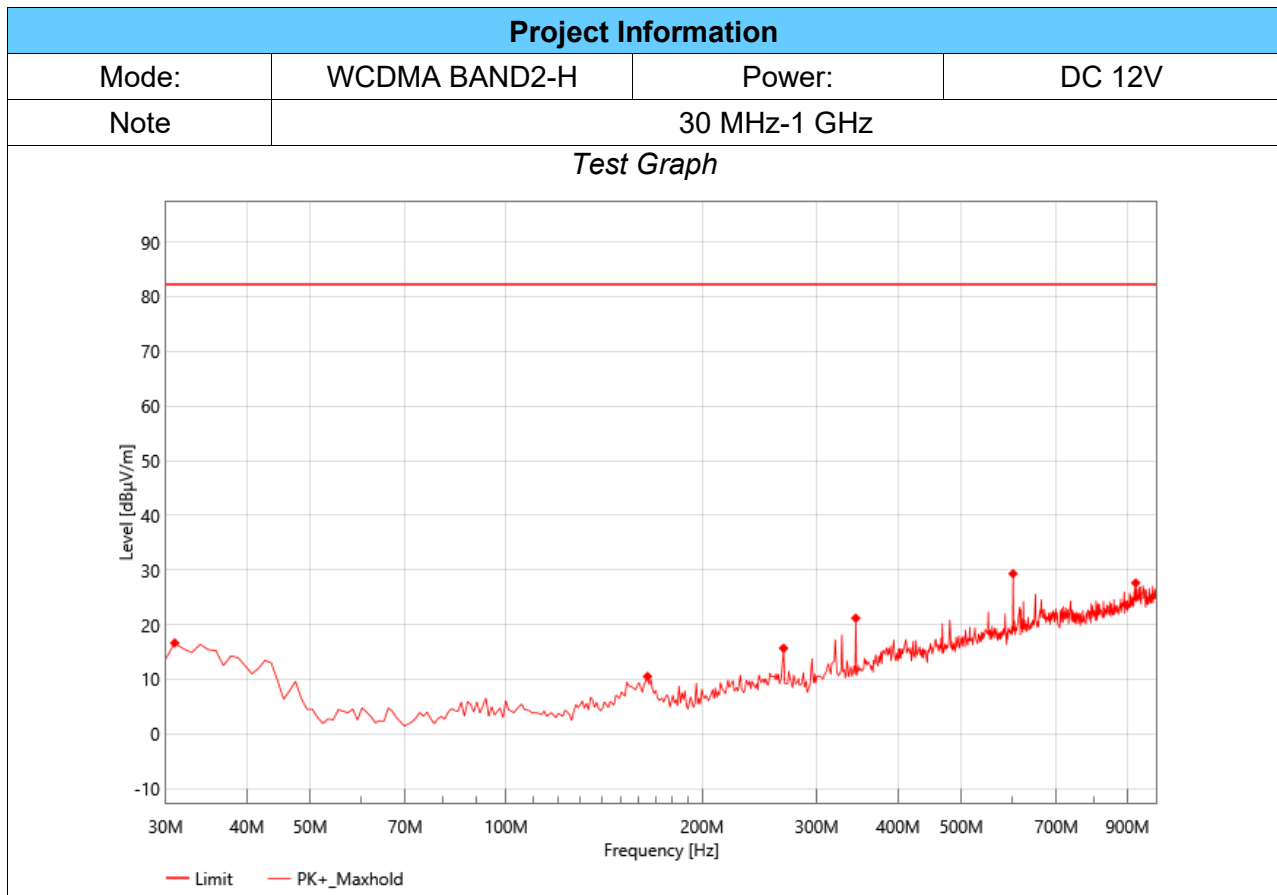

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	30.97	31.52	16.65	-14.87	82.30	65.65	Vertical	PK	PASS
2	164.83	32.79	10.54	-22.25	82.30	71.76	Vertical	PK	PASS
3	266.68	33.85	15.68	-18.17	82.30	66.62	Vertical	PK	PASS
4	344.28	37.67	21.19	-16.48	82.30	61.11	Vertical	PK	PASS
5	600.36	38.75	29.32	-9.43	82.30	52.98	Vertical	PK	PASS
6	926.28	29.97	27.63	-2.34	82.30	54.67	Vertical	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

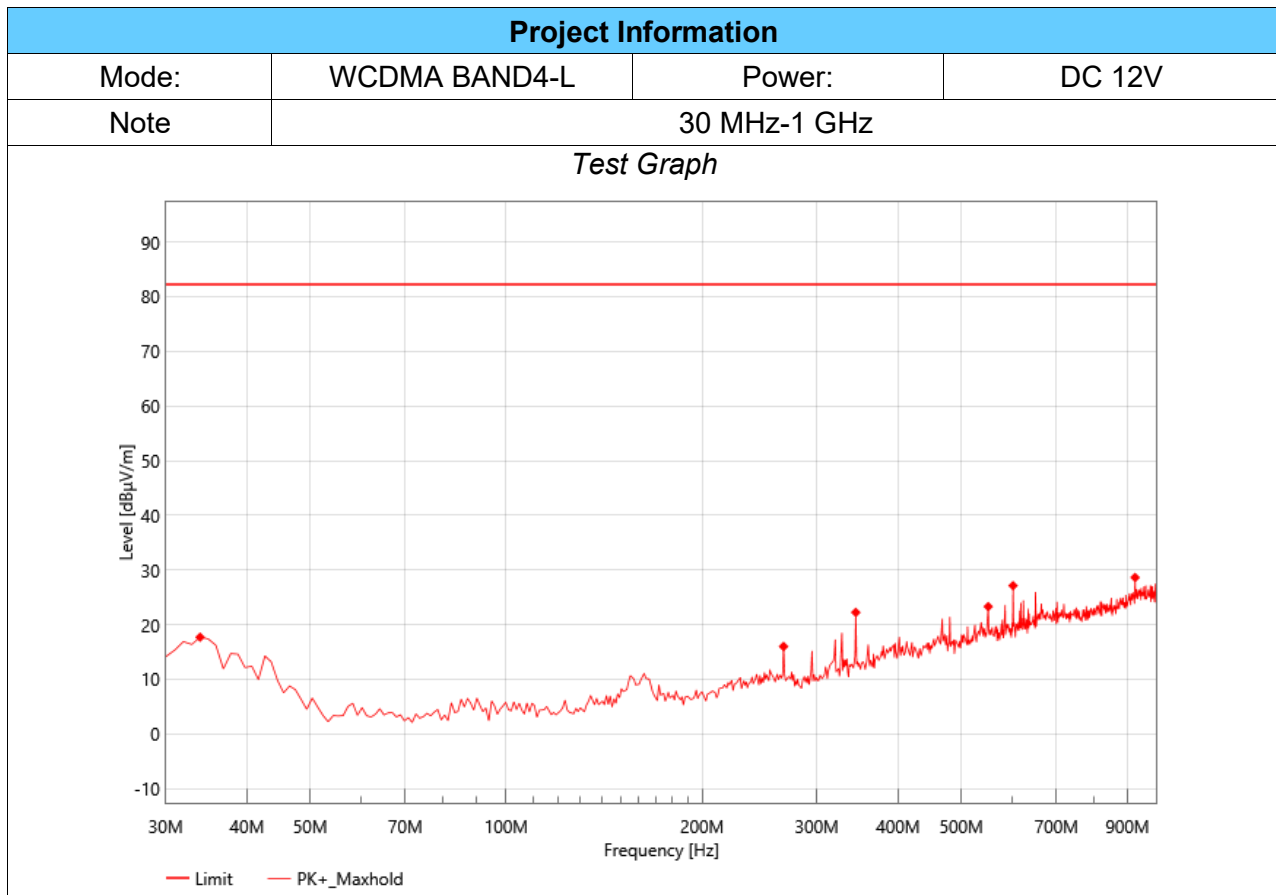

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	33.88	34.35	17.72	-16.63	82.30	64.58	Vertical	PK	PASS
2	266.68	34.19	16.02	-18.17	82.30	66.28	Vertical	PK	PASS
3	344.28	38.73	22.25	-16.48	82.30	60.05	Vertical	PK	PASS
4	549.92	32.80	23.31	-9.49	82.30	58.99	Vertical	PK	PASS
5	600.36	36.58	27.15	-9.43	82.30	55.15	Vertical	PK	PASS
6	924.34	31.14	28.63	-2.51	82.30	53.67	Vertical	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

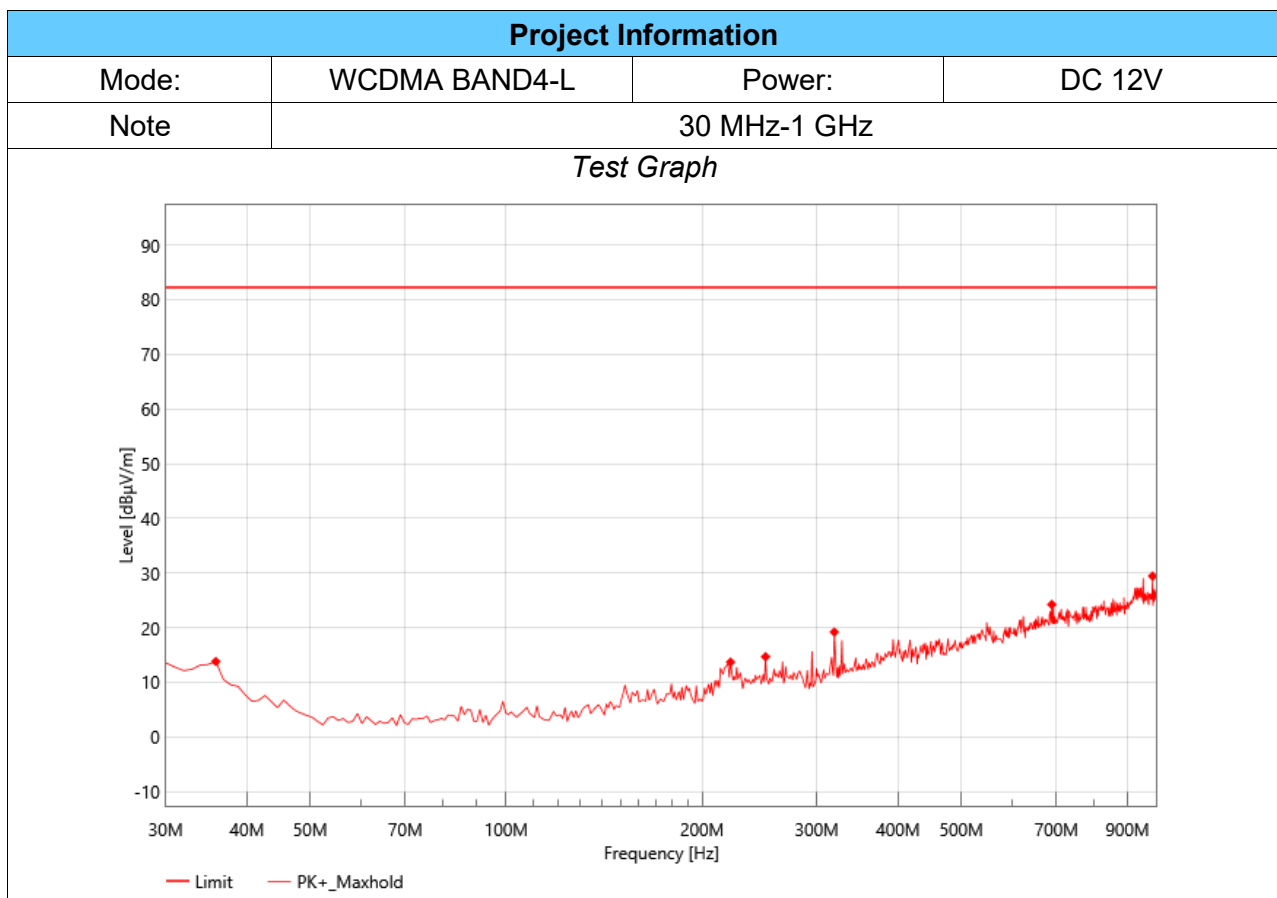

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	35.82	31.57	13.81	-17.76	82.30	68.49	Horizontal	PK	PASS
2	221.09	34.18	13.70	-20.48	82.30	68.60	Horizontal	PK	PASS
3	250.19	33.43	14.69	-18.74	82.30	67.61	Horizontal	PK	PASS
4	319.06	36.81	19.20	-17.61	82.30	63.10	Horizontal	PK	PASS
5	688.63	31.43	24.23	-7.2	82.30	58.07	Horizontal	PK	PASS
6	983.51	32.04	29.43	-2.61	82.30	52.87	Horizontal	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

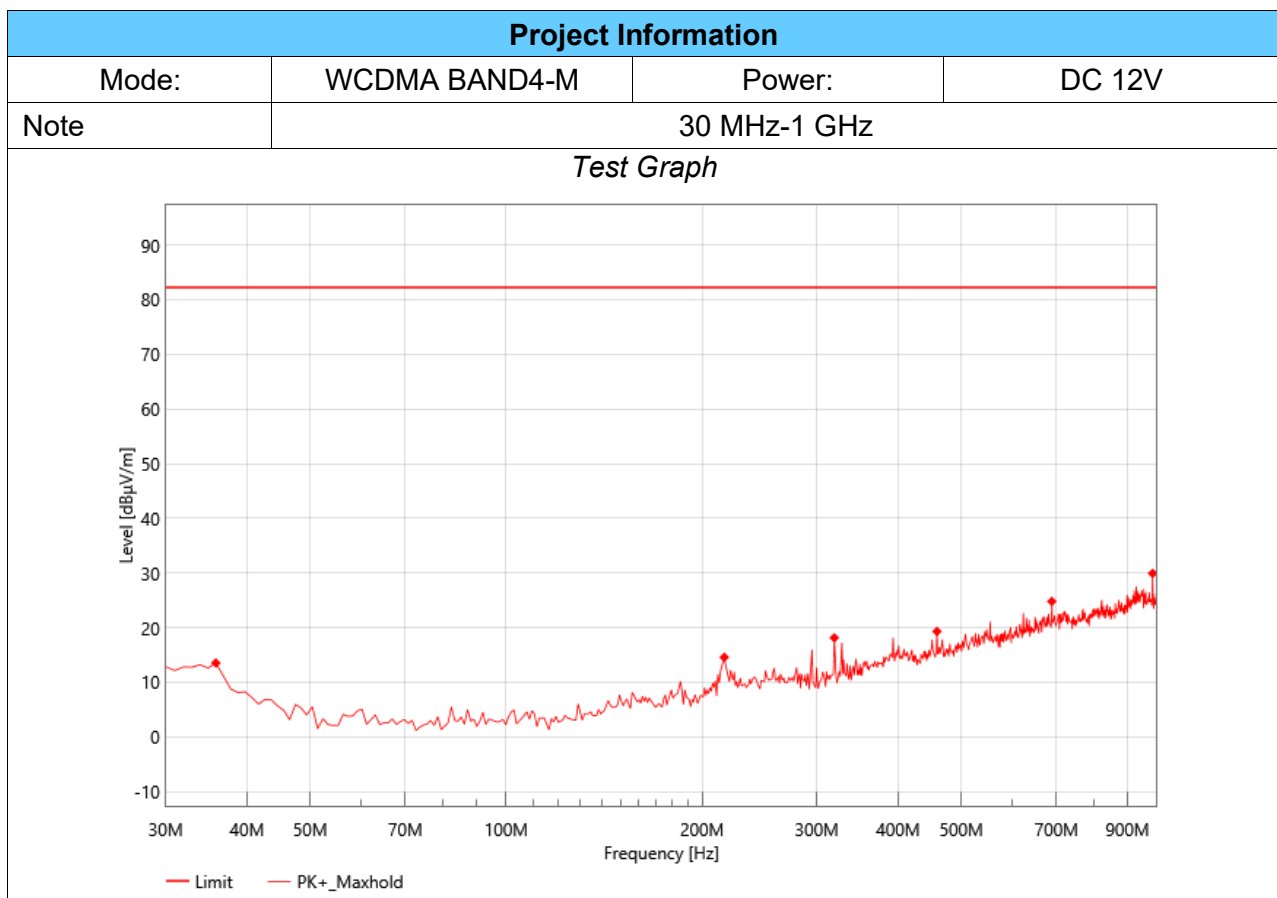

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	35.82	31.30	13.54	-17.76	82.30	68.76	Horizontal	PK	PASS
2	216.24	35.32	14.59	-20.73	82.30	67.71	Horizontal	PK	PASS
3	319.06	35.75	18.14	-17.61	82.30	64.16	Horizontal	PK	PASS
4	458.74	32.68	19.31	-13.37	82.30	62.99	Horizontal	PK	PASS
5	688.63	32.01	24.81	-7.2	82.30	57.49	Horizontal	PK	PASS
6	983.51	32.55	29.94	-2.61	82.30	52.36	Horizontal	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

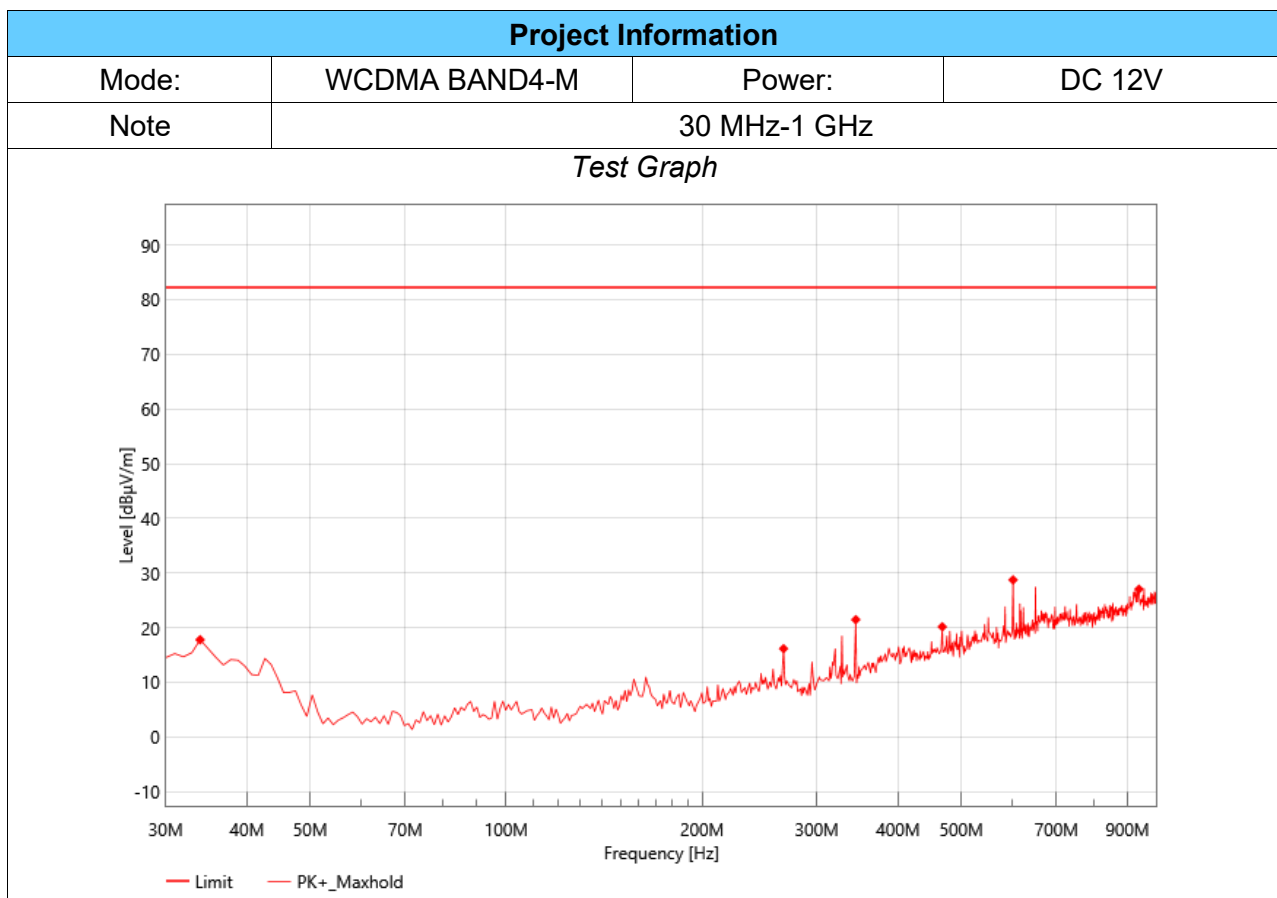

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	33.88	34.43	17.80	-16.63	82.30	64.50	Vertical	PK	PASS
2	266.68	34.33	16.16	-18.17	82.30	66.14	Vertical	PK	PASS
3	344.28	37.95	21.47	-16.48	82.30	60.83	Vertical	PK	PASS
4	467.47	33.30	20.17	-13.13	82.30	62.13	Vertical	PK	PASS
5	600.36	38.17	28.74	-9.43	82.30	53.56	Vertical	PK	PASS
6	936.95	29.20	27.04	-2.16	82.30	55.26	Vertical	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

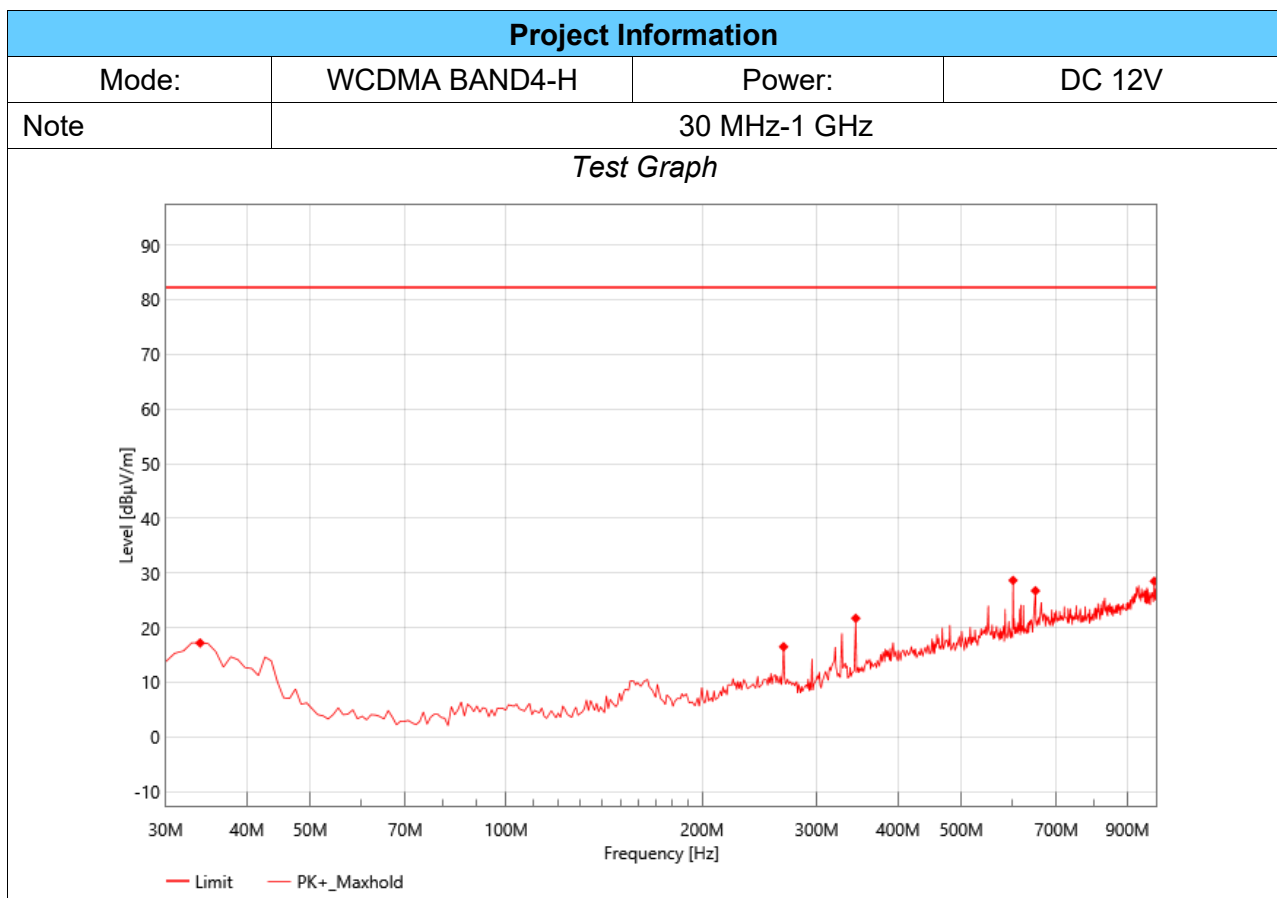

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	33.88	33.83	17.20	-16.63	82.30	65.10	Vertical	PK	PASS
2	266.68	34.68	16.51	-18.17	82.30	65.79	Vertical	PK	PASS
3	344.28	38.20	21.72	-16.48	82.30	60.58	Vertical	PK	PASS
4	600.36	38.09	28.66	-9.43	82.30	53.64	Vertical	PK	PASS
5	649.83	34.78	26.76	-8.02	82.30	55.54	Vertical	PK	PASS
6	989.33	31.04	28.49	-2.55	82.30	53.81	Vertical	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

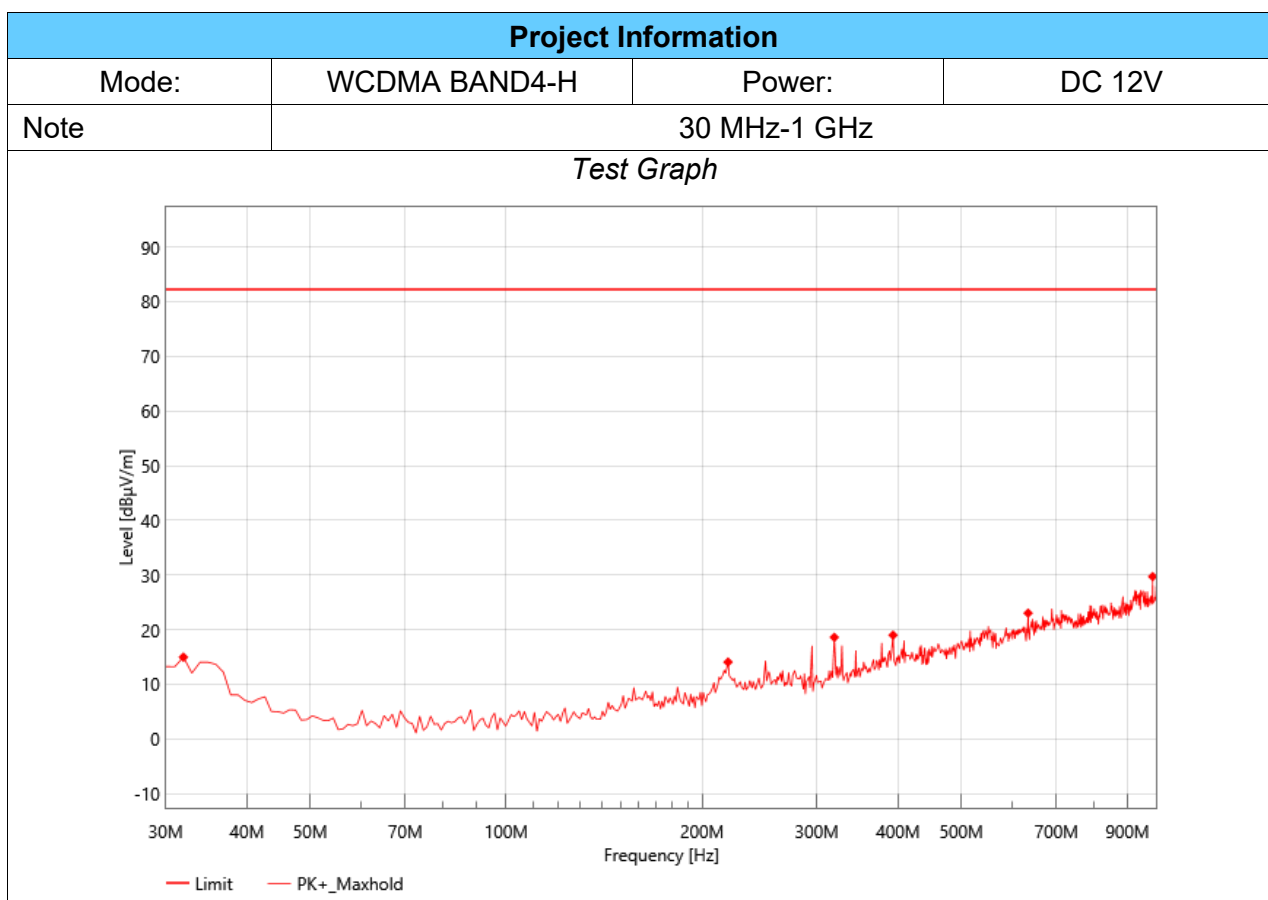

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	31.94	30.42	14.98	-15.44	82.30	67.32	Horizontal	PK	PASS
2	219.15	34.62	14.07	-20.55	82.30	68.23	Horizontal	PK	PASS
3	319.06	36.22	18.61	-17.61	82.30	63.69	Horizontal	PK	PASS
4	392.78	32.91	19.01	-13.9	82.30	63.29	Horizontal	PK	PASS
5	633.34	31.68	23.03	-8.65	82.30	59.27	Horizontal	PK	PASS
6	983.51	32.33	29.72	-2.61	82.30	52.58	Horizontal	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

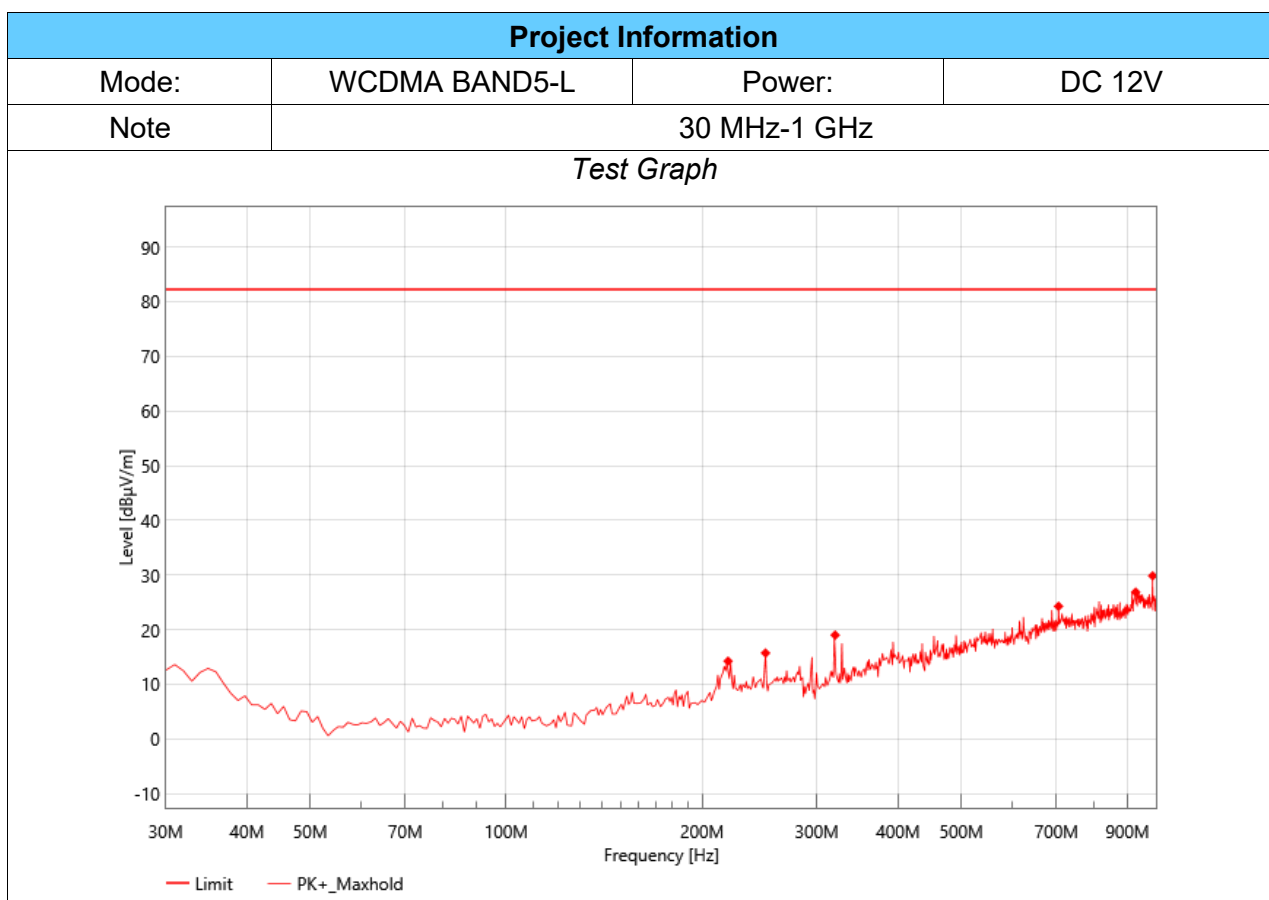

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	219.15	34.79	14.24	-20.55	82.30	68.06	Horizontal	PK	PASS
2	250.19	34.47	15.73	-18.74	82.30	66.57	Horizontal	PK	PASS
3	320.03	36.54	19.01	-17.53	82.30	63.29	Horizontal	PK	PASS
4	705.12	31.15	24.28	-6.87	82.30	58.02	Horizontal	PK	PASS
5	926.28	29.21	26.87	-2.34	82.30	55.43	Horizontal	PK	PASS
6	983.51	32.46	29.85	-2.61	82.30	52.45	Horizontal	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

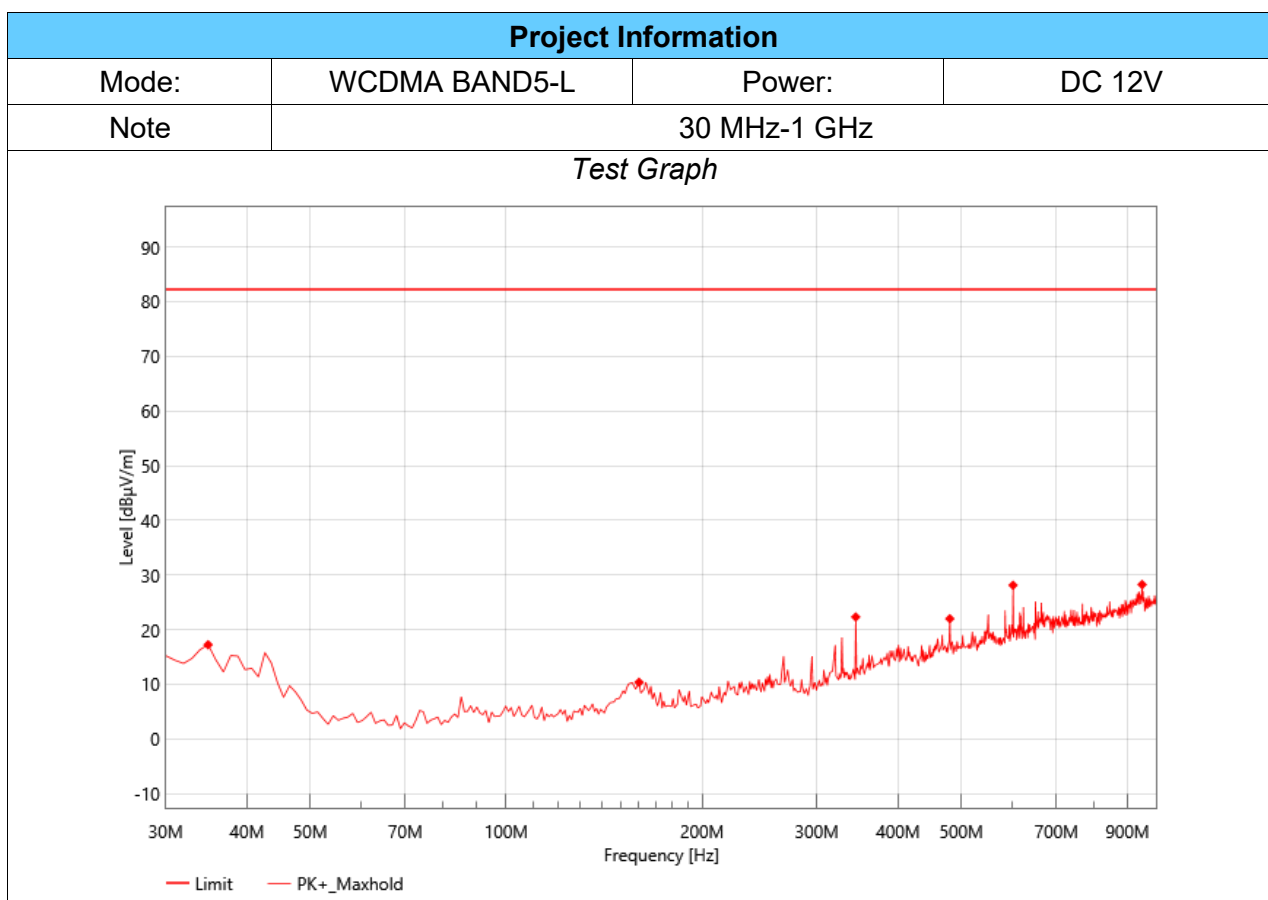

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	34.85	34.43	17.25	-17.18	82.30	65.05	Vertical	PK	PASS
2	159.98	31.77	10.37	-21.4	82.30	71.93	Vertical	PK	PASS
3	344.28	38.80	22.32	-16.48	82.30	59.98	Vertical	PK	PASS
4	480.08	34.67	22.01	-12.66	82.30	60.29	Vertical	PK	PASS
5	600.36	37.56	28.13	-9.43	82.30	54.17	Vertical	PK	PASS
6	947.62	30.53	28.26	-2.27	82.30	54.04	Vertical	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

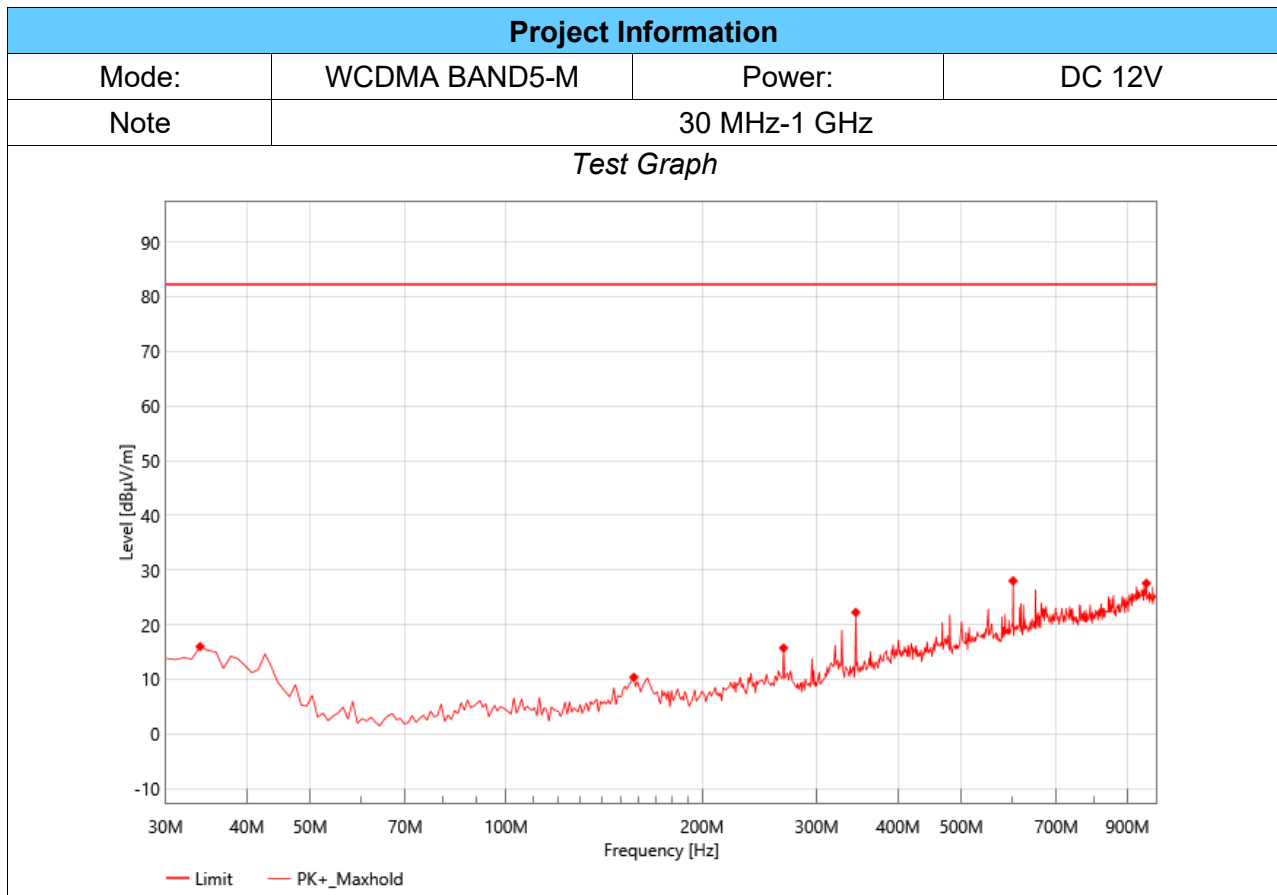

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	33.88	32.63	16.00	-16.63	82.30	66.30	Vertical	PK	PASS
2	157.07	31.30	10.37	-20.93	82.30	71.93	Vertical	PK	PASS
3	266.68	33.90	15.73	-18.17	82.30	66.57	Vertical	PK	PASS
4	344.28	38.72	22.24	-16.48	82.30	60.06	Vertical	PK	PASS
5	600.36	37.44	28.01	-9.43	82.30	54.29	Vertical	PK	PASS
6	962.17	30.42	27.58	-2.84	82.30	54.72	Vertical	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

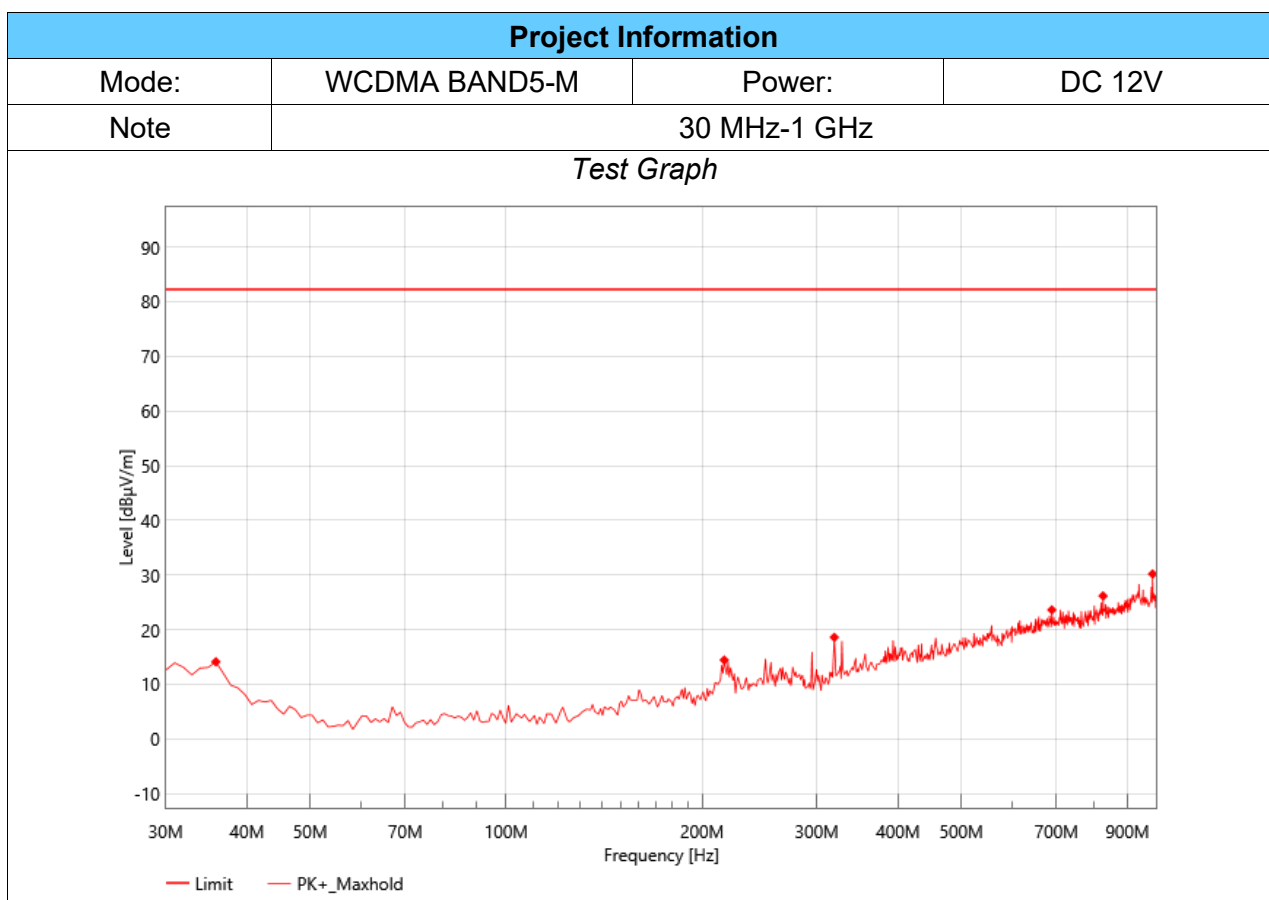

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	35.82	31.89	14.13	-17.76	82.30	68.17	Horizontal	PK	PASS
2	216.24	35.17	14.44	-20.73	82.30	67.86	Horizontal	PK	PASS
3	319.06	36.22	18.61	-17.61	82.30	63.69	Horizontal	PK	PASS
4	688.63	30.83	23.63	-7.2	82.30	58.67	Horizontal	PK	PASS
5	825.40	31.54	26.17	-5.37	82.30	56.13	Horizontal	PK	PASS
6	983.51	32.80	30.19	-2.61	82.30	52.11	Horizontal	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

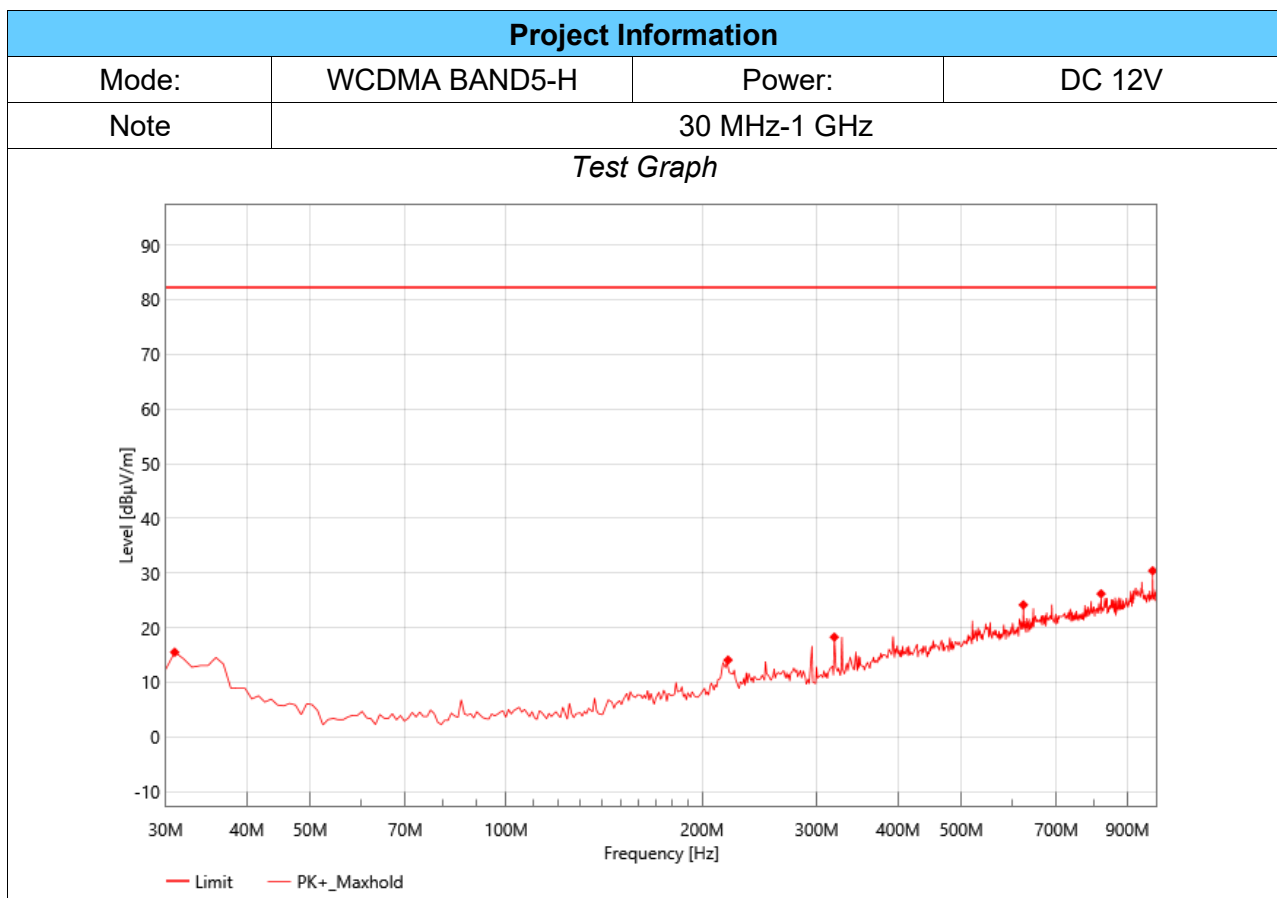

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	30.97	30.38	15.51	-14.87	82.30	66.79	Horizontal	PK	PASS
2	219.15	34.62	14.07	-20.55	82.30	68.23	Horizontal	PK	PASS
3	319.06	35.88	18.27	-17.61	82.30	64.03	Horizontal	PK	PASS
4	622.67	33.04	24.17	-8.87	82.30	58.13	Horizontal	PK	PASS
5	819.58	31.67	26.20	-5.47	82.30	56.10	Horizontal	PK	PASS
6	983.51	33.02	30.41	-2.61	82.30	51.89	Horizontal	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

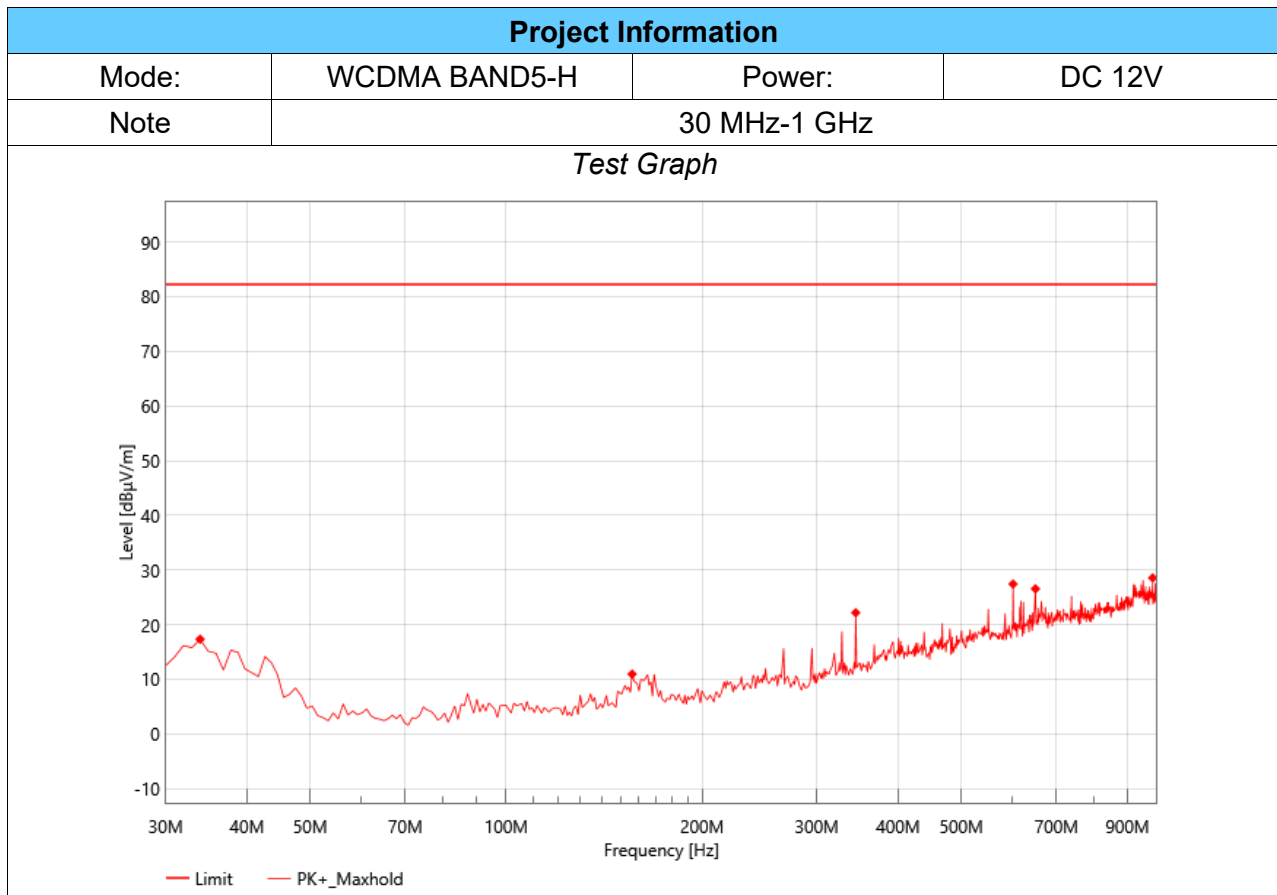


Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	33.88	33.97	17.34	-16.63	82.30	64.96	Vertical	PK	PASS
2	156.10	31.66	10.95	-20.71	82.30	71.35	Vertical	PK	PASS
3	344.28	38.67	22.19	-16.48	82.30	60.11	Vertical	PK	PASS
4	600.36	36.87	27.44	-9.43	82.30	54.86	Vertical	PK	PASS
5	649.83	34.58	26.56	-8.02	82.30	55.74	Vertical	PK	PASS
6	983.51	31.17	28.56	-2.61	82.30	53.74	Vertical	PK	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level]

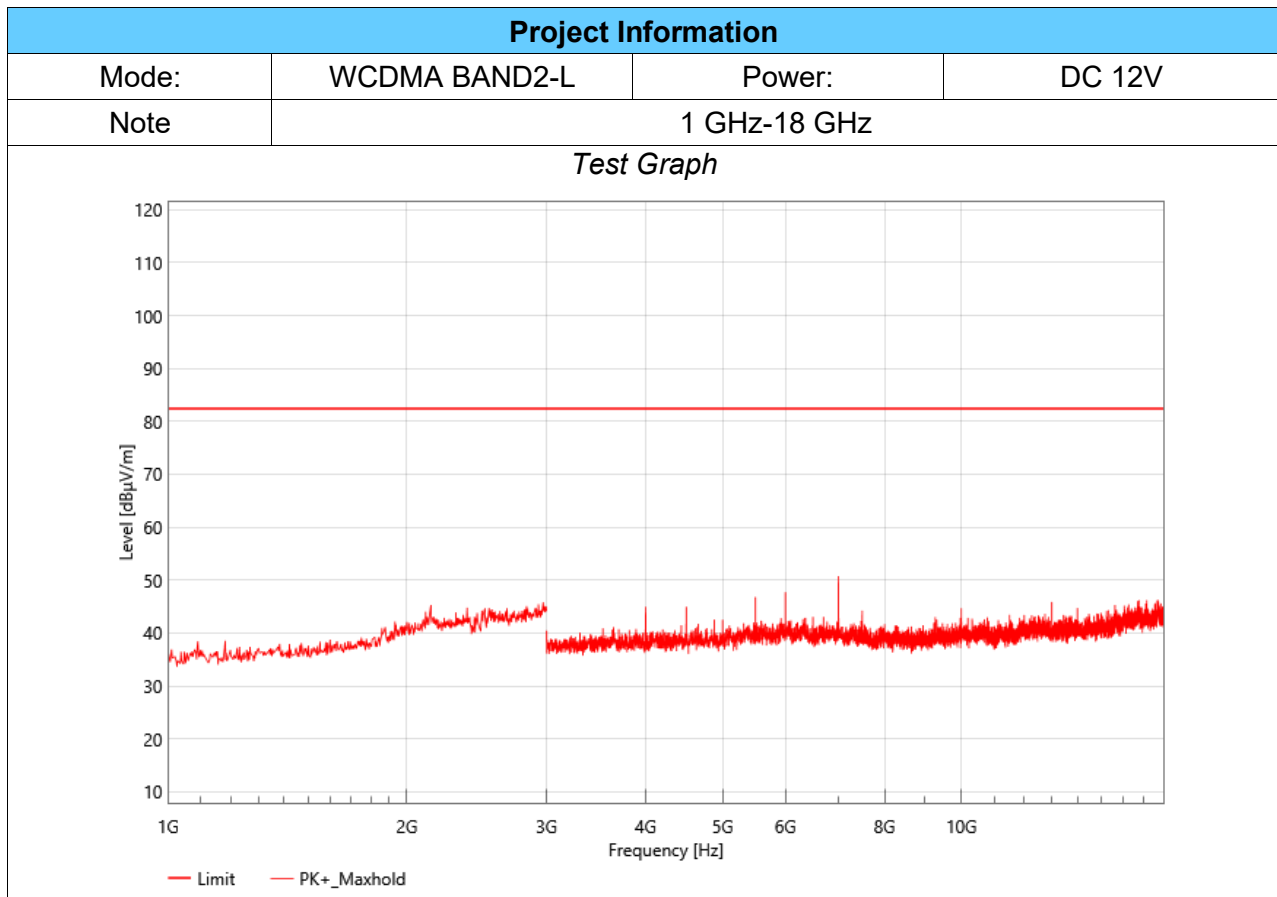


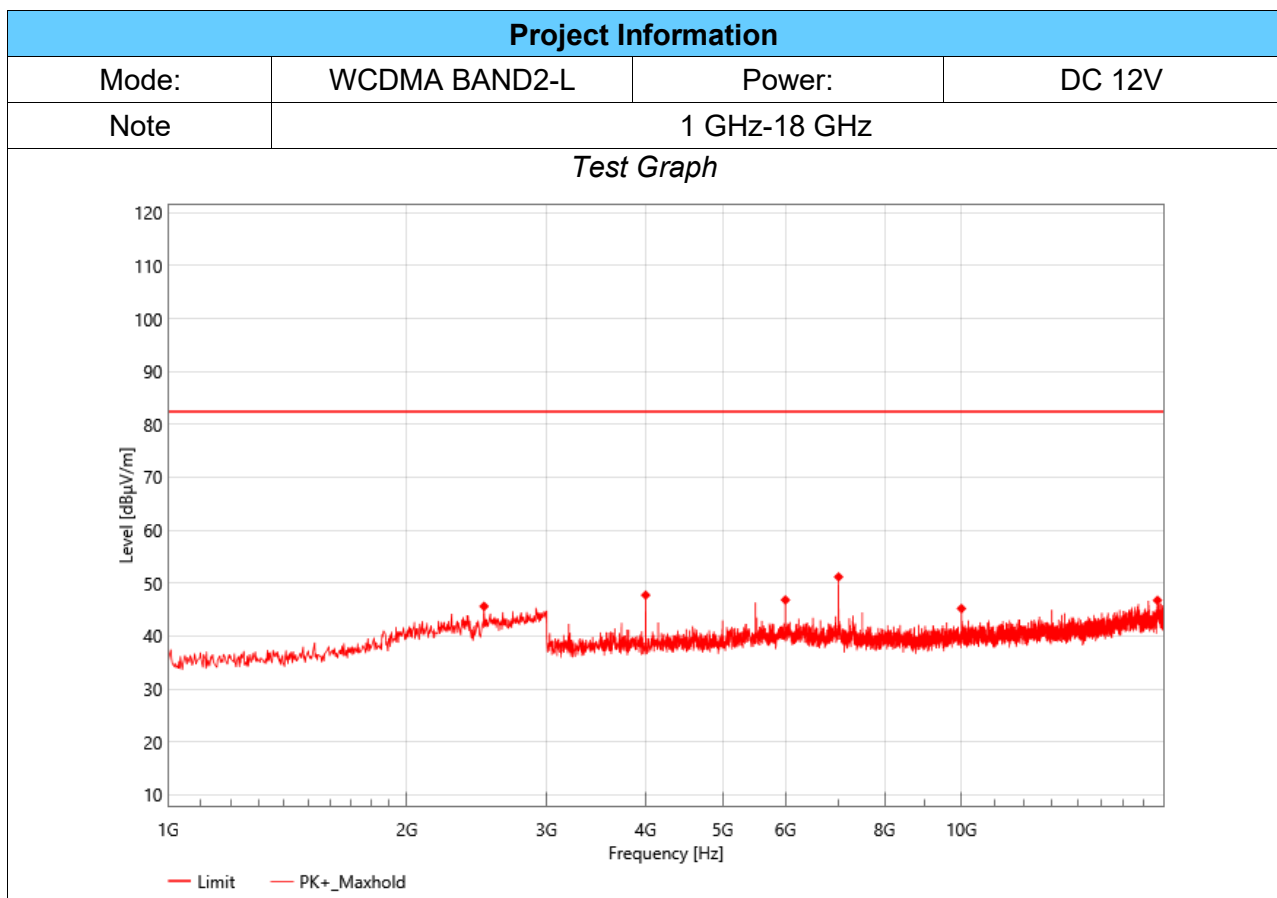

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	2502.00	54.04	45.63	-8.41	82.30	36.67	Horizontal	PK	PASS
2	3999.00	61.08	47.74	-13.34	82.30	34.56	Horizontal	PK	PASS
3	6000.00	55.70	46.83	-8.87	82.30	35.47	Horizontal	PK	PASS
4	7000.50	58.99	51.19	-7.8	82.30	31.11	Horizontal	PK	PASS
5	10000.50	51.37	45.20	-6.17	82.30	37.10	Horizontal	PK	PASS
6	17665.50	46.57	46.76	0.19	82.30	35.54	Horizontal	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

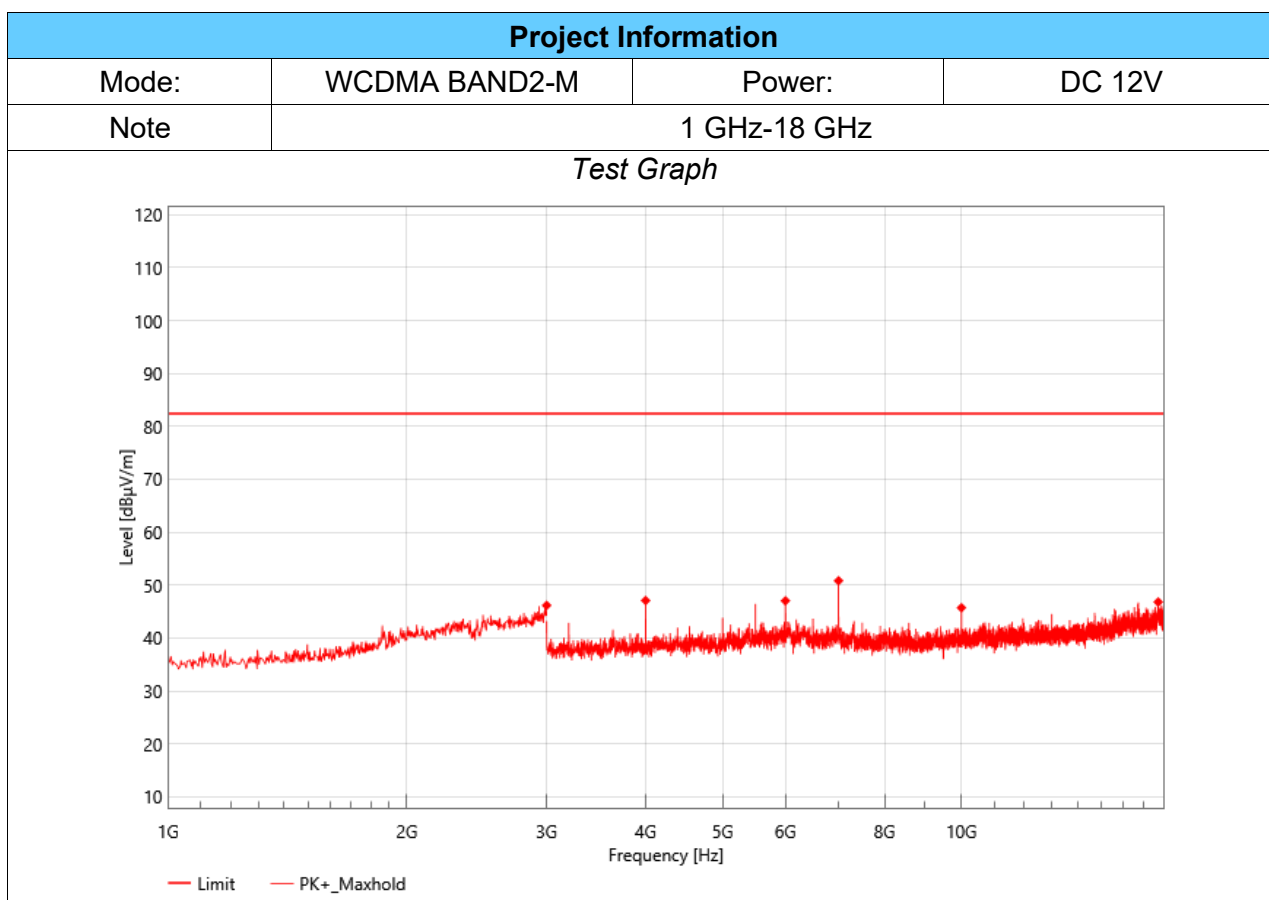

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	3000.00	53.18	46.17	-7.01	82.30	36.13	Horizontal	PK	PASS
2	3999.00	60.44	47.10	-13.34	82.30	35.20	Horizontal	PK	PASS
3	6000.00	55.92	47.05	-8.87	82.30	35.25	Horizontal	PK	PASS
4	7000.50	58.63	50.83	-7.8	82.30	31.47	Horizontal	PK	PASS
5	10000.50	51.90	45.73	-6.17	82.30	36.57	Horizontal	PK	PASS
6	17704.50	46.74	46.82	0.08	82.30	35.48	Horizontal	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

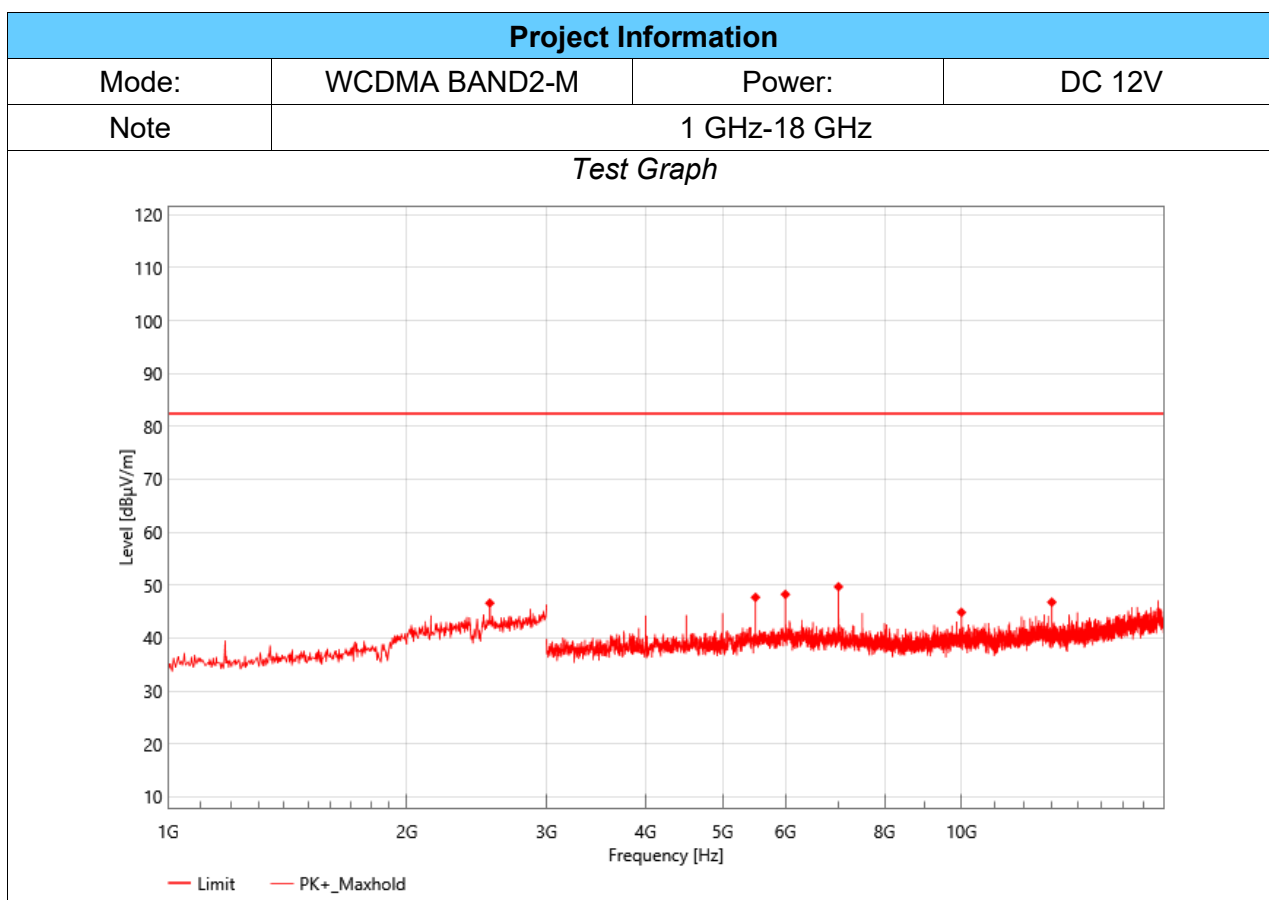

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	2544.00	54.94	46.62	-8.32	82.30	35.68	Vertical	PK	PASS
2	5500.50	57.39	47.70	-9.69	82.30	34.60	Vertical	PK	PASS
3	6000.00	57.13	48.26	-8.87	82.30	34.04	Vertical	PK	PASS
4	6999.00	57.49	49.70	-7.79	82.30	32.60	Vertical	PK	PASS
5	10000.50	51.04	44.87	-6.17	82.30	37.43	Vertical	PK	PASS
6	13000.50	51.30	46.79	-4.51	82.30	35.51	Vertical	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

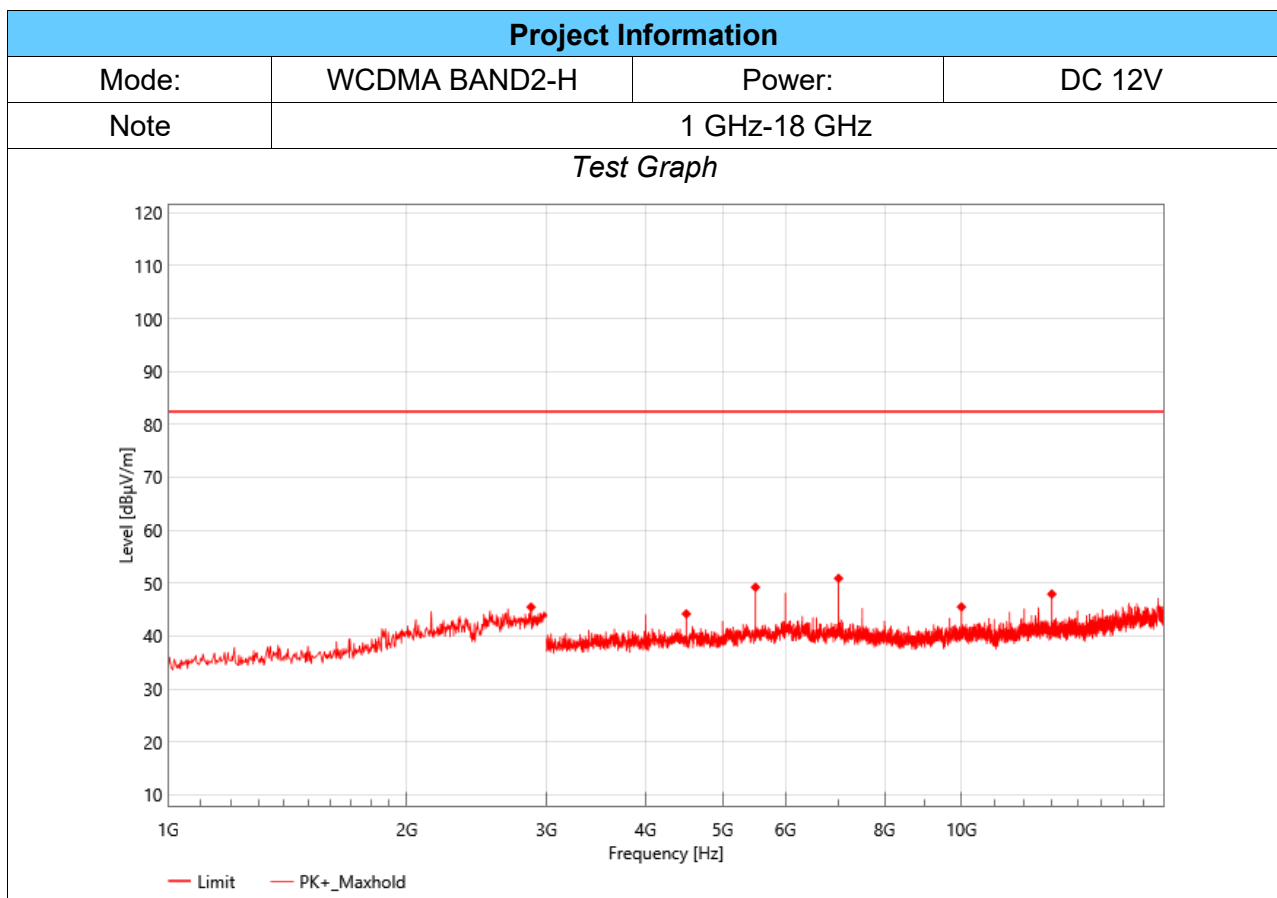

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	2868.00	53.73	45.48	-8.25	82.30	36.82	Vertical	PK	PASS
2	4500.00	56.15	44.20	-11.95	82.30	38.10	Vertical	PK	PASS
3	5500.50	58.92	49.23	-9.69	82.30	33.07	Vertical	PK	PASS
4	7000.50	58.71	50.91	-7.8	82.30	31.39	Vertical	PK	PASS
5	10000.50	51.68	45.51	-6.17	82.30	36.79	Vertical	PK	PASS
6	13000.50	52.45	47.94	-4.51	82.30	34.36	Vertical	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

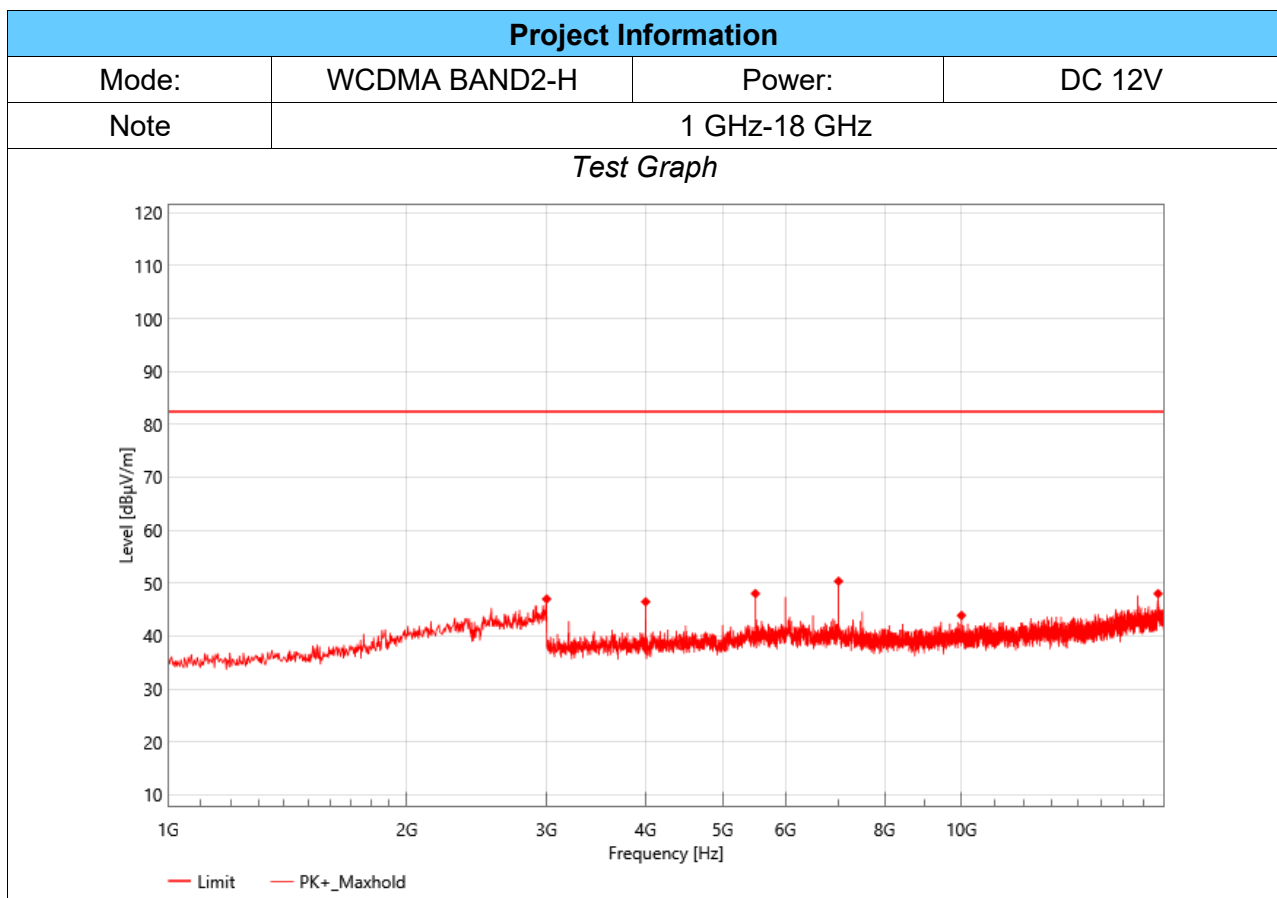

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	3000.00	54.01	47.00	-7.01	82.30	35.30	Horizontal	PK	PASS
2	3999.00	59.81	46.47	-13.34	82.30	35.83	Horizontal	PK	PASS
3	5499.00	57.74	48.04	-9.7	82.30	34.26	Horizontal	PK	PASS
4	7000.50	58.17	50.37	-7.8	82.30	31.93	Horizontal	PK	PASS
5	10000.50	50.06	43.89	-6.17	82.30	38.41	Horizontal	PK	PASS
6	17697.00	47.82	48.02	0.2	82.30	34.28	Horizontal	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

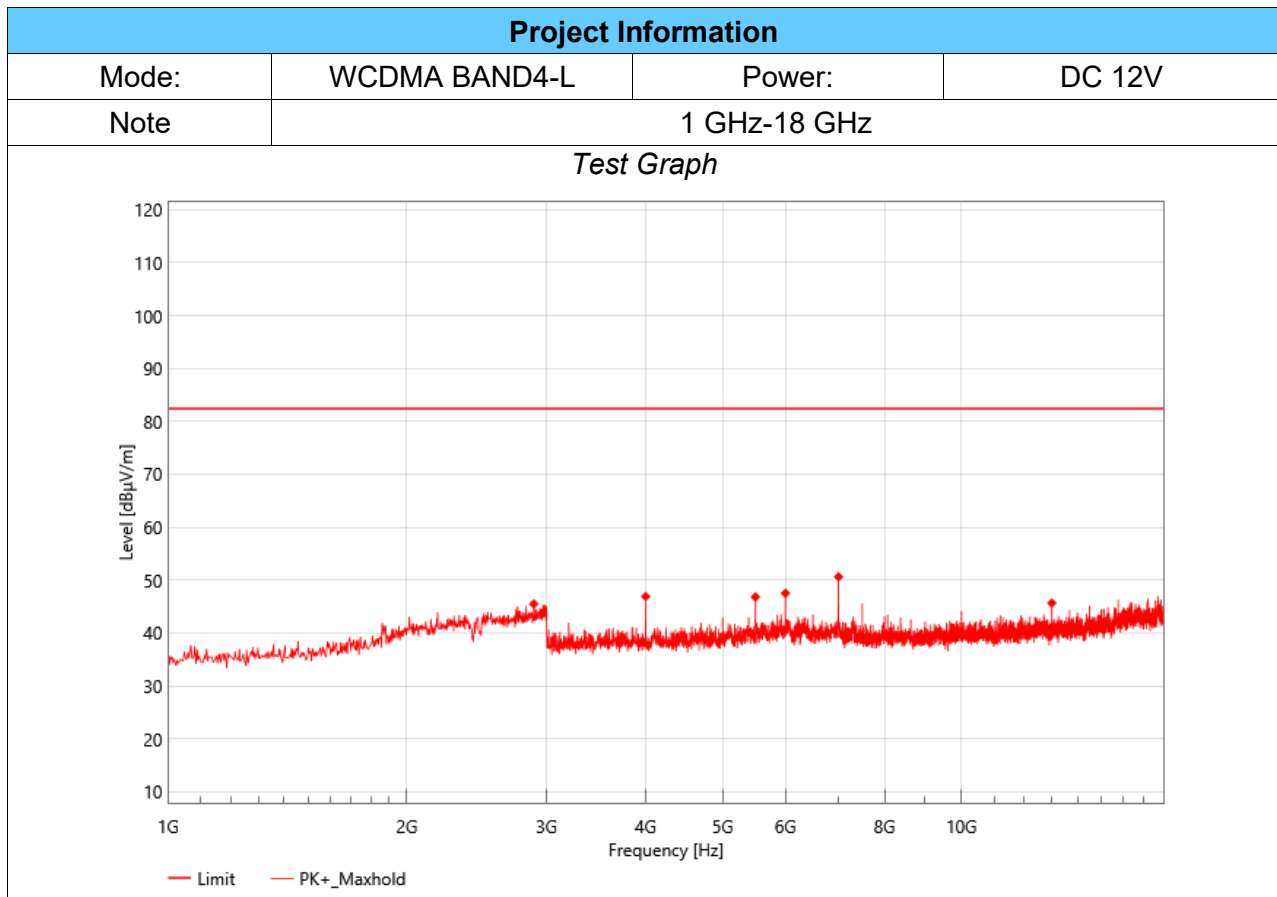

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	2890.00	53.60	45.51	-8.09	82.30	36.79	Horizontal	PK	PASS
2	3999.00	60.26	46.92	-13.34	82.30	35.38	Horizontal	PK	PASS
3	5499.00	56.52	46.82	-9.7	82.30	35.48	Horizontal	PK	PASS
4	6000.00	56.39	47.52	-8.87	82.30	34.78	Horizontal	PK	PASS
5	7000.50	58.44	50.64	-7.8	82.30	31.66	Horizontal	PK	PASS
6	13000.50	50.19	45.68	-4.51	82.30	36.62	Horizontal	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

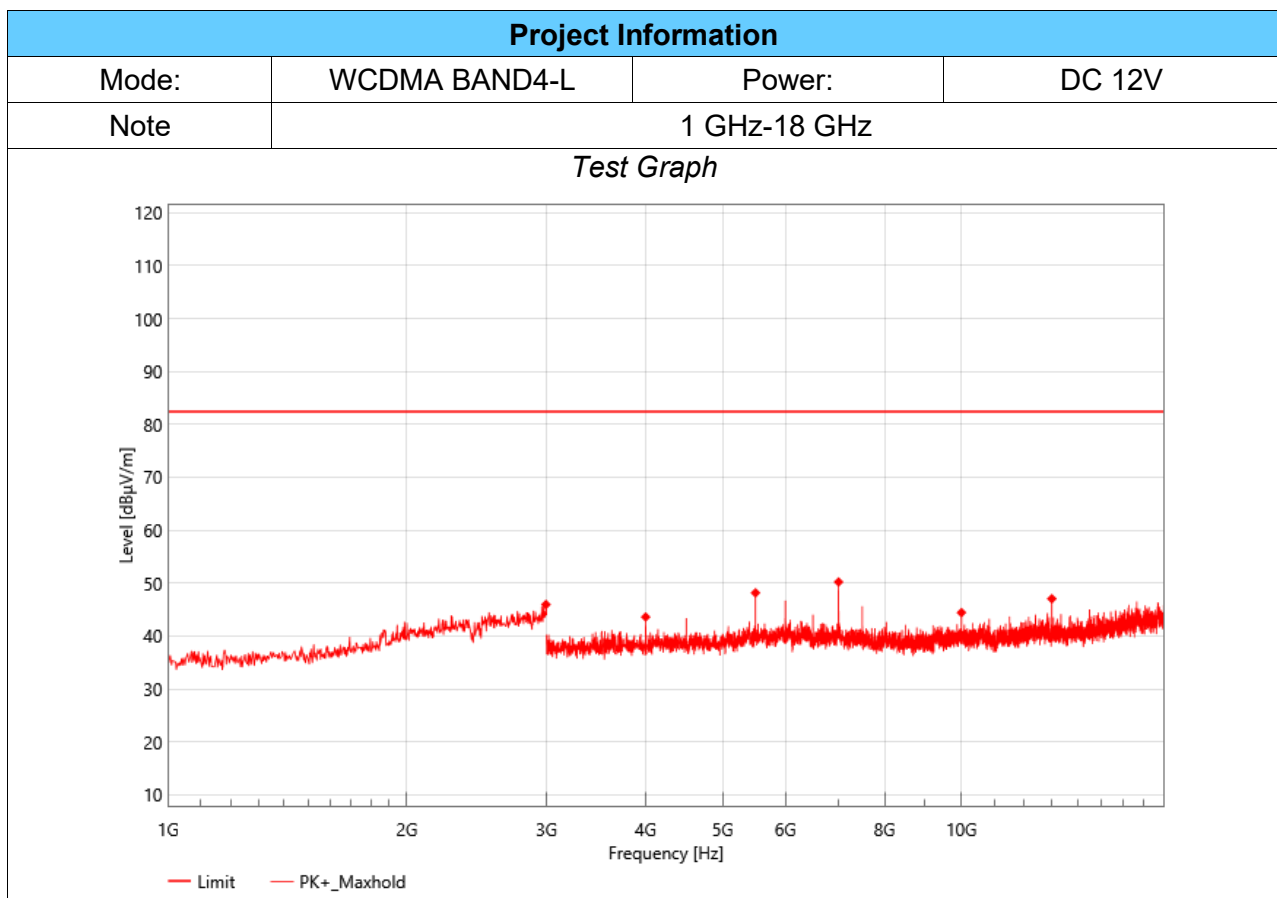

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	2994.00	52.96	45.97	-6.99	82.30	36.33	Vertical	PK	PASS
2	3999.00	56.95	43.61	-13.34	82.30	38.69	Vertical	PK	PASS
3	5500.50	57.86	48.17	-9.69	82.30	34.13	Vertical	PK	PASS
4	7000.50	58.02	50.22	-7.8	82.30	32.08	Vertical	PK	PASS
5	10000.50	50.61	44.44	-6.17	82.30	37.86	Vertical	PK	PASS
6	13000.50	51.56	47.05	-4.51	82.30	35.25	Vertical	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

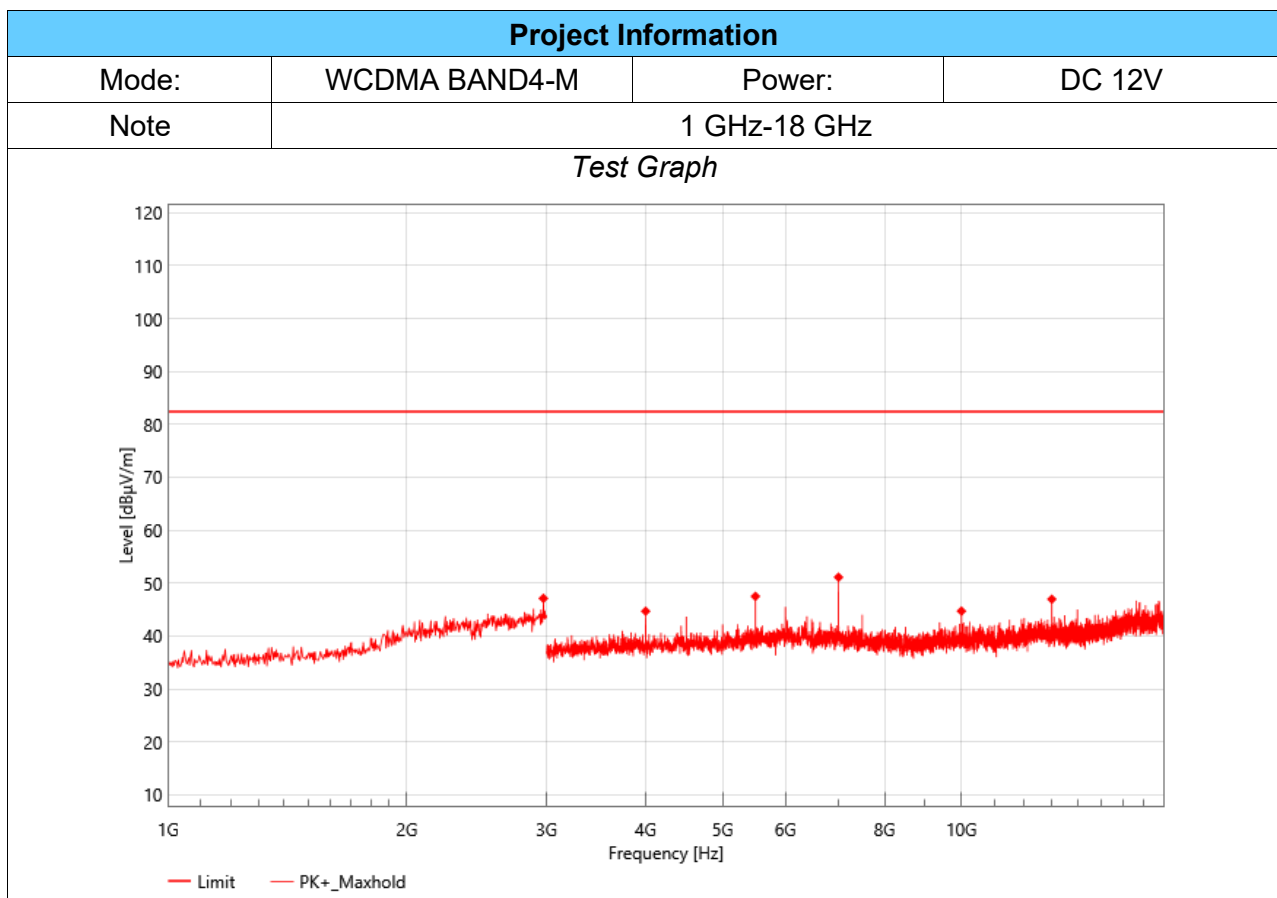

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	2972.00	54.26	47.13	-7.13	82.30	35.17	Vertical	PK	PASS
2	3999.00	58.05	44.71	-13.34	82.30	37.59	Vertical	PK	PASS
3	5499.00	57.21	47.51	-9.7	82.30	34.79	Vertical	PK	PASS
4	7000.50	58.93	51.13	-7.8	82.30	31.17	Vertical	PK	PASS
5	10000.50	50.89	44.72	-6.17	82.30	37.58	Vertical	PK	PASS
6	13000.50	51.48	46.97	-4.51	82.30	35.33	Vertical	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

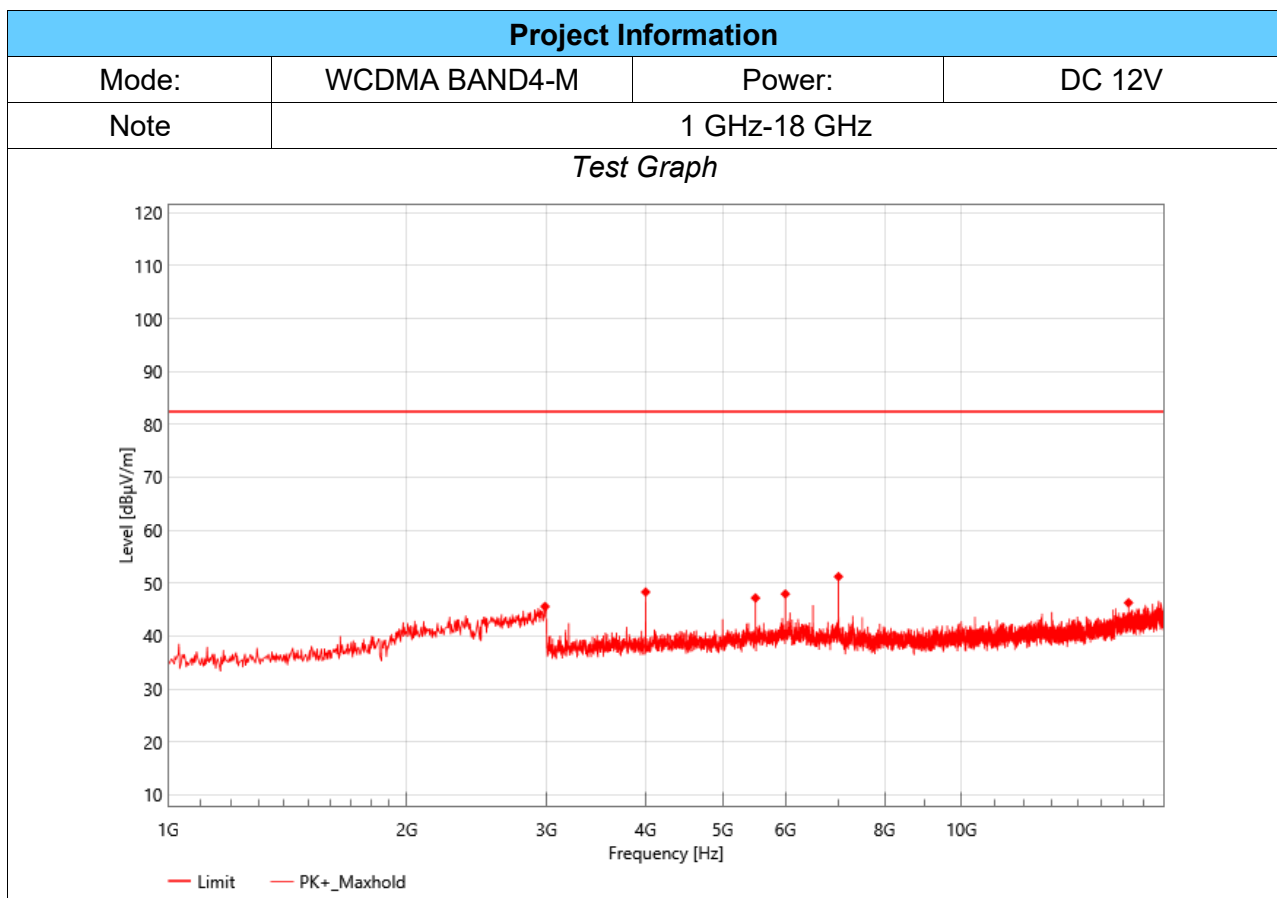

Data table									
NO.	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector	Verdict
1	2986.00	52.56	45.59	-6.97	82.30	36.71	Horizontal	PK	PASS
2	3999.00	61.66	48.32	-13.34	82.30	33.98	Horizontal	PK	PASS
3	5500.50	56.89	47.20	-9.69	82.30	35.10	Horizontal	PK	PASS
4	6000.00	56.83	47.96	-8.87	82.30	34.34	Horizontal	PK	PASS
5	6999.00	59.03	51.24	-7.79	82.30	31.06	Horizontal	PK	PASS
6	16243.50	46.90	46.29	-0.61	82.30	36.01	Horizontal	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

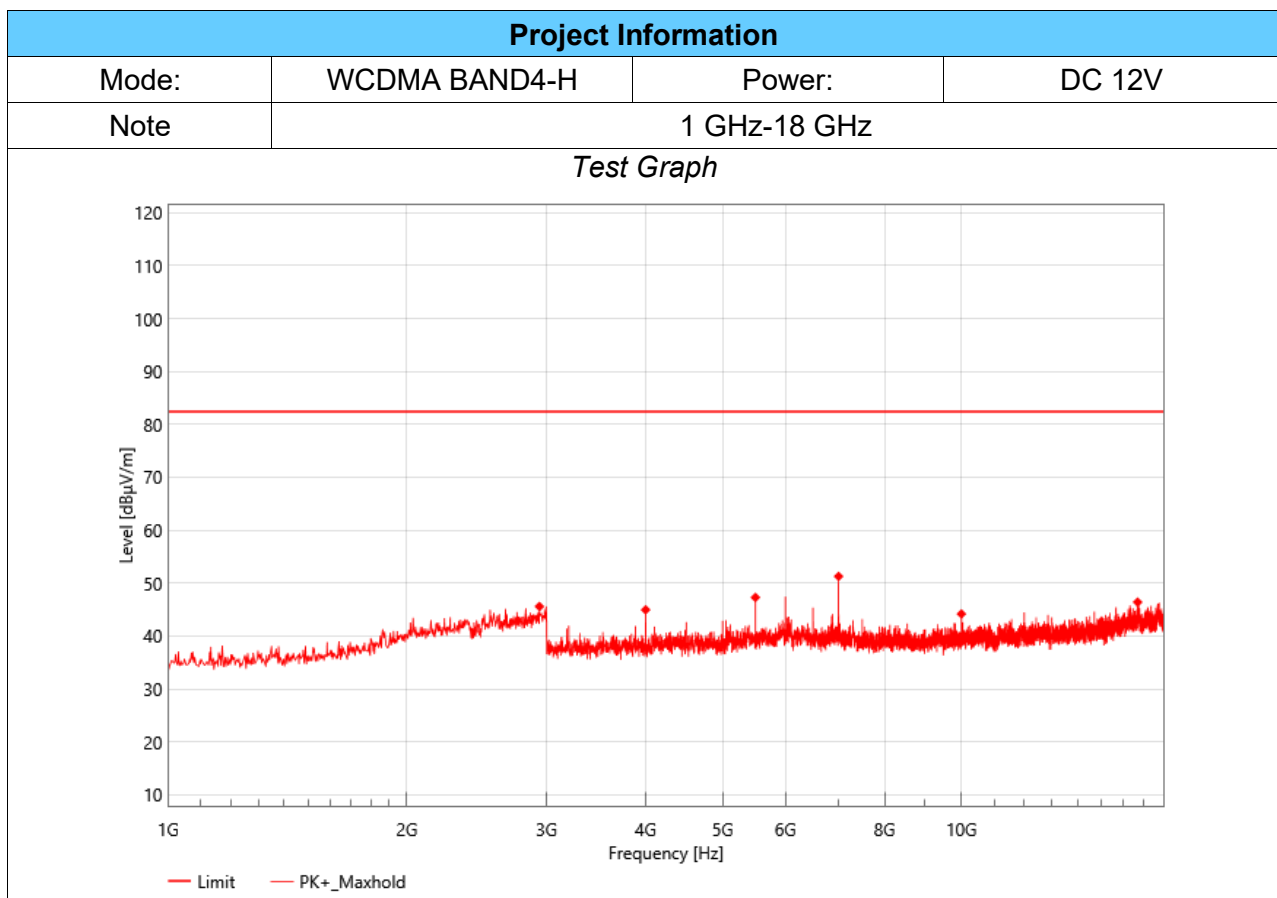

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	2938.00	53.09	45.60	-7.49	82.30	36.70	Horizontal	PK	PASS
2	3999.00	58.30	44.96	-13.34	82.30	37.34	Horizontal	PK	PASS
3	5499.00	57.00	47.30	-9.7	82.30	35.00	Horizontal	PK	PASS
4	7000.50	59.08	51.28	-7.8	82.30	31.02	Horizontal	PK	PASS
5	10000.50	50.36	44.19	-6.17	82.30	38.11	Horizontal	PK	PASS
6	16678.50	46.90	46.41	-0.49	82.30	35.89	Horizontal	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

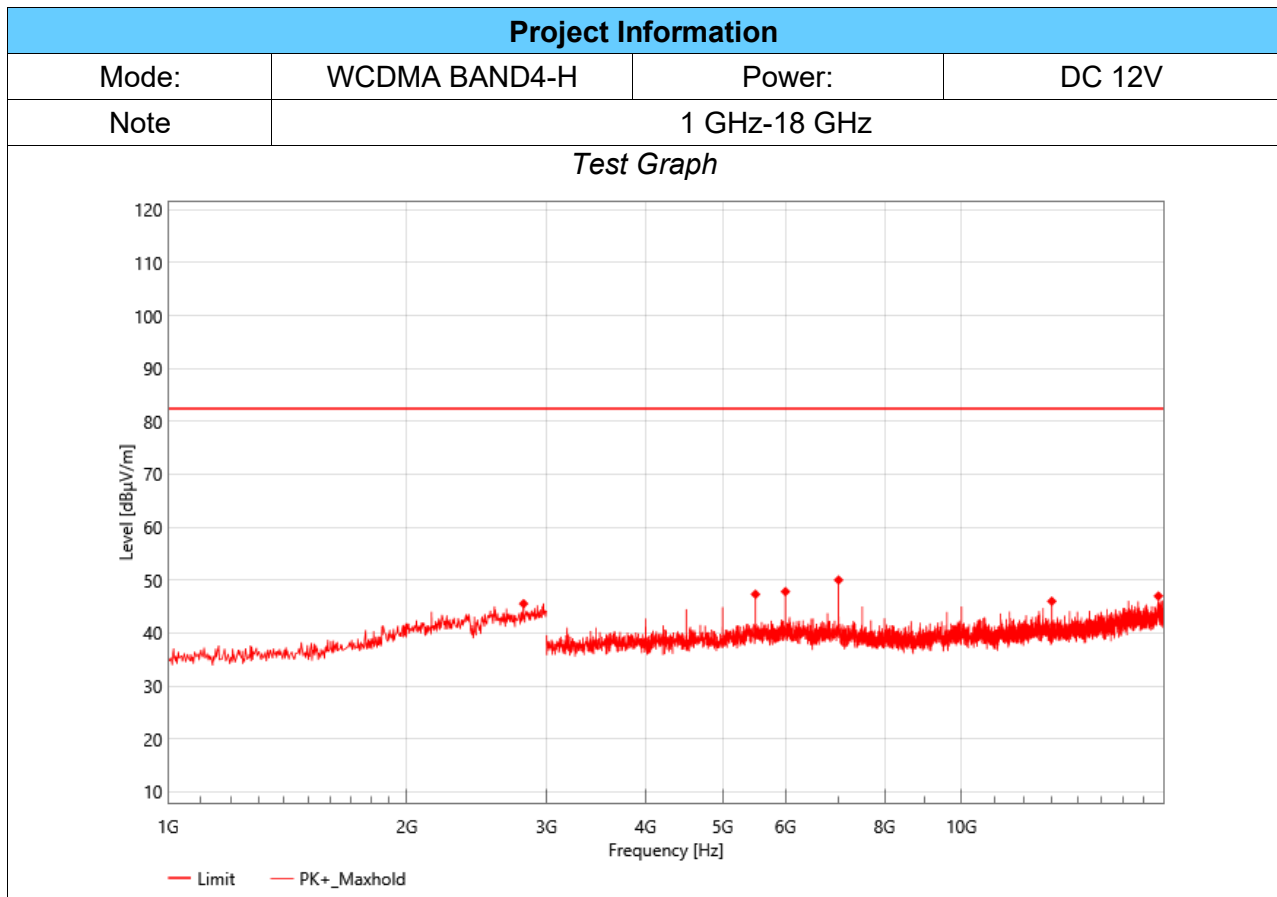

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	2806.00	53.92	45.55	-8.37	82.30	36.75	Vertical	PK	PASS
2	5500.50	57.02	47.33	-9.69	82.30	34.97	Vertical	PK	PASS
3	6000.00	56.71	47.84	-8.87	82.30	34.46	Vertical	PK	PASS
4	7000.50	57.82	50.02	-7.8	82.30	32.28	Vertical	PK	PASS
5	13000.50	50.52	46.01	-4.51	82.30	36.29	Vertical	PK	PASS
6	17713.50	47.10	46.99	-0.11	82.30	35.31	Vertical	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

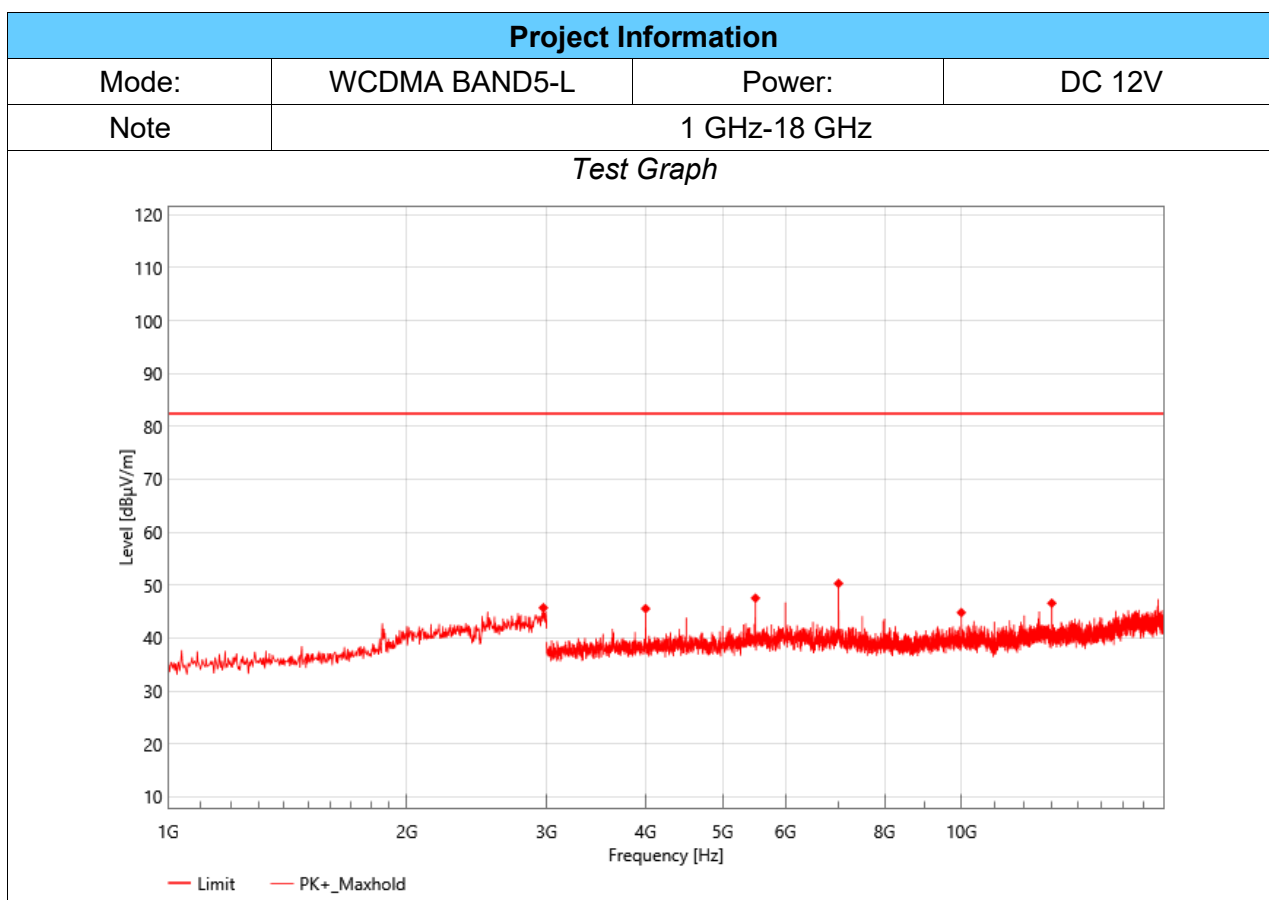

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	2972.00	52.85	45.72	-7.13	82.30	36.58	Vertical	PK	PASS
2	3999.00	58.91	45.57	-13.34	82.30	36.73	Vertical	PK	PASS
3	5500.50	57.24	47.55	-9.69	82.30	34.75	Vertical	PK	PASS
4	7000.50	58.12	50.32	-7.8	82.30	31.98	Vertical	PK	PASS
5	9999.00	50.98	44.82	-6.16	82.30	37.48	Vertical	PK	PASS
6	13000.50	51.10	46.59	-4.51	82.30	35.71	Vertical	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

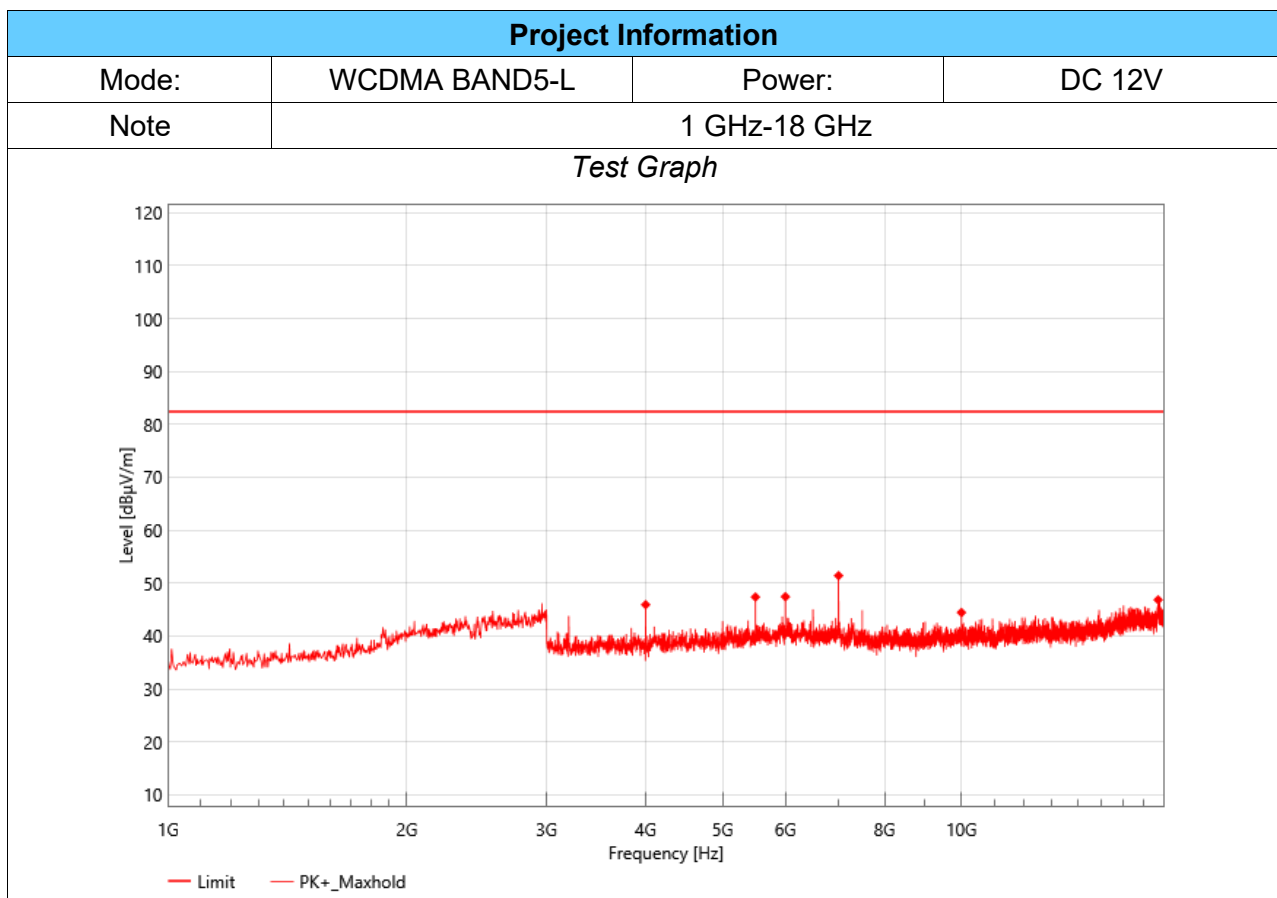

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	3999.00	59.27	45.93	-13.34	82.30	36.37	Horizontal	PK	PASS
2	5499.00	57.08	47.38	-9.7	82.30	34.92	Horizontal	PK	PASS
3	6000.00	56.31	47.44	-8.87	82.30	34.86	Horizontal	PK	PASS
4	7000.50	59.23	51.43	-7.8	82.30	30.87	Horizontal	PK	PASS
5	10000.50	50.63	44.46	-6.17	82.30	37.84	Horizontal	PK	PASS
6	17701.50	46.71	46.85	0.14	82.30	35.45	Horizontal	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

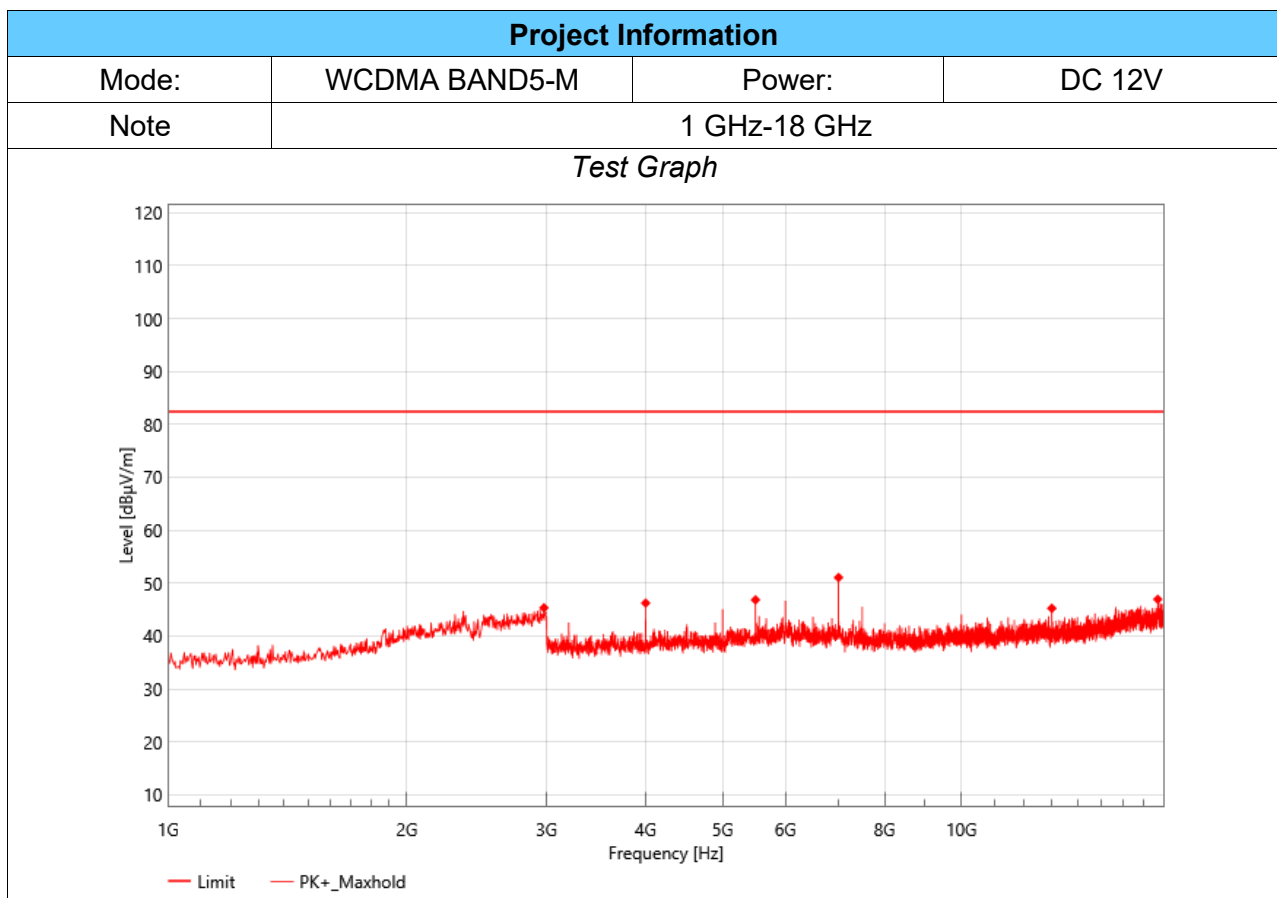

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	2978.00	52.37	45.35	-7.02	82.30	36.95	Horizontal	PK	PASS
2	3999.00	59.58	46.24	-13.34	82.30	36.06	Horizontal	PK	PASS
3	5500.50	56.53	46.84	-9.69	82.30	35.46	Horizontal	PK	PASS
4	7000.50	58.87	51.07	-7.8	82.30	31.23	Horizontal	PK	PASS
5	13000.50	49.75	45.24	-4.51	82.30	37.06	Horizontal	PK	PASS
6	17680.50	46.66	46.95	0.29	82.30	35.35	Horizontal	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

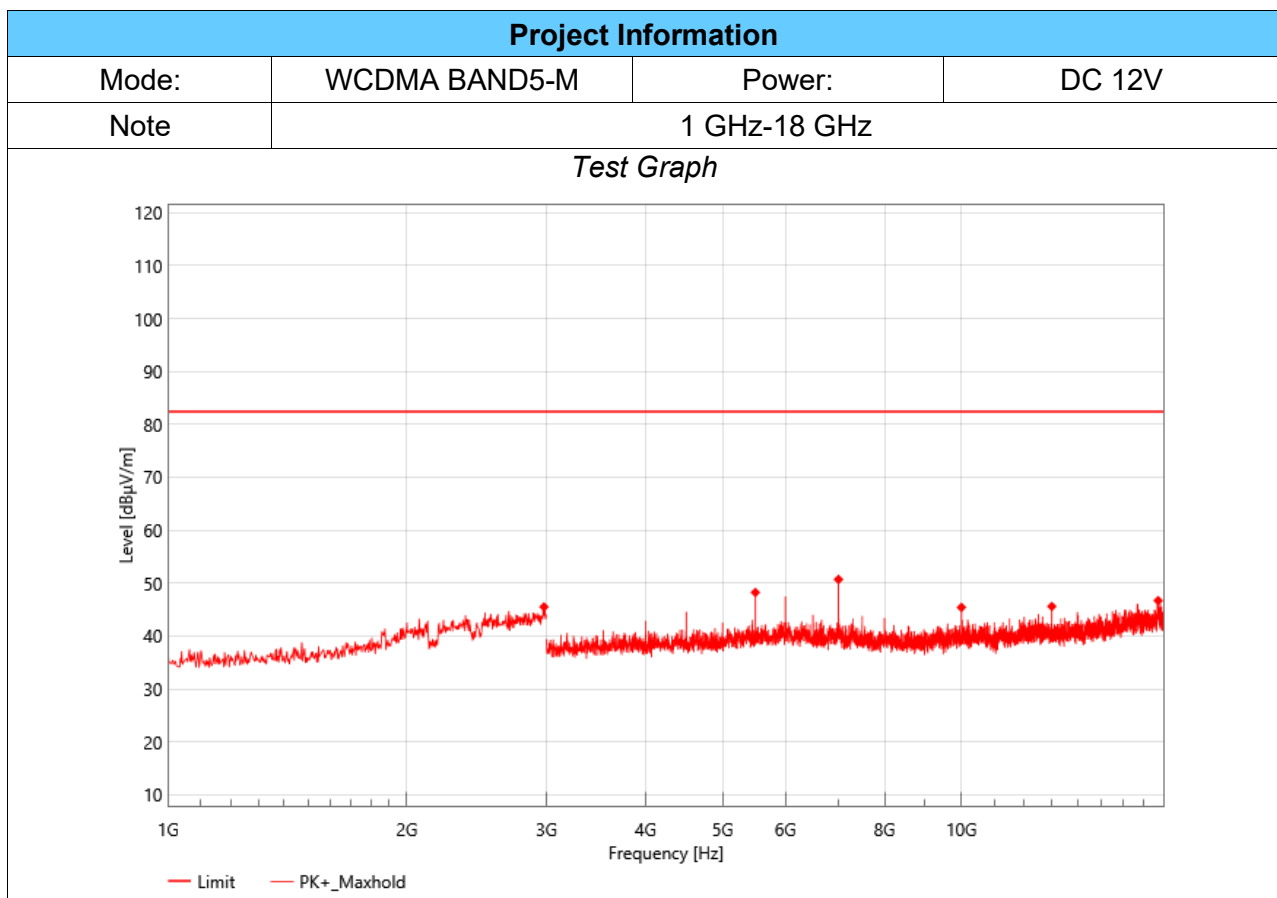

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	2978.00	52.54	45.52	-7.02	82.30	36.78	Vertical	PK	PASS
2	5499.00	57.95	48.25	-9.7	82.30	34.05	Vertical	PK	PASS
3	6999.00	58.49	50.70	-7.79	82.30	31.60	Vertical	PK	PASS
4	10000.50	51.60	45.43	-6.17	82.30	36.87	Vertical	PK	PASS
5	13000.50	50.11	45.60	-4.51	82.30	36.70	Vertical	PK	PASS
6	17703.00	46.60	46.71	0.11	82.30	35.59	Vertical	PK	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level]

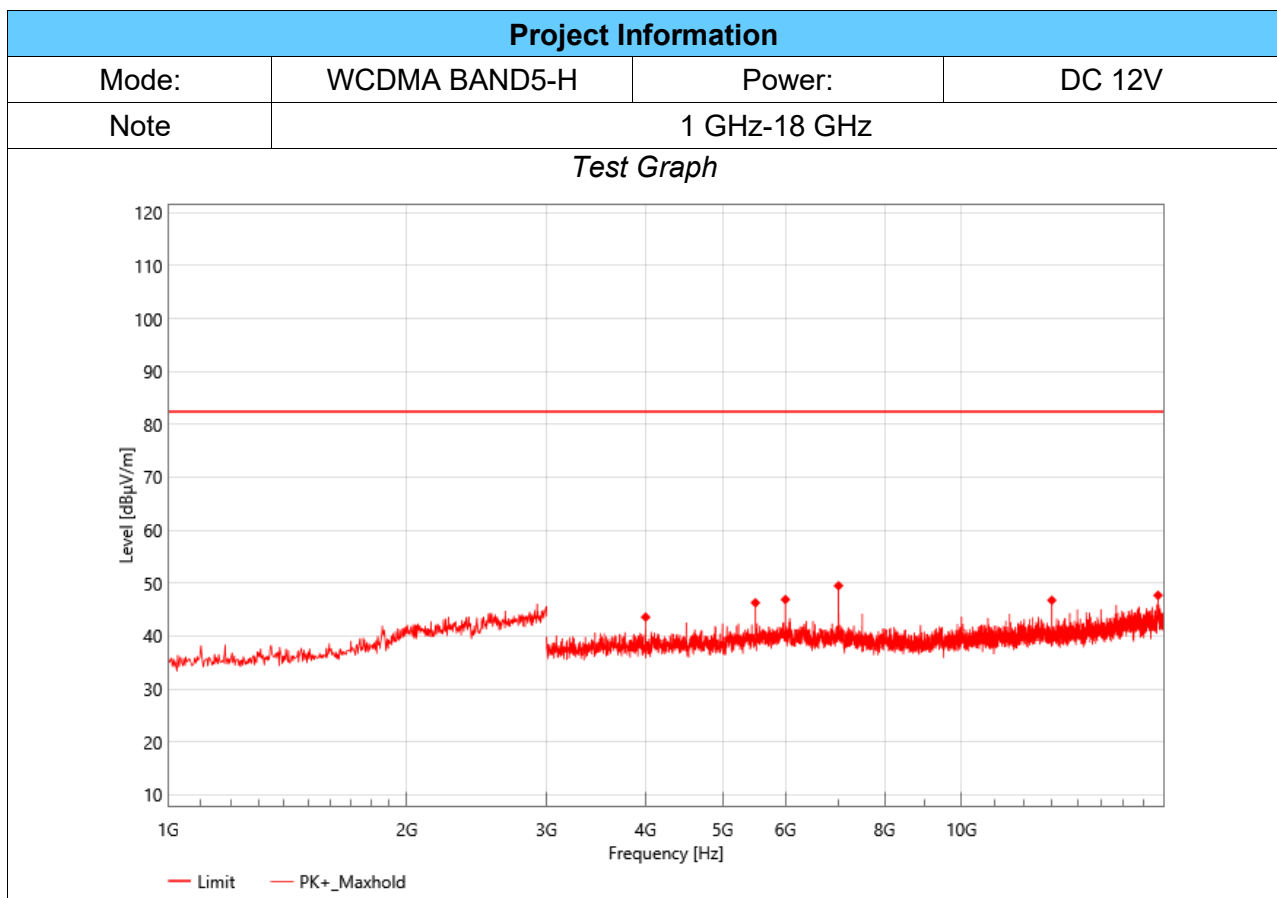

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	3999.00	56.93	43.59	-13.34	82.30	38.71	Vertical	PK	PASS
2	5499.00	56.00	46.30	-9.7	82.30	36.00	Vertical	PK	PASS
3	6000.00	55.78	46.91	-8.87	82.30	35.39	Vertical	PK	PASS
4	7000.50	57.30	49.50	-7.8	82.30	32.80	Vertical	PK	PASS
5	13000.50	51.27	46.76	-4.51	82.30	35.54	Vertical	PK	PASS
6	17695.50	47.49	47.70	0.21	82.30	34.60	Vertical	PK	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level]

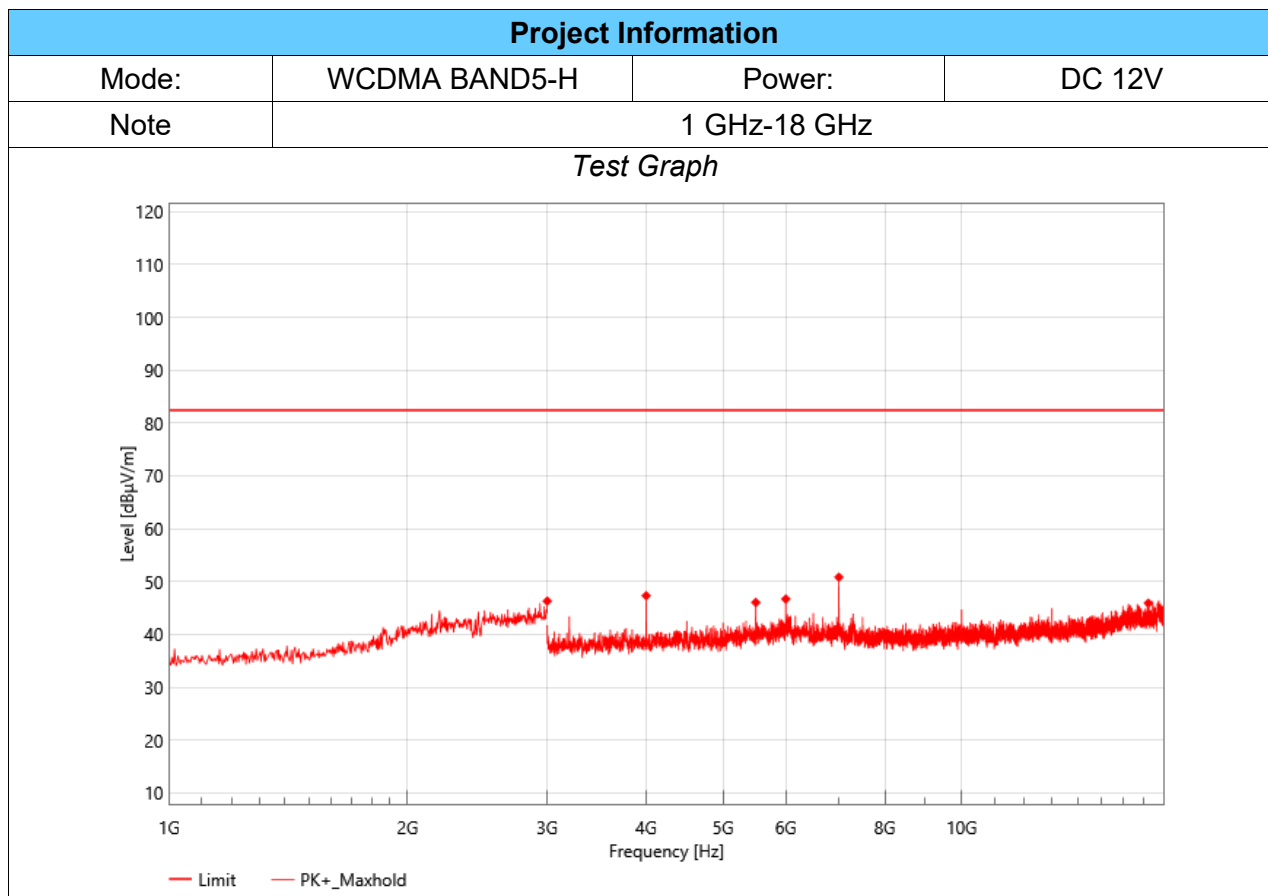

Data table									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector	Verdict
1	3000.00	53.32	46.31	-7.01	82.30	35.99	Horizontal	PK	PASS
2	3999.00	60.66	47.32	-13.34	82.30	34.98	Horizontal	PK	PASS
3	5499.00	55.76	46.06	-9.7	82.30	36.24	Horizontal	PK	PASS
4	6000.00	55.57	46.70	-8.87	82.30	35.60	Horizontal	PK	PASS
5	7000.50	58.65	50.85	-7.8	82.30	31.45	Horizontal	PK	PASS
6	17203.50	47.01	45.92	-1.09	82.30	36.38	Horizontal	PK	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level]

Remark: All the modulation have been tested at low, middle, high channels, only the worst modulation show in the test report.

END OF REPORT